


EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_26Tone_RU8_CH 233_ANT 6+7	Test Voltage	By Notebook PC

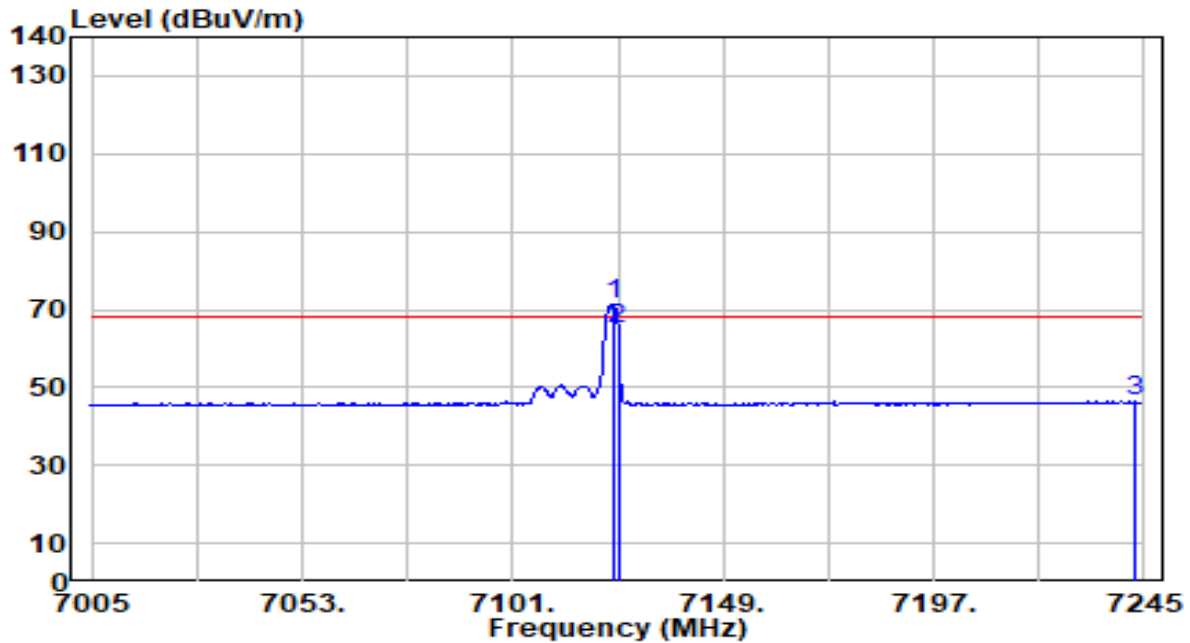


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.800	63.74	7.49	71.24	N/A	N/A	100	140	Average
2	* 7125.000	57.29	7.50	64.79	-3.41	68.20	100	140	Average
3	7242.600	38.60	7.78	46.38	-21.82	68.20	100	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 229_ANT 6+7	Test Voltage	By Notebook PC

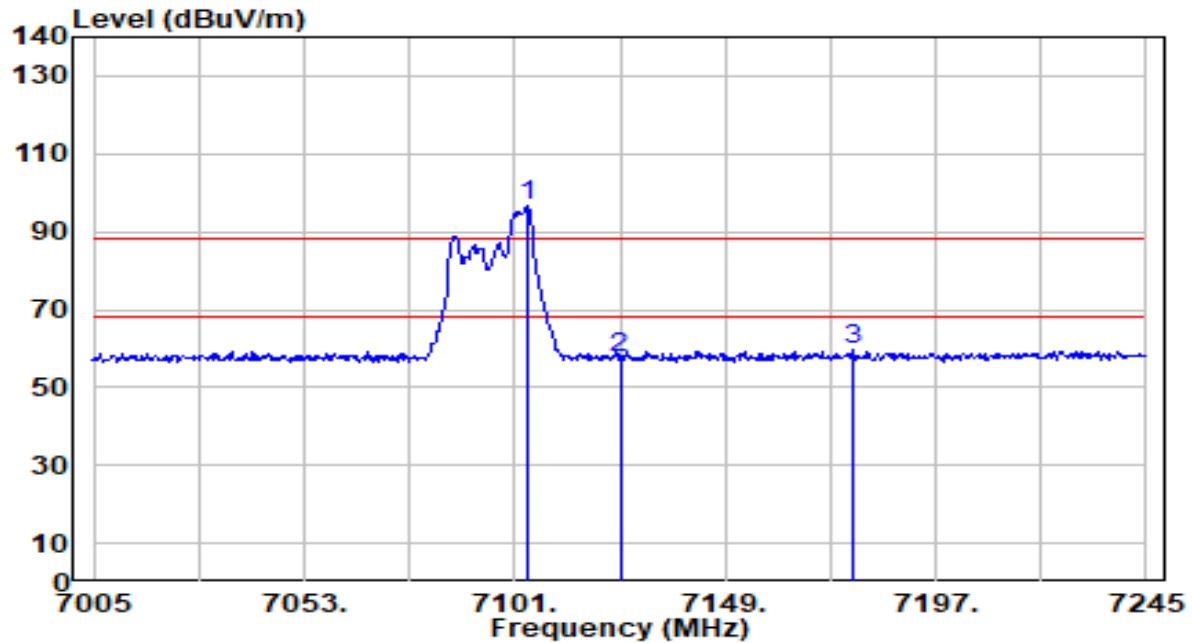


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.700	89.13	7.46	96.59	N/A	N/A	100	237	Peak
2	7125.000	49.98	7.50	57.48	-30.72	88.20	100	237	Peak
3	* 7178.100	51.91	7.60	59.51	-28.69	88.20	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 229_ANT 6+7	Test Voltage	By Notebook PC

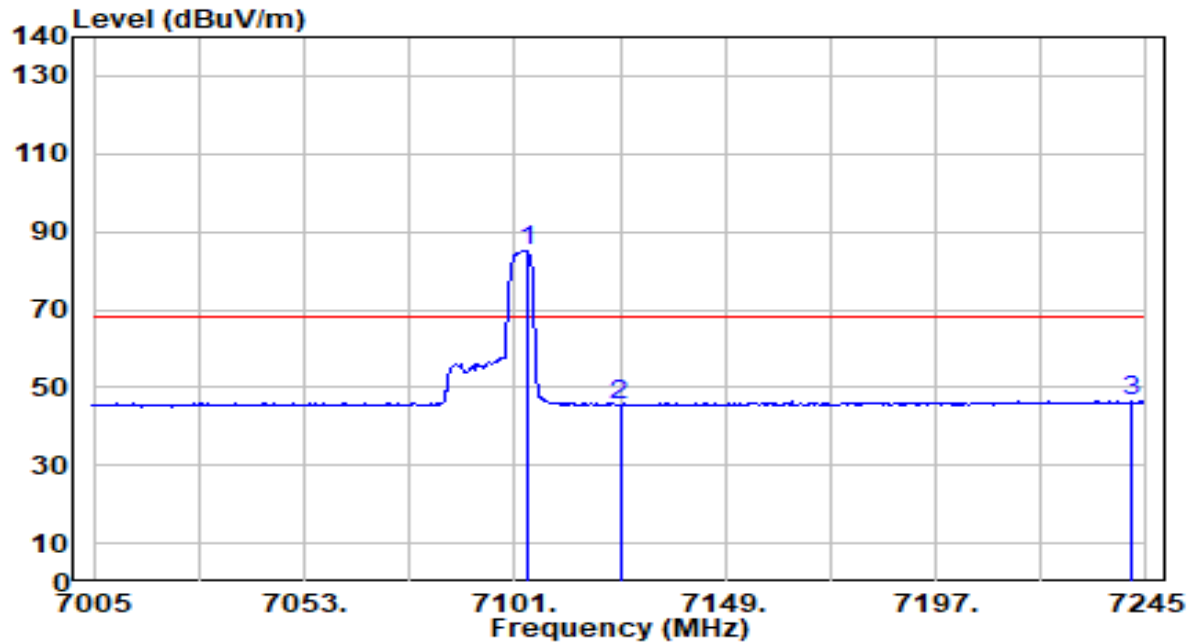


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.700	77.68	7.46	85.13	N/A	N/A	100	237	Average
2	7125.000	38.10	7.50	45.60	-22.60	68.20	100	237	Average
3	* 7241.400	38.61	7.78	46.38	-21.82	68.20	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 229_ANT 6+7	Test Voltage	By Notebook PC

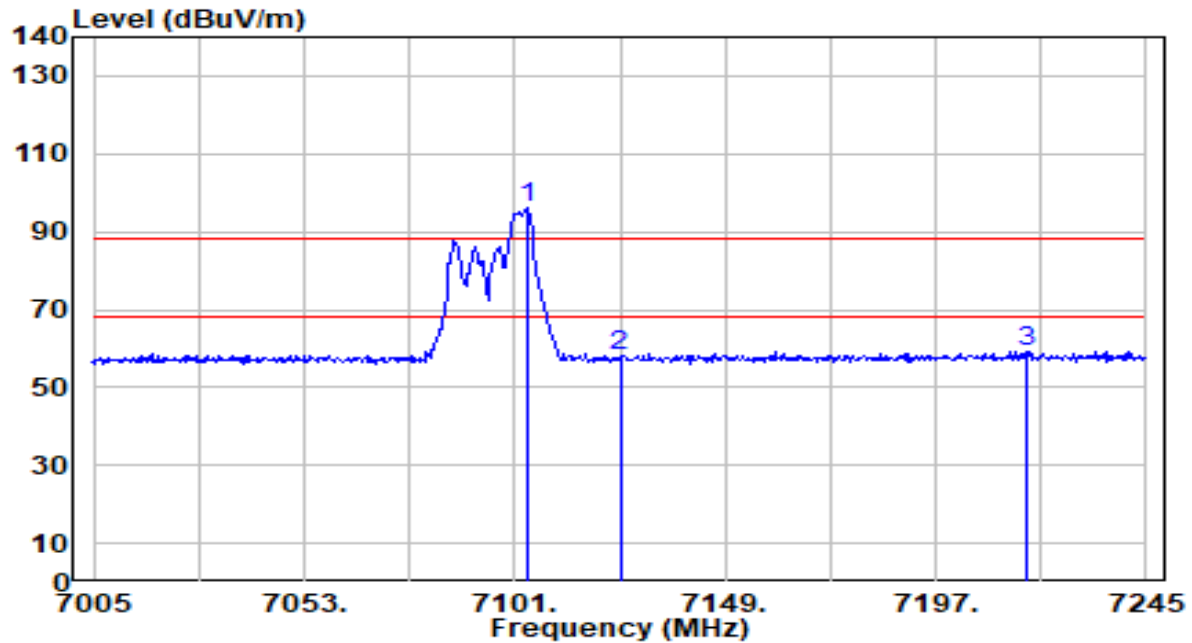


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.700	88.71	7.46	96.17	N/A	N/A	100	139	Peak
2	7125.000	50.63	7.50	58.12	-30.08	88.20	100	139	Peak
3	* 7218.000	51.54	7.70	59.24	-28.96	88.20	100	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 229_ANT 6+7	Test Voltage	By Notebook PC

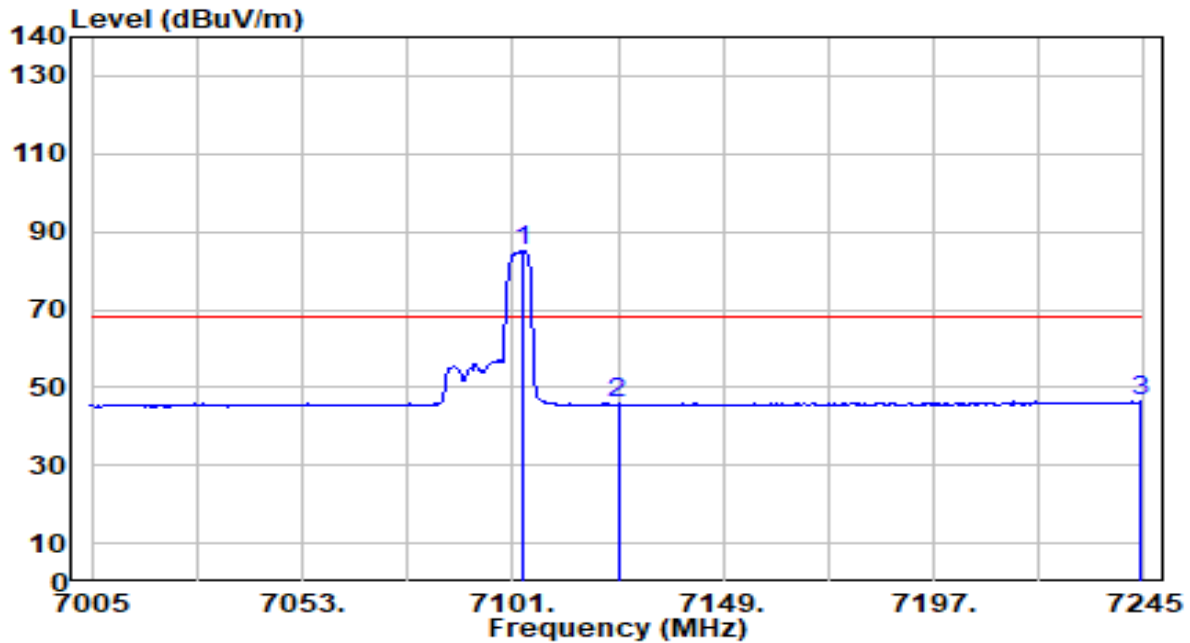


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.400	77.57	7.46	85.02	N/A	N/A	100	139	Average
2	7125.000	38.40	7.50	45.89	-22.31	68.20	100	139	Average
3	* 7244.400	38.54	7.79	46.33	-21.87	68.20	100	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 233_ANT 6+7	Test Voltage	By Notebook PC

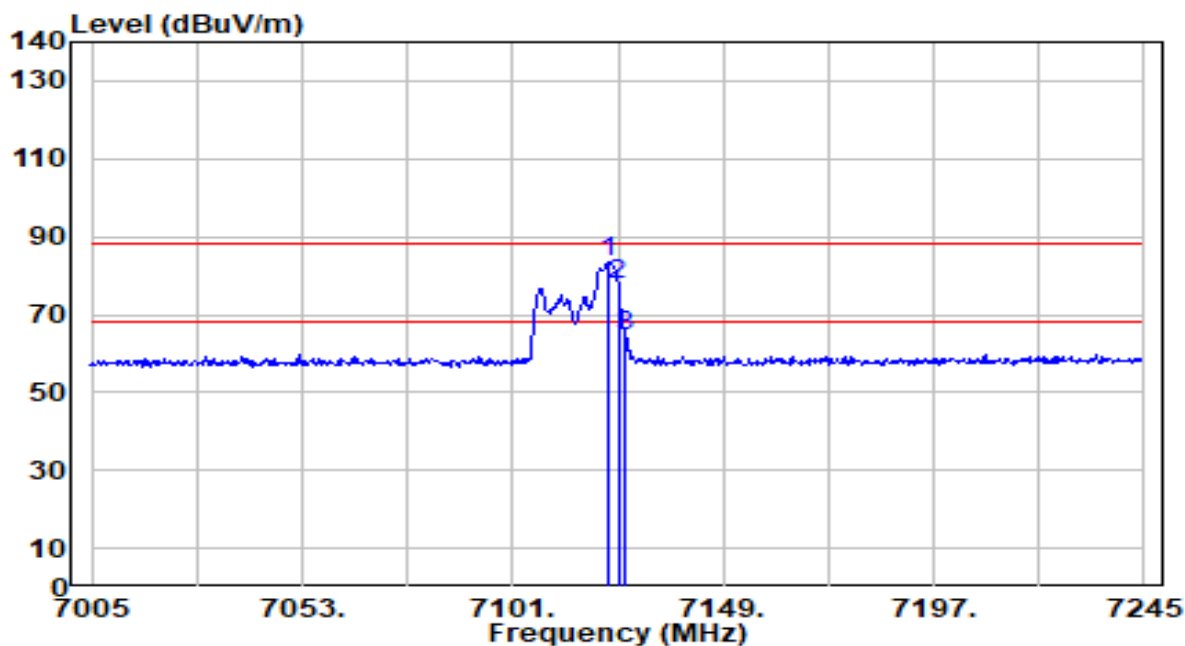


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.600	76.04	7.49	83.53	N/A	N/A	100	236	Peak
2	* 7125.000	70.36	7.50	77.86	-10.34	88.20	100	236	Peak
3	7126.800	57.01	7.50	64.51	-23.69	88.20	100	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 233_ANT 6+7	Test Voltage	By Notebook PC

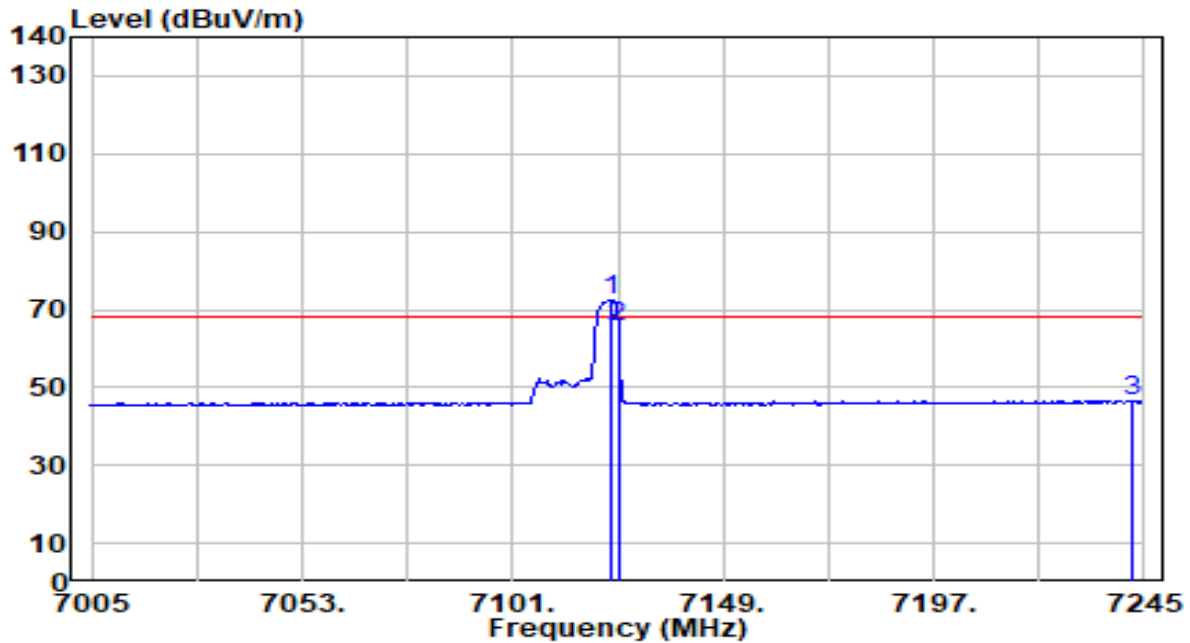


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.200	64.91	7.49	72.40	N/A	N/A	100	236	Average
2	* 7125.000	58.26	7.50	65.76	-2.44	68.20	100	236	Average
3	7242.300	38.81	7.78	46.59	-21.61	68.20	100	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 233_ANT 6+7	Test Voltage	By Notebook PC

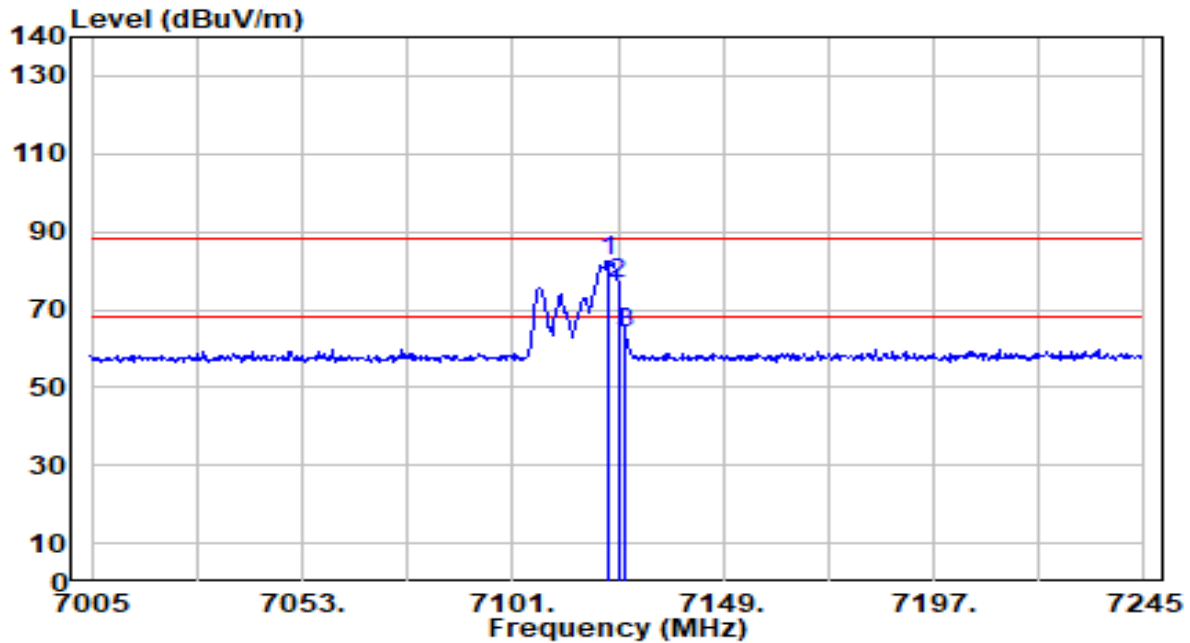


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.600	75.12	7.49	82.61	N/A	N/A	100	140	Peak
2	* 7125.000	68.99	7.50	76.48	-11.72	88.20	100	140	Peak
3	7126.800	56.52	7.50	64.02	-24.18	88.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_52Tone_RU77_CH 233_ANT 6+7	Test Voltage	By Notebook PC

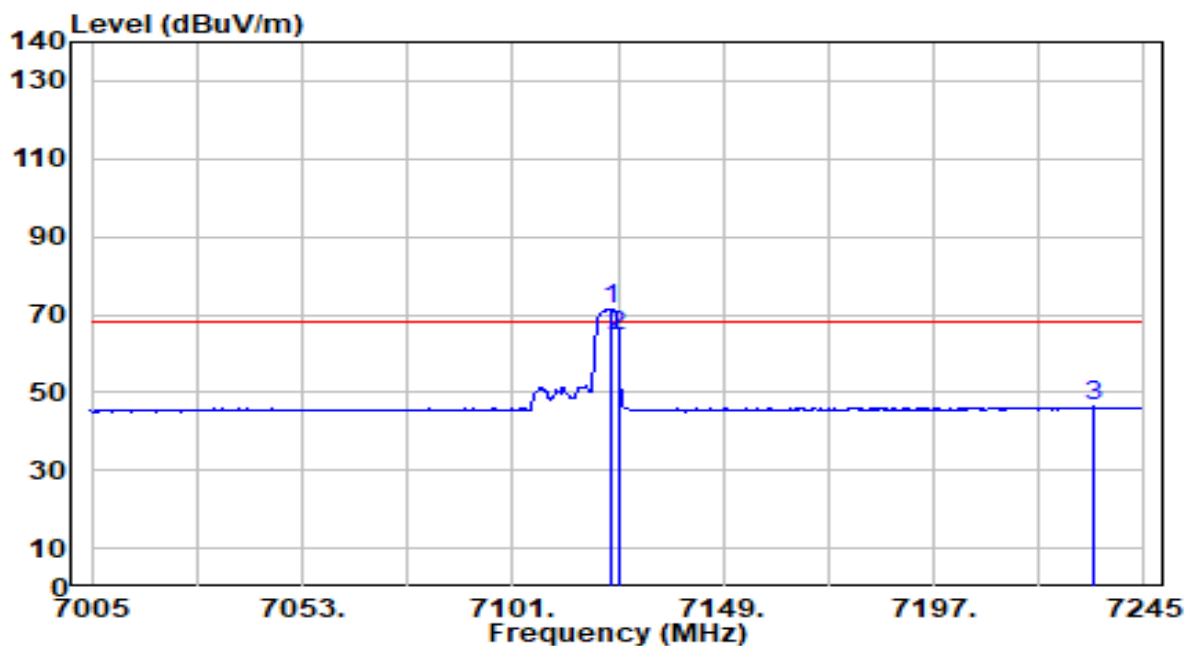


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.500	63.97	7.49	71.46	N/A	N/A	100	140	Average
2	* 7125.000	57.11	7.50	64.61	-3.59	68.20	100	140	Average
3	7233.600	38.52	7.75	46.27	-21.93	68.20	100	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 229_ANT 6+7	Test Voltage	By Notebook PC

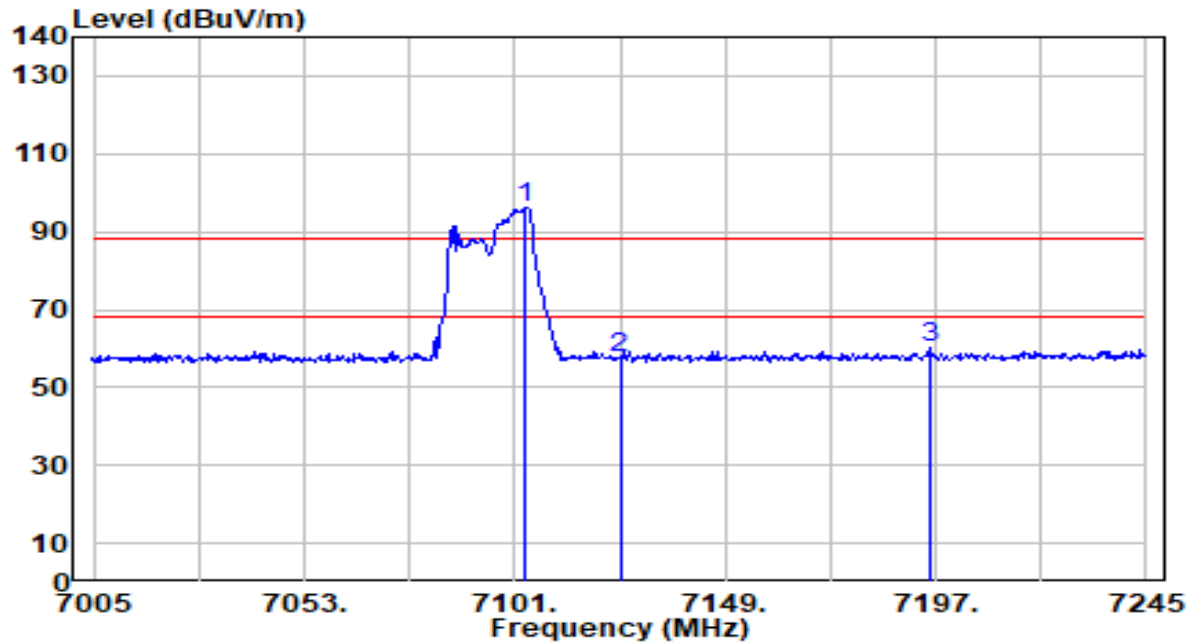


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.400	88.52	7.46	95.97	N/A	N/A	100	237	Peak
2	7125.000	49.98	7.50	57.48	-30.72	88.20	100	237	Peak
3	* 7195.500	52.59	7.63	60.22	-27.98	88.20	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 229_ANT 6+7	Test Voltage	By Notebook PC

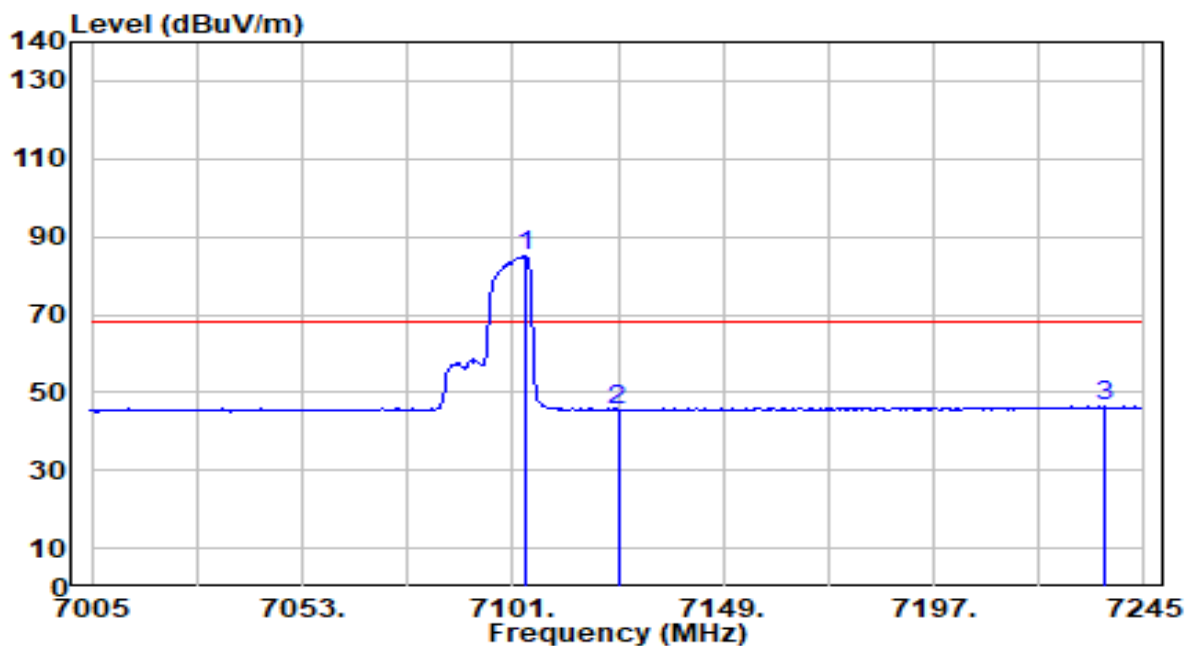


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.700	77.50	7.46	84.95	N/A	N/A	100	237	Average
2	7125.000	38.07	7.50	45.56	-22.64	68.20	100	237	Average
3	* 7236.000	38.62	7.76	46.38	-21.82	68.20	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 229_ANT 6+7	Test Voltage	By Notebook PC

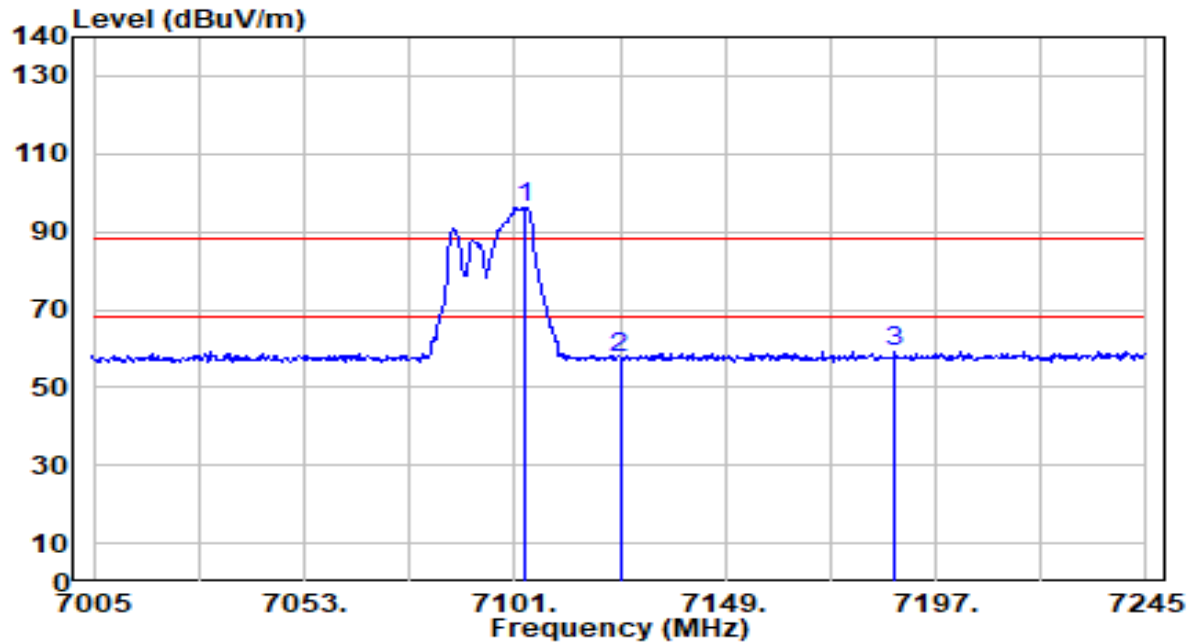


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.400	88.88	7.46	96.33	N/A	N/A	100	139	Peak
2	7125.000	50.33	7.50	57.82	-30.38	88.20	100	139	Peak
3	* 7187.700	51.82	7.61	59.43	-28.77	88.20	100	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 229_ANT 6+7	Test Voltage	By Notebook PC

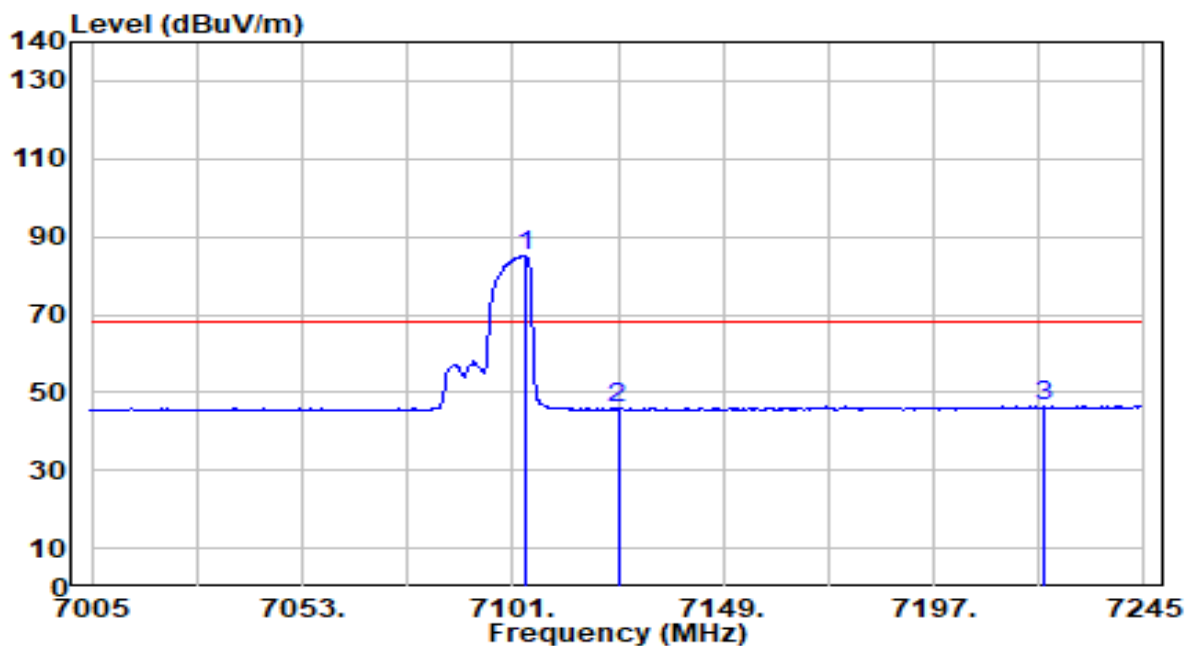


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.700	77.70	7.46	85.16	N/A	N/A	100	139	Average
2	7125.000	38.21	7.50	45.70	-22.50	68.20	100	139	Average
3	* 7222.200	38.75	7.71	46.46	-21.74	68.20	100	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 233_ANT 6+7	Test Voltage	By Notebook PC

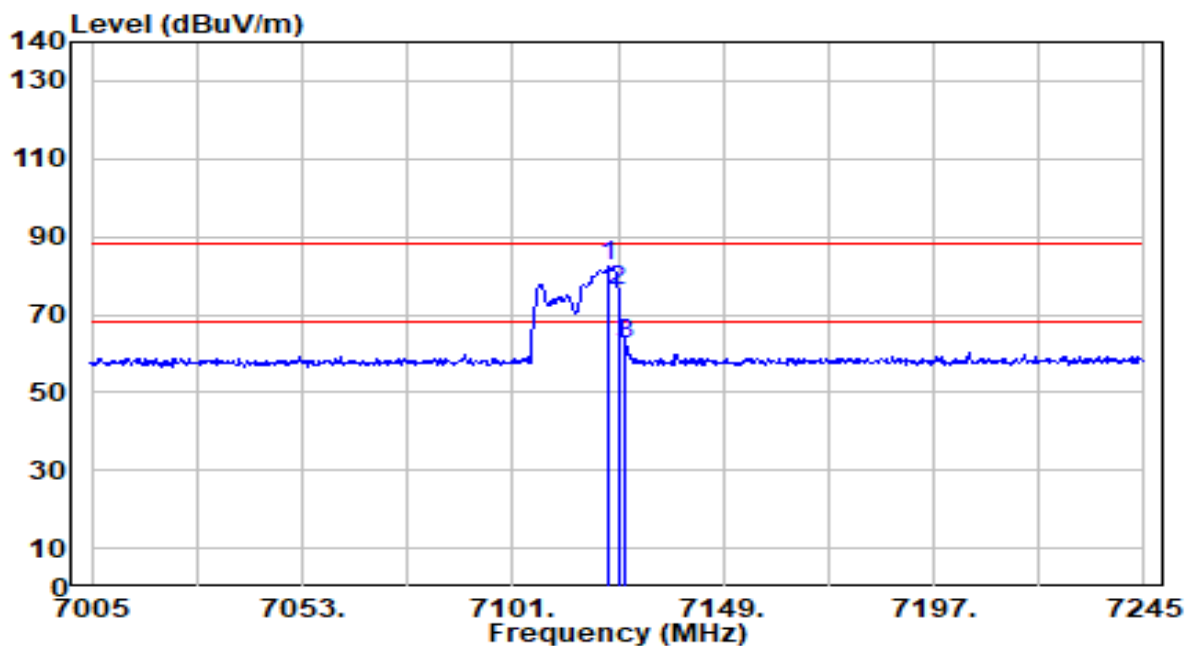


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.900	74.71	7.49	82.21	N/A	N/A	100	236	Peak
2	* 7125.000	68.62	7.50	76.12	-12.08	88.20	100	236	Peak
3	7126.800	55.04	7.50	62.54	-25.66	88.20	100	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 233_ANT 6+7	Test Voltage	By Notebook PC

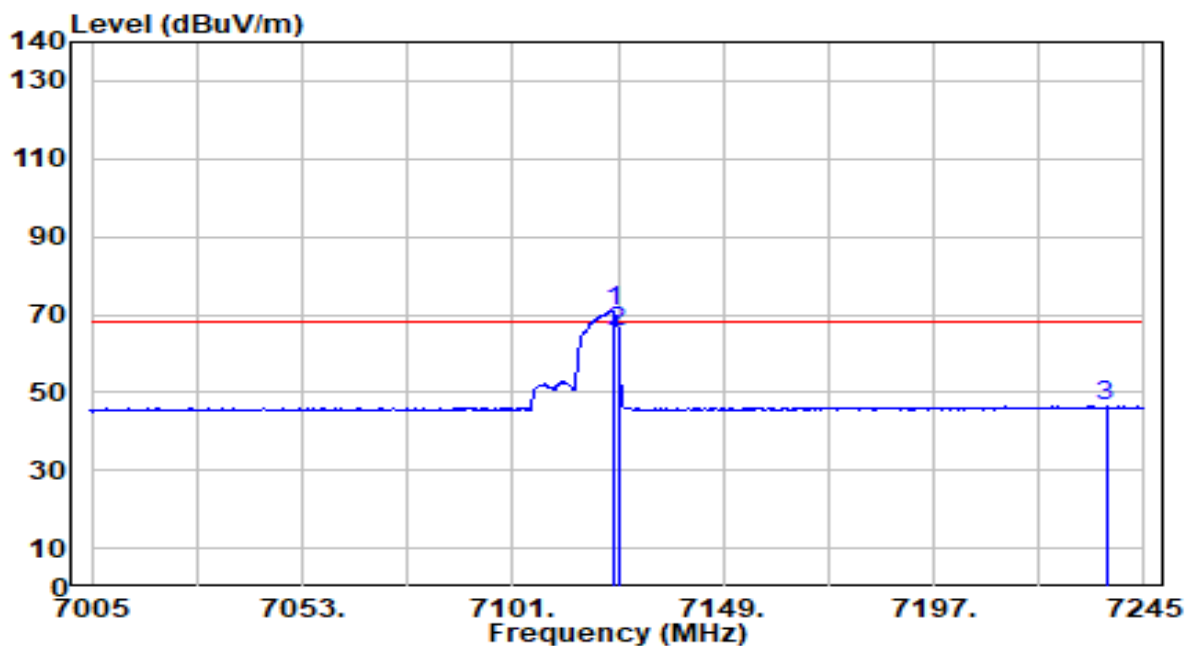


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.800	63.27	7.49	70.76	N/A	N/A	100	236	Average
2	* 7125.000	57.88	7.50	65.38	-2.82	68.20	100	236	Average
3	7236.300	38.70	7.76	46.46	-21.74	68.20	100	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 233_ANT 6+7	Test Voltage	By Notebook PC

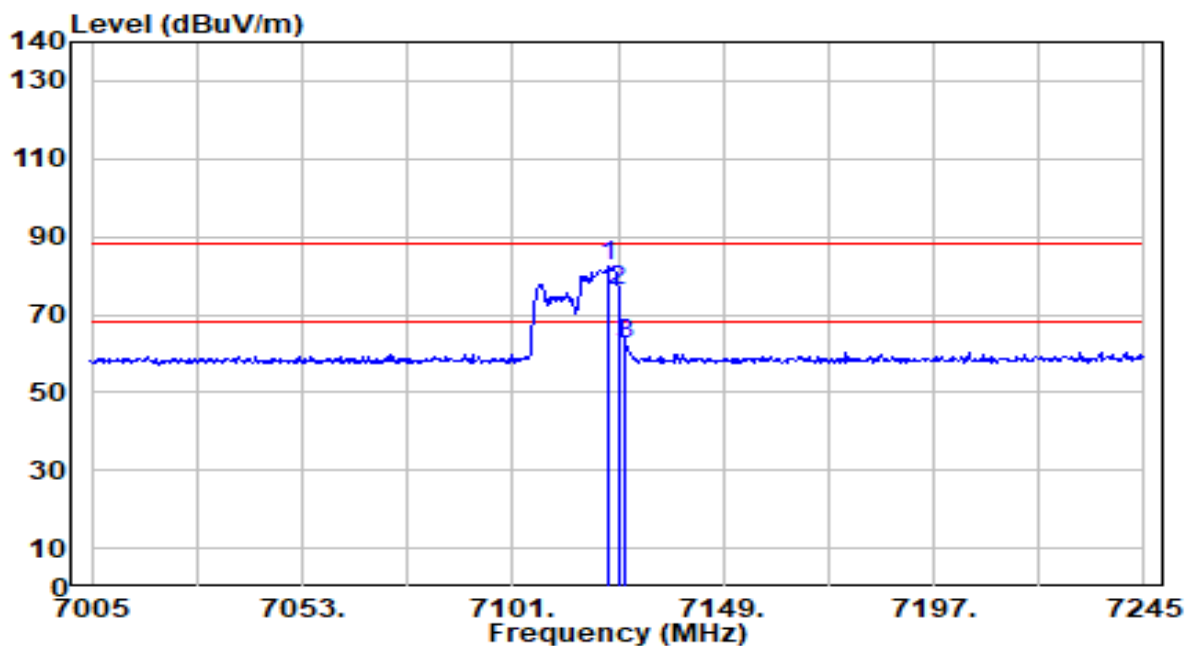


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.900	74.71	7.49	82.21	N/A	N/A	100	140	Peak
2	* 7125.000	68.62	7.50	76.12	-12.08	88.20	100	140	Peak
3	7126.800	55.04	7.50	62.54	-25.66	88.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_106Tone_RU107_CH 233_ANT 6+7	Test Voltage	By Notebook PC

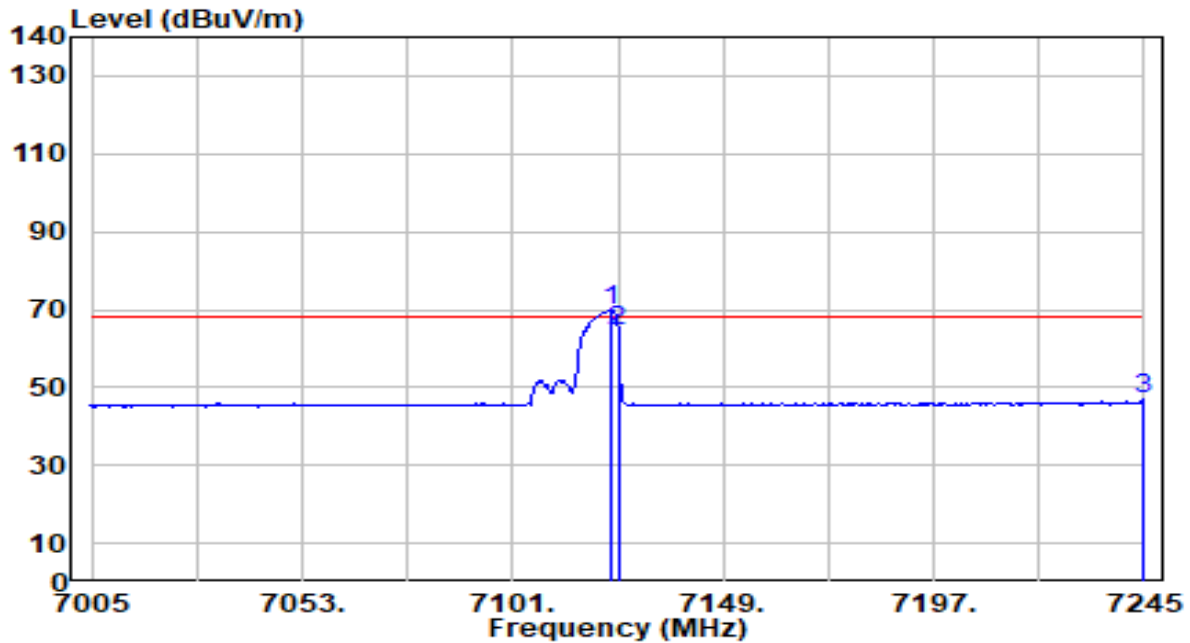


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.500	62.34	7.49	69.83	N/A	N/A	100	140	Average
2	* 7125.000	56.74	7.50	64.23	-3.97	68.20	100	140	Average
3	7244.700	38.98	7.79	46.77	-21.43	68.20	100	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 229_ANT 6+7	Test Voltage	By Notebook PC

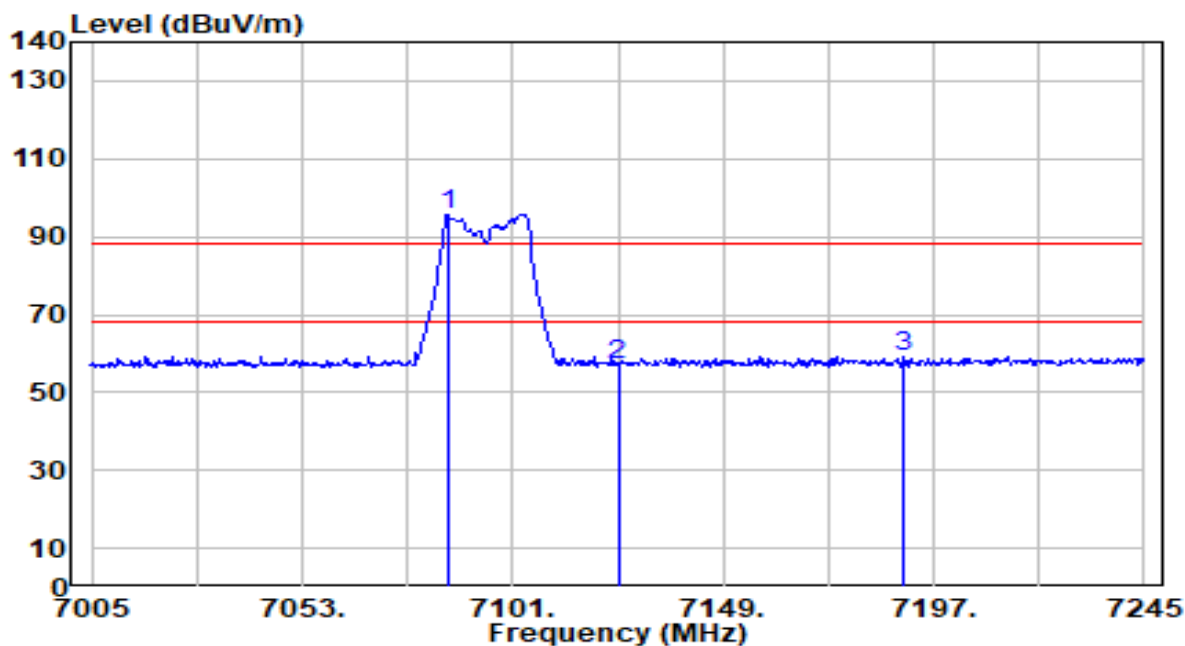


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7086.300	88.28	7.42	95.70	N/A	N/A	100	237	Peak
2	7125.000	49.64	7.50	57.14	-31.06	88.20	100	237	Peak
3	* 7190.100	51.57	7.62	59.19	-29.01	88.20	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 229_ANT 6+7	Test Voltage	By Notebook PC

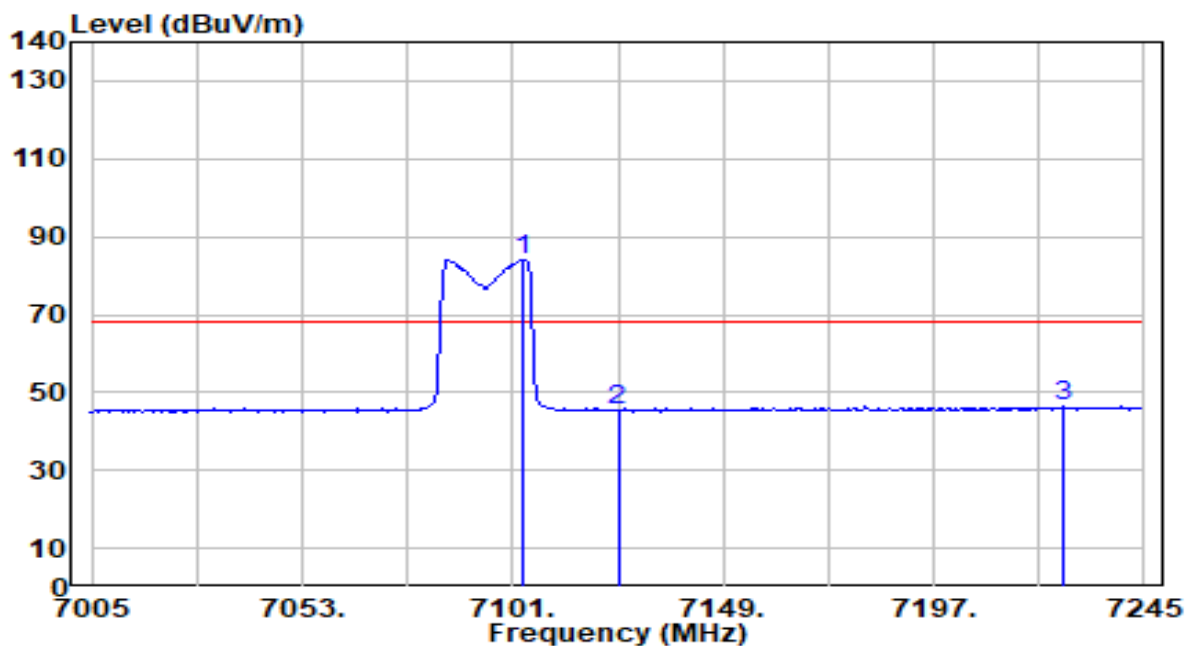


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.400	76.75	7.46	84.20	N/A	N/A	100	237	Average
2	7125.000	37.81	7.50	45.31	-22.89	68.20	100	237	Average
3	* 7226.400	38.53	7.73	46.25	-21.95	68.20	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 229_ANT 6+7	Test Voltage	By Notebook PC

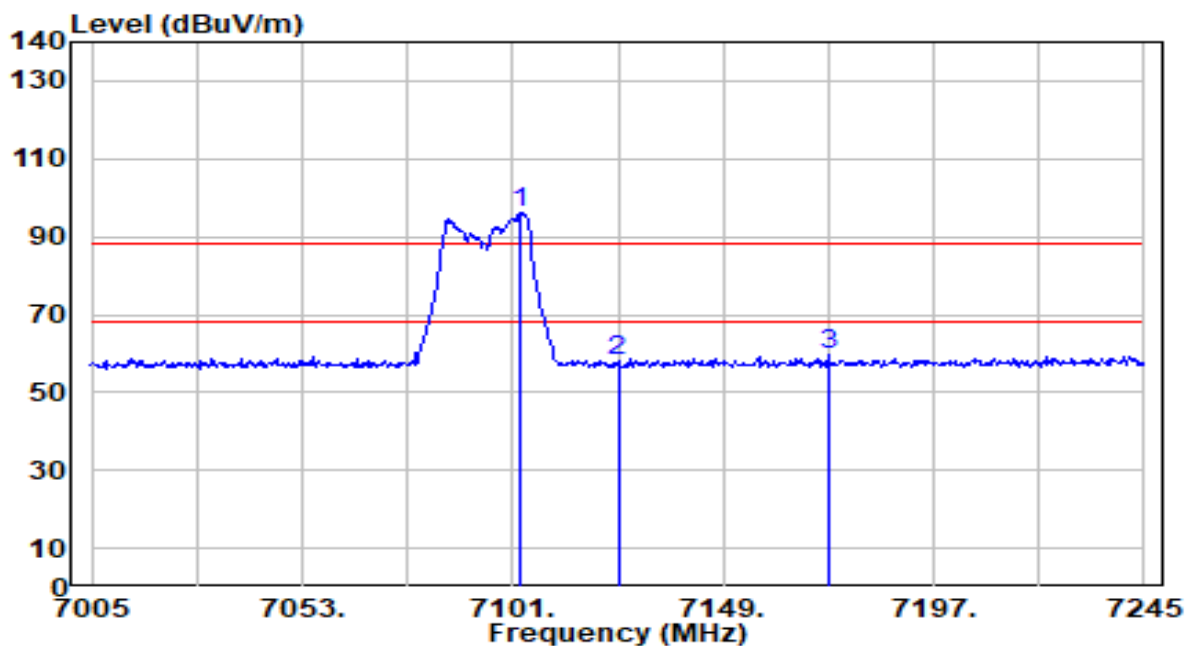


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7102.500	88.51	7.45	95.96	N/A	N/A	100	139	Peak
2	7125.000	50.37	7.50	57.87	-30.33	88.20	100	139	Peak
3	* 7173.000	52.00	7.59	59.59	-28.61	88.20	100	139	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 229_ANT 6+7	Test Voltage	By Notebook PC

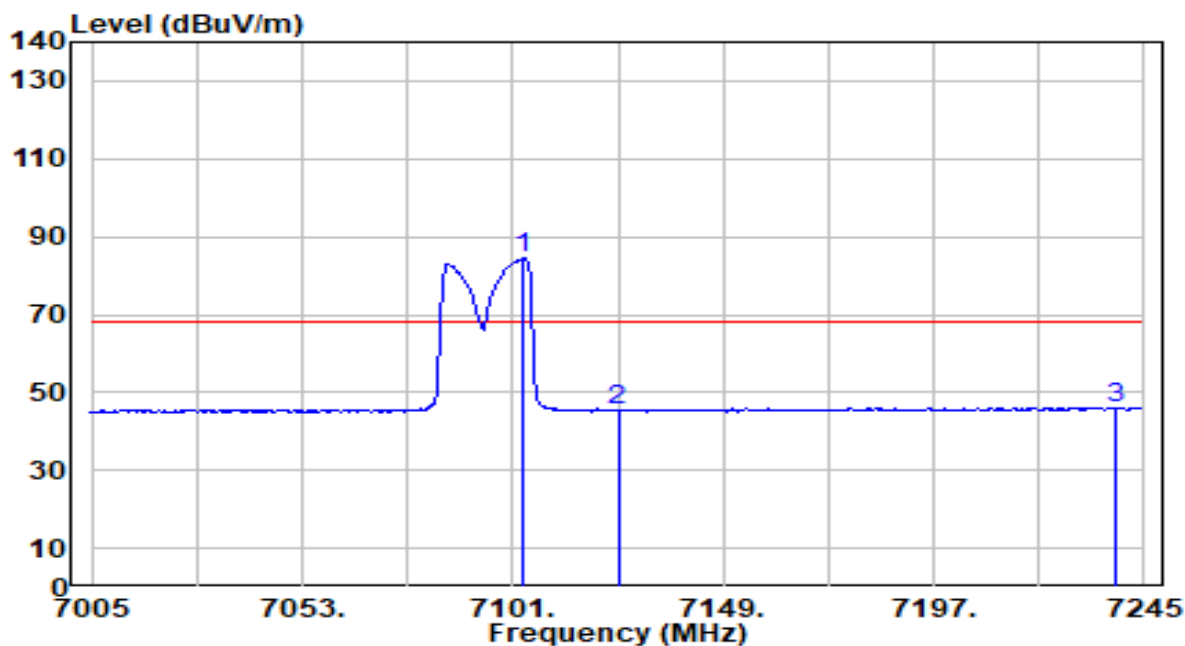


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7103.400	77.08	7.46	84.54	N/A	N/A	100	139	Average
2	7125.000	37.91	7.50	45.40	-22.80	68.20	100	139	Average
3	* 7238.700	38.32	7.77	46.09	-22.11	68.20	100	139	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 233_ANT 6+7	Test Voltage	By Notebook PC

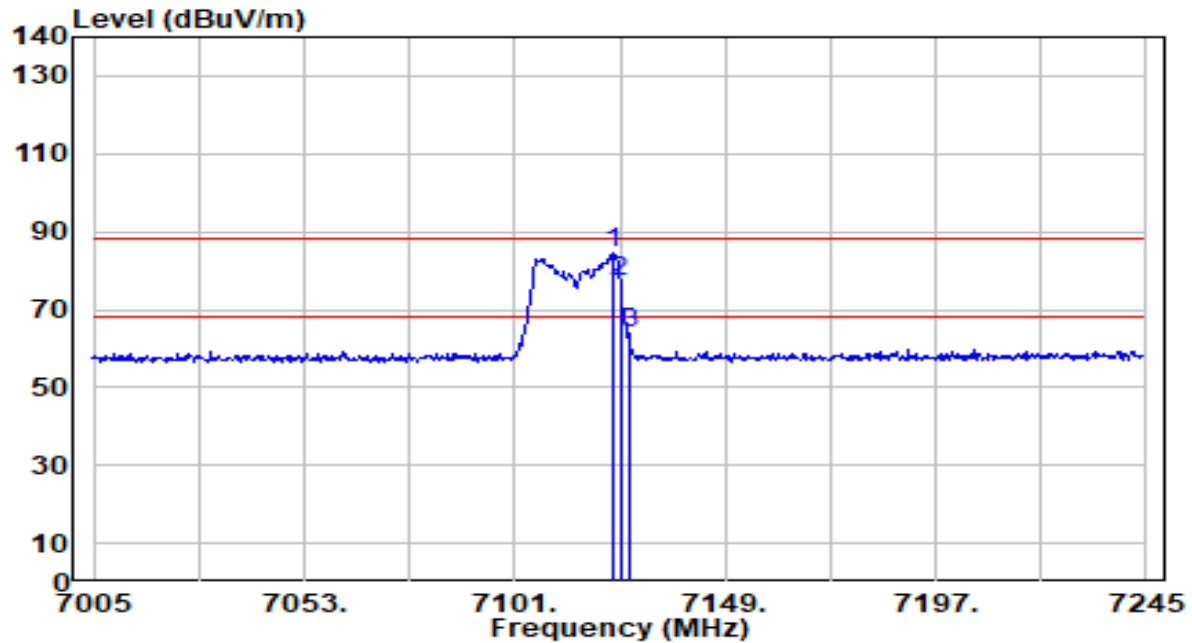


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.500	76.87	7.49	84.36	N/A	N/A	100	236	Peak
2	* 7125.000	69.65	7.50	77.15	-11.05	88.20	100	236	Peak
3	7127.100	56.35	7.50	63.85	-24.35	88.20	100	236	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 233_ANT 6+7	Test Voltage	By Notebook PC

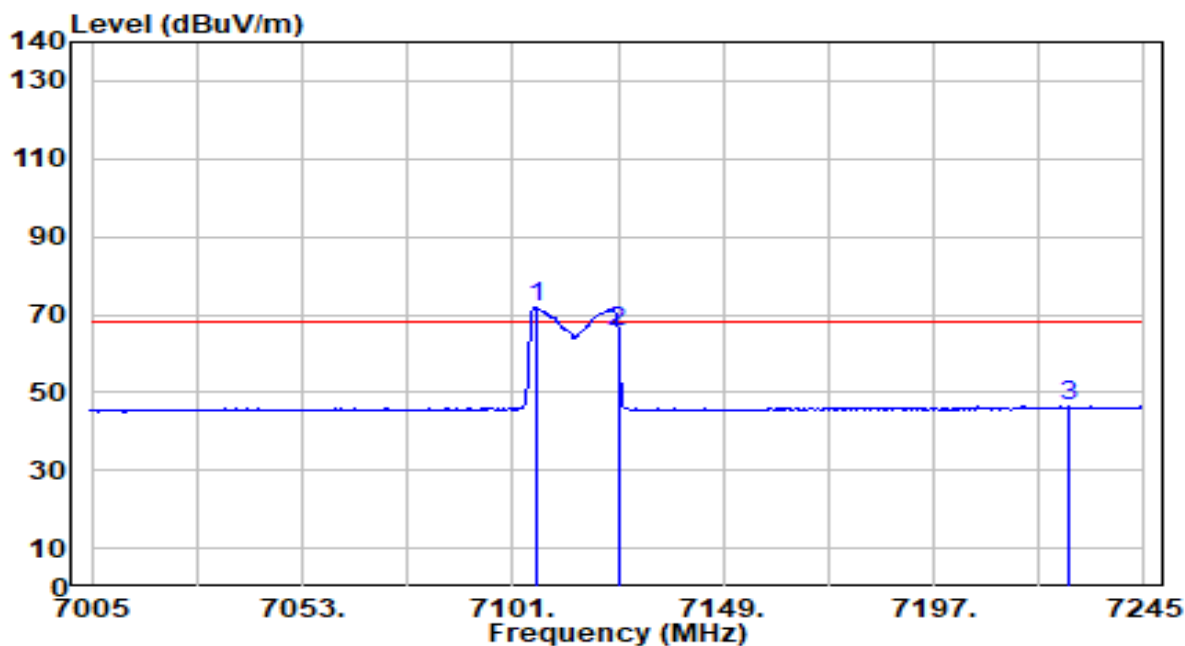


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7106.400	64.20	7.46	71.66	N/A	N/A	100	236	Average
2	* 7125.000	58.24	7.50	65.74	-2.46	68.20	100	236	Average
3	7227.900	38.61	7.73	46.34	-21.86	68.20	100	236	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 233_ANT 6+7	Test Voltage	By Notebook PC

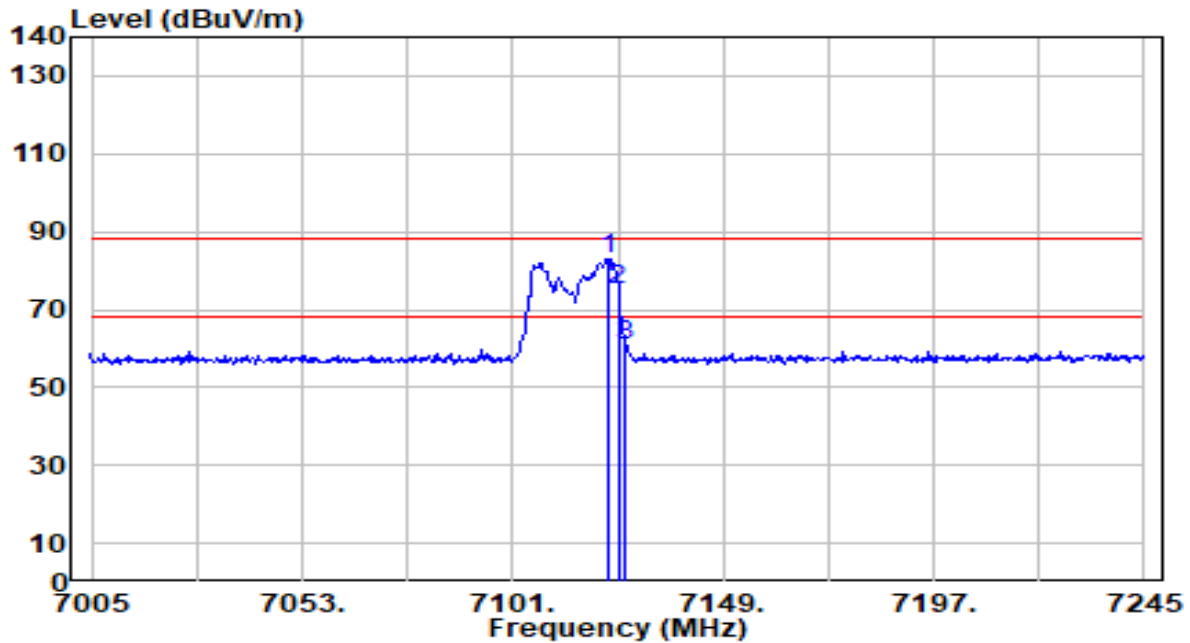


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.900	75.52	7.49	83.01	N/A	N/A	100	140	Peak
2	* 7125.000	67.73	7.50	75.23	-12.97	88.20	100	140	Peak
3	7126.800	53.18	7.50	60.68	-27.52	88.20	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-17
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Marvin
Test Mode	802.11be-20MHz_TX_Band8_242Tone_RU122_CH 233_ANT 6+7	Test Voltage	By Notebook PC

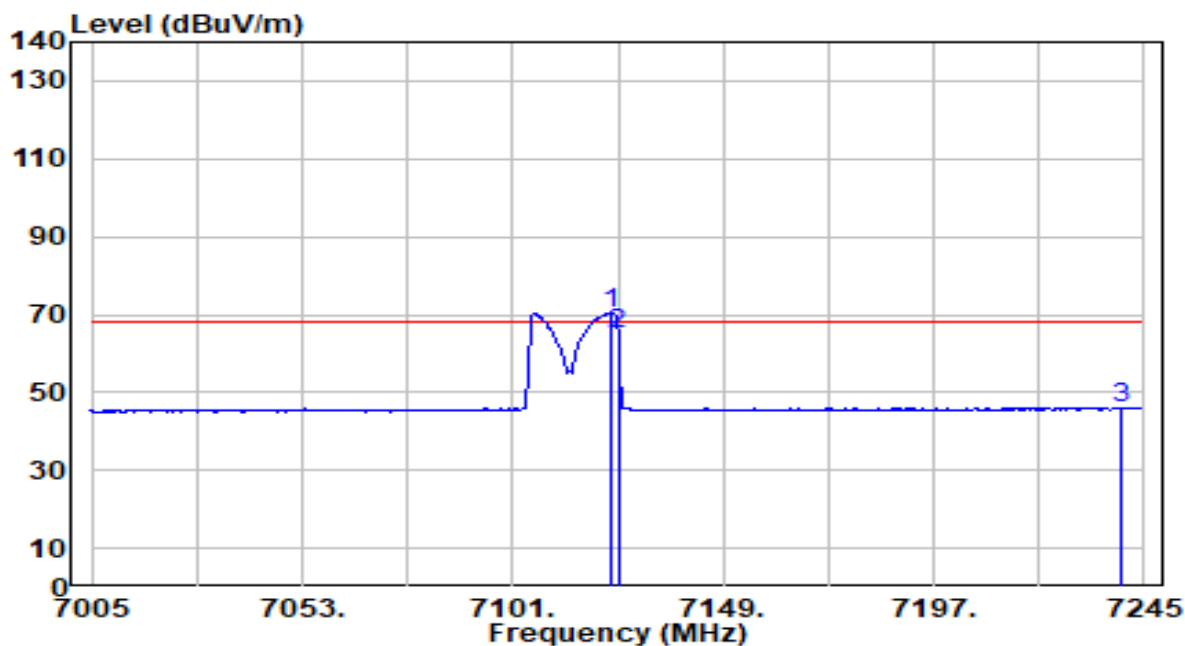


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.200	63.01	7.49	70.50	N/A	N/A	100	140	Average
2	* 7125.000	57.25	7.50	64.74	-3.46	68.20	100	140	Average
3	7239.600	38.45	7.77	46.23	-21.97	68.20	100	140	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRUI3_CH 229_ANT 6+7	Test Voltage	By Notebook PC

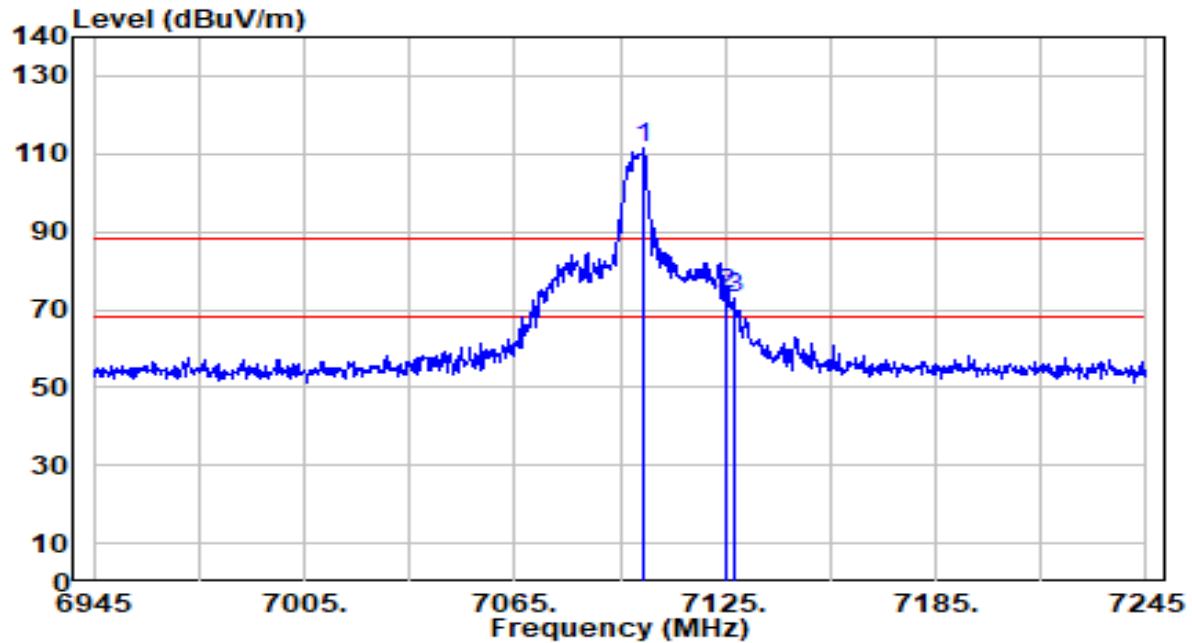


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7101.900	103.85	7.45	111.30	N/A	N/A	100	238	Peak
2	* 7125.000	66.35	7.50	73.85	-14.35	88.20	100	238	Peak
3	7127.700	65.33	7.50	72.83	-15.37	88.20	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 229_ANT 6+7	Test Voltage	By Notebook PC

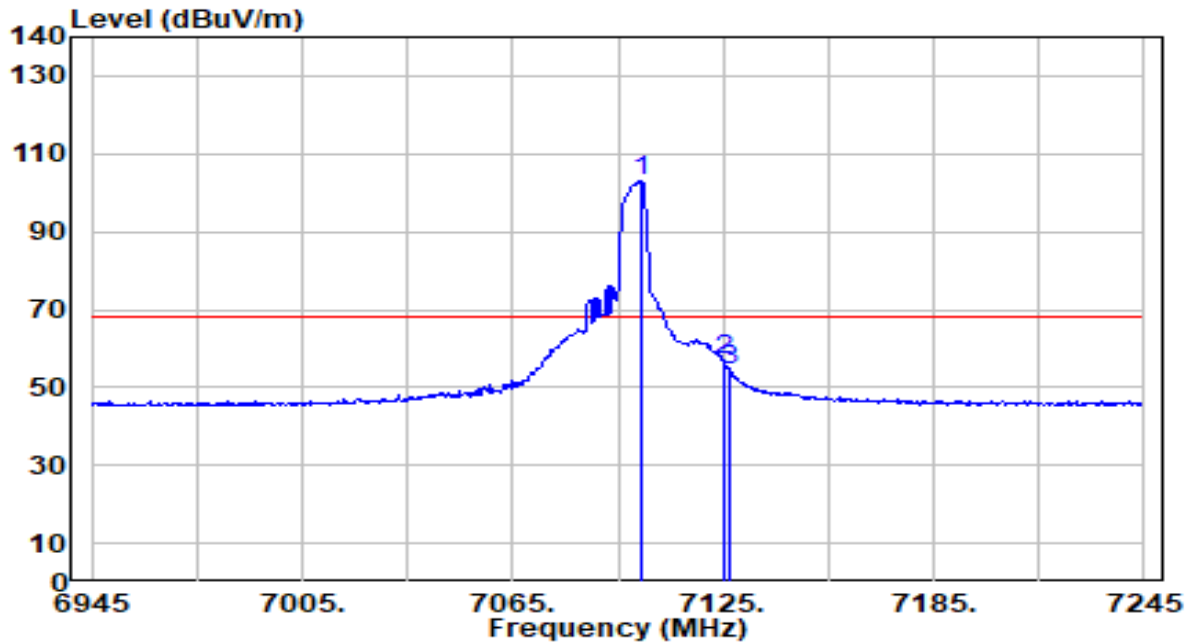


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7101.600	95.79	7.45	103.24	N/A	N/A	100	238	Average
2	* 7125.000	49.65	7.50	57.15	-11.05	68.20	100	238	Average
3	7126.800	47.15	7.50	54.65	-13.55	68.20	100	238	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 229_ANT 6+7	Test Voltage	By Notebook PC

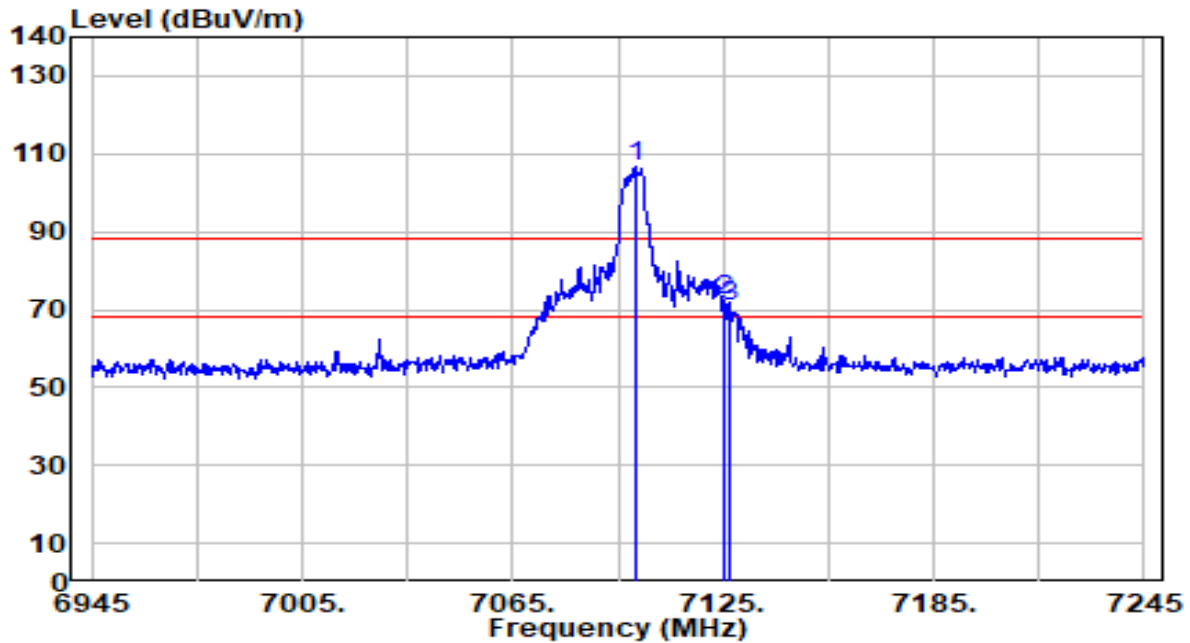


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7099.800	99.02	7.45	106.46	N/A	N/A	319	34	Peak
2	* 7125.000	64.99	7.50	72.48	-15.72	88.20	319	34	Peak
3	7126.800	63.30	7.50	70.80	-17.40	88.20	319	34	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 229_ANT 6+7	Test Voltage	By Notebook PC

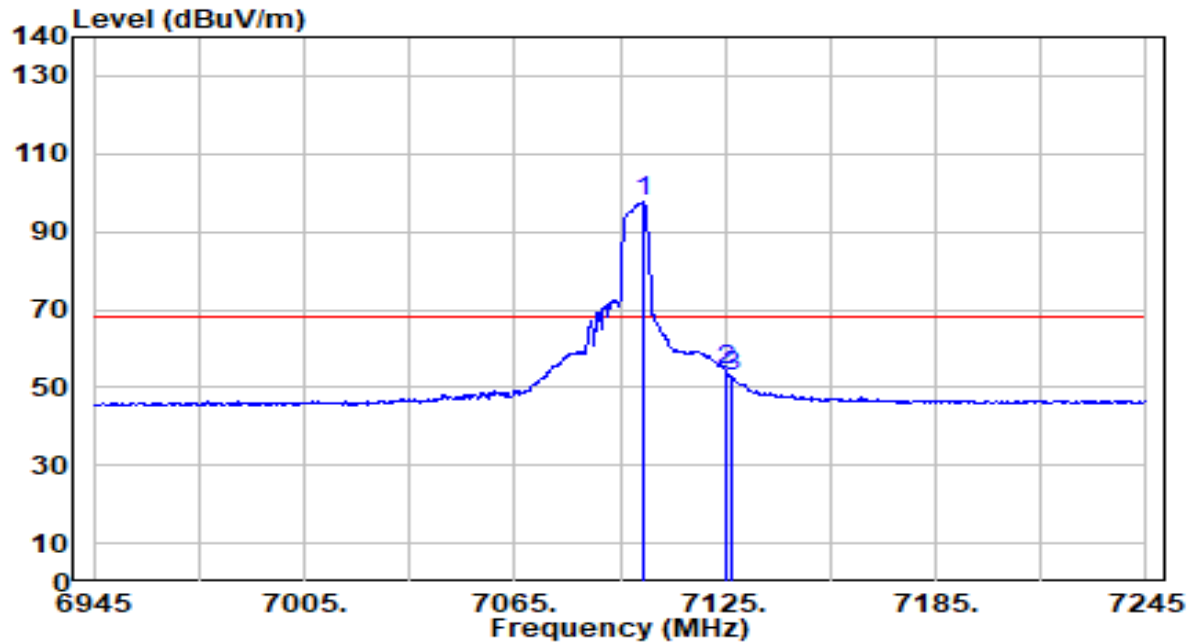


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7101.600	90.17	7.45	97.63	N/A	N/A	319	34	Average
2	* 7125.000	46.77	7.50	54.27	-13.93	68.20	319	34	Average
3	7126.800	45.24	7.50	52.74	-15.46	68.20	319	34	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 233_ANT 6+7	Test Voltage	By Notebook PC

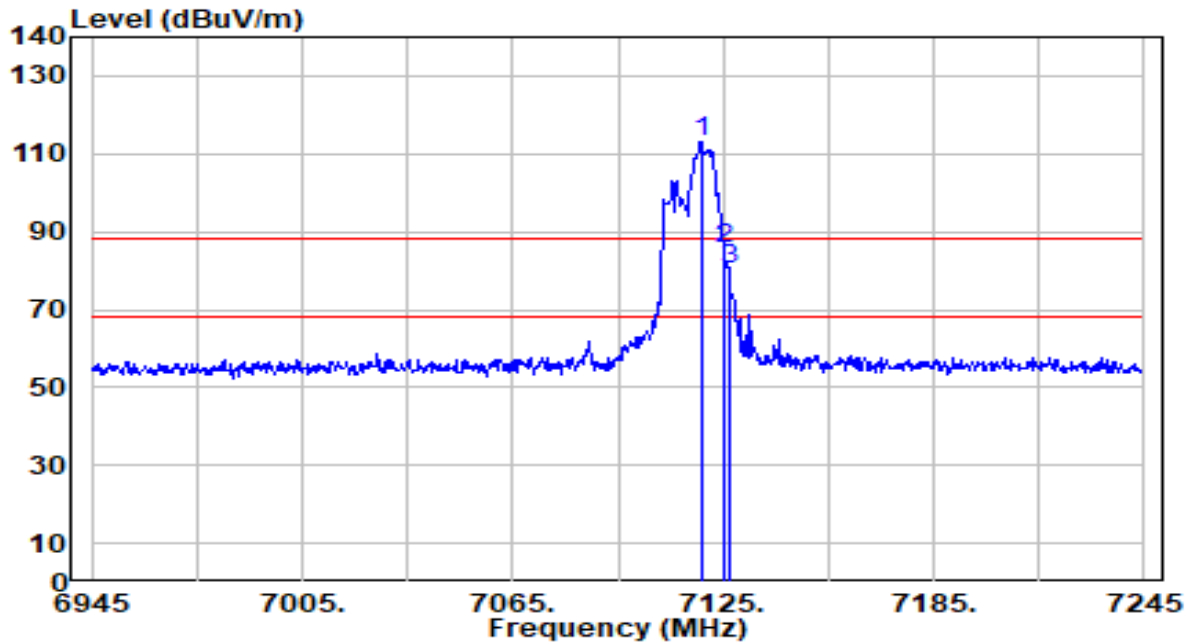


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7118.700	105.76	7.48	113.24	N/A	N/A	100	84	Peak
2	* 7125.000	78.27	7.50	85.77	-2.43	88.20	100	84	Peak
3	7126.800	72.57	7.50	80.07	-8.13	88.20	100	84	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 233_ANT 6+7	Test Voltage	By Notebook PC

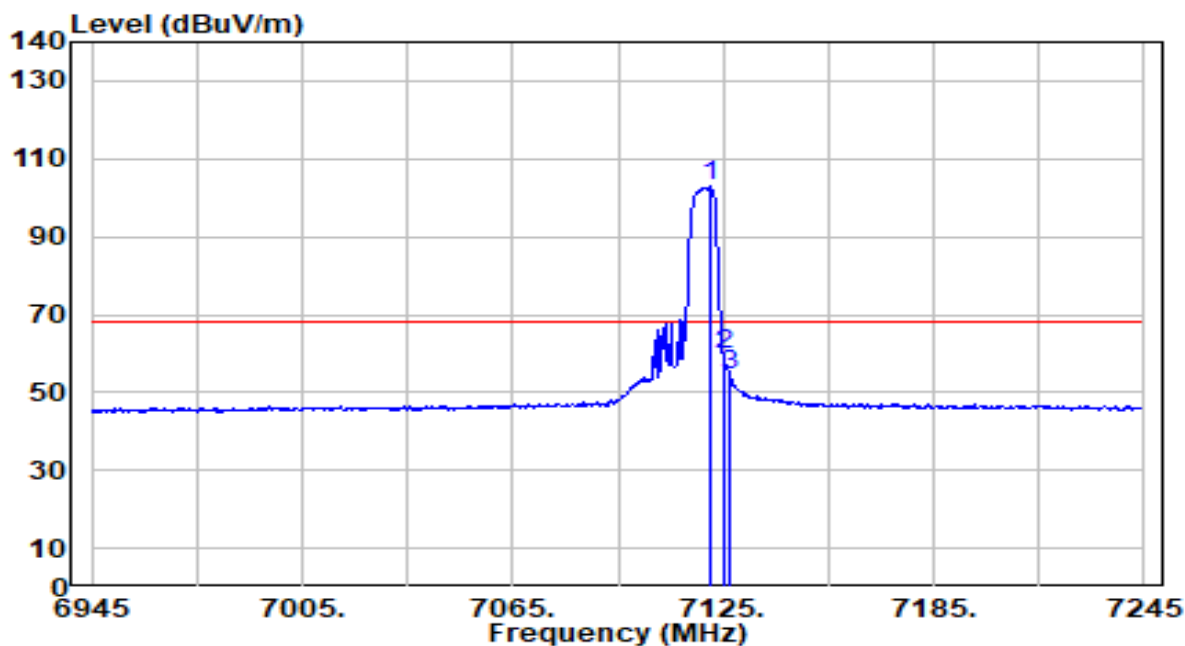


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7121.400	95.38	7.49	102.87	N/A	N/A	100	84	Average
2	* 7125.000	52.16	7.50	59.65	-8.55	68.20	100	84	Average
3	7126.800	46.73	7.50	54.23	-13.97	68.20	100	84	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 233_ANT 6+7	Test Voltage	By Notebook PC

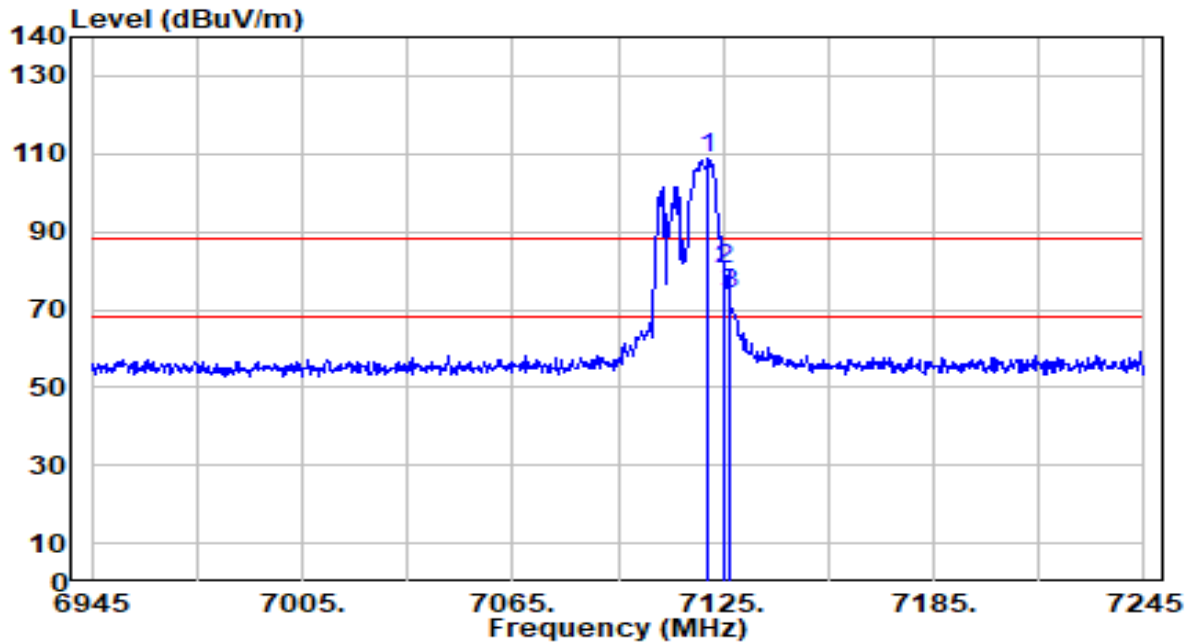


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7120.500	101.27	7.49	108.76	N/A	N/A	352	228	Peak
2	* 7125.000	73.04	7.50	80.54	-7.66	88.20	352	228	Peak
3	7126.800	66.24	7.50	73.73	-14.47	88.20	352	228	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_52+26Tone_MRU3_CH 233_ANT 6+7	Test Voltage	By Notebook PC

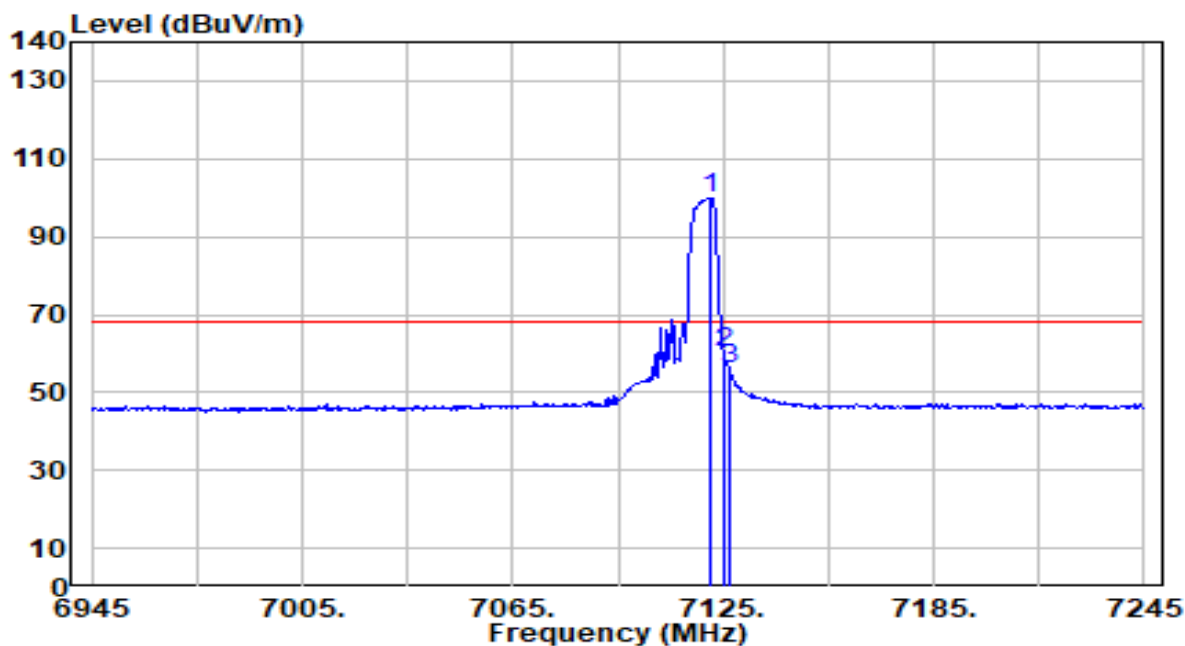


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7121.100	92.61	7.49	100.10	N/A	N/A	352	228	Average
2	* 7125.000	52.83	7.50	60.33	-7.87	68.20	352	228	Average
3	7126.800	48.50	7.50	56.00	-12.20	68.20	352	228	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 229_ANT 6+7	Test Voltage	By Notebook PC

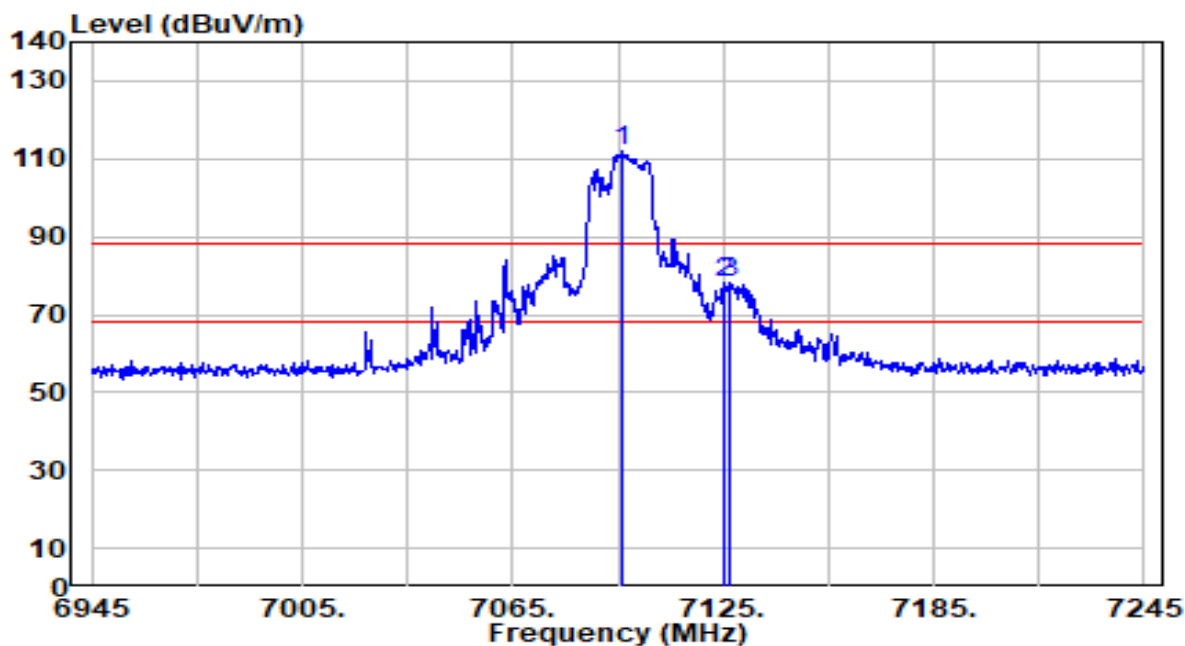


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7096.200	104.56	7.44	112.00	N/A	N/A	100	118	Peak
2	7125.000	70.43	7.50	77.93	-10.27	88.20	100	118	Peak
3	* 7126.800	70.72	7.50	78.22	-9.98	88.20	100	118	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 229_ANT 6+7	Test Voltage	By Notebook PC

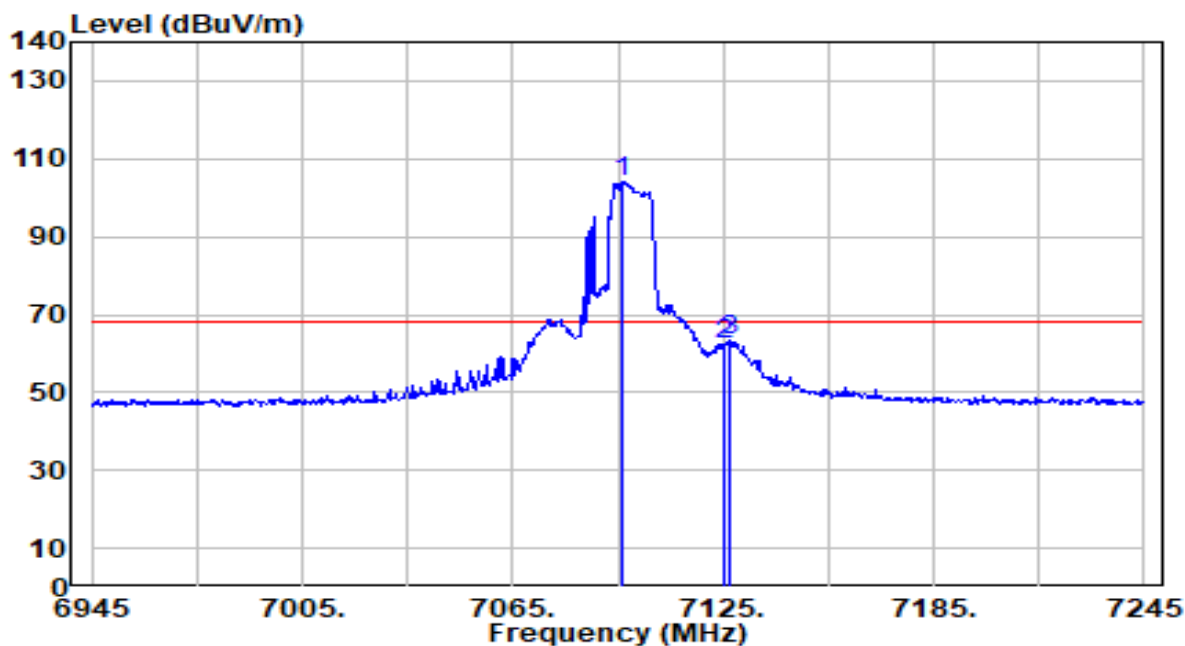


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7096.500	96.64	7.44	104.08	N/A	N/A	100	118	Average
2	7125.000	54.95	7.50	62.45	-5.75	68.20	100	118	Average
3	* 7127.100	55.84	7.50	63.34	-4.86	68.20	100	118	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 229_ANT 6+7	Test Voltage	By Notebook PC

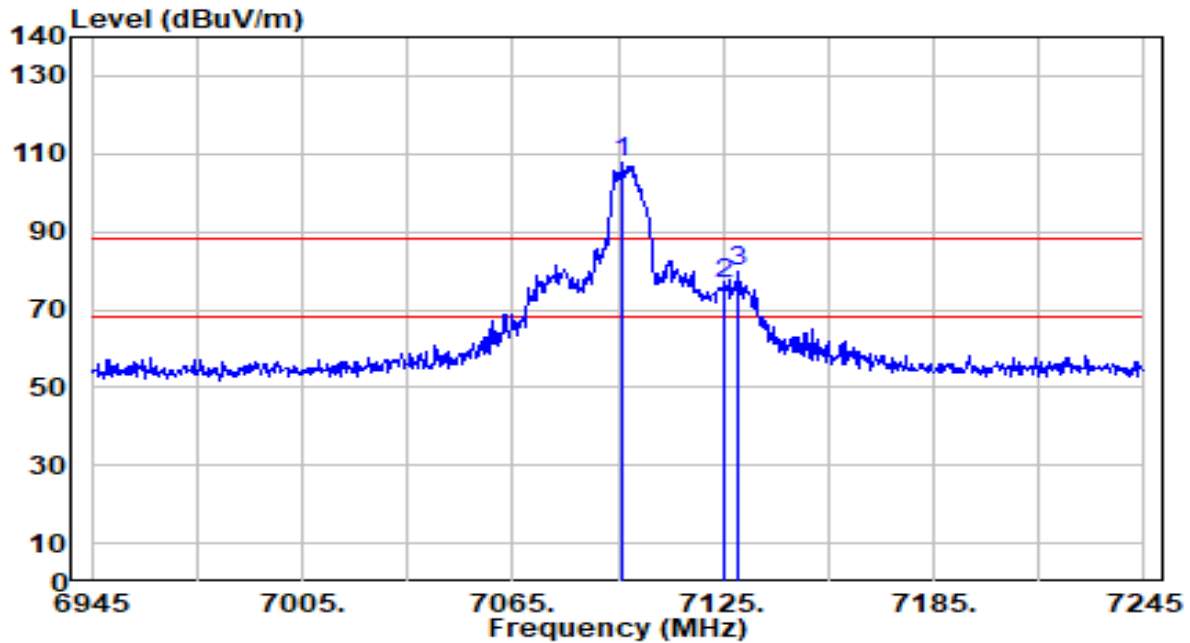


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7096.200	100.21	7.44	107.65	N/A	N/A	296	246	Peak
2	7125.000	69.33	7.50	76.83	-11.37	88.20	296	246	Peak
3	* 7129.500	72.03	7.50	79.53	-8.67	88.20	296	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 229_ANT 6+7	Test Voltage	By Notebook PC

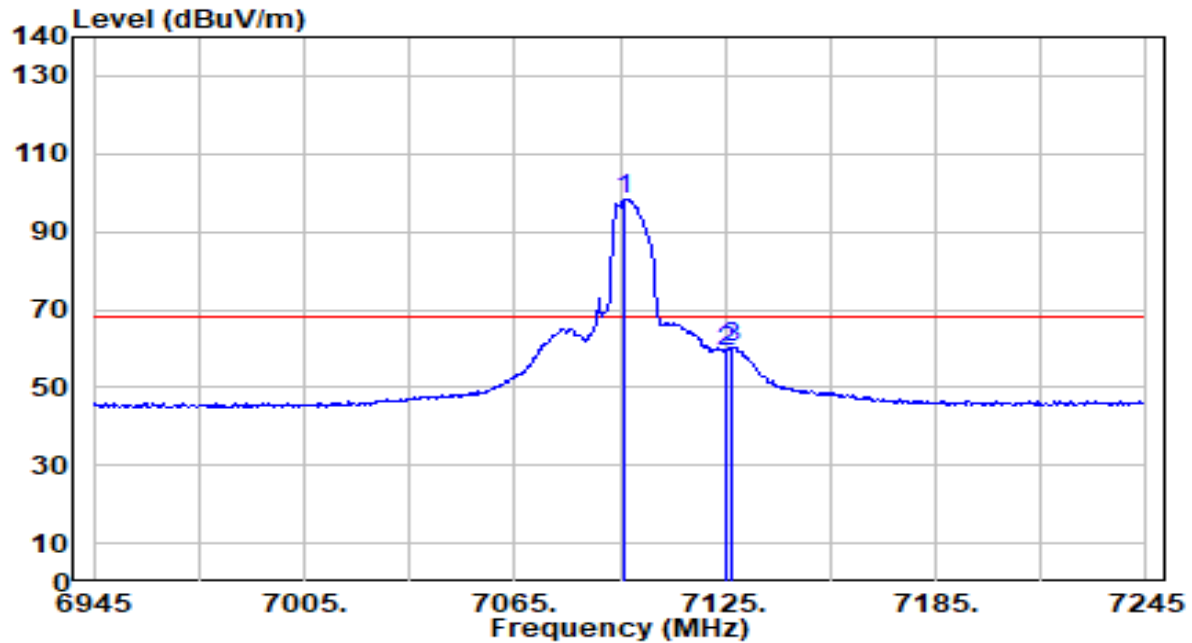


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7096.500	91.03	7.44	98.47	N/A	N/A	296	246	Average
2	7125.000	51.85	7.50	59.35	-8.85	68.20	296	246	Average
3	* 7127.100	52.62	7.50	60.12	-8.08	68.20	296	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 233_ANT 6+7	Test Voltage	By Notebook PC

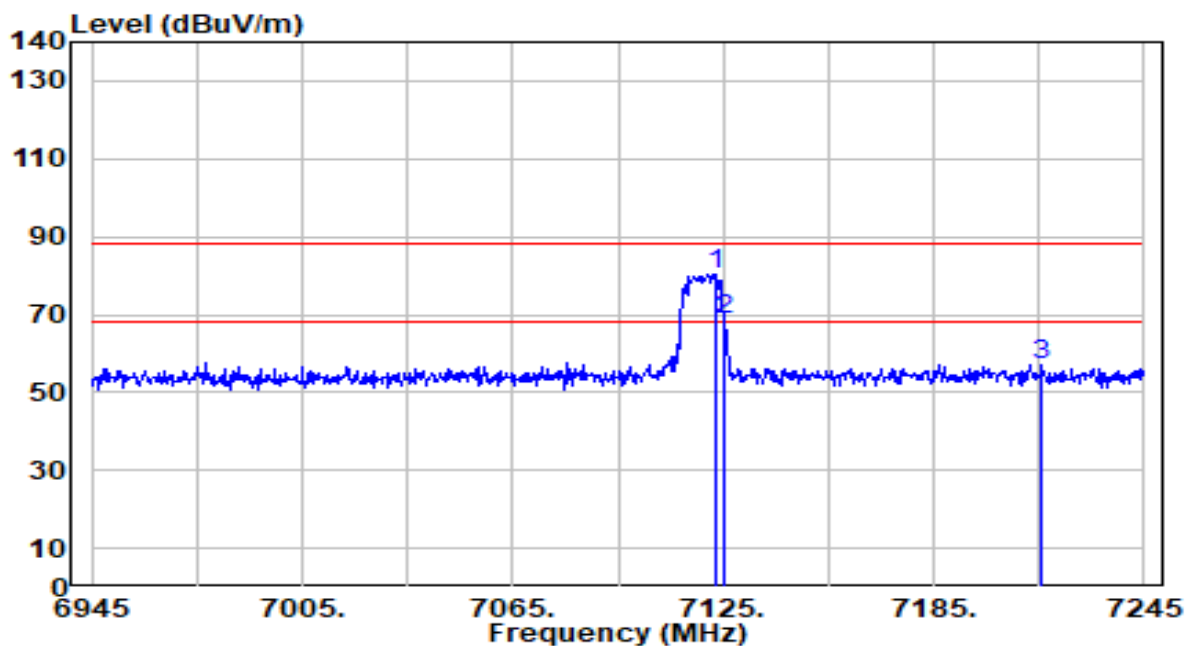


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7123.200	72.93	7.49	80.42	N/A	N/A	100	95	Peak
2	* 7125.000	61.33	7.50	68.82	-19.38	88.20	100	95	Peak
3	7215.600	49.39	7.69	57.08	-31.12	88.20	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 233_ANT 6+7	Test Voltage	By Notebook PC

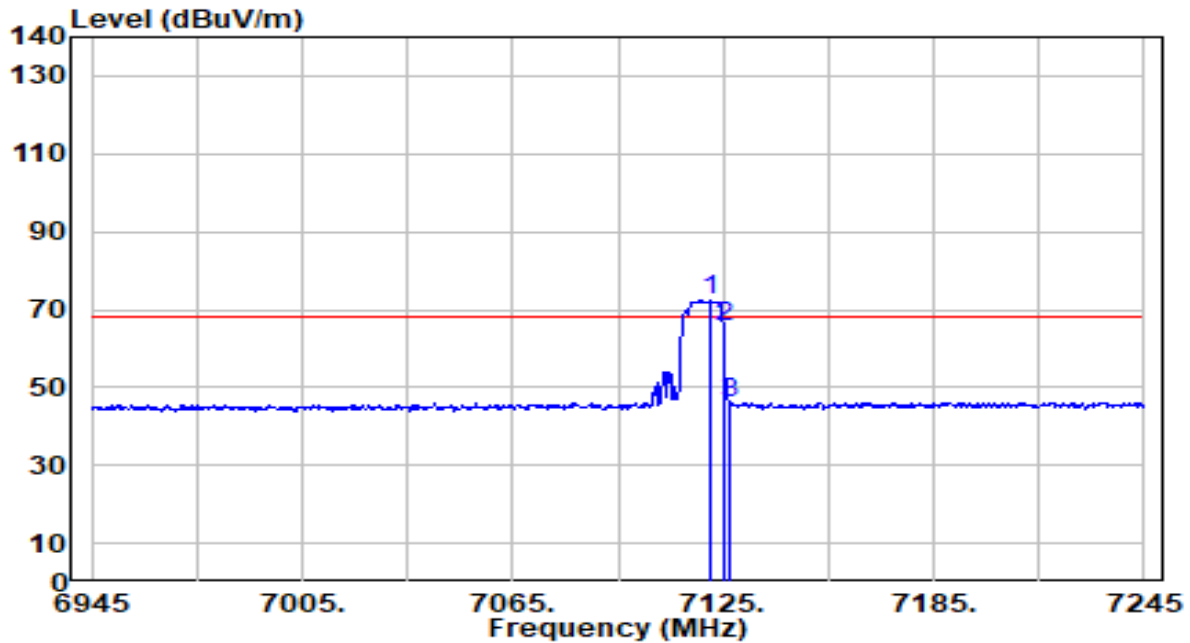


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7121.700	64.71	7.49	72.20	N/A	N/A	100	95	Average
2	* 7125.000	58.09	7.50	65.59	-2.61	68.20	100	95	Average
3	7126.800	38.71	7.50	46.21	-21.99	68.20	100	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 233_ANT 6+7	Test Voltage	By Notebook PC

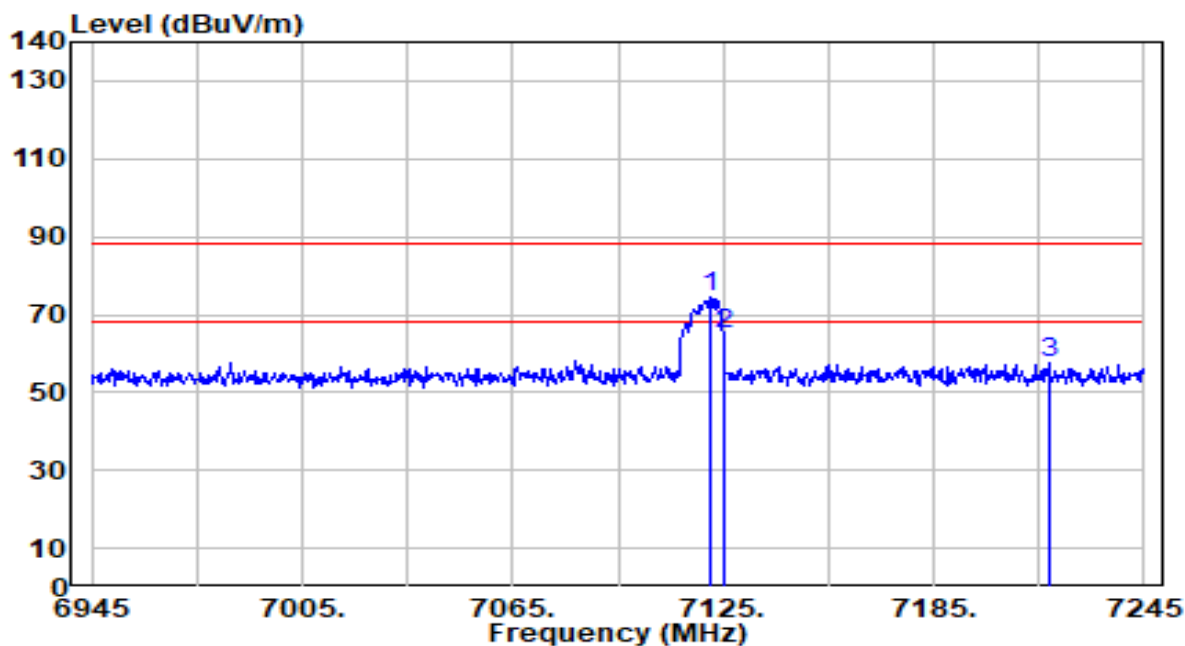


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7121.700	67.17	7.49	74.66	N/A	N/A	308	10	Peak
2	* 7125.000	57.39	7.50	64.88	-23.32	88.20	308	10	Peak
3	7217.700	49.72	7.70	57.42	-30.78	88.20	308	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-20
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-20MHz_TX_Band8_106+26Tone_MRU2_CH 233_ANT 6+7	Test Voltage	By Notebook PC

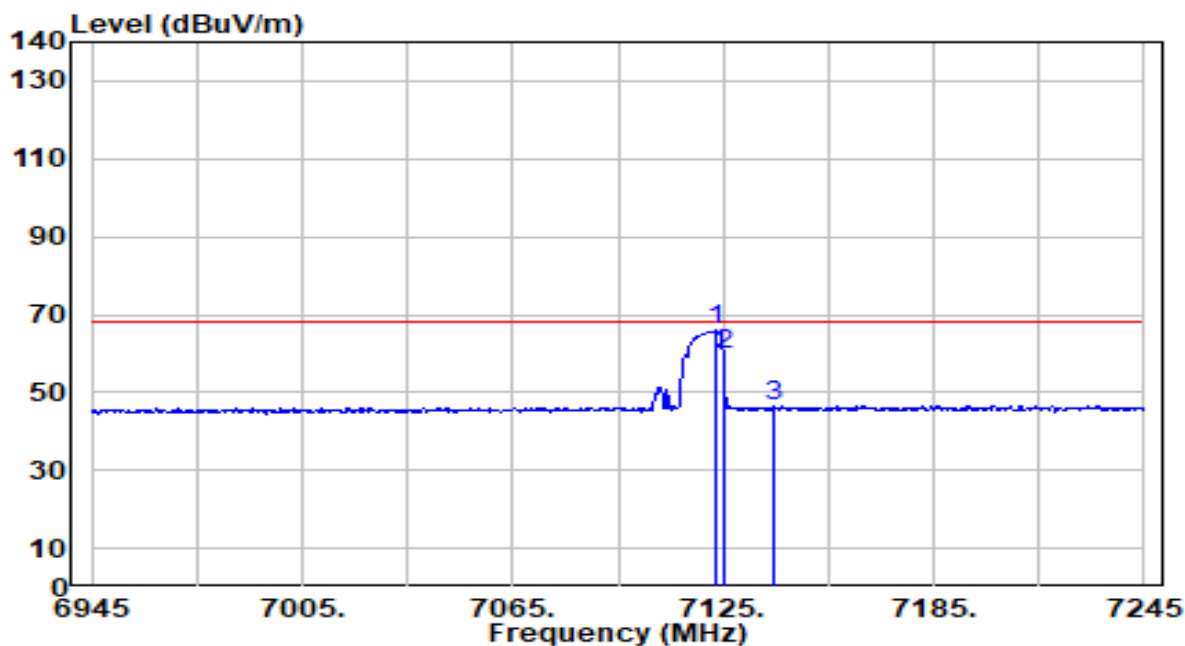


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7122.600	58.43	7.49	65.93	N/A	N/A	308	10	Average
2	* 7125.000	52.09	7.50	59.59	-8.61	68.20	308	10	Average
3	7139.100	39.09	7.52	46.61	-21.59	68.20	308	10	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_MRU1_CH 215_ANT 6+7	Test Voltage	By Notebook PC

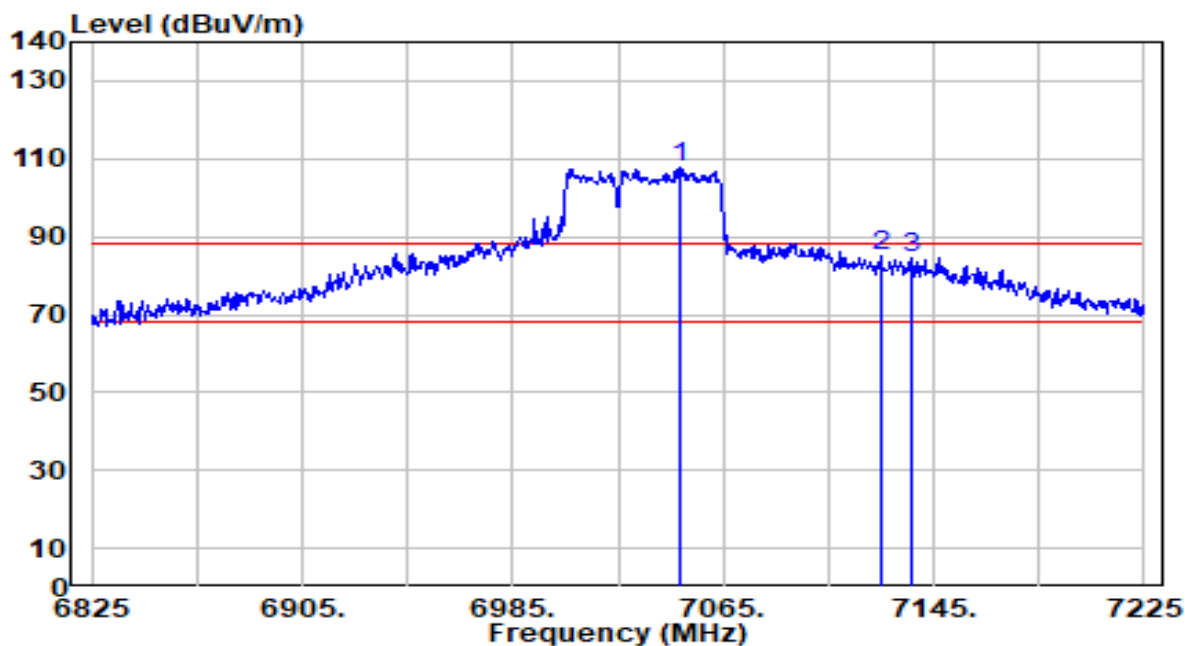


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7049.000	100.63	7.33	107.96	N/A	N/A	104	94	Peak
2	* 7125.000	77.76	7.50	85.25	-2.95	88.20	104	94	Peak
3	7136.200	77.12	7.52	84.63	-3.57	88.20	104	94	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_MRU1_CH 215_ANT 6+7	Test Voltage	By Notebook PC

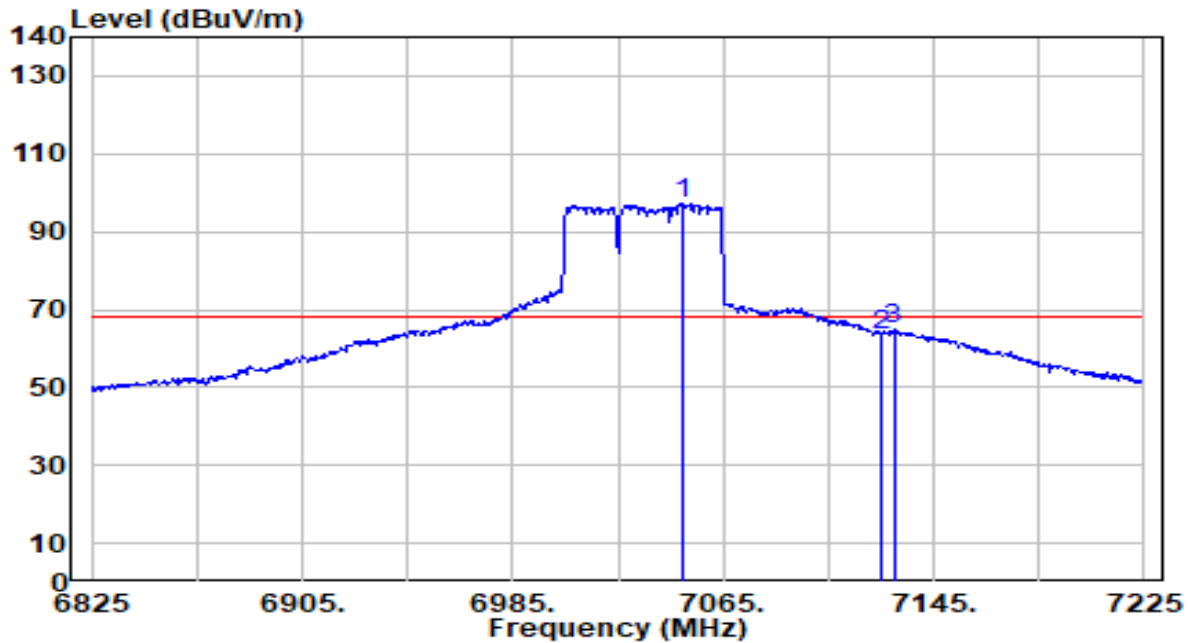


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7049.800	89.82	7.33	97.16	N/A	N/A	104	94	Average
2	7125.000	56.08	7.50	63.58	-4.62	68.20	104	94	Average
3	* 7129.800	57.38	7.51	64.88	-3.32	68.20	104	94	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_MRU1_CH 215_ANT 6+7	Test Voltage	By Notebook PC

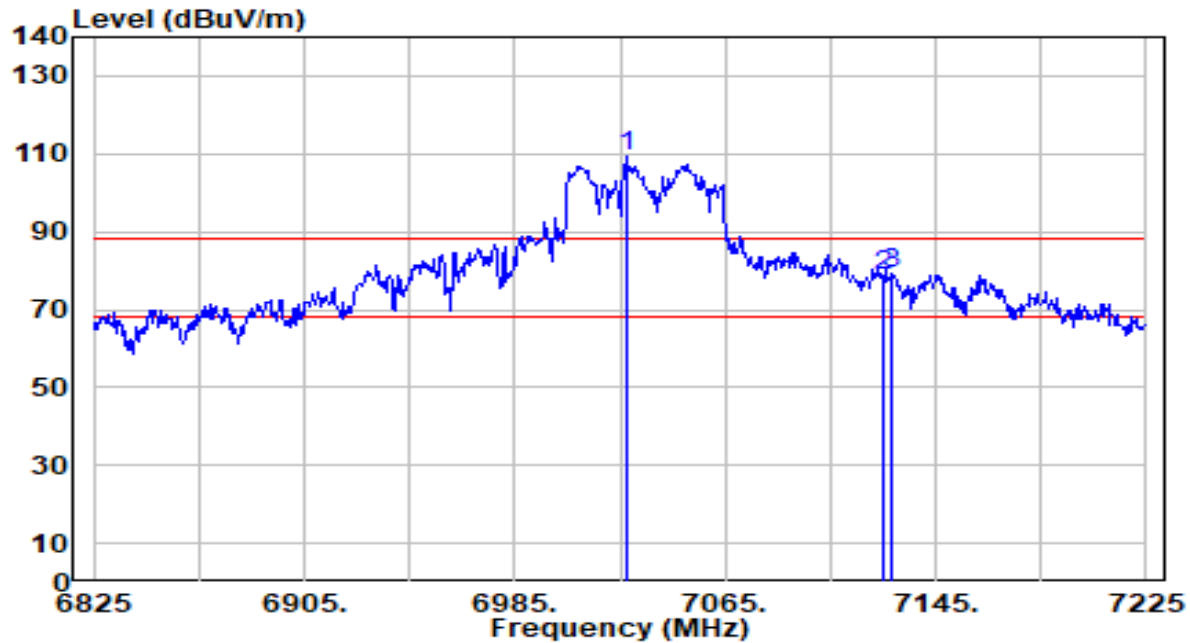


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7027.400	102.06	7.28	109.34	N/A	N/A	109	154	Peak
2	7125.000	71.41	7.50	78.91	-9.29	88.20	109	154	Peak
3	* 7128.200	71.63	7.50	79.14	-9.06	88.20	109	154	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_MRU1_CH 215_ANT 6+7	Test Voltage	By Notebook PC

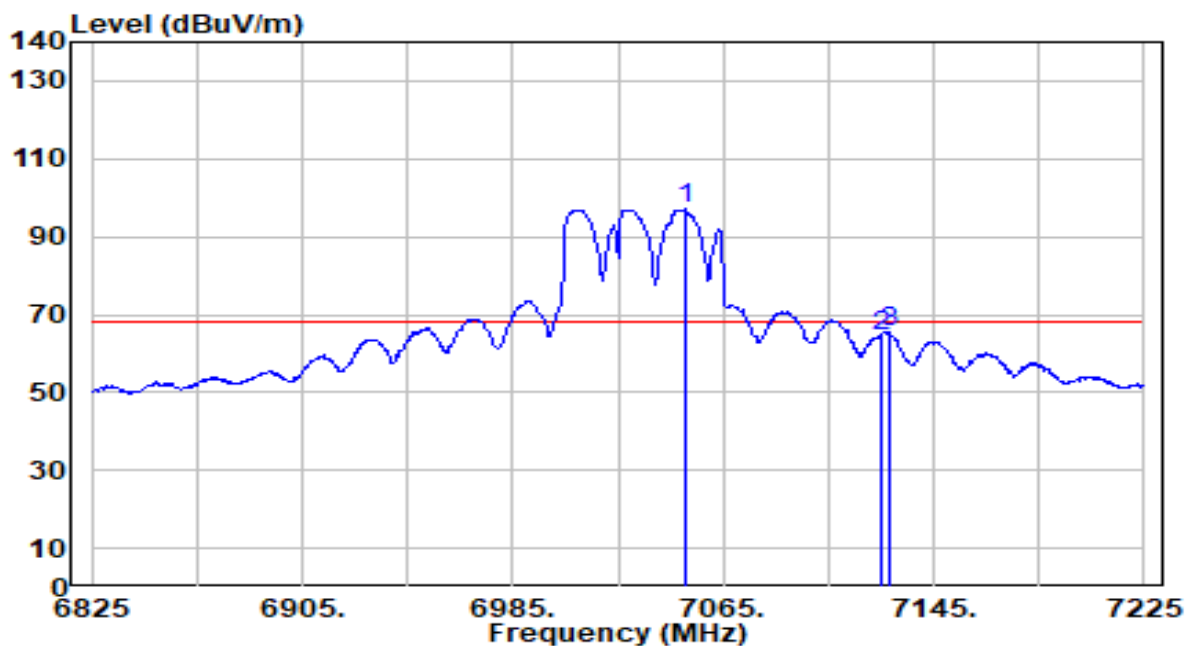


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7051.000	89.61	7.34	96.95	N/A	N/A	109	154	Average
2	7125.000	57.17	7.50	64.67	-3.53	68.20	109	154	Average
3	* 7127.800	57.91	7.50	65.41	-2.79	68.20	109	154	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_MRU1_CH 207_ANT 6+7	Test Voltage	By Notebook PC

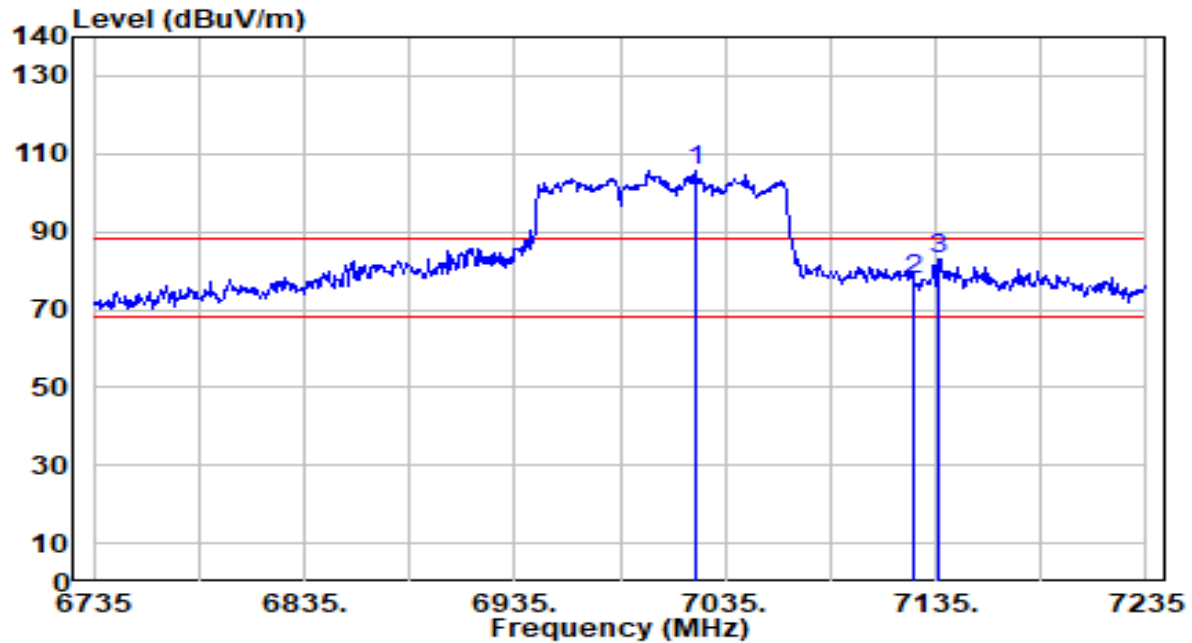


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7021.000	98.50	7.27	105.77	N/A	N/A	100	113	Peak
2	7125.000	70.23	7.50	77.73	-10.47	88.20	100	113	Peak
3	* 7136.500	75.30	7.52	82.82	-5.38	88.20	100	113	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_MRU1_CH 207_ANT 6+7	Test Voltage	By Notebook PC

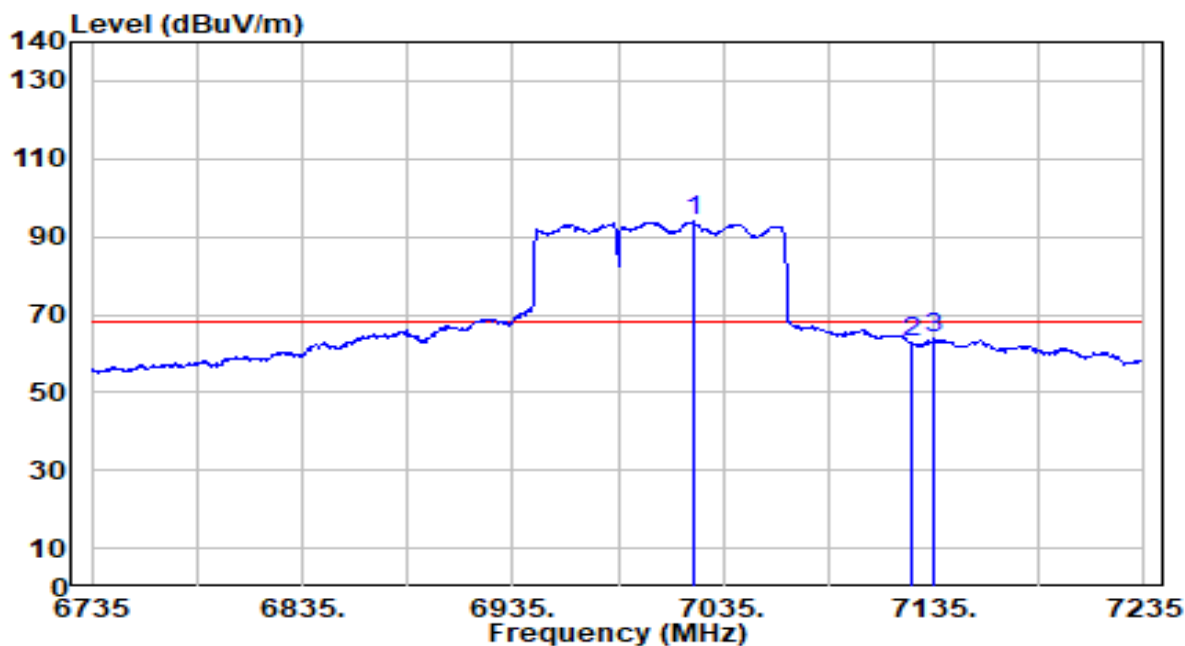


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7020.500	86.54	7.27	93.81	N/A	N/A	100	113	Average
2	7125.000	55.22	7.50	62.71	-5.49	68.20	100	113	Average
3	* 7135.000	56.40	7.52	63.91	-4.29	68.20	100	113	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_MRU1_CH 207_ANT 6+7	Test Voltage	By Notebook PC

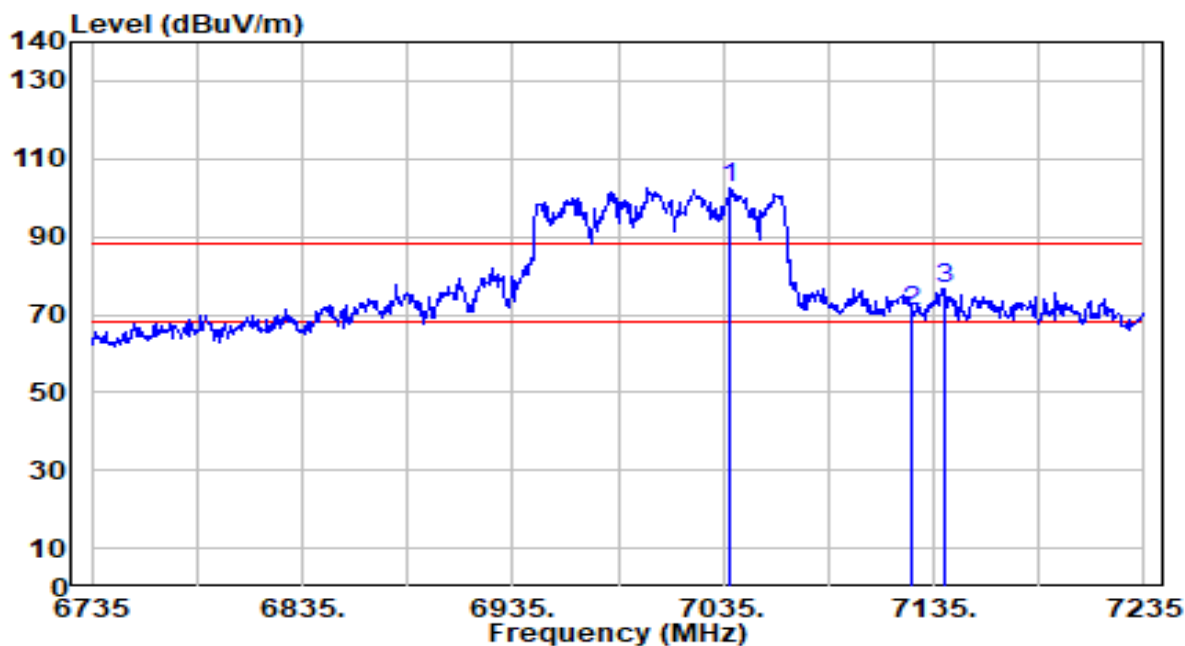


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7038.500	95.20	7.31	102.51	N/A	N/A	100	234	Peak
2	7125.000	63.33	7.50	70.82	-17.38	88.20	100	234	Peak
3	* 7140.000	68.94	7.52	76.47	-11.73	88.20	100	234	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-23
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_MRU1_CH 207_ANT 6+7	Test Voltage	By Notebook PC

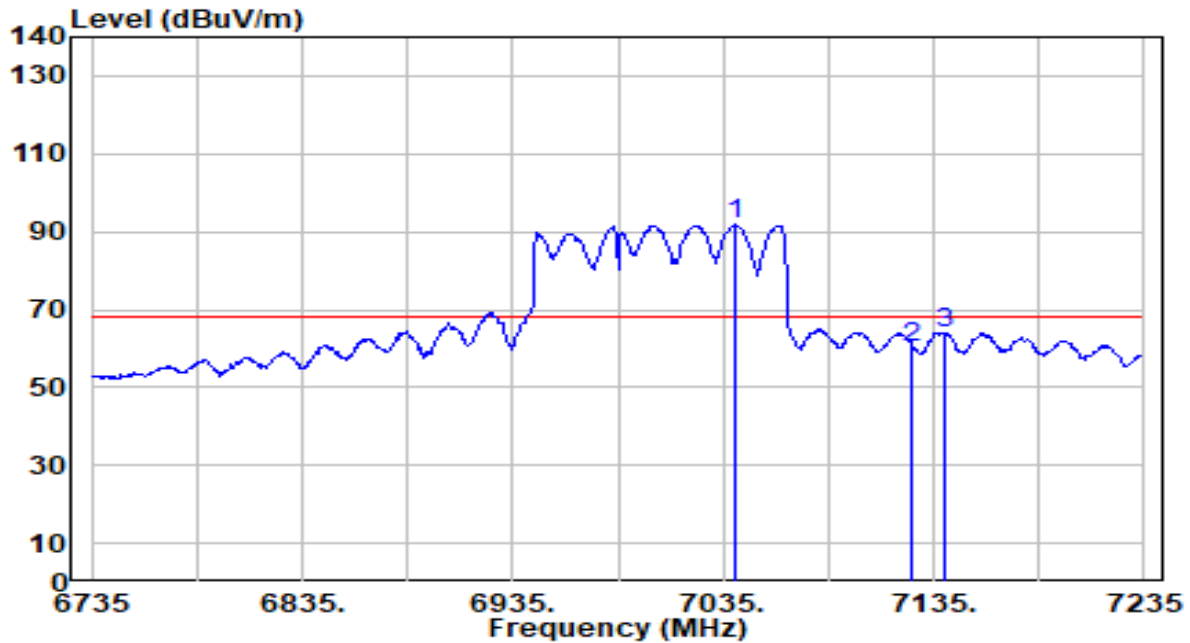


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7041.000	84.38	7.31	91.70	N/A	N/A	100	234	Average
2	7125.000	52.95	7.50	60.44	-7.76	68.20	100	234	Average
3	* 7140.000	56.59	7.52	64.12	-4.08	68.20	100	234	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_PUN2_CH 215_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

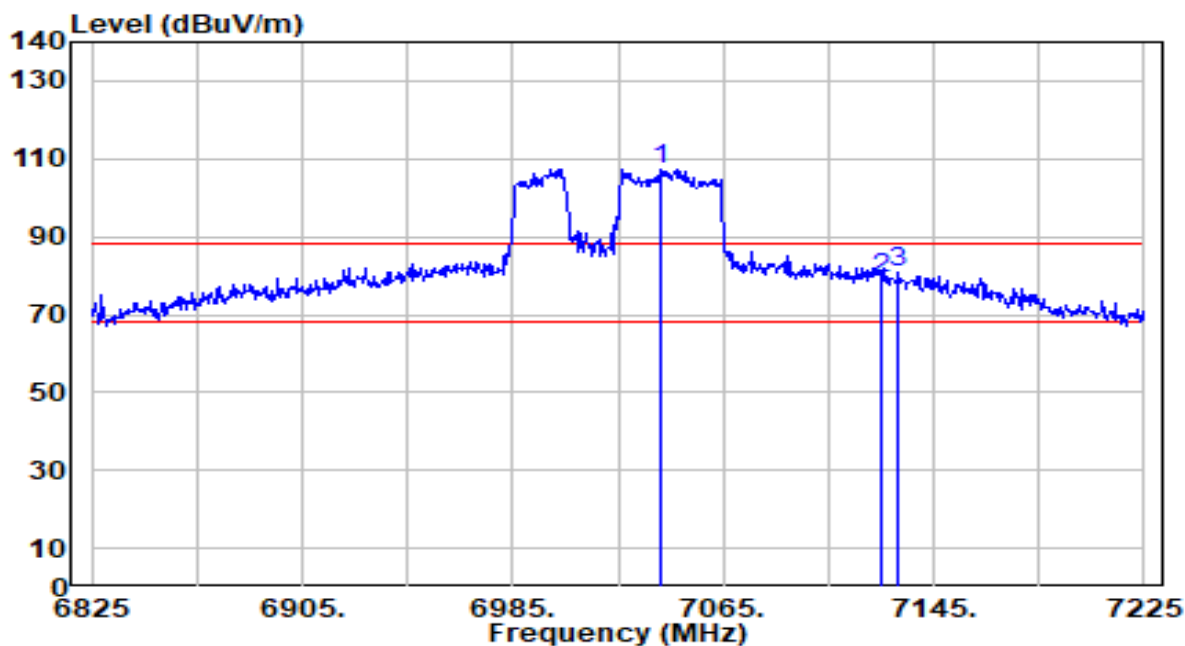


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7041.400	100.00	7.31	107.32	N/A	N/A	100	112	Peak
2	7125.000	71.56	7.50	79.06	-9.14	88.20	100	112	Peak
3	* 7131.800	73.19	7.51	80.70	-7.50	88.20	100	112	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_PUN2_CH 215_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

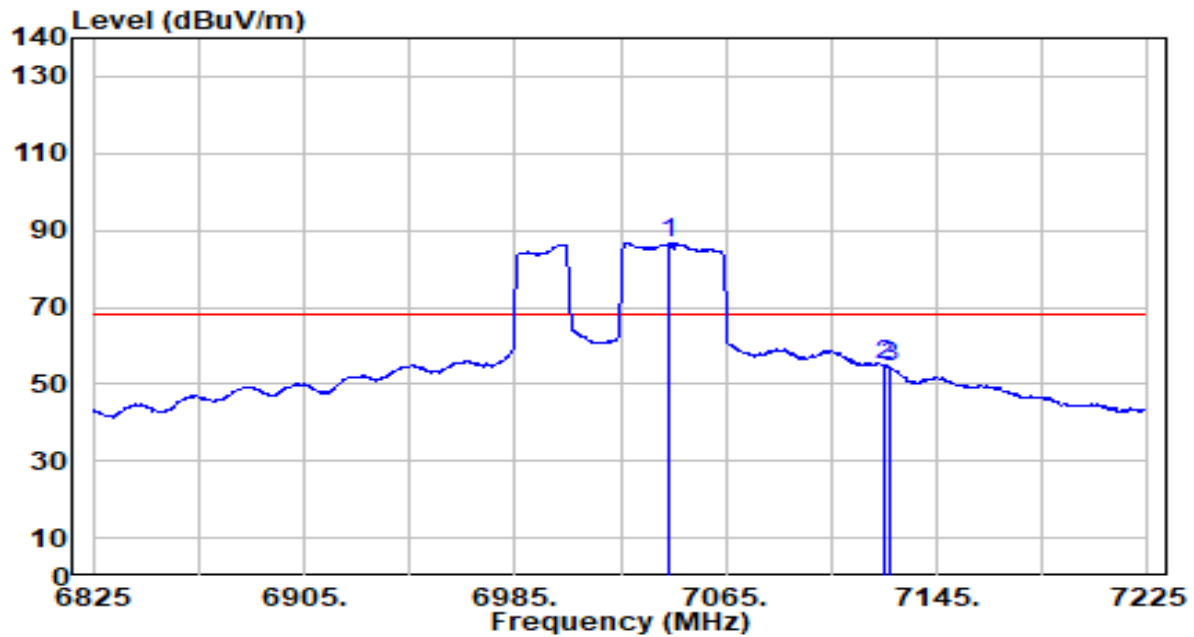


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7046.500	89.98	7.33	97.31	N/A	N/A	100	100	Average
2	* 7125.000	57.33	7.50	64.82	-3.38	68.20	100	100	Average
3	7127.000	56.56	7.50	64.06	-4.14	68.20	100	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_PUN2_CH 215_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

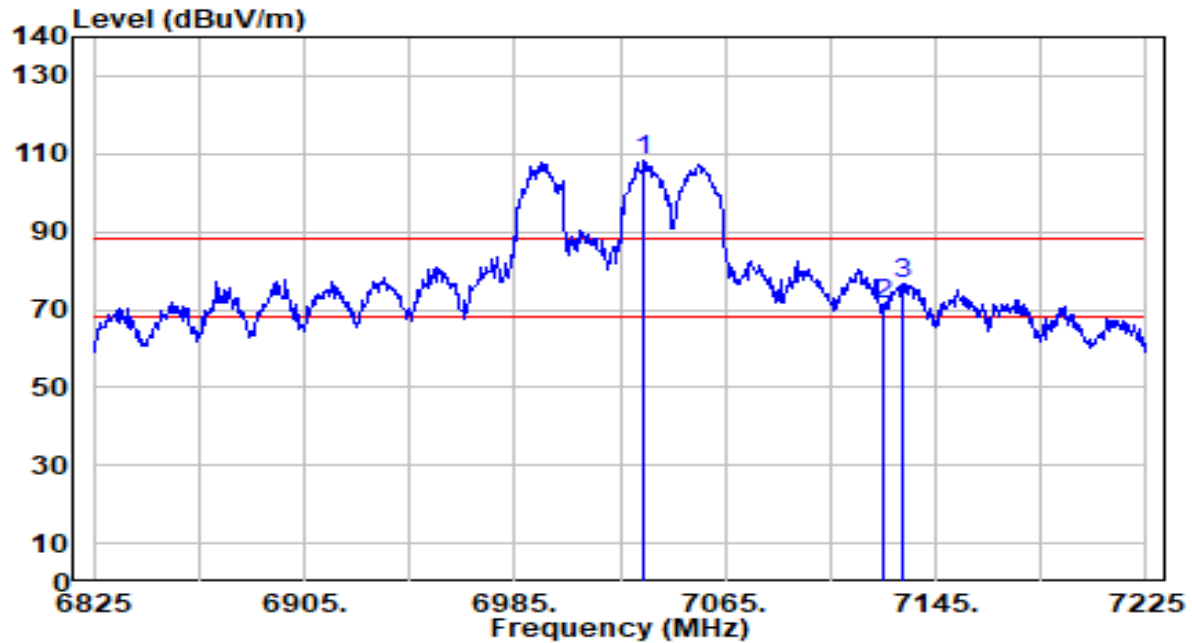


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7033.800	100.99	7.30	108.29	N/A	N/A	100	143	Peak
2	7125.000	63.87	7.50	71.37	-16.83	88.20	100	143	Peak
3	* 7132.600	69.30	7.51	76.81	-11.39	88.20	100	143	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-80MHz_TX_Band8_484+242Tone_PUN2_CH 215_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

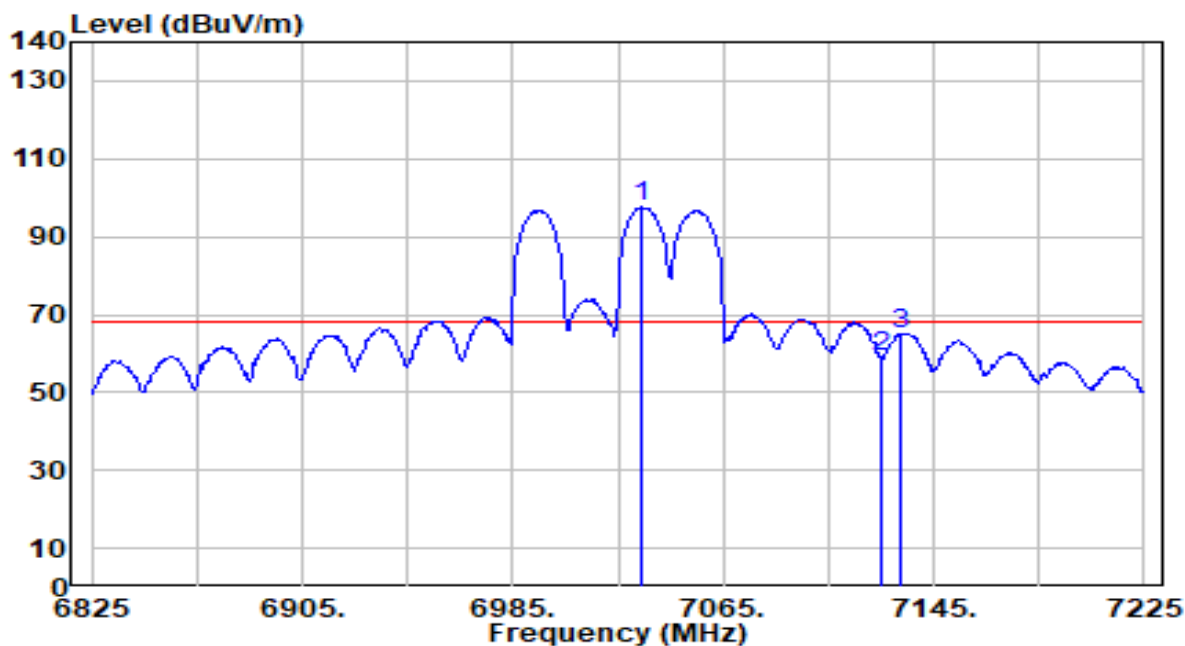


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7033.800	90.18	7.30	97.48	N/A	N/A	100	143	Average
2	7125.000	51.47	7.50	58.96	-9.24	68.20	100	143	Average
3	* 7132.600	57.70	7.51	65.21	-2.99	68.20	100	143	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN1_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

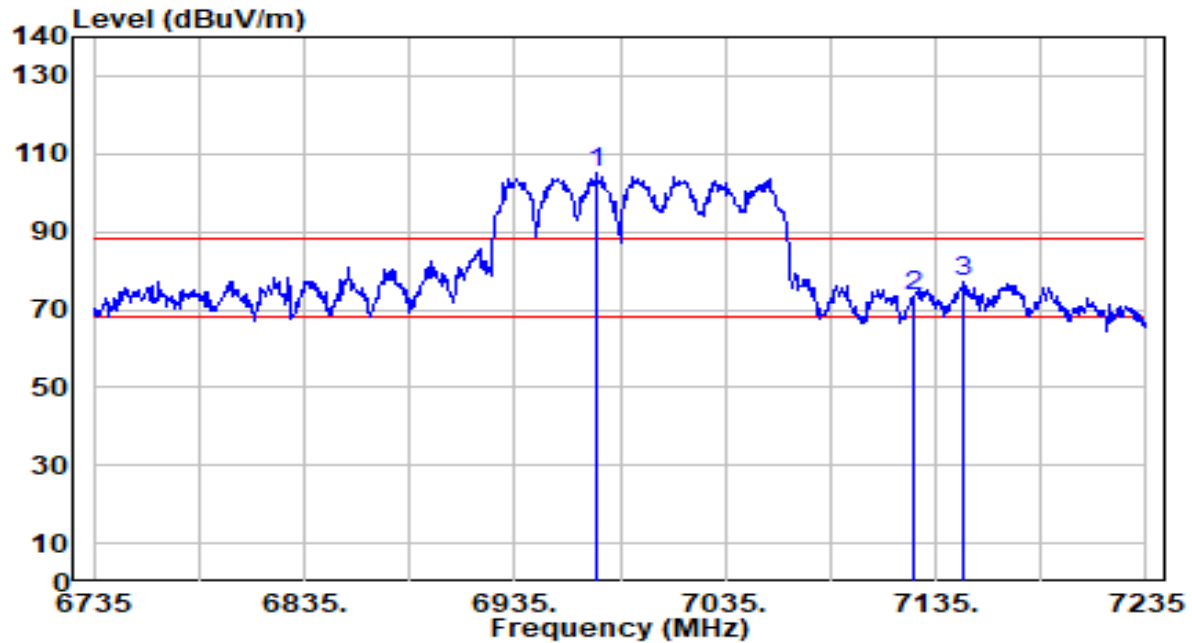


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.000	98.15	7.21	105.36	N/A	N/A	100	246	Peak
2	7125.000	66.01	7.50	73.50	-14.70	88.20	100	246	Peak
3	* 7148.500	69.41	7.54	76.95	-11.25	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN1_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

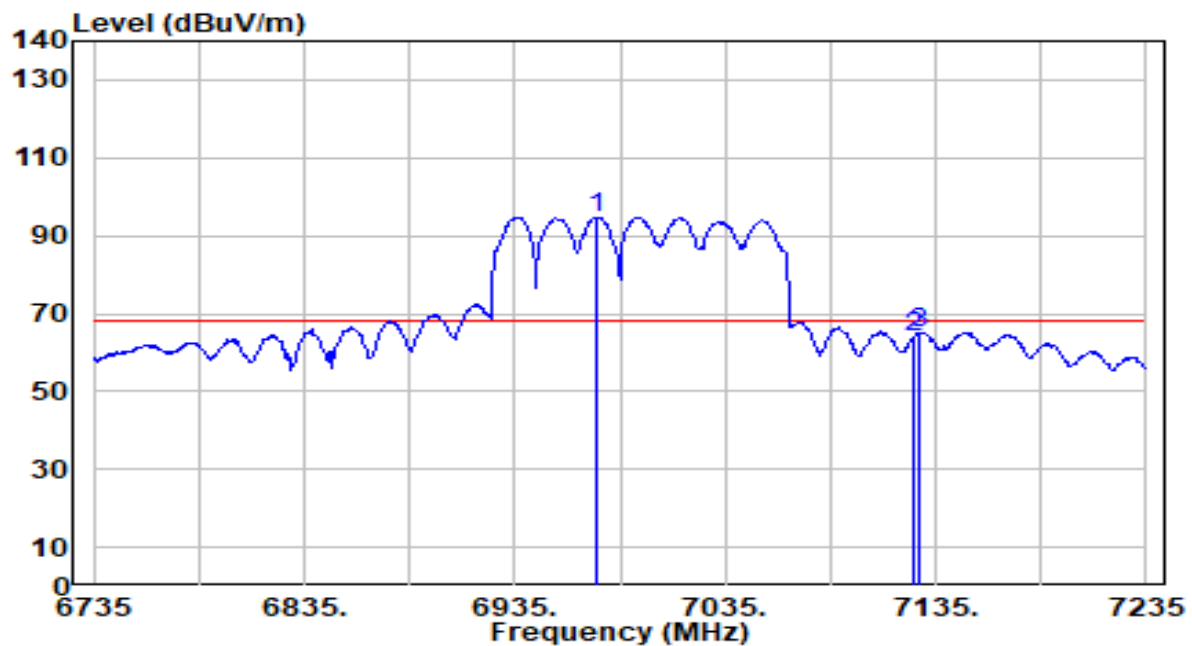


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6973.500	87.60	7.21	94.81	N/A	N/A	100	246	Average
2	7125.000	56.57	7.50	64.06	-4.14	68.20	100	246	Average
3	* 7127.000	57.69	7.50	65.19	-3.01	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN1_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

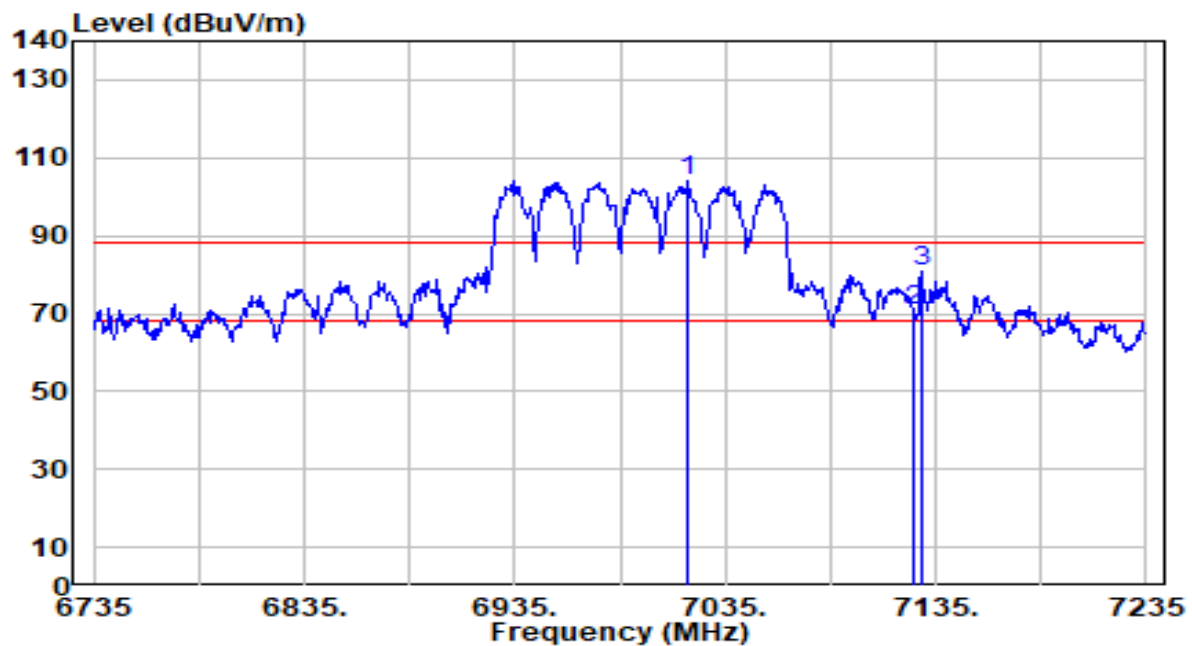


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7017.000	96.81	7.26	104.06	N/A	N/A	100	144	Peak
2	7125.000	63.53	7.50	71.03	-17.17	88.20	100	144	Peak
3	* 7128.000	73.59	7.50	81.09	-7.11	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN1_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

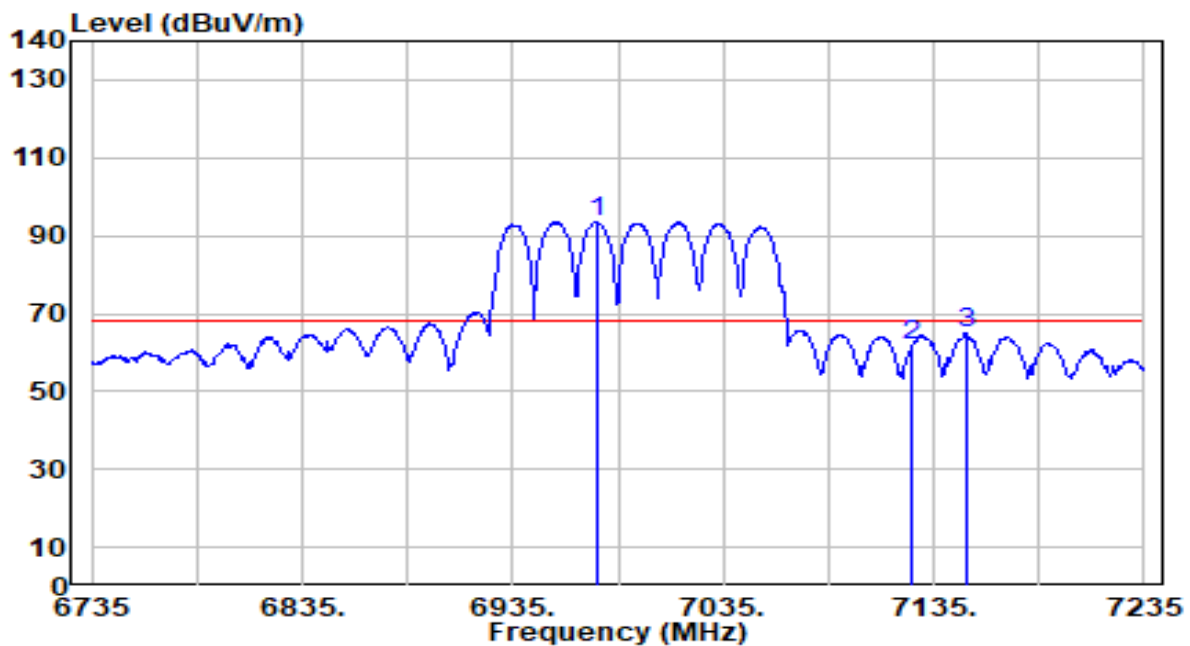


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6975.000	86.25	7.21	93.46	N/A	N/A	100	144	Average
2	7125.000	54.50	7.50	61.99	-6.21	68.20	100	144	Average
3	* 7150.500	57.35	7.54	64.89	-3.31	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

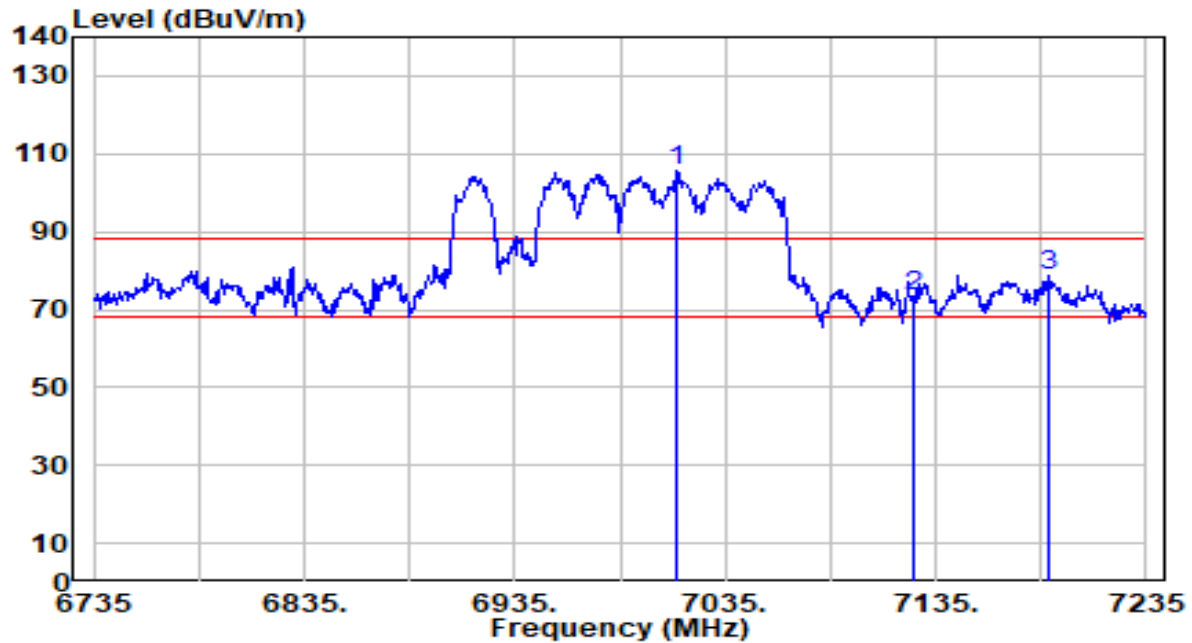


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7012.500	98.62	7.25	105.87	N/A	N/A	100	246	Peak
2	7125.000	66.11	7.50	73.61	-14.59	88.20	100	246	Peak
3	* 7189.000	71.30	7.62	78.92	-9.28	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

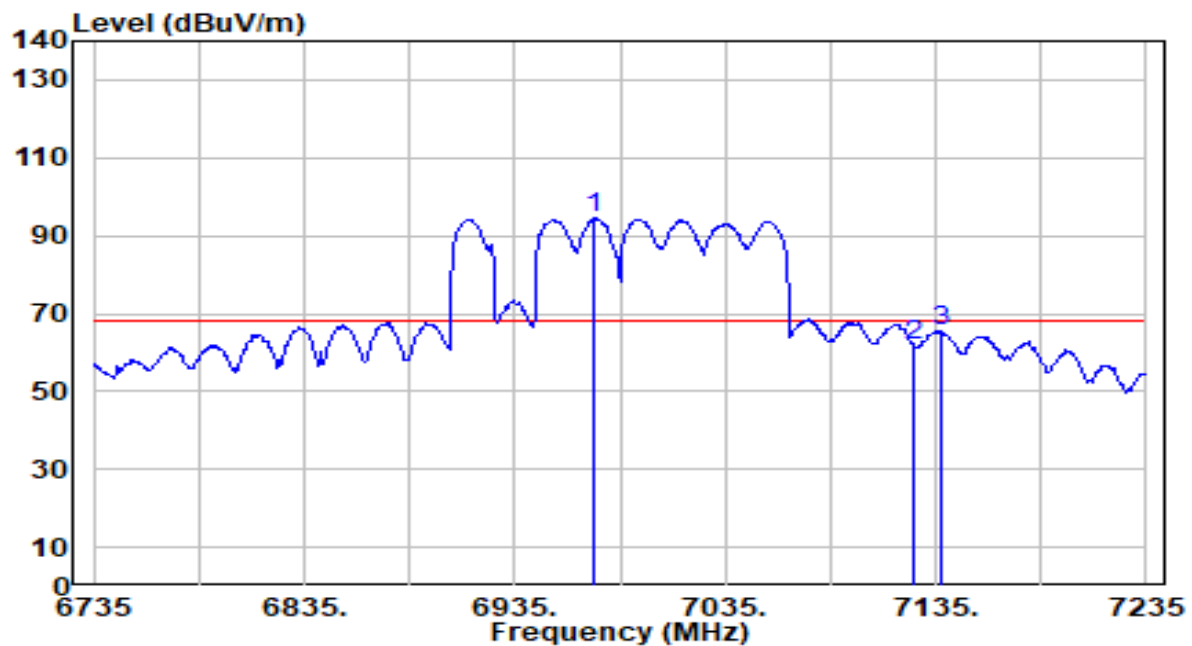


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6973.000	87.35	7.21	94.56	N/A	N/A	100	246	Average
2	7125.000	54.20	7.50	61.70	-6.50	68.20	100	246	Average
3	* 7137.500	57.87	7.52	65.39	-2.81	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

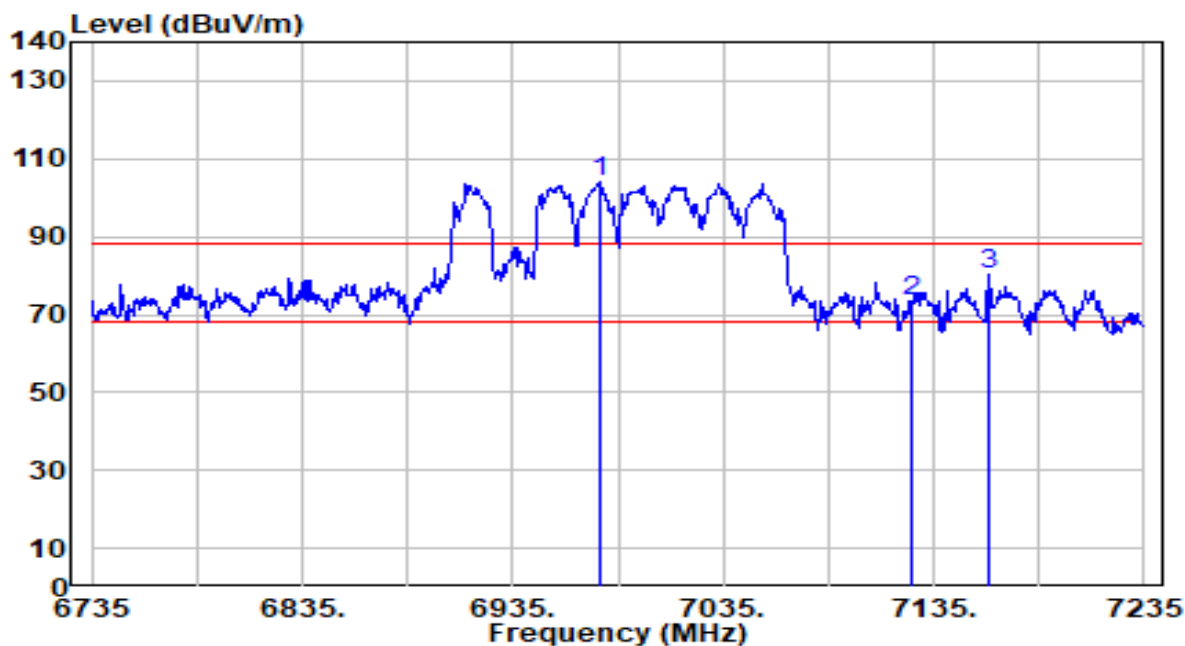


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6976.000	96.79	7.21	104.01	N/A	N/A	100	144	Peak
2	7125.000	65.89	7.50	73.39	-14.81	88.20	100	144	Peak
3	* 7161.500	72.48	7.57	80.05	-8.15	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

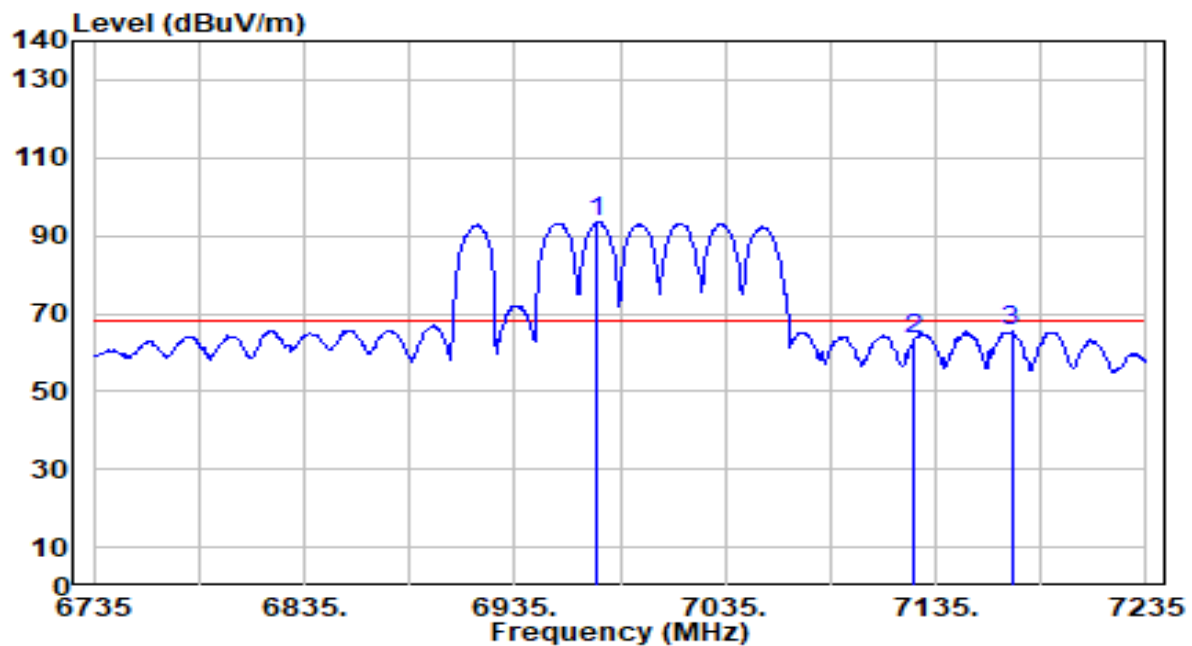


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.000	86.28	7.21	93.49	N/A	N/A	100	144	Average
2	7125.000	55.94	7.50	63.44	-4.76	68.20	100	144	Average
3	* 7171.000	57.76	7.58	65.35	-2.85	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN3_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

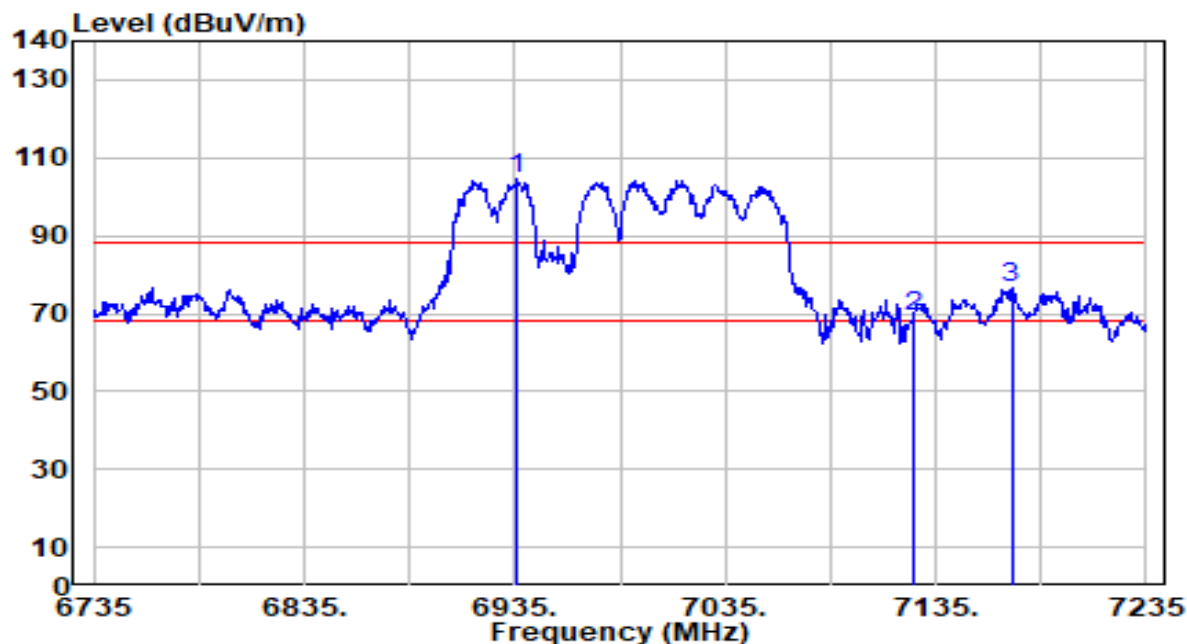


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6936.000	97.29	7.21	104.50	N/A	N/A	100	246	Peak
2	7125.000	61.60	7.50	69.09	-19.11	88.20	100	246	Peak
3	* 7171.000	68.81	7.58	76.39	-11.81	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN3_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

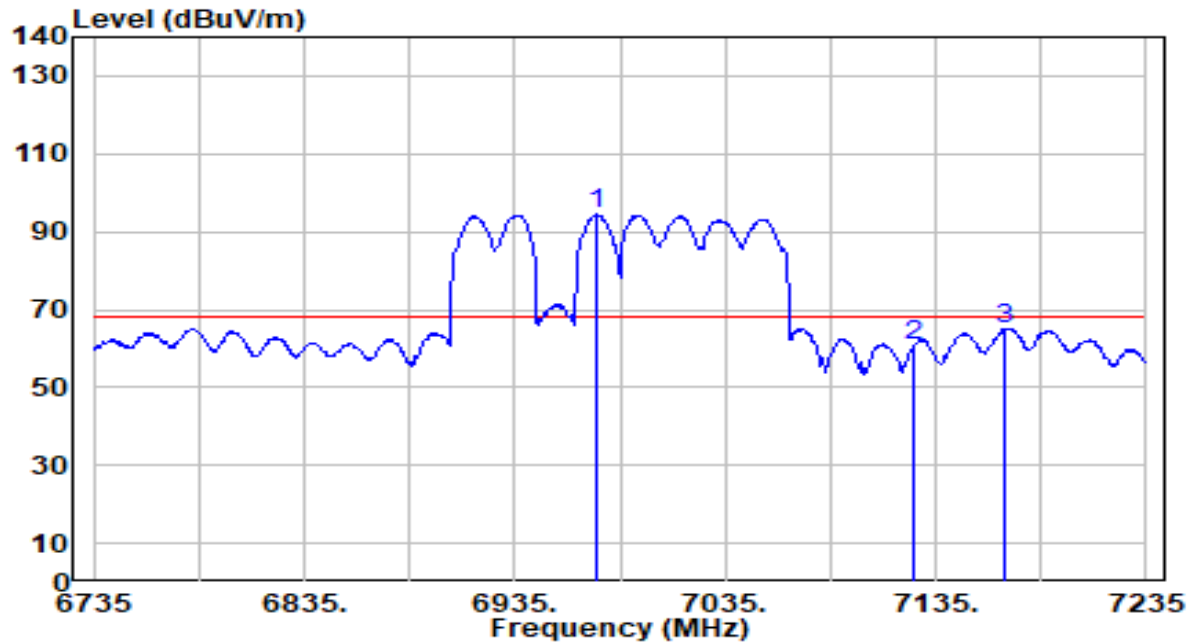


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.500	87.16	7.21	94.37	N/A	N/A	100	246	Average
2	7125.000	53.50	7.50	61.00	-7.20	68.20	100	246	Average
3	* 7168.000	57.51	7.58	65.09	-3.11	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN3_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

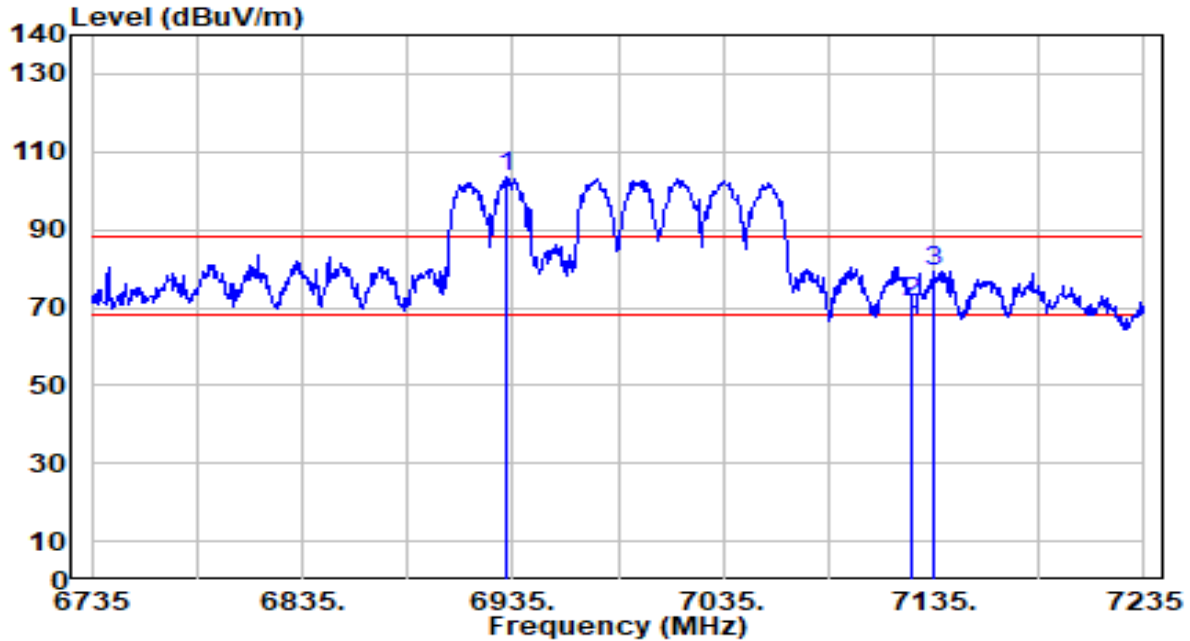


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6932.500	96.12	7.20	103.33	N/A	N/A	100	144	Peak
2	7125.000	63.87	7.50	71.37	-16.83	88.20	100	144	Peak
3	* 7134.500	71.74	7.51	79.26	-8.94	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN3_ CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

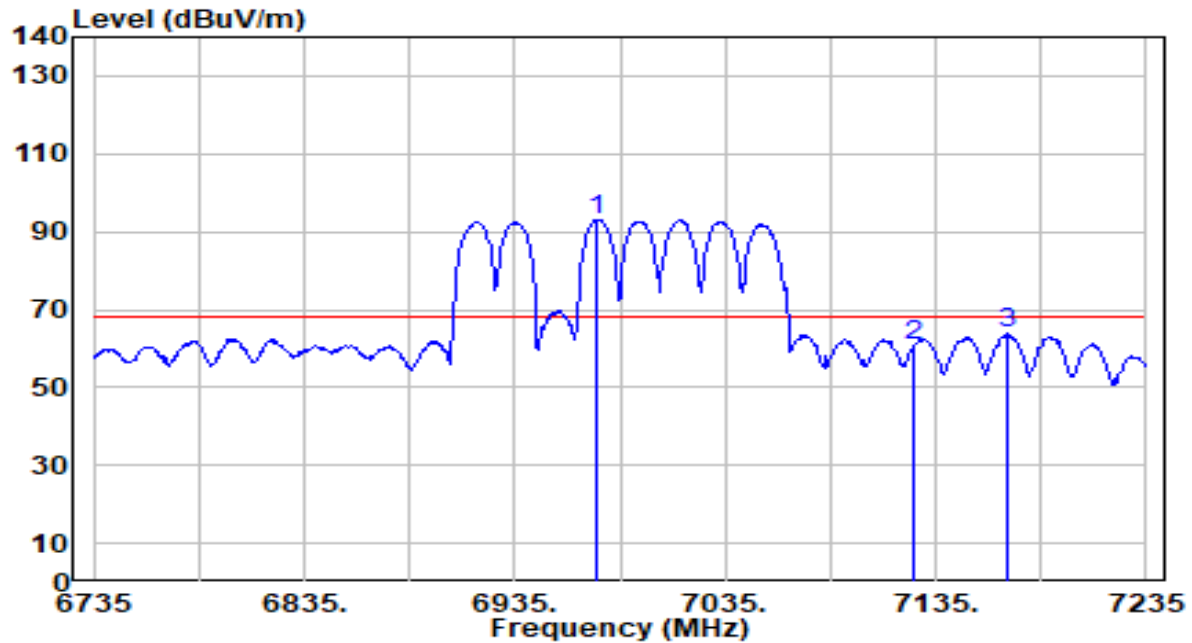


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.000	85.96	7.21	93.17	N/A	N/A	100	144	Average
2	7125.000	53.09	7.50	60.58	-7.62	68.20	100	144	Average
3	* 7168.500	56.14	7.58	63.72	-4.48	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN4_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

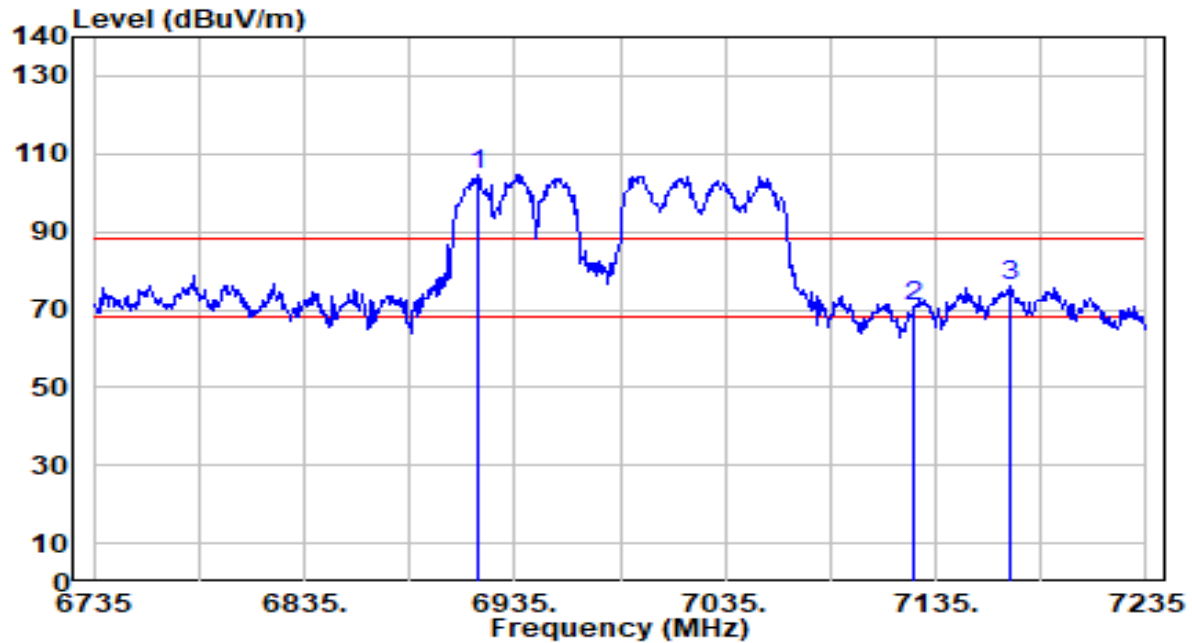


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6917.500	97.43	7.20	104.63	N/A	N/A	100	246	Peak
2	7125.000	63.35	7.50	70.85	-17.35	88.20	100	246	Peak
3	* 7170.500	68.36	7.58	75.94	-12.26	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN4_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

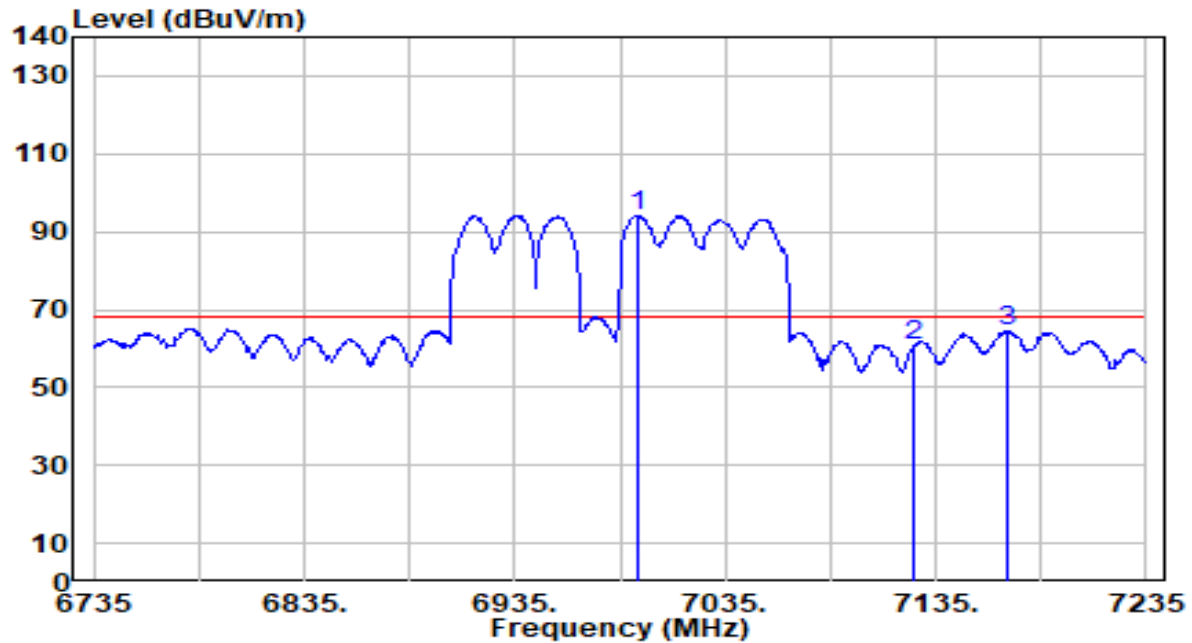


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6993.000	86.95	7.22	94.17	N/A	N/A	100	246	Average
2	7125.000	53.43	7.50	60.93	-7.27	68.20	100	246	Average
3	* 7169.000	56.95	7.58	64.52	-3.68	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN 4_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

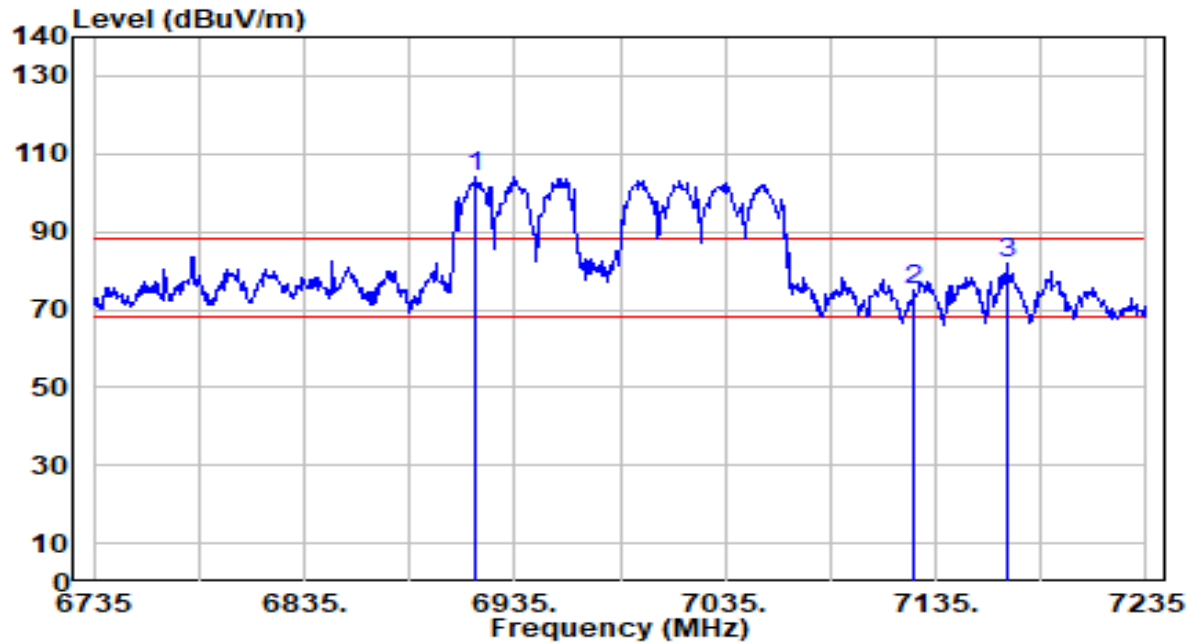


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6916.500	96.89	7.20	104.09	N/A	N/A	100	144	Peak
2	7125.000	67.44	7.50	74.93	-13.27	88.20	100	144	Peak
3	* 7168.500	74.36	7.58	81.93	-6.27	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN4_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

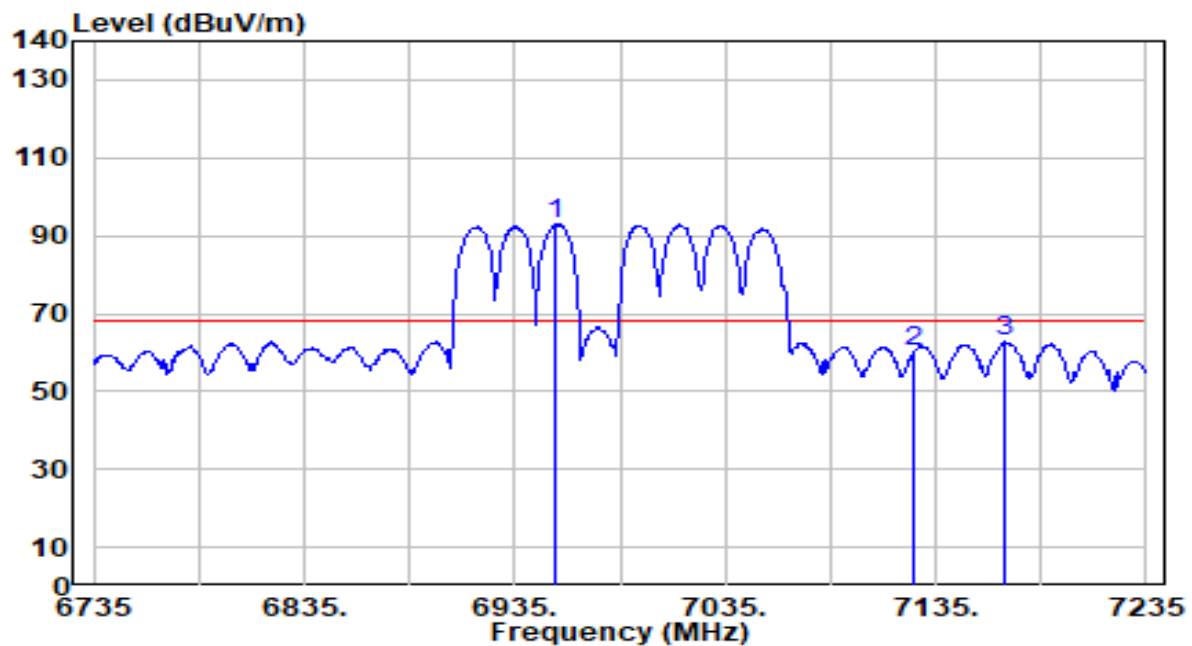


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6954.500	85.71	7.21	92.92	N/A	N/A	100	144	Average
2	7125.000	52.92	7.50	60.42	-7.78	68.20	100	144	Average
3	* 7167.500	55.06	7.58	62.64	-5.56	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN5_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

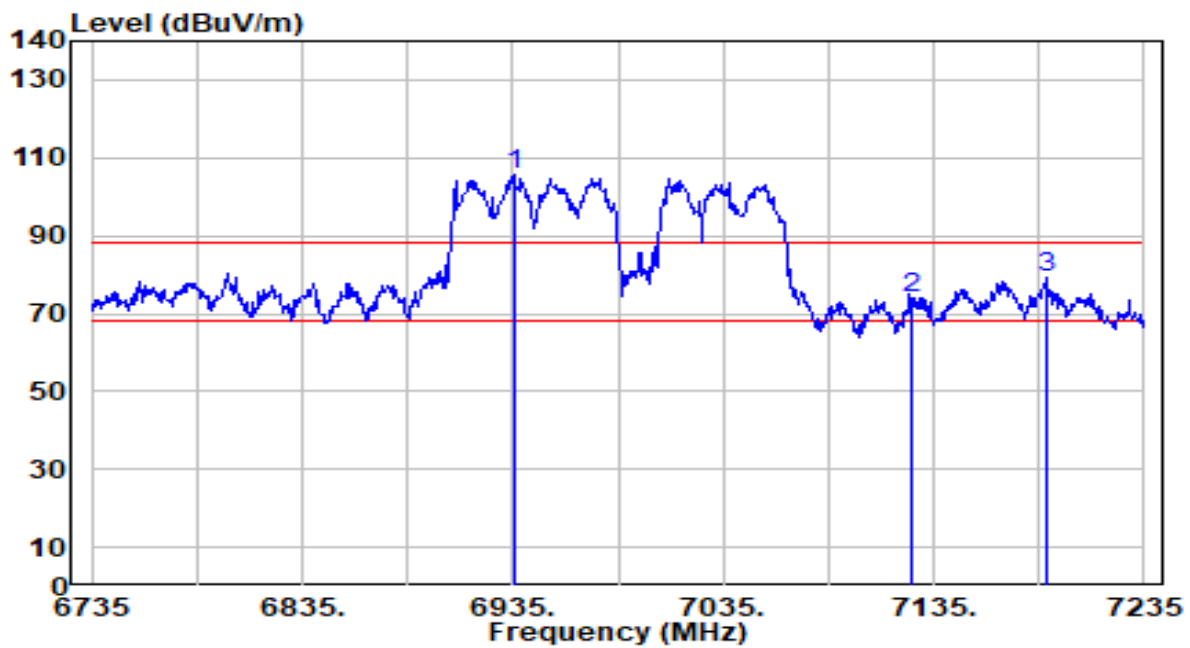


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6935.500	98.65	7.21	105.85	N/A	N/A	100	246	Peak
2	7125.000	66.25	7.50	73.74	-14.46	88.20	100	246	Peak
3	* 7188.500	71.79	7.62	79.40	-8.80	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN5_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

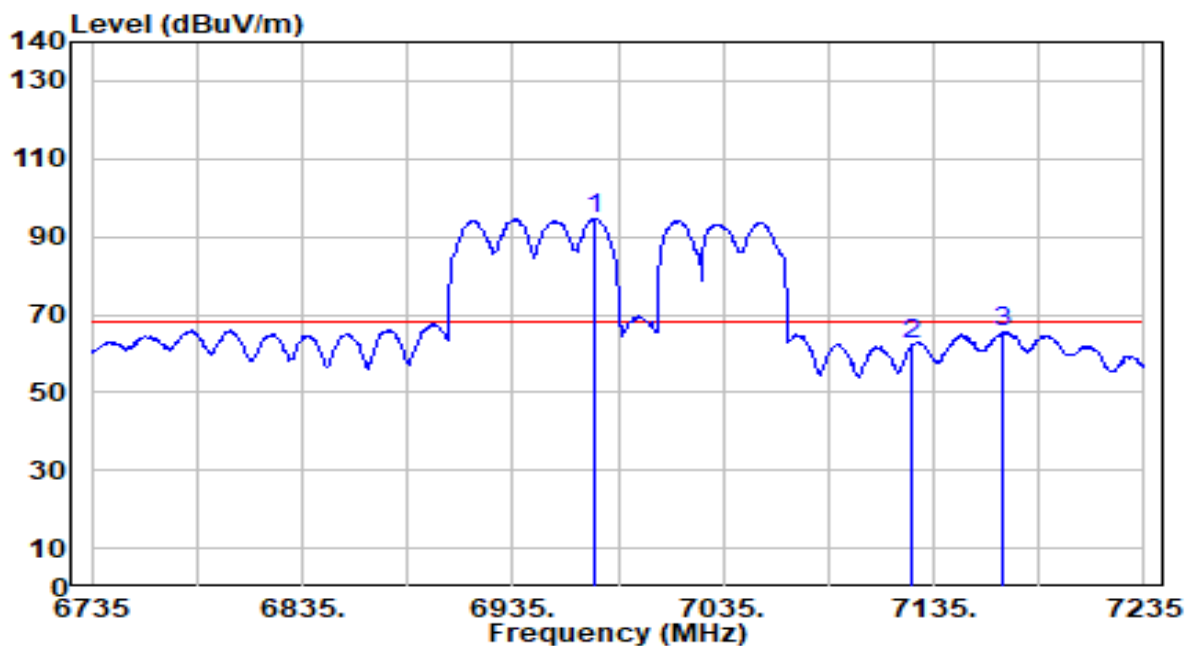


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.500	87.31	7.21	94.52	N/A	N/A	100	246	Average
2	7125.000	54.80	7.50	62.29	-5.91	68.20	100	246	Average
3	* 7168.000	57.82	7.58	65.40	-2.80	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN5_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

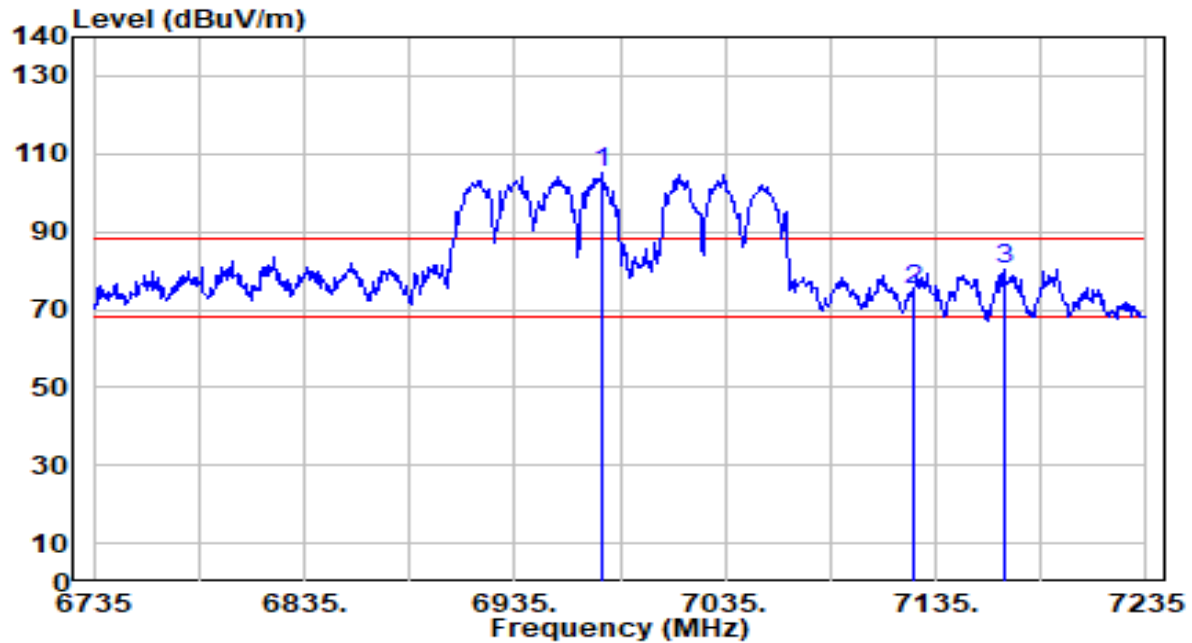


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6976.500	97.94	7.21	105.15	N/A	N/A	100	144	Peak
2	7125.000	67.78	7.50	75.28	-12.92	88.20	100	144	Peak
3	* 7167.500	72.94	7.58	80.52	-7.68	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN5_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

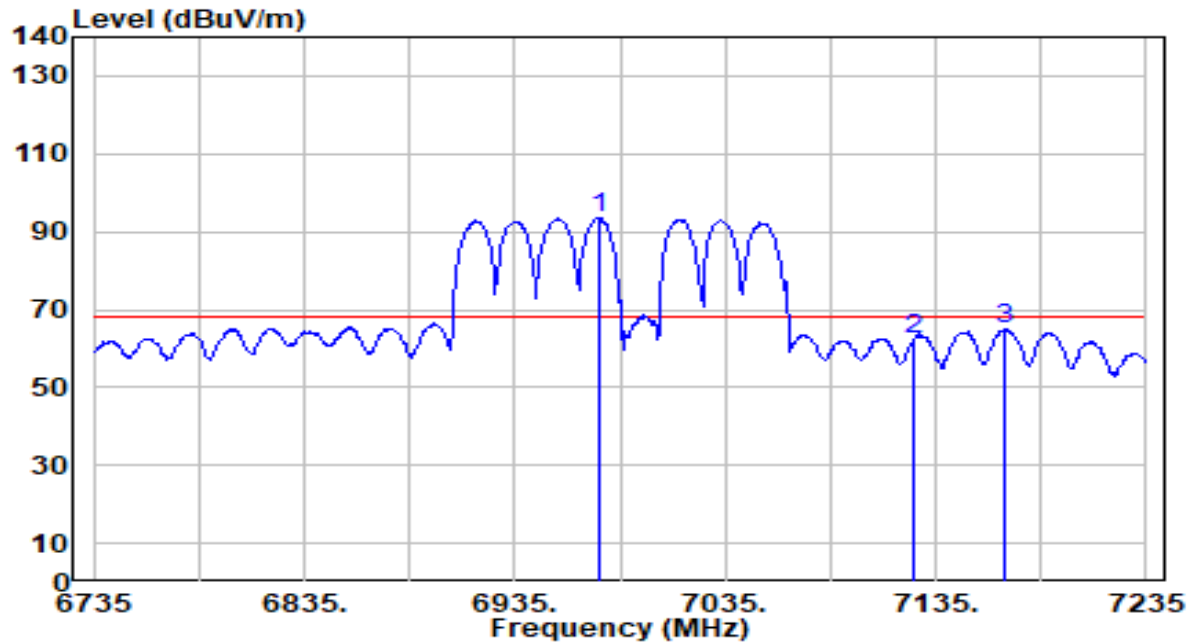


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6975.000	86.27	7.21	93.49	N/A	N/A	100	144	Average
2	7125.000	54.91	7.50	62.40	-5.80	68.20	100	144	Average
3	* 7167.500	57.32	7.58	64.90	-3.30	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN6_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

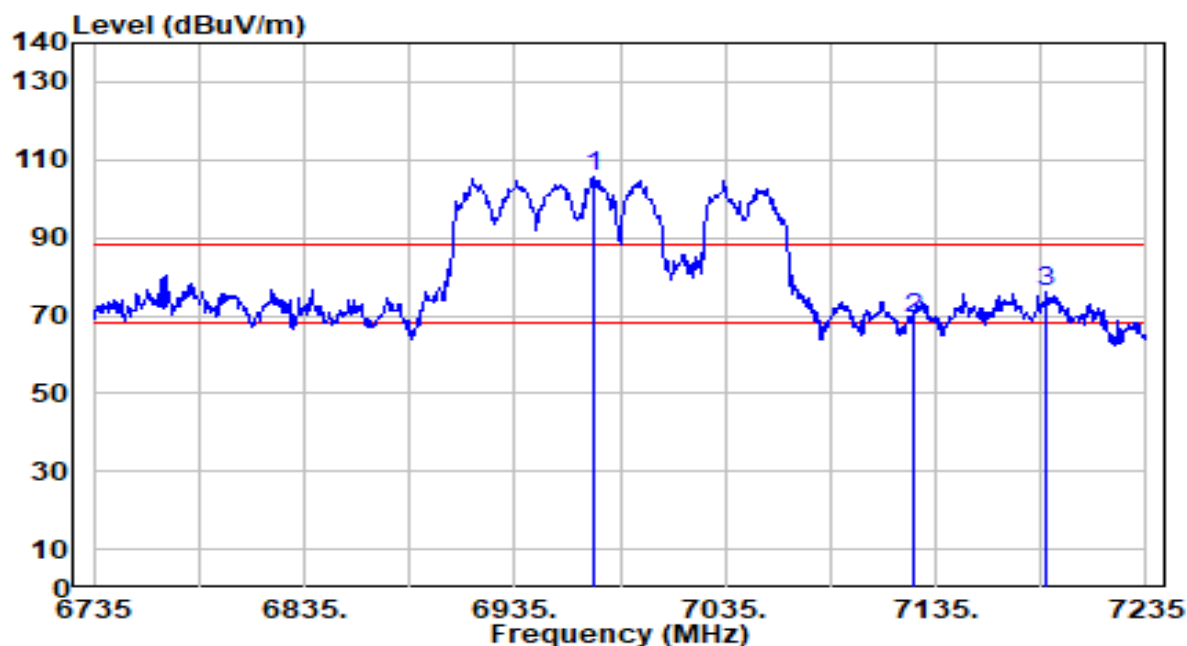


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6972.000	98.40	7.21	105.62	N/A	N/A	100	246	Peak
2	7125.000	61.86	7.50	69.36	-18.84	88.20	100	246	Peak
3	* 7187.500	68.70	7.61	76.32	-11.88	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN6_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

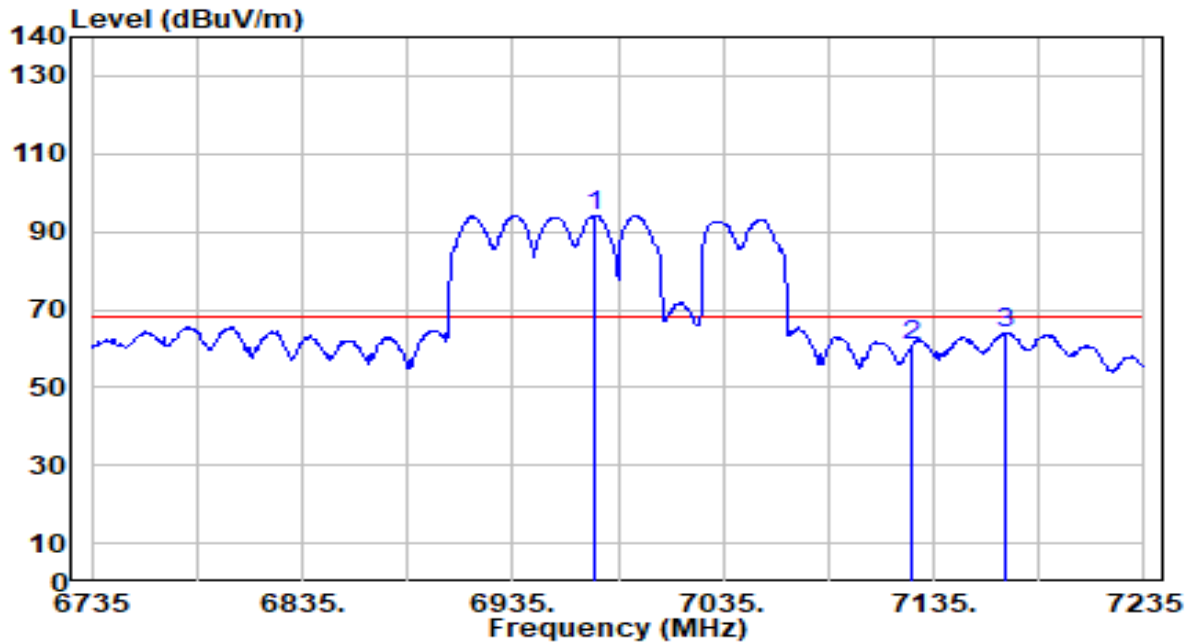


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.000	87.08	7.21	94.30	N/A	N/A	100	246	Average
2	7125.000	53.24	7.50	60.74	-7.46	68.20	100	246	Average
3	* 7169.500	56.36	7.58	63.94	-4.26	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN6_C H 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

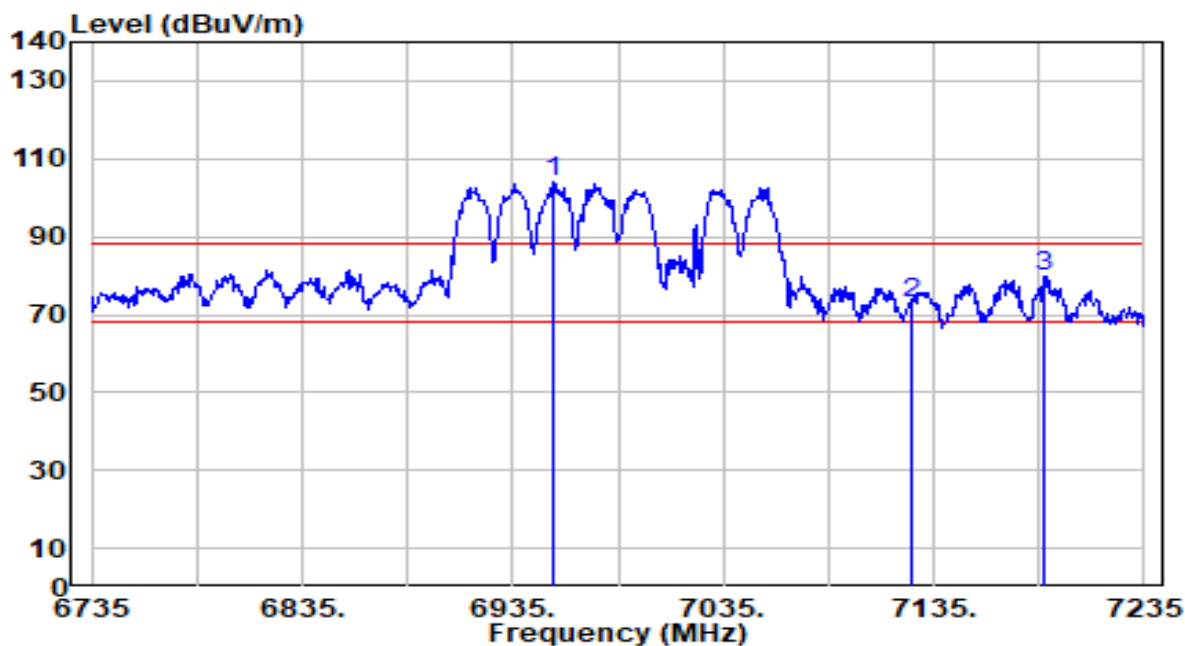


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6954.000	96.65	7.21	103.86	N/A	N/A	100	144	Peak
2	7125.000	65.64	7.50	73.14	-15.06	88.20	100	144	Peak
3	* 7188.000	72.17	7.62	79.78	-8.42	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN6_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

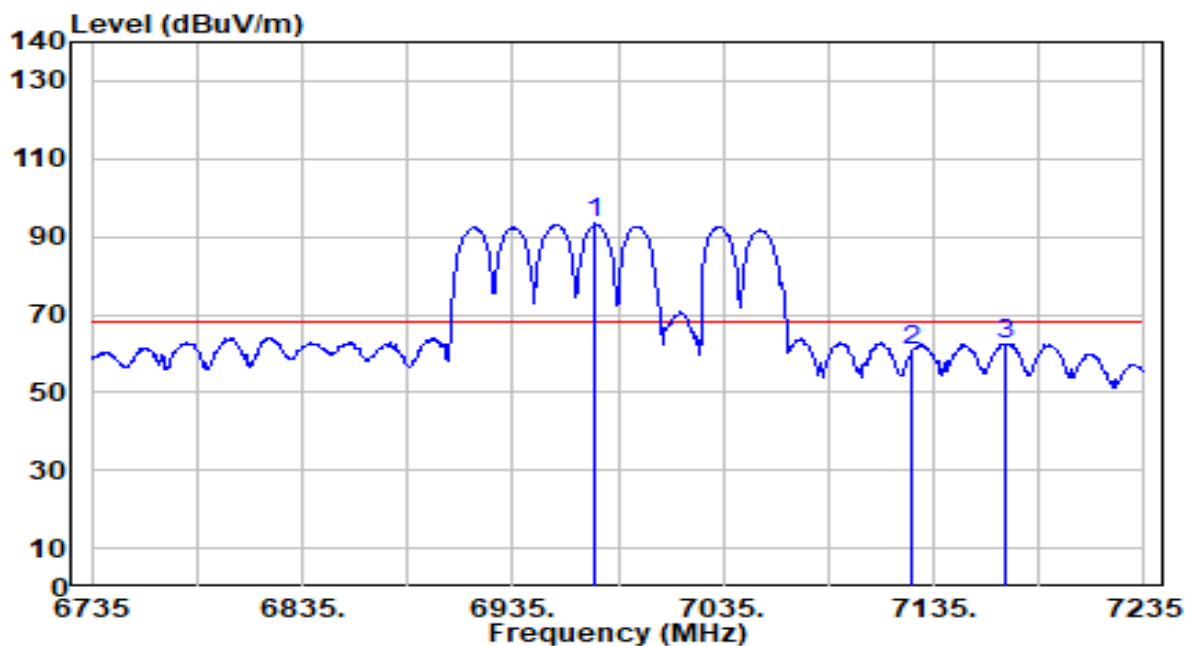


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.500	86.18	7.21	93.40	N/A	N/A	100	144	Average
2	7125.000	53.35	7.50	60.85	-7.35	68.20	100	144	Average
3	* 7169.000	54.99	7.58	62.57	-5.63	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN7_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

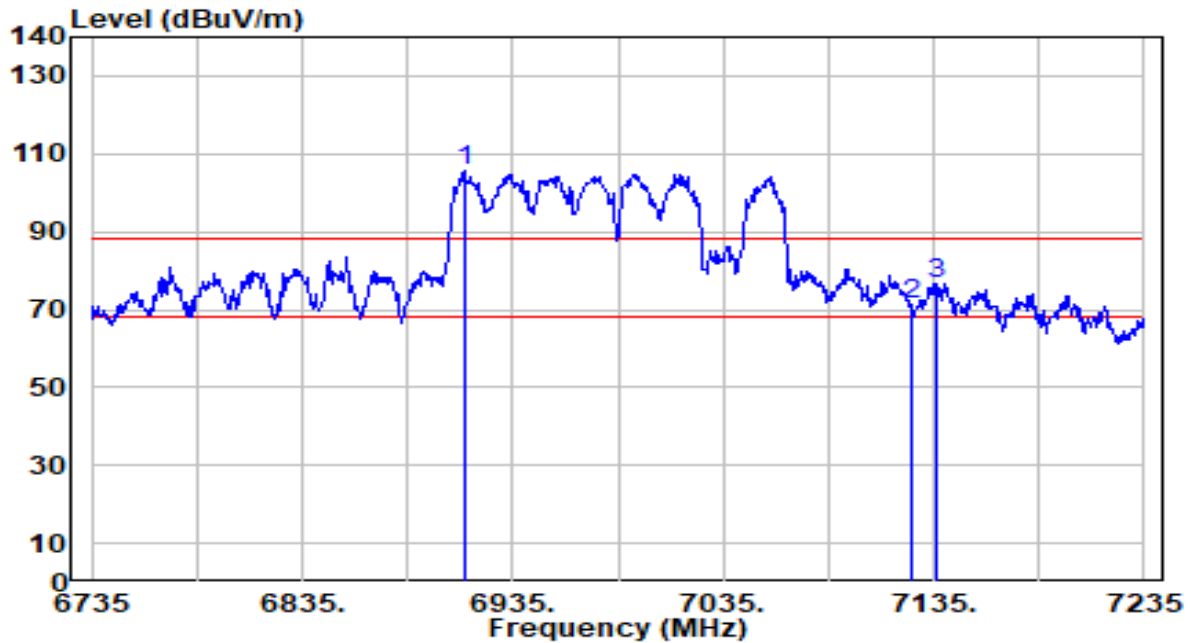


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6912.000	98.53	7.20	105.73	N/A	N/A	100	246	Peak
2	7125.000	63.57	7.50	71.07	-17.13	88.20	100	246	Peak
3	* 7136.000	69.29	7.52	76.81	-11.39	88.20	100	246	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN7_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

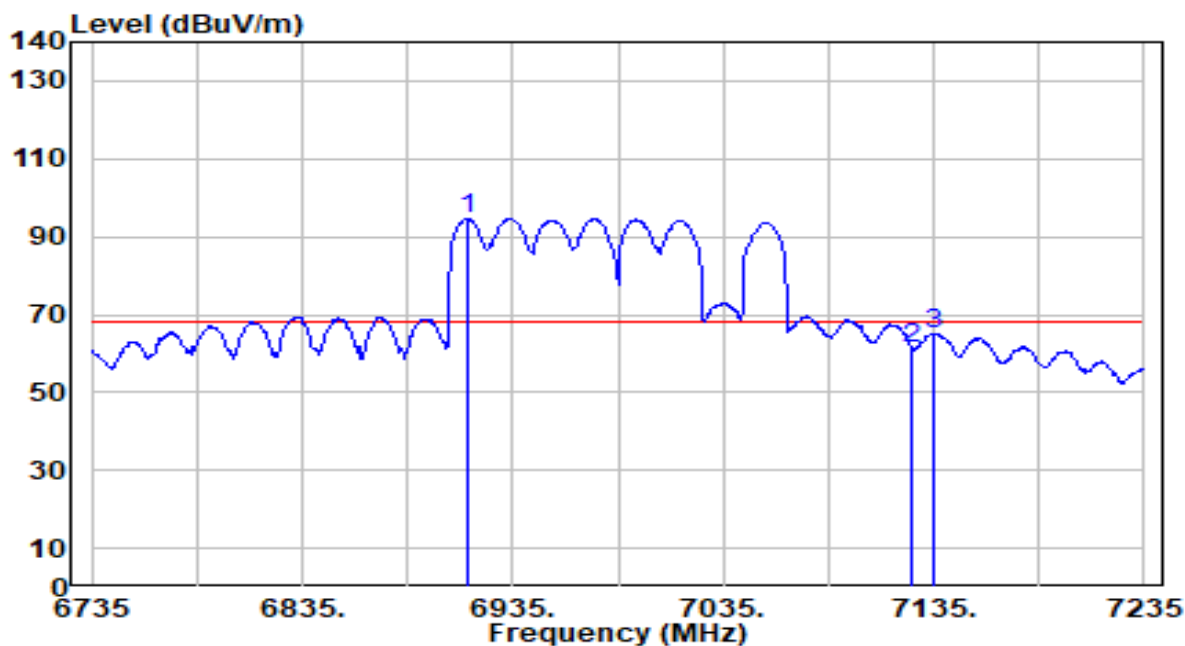


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6913.500	87.36	7.20	94.56	N/A	N/A	100	246	Average
2	7125.000	53.75	7.50	61.25	-6.95	68.20	100	246	Average
3	* 7135.500	57.67	7.52	65.19	-3.01	68.20	100	246	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN7_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

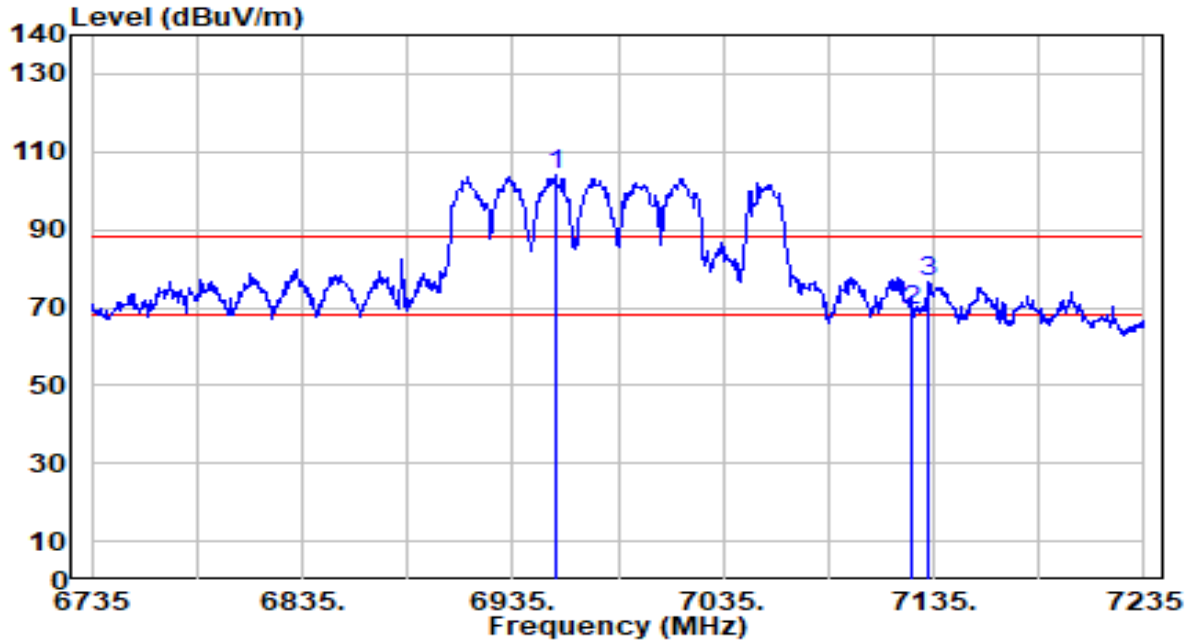


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6955.000	96.86	7.21	104.07	N/A	N/A	100	144	Peak
2	7125.000	61.96	7.50	69.45	-18.75	88.20	100	144	Peak
3	* 7133.000	69.27	7.51	76.78	-11.42	88.20	100	144	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484+242Tone_20-PUN7_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

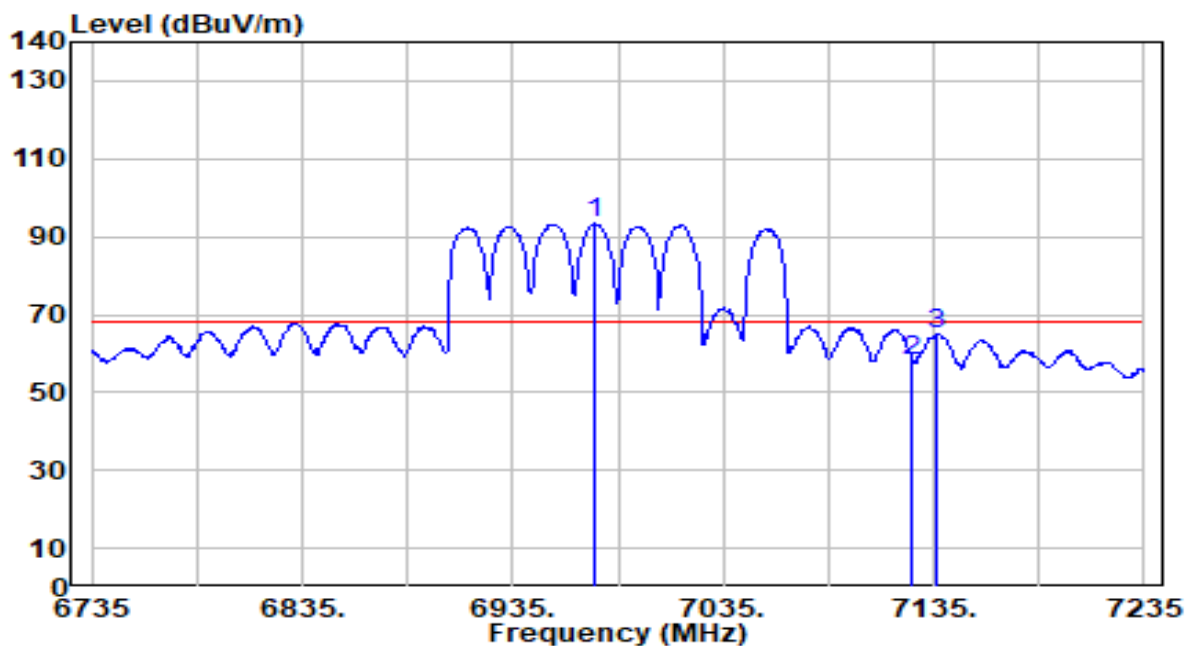


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	6974.500	86.06	7.21	93.27	N/A	N/A	100	144	Average
2	7125.000	50.67	7.50	58.17	-10.03	68.20	100	144	Average
3	* 7136.500	57.67	7.52	65.19	-3.01	68.20	100	144	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_40-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

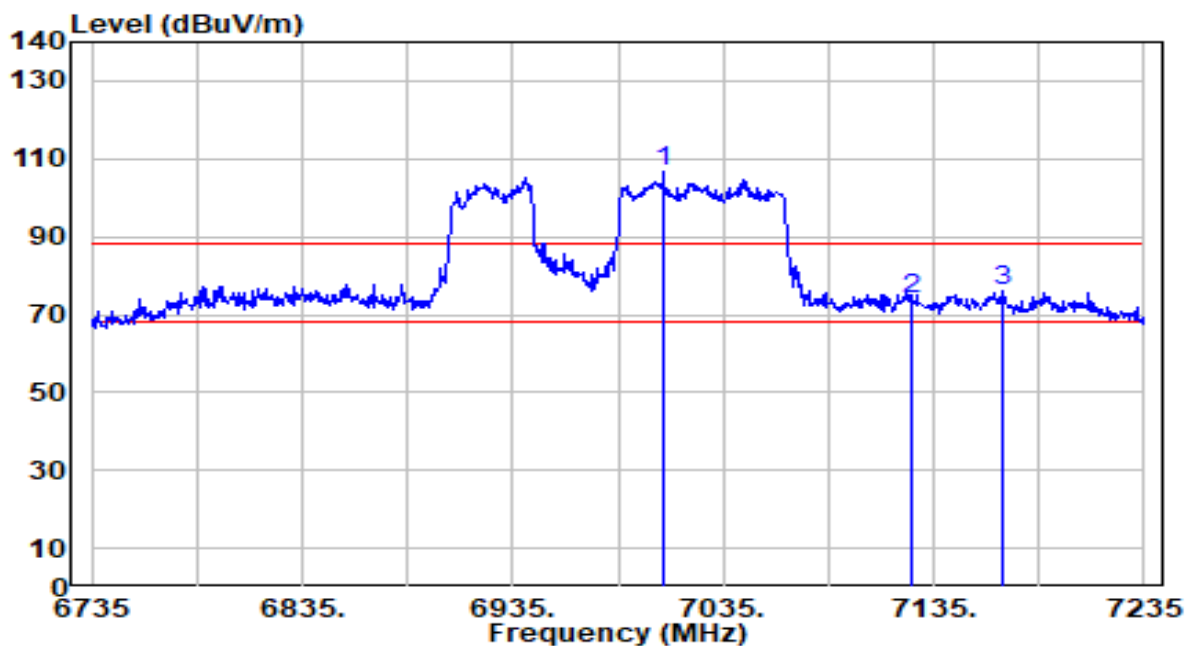


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7006.500	99.63	7.23	106.86	N/A	N/A	100	117	Peak
2	7125.000	66.28	7.50	73.78	-14.42	88.20	100	117	Peak
3	* 7167.500	68.41	7.58	75.99	-12.21	88.20	100	117	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Horizontal	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_40-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

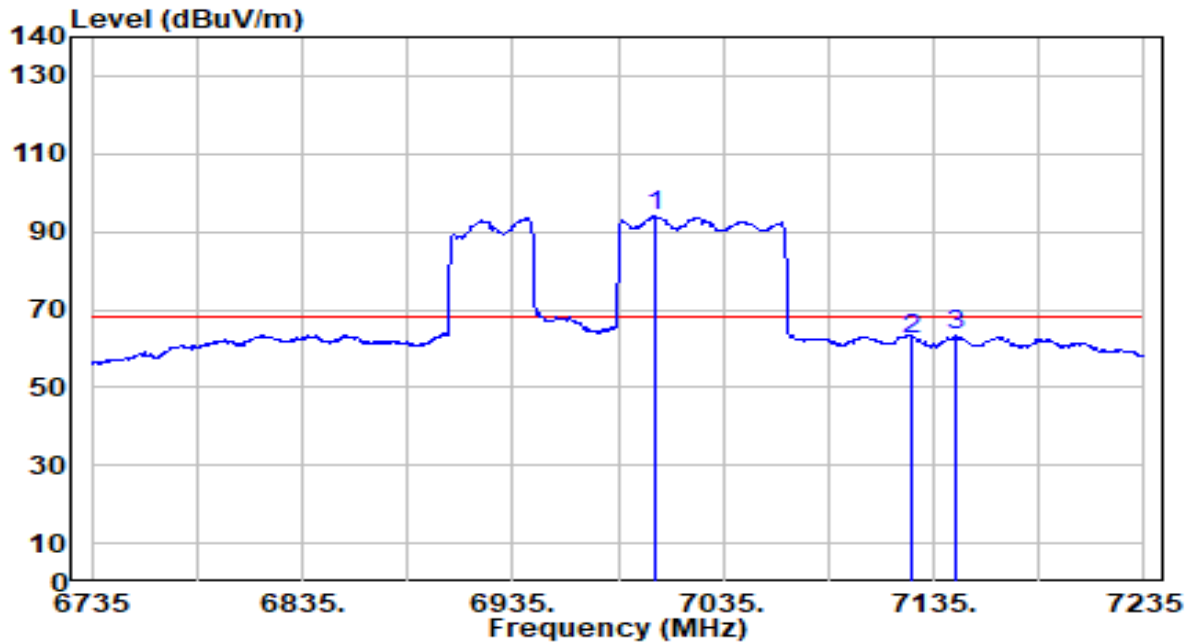


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7003.000	86.75	7.23	93.98	N/A	N/A	100	117	Average
2	7125.000	55.08	7.50	62.57	-5.63	68.20	100	117	Average
3	* 7145.500	55.67	7.53	63.21	-4.99	68.20	100	117	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_40-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

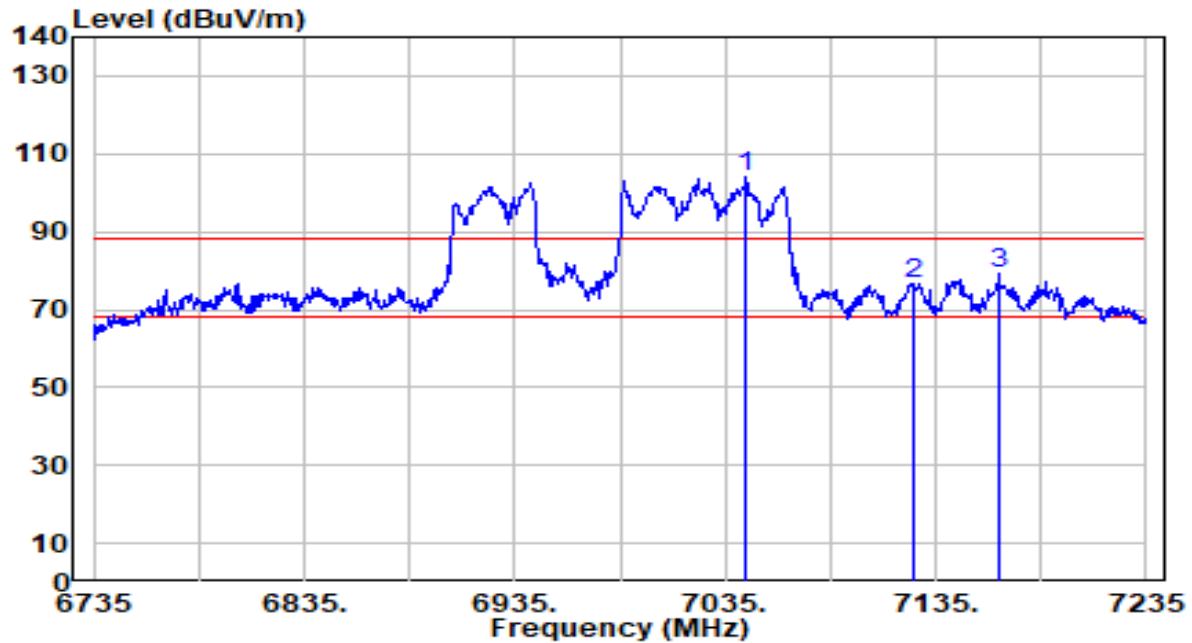


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7045.000	96.82	7.32	104.14	N/A	N/A	100	237	Peak
2	7125.000	69.14	7.50	76.63	-11.57	88.20	100	237	Peak
3	* 7165.000	71.60	7.57	79.17	-9.03	88.20	100	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Mobile Computer	Date of Test	2025-07-21
Factor	DRH18-E	Temp. / Humidity	23°C /60%
Polarity	Vertical	Site / Test Engineer	AC2 / Aby
Test Mode	802.11be-160MHz_TX_Band8_996+484Tone_40-PUN2_CH 207_ANT 6+7_Puncturing Mode	Test Voltage	By Notebook PC

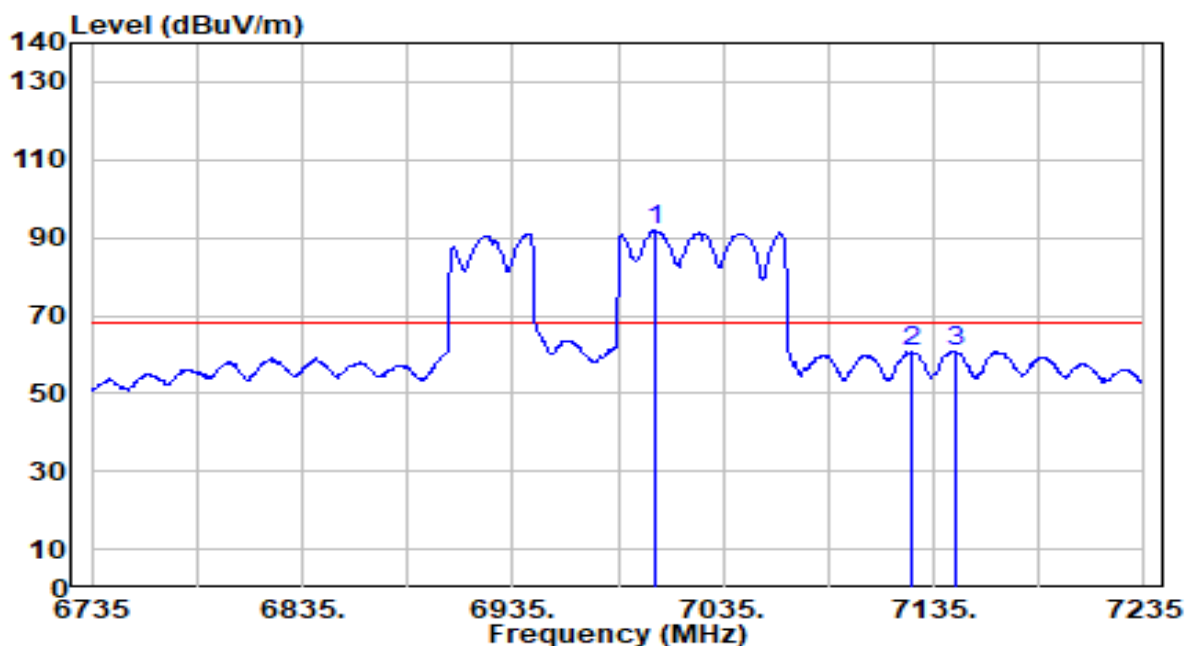

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	7003.000	84.50	7.23	91.73	N/A	N/A	100	237	Average
2	7125.000	53.00	7.50	60.50	-7.70	68.20	100	237	Average
3	* 7145.000	53.28	7.53	60.81	-7.39	68.20	100	237	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6.10. AC Conducted Emissions


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

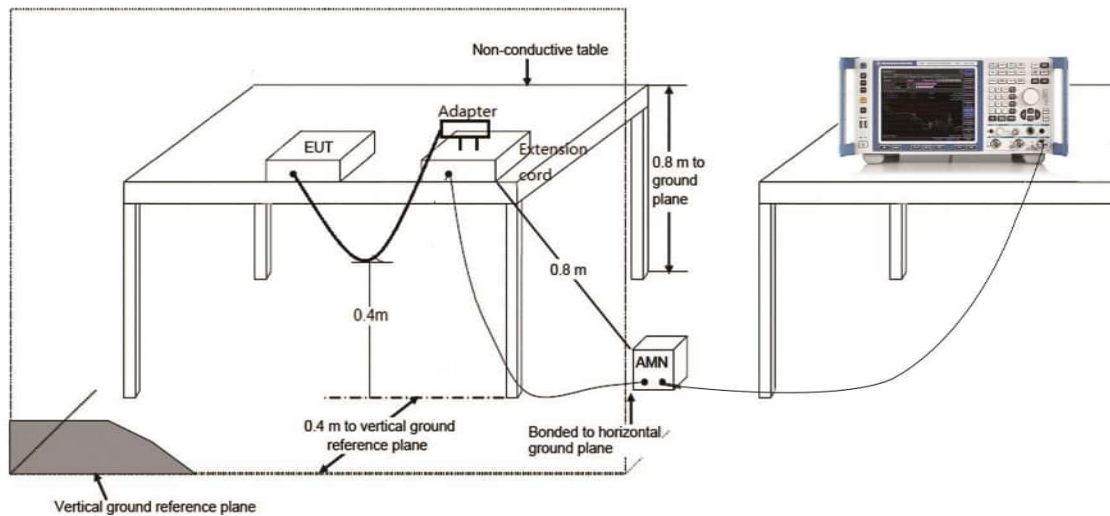

6.10.3. Test Result

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ANT 6+7	Test Voltage	AC 120V/60Hz

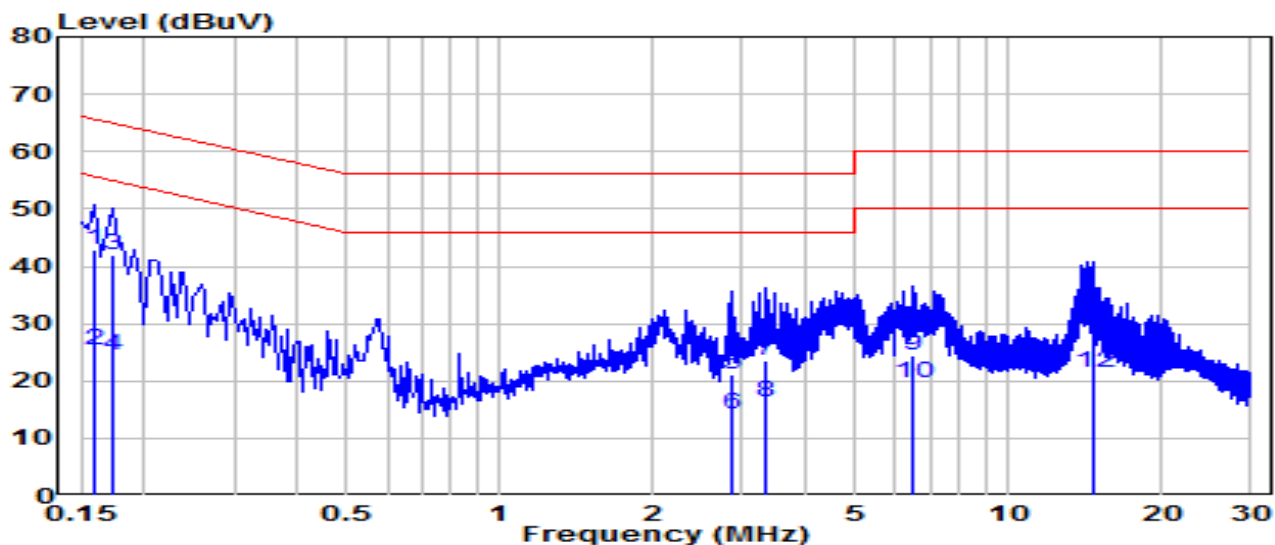


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	*	0.159	33.29	9.63	42.92	-22.60	65.52	QP
2	*	0.159	15.62	9.63	25.25	-30.26	55.52	Average
3		0.172	32.21	9.63	41.84	-23.00	64.84	QP
4		0.172	14.85	9.63	24.47	-30.37	54.84	Average
5		2.859	11.45	9.71	21.16	-34.84	56.00	QP
6		2.859	4.35	9.71	14.06	-31.94	46.00	Average
7		3.340	13.95	9.72	23.67	-32.33	56.00	QP
8		3.340	6.63	9.72	16.35	-29.65	46.00	Average
9		6.476	14.70	9.78	24.49	-35.51	60.00	QP
10		6.476	9.77	9.78	19.55	-30.45	50.00	Average
11		14.738	19.17	9.90	29.06	-30.94	60.00	QP
12		14.738	11.41	9.90	21.31	-28.69	50.00	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Mobile Computer	Date of Test	2025-07-15
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24°C /54%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ax-20MHz_TX_Band5_CH 1_ANT 6+7	Test Voltage	AC 120V/60Hz

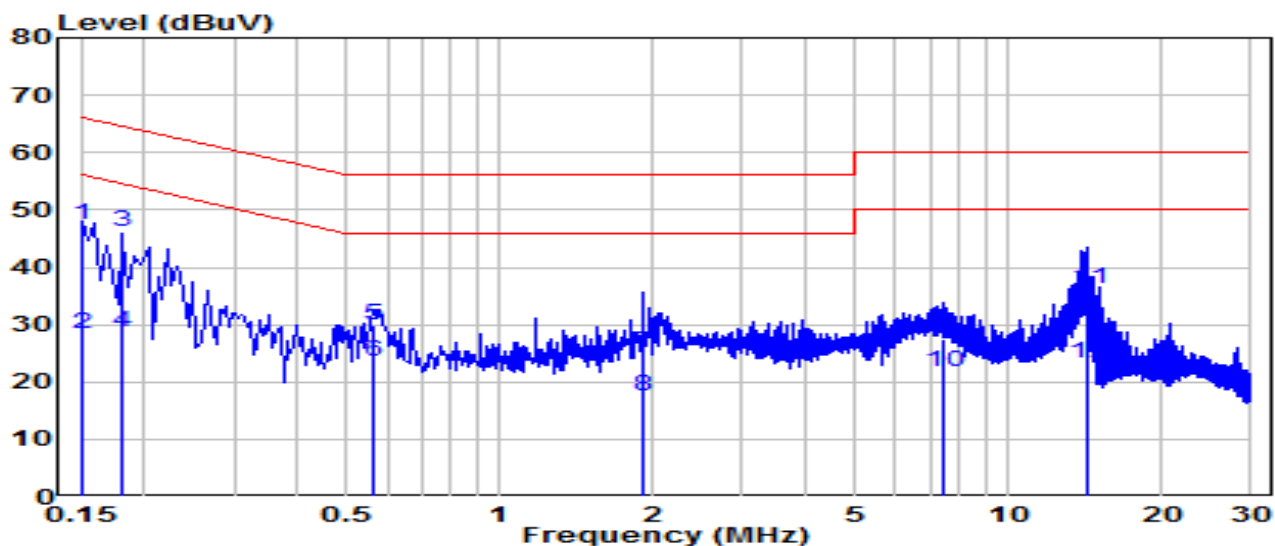

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.150	37.73	9.63	47.36	-18.64	66.00	QP
2	0.150	18.79	9.63	28.42	-27.58	56.00	Average
3	* 0.181	36.41	9.63	46.04	-18.38	64.42	QP
4	* 0.181	18.97	9.63	28.60	-25.82	54.42	Average
5	0.564	20.11	9.65	29.75	-26.25	56.00	QP
6	0.564	13.92	9.65	23.56	-22.44	46.00	Average
7	1.905	15.31	9.70	25.01	-30.99	56.00	QP
8	1.905	7.68	9.70	17.37	-28.63	46.00	Average
9	7.484	17.63	9.81	27.43	-32.57	60.00	QP
10	7.484	11.90	9.81	21.71	-28.29	50.00	Average
11	14.355	26.32	9.91	36.23	-23.77	60.00	QP
12	14.355	13.34	9.91	23.25	-26.75	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

7. Conclusion

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC rules.

Appendix A : Test Setup Photograph

Refer to “2505TW0108-UT” file.

Appendix B : External Photograph

Refer to “2505TW0108-UE” file.

Appendix C : Internal Photograph

Refer to “2505TW0108-UI” file.

_____ The End _____