



5MHz Channel Bandwidth


Low Channel

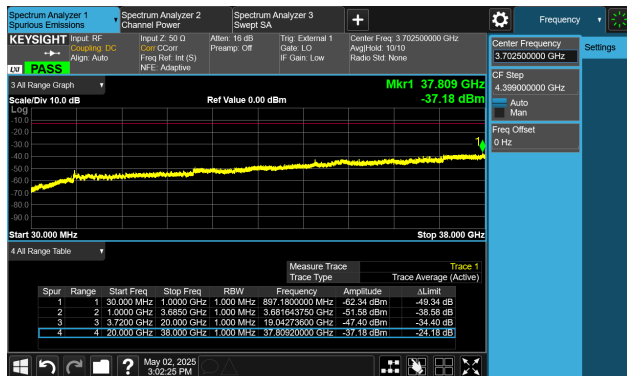

Middle Channel

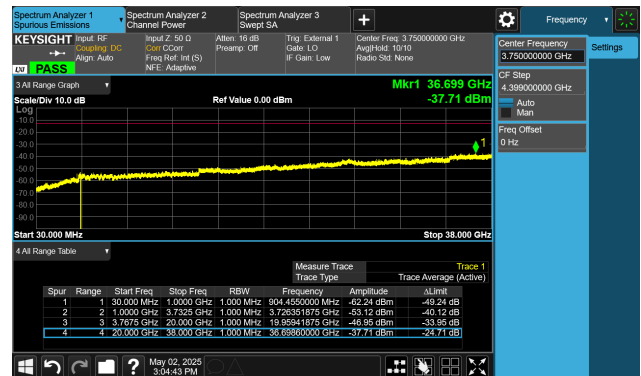


High Channel

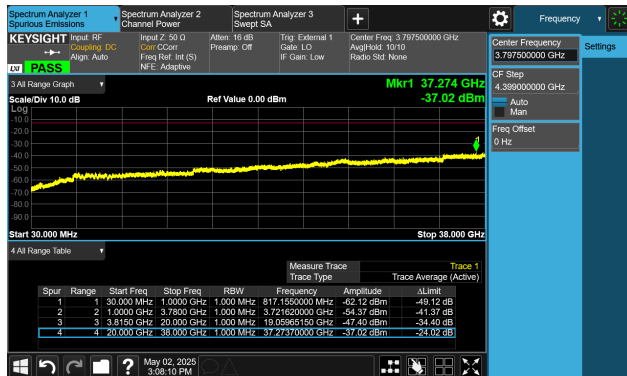


10MHz Channel Bandwidth


Low Channel

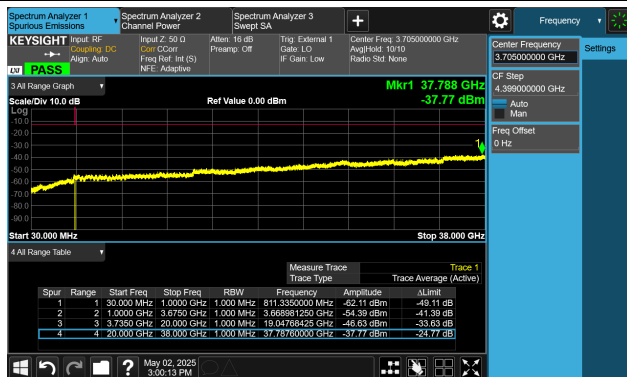

Middle Channel

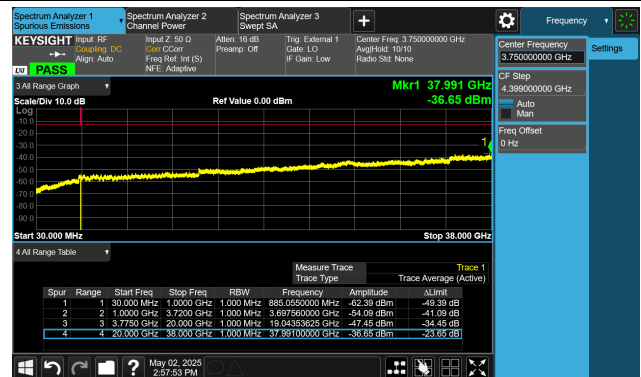


High Channel

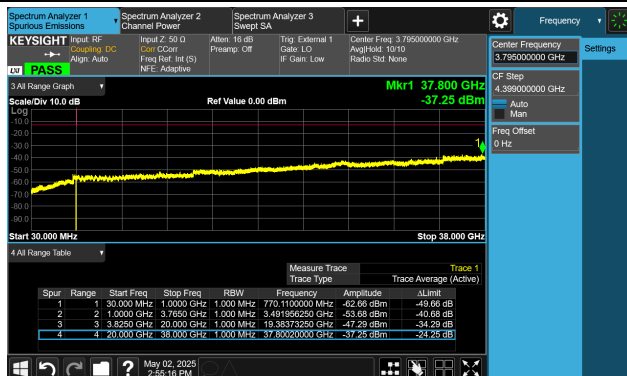


15MHz Channel Bandwidth


Low Channel

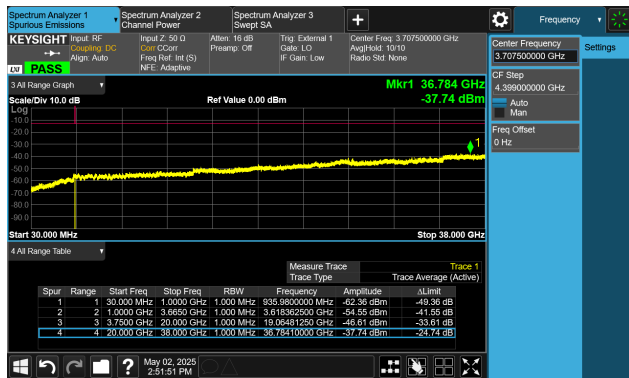

Middle Channel

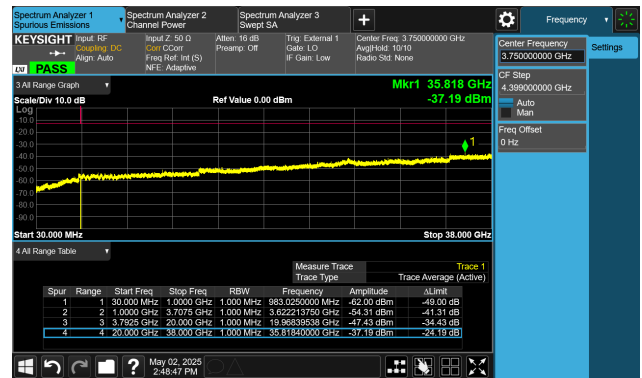


High Channel

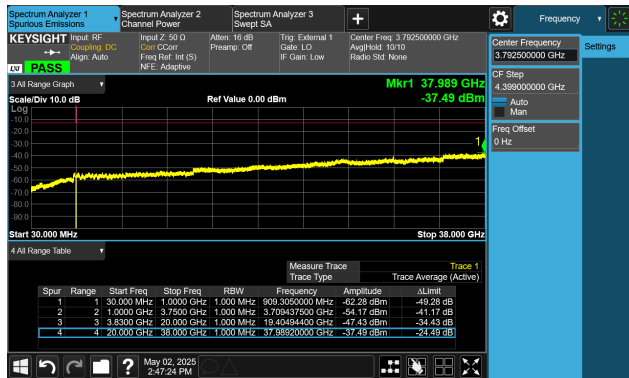


20MHz Channel Bandwidth


Low Channel

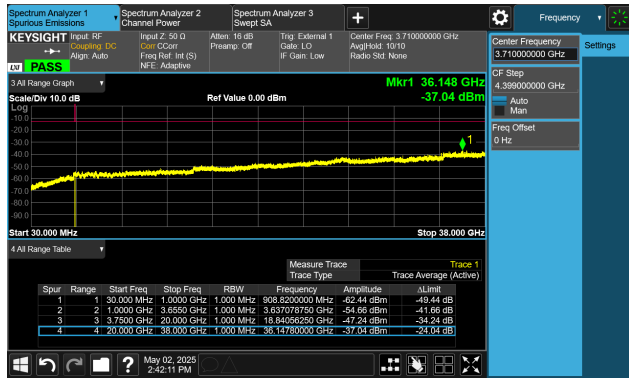

Middle Channel

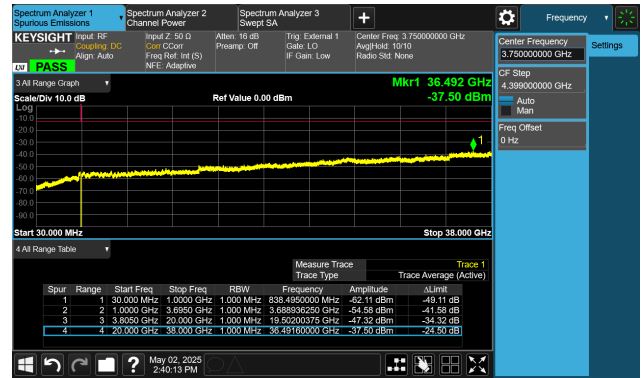

High Channel

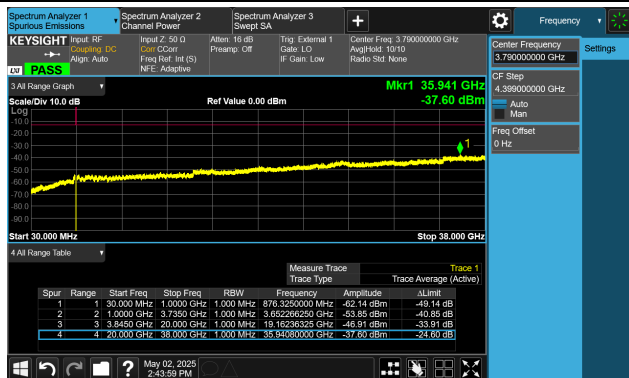

A.7 Radiated Spurious Emissions Test Result

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 2/25

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
83.201	-5.0	14.0	9.0	82.3	-73.3	Quasi-peak	Horizontal
922.516	-0.7	29.9	29.2	82.3	-53.1	Quasi-peak	Horizontal
126.284	22.6	15.4	38.0	82.3	-44.3	Quasi-peak	Vertical
883.263	-0.5	29.7	29.2	82.3	-53.1	Quasi-peak	Vertical
3701.300	50.3	-1.7	48.6	82.3	-33.7	Peak	Horizontal
7400.500	48.0	5.2	53.2	82.3	-29.1	Peak	Horizontal
3701.300	48.1	-1.7	46.4	82.3	-35.9	Peak	Vertical
7400.500	49.9	5.2	55.1	82.3	-27.2	Peak	Vertical
Middle Channel							
96.504	3.7	17.5	21.2	82.3	-61.1	Quasi-peak	Horizontal
895.739	-0.7	30.0	29.3	82.3	-53.0	Quasi-peak	Horizontal
123.482	23.2	15.7	38.9	82.3	-43.4	Quasi-peak	Vertical
878.322	-0.4	29.6	29.2	82.3	-53.1	Quasi-peak	Vertical
3764.200	52.0	-1.5	50.5	82.3	-31.8	Peak	Horizontal
7528.000	52.0	5.1	57.1	82.3	-25.2	Peak	Horizontal
3764.200	46.5	-1.5	45.0	82.3	-37.3	Peak	Vertical
7528.000	47.7	5.1	52.8	82.3	-29.5	Peak	Vertical
High Channel							
106.422	3.6	18.1	21.7	82.3	-60.6	Quasi-peak	Horizontal
875.554	-0.8	29.5	28.7	82.3	-53.6	Quasi-peak	Horizontal
126.683	23.4	15.4	38.8	82.3	-43.5	Quasi-peak	Vertical
925.107	-0.5	29.9	29.4	82.3	-52.9	Quasi-peak	Vertical
3827.100	51.0	-1.4	49.6	82.3	-32.7	Peak	Horizontal
7655.500	51.2	5.1	56.3	82.3	-26.0	Peak	Horizontal
3828.800	50.7	-1.4	49.3	82.3	-33.0	Peak	Vertical
7655.500	51.6	5.1	56.7	82.3	-25.6	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 4/66

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.964	3.7	17.4	21.1	82.3	-61.2	Quasi-peak	Horizontal
907.437	-0.8	29.9	29.1	82.3	-53.2	Quasi-peak	Horizontal
123.222	23.5	15.8	39.3	82.3	-43.0	Quasi-peak	Vertical
879.863	-0.8	29.6	28.8	82.3	-53.5	Quasi-peak	Vertical
9076.700	42.4	6.9	49.3	82.3	-33.0	Peak	Horizontal
15642.100	46.3	6.2	52.5	82.3	-29.8	Peak	Horizontal
3420.800	45.8	-2.8	43.0	82.3	-39.3	Peak	Vertical
14933.200	47.0	5.8	52.8	82.3	-29.5	Peak	Vertical
Middle Channel							
96.402	3.5	17.5	21.0	82.3	-61.3	Quasi-peak	Horizontal
884.813	-0.5	29.8	29.3	82.3	-53.0	Quasi-peak	Horizontal
122.190	24.1	15.9	40.0	82.3	-42.3	Quasi-peak	Vertical
903.309	-0.6	29.9	29.3	82.3	-53.0	Quasi-peak	Vertical
3488.800	49.7	-2.7	47.0	82.3	-35.3	Peak	Horizontal
15006.300	46.0	6.0	52.0	82.3	-30.3	Peak	Horizontal
3488.800	45.9	-2.7	43.2	82.3	-39.1	Peak	Vertical
14295.700	46.8	5.7	52.5	82.3	-29.8	Peak	Vertical
High Channel							
94.528	3.7	17.1	20.8	82.3	-61.5	Quasi-peak	Horizontal
909.986	-0.4	30.0	29.6	82.3	-52.7	Quasi-peak	Horizontal
121.336	23.6	16.0	39.6	82.3	-42.7	Quasi-peak	Vertical
928.031	-0.6	29.9	29.3	82.3	-53.0	Quasi-peak	Vertical
3560.200	47.3	-2.4	44.9	82.3	-37.4	Peak	Horizontal
14392.600	46.6	5.5	52.1	82.3	-30.2	Peak	Horizontal
8085.600	42.5	5.9	48.4	82.3	-33.9	Peak	Vertical
14754.700	46.0	5.8	51.8	82.3	-30.5	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 5/26

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
113.197	7.6	17.3	24.9	82.3	-57.4	Quasi-peak	Horizontal
910.305	9.2	30.0	39.2	82.3	-43.1	Quasi-peak	Horizontal
94.065	13.3	17.0	30.3	82.3	-52.0	Quasi-peak	Vertical
867.304	9.1	29.5	38.6	82.3	-43.7	Quasi-peak	Vertical
3584.000	42.6	-2.3	40.3	82.3	-42.0	Peak	Horizontal
14543.900	47.6	5.9	53.5	82.3	-28.8	Peak	Horizontal
6409.400	42.7	3.5	46.2	82.3	-36.1	Peak	Vertical
17138.100	49.3	3.1	52.4	82.3	-29.9	Peak	Vertical
Middle Channel							
101.966	7.5	18.1	25.6	82.3	-56.7	Quasi-peak	Horizontal
933.580	9.1	29.7	38.8	82.3	-43.5	Quasi-peak	Horizontal
100.229	7.8	18.0	25.8	82.3	-56.5	Quasi-peak	Vertical
903.309	9.2	29.9	39.1	82.3	-43.2	Quasi-peak	Vertical
1673.200	47.5	-7.4	40.1	82.3	-42.2	Peak	Horizontal
15716.900	45.8	6.5	52.3	82.3	-30.0	Peak	Horizontal
8916.900	41.6	6.9	48.5	82.3	-33.8	Peak	Vertical
14475.900	46.9	5.9	52.8	82.3	-29.5	Peak	Vertical
High Channel							
49.759	6.8	20.0	26.8	82.3	-55.5	Quasi-peak	Horizontal
581.722	9.1	25.9	35.0	82.3	-47.3	Quasi-peak	Horizontal
123.959	16.6	15.7	32.3	82.3	-50.0	Quasi-peak	Vertical
728.336	10.0	28.0	38.0	82.3	-44.3	Quasi-peak	Vertical
7308.700	40.5	5.2	45.7	82.3	-36.6	Peak	Horizontal
14984.200	45.3	5.9	51.2	82.3	-31.1	Peak	Horizontal
7327.400	40.1	5.3	45.4	82.3	-36.9	Peak	Vertical
14965.500	45.9	5.6	51.5	82.3	-30.8	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 7

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
101.680	3.6	18.1	21.7	70.3	-48.6	Quasi-peak	Horizontal
865.784	-0.4	29.5	29.1	70.3	-41.2	Quasi-peak	Horizontal
122.018	23.4	15.9	39.3	70.3	-31.0	Quasi-peak	Vertical
902.993	-0.7	29.9	29.2	70.3	-41.1	Quasi-peak	Vertical
7500.800	44.9	5.3	50.2	70.3	-20.1	Peak	Horizontal
12502.200	49.0	5.0	54.0	70.3	-16.3	Peak	Horizontal
7500.800	58.7	5.3	64.0	70.3	-6.3	Peak	Vertical
12502.200	57.5	5.0	62.5	70.3	-7.8	Average	Vertical
Middle Channel							
92.625	1.3	16.7	18.0	70.3	-52.3	Quasi-peak	Horizontal
885.123	-0.5	29.8	29.3	70.3	-41.0	Quasi-peak	Horizontal
122.490	23.4	15.8	39.2	70.3	-31.1	Quasi-peak	Vertical
920.254	-0.7	29.9	29.2	70.3	-41.1	Quasi-peak	Vertical
7599.400	56.8	5.0	61.8	70.3	-8.5	Average	Horizontal
12663.700	60.9	5.3	66.2	70.3	-4.1	Peak	Horizontal
7599.400	56.4	5.0	61.4	70.3	-8.9	Peak	Vertical
14566.000	45.0	5.8	50.8	70.3	-19.5	Peak	Vertical
High Channel							
140.983	6.2	14.4	20.6	70.3	-49.7	Quasi-peak	Horizontal
893.230	-0.6	30.0	29.4	70.3	-40.9	Quasi-peak	Horizontal
122.490	23.2	15.8	39.0	70.3	-31.3	Quasi-peak	Vertical
915.748	-0.5	29.9	29.4	70.3	-40.9	Quasi-peak	Vertical
7696.300	58.0	5.1	63.1	70.3	-7.2	Average	Horizontal
12826.900	57.0	5.4	62.4	70.3	-7.9	Peak	Horizontal
7696.300	55.1	5.1	60.2	70.3	-10.1	Average	Vertical
12826.900	55.1	5.4	60.5	70.3	-9.8	Average	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 12/17

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
49.204	6.7	20.0	26.7	82.3	-55.6	Quasi-peak	Horizontal
582.947	9.0	26.0	35.0	82.3	-47.3	Quasi-peak	Horizontal
94.760	13.0	17.2	30.2	82.3	-52.1	Quasi-peak	Vertical
624.859	12.0	26.6	38.6	82.3	-43.7	Quasi-peak	Vertical
2098.200	44.8	-5.5	39.3	82.3	-43.0	Peak	Horizontal
14467.400	45.9	6.0	51.9	82.3	-30.4	Peak	Horizontal
3216.800	41.7	-3.5	38.2	82.3	-44.1	Peak	Vertical
13527.300	44.5	5.2	49.7	82.3	-32.6	Peak	Vertical
Middle Channel							
105.568	7.2	18.1	25.3	82.3	-57.0	Quasi-peak	Horizontal
626.395	9.2	26.7	35.9	82.3	-46.4	Quasi-peak	Horizontal
98.176	13.2	17.8	31.0	82.3	-51.3	Quasi-peak	Vertical
628.815	11.8	26.8	38.6	82.3	-43.7	Quasi-peak	Vertical
2098.200	44.2	-5.5	38.7	82.3	-43.6	Peak	Horizontal
8325.300	39.6	6.5	46.1	82.3	-36.2	Peak	Horizontal
2446.700	45.1	-4.9	40.2	82.3	-42.1	Peak	Vertical
10720.600	41.6	5.9	47.5	82.3	-34.8	Peak	Vertical
High Channel							
101.858	7.0	18.1	25.1	82.3	-57.2	Quasi-peak	Horizontal
624.421	8.8	26.6	35.4	82.3	-46.9	Quasi-peak	Horizontal
98.694	13.4	17.9	31.3	82.3	-51.0	Quasi-peak	Vertical
642.861	11.6	27.0	38.6	82.3	-43.7	Quasi-peak	Vertical
5216.000	41.2	0.0	41.2	82.3	-41.1	Peak	Horizontal
15179.700	44.7	6.0	50.7	82.3	-31.6	Peak	Horizontal
7070.700	40.9	4.6	45.5	82.3	-36.8	Peak	Vertical
14640.800	44.7	6.0	50.7	82.3	-31.6	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 13

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
108.647	7.3	17.9	25.2	82.3	-57.1	Quasi-peak	Horizontal
728.847	9.9	28.0	37.9	82.3	-44.4	Quasi-peak	Horizontal
100.053	13.6	18.0	31.6	82.3	-50.7	Quasi-peak	Vertical
726.805	10.2	28.0	38.2	82.3	-44.1	Quasi-peak	Vertical
1586.500	40.1	-7.6	32.5	55.3	-22.8	Peak	Horizontal
12677.300	43.9	5.4	49.3	82.3	-33.0	Peak	Horizontal
1586.500	38.9	-7.6	31.3	55.3	-24.0	Peak	Vertical
9008.700	39.2	6.9	46.1	82.3	-36.2	Peak	Vertical
Middle Channel							
110.996	7.1	17.7	24.8	82.3	-57.5	Quasi-peak	Horizontal
686.669	8.4	26.9	35.3	82.3	-47.0	Quasi-peak	Horizontal
98.487	13.1	17.8	30.9	82.3	-51.4	Quasi-peak	Vertical
585.816	10.5	26.1	36.6	82.3	-45.7	Quasi-peak	Vertical
1559.300	45.2	-7.6	37.6	55.3	-17.7	Peak	Horizontal
11514.500	42.9	5.6	48.5	82.3	-33.8	Peak	Horizontal
1574.600	39.3	-7.6	31.7	55.3	-23.6	Peak	Vertical
14596.600	45.6	5.8	51.4	82.3	-30.9	Peak	Vertical
High Channel							
98.902	6.8	17.9	24.7	82.3	-57.6	Quasi-peak	Horizontal
719.957	9.6	27.6	37.2	82.3	-45.1	Quasi-peak	Horizontal
96.099	13.6	17.4	31.0	82.3	-51.3	Quasi-peak	Vertical
721.979	10.4	27.7	38.1	82.3	-44.2	Quasi-peak	Vertical
1559.300	43.8	-7.6	36.2	55.3	-19.1	Peak	Horizontal
2339.600	47.4	-5.0	42.4	82.3	-39.9	Peak	Horizontal
1569.500	39.4	-7.6	31.8	55.3	-23.5	Peak	Vertical
16827.000	47.3	4.0	51.3	82.3	-31.0	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 38/41

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
51.103	-2.8	19.9	17.1	70.3	-53.2	Quasi-peak	Horizontal
821.710	-1.2	28.4	27.2	70.3	-43.1	Quasi-peak	Horizontal
125.754	22.2	15.5	37.7	70.3	-32.6	Quasi-peak	Vertical
881.716	-9.6	29.7	20.1	70.3	-50.2	Quasi-peak	Vertical
7488.900	52.4	5.2	57.6	70.3	-12.7	Peak	Horizontal
16002.500	45.9	6.4	52.3	70.3	-18.0	Peak	Horizontal
7488.900	51.0	5.2	56.2	70.3	-14.1	Peak	Vertical
12481.800	48.4	4.9	53.3	70.3	-17.0	Peak	Vertical
Middle Channel							
95.729	0.5	17.4	17.9	70.3	-52.4	Quasi-peak	Horizontal
766.864	-9.4	28.7	19.3	70.3	-51.0	Quasi-peak	Horizontal
126.462	22.6	15.4	38.0	70.3	-32.3	Quasi-peak	Vertical
889.168	-9.6	29.9	20.3	70.3	-50.0	Quasi-peak	Vertical
7772.800	57.2	5.1	62.3	70.3	-8.0	Average	Horizontal
12954.400	58.9	5.3	64.2	70.3	-6.1	Peak	Horizontal
7772.800	61.3	5.1	66.4	70.3	-3.9	Peak	Vertical
12954.400	61.4	5.3	66.7	70.3	-3.6	Peak	Vertical
High Channel							
48.451	-5.4	20.0	14.6	70.3	-55.7	Quasi-peak	Horizontal
886.055	-7.6	29.8	22.2	70.3	-48.1	Quasi-peak	Horizontal
126.107	21.0	15.4	36.4	70.3	-33.9	Quasi-peak	Vertical
729.103	-7.1	28.1	21.0	70.3	-49.3	Quasi-peak	Vertical
5370.700	51.9	-0.1	51.8	70.3	-18.5	Peak	Horizontal
8056.700	57.1	5.7	62.8	70.3	-7.5	Peak	Horizontal
8056.700	58.2	5.7	63.9	70.3	-6.4	Peak	Vertical
13427.000	50.3	4.9	55.2	70.3	-15.1	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 42

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
106.236	6.5	18.1	24.6	82.3	-57.7	Quasi-peak	Horizontal
728.591	9.1	28.0	37.1	82.3	-45.2	Quasi-peak	Horizontal
98.314	7.2	17.8	25.0	82.3	-57.3	Quasi-peak	Vertical
729.358	10.3	28.1	38.4	82.3	-43.9	Quasi-peak	Vertical
10195.300	42.6	6.7	49.3	82.3	-33.0	Peak	Horizontal
15033.500	46.5	5.7	52.2	82.3	-30.1	Peak	Horizontal
10231.000	42.2	6.3	48.5	82.3	-33.8	Peak	Vertical
15409.200	45.9	6.1	52.0	82.3	-30.3	Peak	Vertical
Middle Channel							
103.515	6.7	18.2	24.9	82.3	-57.4	Quasi-peak	Horizontal
741.478	8.6	28.6	37.2	82.3	-45.1	Quasi-peak	Horizontal
97.798	7.0	17.7	24.7	82.3	-57.6	Quasi-peak	Vertical
863.662	-0.8	29.5	28.7	82.3	-53.6	Quasi-peak	Vertical
9287.500	41.7	7.2	48.9	82.3	-33.4	Peak	Horizontal
15378.600	46.7	6.0	52.7	82.3	-29.6	Peak	Horizontal
11429.500	42.8	5.6	48.4	82.3	-33.9	Peak	Vertical
15285.100	46.1	6.1	52.2	82.3	-30.1	Peak	Vertical
High Channel							
94.793	1.6	17.2	18.8	82.3	-63.5	Quasi-peak	Horizontal
677.342	-1.0	26.9	25.9	82.3	-56.4	Quasi-peak	Horizontal
97.456	7.2	17.7	24.9	82.3	-57.4	Quasi-peak	Vertical
729.358	10.6	28.1	38.7	82.3	-43.6	Quasi-peak	Vertical
9868.900	41.6	6.5	48.1	82.3	-34.2	Peak	Horizontal
14970.600	46.3	5.7	52.0	82.3	-30.3	Peak	Horizontal
9061.400	41.2	6.9	48.1	82.3	-34.2	Peak	Vertical
15642.100	46.0	6.2	52.2	82.3	-30.1	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	Band 43

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
48.400	4.5	20.0	24.5	82.3	-57.8	Quasi-peak	Horizontal
848.651	-2.6	29.3	26.7	82.3	-55.6	Quasi-peak	Horizontal
138.339	6.9	14.5	21.4	82.3	-60.9	Quasi-peak	Vertical
892.604	-2.4	30.0	27.6	82.3	-54.7	Quasi-peak	Vertical
8996.800	40.8	7.2	48.0	82.3	-34.3	Peak	Horizontal
15557.100	46.8	6.1	52.9	82.3	-29.4	Peak	Horizontal
10676.400	42.3	5.8	48.1	82.3	-34.2	Peak	Vertical
15444.900	45.7	5.9	51.6	82.3	-30.7	Peak	Vertical
Middle Channel							
98.867	5.2	17.9	23.1	82.3	-59.2	Quasi-peak	Horizontal
821.134	-4.8	28.4	23.6	82.3	-58.7	Quasi-peak	Horizontal
121.038	5.9	16.1	22.0	82.3	-60.3	Quasi-peak	Vertical
729.358	-3.2	28.1	24.9	82.3	-57.4	Quasi-peak	Vertical
9047.800	40.6	7.1	47.7	82.3	-34.6	Peak	Horizontal
14448.700	46.3	5.7	52.0	82.3	-30.3	Peak	Horizontal
9389.500	40.7	6.6	47.3	82.3	-35.0	Peak	Vertical
14671.400	46.3	5.8	52.1	82.3	-30.2	Peak	Vertical
High Channel							
49.308	5.7	20.0	25.7	82.3	-56.6	Quasi-peak	Horizontal
711.175	-2.4	27.5	25.1	82.3	-57.2	Quasi-peak	Horizontal
132.871	4.8	14.9	19.7	82.3	-62.6	Quasi-peak	Vertical
814.253	-2.8	28.2	25.4	82.3	-56.9	Quasi-peak	Vertical
10139.200	42.1	6.4	48.5	82.3	-33.8	Peak	Horizontal
15247.700	46.2	5.8	52.0	82.3	-30.3	Peak	Horizontal
9071.600	40.3	6.9	47.2	82.3	-35.1	Peak	Vertical
15283.400	45.1	6.1	51.2	82.3	-31.1	Peak	Vertical

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note 2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case result.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9 kHz to 30 MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Appendix B - Test Setup Photograph

Refer to "R25S1020041-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1020041-UE" file.