



5MHz Channel Bandwidth


Low Channel

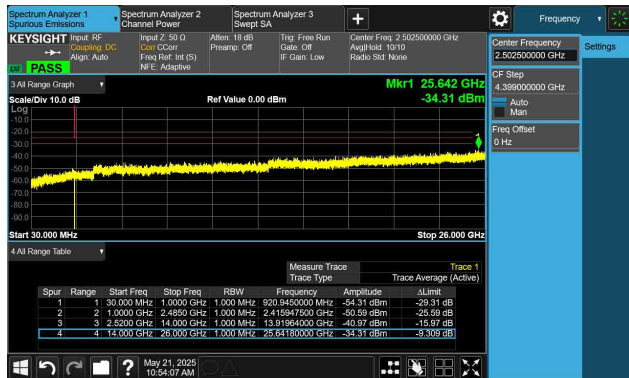

Middle Channel

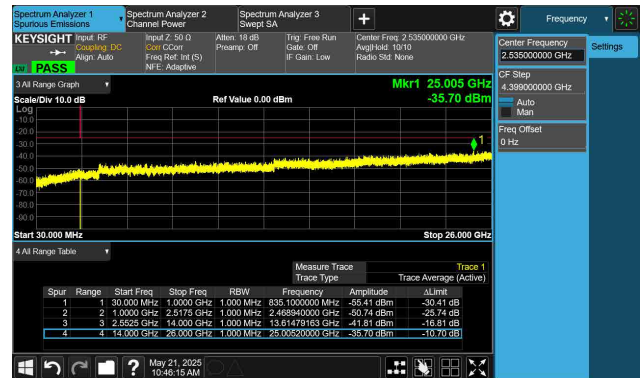


High Channel

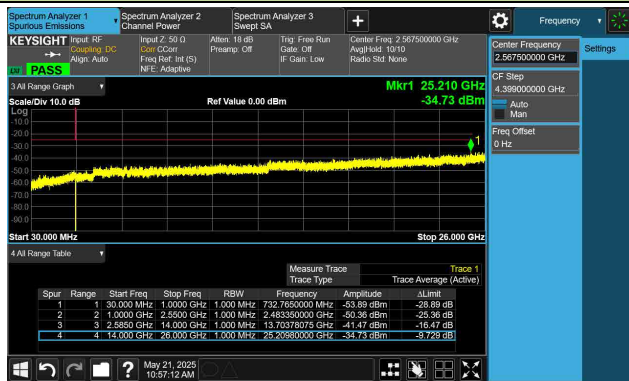

10MHz Channel Bandwidth


Low Channel

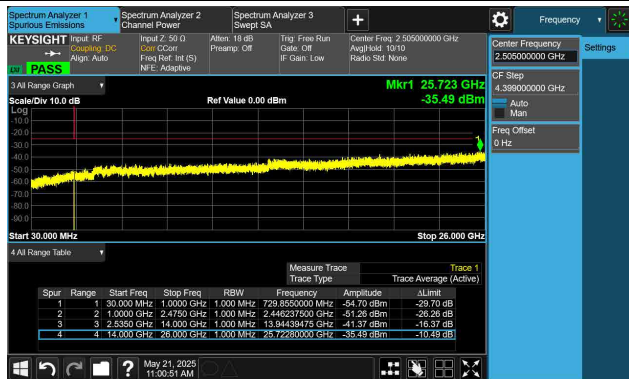

Middle Channel




High Channel

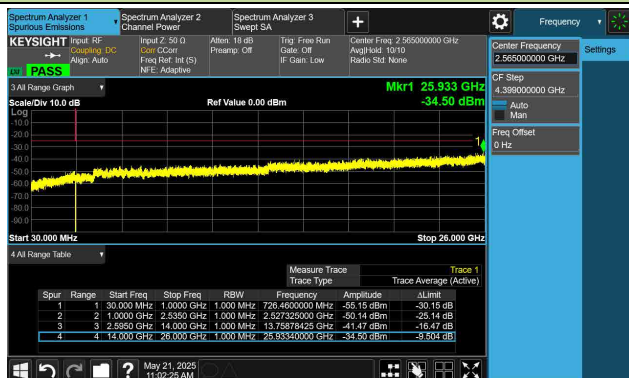


15MHz Channel Bandwidth


Low Channel

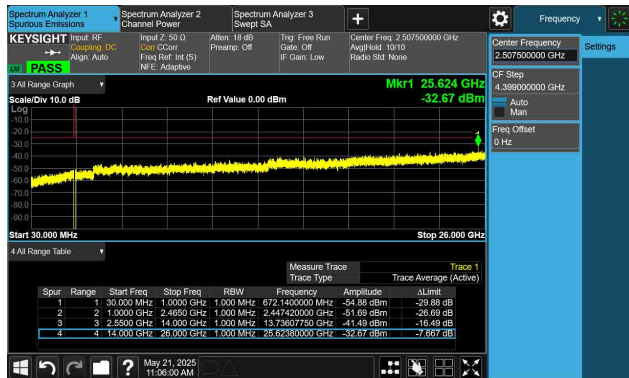

Middle Channel

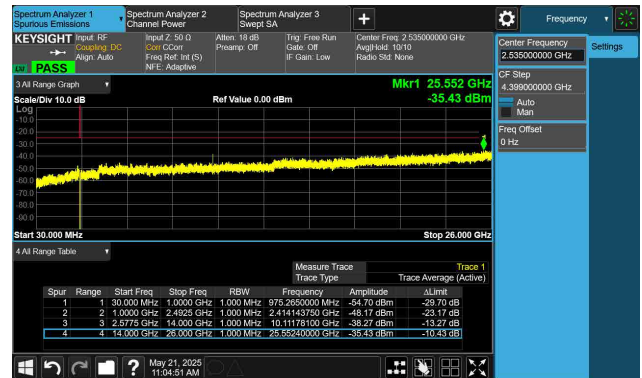


High Channel

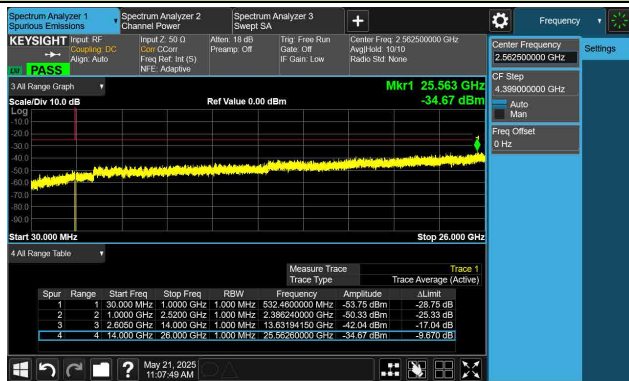


20MHz Channel Bandwidth


Low Channel

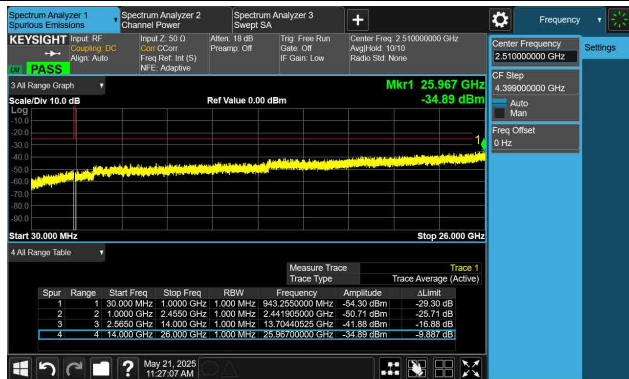

Middle Channel

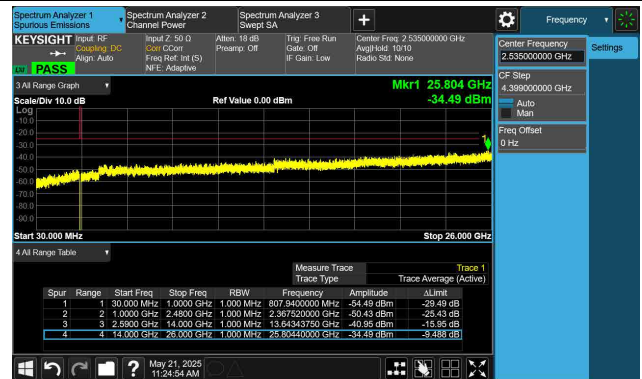

High Channel

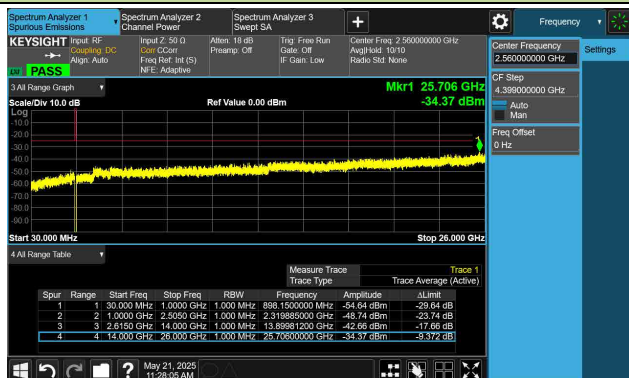


Test Site	WJ-SR11 & SIP-SR1	Test Engineer	Lucas Wang & Yoniter Yang
Test Date	2025-05-09 ~ 2025-05-12	Test Band	n38/41

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
20	2506.02	30 ~ 28000	-37.38	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.14	≤ -25.00	Pass
	2679.99	30 ~ 28000	-37.15	≤ -25.00	Pass
30	2511	30 ~ 28000	-37.13	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.25	≤ -25.00	Pass
	2674.98	30 ~ 28000	-37.40	≤ -25.00	Pass
40	2516.01	30 ~ 28000	-37.42	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.33	≤ -25.00	Pass
	2670	30 ~ 28000	-37.16	≤ -25.00	Pass
50	2521.02	30 ~ 28000	-37.22	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.44	≤ -25.00	Pass
	2664.99	30 ~ 28000	-36.89	≤ -25.00	Pass
60	2526	30 ~ 28000	-37.52	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.25	≤ -25.00	Pass
	2659.98	30 ~ 28000	-36.71	≤ -25.00	Pass
80	2536.02	30 ~ 28000	-37.23	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.46	≤ -25.00	Pass
	2649.99	30 ~ 28000	-37.47	≤ -25.00	Pass
90	2541	30 ~ 28000	-37.42	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.29	≤ -25.00	Pass
	2644.98	30 ~ 28000	-37.42	≤ -25.00	Pass
100	2546.01	30 ~ 28000	-37.58	≤ -25.00	Pass
	2592.99	30 ~ 28000	-37.14	≤ -25.00	Pass
	2640	30 ~ 28000	-37.43	≤ -25.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

20MHz Channel Bandwidth


Low Channel

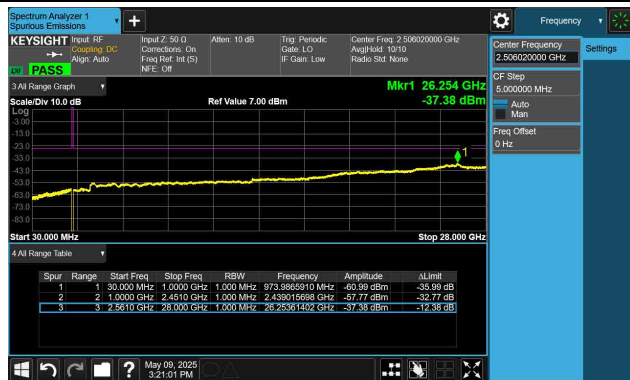

Middle Channel

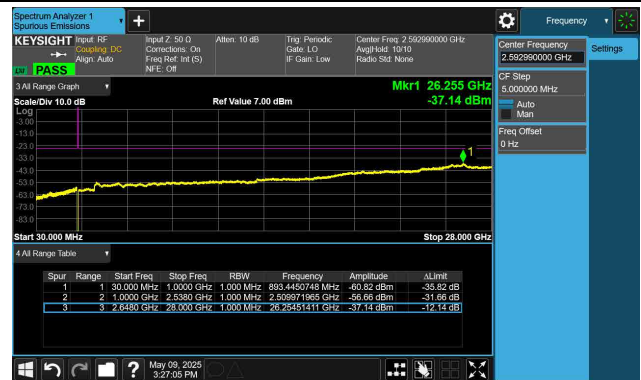


High Channel

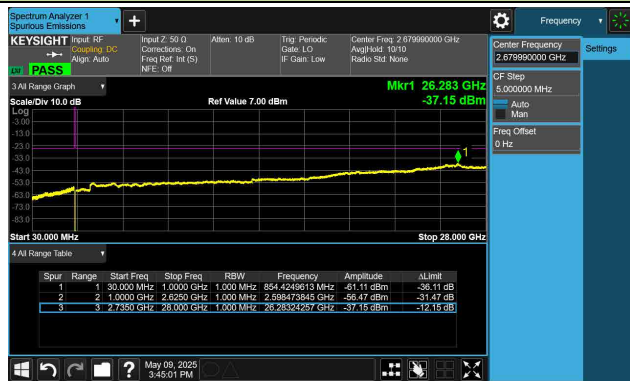


30MHz Channel Bandwidth


Low Channel

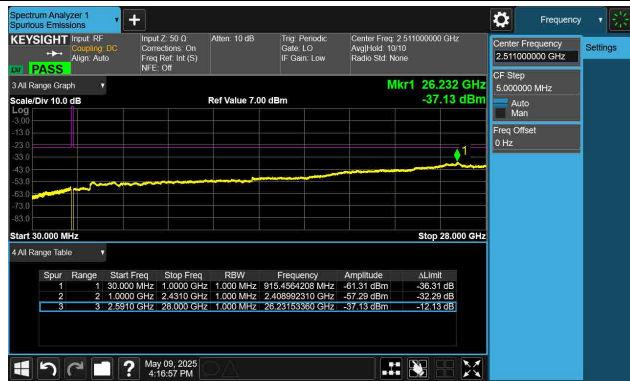

Middle Channel

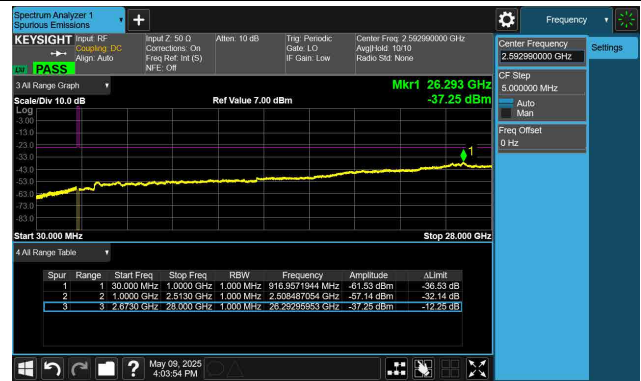


High Channel

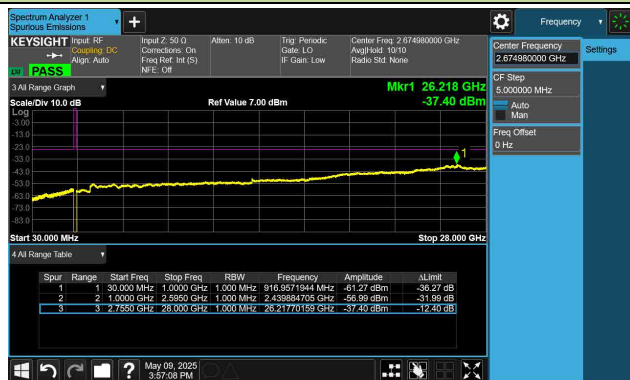


40MHz Channel Bandwidth


Low Channel

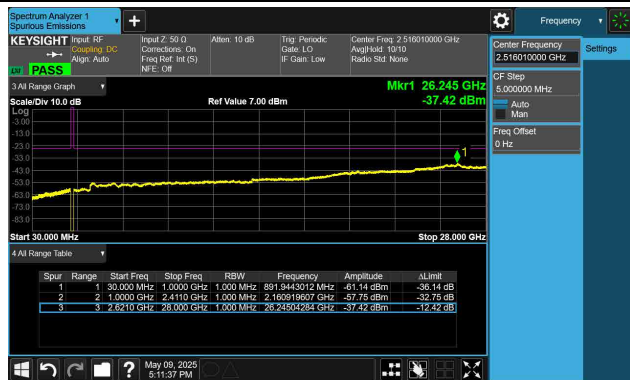

Middle Channel

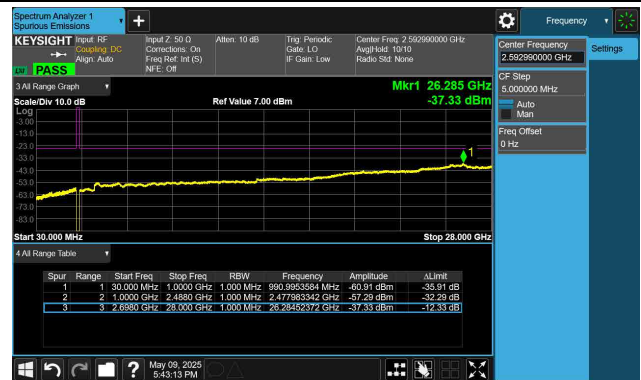


High Channel

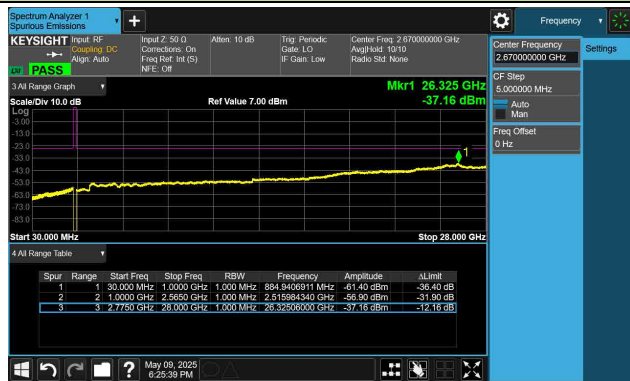


50MHz Channel Bandwidth


Low Channel

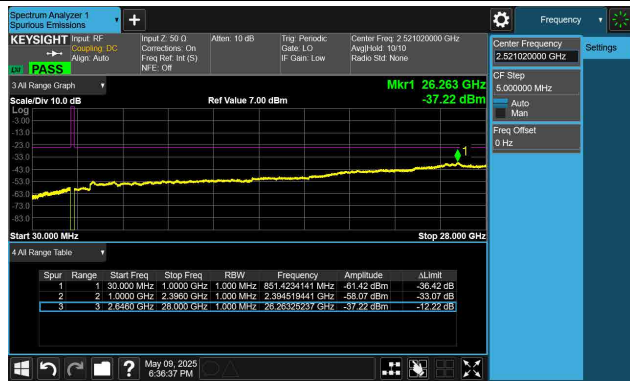

Middle Channel

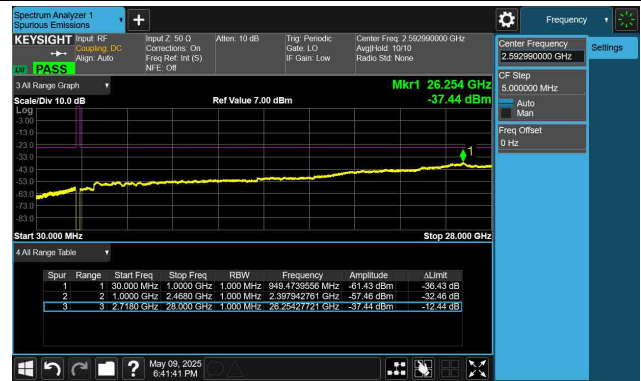


High Channel

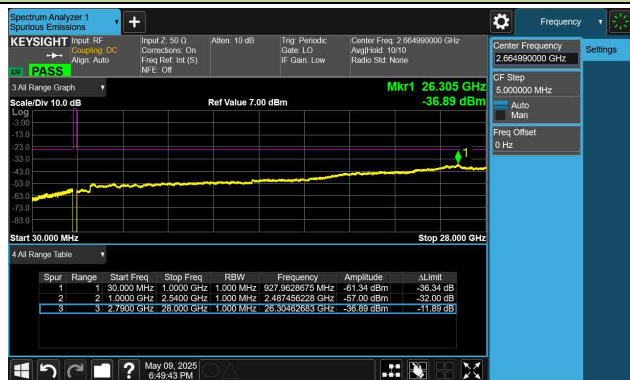


60MHz Channel Bandwidth


Low Channel

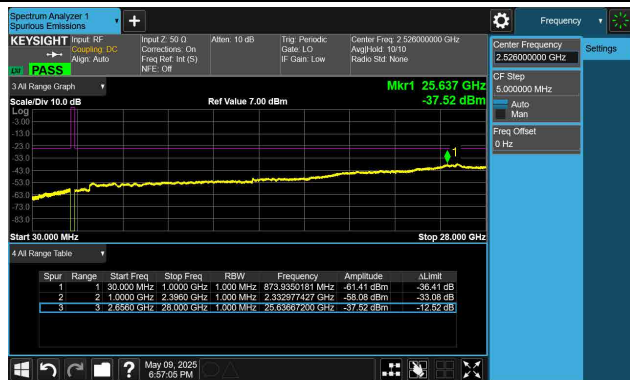

Middle Channel

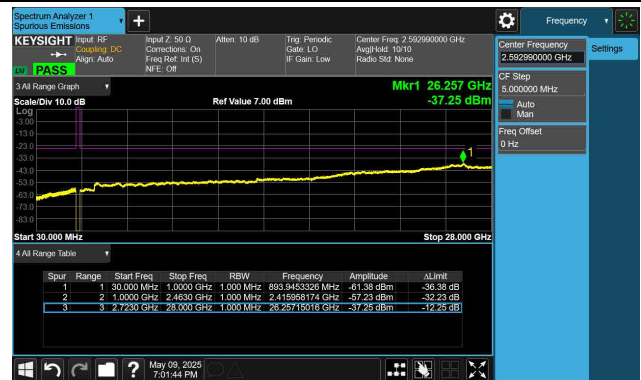


High Channel

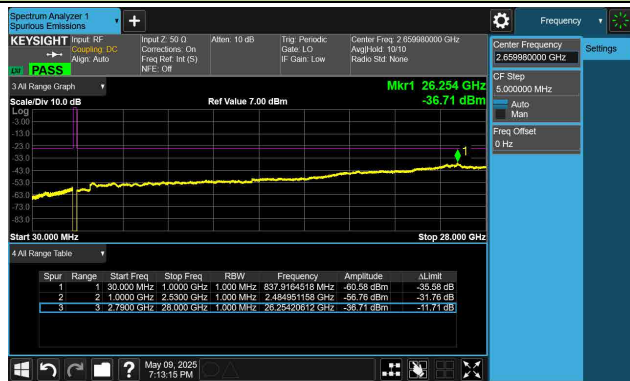


80MHz Channel Bandwidth


Low Channel

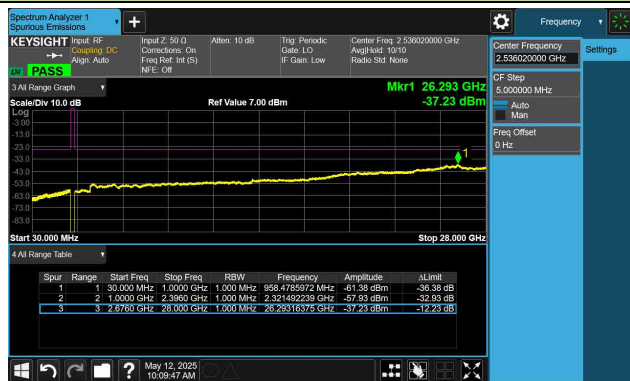

Middle Channel

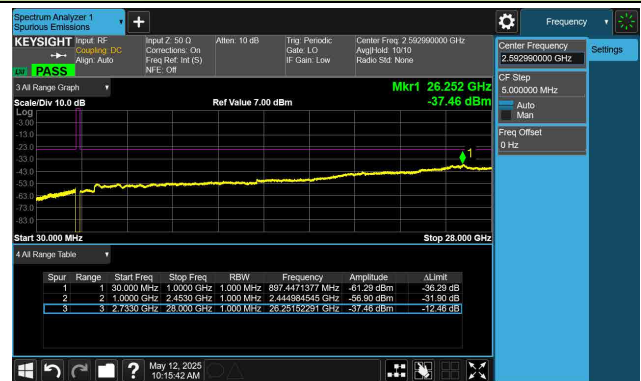


High Channel

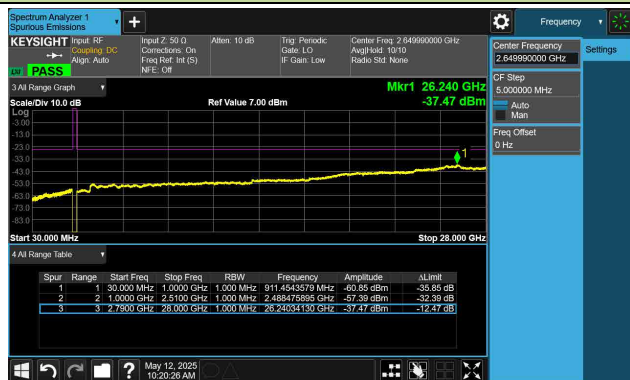


90MHz Channel Bandwidth


Low Channel

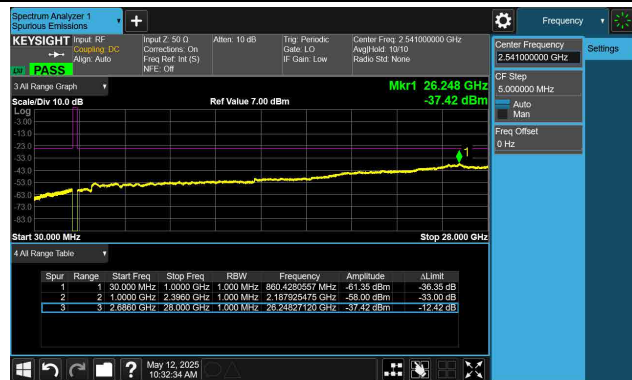

Middle Channel

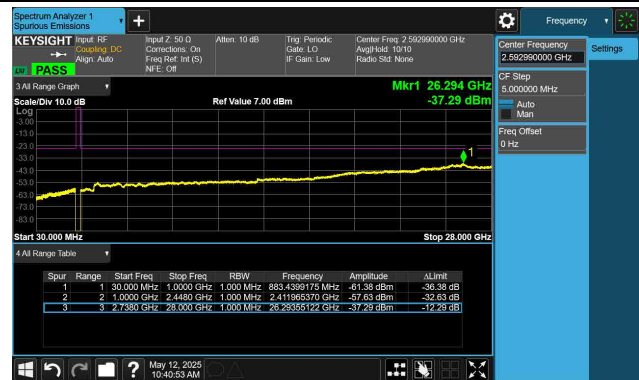


High Channel

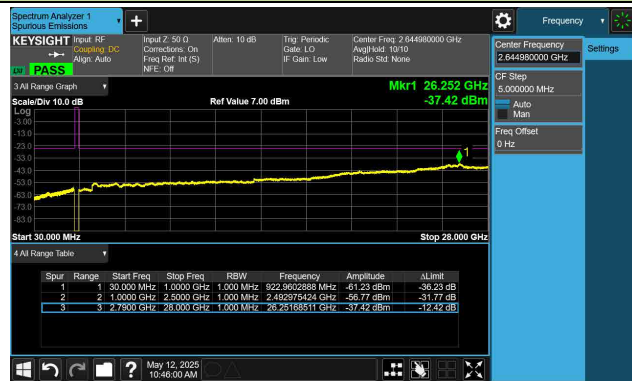


100MHz Channel Bandwidth


Low Channel

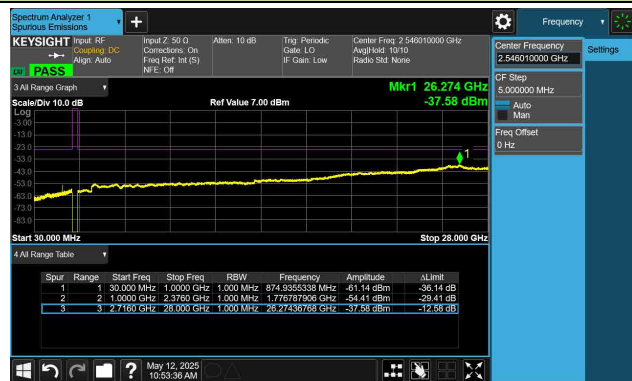

Middle Channel

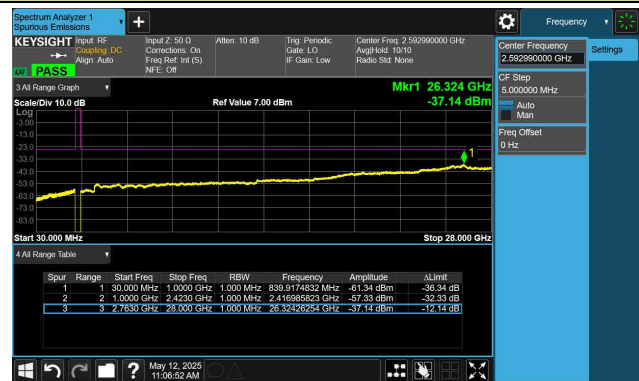

High Channel

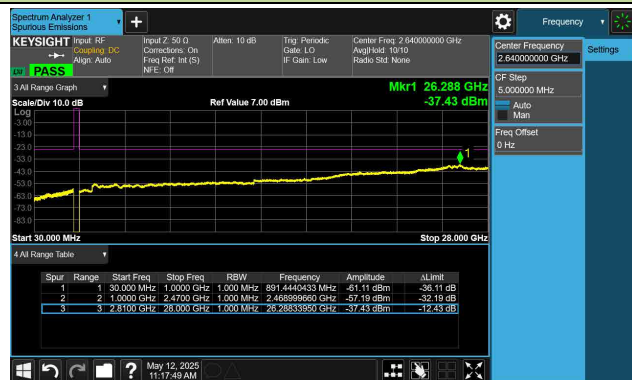

Test Site	WJ-SR11 & SIP-SR1	Test Engineer	Lucas Wang & Yoniter Yang
Test Date	2025-05-12	Test Band	n77/78 - PC2 (3450 ~ 3550)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
20	3460.02	30 ~ 36000	-27.06	≤ -13.00	Pass
	3500.01	30 ~ 36000	-27.10	≤ -13.00	Pass
	3540	30 ~ 36000	-26.96	≤ -13.00	Pass
30	3465	30 ~ 36000	-27.25	≤ -13.00	Pass
	3500.01	30 ~ 36000	-27.04	≤ -13.00	Pass
	3534.99	30 ~ 36000	-26.91	≤ -13.00	Pass
40	3470.01	30 ~ 36000	-27.12	≤ -13.00	Pass
	3500.01	30 ~ 36000	-27.12	≤ -13.00	Pass
	3529.98	30 ~ 36000	-26.94	≤ -13.00	Pass
50	3475.02	30 ~ 36000	-27.03	≤ -13.00	Pass
	3500.01	30 ~ 36000	-27.13	≤ -13.00	Pass
	3525	30 ~ 36000	-27.09	≤ -13.00	Pass
60	3480	30 ~ 36000	-26.95	≤ -13.00	Pass
	3500.01	30 ~ 36000	-27.03	≤ -13.00	Pass
	3519.99	30 ~ 36000	-27.11	≤ -13.00	Pass
70	3485.01	30 ~ 36000	-27.09	≤ -13.00	Pass
	3500.01	30 ~ 36000	-26.88	≤ -13.00	Pass
	3514.98	30 ~ 36000	-26.75	≤ -13.00	Pass
80	3490.02	30 ~ 36000	-27.05	≤ -13.00	Pass
	3500.01	30 ~ 36000	-26.75	≤ -13.00	Pass
	3510	30 ~ 36000	-26.61	≤ -13.00	Pass
90	3495	30 ~ 36000	-26.87	≤ -13.00	Pass
	3500.01	30 ~ 36000	-26.65	≤ -13.00	Pass
	3504.99	30 ~ 36000	-26.92	≤ -13.00	Pass
100	3500.01	30 ~ 36000	-27.12	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

20MHz Channel Bandwidth


Low Channel



Middle Channel

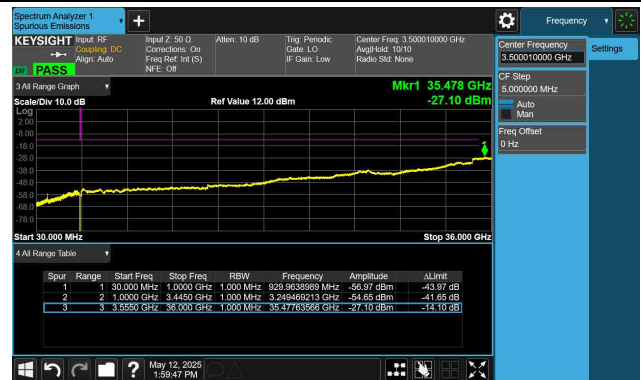


High Channel

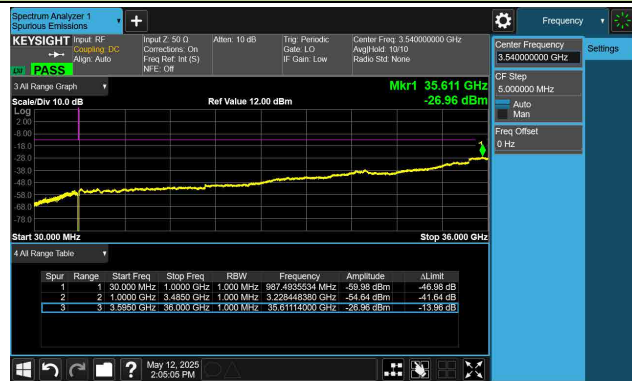

30MHz Channel Bandwidth


Low Channel

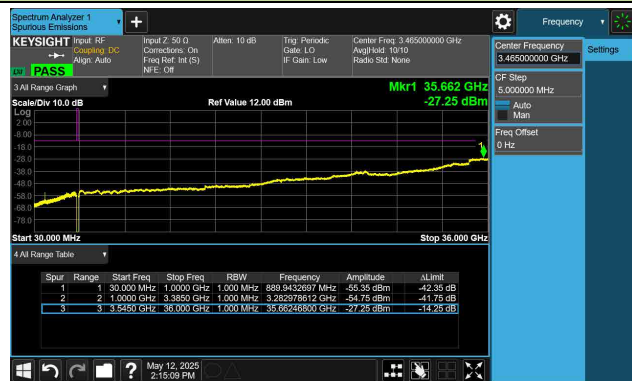

Middle Channel



High Channel

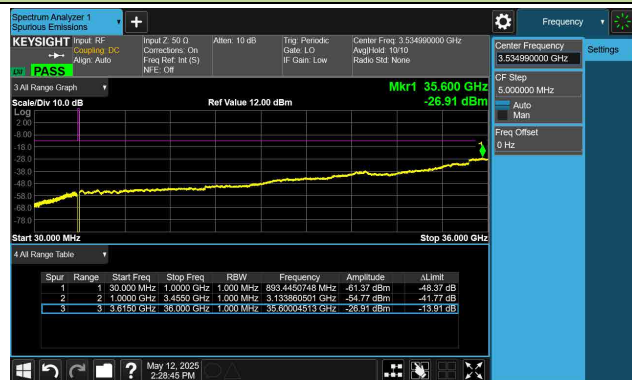


40MHz Channel Bandwidth


Low Channel



Middle Channel

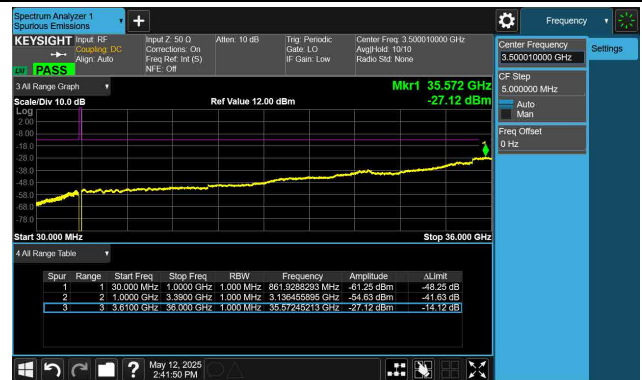


High Channel

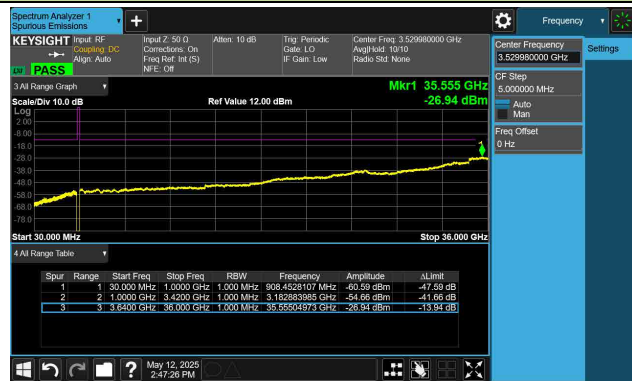


50MHz Channel Bandwidth


Low Channel

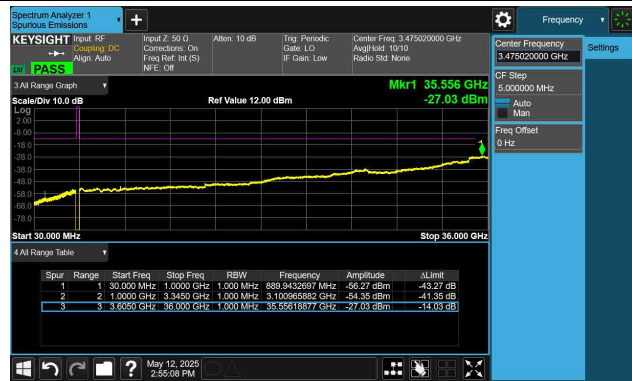

Middle Channel

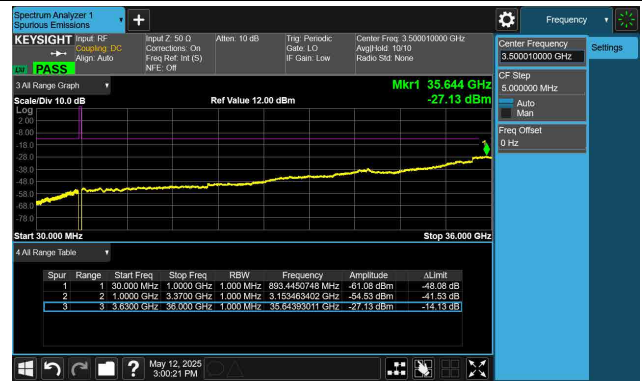

High Channel

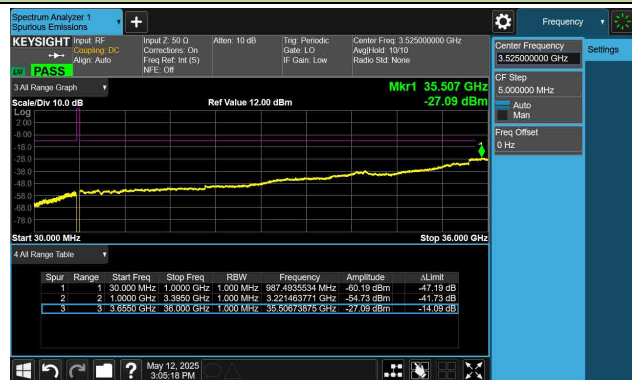


60MHz Channel Bandwidth


Low Channel



Middle Channel

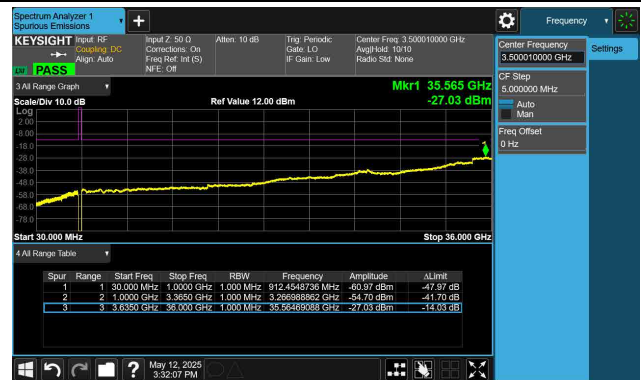

High Channel

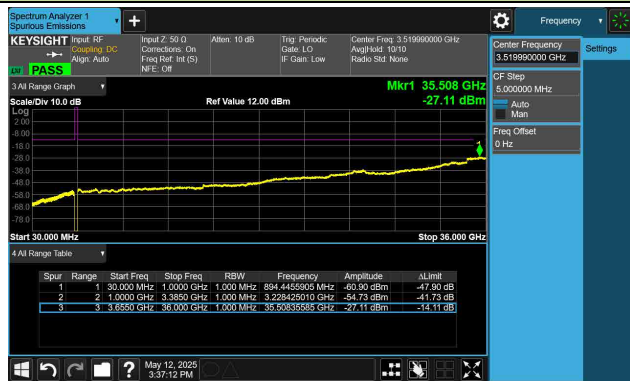


70MHz Channel Bandwidth

Low Channel



Middle Channel

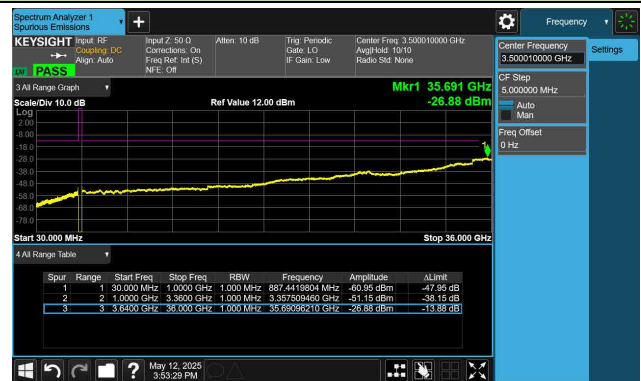

High Channel



80MHz Channel Bandwidth


Low Channel



Middle Channel



High Channel

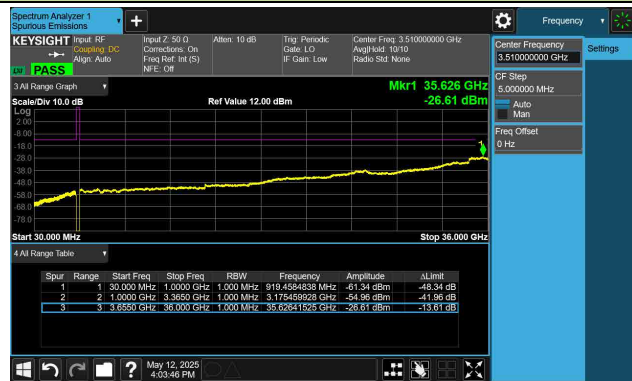

90MHz Channel Bandwidth


Low Channel



Middle Channel



High Channel

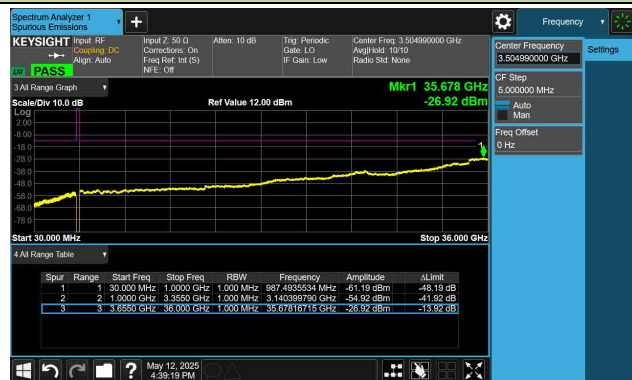

100MHz Channel Bandwidth

Middle Channel




Test Site	WJ-SR11 & SIP-SR1	Test Engineer	Lucas Wang & Yoniter Yang
Test Date	2025-05-12 ~ 2025-05-13	Test Band	n77/78 - PC2 (3700 ~ 3800)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
20	3710.01	30 ~ 40000	-24.16	≤ -13.00	Pass
	3750	30 ~ 40000	-24.33	≤ -13.00	Pass
	3789.99	30 ~ 40000	-23.99	≤ -13.00	Pass
30	3715.02	30 ~ 40000	-24.25	≤ -13.00	Pass
	3750	30 ~ 40000	-24.21	≤ -13.00	Pass
	3784.98	30 ~ 40000	-24.29	≤ -13.00	Pass
40	3720	30 ~ 40000	-24.40	≤ -13.00	Pass
	3750	30 ~ 40000	-24.32	≤ -13.00	Pass
	3780	30 ~ 40000	-24.57	≤ -13.00	Pass
50	3725.01	30 ~ 40000	-24.39	≤ -13.00	Pass
	3750	30 ~ 40000	-24.51	≤ -13.00	Pass
	3774.99	30 ~ 40000	-24.36	≤ -13.00	Pass
60	3730.02	30 ~ 40000	-19.74	≤ -13.00	Pass
	3750	30 ~ 40000	-19.59	≤ -13.00	Pass
	3769.98	30 ~ 40000	-19.55	≤ -13.00	Pass
70	3735	30 ~ 40000	-23.88	≤ -13.00	Pass
	3750	30 ~ 40000	-24.26	≤ -13.00	Pass
	3765	30 ~ 40000	-23.67	≤ -13.00	Pass
80	3740.01	30 ~ 40000	-24.12	≤ -13.00	Pass
	3750	30 ~ 40000	-24.08	≤ -13.00	Pass
	3759.99	30 ~ 40000	-23.79	≤ -13.00	Pass
90	3745.02	30 ~ 40000	-23.74	≤ -13.00	Pass
	3750	30 ~ 40000	-23.56	≤ -13.00	Pass
	3754.98	30 ~ 40000	-23.64	≤ -13.00	Pass
100	3750	30 ~ 40000	-23.72	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

20MHz Channel Bandwidth


Low Channel

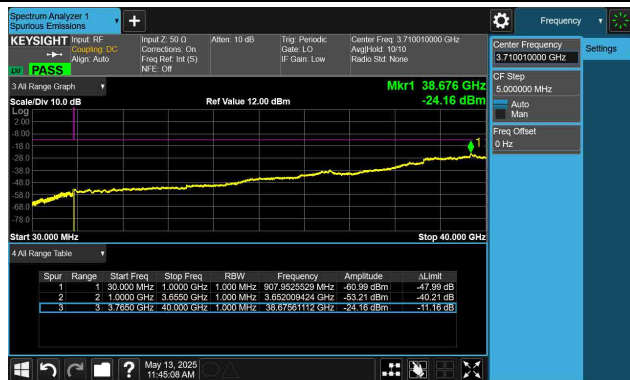

Middle Channel

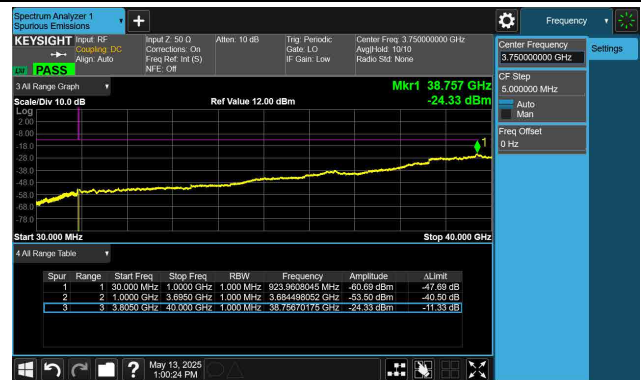


High Channel

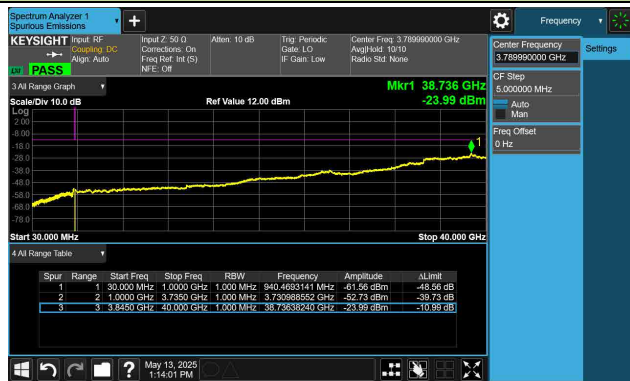


30MHz Channel Bandwidth


Low Channel

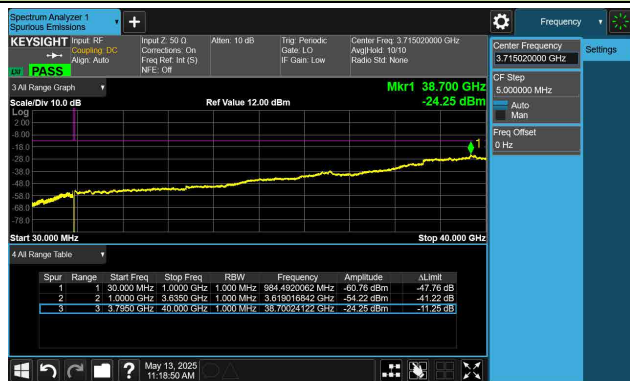

Middle Channel

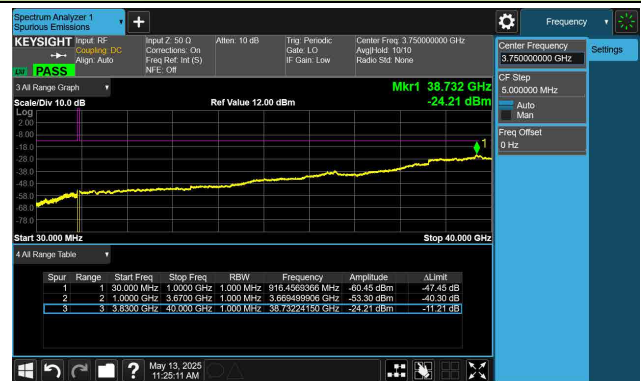


High Channel

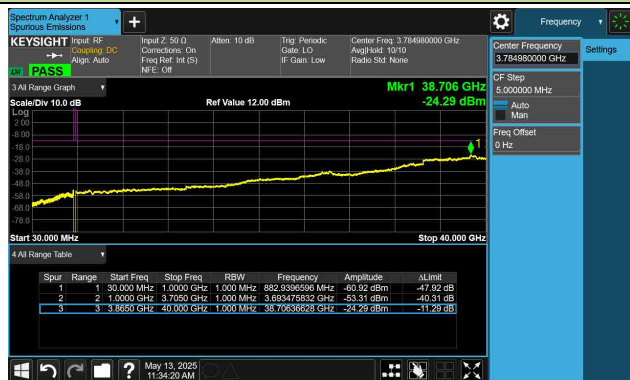


40MHz Channel Bandwidth


Low Channel

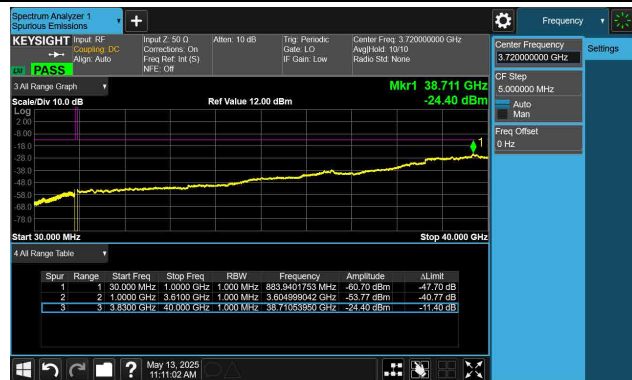

Middle Channel

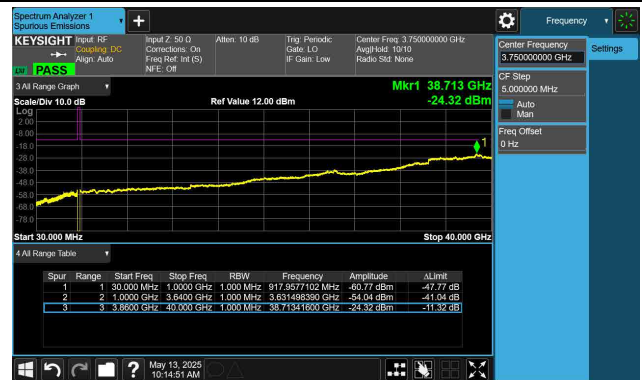


High Channel

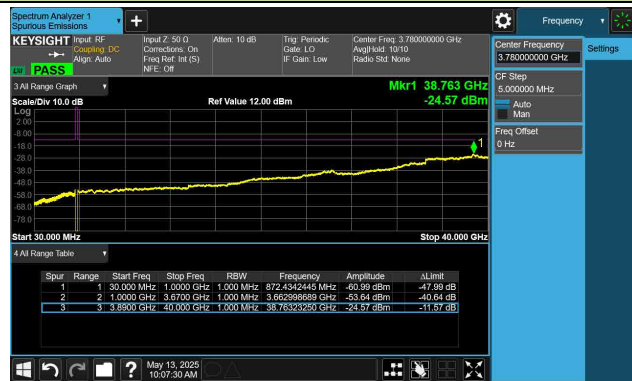


50MHz Channel Bandwidth

Low Channel

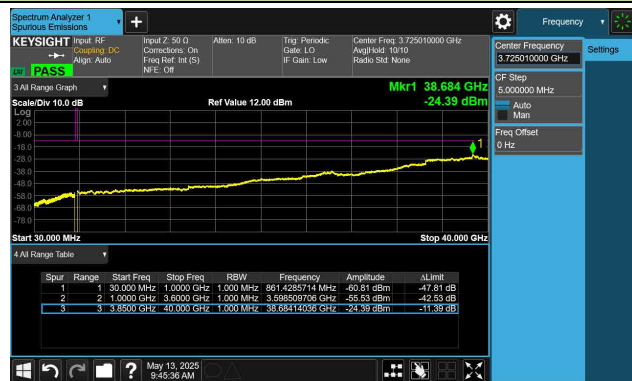

Middle Channel

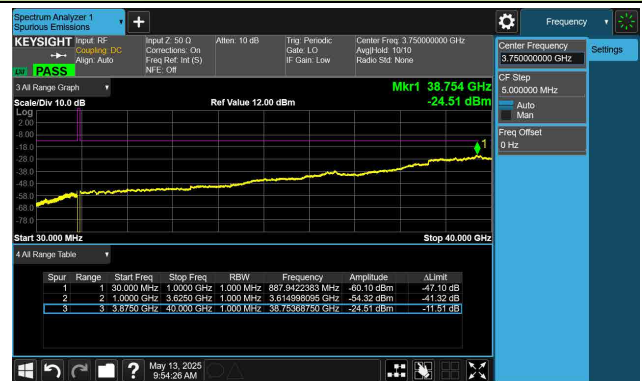

High Channel

