



60MHz Channel Bandwidth


Low Channel

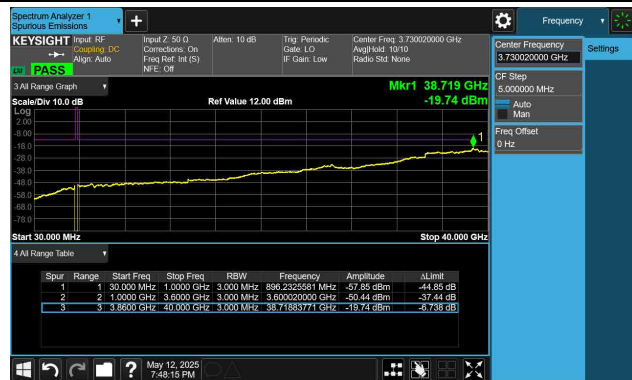

Middle Channel

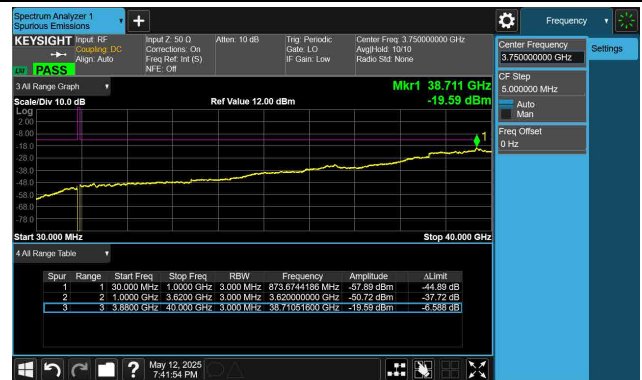


High Channel

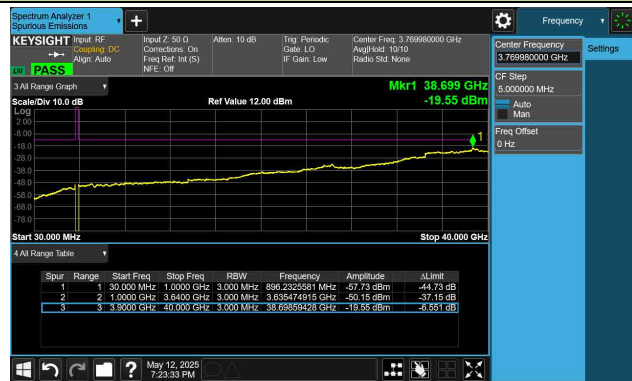


70MHz Channel Bandwidth


Low Channel

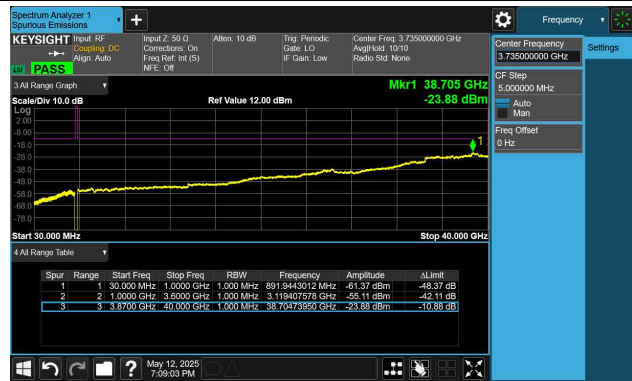

Middle Channel

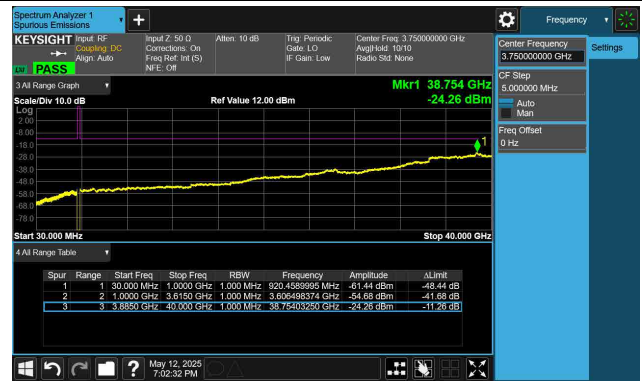


High Channel

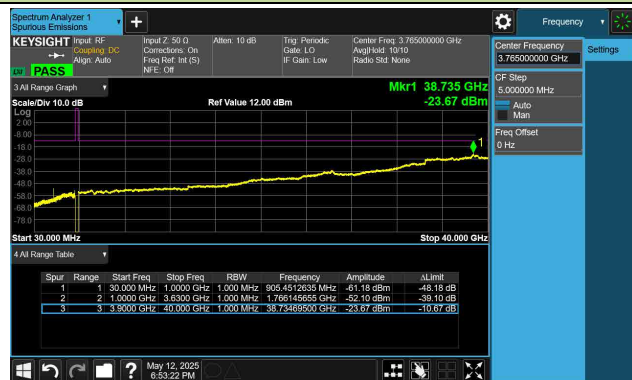


80MHz Channel Bandwidth


Low Channel

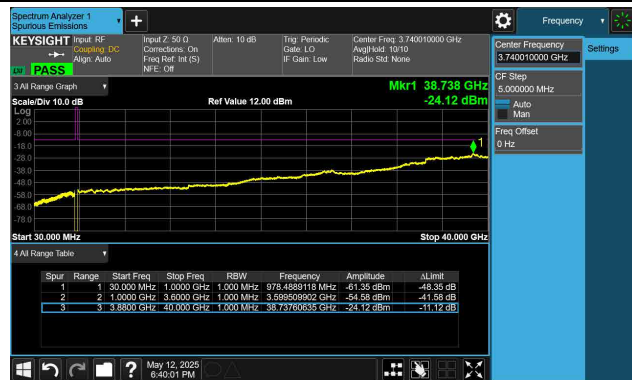

Middle Channel

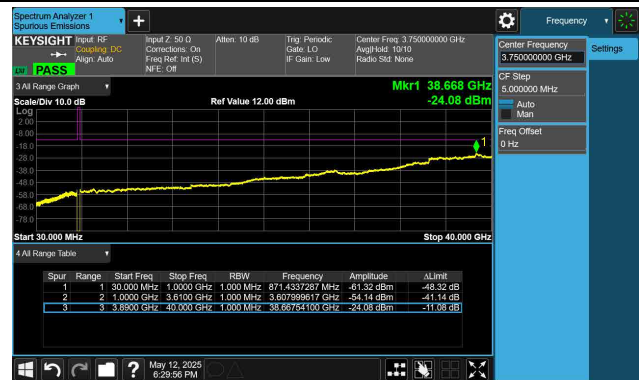


High Channel

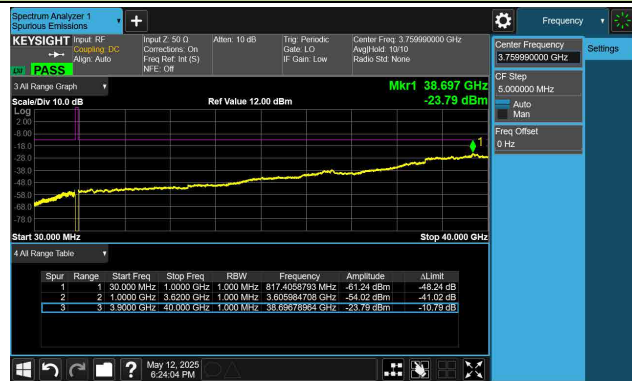


90MHz Channel Bandwidth


Low Channel

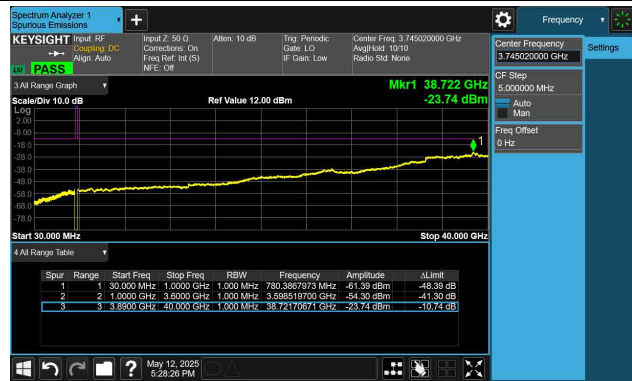

Middle Channel

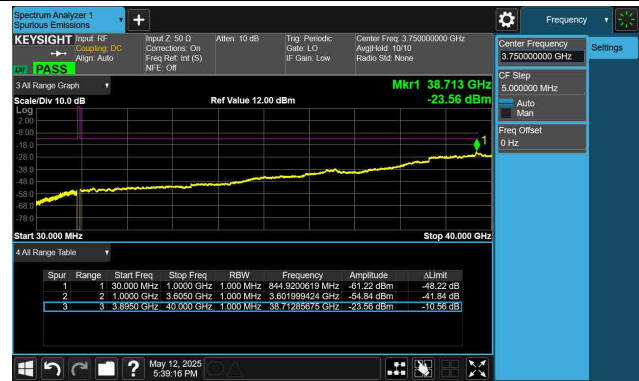


High Channel

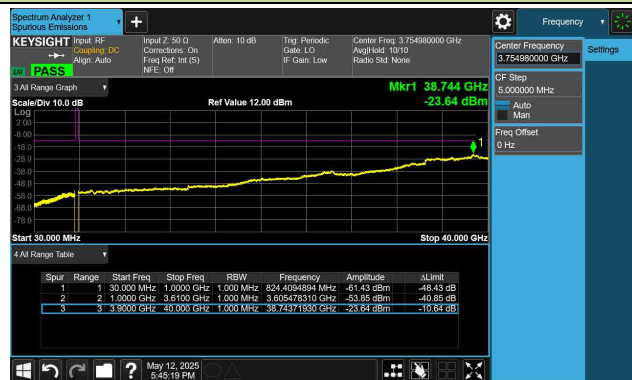

100MHz Channel Bandwidth

Middle Channel

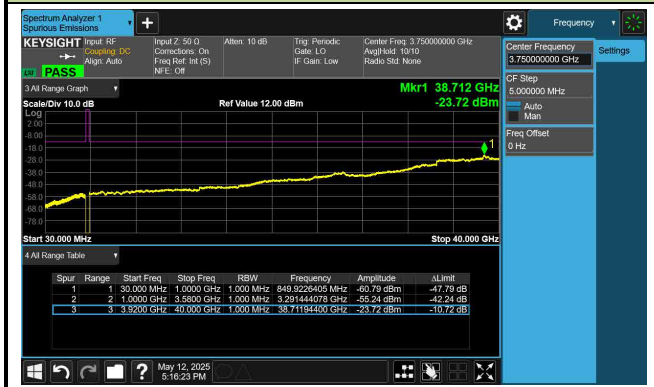


Test Site	WJ-SR11 & SIP-SR1	Test Engineer	Lucas Wang & Yoniter Yang
Test Date	2025-05-13	Test Band	n77 (3800 ~ 3980)

Channel Bandwidth (MHz)	Frequency (MHz)	Frequency Range (MHz)	Max Spurious Emissions (dBm)	Limit (dBm)	Result
20	3810	30 ~ 40000	-24.15	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.85	≤ -13.00	Pass
	3969.99	30 ~ 40000	-23.96	≤ -13.00	Pass
30	3815.01	30 ~ 40000	-23.84	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.58	≤ -13.00	Pass
	3964.98	30 ~ 40000	-23.90	≤ -13.00	Pass
40	3820.02	30 ~ 40000	-23.81	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.90	≤ -13.00	Pass
	3960	30 ~ 40000	-24.08	≤ -13.00	Pass
60	3830.01	30 ~ 40000	-23.96	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.92	≤ -13.00	Pass
	3949.98	30 ~ 40000	-23.91	≤ -13.00	Pass
80	3840	30 ~ 40000	-23.75	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.99	≤ -13.00	Pass
	3939.99	30 ~ 40000	-23.93	≤ -13.00	Pass
100	3850.02	30 ~ 40000	-23.79	≤ -13.00	Pass
	3890.01	30 ~ 40000	-23.75	≤ -13.00	Pass
	3930	30 ~ 40000	-23.70	≤ -13.00	Pass


Note: The amplitude of Conducted Spurious emissions (frequency range from 9kHz to 30MHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

20MHz Channel Bandwidth


Low Channel

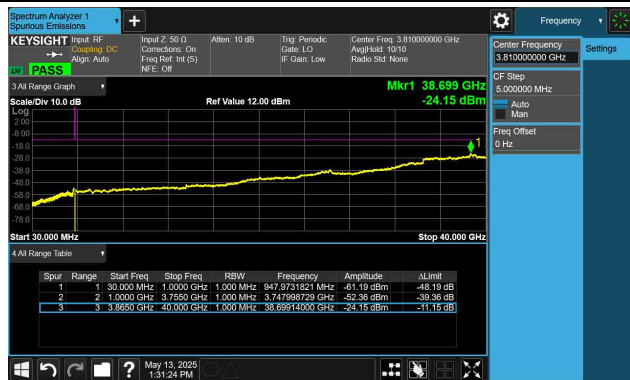

Middle Channel

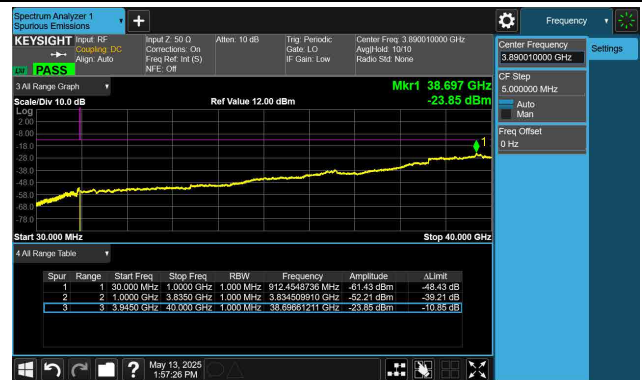


High Channel

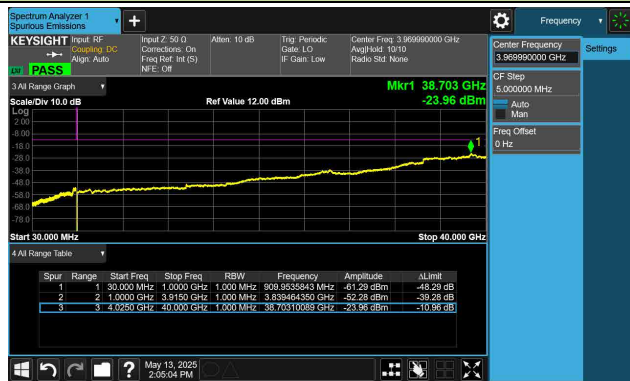


30MHz Channel Bandwidth


Low Channel

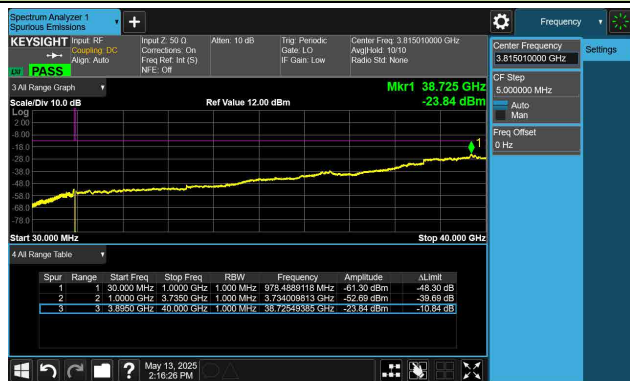

Middle Channel

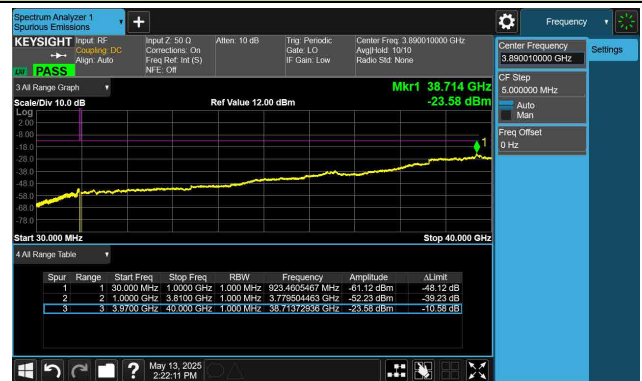


High Channel

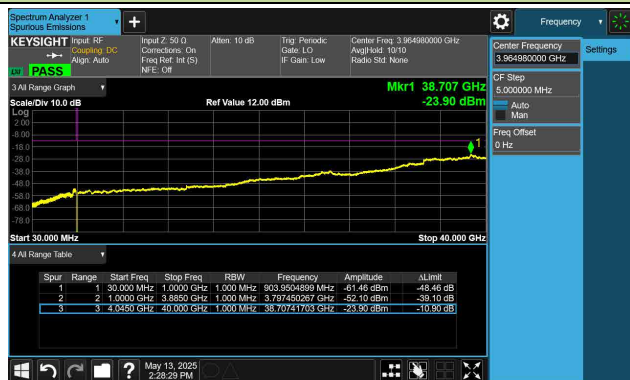


40MHz Channel Bandwidth


Low Channel

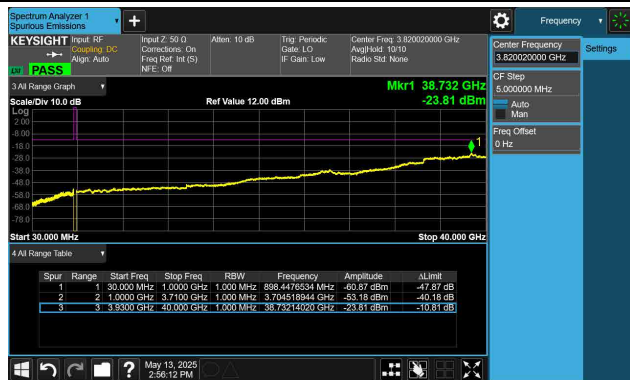

Middle Channel

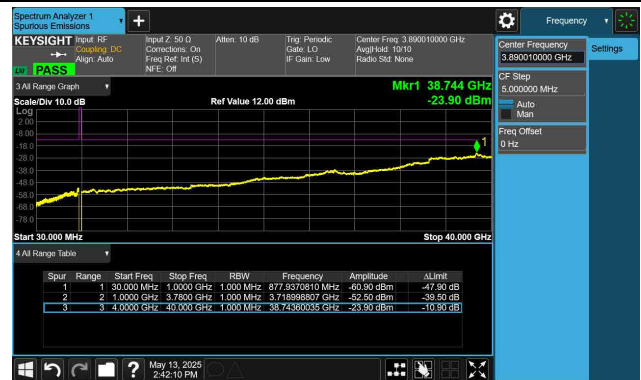


High Channel

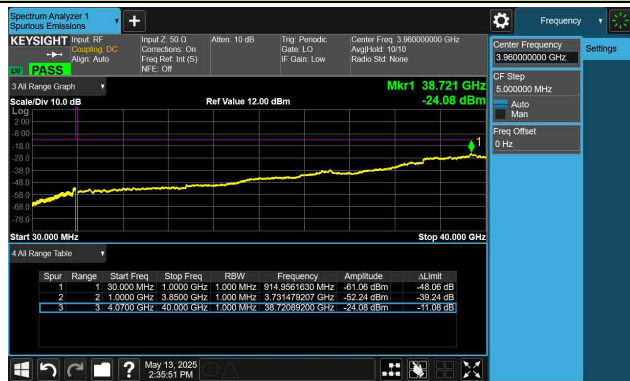


60MHz Channel Bandwidth


Low Channel

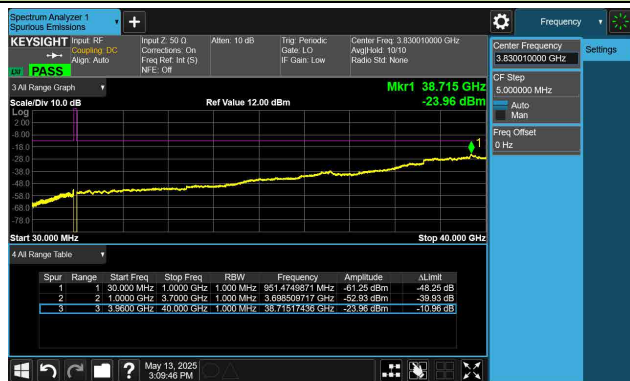

Middle Channel

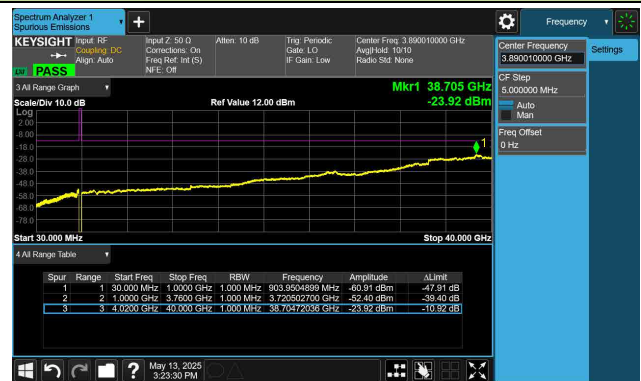


High Channel

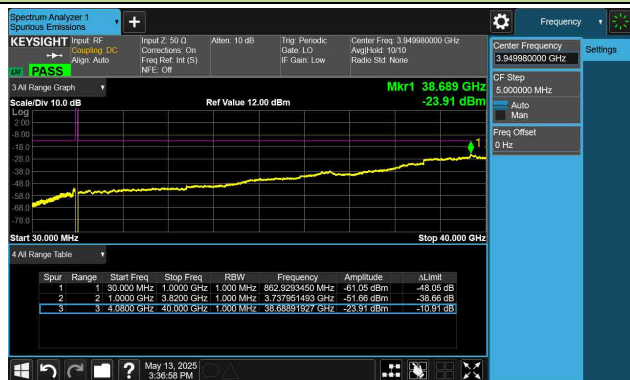


80MHz Channel Bandwidth


Low Channel

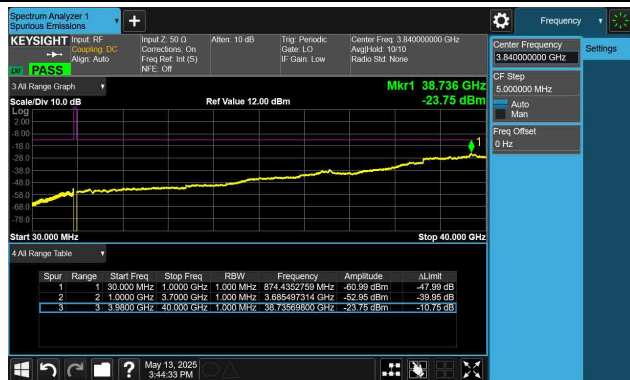

Middle Channel

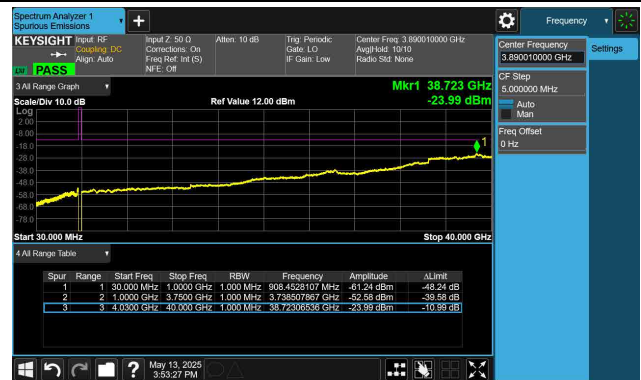


High Channel

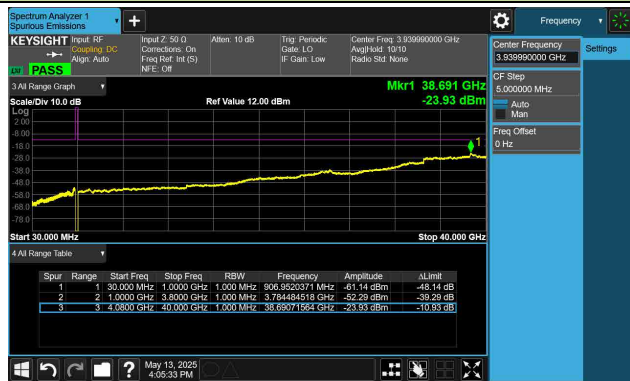


100MHz Channel Bandwidth


Low Channel

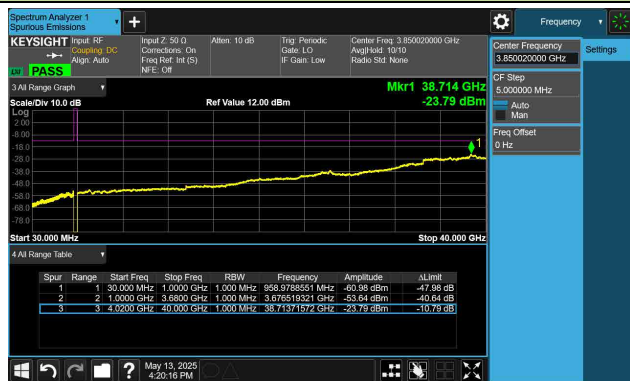

Middle Channel

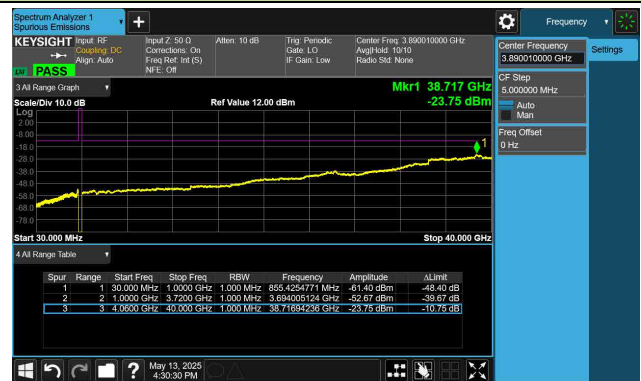

High Channel

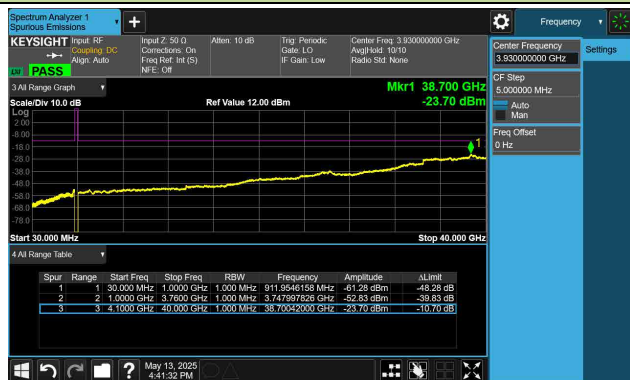

A.7 Radiated Spurious Emissions Test Result

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n2/25

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.897	4.3	17.4	21.7	82.3	-60.6	Quasi-peak	Horizontal
687.392	-10.0	26.9	16.9	82.3	-65.4	Quasi-peak	Horizontal
49.620	9.3	20.0	29.3	82.3	-53.0	Quasi-peak	Vertical
124.700	12.5	15.6	28.1	82.3	-54.2	Quasi-peak	Vertical
3701.300	49.1	-1.7	47.4	82.3	-34.9	Peak	Horizontal
7402.200	49.5	5.2	54.7	82.3	-27.6	Peak	Horizontal
3701.300	47.9	-1.7	46.2	82.3	-36.1	Peak	Vertical
7400.500	48.5	5.2	53.7	82.3	-28.6	Peak	Vertical
Middle Channel							
94.993	4.3	17.2	21.5	82.3	-60.8	Quasi-peak	Horizontal
870.350	-10.2	29.5	19.3	82.3	-63.0	Quasi-peak	Horizontal
49.463	9.1	20.0	29.1	82.3	-53.2	Quasi-peak	Vertical
830.691	-8.4	28.7	20.3	82.3	-62.0	Quasi-peak	Vertical
3760.800	50.7	-1.5	49.2	82.3	-33.1	Peak	Horizontal
7521.200	49.6	5.2	54.8	82.3	-27.5	Peak	Horizontal
3828.800	51.5	-1.4	50.1	82.3	-32.2	Peak	Vertical
7658.900	51.1	5.1	56.2	82.3	-26.1	Peak	Vertical
High Channel							
94.164	5.2	17.0	22.2	82.3	-60.1	Quasi-peak	Horizontal
760.170	-8.9	28.6	19.7	82.3	-62.6	Quasi-peak	Horizontal
48.963	9.2	20.0	29.2	82.3	-53.1	Quasi-peak	Vertical
873.407	-9.7	29.5	19.8	82.3	-62.5	Quasi-peak	Vertical
3828.800	51.5	-1.4	50.1	82.3	-32.2	Peak	Horizontal
7658.900	51.1	5.1	56.2	82.3	-26.1	Peak	Horizontal
3828.800	49.7	-1.4	48.3	82.3	-34.0	Peak	Vertical
7658.900	52.6	5.1	57.7	82.3	-24.6	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n66

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
94.893	4.8	17.2	22.0	82.3	-60.3	Quasi-peak	Horizontal
918.964	-8.8	29.9	21.1	82.3	-61.2	Quasi-peak	Horizontal
49.602	9.5	20.0	29.5	82.3	-52.8	Quasi-peak	Vertical
124.656	11.8	15.6	27.4	82.3	-54.9	Quasi-peak	Vertical
3420.800	47.0	-2.8	44.2	82.3	-38.1	Peak	Horizontal
6841.200	41.0	4.6	45.6	82.3	-36.7	Peak	Horizontal
3420.800	46.3	-2.8	43.5	82.3	-38.8	Peak	Vertical
8551.400	40.6	6.3	46.9	82.3	-35.4	Peak	Vertical
Middle Channel							
94.627	4.2	17.1	21.3	82.3	-61.0	Quasi-peak	Horizontal
883.883	-8.5	29.7	21.2	82.3	-61.1	Quasi-peak	Horizontal
50.039	8.9	20.0	28.9	82.3	-53.4	Quasi-peak	Vertical
124.919	11.4	15.6	27.0	82.3	-55.3	Quasi-peak	Vertical
3485.400	47.2	-2.7	44.5	82.3	-37.8	Peak	Horizontal
5227.900	44.1	0.3	44.4	82.3	-37.9	Peak	Horizontal
3485.400	44.8	-2.7	42.1	82.3	-40.2	Peak	Vertical
6516.500	40.5	4.2	44.7	82.3	-37.6	Peak	Vertical
High Channel							
94.296	5.1	17.1	22.2	82.3	-60.1	Quasi-peak	Horizontal
899.832	-10.1	30.0	19.9	82.3	-62.4	Quasi-peak	Horizontal
49.637	9.1	20.0	29.1	82.3	-53.2	Quasi-peak	Vertical
122.361	11.2	15.9	27.1	82.3	-55.2	Quasi-peak	Vertical
3560.200	43.8	-2.4	41.4	82.3	-40.9	Peak	Horizontal
5338.400	42.8	-0.2	42.6	82.3	-39.7	Peak	Horizontal
3560.200	42.8	-2.4	40.4	82.3	-41.9	Peak	Vertical
6455.300	41.5	3.8	45.3	82.3	-37.0	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n5/26

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
56.217	-2.9	19.3	16.4	82.3	-65.9	Quasi-peak	Horizontal
916.711	-0.3	29.9	29.6	82.3	-52.7	Quasi-peak	Horizontal
53.243	1.6	19.7	21.3	82.3	-61.0	Quasi-peak	Vertical
925.107	-0.3	29.9	29.6	82.3	-52.7	Quasi-peak	Vertical
1945.200	41.6	-6.1	35.5	82.3	-46.8	Peak	Horizontal
14552.400	45.3	6.0	51.3	82.3	-31.0	Peak	Horizontal
1991.100	41.4	-5.6	35.8	82.3	-46.5	Peak	Vertical
14642.500	45.8	6.0	51.8	82.3	-30.5	Peak	Vertical
Middle Channel							
121.549	9.6	16.0	25.6	82.3	-56.7	Quasi-peak	Horizontal
908.073	-0.3	29.9	29.6	82.3	-52.7	Quasi-peak	Horizontal
123.959	18.2	15.7	33.9	82.3	-48.4	Quasi-peak	Vertical
908.073	-0.2	29.9	29.7	82.3	-52.6	Quasi-peak	Vertical
1668.100	44.4	-7.4	37.0	82.3	-45.3	Peak	Horizontal
13017.300	44.1	5.0	49.1	82.3	-33.2	Peak	Horizontal
1986.000	40.9	-5.6	35.3	82.3	-47.0	Peak	Vertical
14470.800	45.1	6.1	51.2	82.3	-31.1	Peak	Vertical
High Channel							
121.506	9.4	16.0	25.4	82.3	-56.9	Quasi-peak	Horizontal
924.459	-0.4	29.9	29.5	82.3	-52.8	Quasi-peak	Horizontal
124.133	18.0	15.7	33.7	82.3	-48.6	Quasi-peak	Vertical
928.357	-0.3	29.8	29.5	82.3	-52.8	Quasi-peak	Vertical
2545.300	43.4	-4.7	38.7	82.3	-43.6	Peak	Horizontal
14477.600	46.0	5.9	51.9	82.3	-30.4	Peak	Horizontal
1970.700	40.9	-5.7	35.2	82.3	-47.1	Peak	Vertical
14710.500	46.3	5.5	51.8	82.3	-30.5	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n7

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.226	5.7	17.3	23.0	70.3	-47.3	Quasi-peak	Horizontal
785.644	-10.5	28.4	17.9	70.3	-52.4	Quasi-peak	Horizontal
49.602	9.8	20.0	29.8	70.3	-40.5	Quasi-peak	Vertical
125.226	11.4	15.5	26.9	70.3	-43.4	Quasi-peak	Vertical
7500.800	56.0	5.3	61.3	70.3	-9.0	Peak	Horizontal
12502.200	54.6	5.0	59.6	70.3	-10.7	Peak	Horizontal
7500.800	57.4	5.3	62.7	70.3	-7.6	Peak	Vertical
12502.200	60.1	5.0	65.1	70.3	-5.2	Peak	Vertical
Middle Channel							
94.627	5.8	17.1	22.9	70.3	-47.4	Quasi-peak	Horizontal
888.856	-10.2	29.8	19.6	70.3	-50.7	Quasi-peak	Horizontal
49.620	9.4	20.0	29.4	70.3	-40.9	Quasi-peak	Vertical
125.050	11.6	15.6	27.2	70.3	-43.1	Quasi-peak	Vertical
7577.300	52.0	5.0	57.0	70.3	-13.3	Average	Horizontal
12629.700	46.8	5.4	52.2	70.3	-18.1	Average	Horizontal
7577.300	52.2	5.0	57.2	70.3	-13.1	Average	Vertical
12629.700	52.2	5.4	57.6	70.3	-12.7	Average	Vertical
High Channel							
96.639	5.1	17.5	22.6	70.3	-47.7	Quasi-peak	Horizontal
762.306	-9.4	28.6	19.2	70.3	-51.1	Quasi-peak	Horizontal
49.759	6.2	20.0	26.2	70.3	-44.1	Quasi-peak	Vertical
125.094	11.7	15.6	27.3	70.3	-43.0	Quasi-peak	Vertical
7709.900	59.2	5.3	64.5	70.3	-5.8	Peak	Horizontal
12849.000	59.5	5.5	65.0	70.3	-5.3	Peak	Horizontal
7709.900	55.3	5.3	60.6	70.3	-9.7	Average	Vertical
12849.000	56.4	5.5	61.9	70.3	-8.4	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n38/41

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.260	5.7	17.3	23.0	70.3	-47.3	Quasi-peak	Horizontal
732.948	-8.5	28.2	19.7	70.3	-50.6	Quasi-peak	Horizontal
49.881	-6.2	20.0	13.8	70.3	-56.5	Quasi-peak	Vertical
124.220	5.1	15.6	20.7	70.3	-49.6	Quasi-peak	Vertical
4995.000	47.1	0.2	47.3	70.3	-23.0	Peak	Horizontal
15412.600	44.7	6.0	50.7	70.3	-19.6	Peak	Horizontal
7490.600	40.6	5.3	45.9	70.3	-24.4	Peak	Vertical
15915.800	44.5	6.5	51.0	70.3	-19.3	Peak	Vertical
Middle Channel							
94.893	3.3	17.2	20.5	70.3	-49.8	Quasi-peak	Horizontal
174.791	4.2	15.7	19.9	70.3	-50.4	Quasi-peak	Horizontal
49.777	9.0	20.0	29.0	70.3	-41.3	Quasi-peak	Vertical
558.143	-9.8	25.3	15.5	70.3	-54.8	Quasi-peak	Vertical
5168.400	50.6	0.0	50.6	70.3	-19.7	Peak	Horizontal
12922.100	43.6	5.6	49.2	70.3	-21.1	Peak	Horizontal
7754.100	44.4	5.4	49.8	70.3	-20.5	Peak	Vertical
12922.100	48.2	5.6	53.8	70.3	-16.5	Peak	Vertical
High Channel							
126.284	5.6	15.4	21.0	70.3	-49.3	Quasi-peak	Horizontal
897.626	-10.1	30.0	19.9	70.3	-50.4	Quasi-peak	Horizontal
49.032	9.3	20.0	29.3	70.3	-41.0	Quasi-peak	Vertical
124.307	15.3	15.6	30.9	70.3	-39.4	Quasi-peak	Vertical
5377.500	53.2	-0.1	53.1	70.3	-17.2	Peak	Horizontal
14814.200	46.2	5.7	51.9	70.3	-18.4	Peak	Horizontal
8066.900	43.4	5.8	49.2	70.3	-21.1	Peak	Vertical
14649.300	45.2	6.0	51.2	70.3	-19.1	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n77/78 - PC2 (3450 ~ 3550)

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
94.528	3.5	17.1	20.6	82.3	-61.7	Quasi-peak	Horizontal
612.064	-9.2	26.4	17.2	82.3	-65.1	Quasi-peak	Horizontal
49.916	9.4	20.0	29.4	82.3	-52.9	Quasi-peak	Vertical
125.270	15.4	15.5	30.9	82.3	-51.4	Quasi-peak	Vertical
7779.600	42.2	5.3	47.5	82.3	-34.8	Peak	Horizontal
14613.600	46.9	5.7	52.6	82.3	-29.7	Peak	Horizontal
8274.300	40.3	6.3	46.6	82.3	-35.7	Peak	Vertical
14295.700	47.3	5.7	53.0	82.3	-29.3	Peak	Vertical
Middle Channel							
95.662	3.5	17.3	20.8	82.3	-61.5	Quasi-peak	Horizontal
754.858	-9.5	28.7	19.2	82.3	-63.1	Quasi-peak	Horizontal
49.637	9.5	20.0	29.5	82.3	-52.8	Quasi-peak	Vertical
124.744	15.7	15.6	31.3	82.3	-51.0	Quasi-peak	Vertical
10006.600	42.4	6.5	48.9	82.3	-33.4	Peak	Horizontal
14317.800	46.4	5.8	52.2	82.3	-30.1	Peak	Horizontal
7126.800	41.6	4.7	46.3	82.3	-36.0	Peak	Vertical
14311.000	46.6	5.8	52.4	82.3	-29.9	Peak	Vertical
High Channel							
94.329	3.8	17.1	20.9	82.3	-61.4	Quasi-peak	Horizontal
595.133	-9.0	26.6	17.6	82.3	-64.7	Quasi-peak	Horizontal
49.325	9.3	20.0	29.3	82.3	-53.0	Quasi-peak	Vertical
125.270	15.3	15.5	30.8	82.3	-51.5	Quasi-peak	Vertical
9421.800	41.5	6.4	47.9	82.3	-34.4	Peak	Horizontal
14628.900	47.0	5.8	52.8	82.3	-29.5	Peak	Horizontal
7757.500	41.3	5.3	46.6	82.3	-35.7	Peak	Vertical
15103.200	46.6	5.9	52.5	82.3	-29.8	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n77/78 - PC2 (3700 ~ 3800)

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.796	3.8	17.4	21.2	82.3	-61.1	Quasi-peak	Horizontal
856.124	-9.4	29.4	20.0	82.3	-62.3	Quasi-peak	Horizontal
49.273	9.6	20.0	29.6	82.3	-52.7	Quasi-peak	Vertical
125.975	15.7	15.5	31.2	82.3	-51.1	Quasi-peak	Vertical
11104.800	48.0	5.5	53.5	82.3	-28.8	Peak	Horizontal
15018.200	45.0	5.9	50.9	82.3	-31.4	Peak	Horizontal
7402.200	42.3	5.2	47.5	82.3	-34.8	Peak	Vertical
11104.800	43.6	5.5	49.1	82.3	-33.2	Peak	Vertical
Middle Channel							
98.004	3.8	17.8	21.6	82.3	-60.7	Quasi-peak	Horizontal
739.401	-9.2	28.5	19.3	82.3	-63.0	Quasi-peak	Horizontal
49.032	9.2	20.0	29.2	82.3	-53.1	Quasi-peak	Vertical
133.058	15.3	14.9	30.2	82.3	-52.1	Quasi-peak	Vertical
11223.800	46.4	5.5	51.9	82.3	-30.4	Peak	Horizontal
14474.200	45.3	6.0	51.3	82.3	-31.0	Peak	Horizontal
11223.800	45.9	5.5	51.4	82.3	-30.9	Peak	Vertical
14928.100	45.1	5.8	50.9	82.3	-31.4	Peak	Vertical
High Channel							
119.940	4.0	16.2	20.2	82.3	-62.1	Quasi-peak	Horizontal
748.269	-9.5	28.7	19.2	82.3	-63.1	Quasi-peak	Horizontal
45.423	9.2	19.8	29.0	82.3	-53.3	Quasi-peak	Vertical
125.094	17.2	15.6	32.8	82.3	-49.5	Quasi-peak	Vertical
11395.500	43.9	5.5	49.4	82.3	-32.9	Peak	Horizontal
14882.200	45.1	5.7	50.8	82.3	-31.5	Peak	Horizontal
11395.500	46.4	5.5	51.9	82.3	-30.4	Peak	Vertical
15293.600	45.6	6.0	51.6	82.3	-30.7	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	n77 (3800 ~ 3980)

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Low Channel							
95.594	3.4	17.3	20.7	82.3	-61.6	Quasi-peak	Horizontal
126.107	8.8	15.4	24.2	82.3	-58.1	Quasi-peak	Horizontal
95.762	12.7	17.4	30.1	82.3	-52.2	Quasi-peak	Vertical
125.358	19.4	15.5	34.9	82.3	-47.4	Quasi-peak	Vertical
7602.800	47.2	5.1	52.3	82.3	-30.0	Peak	Horizontal
11404.000	48.3	5.5	53.8	82.3	-28.5	Peak	Horizontal
7602.800	47.6	5.1	52.7	82.3	-29.6	Peak	Vertical
11404.000	46.8	5.5	52.3	82.3	-30.0	Peak	Vertical
Middle Channel							
127.173	10.4	15.3	25.7	82.3	-56.6	Quasi-peak	Horizontal
747.745	-9.8	28.7	18.9	82.3	-63.4	Quasi-peak	Horizontal
95.561	12.6	17.3	29.9	82.3	-52.4	Quasi-peak	Vertical
126.196	19.4	15.4	34.8	82.3	-47.5	Quasi-peak	Vertical
11643.700	47.5	5.3	52.8	82.3	-29.5	Peak	Horizontal
14742.800	44.5	6.0	50.5	82.3	-31.8	Peak	Horizontal
7424.300	40.3	5.2	45.5	82.3	-36.8	Peak	Vertical
14839.700	45.4	5.8	51.2	82.3	-31.1	Peak	Vertical
High Channel							
128.113	10.2	15.2	25.4	82.3	-56.9	Quasi-peak	Horizontal
905.529	-10.1	29.9	19.8	82.3	-62.5	Quasi-peak	Horizontal
93.900	12.1	17.0	29.1	82.3	-53.2	Quasi-peak	Vertical
125.182	19.6	15.5	35.1	82.3	-47.2	Quasi-peak	Vertical
11936.100	50.5	5.0	55.5	82.3	-26.8	Peak	Horizontal
14406.200	45.3	5.6	50.9	82.3	-31.4	Peak	Horizontal
11936.100	45.1	5.0	50.1	82.3	-32.2	Peak	Vertical
14756.400	44.7	5.8	50.5	82.3	-31.8	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and

above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	DC_7A-n77A

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Middle Channel							
47.642	2.5	20.0	22.5	82.3	-59.8	Quasi-peak	Horizontal
943.453	-5.6	29.6	24.0	82.3	-58.3	Quasi-peak	Horizontal
46.000	3.5	19.9	23.4	82.3	-58.9	Quasi-peak	Vertical
877.090	4.1	29.5	33.6	82.3	-48.7	Quasi-peak	Vertical
7604.500	46.4	5.1	51.5	82.3	-30.8	Peak	Horizontal
14860.100	47.4	5.7	53.1	82.3	-29.2	Peak	Horizontal
7602.800	50.5	5.1	55.6	82.3	-26.7	Peak	Vertical
12672.200	51.7	5.4	57.1	82.3	-25.2	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Test Site	WJ-AC2	Test Engineer	Bob Zhang
Test Date	2025-05-14 ~ 2025-05-26	Test Band	DC_7A-n78A

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Middle Channel							
50.162	1.4	20.0	21.4	82.3	-60.9	Quasi-peak	Horizontal
839.476	-2.9	29.0	26.1	82.3	-56.2	Quasi-peak	Horizontal
45.074	5.1	19.8	24.9	82.3	-57.4	Quasi-peak	Vertical
926.731	-1.6	29.9	28.3	82.3	-54.0	Quasi-peak	Vertical
7601.100	47.2	5.0	52.2	82.3	-30.1	Peak	Horizontal
13127.800	46.9	4.9	51.8	82.3	-30.5	Peak	Horizontal
7602.800	50.5	5.1	55.6	82.3	-26.7	Peak	Vertical
12672.200	49.4	5.4	54.8	82.3	-27.5	Peak	Vertical

Note1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Note2: The peak-detection value will always be equal to or greater than the average-detection value. As a result, the peak-detection value measured by spectrum analyzer shall represent the worst-case results.

Note 3: The amplitude of Radiated transmitter spurious emissions (Frequency range from 9kHz to 30MHz and above 18GHz) is that proximity to ambient noise, which is also attenuated more than 20 dB below the permissible value. Therefore, the data are not presented in the report.

Appendix B - Test Setup Photograph

Refer to "R25S1020041-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1020041-UE" file.