

802.11ax-HE20 Power Spectral Density - Ant 2

Channel 60 (5300MHz) RU26/4




Channel 60 (5300MHz) RU52/38




Channel 60 (5300MHz) RU106/53



Channel 60 (5300MHz) RU242/61

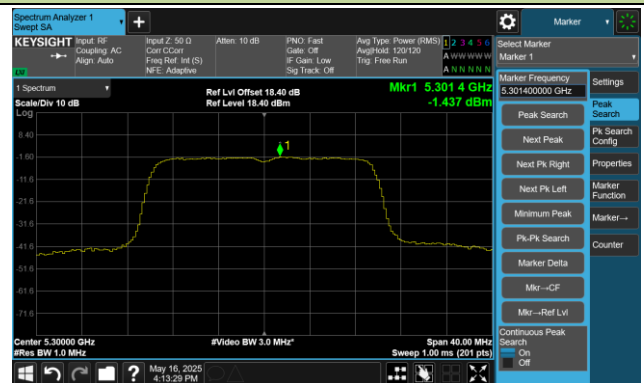


Channel 64 (5320MHz) RU26/8

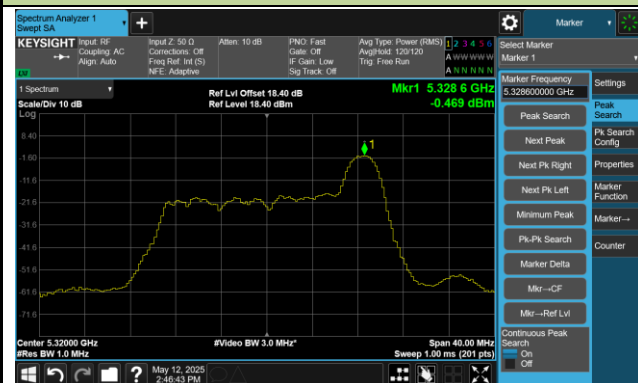


Channel 64 (5320MHz) RU52/40



Channel 64 (5320MHz) RU106/54

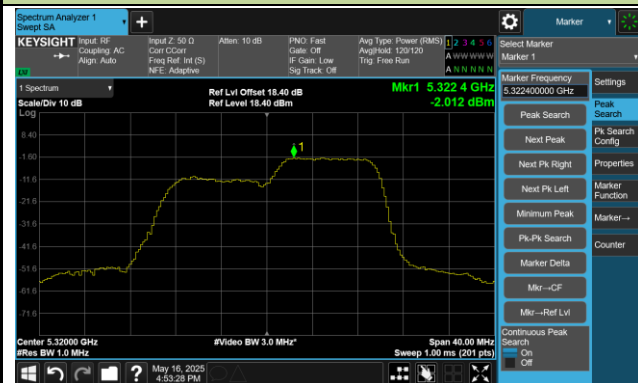

Channel 64 (5320MHz) RU242/61

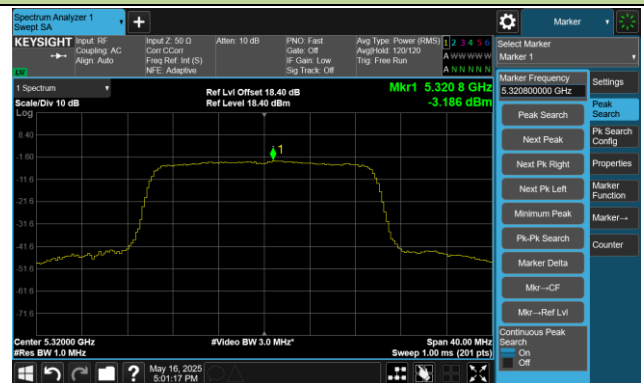


802.11ax-HE20 Power Spectral Density - Ant 2

Channel 100 (5500MHz) RU26/0




Channel 100 (5500MHz) RU52/37

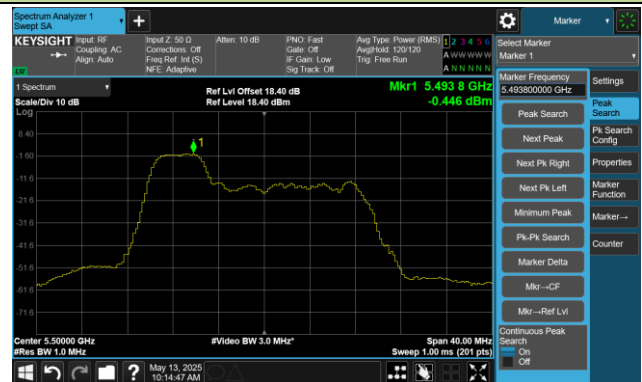


Channel 100 (5500MHz) RU106/53




Channel 100 (5500MHz) RU242/61

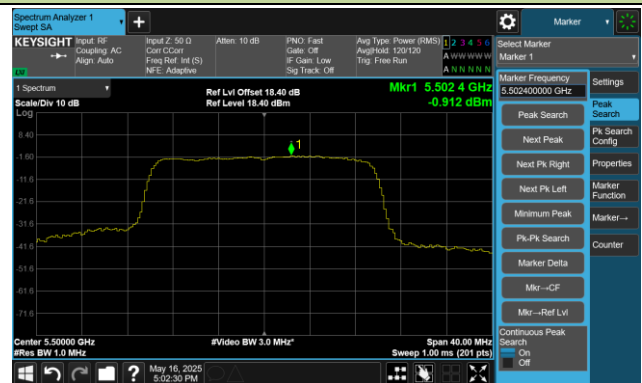

Channel 116 (5580MHz) RU26/4

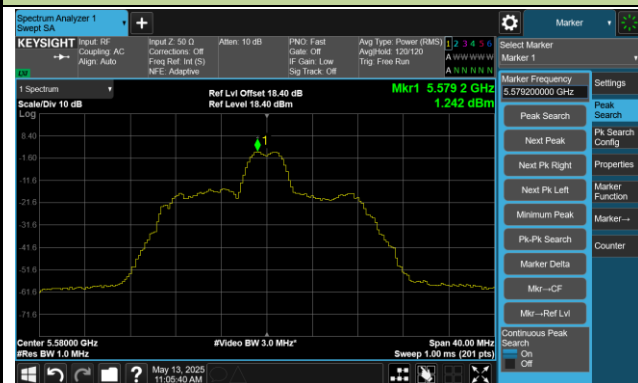


Channel 116 (5580MHz) RU52/38

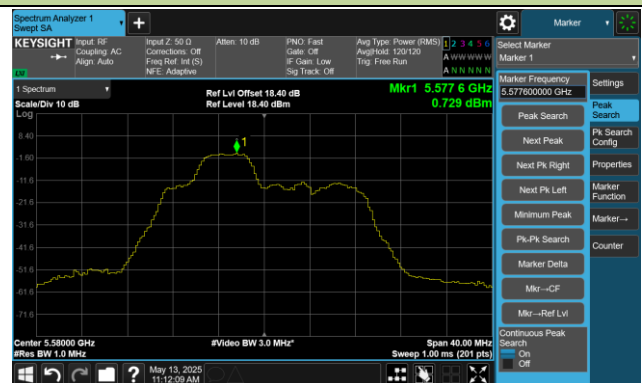

Channel 116 (5580MHz) RU106/53




Channel 116 (5580MHz) RU242/61

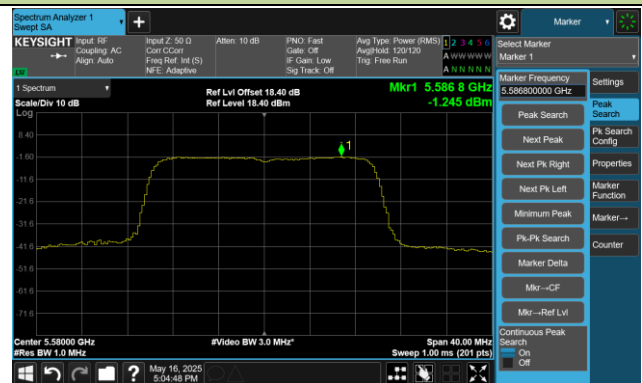

802.11ax-HE20 Power Spectral Density - Ant 2

Channel 140 (5700MHz) RU26/8

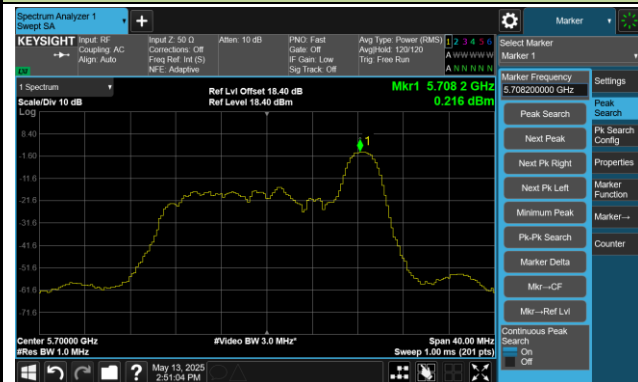


Channel 140 (5700MHz) RU52/40




Channel 140 (5700MHz) RU106/54




Channel 140 (5700MHz) RU242/61

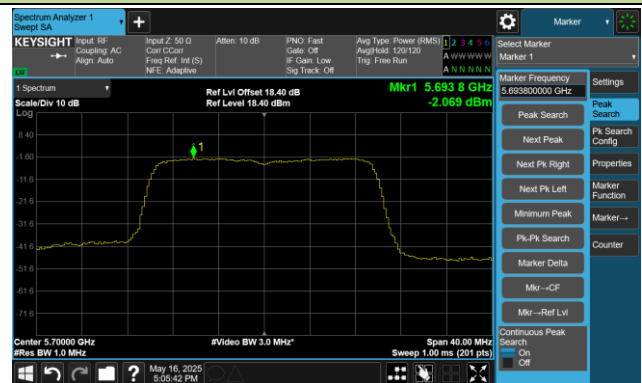

Channel 149 (5745MHz) RU26/0

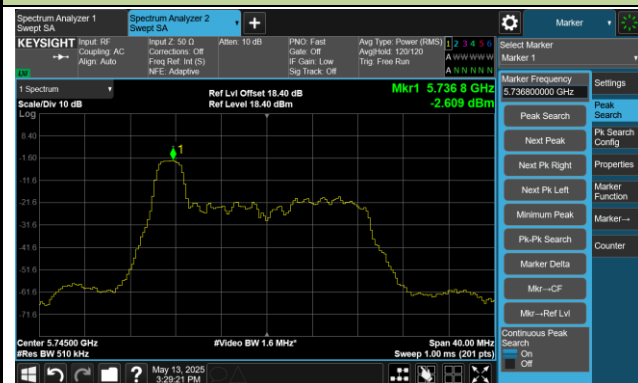


Channel 149 (5745MHz) RU52/37

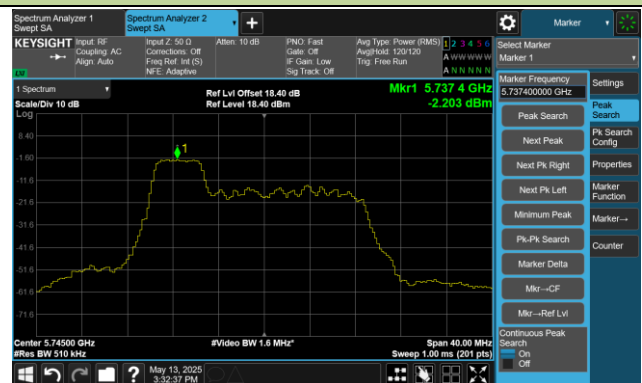

Channel 149 (5745MHz) RU106/53



Channel 149 (5745MHz) RU242/61

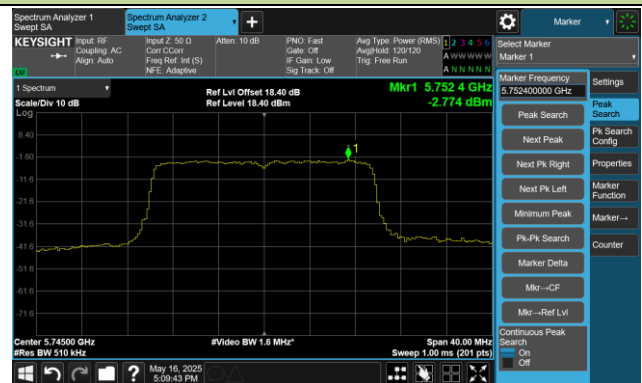

802.11ax-HE20 Power Spectral Density - Ant 2

Channel 157 (5785MHz) RU26/4




Channel 157 (5785MHz) RU52/38




Channel 157 (5785MHz) RU106/53



Channel 157 (5785MHz) RU242/61

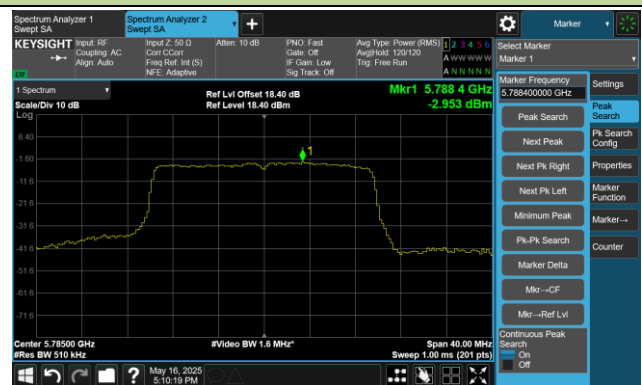

Channel 165 (5825MHz) RU26/8

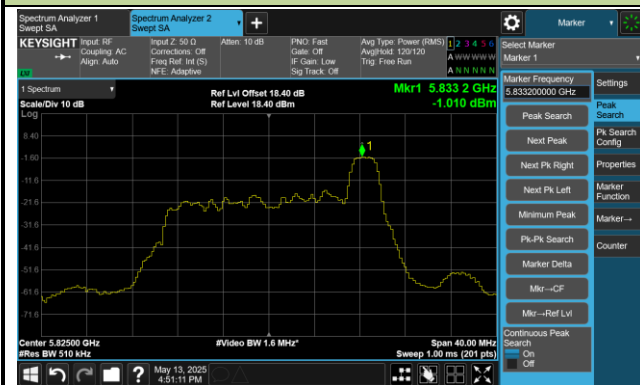


Channel 165 (5825MHz) RU52/40



Channel 165 (5825MHz) RU106/54




Channel 165 (5825MHz) RU242/61

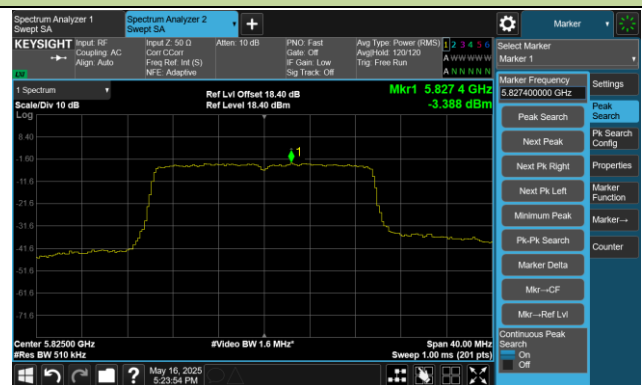


802.11ax-HE40 Power Spectral Density - Ant 2


Channel 38 (5190MHz) RU484/65

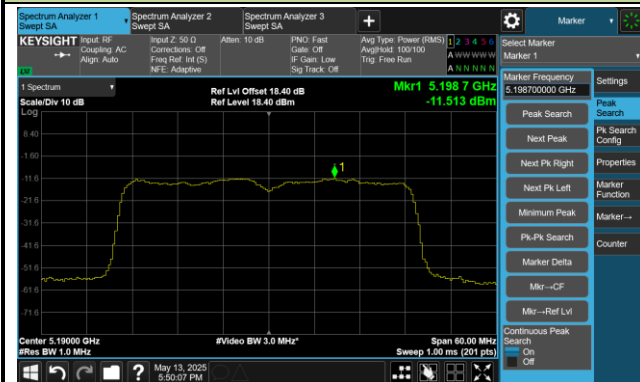


Channel 46 (5230MHz) RU484/65

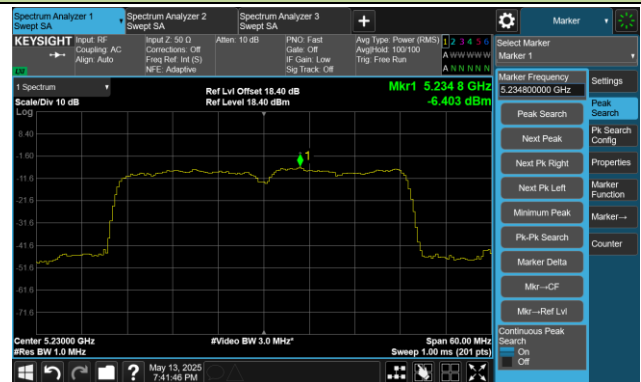


Channel 54 (5270MHz) RU484/65

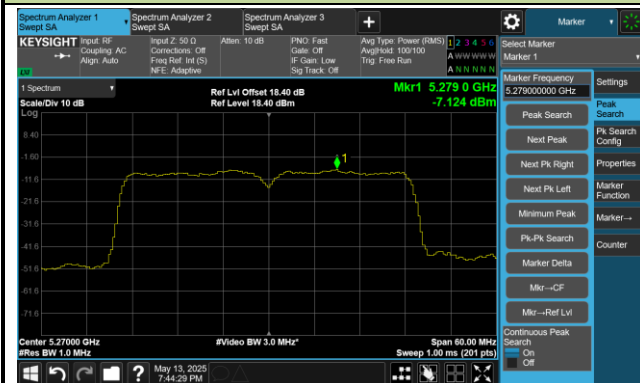


Channel 62 (5310MHz) RU484/65

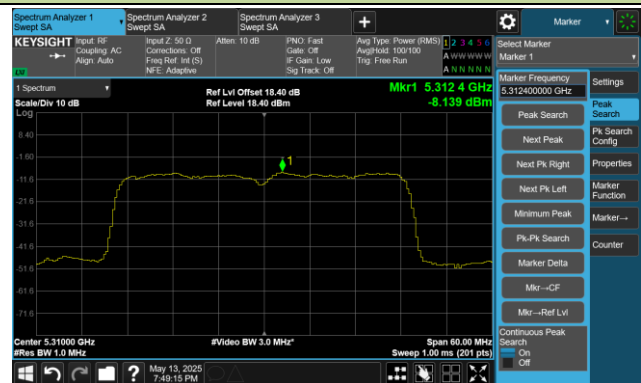


Channel 102 (5510MHz) RU484/65

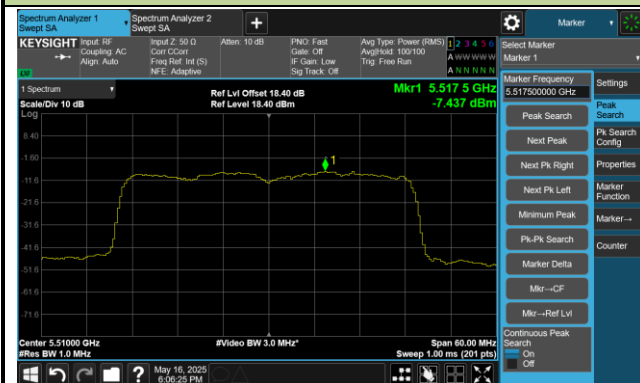


Channel 110 (5550MHz) RU484/65

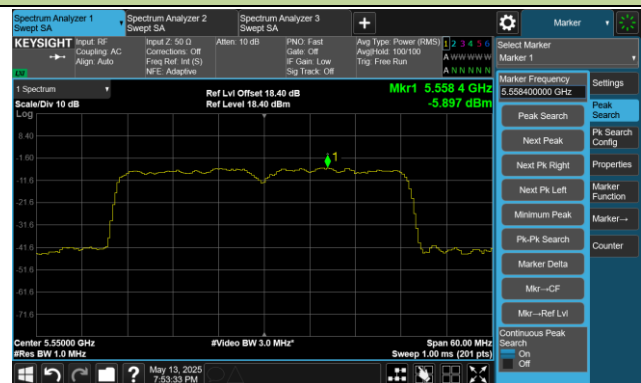

Channel 134 (5670MHz) RU484/65

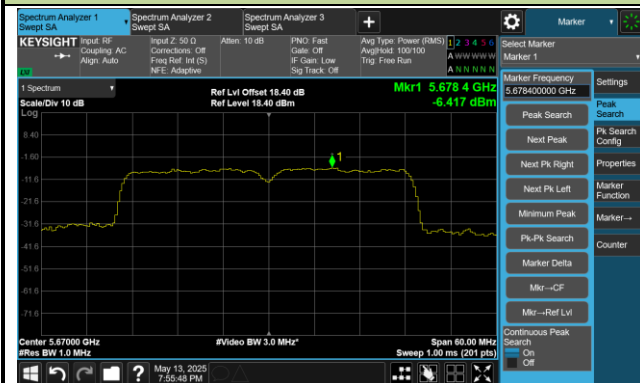

Channel 151 (5755MHz) RU484/65

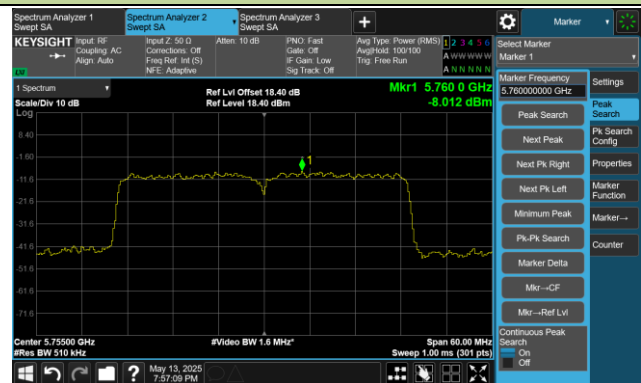


802.11ax-HE40 Power Spectral Density - Ant 2

Channel 159 (5795MHz) RU484/65




802.11ax-HE80 Power Spectral Density - Ant 2

Channel 42 (5210MHz) RU996/67

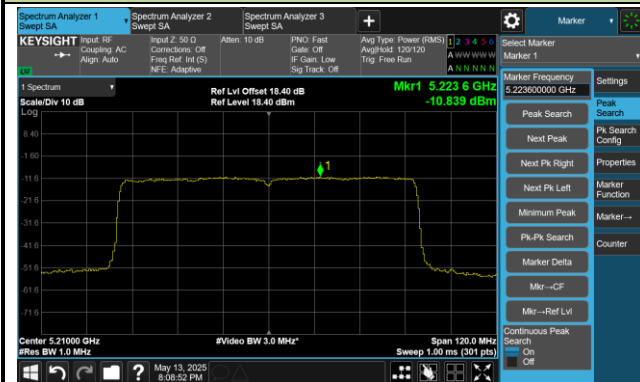


Channel 58 (5290MHz) RU996/67

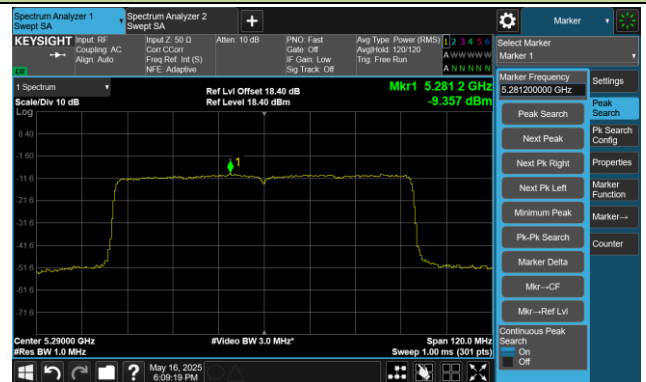


Channel 106 (5530MHz) RU996/67



Channel 122 (5610MHz) RU996/67

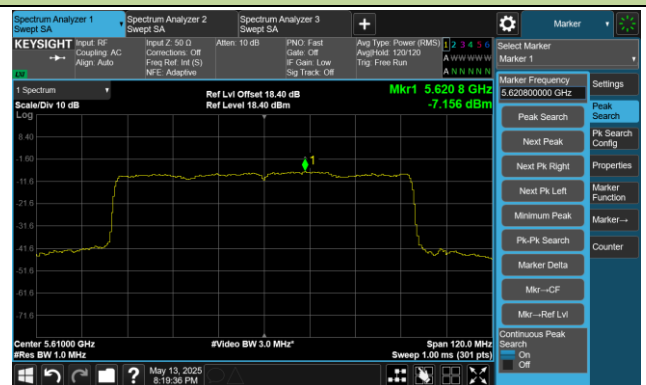

Channel 155 (5775MHz) RU996/67

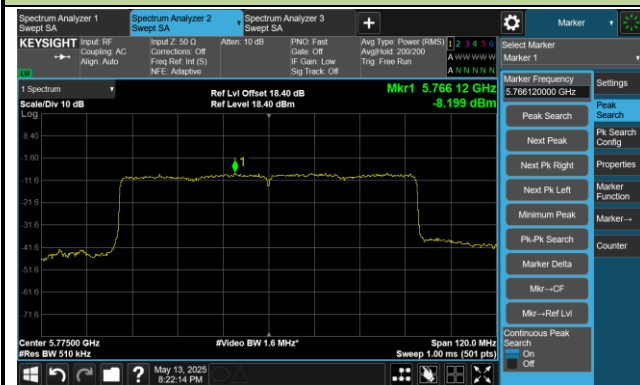

A.6 Frequency Stability Test Result

Test Site	WZ-TR3	Test Engineer	Lynn Yang
Test Date	2025-05-05	Test Mode	5180MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	2.55	2.51	2.52	2.52
		- 20	2.28	2.30	2.31	2.35
		- 10	0.35	0.40	0.43	0.47
		0	-0.68	-0.67	-0.63	-0.60
		+ 10	-2.04	-2.01	-1.98	-1.97
		+ 20	-2.86	-2.84	-2.85	-2.85
		+ 30	-2.94	-2.94	-2.95	-2.94
		+ 40	-1.97	-1.98	-1.98	-1.99
		+ 50	-1.75	-1.46	-1.39	-1.33
115%	138	+ 20	-2.98	-2.97	-2.97	-2.97
85%	102	+ 20	-2.97	-2.97	-2.97	-2.97

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

A.7 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Jerry Lu
Test Date	2025-05-12	Test Mode	802.11a – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11565.50	31.07	16.82	47.89	74.00	-26.11	Peak	Horizontal
*	13955.70	30.53	19.14	49.67	68.20	-18.53	Peak	Horizontal
*	15215.40	32.38	18.30	50.68	68.20	-17.52	Peak	Horizontal
	17933.70	18.41	28.86	47.27	54.00	-6.73	Average	Horizontal
	17933.70	30.60	28.86	59.46	74.00	-14.54	Peak	Horizontal
	11565.50	30.69	16.82	47.51	74.00	-26.49	Peak	Vertical
*	13870.70	30.23	19.31	49.55	68.20	-18.65	Peak	Vertical
*	15218.80	32.08	18.32	50.40	68.20	-17.80	Peak	Vertical
	17943.90	18.35	28.82	47.17	54.00	-6.83	Average	Vertical
	17943.90	30.25	28.82	59.07	74.00	-14.93	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Jerry Lu
Test Date	2025-05-12	Test Mode	802.11a – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11509.40	30.58	17.11	47.70	74.00	-26.30	Peak	Horizontal
*	14617.00	31.19	19.56	50.75	68.20	-17.45	Peak	Horizontal
*	15152.50	32.16	18.59	50.76	68.20	-17.44	Peak	Horizontal
	17921.80	18.29	28.47	46.76	54.00	-7.24	Average	Horizontal
	17921.80	30.75	28.47	59.21	74.00	-14.79	Peak	Horizontal
	11069.10	31.82	16.19	48.01	74.00	-25.99	Peak	Vertical
*	13748.30	30.66	18.81	49.48	68.20	-18.72	Peak	Vertical
*	14559.20	30.89	19.55	50.43	68.20	-17.77	Peak	Vertical
	17933.70	18.37	28.86	47.23	54.00	-6.77	Average	Vertical
	17933.70	30.51	28.86	59.37	74.00	-14.63	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9940.30	33.28	13.42	46.70	68.20	-21.50	Peak	Horizontal
	11455.00	31.22	16.85	48.07	74.00	-25.93	Peak	Horizontal
*	17025.90	33.03	21.34	54.37	68.20	-13.83	Peak	Horizontal
	17925.20	18.29	28.63	46.92	54.00	-7.08	Average	Horizontal
	17925.20	30.74	28.63	59.37	74.00	-14.63	Peak	Horizontal
*	9724.40	33.24	13.54	46.77	68.20	-21.43	Peak	Vertical
	11473.70	30.76	16.85	47.62	74.00	-26.38	Peak	Vertical
*	17141.50	31.41	21.89	53.29	68.20	-14.91	Peak	Vertical
	17918.40	18.31	28.31	46.62	54.00	-7.38	Average	Vertical
	17918.40	31.20	28.31	59.51	74.00	-14.49	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9974.30	32.90	13.42	46.32	68.20	-21.88	Peak	Horizontal
	11174.50	30.97	16.48	47.45	74.00	-26.55	Peak	Horizontal
*	17360.80	31.41	22.93	54.34	68.20	-13.86	Peak	Horizontal
	17938.80	18.35	28.84	47.19	54.00	-6.81	Average	Horizontal
	17938.80	30.97	28.84	59.81	74.00	-14.19	Peak	Horizontal
	11591.00	30.93	16.98	47.91	74.00	-26.09	Peak	Vertical
*	14533.70	31.84	19.51	51.35	68.20	-16.85	Peak	Vertical
*	17416.90	31.41	23.48	54.89	68.20	-13.31	Peak	Vertical
	17952.40	18.35	28.73	47.08	54.00	-6.92	Average	Vertical
	17952.40	30.81	28.73	59.54	74.00	-14.46	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10008.30	33.36	13.41	46.77	68.20	-21.43	Peak	Horizontal
	11619.90	31.37	16.80	48.17	74.00	-25.83	Peak	Horizontal
*	17029.30	33.12	21.30	54.42	68.20	-13.78	Peak	Horizontal
	17955.80	18.28	28.63	46.91	54.00	-7.09	Average	Horizontal
	17955.80	30.65	28.63	59.28	74.00	-14.72	Peak	Horizontal
*	10054.20	33.30	13.47	46.78	68.20	-21.42	Peak	Vertical
	12033.00	31.93	16.51	48.44	74.00	-25.56	Peak	Vertical
*	16871.20	32.99	21.01	54.00	68.20	-14.20	Peak	Vertical
	17928.60	18.37	28.78	47.15	54.00	-6.85	Average	Vertical
	17928.60	30.73	28.78	59.51	74.00	-14.49	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10055.90	33.09	13.48	46.57	68.20	-21.63	Peak	Horizontal
	11681.10	31.73	17.10	48.83	74.00	-25.17	Peak	Horizontal
*	17019.10	31.98	21.40	53.38	68.20	-14.82	Peak	Horizontal
	17930.30	18.41	28.84	47.25	54.00	-6.75	Average	Horizontal
	17930.30	29.96	28.84	58.80	74.00	-15.20	Peak	Horizontal
*	9738.00	32.55	13.52	46.08	68.20	-22.12	Peak	Vertical
	11582.50	31.00	17.01	48.01	74.00	-25.99	Peak	Vertical
*	16874.60	31.80	20.98	52.79	68.20	-15.41	Peak	Vertical
	17940.50	18.24	28.84	47.08	54.00	-6.92	Average	Vertical
	17940.50	30.68	28.84	59.51	74.00	-14.49	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10079.70	33.03	13.57	46.61	68.20	-21.59	Peak	Horizontal
	11130.30	31.30	16.49	47.79	74.00	-26.21	Peak	Horizontal
*	17286.00	31.68	23.27	54.95	68.20	-13.25	Peak	Horizontal
	17930.30	18.18	28.84	47.02	54.00	-6.98	Average	Horizontal
	17930.30	30.89	28.84	59.73	74.00	-14.27	Peak	Horizontal
*	9724.40	33.81	13.54	47.34	68.20	-20.86	Peak	Vertical
	12039.80	31.75	16.55	48.30	74.00	-25.70	Peak	Vertical
*	16959.60	32.80	20.97	53.77	68.20	-14.43	Peak	Vertical
	17940.50	18.38	28.84	47.22	54.00	-6.78	Average	Vertical
	17940.50	30.76	28.84	59.59	74.00	-14.41	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10015.10	33.12	13.44	46.56	68.20	-21.64	Peak	Horizontal
	11128.60	32.12	16.50	48.62	74.00	-25.38	Peak	Horizontal
*	16983.40	32.97	20.90	53.87	68.20	-14.33	Peak	Horizontal
	17860.60	18.45	28.43	46.88	54.00	-7.12	Average	Horizontal
	17860.60	30.46	28.43	58.89	74.00	-15.11	Peak	Horizontal
*	10470.70	31.72	15.15	46.87	68.20	-21.33	Peak	Vertical
	12119.70	32.01	16.84	48.85	74.00	-25.15	Peak	Vertical
*	17020.80	32.76	21.39	54.15	68.20	-14.05	Peak	Vertical
	17935.40	18.19	28.85	47.04	54.00	-6.96	Average	Vertical
	17935.40	30.34	28.85	59.19	74.00	-14.81	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9894.40	33.80	13.46	47.26	68.20	-20.94	Peak	Horizontal
	11477.10	30.87	16.86	47.73	74.00	-26.27	Peak	Horizontal
*	16825.30	33.37	20.51	53.89	68.20	-14.31	Peak	Horizontal
	17950.70	18.34	28.78	47.12	54.00	-6.88	Average	Horizontal
	17950.70	30.68	28.78	59.46	74.00	-14.54	Peak	Horizontal
*	9868.90	34.11	13.39	47.50	68.20	-20.70	Peak	Vertical
	11402.30	32.77	16.90	49.67	74.00	-24.33	Peak	Vertical
*	17313.20	32.11	23.26	55.37	68.20	-12.83	Peak	Vertical
	17881.00	18.21	27.85	46.06	54.00	-7.94	Average	Vertical
	17881.00	32.14	27.85	60.00	74.00	-14.00	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9918.20	33.76	13.48	47.23	68.20	-20.97	Peak	Horizontal
	11060.60	32.66	16.22	48.88	74.00	-25.12	Peak	Horizontal
*	16811.70	32.94	20.40	53.34	68.20	-14.86	Peak	Horizontal
	17981.30	18.24	27.98	46.22	54.00	-7.78	Average	Horizontal
	17981.30	31.87	27.98	59.85	74.00	-14.15	Peak	Horizontal
*	9833.20	34.12	13.48	47.60	68.20	-20.60	Peak	Vertical
	11483.90	35.22	16.93	52.15	74.00	-21.85	Peak	Vertical
*	16906.90	33.18	20.68	53.86	68.20	-14.34	Peak	Vertical
	17964.30	18.19	28.39	46.58	54.00	-7.42	Average	Vertical
	17964.30	31.25	28.39	59.64	74.00	-14.36	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9807.70	32.91	13.51	46.42	68.20	-21.78	Peak	Horizontal
	11628.40	30.88	16.75	47.62	74.00	-26.38	Peak	Horizontal
*	16981.70	32.74	20.89	53.63	68.20	-14.57	Peak	Horizontal
	17954.10	18.32	28.68	47.00	54.00	-7.00	Average	Horizontal
	17954.10	30.80	28.68	59.48	74.00	-14.52	Peak	Horizontal
*	9962.40	33.73	13.42	47.15	68.20	-21.05	Peak	Vertical
	11570.60	33.50	16.87	50.37	74.00	-23.63	Peak	Vertical
*	17056.50	32.87	20.96	53.83	68.20	-14.37	Peak	Vertical
	17950.70	18.21	28.78	46.99	54.00	-7.01	Average	Vertical
	17950.70	30.83	28.78	59.61	74.00	-14.39	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11a – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9834.90	33.52	13.47	46.99	68.20	-21.21	Peak	Horizontal
	11648.80	31.98	16.87	48.85	74.00	-25.15	Peak	Horizontal
*	16957.90	33.46	20.99	54.45	68.20	-13.75	Peak	Horizontal
	17943.90	18.15	28.82	46.97	54.00	-7.03	Average	Horizontal
	17943.90	31.57	28.82	60.39	74.00	-13.61	Peak	Horizontal
*	10397.60	32.77	14.91	47.69	68.20	-20.51	Peak	Vertical
	11650.50	34.16	16.90	51.06	74.00	-22.94	Peak	Vertical
*	16922.20	32.90	20.70	53.60	68.20	-14.60	Peak	Vertical
	17940.50	18.26	28.84	47.10	54.00	-6.90	Average	Vertical
	17940.50	30.43	28.84	59.27	74.00	-14.73	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9744.80	34.03	13.48	47.51	68.20	-20.69	Peak	Horizontal
	11866.40	31.20	16.68	47.88	74.00	-26.12	Peak	Horizontal
*	13989.70	31.68	19.63	51.30	68.20	-16.90	Peak	Horizontal
	17955.80	18.17	28.63	46.80	54.00	-7.20	Average	Horizontal
	17955.80	30.98	28.63	59.61	74.00	-14.39	Peak	Horizontal
*	9913.10	33.20	13.49	46.69	68.20	-21.51	Peak	Vertical
	11665.80	30.47	17.07	47.54	74.00	-26.46	Peak	Vertical
*	14712.20	32.10	19.73	51.82	68.20	-16.38	Peak	Vertical
	17964.30	18.25	28.39	46.64	54.00	-7.36	Average	Vertical
	17964.30	30.96	28.39	59.35	74.00	-14.65	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9945.40	33.87	13.41	47.29	68.20	-20.91	Peak	Horizontal
	11512.80	30.97	17.13	48.10	74.00	-25.90	Peak	Horizontal
*	17093.90	33.10	21.49	54.59	68.20	-13.61	Peak	Horizontal
	17993.20	18.37	28.19	46.56	54.00	-7.44	Average	Horizontal
	17993.20	31.71	28.19	59.90	74.00	-14.10	Peak	Horizontal
*	9819.60	33.40	13.51	46.91	68.20	-21.29	Peak	Vertical
	11016.40	31.61	16.42	48.03	74.00	-25.97	Peak	Vertical
*	17195.90	31.19	22.61	53.80	68.20	-14.40	Peak	Vertical
	17940.50	18.47	28.84	47.31	54.00	-6.69	Average	Vertical
	17940.50	30.56	28.84	59.39	74.00	-14.61	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10037.20	33.42	13.49	46.91	68.20	-21.29	Peak	Horizontal
	11077.60	32.51	16.25	48.76	74.00	-25.24	Peak	Horizontal
*	17000.40	33.04	21.14	54.17	68.20	-14.03	Peak	Horizontal
	17915.00	18.31	28.15	46.46	54.00	-7.54	Average	Horizontal
	17915.00	31.24	28.15	59.38	74.00	-14.62	Peak	Horizontal
*	10071.20	33.31	13.56	46.87	68.20	-21.33	Peak	Vertical
	12075.50	31.54	16.78	48.32	74.00	-25.68	Peak	Vertical
*	17316.60	31.93	23.13	55.05	68.20	-13.15	Peak	Vertical
	17938.80	18.24	28.84	47.08	54.00	-6.92	Average	Vertical
	17938.80	30.30	28.84	59.14	74.00	-14.86	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9911.40	33.43	13.49	46.92	68.20	-21.28	Peak	Horizontal
	11494.10	30.41	17.02	47.43	74.00	-26.57	Peak	Horizontal
*	16947.70	32.66	20.93	53.59	68.20	-14.61	Peak	Horizontal
	17932.00	18.19	28.87	47.06	54.00	-6.94	Average	Horizontal
	17932.00	30.32	28.87	59.19	74.00	-14.81	Peak	Horizontal
*	9902.90	34.40	13.47	47.87	68.20	-20.33	Peak	Vertical
	11883.40	30.75	16.65	47.40	74.00	-26.60	Peak	Vertical
*	17012.30	32.67	21.40	54.06	68.20	-14.14	Peak	Vertical
	17957.50	18.27	28.58	46.85	54.00	-7.15	Average	Vertical
	17957.50	31.36	28.58	59.94	74.00	-14.06	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.50	34.23	13.47	47.70	68.20	-20.50	Peak	Horizontal
	11517.90	30.61	17.12	47.73	74.00	-26.27	Peak	Horizontal
*	16847.40	31.90	20.94	52.84	68.20	-15.36	Peak	Horizontal
	17750.10	18.17	27.24	45.41	54.00	-8.59	Average	Horizontal
	17750.10	30.71	27.24	57.95	74.00	-16.05	Peak	Horizontal
*	10113.70	33.73	13.54	47.27	68.20	-20.93	Peak	Vertical
	11490.70	31.00	16.99	47.99	74.00	-26.01	Peak	Vertical
*	16791.30	32.93	20.51	53.44	68.20	-14.76	Peak	Vertical
	17920.10	18.21	28.39	46.60	54.00	-7.40	Average	Vertical
	17920.10	31.00	28.39	59.39	74.00	-14.61	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10095.00	32.84	13.50	46.35	68.20	-21.85	Peak	Horizontal
	11494.10	30.95	17.02	47.98	74.00	-26.02	Peak	Horizontal
*	17102.40	32.60	21.73	54.33	68.20	-13.87	Peak	Horizontal
	17959.20	18.11	28.54	46.65	54.00	-7.35	Average	Horizontal
	17959.20	31.10	28.54	59.64	74.00	-14.36	Peak	Horizontal
*	10059.30	33.66	13.49	47.14	68.20	-21.06	Peak	Vertical
	11026.60	31.95	16.42	48.37	74.00	-25.63	Peak	Vertical
*	16782.80	33.16	20.57	53.73	68.20	-14.47	Peak	Vertical
	18000.00	18.21	28.36	46.57	54.00	-7.43	Average	Vertical
	18000.00	29.77	28.36	58.13	74.00	-15.87	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10120.50	33.26	13.58	46.84	68.20	-21.36	Peak	Horizontal
	12016.00	31.24	16.42	47.66	74.00	-26.34	Peak	Horizontal
*	17238.40	32.81	22.23	55.03	68.20	-13.17	Peak	Horizontal
	17853.80	18.24	28.40	46.64	54.00	-7.36	Average	Horizontal
	17853.80	30.43	28.40	58.83	74.00	-15.17	Peak	Horizontal
*	10132.40	31.77	13.61	45.38	68.20	-22.82	Peak	Vertical
	11138.80	31.52	16.44	47.96	74.00	-26.04	Peak	Vertical
*	16879.70	31.98	20.93	52.91	68.20	-15.29	Peak	Vertical
	17889.50	18.15	27.73	45.88	54.00	-8.12	Average	Vertical
	17889.50	31.28	27.73	59.01	74.00	-14.99	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9904.60	34.32	13.48	47.79	68.20	-20.41	Peak	Horizontal
	11387.00	30.95	16.82	47.77	74.00	-26.23	Peak	Horizontal
*	17303.00	31.75	23.46	55.21	68.20	-12.99	Peak	Horizontal
	17911.60	18.21	28.00	46.21	54.00	-7.79	Average	Horizontal
	17911.60	31.41	28.00	59.42	74.00	-14.58	Peak	Horizontal
*	9806.00	32.95	13.51	46.46	68.20	-21.74	Peak	Vertical
	11162.60	31.54	16.43	47.97	74.00	-26.03	Peak	Vertical
*	16855.90	32.53	21.01	53.54	68.20	-14.66	Peak	Vertical
	17949.00	18.17	28.82	46.99	54.00	-7.01	Average	Vertical
	17949.00	30.20	28.82	59.02	74.00	-14.98	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10372.10	32.35	14.76	47.11	68.20	-21.09	Peak	Horizontal
	11499.20	31.24	17.07	48.31	74.00	-25.69	Peak	Horizontal
*	17275.80	31.13	22.98	54.11	68.20	-14.09	Peak	Horizontal
	17947.30	18.19	28.83	47.02	54.00	-6.98	Average	Horizontal
	17947.30	30.33	28.83	59.15	74.00	-14.85	Peak	Horizontal
*	9812.80	33.28	13.52	46.80	68.20	-21.40	Peak	Vertical
	12021.10	31.91	16.44	48.35	74.00	-25.65	Peak	Vertical
*	17027.60	32.81	21.32	54.13	68.20	-14.07	Peak	Vertical
	17974.50	18.26	28.14	46.40	54.00	-7.60	Average	Vertical
	17974.50	31.57	28.14	59.71	74.00	-14.29	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9999.80	33.05	13.39	46.45	68.20	-21.75	Peak	Horizontal
	11665.80	30.08	17.07	47.15	74.00	-26.85	Peak	Horizontal
*	17270.70	32.02	22.81	54.83	68.20	-13.37	Peak	Horizontal
	18000.00	18.15	28.36	46.51	54.00	-7.49	Average	Horizontal
	18000.00	29.07	28.36	57.43	74.00	-16.57	Peak	Horizontal
*	9921.60	33.71	13.46	47.17	68.20	-21.03	Peak	Vertical
	11494.10	31.70	17.02	48.72	74.00	-25.28	Peak	Vertical
*	17197.60	31.69	22.62	54.30	68.20	-13.90	Peak	Vertical
	17969.40	18.22	28.26	46.48	54.00	-7.52	Average	Vertical
	17969.40	31.35	28.26	59.61	74.00	-14.39	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10151.10	32.40	13.64	46.03	68.20	-22.17	Peak	Horizontal
	11545.10	31.36	16.82	48.18	74.00	-25.82	Peak	Horizontal
*	17014.00	32.03	21.40	53.43	68.20	-14.77	Peak	Horizontal
	17994.90	18.16	28.24	46.40	54.00	-7.60	Average	Horizontal
	17994.90	30.31	28.24	58.54	74.00	-15.46	Peak	Horizontal
*	10159.60	32.99	13.68	46.67	68.20	-21.53	Peak	Vertical
	11565.50	33.25	16.82	50.07	74.00	-23.93	Peak	Vertical
*	17204.40	32.02	22.64	54.66	68.20	-13.54	Peak	Vertical
	17998.30	18.18	28.32	46.50	54.00	-7.50	Average	Vertical
	17998.30	31.35	28.32	59.67	74.00	-14.33	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9982.80	34.10	13.41	47.51	68.20	-20.69	Peak	Horizontal
	12077.20	31.06	16.80	47.86	74.00	-26.14	Peak	Horizontal
*	17265.60	32.06	22.64	54.70	68.20	-13.50	Peak	Horizontal
	17971.10	18.14	28.22	46.36	54.00	-7.64	Average	Horizontal
	17971.10	31.20	28.22	59.42	74.00	-14.58	Peak	Horizontal
*	9913.10	33.81	13.49	47.30	68.20	-20.90	Peak	Vertical
	11655.60	31.41	16.99	48.40	74.00	-25.60	Peak	Vertical
*	17284.30	30.97	23.22	54.19	68.20	-14.01	Peak	Vertical
	17930.30	18.19	28.84	47.03	54.00	-6.97	Average	Vertical
	17930.30	30.54	28.84	59.38	74.00	-14.62	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10356.80	33.07	14.57	47.64	68.20	-20.56	Peak	Horizontal
	11657.30	30.91	17.02	47.92	74.00	-26.08	Peak	Horizontal
*	16854.20	32.84	21.01	53.85	68.20	-14.35	Peak	Horizontal
	17966.00	18.21	28.34	46.55	54.00	-7.45	Average	Horizontal
	17966.00	31.40	28.34	59.74	74.00	-14.26	Peak	Horizontal
*	10047.40	32.53	13.49	46.02	68.20	-22.18	Peak	Vertical
	11631.80	31.06	16.72	47.78	74.00	-26.22	Peak	Vertical
*	17025.90	32.68	21.34	54.02	68.20	-14.18	Peak	Vertical
	17933.70	18.21	28.86	47.07	54.00	-6.93	Average	Vertical
	17933.70	29.76	28.86	58.62	74.00	-15.38	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9829.80	33.28	13.49	46.78	68.20	-21.42	Peak	Horizontal
	11002.80	31.38	16.29	47.67	74.00	-26.33	Peak	Horizontal
*	16750.50	32.37	20.40	52.77	68.20	-15.43	Peak	Horizontal
	17996.60	18.20	28.28	46.48	54.00	-7.52	Average	Horizontal
	17996.60	30.97	28.28	59.25	74.00	-14.75	Peak	Horizontal
*	10038.90	32.79	13.50	46.30	68.20	-21.90	Peak	Vertical
	11514.50	32.34	17.13	49.47	74.00	-24.53	Peak	Vertical
*	17415.20	31.34	23.50	54.84	68.20	-13.36	Peak	Vertical
	17952.40	18.16	28.73	46.89	54.00	-7.11	Average	Vertical
	17952.40	31.46	28.73	60.19	74.00	-13.81	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10159.60	32.83	13.68	46.50	68.20	-21.70	Peak	Horizontal
	11502.60	31.29	17.09	48.38	74.00	-25.62	Peak	Horizontal
*	16888.20	32.57	20.84	53.41	68.20	-14.79	Peak	Horizontal
	17943.90	18.15	28.82	46.97	54.00	-7.03	Average	Horizontal
	17943.90	31.03	28.82	59.85	74.00	-14.15	Peak	Horizontal
*	9889.30	33.18	13.45	46.63	68.20	-21.57	Peak	Vertical
	11220.40	30.02	16.68	46.71	74.00	-27.29	Peak	Vertical
*	16961.30	32.51	20.96	53.47	68.20	-14.73	Peak	Vertical
	17942.20	18.14	28.83	46.97	54.00	-7.03	Average	Vertical
	17942.20	31.15	28.83	59.98	74.00	-14.02	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10144.30	33.24	13.62	46.86	68.20	-21.34	Peak	Horizontal
	11509.40	30.02	17.11	47.13	74.00	-26.87	Peak	Horizontal
*	16884.80	31.99	20.88	52.86	68.20	-15.34	Peak	Horizontal
	17933.70	18.11	28.86	46.97	54.00	-7.03	Average	Horizontal
	17933.70	30.92	28.86	59.78	74.00	-14.22	Peak	Horizontal
*	10037.20	33.19	13.49	46.68	68.20	-21.52	Peak	Vertical
	11431.20	31.37	16.86	48.22	74.00	-25.78	Peak	Vertical
*	17270.70	32.53	22.81	55.34	68.20	-12.86	Peak	Vertical
	17853.80	18.33	28.40	46.73	54.00	-7.27	Average	Vertical
	17853.80	30.74	28.40	59.14	74.00	-14.86	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9957.30	33.20	13.42	46.62	68.20	-21.58	Peak	Horizontal
	11098.00	32.05	16.44	48.49	74.00	-25.51	Peak	Horizontal
*	17294.50	31.01	23.50	54.50	68.20	-13.70	Peak	Horizontal
	17964.30	18.26	28.39	46.65	54.00	-7.35	Average	Horizontal
	17964.30	31.13	28.39	59.52	74.00	-14.48	Peak	Horizontal
*	10013.40	33.56	13.43	46.99	68.20	-21.21	Peak	Vertical
	11397.20	30.65	16.89	47.53	74.00	-26.47	Peak	Vertical
*	16983.40	33.78	20.90	54.68	68.20	-13.52	Peak	Vertical
	17945.60	18.15	28.82	46.97	54.00	-7.03	Average	Vertical
	17945.60	31.05	28.82	59.87	74.00	-14.13	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11489.00	31.66	16.98	48.64	74.00	-25.36	Peak	Horizontal
*	14159.70	30.49	19.90	50.39	68.20	-17.81	Peak	Horizontal
*	16823.60	34.20	20.49	54.69	68.20	-13.51	Peak	Horizontal
	17845.30	18.21	28.35	46.56	54.00	-7.44	Average	Horizontal
	17845.30	31.20	28.35	59.55	74.00	-14.45	Peak	Horizontal
*	10088.20	33.41	13.53	46.95	68.20	-21.25	Peak	Vertical
	11470.30	30.99	16.85	47.84	74.00	-26.16	Peak	Vertical
*	16957.90	33.01	20.99	54.00	68.20	-14.20	Peak	Vertical
	17843.60	18.01	28.26	46.27	54.00	-7.73	Average	Vertical
	17843.60	30.89	28.26	59.14	74.00	-14.86	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9979.40	32.65	13.41	46.06	68.20	-22.14	Peak	Horizontal
	11631.80	30.59	16.72	47.31	74.00	-26.69	Peak	Horizontal
*	16759.00	31.50	20.55	52.05	68.20	-16.15	Peak	Horizontal
	17938.80	18.26	28.84	47.10	54.00	-6.90	Average	Horizontal
	17938.80	31.34	28.84	60.18	74.00	-13.82	Peak	Horizontal
*	10008.30	33.96	13.41	47.37	68.20	-20.83	Peak	Vertical
	11653.90	31.39	16.96	48.35	74.00	-25.65	Peak	Vertical
*	17012.30	32.68	21.40	54.08	68.20	-14.12	Peak	Vertical
	17930.30	18.16	28.84	47.00	54.00	-7.00	Average	Vertical
	17930.30	30.99	28.84	59.83	74.00	-14.17	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9840.00	33.27	13.44	46.71	68.20	-21.49	Peak	Horizontal
	11421.00	30.70	16.90	47.60	74.00	-26.40	Peak	Horizontal
*	16864.40	32.44	21.05	53.50	68.20	-14.70	Peak	Horizontal
	17862.30	18.27	28.44	46.71	54.00	-7.29	Average	Horizontal
	17862.30	30.19	28.44	58.63	74.00	-15.37	Peak	Horizontal
*	10180.00	33.07	13.83	46.90	68.20	-21.30	Peak	Vertical
	11589.30	30.95	16.99	47.94	74.00	-26.06	Peak	Vertical
*	16845.70	32.52	20.90	53.42	68.20	-14.78	Peak	Vertical
	17874.20	18.35	28.05	46.40	54.00	-7.60	Average	Vertical
	17874.20	30.94	28.05	59.00	74.00	-15.00	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9897.80	33.94	13.46	47.41	68.20	-20.79	Peak	Horizontal
	11704.90	31.25	16.82	48.07	74.00	-25.93	Peak	Horizontal
*	17129.60	31.67	22.10	53.78	68.20	-14.42	Peak	Horizontal
	17945.60	18.32	28.82	47.14	54.00	-6.86	Average	Horizontal
	17945.60	31.24	28.82	60.05	74.00	-13.95	Peak	Horizontal
*	9916.50	33.09	13.48	46.57	68.20	-21.63	Peak	Vertical
	11653.90	33.68	16.96	50.64	74.00	-23.36	Peak	Vertical
*	16755.60	33.92	20.49	54.41	68.20	-13.79	Peak	Vertical
	17933.70	18.29	28.86	47.15	54.00	-6.85	Average	Vertical
	17933.70	31.79	28.86	60.65	74.00	-13.35	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10394.20	31.97	14.91	46.89	68.20	-21.31	Peak	Horizontal
	12087.40	31.67	16.91	48.58	74.00	-25.42	Peak	Horizontal
*	16879.70	33.63	20.93	54.57	68.20	-13.63	Peak	Horizontal
	17947.30	18.16	28.83	46.99	54.00	-7.01	Average	Horizontal
	17947.30	30.59	28.83	59.41	74.00	-14.59	Peak	Horizontal
*	9734.60	32.85	13.54	46.39	68.20	-21.81	Peak	Vertical
	11745.70	31.05	16.56	47.61	74.00	-26.39	Peak	Vertical
*	17309.80	31.36	23.35	54.71	68.20	-13.49	Peak	Vertical
	17954.10	18.16	28.68	46.84	54.00	-7.16	Average	Vertical
	17954.10	30.48	28.68	59.16	74.00	-14.84	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10105.20	33.58	13.53	47.11	68.20	-21.09	Peak	Horizontal
	11118.40	31.63	16.57	48.20	74.00	-25.80	Peak	Horizontal
*	17185.70	31.87	22.33	54.21	68.20	-13.99	Peak	Horizontal
	17966.00	18.32	28.34	46.66	54.00	-7.34	Average	Horizontal
	17966.00	30.57	28.34	58.91	74.00	-15.09	Peak	Horizontal
*	10035.50	33.74	13.49	47.23	68.20	-20.97	Peak	Vertical
	11645.40	32.95	16.81	49.75	74.00	-24.25	Peak	Vertical
*	17297.90	31.03	23.52	54.55	68.20	-13.65	Peak	Vertical
	17930.30	18.24	28.84	47.08	54.00	-6.92	Average	Vertical
	17930.30	30.53	28.84	59.37	74.00	-14.63	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10397.60	32.05	14.91	46.97	68.20	-21.23	Peak	Horizontal
	11667.50	31.07	17.08	48.15	74.00	-25.85	Peak	Horizontal
*	17024.20	33.07	21.35	54.42	68.20	-13.78	Peak	Horizontal
	17981.30	18.27	27.98	46.25	54.00	-7.75	Average	Horizontal
	17981.30	30.28	27.98	58.27	74.00	-15.73	Peak	Horizontal
*	10122.20	33.01	13.58	46.60	68.20	-21.60	Peak	Vertical
	11395.50	30.96	16.89	47.85	74.00	-26.15	Peak	Vertical
*	17012.30	32.95	21.40	54.35	68.20	-13.85	Peak	Vertical
	17852.10	18.29	28.39	46.68	54.00	-7.32	Average	Vertical
	17852.10	31.02	28.39	59.40	74.00	-14.60	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9977.70	33.55	13.42	46.97	68.20	-21.23	Peak	Horizontal
	11689.60	30.79	17.06	47.86	74.00	-26.14	Peak	Horizontal
*	17015.70	32.91	21.40	54.31	68.20	-13.89	Peak	Horizontal
	17857.20	18.24	28.42	46.66	54.00	-7.34	Average	Horizontal
	17857.20	30.53	28.42	58.96	74.00	-15.04	Peak	Horizontal
*	10008.30	32.65	13.41	46.06	68.20	-22.14	Peak	Vertical
	11118.40	31.80	16.57	48.37	74.00	-25.63	Peak	Vertical
*	16906.90	32.19	20.68	52.87	68.20	-15.33	Peak	Vertical
	17928.60	18.18	28.78	46.96	54.00	-7.04	Average	Vertical
	17928.60	30.78	28.78	59.56	74.00	-14.44	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ac-VHT80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10049.10	33.62	13.48	47.10	68.20	-21.10	Peak	Horizontal
	11570.60	31.23	16.87	48.10	74.00	-25.90	Peak	Horizontal
*	17095.60	31.85	21.54	53.39	68.20	-14.81	Peak	Horizontal
	17947.30	18.21	28.83	47.04	54.00	-6.96	Average	Horizontal
	17947.30	30.49	28.83	59.32	74.00	-14.68	Peak	Horizontal
*	10003.20	33.52	13.39	46.91	68.20	-21.29	Peak	Vertical
	11657.30	31.49	17.02	48.51	74.00	-25.49	Peak	Vertical
*	16881.40	32.74	20.92	53.66	68.20	-14.54	Peak	Vertical
	17954.10	18.24	28.68	46.92	54.00	-7.08	Average	Vertical
	17954.10	31.99	28.68	60.67	74.00	-13.33	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10064.40	33.13	13.52	46.65	68.20	-21.55	Peak	Horizontal
	11473.70	30.94	16.85	47.80	74.00	-26.20	Peak	Horizontal
*	17034.40	32.71	21.27	53.98	68.20	-14.22	Peak	Horizontal
	17937.10	18.21	28.85	47.06	54.00	-6.94	Average	Horizontal
	17937.10	30.33	28.85	59.18	74.00	-14.82	Peak	Horizontal
*	10389.10	31.00	14.91	45.91	68.20	-22.29	Peak	Vertical
	11616.50	30.65	16.81	47.46	74.00	-26.54	Peak	Vertical
*	16922.20	32.74	20.70	53.44	68.20	-14.76	Peak	Vertical
	17920.10	18.20	28.39	46.59	54.00	-7.41	Average	Vertical
	17920.10	30.55	28.39	58.93	74.00	-15.07	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9904.60	32.96	13.48	46.43	68.20	-21.77	Peak	Horizontal
	11606.30	30.54	16.85	47.39	74.00	-26.61	Peak	Horizontal
*	16866.10	32.54	21.05	53.59	68.20	-14.61	Peak	Horizontal
	17938.80	18.17	28.84	47.01	54.00	-6.99	Average	Horizontal
	17938.80	30.53	28.84	59.37	74.00	-14.63	Peak	Horizontal
*	10123.90	32.34	13.59	45.93	68.20	-22.27	Peak	Vertical
	10824.30	32.79	15.81	48.61	74.00	-25.39	Peak	Vertical
*	17143.20	32.42	21.86	54.27	68.20	-13.93	Peak	Vertical
	17954.10	18.32	28.68	47.00	54.00	-7.00	Average	Vertical
	17954.10	30.62	28.68	59.30	74.00	-14.70	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9936.90	33.20	13.42	46.62	68.20	-21.58	Peak	Horizontal
	11674.30	30.53	17.11	47.64	74.00	-26.36	Peak	Horizontal
*	16757.30	32.97	20.52	53.49	68.20	-14.71	Peak	Horizontal
	17921.80	18.24	28.47	46.71	54.00	-7.29	Average	Horizontal
	17921.80	31.89	28.47	60.36	74.00	-13.64	Peak	Horizontal
*	10083.10	32.77	13.56	46.33	68.20	-21.87	Peak	Vertical
	11126.90	32.13	16.52	48.65	74.00	-25.35	Peak	Vertical
*	16769.20	32.44	20.59	53.03	68.20	-15.17	Peak	Vertical
	17952.40	18.21	28.73	46.94	54.00	-7.06	Average	Vertical
	17952.40	30.13	28.73	58.85	74.00	-15.15	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10028.70	33.27	13.47	46.74	68.20	-21.46	Peak	Horizontal
	12218.30	31.50	16.87	48.37	74.00	-25.63	Peak	Horizontal
*	16966.40	33.52	20.92	54.44	68.20	-13.76	Peak	Horizontal
	17843.60	18.32	28.26	46.58	54.00	-7.42	Average	Horizontal
	17843.60	30.13	28.26	58.39	74.00	-15.61	Peak	Horizontal
*	9916.50	34.26	13.48	47.74	68.20	-20.46	Peak	Vertical
	11647.10	31.48	16.84	48.31	74.00	-25.69	Peak	Vertical
*	16745.40	32.41	20.30	52.72	68.20	-15.48	Peak	Vertical
	17998.30	18.24	28.32	46.56	54.00	-7.44	Average	Vertical
	17998.30	29.83	28.32	58.14	74.00	-15.86	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9899.50	33.58	13.47	47.05	68.20	-21.15	Peak	Horizontal
	11453.30	30.69	16.84	47.53	74.00	-26.47	Peak	Horizontal
*	17379.50	31.64	23.43	55.07	68.20	-13.13	Peak	Horizontal
	17993.20	18.19	28.19	46.38	54.00	-7.62	Average	Horizontal
	17993.20	30.30	28.19	58.49	74.00	-15.51	Peak	Horizontal
*	9909.70	34.22	13.48	47.70	68.20	-20.50	Peak	Vertical
	11116.70	30.57	16.57	47.14	74.00	-26.86	Peak	Vertical
*	17012.30	32.61	21.40	54.01	68.20	-14.19	Peak	Vertical
	17955.80	18.21	28.63	46.84	54.00	-7.16	Average	Vertical
	17955.80	31.21	28.63	59.84	74.00	-14.16	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9962.40	31.43	13.42	44.85	68.20	-23.35	Peak	Horizontal
	11523.00	30.55	17.12	47.66	74.00	-26.34	Peak	Horizontal
*	17321.70	28.93	23.00	51.93	68.20	-16.27	Peak	Horizontal
	17959.20	18.16	28.54	46.70	54.00	-7.30	Average	Horizontal
	17959.20	29.58	28.54	58.12	74.00	-15.88	Peak	Horizontal
*	9921.60	33.20	13.46	46.66	68.20	-21.54	Peak	Vertical
	11490.70	30.99	16.99	47.99	74.00	-26.01	Peak	Vertical
*	16961.30	32.62	20.96	53.58	68.20	-14.62	Peak	Vertical
	18000.00	18.22	28.36	46.58	54.00	-7.42	Average	Vertical
	18000.00	30.11	28.36	58.46	74.00	-15.54	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.00	33.11	13.42	46.52	68.20	-21.68	Peak	Horizontal
	11625.00	31.23	16.77	48.01	74.00	-25.99	Peak	Horizontal
*	17027.60	32.82	21.32	54.14	68.20	-14.06	Peak	Horizontal
	17983.00	18.32	27.95	46.27	54.00	-7.73	Average	Horizontal
	17983.00	31.00	27.95	58.96	74.00	-15.04	Peak	Horizontal
	11684.50	30.34	17.09	47.42	74.00	-26.58	Peak	Vertical
*	15268.10	31.87	18.79	50.66	68.20	-17.54	Peak	Vertical
*	16997.00	32.63	21.06	53.69	68.20	-14.51	Peak	Vertical
	17930.30	18.21	28.84	47.05	54.00	-6.95	Average	Vertical
	17930.30	30.54	28.84	59.38	74.00	-14.62	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9732.90	33.23	13.55	46.77	68.20	-21.43	Peak	Horizontal
	11096.30	31.78	16.42	48.20	74.00	-25.80	Peak	Horizontal
*	16869.50	32.21	21.03	53.24	68.20	-14.96	Peak	Horizontal
	17943.90	18.21	28.82	47.03	54.00	-6.97	Average	Horizontal
	17943.90	30.11	28.82	58.93	74.00	-15.07	Peak	Horizontal
*	9901.20	33.38	13.47	46.85	68.20	-21.35	Peak	Vertical
	11599.50	31.02	16.89	47.91	74.00	-26.09	Peak	Vertical
*	16874.60	32.81	20.98	53.80	68.20	-14.40	Peak	Vertical
	17943.90	18.32	28.82	47.14	54.00	-6.86	Average	Vertical
	17943.90	31.27	28.82	60.09	74.00	-13.91	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-13	Test Mode	802.11ax-HE20 – Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10052.50	33.54	13.48	47.02	68.20	-21.18	Peak	Horizontal
	11606.30	30.39	16.85	47.24	74.00	-26.76	Peak	Horizontal
*	16793.00	31.99	20.50	52.48	68.20	-15.72	Peak	Horizontal
	17974.50	18.15	28.14	46.29	54.00	-7.71	Average	Horizontal
	17974.50	31.04	28.14	59.19	74.00	-14.81	Peak	Horizontal
*	9918.20	32.78	13.48	46.25	68.20	-21.95	Peak	Vertical
	11395.50	26.98	16.89	43.87	54.00	-10.13	Average	Vertical
	11395.50	34.40	16.89	51.29	74.00	-22.71	Peak	Vertical
*	17296.20	31.79	23.51	55.30	68.20	-12.90	Peak	Vertical
	18000.00	18.24	28.36	46.60	54.00	-7.40	Average	Vertical
	18000.00	29.29	28.36	57.64	74.00	-16.36	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-05-22	Test Mode	802.11ax-HE20 – Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	10958.60	33.72	15.72	49.44	-24.56	74.00	Peak	Horizontal
*	13962.50	30.95	18.92	49.87	-18.33	68.20	Peak	Horizontal
*	14817.60	31.81	19.11	50.93	-17.27	68.20	Peak	Horizontal
	17932.00	18.96	28.47	47.43	-6.57	54.00	Average	Horizontal
	17932.00	31.65	28.47	60.12	-13.88	74.00	Peak	Horizontal
	11664.10	33.42	16.37	49.79	-24.21	74.00	Peak	Vertical
*	13855.40	32.50	18.54	51.04	-17.16	68.20	Peak	Vertical
*	14887.30	32.51	18.83	51.35	-16.85	68.20	Peak	Vertical
	17947.30	19.23	28.63	47.86	-6.14	54.00	Average	Vertical
	17947.30	31.56	28.63	60.19	-13.81	74.00	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-14	Test Mode	802.11ax-HE20 – Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	19128.60	55.68	-9.61	46.08	74.00	-27.92	Peak	Horizontal
*	21482.60	56.03	-8.15	47.88	68.20	-20.32	Peak	Horizontal
*	29420.20	53.75	-5.91	47.83	68.20	-20.37	Peak	Horizontal
	39837.20	46.30	0.04	46.34	54.00	-7.66	Average	Horizontal
	39837.20	54.89	0.04	54.93	74.00	-19.07	Peak	Horizontal
	19936.00	55.25	-9.13	46.12	74.00	-27.88	Peak	Vertical
*	27266.40	52.79	-5.93	46.85	68.20	-21.35	Peak	Vertical
*	34434.00	56.36	-5.66	50.70	68.20	-17.50	Peak	Vertical
	39826.20	45.10	0.38	45.48	54.00	-8.52	Average	Vertical
	39826.20	53.86	0.38	54.24	74.00	-19.76	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE20 – Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	8242.00	32.95	10.54	43.49	74.00	-30.51	Peak	Horizontal
*	9884.20	33.25	12.96	46.21	68.20	-21.99	Peak	Horizontal
	11434.60	30.44	16.34	46.77	74.00	-27.23	Peak	Horizontal
	17843.60	18.17	28.42	46.59	54.00	-7.41	Average	Horizontal
	17843.60	29.69	28.42	58.11	74.00	-15.89	Peak	Horizontal
*	10020.20	32.36	13.13	45.49	68.20	-22.71	Peak	Vertical
	11463.50	30.63	16.26	46.89	74.00	-27.11	Peak	Vertical
*	16772.60	31.09	20.10	51.19	68.20	-17.01	Peak	Vertical
	18000.00	18.22	27.93	46.15	54.00	-7.85	Average	Vertical
	18000.00	28.24	27.93	56.17	74.00	-17.83	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Ajin Fan
Test Date	2025-05-22	Test Mode	802.11ax-HE40 – Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
	11115.00	33.25	16.10	49.34	74.00	-24.66	Peak	Horizontal
*	13627.60	31.76	18.35	50.10	68.20	-18.10	Peak	Horizontal
*	14843.10	32.20	18.69	50.89	68.20	-17.31	Peak	Horizontal
	17841.90	19.32	28.32	47.64	54.00	-6.36	Average	Horizontal
	17841.90	31.20	28.32	59.52	74.00	-14.48	Peak	Horizontal
	11162.60	32.97	15.87	48.85	74.00	-25.15	Peak	Vertical
*	13794.20	30.12	18.61	48.73	68.20	-19.47	Peak	Vertical
*	14764.90	30.06	18.90	48.96	68.20	-19.24	Peak	Vertical
	18000.00	19.23	27.93	47.16	54.00	-6.84	Average	Vertical
	18000.00	29.25	27.93	57.17	74.00	-16.83	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10095.00	32.61	13.15	45.76	68.20	-22.44	Peak	Horizontal
	11541.70	30.29	16.31	46.60	74.00	-27.40	Peak	Horizontal
*	17265.60	30.78	22.24	53.02	68.20	-15.18	Peak	Horizontal
	17943.90	18.28	28.58	46.86	54.00	-7.14	Average	Horizontal
	17943.90	29.33	28.58	57.92	74.00	-16.08	Peak	Horizontal
*	9984.50	33.21	12.98	46.19	68.20	-22.01	Peak	Vertical
	11706.60	31.16	16.21	47.38	74.00	-26.62	Peak	Vertical
*	17121.10	29.53	21.41	50.95	68.20	-17.25	Peak	Vertical
	17937.10	18.31	28.52	46.83	54.00	-7.17	Average	Vertical
	17937.10	29.65	28.52	58.17	74.00	-15.83	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10455.40	31.54	14.49	46.03	68.20	-22.17	Peak	Horizontal
	11502.60	30.43	16.41	46.84	74.00	-27.16	Peak	Horizontal
*	17116.00	30.43	21.37	51.80	68.20	-16.40	Peak	Horizontal
	17957.50	18.24	28.48	46.72	54.00	-7.28	Average	Horizontal
	17957.50	29.99	28.48	58.47	74.00	-15.53	Peak	Horizontal
*	10188.50	32.83	13.55	46.38	68.20	-21.82	Peak	Vertical
	11038.50	31.12	15.94	47.07	74.00	-26.93	Peak	Vertical
*	17112.60	30.04	21.34	51.38	68.20	-16.82	Peak	Vertical
	17882.70	18.20	27.56	45.76	54.00	-8.24	Average	Vertical
	17882.70	31.06	27.56	58.61	74.00	-15.39	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9829.80	33.54	13.10	46.65	68.20	-21.55	Peak	Horizontal
	11618.20	31.66	16.30	47.97	74.00	-26.03	Peak	Horizontal
*	17008.90	30.87	20.73	51.60	68.20	-16.60	Peak	Horizontal
	17847.00	18.11	28.53	46.64	54.00	-7.36	Average	Horizontal
	17847.00	29.93	28.53	58.46	74.00	-15.54	Peak	Horizontal
*	9748.20	34.21	12.93	47.14	68.20	-21.06	Peak	Vertical
	10890.60	33.00	15.30	48.31	74.00	-25.69	Peak	Vertical
*	17323.40	31.01	22.81	53.82	68.20	-14.38	Peak	Vertical
	17949.00	18.18	28.64	46.82	54.00	-7.18	Average	Vertical
	17949.00	29.92	28.64	58.56	74.00	-15.44	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10146.00	33.69	13.17	46.87	68.20	-21.33	Peak	Horizontal
	11346.20	30.61	16.10	46.71	74.00	-27.29	Peak	Horizontal
*	17017.40	28.82	20.86	49.67	68.20	-18.53	Peak	Horizontal
	17860.60	18.23	28.55	46.78	54.00	-7.22	Average	Horizontal
	17860.60	29.23	28.55	57.78	74.00	-16.22	Peak	Horizontal
*	9925.00	33.98	13.02	47.00	68.20	-21.20	Peak	Vertical
	11500.90	31.30	16.42	47.72	74.00	-26.28	Peak	Vertical
*	17182.30	31.30	21.74	53.05	68.20	-15.15	Peak	Vertical
	17960.90	18.19	28.42	46.61	54.00	-7.39	Average	Vertical
	17960.90	29.83	28.42	58.25	74.00	-15.75	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10122.20	31.45	13.20	44.65	68.20	-23.55	Peak	Horizontal
	11575.70	29.51	16.36	45.86	74.00	-28.14	Peak	Horizontal
*	16903.50	29.15	20.44	49.59	68.20	-18.61	Peak	Horizontal
	17937.10	18.26	28.52	46.78	54.00	-7.22	Average	Horizontal
	17937.10	30.20	28.52	58.72	74.00	-15.28	Peak	Horizontal
*	10038.90	32.85	12.99	45.85	68.20	-22.35	Peak	Vertical
	11565.50	30.97	16.32	47.29	74.00	-26.71	Peak	Vertical
*	17175.50	30.84	21.53	52.37	68.20	-15.83	Peak	Vertical
	17928.60	18.33	28.34	46.67	54.00	-7.33	Average	Vertical
	17928.60	30.11	28.34	58.45	74.00	-15.55	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10069.50	32.85	13.00	45.85	68.20	-22.35	Peak	Horizontal
	11047.00	31.49	15.86	47.35	74.00	-26.65	Peak	Horizontal
*	17223.10	30.46	22.35	52.81	68.20	-15.39	Peak	Horizontal
	17860.60	30.32	28.55	58.87	74.00	-15.13	Peak	Horizontal
*	9902.90	33.16	12.98	46.14	68.20	-22.06	Peak	Vertical
	11509.40	30.96	16.39	47.36	74.00	-26.64	Peak	Vertical
*	17172.10	30.78	21.46	52.24	68.20	-15.96	Peak	Vertical
	17923.50	18.15	28.18	46.33	54.00	-7.67	Average	Vertical
	17923.50	30.73	28.18	58.91	74.00	-15.09	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9931.80	33.07	13.03	46.10	68.20	-22.10	Peak	Horizontal
	11543.40	31.96	16.31	48.27	74.00	-25.73	Peak	Horizontal
*	17226.50	30.78	22.33	53.11	68.20	-15.09	Peak	Horizontal
	17942.20	18.21	28.57	46.78	54.00	-7.22	Average	Horizontal
	17942.20	29.95	28.57	58.52	74.00	-15.48	Peak	Horizontal
*	10144.30	33.40	13.17	46.57	68.20	-21.63	Peak	Vertical
	11432.90	31.14	16.34	47.48	74.00	-26.52	Peak	Vertical
*	17114.30	31.10	21.35	52.45	68.20	-15.75	Peak	Vertical
	17935.40	18.12	28.50	46.62	54.00	-7.38	Average	Vertical
	17935.40	30.11	28.50	58.61	74.00	-15.39	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE40 – Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9897.80	33.37	12.97	46.33	68.20	-21.87	Peak	Horizontal
	11512.80	31.04	16.38	47.43	74.00	-26.57	Peak	Horizontal
*	17168.70	30.42	21.40	51.83	68.20	-16.37	Peak	Horizontal
	18000.00	18.17	27.93	46.10	54.00	-7.90	Average	Horizontal
	18000.00	27.79	27.93	55.72	74.00	-18.28	Peak	Horizontal
*	9887.60	31.19	12.96	44.14	68.20	-24.06	Peak	Vertical
	11193.20	28.65	16.04	44.69	74.00	-29.31	Peak	Vertical
*	17075.20	28.93	20.86	49.79	68.20	-18.41	Peak	Vertical
	17942.20	18.11	28.57	46.68	54.00	-7.32	Average	Vertical
	17942.20	29.86	28.57	58.43	74.00	-15.57	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE80 – Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10129.00	33.42	13.19	46.61	68.20	-21.59	Peak	Horizontal
	11721.90	31.27	16.13	47.40	74.00	-26.60	Peak	Horizontal
*	17246.90	31.06	22.08	53.14	68.20	-15.06	Peak	Horizontal
	17964.30	18.24	28.35	46.59	54.00	-7.41	Average	Horizontal
	17964.30	29.93	28.35	58.28	74.00	-15.72	Peak	Horizontal
*	9928.40	32.51	13.03	45.53	68.20	-22.67	Peak	Vertical
	11249.30	31.21	16.00	47.20	74.00	-26.80	Peak	Vertical
*	16757.30	30.64	20.06	50.70	68.20	-17.50	Peak	Vertical
	17942.20	18.32	28.57	46.89	54.00	-7.11	Average	Vertical
	17942.20	30.04	28.57	58.61	74.00	-15.39	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE80 – Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9942.00	33.38	13.03	46.41	68.20	-21.79	Peak	Horizontal
	11419.30	30.86	16.40	47.26	74.00	-26.74	Peak	Horizontal
*	16755.60	30.00	20.05	50.04	68.20	-18.16	Peak	Horizontal
	17930.30	18.30	28.42	46.72	54.00	-7.28	Average	Horizontal
	17930.30	29.78	28.42	58.20	74.00	-15.80	Peak	Horizontal
*	10105.20	33.02	13.19	46.21	68.20	-21.99	Peak	Vertical
	11320.70	31.29	16.30	47.58	74.00	-26.42	Peak	Vertical
*	16927.30	30.84	20.53	51.37	68.20	-16.83	Peak	Vertical
	17954.10	18.24	28.54	46.78	54.00	-7.22	Average	Vertical
	17954.10	31.20	28.54	59.74	74.00	-14.26	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE80 – Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10173.20	33.15	13.36	46.51	68.20	-21.69	Peak	Horizontal
	11322.40	30.94	16.29	47.23	74.00	-26.77	Peak	Horizontal
*	17126.20	30.76	21.41	52.17	68.20	-16.03	Peak	Horizontal
	17979.60	18.31	27.95	46.26	54.00	-7.74	Average	Horizontal
	17979.60	30.65	27.95	58.60	74.00	-15.40	Peak	Horizontal
*	9948.80	32.55	13.03	45.58	68.20	-22.62	Peak	Vertical
	11152.40	31.04	15.94	46.98	74.00	-27.02	Peak	Vertical
*	17292.80	31.27	22.80	54.06	68.20	-14.14	Peak	Vertical
	17870.80	18.15	28.08	46.23	54.00	-7.77	Average	Vertical
	17870.80	31.10	28.08	59.17	74.00	-14.83	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE80 – Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	9819.60	34.85	13.10	47.95	68.20	-20.25	Peak	Horizontal
	11388.70	31.09	16.28	47.37	74.00	-26.63	Peak	Horizontal
*	17107.50	30.79	21.30	52.09	68.20	-16.11	Peak	Horizontal
	17962.60	18.31	28.38	46.69	54.00	-7.31	Average	Horizontal
	17962.60	30.79	28.38	59.17	74.00	-14.83	Peak	Horizontal
*	10047.40	33.27	12.99	46.26	68.20	-21.94	Peak	Vertical
	11509.40	30.86	16.39	47.25	74.00	-26.75	Peak	Vertical
*	17223.10	30.95	22.35	53.30	68.20	-14.90	Peak	Vertical
	17862.30	18.27	28.52	46.79	54.00	-7.21	Average	Vertical
	17862.30	29.97	28.52	58.49	74.00	-15.51	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-20	Test Mode	802.11ax-HE80 – Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB/m)	Detector	Polarization
*	10108.60	33.21	13.20	46.40	68.20	-21.80	Peak	Horizontal
	11568.90	31.38	16.33	47.71	74.00	-26.29	Peak	Horizontal
*	17126.20	31.07	21.41	52.48	68.20	-15.72	Peak	Horizontal
	17932.00	18.24	28.47	46.71	54.00	-7.29	Average	Horizontal
	17932.00	30.47	28.47	58.94	74.00	-15.06	Peak	Horizontal
*	9899.50	32.59	12.97	45.56	68.20	-22.64	Peak	Vertical
	11381.90	31.25	16.23	47.47	74.00	-26.53	Peak	Vertical
*	16947.70	31.27	20.59	51.86	68.20	-16.34	Peak	Vertical
	17938.80	18.15	28.53	46.68	54.00	-7.32	Average	Vertical
	17938.80	30.05	28.53	58.58	74.00	-15.42	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2dB to the EIRP limit of -27dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

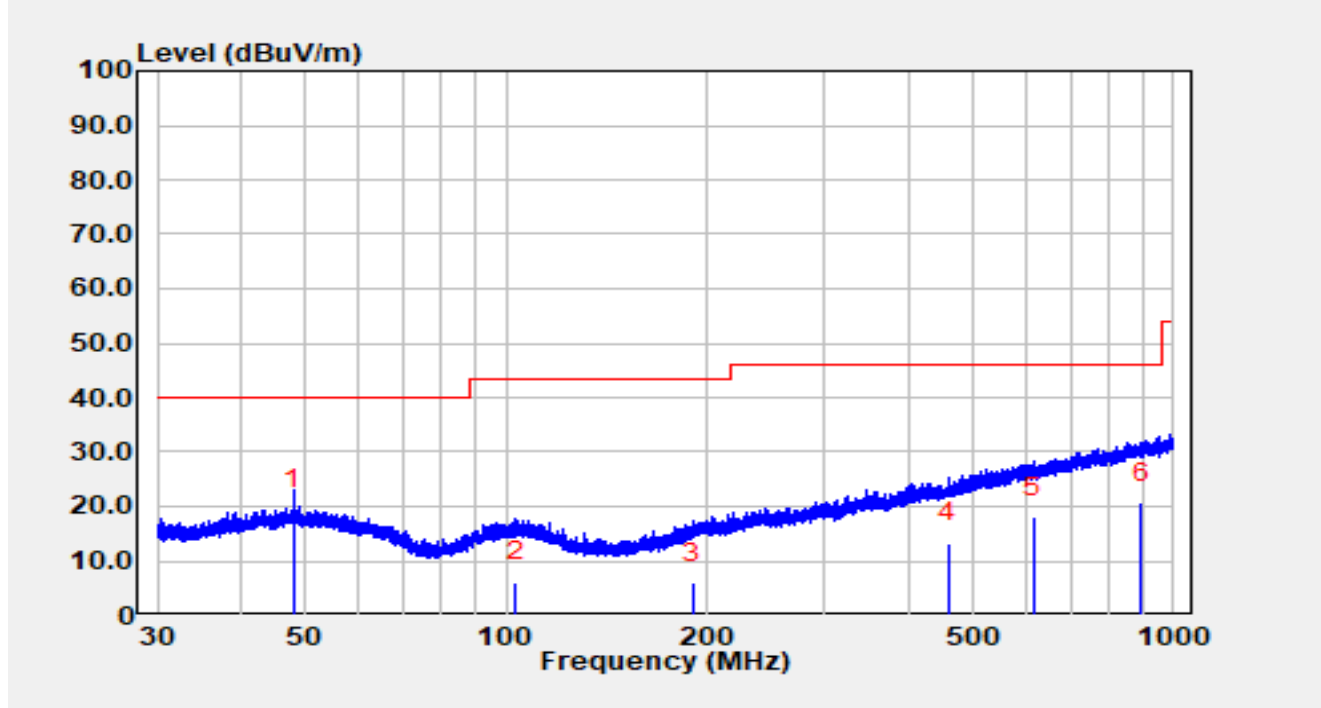


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	47.994	-0.40	19.67	19.27	-20.73	40.00	QP
2		103.080	-11.70	17.86	6.16	-37.34	43.50	QP
3		190.072	-11.20	17.06	5.86	-37.64	43.50	QP
4		459.598	-10.70	24.05	13.35	-32.65	46.00	QP
5		617.453	-9.20	27.25	18.05	-27.95	46.00	QP
6		895.111	-10.00	30.68	20.68	-25.32	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

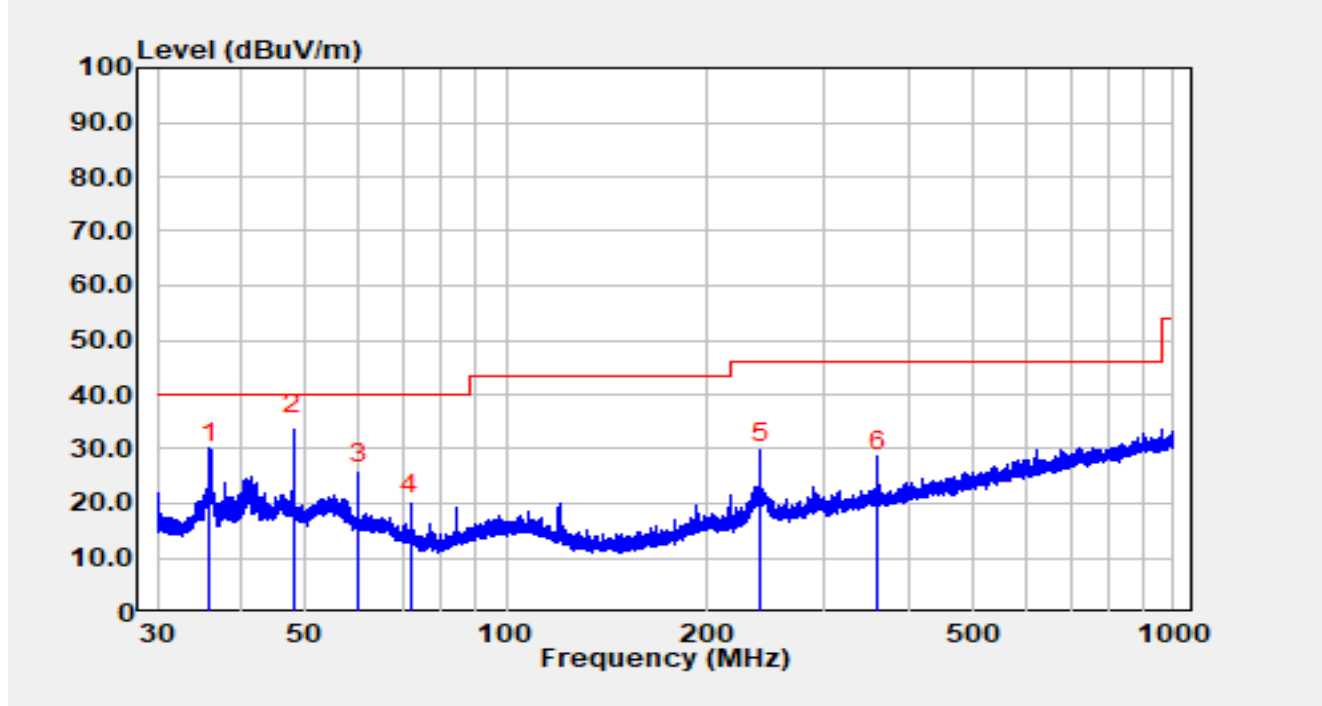

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		36.001	9.90	17.42	27.32	-12.68	40.00	QP
2	*	47.994	13.00	19.67	32.67	-7.33	40.00	QP
3		59.985	5.70	18.07	23.77	-16.23	40.00	QP
4		71.983	3.10	14.66	17.76	-22.24	40.00	QP
5		240.072	8.20	19.17	27.37	-18.63	46.00	QP
6		360.069	3.70	22.27	25.97	-20.03	46.00	QP


Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 40GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.8 Radiated Restricted Band Edge Test Result

Full RU

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

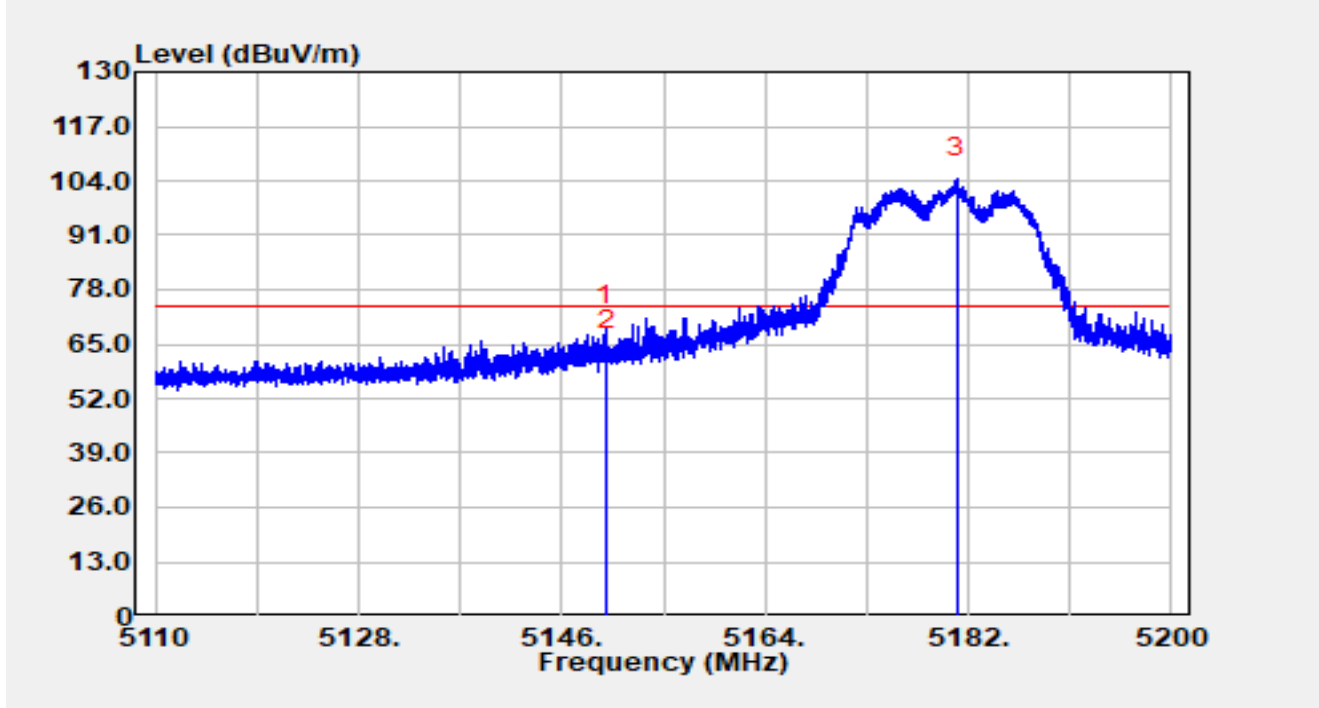


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.906	44.31	24.93	69.25	-4.75	74.00	Peak
2		5150.000	38.57	24.93	63.51	-10.49	74.00	Peak
3		5180.947	79.37	25.17	104.54	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

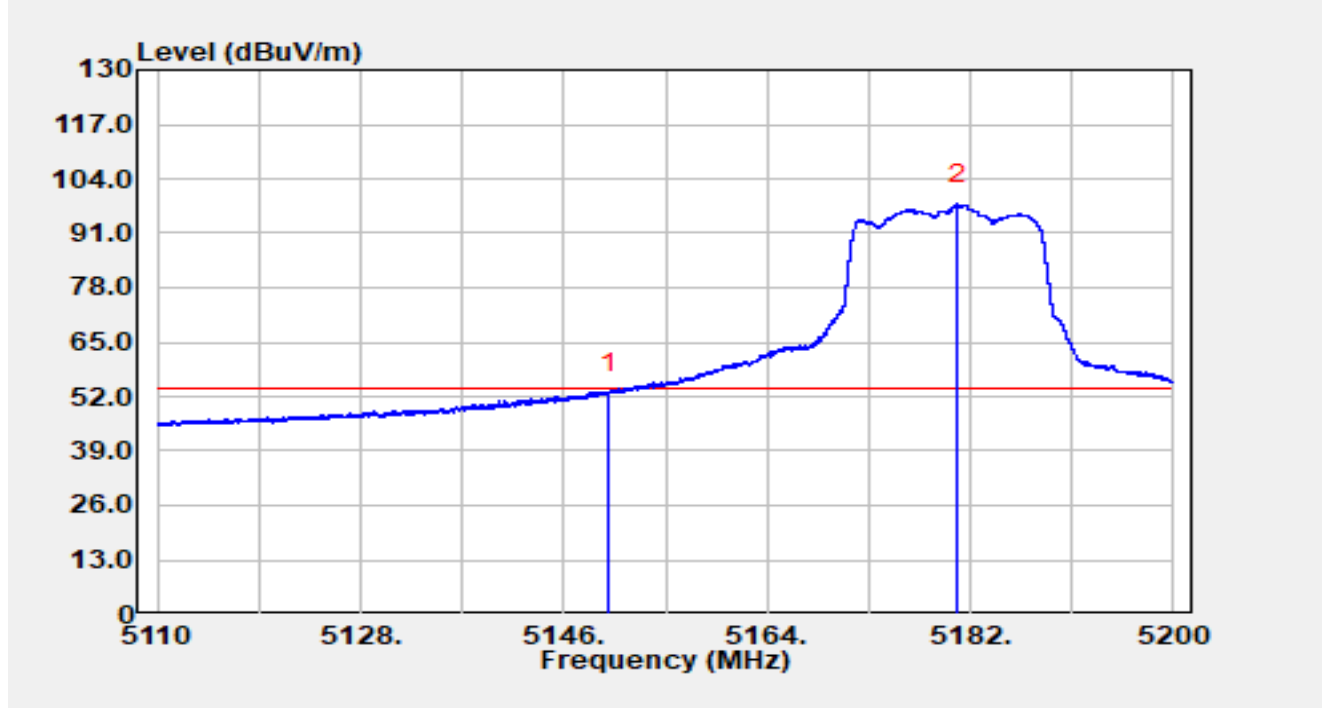


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	27.95	24.93	52.88	-1.12	54.00	Average
2		5180.866	72.74	25.17	97.92	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

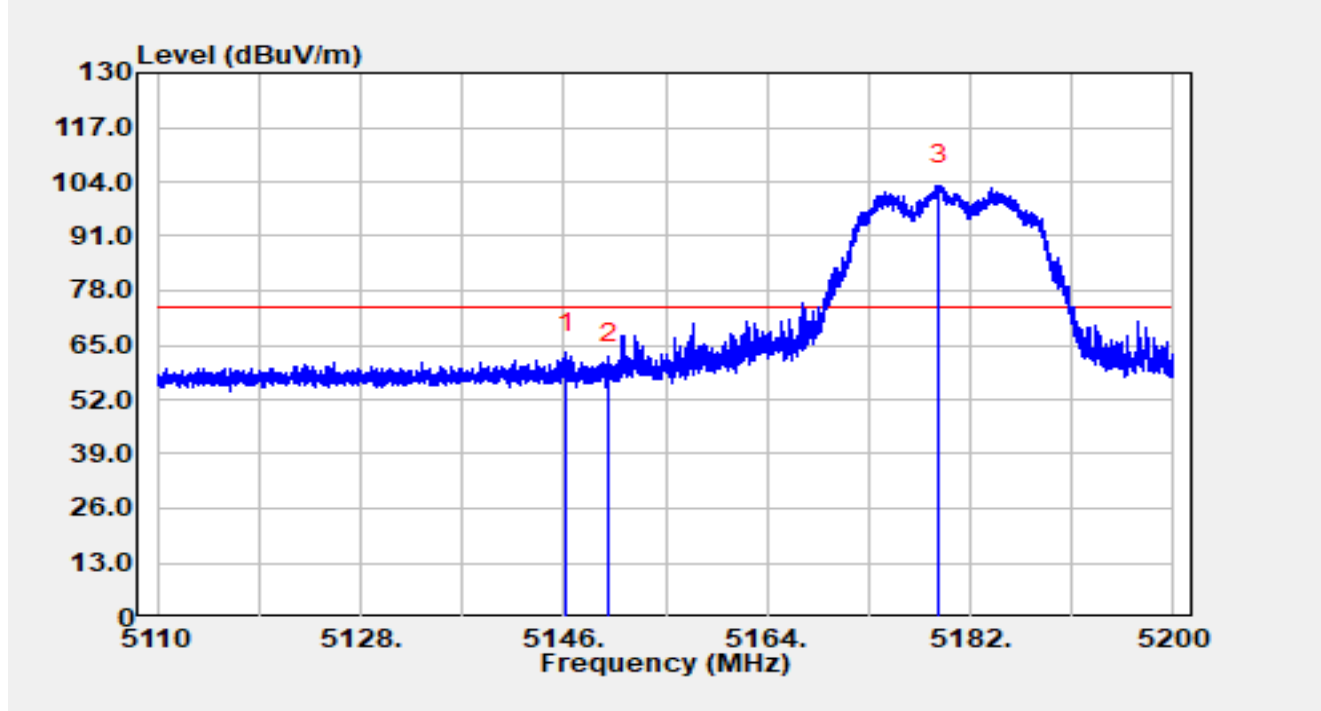


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.198	38.23	24.97	63.20	-10.80	74.00	Peak
2		5150.000	35.56	24.93	60.50	-13.50	74.00	Peak
3		5179.273	77.98	25.16	103.14	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5180MHz		

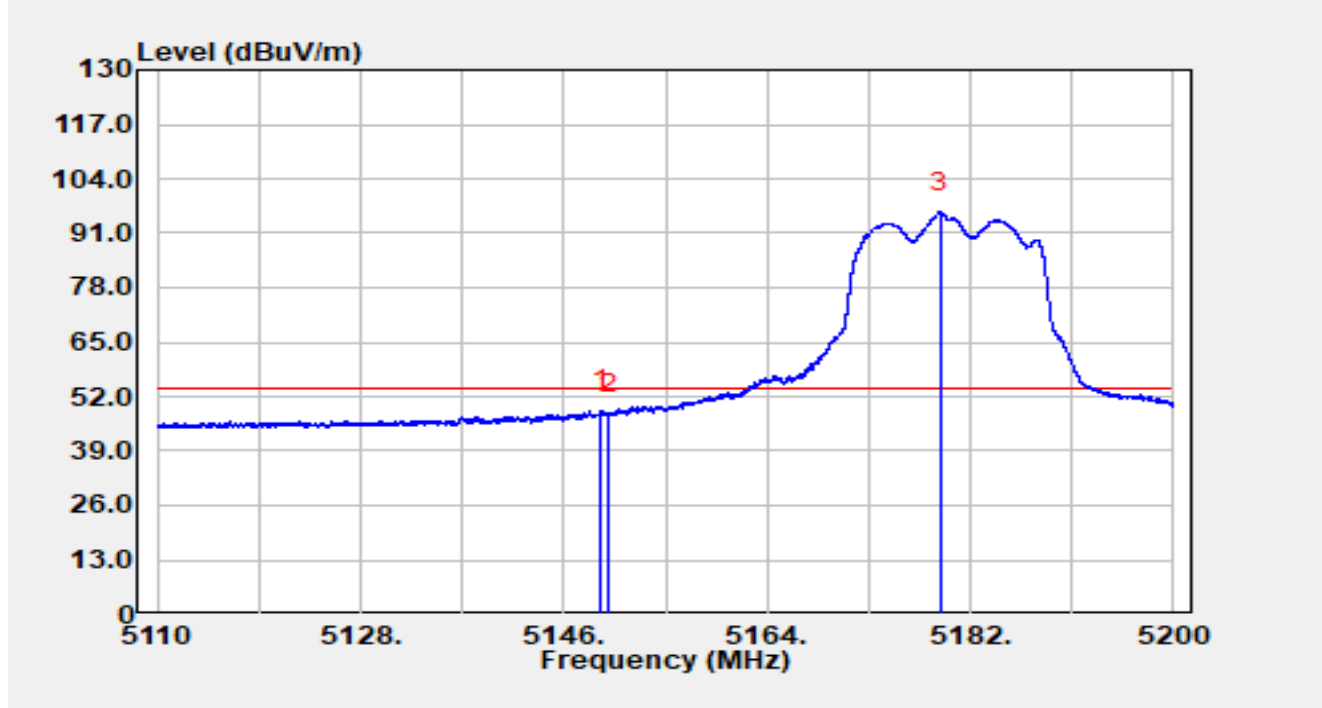


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.330	23.76	24.94	48.70	-5.30	54.00	Average
2		5150.000	23.06	24.93	47.99	-6.01	54.00	Average
3		5179.336	70.82	25.16	95.98	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

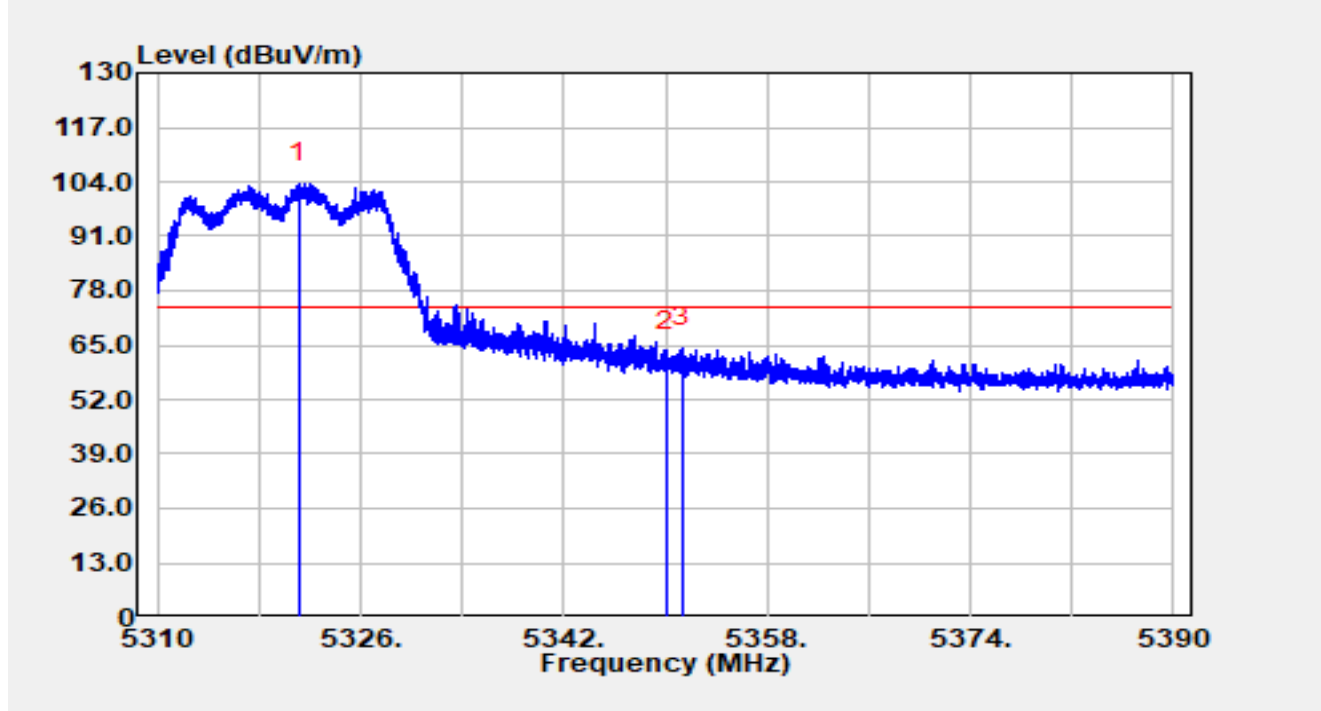


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.136	78.19	25.49	103.67	N/A	N/A	Peak
2		5350.000	37.87	25.74	63.61	-10.39	74.00	Peak
3	*	5351.272	38.62	25.72	64.34	-9.66	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

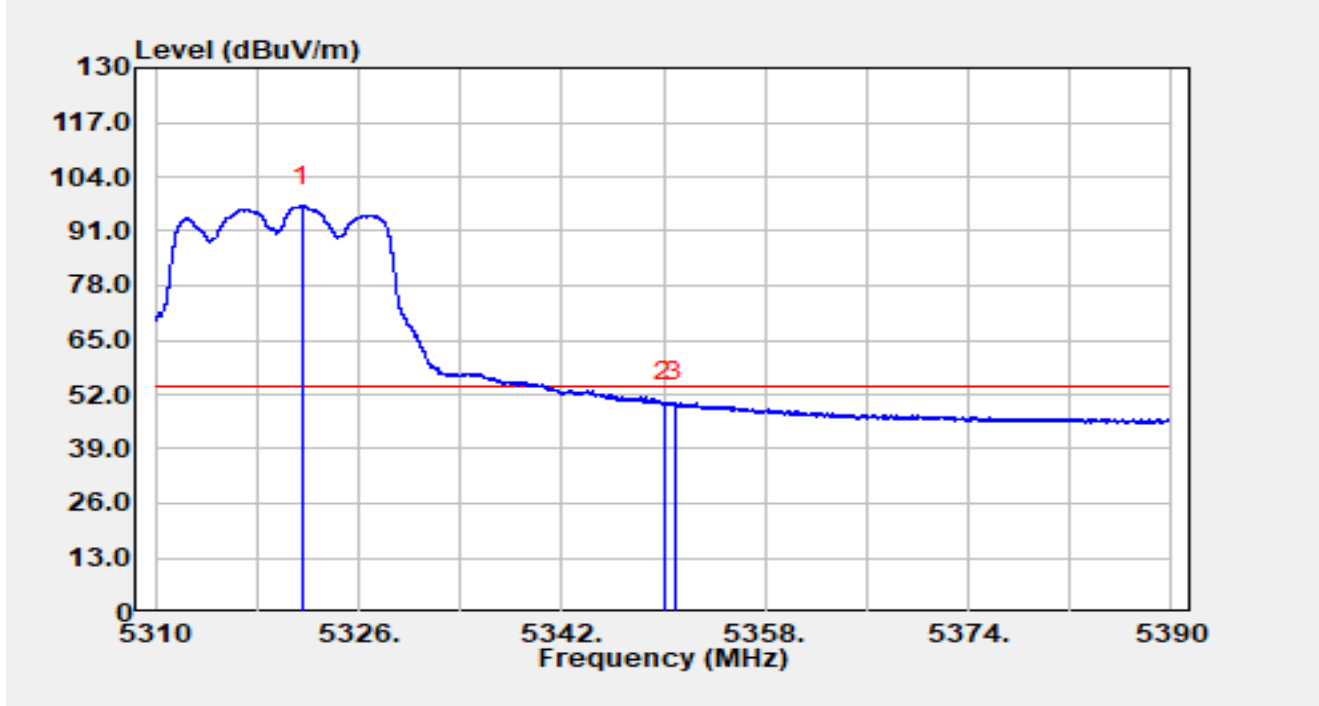


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.552	71.54	25.49	97.03	N/A	N/A	Average
2		5350.000	24.30	25.74	50.04	-3.96	54.00	Average
3	*	5350.936	24.45	25.73	50.18	-3.82	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

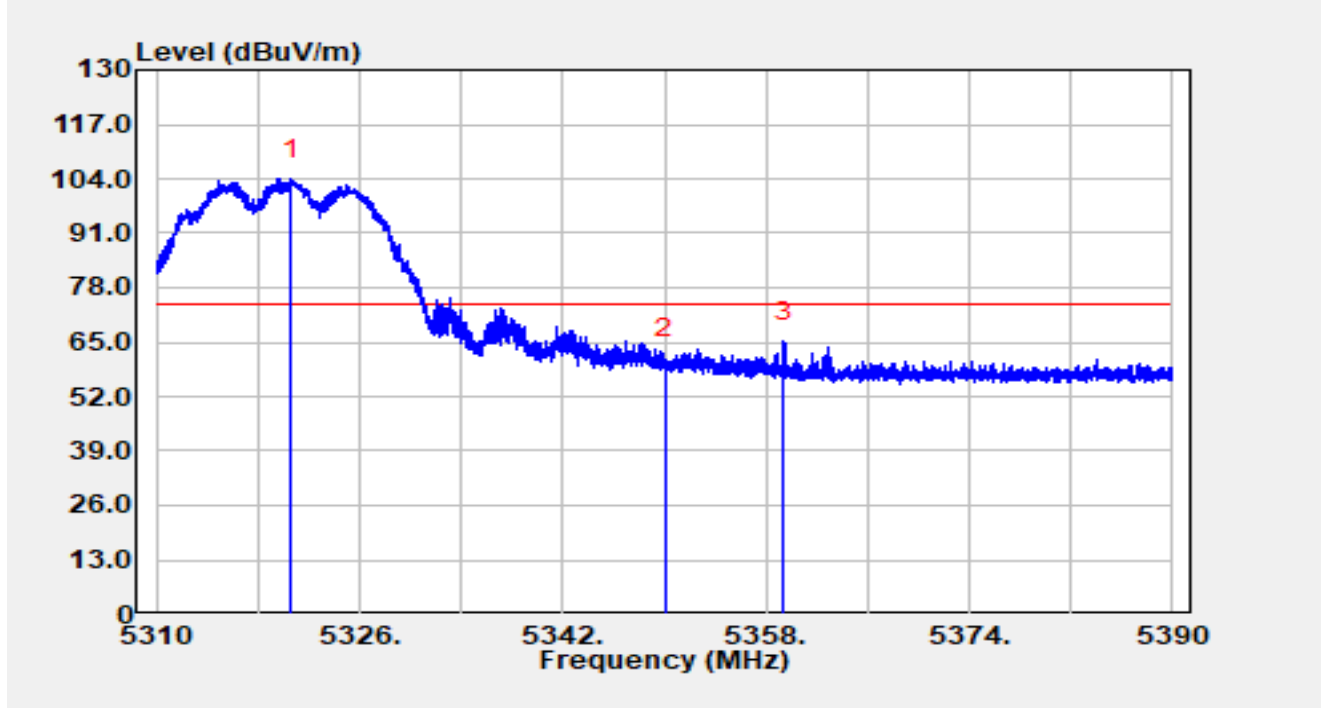


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.600	78.51	25.48	103.99	N/A	N/A	Peak
2		5350.000	35.28	25.74	61.02	-12.98	74.00	Peak
3	*	5359.416	39.39	25.62	65.01	-8.99	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5320MHz		

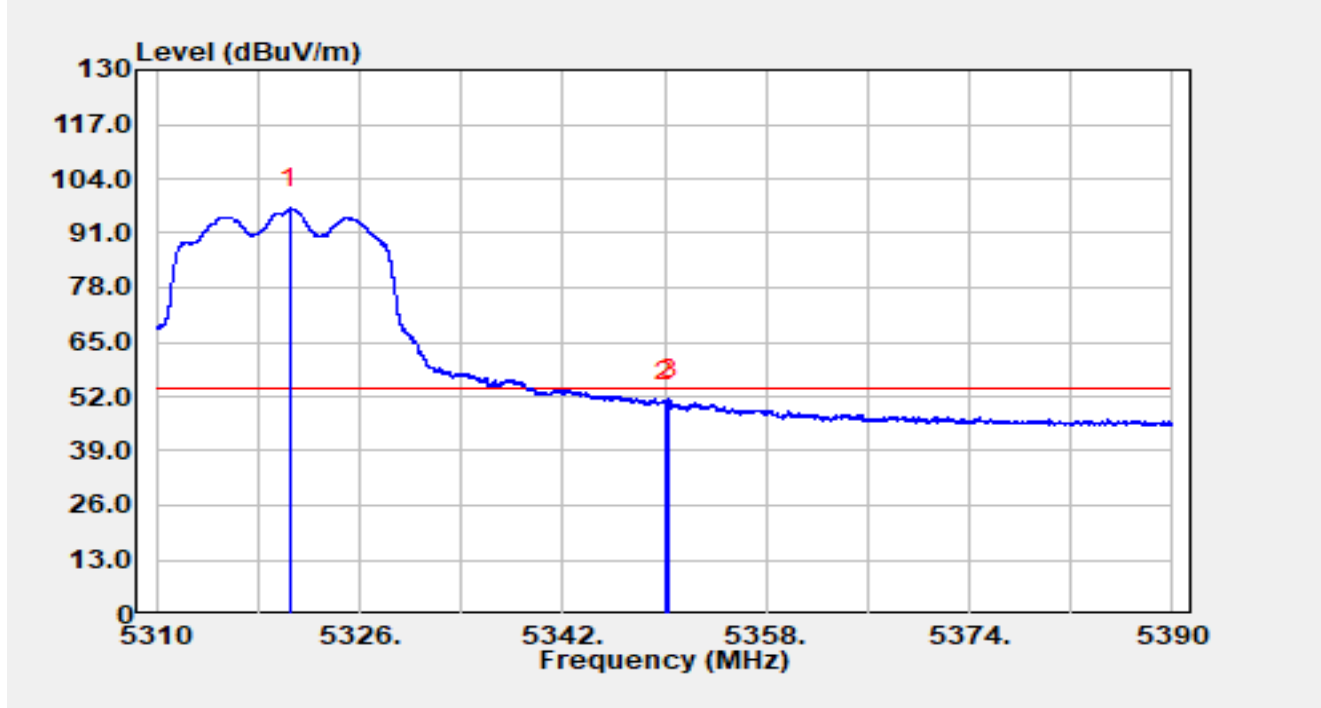


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5320.536	71.57	25.48	97.05	N/A	N/A	Average
2		5350.000	24.87	25.74	50.61	-3.39	54.00	Average
3	*	5350.376	25.54	25.73	51.28	-2.72	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

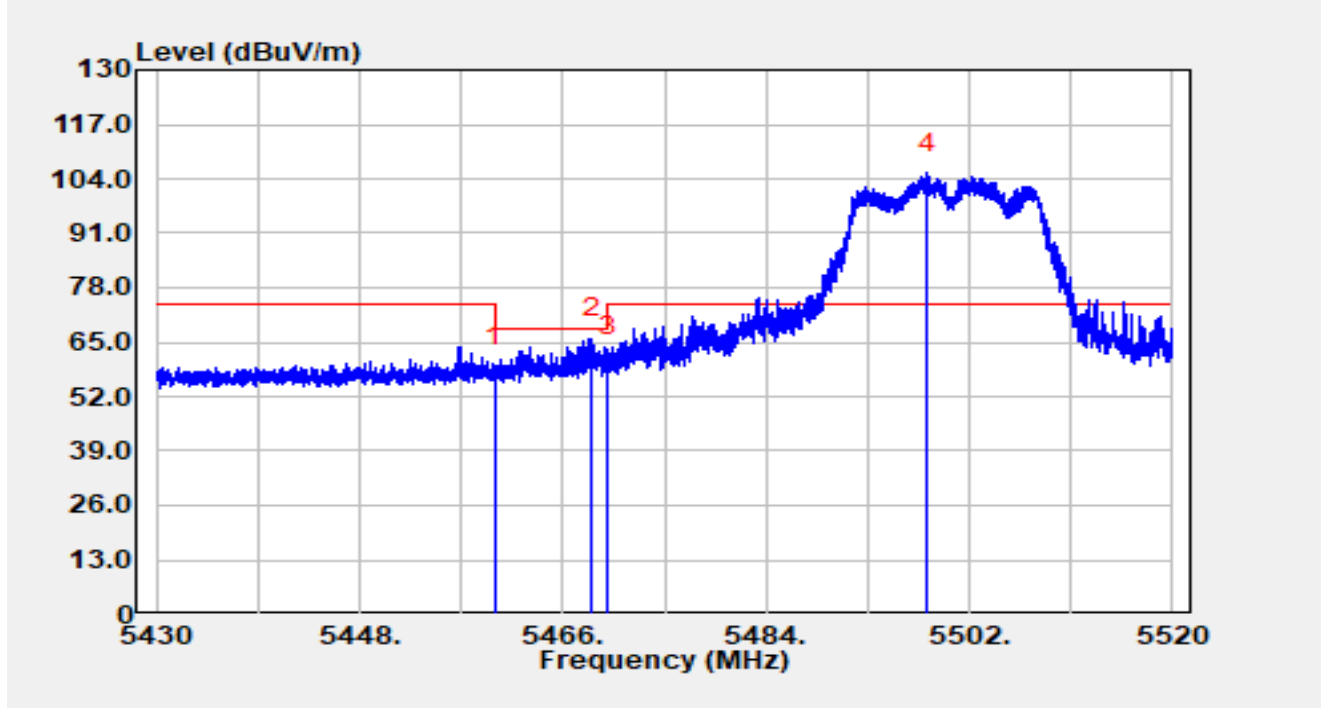


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	33.11	25.80	58.91	-9.29	68.20	Peak
2	*	5468.592	40.20	25.69	65.89	-2.31	68.20	Peak
3		5470.000	35.93	25.67	61.60	-6.60	68.20	Peak
4		5498.256	79.54	25.89	105.43	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

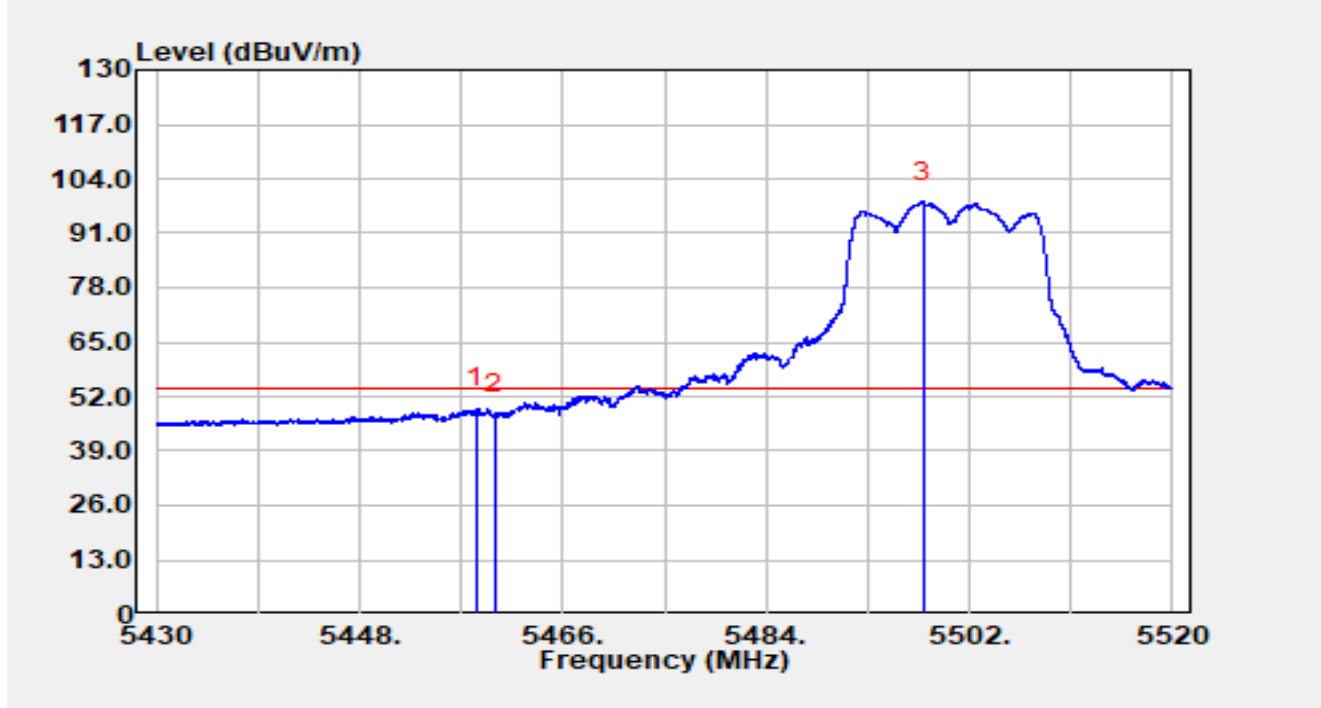


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.332	23.42	25.82	49.24	-4.76	54.00	Average
2		5460.000	21.86	25.80	47.66	-6.34	54.00	Average
3		5497.914	72.58	25.89	98.47	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

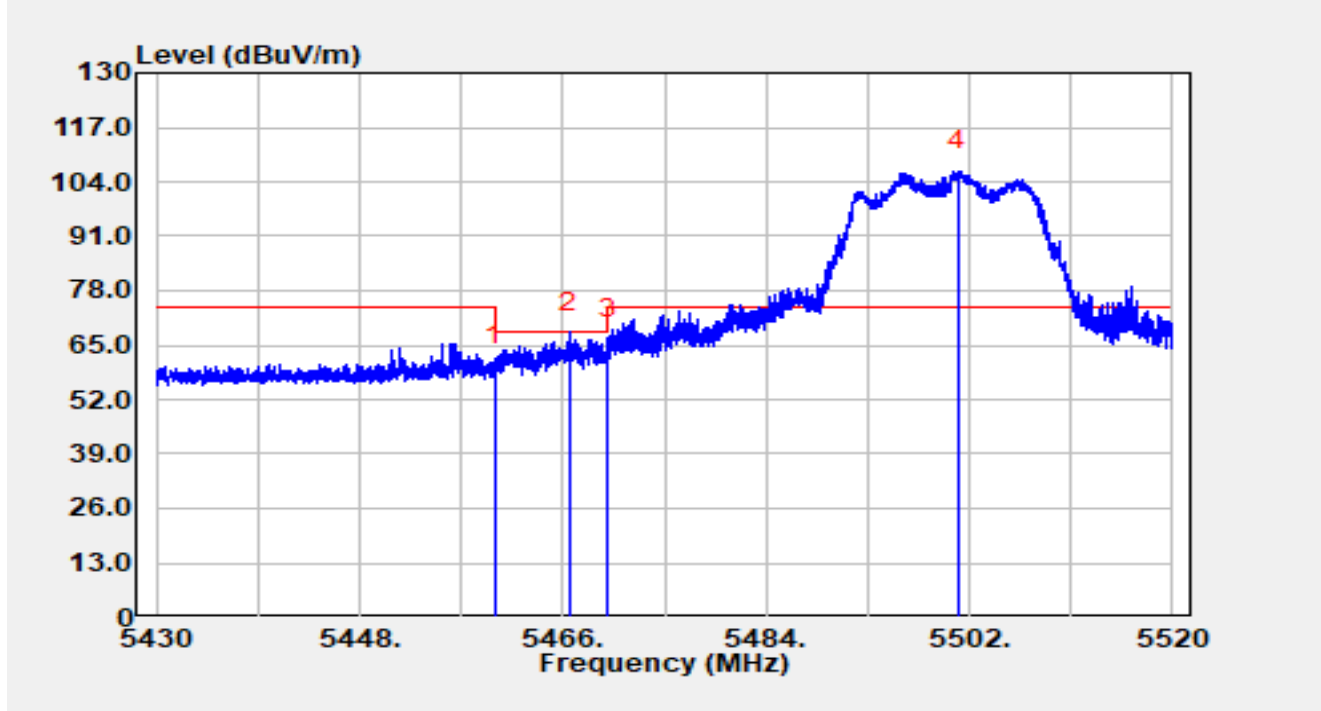


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	34.24	25.80	60.03	-8.17	68.20	Peak
2	*	5466.594	42.28	25.71	67.99	-0.21	68.20	Peak
3		5470.000	40.73	25.67	66.40	-1.80	68.20	Peak
4		5501.019	80.66	25.89	106.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5500MHz		

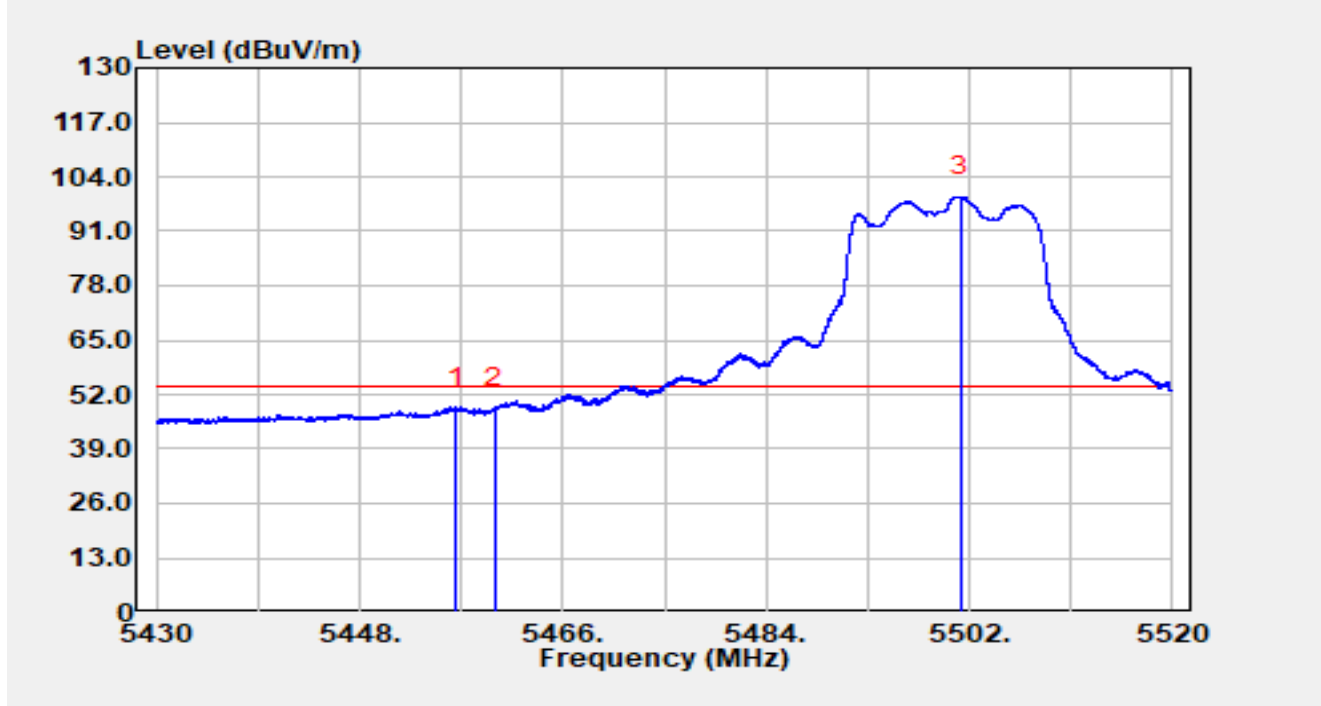


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5456.514	23.12	25.84	48.96	-5.04	54.00	Average
2		5460.000	22.77	25.80	48.57	-5.43	54.00	Average
3		5501.190	73.43	25.89	99.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

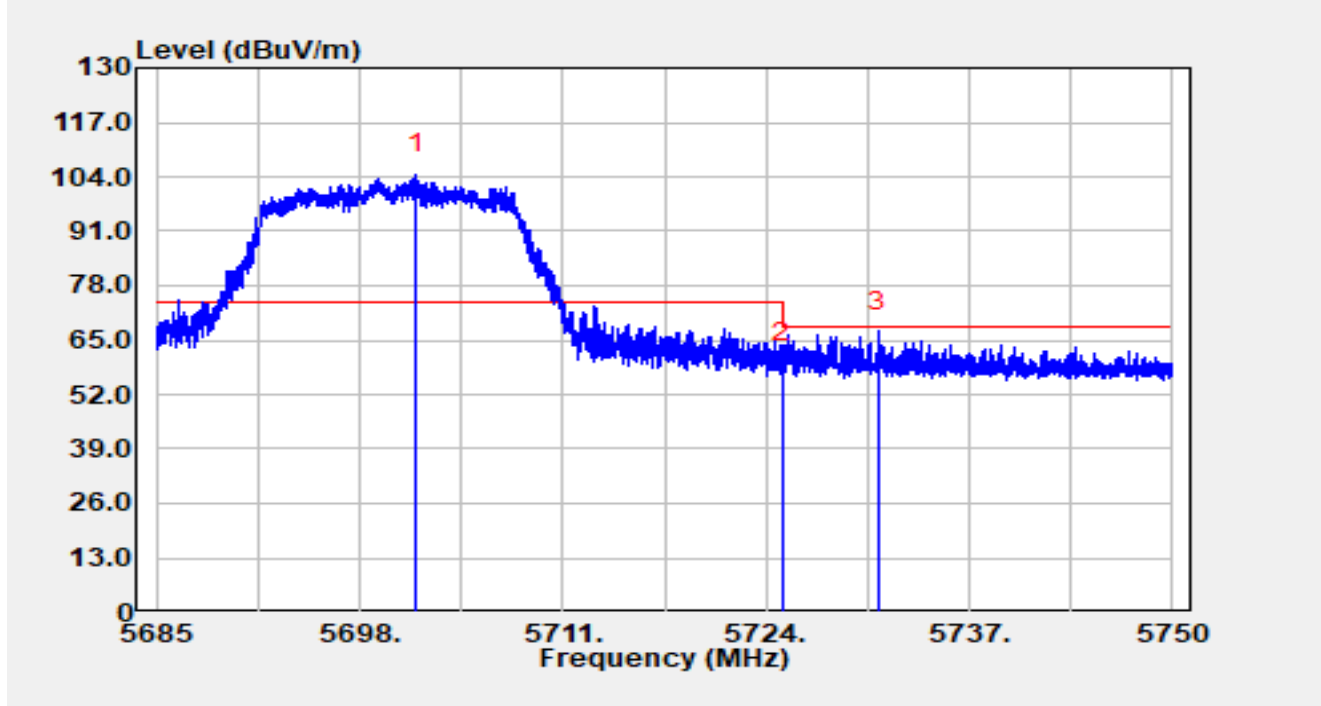


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.627	78.14	26.38	104.52	N/A	N/A	Peak
2		5725.000	32.94	26.52	59.46	-8.74	68.20	Peak
3	*	5731.189	40.64	26.51	67.15	-1.05	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5700MHz		

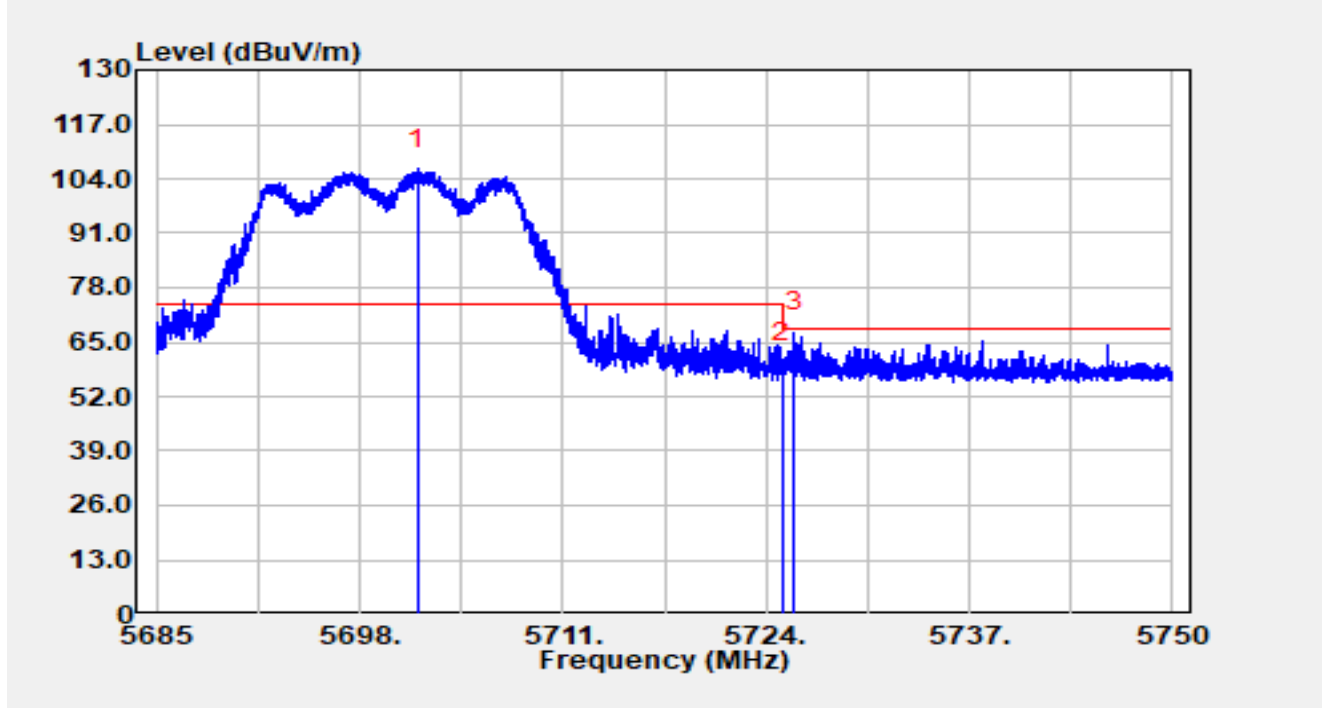


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5701.744	79.99	26.38	106.37	N/A	N/A	Peak
2		5725.000	33.36	26.52	59.88	-8.32	68.20	Peak
3	*	5725.781	40.85	26.52	67.37	-0.83	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

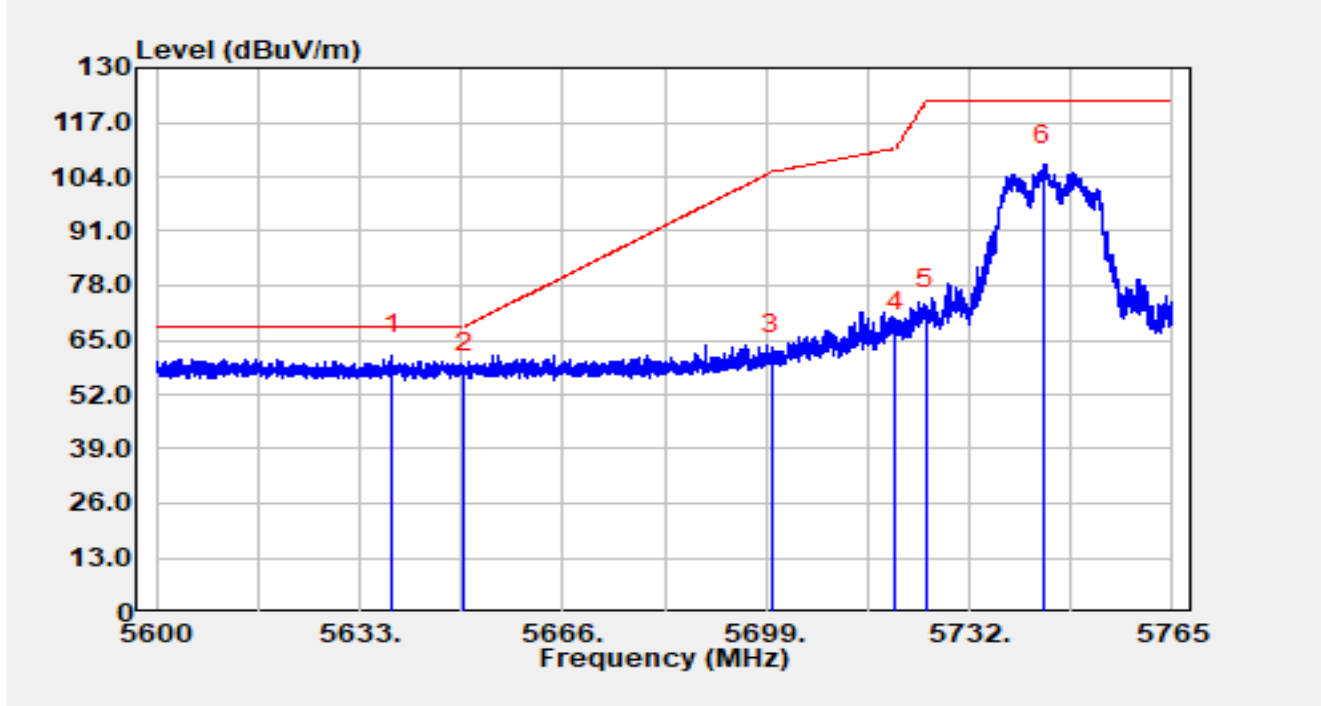


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5638.230	35.41	25.97	61.38	-6.82	68.20	Peak
2		5650.000	31.09	26.12	57.21	-10.99	68.20	Peak
3		5700.000	35.26	26.36	61.61	-43.59	105.20	Peak
4		5720.000	40.37	26.54	66.91	-43.89	110.80	Peak
5		5725.000	45.84	26.52	72.36	-49.84	122.20	Peak
6		5744.062	80.32	26.50	106.82	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5745MHz		

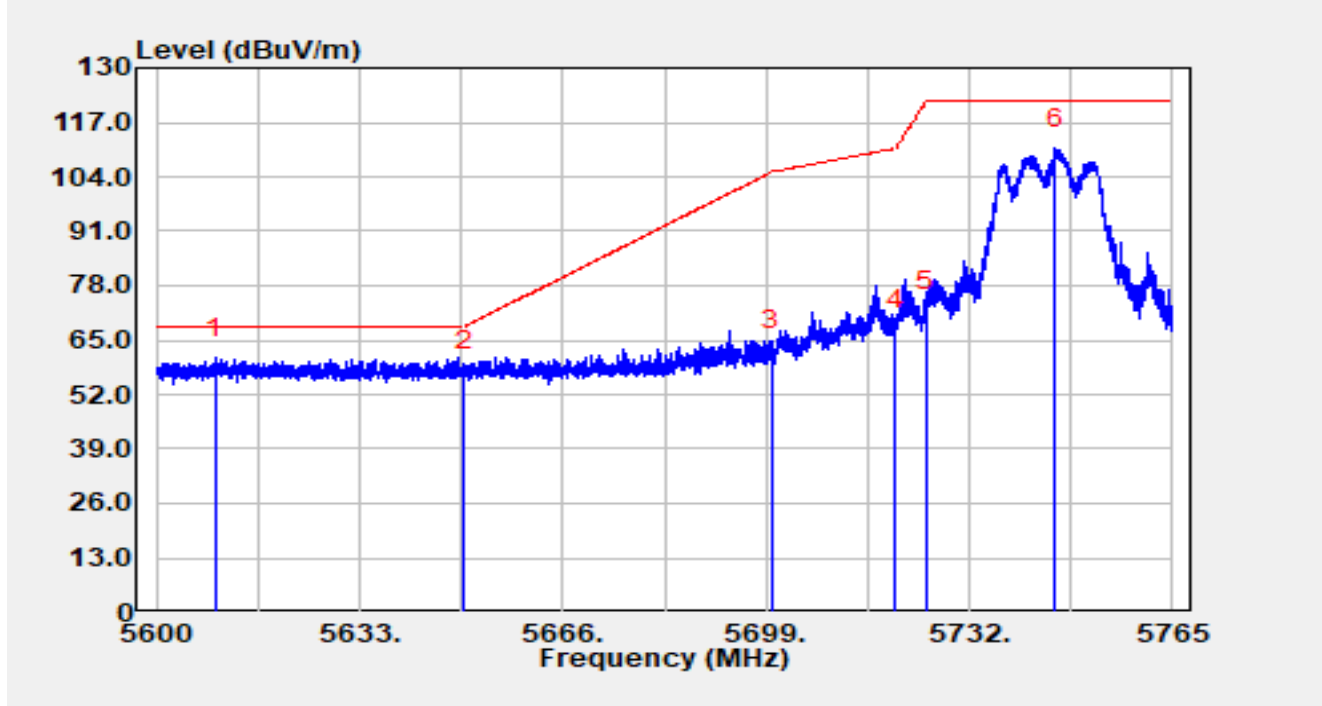


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5609.537	34.55	26.14	60.69	-7.51	68.20	Peak
2		5650.000	31.65	26.12	57.77	-10.43	68.20	Peak
3		5700.000	36.27	26.36	62.62	-42.58	105.20	Peak
4		5720.000	40.92	26.54	67.46	-43.34	110.80	Peak
5		5725.000	45.20	26.52	71.72	-50.48	122.20	Peak
6		5746.008	84.14	26.49	110.63	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

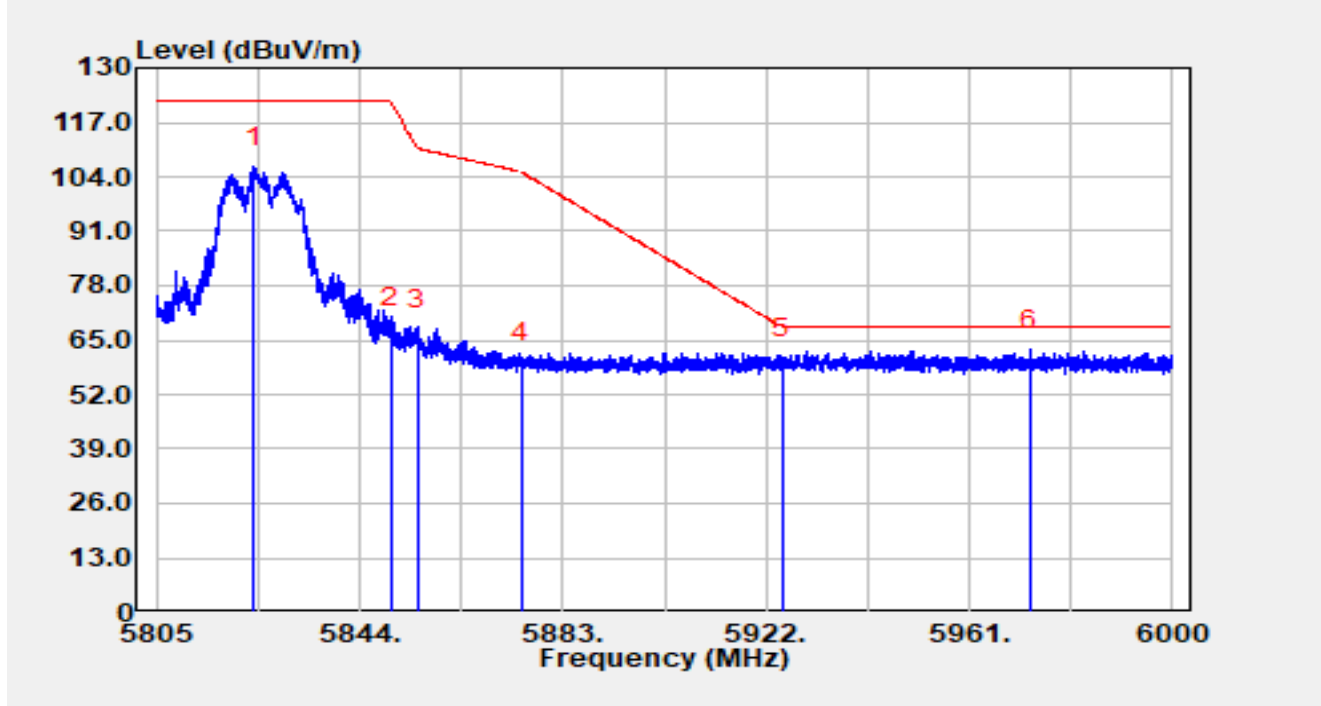


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.817	79.19	27.19	106.38	N/A	N/A	Peak
2		5850.000	40.98	27.08	68.06	-54.14	122.20	Peak
3		5855.000	40.30	27.12	67.43	-43.37	110.80	Peak
4		5875.000	32.28	27.51	59.79	-45.41	105.20	Peak
5		5925.000	32.83	27.73	60.55	-7.65	68.20	Peak
6	*	5972.720	34.93	27.80	62.73	-5.47	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11a at 5825MHz		

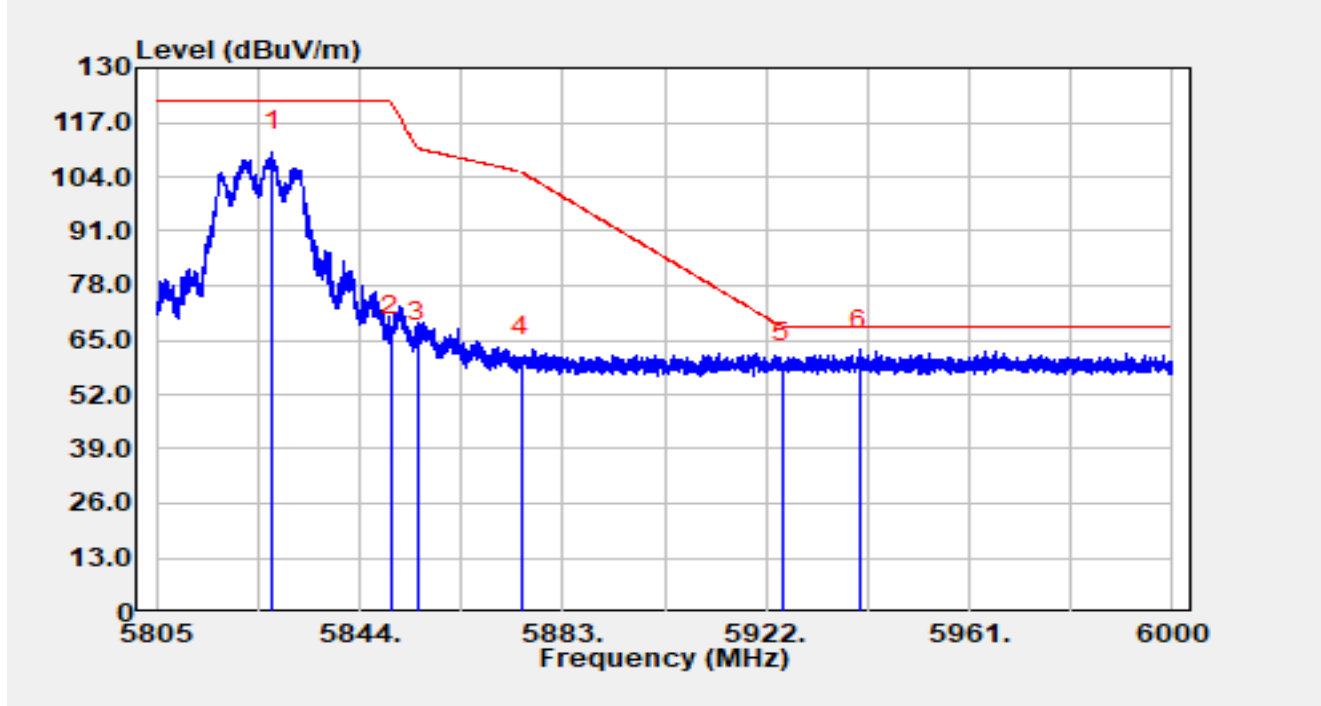


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.347	82.81	27.14	109.95	N/A	N/A	Peak
2		5850.000	38.98	27.08	66.06	-56.14	122.20	Peak
3		5855.000	37.36	27.12	64.49	-46.31	110.80	Peak
4		5875.000	33.41	27.51	60.92	-44.28	105.20	Peak
5		5925.000	31.67	27.73	59.39	-8.81	68.20	Peak
6	*	5939.862	34.98	27.69	62.66	-5.54	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

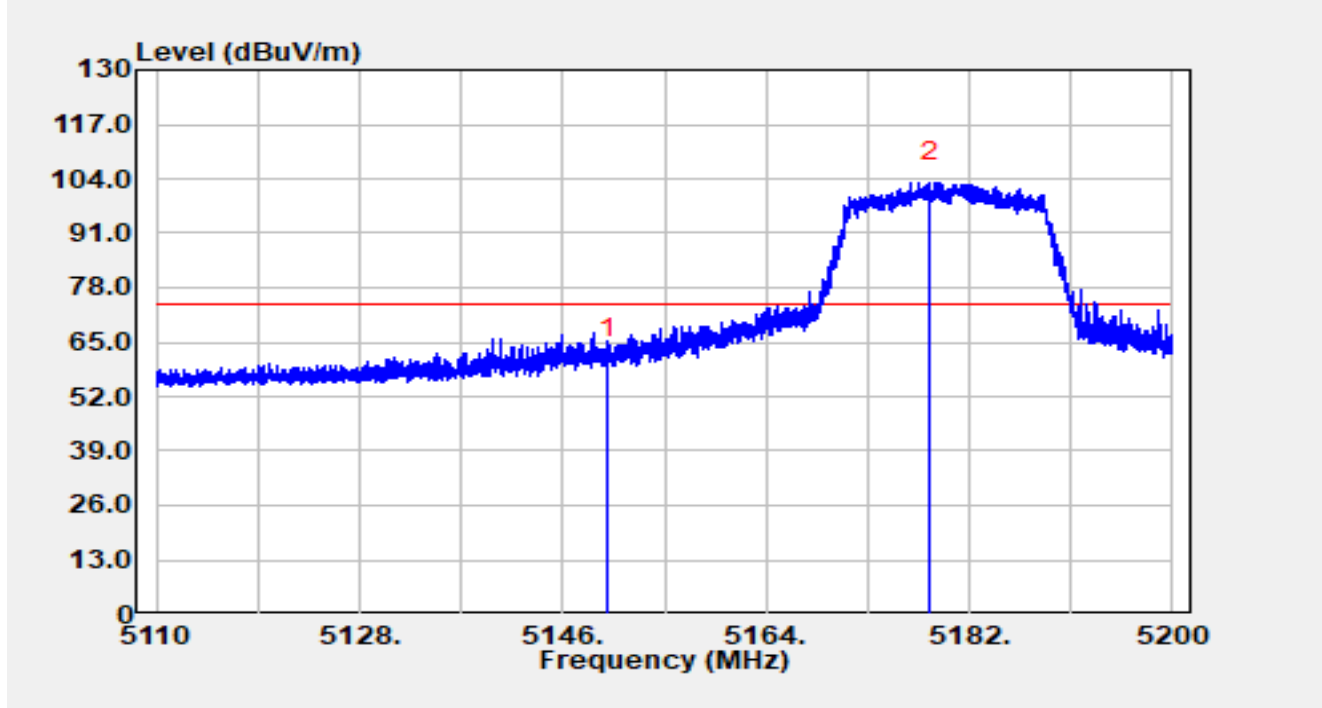


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5150.000	36.12	24.93	61.05	-12.95	74.00	Peak
2		5178.544	78.03	25.15	103.18	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

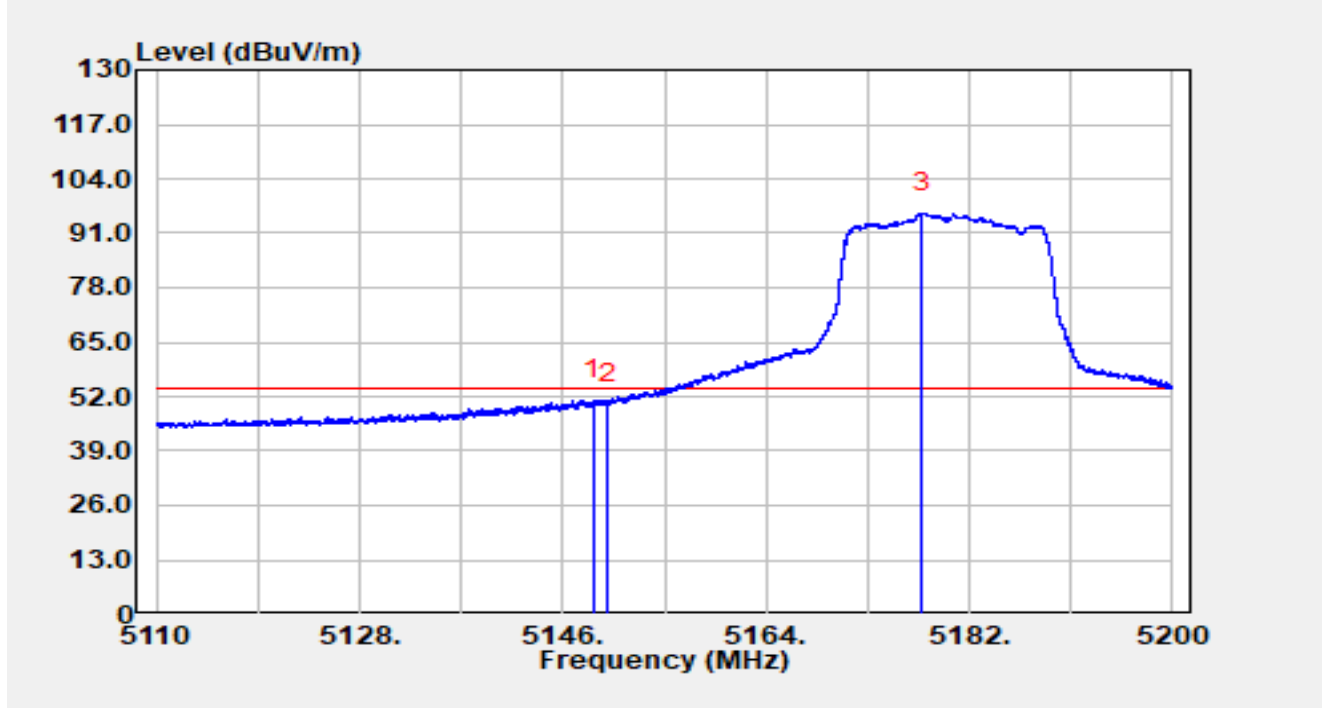


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.682	26.30	24.95	51.24	-2.76	54.00	Average
2		5150.000	25.25	24.93	50.18	-3.82	54.00	Average
3		5177.806	70.74	25.14	95.88	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

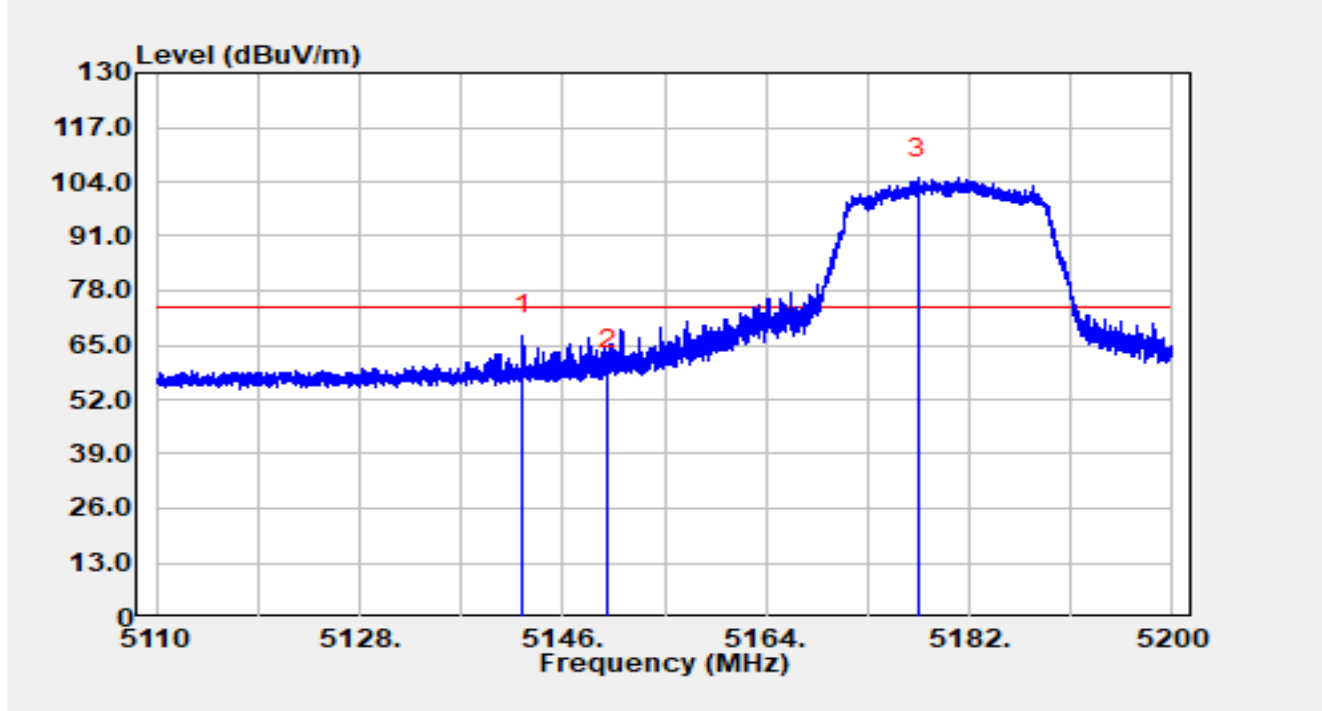


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.427	42.35	25.00	67.35	-6.65	74.00	Peak
2		5150.000	33.94	24.93	58.88	-15.12	74.00	Peak
3		5177.464	79.81	25.14	104.95	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5180MHz		

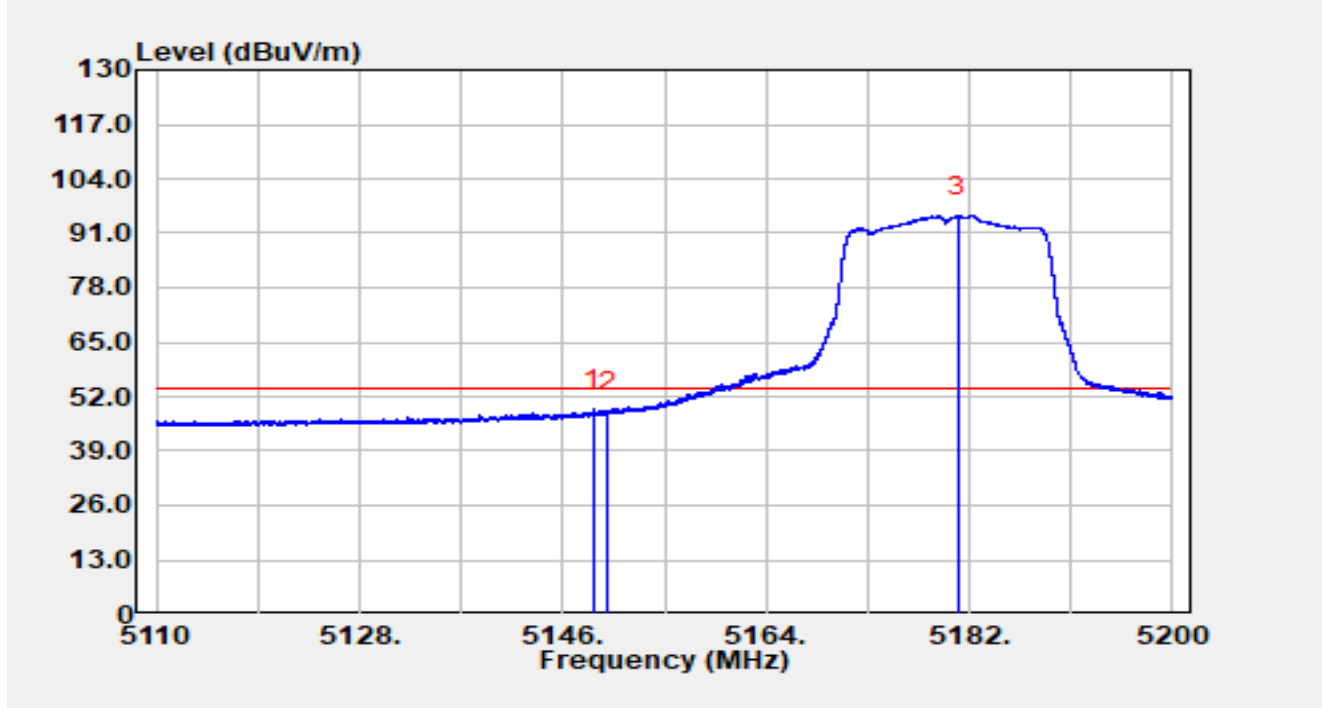


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.745	24.01	24.94	48.95	-5.05	54.00	Average
2		5150.000	23.62	24.93	48.55	-5.45	54.00	Average
3		5180.965	69.97	25.17	95.14	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

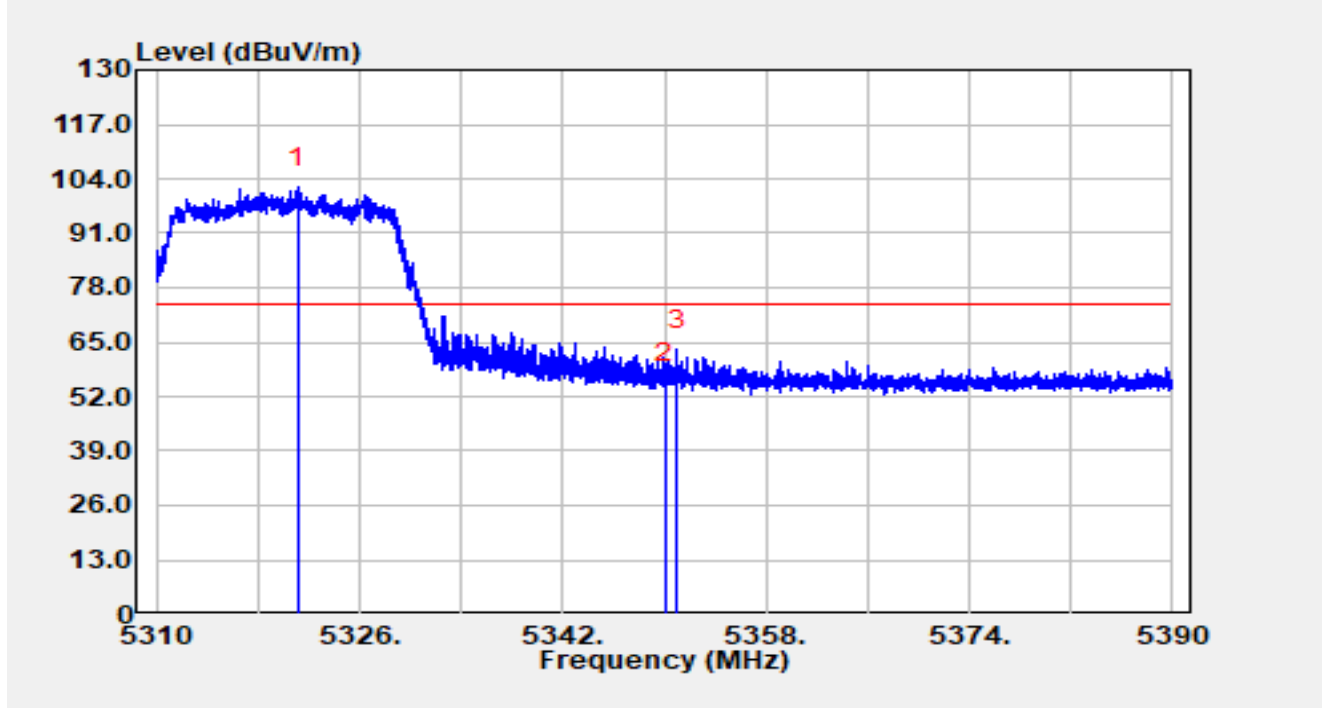


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5321.096	76.53	25.49	102.02	N/A	N/A	Peak
2		5350.000	29.55	25.74	55.28	-18.72	74.00	Peak
3	*	5350.952	37.38	25.73	63.10	-10.90	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

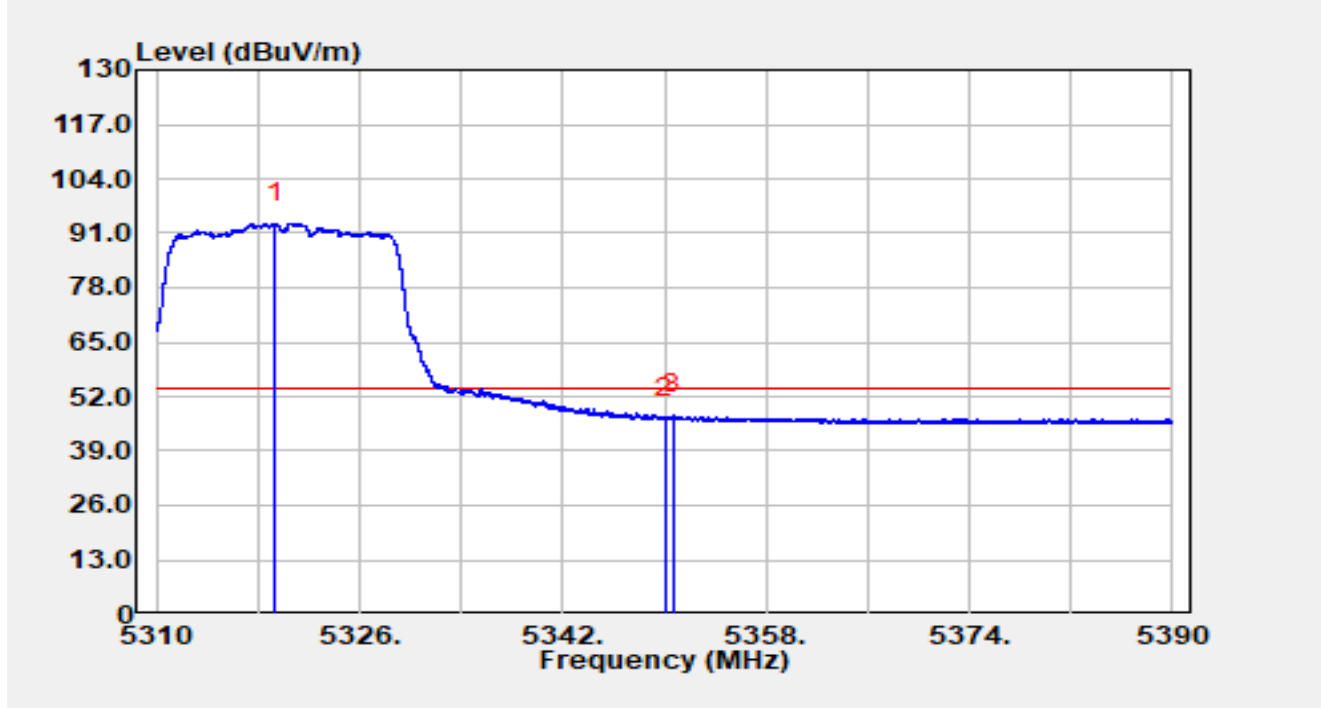


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.400	67.91	25.48	93.39	N/A	N/A	Average
2		5350.000	21.21	25.74	46.95	-7.05	54.00	Average
3	*	5350.696	22.06	25.73	47.79	-6.21	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

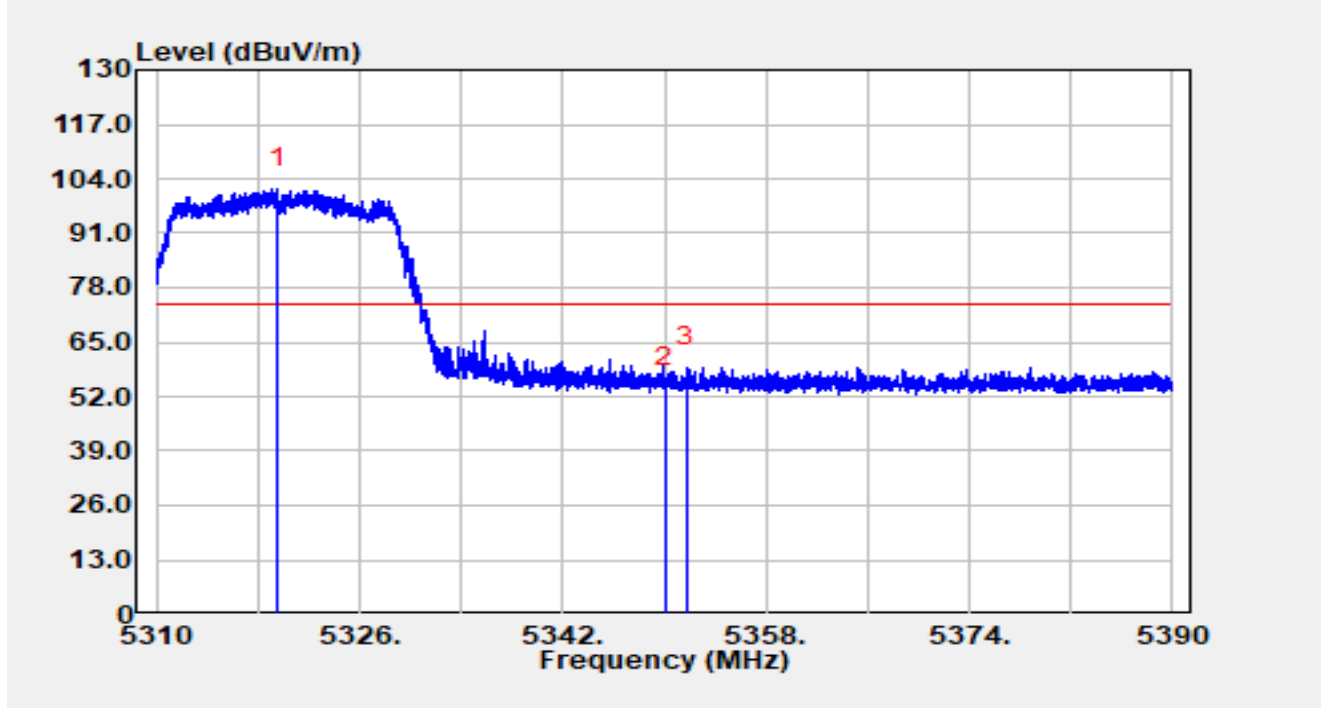


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.544	76.13	25.48	101.61	N/A	N/A	Peak
2		5350.000	28.70	25.74	54.44	-19.56	74.00	Peak
3	*	5351.720	33.18	25.72	58.89	-15.11	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5320MHz		

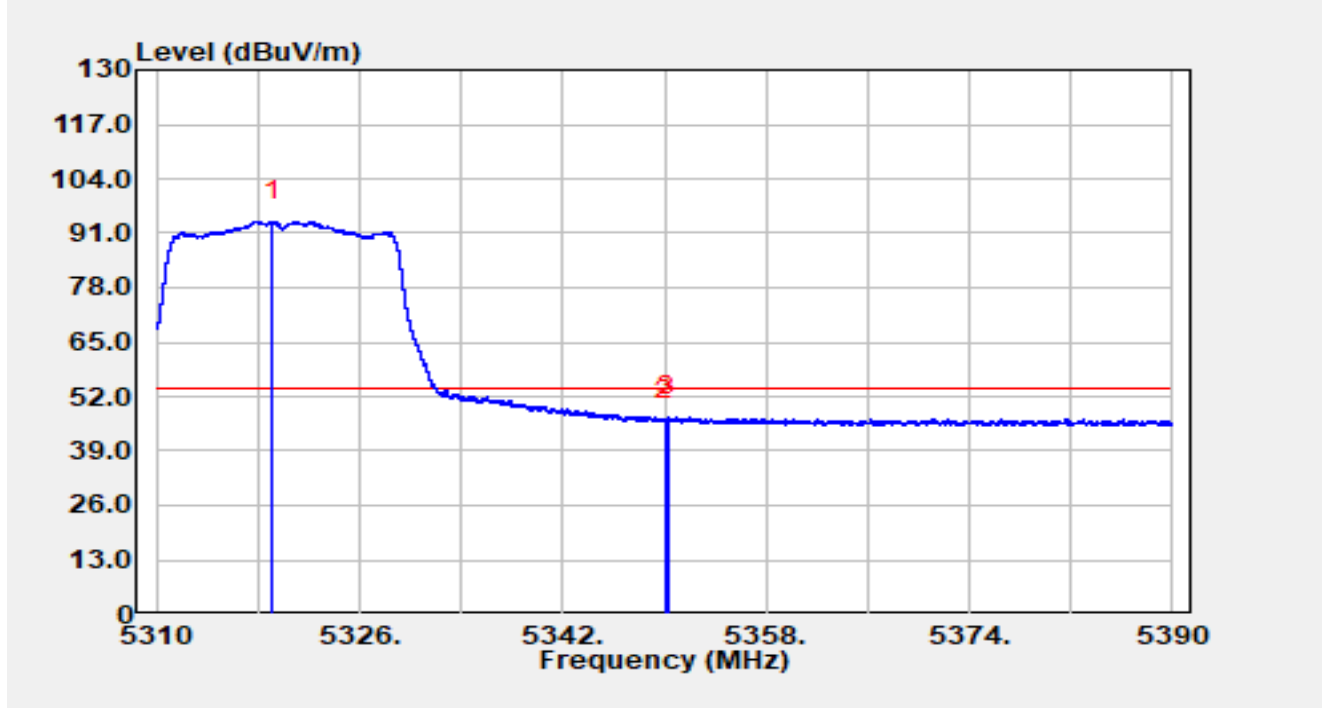


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.176	68.33	25.48	93.81	N/A	N/A	Average
2		5350.000	20.54	25.74	46.28	-7.72	54.00	Average
3	*	5350.280	21.37	25.74	47.10	-6.90	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

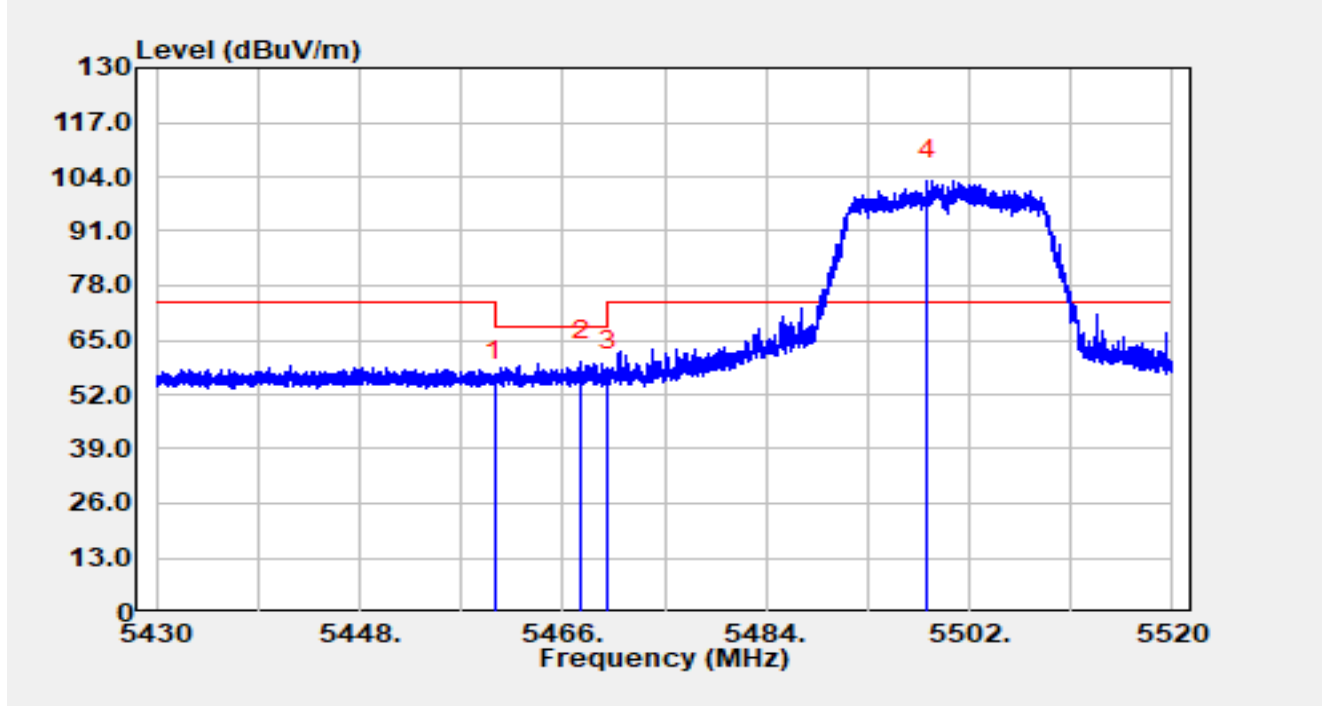


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	29.29	25.80	55.09	-13.11	68.20	Peak
2	*	5467.656	34.19	25.70	59.89	-8.31	68.20	Peak
3		5470.000	31.90	25.67	57.57	-10.63	68.20	Peak
4		5498.274	77.25	25.89	103.14	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

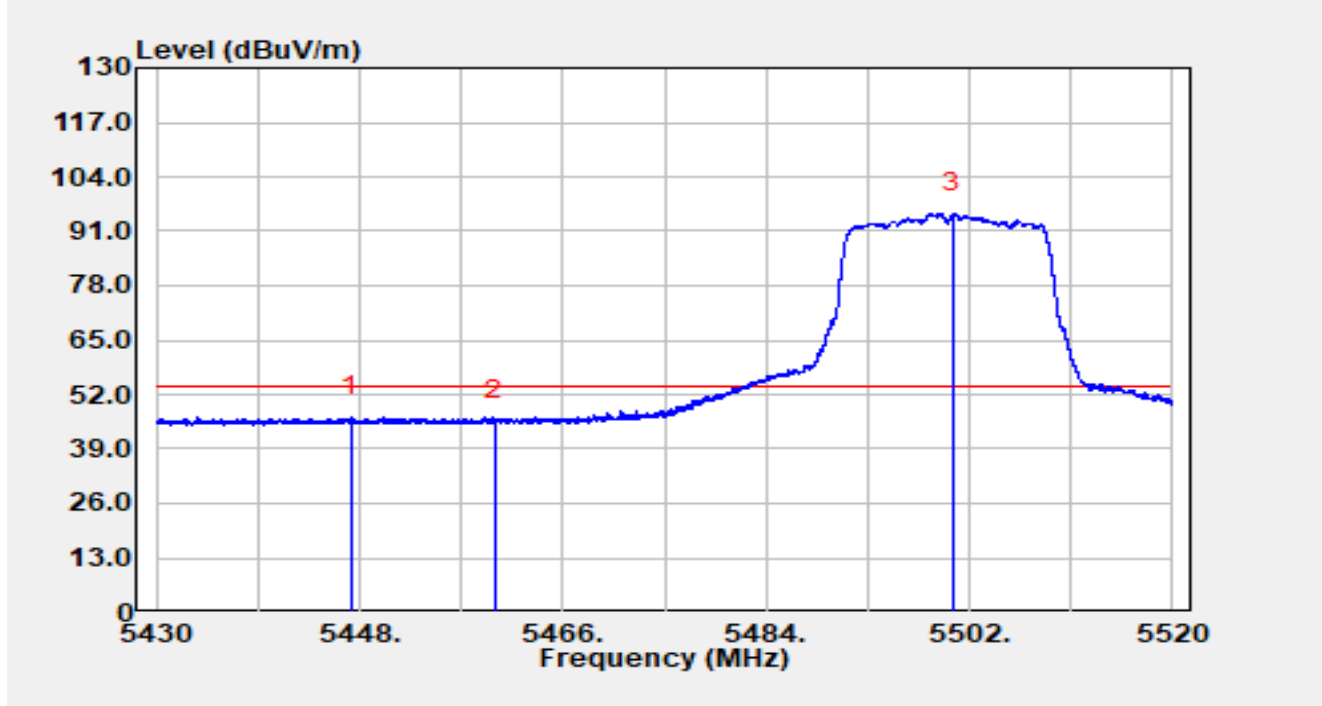


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5447.235	20.83	25.86	46.69	-7.31	54.00	Average
2		5460.000	19.83	25.80	45.63	-8.37	54.00	Average
3		5500.515	69.44	25.89	95.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

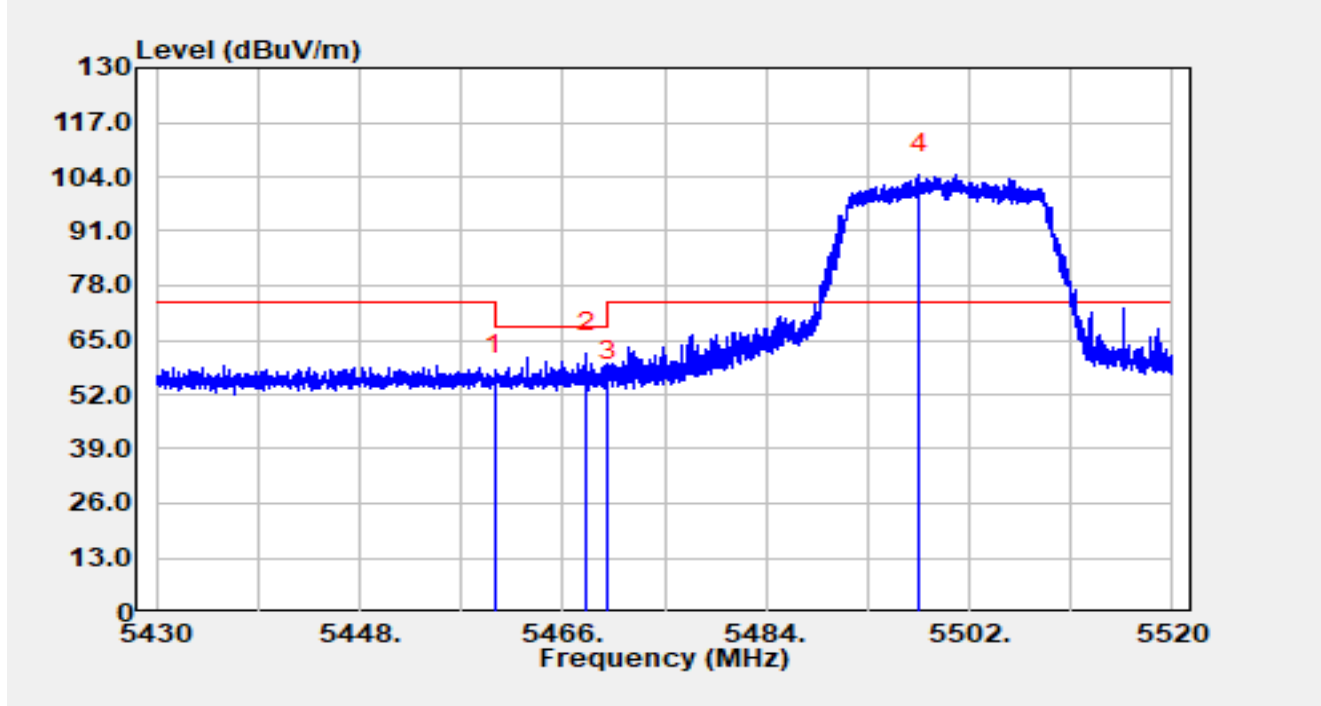


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	30.97	25.80	56.77	-11.43	68.20	Peak
2	*	5468.088	36.31	25.70	62.01	-6.19	68.20	Peak
3		5470.000	29.65	25.67	55.32	-12.88	68.20	Peak
4		5497.581	78.78	25.89	104.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

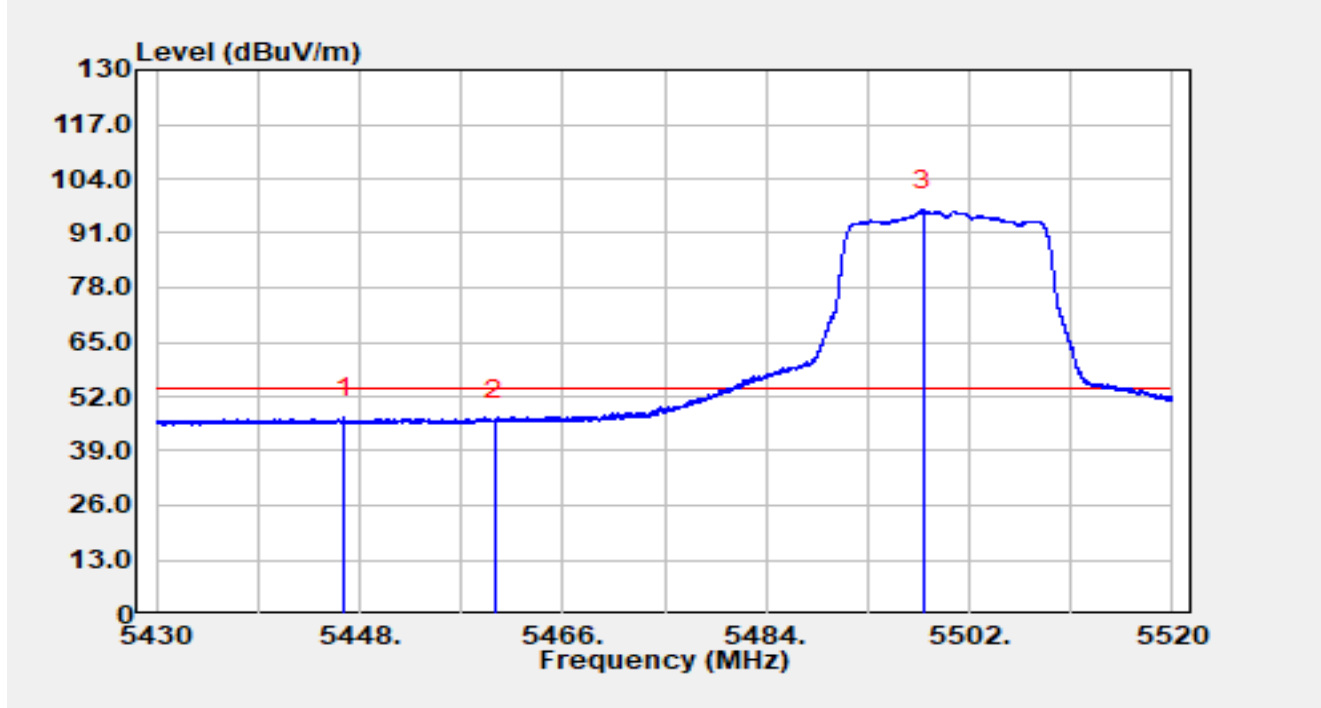


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5446.668	21.03	25.86	46.89	-7.11	54.00	Average
2		5460.000	20.49	25.80	46.29	-7.71	54.00	Average
3		5497.887	70.70	25.89	96.58	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

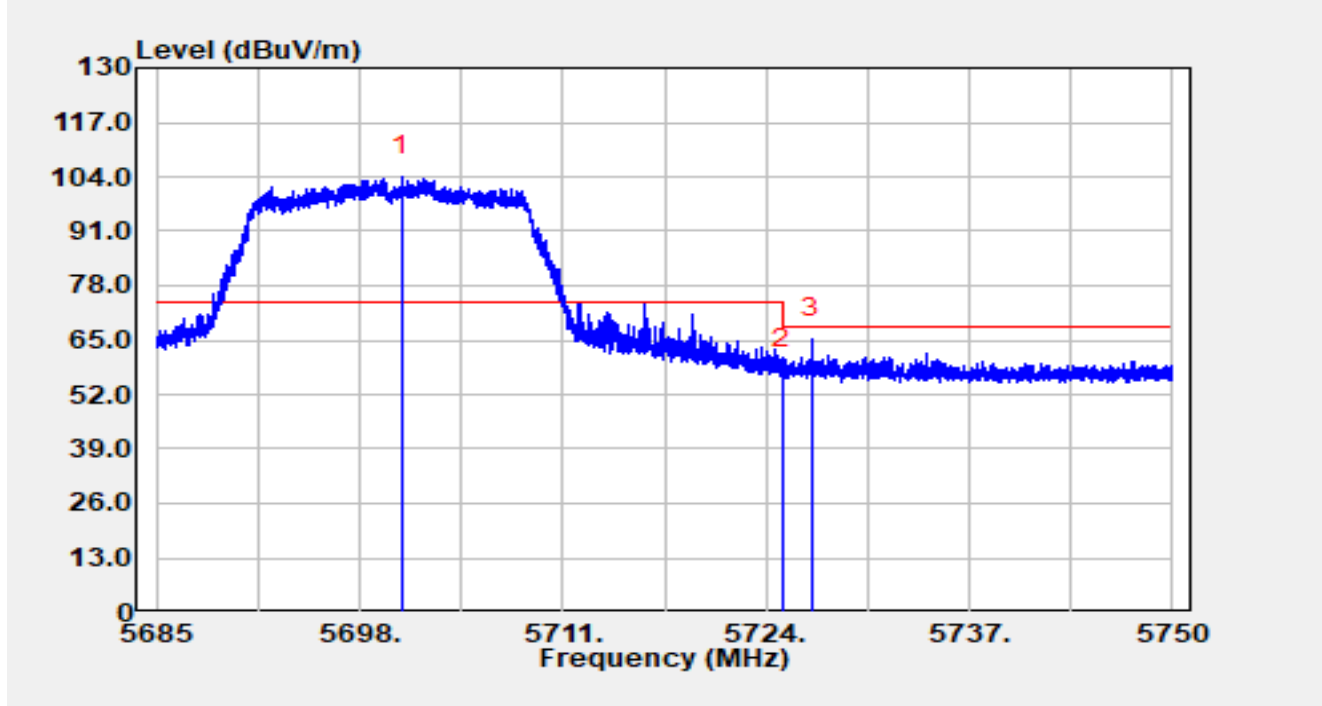


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5700.678	77.64	26.37	104.01	N/A	N/A	Peak
2		5725.000	31.46	26.52	57.99	-10.21	68.20	Peak
3	*	5726.925	38.95	26.52	65.46	-2.74	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

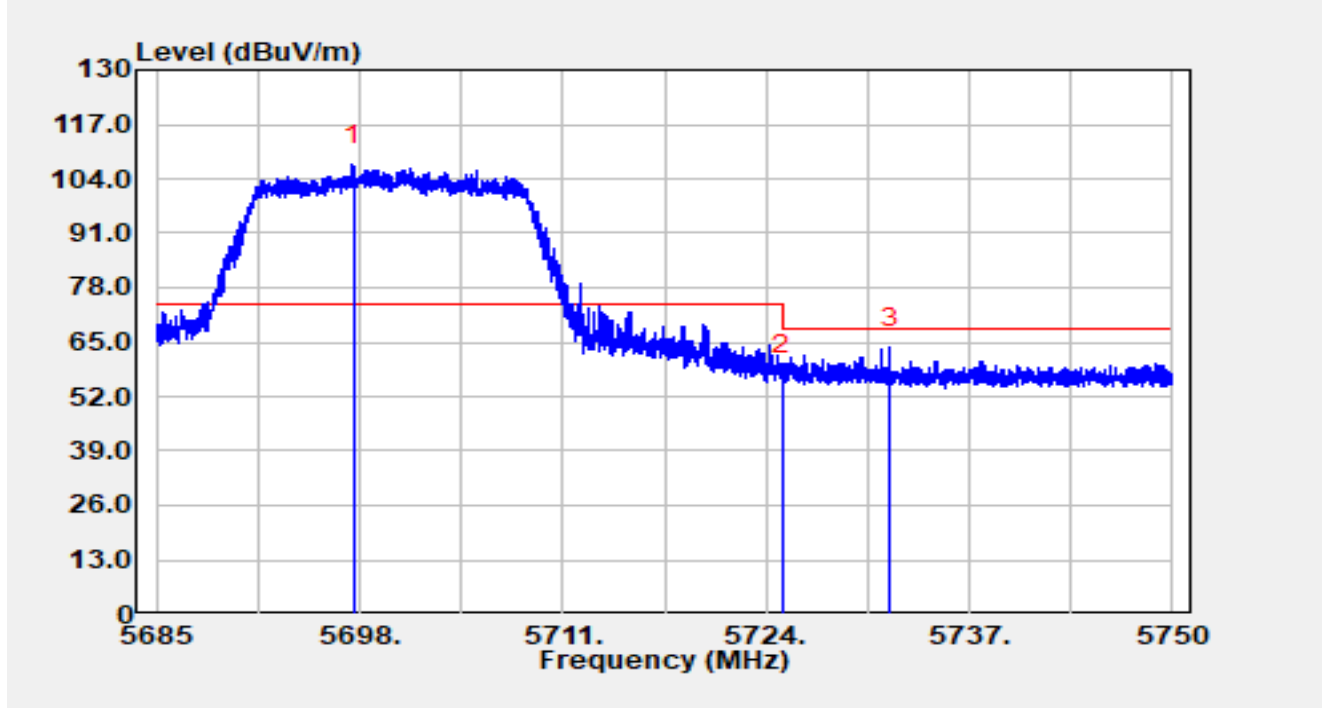


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5697.578	80.87	26.33	107.19	N/A	N/A	Peak
2		5725.000	30.43	26.52	56.95	-11.25	68.20	Peak
3	*	5731.917	37.18	26.50	63.68	-4.52	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

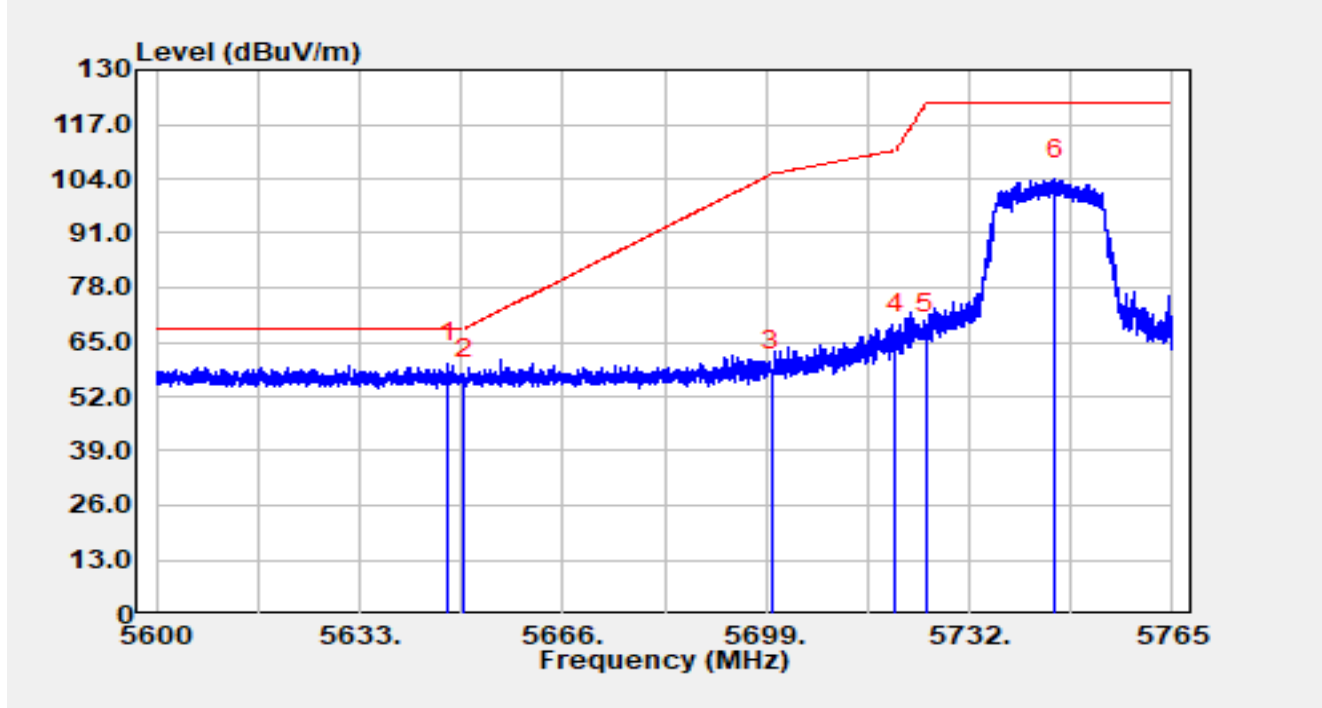


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.289	33.80	26.08	59.89	-8.31	68.20	Peak
2		5650.000	30.13	26.12	56.25	-11.95	68.20	Peak
3		5700.000	31.84	26.36	58.20	-47.00	105.20	Peak
4		5720.000	40.32	26.54	66.86	-43.94	110.80	Peak
5		5725.000	40.52	26.52	67.04	-55.16	122.20	Peak
6		5745.843	77.27	26.50	103.77	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

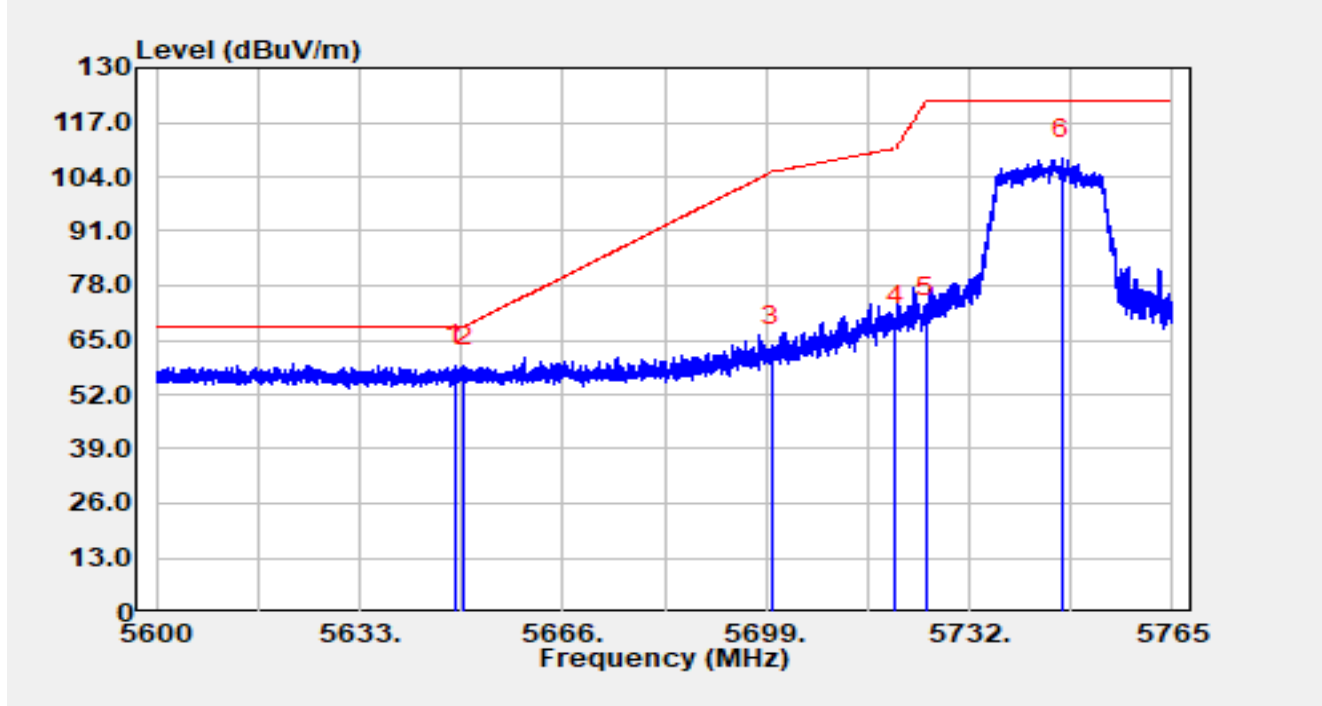


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.444	32.94	26.10	59.04	-9.16	68.20	Peak
2		5650.000	32.61	26.12	58.73	-9.47	68.20	Peak
3		5700.000	37.24	26.36	63.60	-41.60	105.20	Peak
4		5720.000	41.72	26.54	68.27	-42.53	110.80	Peak
5		5725.000	44.11	26.52	70.63	-51.57	122.20	Peak
6		5746.949	81.76	26.49	108.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

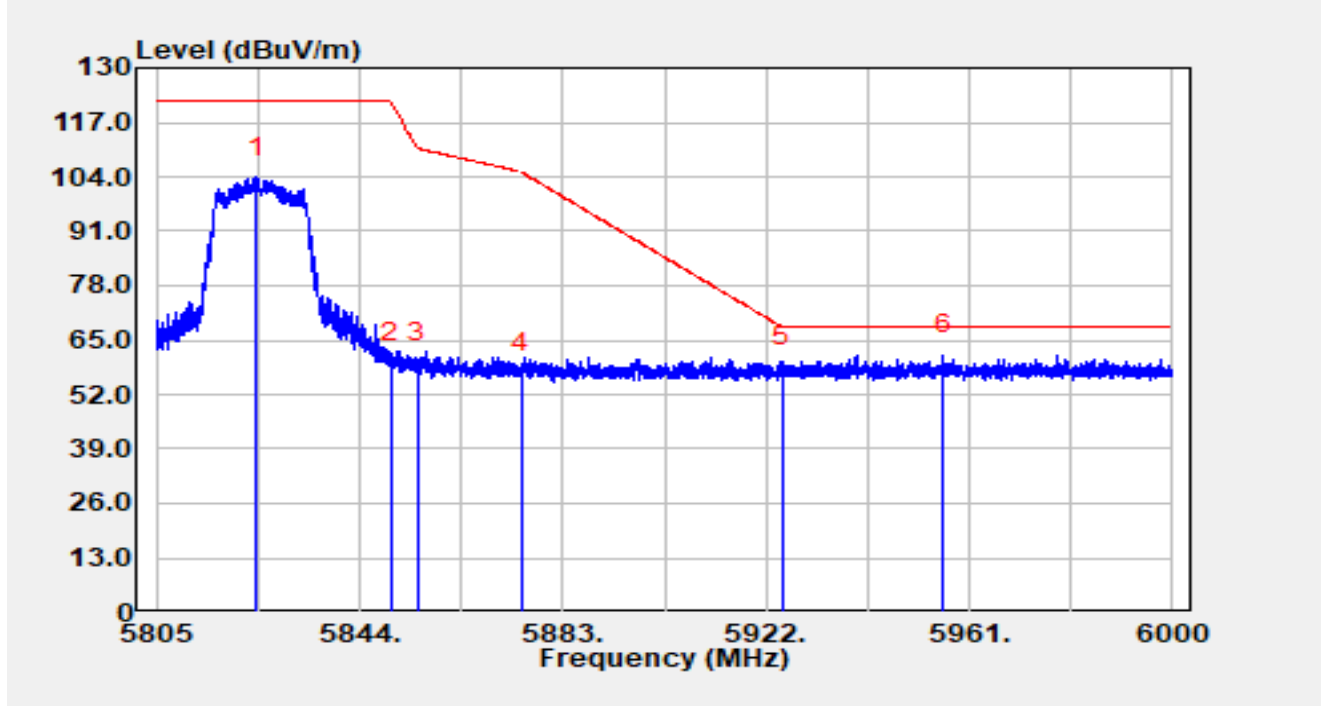


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5824.325	76.76	27.18	103.94	N/A	N/A	Peak
2		5850.000	32.57	27.08	59.65	-62.55	122.20	Peak
3		5855.000	32.58	27.12	59.70	-51.10	110.80	Peak
4		5875.000	29.53	27.51	57.04	-48.16	105.20	Peak
5		5925.000	30.98	27.73	58.71	-9.49	68.20	Peak
6	*	5955.950	33.83	27.67	61.50	-6.70	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

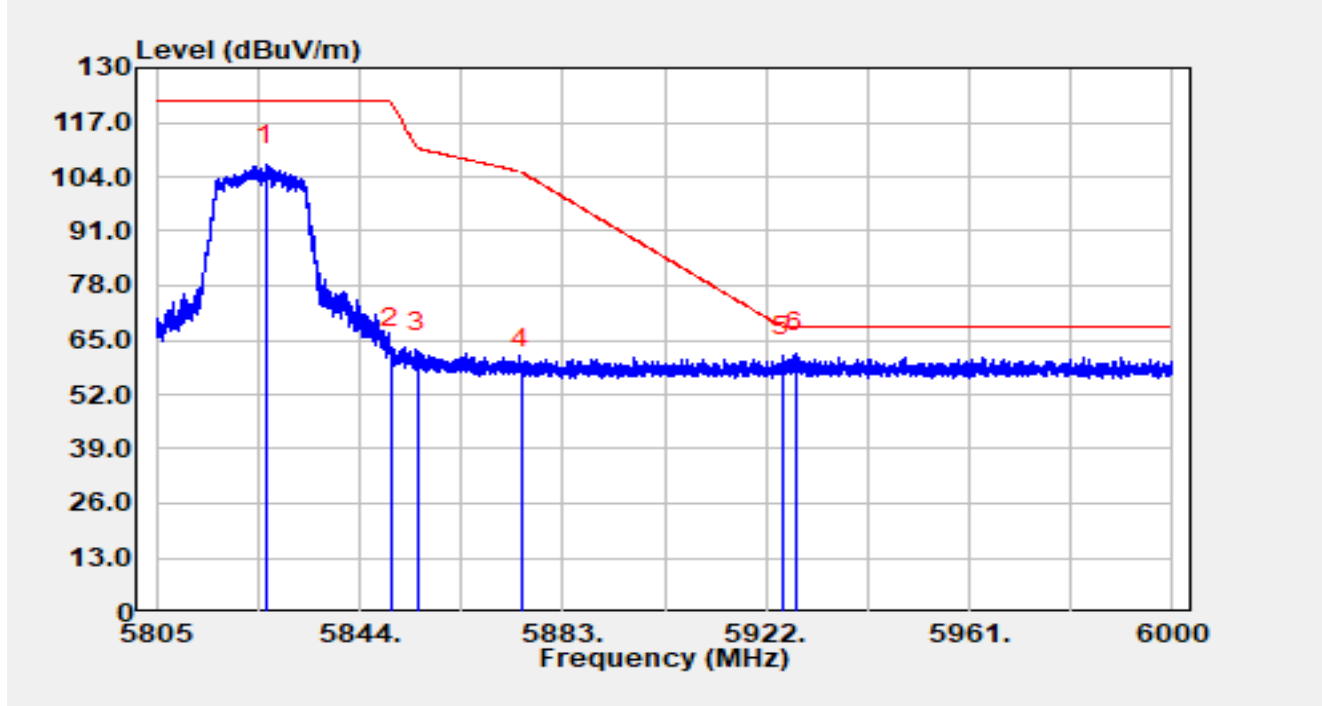


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.080	79.56	27.16	106.72	N/A	N/A	Peak
2		5850.000	36.11	27.08	63.19	-59.01	122.20	Peak
3		5855.000	35.14	27.12	62.26	-48.54	110.80	Peak
4		5875.000	30.80	27.51	58.31	-46.89	105.20	Peak
5		5925.000	33.38	27.73	61.10	-7.10	68.20	Peak
6	*	5927.558	34.11	27.73	61.84	-6.36	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

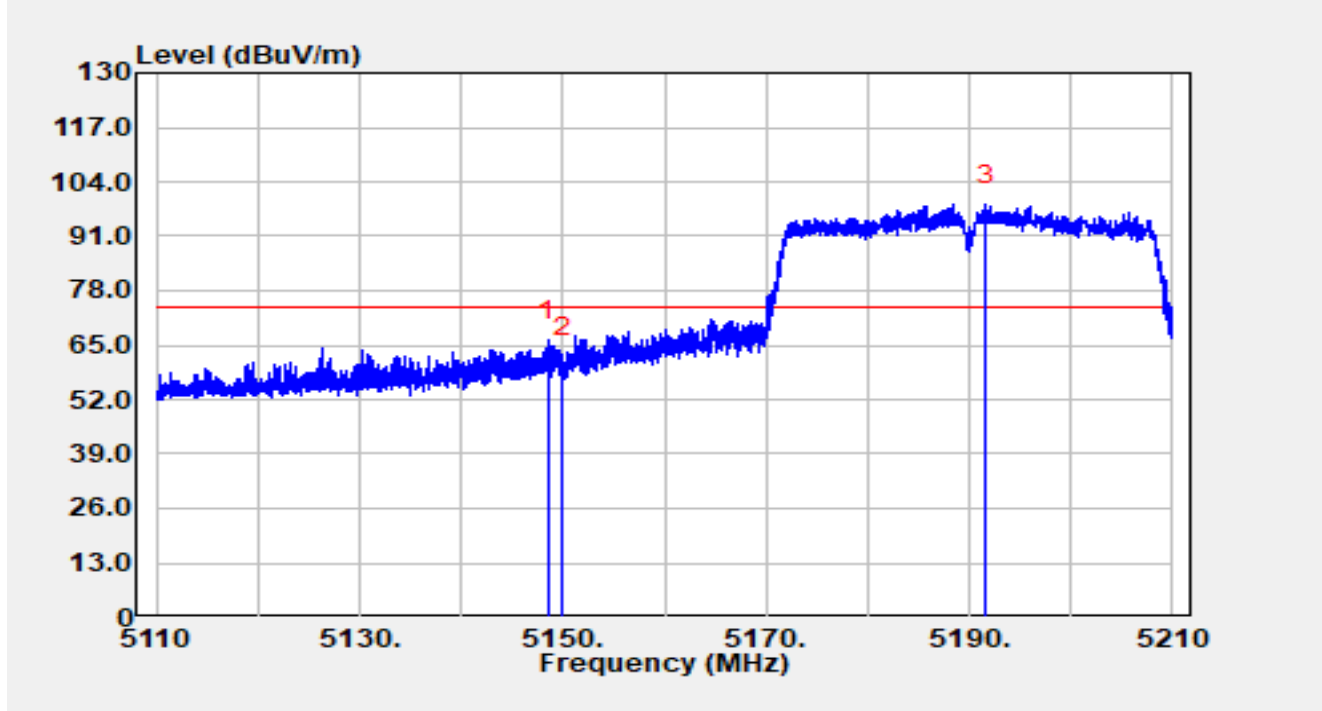


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.520	41.08	24.95	66.03	-7.97	74.00	Peak
2		5150.000	37.19	24.93	62.12	-11.88	74.00	Peak
3		5191.640	73.31	25.24	98.54	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

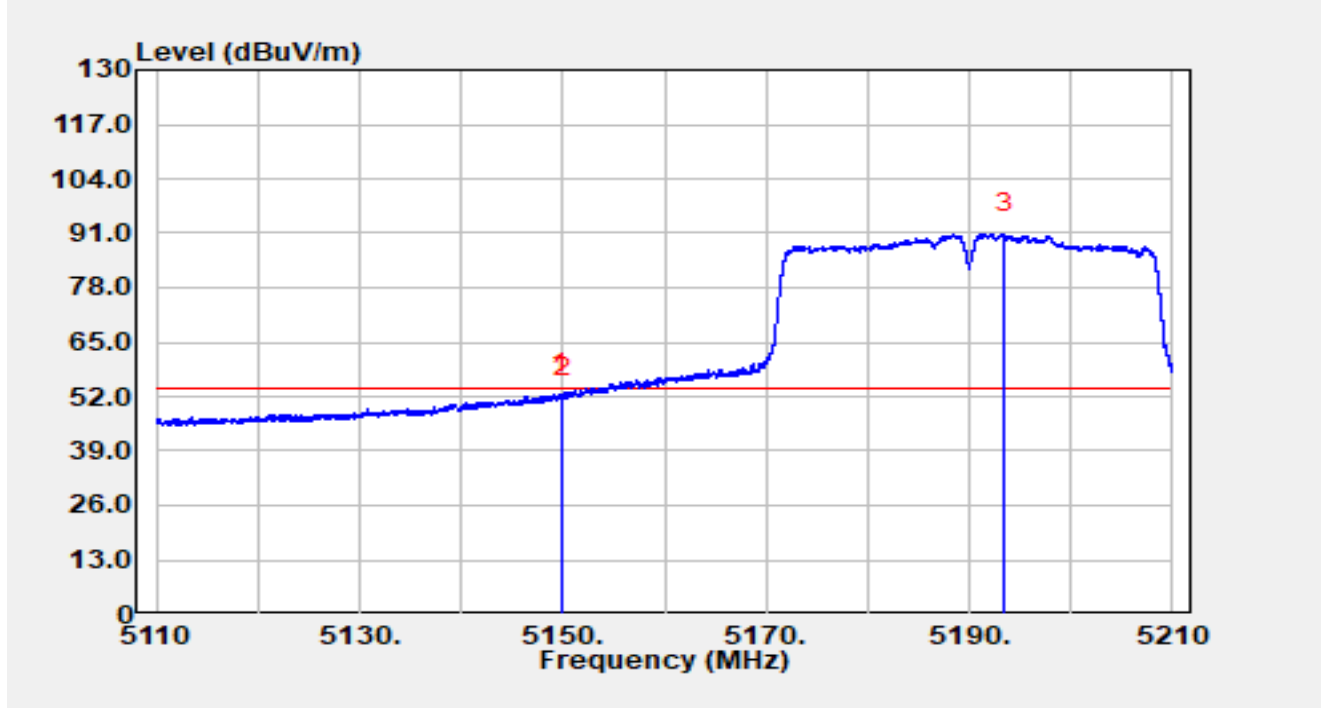


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.810	27.80	24.94	52.73	-1.27	54.00	Average
2		5150.000	26.97	24.93	51.90	-2.10	54.00	Average
3		5193.460	65.67	25.22	90.88	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

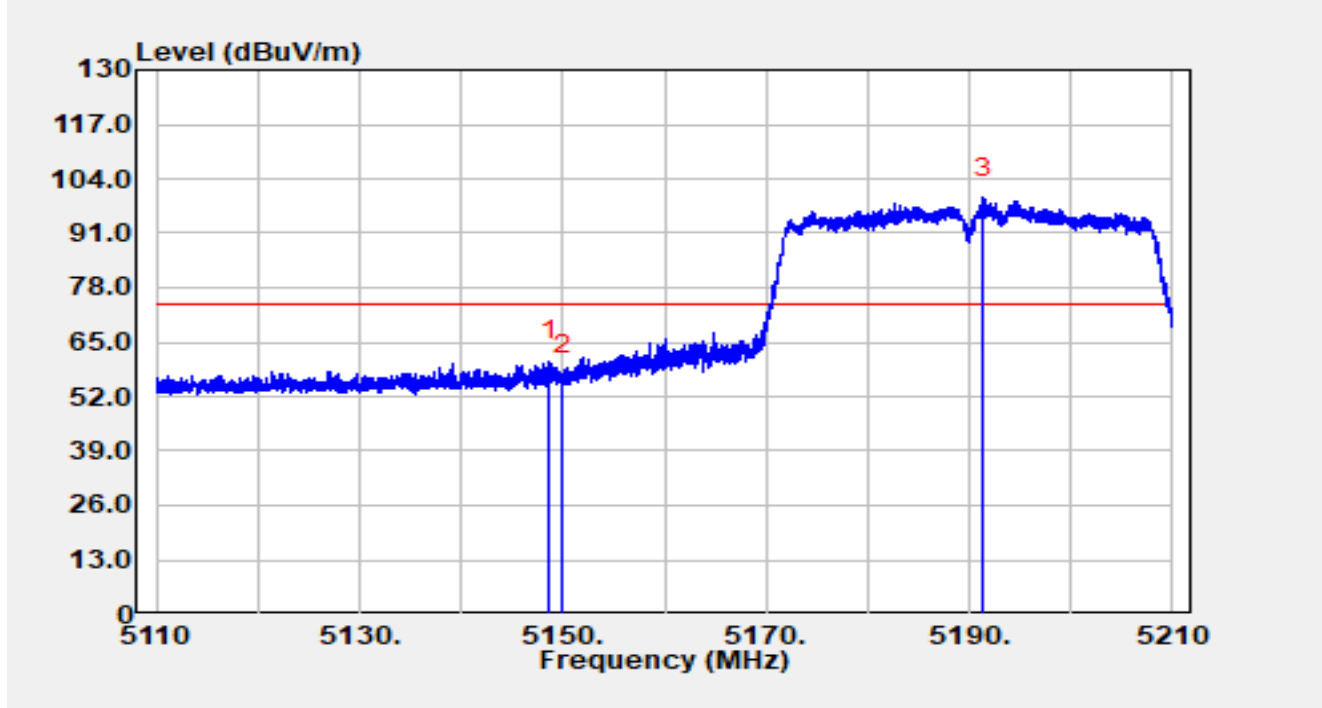


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.720	35.43	24.94	60.37	-13.63	74.00	Peak
2		5150.000	32.16	24.93	57.09	-16.91	74.00	Peak
3		5191.430	74.17	25.24	99.41	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5190MHz		

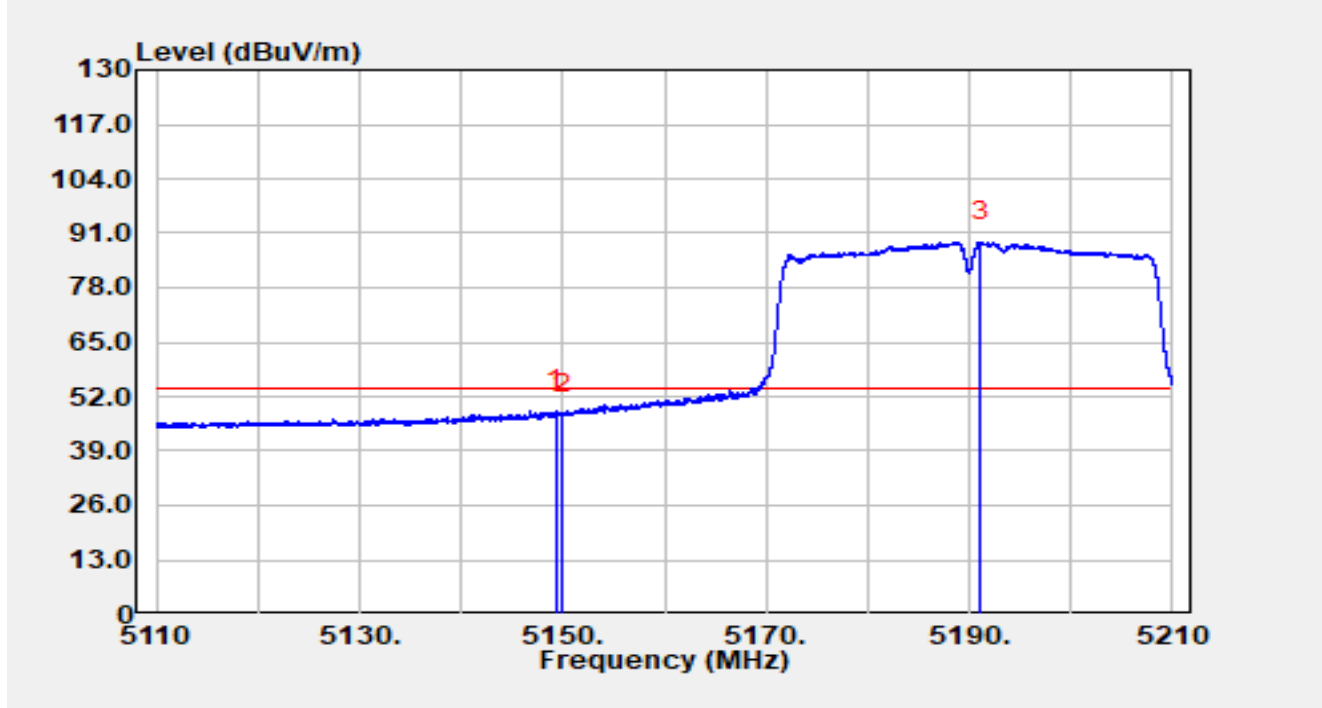


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.330	23.81	24.94	48.75	-5.25	54.00	Average
2		5150.000	22.82	24.93	47.75	-6.25	54.00	Average
3		5191.130	63.79	25.24	89.03	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

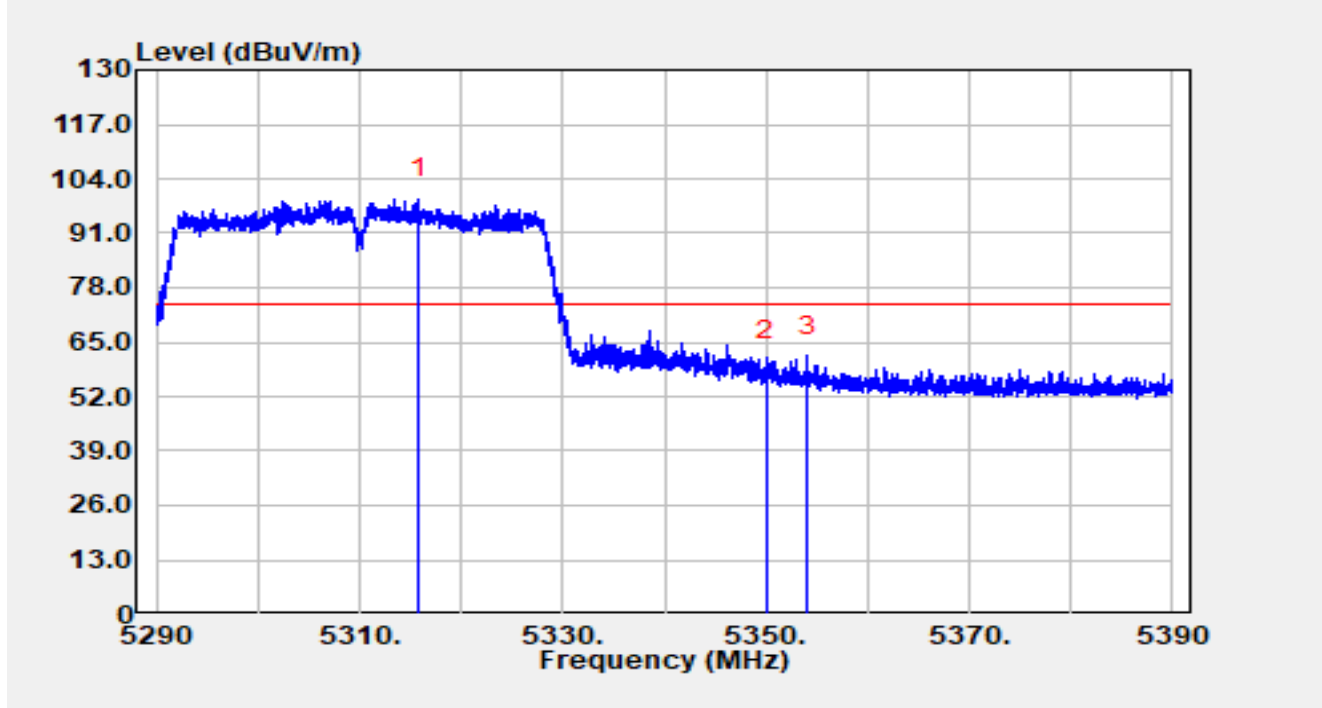


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5315.860	73.88	25.46	99.34	N/A	N/A	Peak
2		5350.000	34.70	25.74	60.44	-13.56	74.00	Peak
3	*	5354.060	35.96	25.69	61.64	-12.36	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

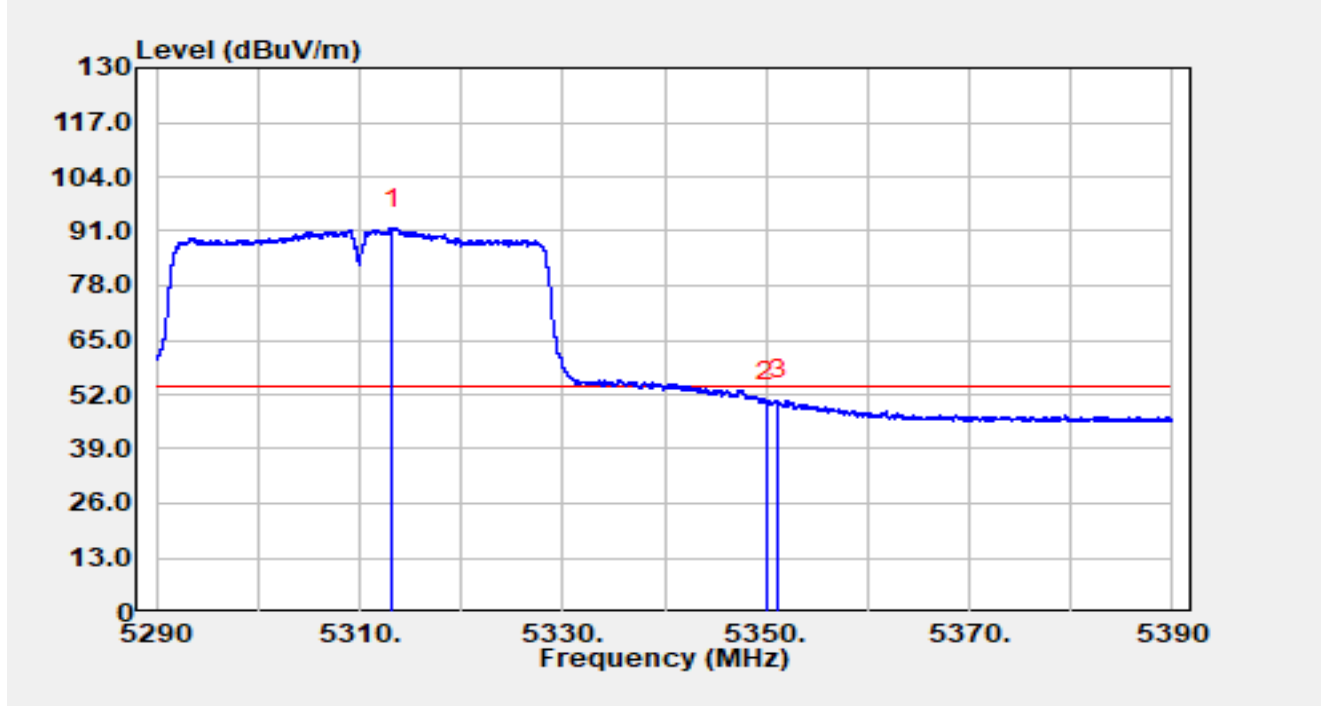


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.200	66.25	25.44	91.70	N/A	N/A	Average
2		5350.000	24.73	25.74	50.47	-3.53	54.00	Average
3	*	5351.150	24.95	25.72	50.67	-3.33	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

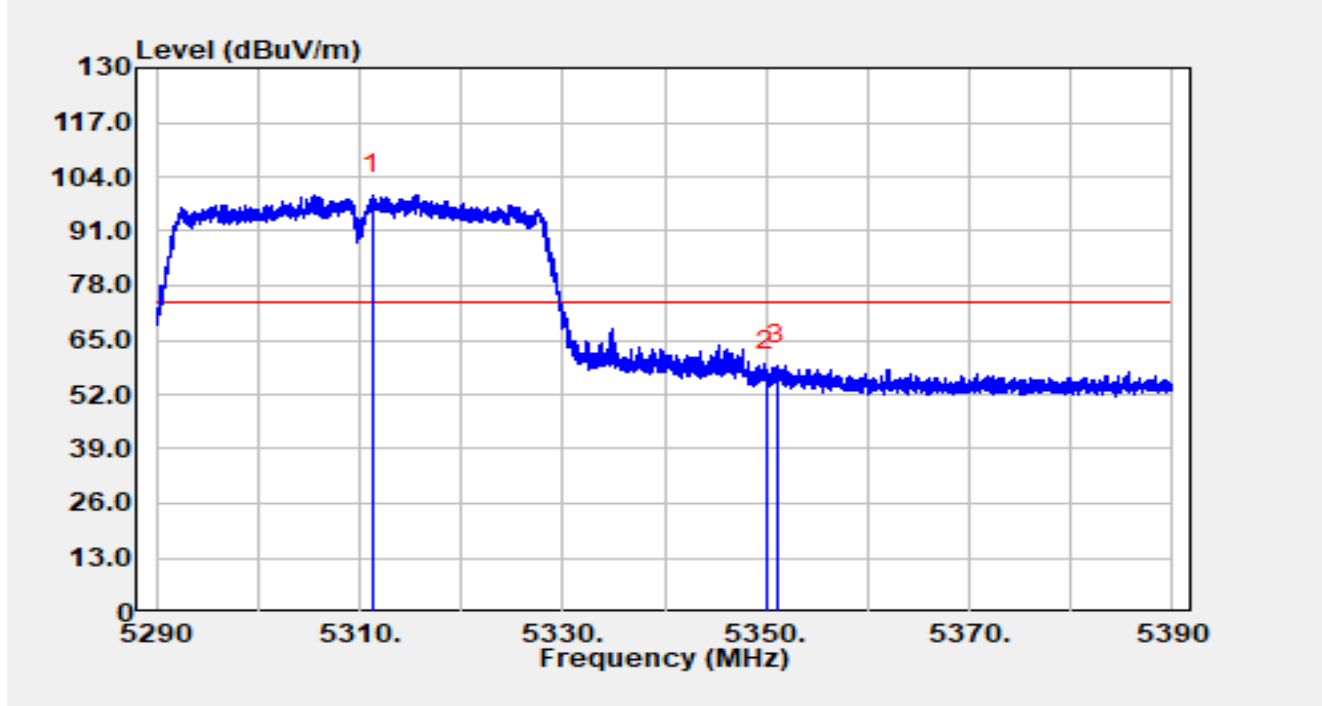


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.260	74.30	25.45	99.75	N/A	N/A	Peak
2		5350.000	31.86	25.74	57.60	-16.40	74.00	Peak
3	*	5351.080	33.32	25.72	59.05	-14.95	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5310MHz		

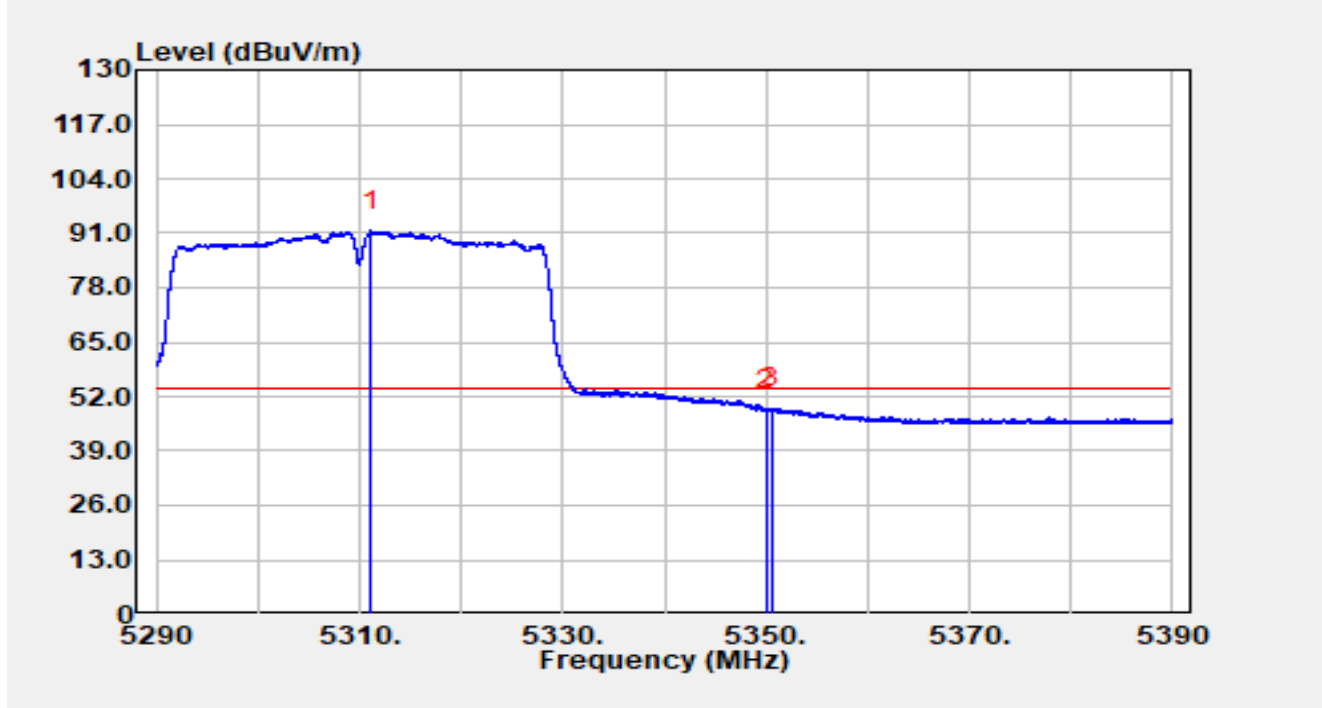


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.160	66.17	25.45	91.62	N/A	N/A	Average
2		5350.000	23.28	25.74	49.02	-4.98	54.00	Average
3	*	5350.590	23.55	25.73	49.28	-4.72	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

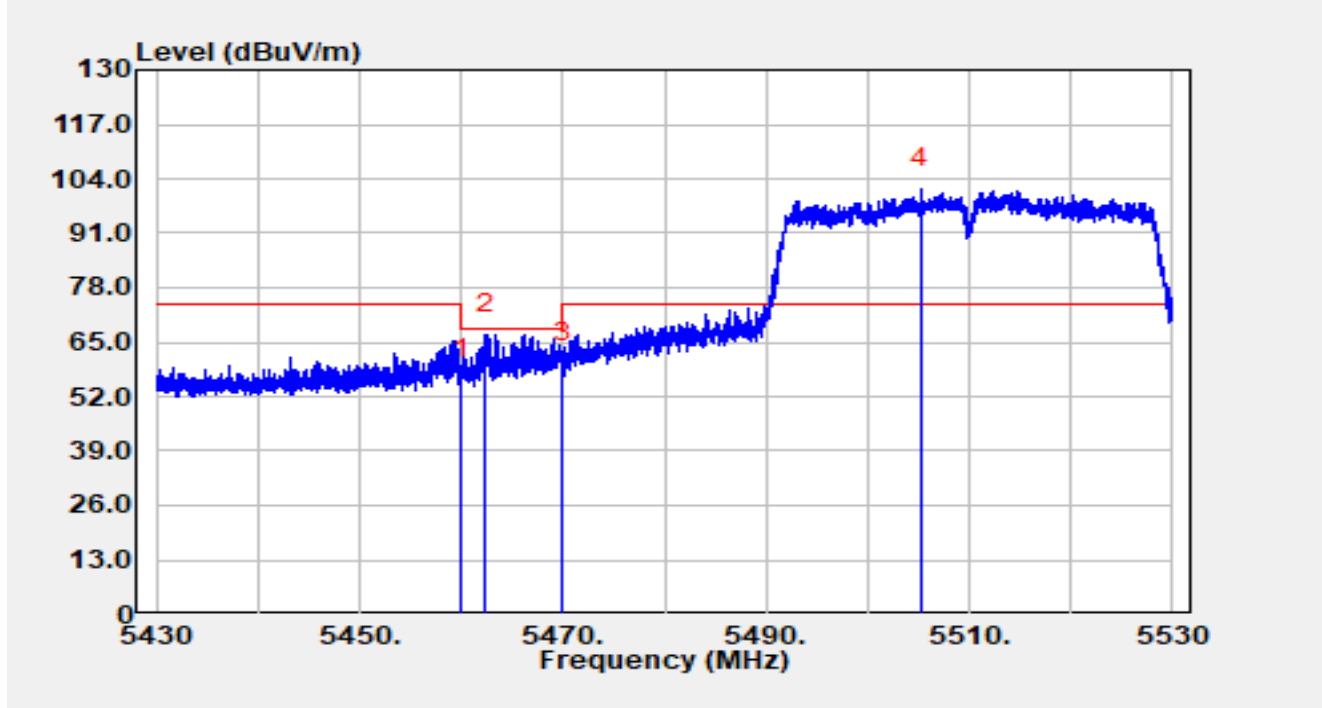


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	30.55	25.80	56.35	-11.85	68.20	Peak
2	*	5462.390	41.04	25.77	66.81	-1.39	68.20	Peak
3		5470.000	34.55	25.67	60.23	-7.97	68.20	Peak
4		5505.190	75.81	25.90	101.71	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

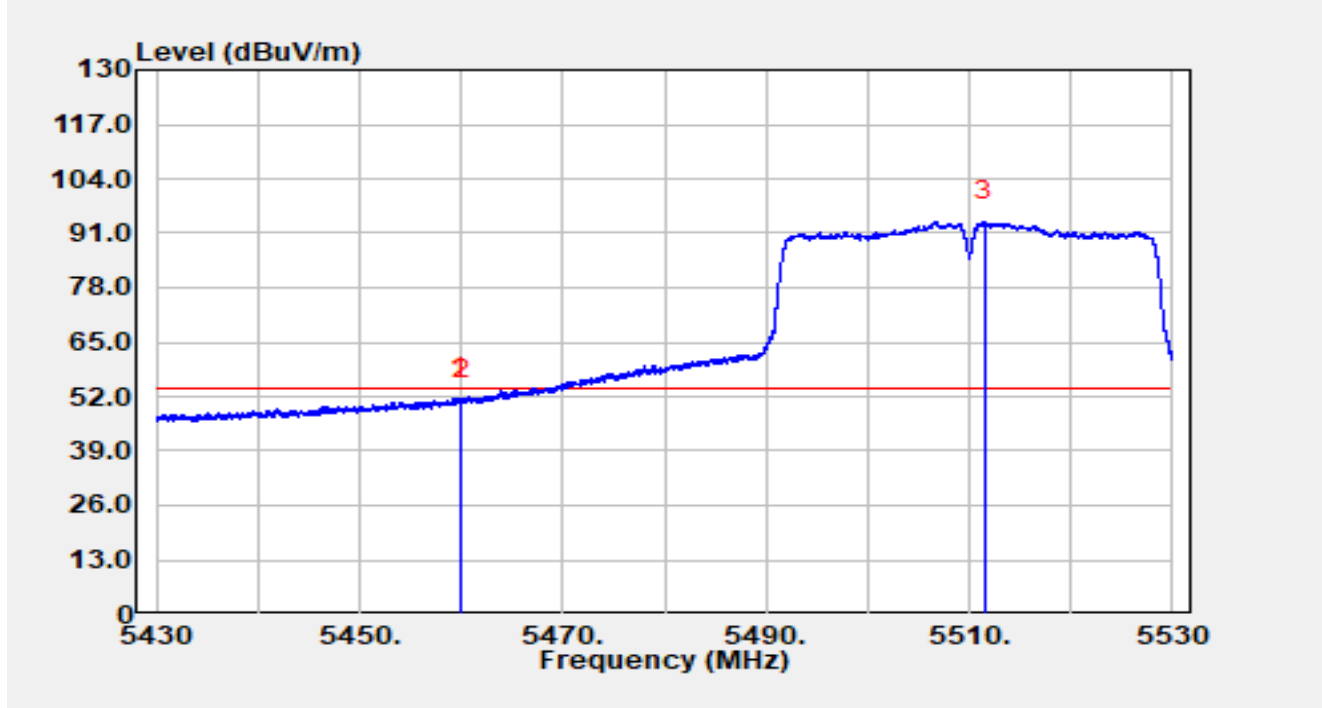


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.900	25.95	25.80	51.75	-2.25	54.00	Average
2		5460.000	25.52	25.80	51.32	-2.68	54.00	Average
3		5511.530	67.98	25.81	93.79	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

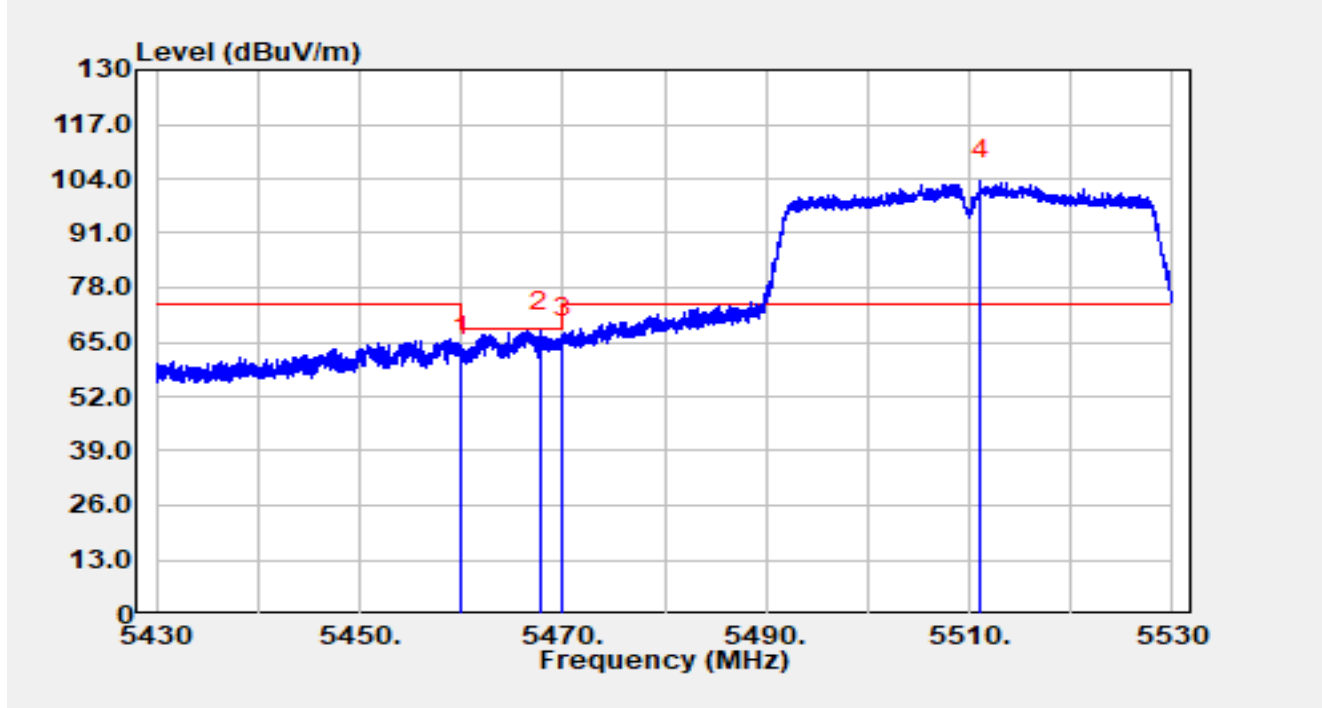


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	35.74	25.80	61.53	-6.67	68.20	Peak
2	*	5467.720	41.95	25.70	67.65	-0.55	68.20	Peak
3		5470.000	40.49	25.67	66.17	-2.03	68.20	Peak
4		5511.090	77.80	25.81	103.61	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

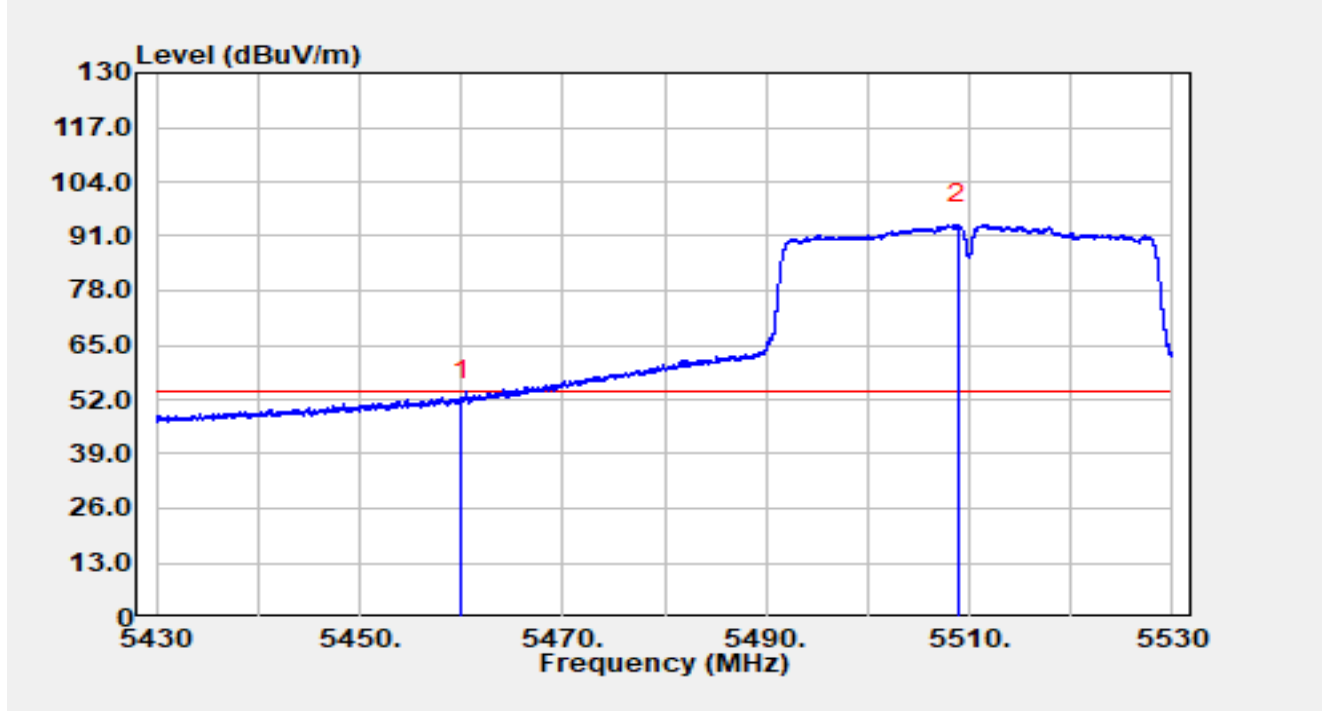


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	26.00	25.80	51.79	-2.21	54.00	Average
2		5508.830	67.88	25.85	93.73	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

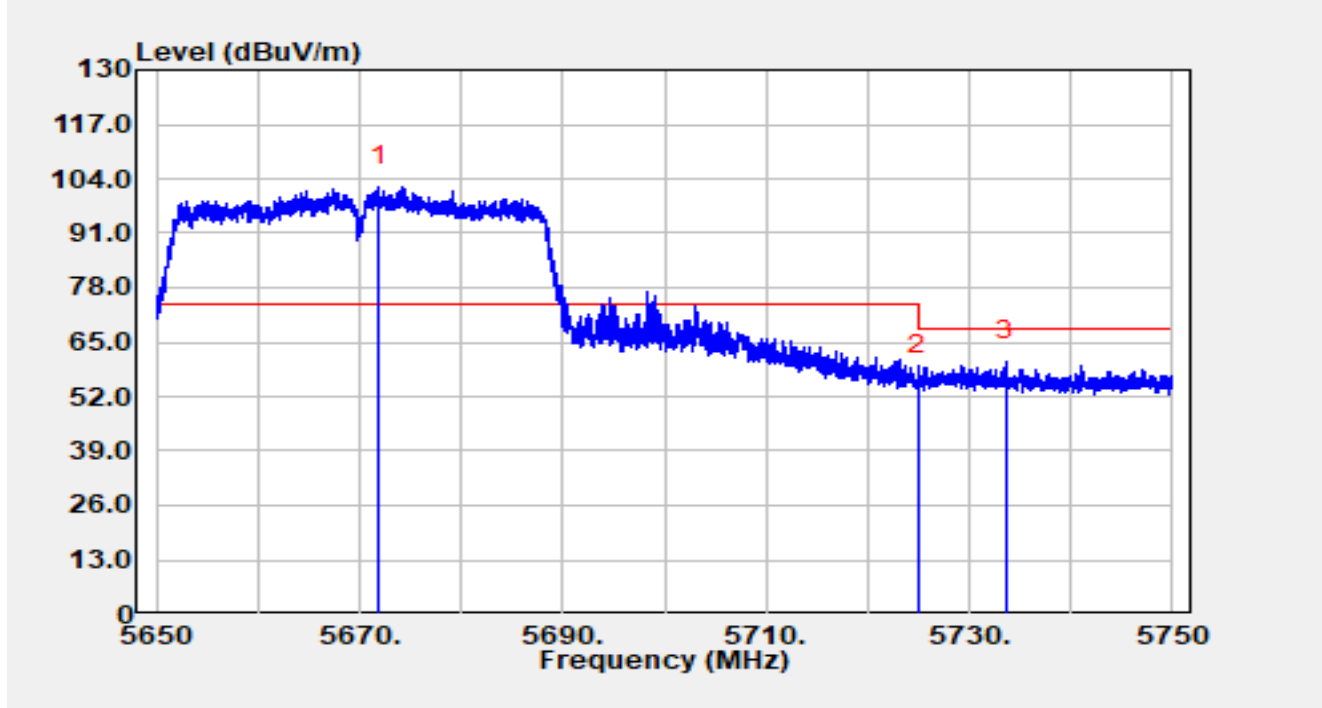


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5671.900	75.96	26.21	102.17	N/A	N/A	Peak
2		5725.000	30.59	26.52	57.11	-11.09	68.20	Peak
3	*	5733.570	34.02	26.50	60.53	-7.67	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

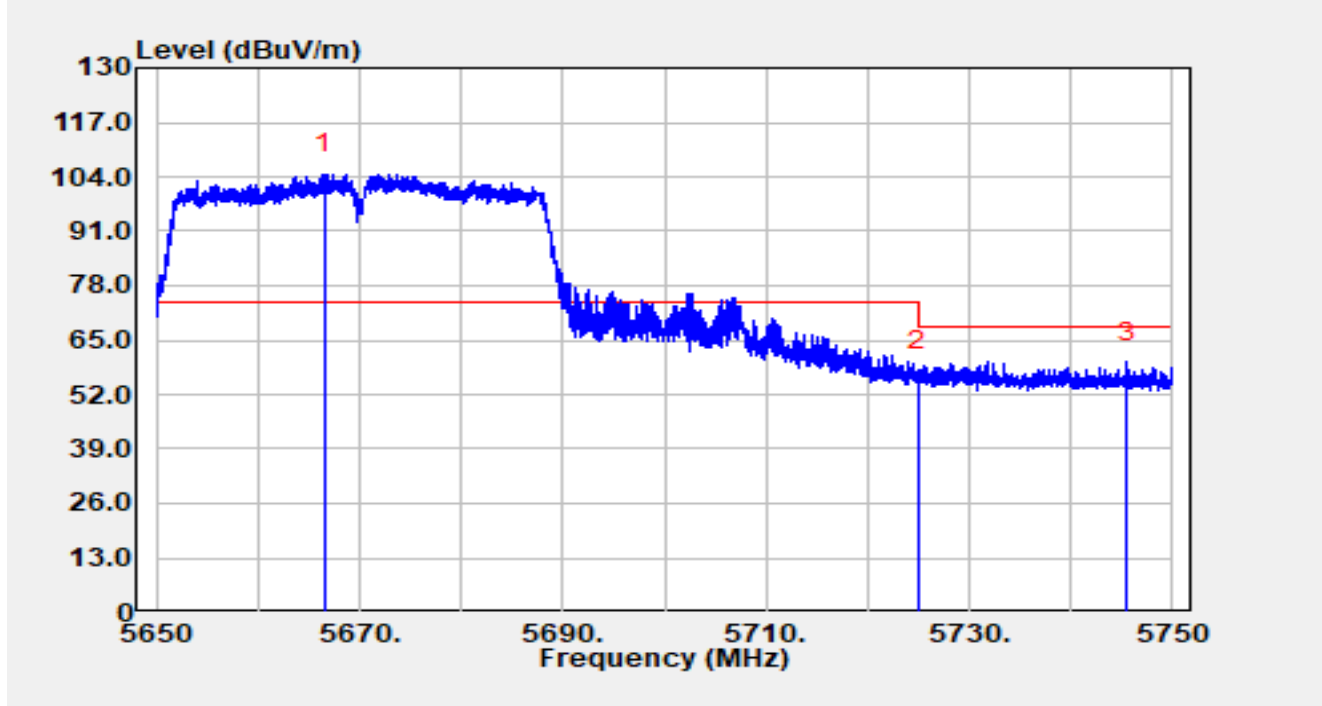


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5666.580	78.42	26.27	104.69	N/A	N/A	Peak
2		5725.000	31.03	26.52	57.55	-10.65	68.20	Peak
3	*	5745.480	33.30	26.50	59.80	-8.40	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

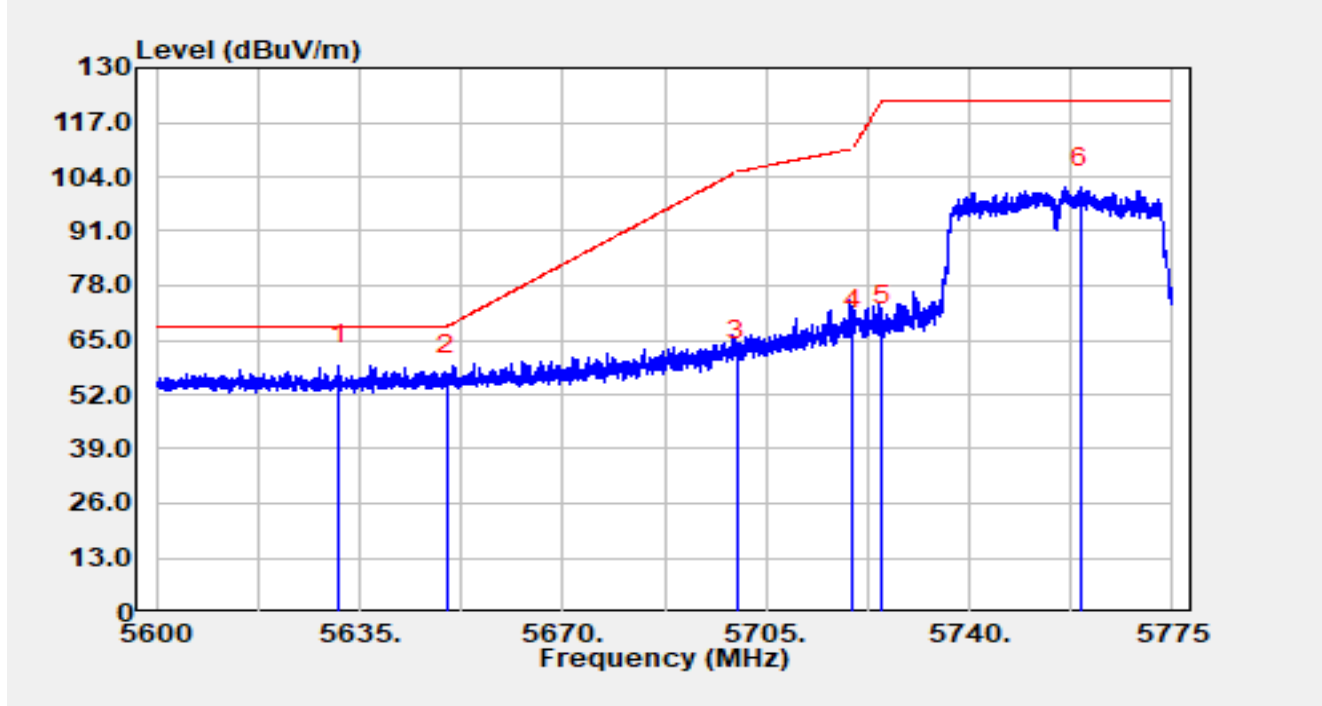


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5631.395	33.17	25.89	59.06	-9.14	68.20	Peak
2		5650.000	30.39	26.12	56.51	-11.69	68.20	Peak
3		5700.000	33.79	26.36	60.15	-45.05	105.20	Peak
4		5720.000	41.02	26.54	67.56	-43.24	110.80	Peak
5		5725.000	41.83	26.52	68.36	-53.84	122.20	Peak
6		5759.058	74.88	26.66	101.55	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

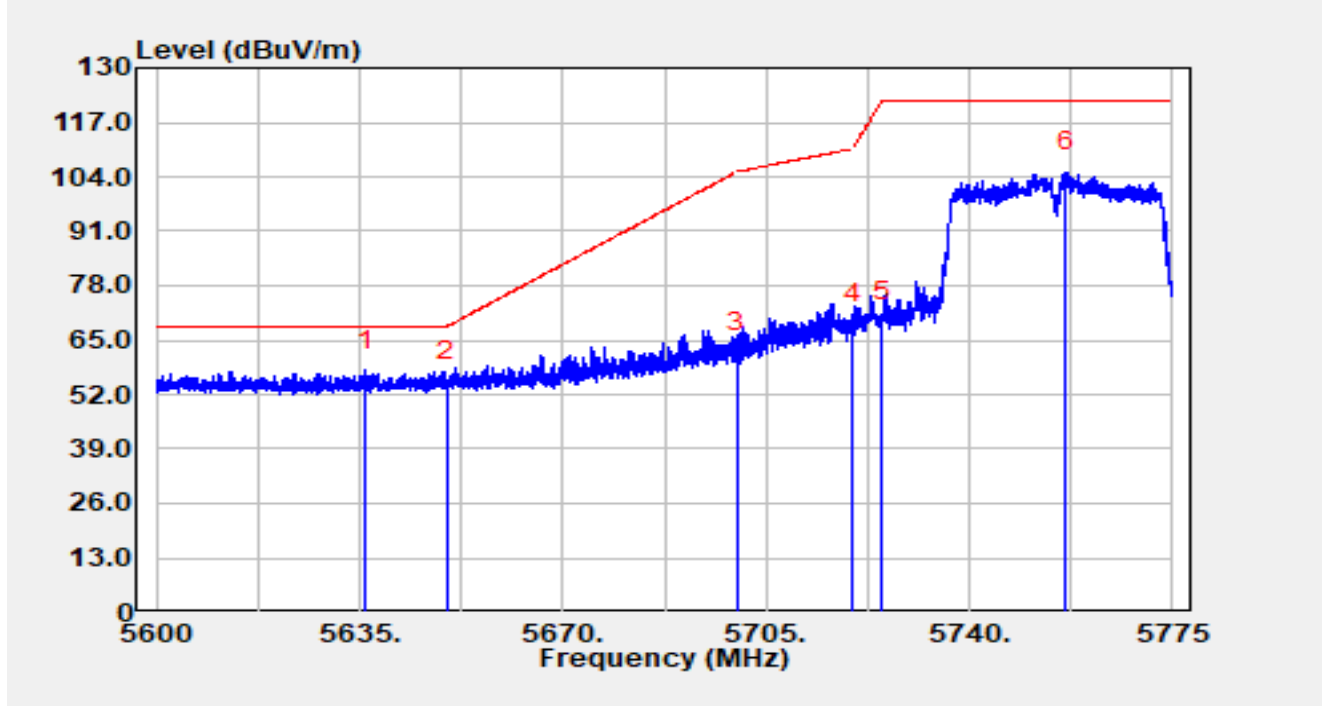


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5636.067	31.90	25.95	57.84	-10.36	68.20	Peak
2		5650.000	29.15	26.12	55.27	-12.93	68.20	Peak
3		5700.000	35.87	26.36	62.23	-42.97	105.20	Peak
4		5720.000	42.48	26.54	69.02	-41.78	110.80	Peak
5		5725.000	42.70	26.52	69.23	-52.97	122.20	Peak
6		5756.538	78.59	26.61	105.20	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

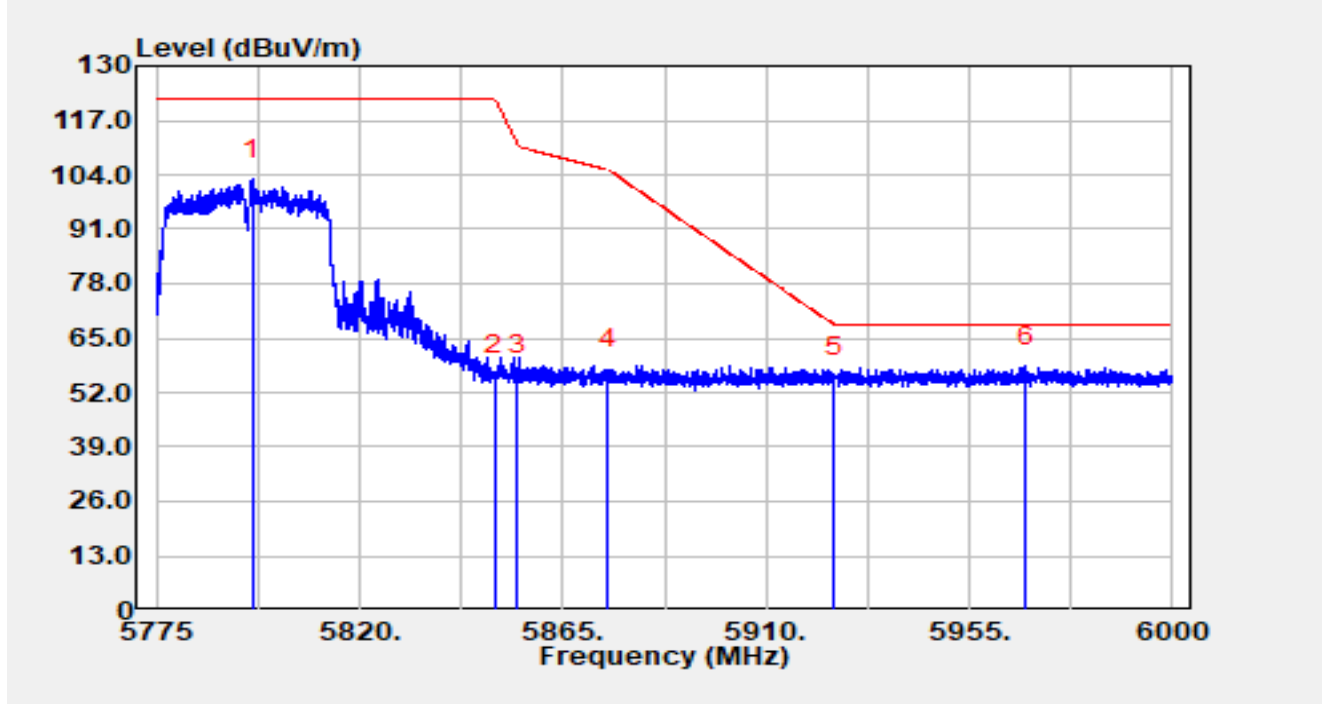


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.353	76.19	26.81	103.00	N/A	N/A	Peak
2		5850.000	29.05	27.08	56.13	-66.07	122.20	Peak
3		5855.000	29.05	27.12	56.17	-54.63	110.80	Peak
4		5875.000	29.98	27.51	57.49	-47.71	105.20	Peak
5		5925.000	28.12	27.73	55.84	-12.36	68.20	Peak
6	*	5967.578	30.51	27.74	58.25	-9.95	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

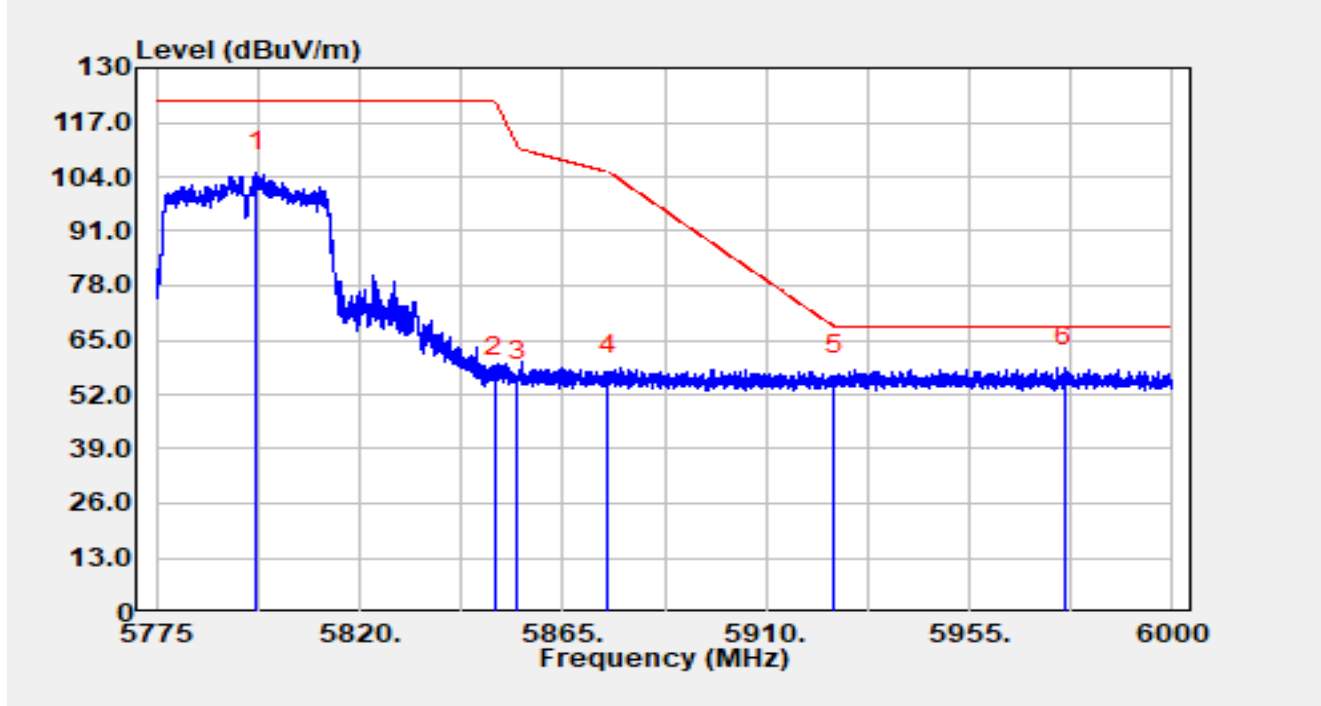


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5797.275	78.30	26.83	105.13	N/A	N/A	Peak
2		5850.000	28.89	27.08	55.97	-66.23	122.20	Peak
3		5855.000	27.84	27.12	54.96	-55.84	110.80	Peak
4		5875.000	29.26	27.51	56.77	-48.43	105.20	Peak
5		5925.000	28.90	27.73	56.63	-11.57	68.20	Peak
6	*	5976.172	30.56	27.84	58.40	-9.80	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

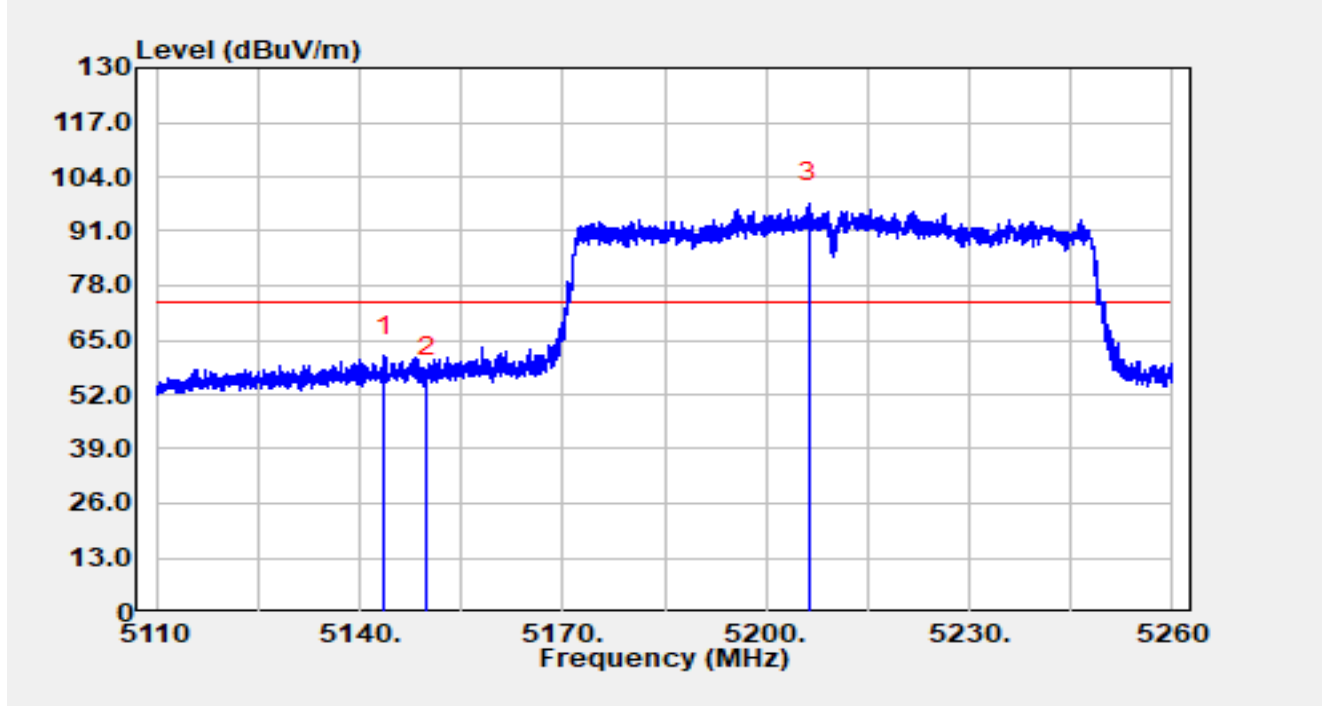


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.735	36.18	24.98	61.16	-12.84	74.00	Peak
2		5150.000	31.15	24.93	56.08	-17.92	74.00	Peak
3		5206.345	72.64	25.07	97.70	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

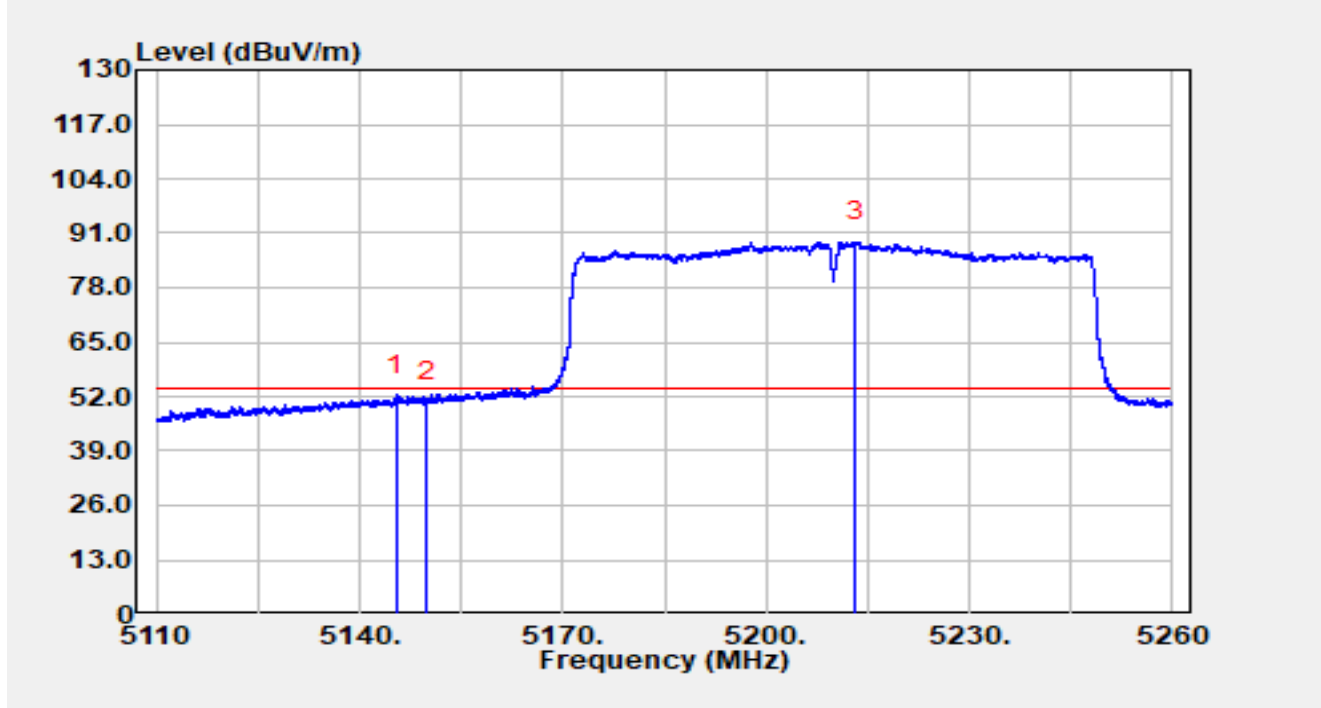


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.460	27.50	24.97	52.47	-1.53	54.00	Average
2		5150.000	25.67	24.93	50.61	-3.39	54.00	Average
3		5213.110	63.91	25.09	88.99	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

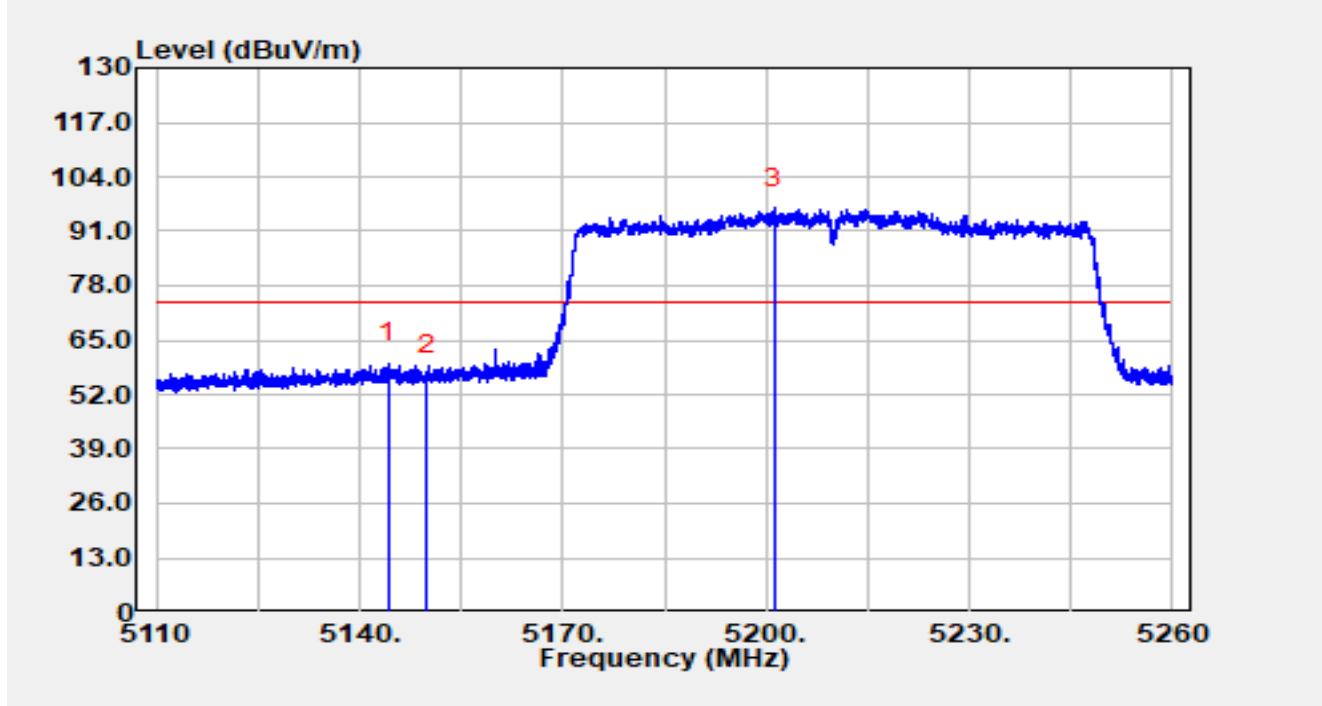


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.230	34.47	24.98	59.45	-14.55	74.00	Peak
2		5150.000	31.52	24.93	56.45	-17.55	74.00	Peak
3		5201.305	71.43	25.13	96.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5210MHz		

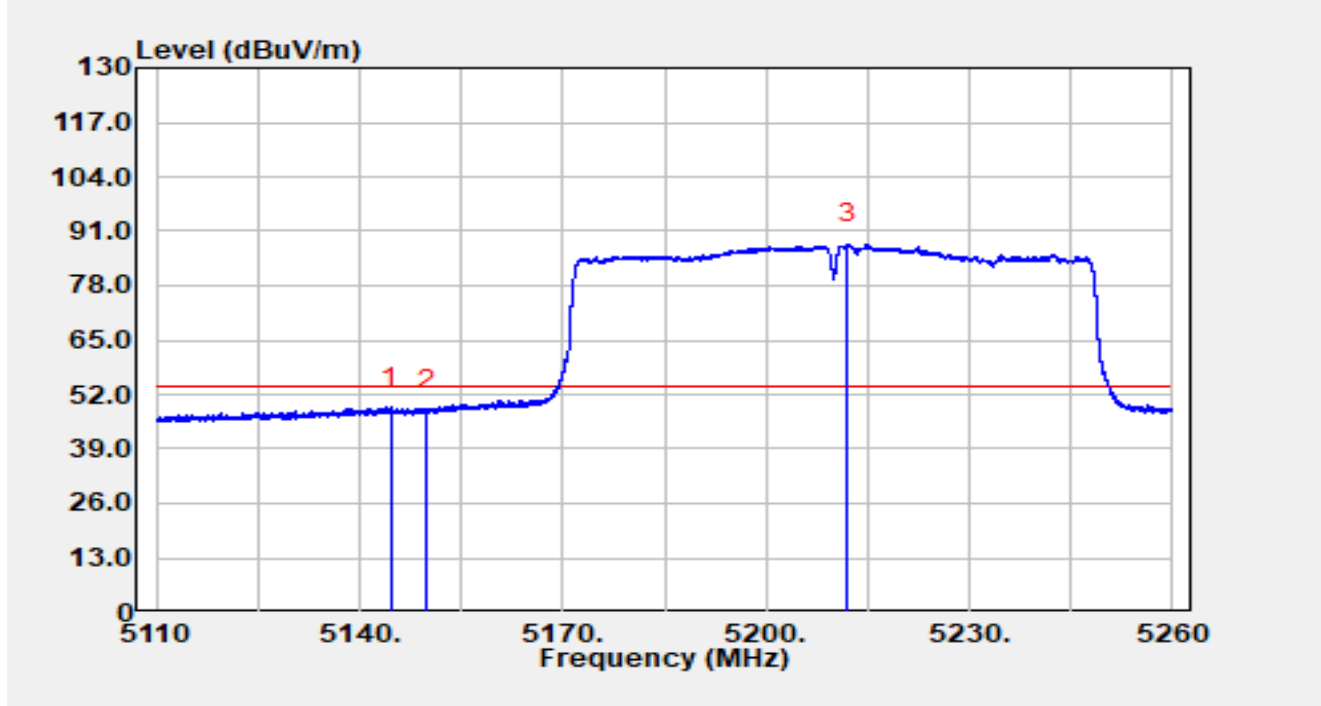


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.545	23.94	24.98	48.91	-5.09	54.00	Average
2		5150.000	23.44	24.93	48.38	-5.62	54.00	Average
3		5211.970	62.87	25.08	87.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

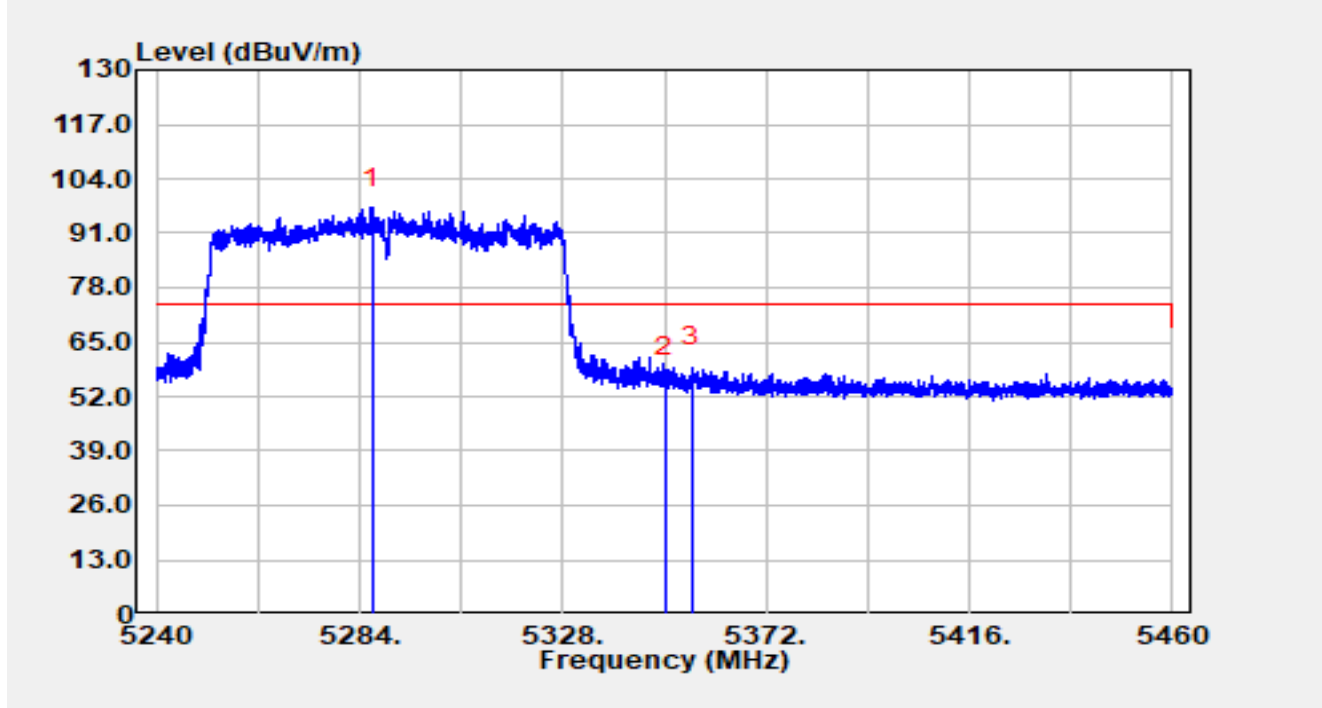


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5286.728	71.63	25.47	97.09	N/A	N/A	Peak
2		5350.000	31.10	25.74	56.84	-17.16	74.00	Peak
3	*	5355.940	33.34	25.66	59.01	-14.99	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

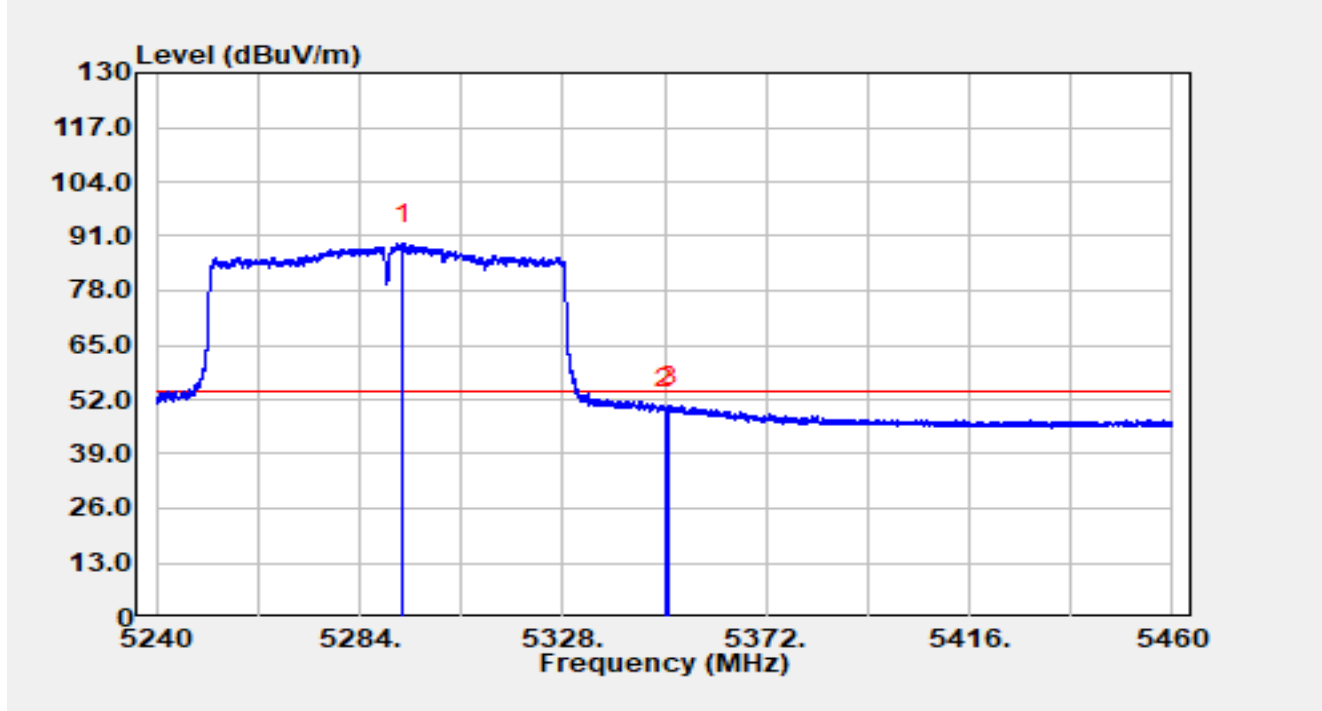


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5293.504	63.65	25.53	89.18	N/A	N/A	Average
2		5350.000	23.96	25.74	49.70	-4.30	54.00	Average
3	*	5350.990	24.65	25.73	50.38	-3.62	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

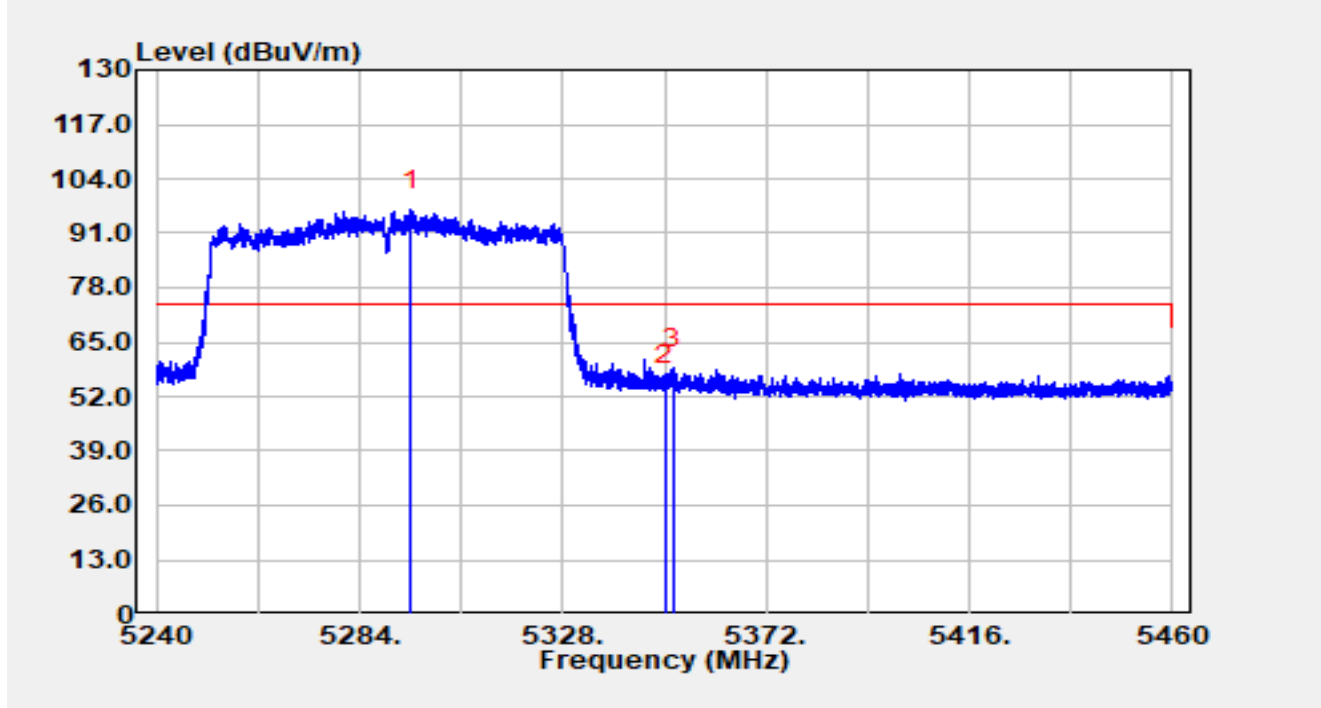


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5295.220	70.86	25.54	96.40	N/A	N/A	Peak
2		5350.000	28.91	25.74	54.65	-19.35	74.00	Peak
3	*	5351.738	33.07	25.72	58.79	-15.21	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

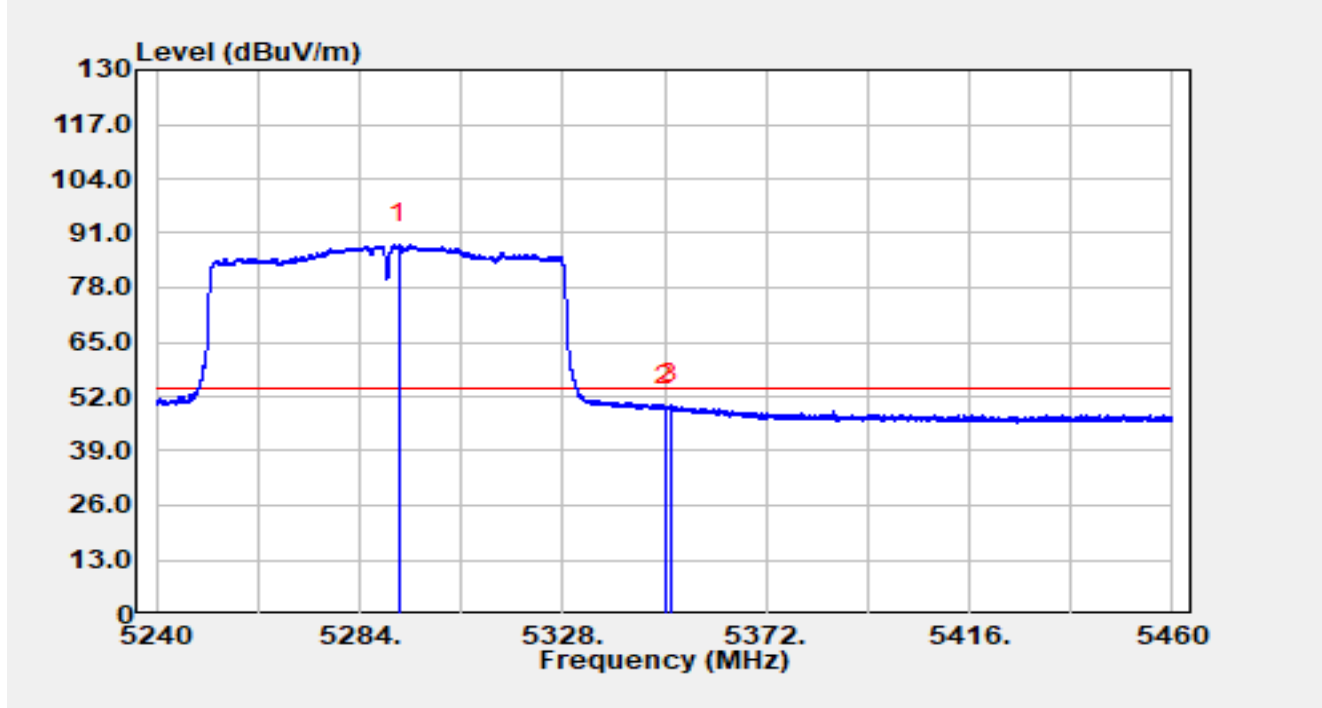


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5292.448	62.86	25.52	88.38	N/A	N/A	Average
2		5350.000	23.95	25.74	49.69	-4.31	54.00	Average
3	*	5351.232	24.40	25.72	50.12	-3.88	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

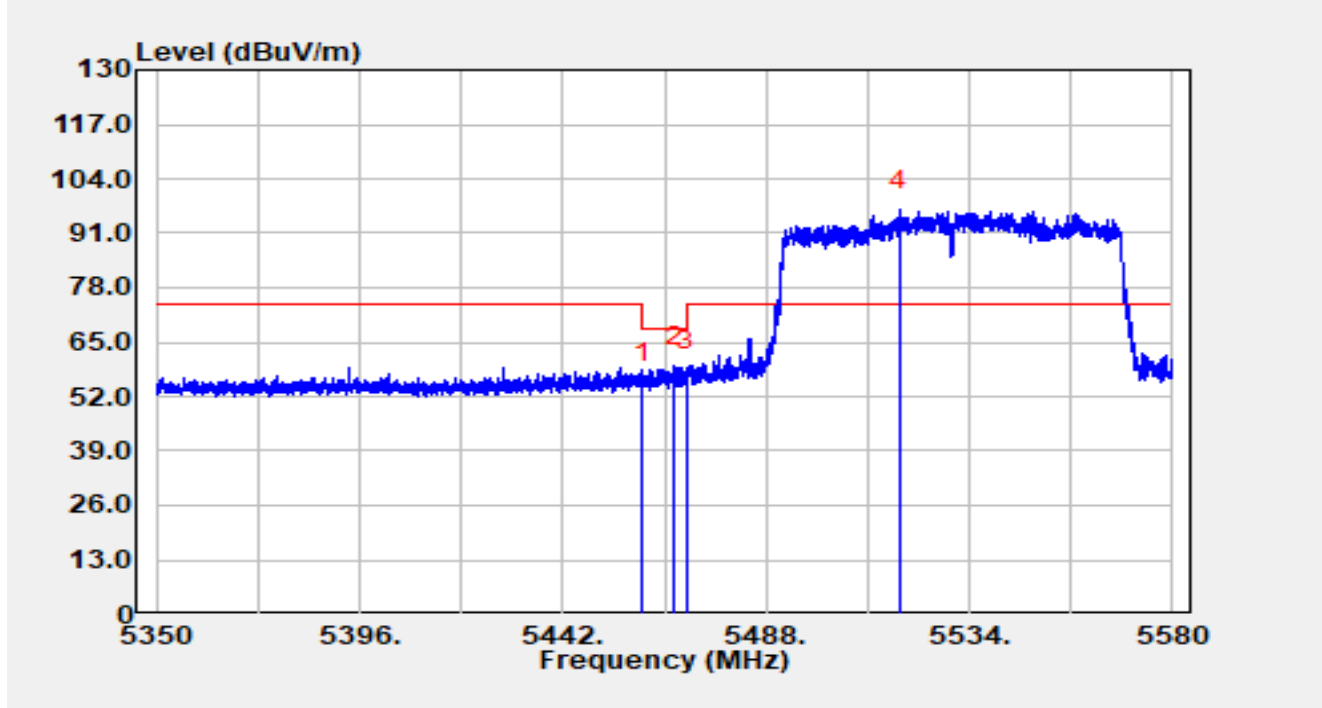


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	29.25	25.80	55.05	-13.15	68.20	Peak
2	*	5467.139	33.58	25.71	59.28	-8.92	68.20	Peak
3		5470.000	32.23	25.67	57.90	-10.30	68.20	Peak
4		5518.245	70.89	25.71	96.60	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

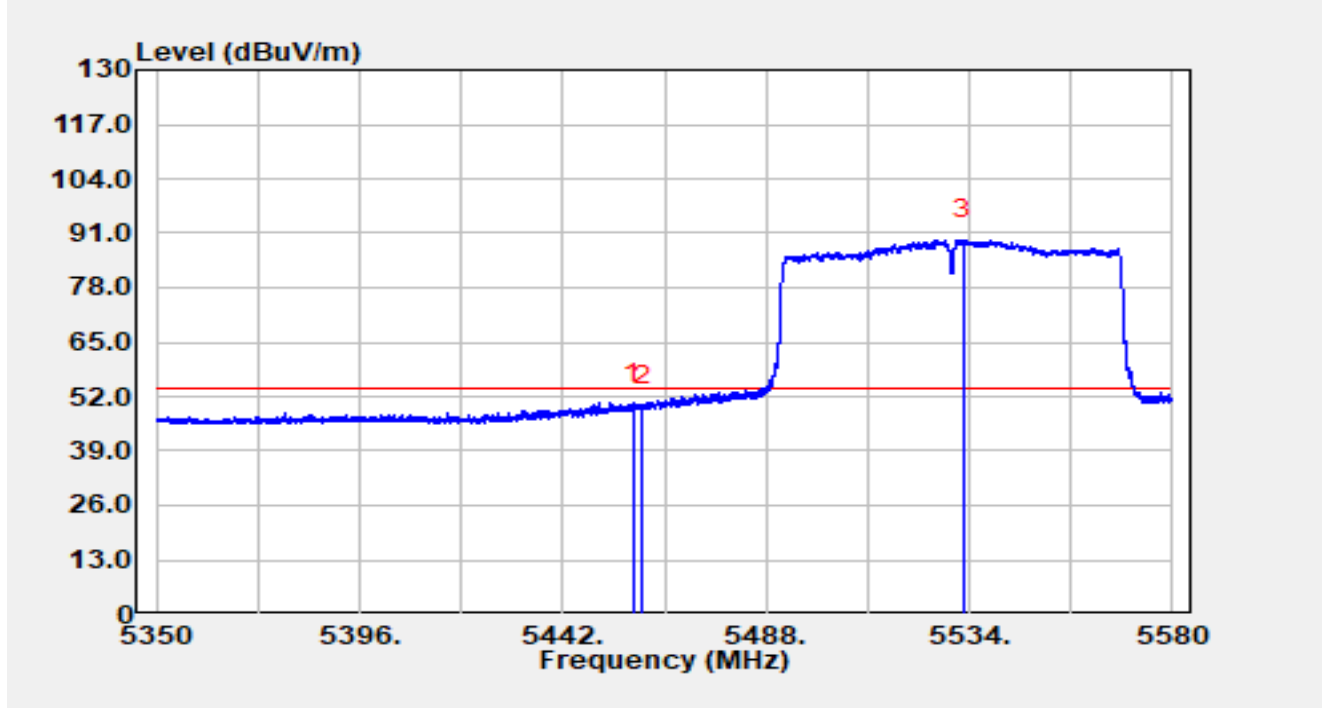


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.054	24.67	25.82	50.49	-3.51	54.00	Average
2		5460.000	24.00	25.80	49.80	-4.20	54.00	Average
3		5532.505	63.72	25.77	89.48	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

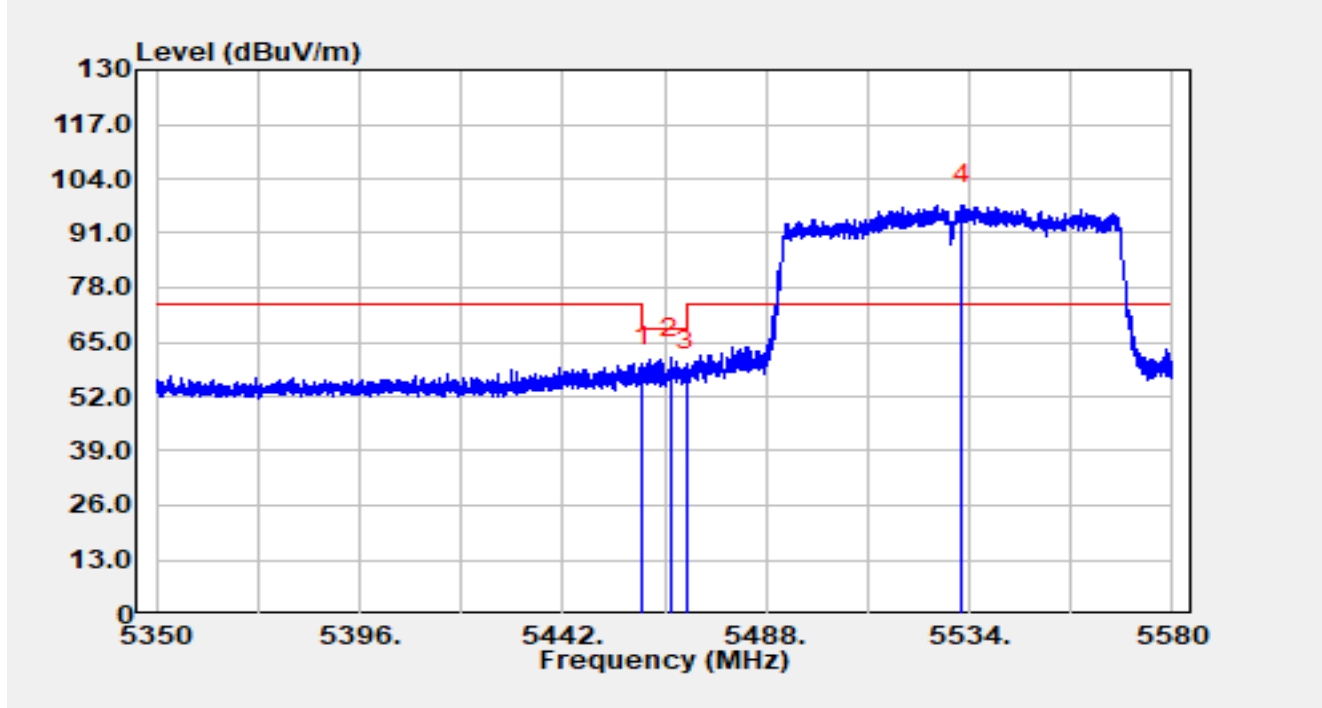


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		5460.000	33.50	25.80	59.29	-8.91	68.20	Peak
2	*	5466.403	35.42	25.72	61.14	-7.06	68.20	Peak
3		5470.000	32.48	25.67	58.15	-10.05	68.20	Peak
4		5532.482	72.10	25.77	97.86	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-05
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

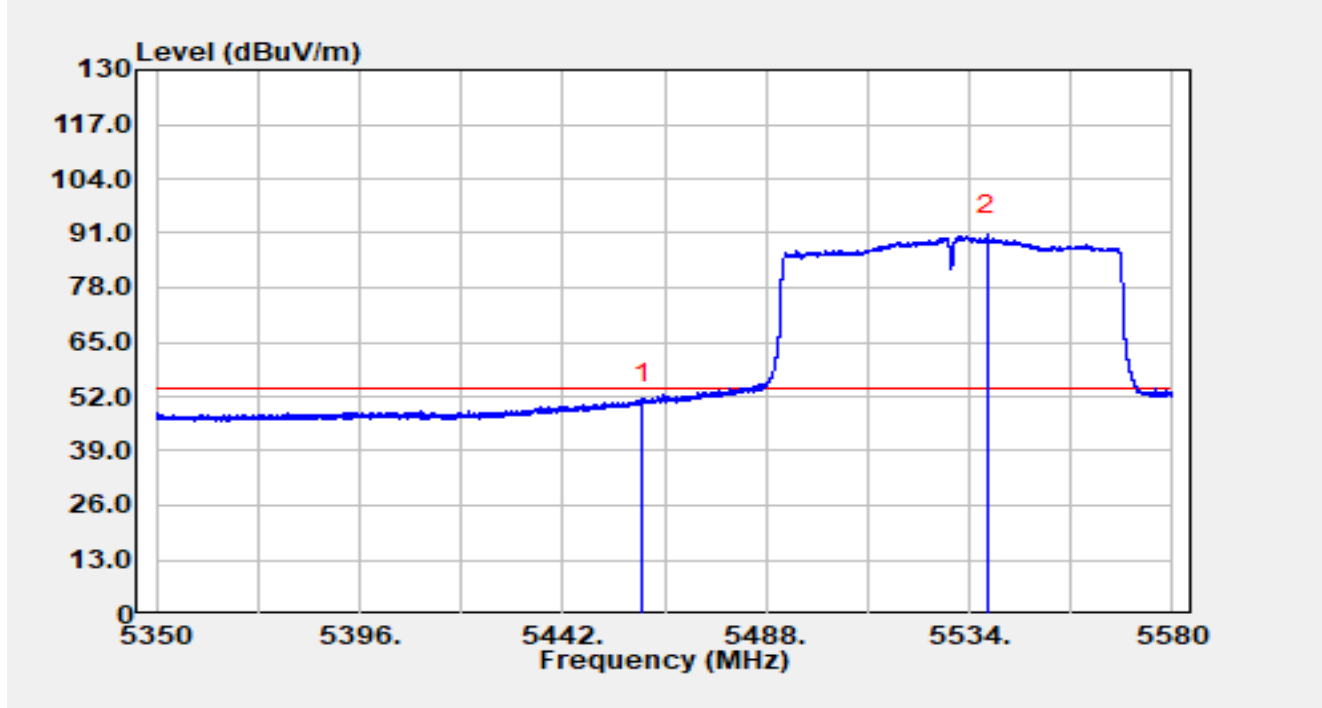


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	24.69	25.80	50.48	-3.52	54.00	Average
2		5538.094	64.76	25.83	90.60	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

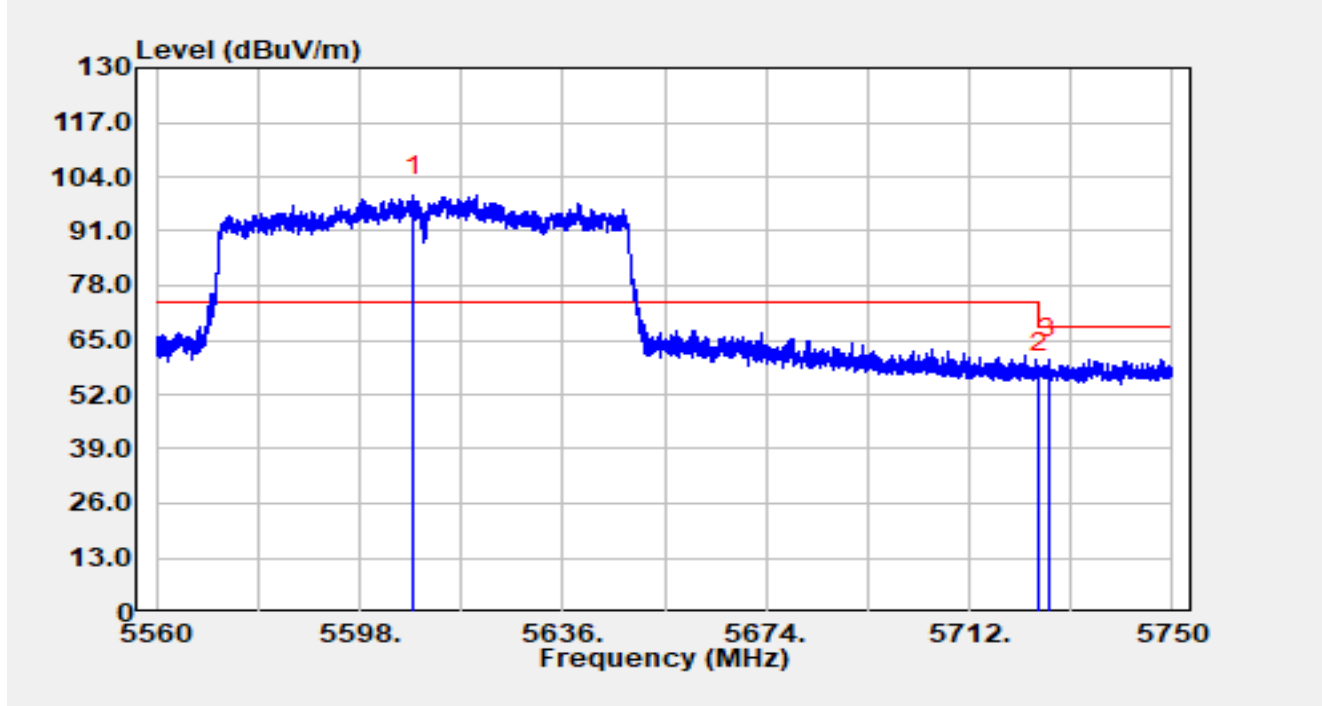


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.032	73.37	26.13	99.49	N/A	N/A	Peak
2		5725.000	30.55	26.52	57.07	-11.13	68.20	Peak
3	*	5726.725	34.02	26.52	60.53	-7.67	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

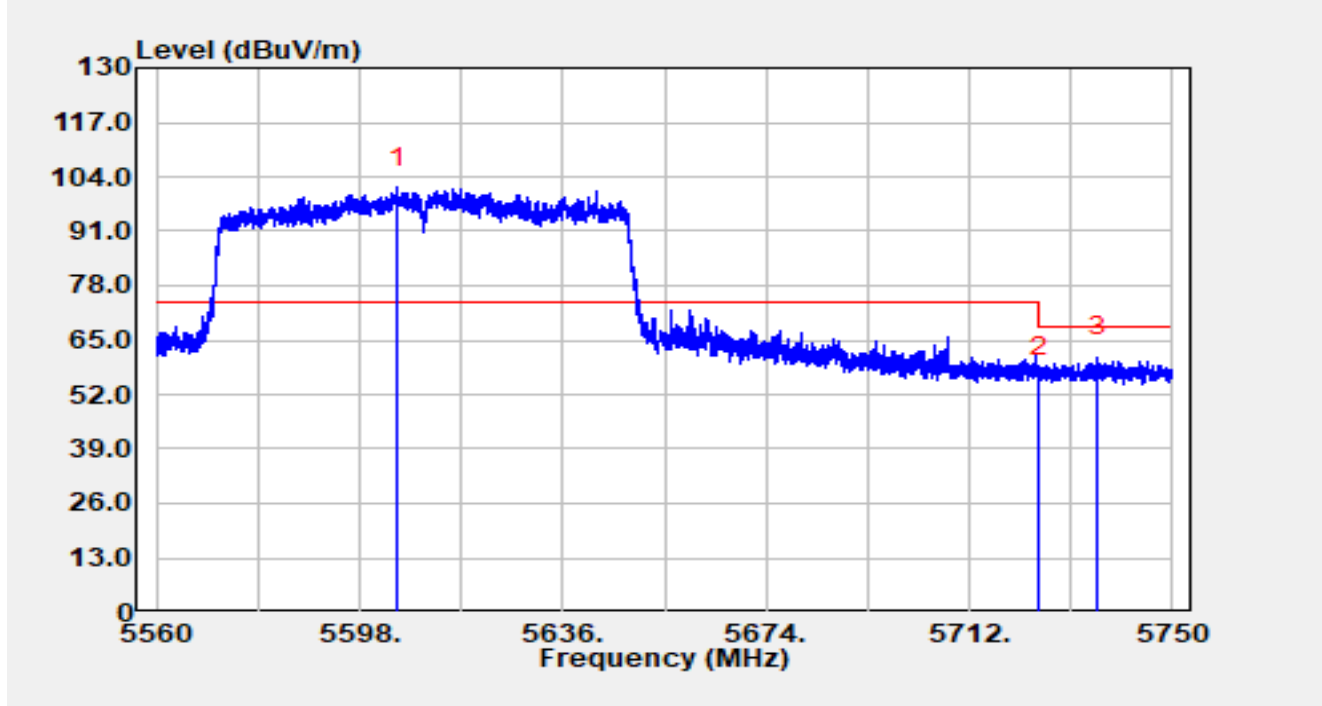


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5605.163	75.43	26.11	101.54	N/A	N/A	Peak
2		5725.000	29.86	26.52	56.39	-11.81	68.20	Peak
3	*	5736.092	34.43	26.50	60.94	-7.26	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

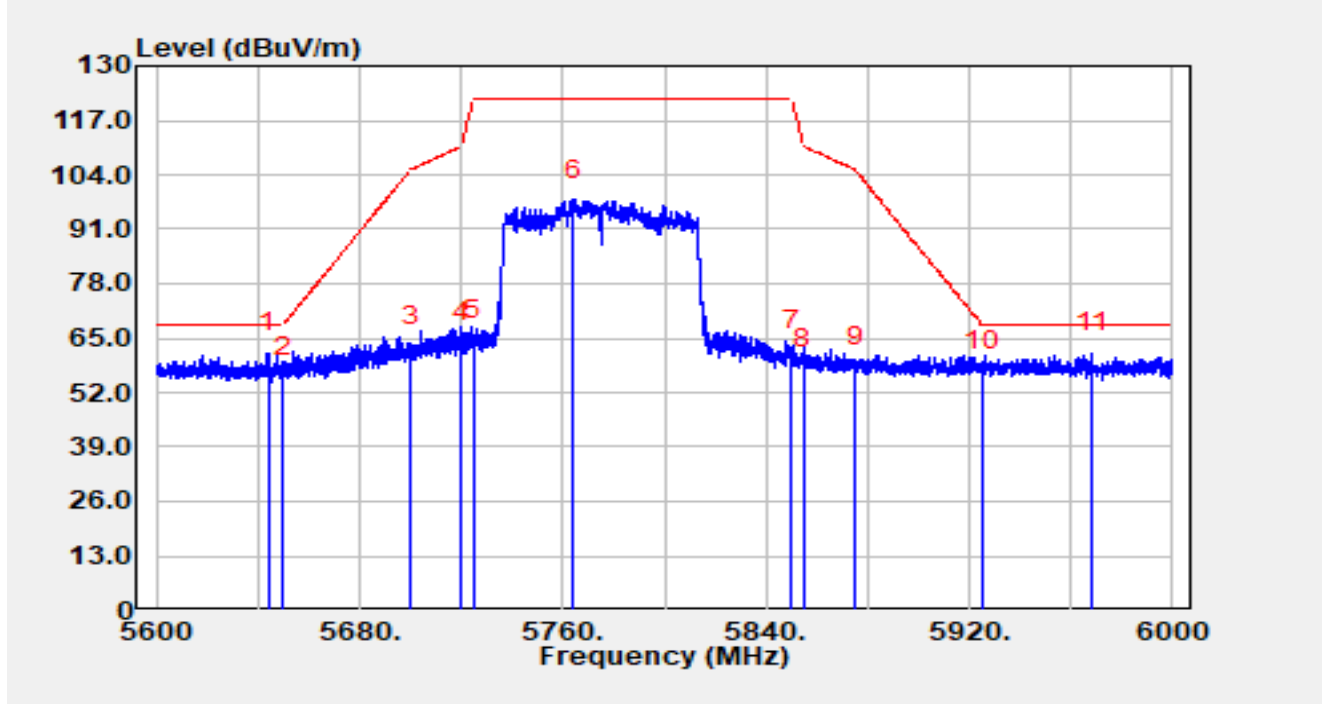

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5643.880	35.33	26.04	61.37	-6.83	68.20	Peak
2		5650.000	29.37	26.12	55.49	-12.71	68.20	Peak
3		5700.000	36.64	26.36	63.00	-42.20	105.20	Peak
4		5720.000	37.47	26.54	64.01	-46.79	110.80	Peak
5		5725.000	37.84	26.52	64.36	-57.84	122.20	Peak
6		5764.360	71.24	26.79	98.03	N/A	N/A	Peak
7		5850.000	35.15	27.08	62.23	-59.97	122.20	Peak
8		5855.000	30.45	27.12	57.58	-53.22	110.80	Peak
9		5875.000	30.54	27.51	58.05	-47.15	105.20	Peak
10		5925.000	29.45	27.73	57.18	-11.02	68.20	Peak
11	*	5968.200	33.64	27.75	61.39	-6.81	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

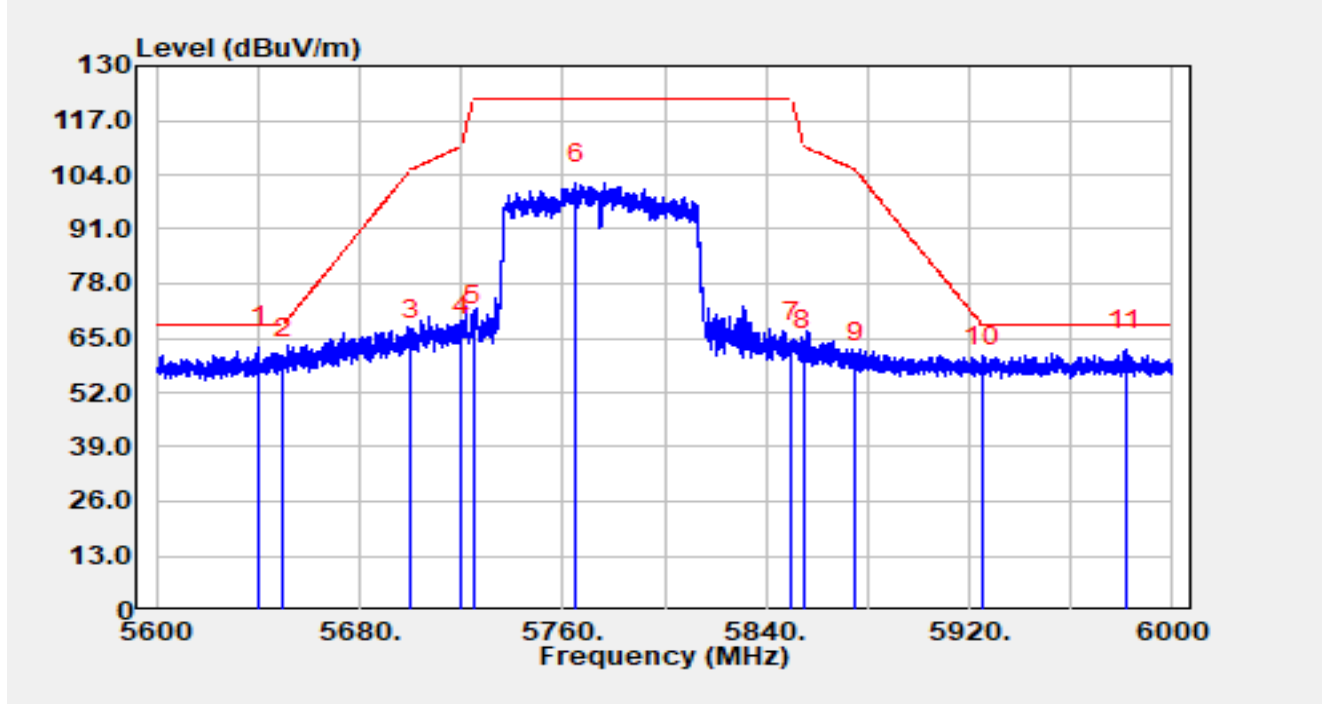

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5640.280	36.92	26.00	62.92	-5.28	68.20	Peak
2		5650.000	33.81	26.12	59.94	-8.26	68.20	Peak
3		5700.000	38.27	26.36	64.63	-40.57	105.20	Peak
4		5720.000	39.08	26.54	65.62	-45.18	110.80	Peak
5		5725.000	41.34	26.52	67.87	-54.33	122.20	Peak
6		5764.960	75.11	26.80	101.91	N/A	N/A	Peak
7		5850.000	36.88	27.08	63.96	-58.24	122.20	Peak
8		5855.000	34.82	27.12	61.94	-48.86	110.80	Peak
9		5875.000	31.41	27.51	58.92	-46.28	105.20	Peak
10		5925.000	30.58	27.73	58.30	-9.90	68.20	Peak
11		5981.280	34.29	27.81	62.11	-6.09	68.20	Peak


Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

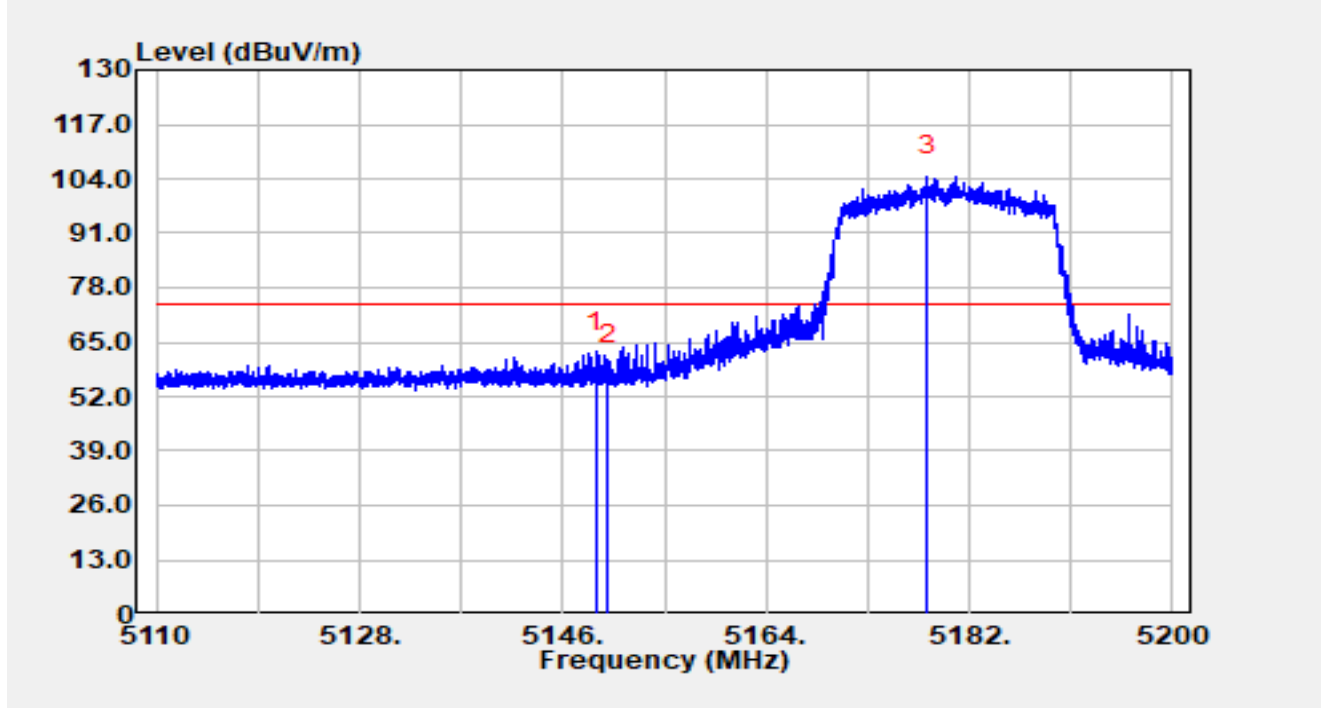


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.961	37.64	24.94	62.58	-11.42	74.00	Peak
2		5150.000	34.89	24.93	59.82	-14.18	74.00	Peak
3		5178.301	79.40	25.15	104.55	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

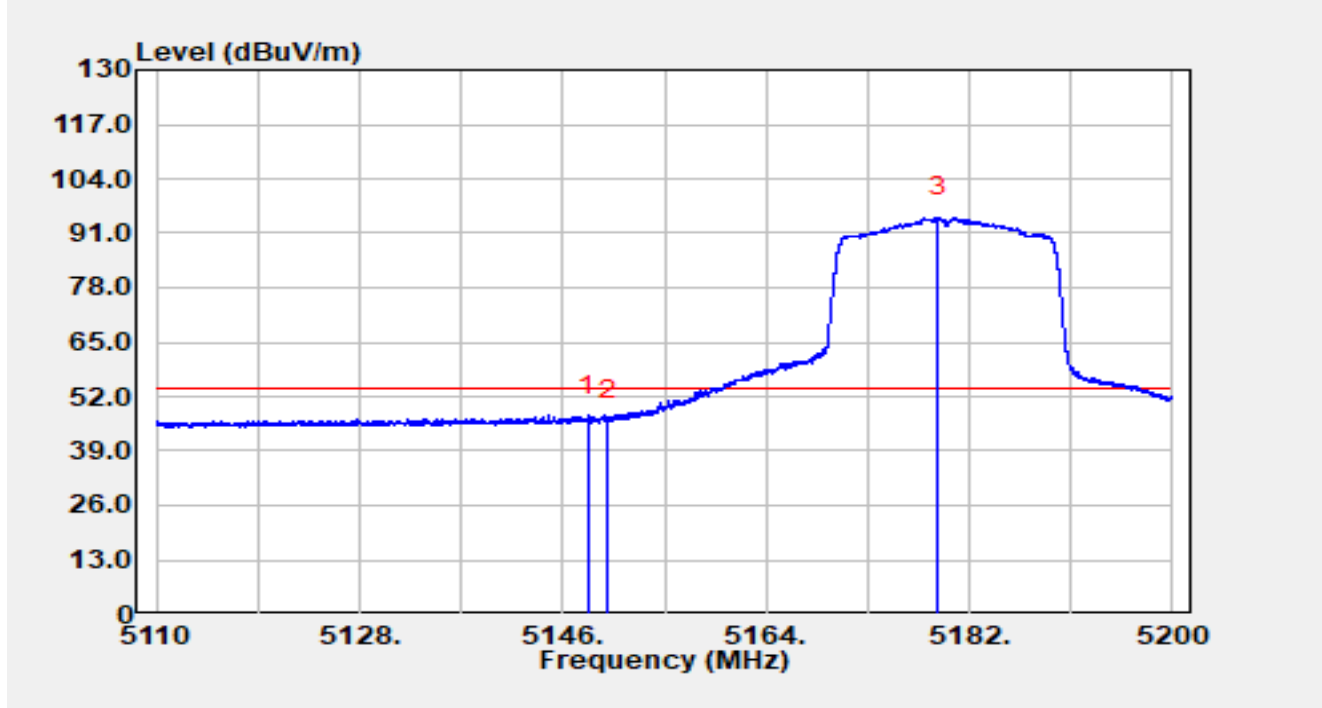


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.223	22.59	24.95	47.54	-6.46	54.00	Average
2		5150.000	21.55	24.93	46.48	-7.52	54.00	Average
3		5179.273	69.65	25.16	94.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

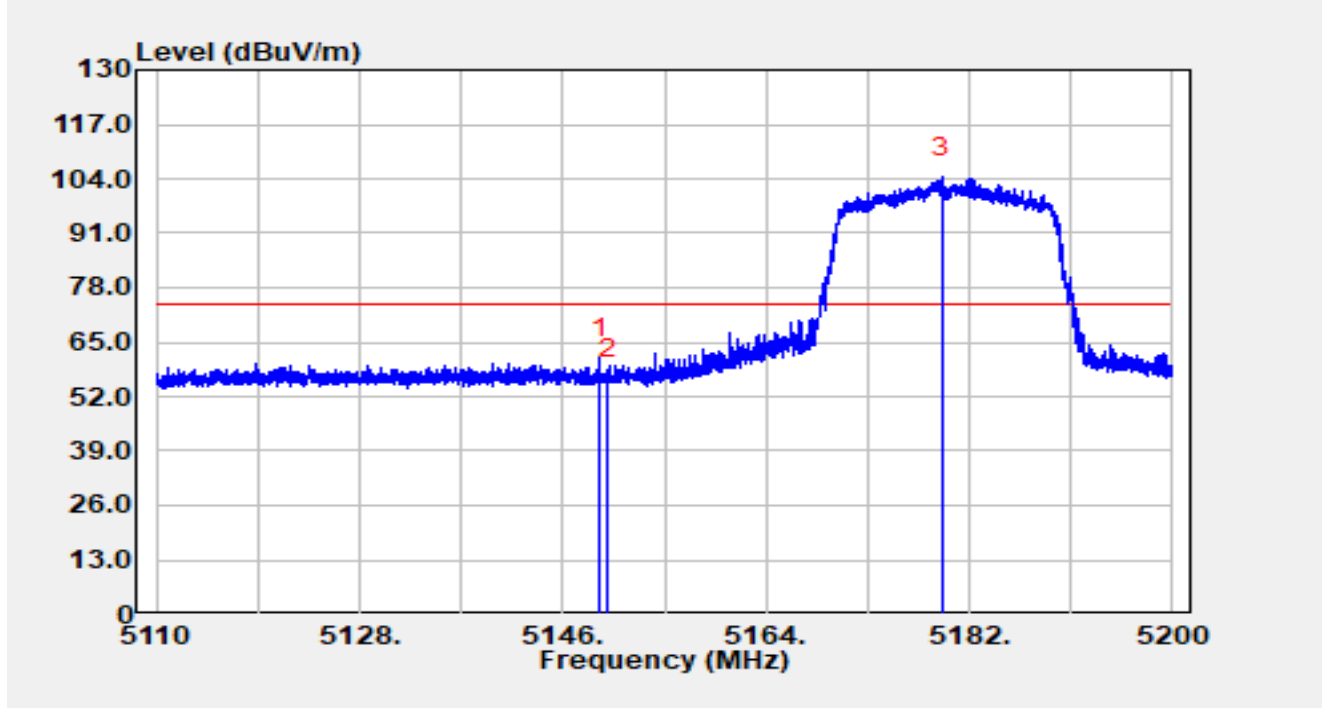


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.258	36.29	24.94	61.23	-12.77	74.00	Peak
2		5150.000	31.25	24.93	56.18	-17.82	74.00	Peak
3		5179.579	79.15	25.16	104.31	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

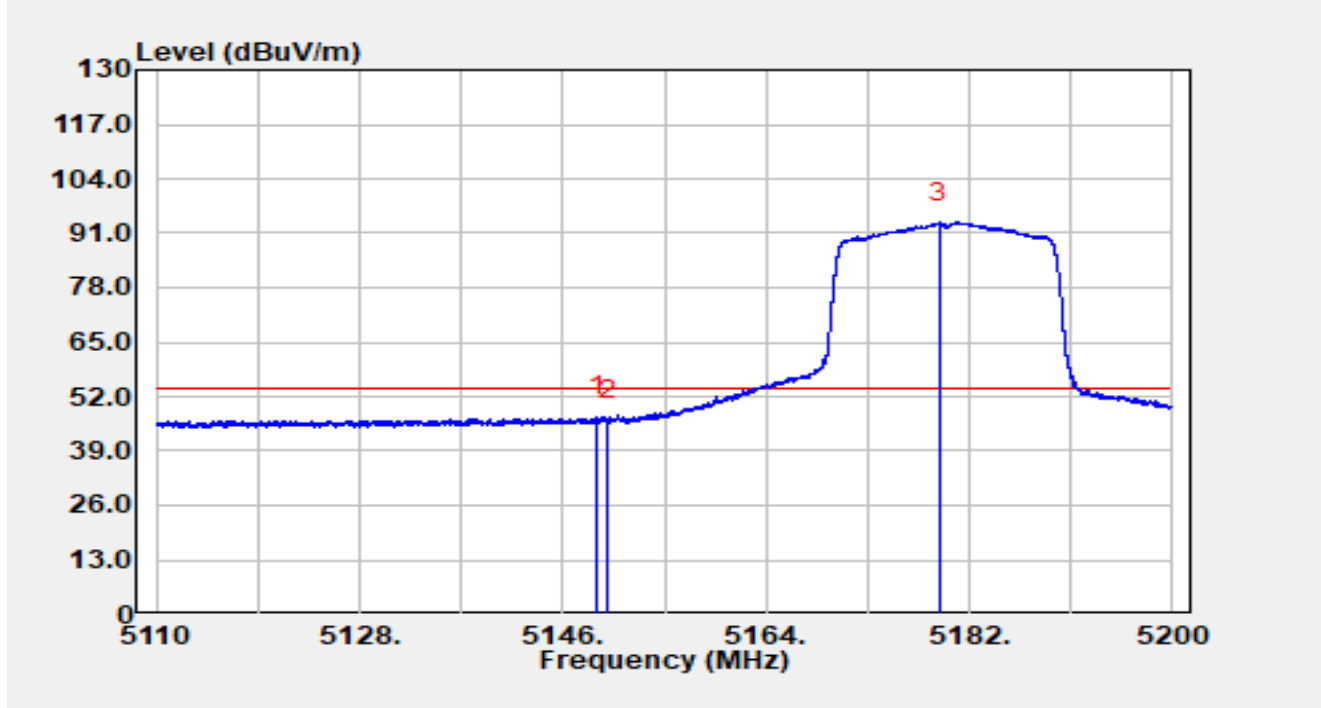


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.087	22.18	24.94	47.13	-6.87	54.00	Average
2		5150.000	21.22	24.93	46.15	-7.85	54.00	Average
3		5179.336	68.40	25.16	93.56	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

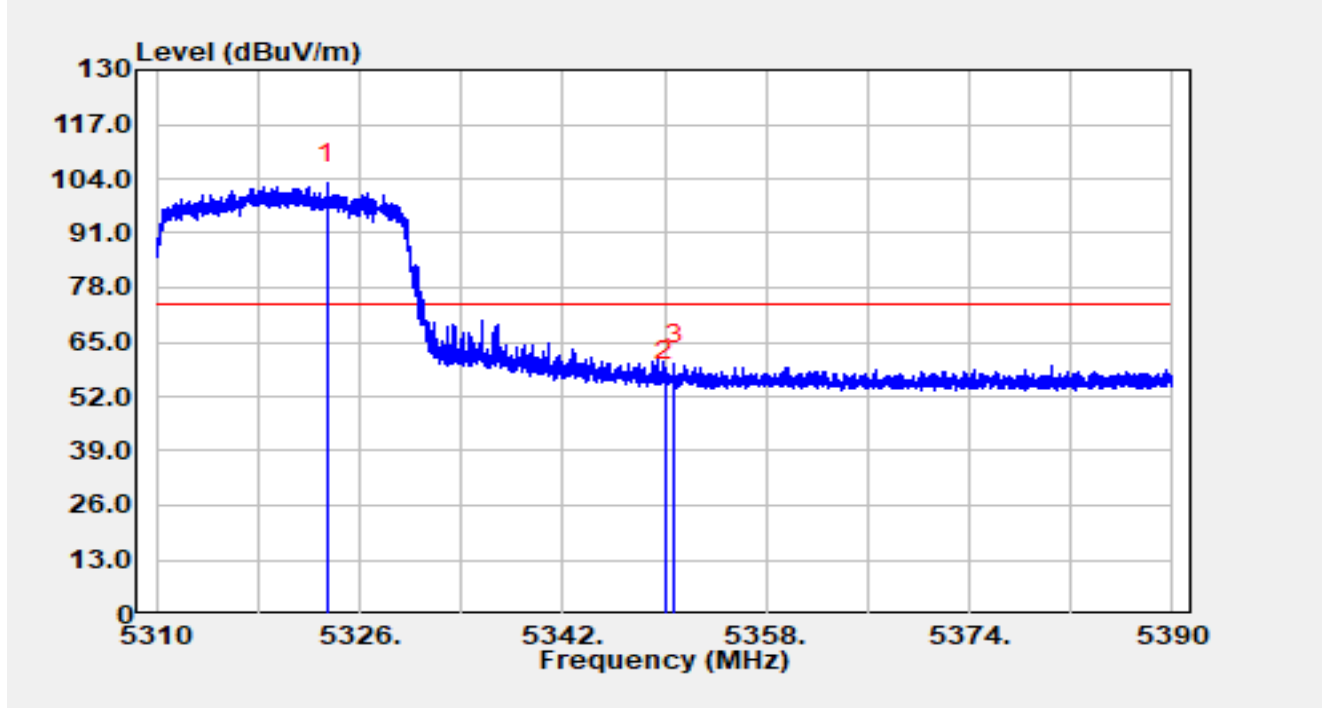


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5323.448	77.31	25.50	102.81	N/A	N/A	Peak
2		5350.000	29.94	25.74	55.68	-18.32	74.00	Peak
3	*	5350.752	34.01	25.73	59.74	-14.26	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

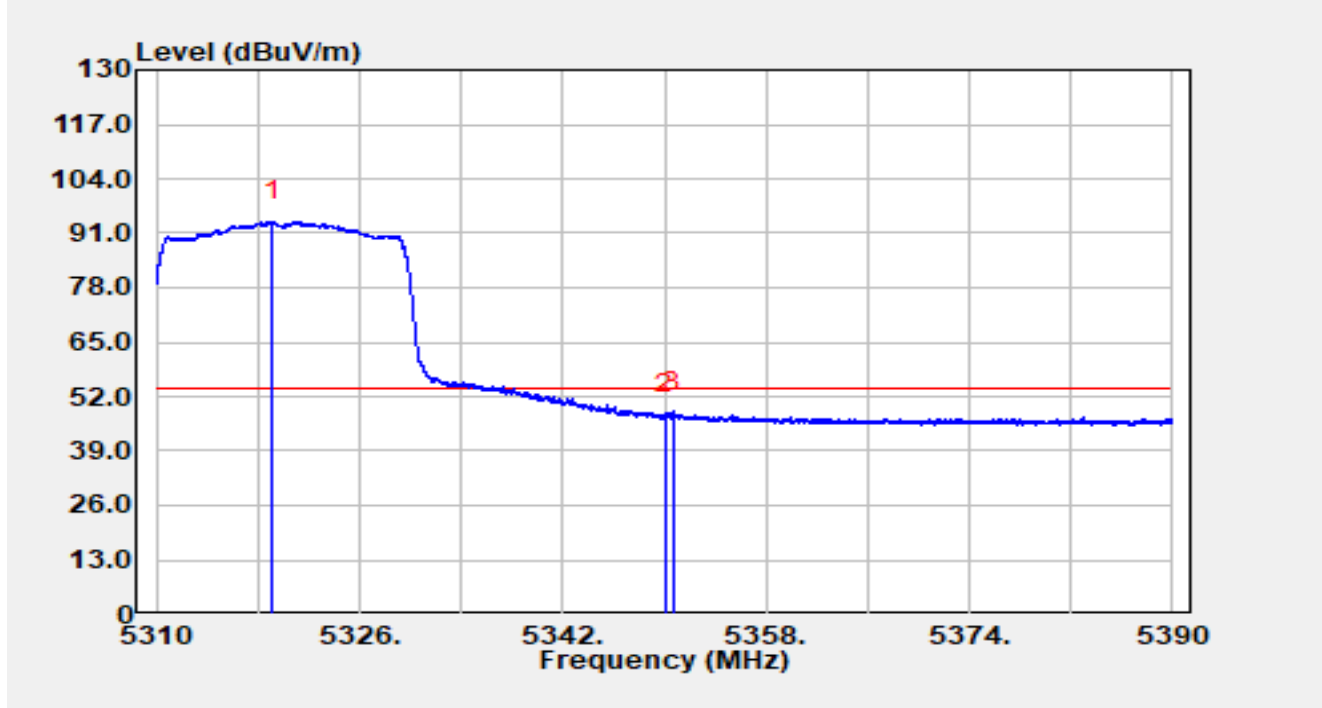


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.128	68.45	25.48	93.93	N/A	N/A	Average
2		5350.000	22.23	25.74	47.97	-6.03	54.00	Average
3	*	5350.640	22.61	25.73	48.34	-5.66	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

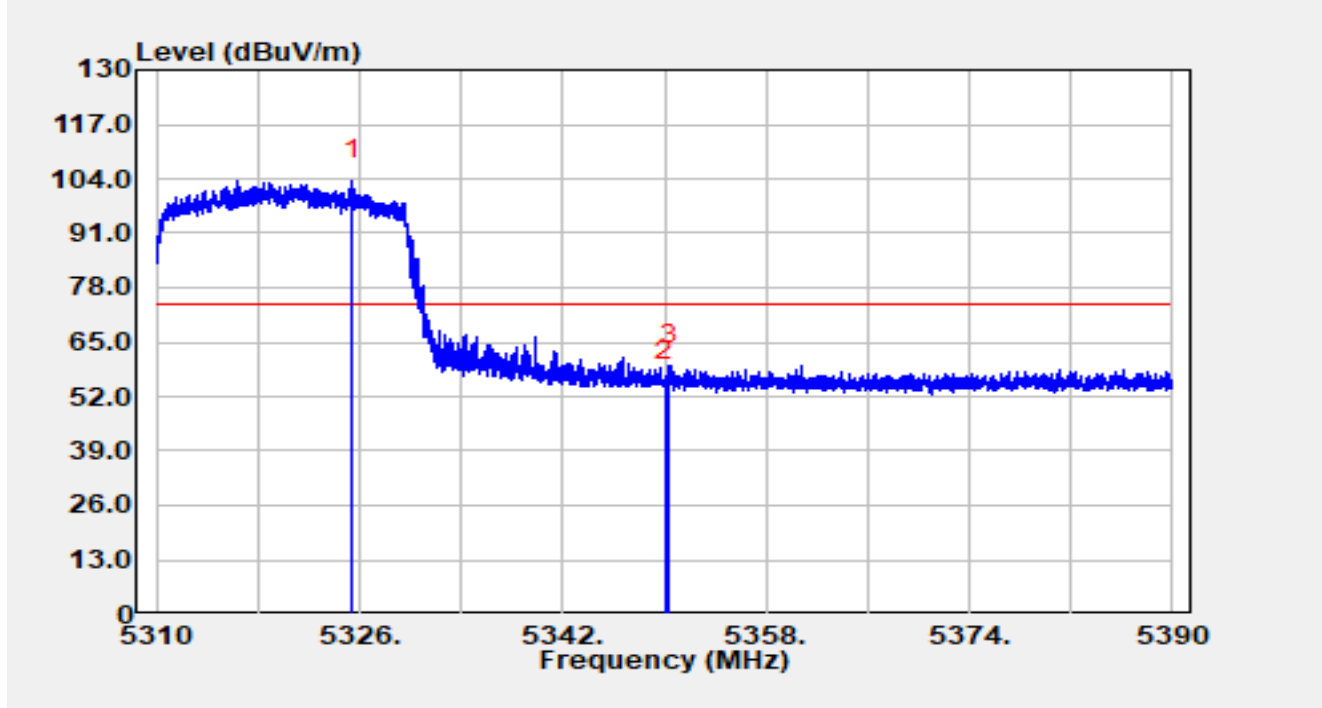


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5325.464	78.16	25.51	103.68	N/A	N/A	Peak
2		5350.000	29.97	25.74	55.71	-18.29	74.00	Peak
3	*	5350.384	33.78	25.73	59.51	-14.49	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

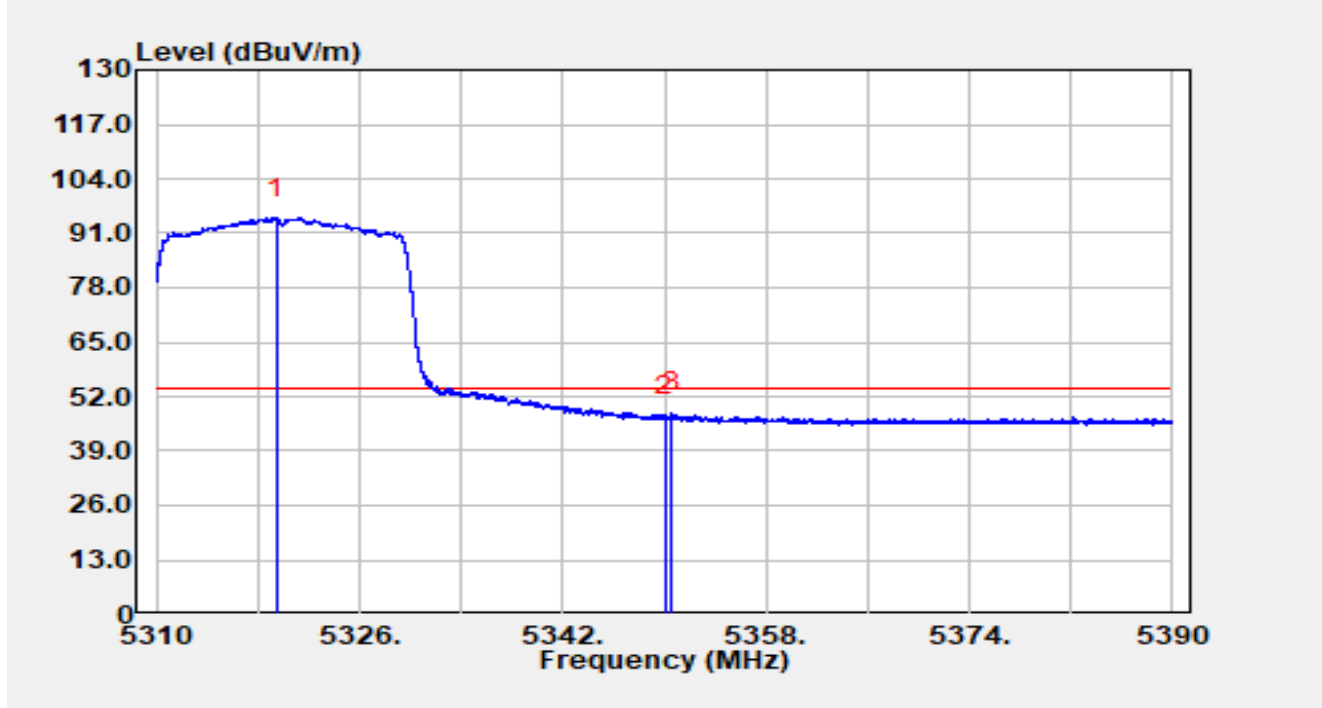


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.464	69.20	25.48	94.67	N/A	N/A	Average
2		5350.000	21.64	25.74	47.38	-6.62	54.00	Average
3	*	5350.528	22.58	25.73	48.32	-5.68	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

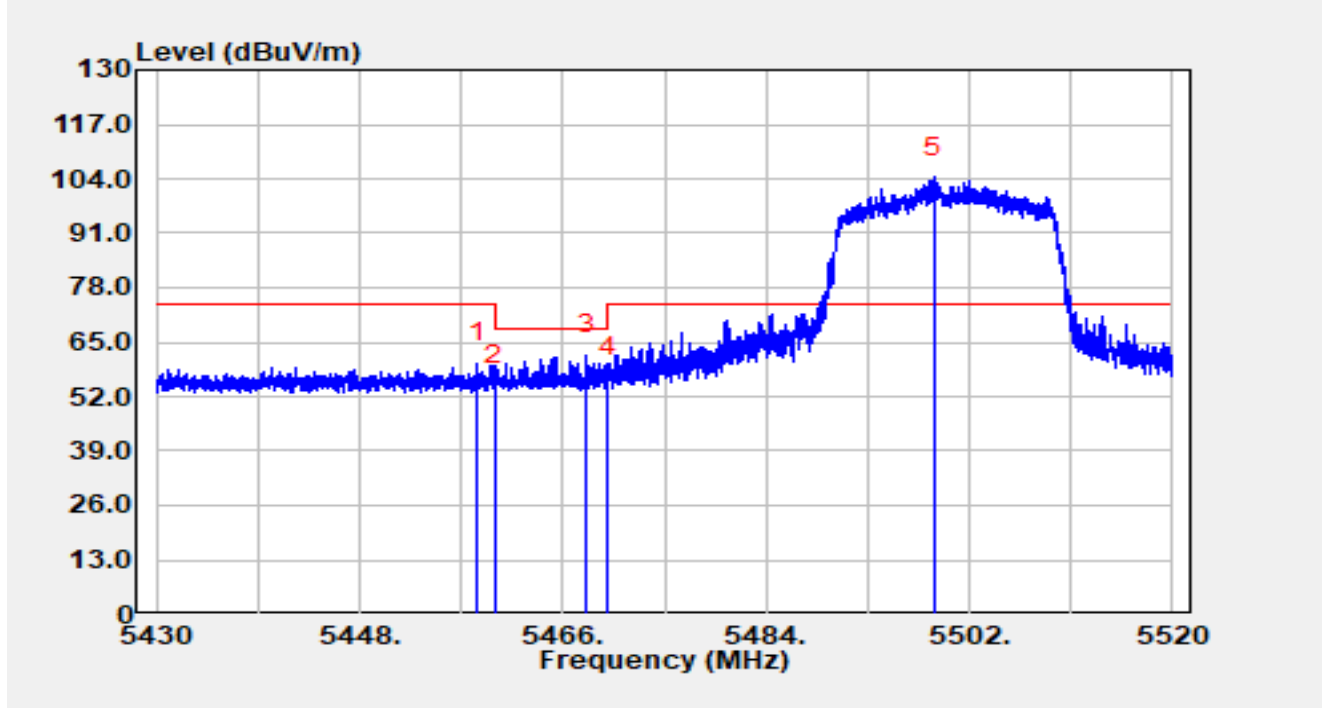


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.404	34.14	25.82	59.96	-14.04	74.00	Peak
2		5460.000	28.72	25.80	54.52	-13.68	68.20	Peak
3	*	5468.052	36.18	25.70	61.87	-6.33	68.20	Peak
4		5470.000	30.78	25.67	56.45	-11.75	68.20	Peak
5		5498.832	78.46	25.89	104.35	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

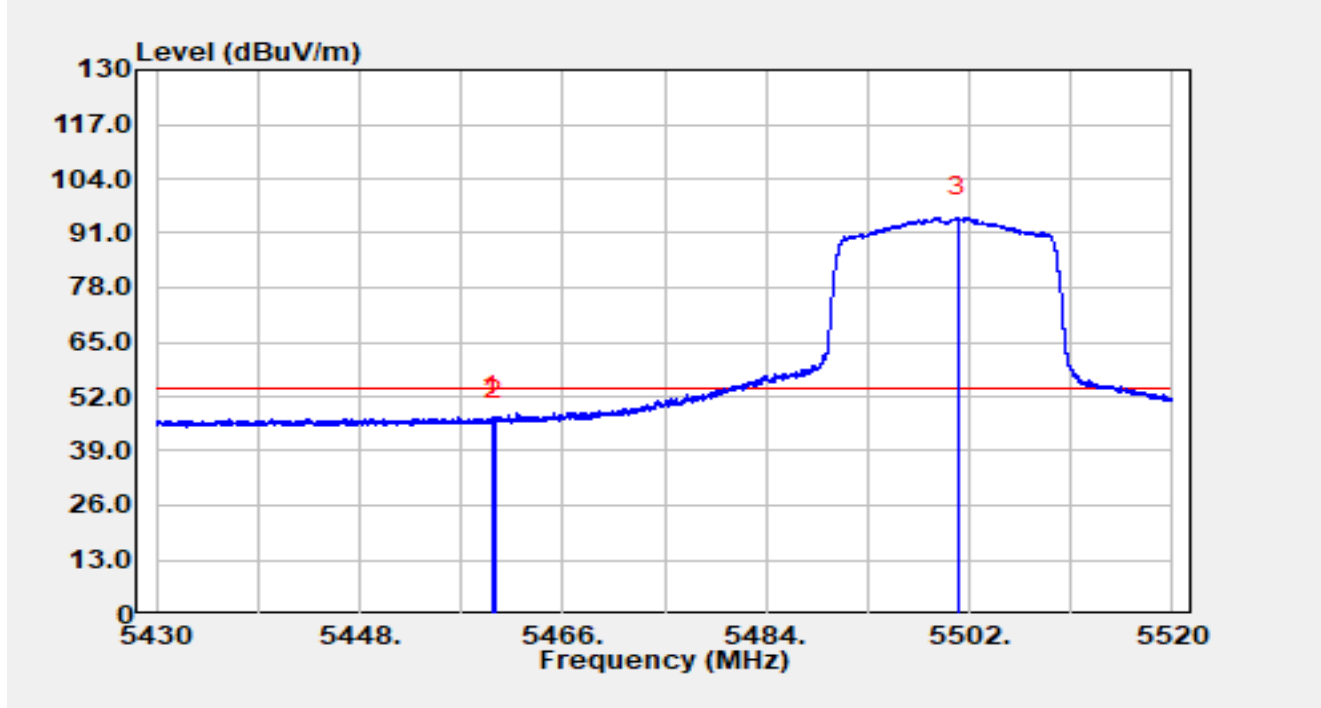


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.736	21.44	25.80	47.24	-6.76	54.00	Average
2		5460.000	20.72	25.80	46.52	-7.48	54.00	Average
3		5500.965	68.81	25.89	94.71	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

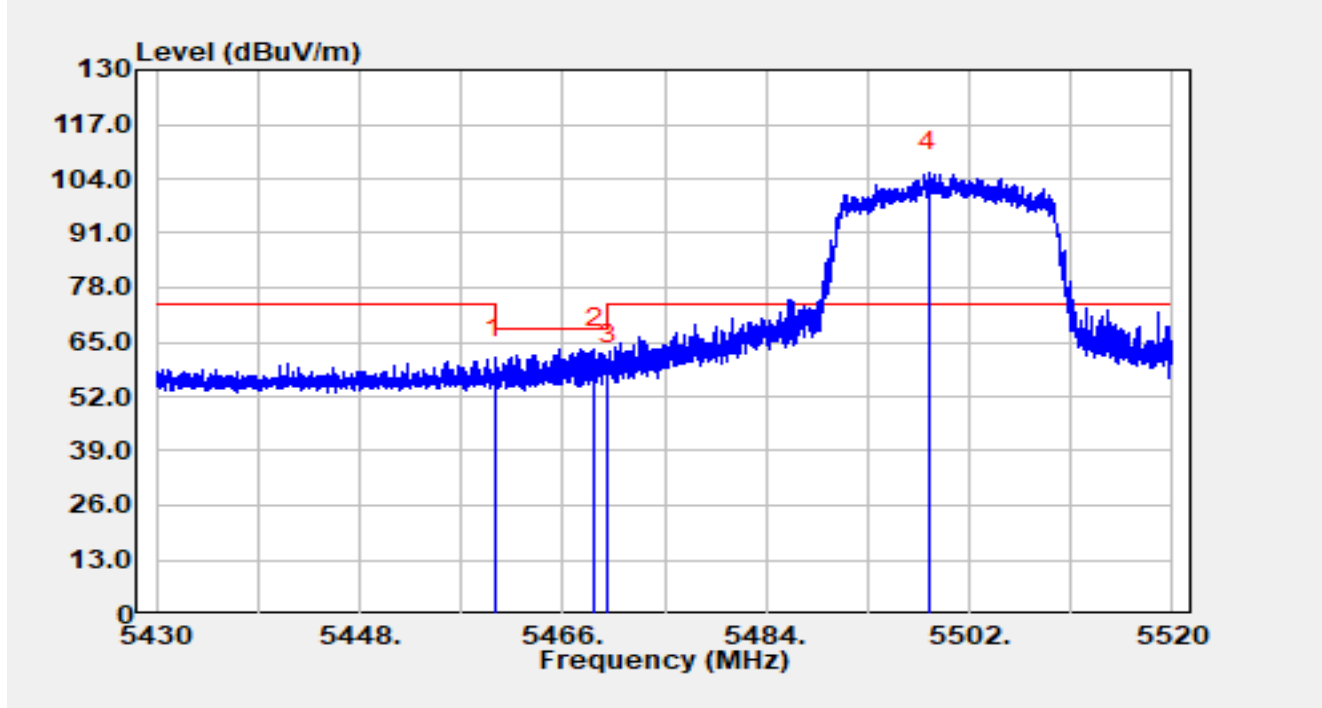


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	35.45	25.80	61.25	-6.95	68.20	Peak
2	*	5468.763	37.82	25.69	63.51	-4.69	68.20	Peak
3		5470.000	33.80	25.67	59.47	-8.73	68.20	Peak
4		5498.409	79.71	25.89	105.59	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

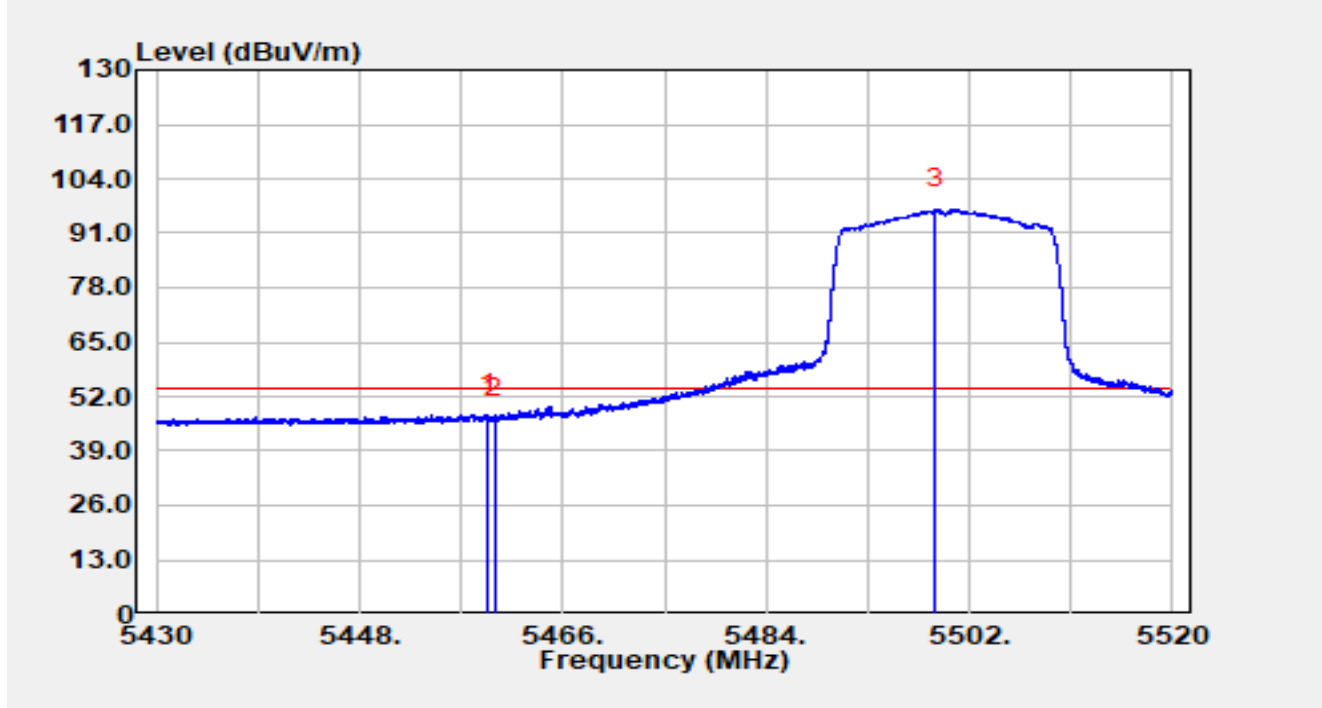


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.349	21.95	25.81	47.75	-6.25	54.00	Average
2		5460.000	20.93	25.80	46.73	-7.27	54.00	Average
3		5499.030	70.90	25.89	96.78	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

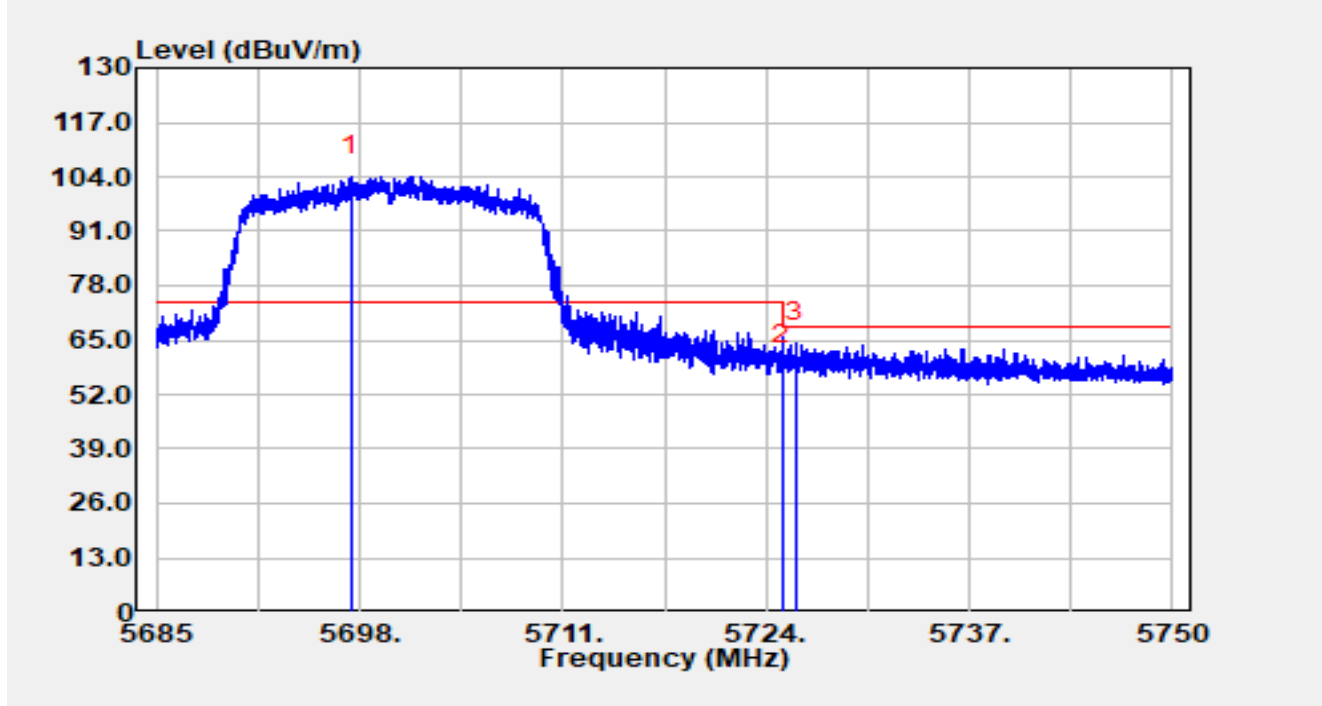


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5697.421	77.91	26.33	104.23	N/A	N/A	Peak
2		5725.000	32.60	26.52	59.13	-9.07	68.20	Peak
3	*	5725.917	37.80	26.52	64.32	-3.88	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

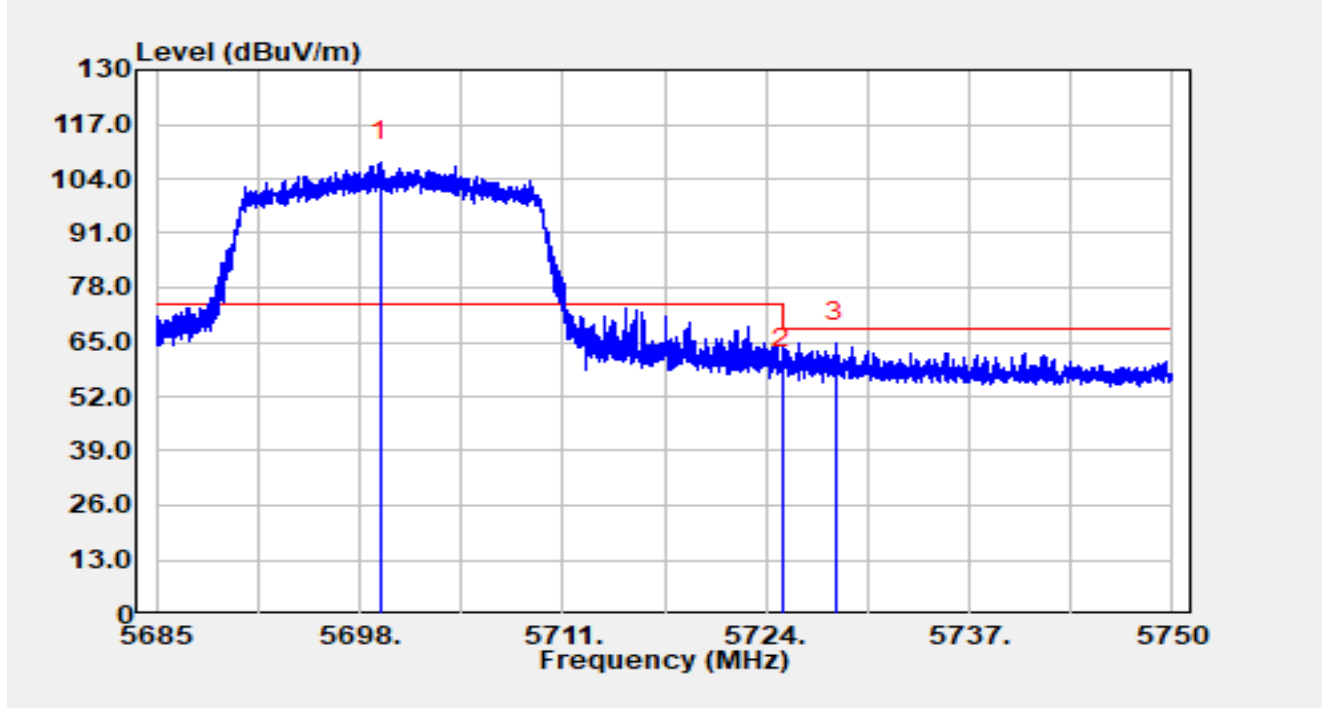


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5699.287	81.67	26.35	108.02	N/A	N/A	Peak
2		5725.000	32.18	26.52	58.70	-9.50	68.20	Peak
3	*	5728.453	38.30	26.51	64.82	-3.38	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

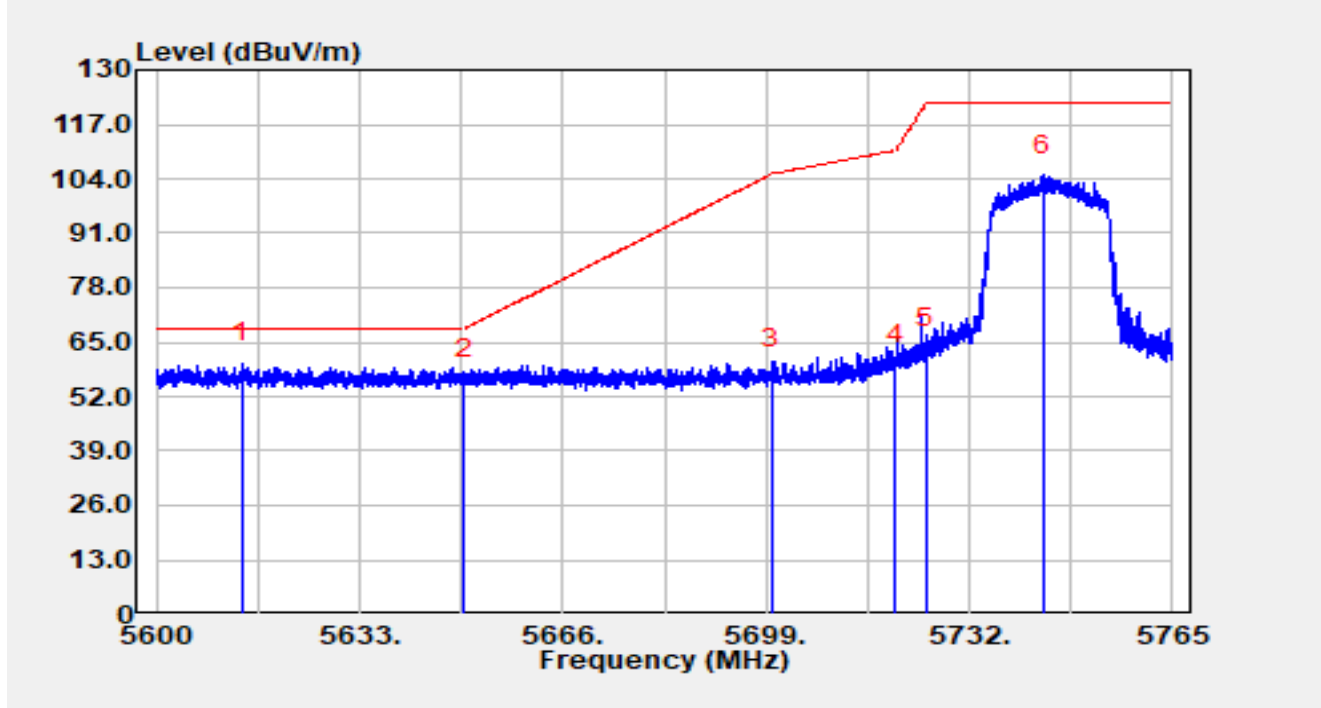


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5613.843	33.88	26.08	59.96	-8.24	68.20	Peak
2		5650.000	30.00	26.12	56.12	-12.08	68.20	Peak
3		5700.000	32.17	26.36	58.52	-46.68	105.20	Peak
4		5720.000	33.09	26.54	59.64	-51.16	110.80	Peak
5		5725.000	37.23	26.52	63.75	-58.45	122.20	Peak
6		5743.979	78.45	26.50	104.95	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

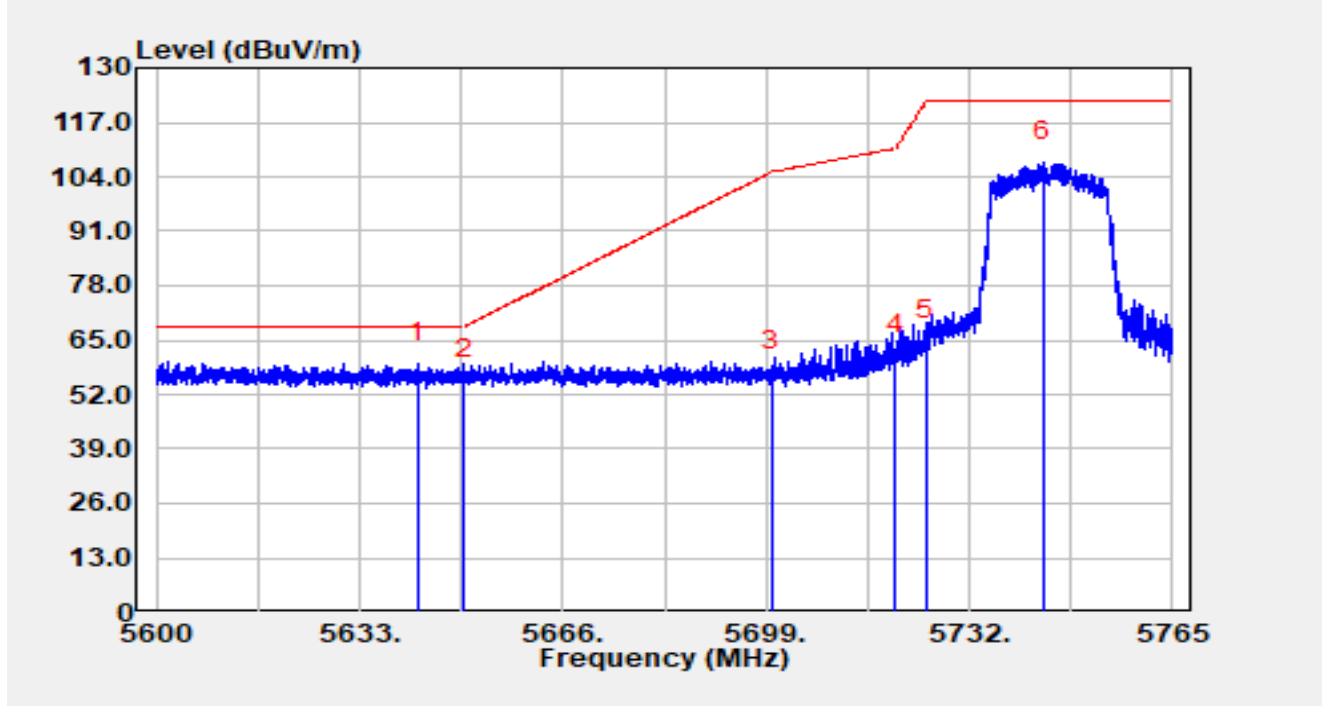


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.355	33.44	26.02	59.47	-8.73	68.20	Peak
2		5650.000	29.71	26.12	55.83	-12.37	68.20	Peak
3		5700.000	31.09	26.36	57.45	-47.75	105.20	Peak
4		5720.000	35.14	26.54	61.68	-49.12	110.80	Peak
5		5725.000	38.47	26.52	64.99	-57.21	122.20	Peak
6		5743.979	81.13	26.50	107.63	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

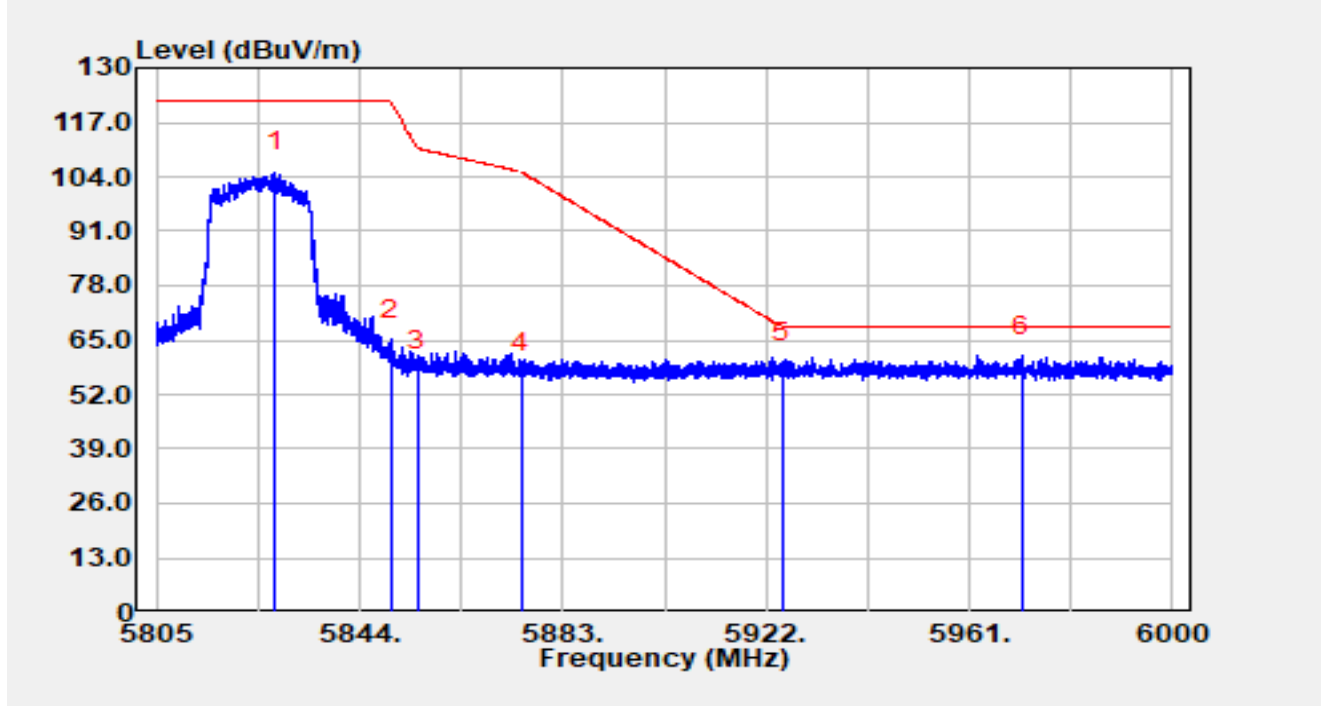


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.854	77.88	27.14	105.02	N/A	N/A	Peak
2		5850.000	37.84	27.08	64.92	-57.28	122.20	Peak
3		5855.000	30.74	27.12	57.86	-52.94	110.80	Peak
4		5875.000	29.62	27.51	57.13	-48.07	105.20	Peak
5		5925.000	32.07	27.73	59.80	-8.40	68.20	Peak
6	*	5971.023	33.54	27.78	61.31	-6.89	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-10
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

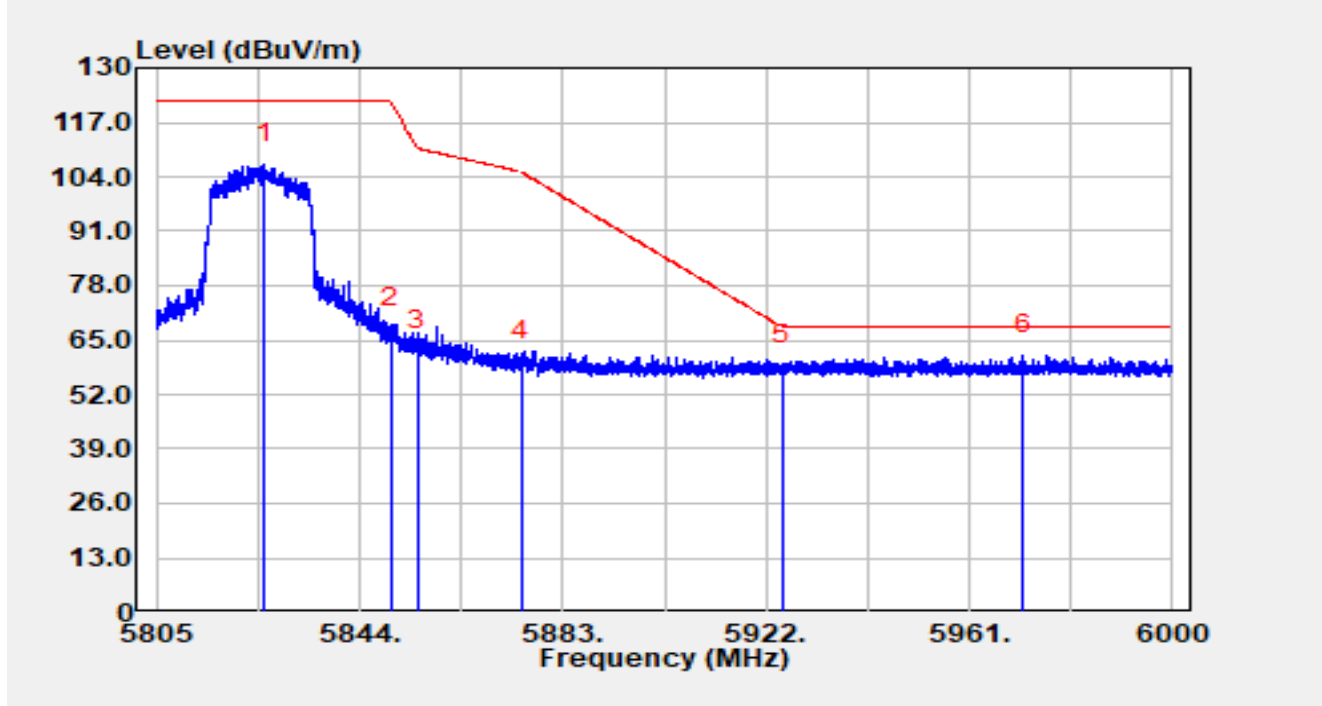


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5825.650	80.01	27.16	107.18	N/A	N/A	Peak
2		5850.000	40.88	27.08	67.96	-54.24	122.20	Peak
3		5855.000	35.20	27.12	62.32	-48.48	110.80	Peak
4		5875.000	32.40	27.51	59.91	-45.29	105.20	Peak
5		5925.000	31.44	27.73	59.17	-9.03	68.20	Peak
6	*	5971.413	33.63	27.78	61.41	-6.79	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

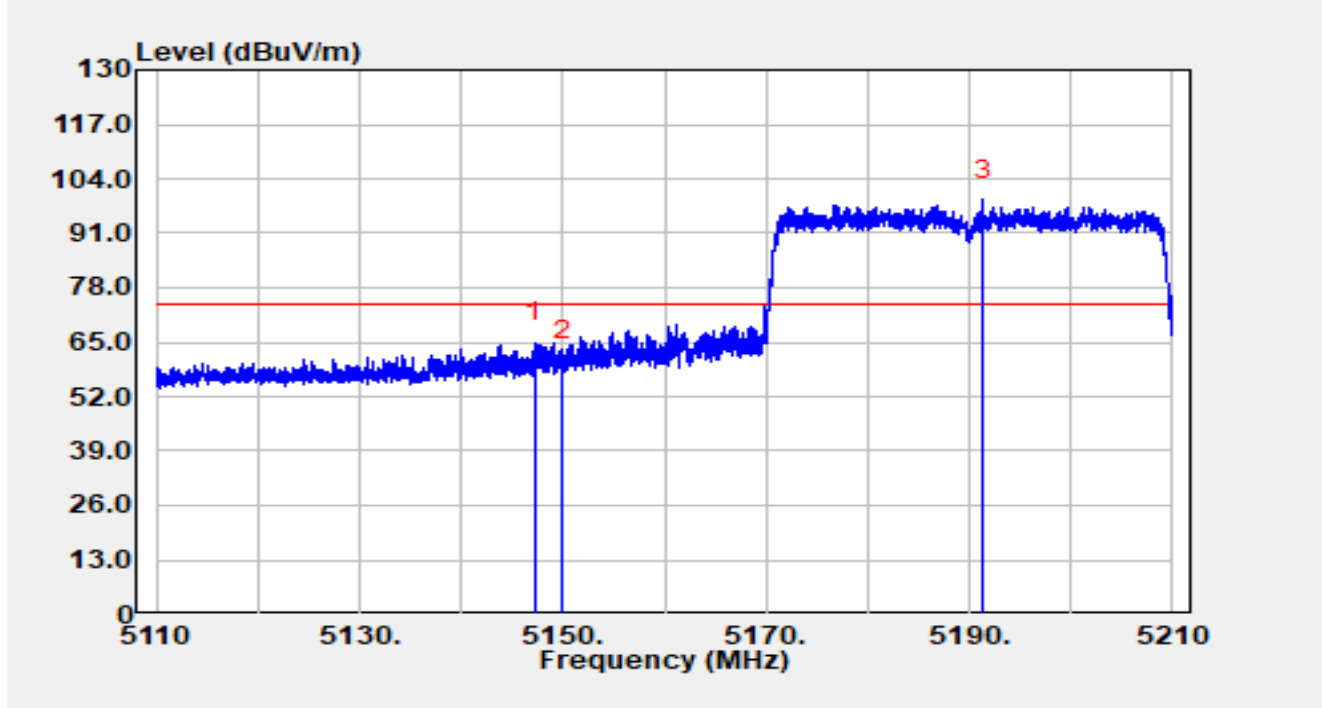


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.190	39.93	24.96	64.89	-9.11	74.00	Peak
2		5150.000	35.47	24.93	60.40	-13.60	74.00	Peak
3		5191.350	73.70	25.24	98.93	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

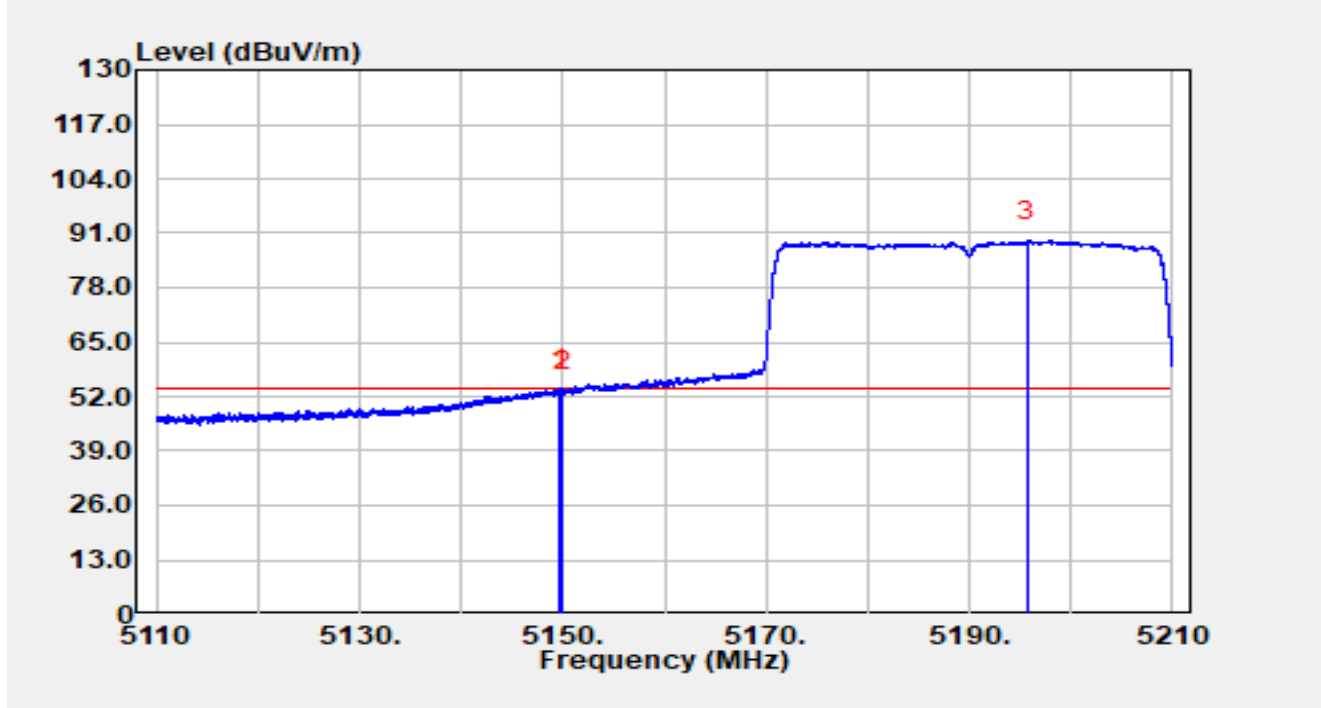


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.740	28.92	24.94	53.86	-0.14	54.00	Average
2		5150.000	28.10	24.93	53.03	-0.97	54.00	Average
3		5195.640	63.96	25.19	89.15	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

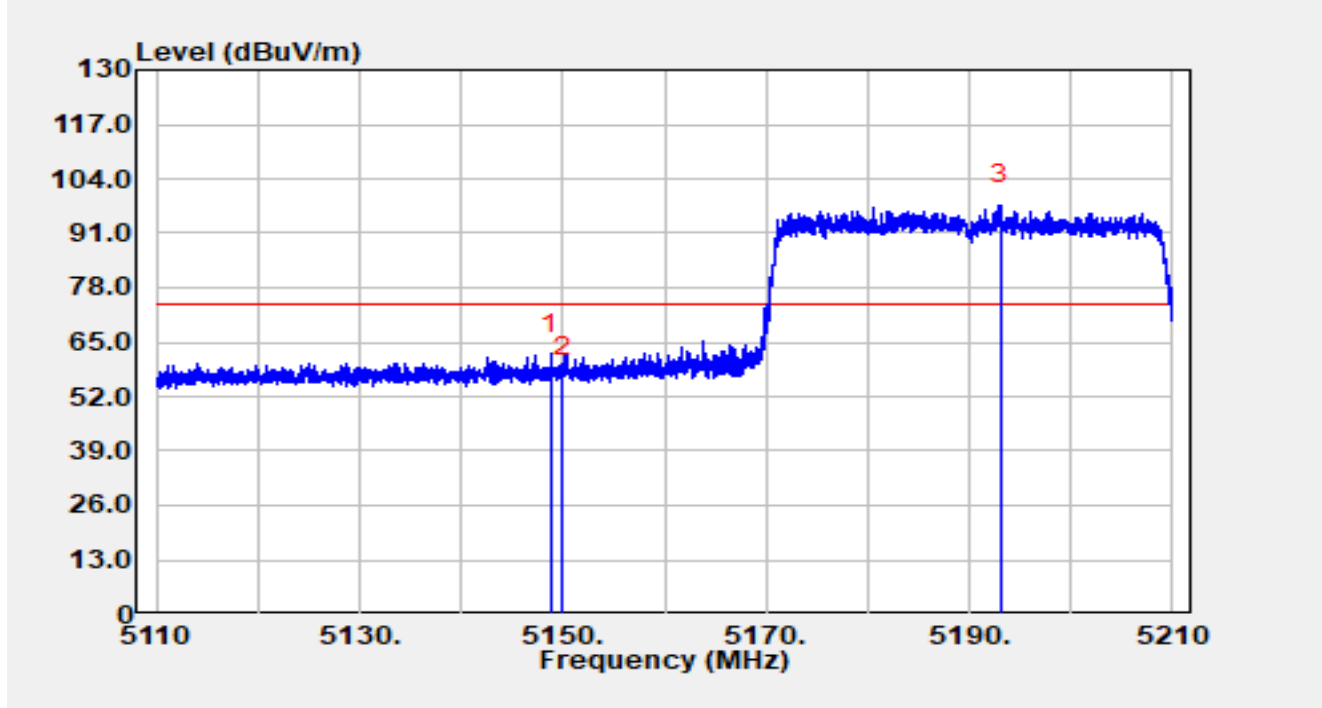


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.790	37.30	24.94	62.24	-11.76	74.00	Peak
2		5150.000	31.73	24.93	56.67	-17.33	74.00	Peak
3		5193.010	72.61	25.22	97.84	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

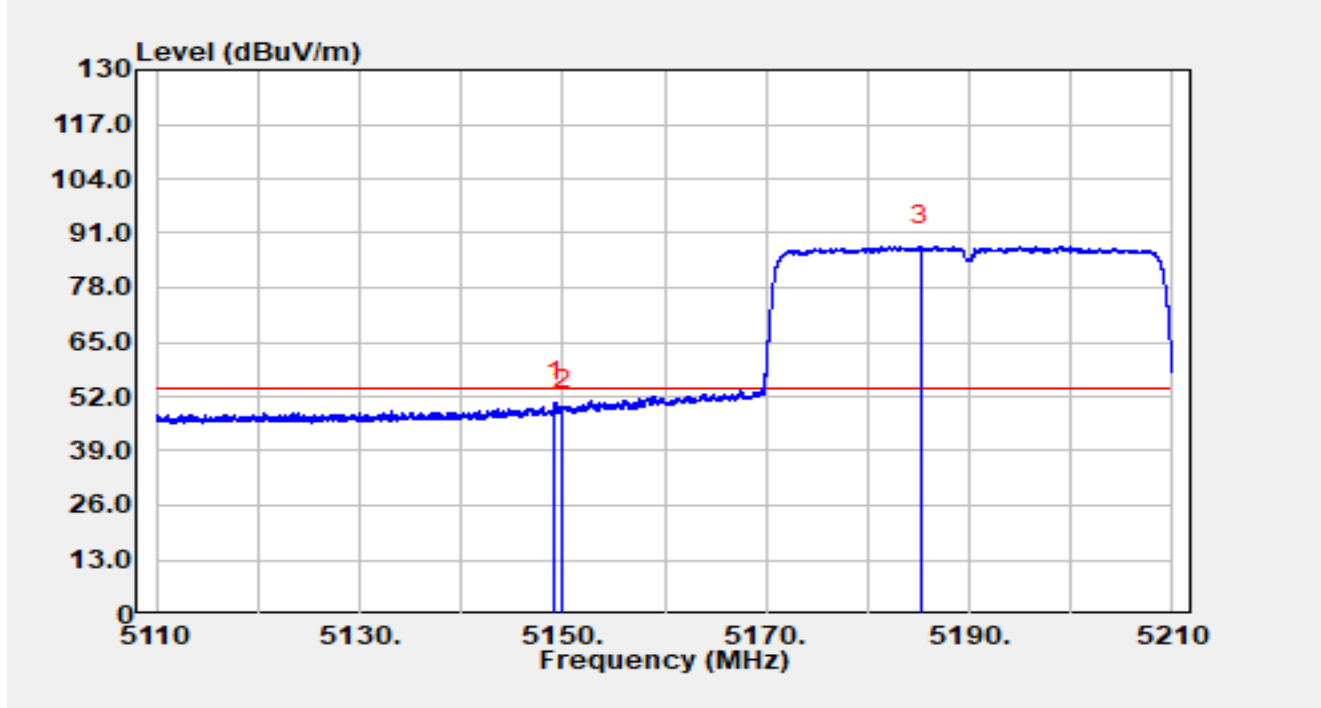


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.210	25.74	24.94	50.68	-3.32	54.00	Average
2		5150.000	23.75	24.93	48.68	-5.32	54.00	Average
3		5185.170	62.62	25.21	87.83	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

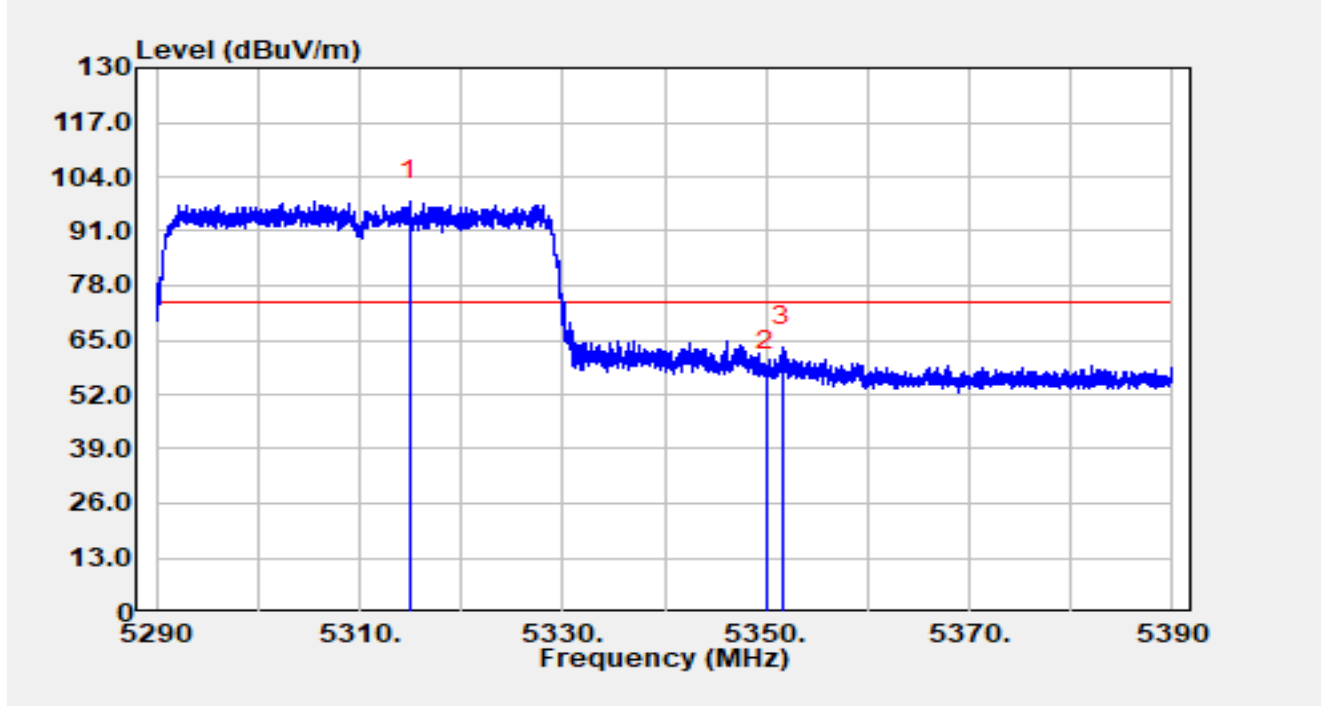


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.920	72.75	25.45	98.20	N/A	N/A	Peak
2		5350.000	31.71	25.74	57.45	-16.55	74.00	Peak
3	*	5351.550	37.70	25.72	63.42	-10.58	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

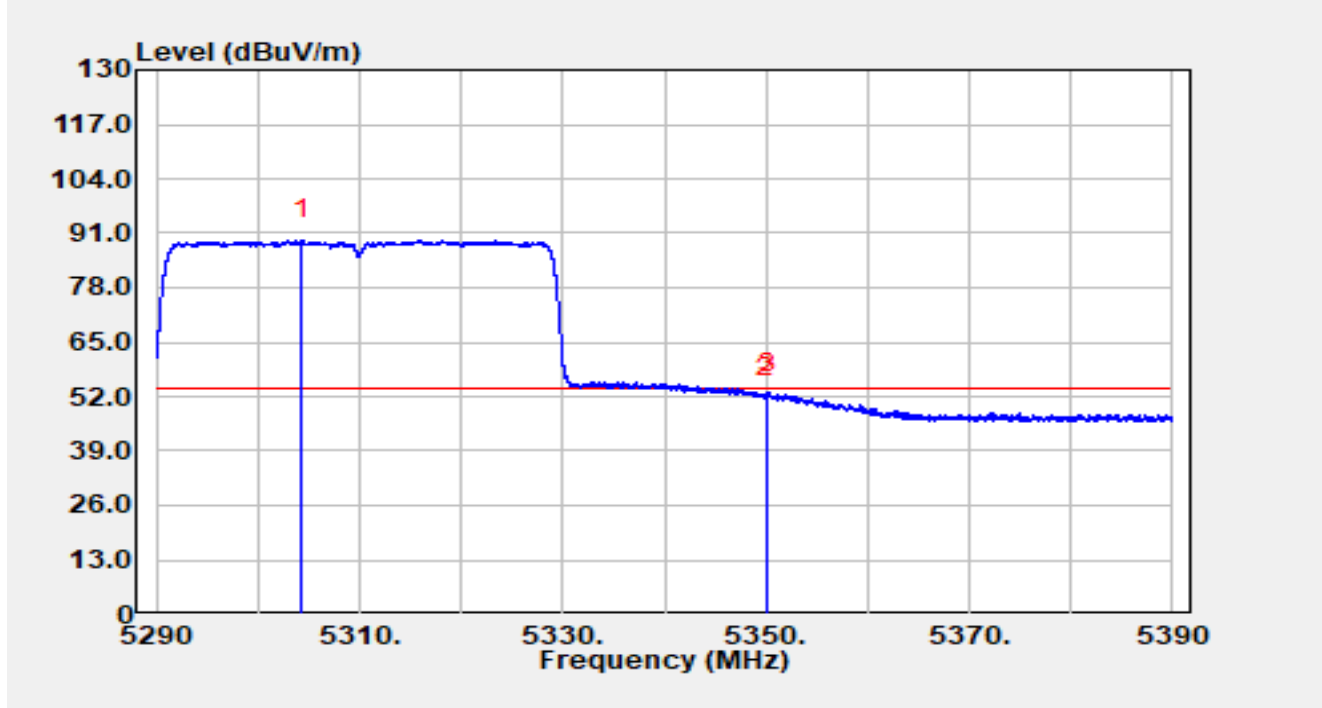


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5304.320	63.87	25.49	89.36	N/A	N/A	Average
2		5350.000	25.98	25.74	51.72	-2.28	54.00	Average
3	*	5350.160	27.18	25.74	52.92	-1.08	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

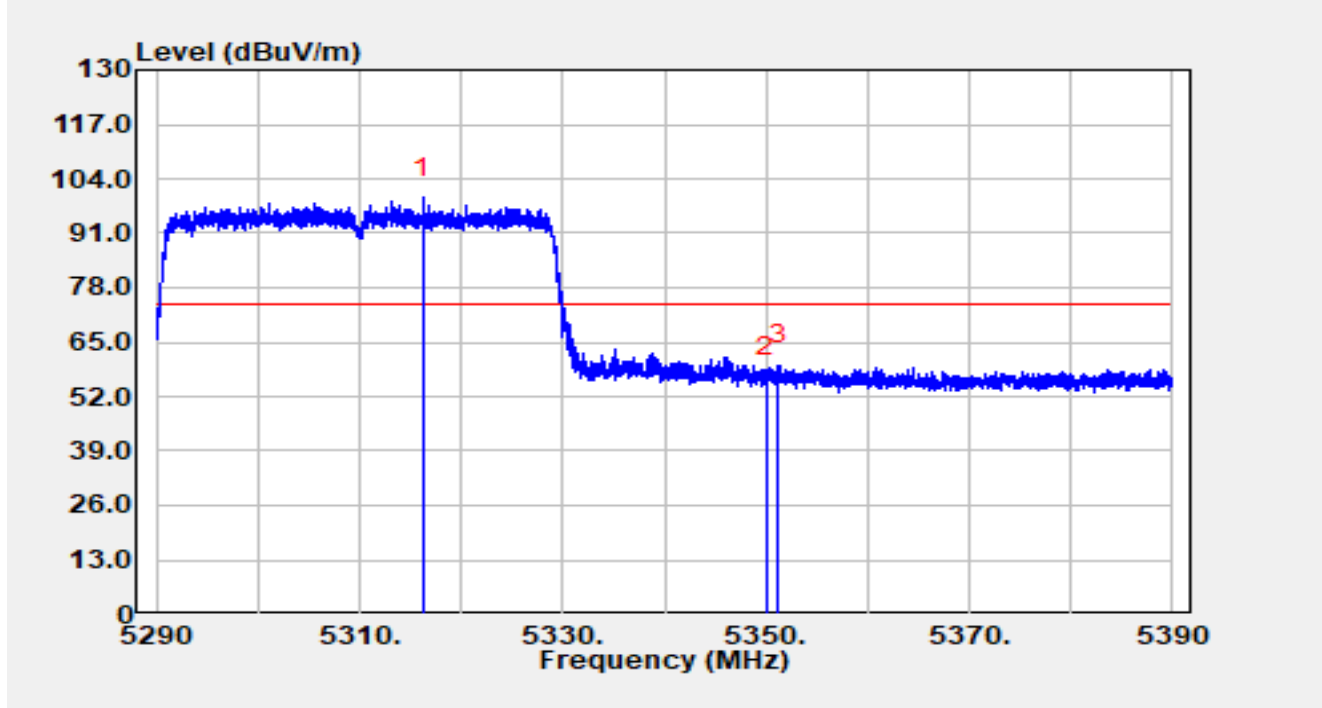


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5316.270	73.93	25.46	99.39	N/A	N/A	Peak
2		5350.000	30.83	25.74	56.57	-17.43	74.00	Peak
3	*	5351.260	33.71	25.72	59.43	-14.57	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

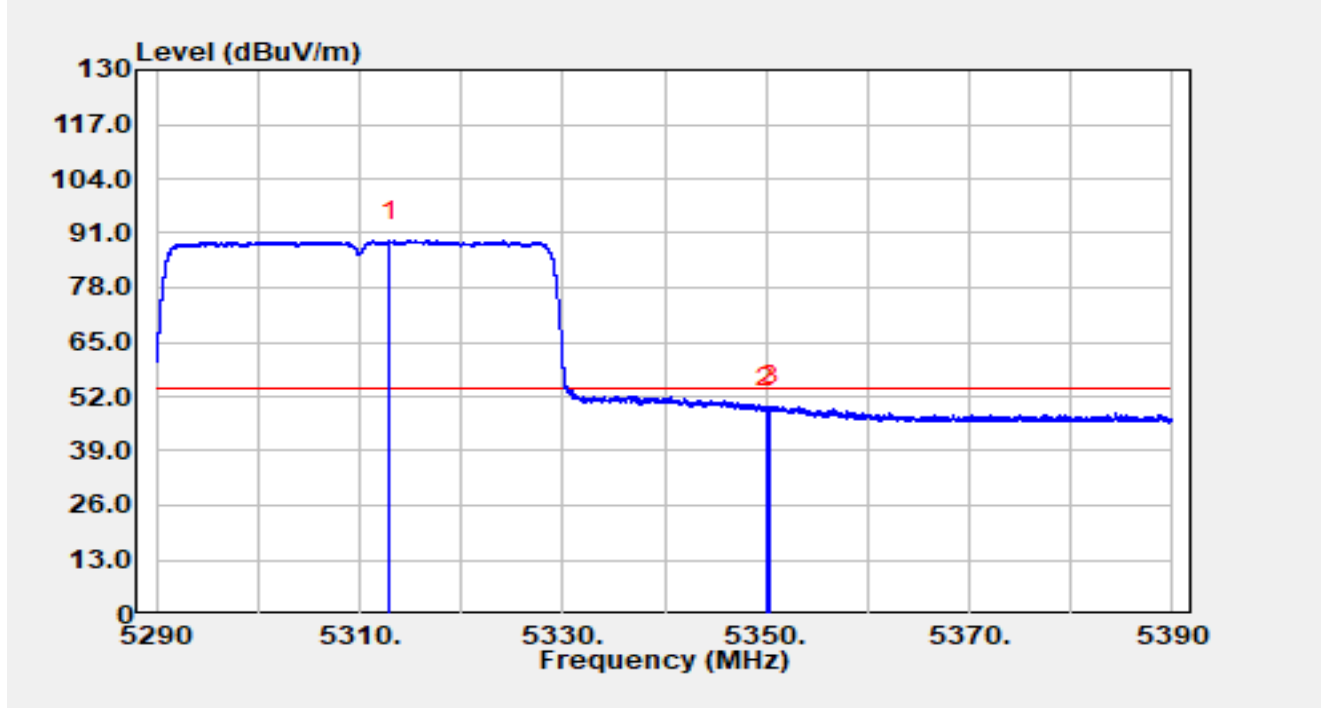


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.940	63.75	25.44	89.19	N/A	N/A	Average
2		5350.000	23.58	25.74	49.32	-4.68	54.00	Average
3	*	5350.380	23.83	25.73	49.56	-4.44	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

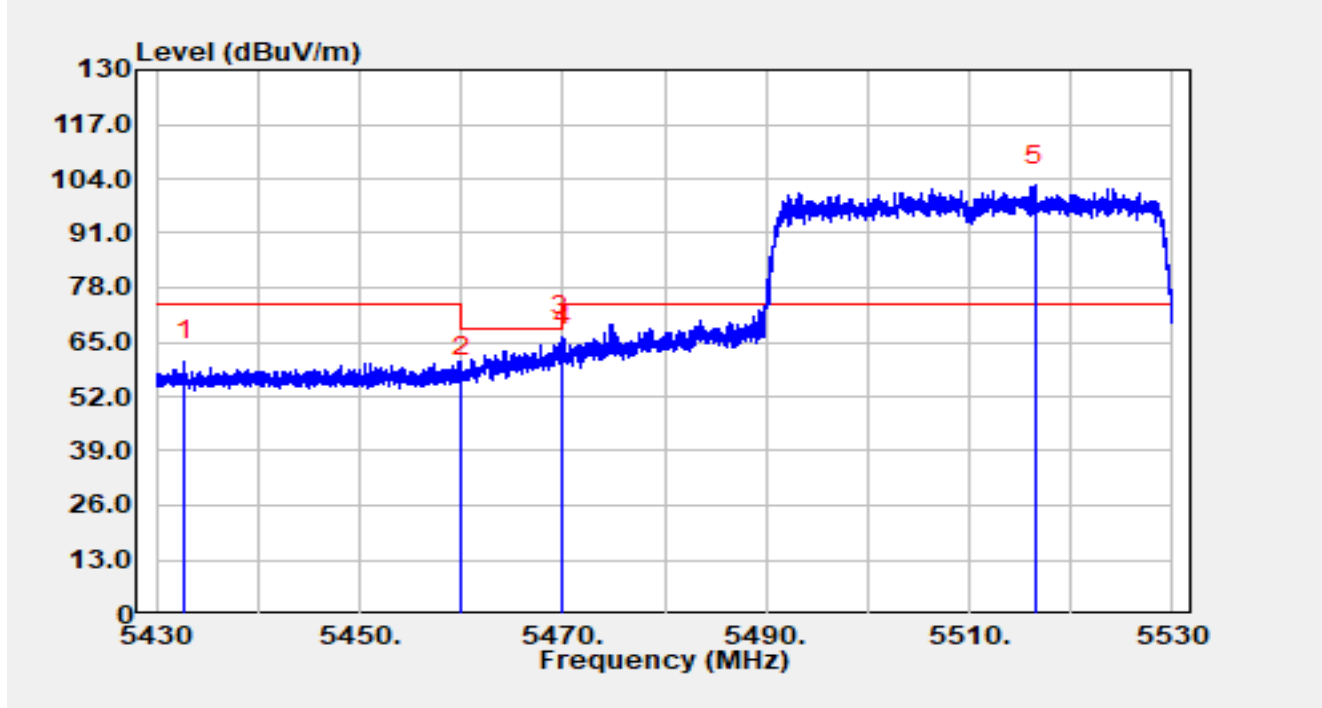


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.810	34.59	25.75	60.34	-13.66	74.00	Peak
2		5460.000	31.10	25.80	56.90	-11.30	68.20	Peak
3	*	5469.840	40.64	25.67	66.31	-1.89	68.20	Peak
4		5470.000	38.15	25.67	63.82	-4.38	68.20	Peak
5		5516.510	76.60	25.74	102.34	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

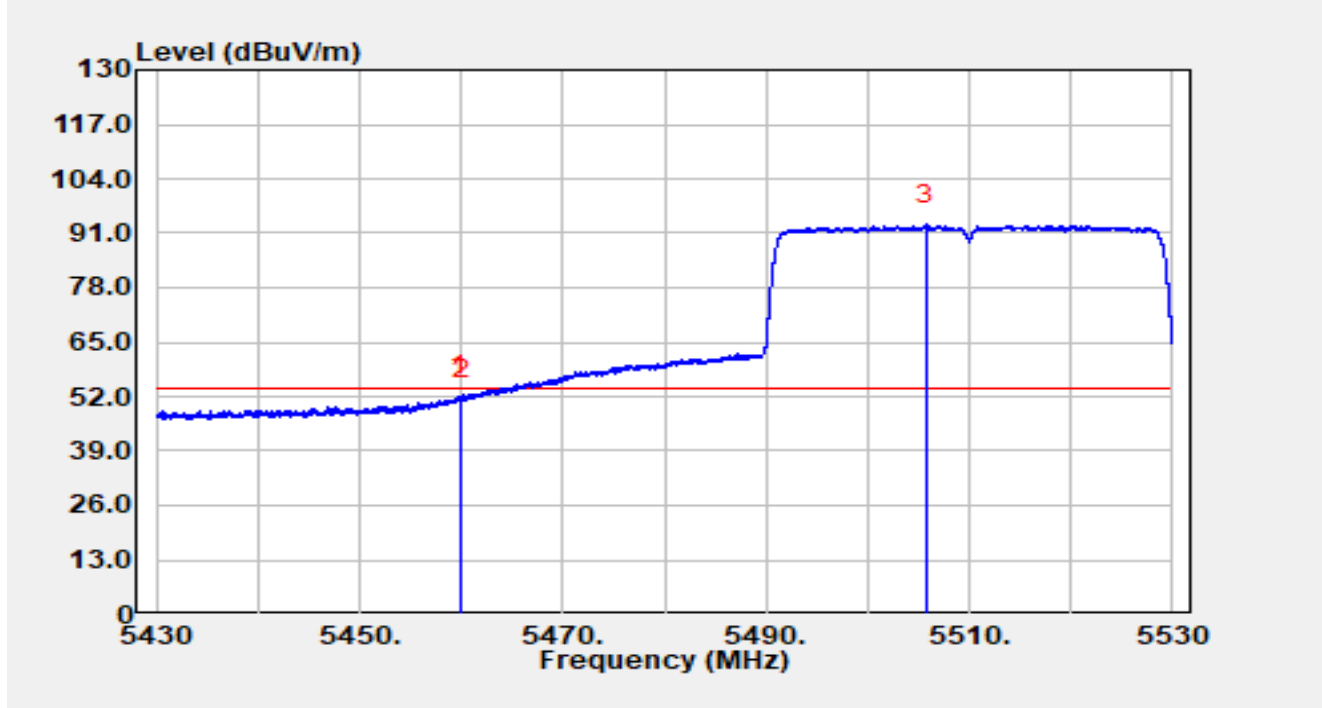


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.860	26.32	25.80	52.12	-1.88	54.00	Average
2		5460.000	25.53	25.80	51.33	-2.67	54.00	Average
3		5505.780	67.10	25.89	92.99	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

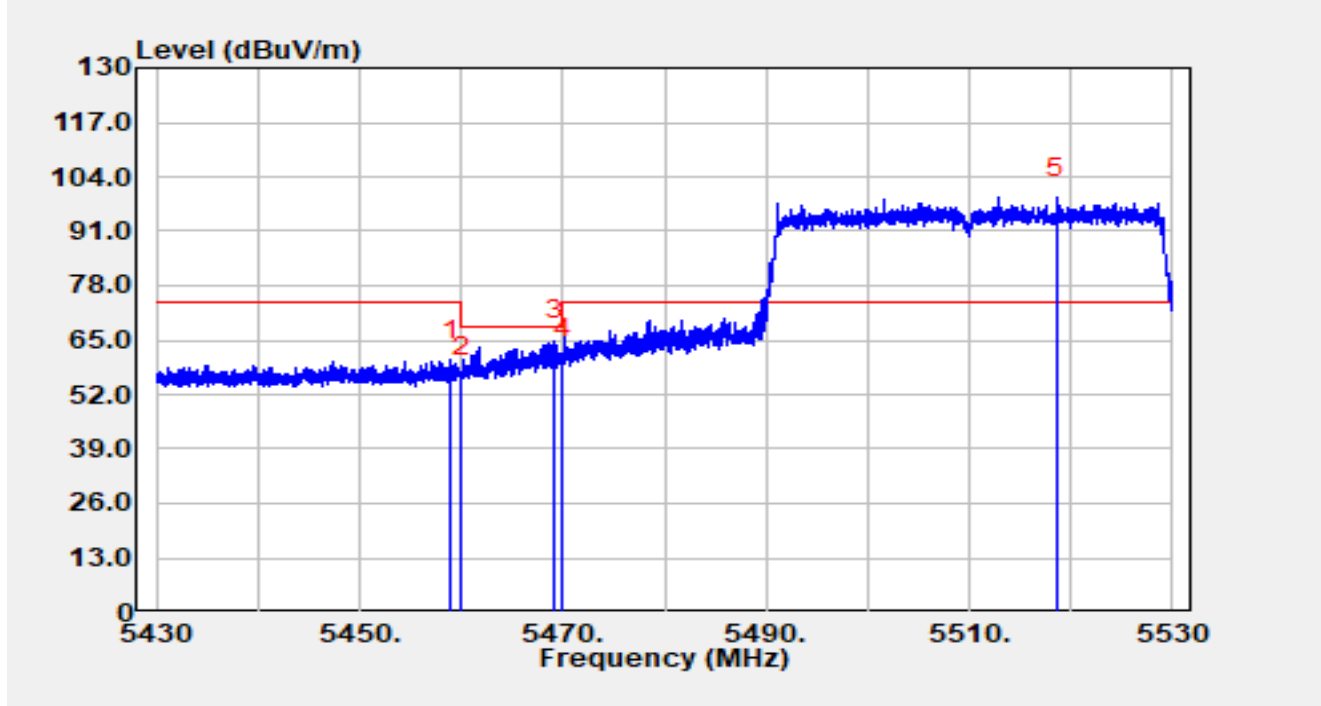


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.010	34.43	25.81	60.24	-13.76	74.00	Peak
2		5460.000	30.21	25.80	56.01	-12.19	68.20	Peak
3	*	5469.240	39.31	25.68	64.99	-3.21	68.20	Peak
4		5470.000	34.69	25.67	60.36	-7.84	68.20	Peak
5		5518.570	73.38	25.71	99.09	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

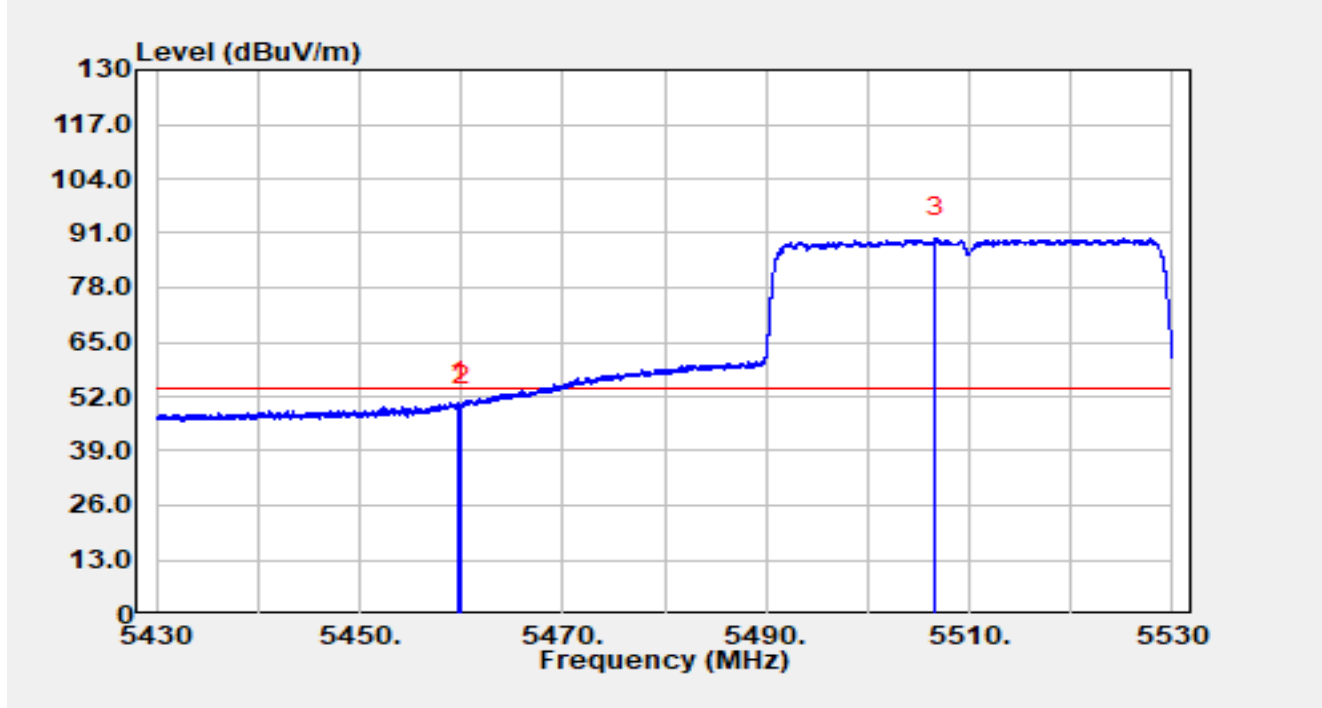


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.780	24.88	25.80	50.68	-3.32	54.00	Average
2		5460.000	24.16	25.80	49.96	-4.04	54.00	Average
3		5506.710	64.12	25.88	90.00	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

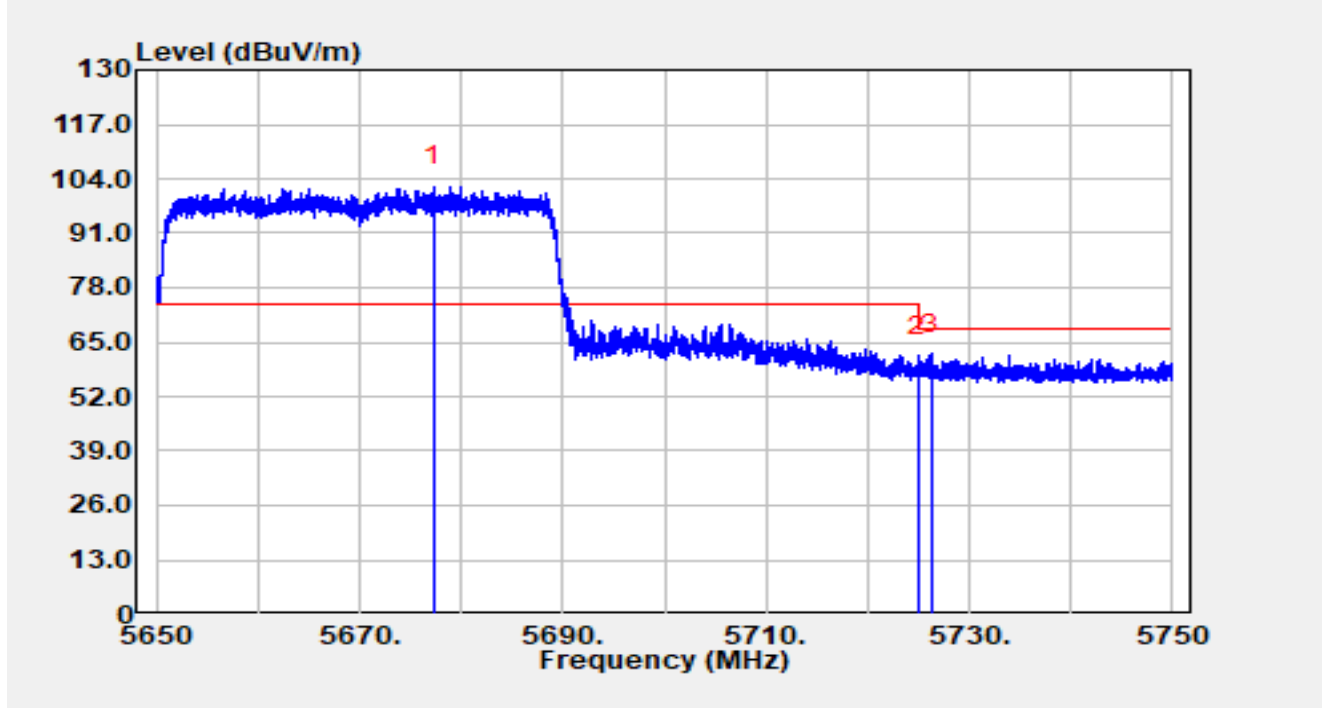


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5677.310	76.08	26.16	102.24	N/A	N/A	Peak
2		5725.000	35.24	26.52	61.76	-6.44	68.20	Peak
3	*	5726.240	35.71	26.52	62.22	-5.98	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

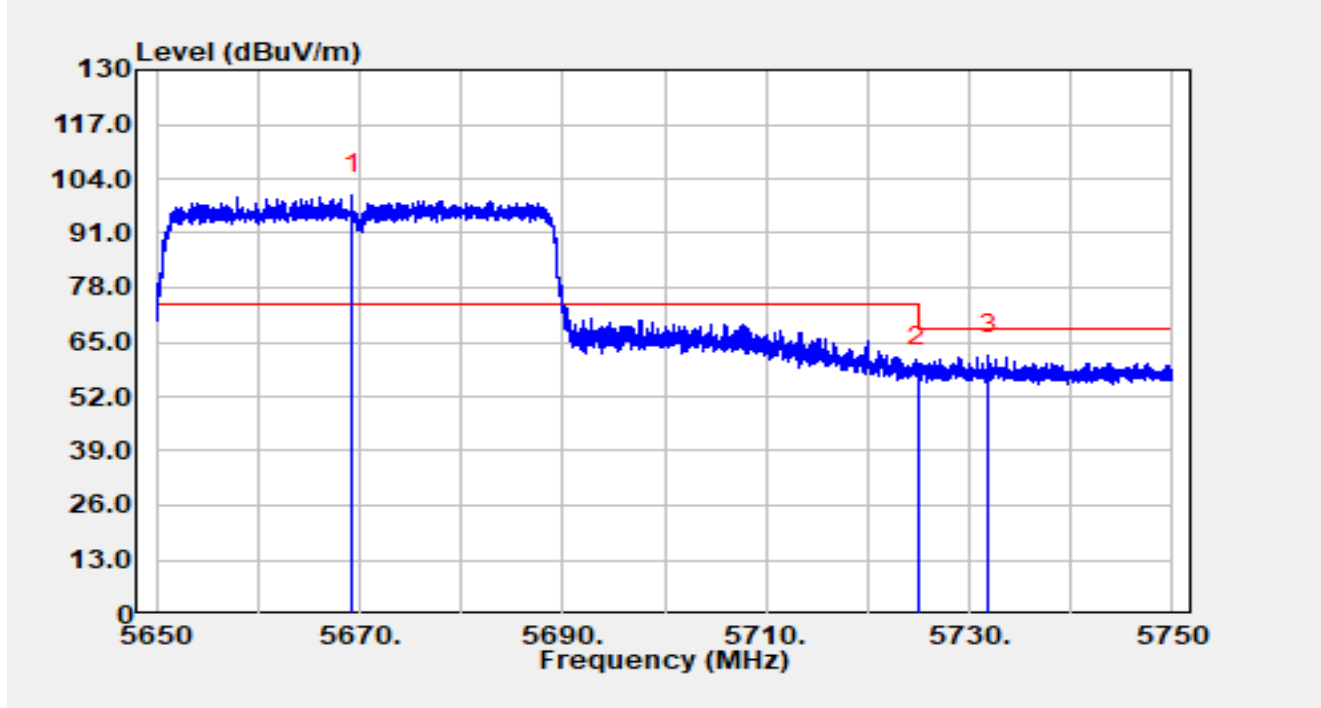


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5669.320	73.84	26.24	100.08	N/A	N/A	Peak
2		5725.000	32.41	26.52	58.94	-9.26	68.20	Peak
3	*	5731.920	35.48	26.50	61.98	-6.22	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

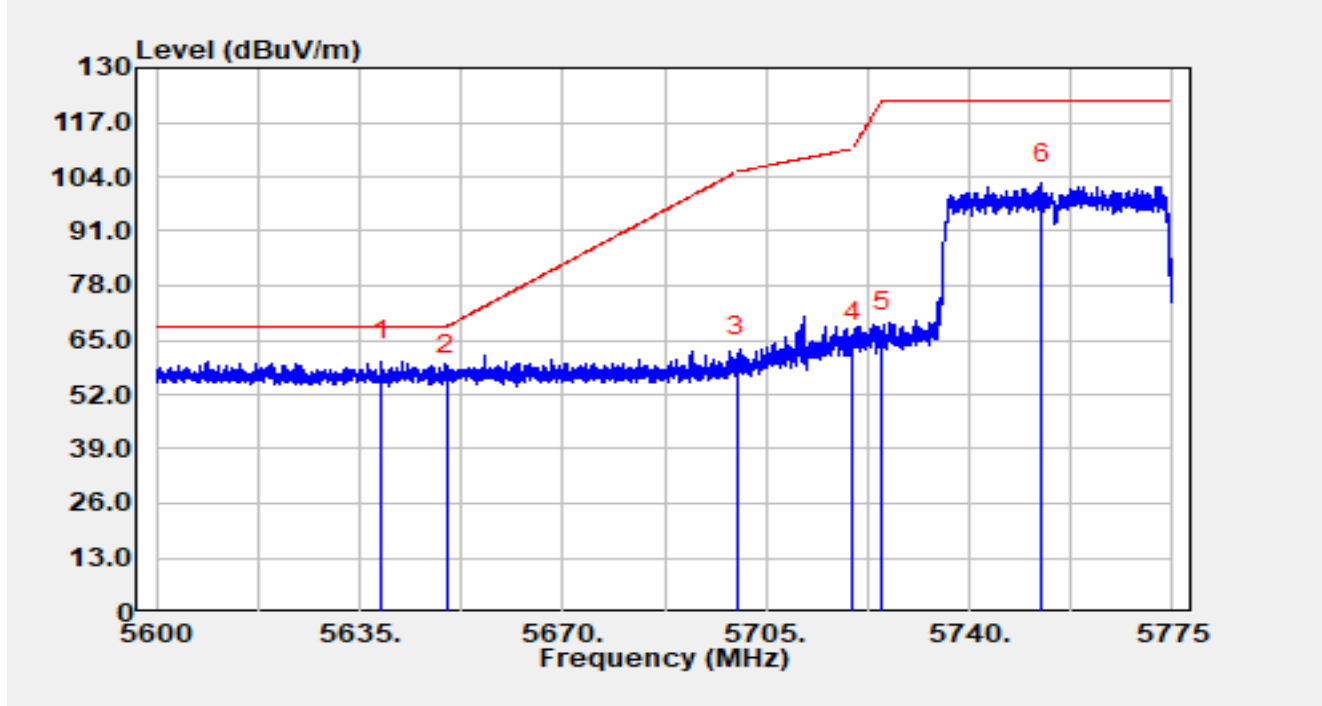


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5638.815	33.96	25.98	59.94	-8.26	68.20	Peak
2		5650.000	30.78	26.12	56.91	-11.29	68.20	Peak
3		5700.000	34.81	26.36	61.16	-44.04	105.20	Peak
4		5720.000	38.01	26.54	64.55	-46.25	110.80	Peak
5		5725.000	40.58	26.52	67.10	-55.10	122.20	Peak
6		5752.442	75.83	26.53	102.36	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

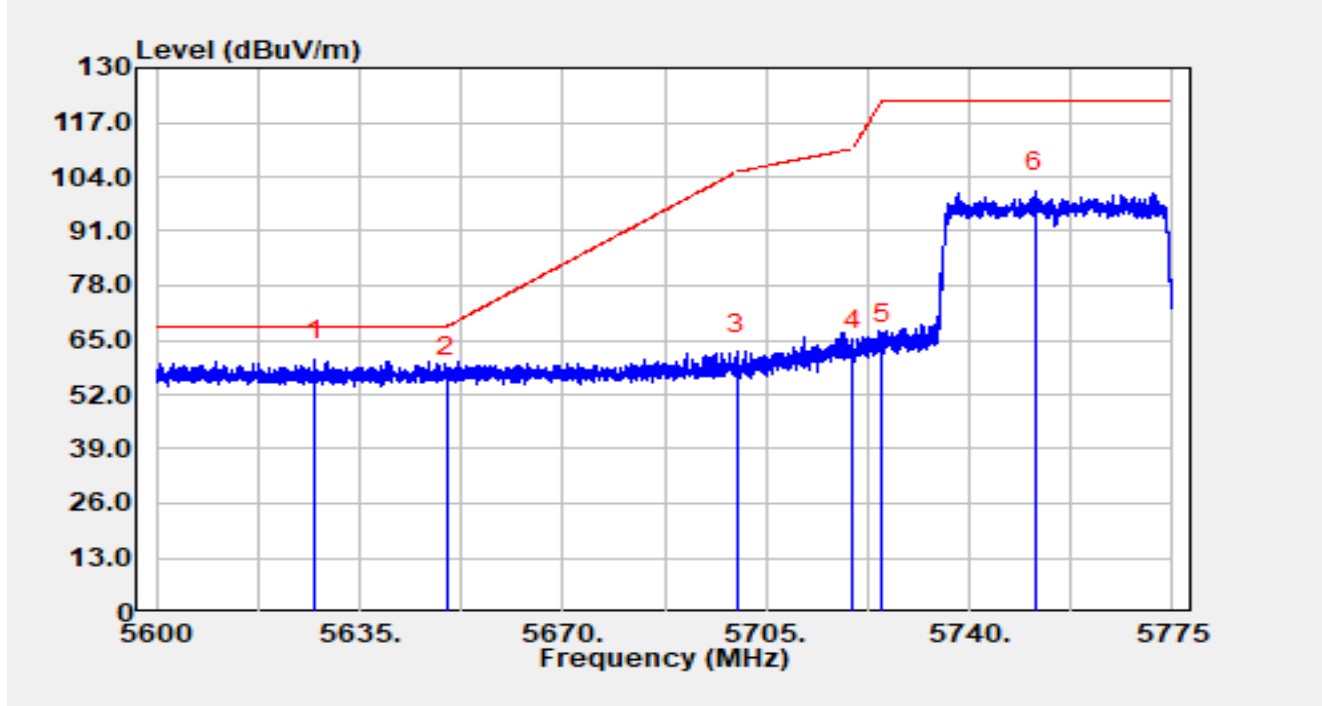


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5627.388	34.48	25.85	60.33	-7.87	68.20	Peak
2		5650.000	29.86	26.12	55.98	-12.22	68.20	Peak
3		5700.000	35.30	26.36	61.66	-43.54	105.20	Peak
4		5720.000	35.93	26.54	62.47	-48.33	110.80	Peak
5		5725.000	37.28	26.52	63.80	-58.40	122.20	Peak
6		5751.375	73.82	26.51	100.32	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

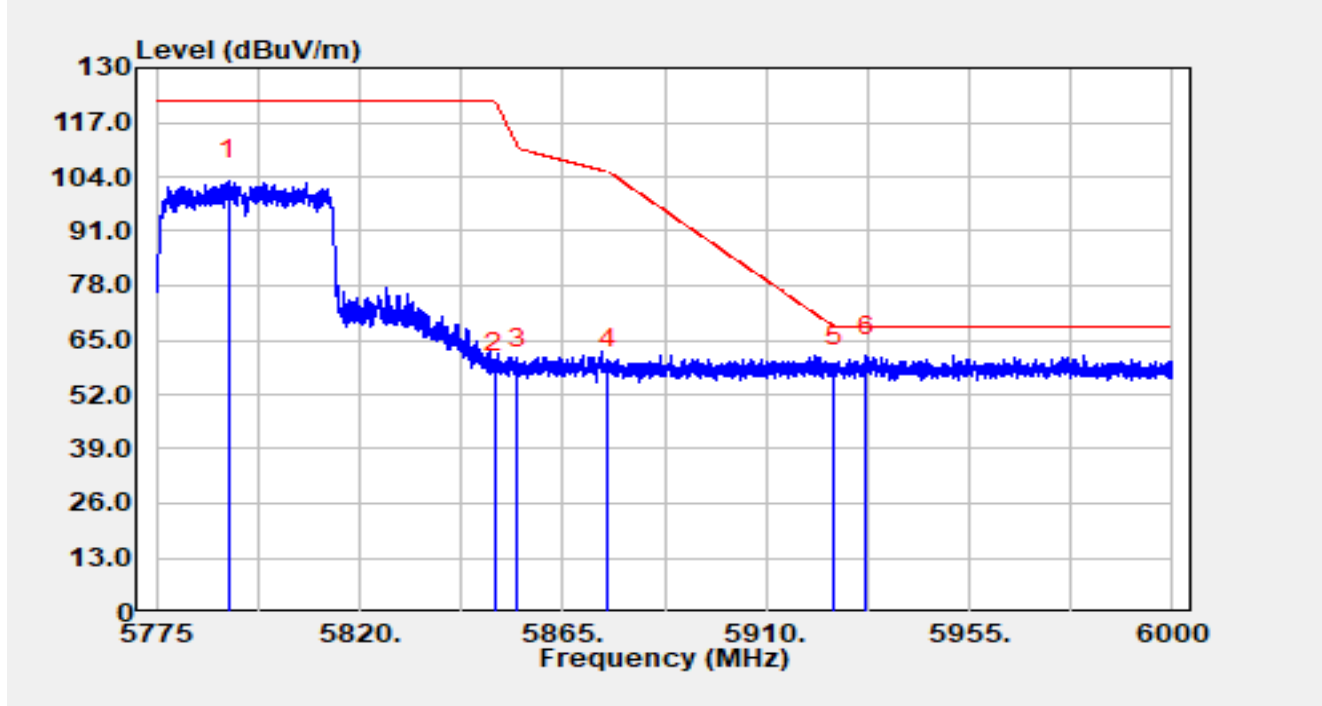


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5790.975	76.46	26.71	103.17	N/A	N/A	Peak
2		5850.000	29.93	27.08	57.00	-65.20	122.20	Peak
3		5855.000	30.95	27.12	58.07	-52.73	110.80	Peak
4		5875.000	30.48	27.51	57.99	-47.21	105.20	Peak
5		5925.000	30.97	27.73	58.70	-9.50	68.20	Peak
6	*	5932.252	33.58	27.71	61.29	-6.91	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

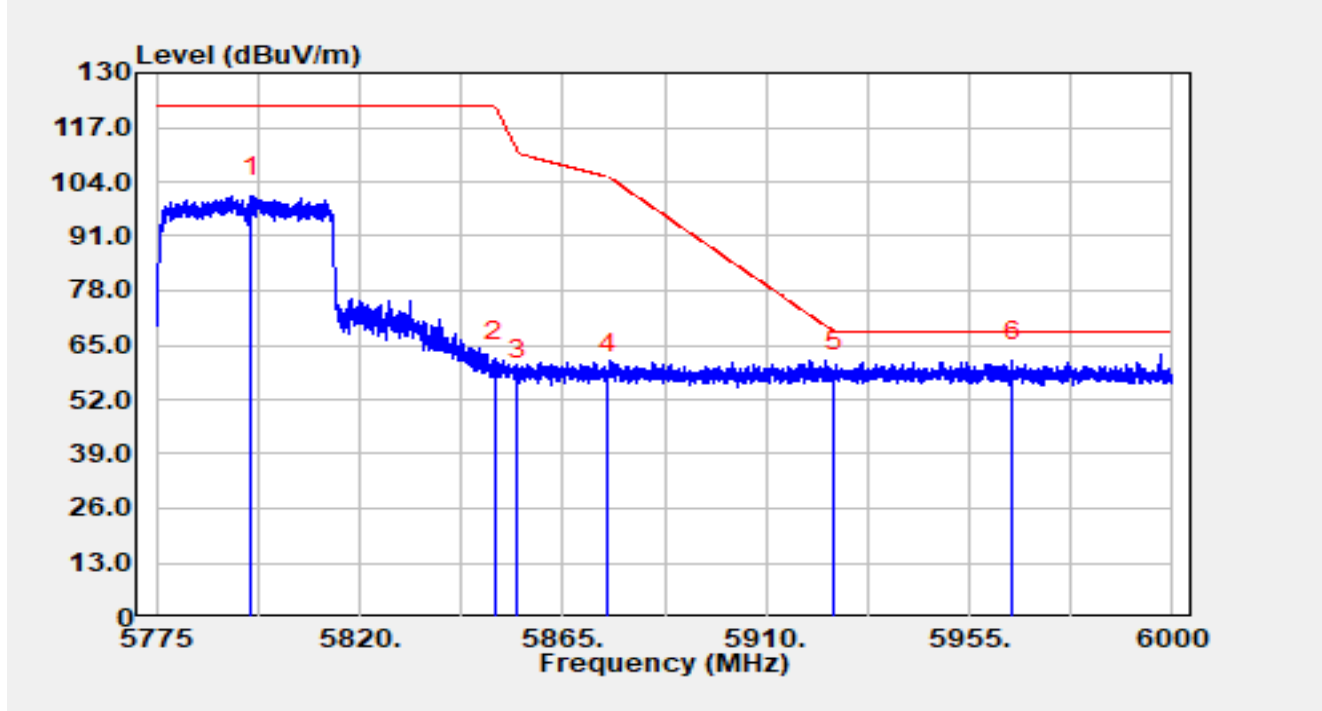


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5796.127	73.72	26.81	100.52	N/A	N/A	Peak
2		5850.000	34.00	27.08	61.08	-61.12	122.20	Peak
3		5855.000	29.65	27.12	56.77	-54.03	110.80	Peak
4		5875.000	30.39	27.51	57.90	-47.30	105.20	Peak
5		5925.000	30.95	27.73	58.68	-9.52	68.20	Peak
6	*	5964.607	33.47	27.71	61.18	-7.02	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

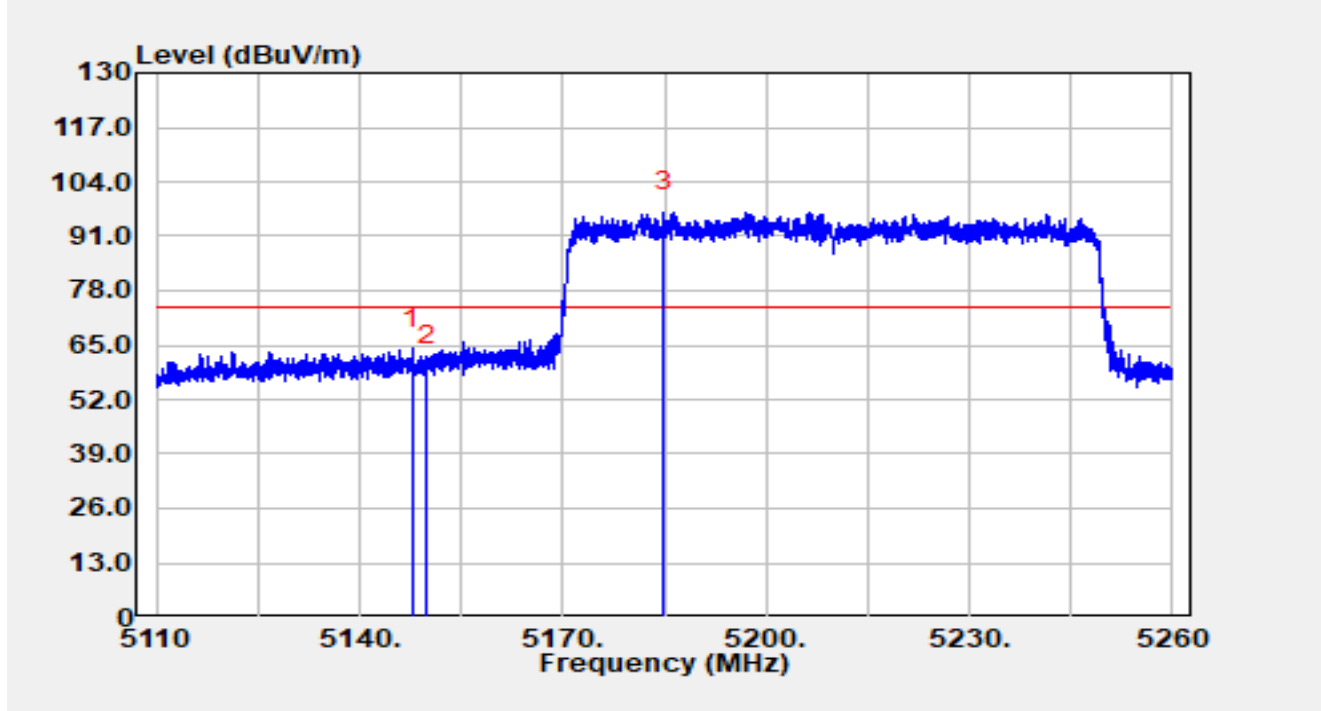


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.830	39.13	24.95	64.08	-9.92	74.00	Peak
2		5150.000	35.24	24.93	60.17	-13.83	74.00	Peak
3		5184.865	71.54	25.21	96.75	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

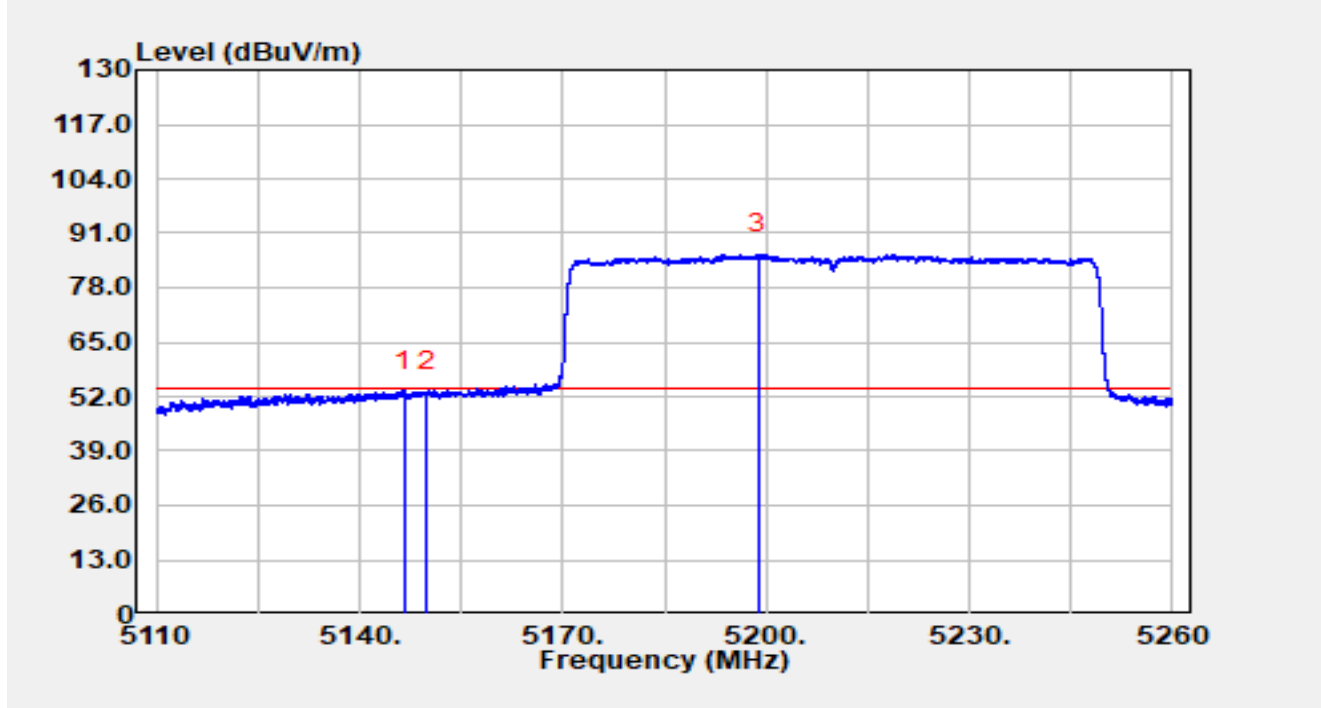


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.525	28.50	24.96	53.46	-0.54	54.00	Average
2		5150.000	28.28	24.93	53.21	-0.79	54.00	Average
3		5198.860	60.79	25.15	85.95	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

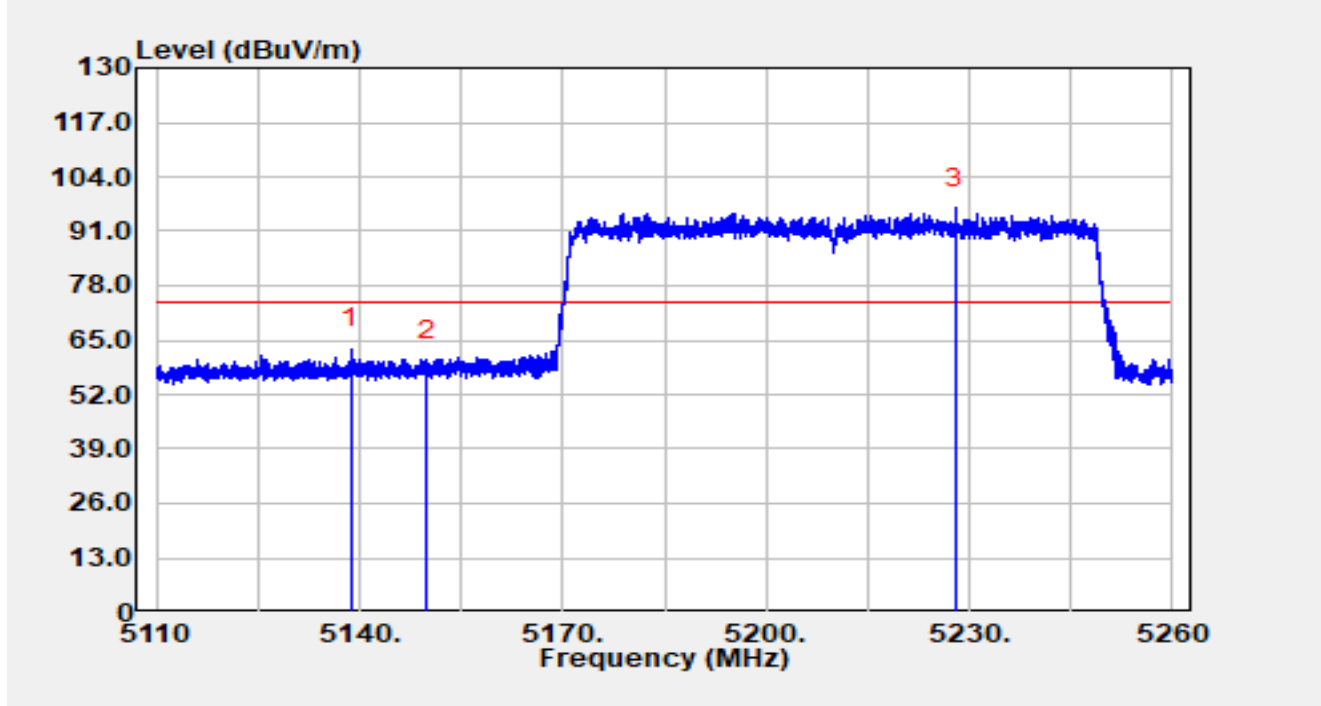


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5138.680	37.92	25.03	62.94	-11.06	74.00	Peak
2		5150.000	35.30	24.93	60.24	-13.76	74.00	Peak
3		5227.945	71.34	25.20	96.54	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

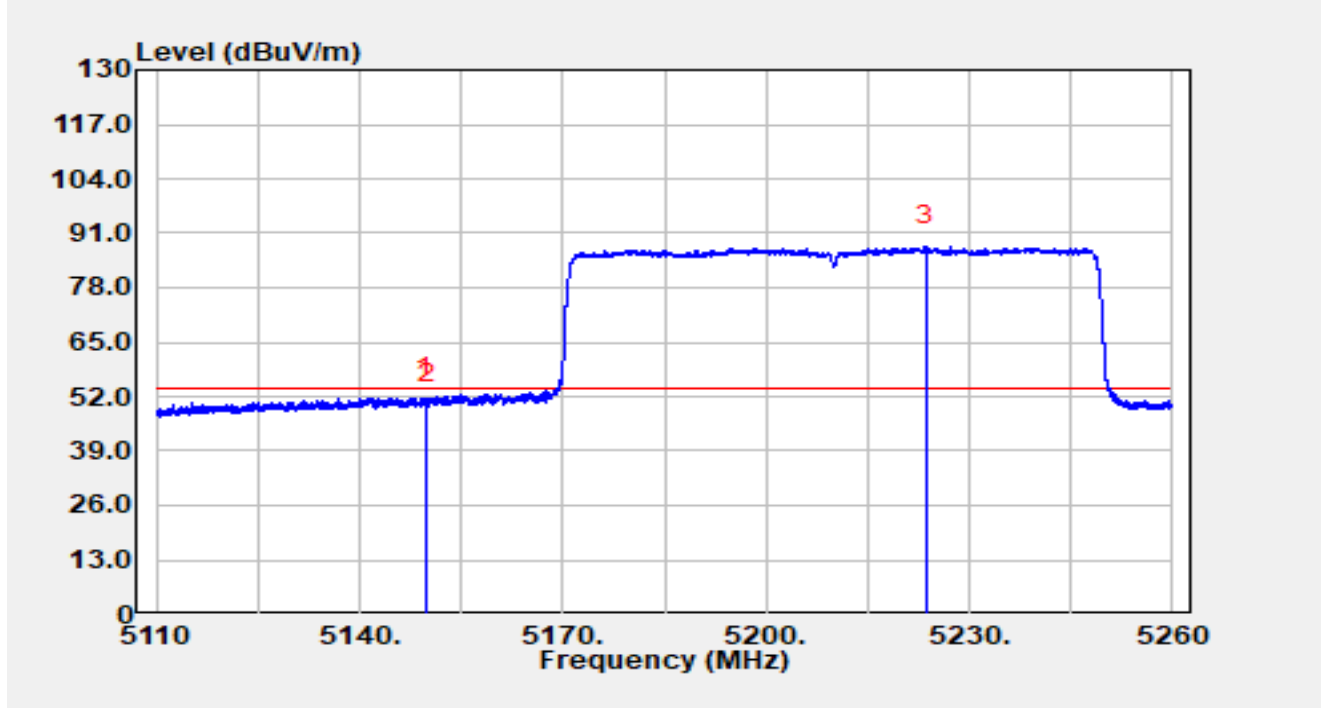


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.645	26.78	24.94	51.71	-2.29	54.00	Average
2		5150.000	25.17	24.93	50.10	-3.90	54.00	Average
3		5223.520	62.86	25.16	88.02	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

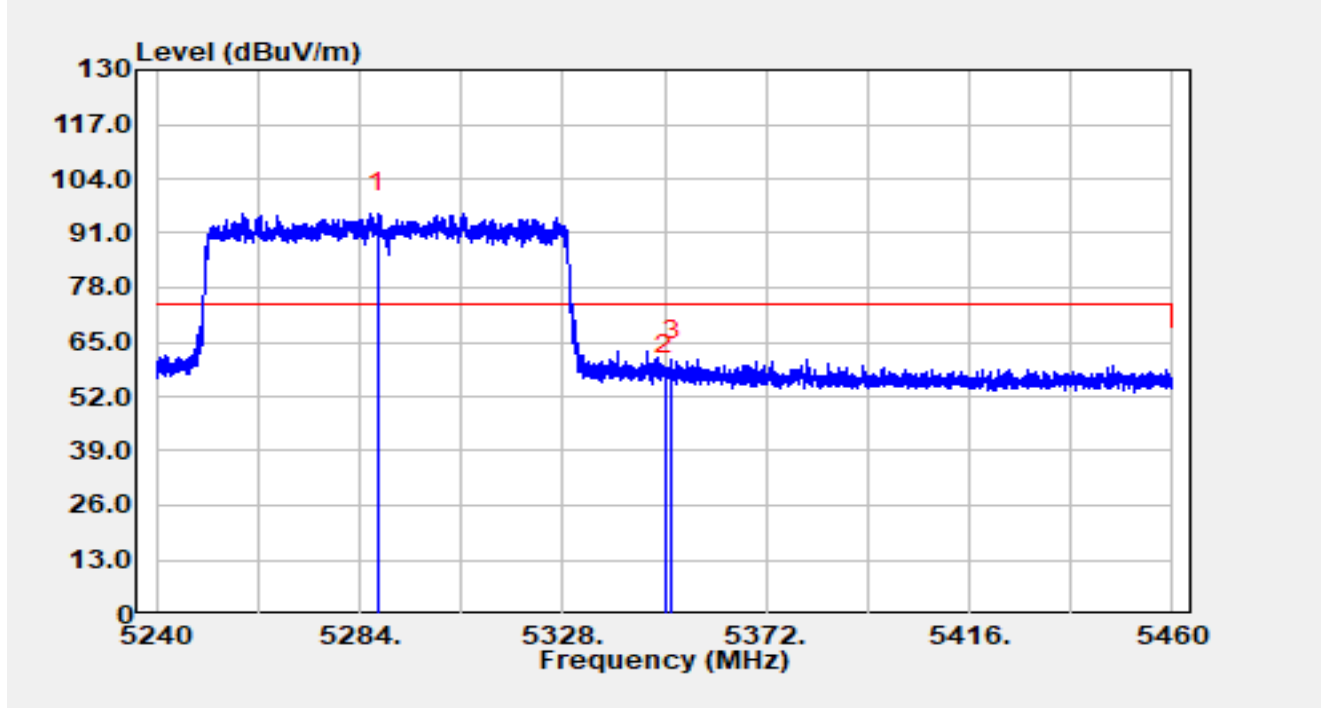


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5287.960	70.36	25.48	95.84	N/A	N/A	Peak
2		5350.000	31.50	25.74	57.24	-16.76	74.00	Peak
3	*	5351.518	35.07	25.72	60.79	-13.21	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

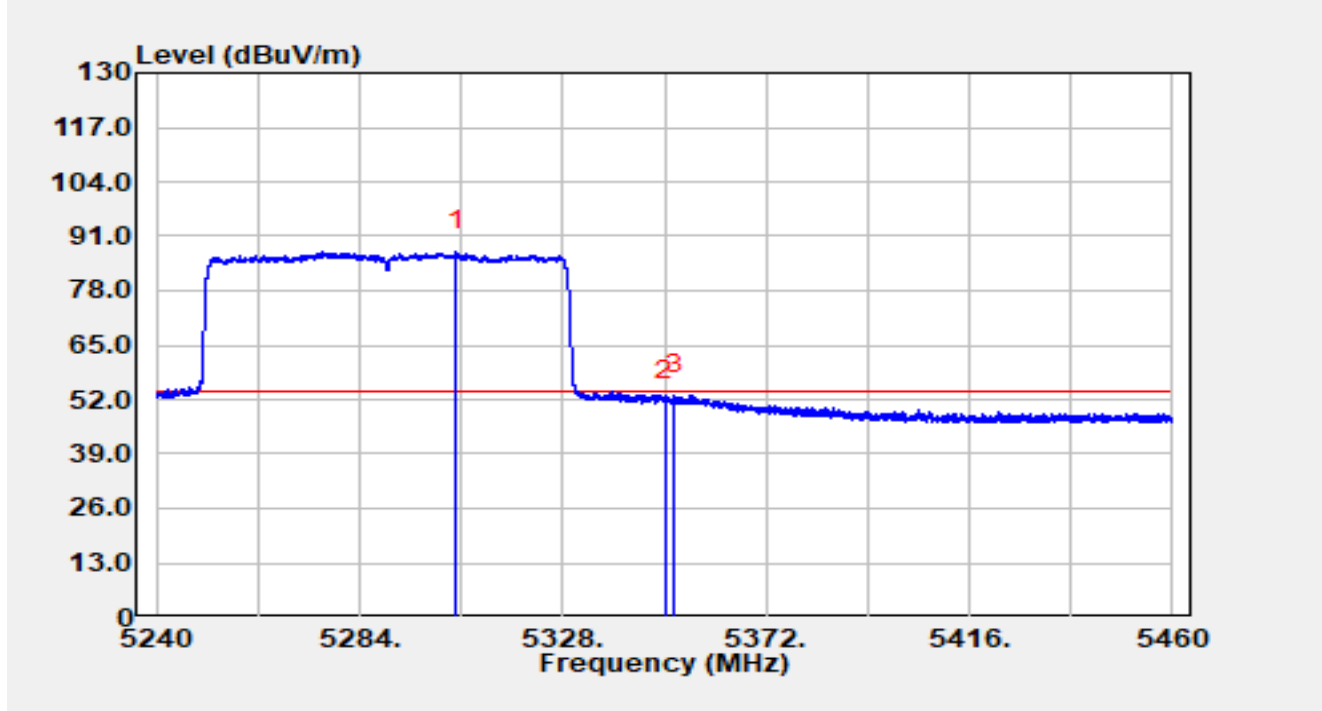


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5304.878	61.96	25.48	87.45	N/A	N/A	Average
2		5350.000	25.91	25.74	51.65	-2.35	54.00	Average
3	*	5352.244	27.40	25.71	53.10	-0.90	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

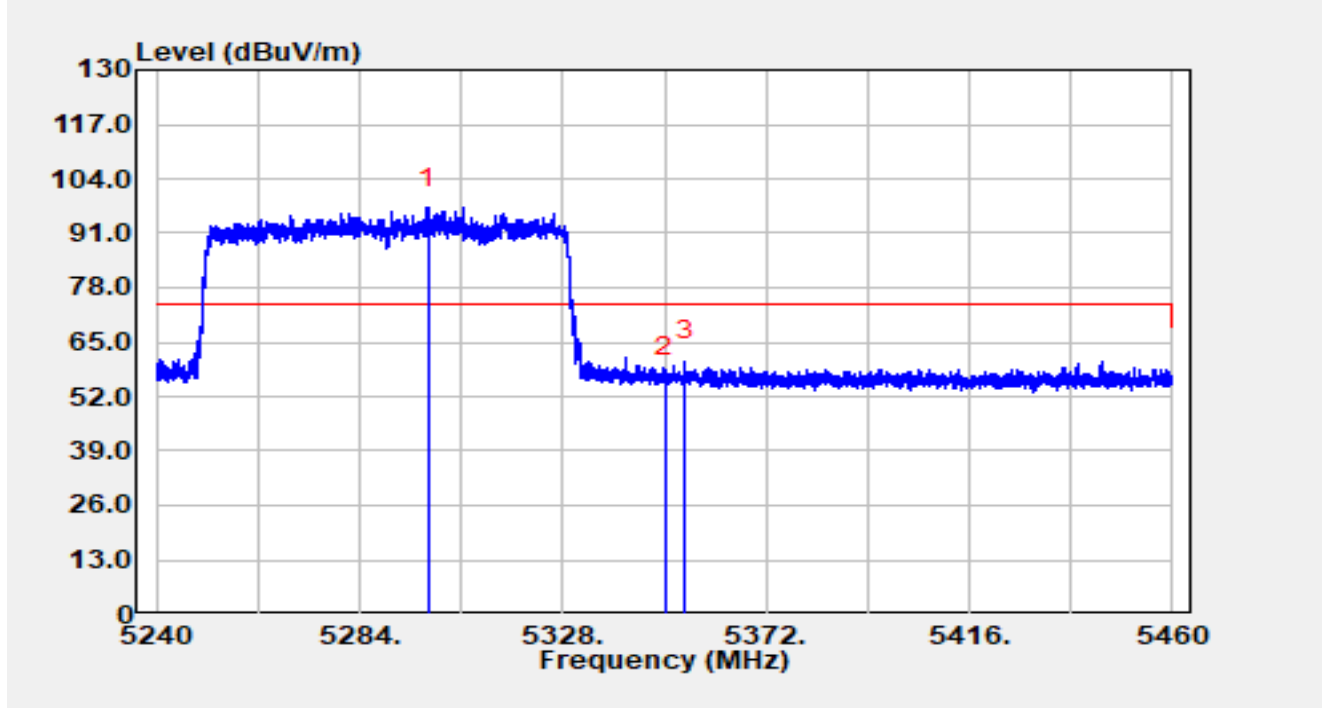


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5298.718	71.57	25.52	97.09	N/A	N/A	Peak
2		5350.000	31.07	25.74	56.81	-17.19	74.00	Peak
3	*	5354.532	34.72	25.68	60.40	-13.60	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

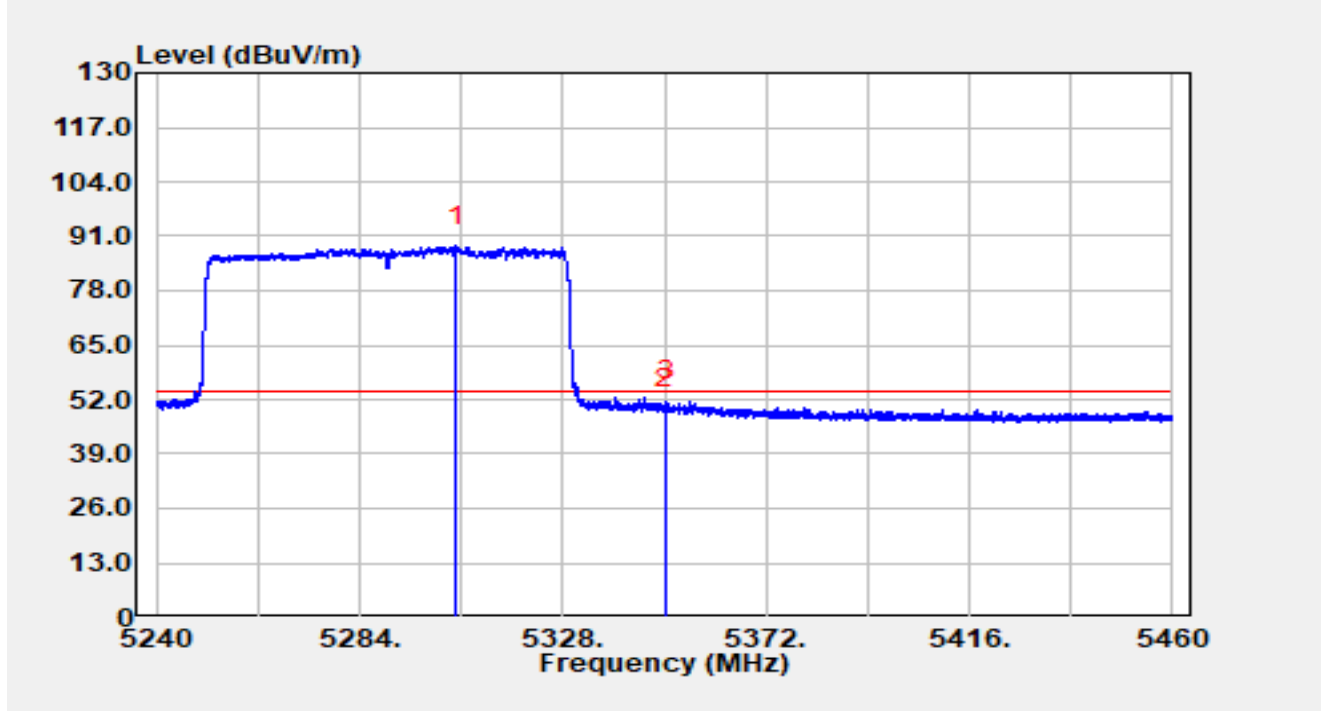


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5304.878	63.11	25.48	88.59	N/A	N/A	Average
2		5350.000	23.86	25.74	49.60	-4.40	54.00	Average
3	*	5350.308	25.91	25.74	51.64	-2.36	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

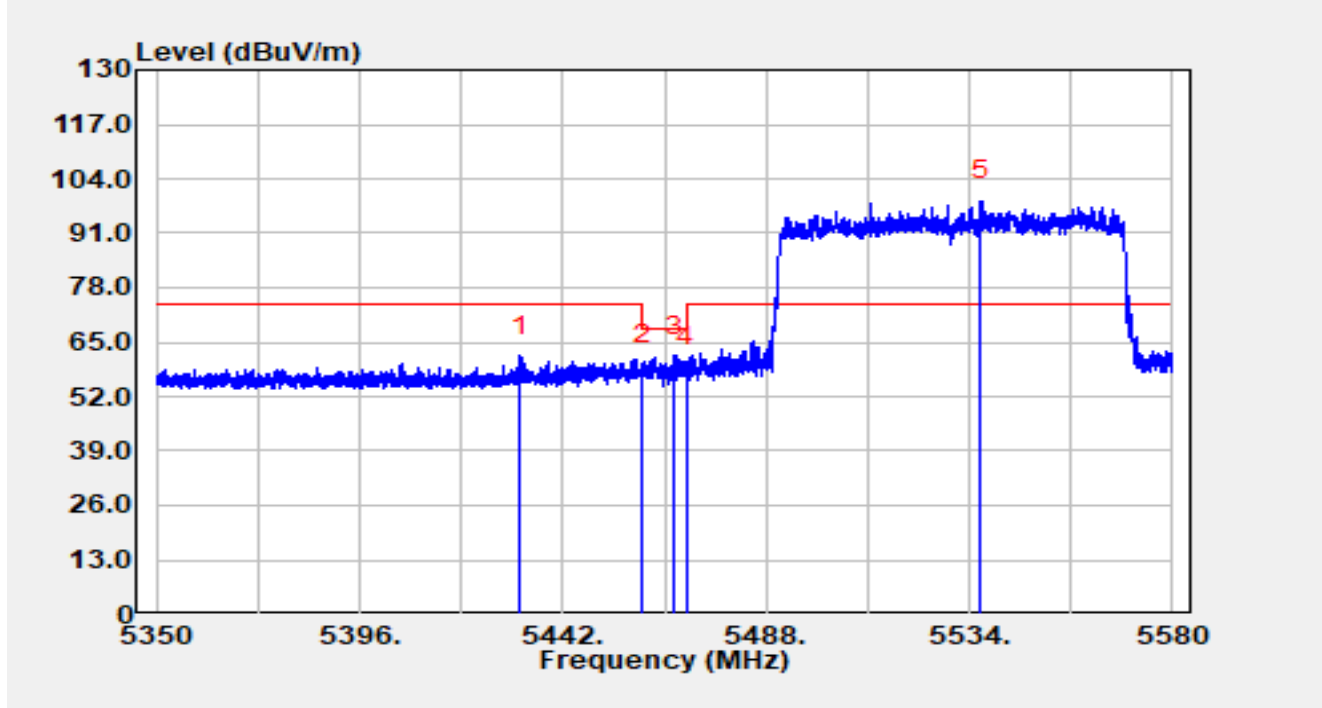


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5432.455	35.93	25.74	61.68	-12.32	74.00	Peak
2		5460.000	33.98	25.80	59.78	-8.42	68.20	Peak
3	*	5467.277	36.06	25.71	61.77	-6.43	68.20	Peak
4		5470.000	33.25	25.67	58.92	-9.28	68.20	Peak
5		5536.691	72.98	25.81	98.79	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

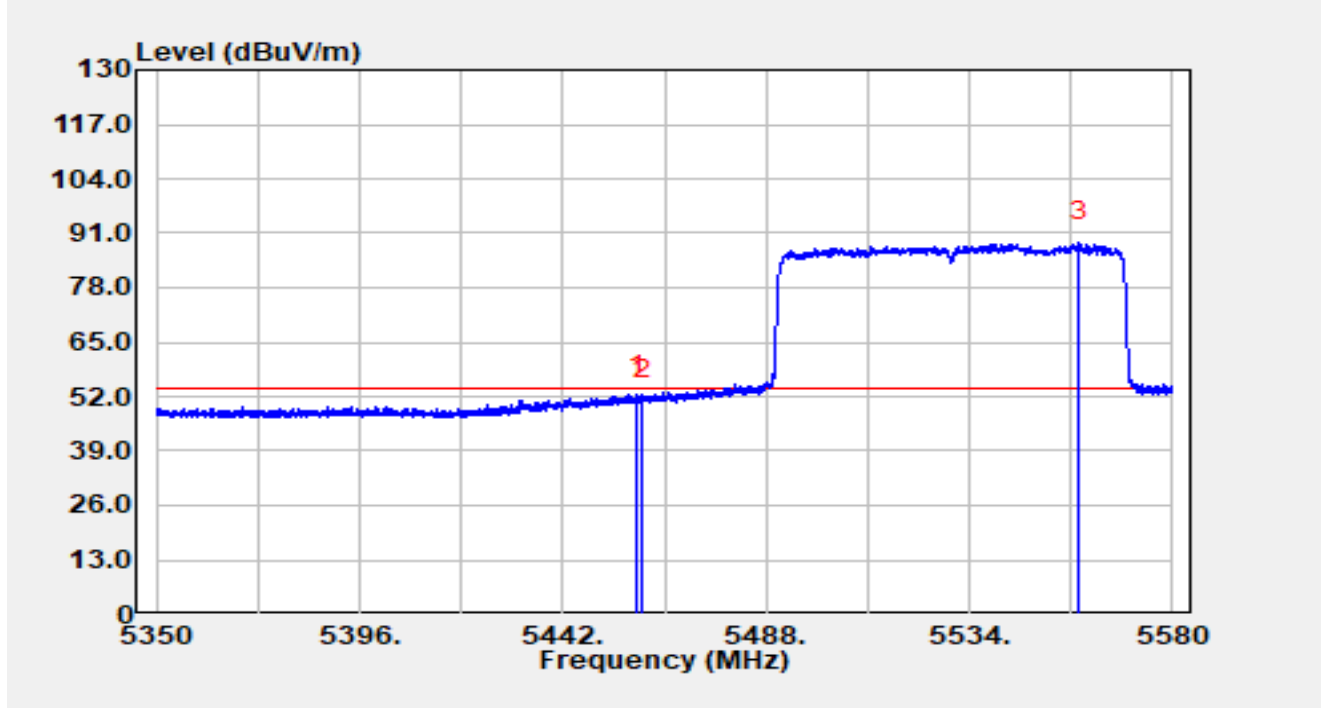


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.744	26.67	25.81	52.48	-1.52	54.00	Average
2		5460.000	25.66	25.80	51.46	-2.54	54.00	Average
3		5558.840	62.81	26.06	88.87	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

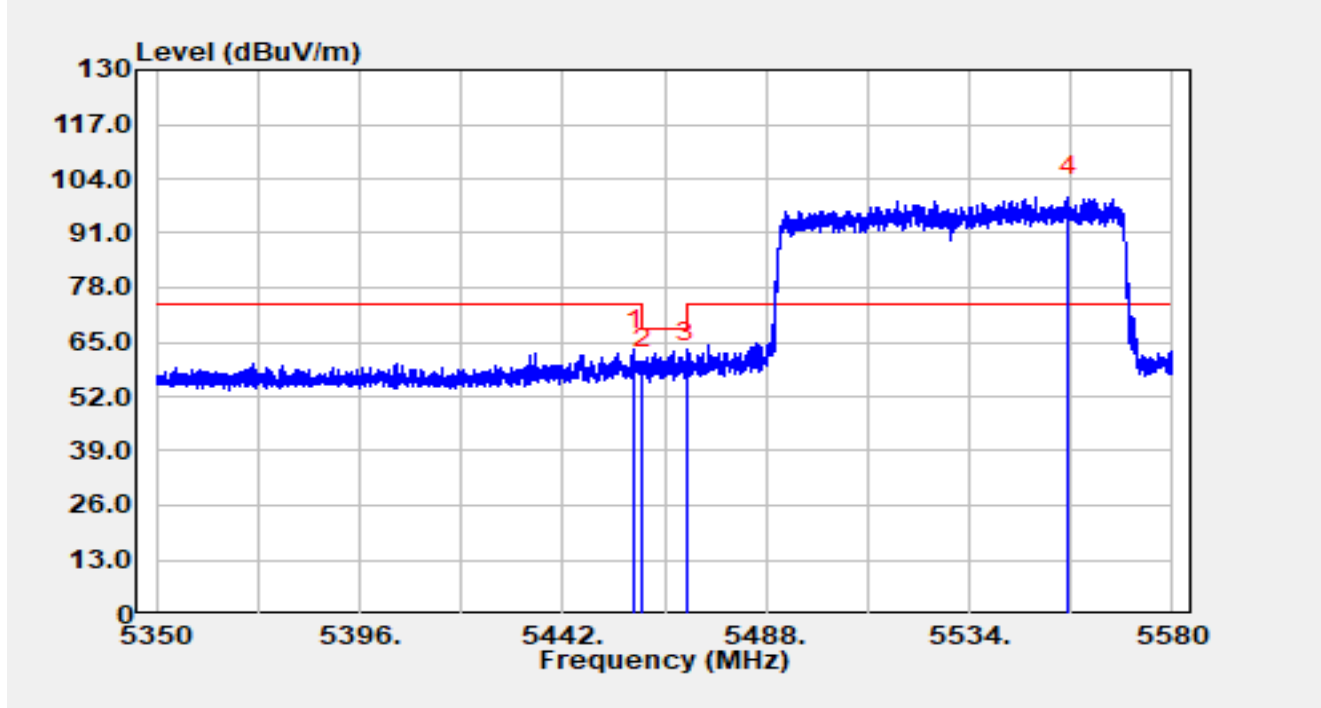


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.077	37.40	25.82	63.22	-10.78	74.00	Peak
2		5460.000	32.97	25.80	58.77	-9.43	68.20	Peak
3	*	5470.000	34.41	25.67	60.08	-8.12	68.20	Peak
4		5556.517	73.60	26.07	99.67	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

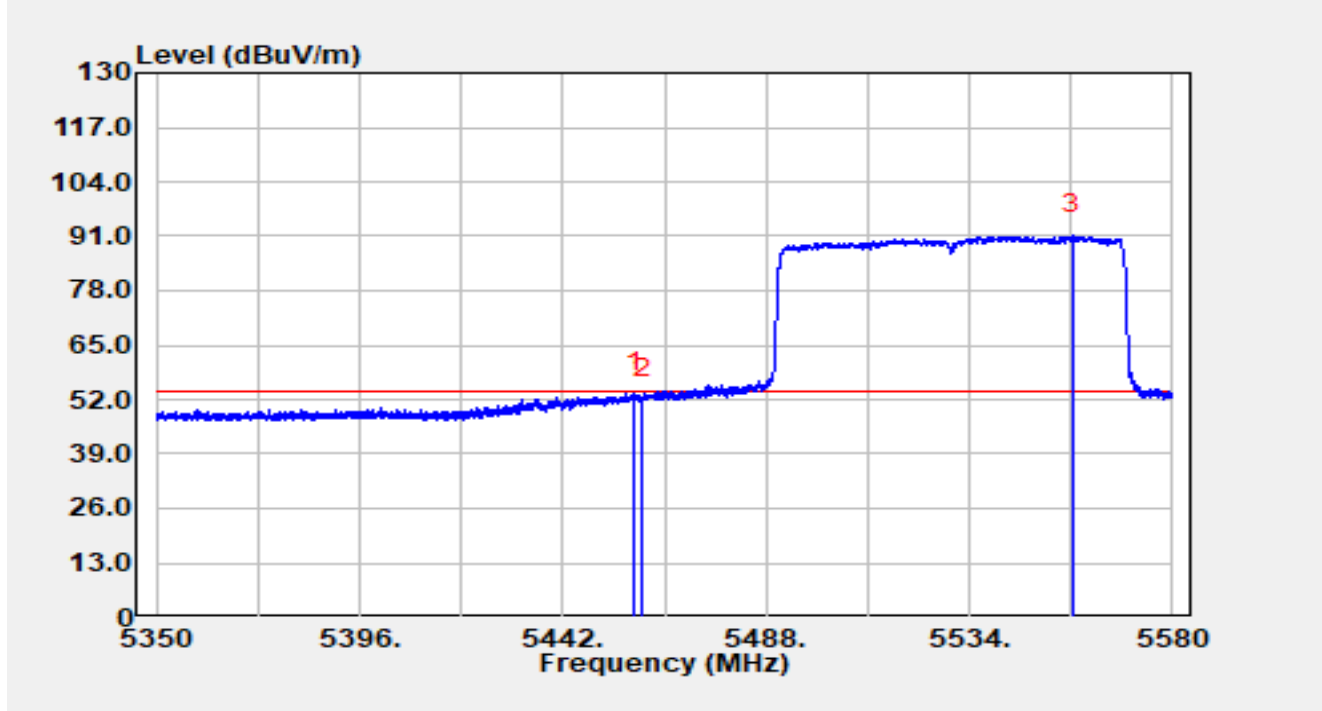


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.238	27.76	25.82	53.59	-0.41	54.00	Average
2		5460.000	26.21	25.80	52.01	-1.99	54.00	Average
3		5557.345	65.35	26.08	91.43	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

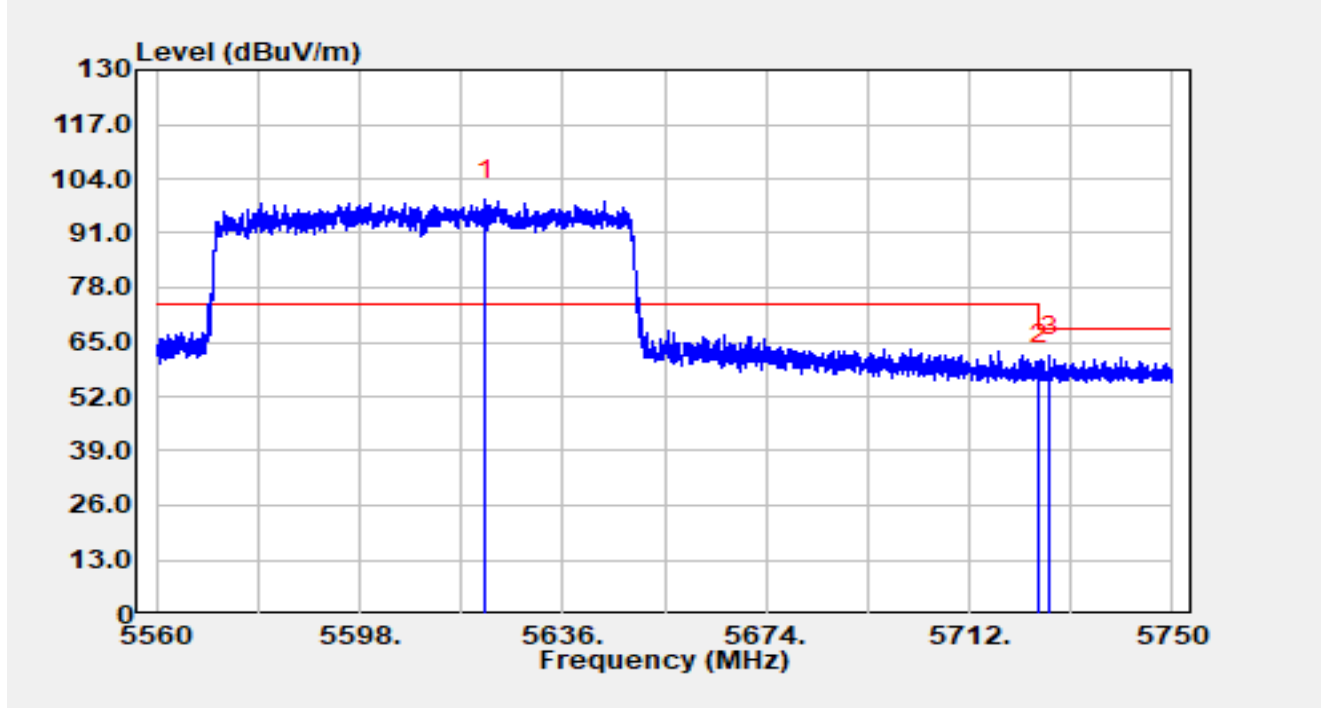


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5621.617	73.04	25.95	98.98	N/A	N/A	Peak
2		5725.000	32.85	26.52	59.37	-8.83	68.20	Peak
3	*	5726.953	35.26	26.52	61.77	-6.43	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

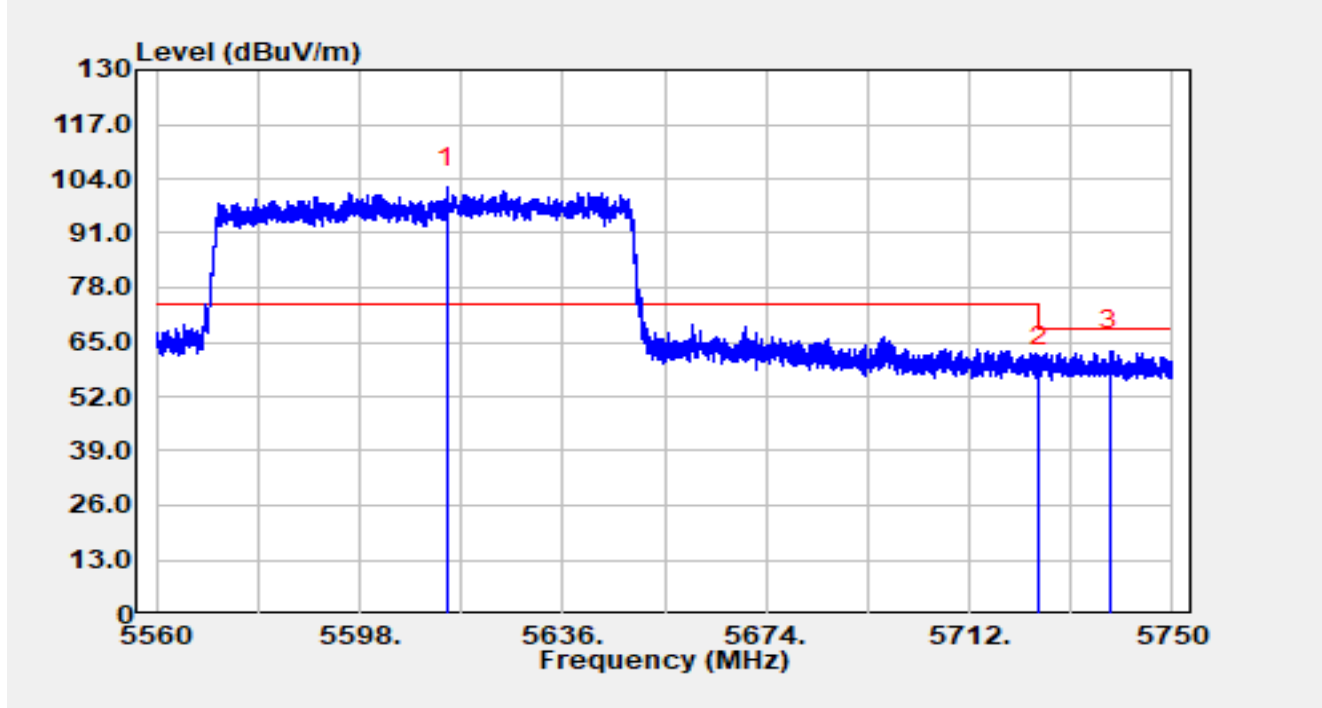


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5614.245	75.86	26.07	101.93	N/A	N/A	Peak
2		5725.000	32.61	26.52	59.13	-9.07	68.20	Peak
3	*	5738.258	36.42	26.51	62.93	-5.27	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-12
Temperature	23.3 °C	Humidity	44.5 %
Limit	FCC_Part 15.407_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

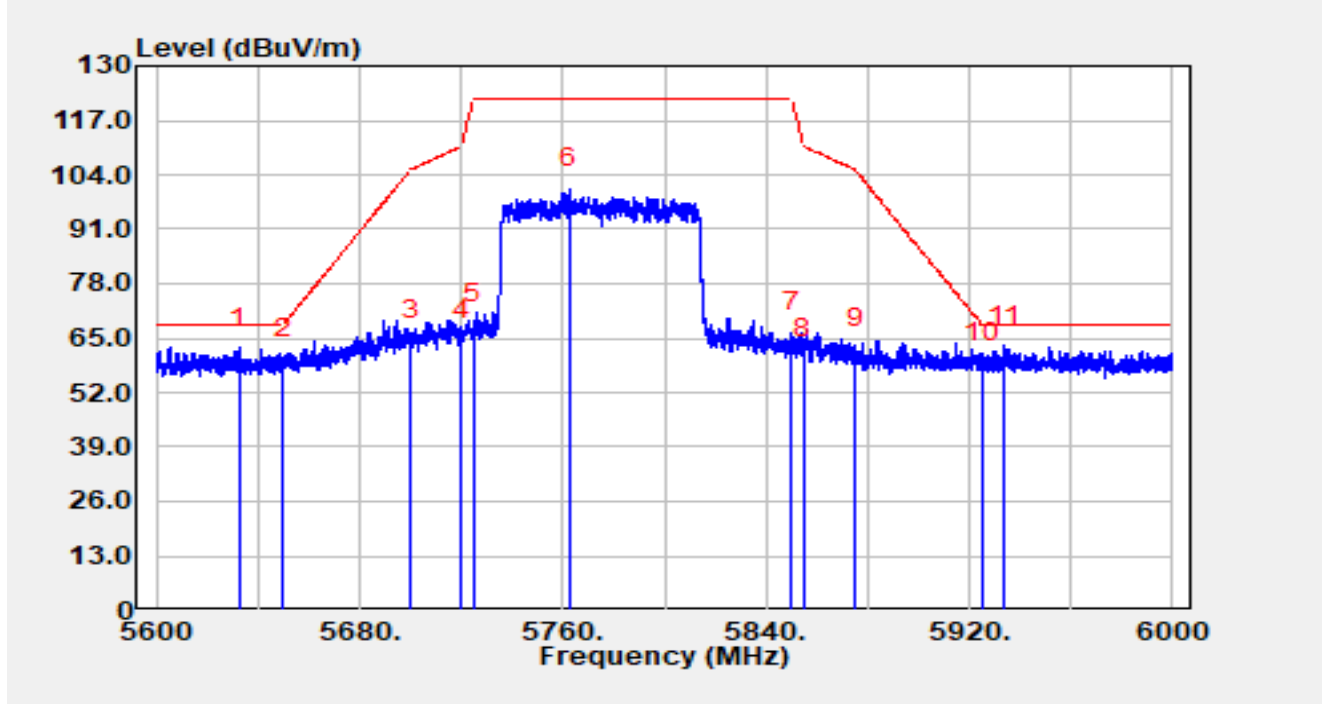

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5632.720	36.80	25.91	62.71	-5.49	68.20	Peak
2		5650.000	33.85	26.12	59.97	-8.23	68.20	Peak
3		5700.000	38.22	26.36	64.58	-40.62	105.20	Peak
4		5720.000	37.73	26.54	64.27	-46.53	110.80	Peak
5		5725.000	41.96	26.52	68.48	-53.72	122.20	Peak
6		5762.440	73.90	26.74	100.64	N/A	N/A	Peak
7		5850.000	39.24	27.08	66.32	-55.88	122.20	Peak
8		5855.000	32.99	27.12	60.12	-50.68	110.80	Peak
9		5875.000	34.96	27.51	62.47	-42.73	105.20	Peak
10		5925.000	31.39	27.73	59.12	-9.08	68.20	Peak
11	*	5933.680	35.56	27.71	63.27	-4.93	68.20	Peak

Notes:

1. " * ", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).

3. Measurement (dB μ V/m) = Reading (dB μ V) + C.F (dB/m).