



BLE-500Kbps Out-of-Band Emissions

Channel 00 (2402MHz)

100kHz PSD Reference Level

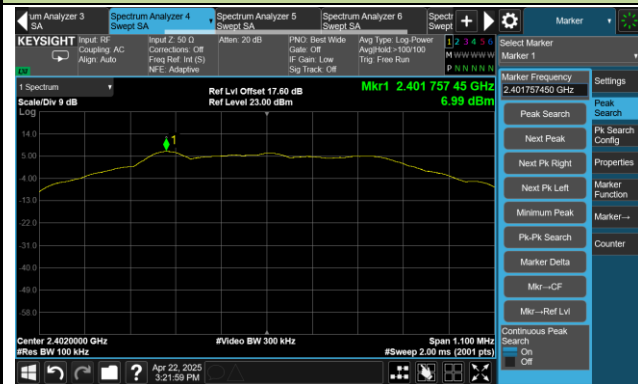

Low Band Edge

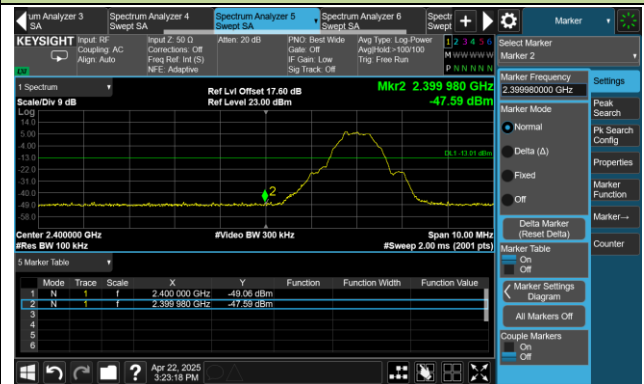


Spurious Emission 30MHz ~ 25GHz



Channel 19 (2440MHz)

100kHz PSD Reference Level

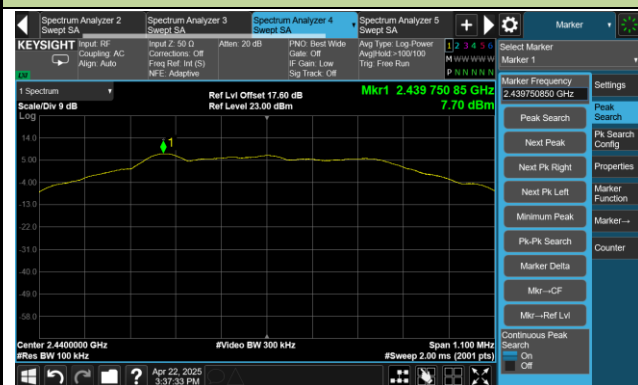

Spurious Emission 30MHz ~ 25GHz




Channel 39 (2480MHz)


100kHz PSD Reference Level



High Band Edge

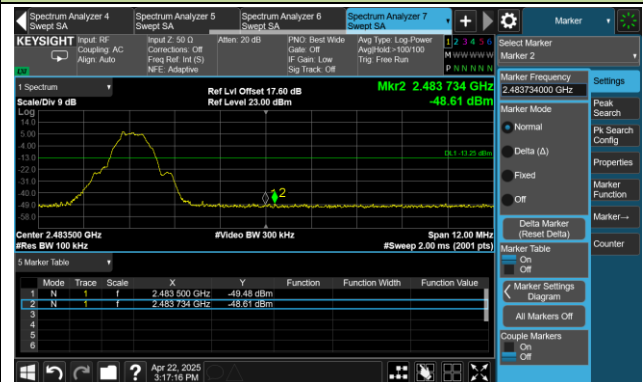

Spurious Emission 30MHz ~ 25GHz

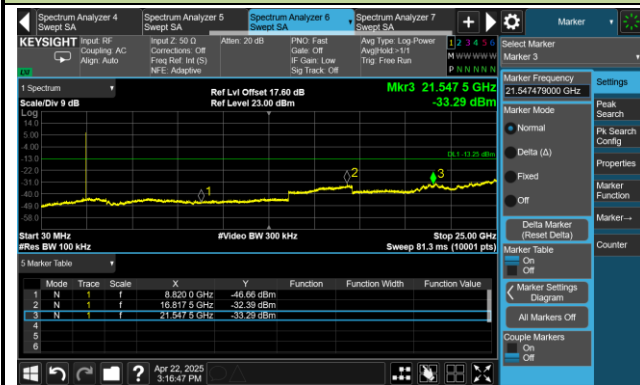

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-02	Test Mode	BLE-1Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	3997.10	37.49	1.38	38.87	74.00	-35.13	Peak	Horizontal
	10866.80	35.43	15.25	50.68	74.00	-23.32	Peak	Horizontal
	17994.90	18.86	22.81	41.67	54.00	-12.33	Average	Horizontal
	17994.90	34.33	22.81	57.14	74.00	-16.86	Peak	Horizontal
	4799.50	37.19	3.36	40.54	74.00	-33.46	Peak	Vertical
	11028.30	25.11	14.90	40.01	54.00	-13.99	Average	Vertical
	11028.30	36.57	14.90	51.47	74.00	-22.53	Peak	Vertical
	17988.10	18.64	22.75	41.39	54.00	-12.61	Average	Vertical
	17988.10	34.59	22.75	57.35	74.00	-16.65	Peak	Vertical
19	4830.10	44.46	3.46	47.92	74.00	-26.08	Peak	Horizontal
	10955.20	25.24	15.16	40.40	54.00	-13.60	Average	Horizontal
	10955.20	35.95	15.16	51.11	74.00	-22.89	Peak	Horizontal
	17996.60	18.57	22.83	41.40	54.00	-12.60	Average	Horizontal
	17996.60	35.17	22.83	57.99	74.00	-16.01	Peak	Horizontal
	4797.80	37.35	3.35	40.70	74.00	-33.30	Peak	Vertical
	11412.50	36.28	14.45	50.74	74.00	-23.26	Peak	Vertical
	17979.60	18.74	22.60	41.34	54.00	-12.66	Average	Vertical
	17979.60	34.50	22.60	57.09	74.00	-16.91	Peak	Vertical
39	4886.20	37.64	3.33	40.96	74.00	-33.04	Peak	Horizontal
	11492.40	36.11	14.30	50.41	74.00	-23.59	Peak	Horizontal
	17974.50	19.11	22.43	41.54	54.00	-12.46	Average	Horizontal
	17974.50	35.70	22.43	58.13	74.00	-15.87	Peak	Horizontal
	4049.80	38.92	1.27	40.19	74.00	-33.81	Peak	Vertical
	11113.30	35.74	14.58	50.32	74.00	-23.68	Peak	Vertical
	17976.20	19.09	22.48	41.57	54.00	-12.43	Average	Vertical
	17976.20	35.38	22.48	57.87	74.00	-16.13	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-02	Test Mode	BLE-2Mbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4877.70	43.16	3.31	46.47	74.00	-27.53	Peak	Horizontal
	10851.50	34.83	15.25	50.08	74.00	-23.92	Peak	Horizontal
	17988.10	18.99	22.75	41.74	54.00	-12.26	Average	Horizontal
	17988.10	34.40	22.75	57.15	74.00	-16.85	Peak	Horizontal
	4797.80	36.77	3.35	40.12	74.00	-33.88	Peak	Vertical
	11016.40	35.50	14.97	50.47	74.00	-23.53	Peak	Vertical
	17998.30	19.14	22.84	41.98	54.00	-12.02	Average	Vertical
	17998.30	34.43	22.84	57.27	74.00	-16.73	Peak	Vertical
19	4961.00	36.70	3.67	40.38	74.00	-33.62	Peak	Horizontal
	11019.80	36.00	14.95	50.95	74.00	-23.05	Peak	Horizontal
	17959.20	19.27	22.08	41.35	54.00	-12.65	Average	Horizontal
	17959.20	34.69	22.08	56.78	74.00	-17.22	Peak	Horizontal
	4935.50	37.14	3.65	40.79	74.00	-33.21	Peak	Vertical
	11077.60	25.17	14.67	39.84	54.00	-14.16	Average	Vertical
	11077.60	36.36	14.67	51.03	74.00	-22.97	Peak	Vertical
	17923.50	18.77	21.64	40.41	54.00	-13.59	Average	Vertical
	17923.50	34.99	21.64	56.64	74.00	-17.36	Peak	Vertical
39	4857.30	41.70	3.38	45.09	74.00	-28.91	Peak	Horizontal
	11069.10	35.55	14.69	50.24	74.00	-23.76	Peak	Horizontal
	17984.70	18.65	22.73	41.38	54.00	-12.62	Average	Horizontal
	17984.70	34.71	22.73	57.43	74.00	-16.57	Peak	Horizontal
	4826.70	37.39	3.47	40.85	74.00	-33.15	Peak	Vertical
	10878.70	35.56	15.22	50.78	74.00	-23.22	Peak	Vertical
	17996.60	18.98	22.83	41.81	54.00	-12.19	Average	Vertical
	17996.60	34.14	22.83	56.96	74.00	-17.04	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	2025-05-02
Test Date	Dick Shen	Test Mode	BLE-125Kbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4802.90	37.95	3.37	41.32	74.00	-32.68	Peak	Horizontal
	10841.30	35.33	15.22	50.55	74.00	-23.45	Peak	Horizontal
	17994.90	19.25	22.81	42.06	54.00	-11.94	Average	Horizontal
	17994.90	34.91	22.81	57.72	74.00	-16.28	Peak	Horizontal
	4887.90	37.05	3.34	40.39	74.00	-33.61	Peak	Vertical
	11373.40	36.46	14.43	50.89	74.00	-23.11	Peak	Vertical
	17983.00	19.32	22.71	42.03	54.00	-11.97	Average	Vertical
	17983.00	34.08	22.71	56.79	74.00	-17.21	Peak	Vertical
19	4799.50	37.69	3.36	41.05	74.00	-32.95	Peak	Horizontal
	10899.10	35.11	15.13	50.24	74.00	-23.76	Peak	Horizontal
	17988.10	19.27	22.75	42.02	54.00	-11.98	Average	Horizontal
	17988.10	34.21	22.75	56.96	74.00	-17.04	Peak	Horizontal
	4797.80	38.27	3.35	41.61	74.00	-32.39	Peak	Vertical
	10882.10	26.11	15.22	41.33	54.00	-12.67	Average	Vertical
	10882.10	36.04	15.22	51.26	74.00	-22.74	Peak	Vertical
	17976.20	18.68	22.48	41.16	54.00	-12.84	Average	Vertical
	17976.20	34.07	22.48	56.55	74.00	-17.45	Peak	Vertical
39	4814.80	38.49	3.43	41.92	74.00	-32.08	Peak	Horizontal
	11041.90	35.43	14.83	50.26	74.00	-23.74	Peak	Horizontal
	17983.00	18.68	22.71	41.39	54.00	-12.61	Average	Horizontal
	17983.00	34.08	22.71	56.79	74.00	-17.21	Peak	Horizontal
	4814.80	38.11	3.43	41.54	74.00	-32.46	Peak	Vertical
	10977.30	35.22	15.12	50.34	74.00	-23.66	Peak	Vertical
	17983.00	18.77	22.71	41.48	54.00	-12.52	Average	Vertical
	17983.00	35.42	22.71	58.13	74.00	-15.87	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-02	Test Mode	BLE-500Kbps
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4796.10	37.52	3.34	40.86	74.00	-33.14	Peak	Horizontal
	10911.00	34.96	15.15	50.11	74.00	-23.89	Peak	Horizontal
	17972.80	18.68	22.37	41.05	54.00	-12.95	Average	Horizontal
	17972.80	34.98	22.37	57.36	74.00	-16.64	Peak	Horizontal
	4828.40	38.81	3.46	42.27	74.00	-31.73	Peak	Vertical
	11184.70	36.27	14.44	50.71	74.00	-23.29	Peak	Vertical
	17993.20	19.22	22.80	42.02	54.00	-11.98	Average	Vertical
	17993.20	34.84	22.80	57.64	74.00	-16.36	Peak	Vertical
19	3895.10	37.59	1.06	38.65	74.00	-35.35	Peak	Horizontal
	11461.80	36.62	14.32	50.94	74.00	-23.06	Peak	Horizontal
	17969.40	18.87	22.26	41.13	54.00	-12.87	Average	Horizontal
	17969.40	34.59	22.26	56.86	74.00	-17.14	Peak	Horizontal
	4932.10	40.82	3.66	44.48	74.00	-29.52	Peak	Vertical
	11094.60	35.26	14.59	49.85	74.00	-24.15	Peak	Vertical
	17952.40	18.99	22.02	41.01	54.00	-12.99	Average	Vertical
	17952.40	34.84	22.02	56.86	74.00	-17.14	Peak	Vertical
39	4826.70	38.49	3.47	41.96	74.00	-32.04	Peak	Horizontal
	10844.70	25.98	15.25	41.23	54.00	-12.77	Average	Horizontal
	10844.70	36.06	15.25	51.31	74.00	-22.69	Peak	Horizontal
	17947.30	18.98	21.96	40.94	54.00	-13.06	Average	Horizontal
	17947.30	35.24	21.96	57.20	74.00	-16.80	Peak	Horizontal
	4791.00	37.49	3.31	40.80	74.00	-33.20	Peak	Vertical
	11240.80	36.44	14.27	50.71	74.00	-23.29	Peak	Vertical
	17896.30	19.02	21.55	40.57	54.00	-13.43	Average	Vertical
	17896.30	36.14	21.55	57.69	74.00	-16.31	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-04-29
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

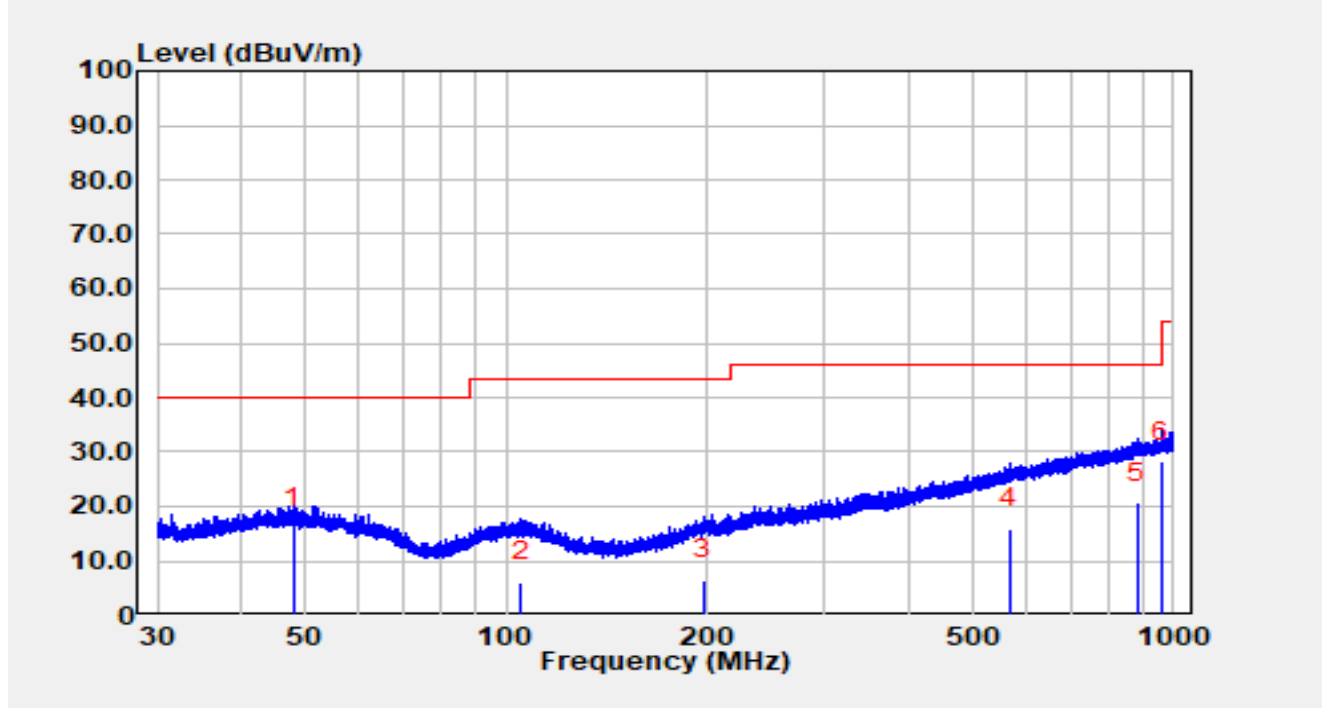


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	48.028	-3.70	19.67	15.97	-24.03	40.00	QP
2		105.124	-11.80	17.94	6.14	-37.36	43.50	QP
3		197.823	-11.30	17.84	6.54	-36.96	43.50	QP
4		567.418	-10.20	26.17	15.97	-30.03	46.00	QP
5		883.883	-10.00	30.58	20.58	-25.42	46.00	QP
6		960.140	-2.90	31.10	28.20	-25.80	54.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-04-29
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

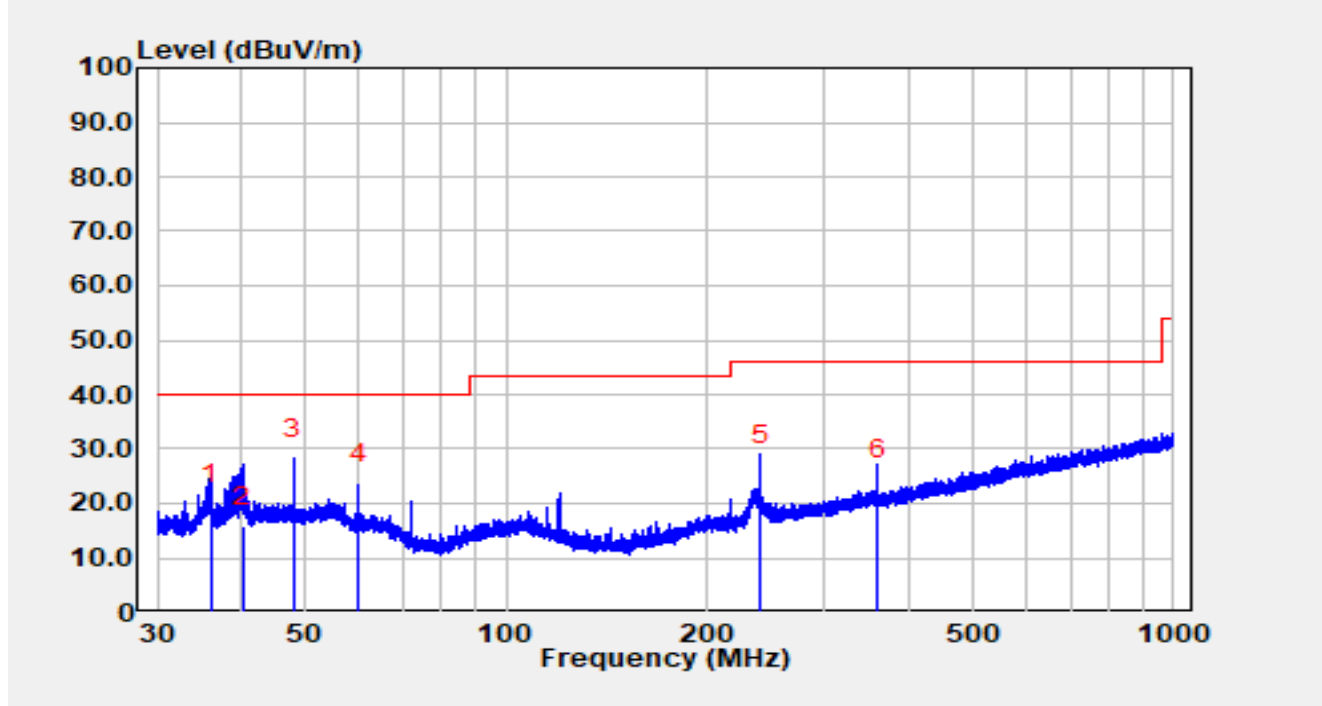


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		36.064	2.30	17.44	19.74	-20.26	40.00	QP
2		40.262	-2.90	18.66	15.76	-24.24	40.00	QP
3	*	47.994	8.40	19.67	28.07	-11.93	40.00	QP
4		60.006	5.50	18.07	23.57	-16.44	40.00	QP
5		239.987	7.90	19.17	27.07	-18.93	46.00	QP
6		360.069	2.00	22.27	24.27	-21.73	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

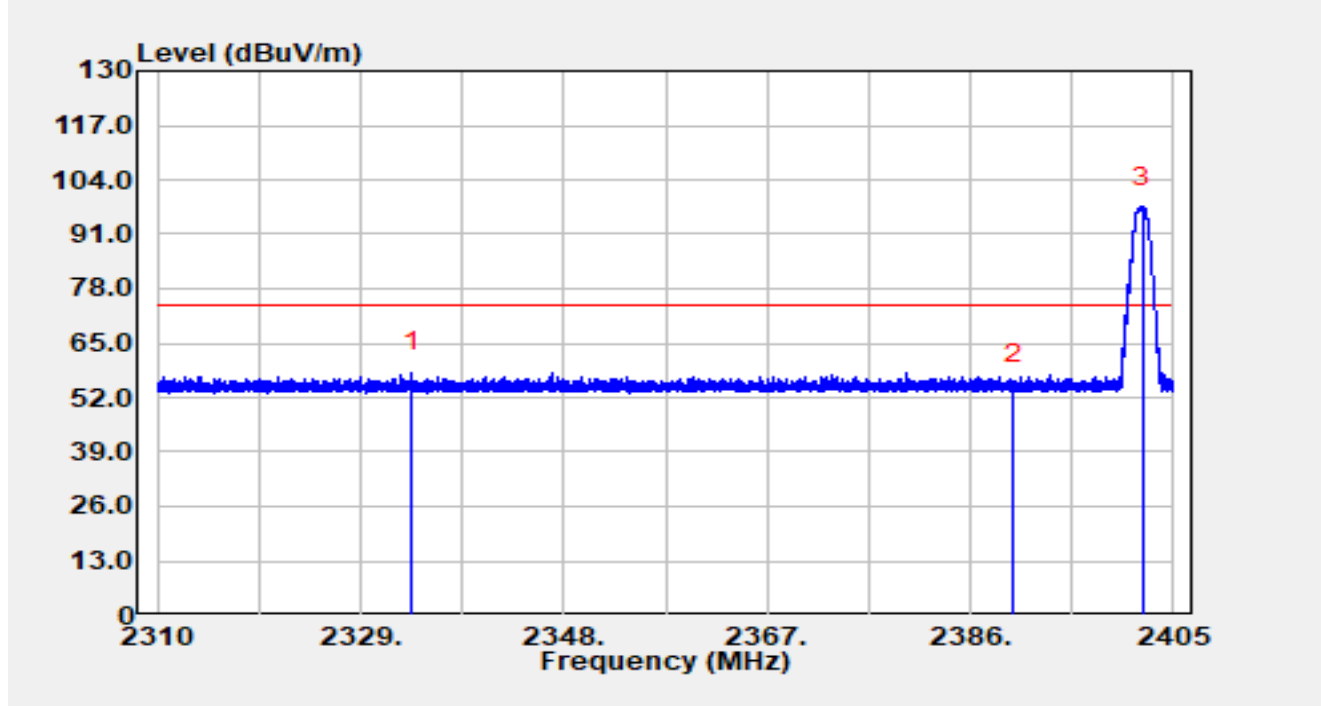


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2333.82	25.94	32.03	57.97	-16.03	74.00	Peak
2		2390.00	23.00	31.96	54.96	-19.04	74.00	Peak
3		2402.08	65.53	31.90	97.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

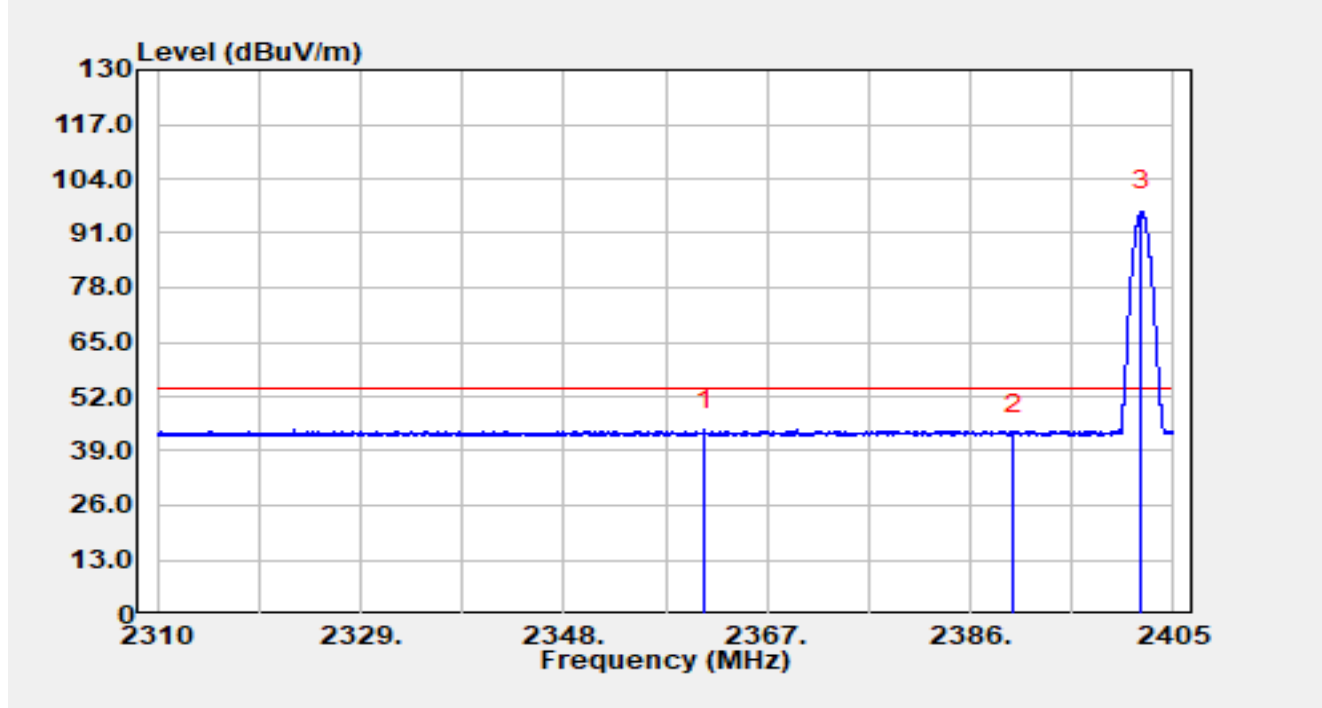


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2361.15	11.99	31.96	43.95	-10.05	54.00	Average
2		2390.00	11.15	31.96	43.10	-10.90	54.00	Average
3		2402.05	64.26	31.90	96.16	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

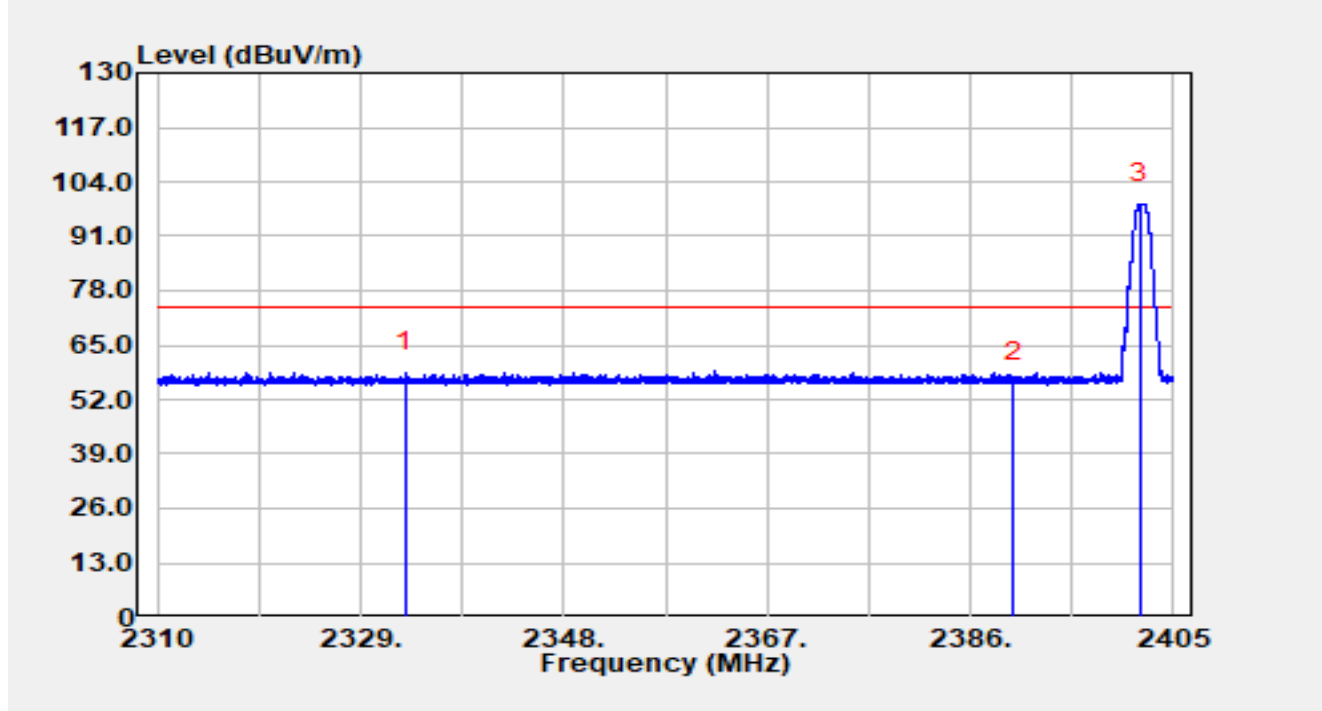


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2333.15	26.56	32.04	58.60	-15.40	74.00	Peak
2		2390.00	24.33	31.96	56.28	-17.72	74.00	Peak
3		2401.90	66.81	31.90	98.71	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

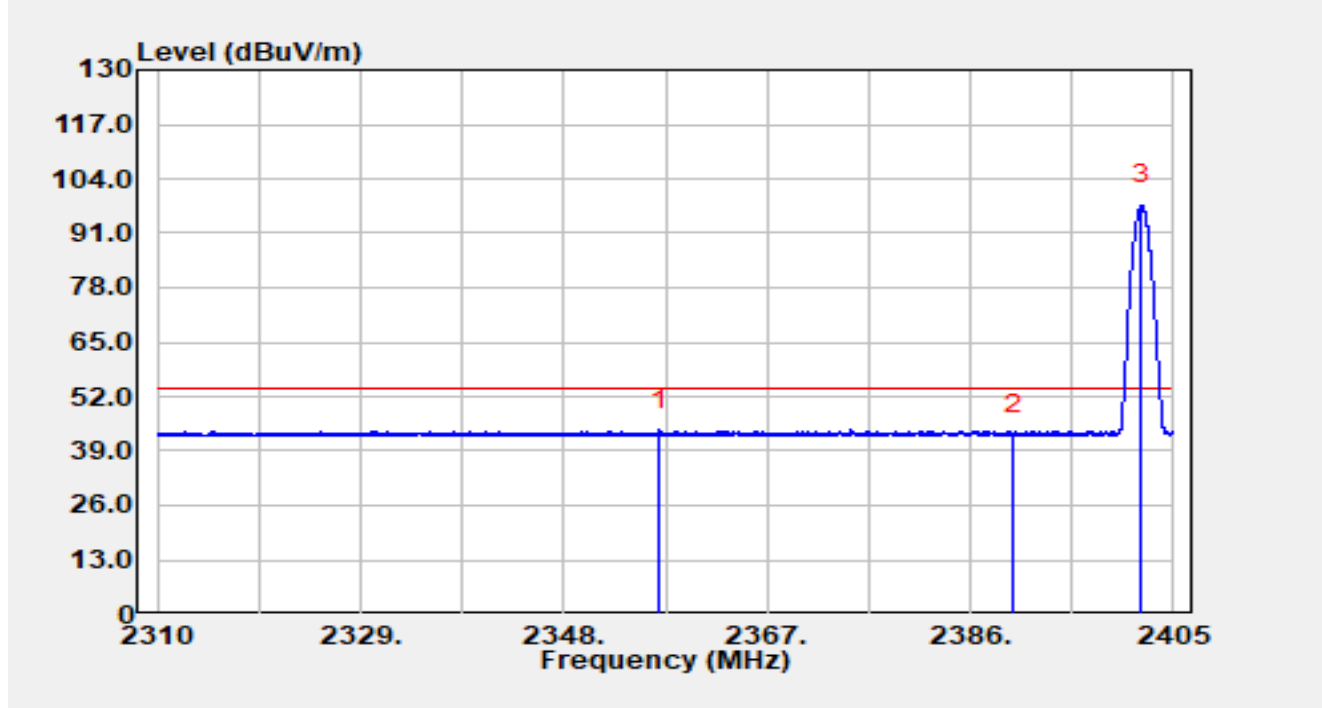


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2356.95	11.96	31.97	43.92	-10.08	54.00	Average
2		2390.00	11.20	31.96	43.16	-10.84	54.00	Average
3		2402.01	65.75	31.90	97.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

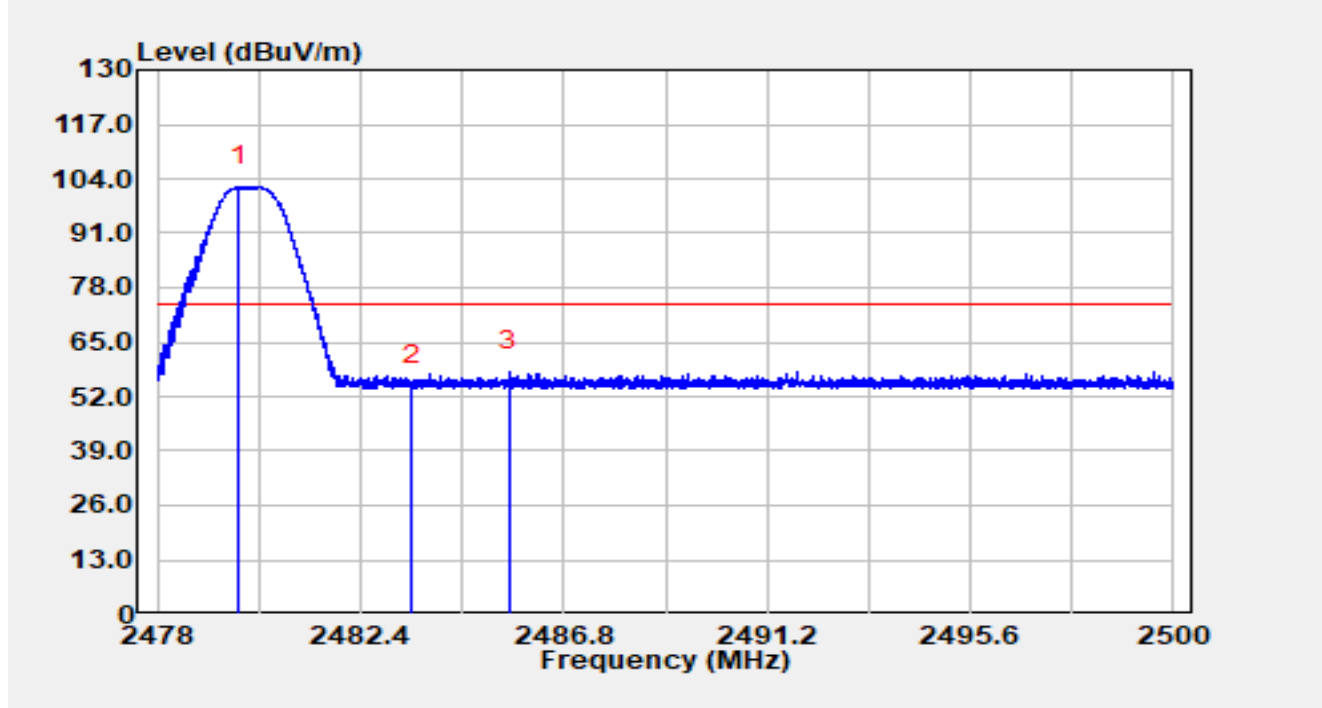


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.76	70.33	31.80	102.13	N/A	N/A	Peak
2		2483.50	22.91	31.81	54.72	-19.28	74.00	Peak
3	*	2485.61	26.22	31.81	58.02	-15.98	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

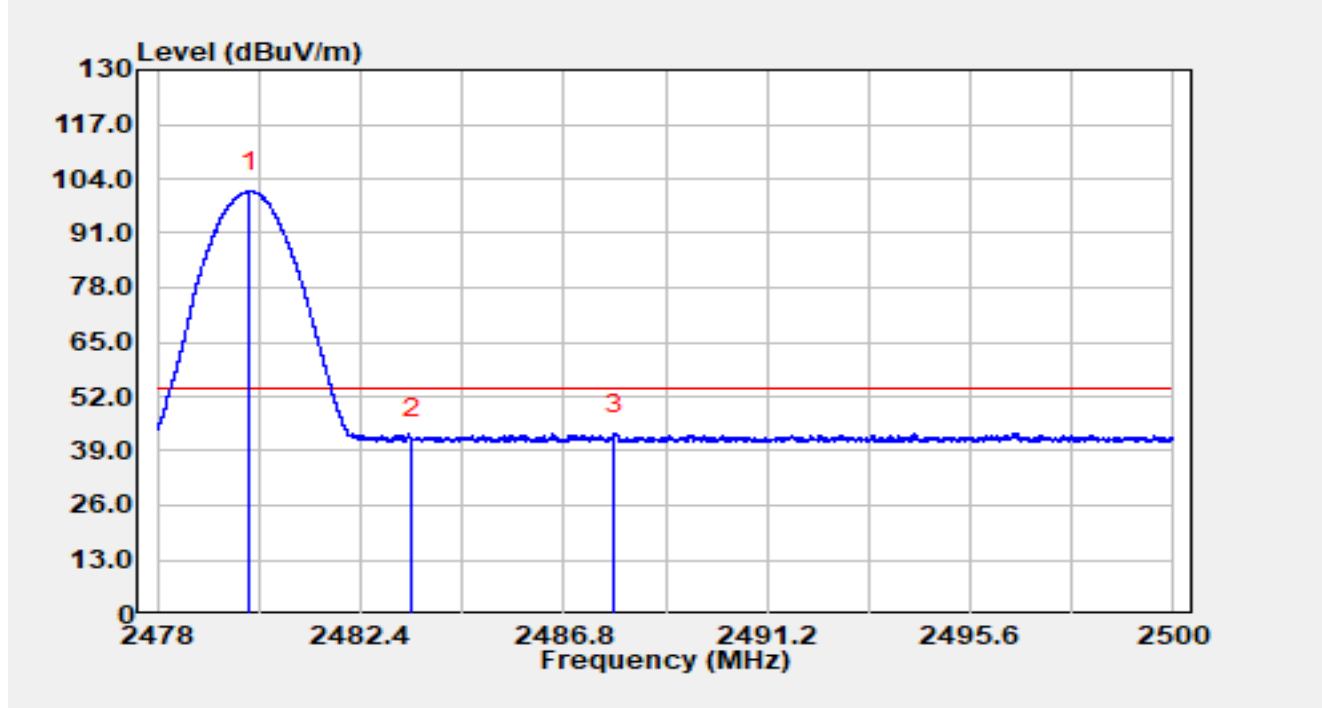


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.00	69.23	31.80	101.03	N/A	N/A	Average
2		2483.50	10.12	31.81	41.93	-12.07	54.00	Average
3	*	2487.89	11.35	31.81	43.16	-10.84	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

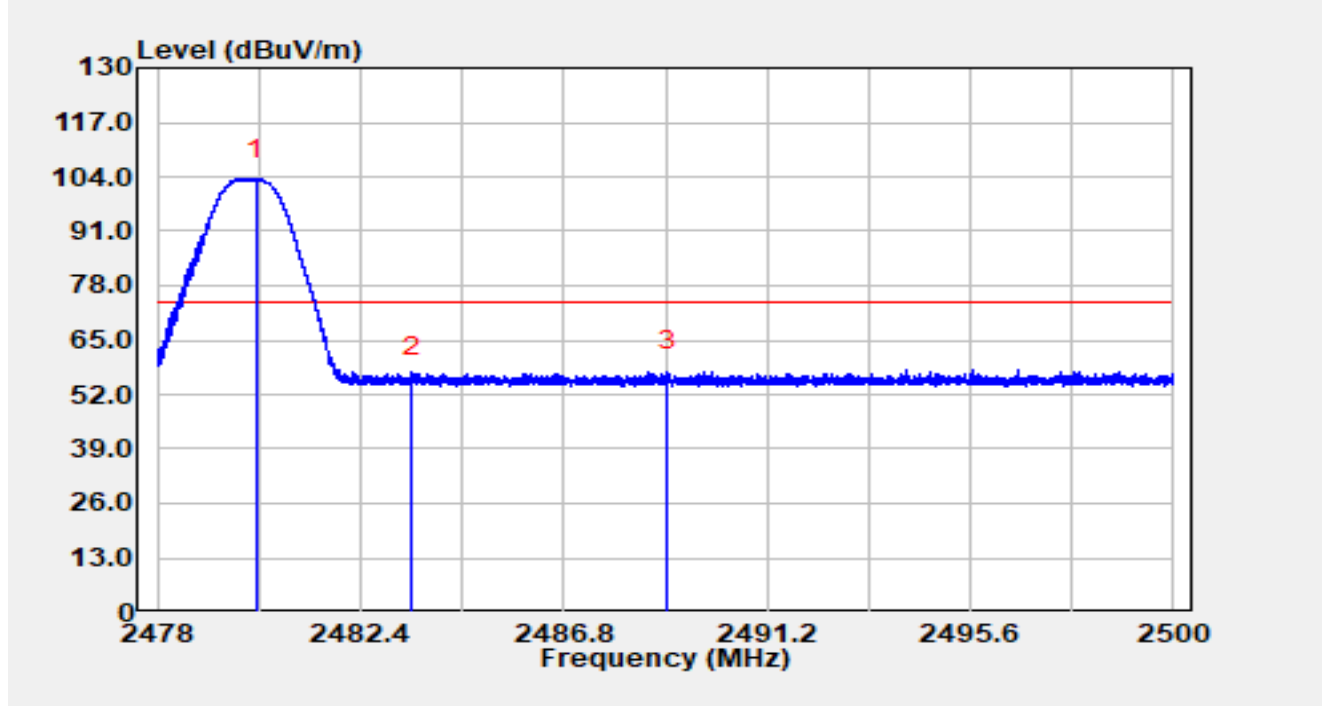


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.14	71.70	31.80	103.50	N/A	N/A	Peak
2		2483.50	24.52	31.81	56.33	-17.67	74.00	Peak
3	*	2489.06	25.76	31.81	57.57	-16.43	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 1Mbps at 2480MHz		

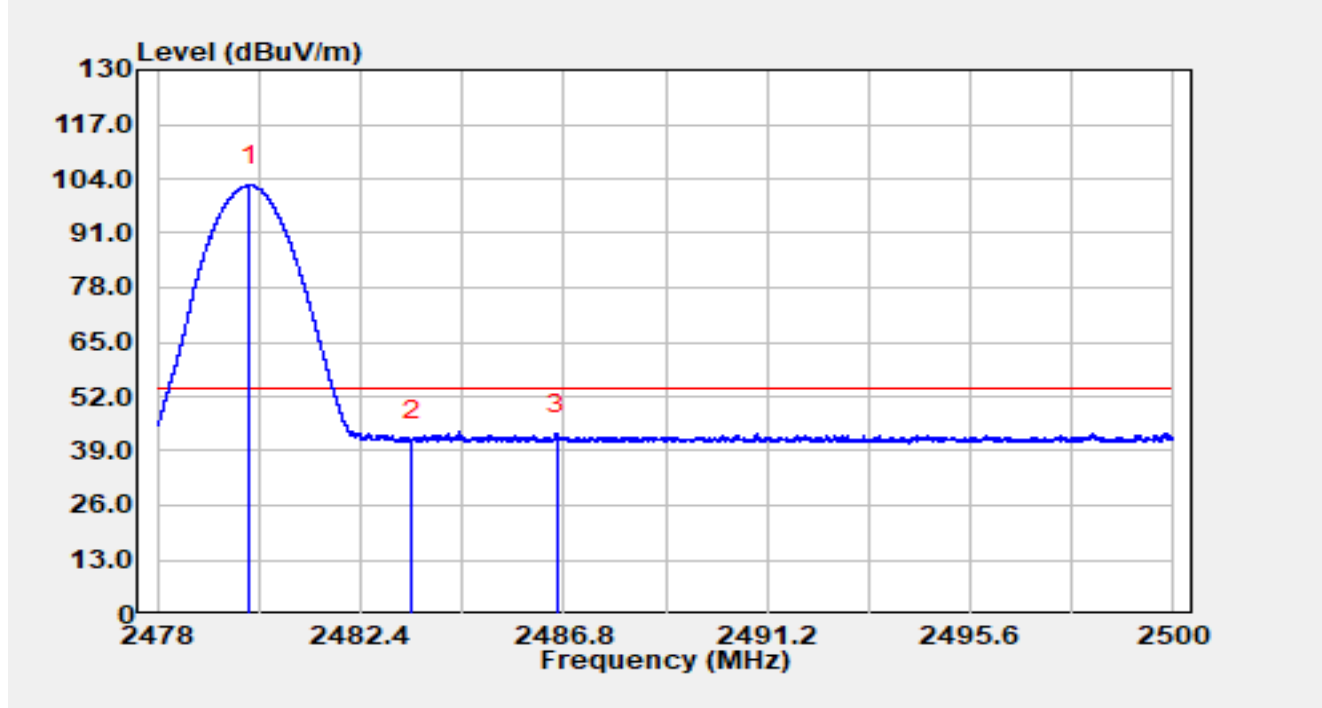


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.01	70.61	31.80	102.41	N/A	N/A	Average
2		2483.50	9.55	31.81	41.35	-12.65	54.00	Average
3	*	2486.64	11.22	31.81	43.03	-10.97	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

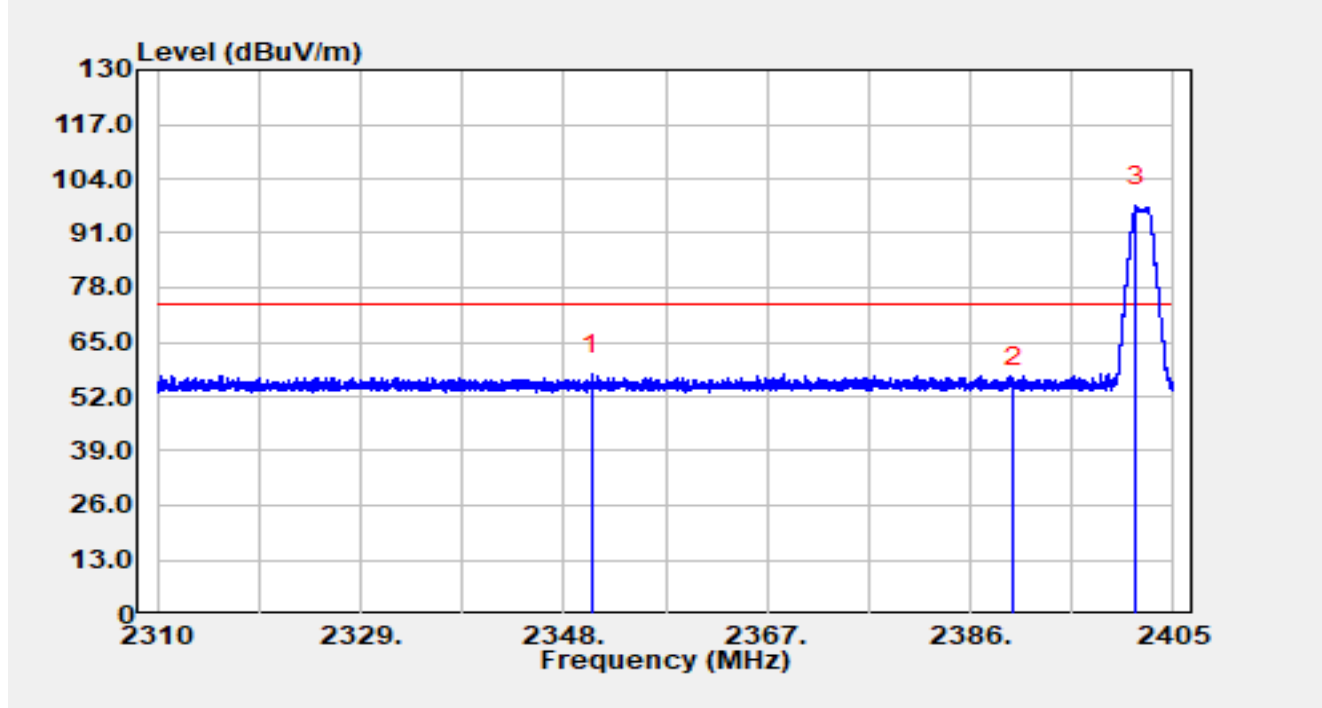


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2350.57	25.31	31.97	57.28	-16.72	74.00	Peak
2		2390.00	22.05	31.96	54.00	-20.00	74.00	Peak
3		2401.52	65.52	31.90	97.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

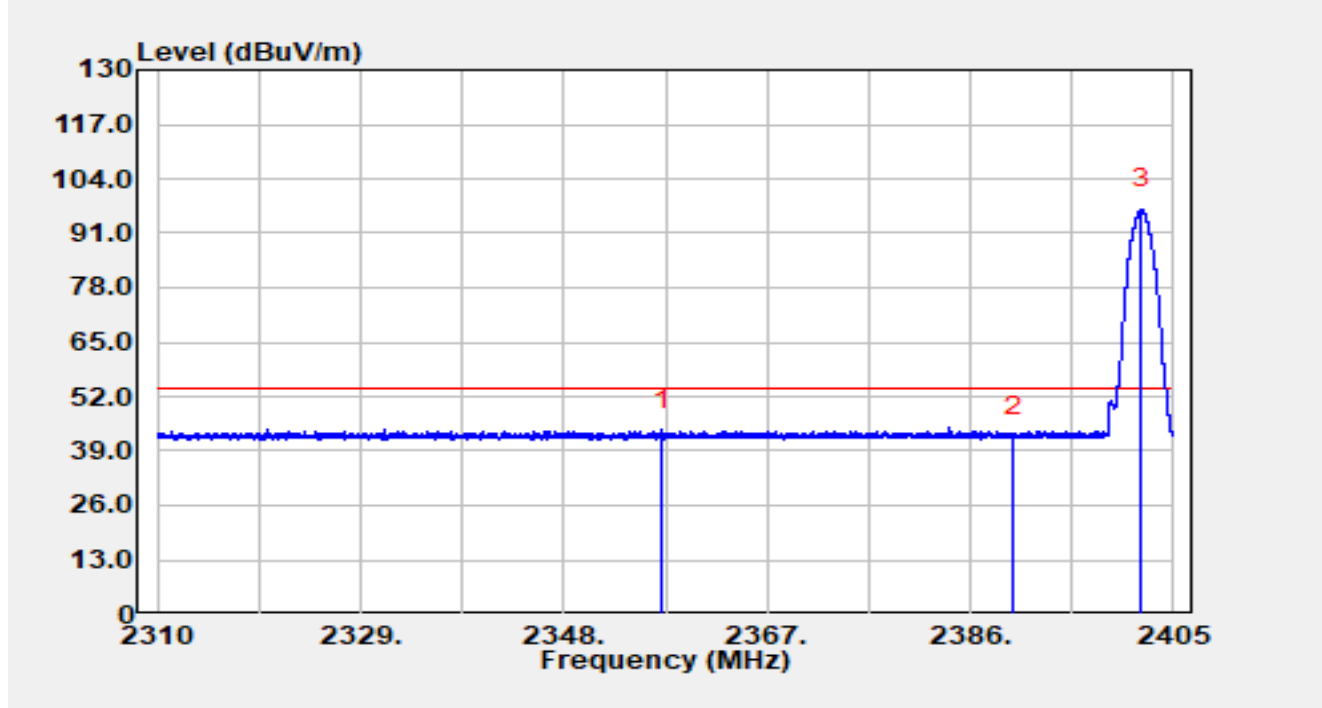


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2357.17	12.08	31.97	44.04	-9.96	54.00	Average
2		2390.00	10.45	31.96	42.41	-11.59	54.00	Average
3		2402.03	64.84	31.90	96.74	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

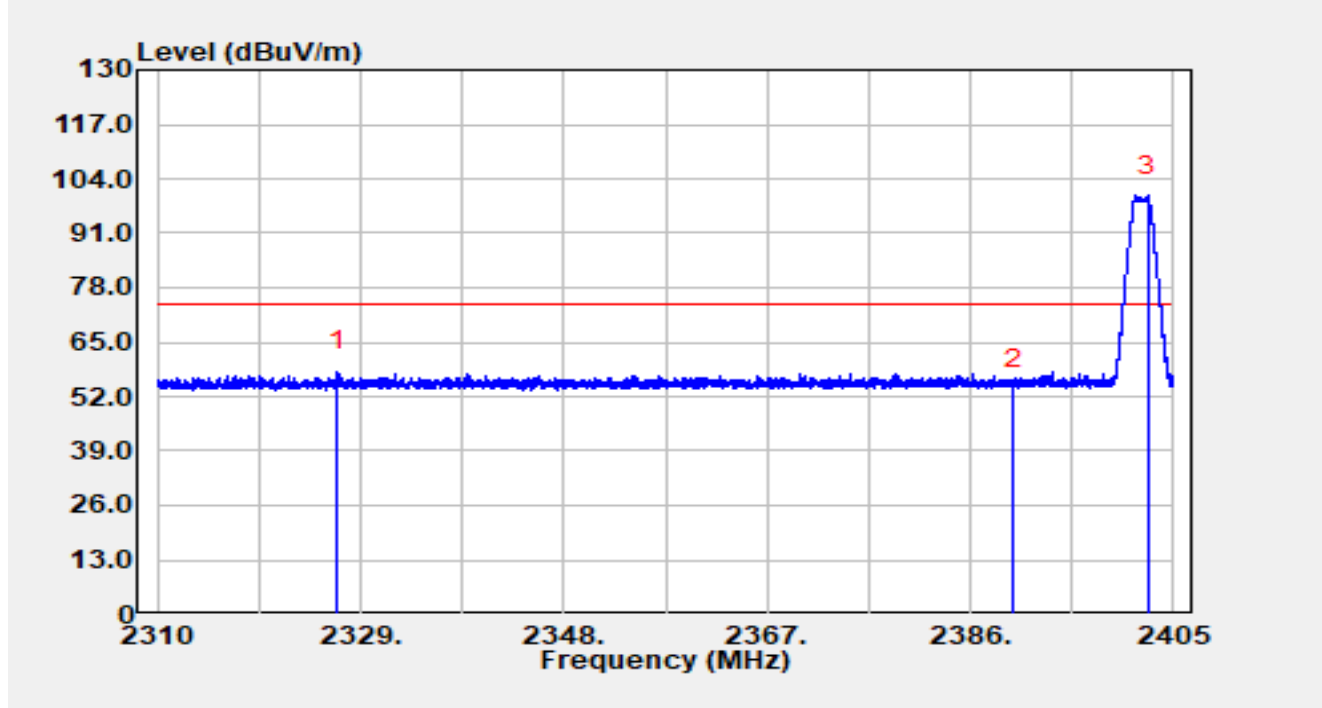


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2326.87	25.87	32.05	57.93	-16.07	74.00	Peak
2		2390.00	21.84	31.96	53.80	-20.20	74.00	Peak
3		2402.57	68.01	31.89	99.90	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2402MHz		

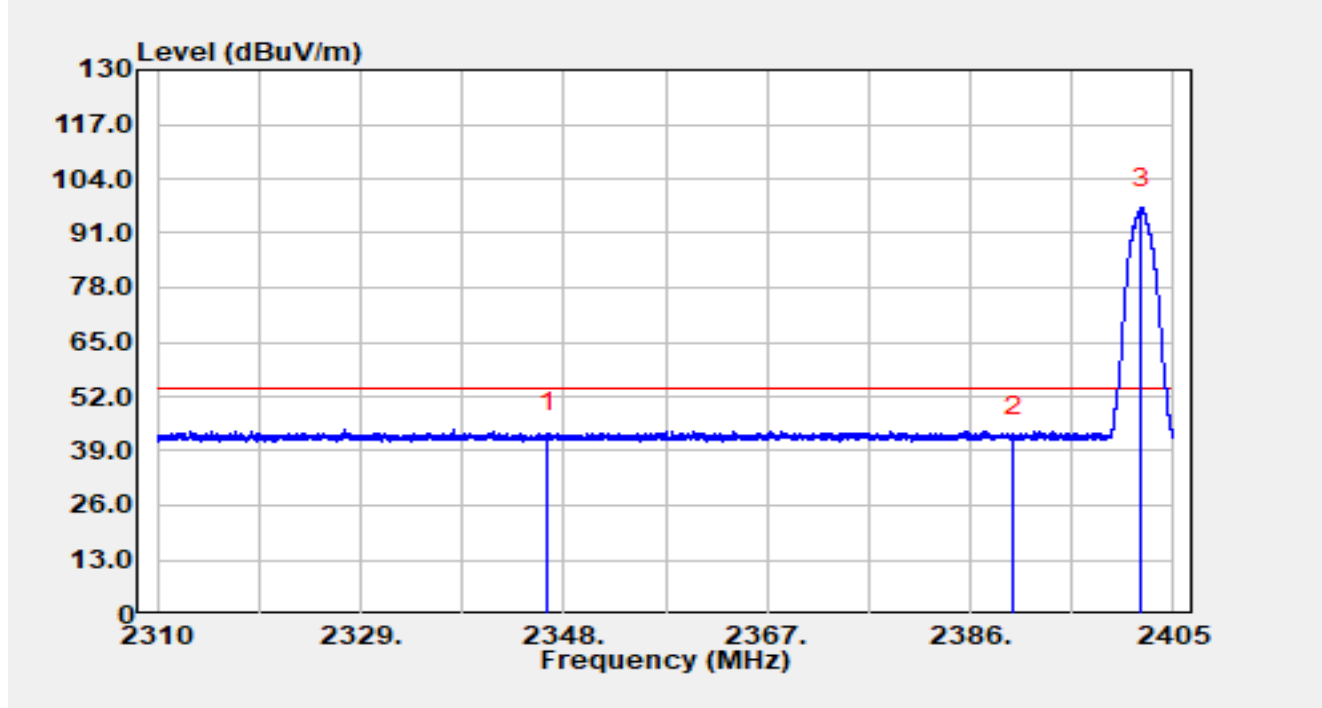


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2346.53	11.42	31.98	43.40	-10.60	54.00	Average
2		2390.00	10.58	31.96	42.53	-11.47	54.00	Average
3		2402.02	65.11	31.90	97.01	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

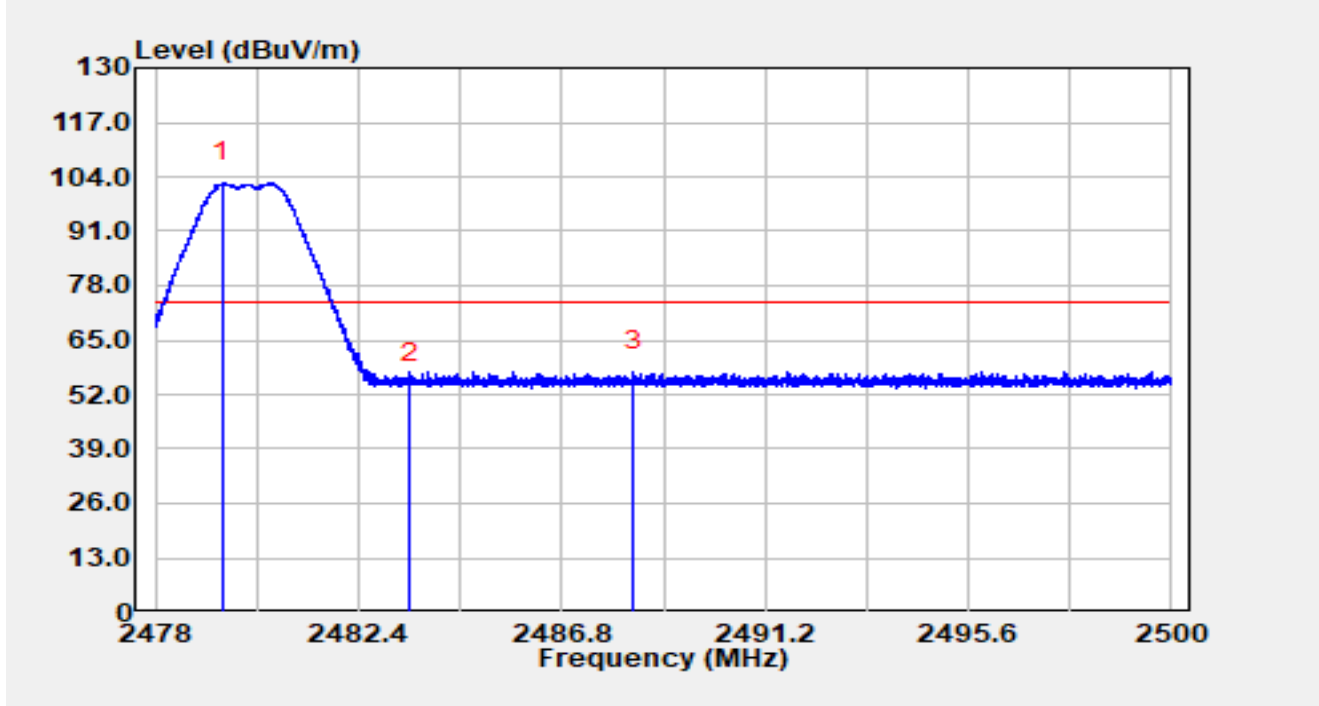


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.45	70.75	31.80	102.56	N/A	N/A	Peak
2		2483.50	22.80	31.81	54.61	-19.39	74.00	Peak
3	*	2488.35	25.68	31.81	57.49	-16.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

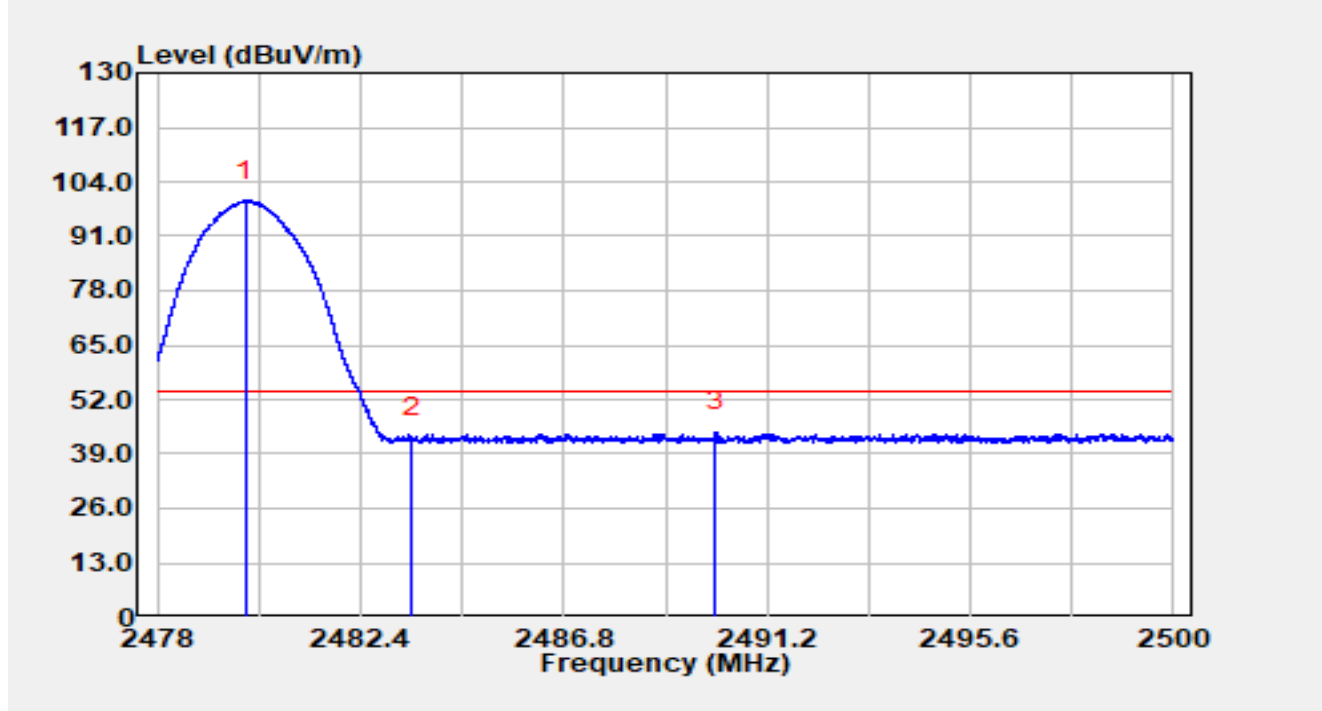


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.92	67.69	31.80	99.50	N/A	N/A	Average
2		2483.50	11.31	31.81	43.12	-10.88	54.00	Average
3	*	2490.09	12.50	31.81	44.31	-9.69	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

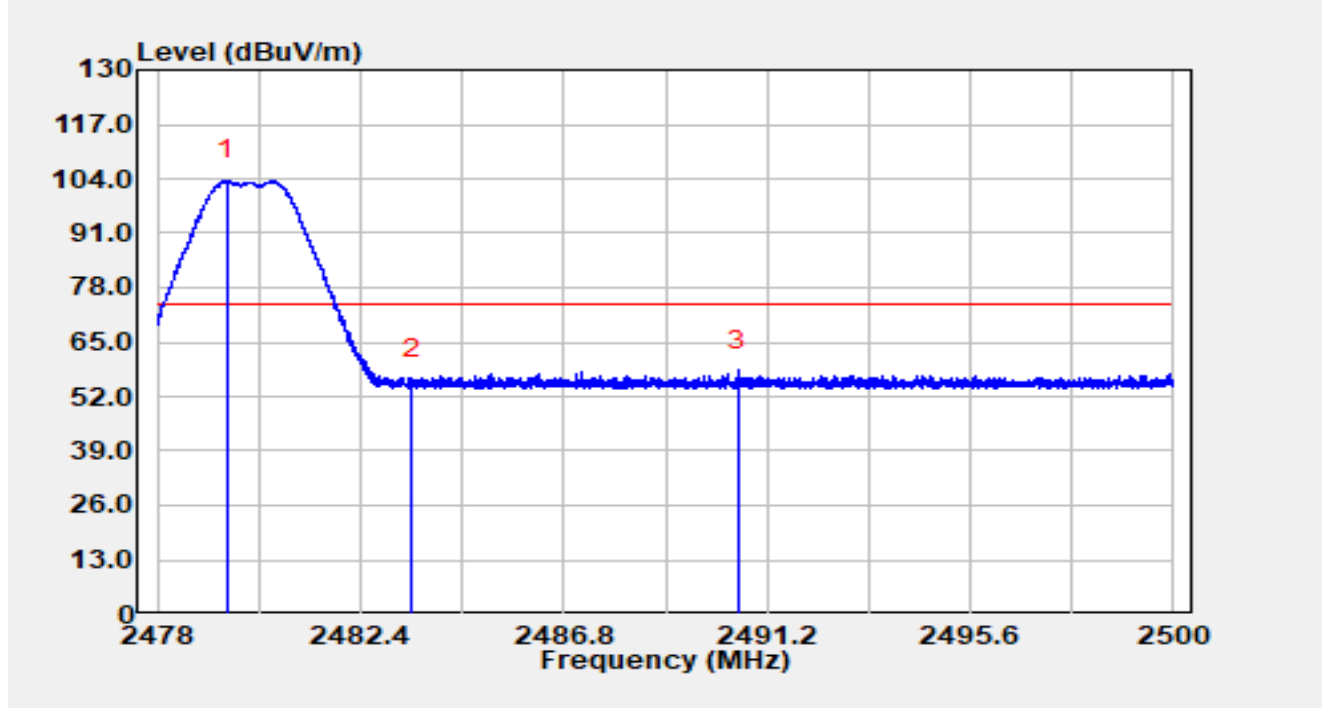


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.51	71.95	31.80	103.75	N/A	N/A	Peak
2		2483.50	24.40	31.81	56.21	-17.79	74.00	Peak
3	*	2490.58	26.40	31.81	58.21	-15.79	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 2Mbps at 2480MHz		

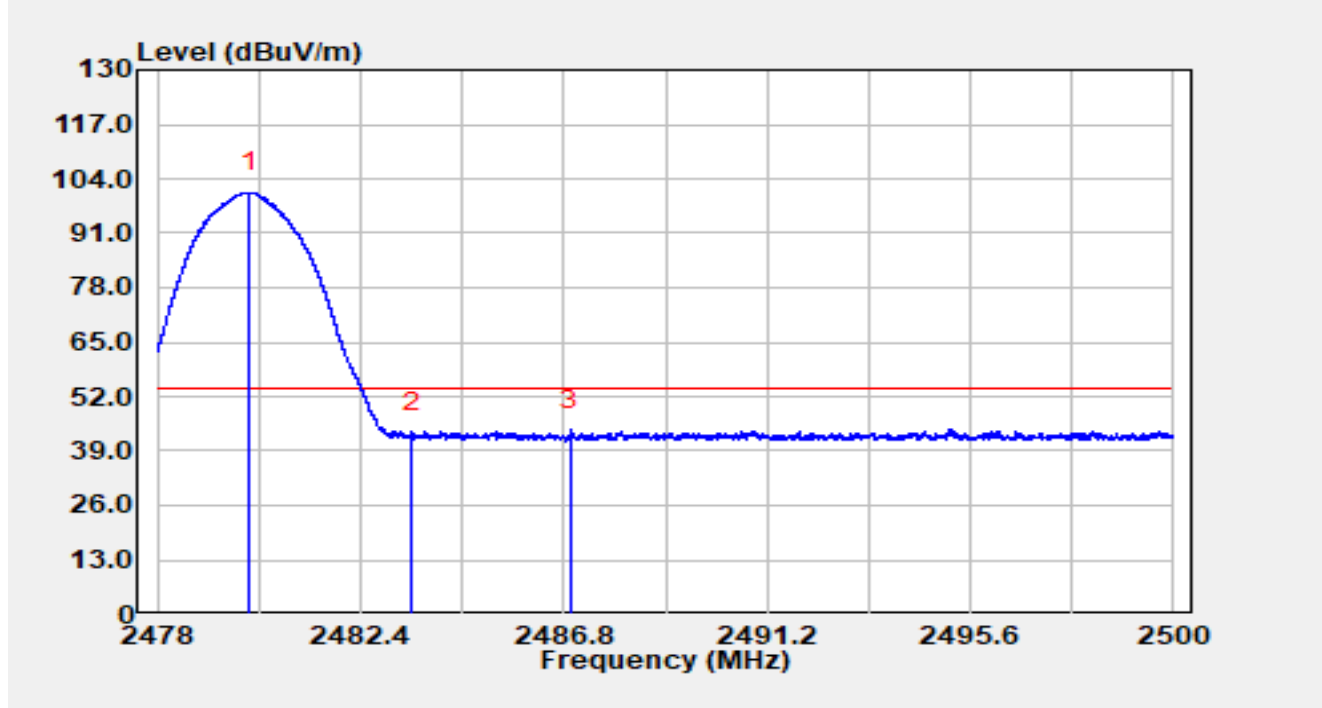


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.00	68.93	31.80	100.73	N/A	N/A	Average
2		2483.50	11.81	31.81	43.62	-10.38	54.00	Average
3	*	2486.95	12.15	31.81	43.96	-10.04	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2402MHz		

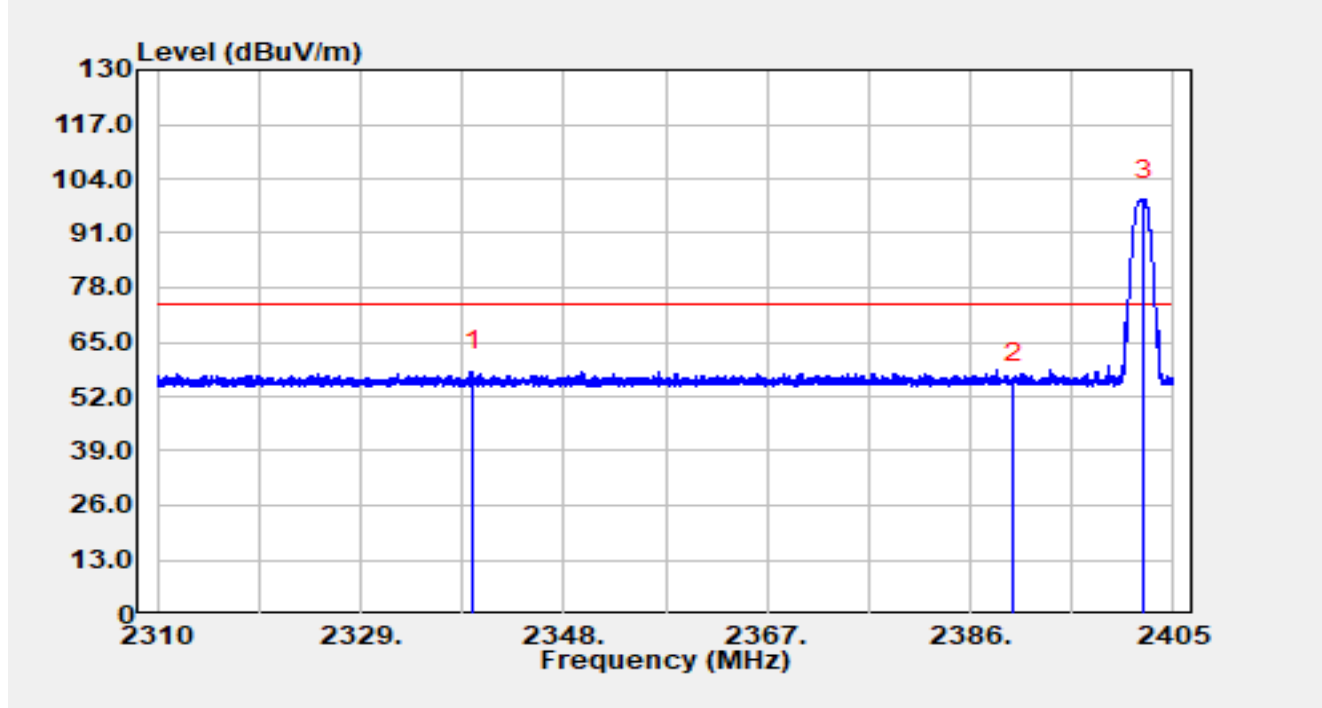


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2339.48	25.95	32.01	57.96	-16.04	74.00	Peak
2		2390.00	23.30	31.96	55.26	-18.74	74.00	Peak
3		2402.28	67.03	31.90	98.92	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2402MHz		

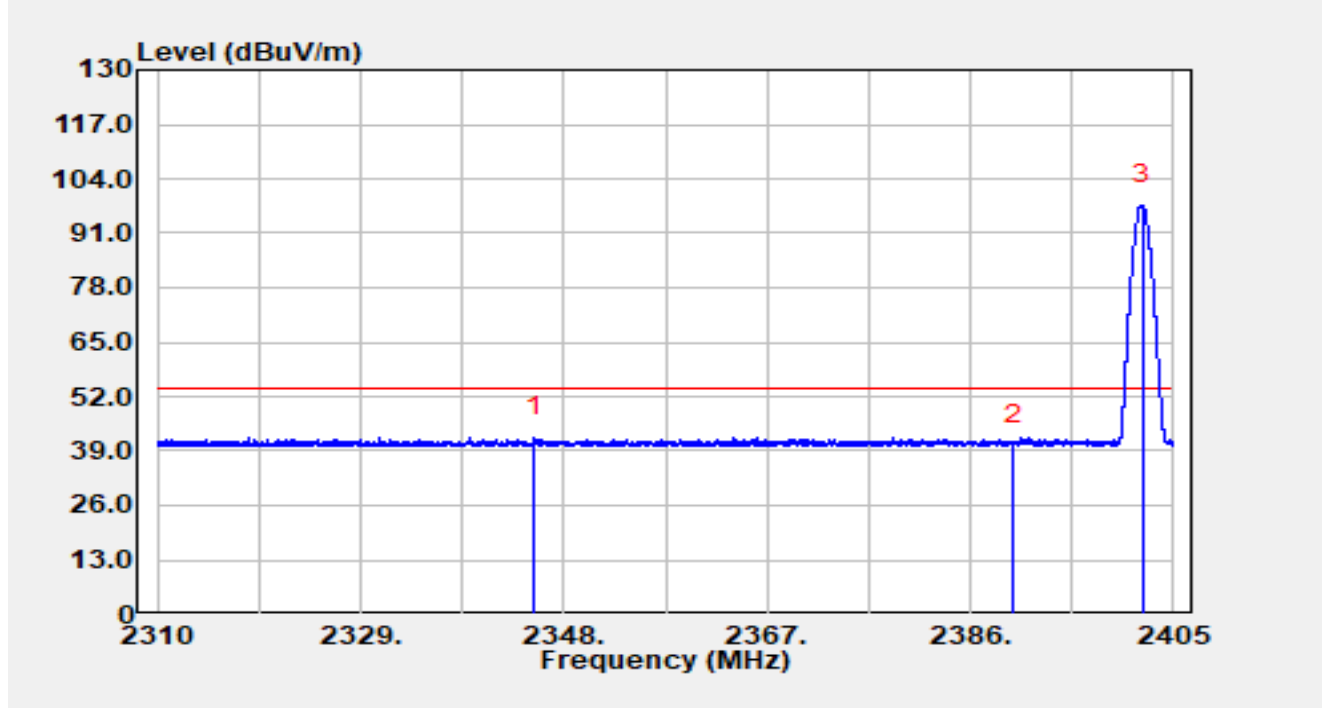


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2345.23	10.22	31.98	42.21	-11.79	54.00	Average
2		2390.00	8.73	31.96	40.68	-13.32	54.00	Average
3		2402.06	65.94	31.90	97.84	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2402MHz		

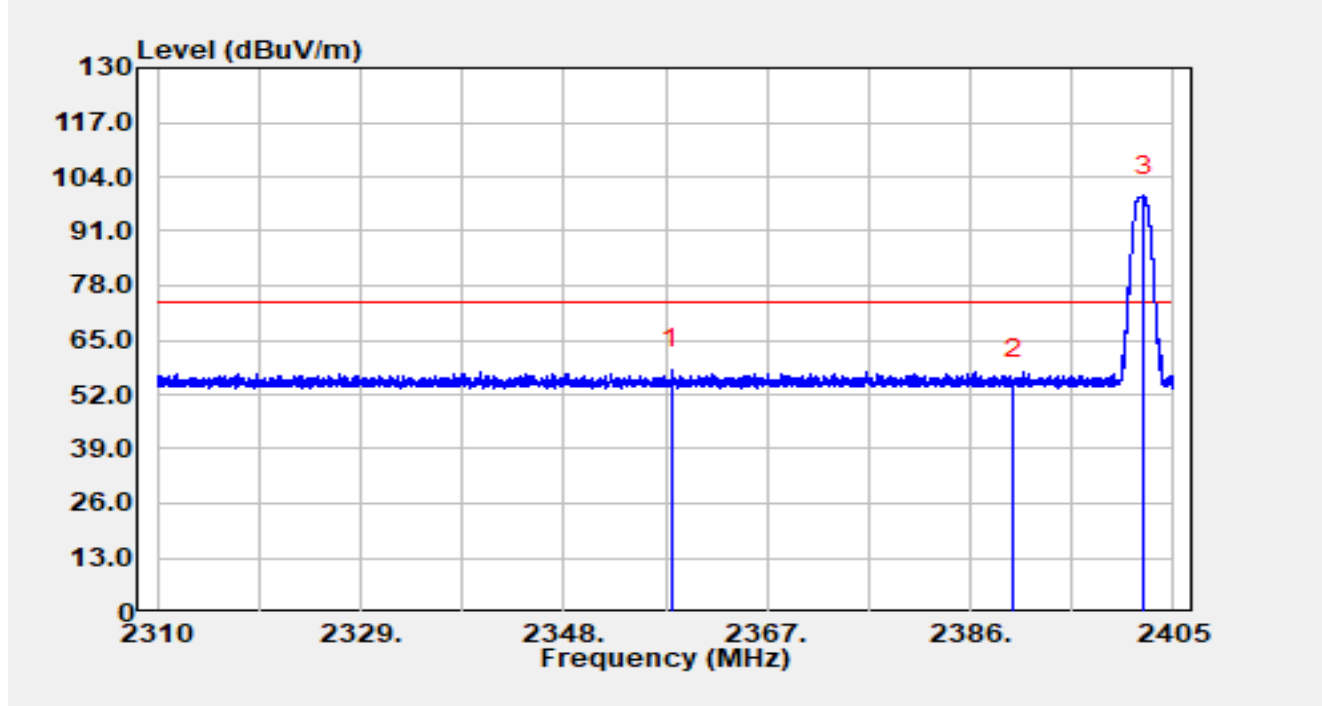


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2358.04	26.09	31.97	58.06	-15.94	74.00	Peak
2		2390.00	23.51	31.96	55.47	-18.53	74.00	Peak
3		2402.25	67.53	31.90	99.42	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2402MHz		

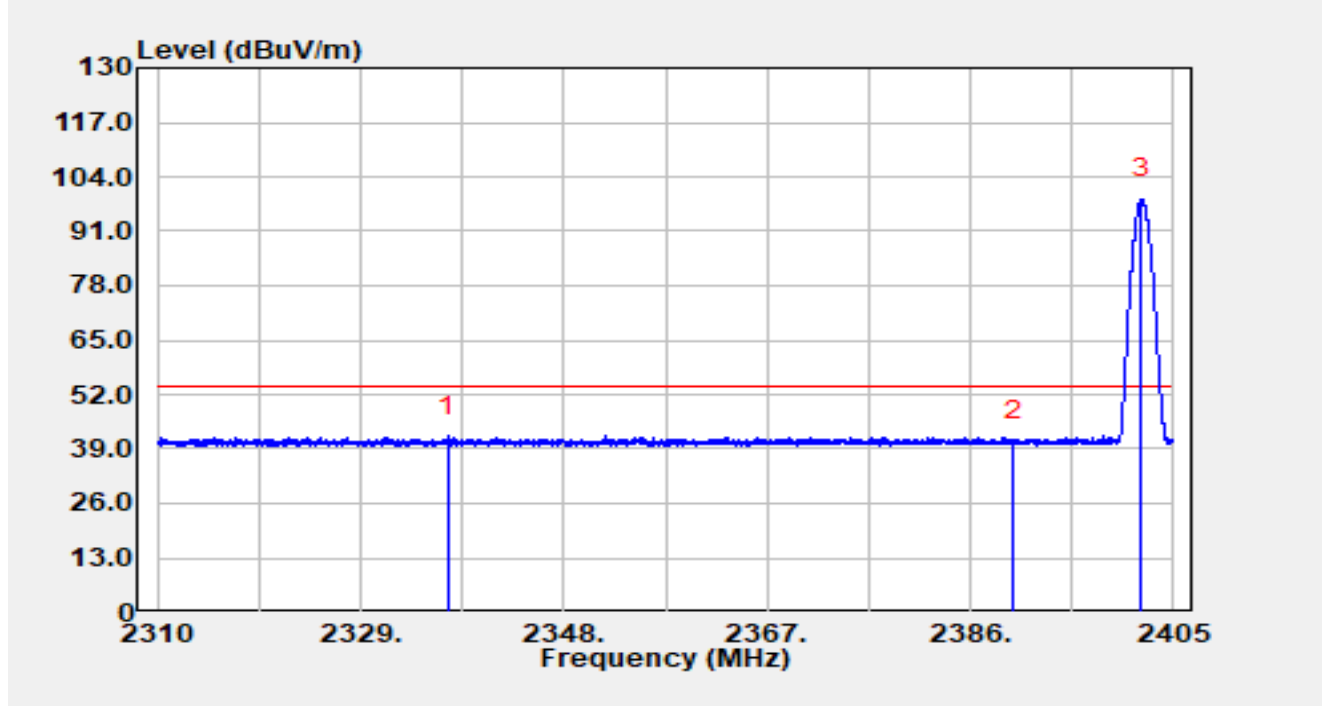


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2337.14	10.07	32.02	42.09	-11.91	54.00	Average
2		2390.00	8.94	31.96	40.90	-13.10	54.00	Average
3		2402.05	66.78	31.90	98.67	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2480MHz		

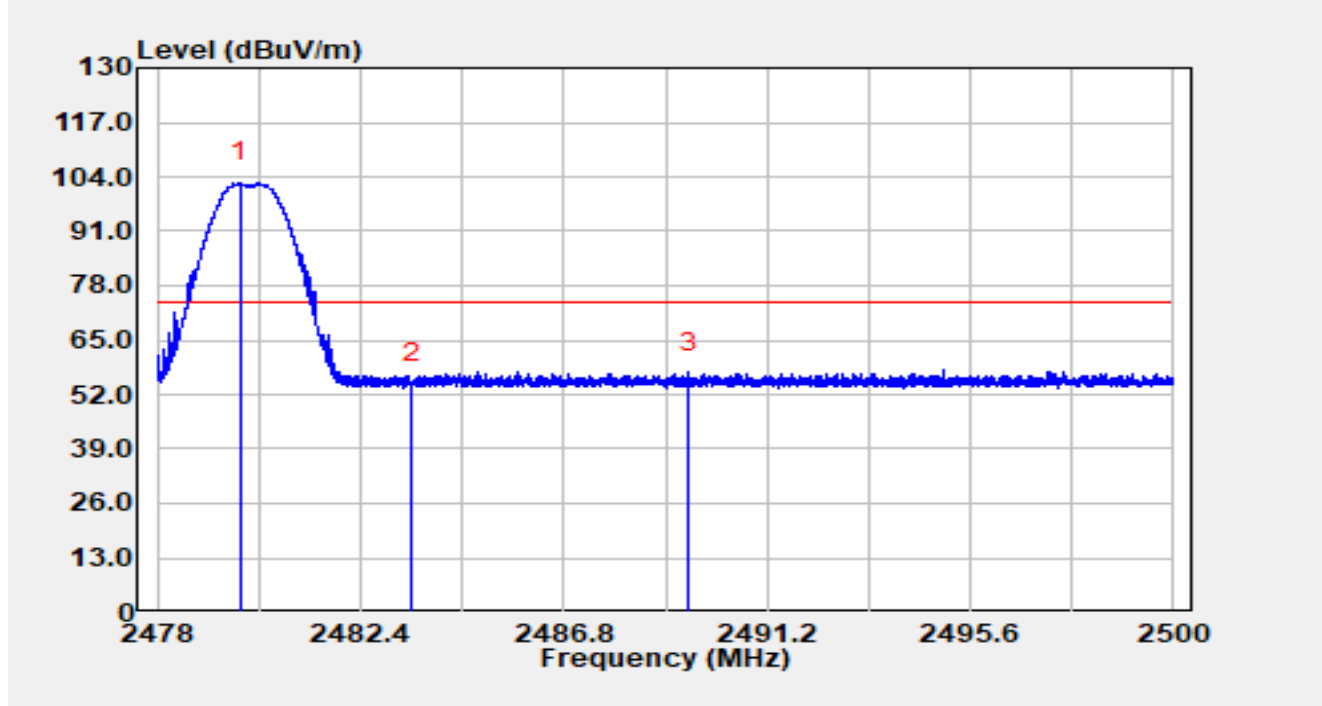


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.78	70.82	31.80	102.62	N/A	N/A	Peak
2		2483.50	22.81	31.81	54.62	-19.38	74.00	Peak
3	*	2489.50	25.43	31.81	57.24	-16.76	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2480MHz		

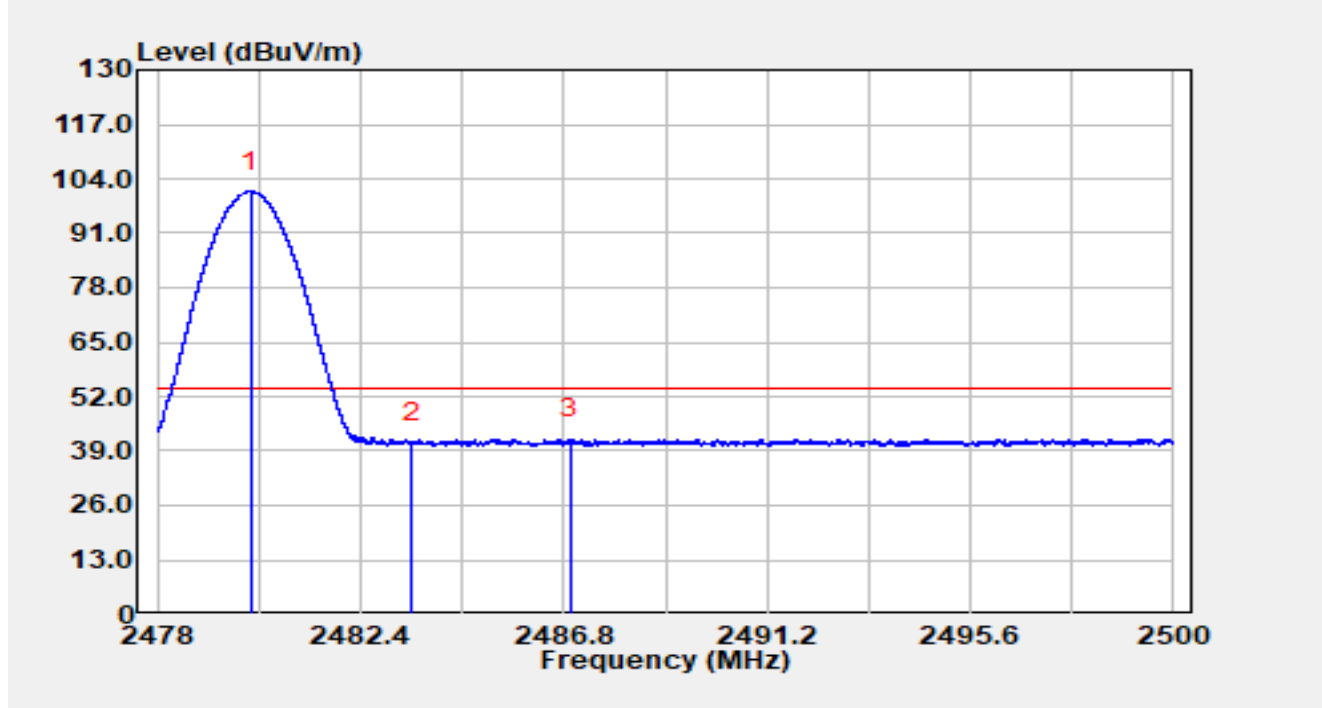


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.03	69.12	31.80	100.93	N/A	N/A	Average
2		2483.50	9.32	31.81	41.12	-12.88	54.00	Average
3	*	2486.95	10.06	31.81	41.87	-12.13	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2480MHz		

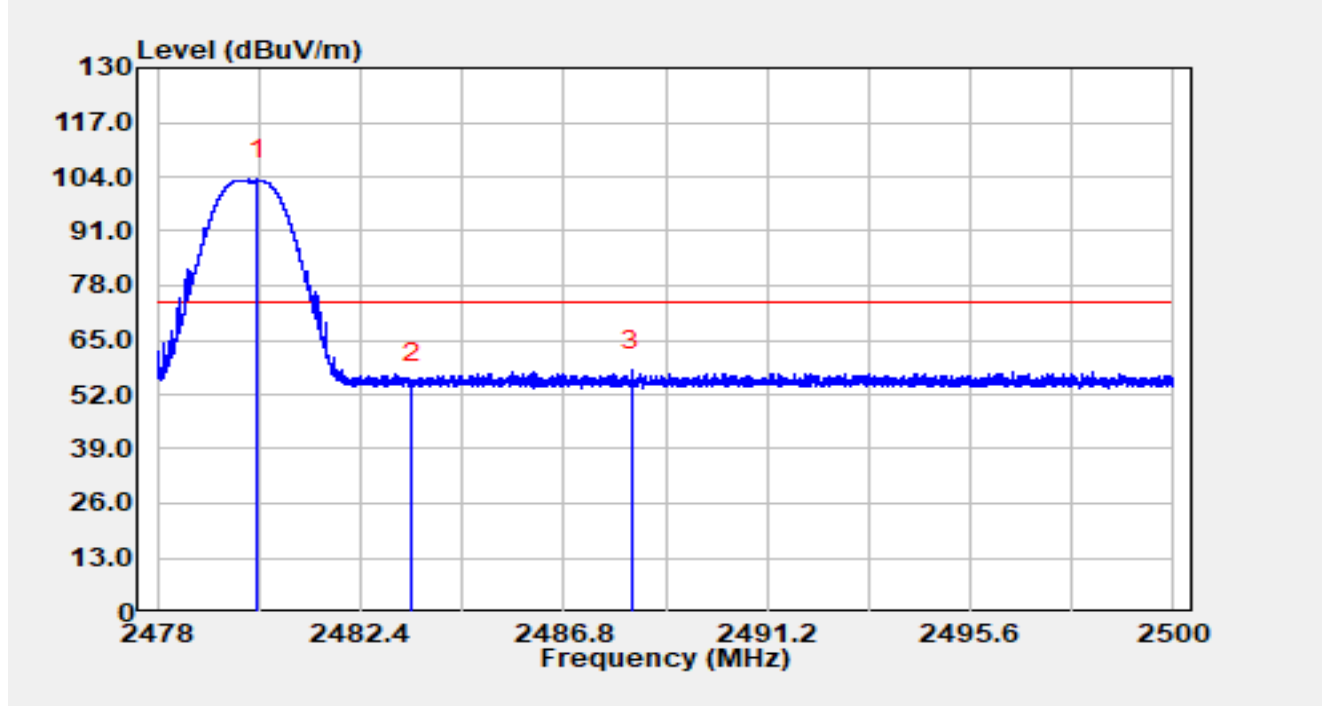


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.18	71.49	31.80	103.30	N/A	N/A	Peak
2		2483.50	22.82	31.81	54.63	-19.37	74.00	Peak
3	*	2488.27	25.98	31.81	57.79	-16.21	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 125Kbps at 2480MHz		

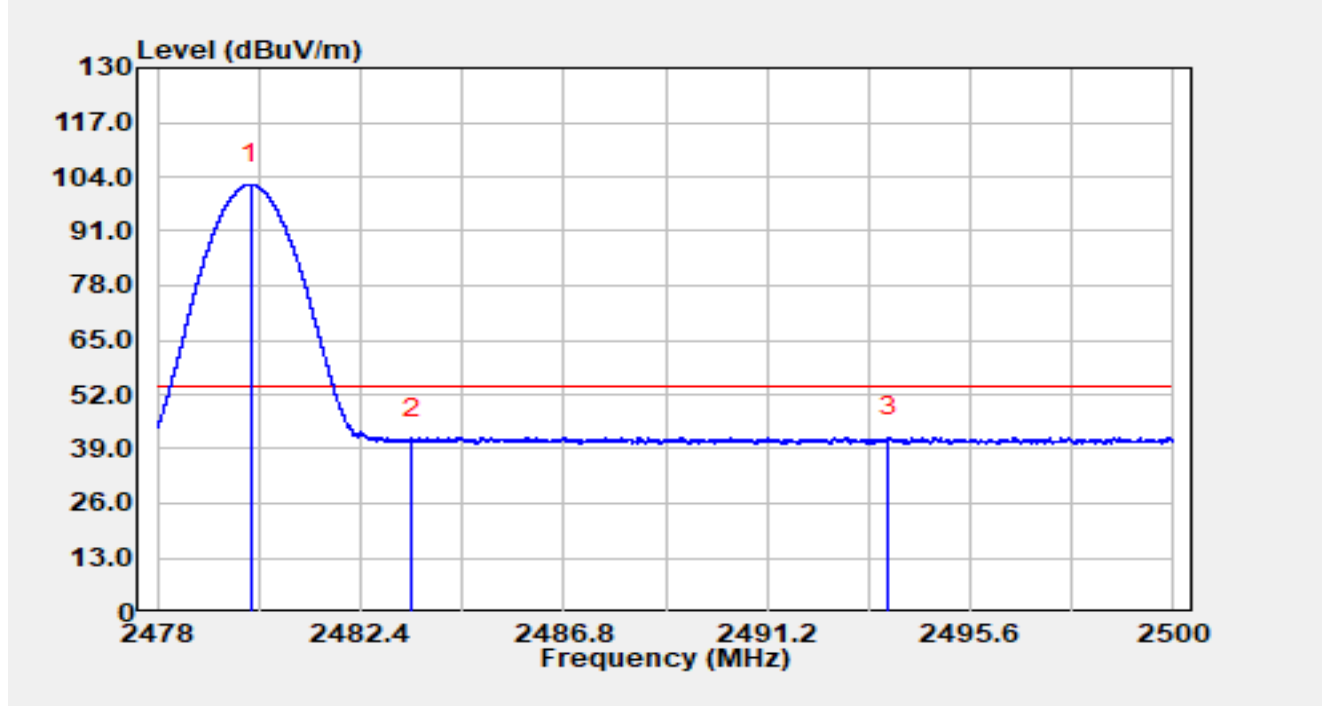


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.01	70.32	31.80	102.13	N/A	N/A	Average
2		2483.50	9.60	31.81	41.41	-12.59	54.00	Average
3	*	2493.82	10.06	31.81	41.88	-12.12	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2402MHz		

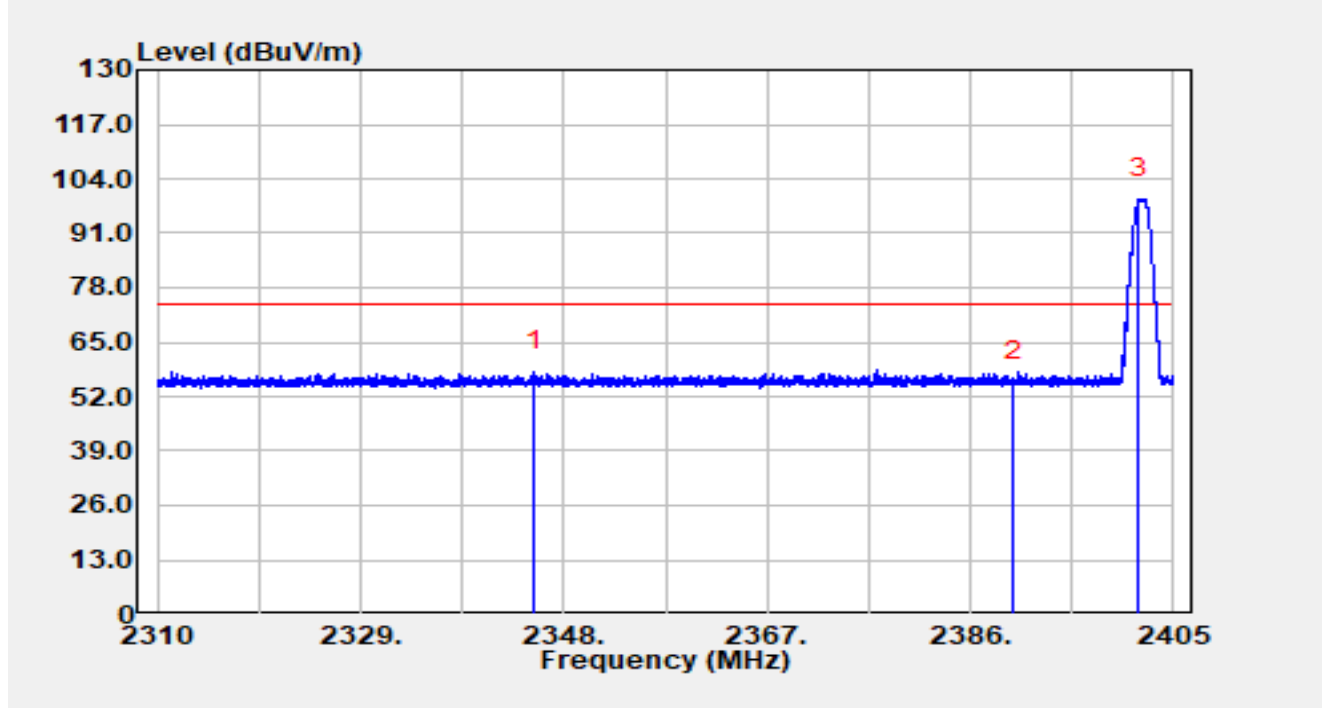


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2345.25	25.97	31.98	57.96	-16.04	74.00	Peak
2		2390.00	23.74	31.96	55.70	-18.30	74.00	Peak
3		2401.79	67.32	31.90	99.22	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2402MHz		

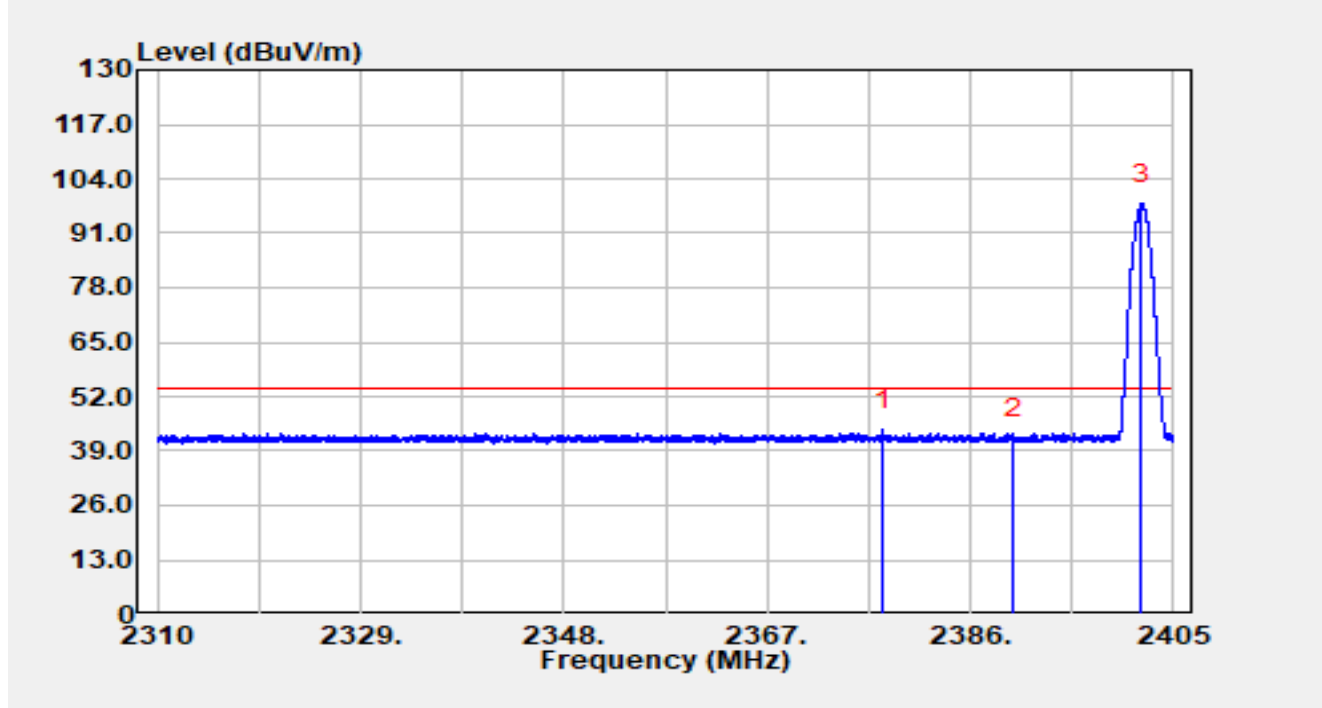


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.79	11.95	31.97	43.92	-10.08	54.00	Average
2		2390.00	9.86	31.96	41.82	-12.18	54.00	Average
3		2402.02	66.06	31.90	97.96	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2402MHz		

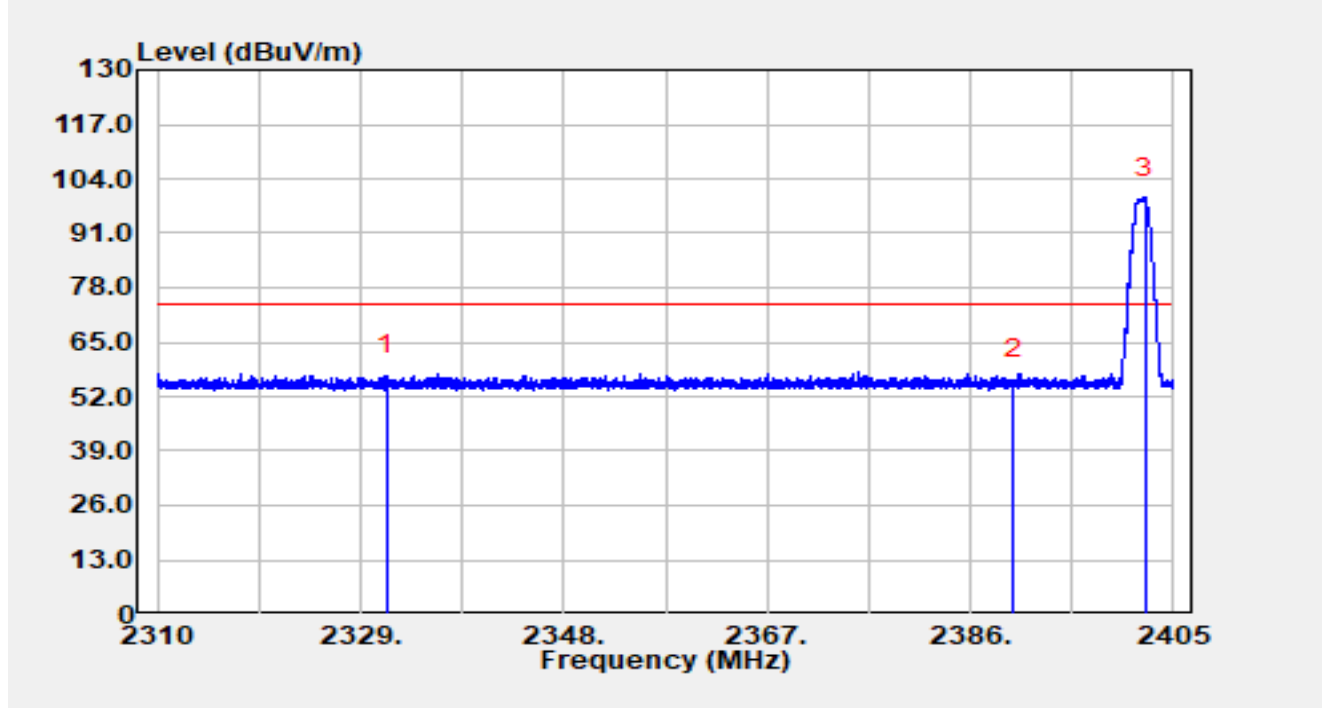


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2331.39	24.96	32.05	57.01	-16.99	74.00	Peak
2		2390.00	24.10	31.96	56.05	-17.95	74.00	Peak
3		2402.30	67.67	31.90	99.56	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2402MHz		

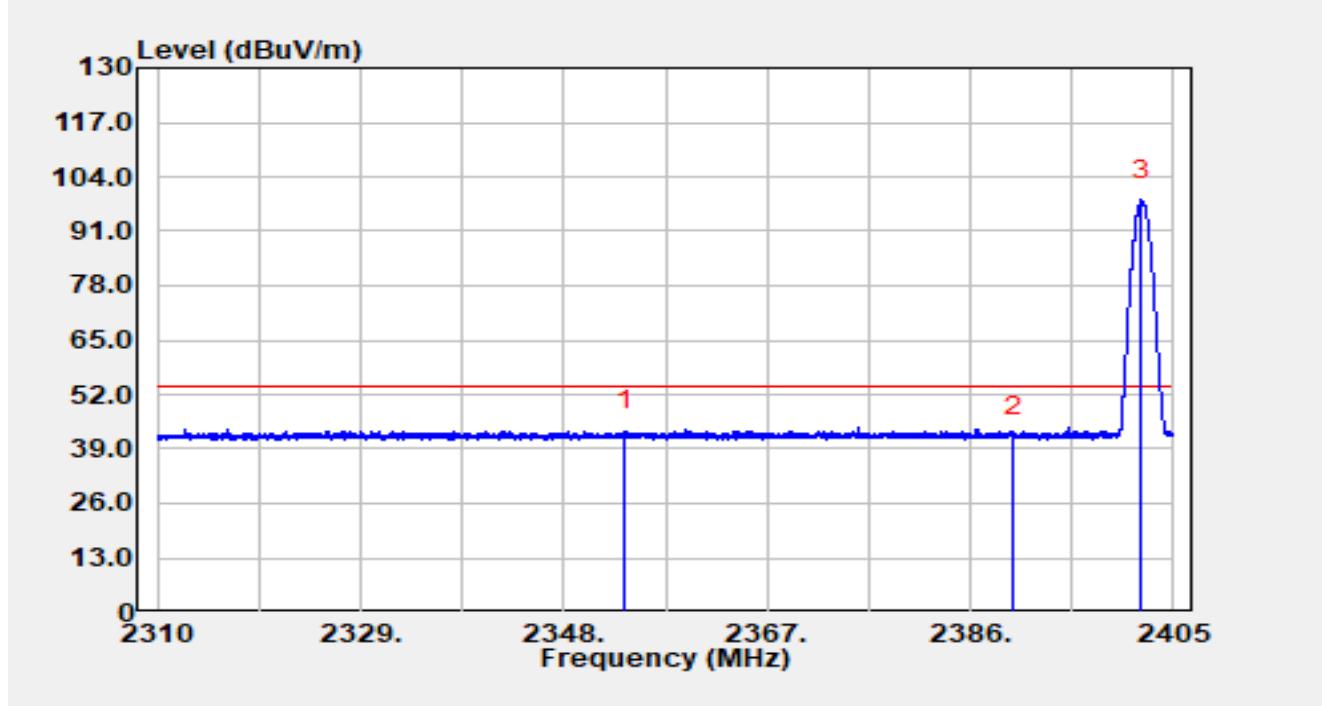


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2353.72	11.42	31.97	43.38	-10.62	54.00	Average
2		2390.00	10.04	31.96	42.00	-12.00	54.00	Average
3		2402.04	66.52	31.90	98.42	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2480MHz		

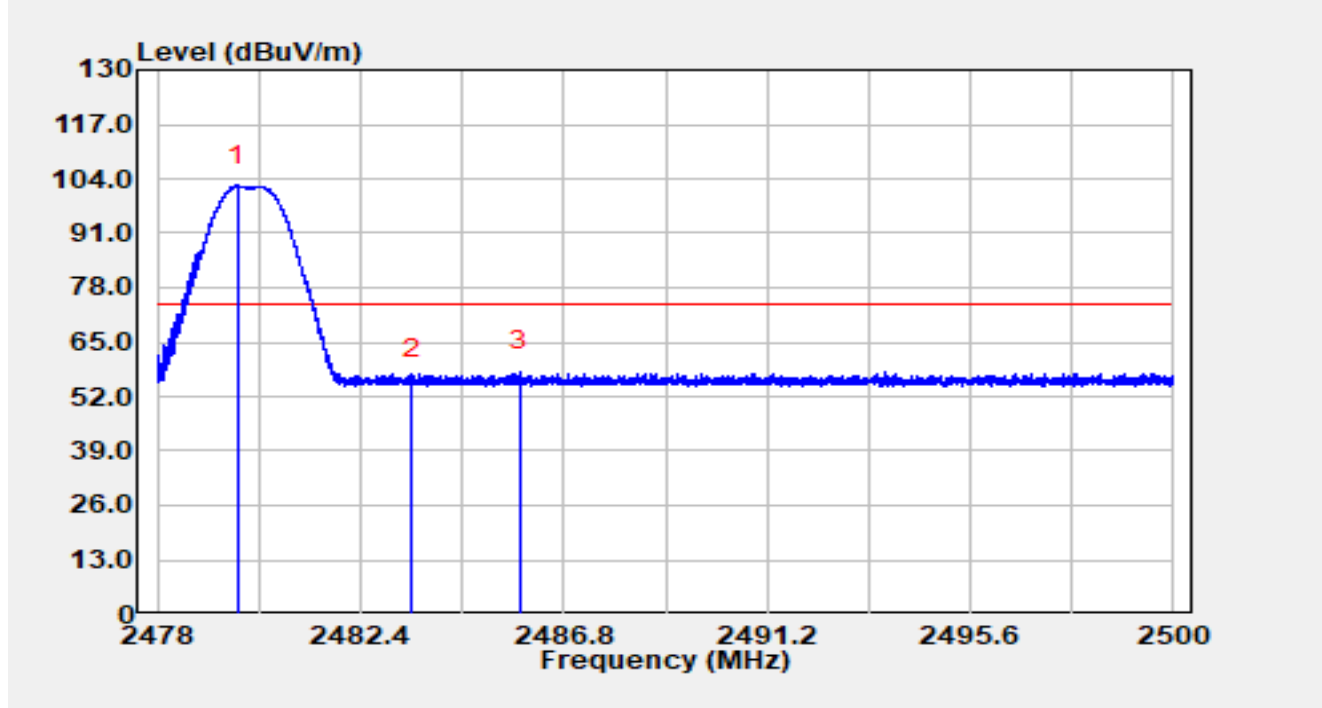


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.74	70.63	31.80	102.43	N/A	N/A	Peak
2		2483.50	24.51	31.81	56.32	-17.68	74.00	Peak
3	*	2485.84	26.23	31.81	58.04	-15.96	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2480MHz		

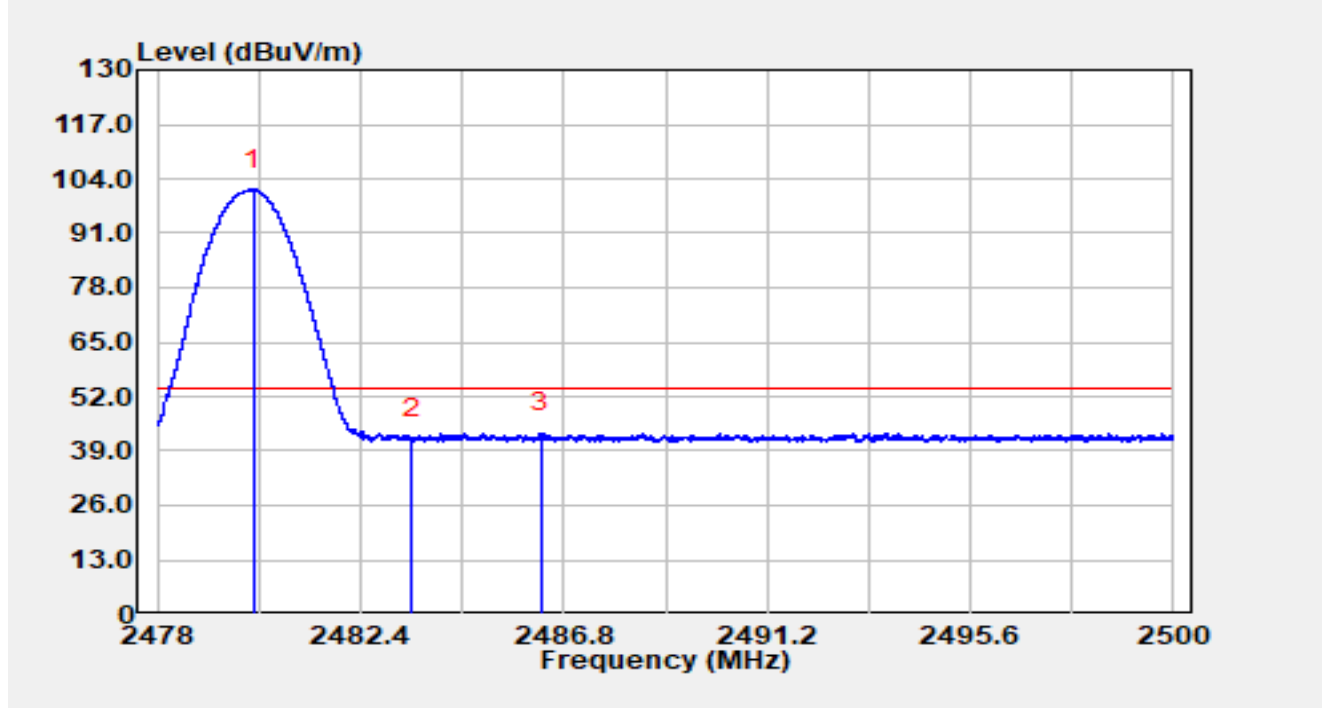


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.07	69.65	31.80	101.46	N/A	N/A	Average
2		2483.50	10.05	31.81	41.85	-12.15	54.00	Average
3	*	2486.29	11.57	31.81	43.38	-10.62	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2480MHz		

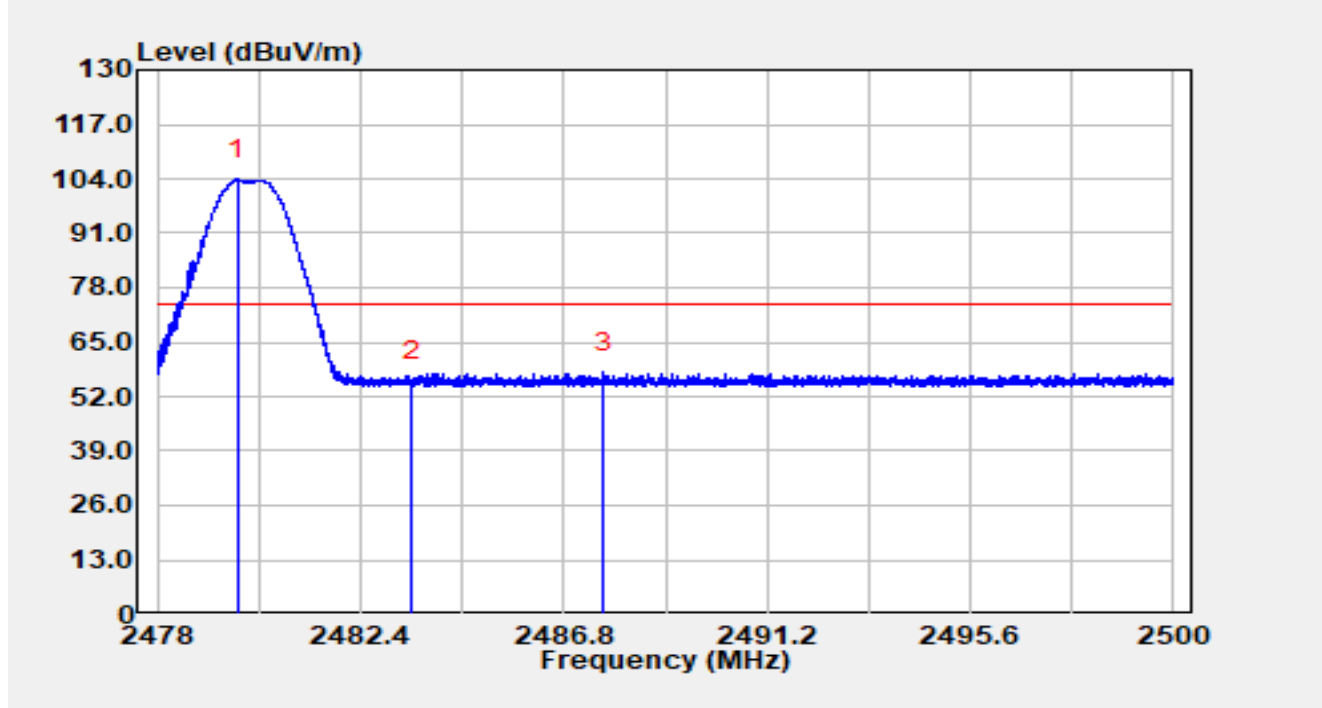


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.73	72.09	31.80	103.89	N/A	N/A	Peak
2		2483.50	24.01	31.81	55.81	-18.19	74.00	Peak
3	*	2487.65	25.94	31.81	57.75	-16.25	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by BLE 500Kbps at 2480MHz		

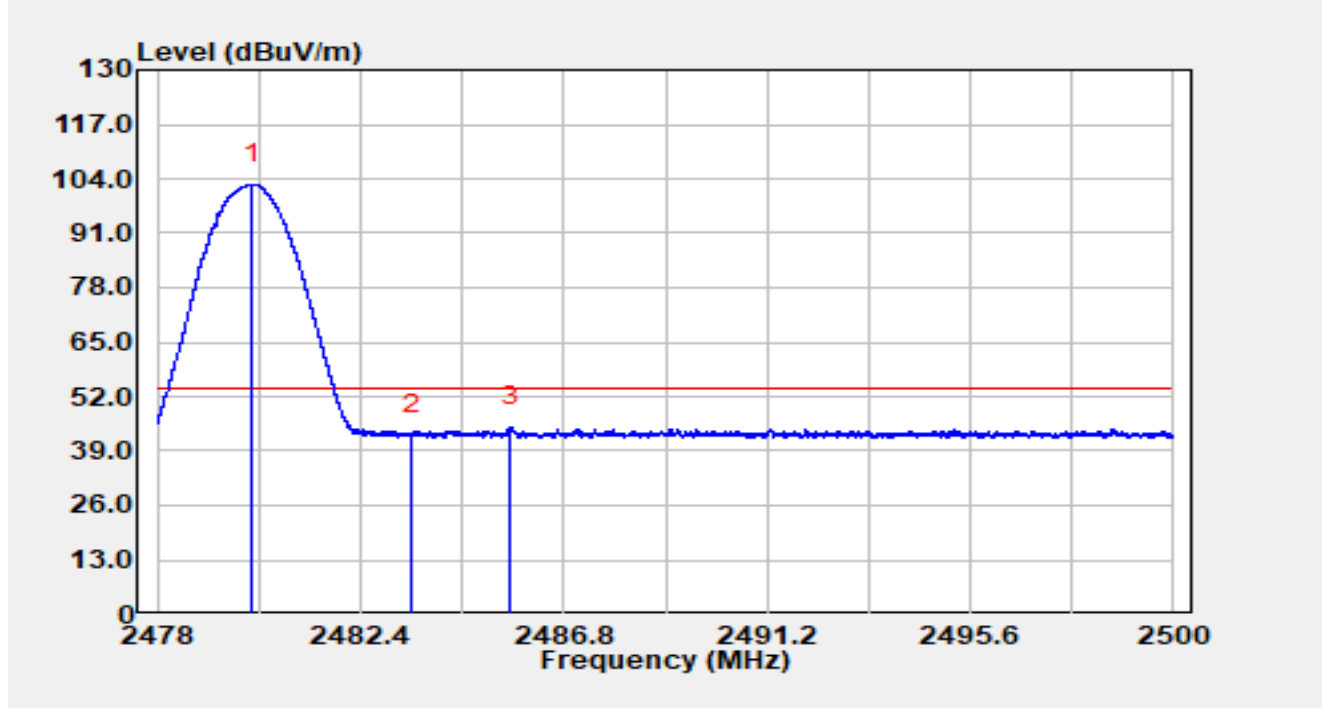


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.06	70.83	31.80	102.64	N/A	N/A	Average
2		2483.50	11.08	31.81	42.89	-11.11	54.00	Average
3	*	2485.65	13.07	31.81	44.88	-9.12	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

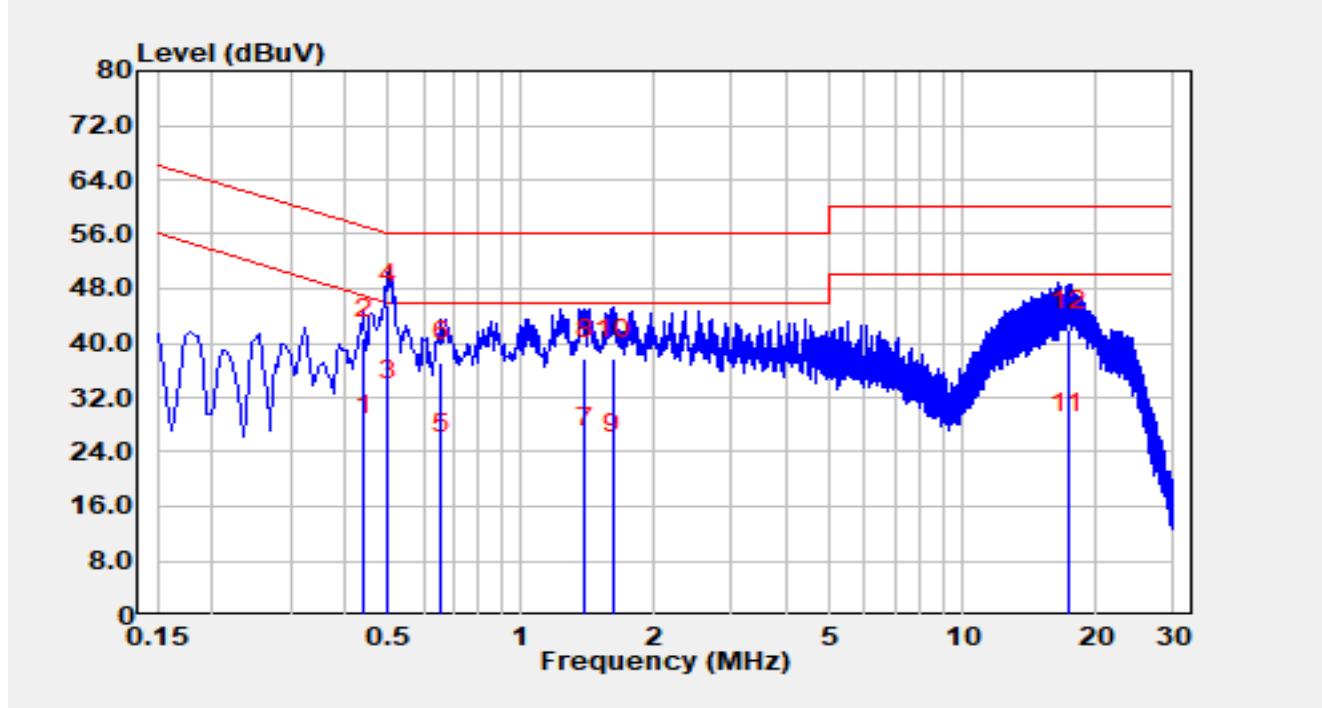


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.44	16.80	9.74	26.54	-20.54	47.08	Average
2		0.44	30.90	9.74	40.64	-16.44	57.08	QP
3		0.50	21.90	9.75	31.65	-14.35	46.00	Average
4	*	0.50	35.90	9.75	45.65	-10.35	56.00	QP
5		0.66	14.00	9.77	23.77	-22.23	46.00	Average
6		0.66	27.40	9.77	37.17	-18.83	56.00	QP
7		1.39	14.80	9.88	24.68	-21.32	46.00	Average
8		1.39	27.80	9.88	37.68	-18.32	56.00	QP
9		1.61	13.90	9.91	23.81	-22.19	46.00	Average
10		1.61	27.70	9.91	37.61	-18.39	56.00	QP
11		17.30	15.60	11.03	26.63	-23.37	50.00	Average
12		17.30	30.80	11.03	41.83	-18.17	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BLE 1Mbps at 2402MHz		

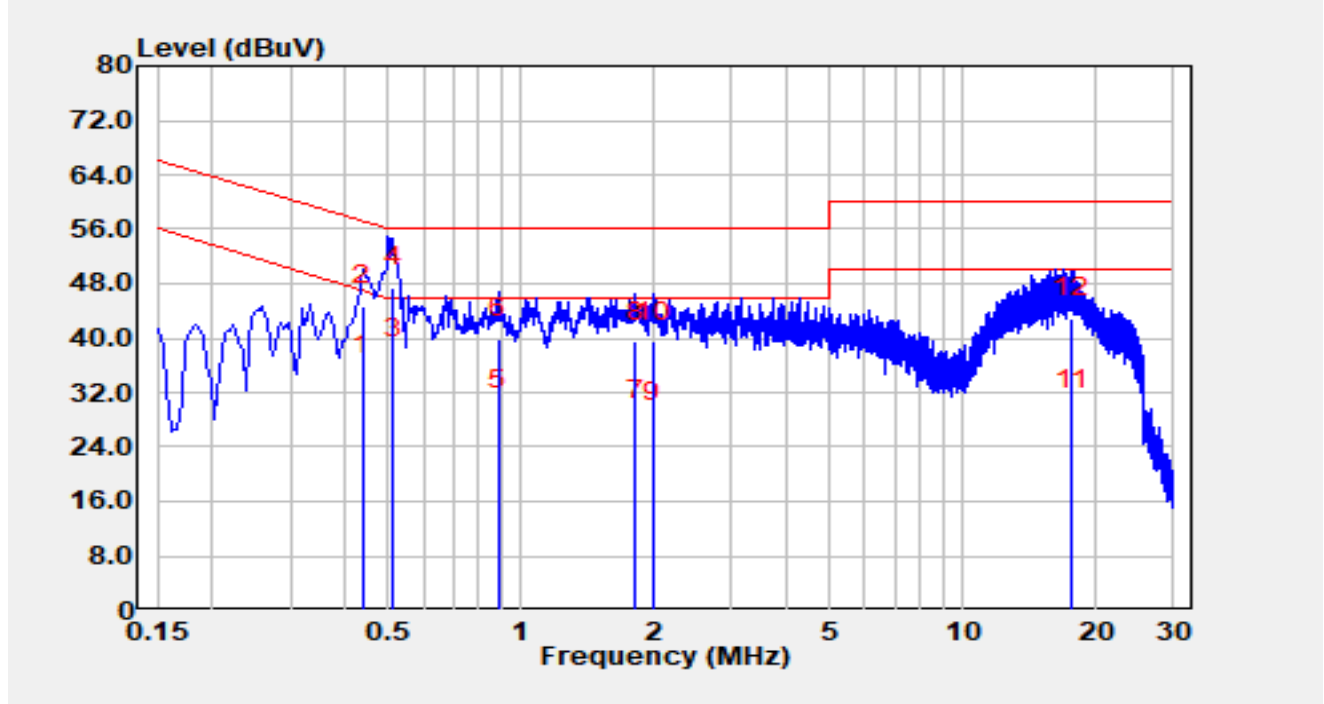

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.44	24.80	9.73	34.53	-12.57	47.10	Average
2		0.44	35.10	9.73	44.83	-12.27	57.10	QP
3		0.51	27.30	9.73	37.03	-8.97	46.00	Average
4	*	0.51	37.70	9.73	47.43	-8.57	56.00	QP
5		0.89	19.60	9.79	29.39	-16.61	46.00	Average
6		0.89	30.20	9.79	39.99	-16.01	56.00	QP
7		1.82	18.10	9.91	28.01	-17.99	46.00	Average
8		1.82	29.50	9.91	39.41	-16.59	56.00	QP
9		1.99	17.80	9.93	27.73	-18.27	46.00	Average
10		1.99	29.50	9.93	39.43	-16.57	56.00	QP
11		17.64	18.40	11.11	29.51	-20.49	50.00	Average
12		17.64	31.90	11.11	43.01	-16.99	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.

2. $C.F (dB) = LISN \text{ Factor } (dB) + \text{Cable Loss } (dB)$.
3. $\text{Measurement } (dB\mu V) = \text{Reading } (dB\mu V) + C.F (dB)$.

Appendix B - Test Setup Photograph

Refer to “R25S1020041-UT” file.

Appendix C - EUT Photograph

Refer to "R25S1020041-UE" file.

The End
