


802.11ax-HE20 Out-of-Band Emissions – Ant 2

Channel 11 (2462MHz) RU52/40


Reference Level



High Band Edge

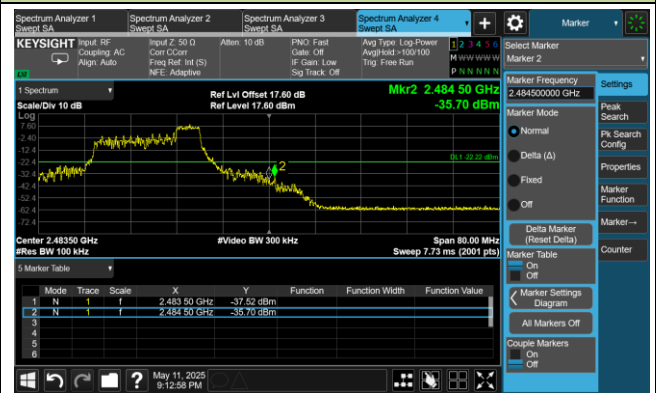

Spurious Emission

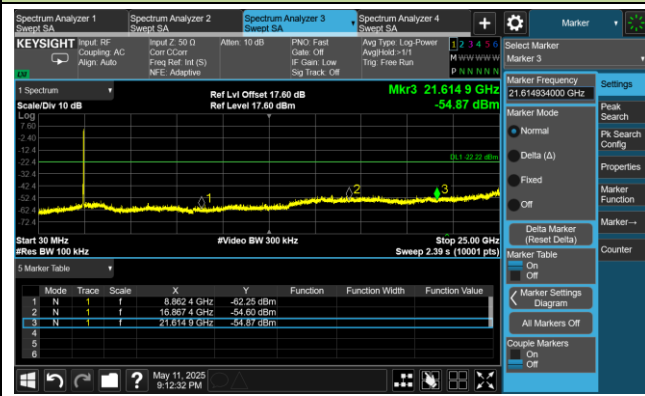

802.11ax-HE20 Out-of-Band Emissions – Ant 2

Channel 11 (2462MHz) RU106/54


Reference Level



High Band Edge




Spurious Emission

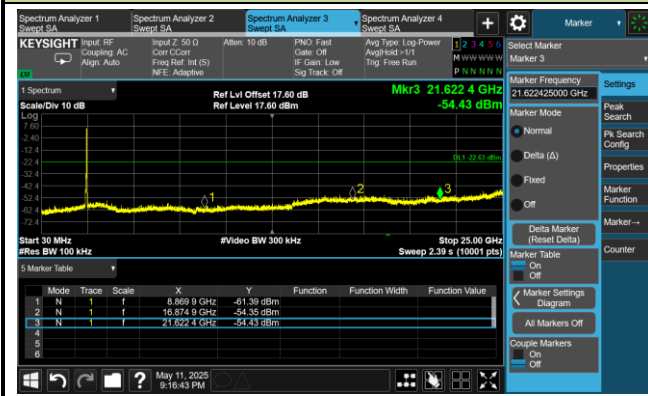


802.11ax-HE20 Out-of-Band Emissions – Ant 2

Channel 11 (2462MHz) RU242/61


Reference Level

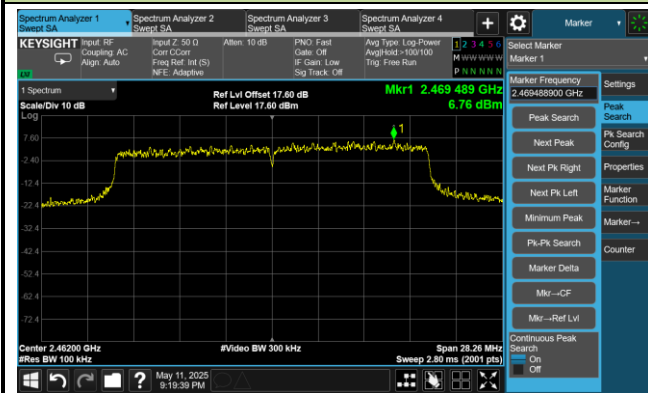

High Band Edge

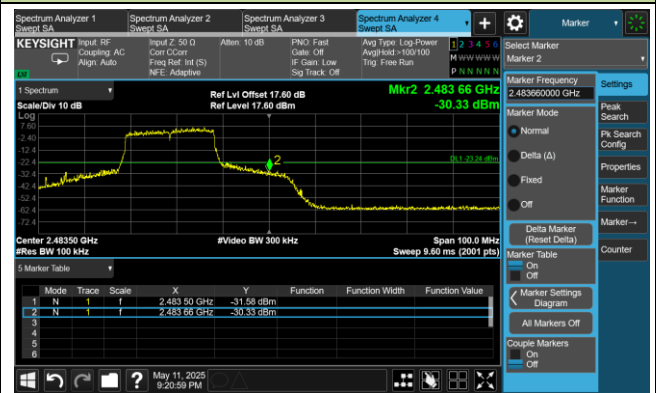


Spurious Emission

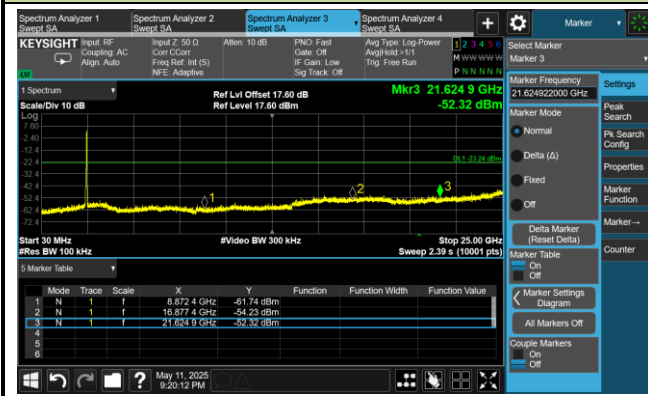


802.11ax-HE40 Out-of-Band Emissions – Ant 2

Channel 03 (2422MHz) RU484/65


Reference Level

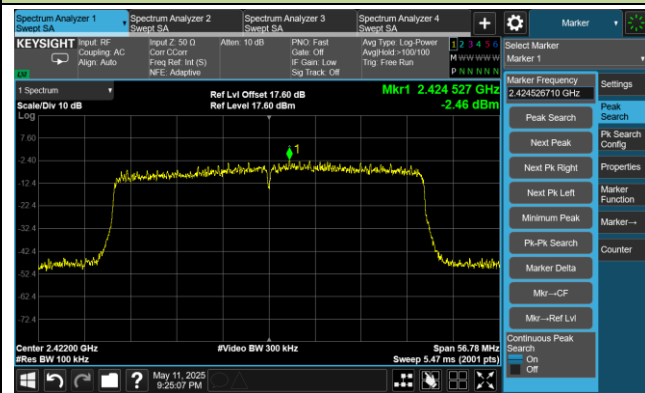

Low Band Edge

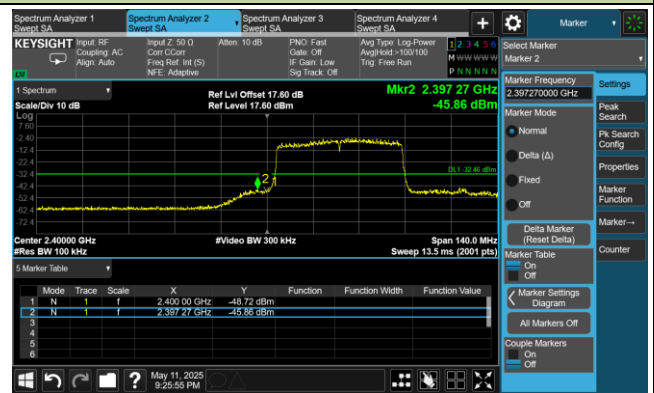

Spurious Emission

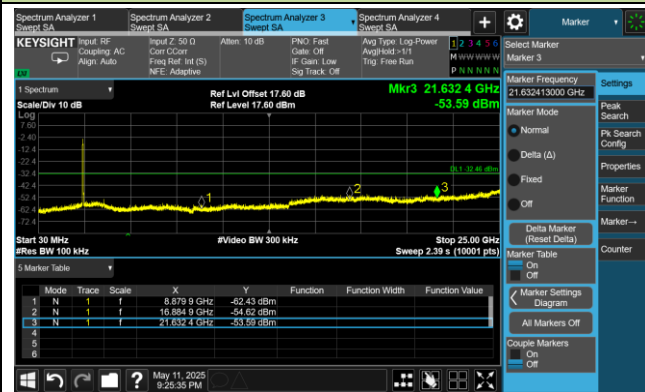


Channel 06 (2437MHz) RU484/65

Reference Level




Spurious Emission

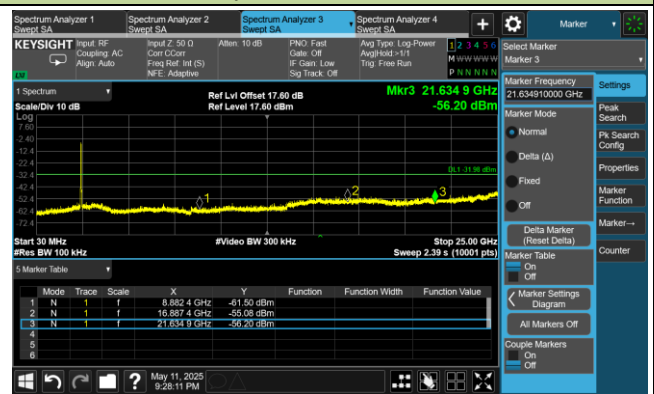


802.11ax-HE40 Out-of-Band Emissions – Ant 2

Channel 09 (2452MHz) RU484/65


Reference Level

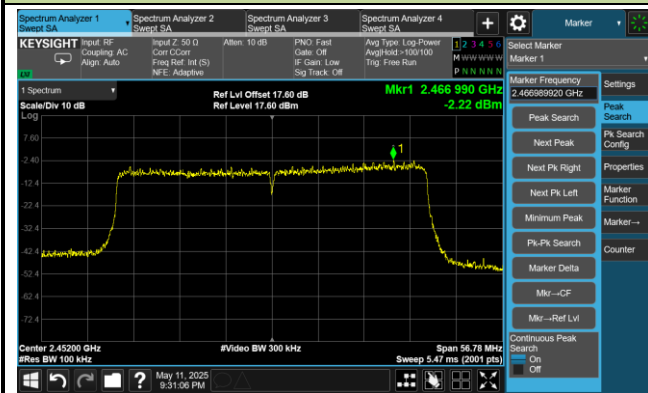

High Band Edge

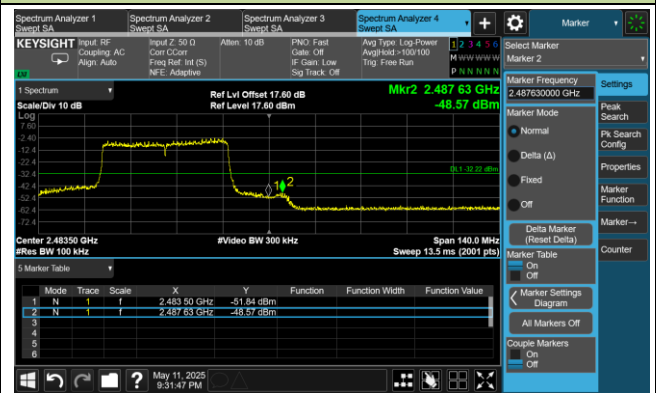

Spurious Emission

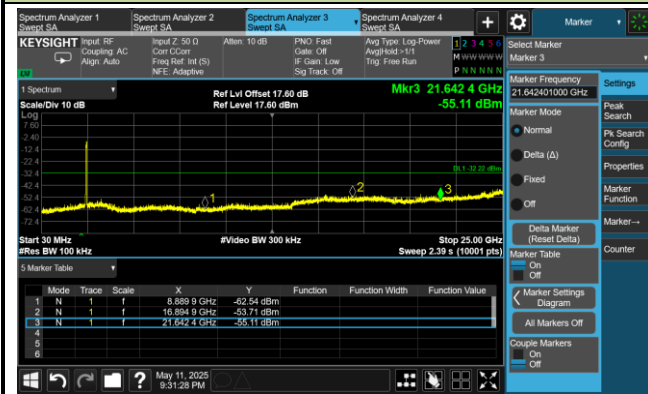

A.6 Radiated Spurious Emission Test Result

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-12	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4933.80	34.83	3.92	38.76	74.00	-35.24	Peak	Horizontal
	11495.80	31.67	17.04	48.71	74.00	-25.29	Peak	Horizontal
	17972.80	18.44	28.18	46.62	54.00	-7.38	Average	Horizontal
	17972.80	31.35	28.18	59.53	74.00	-14.47	Peak	Horizontal
	4945.70	34.64	3.81	38.46	74.00	-35.54	Peak	Vertical
	11703.20	31.25	16.85	48.09	74.00	-25.91	Peak	Vertical
	18000.00	18.17	28.36	46.53	54.00	-7.47	Average	Vertical
	18000.00	30.18	28.36	58.53	74.00	-15.47	Peak	Vertical
06	7308.70	36.90	11.24	48.14	74.00	-25.86	Peak	Horizontal
	11625.00	31.22	16.77	47.99	74.00	-26.01	Peak	Horizontal
	17923.50	18.06	28.55	46.61	54.00	-7.39	Average	Horizontal
	17923.50	30.75	28.55	59.30	74.00	-14.70	Peak	Horizontal
	7308.70	37.28	11.24	48.52	74.00	-25.48	Peak	Vertical
	11533.20	30.98	17.06	48.03	74.00	-25.97	Peak	Vertical
	17942.20	18.15	28.83	46.98	54.00	-7.02	Average	Vertical
	17942.20	30.46	28.83	59.29	74.00	-14.71	Peak	Vertical
11	4923.60	38.25	3.91	42.16	74.00	-31.84	Peak	Horizontal
	11606.30	31.37	16.85	48.21	74.00	-25.79	Peak	Horizontal
	17993.20	18.21	28.19	46.40	54.00	-7.60	Average	Horizontal
	17993.20	30.24	28.19	58.44	74.00	-15.56	Peak	Horizontal
	4923.60	38.25	3.91	42.16	74.00	-31.84	Peak	Vertical
	11606.30	31.37	16.85	48.21	74.00	-25.79	Peak	Vertical
	17964.30	18.09	28.39	46.48	54.00	-7.52	Average	Vertical
	17964.30	31.12	28.39	59.51	74.00	-14.49	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-12	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4853.90	33.99	3.87	37.86	74.00	-36.14	Peak	Horizontal
	11679.40	30.70	17.10	47.80	74.00	-26.20	Peak	Horizontal
	17955.80	18.24	28.63	46.87	54.00	-7.13	Average	Horizontal
	17955.80	30.81	28.63	59.44	74.00	-14.56	Peak	Horizontal
	4830.10	34.38	4.07	38.45	74.00	-35.55	Peak	Vertical
	7507.60	33.00	11.76	44.76	74.00	-29.24	Peak	Vertical
	17938.80	18.33	28.84	47.17	54.00	-6.83	Average	Vertical
	17938.80	31.22	28.84	60.06	74.00	-13.94	Peak	Vertical
06	7305.30	34.08	11.21	45.29	74.00	-28.71	Peak	Horizontal
	11555.30	31.71	16.77	48.49	74.00	-25.51	Peak	Horizontal
	17942.20	18.36	28.83	47.19	54.00	-6.81	Average	Horizontal
	17942.20	30.67	28.83	59.50	74.00	-14.50	Peak	Horizontal
	7310.40	34.54	11.26	45.80	74.00	-28.20	Peak	Vertical
	11635.20	30.82	16.70	47.51	74.00	-26.49	Peak	Vertical
	17942.20	18.19	28.83	47.02	54.00	-6.98	Average	Vertical
	17942.20	31.04	28.83	59.87	74.00	-14.13	Peak	Vertical
11	3840.70	39.43	0.56	39.99	74.00	-34.01	Peak	Horizontal
	11625.00	31.32	16.77	48.09	74.00	-25.91	Peak	Horizontal
	17955.80	18.27	28.63	46.90	54.00	-7.10	Average	Horizontal
	17955.80	30.70	28.63	59.33	74.00	-14.67	Peak	Horizontal
	7395.40	35.21	11.47	46.69	74.00	-27.31	Peak	Vertical
	11699.80	32.08	16.91	48.98	74.00	-25.02	Peak	Vertical
	17943.90	18.11	28.82	46.93	54.00	-7.07	Average	Vertical
	17943.90	30.63	28.82	59.45	74.00	-14.55	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-12	Test Mode	802.11n-HT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4843.70	34.27	4.03	38.30	74.00	-35.70	Peak	Horizontal
	11725.30	31.54	16.61	48.15	74.00	-25.85	Peak	Horizontal
	18000.00	18.34	28.36	46.70	54.00	-7.30	Average	Horizontal
	18000.00	29.34	28.36	57.70	74.00	-16.30	Peak	Horizontal
	4955.90	34.29	3.69	37.98	74.00	-36.02	Peak	Vertical
	11130.30	31.68	16.49	48.16	74.00	-25.84	Peak	Vertical
	17925.20	18.32	28.63	46.95	54.00	-7.05	Average	Vertical
	17925.20	30.50	28.63	59.13	74.00	-14.87	Peak	Vertical
06	4869.20	34.72	3.60	38.32	74.00	-35.68	Peak	Horizontal
	11602.90	31.13	16.86	47.99	74.00	-26.01	Peak	Horizontal
	17926.90	18.08	28.71	46.79	54.00	-7.21	Average	Horizontal
	17926.90	31.42	28.71	60.13	74.00	-13.87	Peak	Horizontal
	7298.50	36.47	11.16	47.64	74.00	-26.36	Peak	Vertical
	11592.70	30.36	16.96	47.32	74.00	-26.68	Peak	Vertical
	17943.90	18.21	28.82	47.03	54.00	-6.97	Average	Vertical
	17943.90	30.71	28.82	59.53	74.00	-14.47	Peak	Vertical
11	4930.40	35.19	3.94	39.13	74.00	-34.87	Peak	Horizontal
	11514.50	30.87	17.13	47.99	74.00	-26.01	Peak	Horizontal
	17952.40	18.20	28.73	46.93	54.00	-7.07	Average	Horizontal
	17952.40	31.99	28.73	60.72	74.00	-13.28	Peak	Horizontal
	3840.70	39.52	0.56	40.08	74.00	-33.92	Peak	Vertical
	11500.90	31.12	17.08	48.20	74.00	-25.80	Peak	Vertical
	17940.50	17.88	28.84	46.72	54.00	-7.28	Average	Vertical
	17940.50	30.44	28.84	59.27	74.00	-14.73	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-12	Test Mode	802.11n-HT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	4952.50	34.75	3.72	38.47	74.00	-35.53	Peak	Horizontal
	11553.60	32.13	16.76	48.89	74.00	-25.11	Peak	Horizontal
	18000.00	17.98	28.36	46.34	54.00	-7.66	Average	Horizontal
	18000.00	29.21	28.36	57.56	74.00	-16.44	Peak	Horizontal
	3840.70	39.12	0.56	39.68	74.00	-34.32	Peak	Vertical
	11567.20	30.72	16.83	47.54	74.00	-26.46	Peak	Vertical
	17962.60	17.68	28.44	46.12	54.00	-7.88	Average	Vertical
	17962.60	31.16	28.44	59.60	74.00	-14.40	Peak	Vertical
06	4950.80	34.86	3.74	38.61	74.00	-35.39	Peak	Horizontal
	11596.10	31.27	16.93	48.19	74.00	-25.81	Peak	Horizontal
	17962.60	17.77	28.44	46.21	54.00	-7.79	Average	Horizontal
	17962.60	31.33	28.44	59.77	74.00	-14.23	Peak	Horizontal
	3840.70	38.53	0.56	39.09	74.00	-34.91	Peak	Vertical
	11574.00	31.52	16.91	48.44	74.00	-25.56	Peak	Vertical
	17952.40	17.82	28.73	46.55	54.00	-7.45	Average	Vertical
	17952.40	30.56	28.73	59.29	74.00	-14.71	Peak	Vertical
09	4695.80	34.93	3.48	38.40	74.00	-35.60	Peak	Horizontal
	11655.60	30.59	16.99	47.59	74.00	-26.41	Peak	Horizontal
	17957.50	17.96	28.58	46.54	54.00	-7.46	Average	Horizontal
	17957.50	30.42	28.58	59.00	74.00	-15.00	Peak	Horizontal
	3840.70	39.03	0.56	39.60	74.00	-34.40	Peak	Vertical
	11638.60	30.89	16.68	47.57	74.00	-26.43	Peak	Vertical
	17977.90	17.99	28.06	46.05	54.00	-7.95	Average	Vertical
	17977.90	31.37	28.06	59.44	74.00	-14.56	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Jerry Lu
Test Date	2025-05-12	Test Mode	VHT20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	7412.40	32.89	11.78	44.67	74.00	-29.33	Peak	Horizontal
	11687.90	30.54	17.08	47.62	74.00	-26.38	Peak	Horizontal
	17930.30	18.19	28.84	47.03	54.00	-6.97	Average	Horizontal
	17930.30	30.41	28.84	59.25	74.00	-14.75	Peak	Horizontal
	7652.10	33.01	10.87	43.88	74.00	-30.12	Peak	Vertical
	11555.30	30.99	16.77	47.76	74.00	-26.24	Peak	Vertical
	17988.10	19.11	28.07	47.18	54.00	-6.82	Average	Vertical
	17988.10	31.40	28.07	59.48	74.00	-14.52	Peak	Vertical
06	7310.40	33.43	11.26	44.70	74.00	-29.30	Peak	Horizontal
	11883.40	30.87	16.65	47.51	74.00	-26.49	Peak	Horizontal
	17954.10	18.43	28.68	47.11	54.00	-6.89	Average	Horizontal
	17954.10	30.18	28.68	58.86	74.00	-15.14	Peak	Horizontal
	7317.20	34.42	11.37	45.78	74.00	-28.22	Peak	Vertical
	11737.20	30.62	16.57	47.19	74.00	-26.81	Peak	Vertical
	17928.60	18.25	28.78	47.03	54.00	-6.97	Average	Vertical
	17928.60	30.31	28.78	59.09	74.00	-14.91	Peak	Vertical
11	7494.00	31.86	11.64	43.50	74.00	-30.50	Peak	Horizontal
	11470.30	31.55	16.85	48.40	74.00	-25.60	Peak	Horizontal
	17935.40	18.37	28.85	47.22	54.00	-6.78	Average	Horizontal
	17935.40	30.13	28.85	58.98	74.00	-15.02	Peak	Horizontal
	7393.70	32.80	11.44	44.23	74.00	-29.77	Peak	Vertical
	11120.10	31.89	16.58	48.47	74.00	-25.53	Peak	Vertical
	17935.40	19.21	28.85	48.06	54.00	-5.94	Average	Vertical
	17935.40	29.88	28.85	58.73	74.00	-15.27	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Jerry Lu
Test Date	2025-05-12	Test Mode	VHT40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7550.10	32.62	11.09	43.71	74.00	-30.29	Peak	Horizontal
	10953.50	31.85	16.14	47.99	74.00	-26.01	Peak	Horizontal
	17976.20	18.26	28.10	46.36	54.00	-7.64	Average	Horizontal
	17976.20	31.67	28.10	59.77	74.00	-14.23	Peak	Horizontal
	7528.00	32.55	11.41	43.96	74.00	-30.04	Peak	Vertical
	12087.40	30.79	16.91	47.71	74.00	-26.29	Peak	Vertical
	17921.80	18.53	28.47	47.00	54.00	-7.00	Average	Vertical
	17921.80	30.45	28.47	58.92	74.00	-15.08	Peak	Vertical
06	7579.00	32.86	11.33	44.19	74.00	-29.81	Peak	Horizontal
	11285.00	31.36	16.68	48.04	74.00	-25.96	Peak	Horizontal
	17930.30	31.37	28.84	60.21	74.00	-13.79	Peak	Horizontal
	7354.60	33.14	11.09	44.23	74.00	-29.77	Peak	Vertical
	11511.10	30.90	17.12	48.02	74.00	-25.98	Peak	Vertical
	17920.10	18.46	28.39	46.85	54.00	-7.15	Average	Vertical
	17920.10	30.96	28.39	59.34	74.00	-14.66	Peak	Vertical
09	7647.00	33.17	10.77	43.94	74.00	-30.06	Peak	Horizontal
	12112.90	31.56	16.90	48.46	74.00	-25.54	Peak	Horizontal
	17964.30	18.36	28.39	46.75	54.00	-7.25	Average	Horizontal
	17964.30	30.58	28.39	58.97	74.00	-15.03	Peak	Horizontal
	7526.30	33.56	11.44	45.00	74.00	-29.00	Peak	Vertical
	11268.00	31.43	16.53	47.97	74.00	-26.03	Peak	Vertical
	17943.90	18.46	28.82	47.28	54.00	-6.72	Average	Vertical
	17943.90	30.78	28.82	59.60	74.00	-14.40	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2025-05-12	Test Mode	802.11ax-HE20
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4930.40	34.79	3.94	38.73	74.00	-35.27	Peak	Horizontal
	11091.20	31.84	16.35	48.19	74.00	-25.81	Peak	Horizontal
	17940.50	18.21	28.84	47.05	54.00	-6.95	Average	Horizontal
	17940.50	30.76	28.84	59.59	74.00	-14.41	Peak	Horizontal
	3840.70	39.53	0.56	40.09	74.00	-33.91	Peak	Vertical
	11577.40	31.85	16.95	48.80	74.00	-25.20	Peak	Vertical
	17966.00	18.32	28.34	46.66	54.00	-7.34	Average	Vertical
	17966.00	31.36	28.34	59.70	74.00	-14.30	Peak	Vertical
06	4826.70	33.74	4.07	37.82	74.00	-36.18	Peak	Horizontal
	11553.60	30.78	16.76	47.54	74.00	-26.46	Peak	Horizontal
	17994.90	17.95	28.24	46.19	54.00	-7.81	Average	Horizontal
	17994.90	31.58	28.24	59.81	74.00	-14.19	Peak	Horizontal
	7305.30	35.18	11.21	46.39	74.00	-27.61	Peak	Vertical
	11135.40	31.42	16.44	47.86	74.00	-26.14	Peak	Vertical
	17945.60	18.05	28.82	46.87	54.00	-7.13	Average	Vertical
	17945.60	30.84	28.82	59.66	74.00	-14.34	Peak	Vertical
11	3839.00	36.59	0.54	37.13	74.00	-36.87	Peak	Horizontal
	11623.30	31.55	16.78	48.33	74.00	-25.67	Peak	Horizontal
	17921.80	18.10	28.47	46.57	54.00	-7.43	Average	Horizontal
	17921.80	31.30	28.47	59.77	74.00	-14.23	Peak	Horizontal
	3840.70	38.85	0.56	39.41	74.00	-34.59	Peak	Vertical
	11580.80	30.71	16.99	47.70	74.00	-26.30	Peak	Vertical
	17947.30	18.22	28.83	47.05	54.00	-6.95	Average	Vertical
	17947.30	30.67	28.83	59.50	74.00	-14.50	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WZ-AC2	Test Engineer	Jerry Lu
Test Date	2025-05-12	Test Mode	802.11ax-HE40
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
03	7674.20	33.12	11.30	44.42	74.00	-29.58	Peak	Horizontal
	12369.60	30.97	17.00	47.96	74.00	-26.04	Peak	Horizontal
	17964.30	18.25	28.39	46.64	54.00	-7.36	Average	Horizontal
	17964.30	31.45	28.39	59.84	74.00	-14.16	Peak	Horizontal
	7648.70	33.62	10.80	44.41	74.00	-29.59	Peak	Vertical
	12248.90	31.40	16.97	48.38	74.00	-25.62	Peak	Vertical
	17964.30	18.36	28.39	46.75	54.00	-7.25	Average	Vertical
	17964.30	30.95	28.39	59.34	74.00	-14.66	Peak	Vertical
06	7526.30	32.42	11.44	43.87	74.00	-30.13	Peak	Horizontal
	10882.10	31.63	15.91	47.54	74.00	-26.46	Peak	Horizontal
	17915.00	17.95	28.15	46.10	54.00	-7.90	Average	Horizontal
	17915.00	31.13	28.15	59.27	74.00	-14.73	Peak	Horizontal
	7429.40	32.07	11.67	43.74	74.00	-30.26	Peak	Vertical
	11259.50	31.17	16.46	47.63	74.00	-26.37	Peak	Vertical
	17840.20	18.48	28.07	46.55	54.00	-7.45	Average	Vertical
	17840.20	31.48	28.07	59.55	74.00	-14.45	Peak	Vertical
09	7667.40	32.82	11.18	44.00	74.00	-30.00	Peak	Horizontal
	11623.30	31.15	16.78	47.94	74.00	-26.06	Peak	Horizontal
	17940.50	18.41	28.84	47.25	54.00	-6.75	Average	Horizontal
	17940.50	30.51	28.84	59.35	74.00	-14.65	Peak	Horizontal
	7480.40	32.22	11.42	43.64	74.00	-30.36	Peak	Vertical
	12403.60	31.23	16.46	47.70	74.00	-26.30	Peak	Vertical
	17966.00	18.53	28.34	46.87	54.00	-7.13	Average	Vertical
	17966.00	31.56	28.34	59.91	74.00	-14.09	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

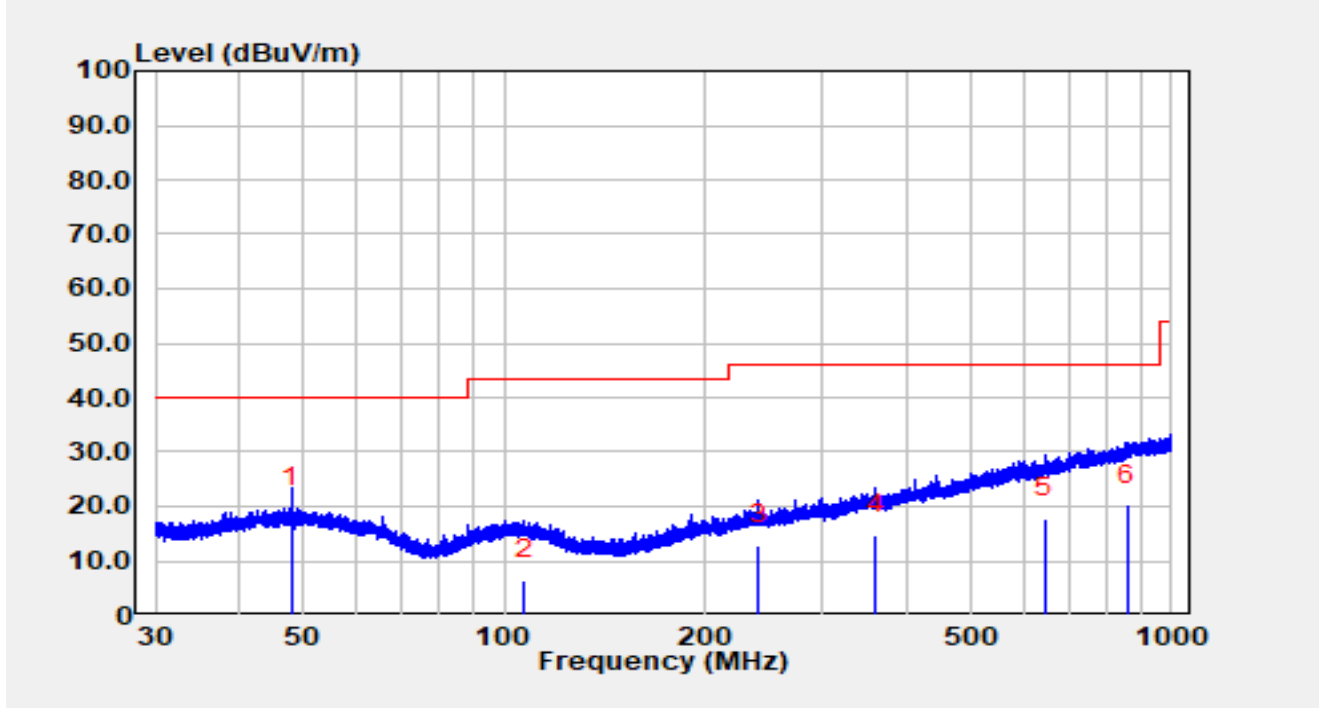


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	47.977	0.10	19.67	19.77	-20.23	40.00	QP
2		106.946	-11.40	17.85	6.45	-37.05	43.50	QP
3		239.987	-6.30	19.17	12.87	-33.13	46.00	QP
4		359.943	-7.40	22.27	14.87	-31.13	46.00	QP
5		646.932	-9.70	27.56	17.86	-28.14	46.00	QP
6		858.228	-9.90	30.16	20.26	-25.74	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Carl Jiang
Factor	VULB 9163_07096_3m	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

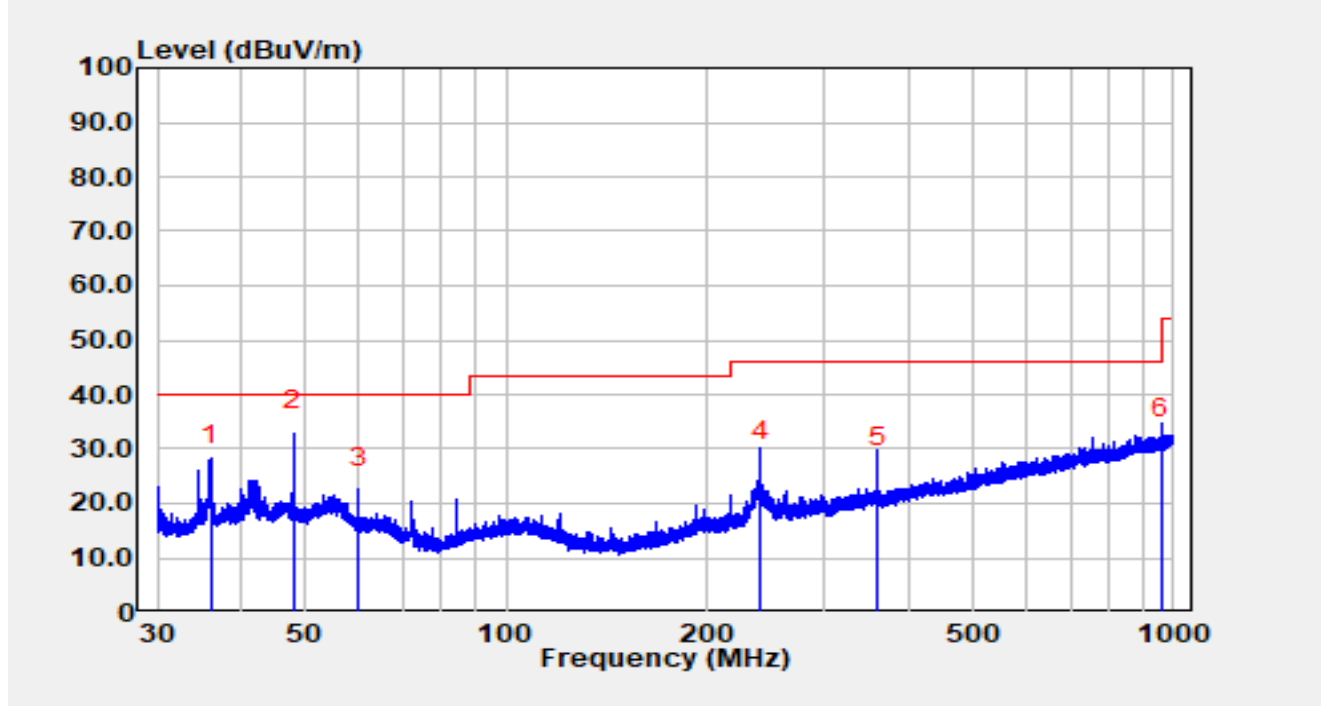

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		36.026	9.70	17.43	27.13	-12.87	40.00	QP
2	*	47.994	13.60	19.67	33.27	-6.73	40.00	QP
3		59.985	4.70	18.07	22.77	-17.23	40.00	QP
4		239.987	8.40	19.17	27.57	-18.43	46.00	QP
5		360.069	4.30	22.27	26.57	-19.43	46.00	QP
6		960.140	0.80	31.10	31.90	-22.10	54.00	QP


Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.7 Radiated Restricted Band Edge Test Result

Full RU

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

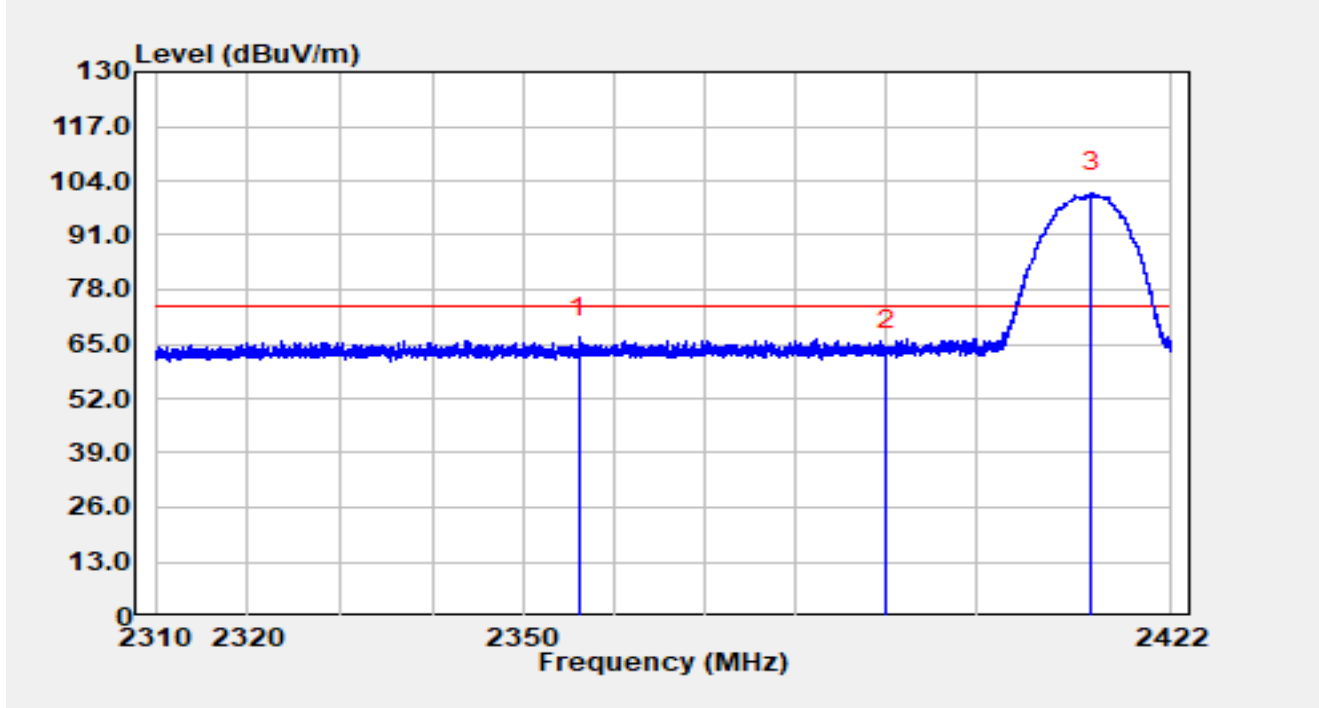


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2356.043	29.87	36.71	66.59	-7.41	74.00	Peak
2		2390.000	26.72	36.83	63.55	-10.45	74.00	Peak
3		2412.906	64.29	36.98	101.27	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

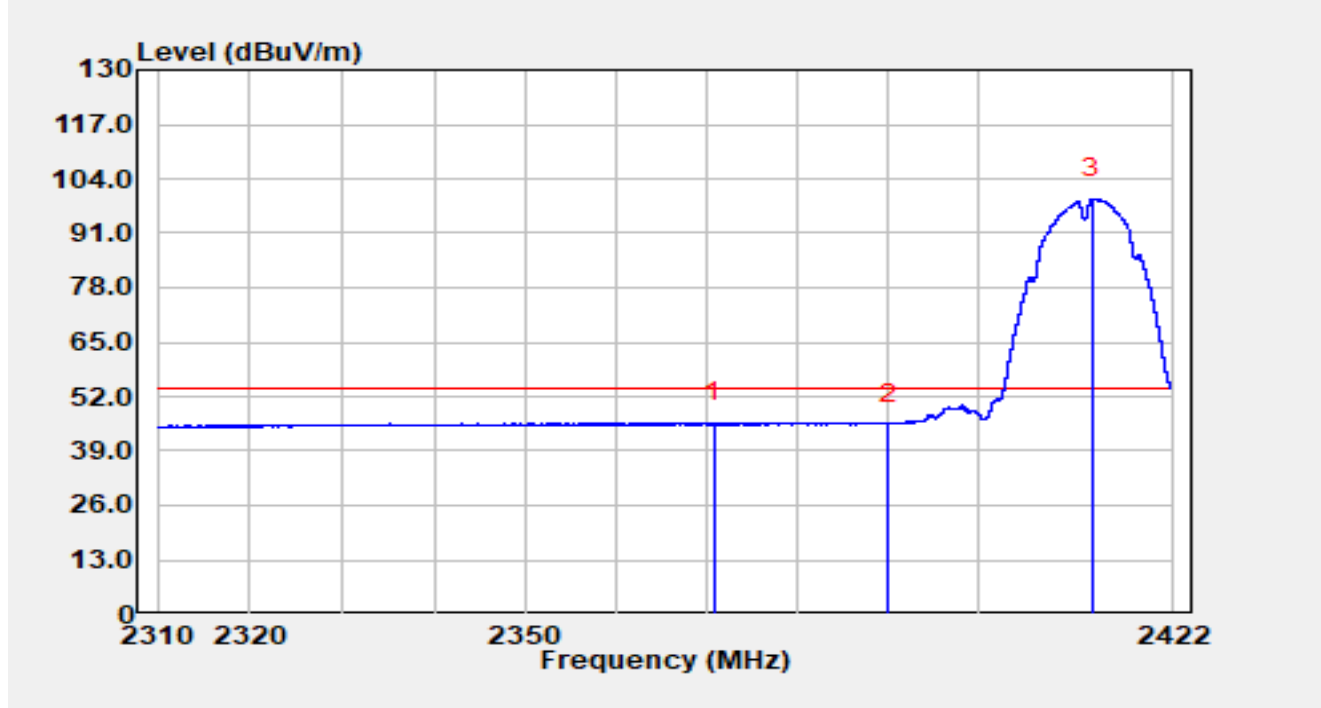


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2370.682	8.94	36.74	45.67	-8.33	54.00	Average
2		2390.000	8.65	36.83	45.48	-8.52	54.00	Average
3		2412.827	62.25	36.98	99.23	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

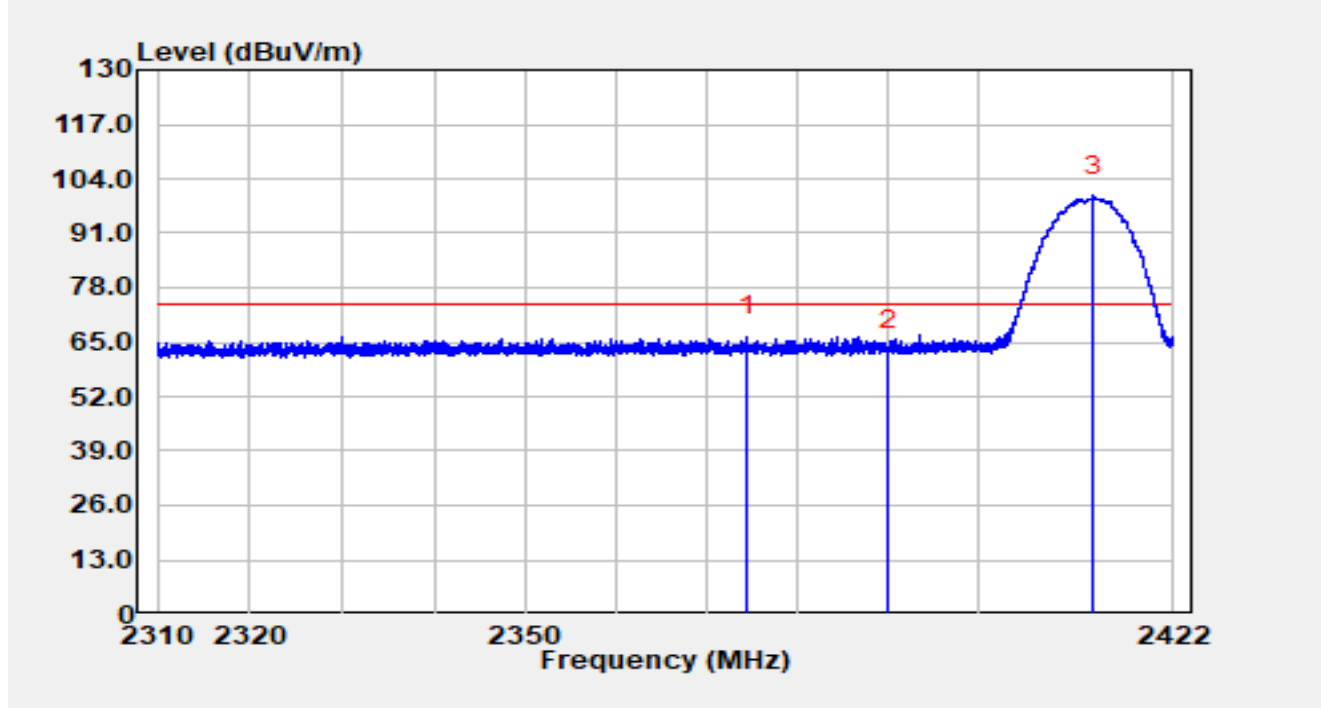


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2374.333	29.49	36.75	66.24	-7.76	74.00	Peak
2		2390.000	26.09	36.83	62.92	-11.08	74.00	Peak
3		2412.939	62.86	36.98	99.83	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2412MHz		

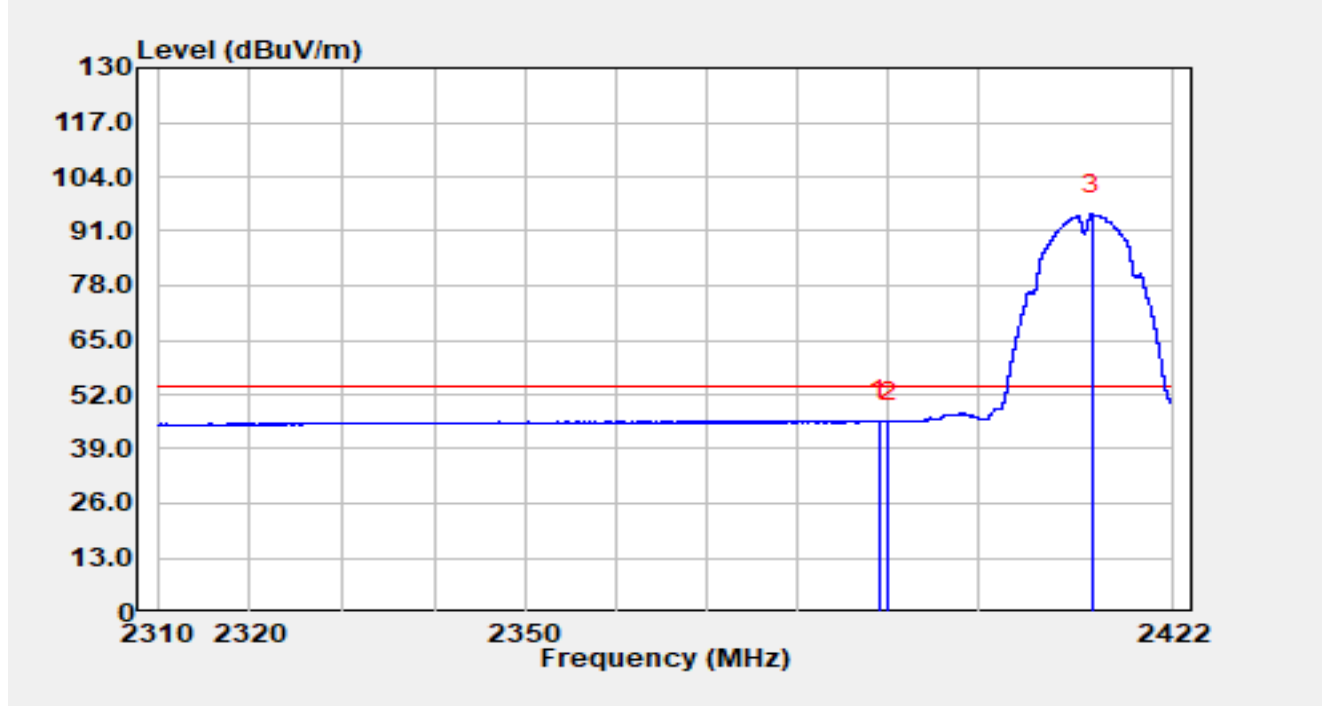


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.971	8.80	36.83	45.63	-8.37	54.00	Average
2		2390.000	8.67	36.83	45.50	-8.50	54.00	Average
3		2412.771	58.06	36.98	95.04	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

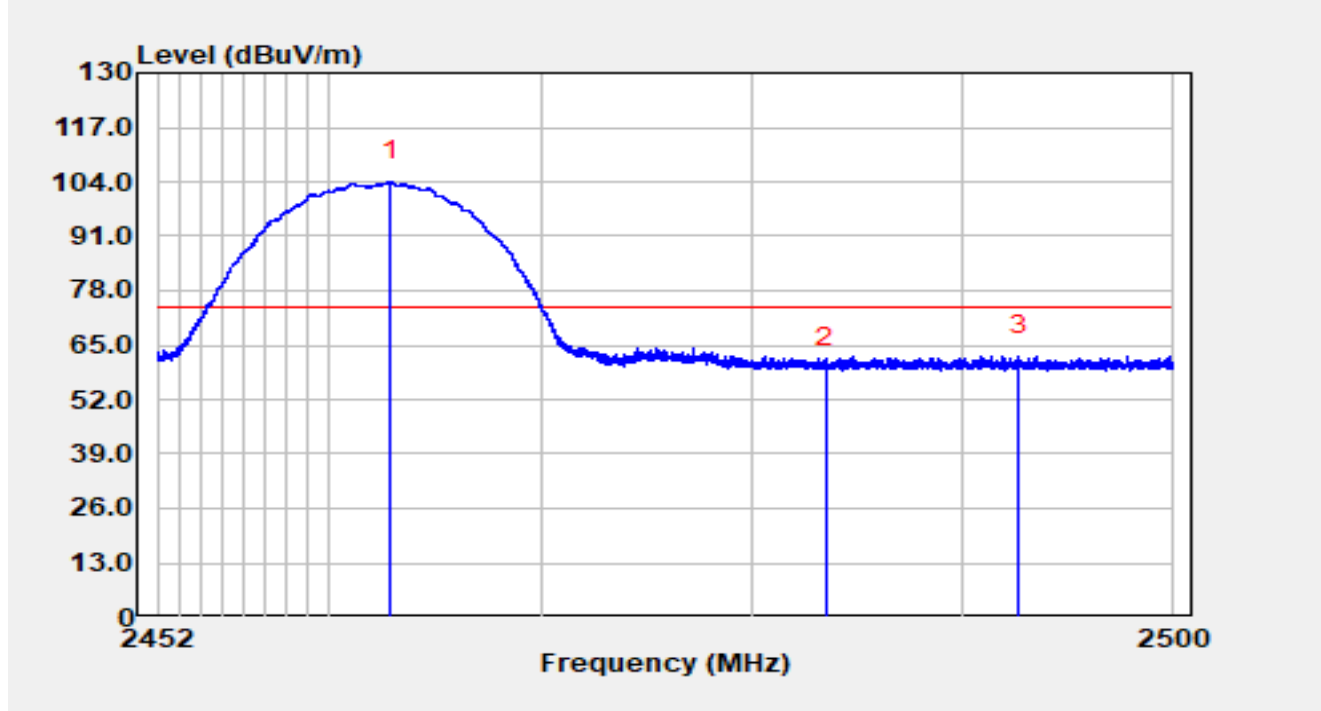


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.915	67.08	37.00	104.08	N/A	N/A	Peak
2		2483.500	22.69	37.05	59.74	-14.26	74.00	Peak
3	*	2492.642	25.47	37.07	62.54	-11.46	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

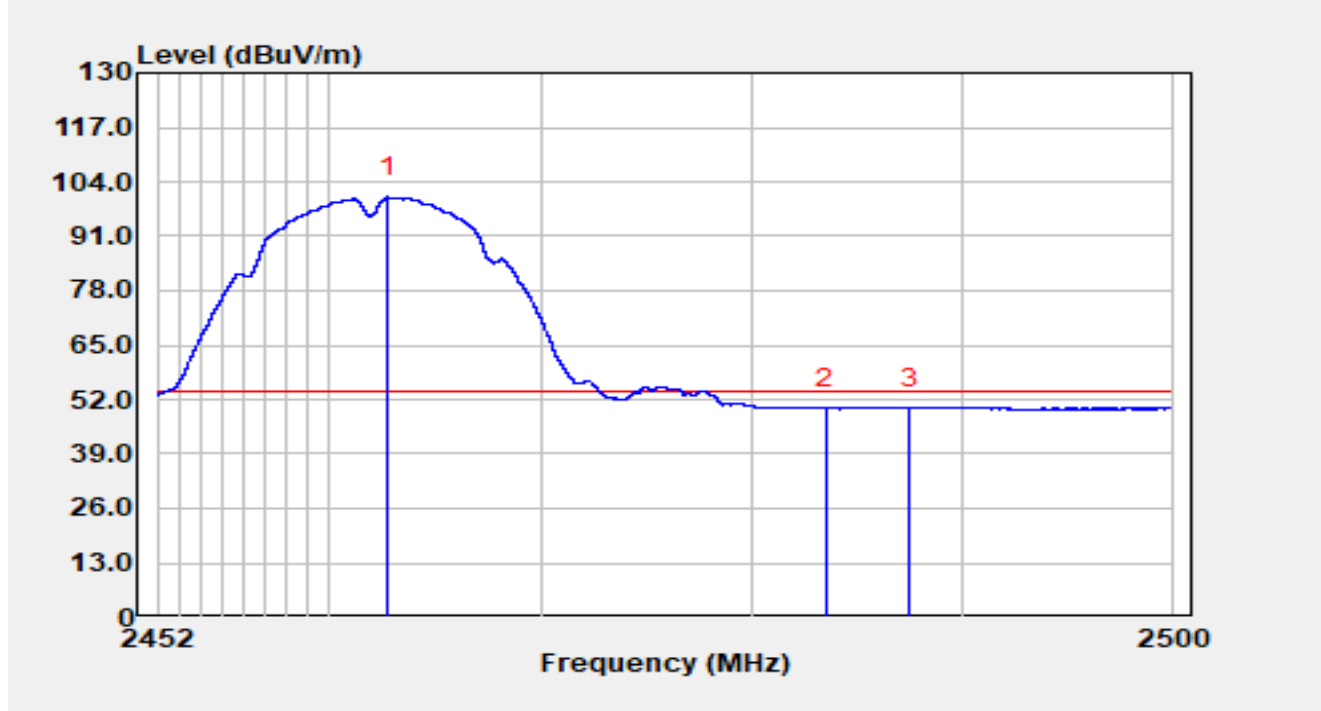


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.805	63.33	37.00	100.33	N/A	N/A	Average
2		2483.500	12.86	37.05	49.92	-4.08	54.00	Average
3	*	2487.458	12.95	37.06	50.02	-3.98	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

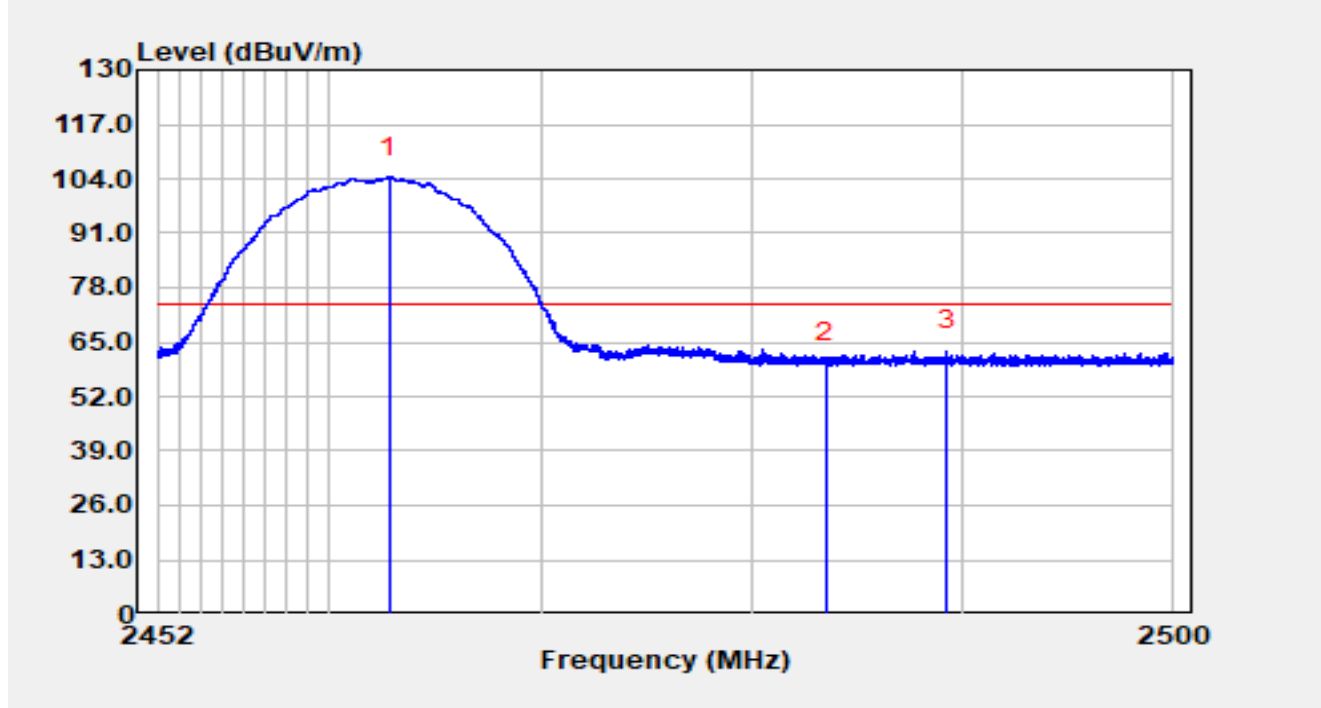


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.858	67.49	37.00	104.49	N/A	N/A	Peak
2		2483.500	23.15	37.05	60.20	-13.80	74.00	Peak
3	*	2489.238	25.85	37.07	62.92	-11.08	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11b at 2462MHz		

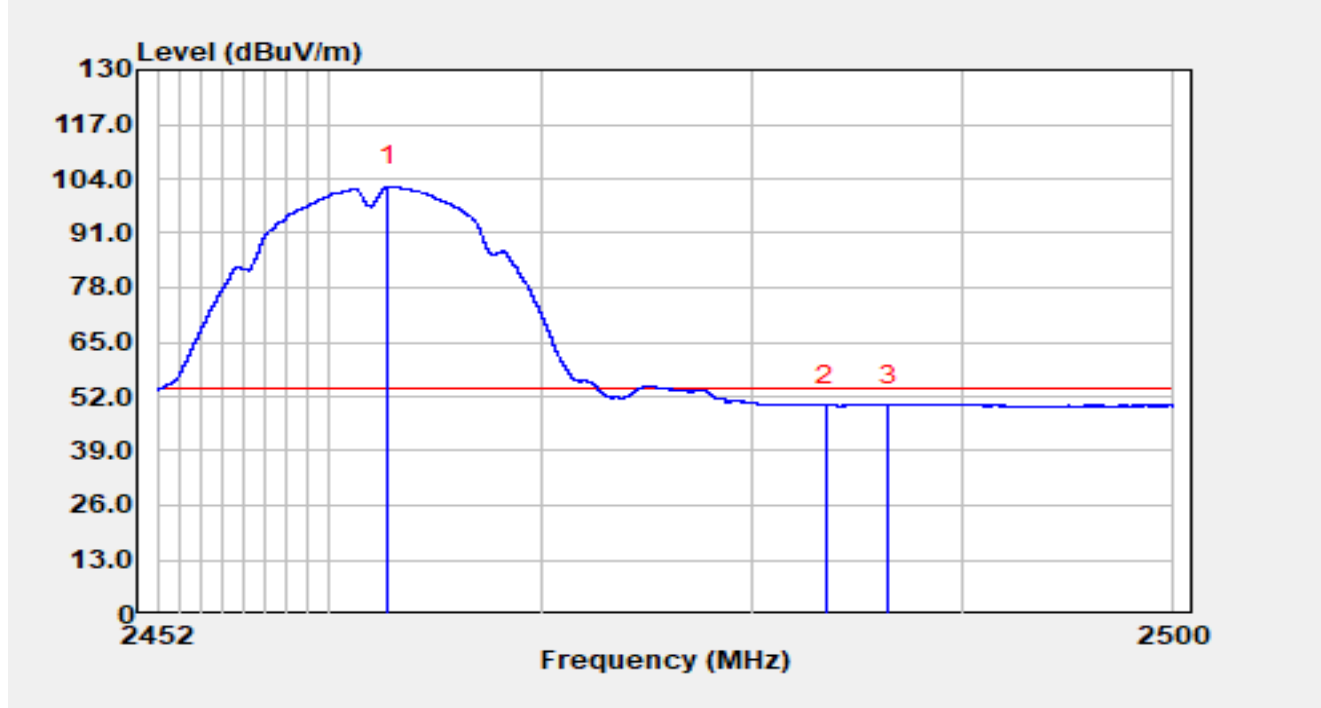


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.814	65.18	37.00	102.18	N/A	N/A	Average
2		2483.500	12.79	37.05	49.85	-4.15	54.00	Average
3	*	2486.416	12.96	37.06	50.02	-3.98	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

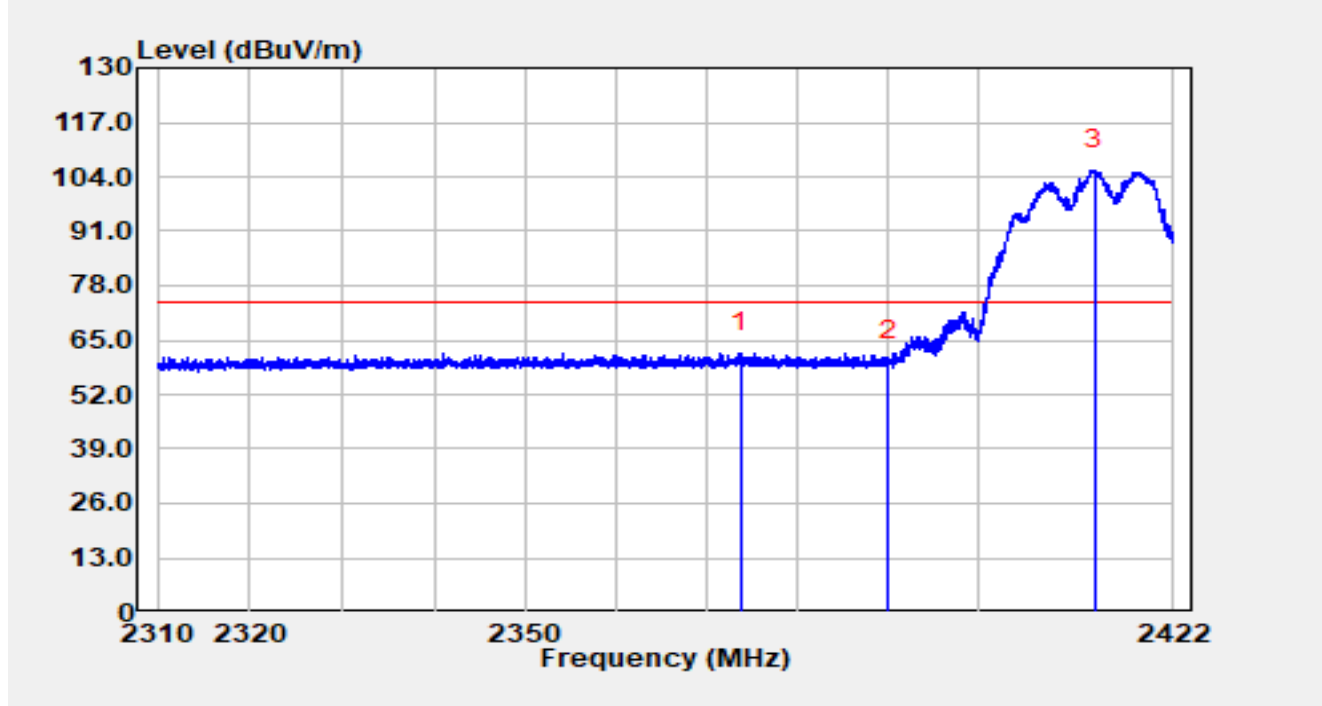


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2373.571	25.15	36.75	61.89	-12.11	74.00	Peak
2		2390.000	23.35	36.83	60.18	-13.82	74.00	Peak
3		2413.107	68.65	36.98	105.63	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

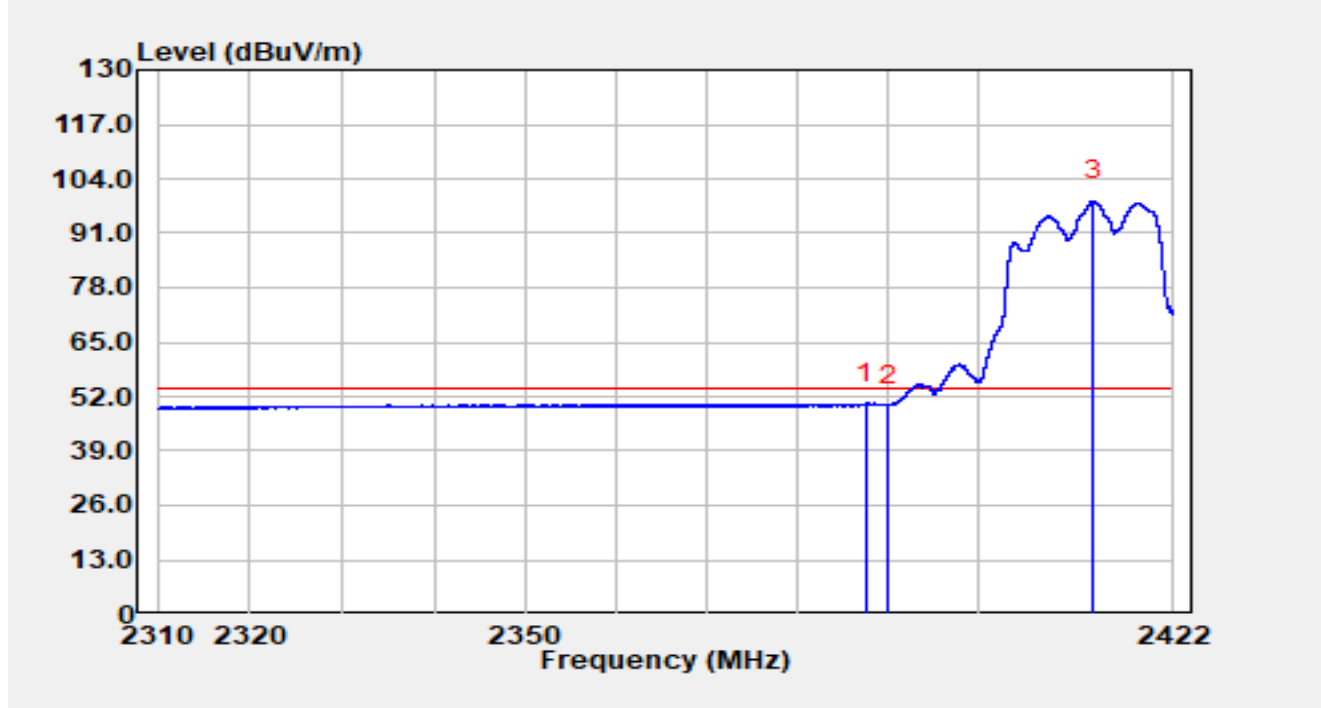


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.526	13.52	36.82	50.33	-3.67	54.00	Average
2		2390.000	13.16	36.83	49.99	-4.01	54.00	Average
3		2412.906	61.66	36.98	98.64	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

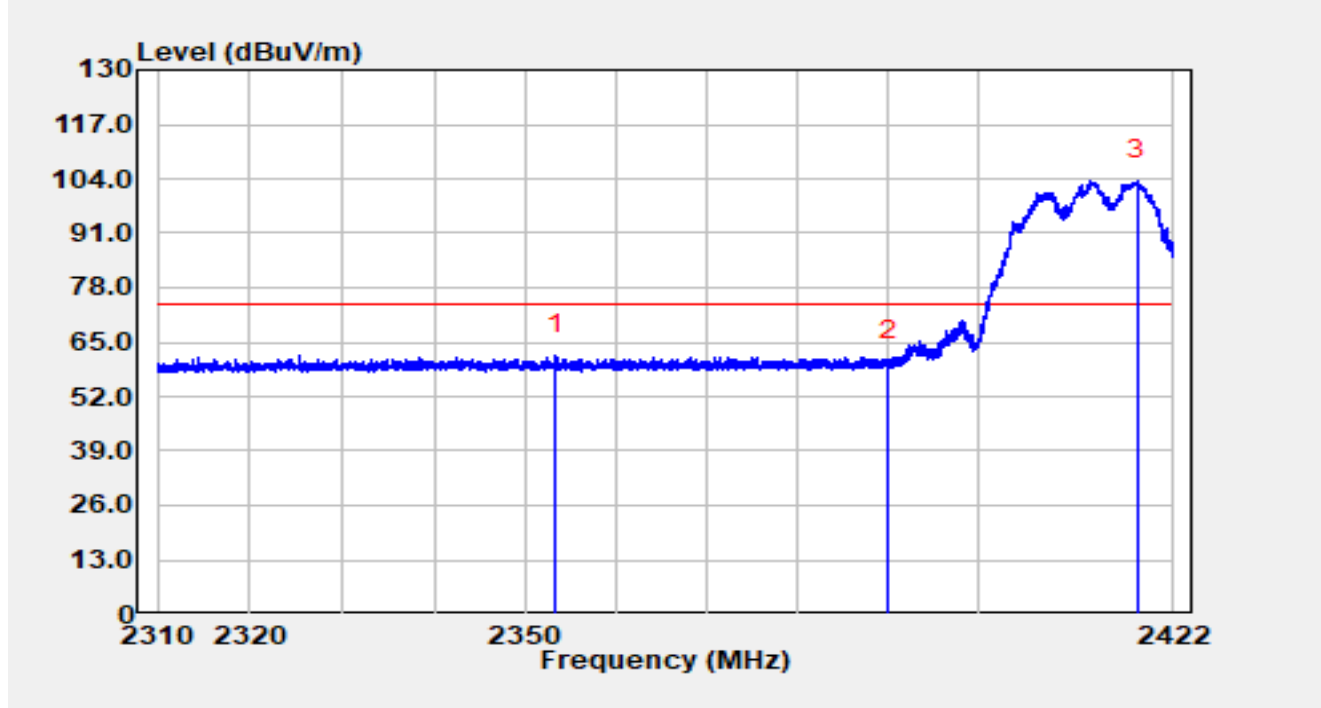


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2353.322	25.23	36.71	61.94	-12.06	74.00	Peak
2		2390.000	23.86	36.83	60.69	-13.31	74.00	Peak
3		2417.878	66.73	37.00	103.73	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2412MHz		

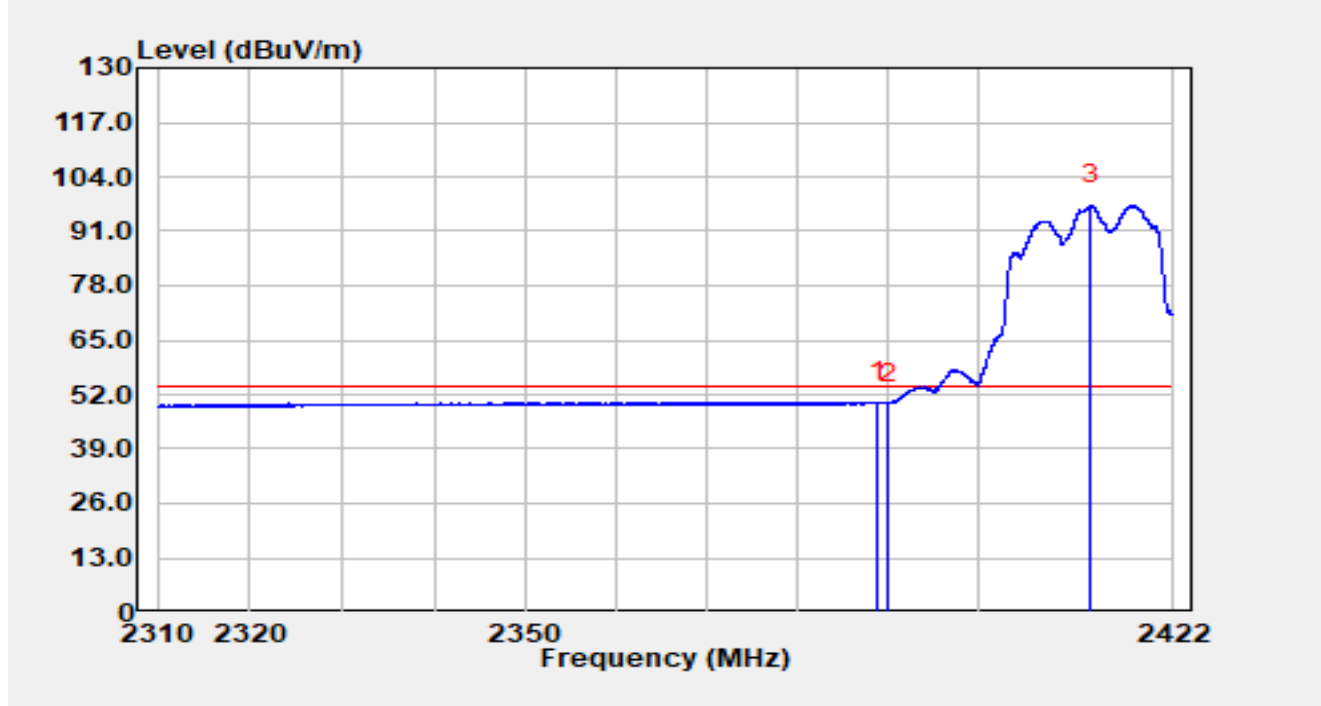


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.837	13.35	36.83	50.17	-3.83	54.00	Average
2		2390.000	13.18	36.83	50.01	-3.99	54.00	Average
3		2412.659	60.19	36.98	97.16	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

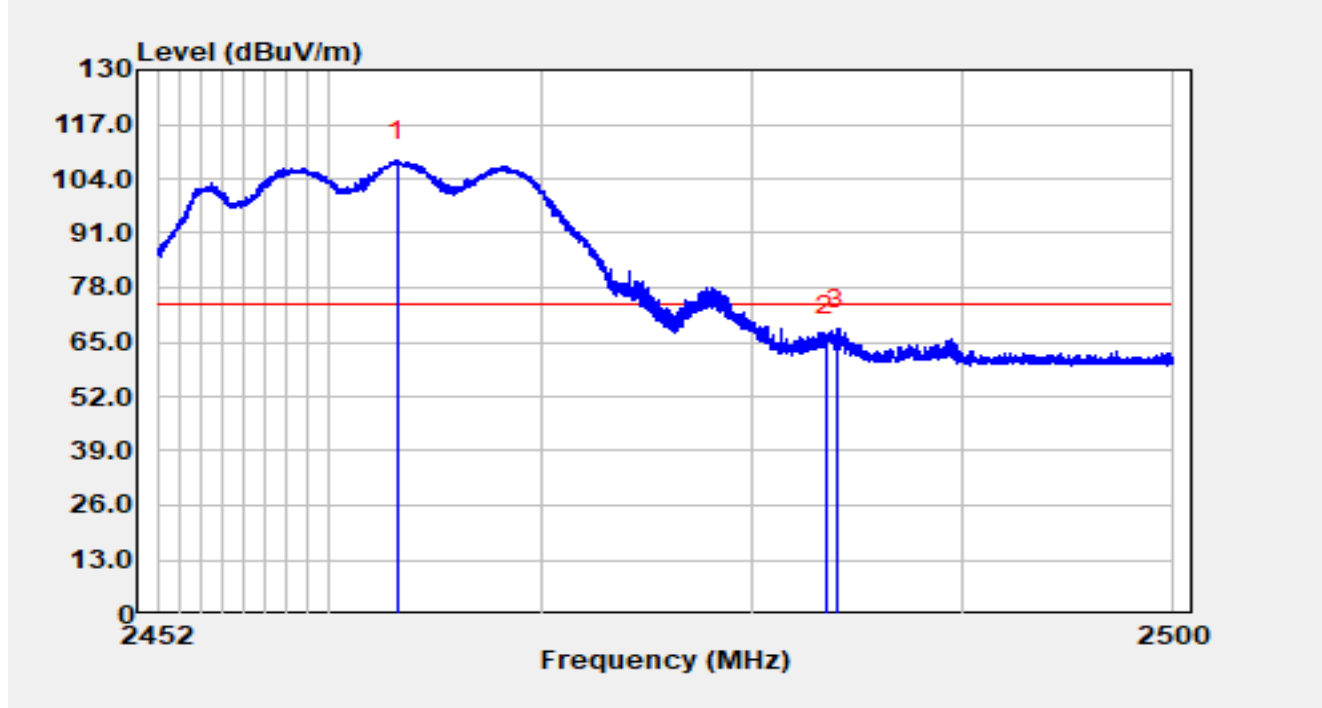


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.232	71.20	37.00	108.21	N/A	N/A	Peak
2		2483.500	29.22	37.05	66.28	-7.72	74.00	Peak
3	*	2483.958	31.06	37.05	68.11	-5.89	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

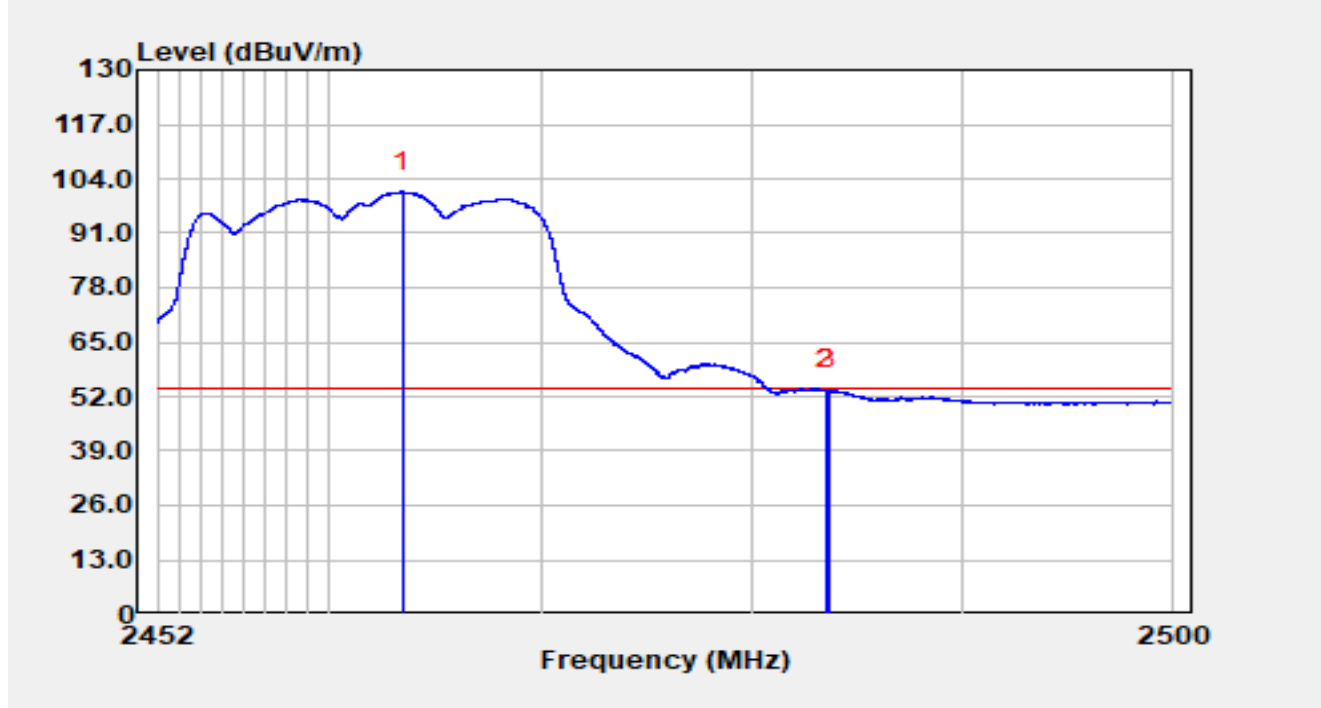


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.467	63.84	37.00	100.85	N/A	N/A	Average
2		2483.500	16.50	37.05	53.55	-0.45	54.00	Average
3	*	2483.603	16.60	37.05	53.65	-0.35	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

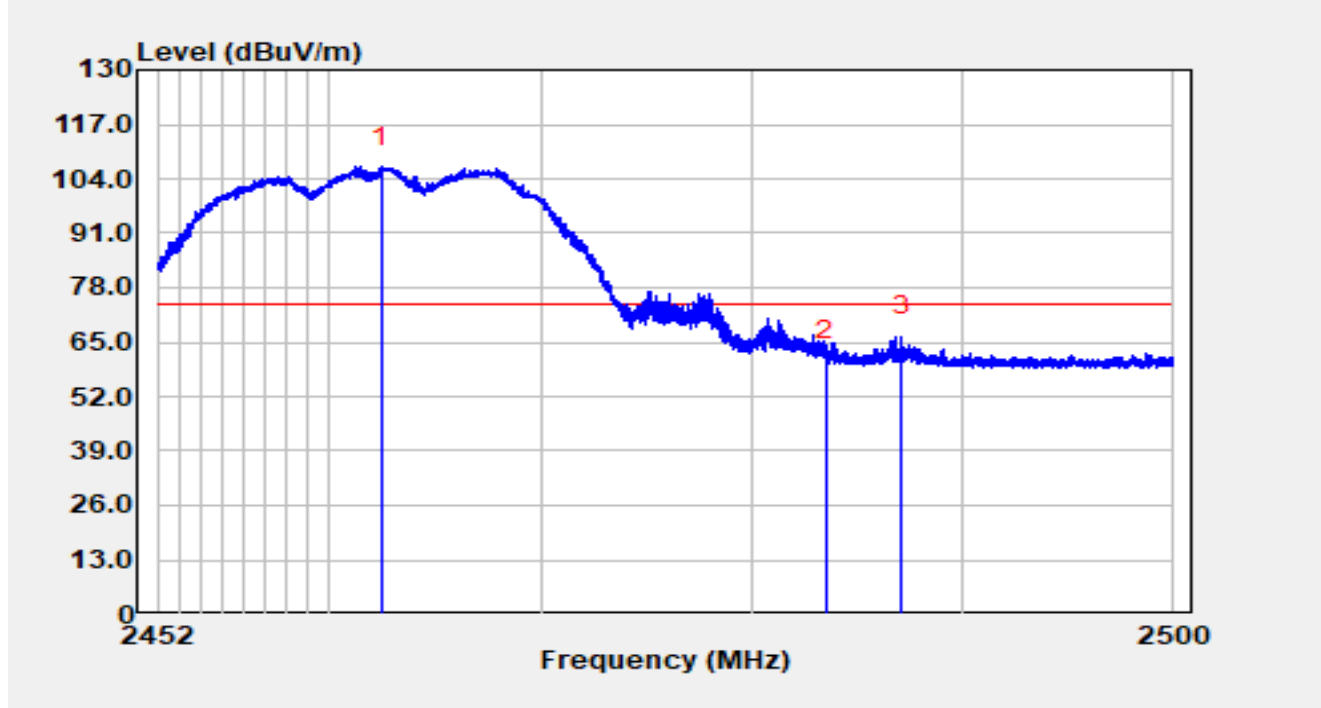


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.483	69.92	37.00	106.93	N/A	N/A	Peak
2		2483.500	23.58	37.05	60.64	-13.36	74.00	Peak
3	*	2487.050	29.17	37.06	66.23	-7.77	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-04-30
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11g at 2462MHz		

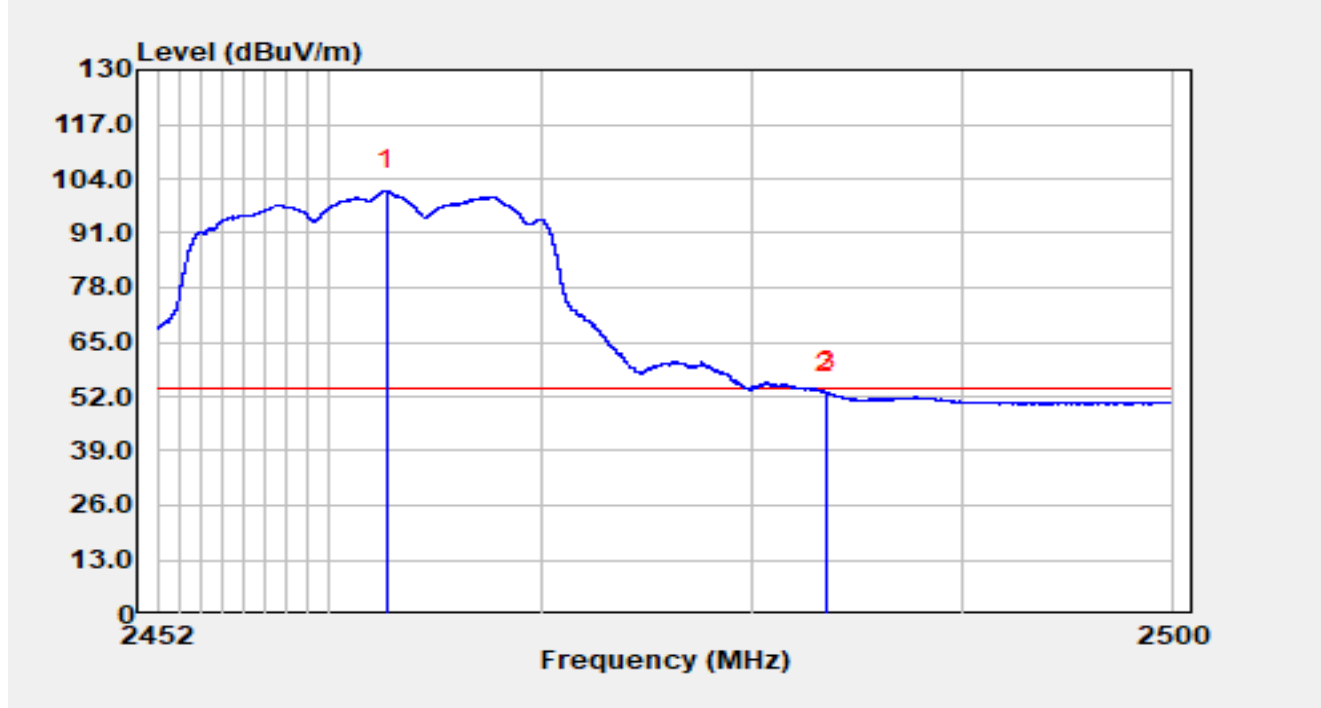


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.733	64.07	37.00	101.08	N/A	N/A	Average
2		2483.500	15.87	37.05	52.92	-1.08	54.00	Average
3	*	2483.536	15.95	37.05	53.00	-1.00	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

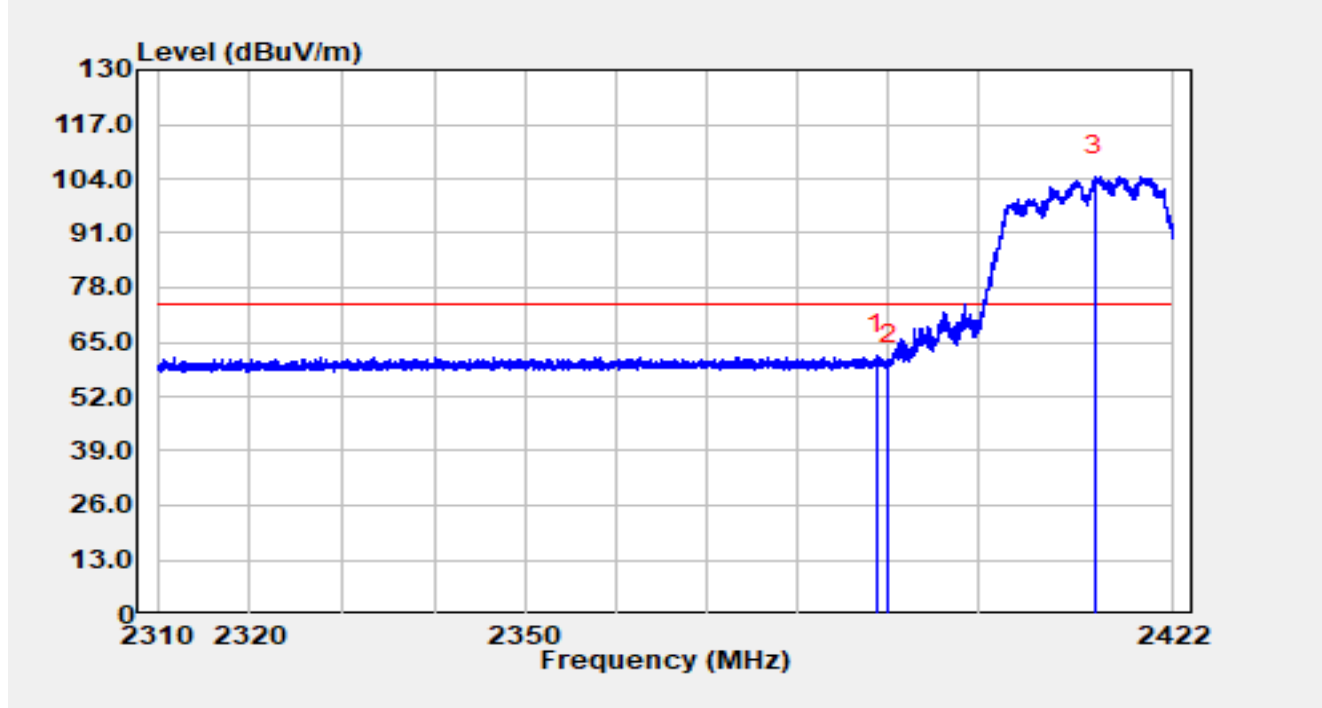


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.691	25.22	36.82	62.05	-11.95	74.00	Peak
2		2390.000	22.75	36.83	59.58	-14.42	74.00	Peak
3		2413.174	67.54	36.98	104.52	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

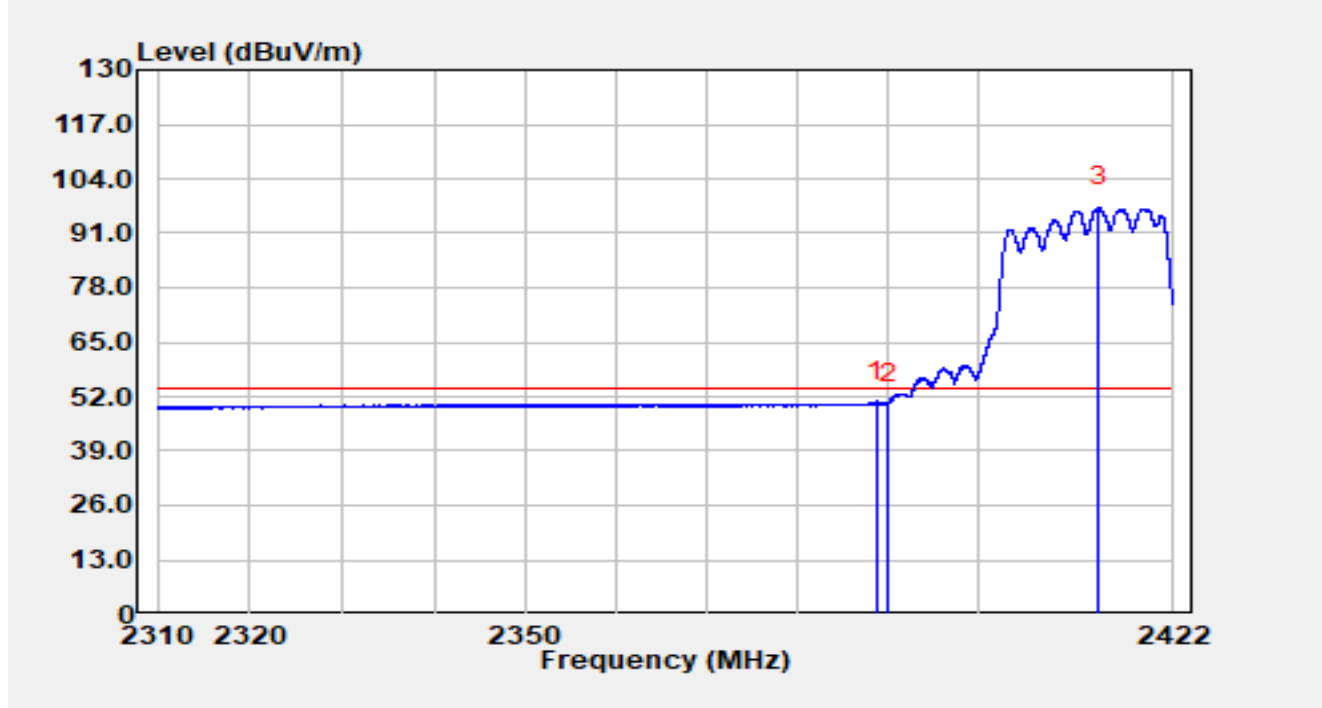


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.691	14.01	36.82	50.83	-3.17	54.00	Average
2		2390.000	13.62	36.83	50.45	-3.55	54.00	Average
3		2413.555	60.29	36.98	97.28	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

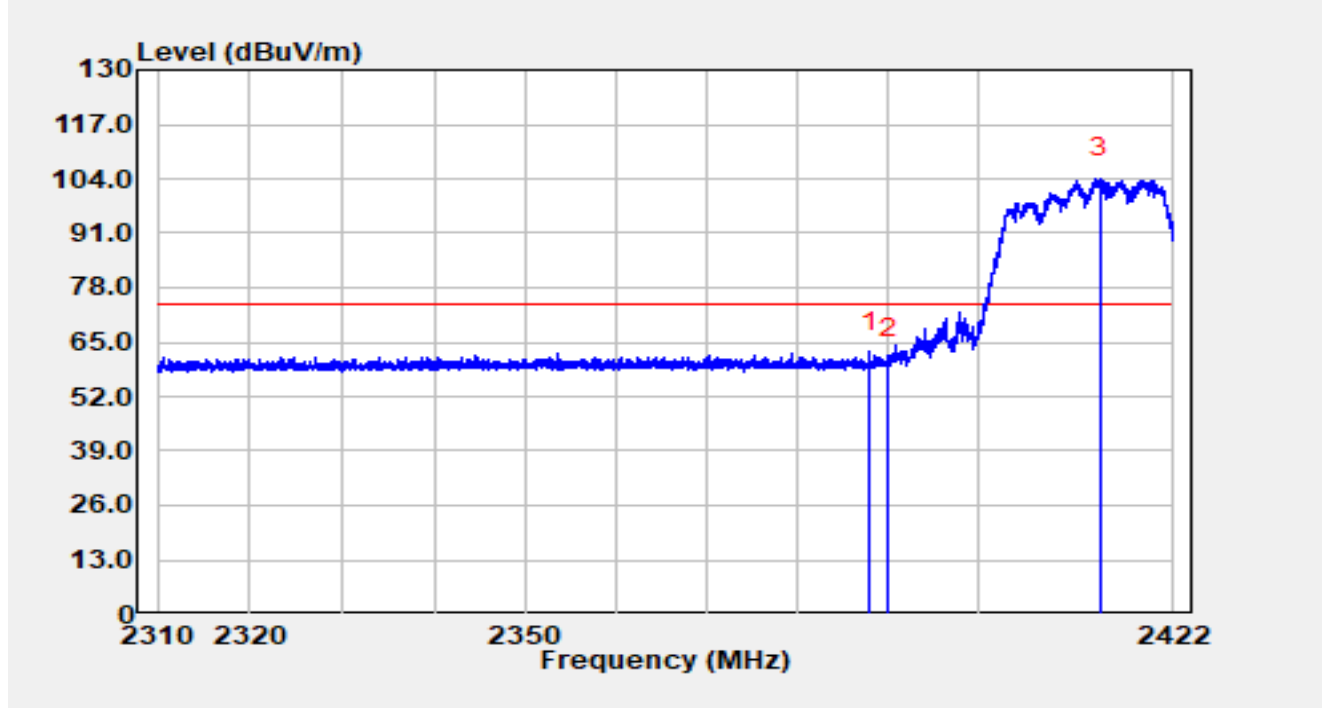


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.896	25.91	36.82	62.73	-11.27	74.00	Peak
2		2390.000	24.32	36.83	61.15	-12.85	74.00	Peak
3		2413.667	67.22	36.98	104.20	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

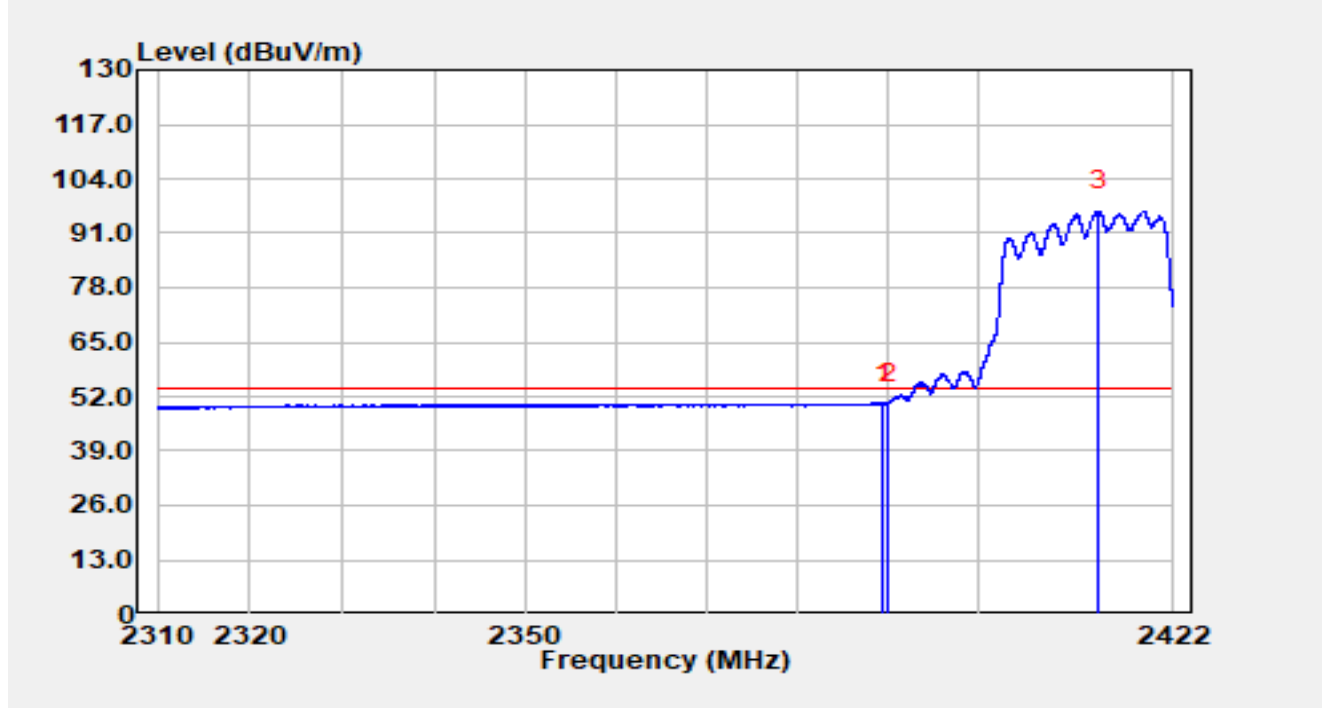


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.464	13.64	36.83	50.47	-3.53	54.00	Average
2		2390.000	13.49	36.83	50.32	-3.68	54.00	Average
3		2413.589	59.25	36.98	96.23	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

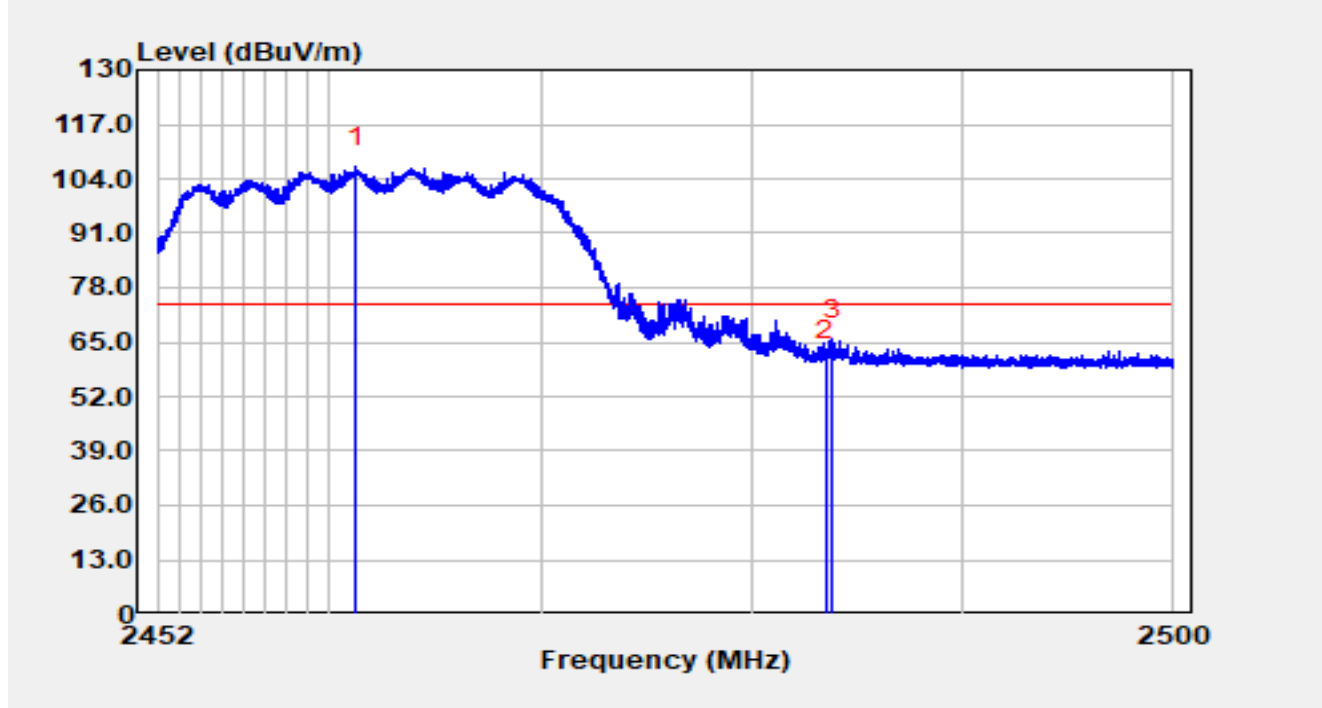


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.298	69.79	37.00	106.79	N/A	N/A	Peak
2		2483.500	23.71	37.05	60.76	-13.24	74.00	Peak
3	*	2483.766	28.44	37.05	65.49	-8.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

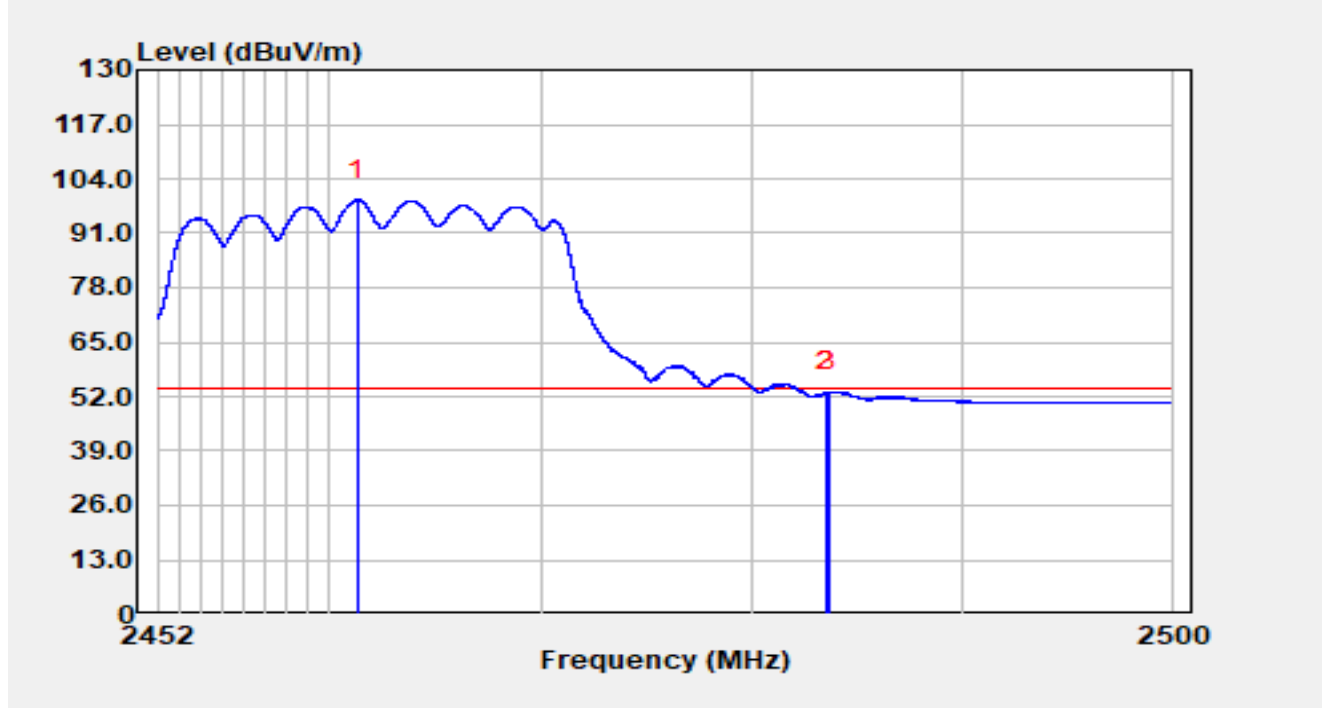


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.341	61.97	37.00	98.97	N/A	N/A	Average
2		2483.500	16.03	37.05	53.09	-0.91	54.00	Average
3	*	2483.574	16.07	37.05	53.12	-0.88	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

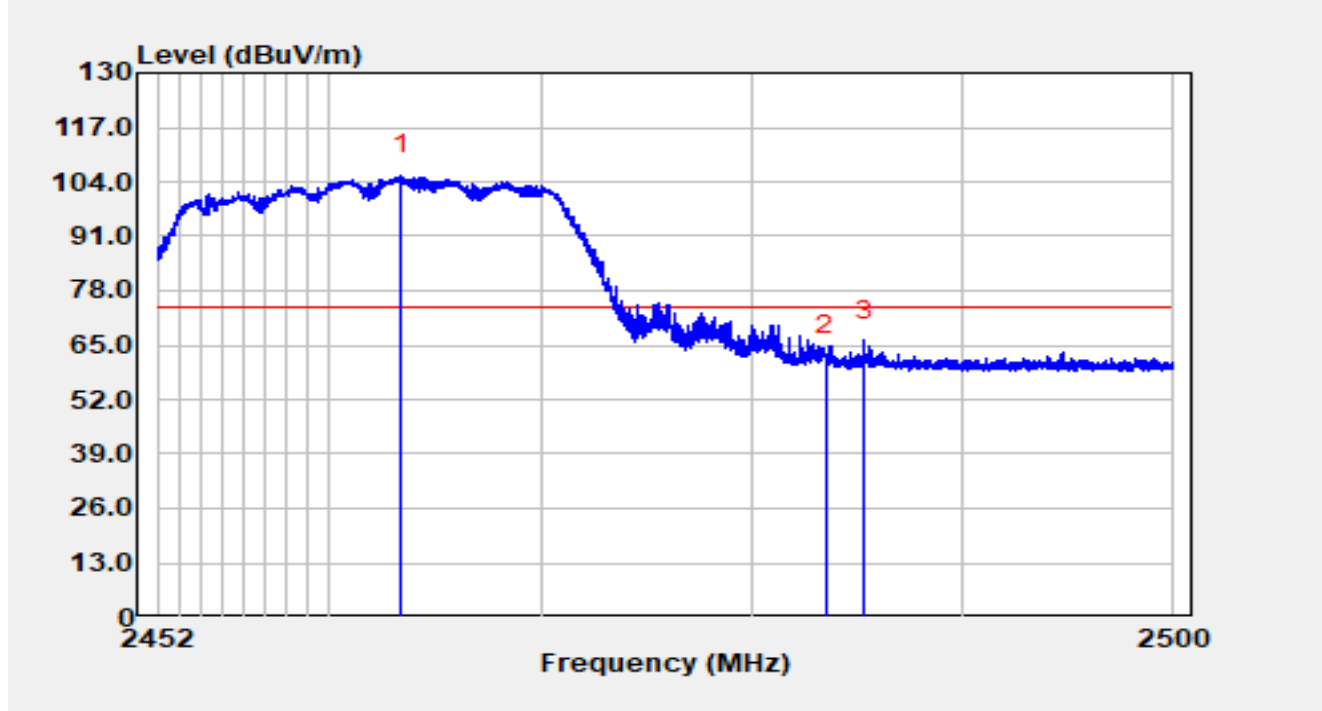


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.410	68.64	37.00	105.65	N/A	N/A	Peak
2		2483.500	25.42	37.05	62.47	-11.53	74.00	Peak
3	*	2485.307	29.16	37.06	66.21	-7.79	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

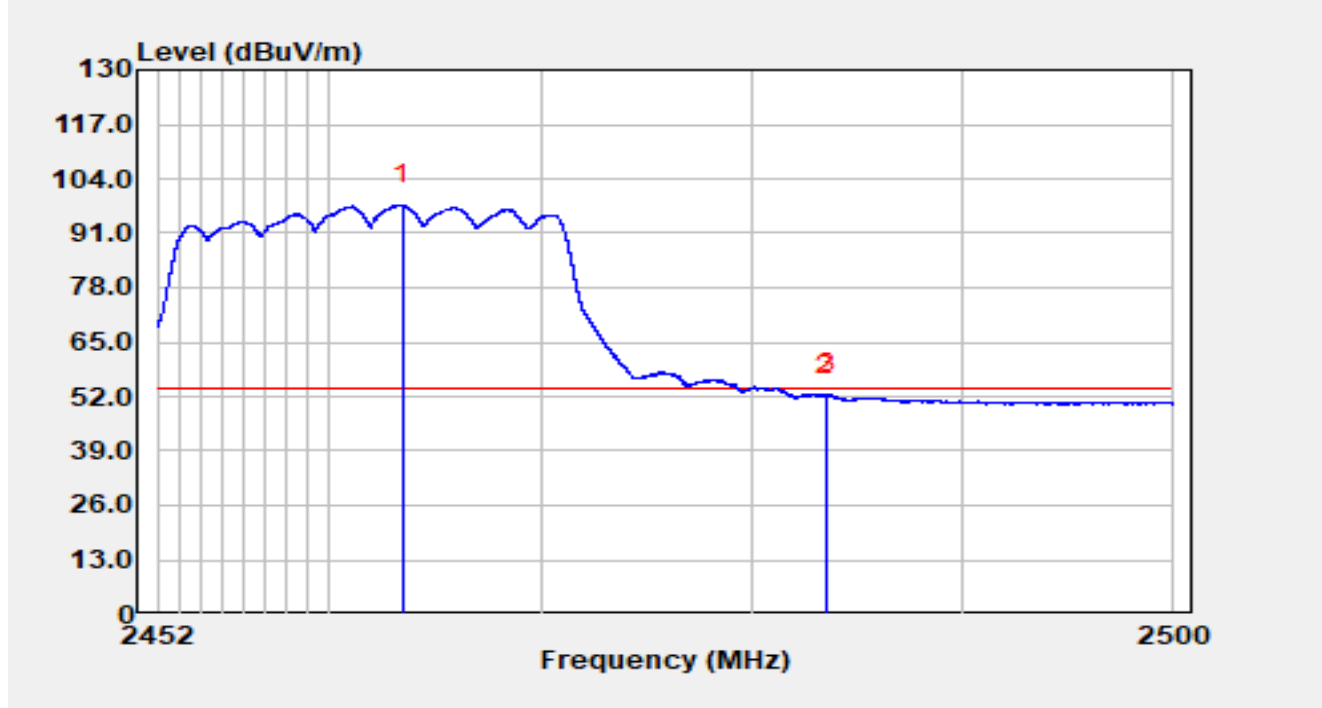


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.510	60.85	37.00	97.86	N/A	N/A	Average
2		2483.500	15.25	37.05	52.31	-1.69	54.00	Average
3	*	2483.512	15.47	37.05	52.52	-1.48	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

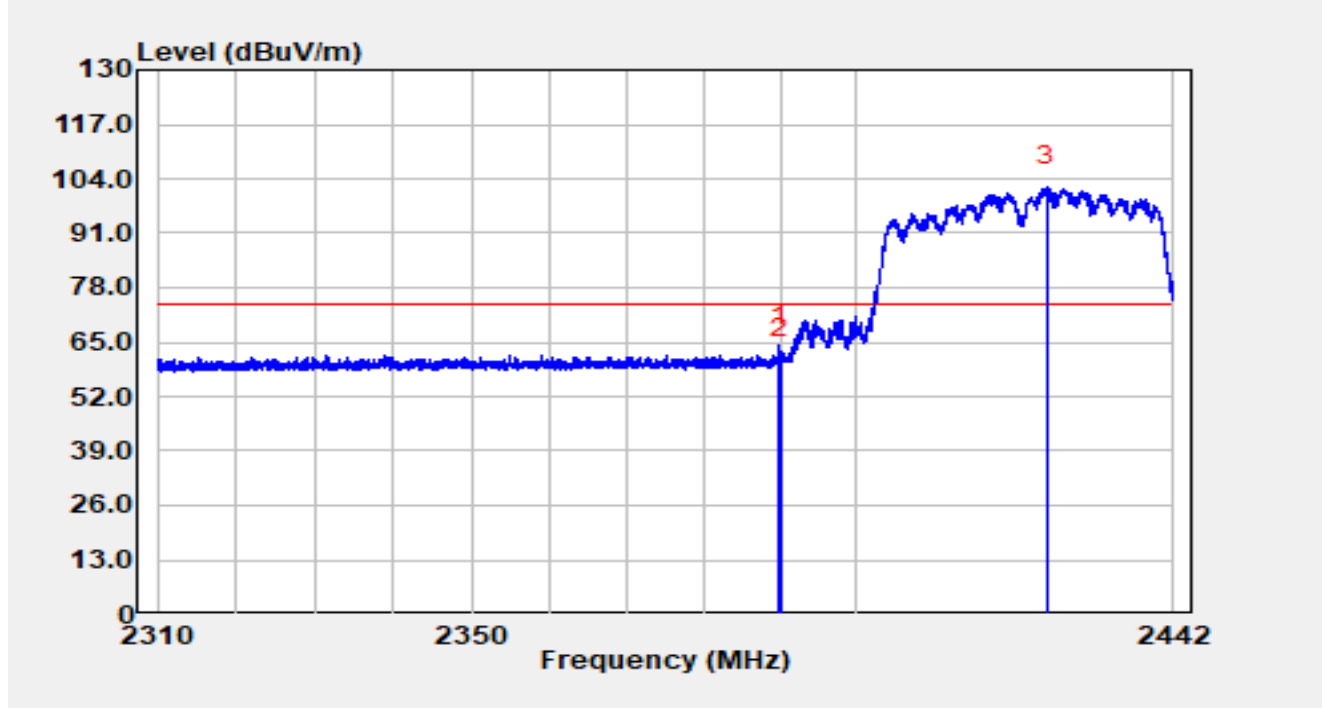


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.926	27.39	36.83	64.22	-9.78	74.00	Peak
2		2390.000	24.29	36.83	61.12	-12.88	74.00	Peak
3		2425.183	65.10	37.00	102.11	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

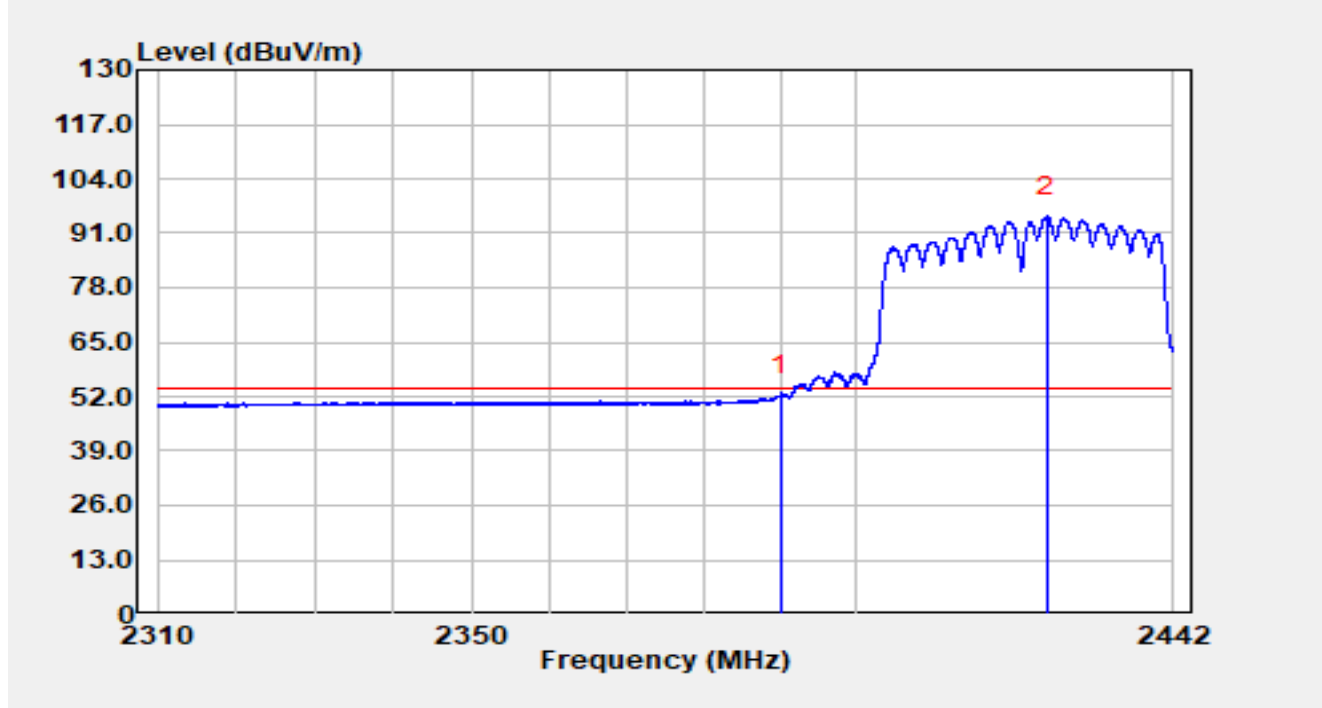


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.27	36.83	52.10	-1.90	54.00	Average
2		2425.104	57.97	37.00	94.98	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

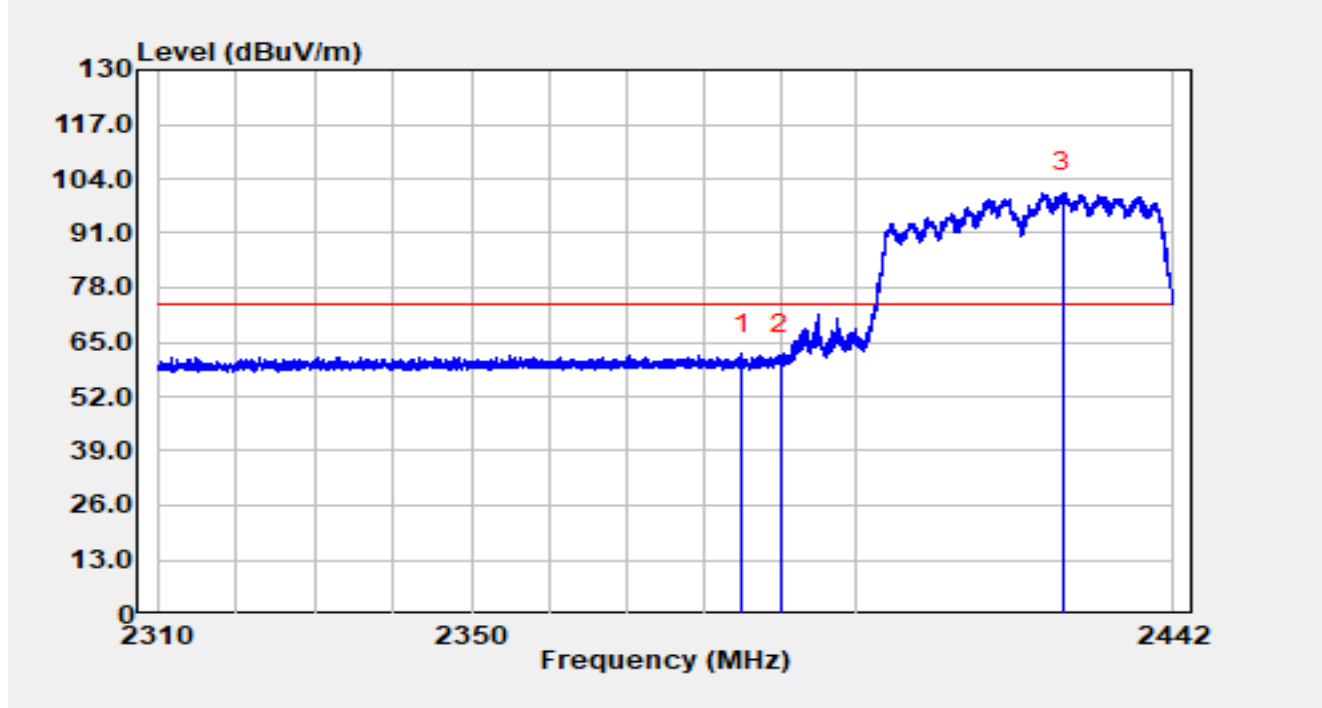


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.055	25.49	36.81	62.30	-11.70	74.00	Peak
2		2390.000	25.14	36.83	61.98	-12.02	74.00	Peak
3		2427.295	63.72	37.00	100.73	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

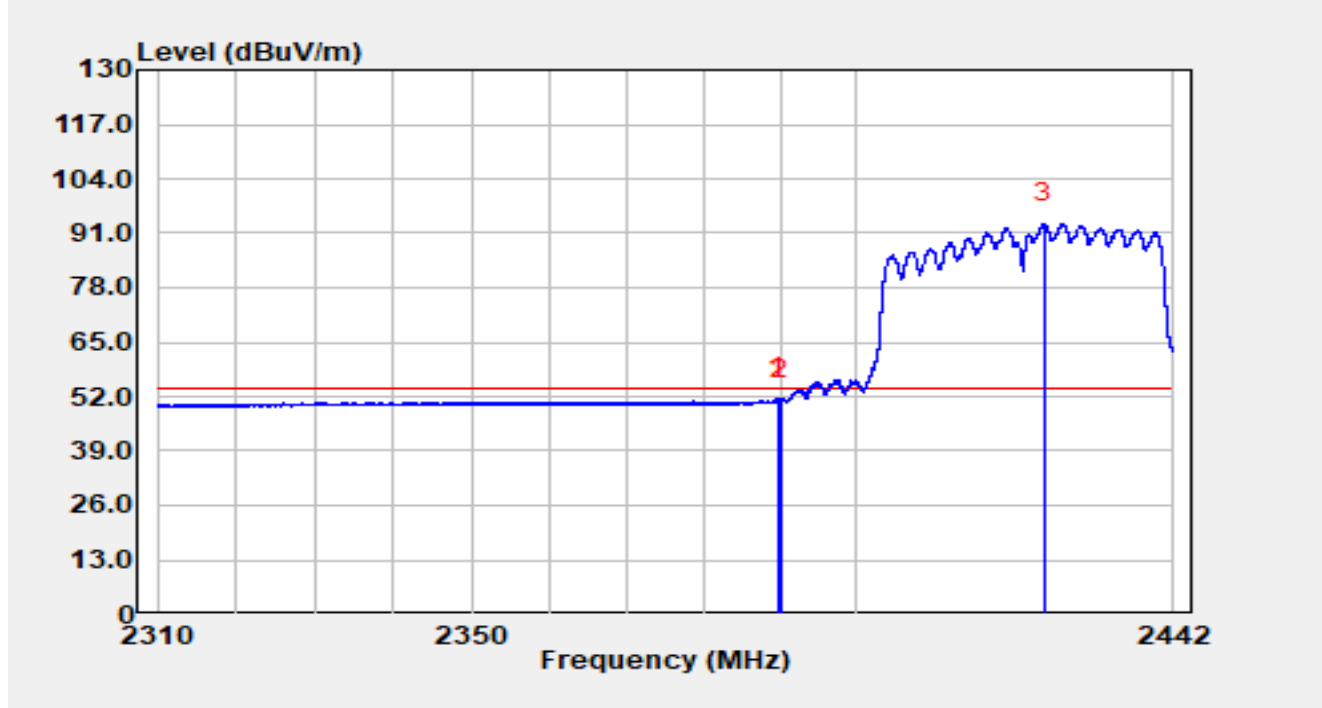


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.794	14.87	36.83	51.70	-2.30	54.00	Average
2		2390.000	14.49	36.83	51.32	-2.68	54.00	Average
3		2424.761	56.45	37.00	93.45	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

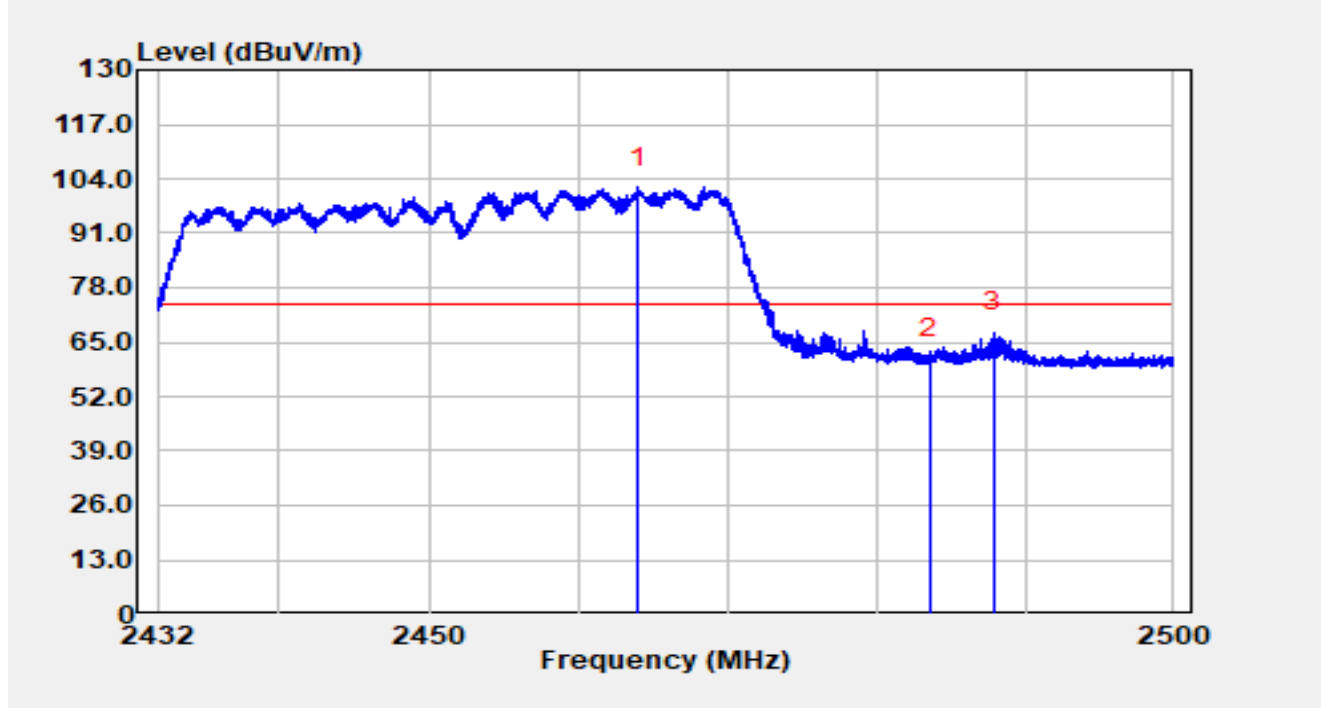


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.926	64.88	37.00	101.89	N/A	N/A	Peak
2		2483.500	23.97	37.05	61.03	-12.97	74.00	Peak
3	*	2487.848	30.29	37.07	67.35	-6.65	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

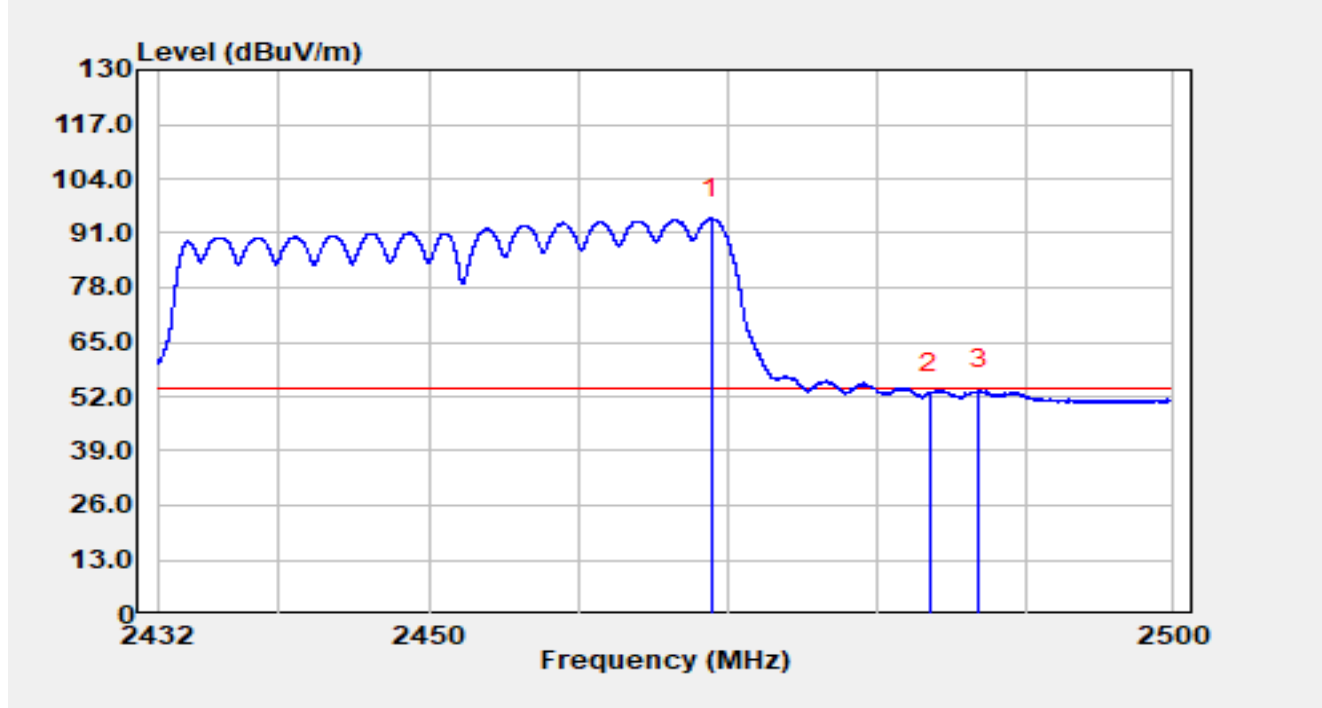


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.802	57.53	37.02	94.54	N/A	N/A	Average
2		2483.500	15.68	37.05	52.73	-1.27	54.00	Average
3	*	2486.815	16.63	37.06	53.70	-0.30	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

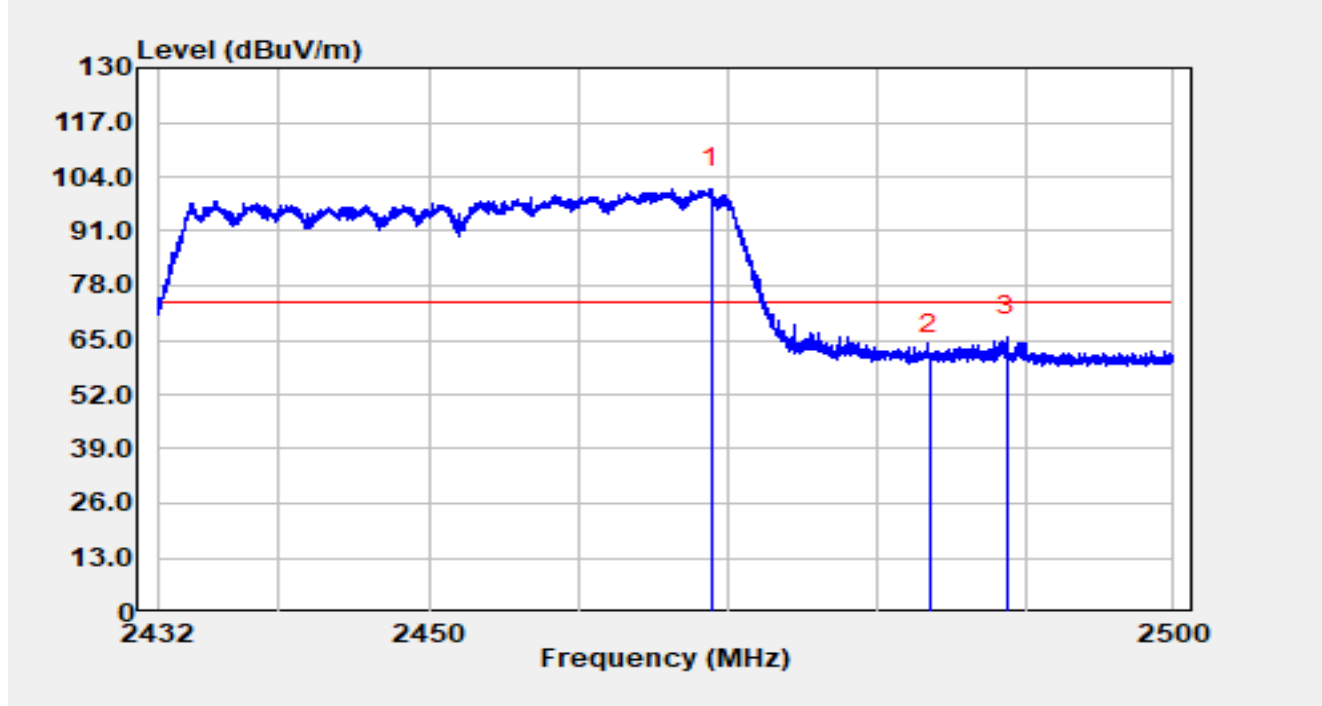


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.802	64.16	37.02	101.17	N/A	N/A	Peak
2		2483.500	24.66	37.05	61.71	-12.29	74.00	Peak
3	*	2488.692	28.84	37.07	65.91	-8.09	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

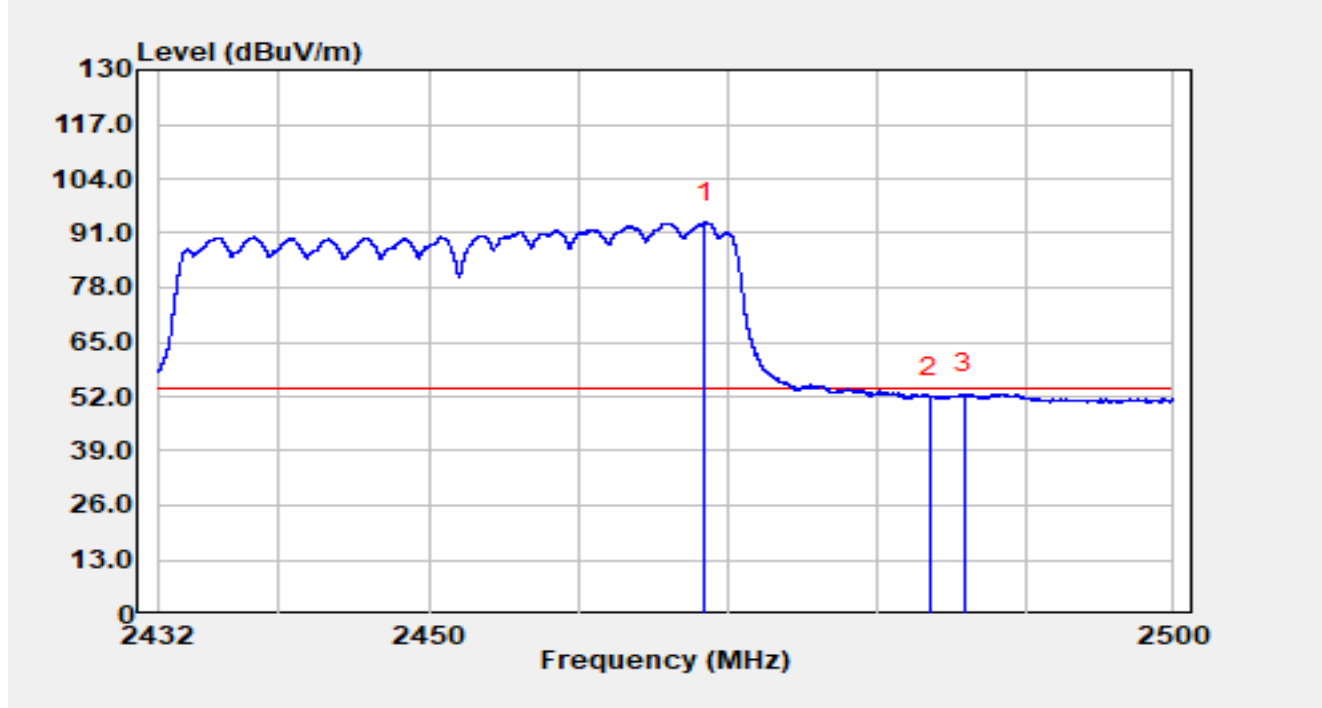


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.407	56.51	37.02	93.52	N/A	N/A	Average
2		2483.500	14.95	37.05	52.00	-2.00	54.00	Average
3	*	2485.808	15.51	37.06	52.57	-1.43	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

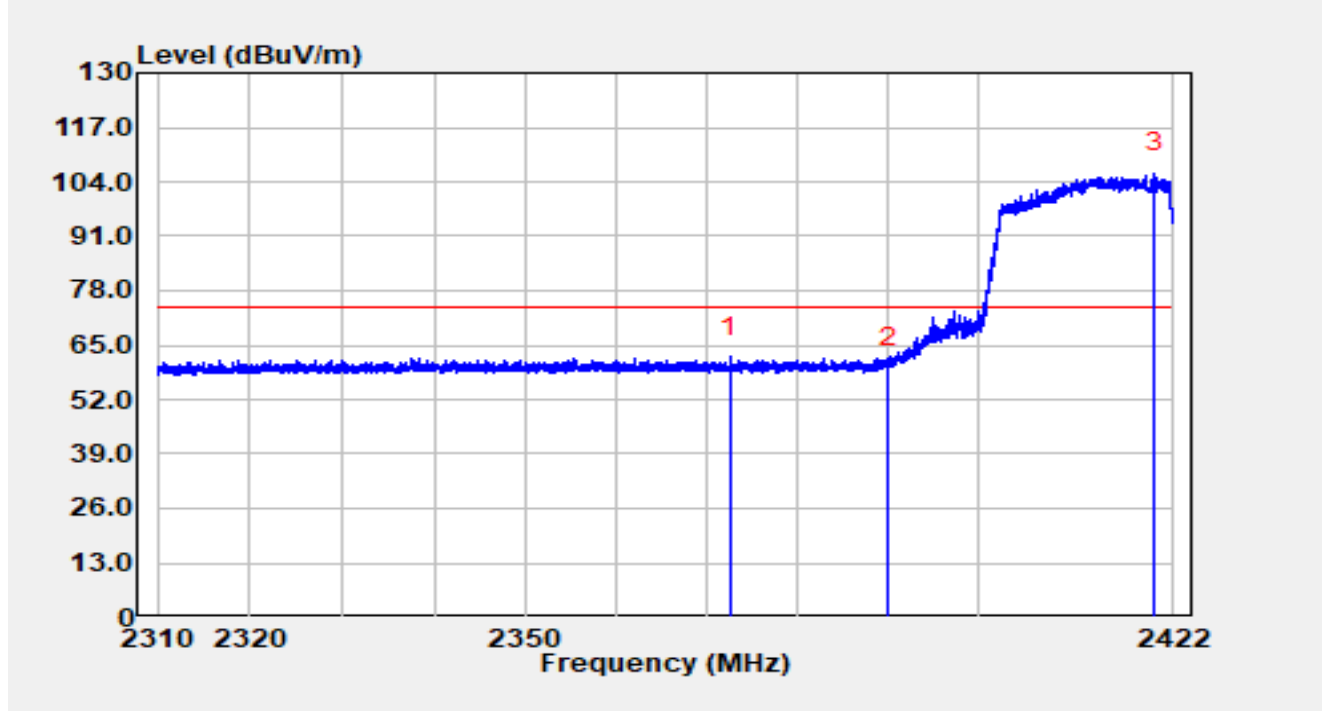


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.451	25.54	36.74	62.29	-11.71	74.00	Peak
2		2390.000	22.76	36.83	59.59	-14.41	74.00	Peak
3		2419.816	68.98	37.00	105.98	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

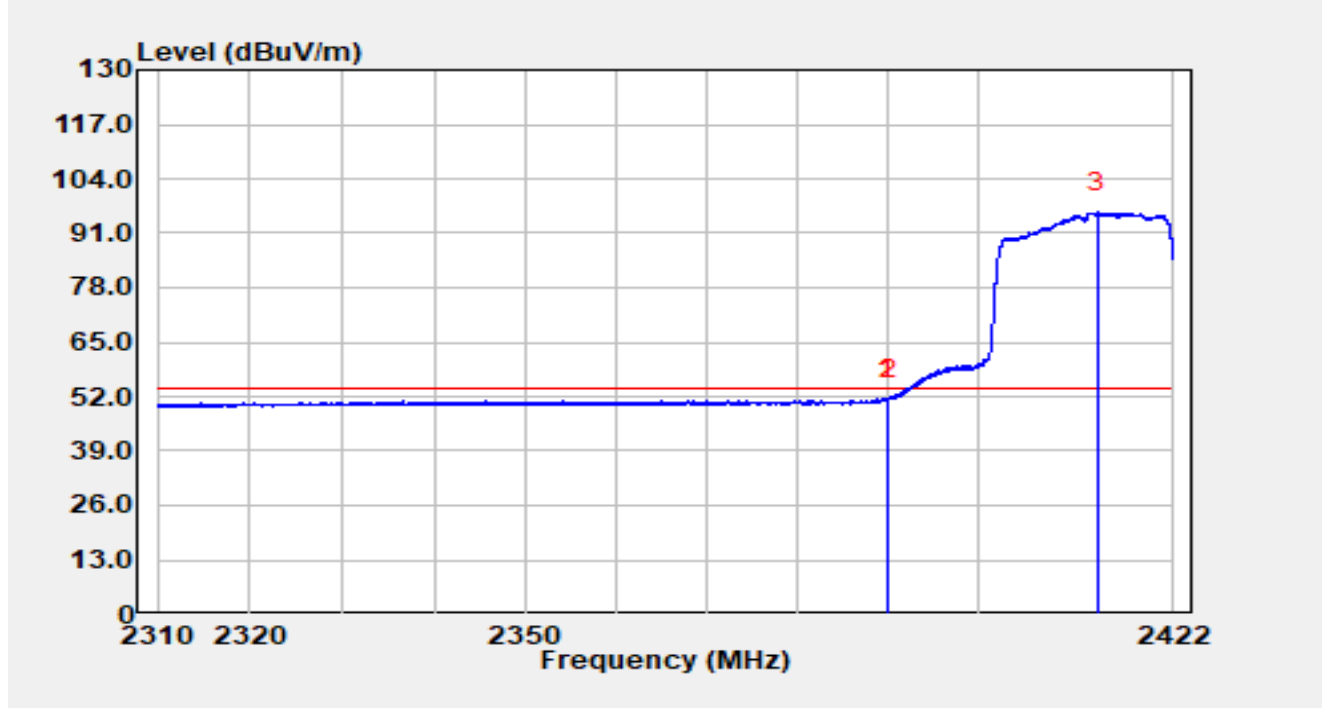


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.946	14.64	36.83	51.47	-2.53	54.00	Average
2		2390.000	14.47	36.83	51.30	-2.70	54.00	Average
3		2413.376	58.93	36.98	95.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

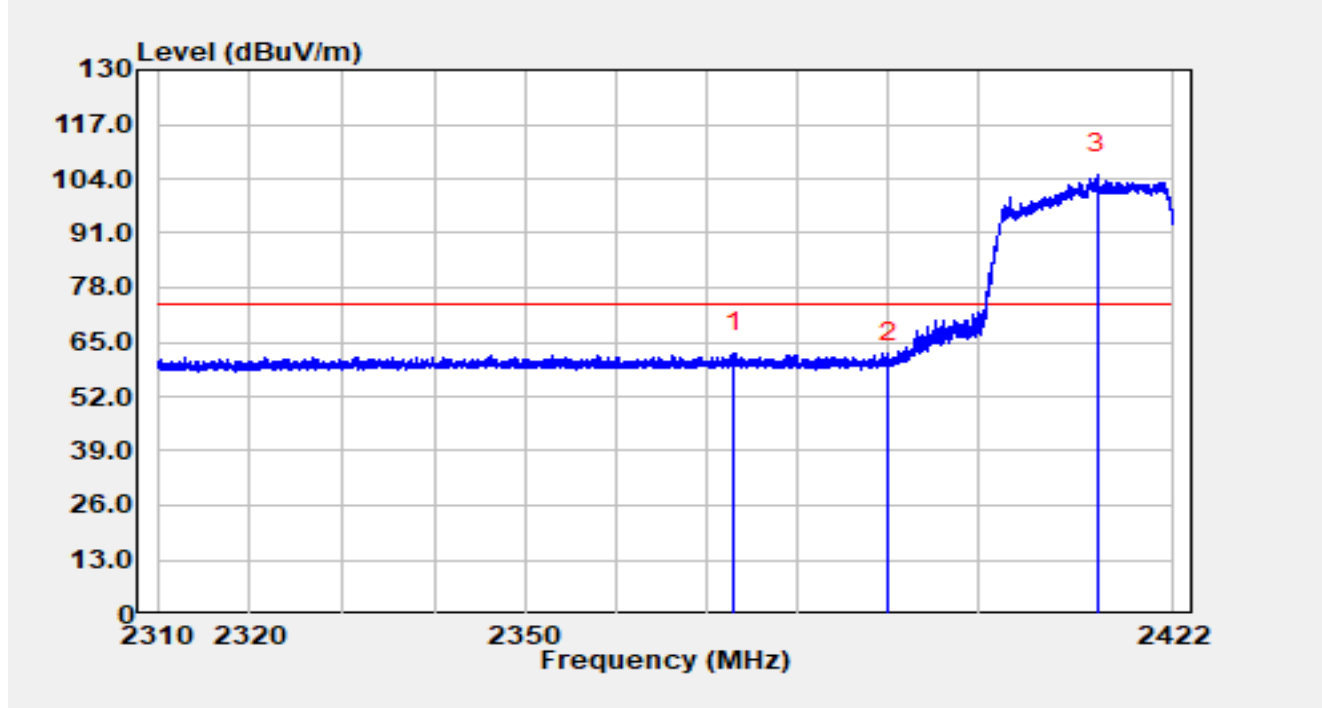


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.966	25.63	36.75	62.38	-11.62	74.00	Peak
2		2390.000	23.08	36.83	59.91	-14.09	74.00	Peak
3		2413.410	68.08	36.98	105.06	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz		

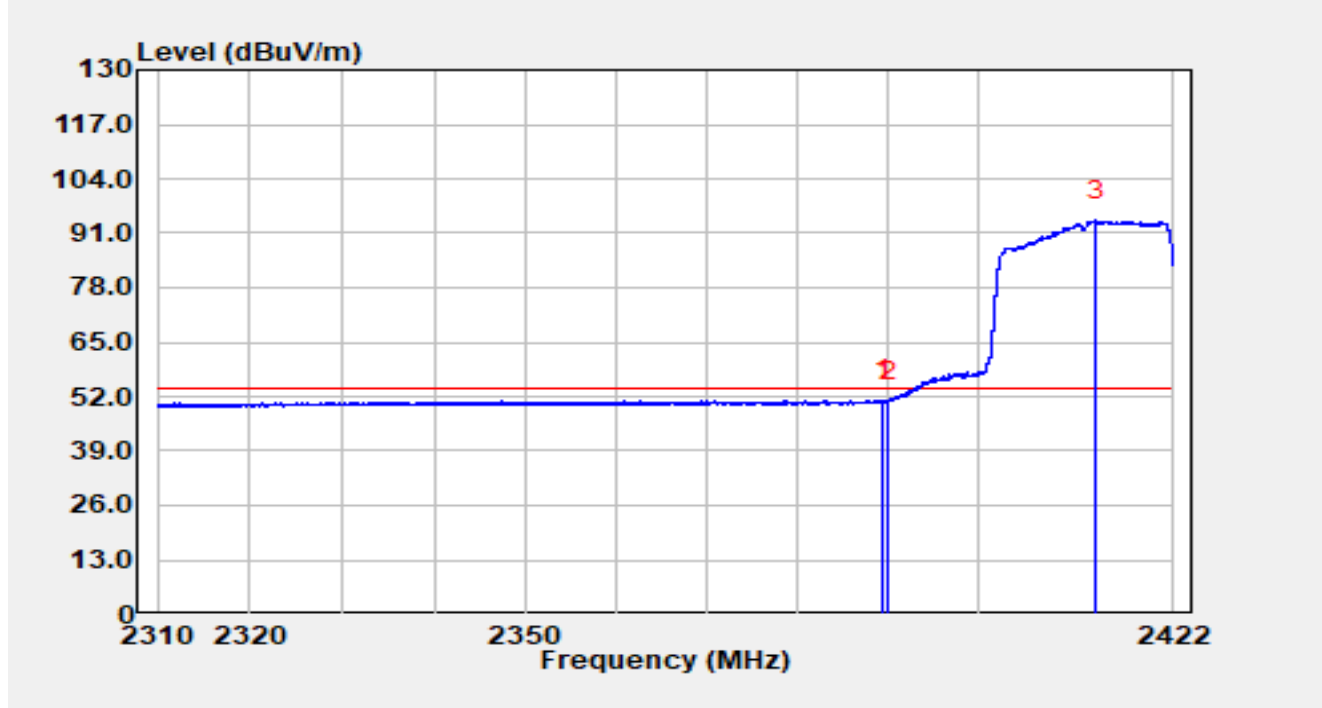


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.385	14.29	36.83	51.12	-2.88	54.00	Average
2		2390.000	13.99	36.83	50.82	-3.18	54.00	Average
3		2413.320	57.15	36.98	94.13	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

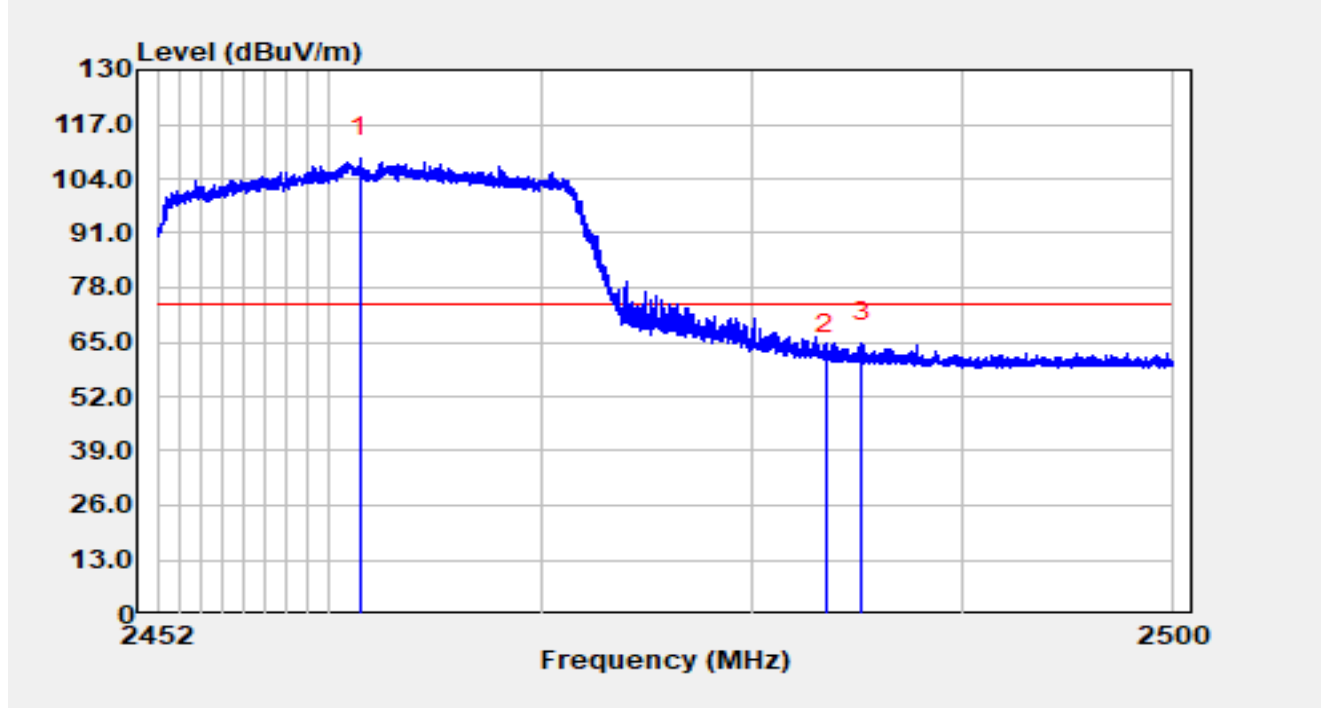


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.475	72.01	37.00	109.01	N/A	N/A	Peak
2		2483.500	24.83	37.05	61.88	-12.12	74.00	Peak
3	*	2485.182	27.71	37.06	64.77	-9.23	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

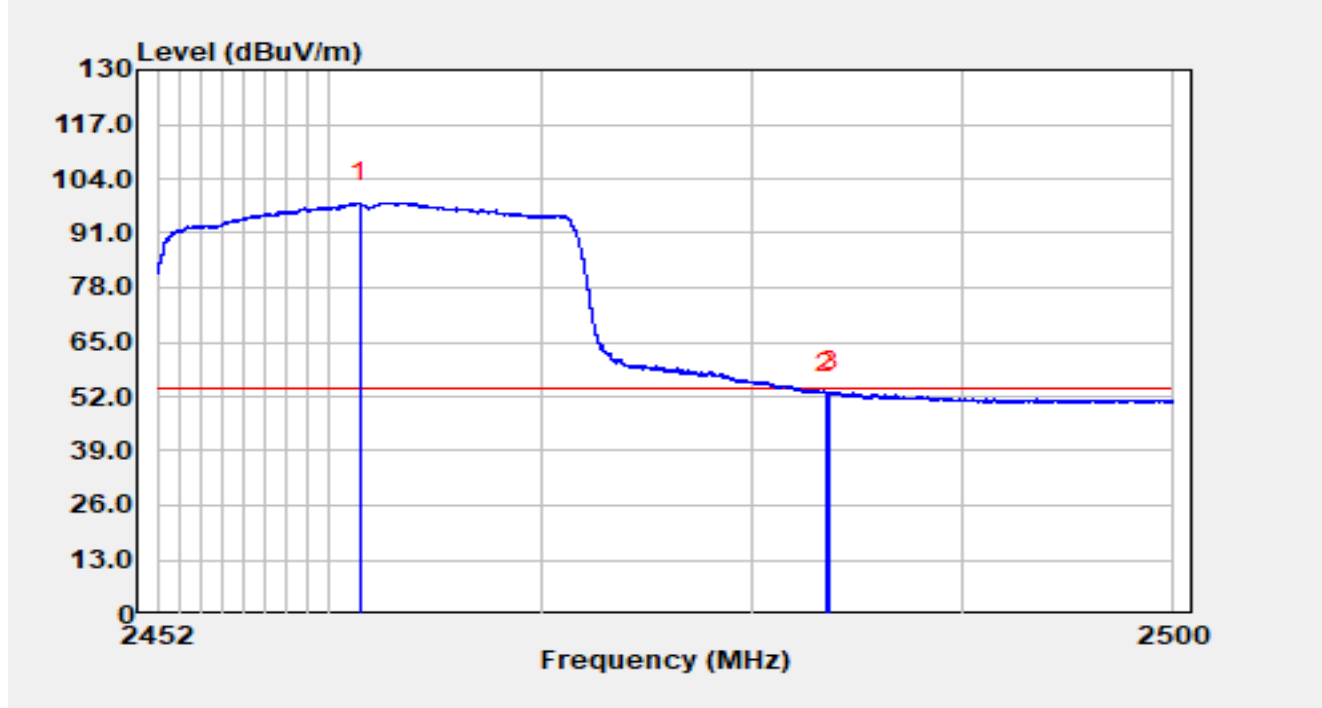


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.485	61.34	37.00	98.34	N/A	N/A	Average
2		2483.500	15.85	37.05	52.90	-1.10	54.00	Average
3	*	2483.690	15.97	37.05	53.02	-0.98	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

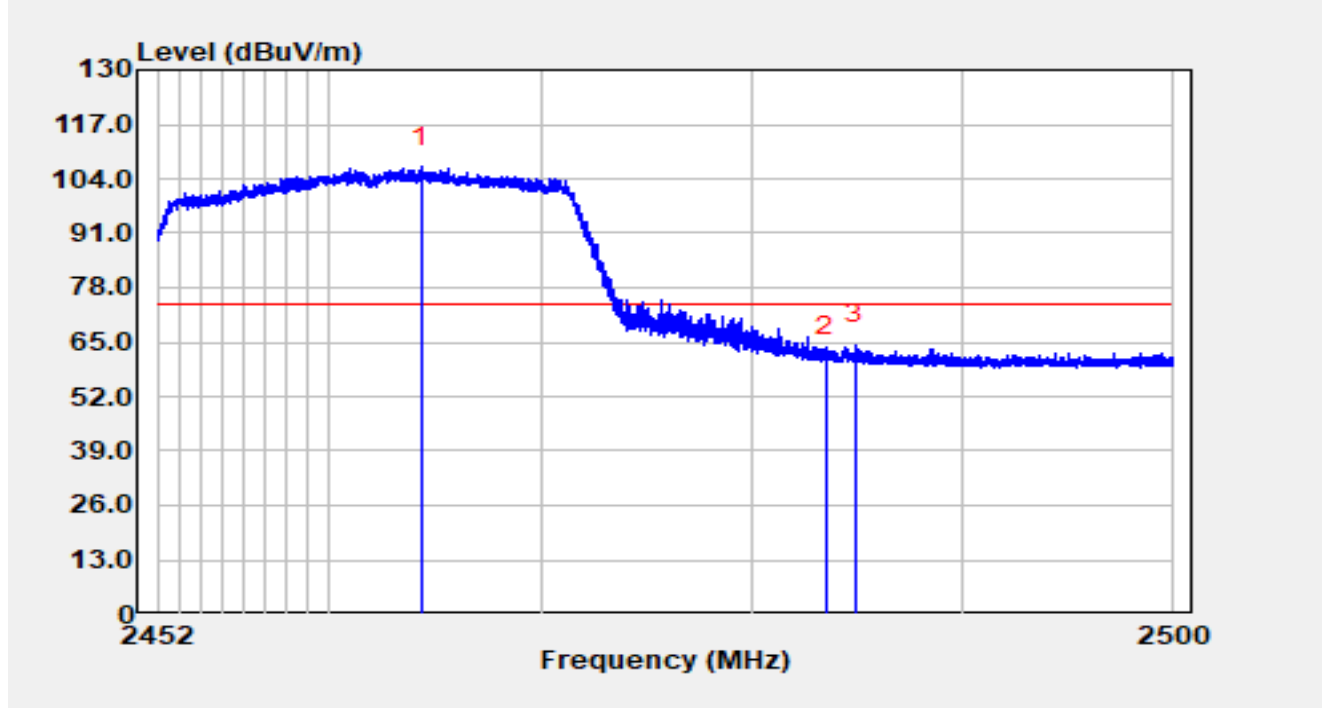


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.389	69.93	37.01	106.94	N/A	N/A	Peak
2		2483.500	24.40	37.05	61.45	-12.55	74.00	Peak
3	*	2484.880	27.41	37.06	64.47	-9.53	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz		

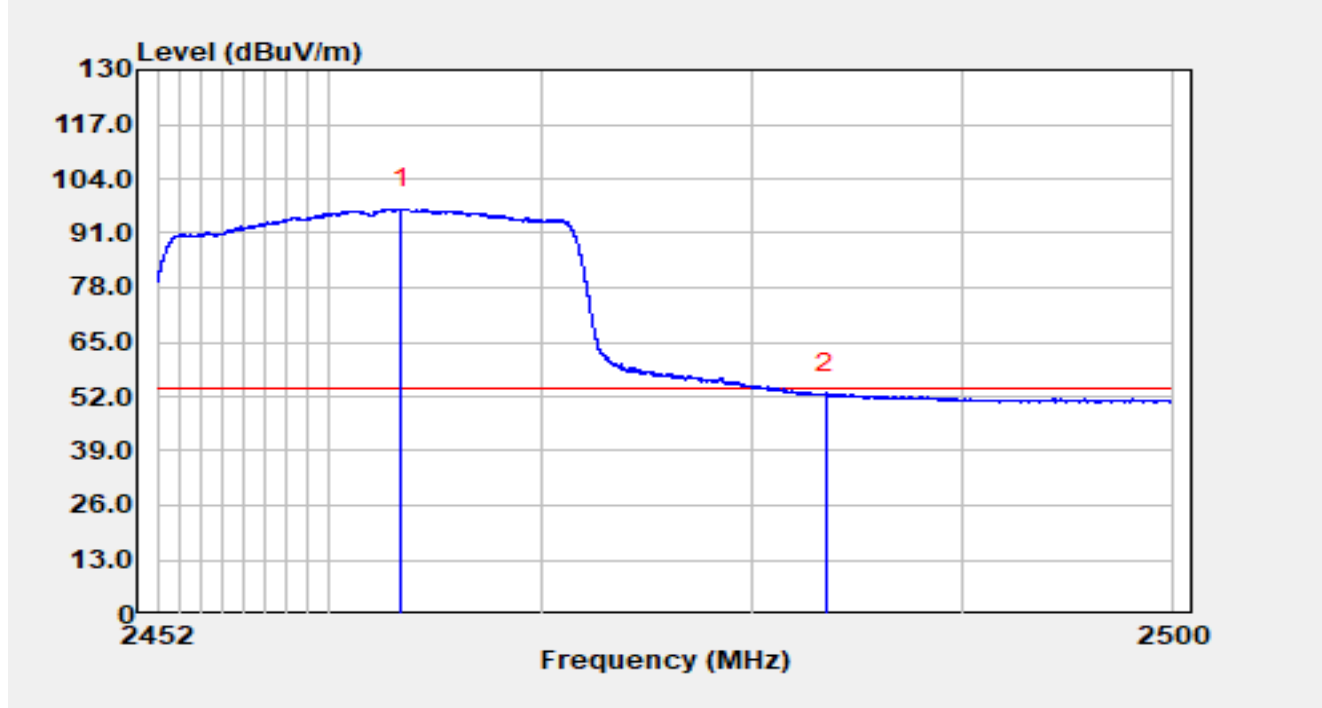


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.429	59.85	37.00	96.86	N/A	N/A	Average
2	*	2483.500	15.53	37.05	52.58	-1.42	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

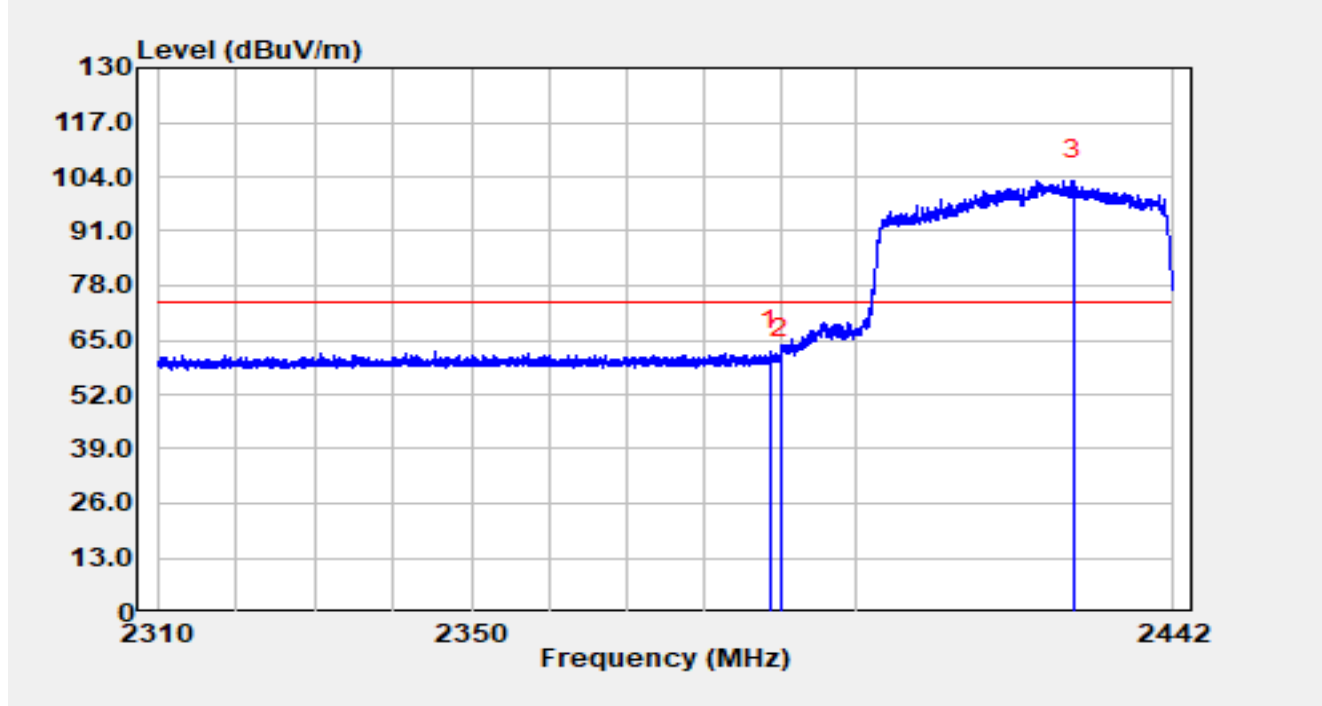


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.751	25.55	36.82	62.37	-11.63	74.00	Peak
2		2390.000	23.69	36.83	60.52	-13.48	74.00	Peak
3		2428.589	66.07	37.00	103.08	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

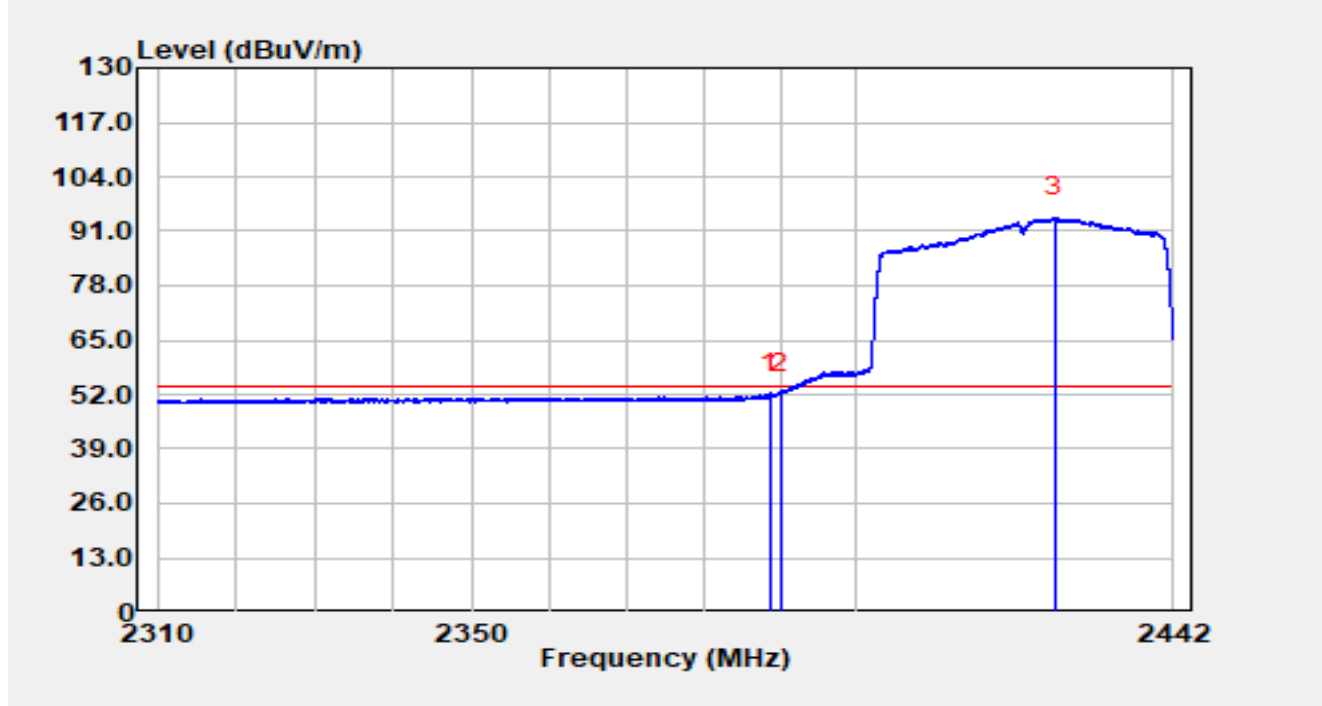


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.778	15.47	36.82	52.30	-1.70	54.00	Average
2		2390.000	15.30	36.83	52.13	-1.87	54.00	Average
3		2426.134	57.24	37.00	94.24	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

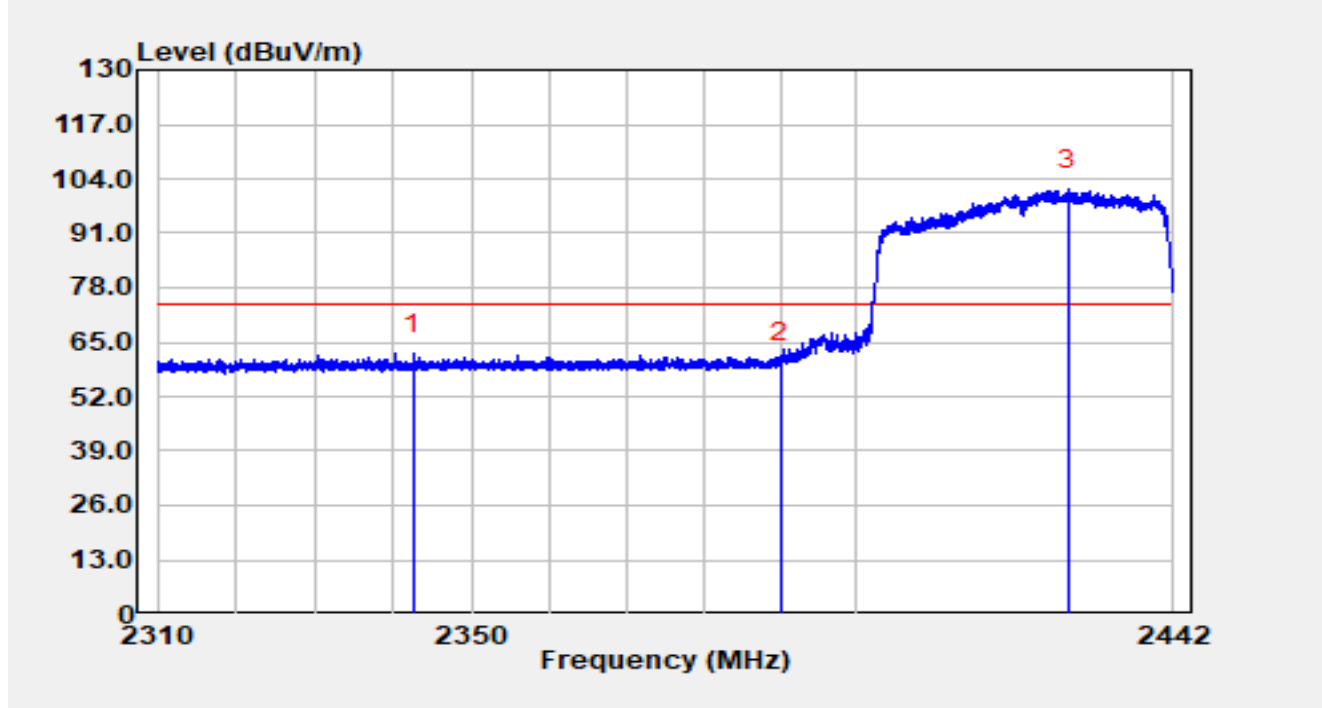


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2342.564	25.58	36.70	62.28	-11.72	74.00	Peak
2		2390.000	23.26	36.83	60.09	-13.91	74.00	Peak
3		2427.929	64.46	37.00	101.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz		

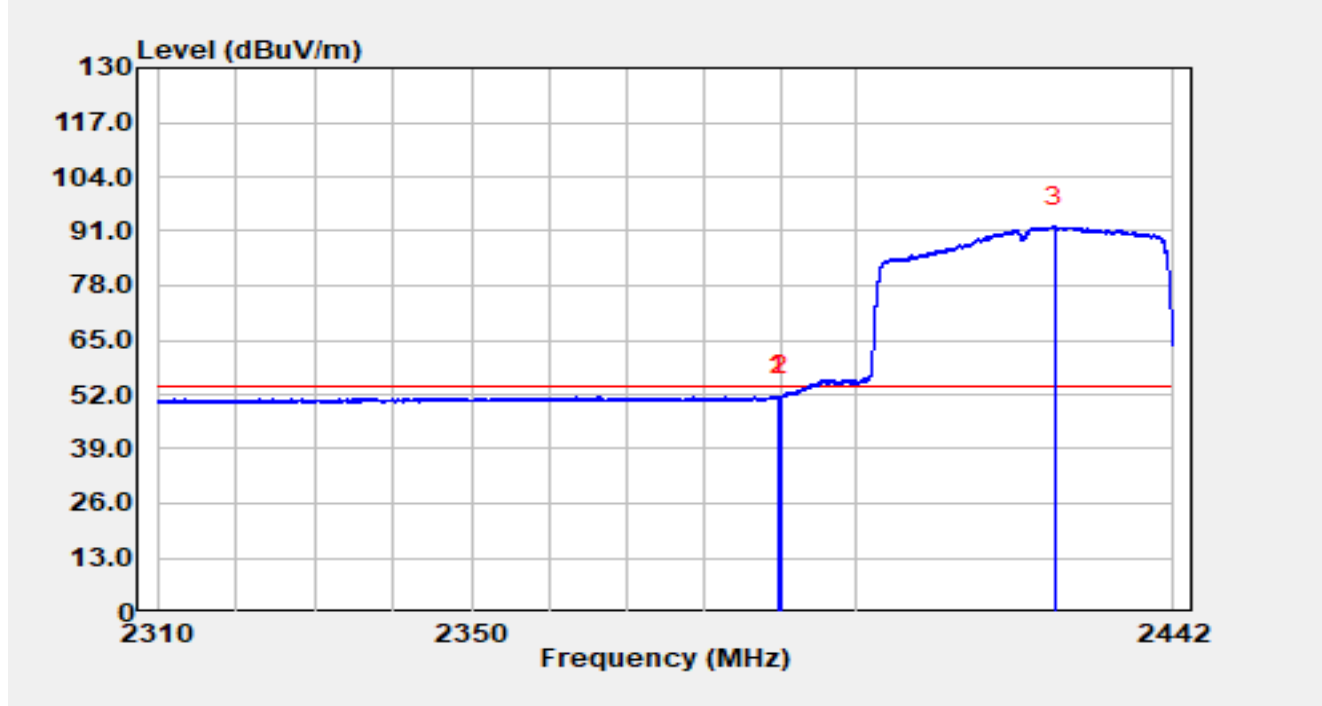


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.688	14.87	36.83	51.70	-2.30	54.00	Average
2		2390.000	14.73	36.83	51.56	-2.44	54.00	Average
3		2426.239	55.05	37.00	92.05	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

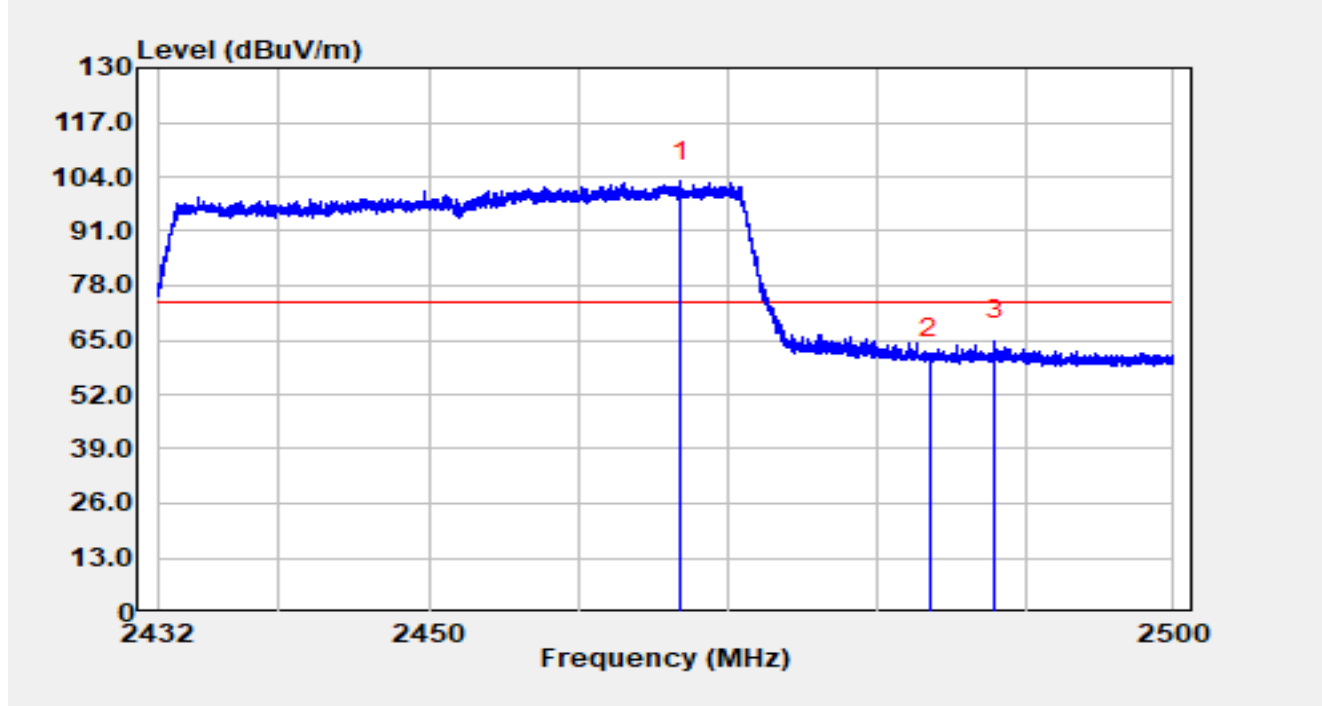


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.768	65.81	37.01	102.82	N/A	N/A	Peak
2		2483.500	23.73	37.05	60.78	-13.22	74.00	Peak
3	*	2487.917	27.70	37.07	64.77	-9.23	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

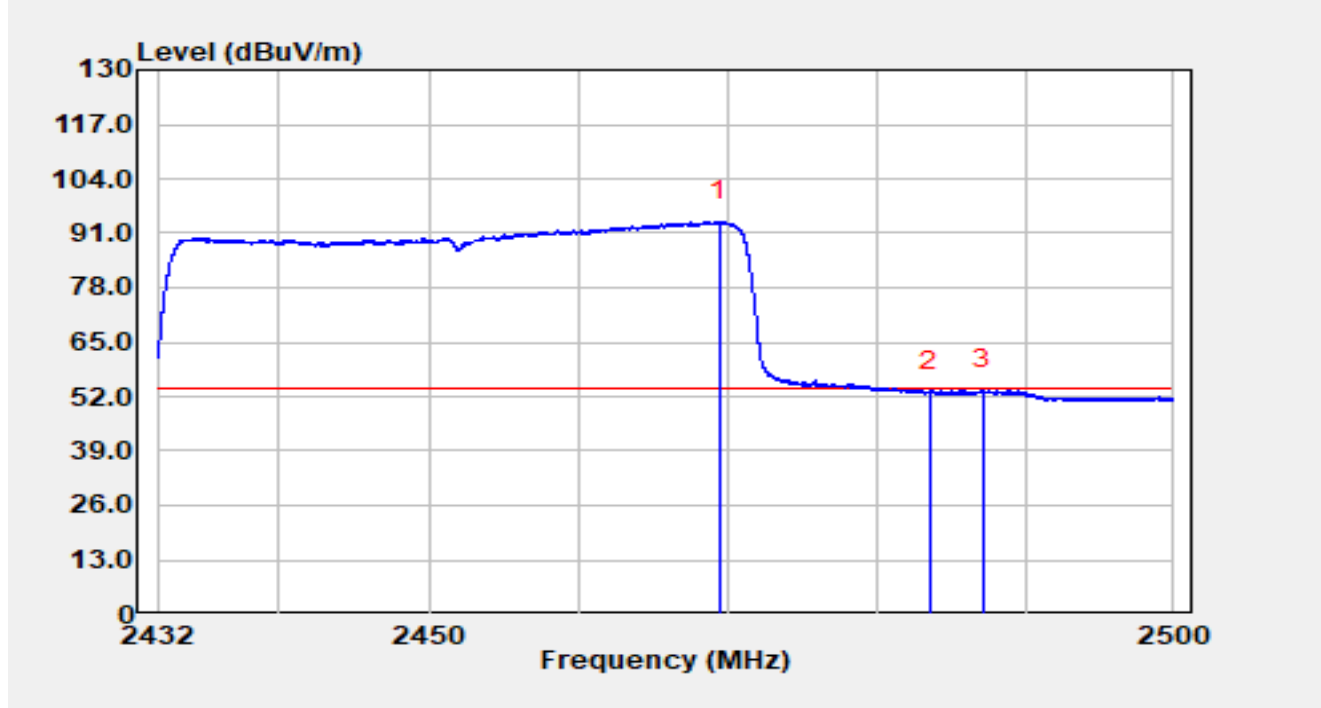


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.420	56.85	37.02	93.87	N/A	N/A	Average
2		2483.500	16.00	37.05	53.06	-0.94	54.00	Average
3	*	2487.073	16.42	37.06	53.48	-0.52	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

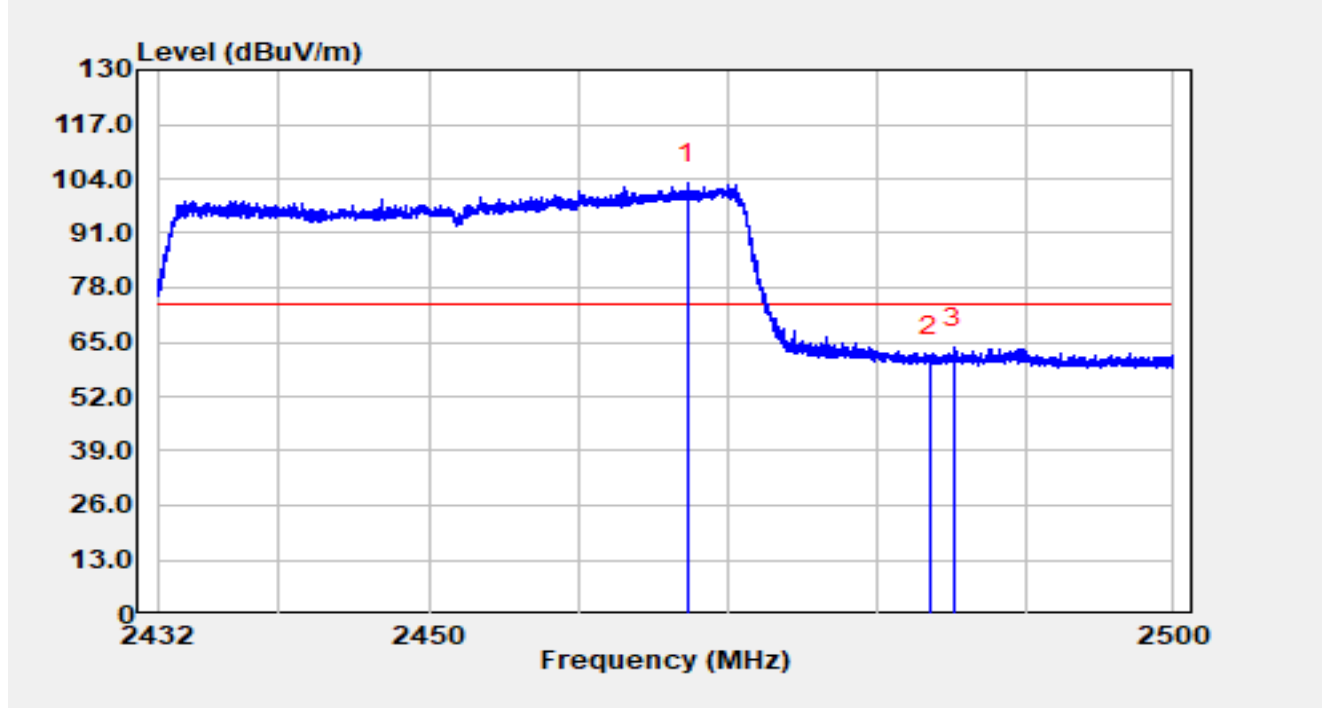


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.224	65.78	37.01	102.79	N/A	N/A	Peak
2		2483.500	24.74	37.05	61.79	-12.21	74.00	Peak
3	*	2485.101	26.50	37.06	63.56	-10.44	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz		

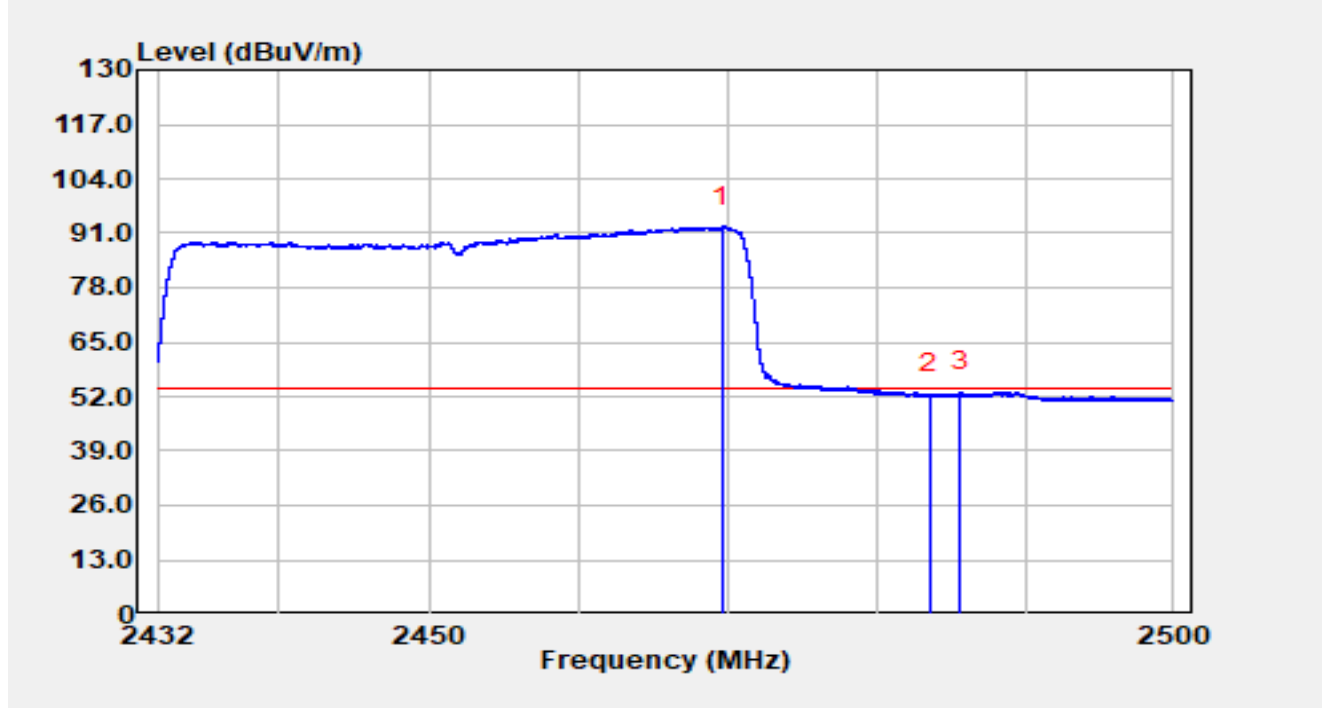


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.556	55.49	37.02	92.50	N/A	N/A	Average
2		2483.500	15.46	37.05	52.52	-1.48	54.00	Average
3	*	2485.530	16.16	37.06	53.22	-0.78	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

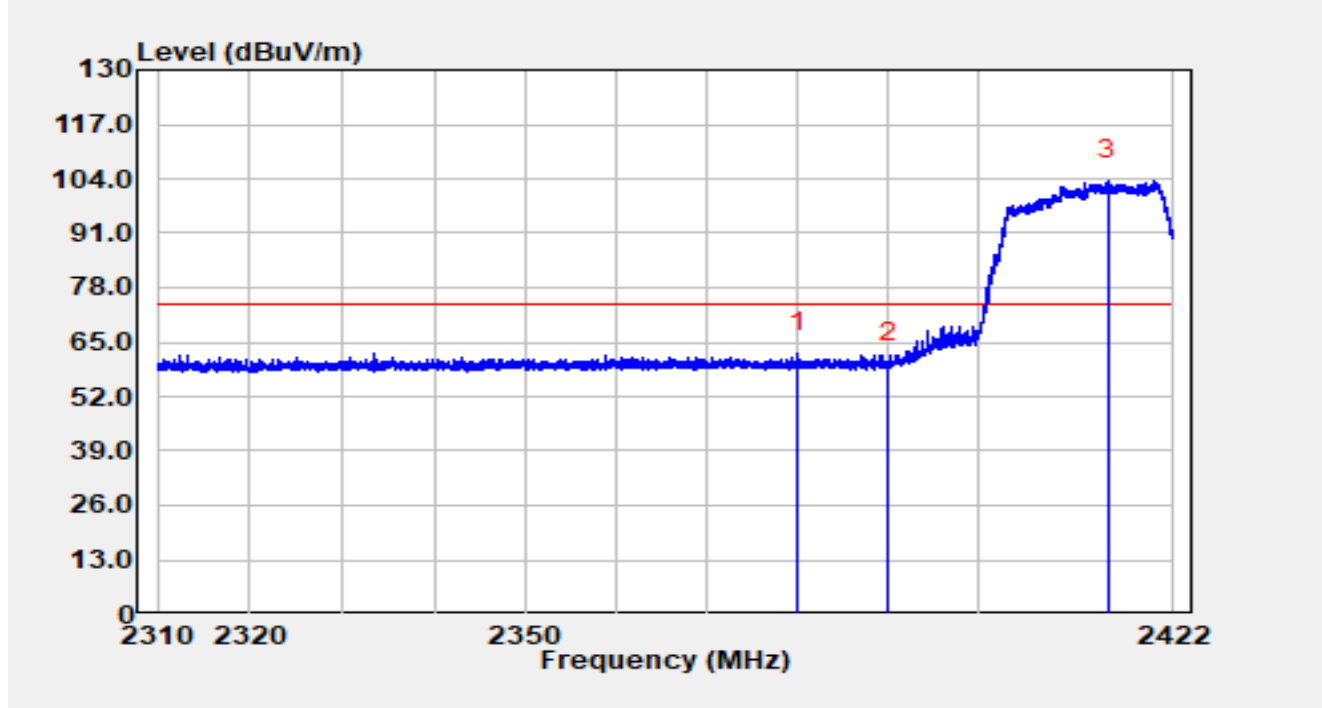


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.000	25.63	36.78	62.41	-11.59	74.00	Peak
2		2390.000	23.24	36.83	60.07	-13.93	74.00	Peak
3		2414.608	66.67	36.99	103.65	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

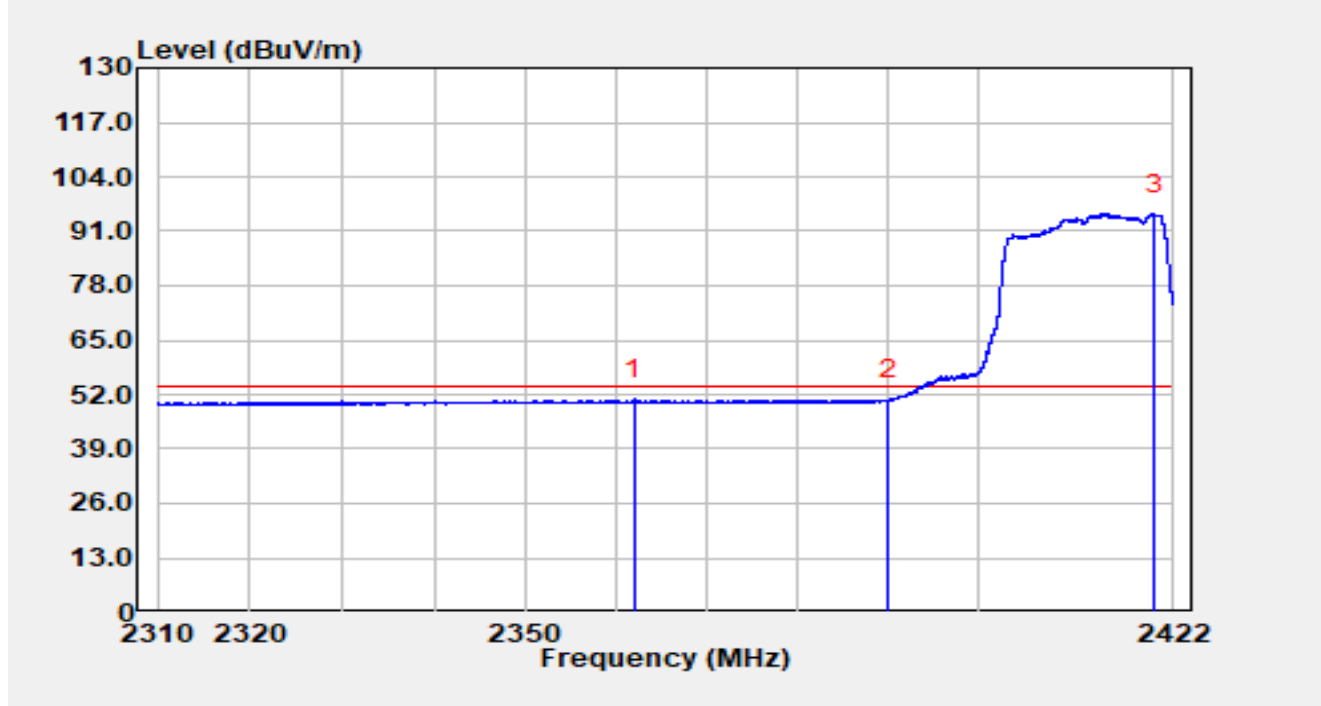


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2361.946	14.11	36.72	50.82	-3.18	54.00	Average
2		2390.000	13.76	36.83	50.59	-3.41	54.00	Average
3		2419.827	58.15	37.00	95.16	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

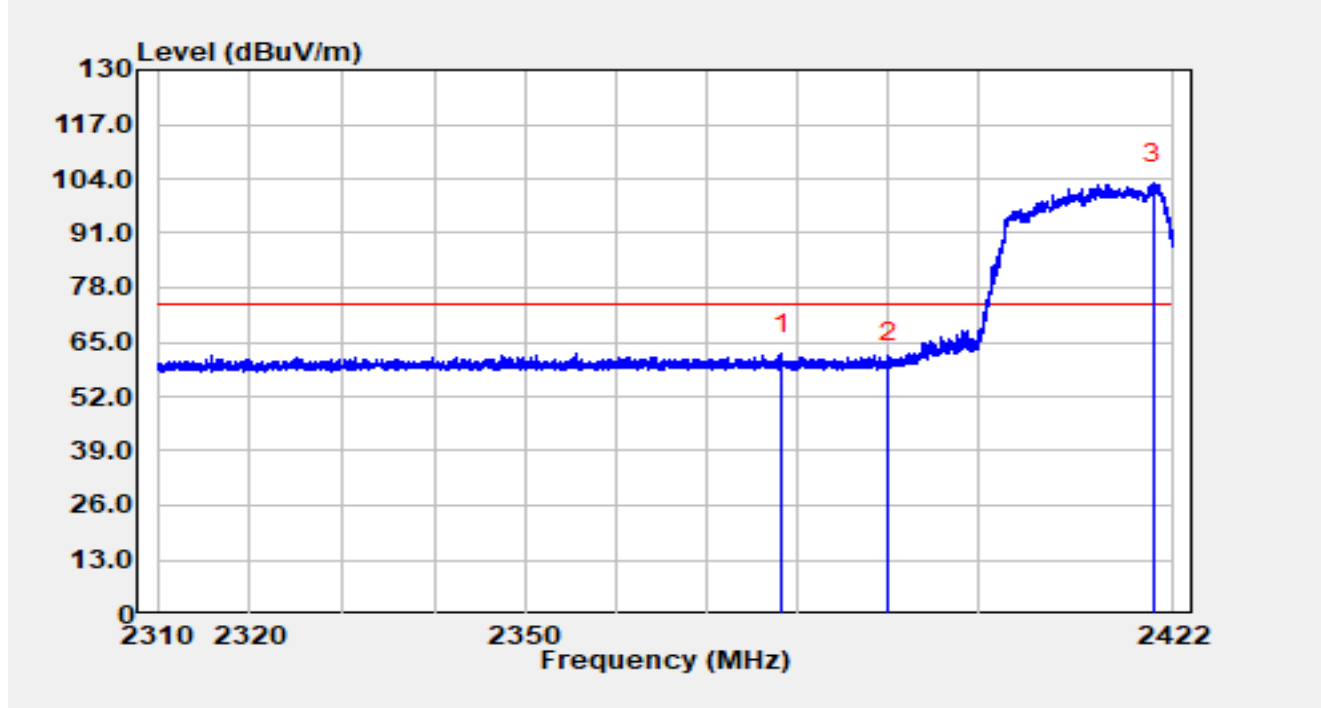


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2378.141	25.43	36.77	62.20	-11.80	74.00	Peak
2		2390.000	23.23	36.83	60.06	-13.94	74.00	Peak
3		2419.648	65.78	37.00	102.78	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2412MHz		

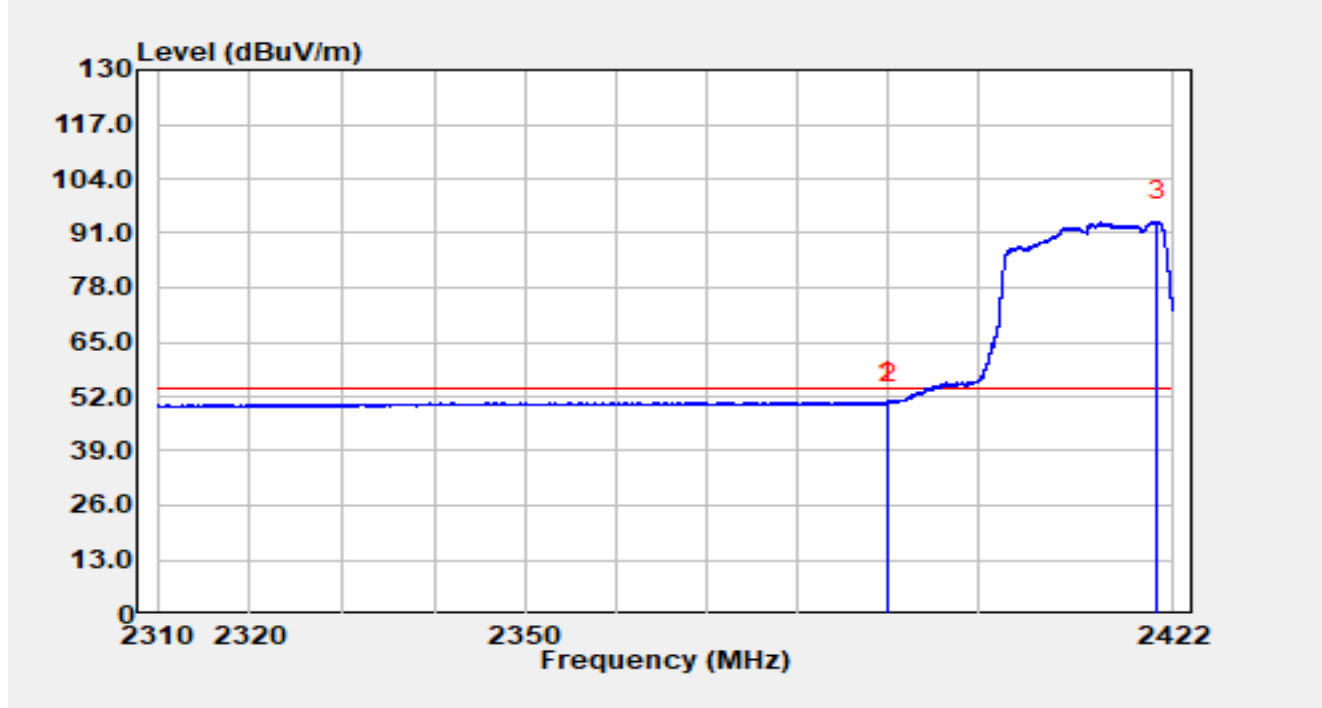


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.957	13.98	36.83	50.81	-3.19	54.00	Average
2		2390.000	13.66	36.83	50.50	-3.50	54.00	Average
3		2420.141	56.92	37.00	93.93	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

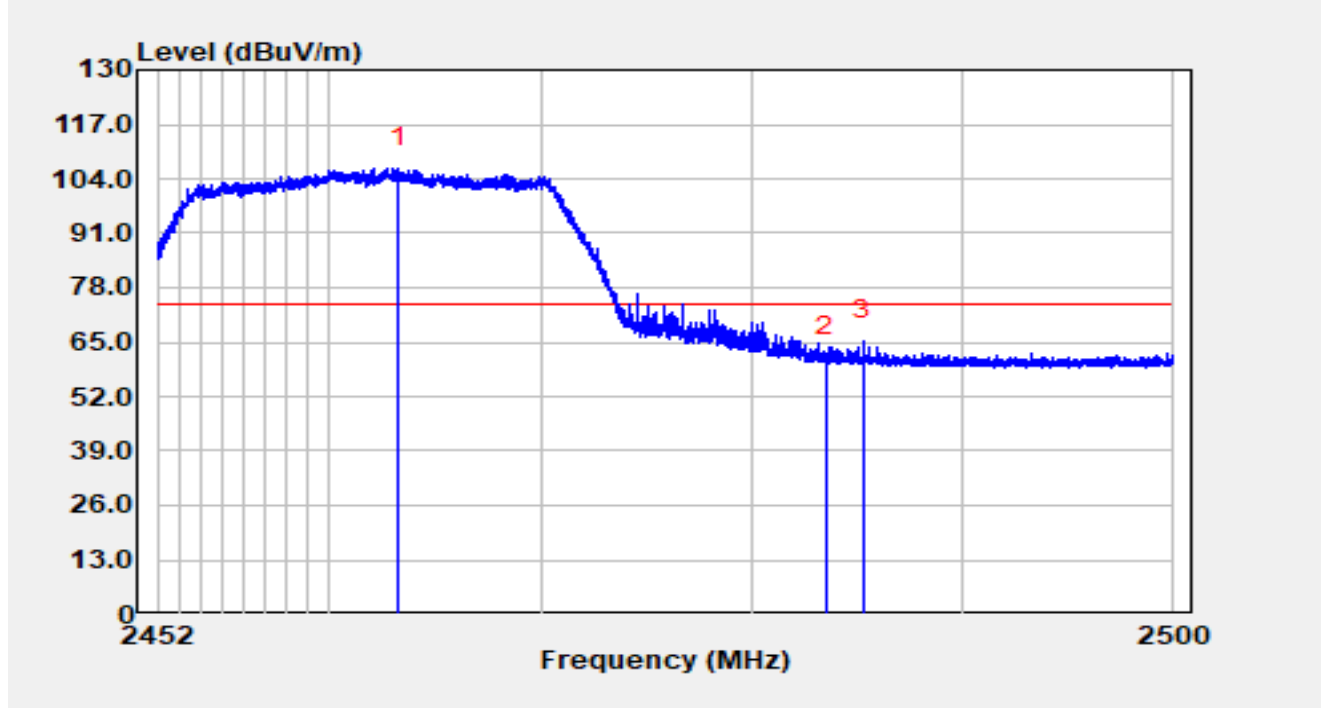


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.285	69.57	37.00	106.58	N/A	N/A	Peak
2		2483.500	24.31	37.05	61.36	-12.64	74.00	Peak
3	*	2485.235	28.39	37.06	65.44	-8.56	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

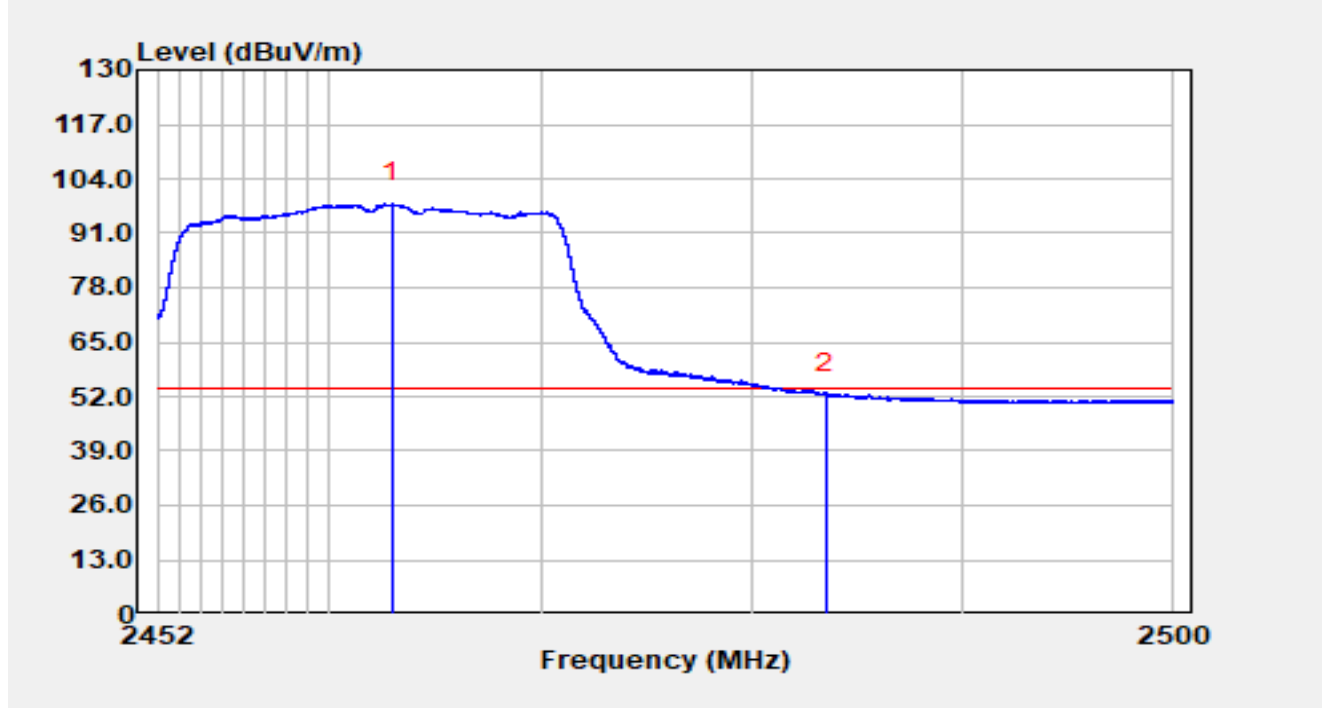


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.021	61.16	37.00	98.16	N/A	N/A	Average
2	*	2483.500	15.63	37.05	52.68	-1.32	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

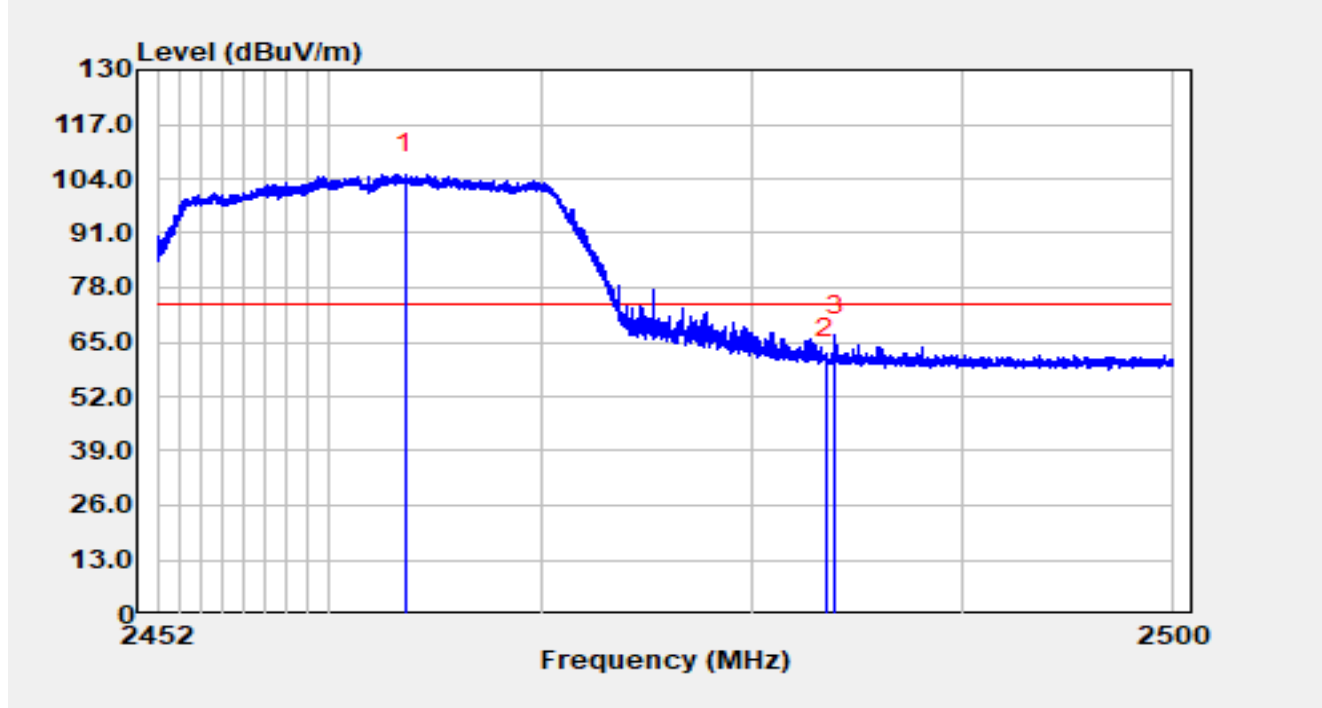


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.654	68.06	37.00	105.06	N/A	N/A	Peak
2		2483.500	24.13	37.05	61.18	-12.82	74.00	Peak
3	*	2483.896	29.62	37.05	66.67	-7.33	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT20 at 2462MHz		

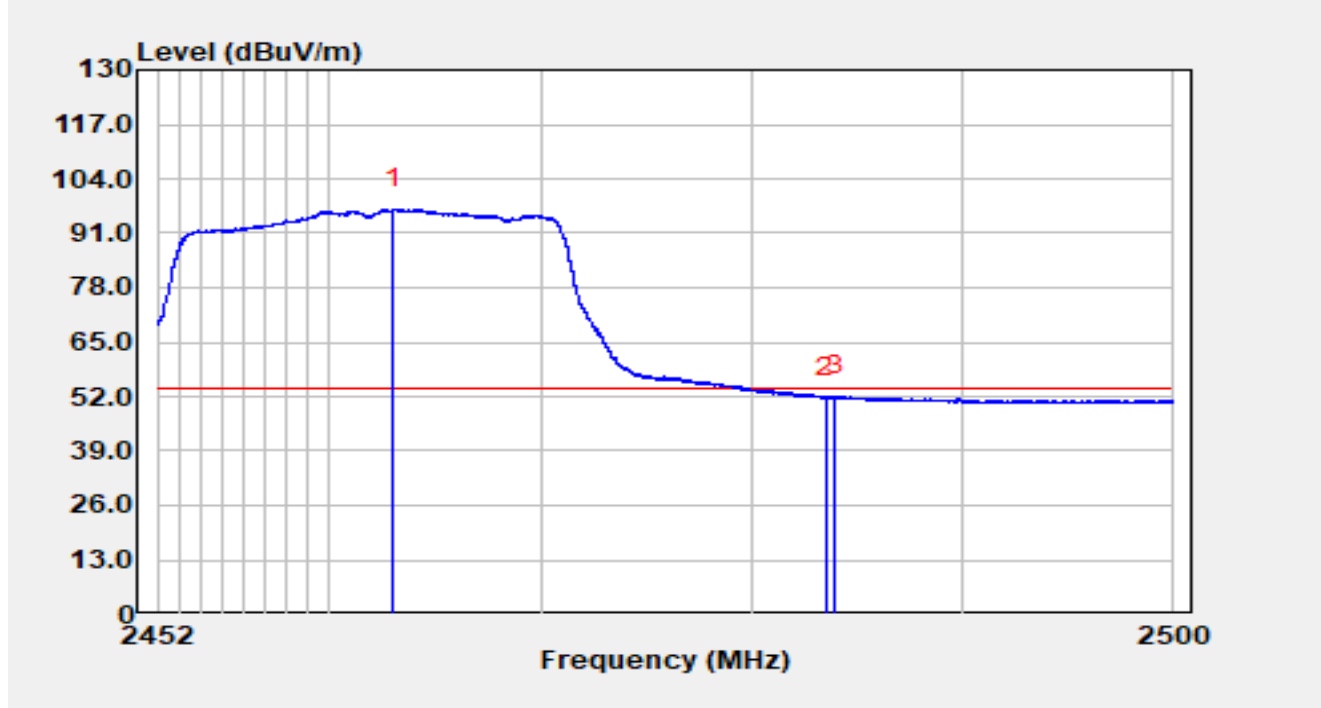


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.054	59.70	37.00	96.71	N/A	N/A	Average
2		2483.500	14.73	37.05	51.79	-2.21	54.00	Average
3	*	2483.925	15.06	37.05	52.11	-1.89	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

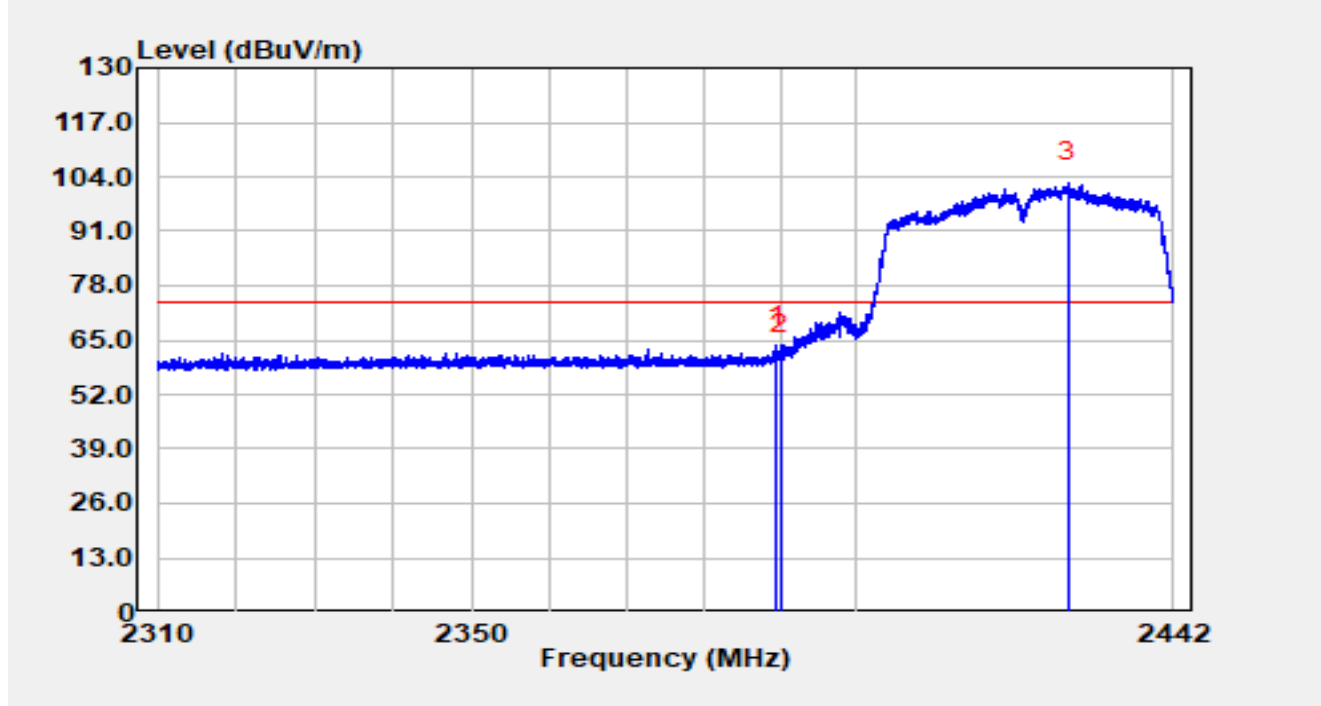


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.622	26.71	36.83	63.54	-10.46	74.00	Peak
2		2390.000	24.69	36.83	61.52	-12.48	74.00	Peak
3		2427.929	65.58	37.00	102.58	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

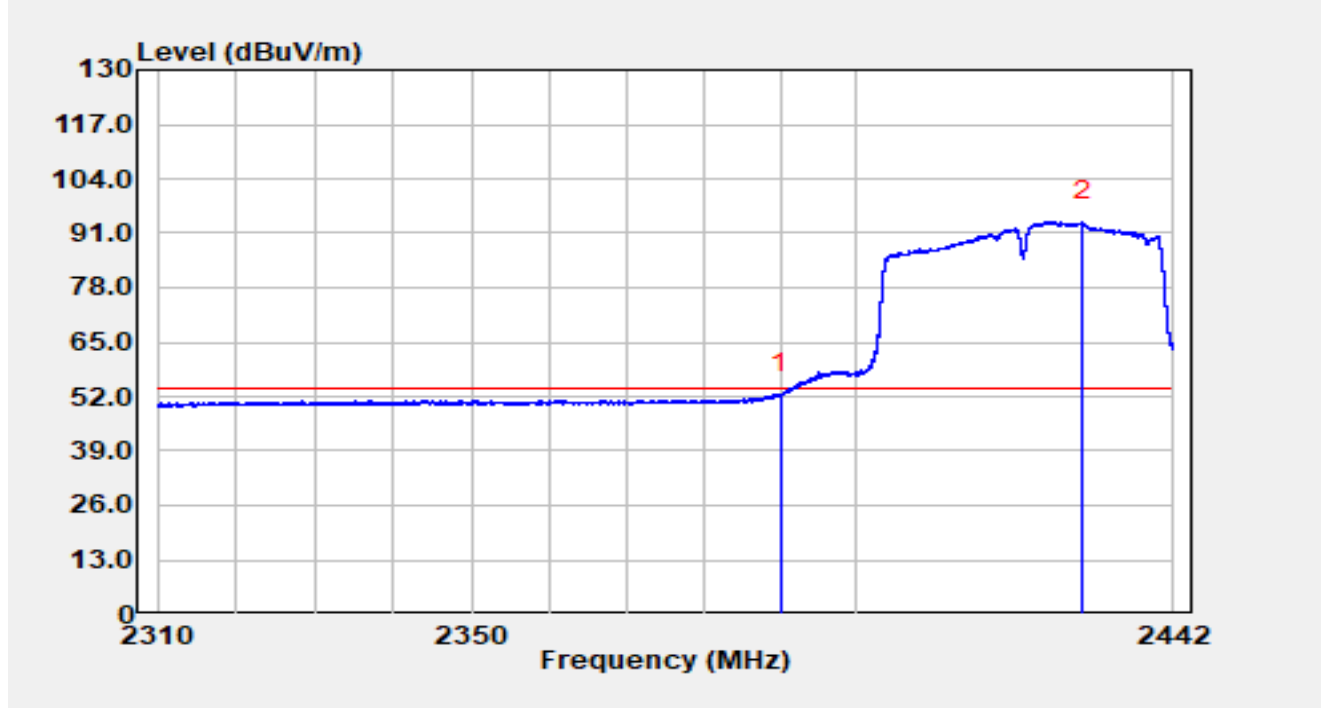


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.000	15.88	36.83	52.71	-1.29	54.00	Average
2		2429.869	56.71	37.00	93.71	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

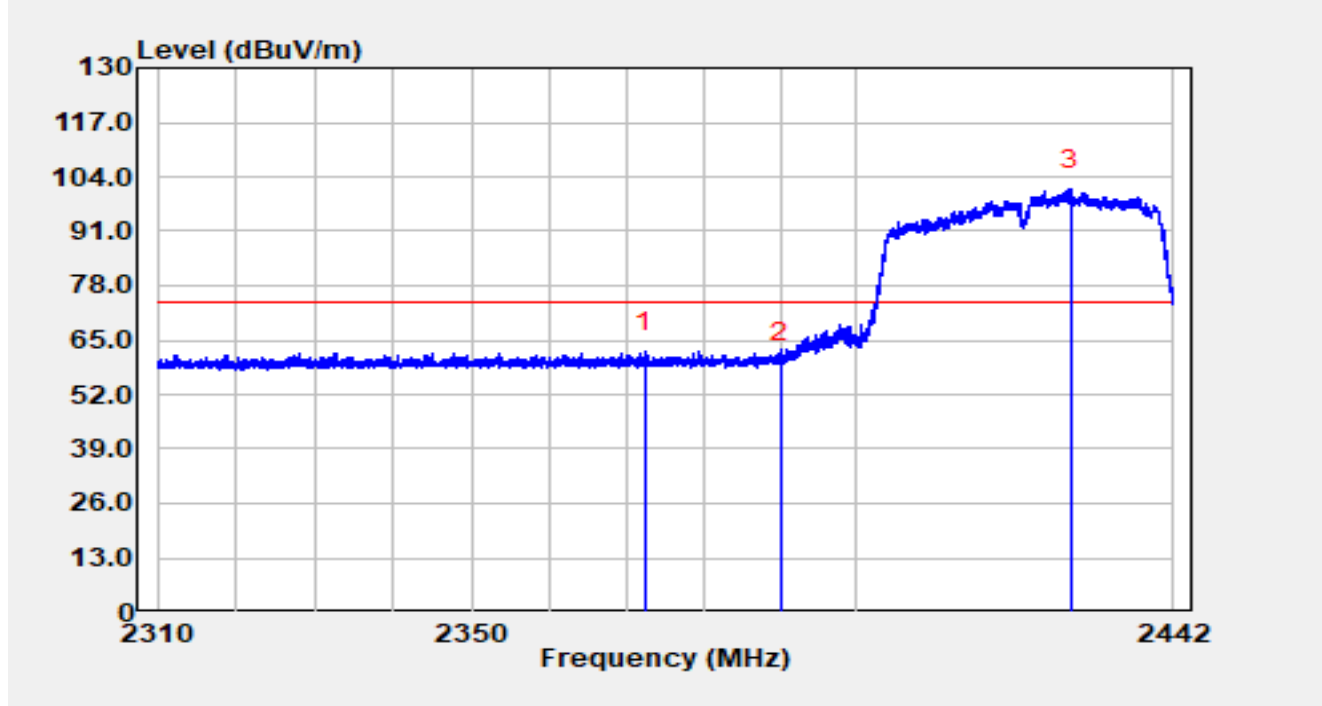


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2372.436	25.34	36.74	62.08	-11.92	74.00	Peak
2		2390.000	22.85	36.83	59.68	-14.32	74.00	Peak
3		2428.365	64.02	37.00	101.02	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2422MHz		

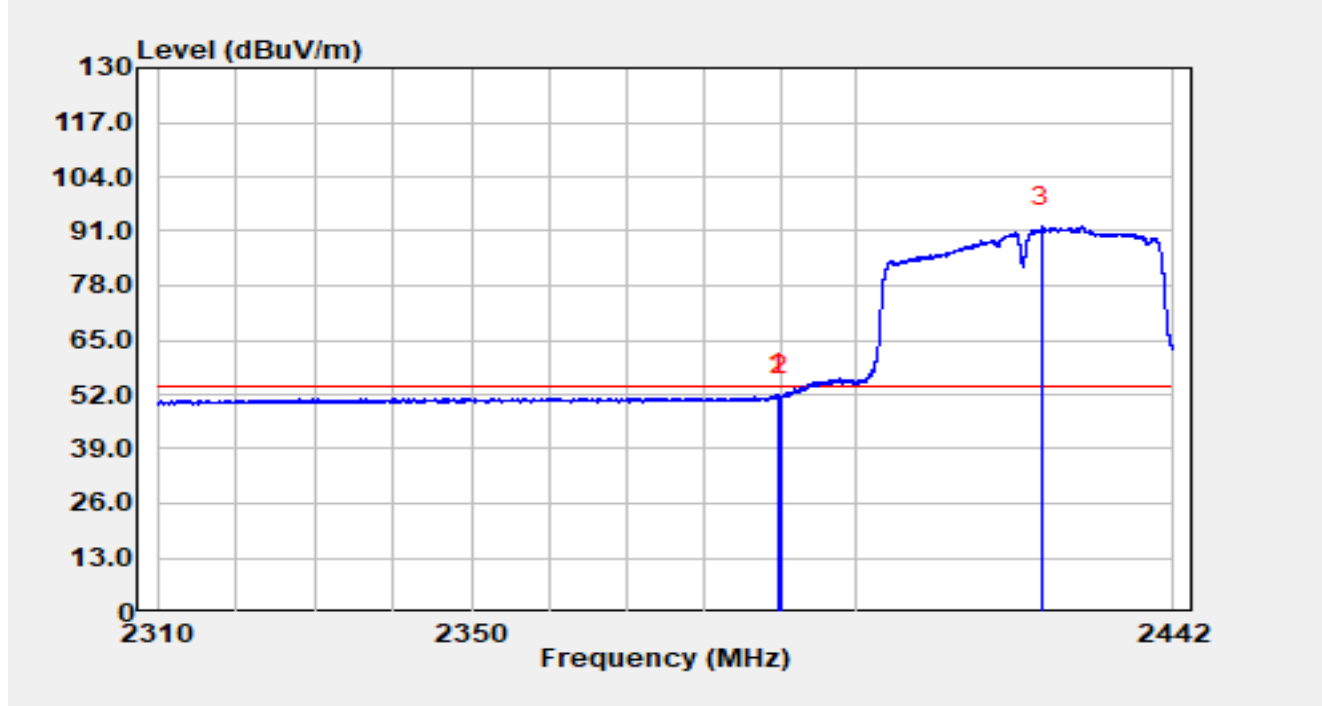


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.807	15.32	36.83	52.15	-1.85	54.00	Average
2		2390.000	14.81	36.83	51.64	-2.36	54.00	Average
3		2424.444	55.06	37.00	92.06	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

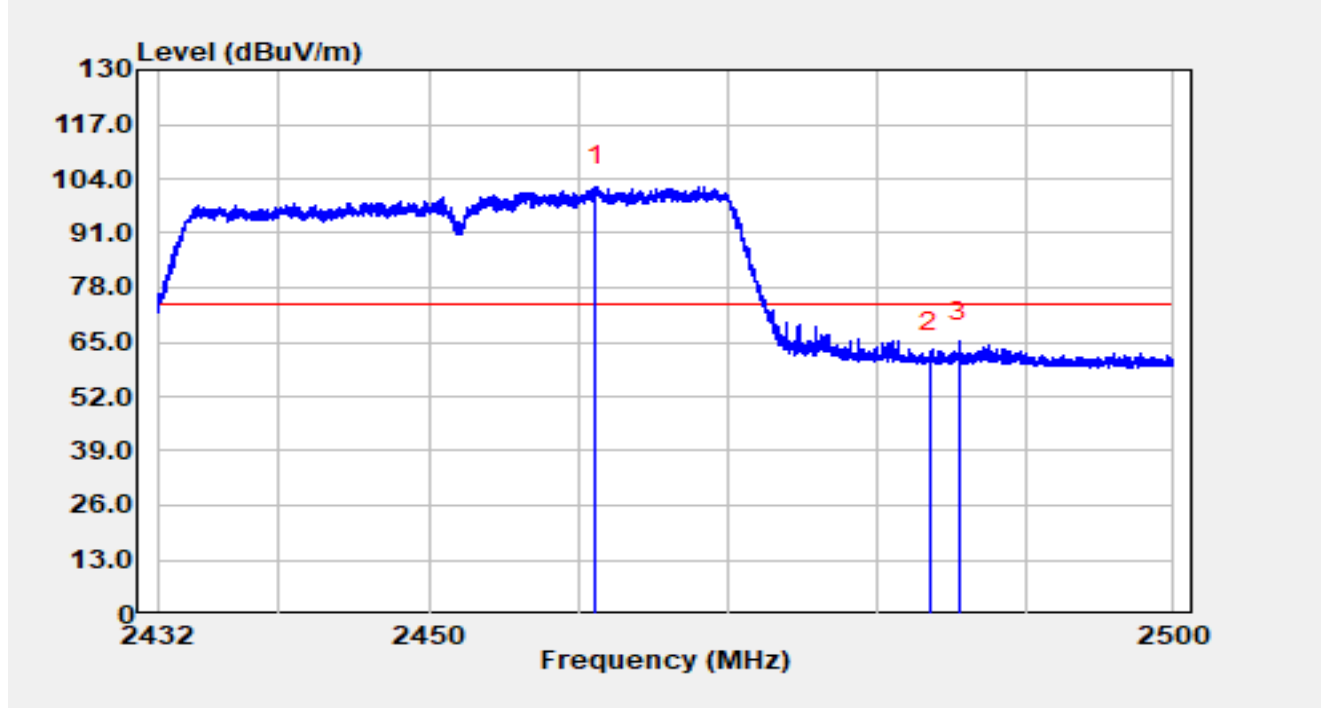


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.138	65.07	37.00	102.06	N/A	N/A	Peak
2		2483.500	25.26	37.05	62.31	-11.69	74.00	Peak
3	*	2485.475	28.12	37.06	65.17	-8.83	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

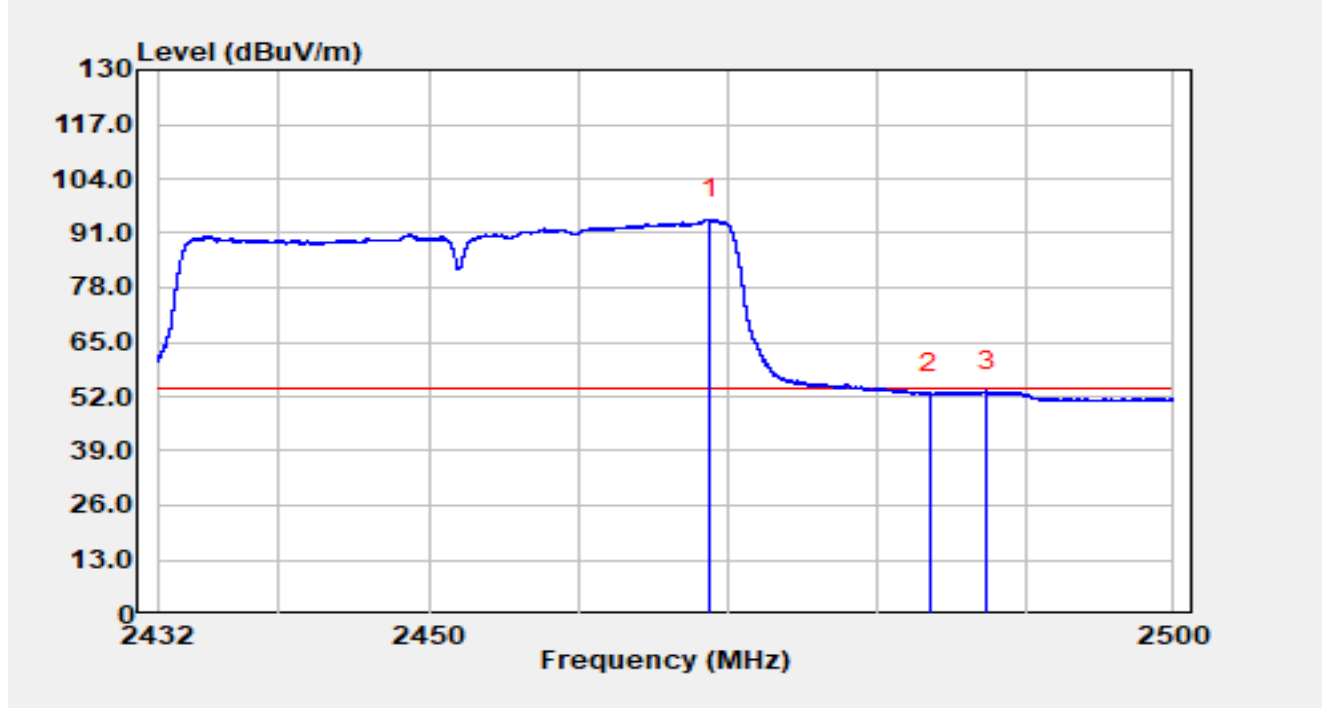


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.720	57.39	37.02	94.40	N/A	N/A	Average
2		2483.500	15.67	37.05	52.72	-1.28	54.00	Average
3	*	2487.345	16.40	37.06	53.46	-0.54	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

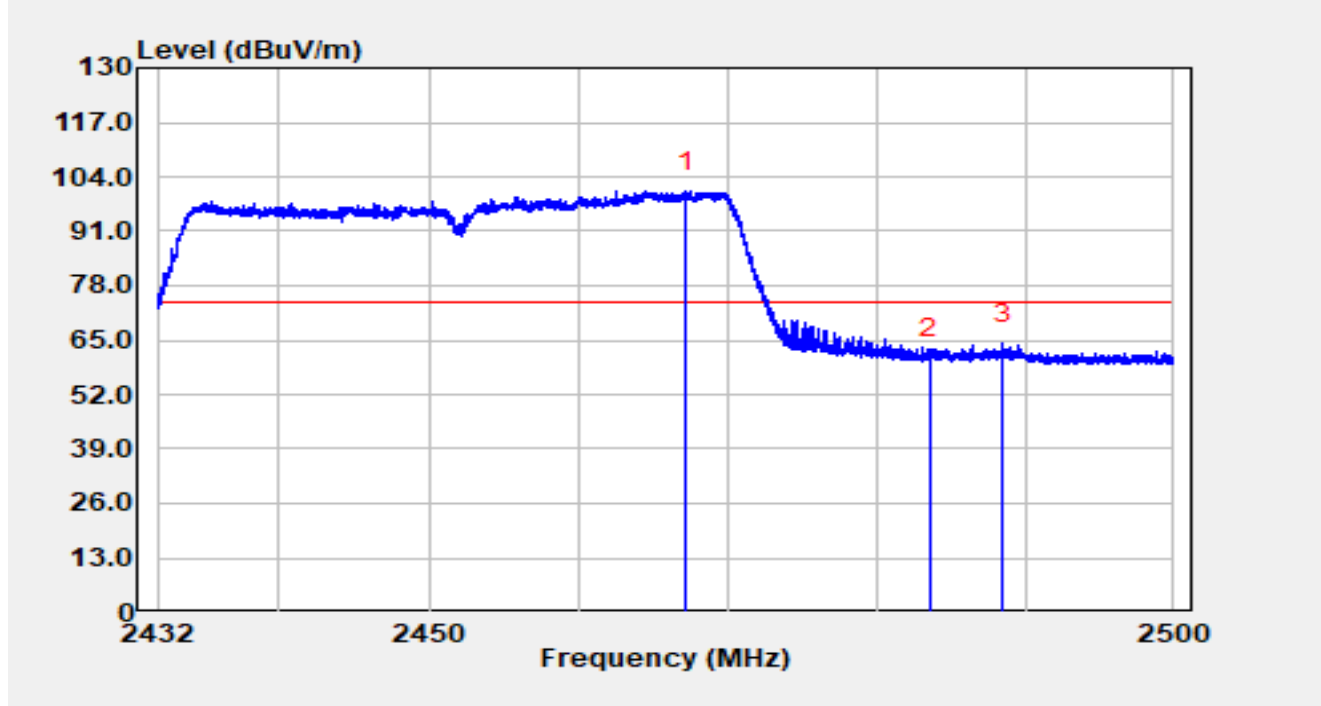


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.115	63.51	37.01	100.52	N/A	N/A	Peak
2		2483.500	23.35	37.05	60.41	-13.59	74.00	Peak
3	*	2488.420	27.10	37.07	64.17	-9.83	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2025-05-01
Temperature	22.5 °C	Humidity	38.8 %
Limit	FCC_Part 15_Band Edge (3m)	Test Engineer	Carl Jiang
Factor	Horn 3117_06257	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by VHT40 at 2452MHz		

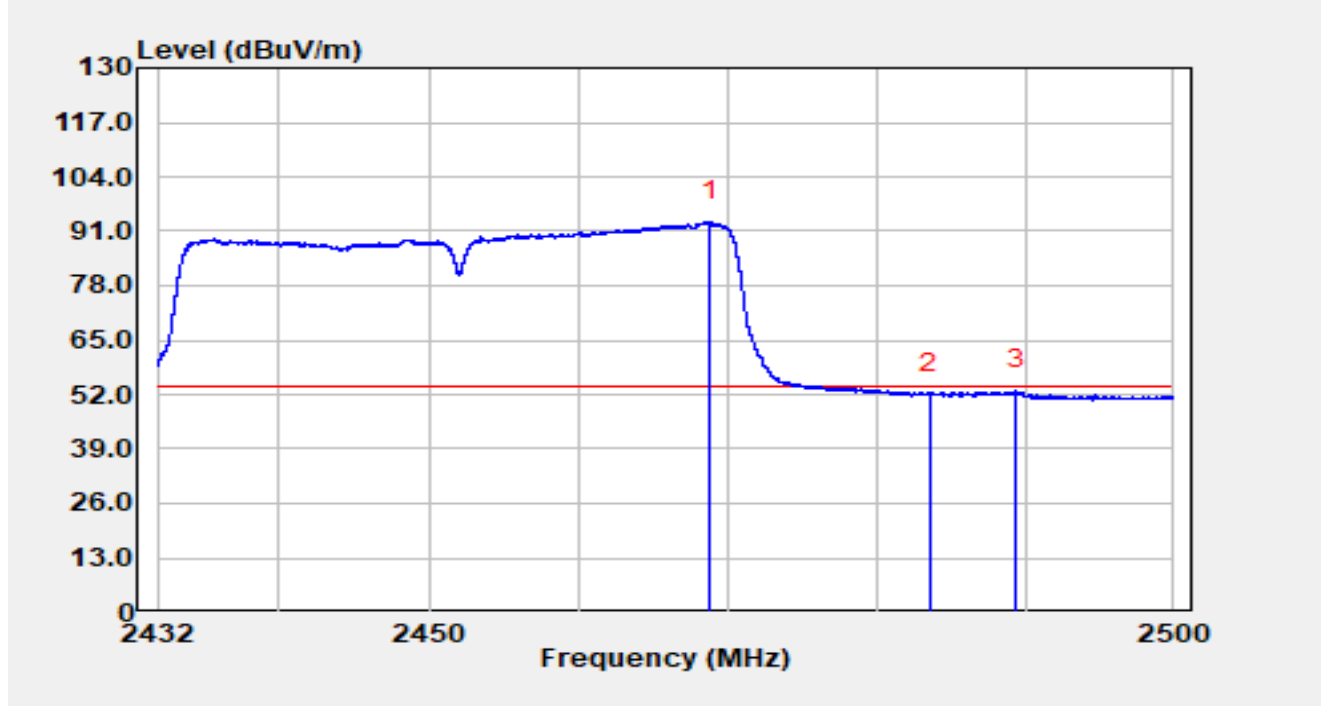


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.774	56.28	37.02	93.30	N/A	N/A	Average
2		2483.500	14.99	37.05	52.04	-1.96	54.00	Average
3	*	2489.338	15.92	37.07	52.99	-1.01	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Partial RU

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

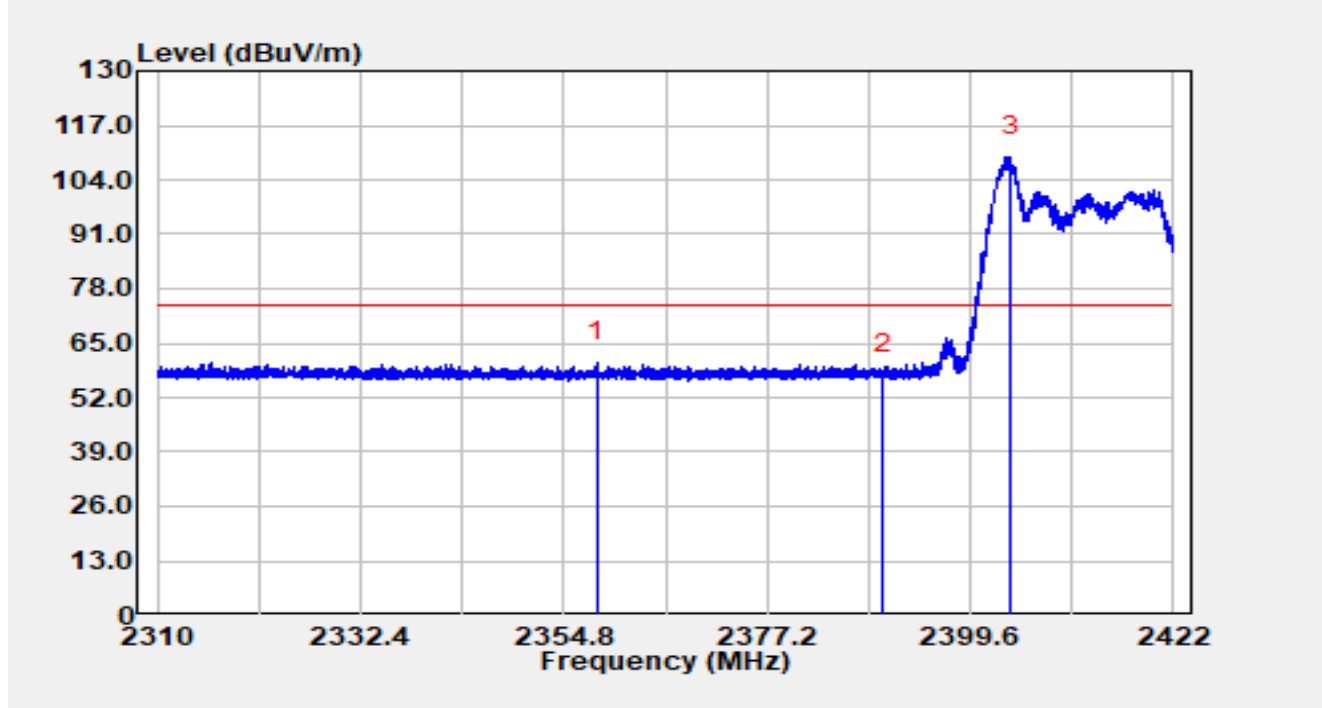


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2358.45	28.54	31.97	60.51	-13.49	74.00	Peak
2		2390.00	25.93	31.96	57.88	-16.12	74.00	Peak
3		2404.04	77.63	31.89	109.52	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

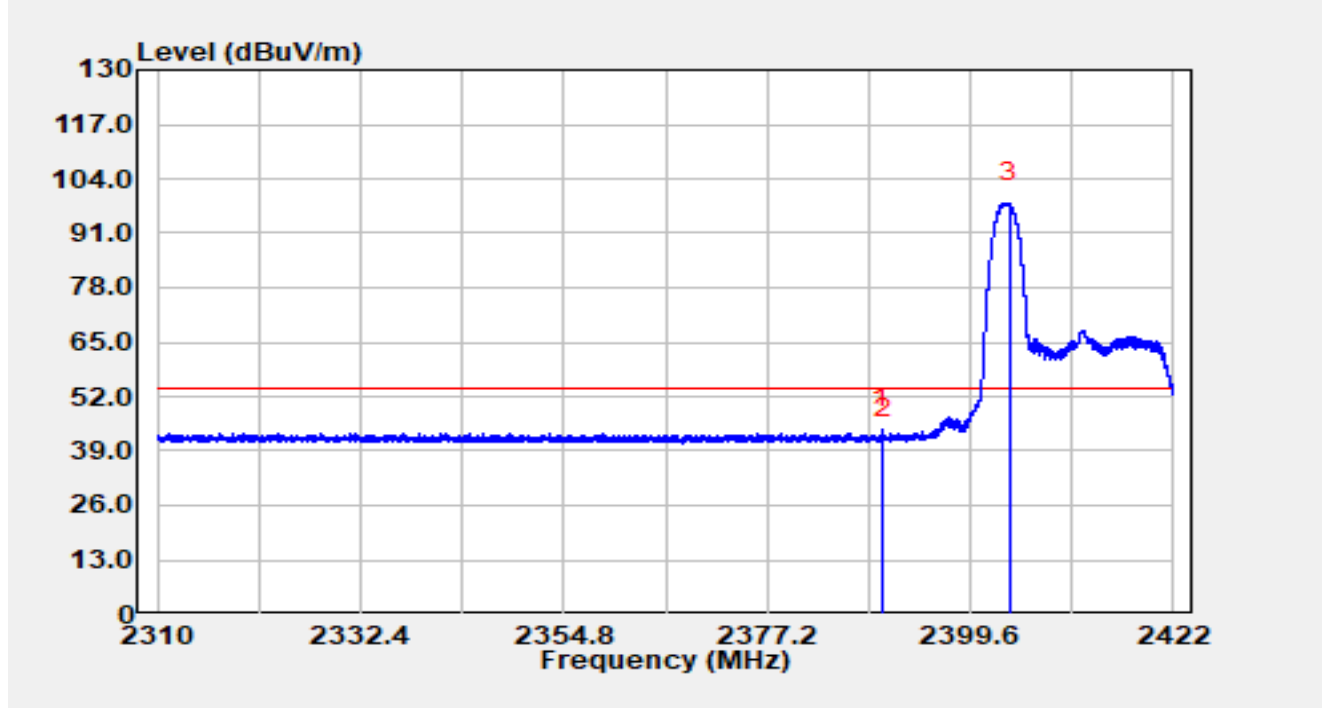


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.90	12.41	31.96	44.36	-9.64	54.00	Average
2		2390.00	9.93	31.96	41.89	-12.11	54.00	Average
3		2403.90	66.31	31.89	98.20	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

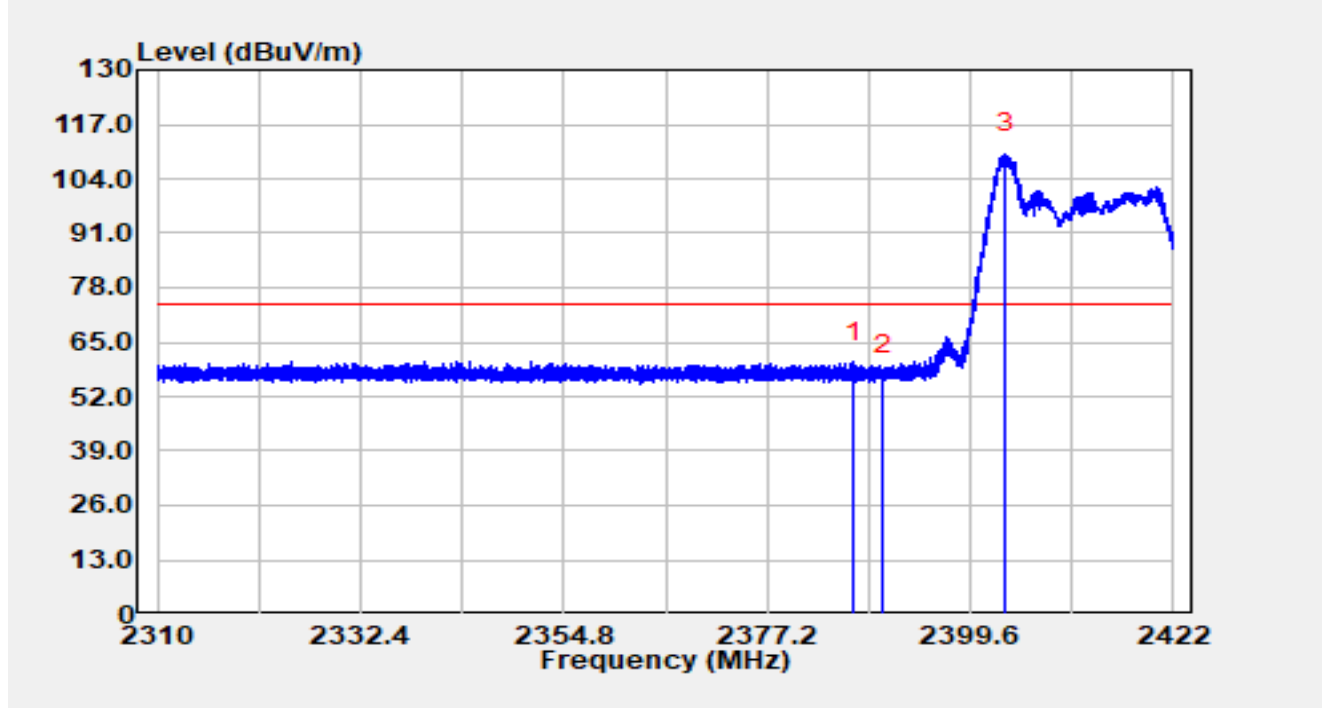


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.82	28.37	31.97	60.33	-13.67	74.00	Peak
2		2390.00	25.31	31.96	57.27	-16.73	74.00	Peak
3		2403.53	78.16	31.89	110.05	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU26/0		

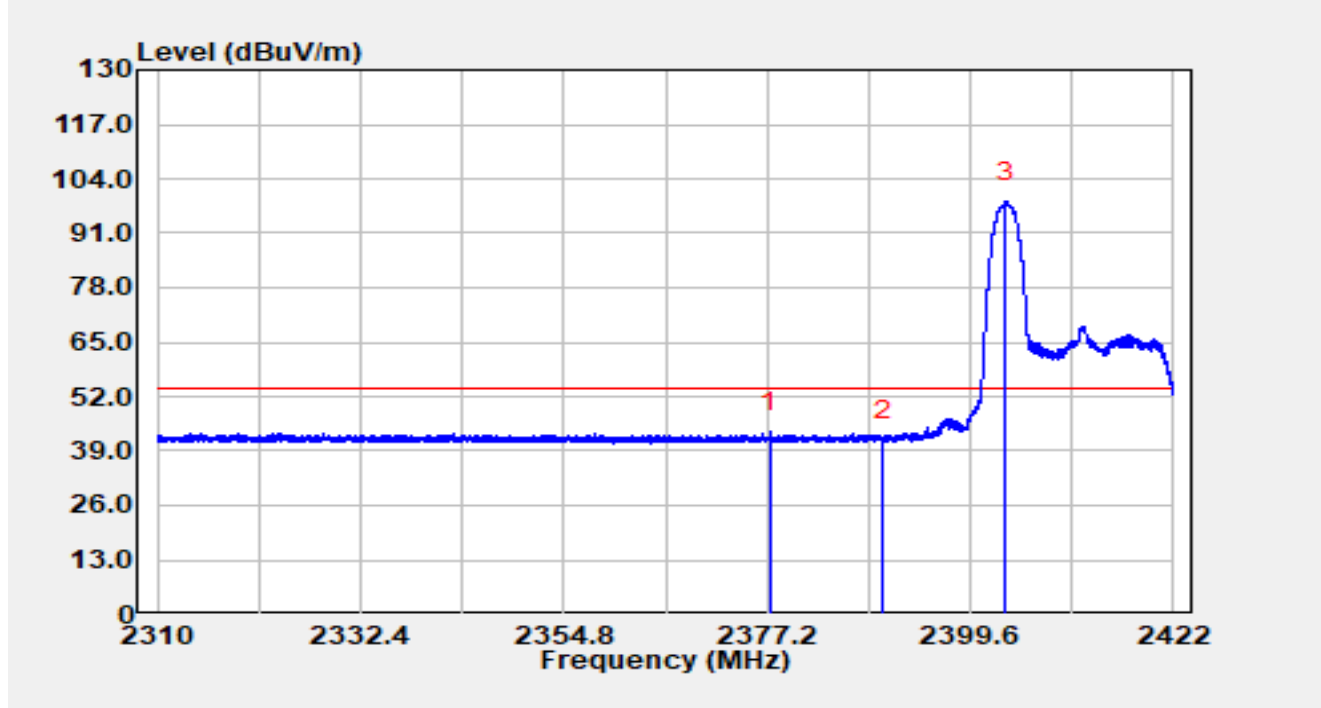


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2377.56	11.46	31.97	43.43	-10.57	54.00	Average
2		2390.00	9.74	31.96	41.69	-12.31	54.00	Average
3		2403.50	66.49	31.89	98.38	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

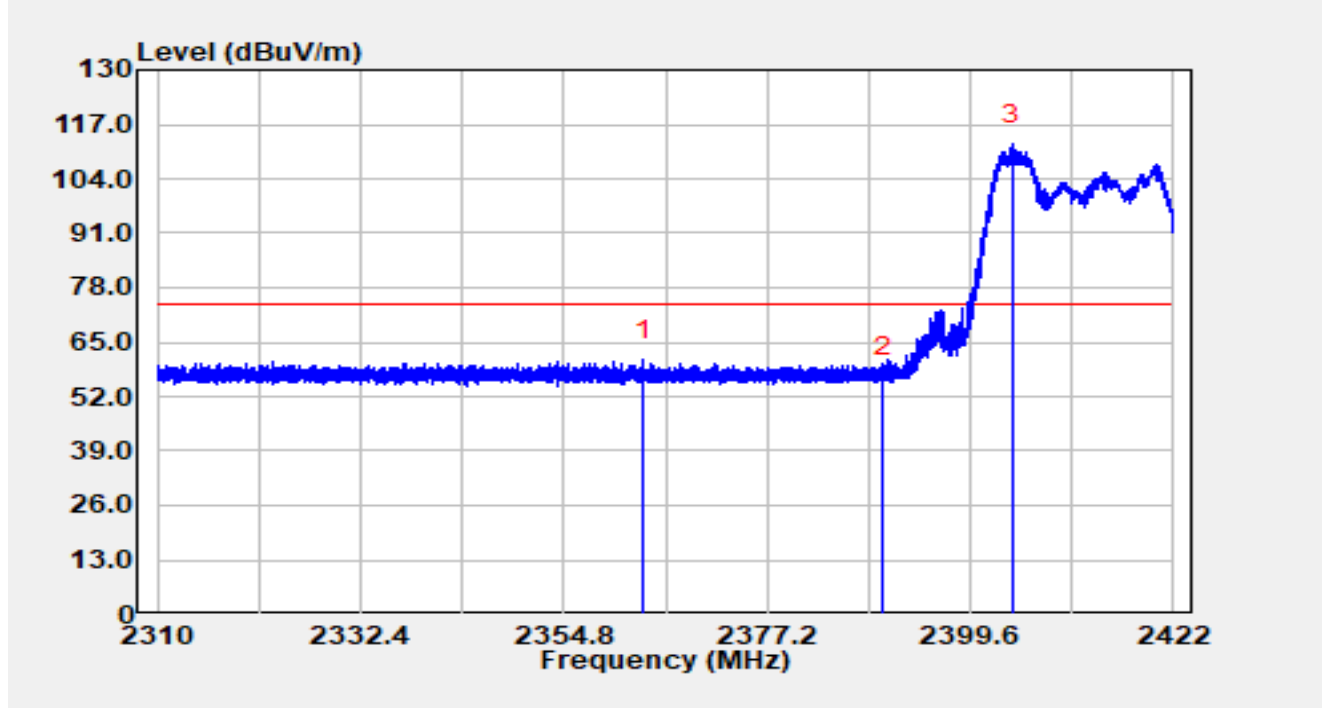


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2363.51	28.70	31.96	60.66	-13.34	74.00	Peak
2		2390.00	24.93	31.96	56.88	-17.12	74.00	Peak
3		2404.20	80.39	31.89	112.28	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

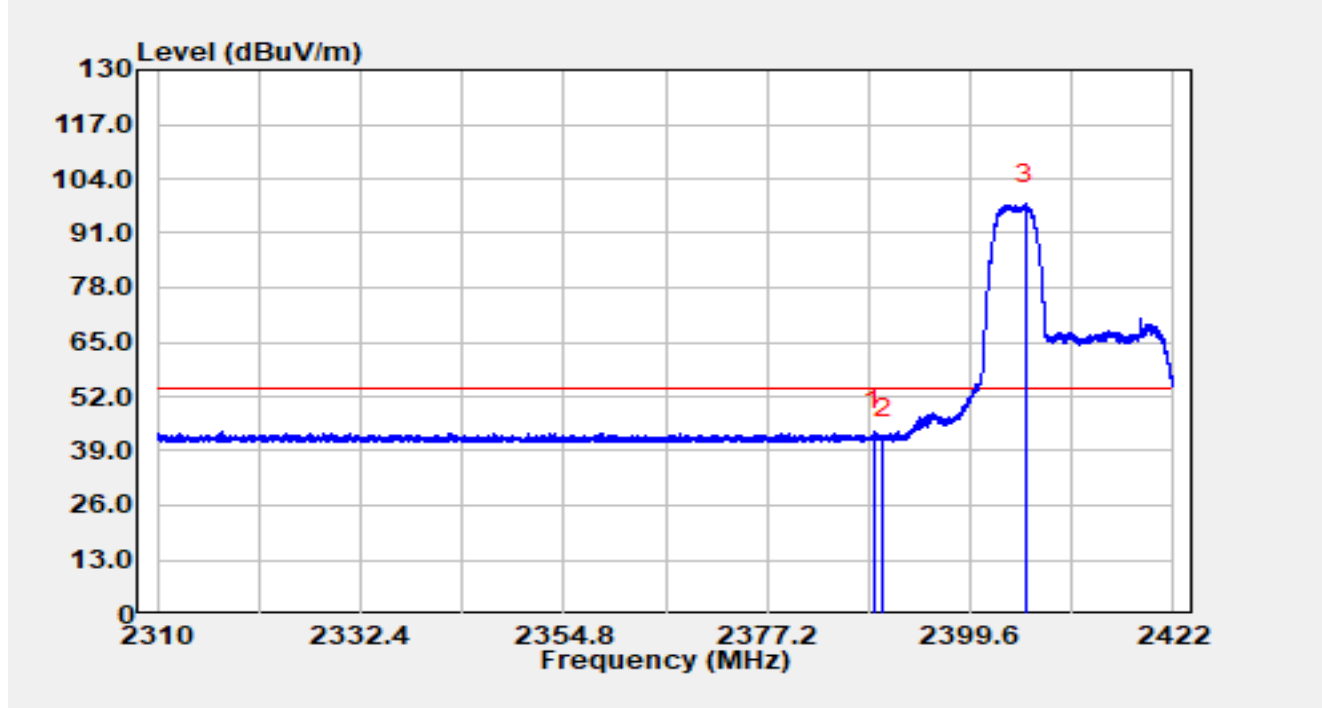


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.96	11.72	31.96	43.68	-10.32	54.00	Average
2		2390.00	10.12	31.96	42.08	-11.93	54.00	Average
3		2405.70	66.05	31.88	97.93	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

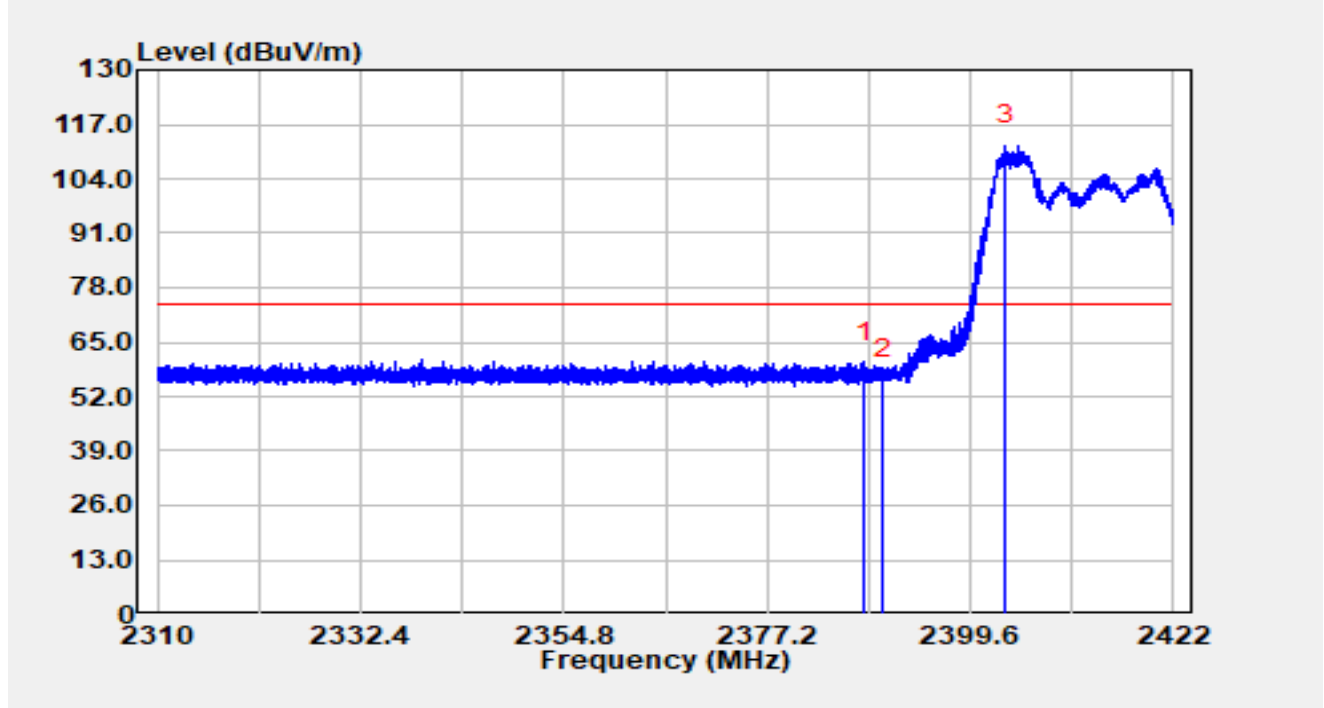


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.99	28.33	31.96	60.29	-13.71	74.00	Peak
2		2390.00	24.26	31.96	56.22	-17.78	74.00	Peak
3		2403.53	80.07	31.89	111.96	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU52/37		

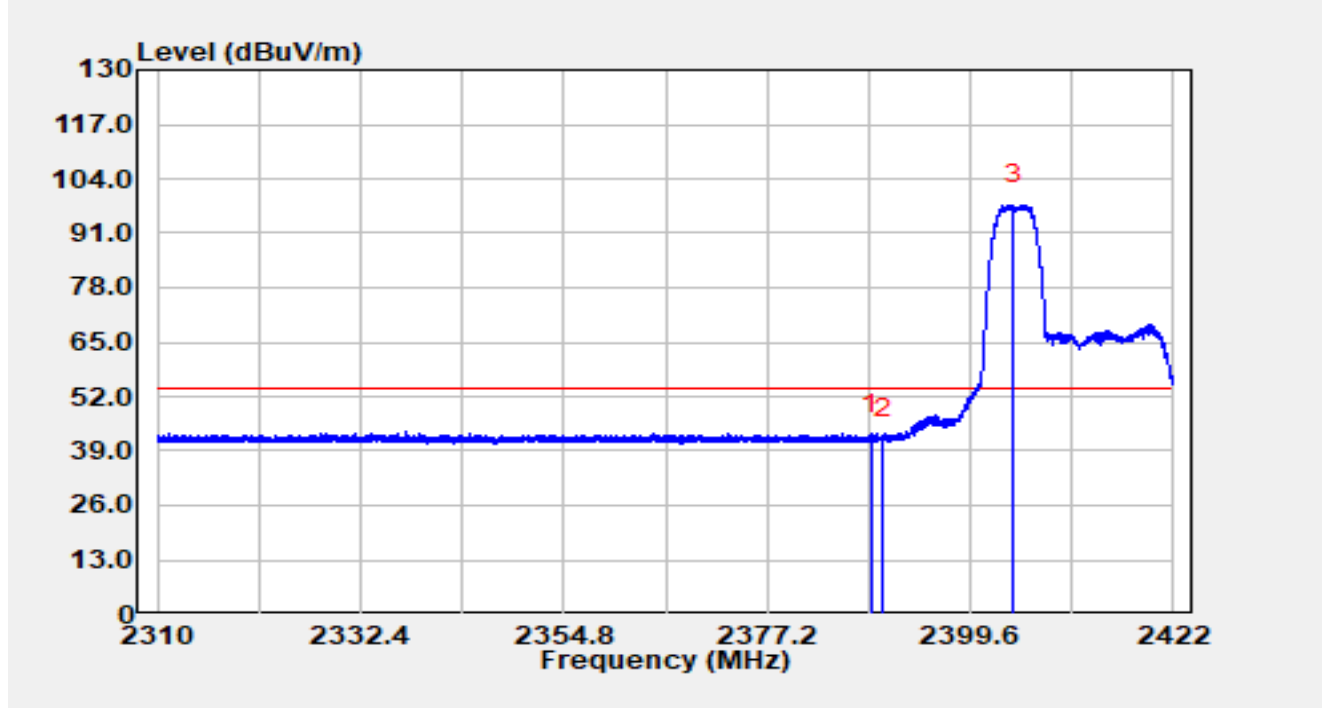

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2388.71	11.09	31.96	43.05	-10.95	54.00	Average
2		2390.00	9.83	31.96	41.79	-12.21	54.00	Average
3		2404.34	65.76	31.89	97.65	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).