


Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

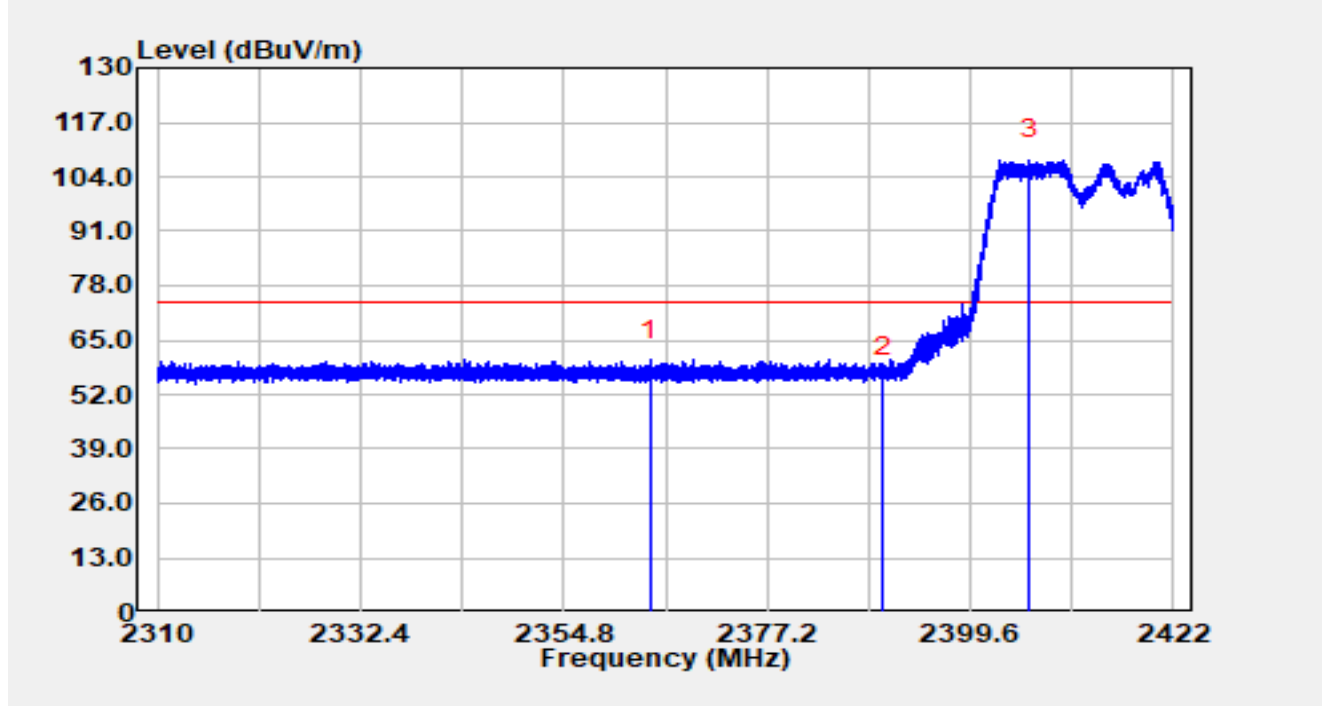


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2364.28	28.36	31.96	60.32	-13.68	74.00	Peak
2		2390.00	24.29	31.96	56.25	-17.75	74.00	Peak
3		2406.05	76.12	31.88	108.01	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

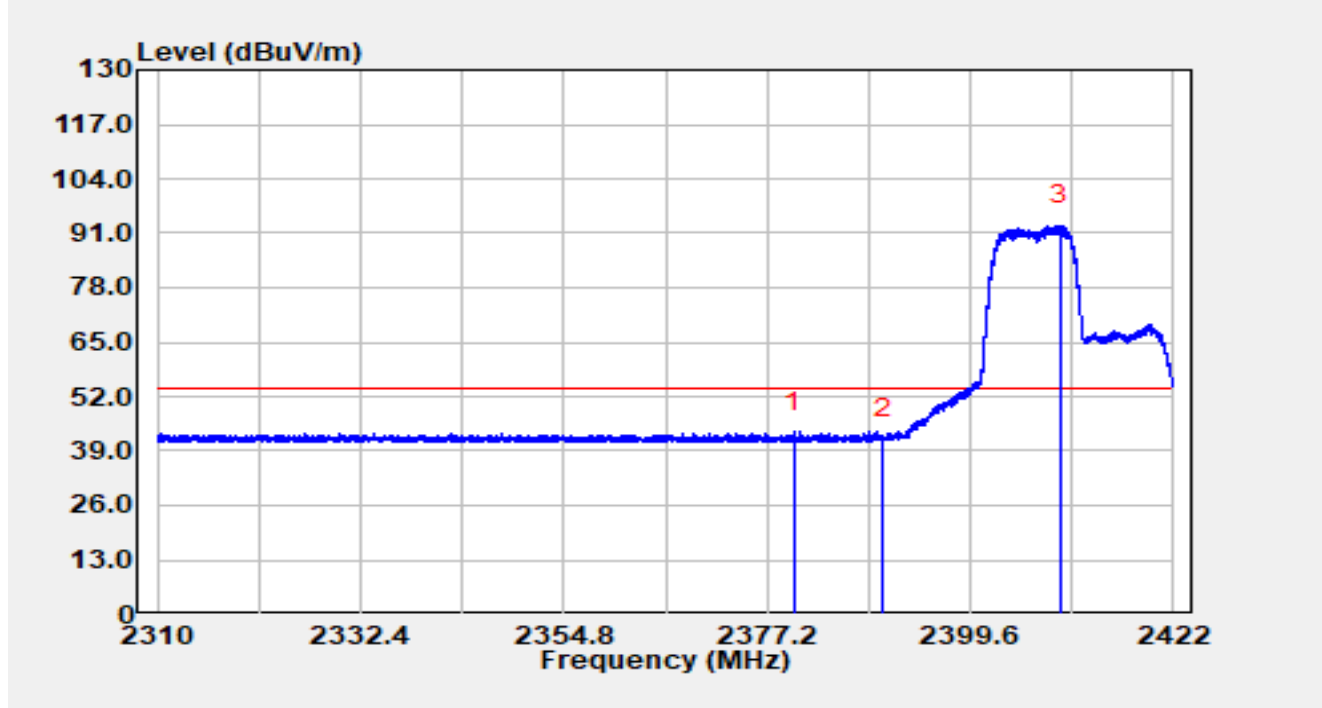


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.21	11.53	31.97	43.50	-10.50	54.00	Average
2		2390.00	9.78	31.96	41.73	-12.27	54.00	Average
3		2409.46	60.91	31.87	92.78	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

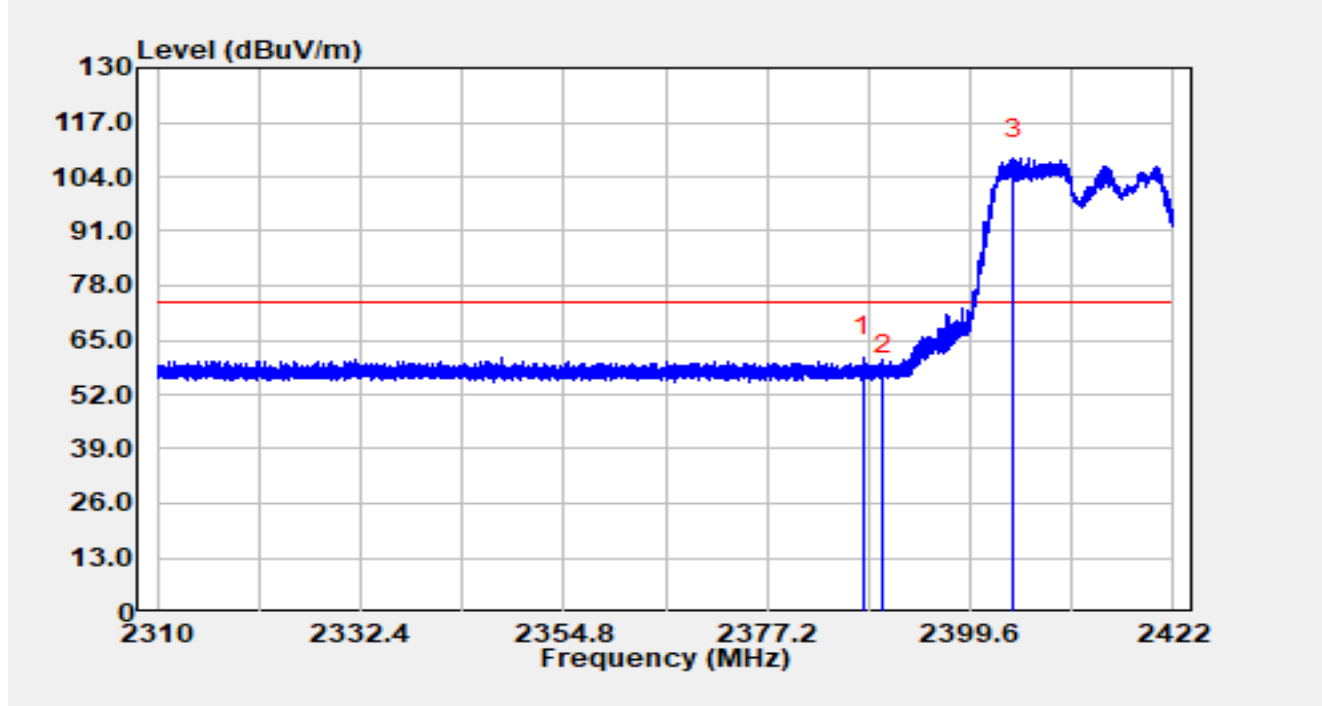


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.73	28.93	31.96	60.89	-13.11	74.00	Peak
2		2390.00	24.48	31.96	56.43	-17.57	74.00	Peak
3		2404.39	76.44	31.89	108.33	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU106/53		

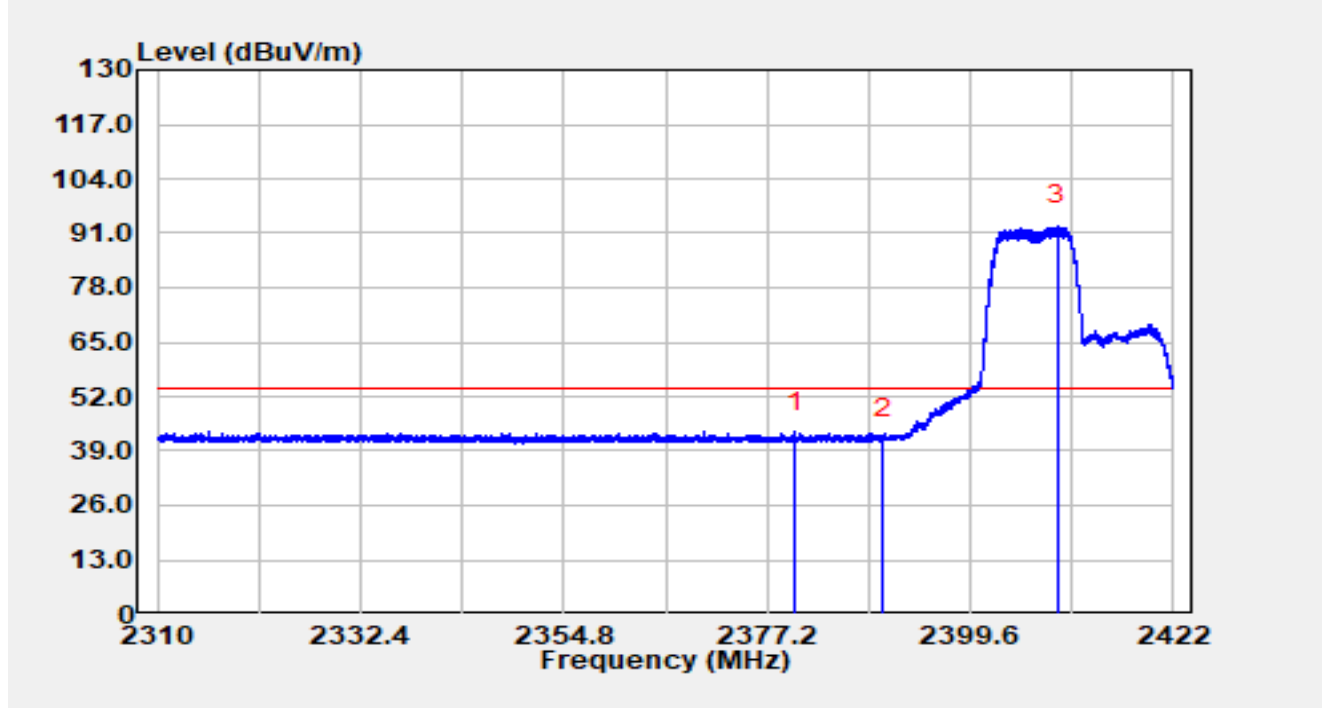


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.27	11.61	31.97	43.58	-10.42	54.00	Average
2		2390.00	10.00	31.96	41.95	-12.05	54.00	Average
3		2409.24	60.92	31.87	92.79	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU242/61		

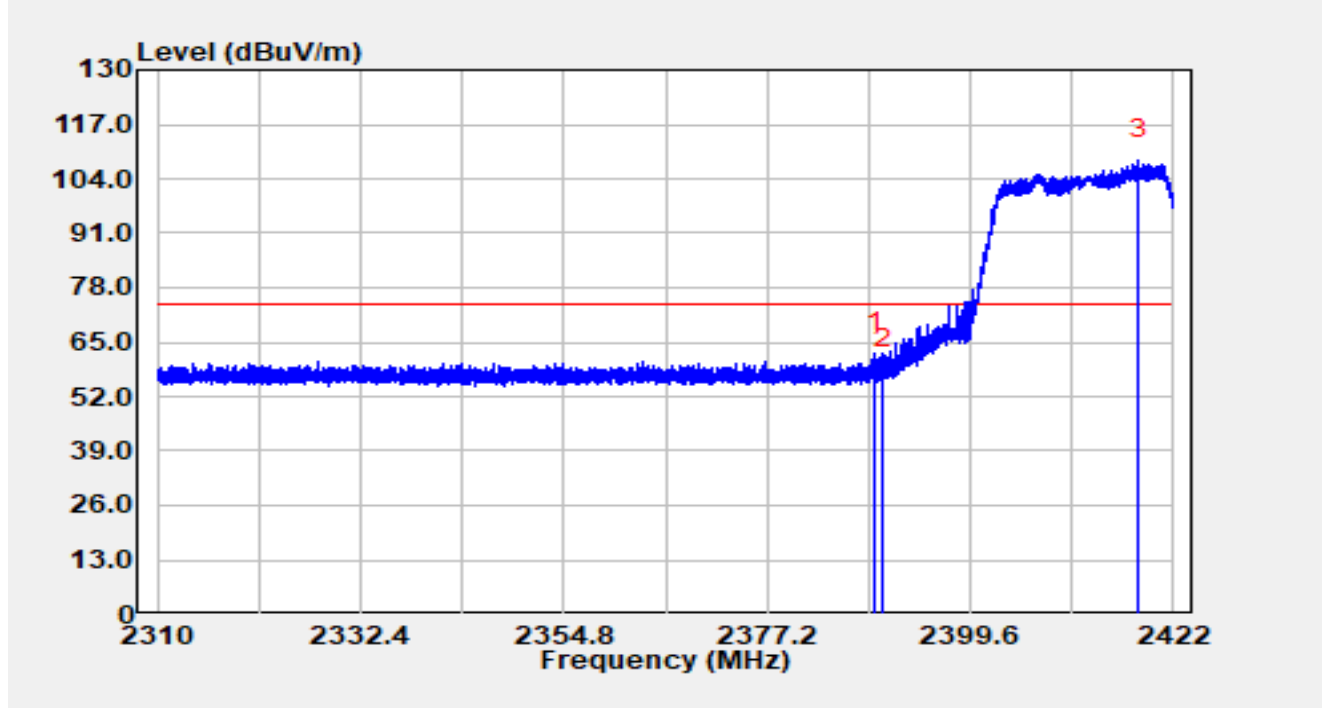


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.05	30.56	31.96	62.52	-11.48	74.00	Peak
2		2390.00	26.66	31.96	58.62	-15.38	74.00	Peak
3		2418.15	76.82	31.84	108.66	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU242/61		

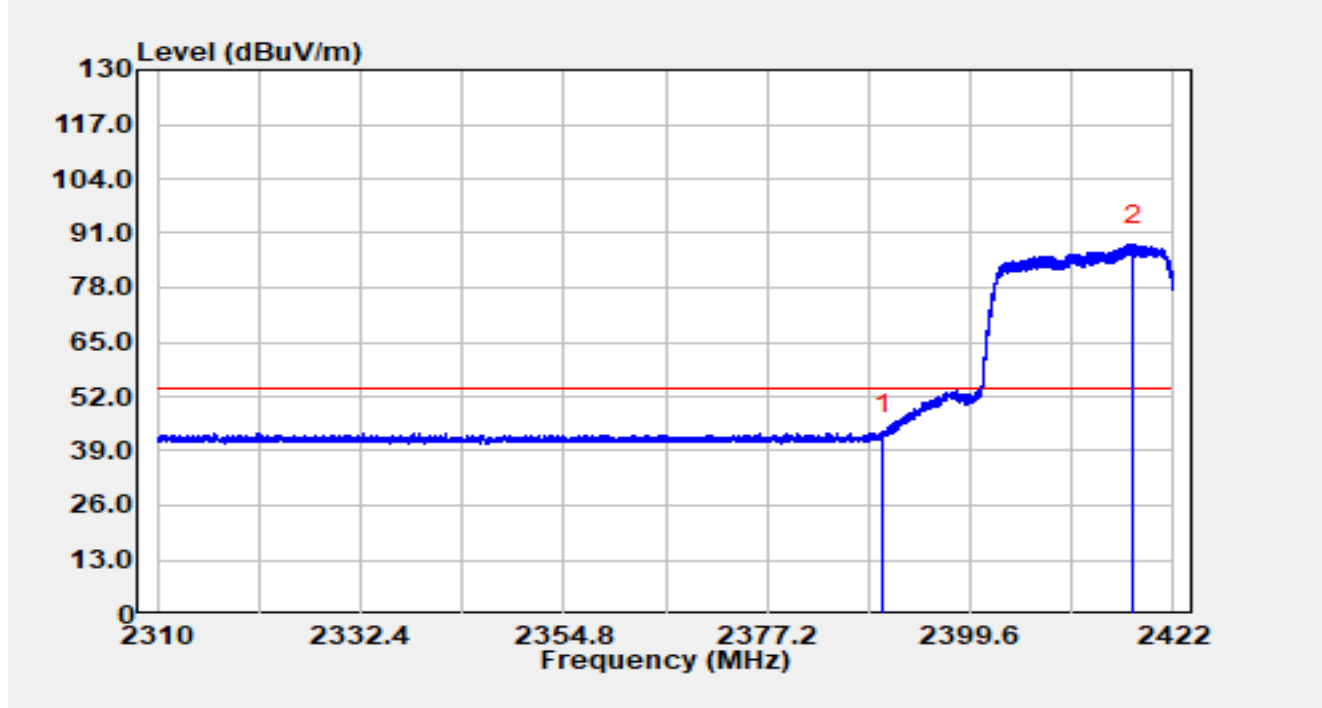


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2390.00	11.19	31.96	43.15	-10.85	54.00	Average
2		2417.59	56.42	31.84	88.26	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU242/61		

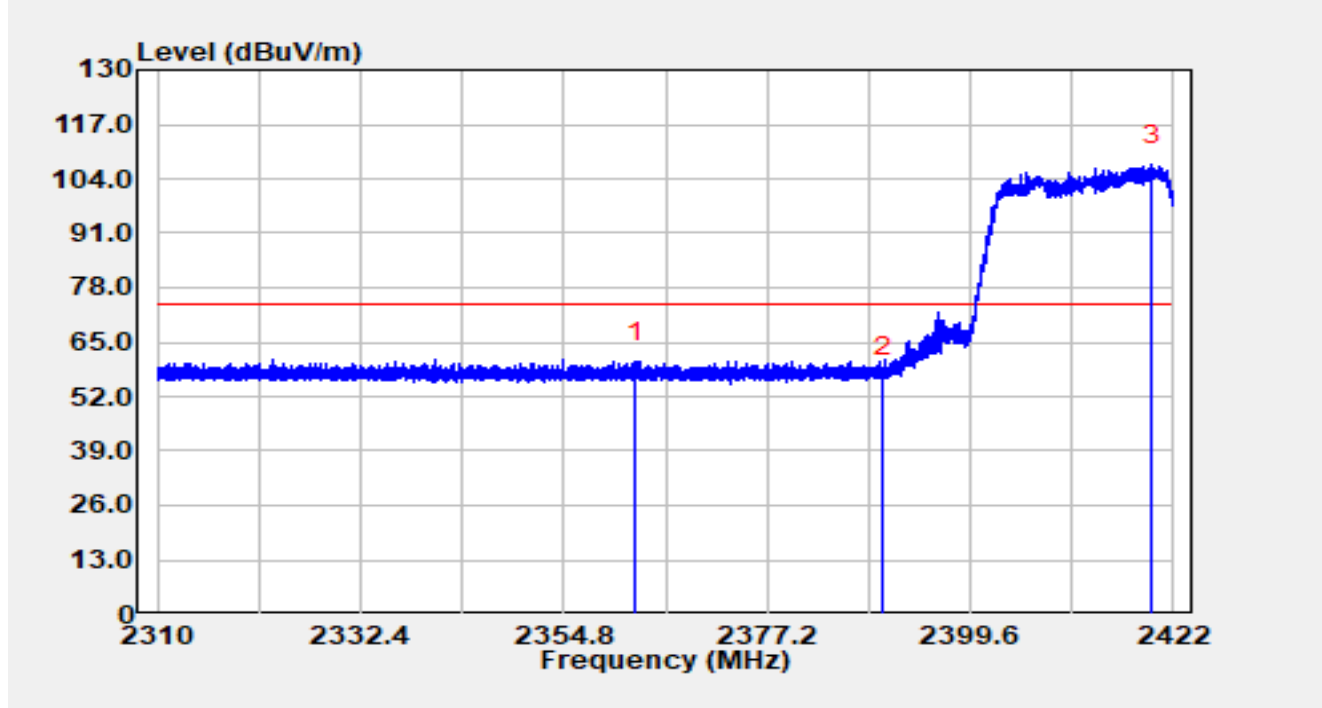


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2362.64	28.37	31.96	60.34	-13.66	74.00	Peak
2		2390.00	24.79	31.96	56.74	-17.26	74.00	Peak
3		2419.55	75.38	31.84	107.21	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2412MHz RU242/61		

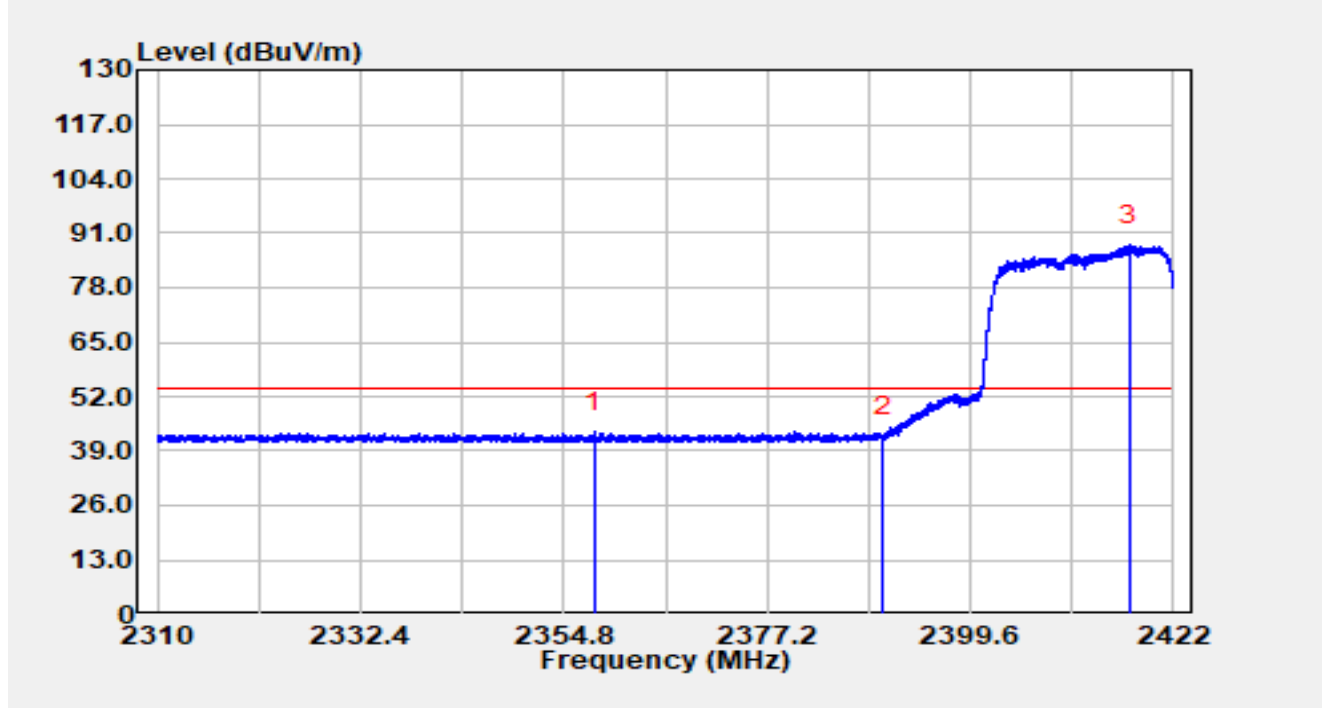


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2358.10	11.67	31.97	43.63	-10.37	54.00	Average
2		2390.00	10.65	31.96	42.61	-11.39	54.00	Average
3		2417.12	56.29	31.84	88.14	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

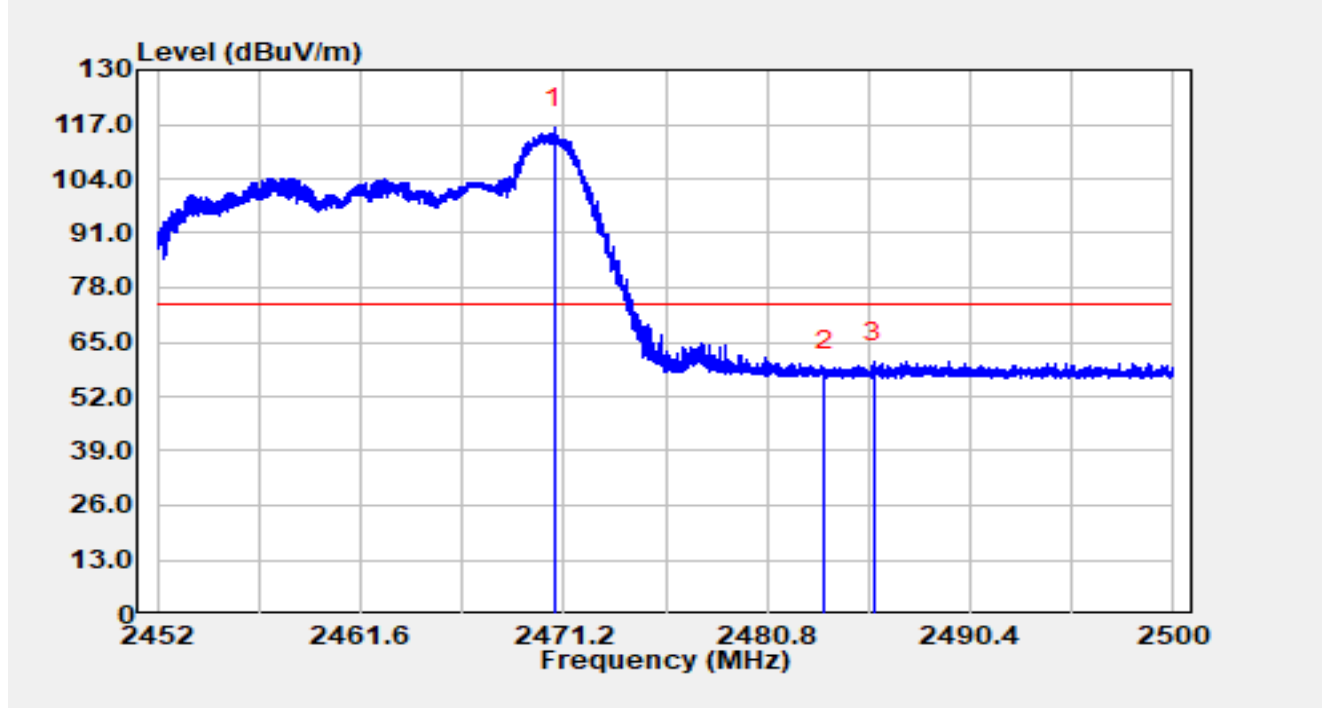


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2470.73	84.39	31.81	116.20	N/A	N/A	Peak
2		2483.50	26.39	31.81	58.20	-15.80	74.00	Peak
3	*	2485.83	28.48	31.81	60.29	-13.71	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

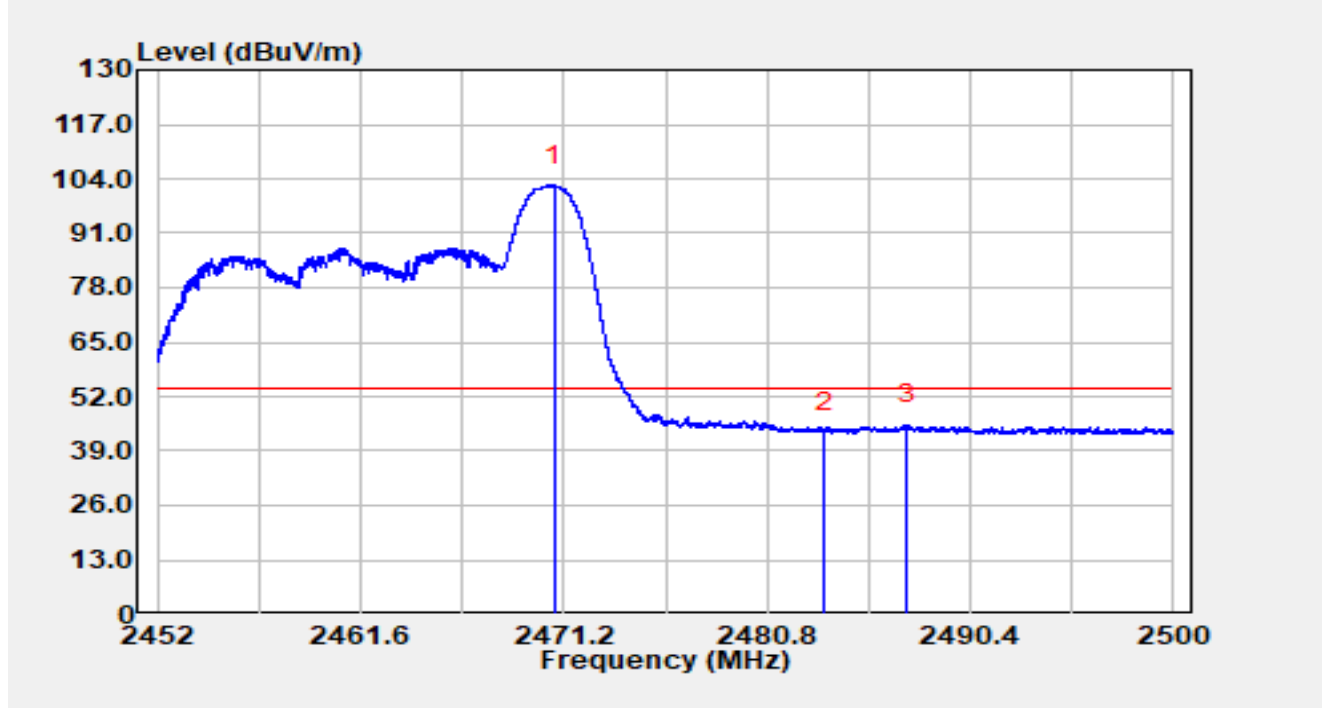


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2470.75	70.59	31.81	102.40	N/A	N/A	Average
2		2483.50	11.76	31.81	43.56	-10.44	54.00	Average
3	*	2487.42	13.45	31.81	45.26	-8.74	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

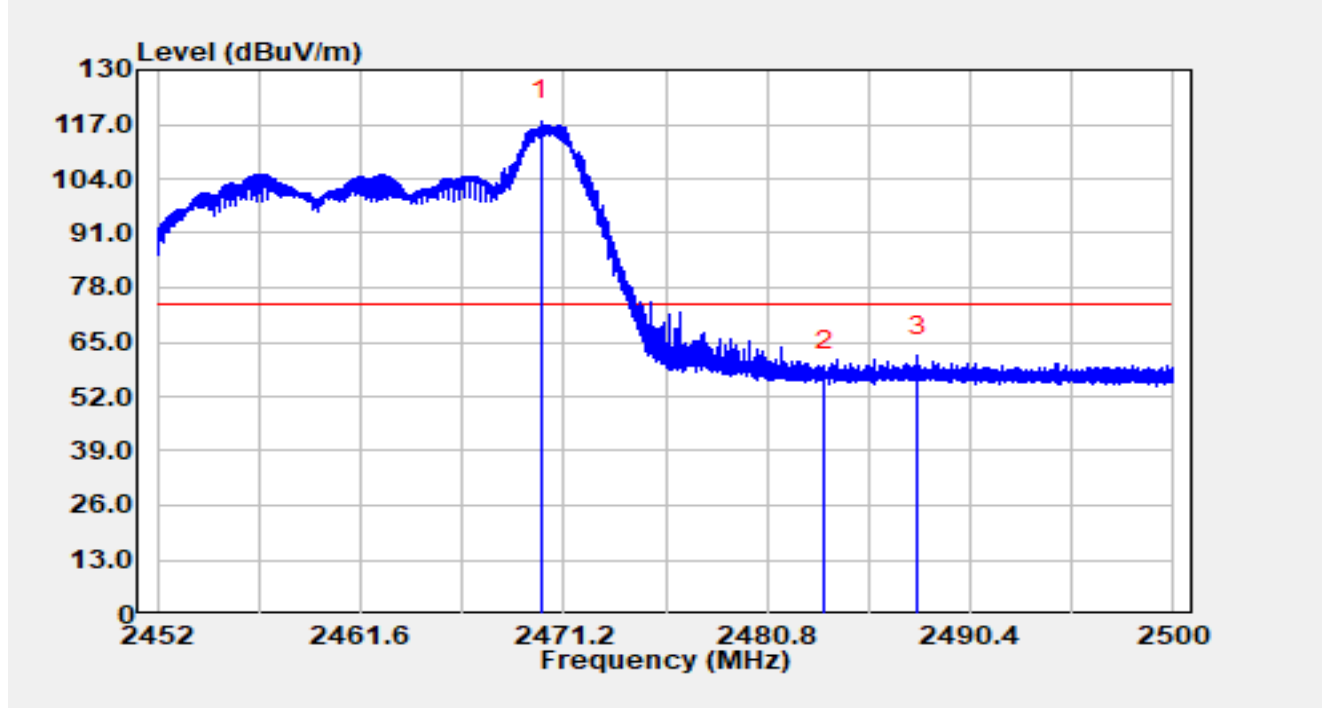


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2470.14	86.05	31.81	117.86	N/A	N/A	Peak
2		2483.50	26.18	31.81	57.98	-16.02	74.00	Peak
3	*	2487.92	29.87	31.81	61.68	-12.32	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU26/8		

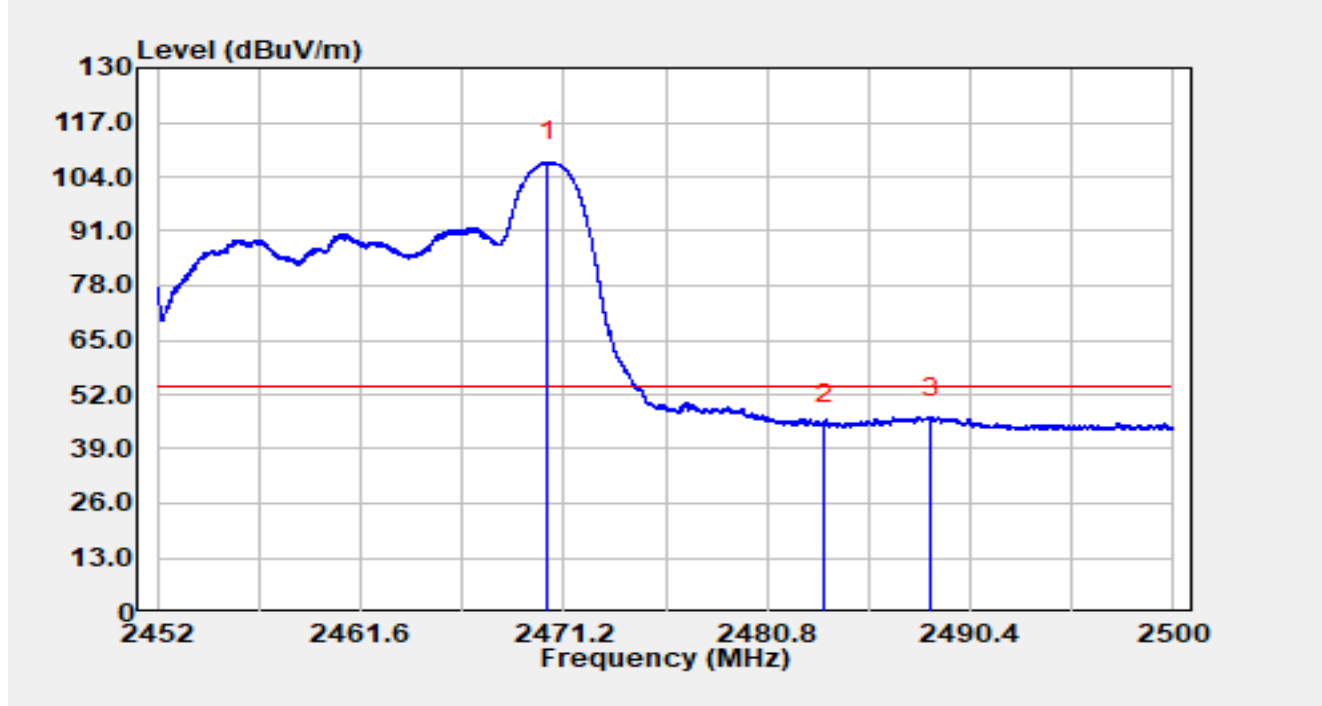


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2470.47	75.66	31.81	107.47	N/A	N/A	Average
2		2483.50	13.14	31.81	44.95	-9.05	54.00	Average
3	*	2488.57	14.73	31.81	46.54	-7.46	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

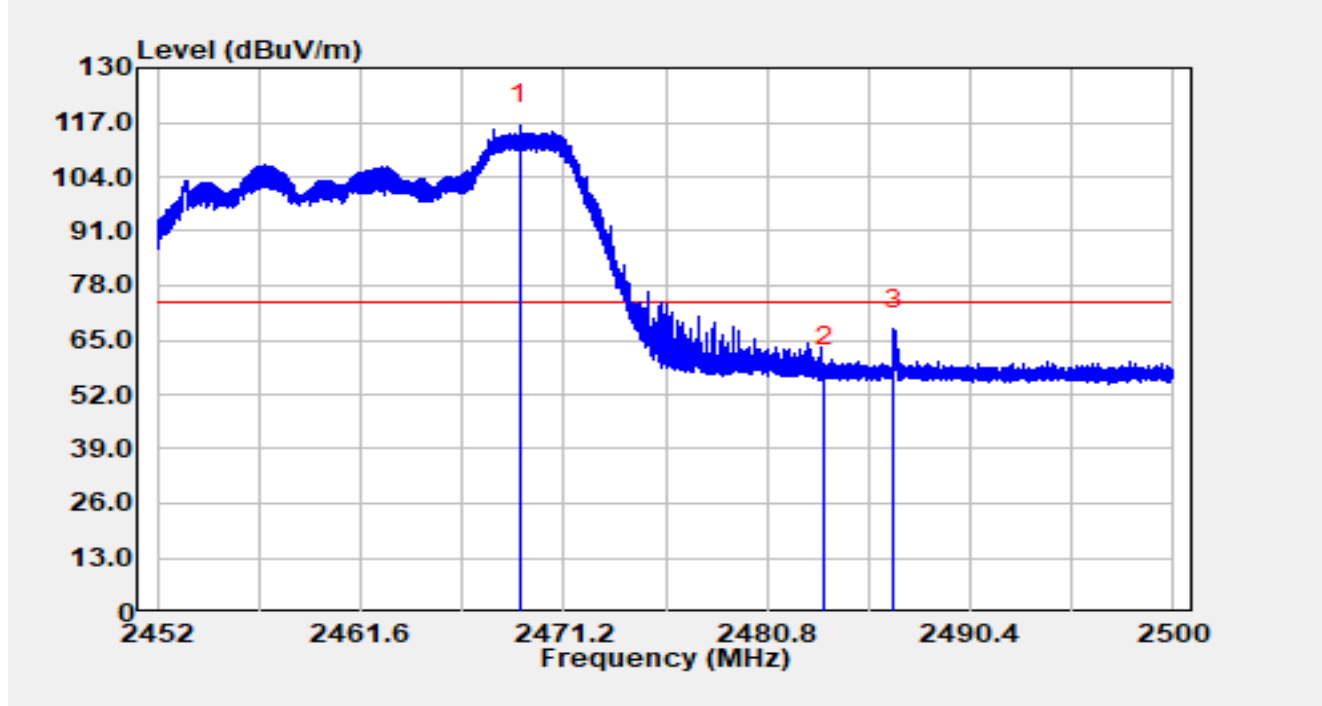


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.09	84.55	31.82	116.37	N/A	N/A	Peak
2		2483.50	26.86	31.81	58.66	-15.34	74.00	Peak
3	*	2486.81	35.68	31.81	67.49	-6.51	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

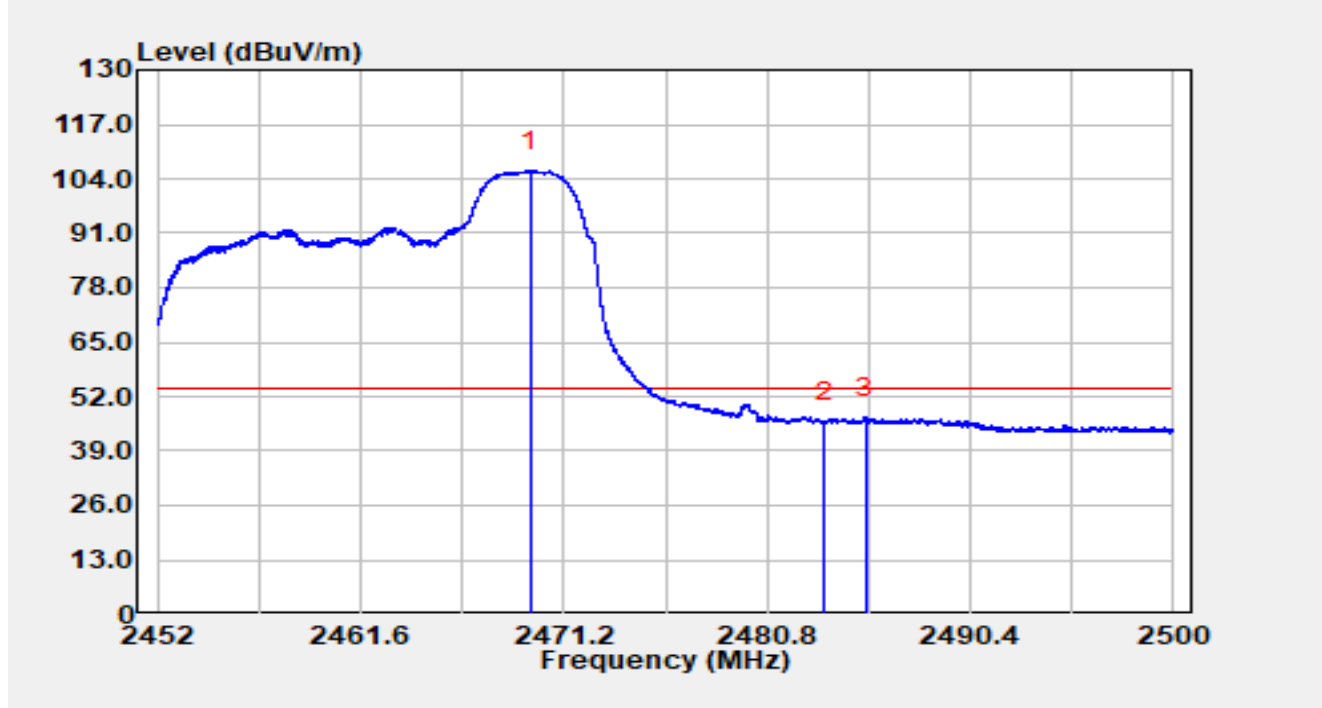


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.63	74.11	31.82	105.92	N/A	N/A	Average
2		2483.50	14.17	31.81	45.97	-8.03	54.00	Average
3	*	2485.47	15.23	31.81	47.04	-6.96	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

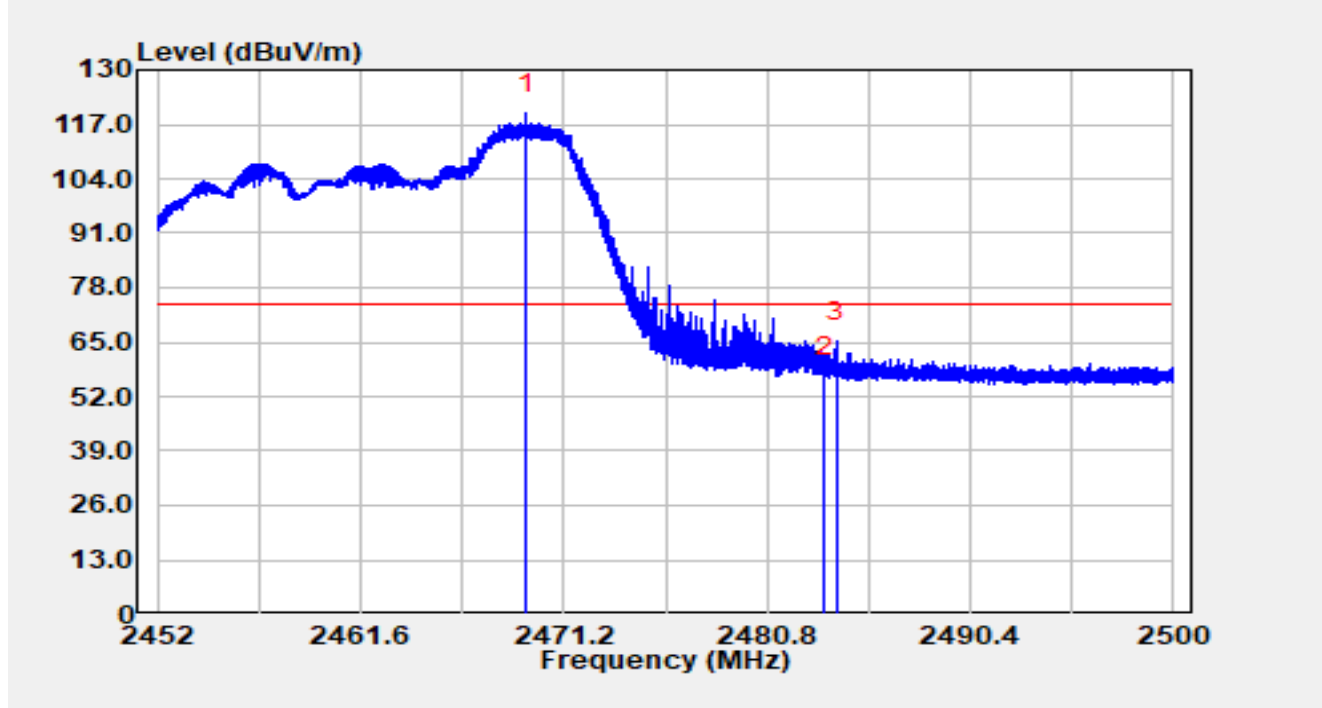


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.43	87.67	31.82	119.48	N/A	N/A	Peak
2		2483.50	24.75	31.81	56.56	-17.44	74.00	Peak
3	*	2484.09	33.28	31.81	65.09	-8.91	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU52/40		

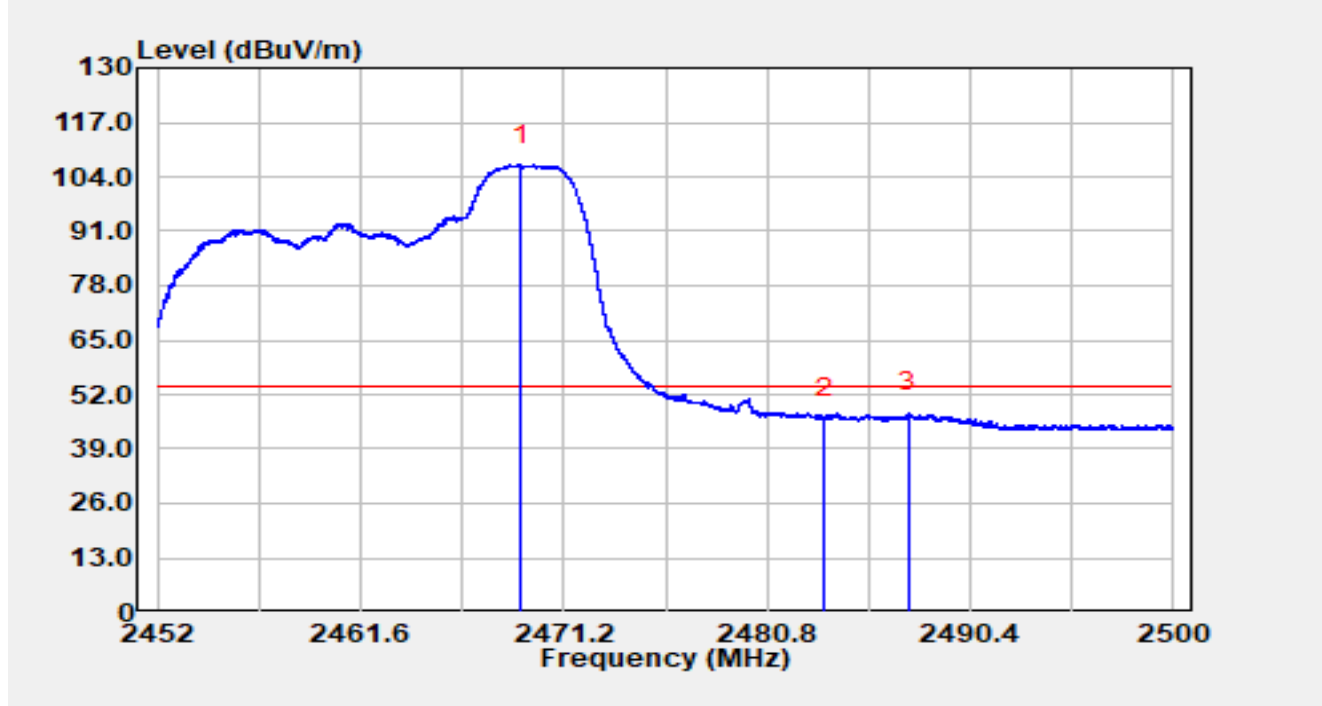


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.19	75.01	31.82	106.83	N/A	N/A	Average
2		2483.50	14.42	31.81	46.23	-7.77	54.00	Average
3	*	2487.48	15.93	31.81	47.74	-6.26	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

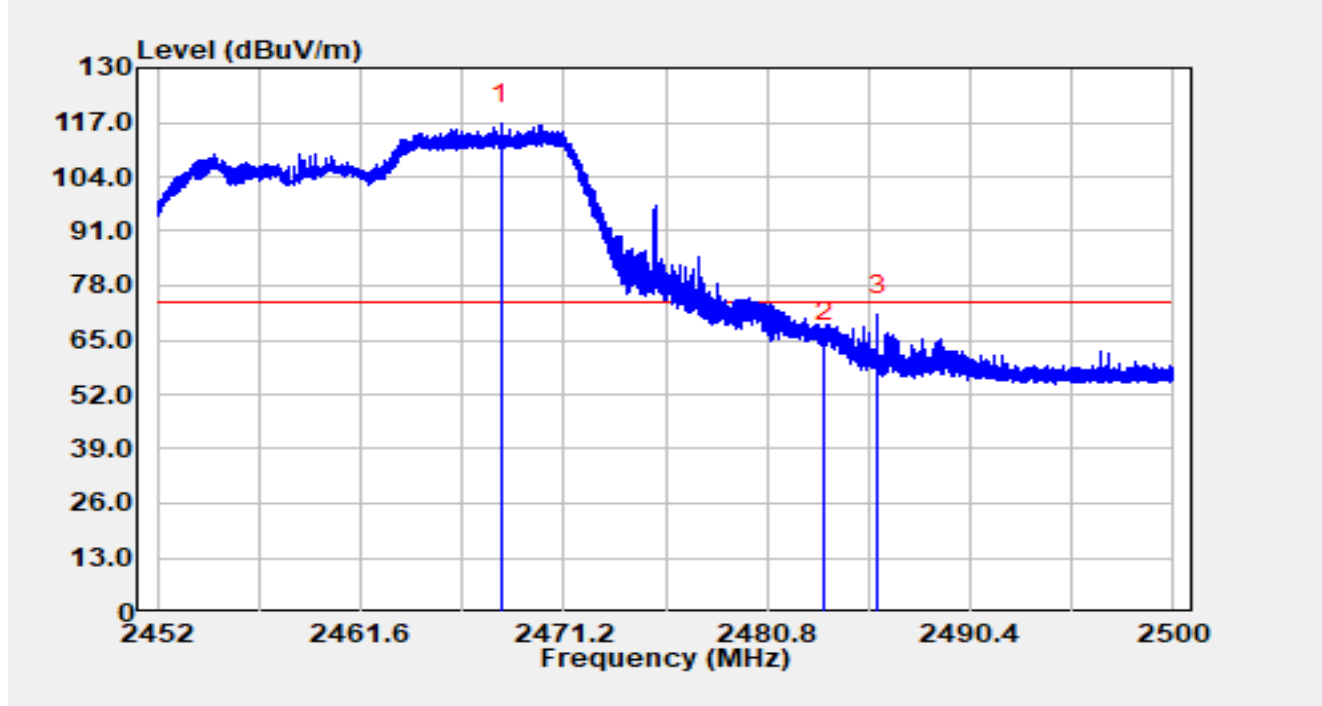


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2468.23	84.76	31.82	116.58	N/A	N/A	Peak
2		2483.50	32.93	31.81	64.74	-9.26	74.00	Peak
3	*	2486.03	39.18	31.81	70.99	-3.01	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

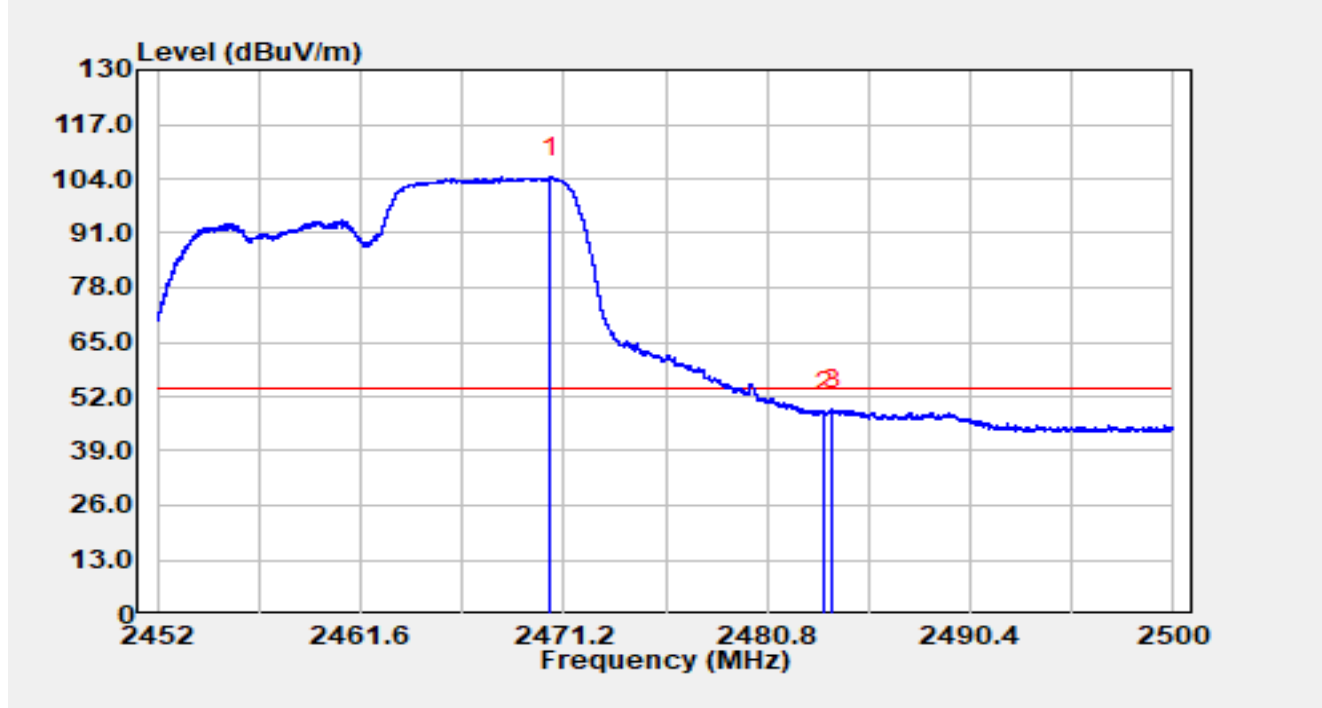


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2470.57	72.55	31.81	104.37	N/A	N/A	Average
2		2483.50	16.32	31.81	48.13	-5.87	54.00	Average
3	*	2483.91	17.17	31.81	48.97	-5.03	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

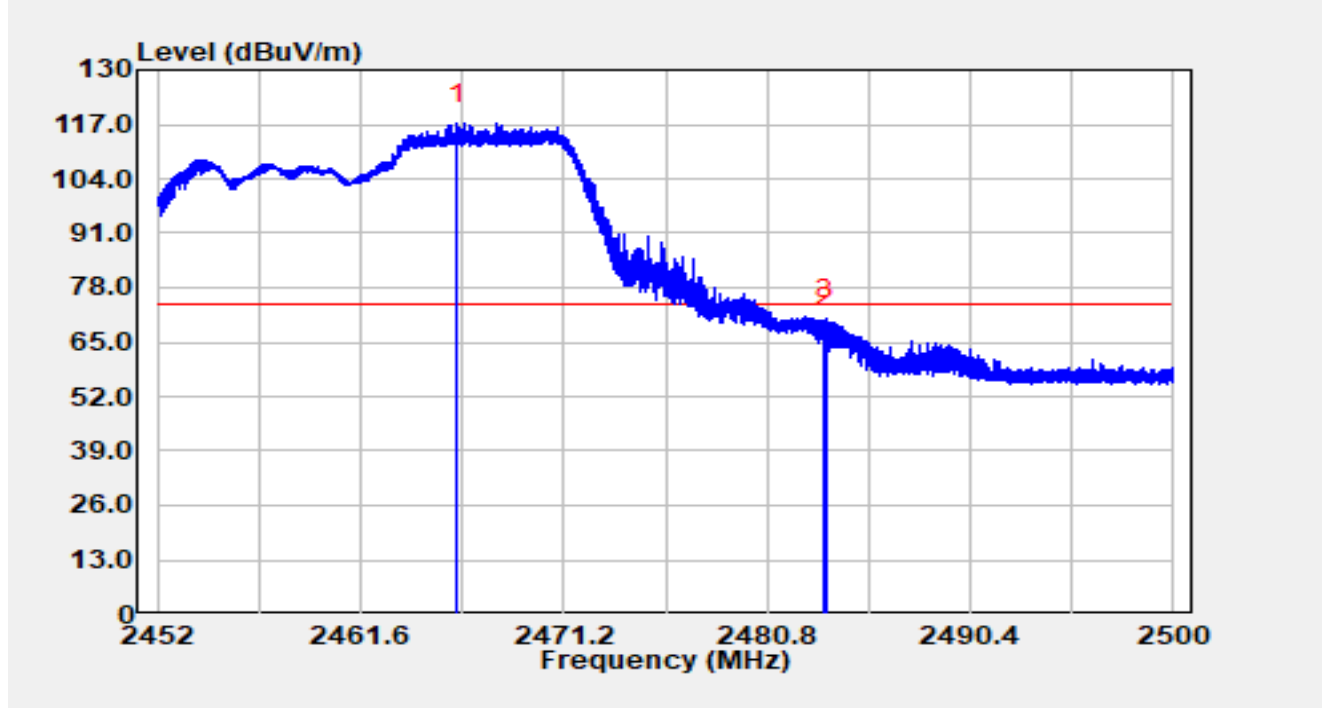


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.14	85.41	31.82	117.23	N/A	N/A	Peak
2		2483.50	36.43	31.81	68.24	-5.76	74.00	Peak
3	*	2483.55	38.60	31.81	70.41	-3.59	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU106/54		

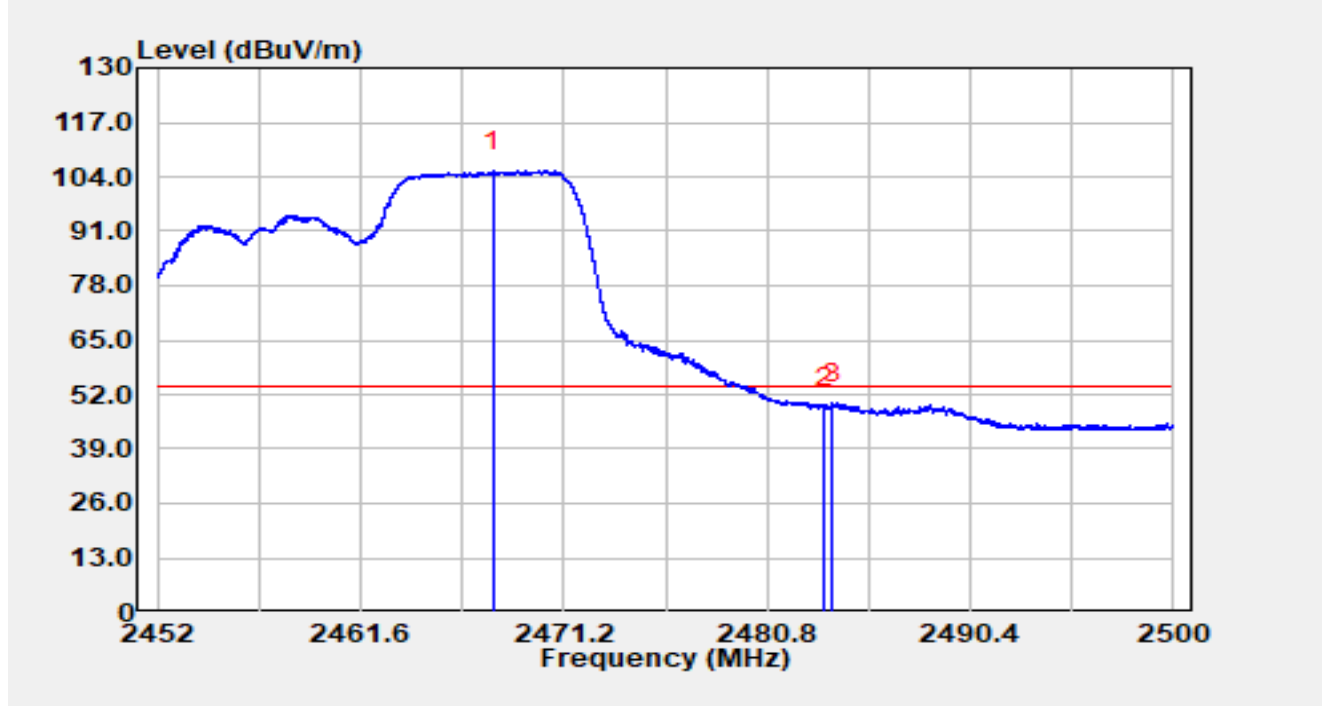


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.86	73.59	31.82	105.41	N/A	N/A	Average
2		2483.50	16.98	31.81	48.79	-5.21	54.00	Average
3	*	2483.91	18.13	31.81	49.93	-4.07	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU242/61		

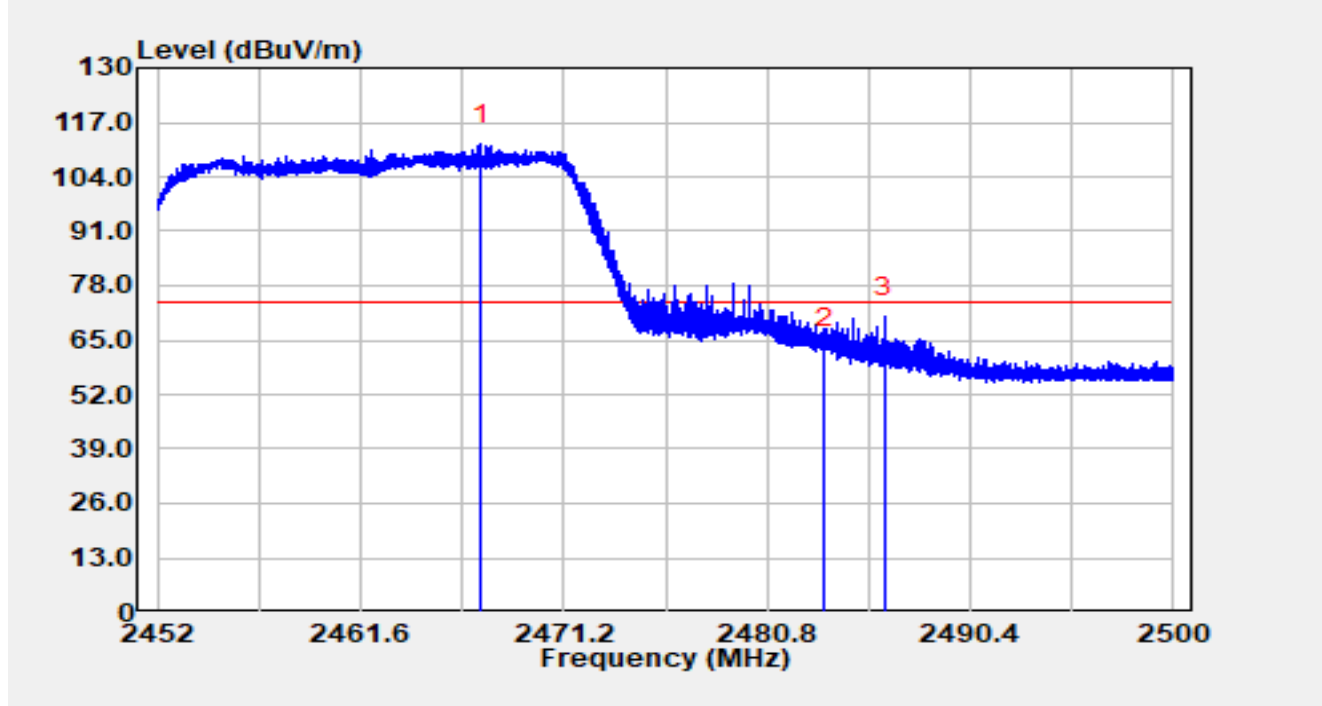


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.30	80.03	31.82	111.85	N/A	N/A	Peak
2		2483.50	31.07	31.81	62.88	-11.12	74.00	Peak
3	*	2486.37	38.69	31.81	70.50	-3.50	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU242/61		

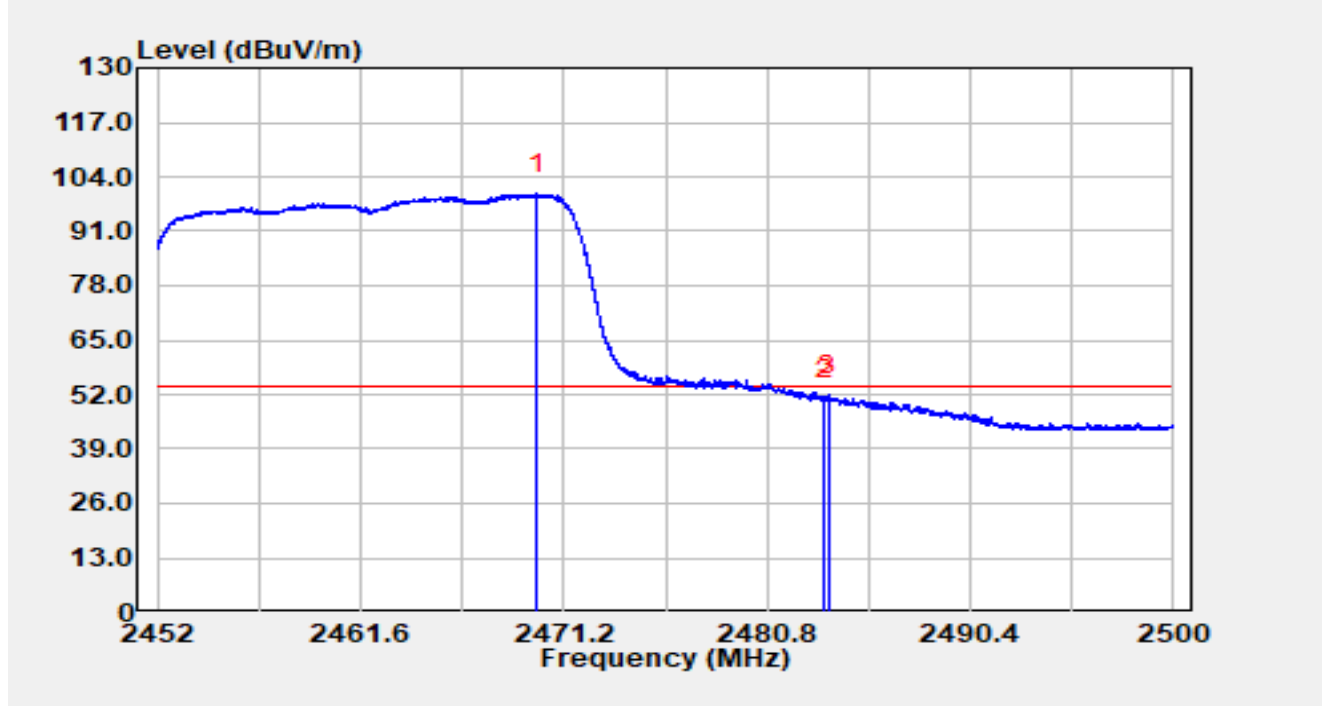


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.93	68.18	31.81	100.00	N/A	N/A	Average
2		2483.50	19.17	31.81	50.98	-3.02	54.00	Average
3	*	2483.69	20.02	31.81	51.83	-2.17	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU242/61		

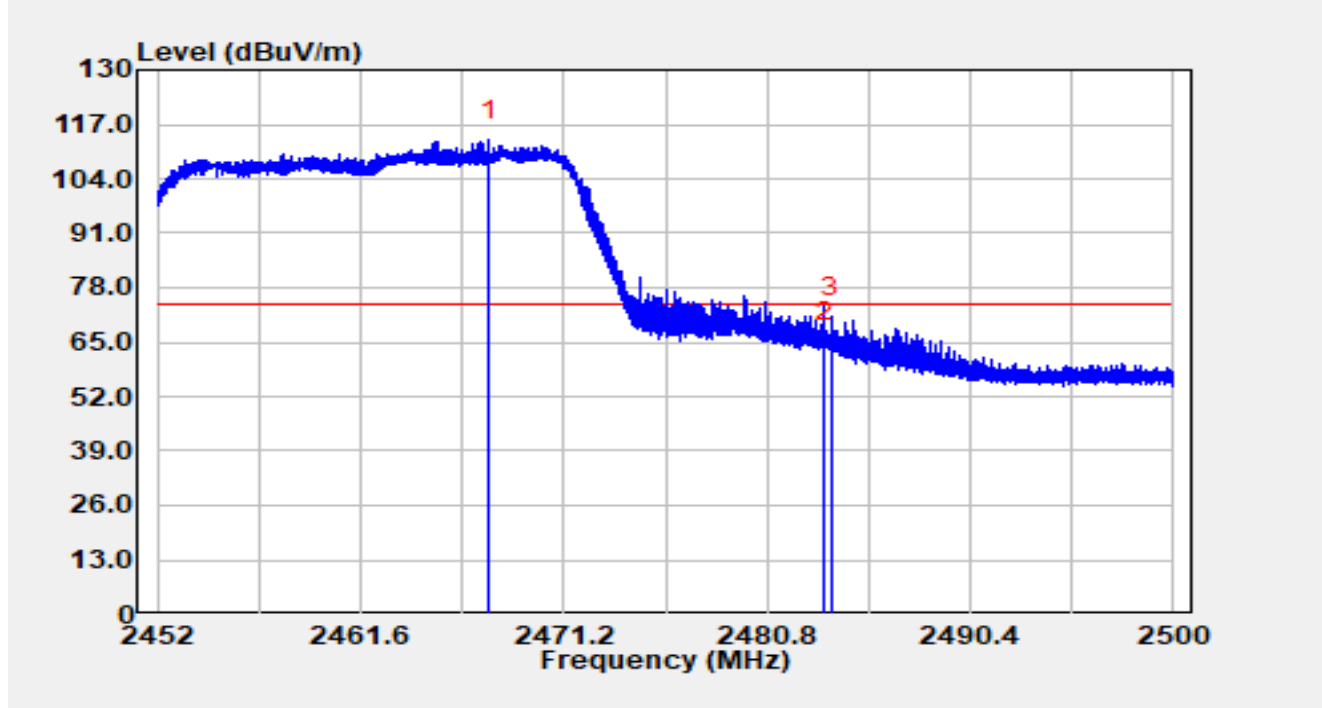


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.70	81.28	31.82	113.10	N/A	N/A	Peak
2		2483.50	33.00	31.81	64.80	-9.20	74.00	Peak
3	*	2483.81	39.21	31.81	71.01	-2.99	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-14
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE20 at 2462MHz RU242/61		

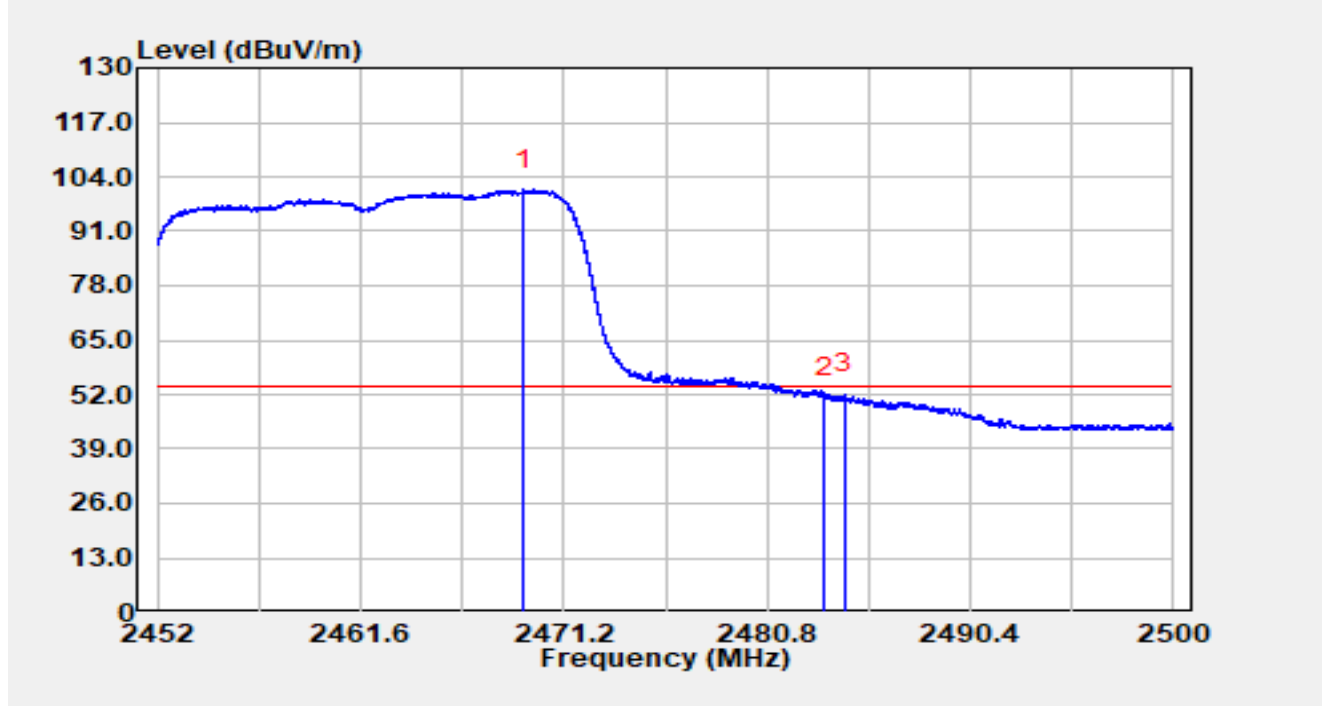


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2469.29	69.18	31.82	101.00	N/A	N/A	Average
2		2483.50	19.56	31.81	51.37	-2.63	54.00	Average
3	*	2484.47	20.29	31.81	52.10	-1.90	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU484/65		

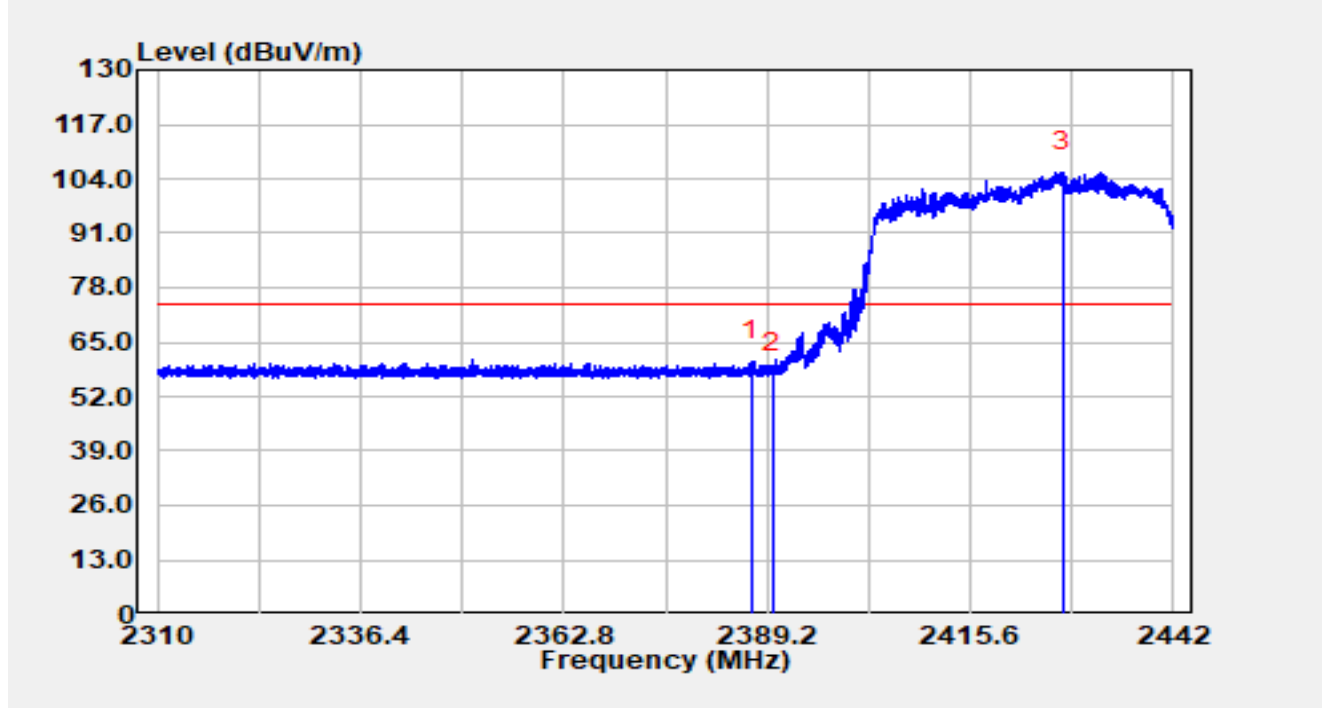


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.14	28.45	31.96	60.41	-13.59	74.00	Peak
2		2390.00	25.90	31.96	57.85	-16.15	74.00	Peak
3		2427.59	73.73	31.86	105.59	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU484/65		

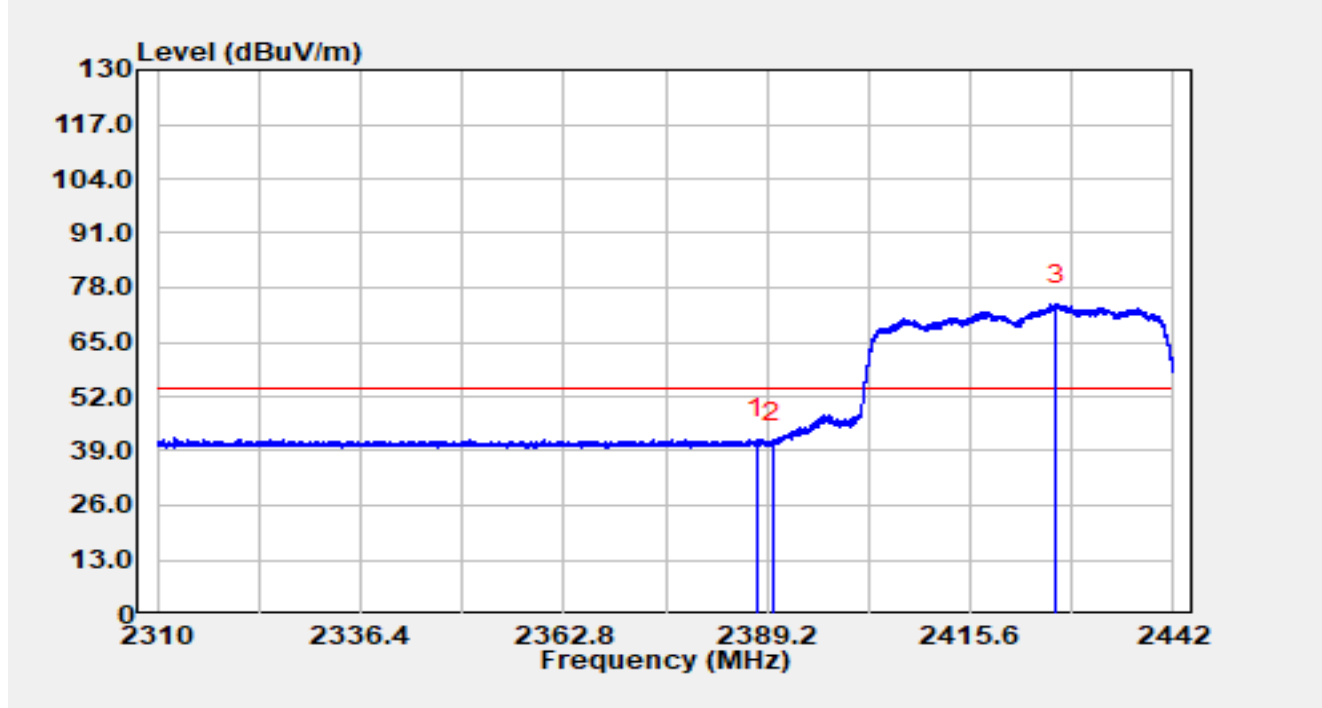


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2387.91	9.76	31.96	41.73	-12.27	54.00	Average
2		2390.00	8.93	31.96	40.88	-13.12	54.00	Average
3		2426.75	42.21	31.86	74.06	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU484/65		

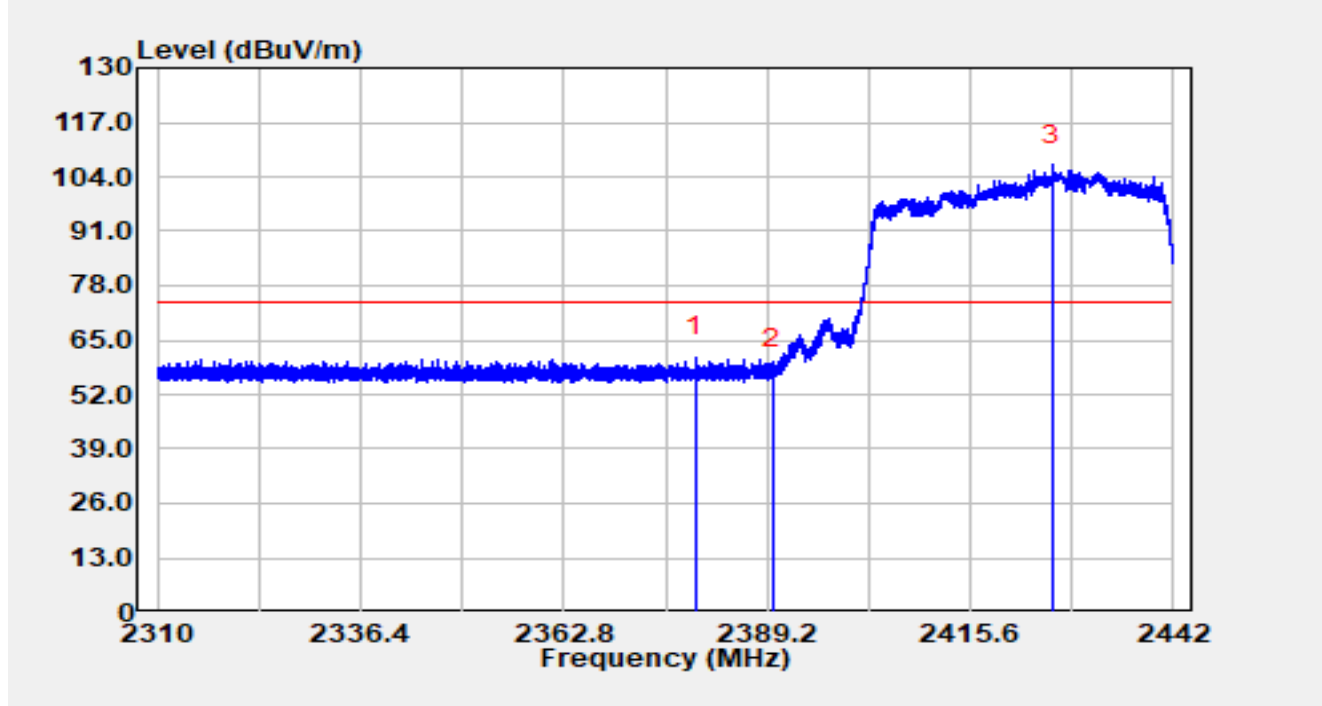


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2379.88	29.01	31.97	60.98	-13.02	74.00	Peak
2		2390.00	25.95	31.96	57.91	-16.09	74.00	Peak
3		2426.16	74.97	31.85	106.82	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2422MHz RU484/65		

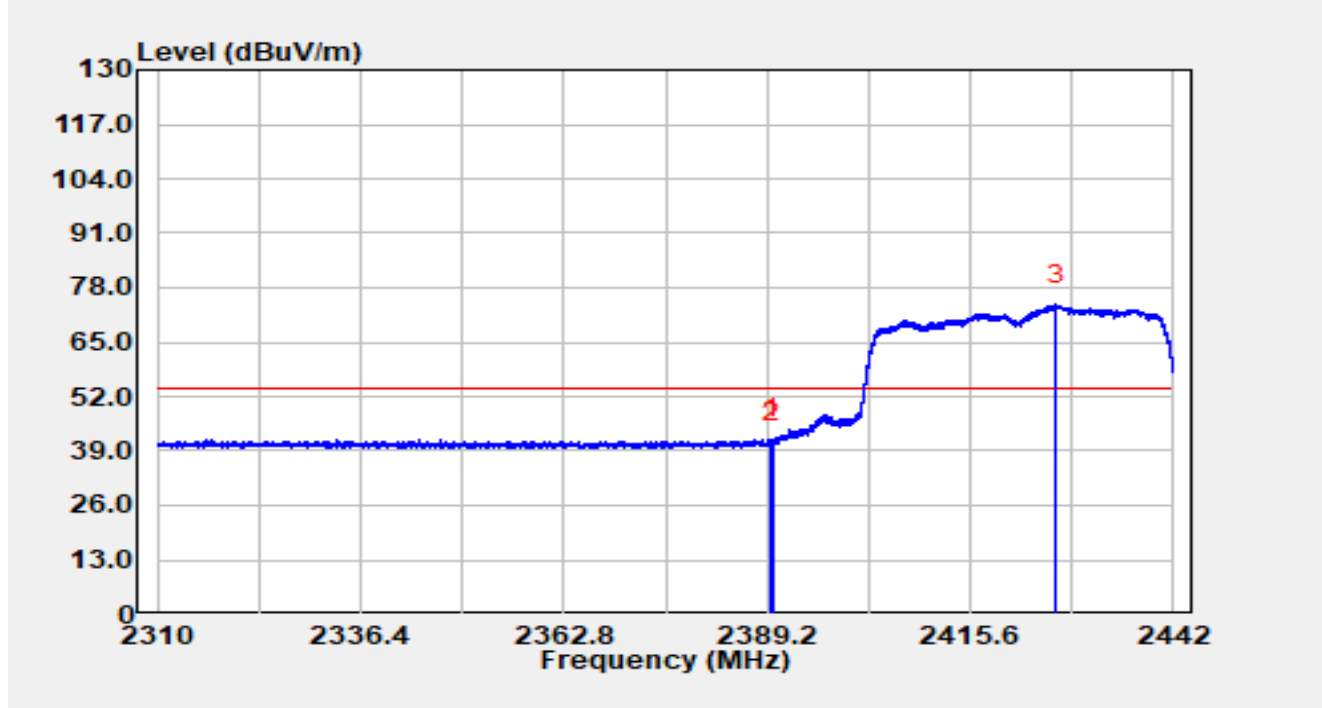


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.68	9.90	31.96	41.86	-12.14	54.00	Average
2		2390.00	9.11	31.96	41.07	-12.93	54.00	Average
3		2426.70	41.98	31.86	73.83	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU484/65		

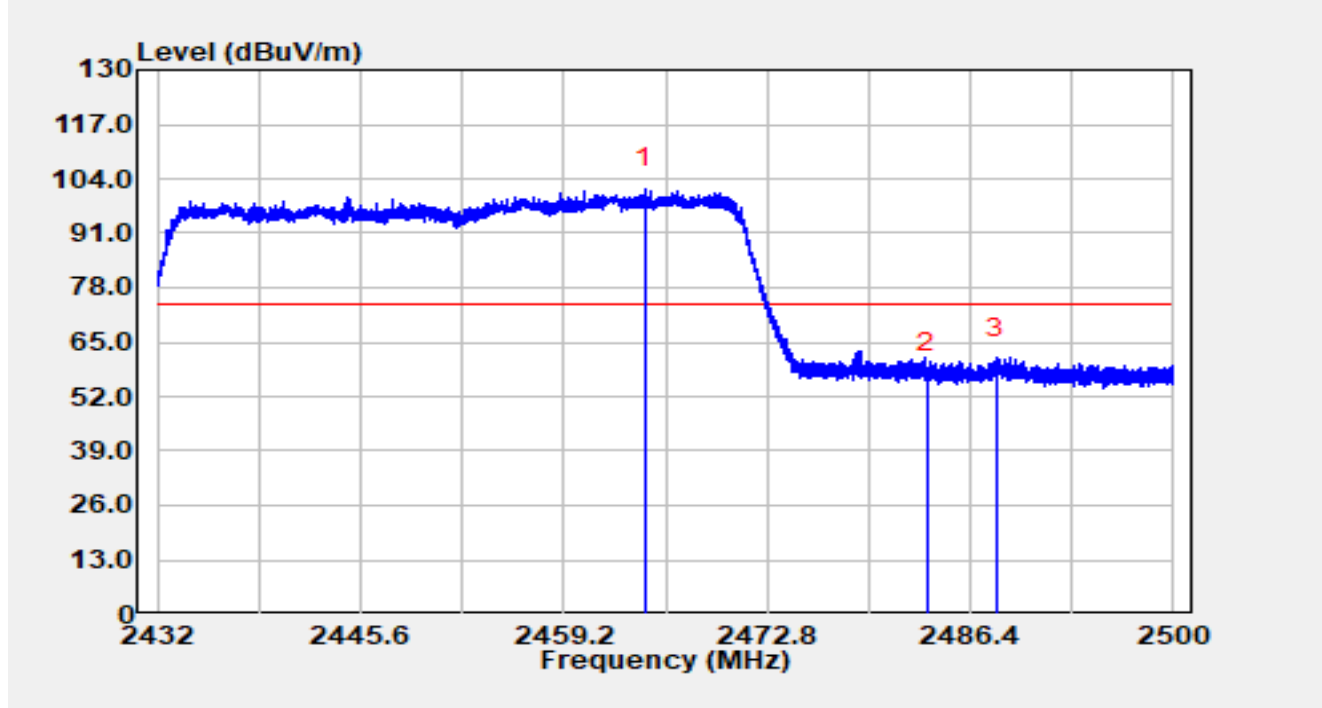


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.66	69.84	31.82	101.66	N/A	N/A	Peak
2		2483.50	25.99	31.81	57.80	-16.20	74.00	Peak
3	*	2488.18	29.33	31.81	61.14	-12.86	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU484/65		

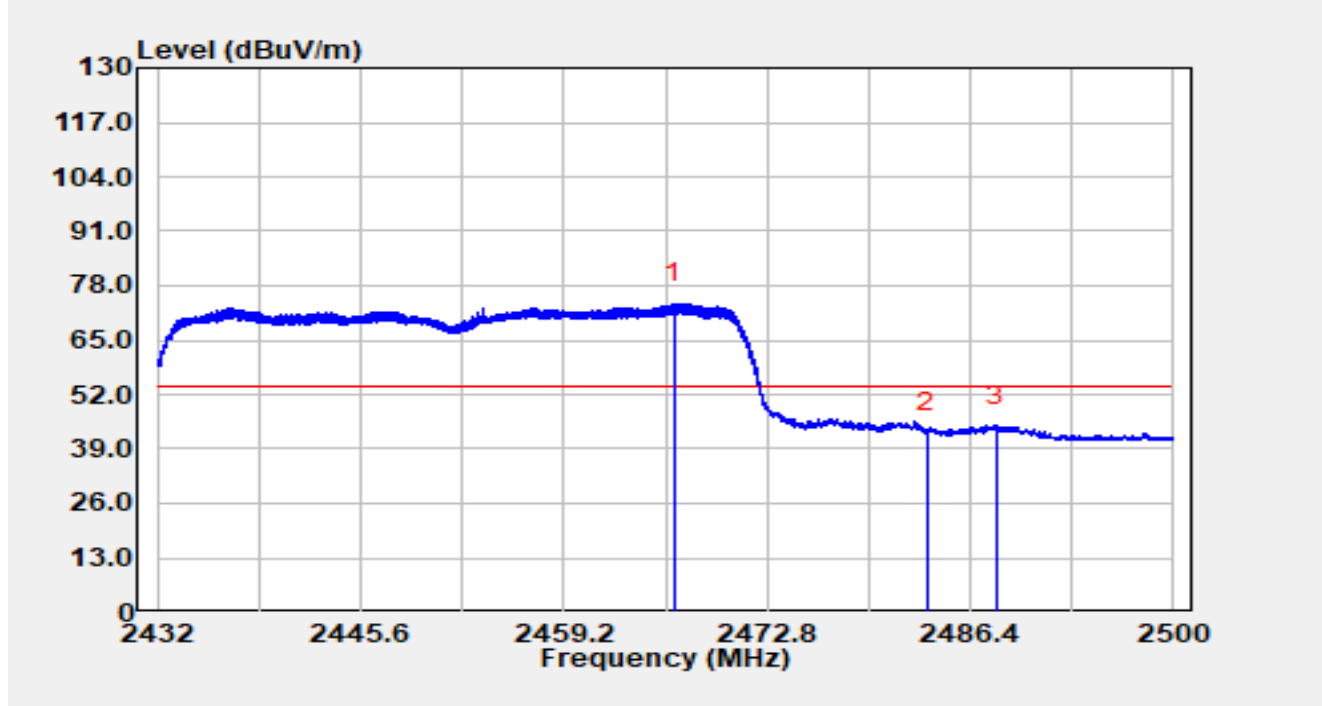


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.61	41.84	31.82	73.66	N/A	N/A	Average
2		2483.50	11.23	31.81	43.04	-10.96	54.00	Average
3	*	2488.10	12.79	31.81	44.60	-9.40	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU484/65		

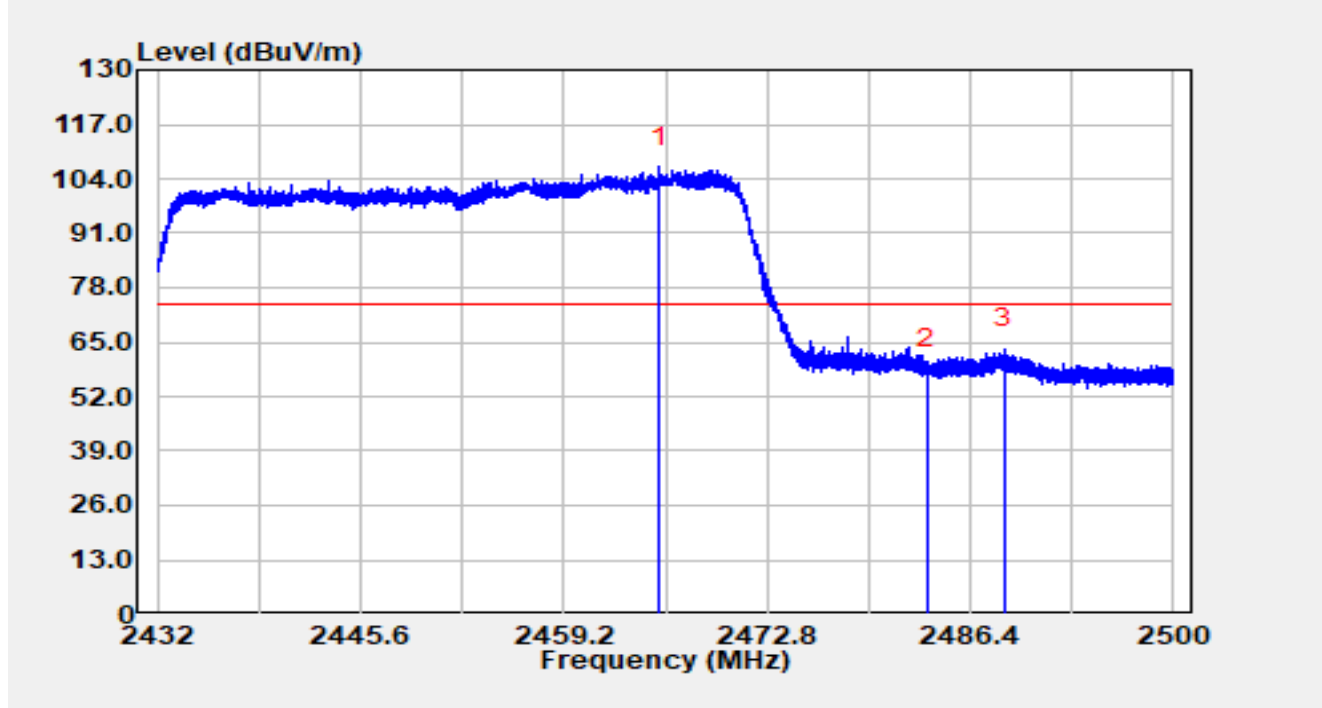


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2465.61	74.90	31.82	106.72	N/A	N/A	Peak
2		2483.50	26.67	31.81	58.48	-15.52	74.00	Peak
3	*	2488.64	31.48	31.81	63.29	-10.71	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-15
Temperature	24.8 °C	Humidity	50.8 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Ajin Fan
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 802.11ax-HE40 at 2452MHz RU484/65		

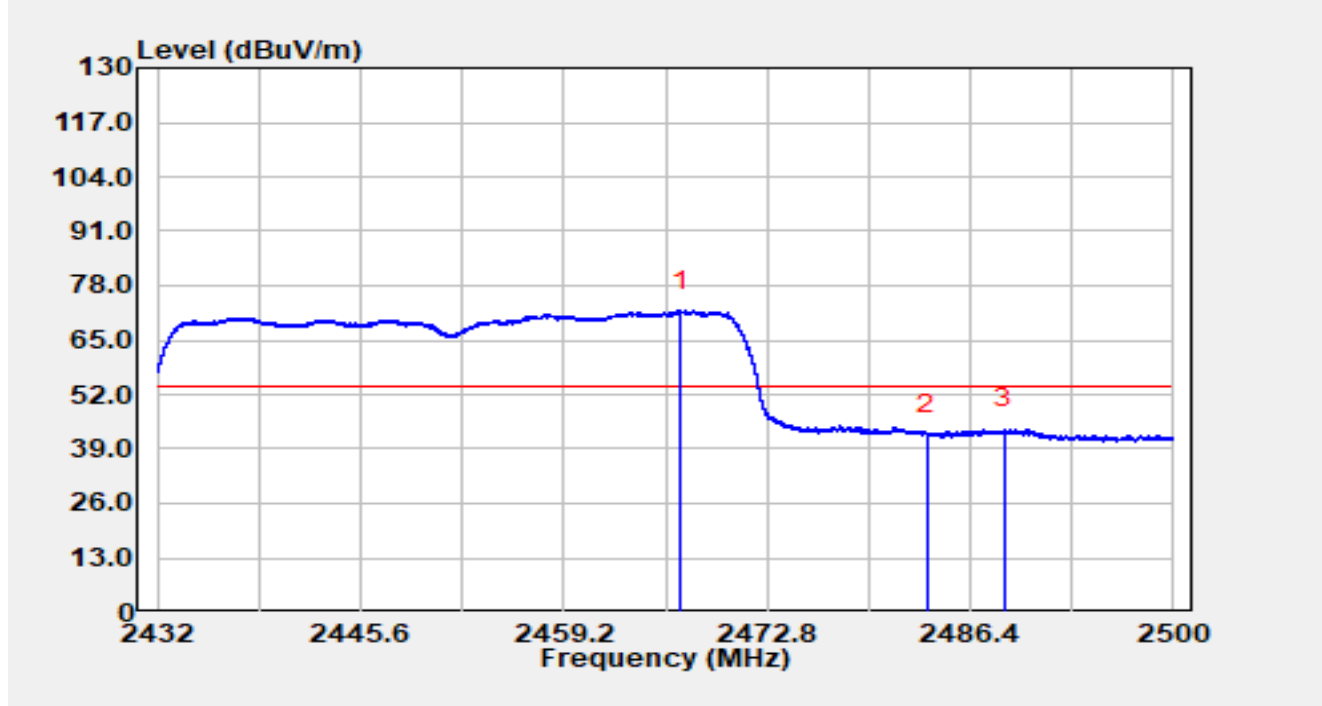


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.99	40.26	31.82	72.08	N/A	N/A	Average
2		2483.50	10.81	31.81	42.62	-11.38	54.00	Average
3	*	2488.69	11.98	31.81	43.79	-10.21	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

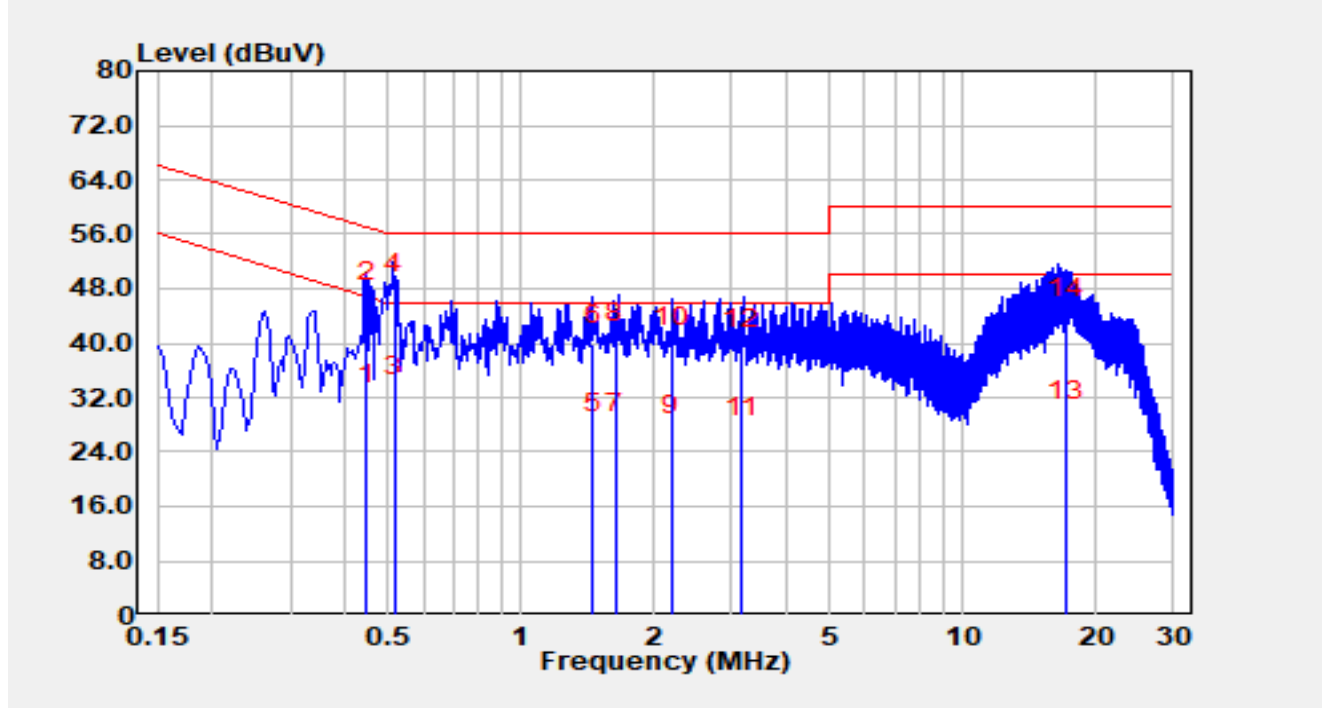


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	21.30	9.74	31.04	-15.87	46.91	Average
2		0.45	36.20	9.74	45.94	-10.97	56.91	QP
3		0.52	22.50	9.75	32.25	-13.75	46.00	Average
4	*	0.52	37.60	9.75	47.35	-8.65	56.00	QP
5		1.45	16.70	9.89	26.59	-19.41	46.00	Average
6		1.45	29.90	9.89	39.79	-16.21	56.00	QP
7		1.63	16.90	9.91	26.81	-19.19	46.00	Average
8		1.63	30.10	9.91	40.01	-15.99	56.00	QP
9		2.19	16.50	9.98	26.48	-19.52	46.00	Average
10		2.19	29.40	9.98	39.38	-16.62	56.00	QP
11		3.17	15.90	10.09	25.99	-20.01	46.00	Average
12		3.17	29.10	10.09	39.19	-16.81	56.00	QP
13		17.13	17.60	11.03	28.63	-21.37	50.00	Average

14		17.13	32.50	11.03	43.53	-16.47	60.00	QP
----	--	-------	-------	-------	-------	--------	-------	----

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11b at 2412MHz		

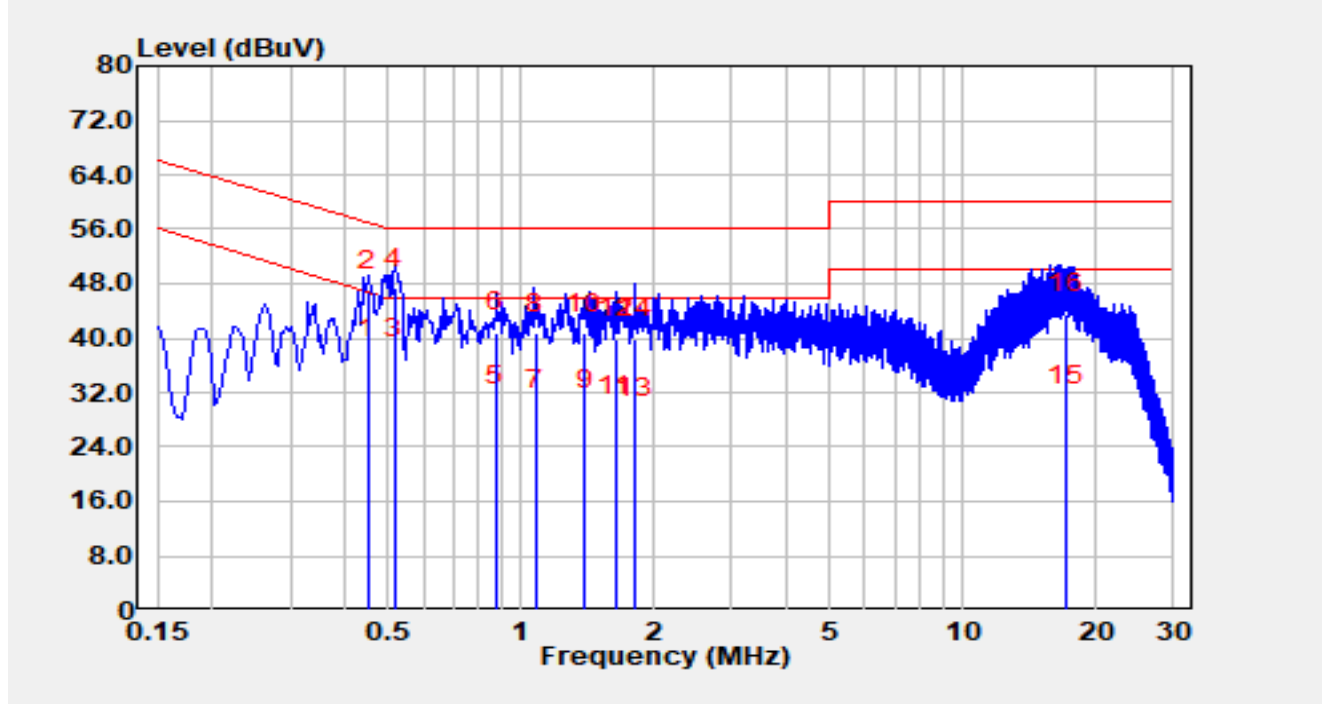

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	27.40	9.73	37.13	-9.73	46.86	Average
2		0.45	37.10	9.73	46.83	-10.03	56.86	QP
3		0.52	27.30	9.73	37.03	-8.97	46.00	Average
4	*	0.52	37.60	9.73	47.33	-8.67	56.00	QP
5		0.88	20.20	9.79	29.99	-16.01	46.00	Average
6		0.88	31.10	9.79	40.89	-15.11	56.00	QP
7		1.08	19.60	9.82	29.42	-16.58	46.00	Average
8		1.08	30.80	9.82	40.62	-15.38	56.00	QP
9		1.39	19.70	9.86	29.56	-16.44	46.00	Average
10		1.39	30.80	9.86	40.66	-15.34	56.00	QP
11		1.63	18.60	9.89	28.49	-17.51	46.00	Average
12		1.63	30.00	9.89	39.89	-16.11	56.00	QP
13		1.81	18.40	9.91	28.31	-17.69	46.00	Average
14		1.81	30.00	9.91	39.91	-16.09	56.00	QP

15		17.17	18.90	11.10	30.00	-20.00	50.00	Average
16		17.17	32.50	11.10	43.60	-16.40	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1020041-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1020041-UE” file.

The End
