



Band-edge Compliance


DH5 - Channel 00 (2402MHz)

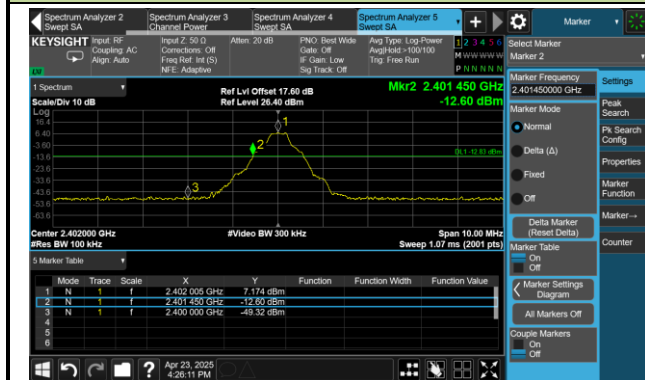


DH5 - Channel 78 (2480MHz)

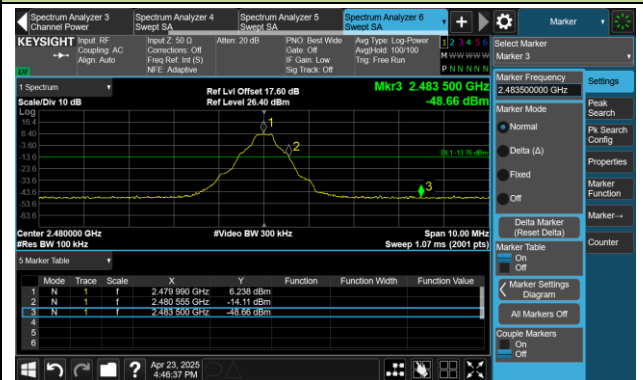


2DH5 - Channel 00 (2402MHz)

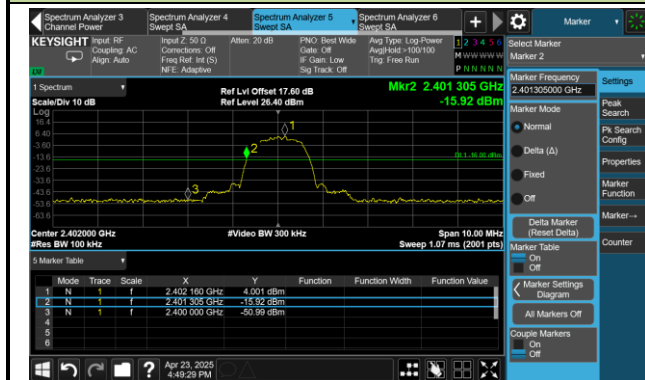


2DH5 - Channel 78 (2480MHz)

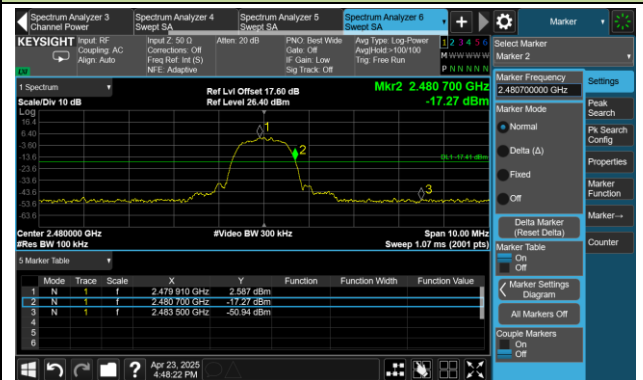

3DH5 - Channel 00 (2402MHz)

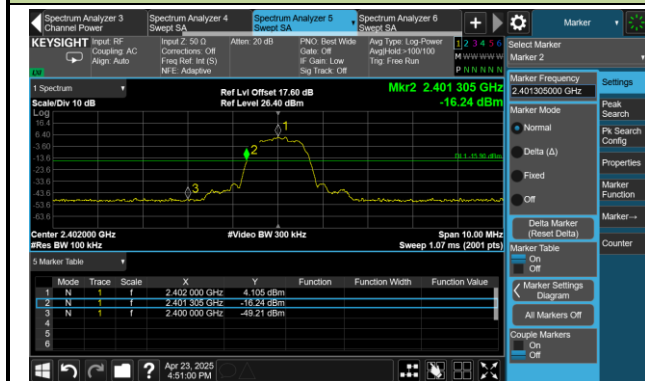


3DH5 - Channel 78 (2480MHz)

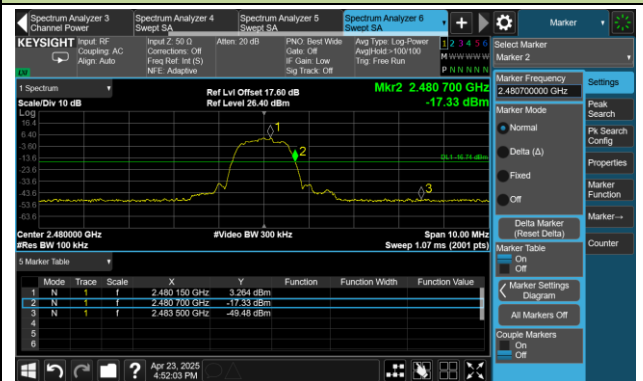


Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

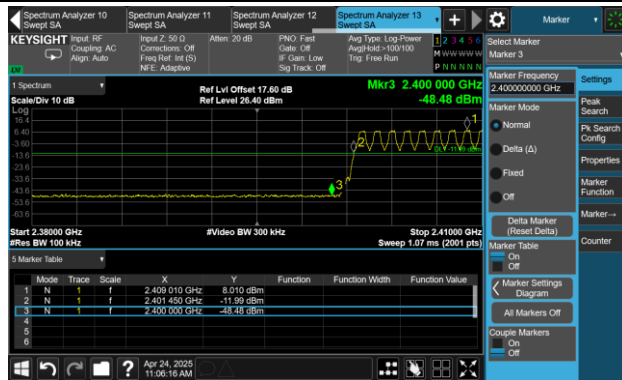


DH5 - Channel 78 (2480MHz)

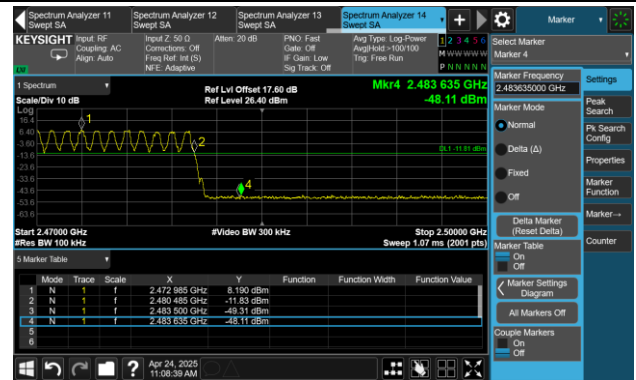


2DH5 - Channel 00 (2402MHz)

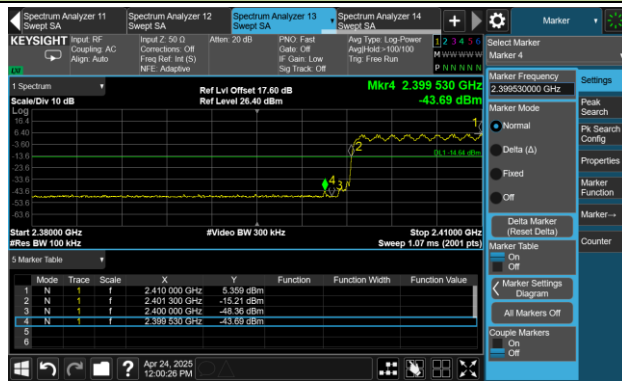

2DH5 - Channel 78 (2480MHz)

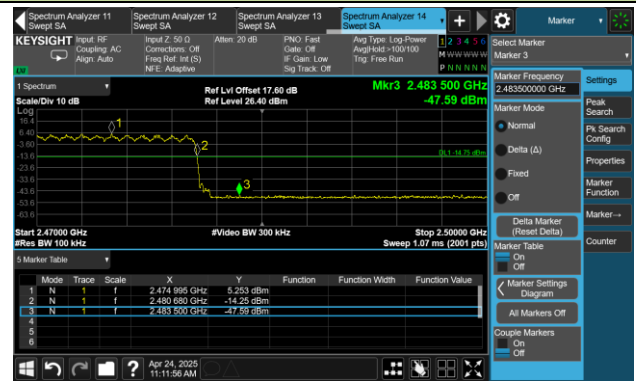

3DH5 - Channel 00 (2402MHz)

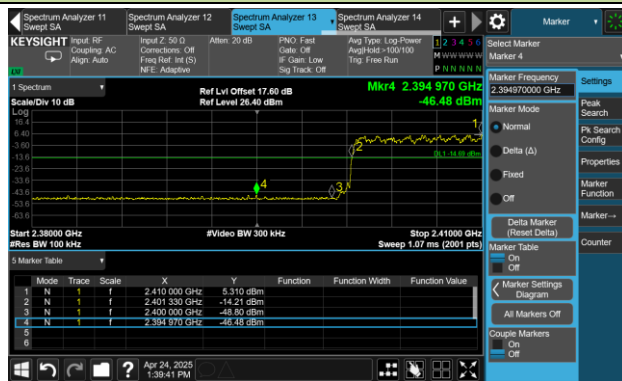

3DH5 - Channel 78 (2480MHz)




A.8 Conducted Spurious Emissions Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-04-23		

Test Mode	Channel No.	Frequency (MHz)	Limit	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

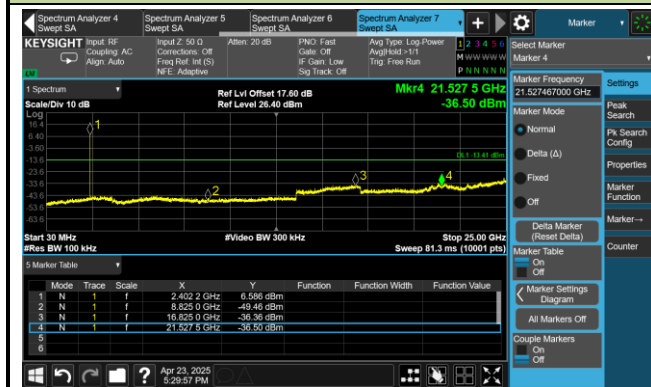

Channel 39 (2441MHz)



Channel 78 (2480MHz)

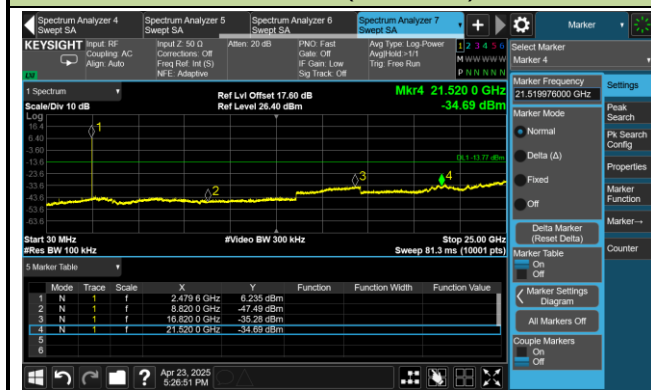

2DH5 Conducted Spurious Emissions

Channel 00 (2402MHz)



Channel 39 (2441MHz)




Channel 78 (2480MHz)



3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

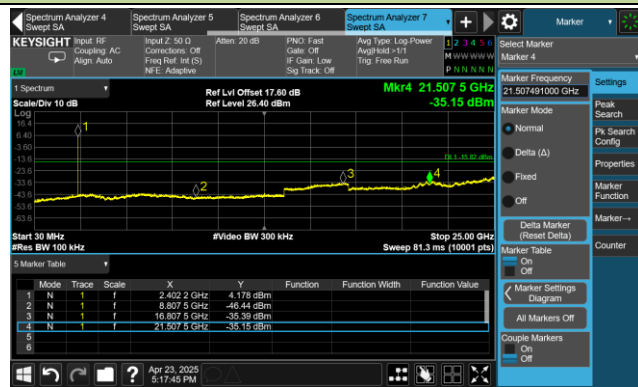

Channel 39 (2441MHz)



Channel 78 (2480MHz)

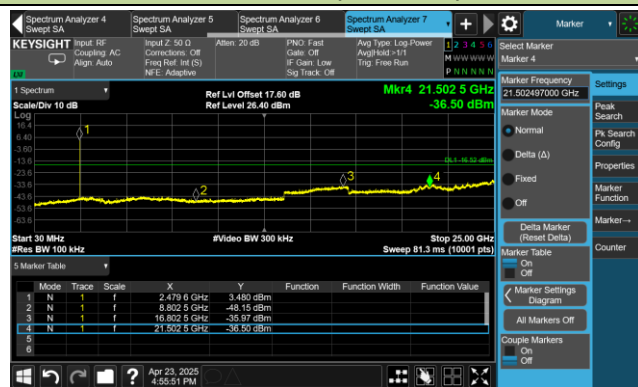

A.9 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-01	Test Mode	DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4828.40	38.58	3.46	42.04	74.00	-31.96	Peak	Horizontal
	10763.10	22.60	15.14	37.74	54.00	-16.26	Average	Horizontal
	10763.10	36.77	15.14	51.91	74.00	-22.09	Peak	Horizontal
	17977.90	18.55	22.54	41.09	54.00	-12.91	Average	Horizontal
	17977.90	35.66	22.54	58.20	74.00	-15.80	Peak	Horizontal
	4887.90	37.27	3.34	40.61	74.00	-33.39	Peak	Vertical
	11179.60	36.43	14.44	50.87	74.00	-23.13	Peak	Vertical
	17984.70	18.46	22.73	41.19	54.00	-12.81	Average	Vertical
	17984.70	36.06	22.73	58.79	74.00	-15.21	Peak	Vertical
39	4828.40	40.47	3.46	43.93	74.00	-30.07	Peak	Horizontal
	7397.10	38.35	8.63	46.98	74.00	-27.02	Peak	Horizontal
	17901.40	18.51	21.56	40.07	54.00	-13.93	Average	Horizontal
	17901.40	37.20	21.56	58.76	74.00	-15.24	Peak	Horizontal
	4887.90	40.11	3.34	43.45	74.00	-30.55	Peak	Vertical
	10839.60	22.68	15.20	37.88	54.00	-16.12	Average	Vertical
	10839.60	36.79	15.20	51.99	74.00	-22.01	Peak	Vertical
	17962.60	18.34	22.12	40.46	54.00	-13.54	Average	Vertical
	17962.60	36.11	22.12	58.23	74.00	-15.77	Peak	Vertical

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
78	4859.00	42.77	3.37	46.14	74.00	-27.86	Peak	Horizontal
	10856.60	22.48	15.24	37.72	54.00	-16.28	Average	Horizontal
	10856.60	35.90	15.24	51.14	74.00	-22.86	Peak	Horizontal
	17918.40	18.38	21.57	39.95	54.00	-14.05	Average	Horizontal
	17918.40	35.83	21.57	57.40	74.00	-16.60	Peak	Horizontal
	4887.90	38.74	3.34	42.08	74.00	-31.92	Peak	Vertical
	10776.70	22.37	15.15	37.52	54.00	-16.48	Average	Vertical
	10776.70	36.98	15.15	52.13	74.00	-21.87	Peak	Vertical
	17974.50	18.45	22.43	40.88	74.00	-33.12	Average	Vertical
	17974.50	35.10	22.43	57.53	74.00	-16.47	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-02	Test Mode	2DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4986.50	37.17	3.62	40.78	74.00	-33.22	Peak	Horizontal
	10996.00	23.65	15.06	38.71	54.00	-15.29	Average	Horizontal
	10996.00	36.26	15.06	51.32	74.00	-22.68	Peak	Horizontal
	17972.80	18.56	22.37	40.93	54.00	-13.07	Average	Horizontal
	17972.80	35.02	22.37	57.39	74.00	-16.61	Peak	Horizontal
	3876.40	38.38	0.82	39.20	74.00	-34.80	Peak	Vertical
	10956.90	23.69	15.16	38.85	54.00	-15.15	Average	Vertical
	10956.90	36.13	15.16	51.28	74.00	-22.72	Peak	Vertical
	17993.20	18.39	22.80	41.19	54.00	-12.81	Average	Vertical
	17993.20	34.73	22.80	57.53	74.00	-16.47	Peak	Vertical
39	4901.50	44.19	3.55	47.74	74.00	-26.26	Peak	Horizontal
	10866.80	24.15	15.25	39.40	54.00	-14.60	Average	Horizontal
	10866.80	36.89	15.25	52.14	74.00	-21.86	Peak	Horizontal
	17994.90	18.61	22.81	41.42	54.00	-12.58	Average	Horizontal
	17994.90	35.48	22.81	58.29	74.00	-15.71	Peak	Horizontal
	4964.40	43.11	3.64	46.75	74.00	-27.25	Peak	Vertical
	11543.40	24.24	14.19	38.43	54.00	-15.57	Average	Vertical
	11543.40	37.03	14.19	51.22	74.00	-22.78	Peak	Vertical
	17984.70	18.65	22.73	41.38	54.00	-12.62	Average	Vertical
	17984.70	35.28	22.73	58.01	74.00	-15.99	Peak	Vertical

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
78	4857.30	44.78	3.38	48.17	74.00	-25.83	Peak	Horizontal
	10973.90	35.71	15.12	50.83	74.00	-23.17	Peak	Horizontal
	17993.20	18.39	22.80	41.19	54.00	-12.81	Average	Horizontal
	17993.20	35.35	22.80	58.15	74.00	-15.85	Peak	Horizontal
	7444.70	39.14	9.05	48.19	74.00	-25.81	Peak	Vertical
	10625.40	24.50	15.12	39.62	54.00	-14.38	Average	Vertical
	10625.40	36.26	15.12	51.38	74.00	-22.62	Peak	Vertical
	17988.10	18.66	22.75	41.41	54.00	-12.59	Average	Vertical
	17988.10	34.85	22.75	57.60	74.00	-16.40	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Dick Shen
Test Date	2025-05-02	Test Mode	3DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4821.60	41.67	3.46	45.13	74.00	-28.87	Peak	Horizontal
	10887.20	25.90	15.20	41.10	54.00	-12.90	Average	Horizontal
	10887.20	35.96	15.20	51.17	74.00	-22.83	Peak	Horizontal
	18000.00	18.68	22.85	41.53	54.00	-12.47	Average	Horizontal
	18000.00	35.02	22.85	57.88	74.00	-16.12	Peak	Horizontal
	4889.60	42.43	3.35	45.79	74.00	-28.21	Peak	Vertical
	7397.10	39.99	8.63	48.62	74.00	-25.38	Peak	Vertical
	17942.20	18.90	21.90	40.80	54.00	-13.20	Average	Vertical
	17942.20	35.57	21.90	57.47	74.00	-16.53	Peak	Vertical
39	4879.40	38.13	3.30	41.43	74.00	-32.57	Peak	Horizontal
	11565.50	35.57	14.06	49.63	74.00	-24.37	Peak	Horizontal
	17991.50	18.63	22.78	41.41	54.00	-12.59	Average	Horizontal
	17991.50	34.74	22.78	57.52	74.00	-16.48	Peak	Horizontal
	4954.20	38.70	3.76	42.46	74.00	-31.54	Peak	Vertical
	10996.00	35.74	15.06	50.81	74.00	-23.19	Peak	Vertical
	17998.30	18.65	22.84	41.49	54.00	-12.51	Average	Vertical
	17998.30	34.60	22.84	57.44	74.00	-16.56	Peak	Vertical
78	4794.40	39.00	3.33	42.33	74.00	-31.67	Peak	Horizontal
	10776.70	35.52	15.15	50.67	74.00	-23.33	Peak	Horizontal
	17964.30	18.57	22.13	40.70	54.00	-13.30	Average	Horizontal
	17964.30	34.95	22.13	57.09	74.00	-16.91	Peak	Horizontal
	4886.20	37.16	3.33	40.48	74.00	-33.52	Peak	Vertical
	10877.00	35.73	15.22	50.95	74.00	-23.05	Peak	Vertical
	17864.00	18.98	20.68	39.66	54.00	-14.34	Average	Vertical
	17864.00	36.88	20.68	57.55	74.00	-16.45	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site	WZ-AC1	Test Date	2025-05-14
Temperature	23.8 °C	Humidity	53.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Jerry Lu
Factor	VULB 9168_00662	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

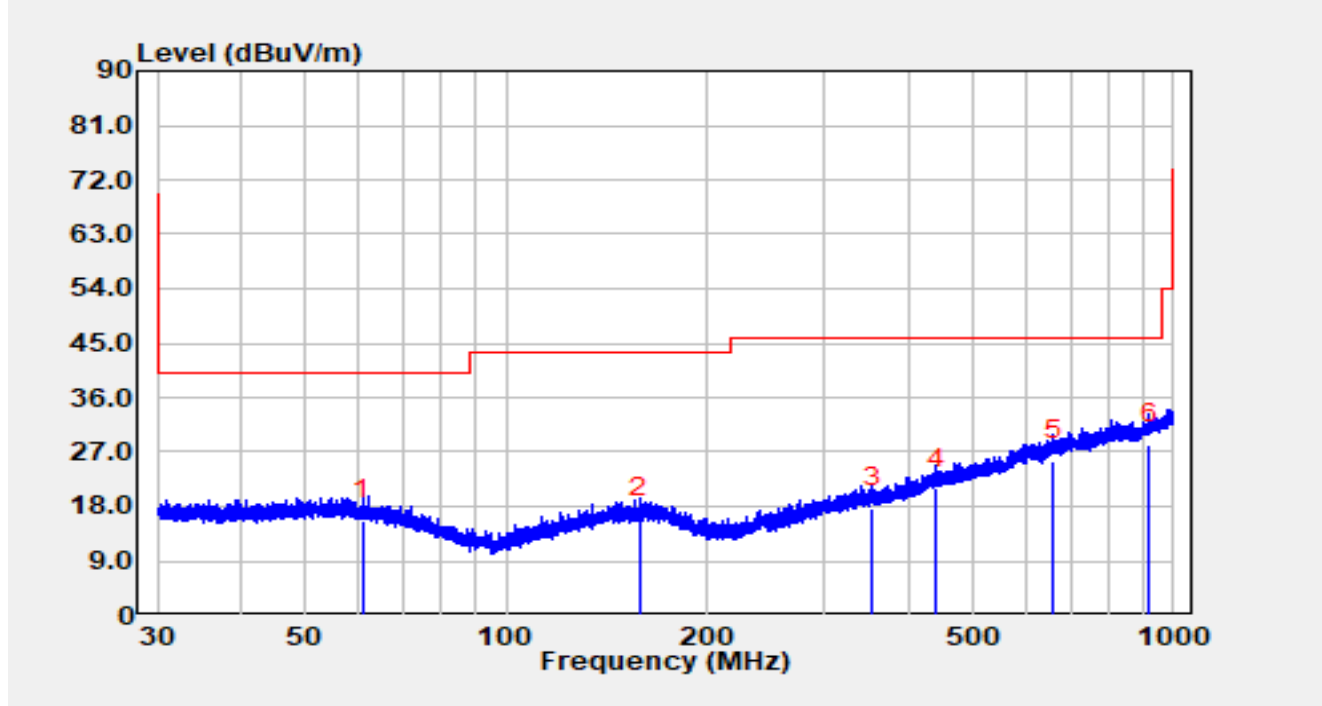


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		60.98	-2.43	18.08	15.65	-24.35	40.00	QP
2		158.28	-2.29	18.35	16.06	-27.44	43.50	QP
3		353.81	-2.37	20.06	17.69	-28.31	46.00	QP
4		440.35	-1.48	22.52	21.04	-24.96	46.00	QP
5		662.08	-1.33	26.87	25.54	-20.46	46.00	QP
6	*	920.90	-2.15	30.50	28.35	-17.65	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

Site	WZ-AC1	Test Date	2025-05-14
Temperature	23.8 °C	Humidity	53.5 %
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Jerry Lu
Factor	VULB 9168_00662	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

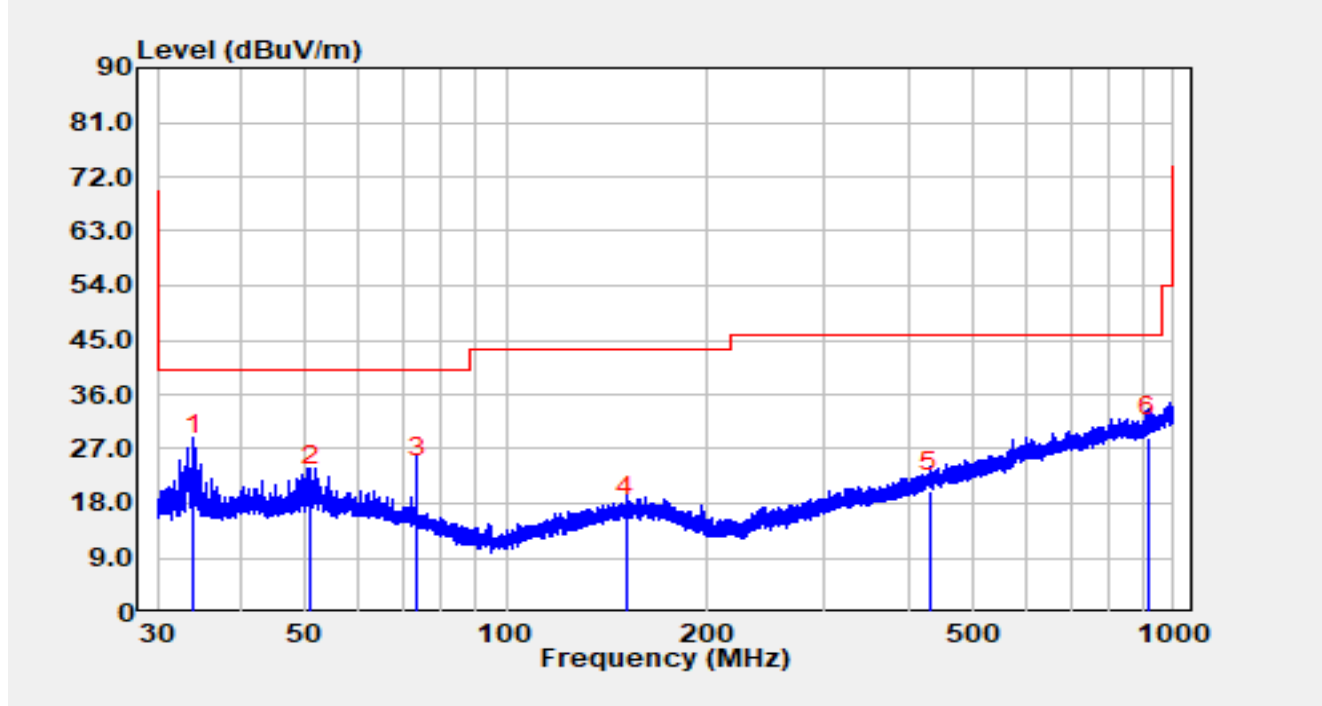


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	34.02	8.39	17.56	25.95	-14.05	40.00	QP
2		50.94	2.47	18.51	20.98	-19.02	40.00	QP
3		73.49	6.22	16.17	22.39	-17.61	40.00	QP
4		151.60	-2.51	18.27	15.76	-27.74	43.50	QP
5		431.03	-2.36	22.26	19.90	-26.10	46.00	QP
6		914.14	-1.25	30.16	28.91	-17.09	46.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

A.10 Radiated Restricted Band Edge Test Result

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

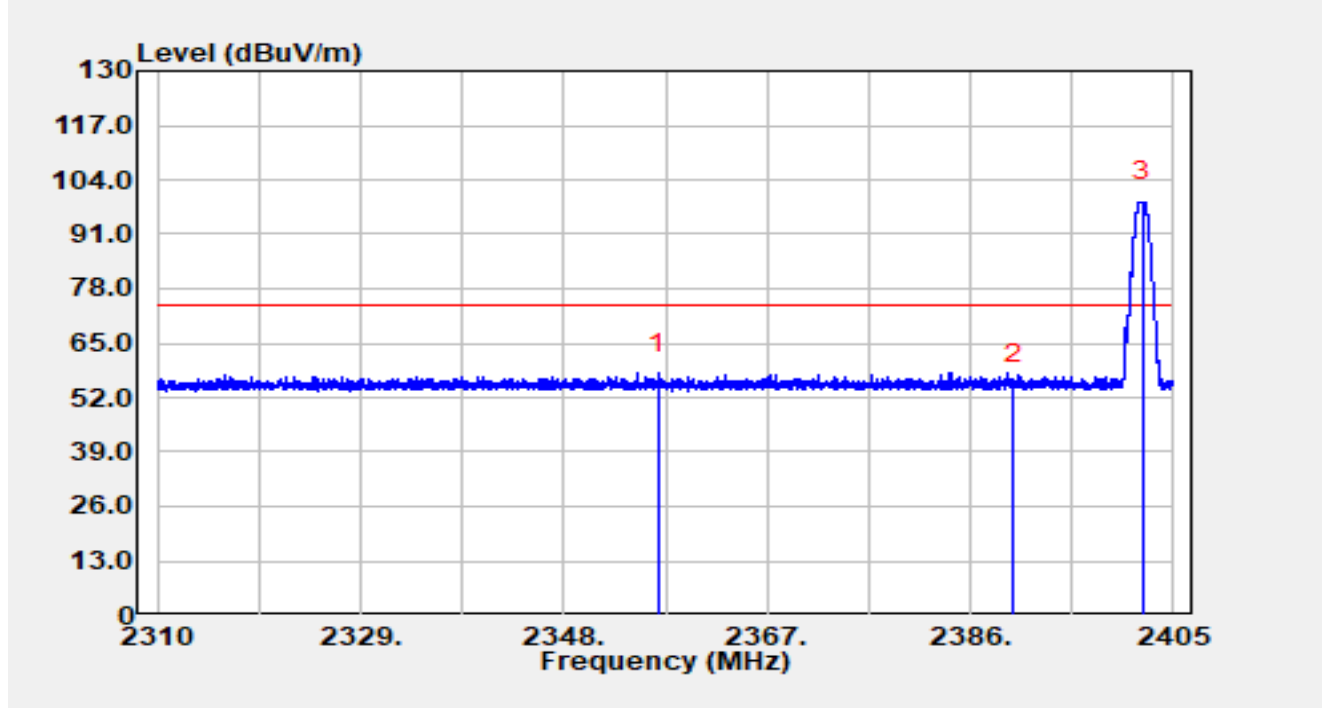


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2356.84	25.83	31.97	57.80	-16.20	74.00	Peak
2		2390.00	23.34	31.96	55.29	-18.71	74.00	Peak
3		2402.11	66.83	31.90	98.73	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

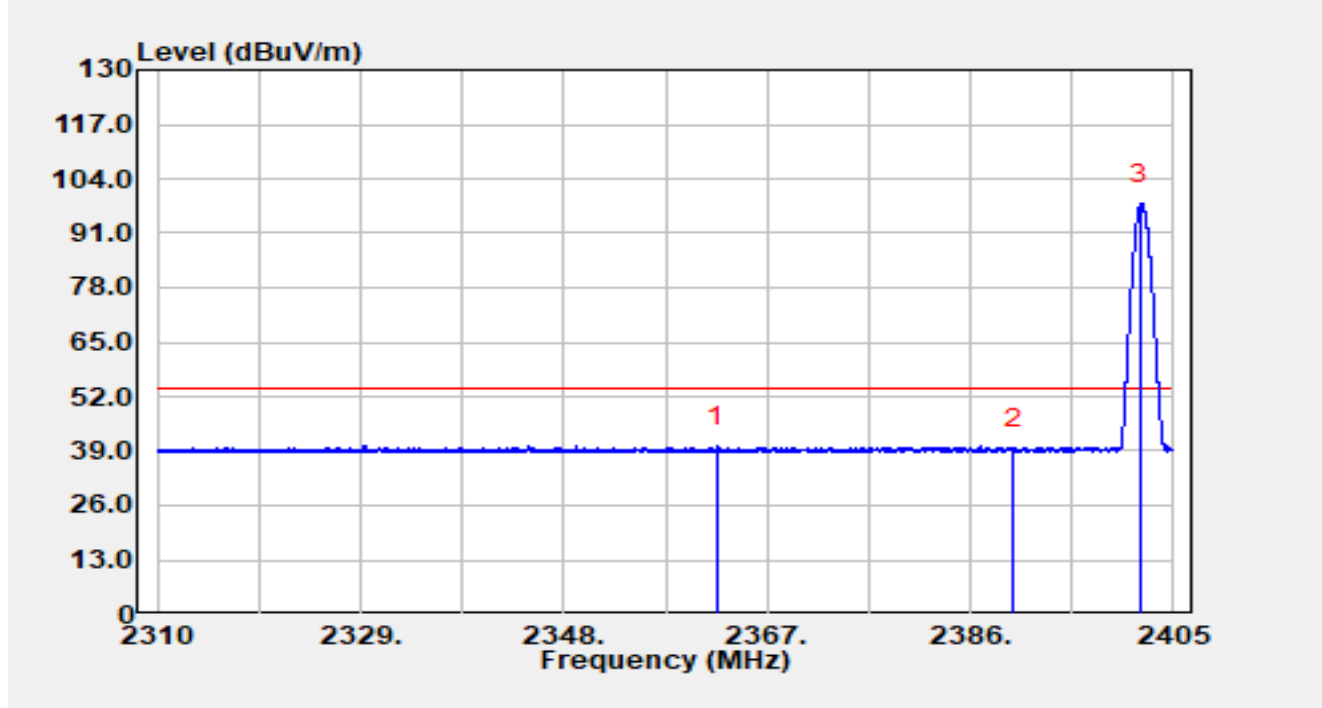


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2362.28	8.12	31.96	40.08	-13.92	54.00	Average
2		2390.00	7.33	31.96	39.29	-14.71	54.00	Average
3		2401.89	66.06	31.90	97.96	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

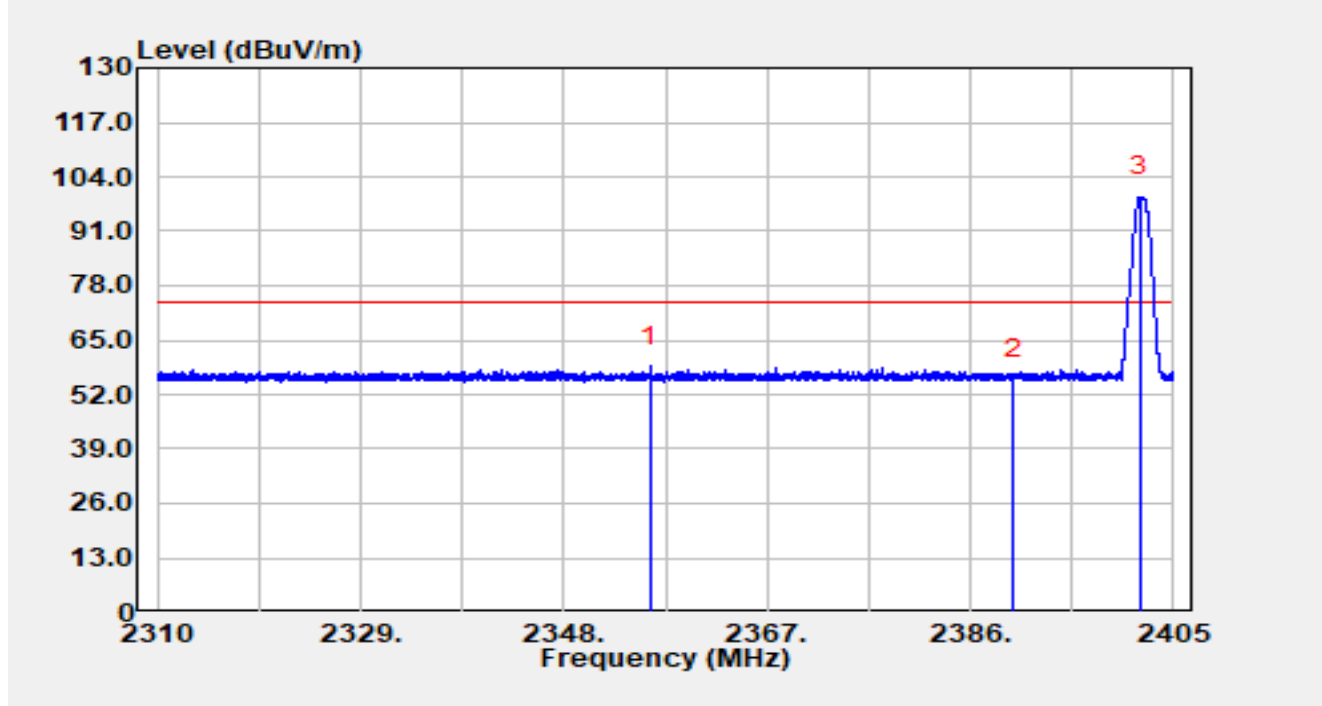


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2356.09	26.81	31.97	58.78	-15.22	74.00	Peak
2		2390.00	23.83	31.96	55.79	-18.21	74.00	Peak
3		2401.87	67.28	31.90	99.18	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2402MHz		

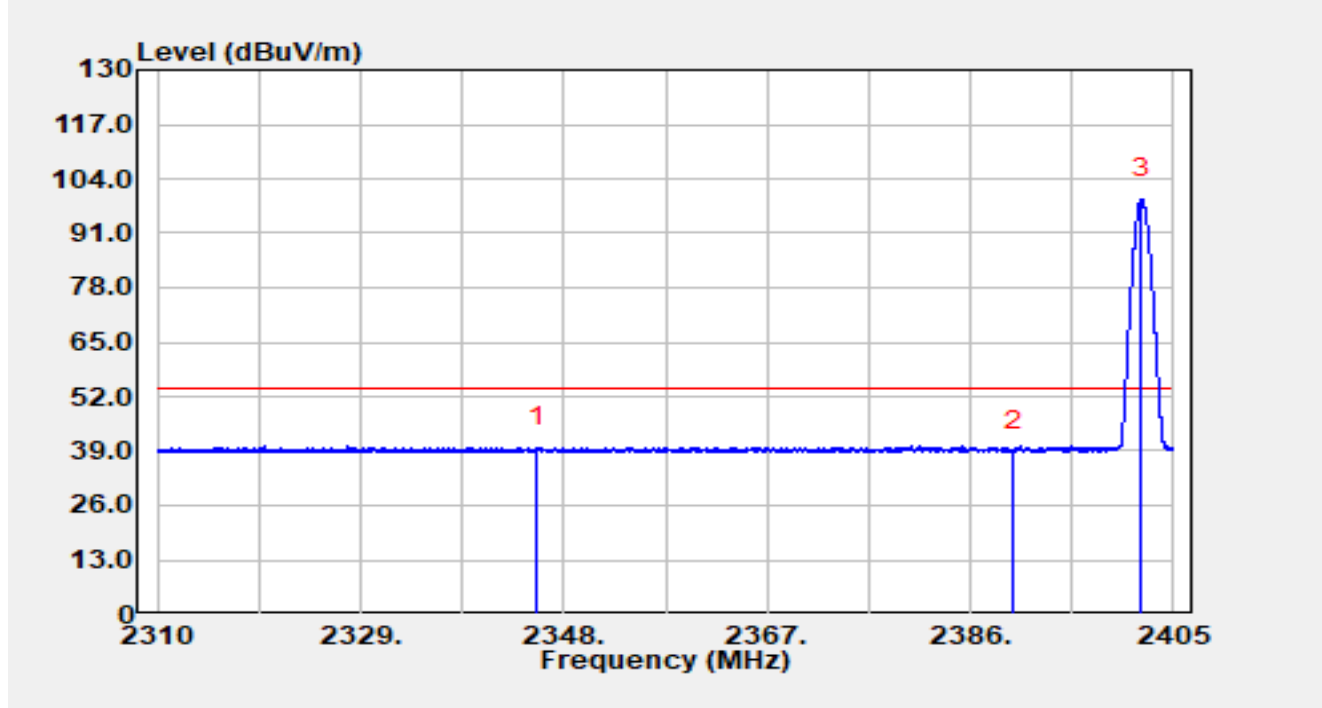


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2345.52	7.79	31.98	39.78	-14.22	54.00	Average
2		2390.00	7.20	31.96	39.16	-14.84	54.00	Average
3		2402.02	67.20	31.90	99.10	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2480MHz		

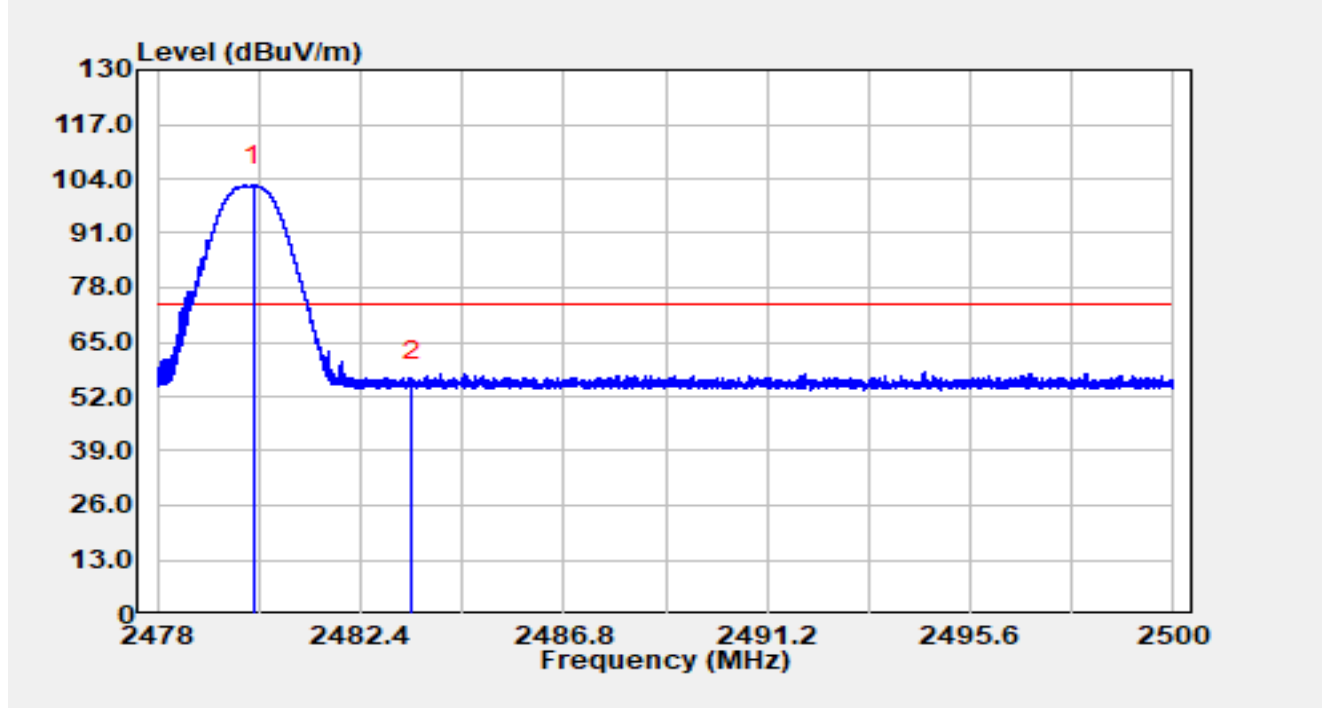


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.09	70.57	31.80	102.38	N/A	N/A	Peak
2	*	2483.50	23.88	31.81	55.69	-18.31	74.00	Peak

Notes:

- " * ", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2480MHz		

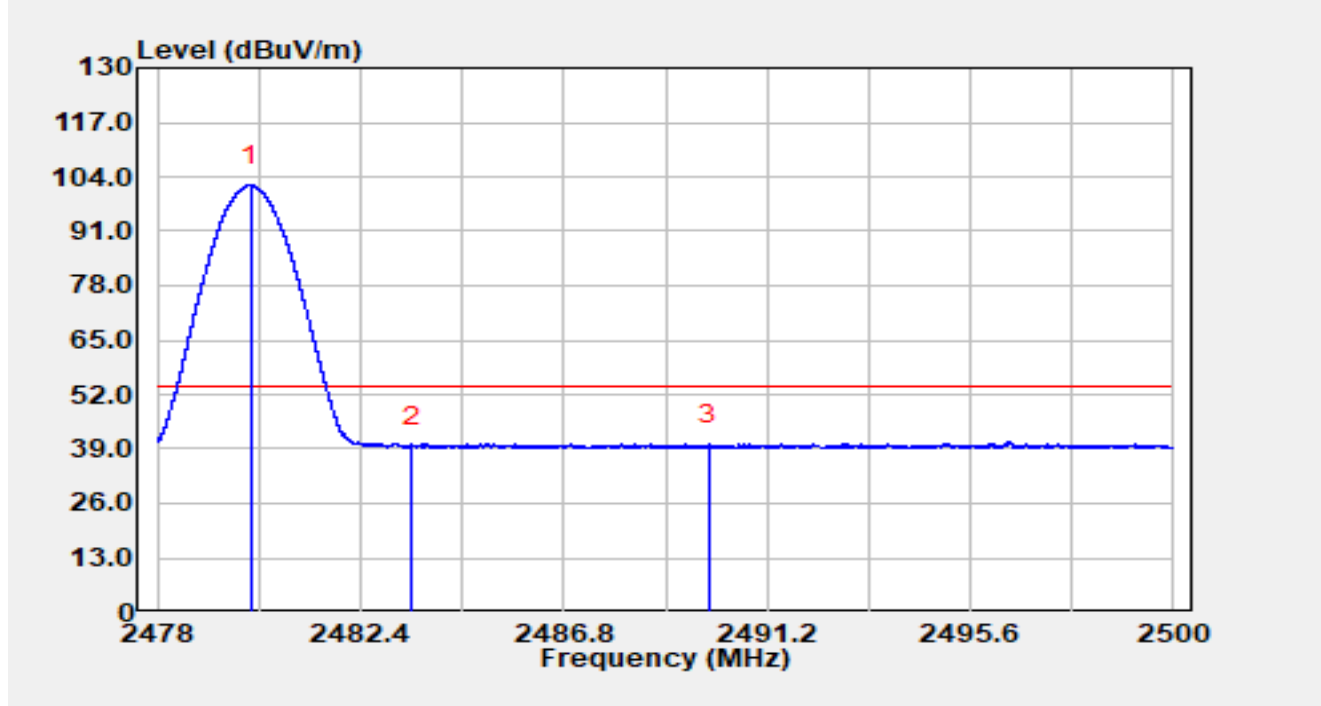


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.01	70.14	31.80	101.94	N/A	N/A	Average
2		2483.50	7.76	31.81	39.57	-14.43	54.00	Average
3	*	2489.95	8.41	31.81	40.22	-13.78	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2480MHz		

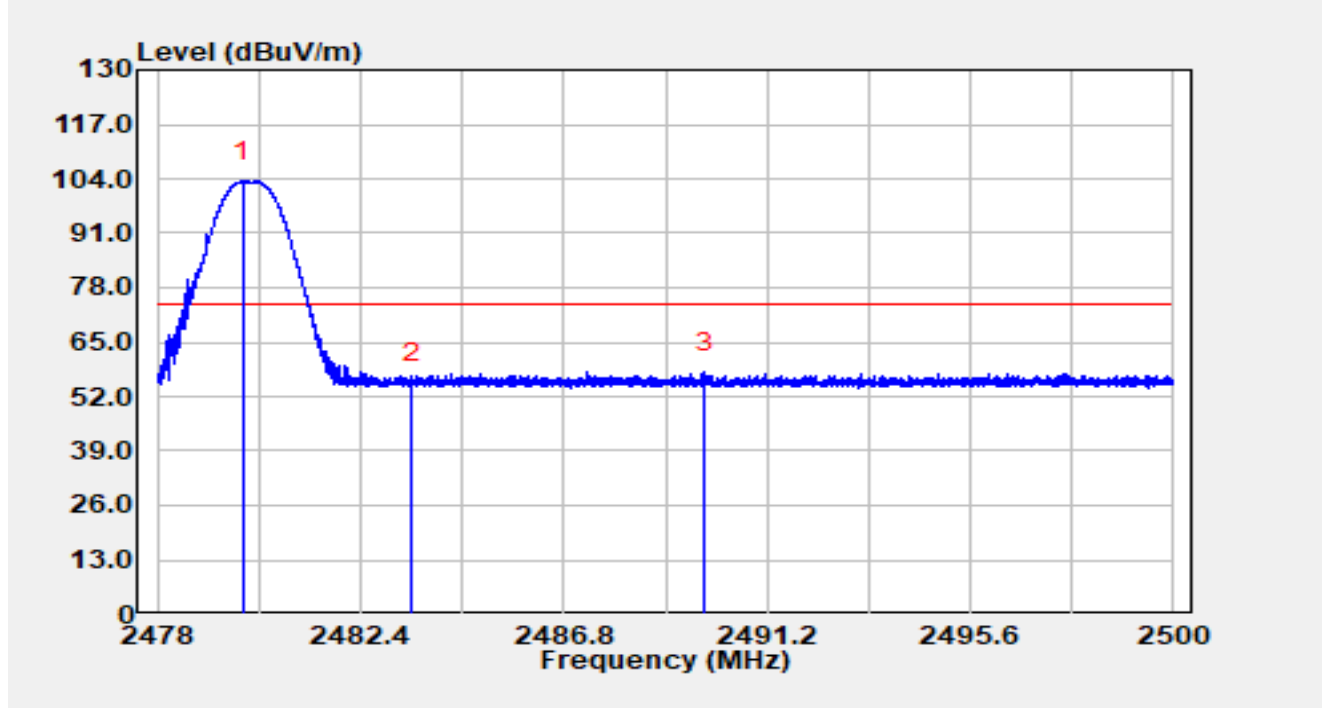


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.84	71.62	31.80	103.42	N/A	N/A	Peak
2		2483.50	23.55	31.81	55.36	-18.64	74.00	Peak
3	*	2489.84	26.07	31.81	57.88	-16.12	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by DH5 at 2480MHz		

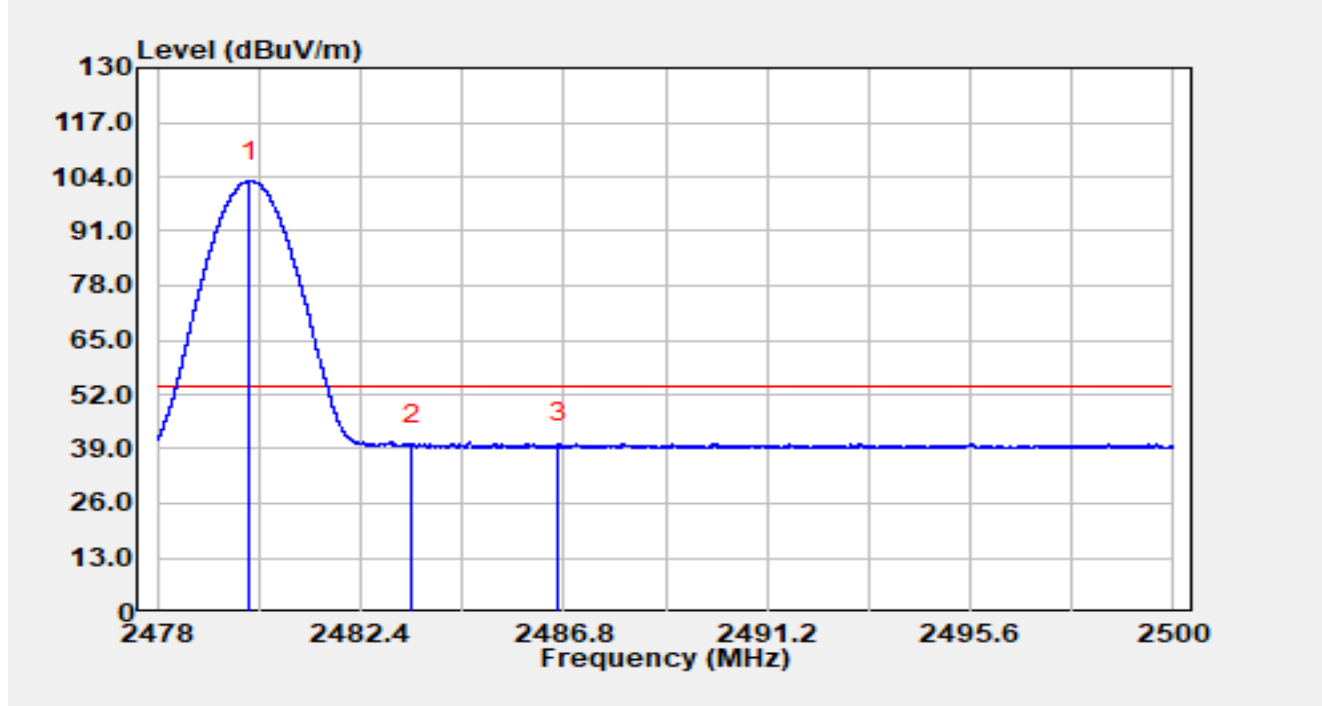


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.01	71.20	31.80	103.00	N/A	N/A	Average
2		2483.50	8.15	31.81	39.96	-14.04	54.00	Average
3	*	2486.68	8.42	31.81	40.23	-13.77	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2402MHz		

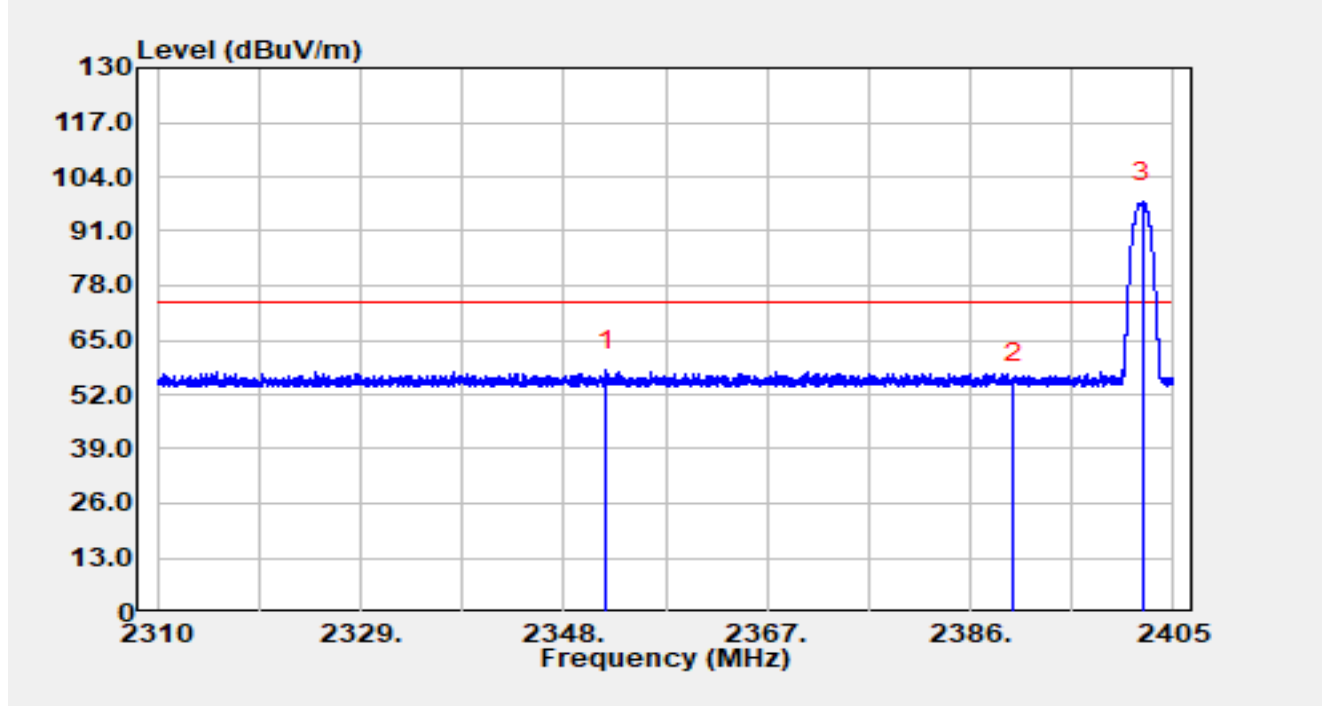


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2352.01	25.69	31.97	57.66	-16.34	74.00	Peak
2		2390.00	22.51	31.96	54.46	-19.54	74.00	Peak
3		2402.11	66.01	31.90	97.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2402MHz		

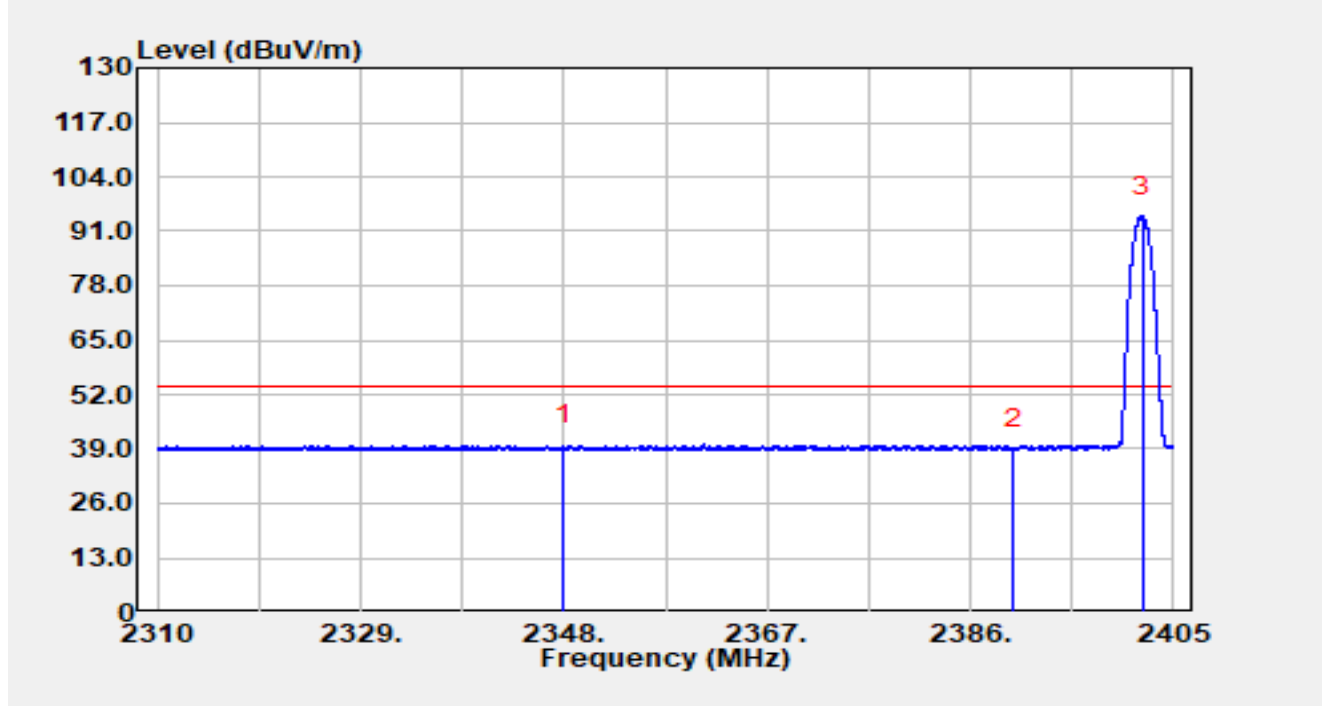


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2348.01	7.86	31.97	39.84	-14.16	54.00	Average
2		2390.00	7.08	31.96	39.04	-14.96	54.00	Average
3		2402.06	62.64	31.90	94.54	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2402MHz		

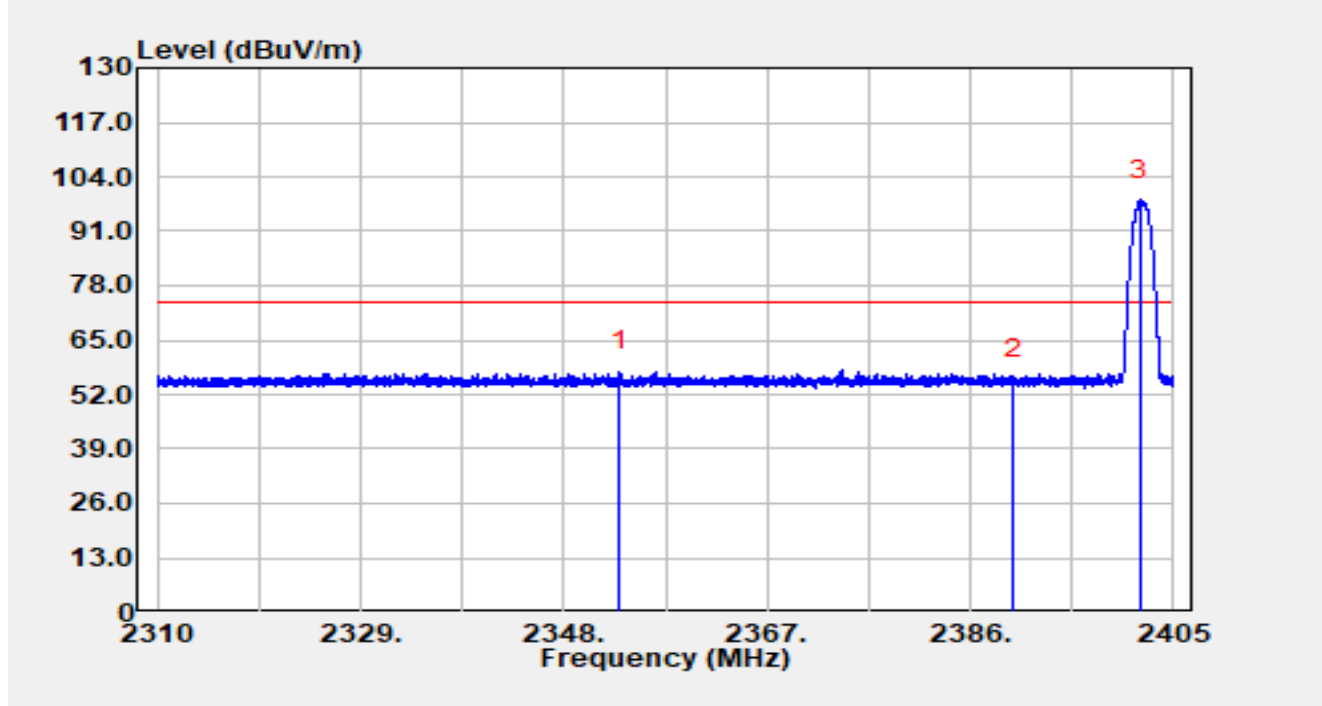


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2353.20	25.53	31.97	57.49	-16.51	74.00	Peak
2		2390.00	23.60	31.96	55.56	-18.44	74.00	Peak
3		2401.89	66.47	31.90	98.37	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2402MHz		

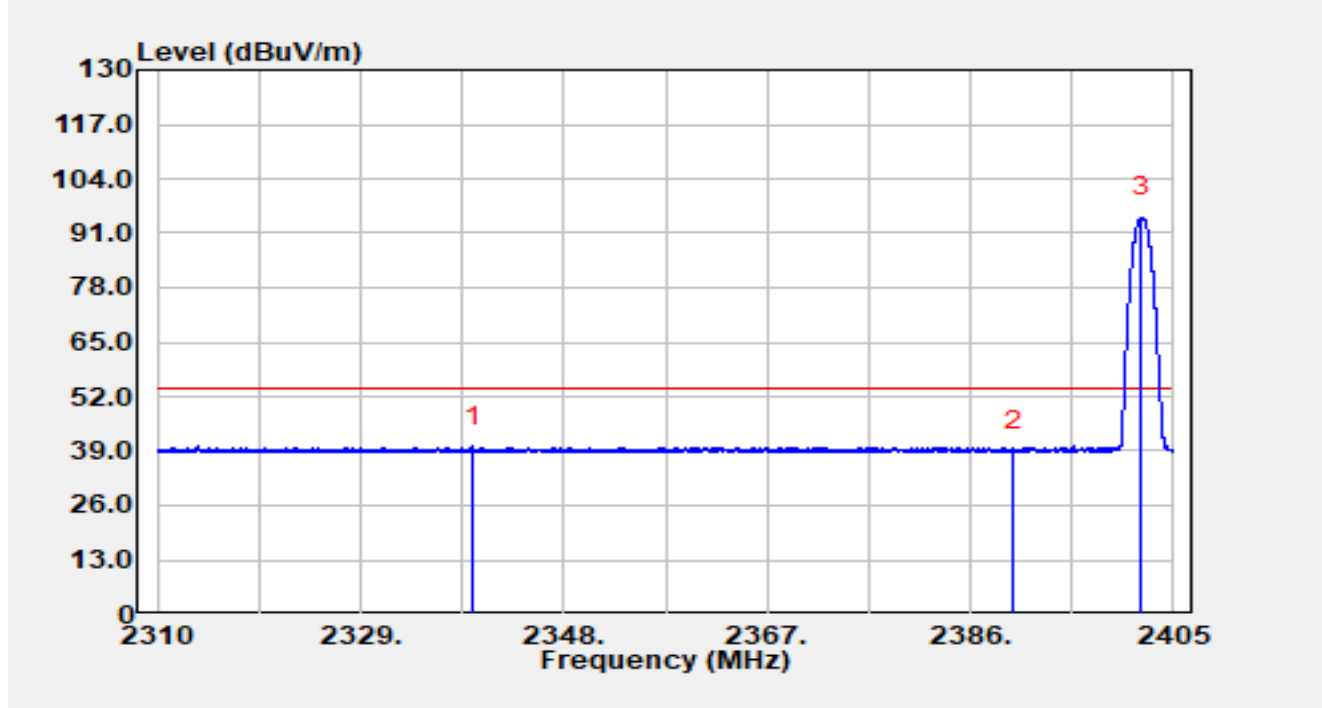


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2339.49	8.01	32.01	40.01	-13.99	54.00	Average
2		2390.00	7.14	31.96	39.09	-14.91	54.00	Average
3		2401.93	62.93	31.90	94.82	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2480MHz		

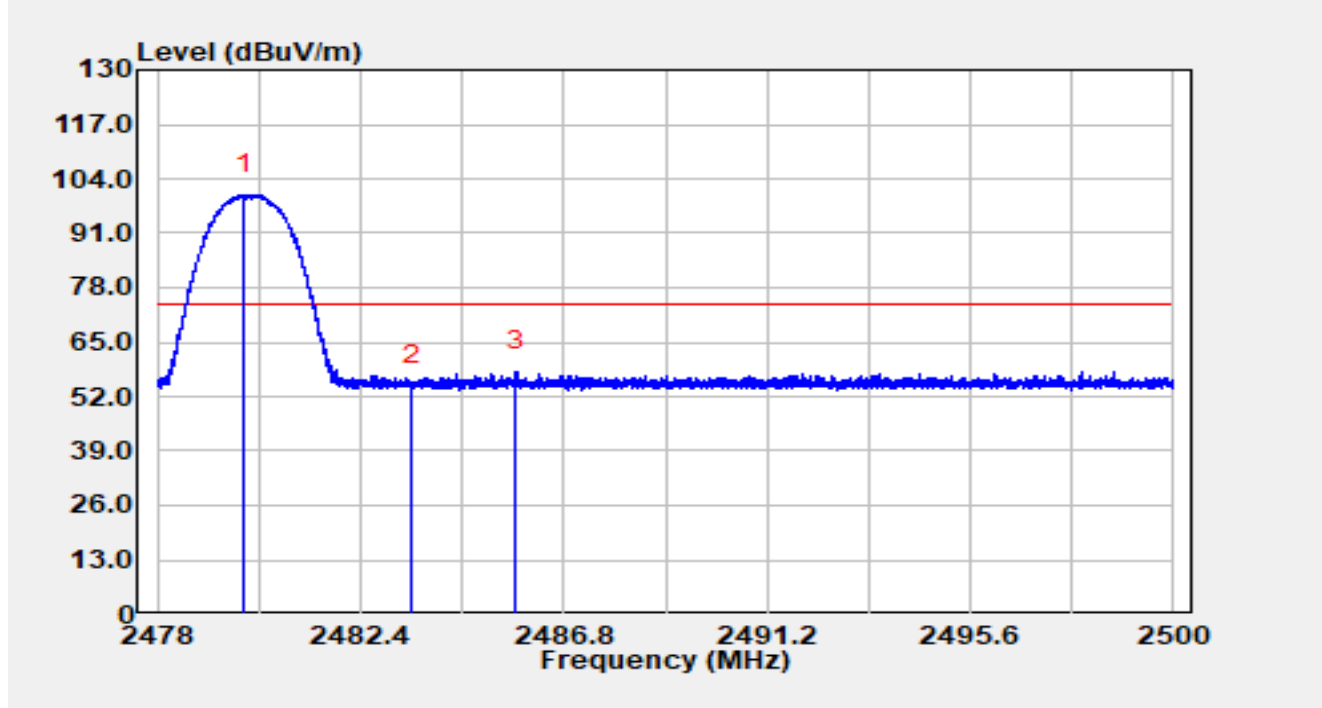


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.88	68.38	31.80	100.18	N/A	N/A	Peak
2		2483.50	23.07	31.81	54.88	-19.12	74.00	Peak
3	*	2485.77	26.18	31.81	57.99	-16.01	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2480MHz		

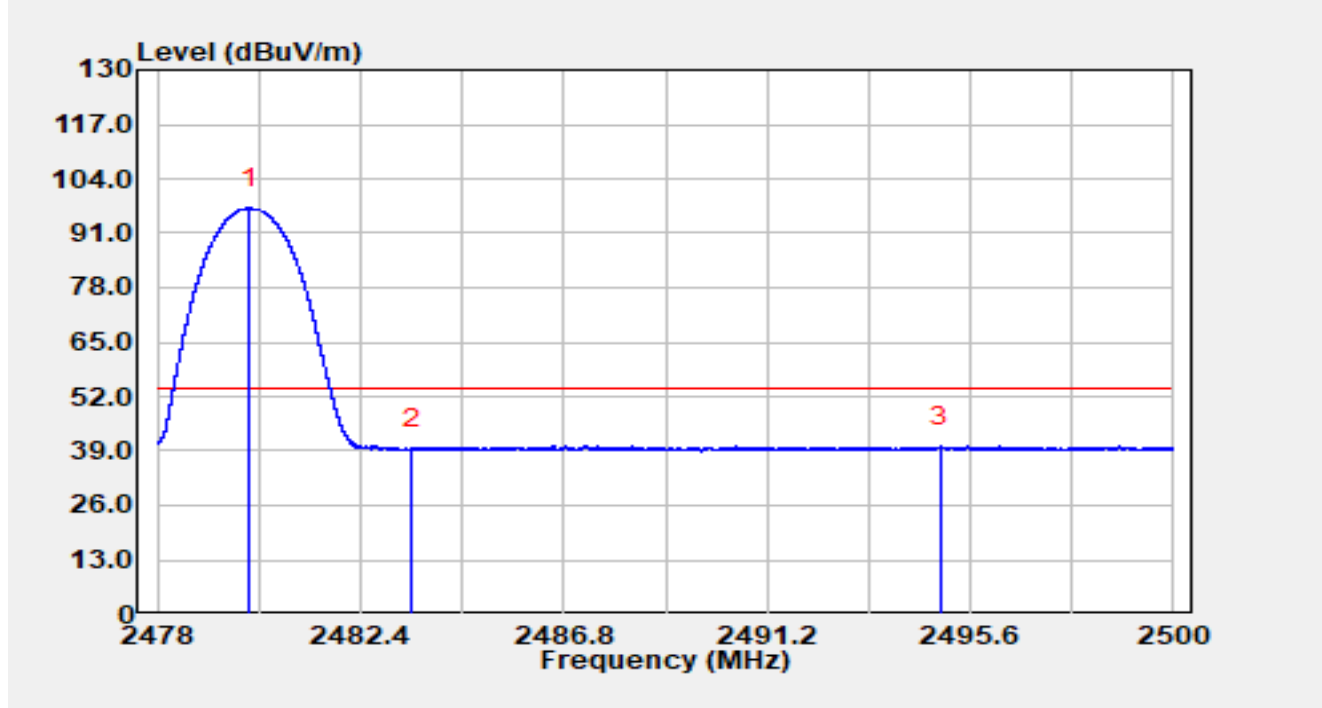


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.00	65.20	31.80	97.00	N/A	N/A	Average
2		2483.50	7.70	31.81	39.51	-14.49	54.00	Average
3	*	2494.96	8.29	31.81	40.10	-13.90	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2480MHz		

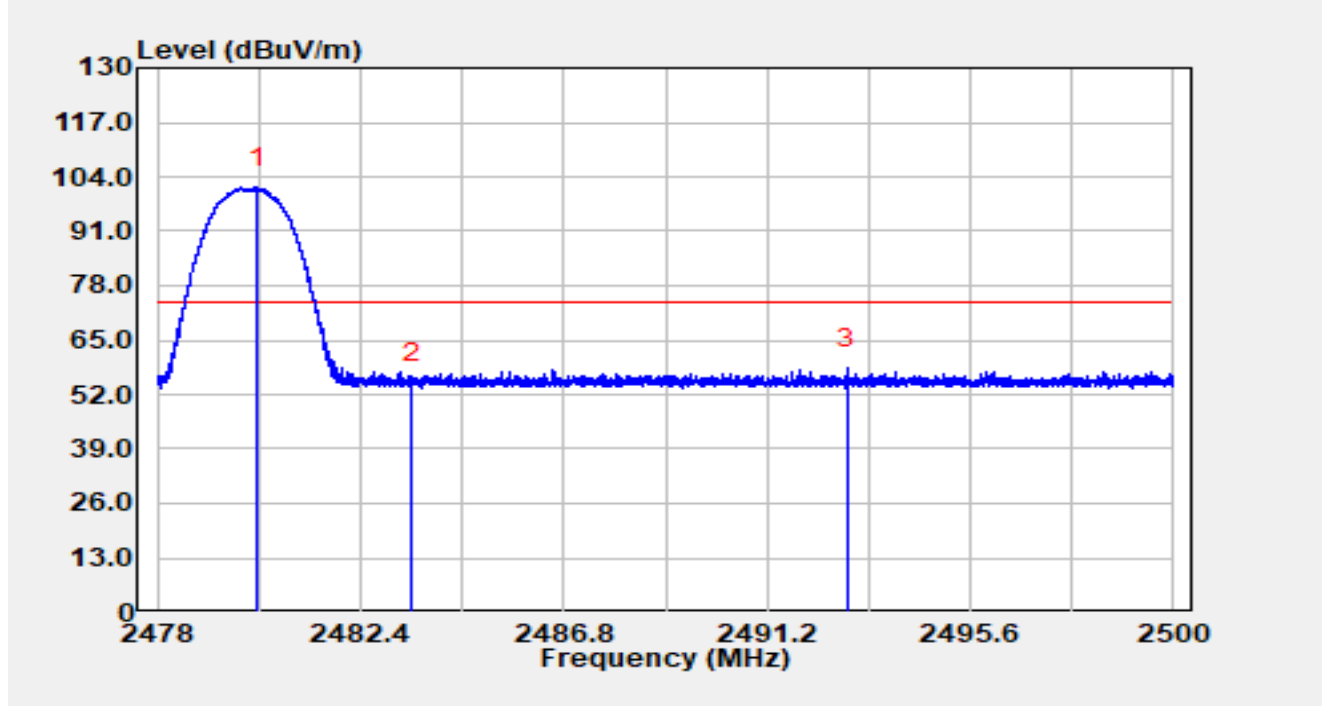


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.16	69.57	31.80	101.37	N/A	N/A	Peak
2		2483.50	23.04	31.81	54.85	-19.15	74.00	Peak
3	*	2492.95	26.44	31.82	58.26	-15.74	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 2DH5 at 2480MHz		

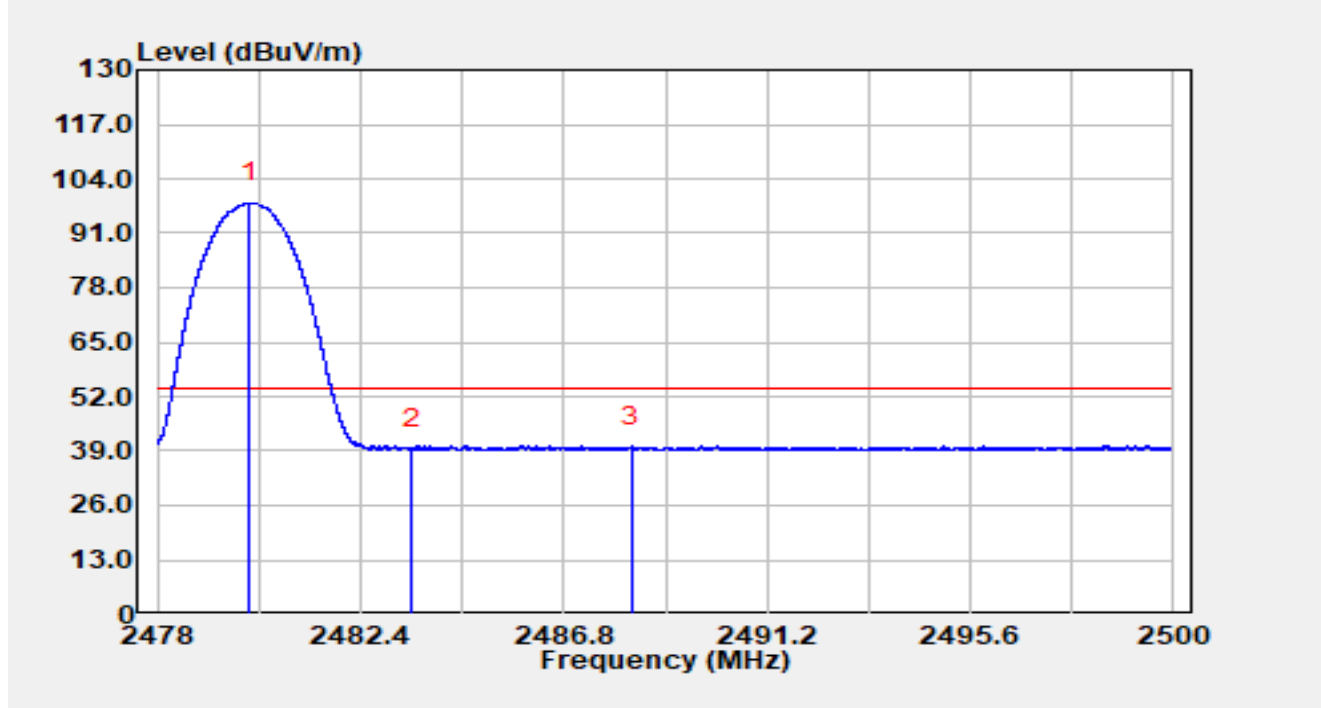


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.99	66.35	31.80	98.16	N/A	N/A	Average
2		2483.50	7.58	31.81	39.39	-14.61	54.00	Average
3	*	2488.26	8.23	31.81	40.04	-13.96	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2402MHz		

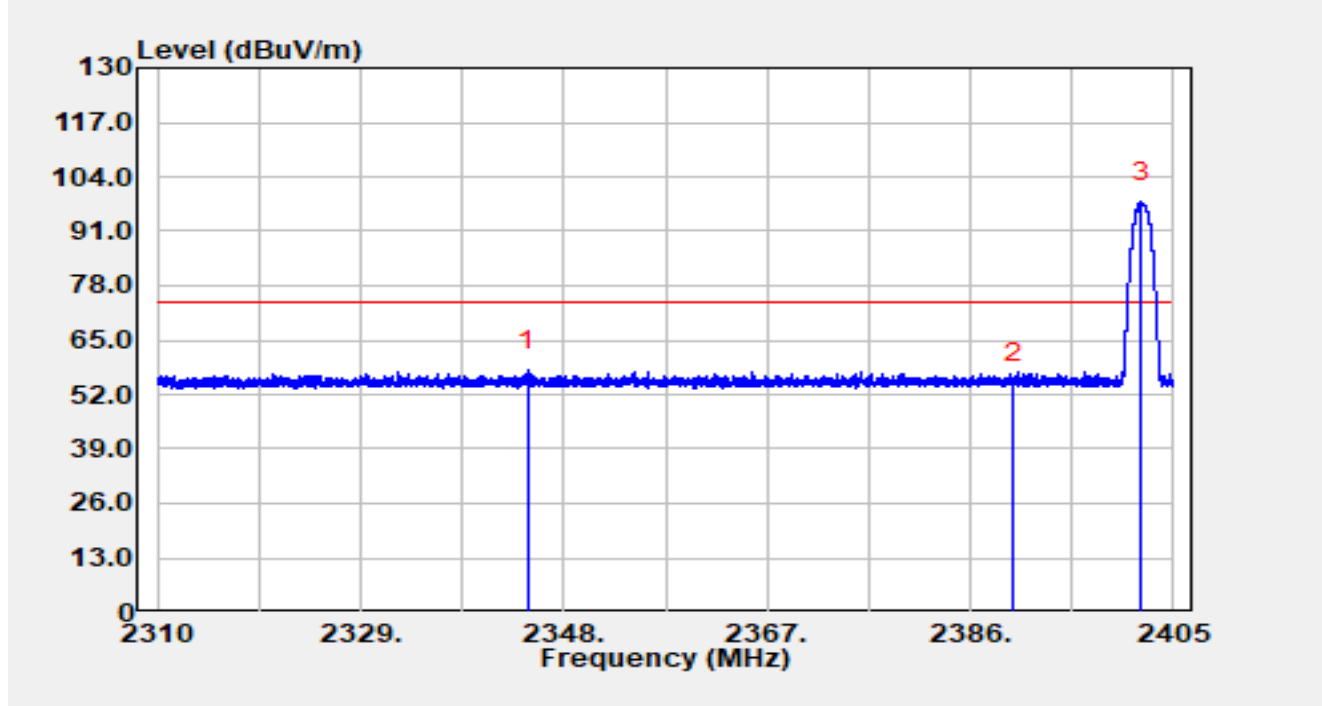


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.58	25.69	31.99	57.68	-16.32	74.00	Peak
2		2390.00	22.80	31.96	54.76	-19.24	74.00	Peak
3		2402.01	66.01	31.90	97.91	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2402MHz		

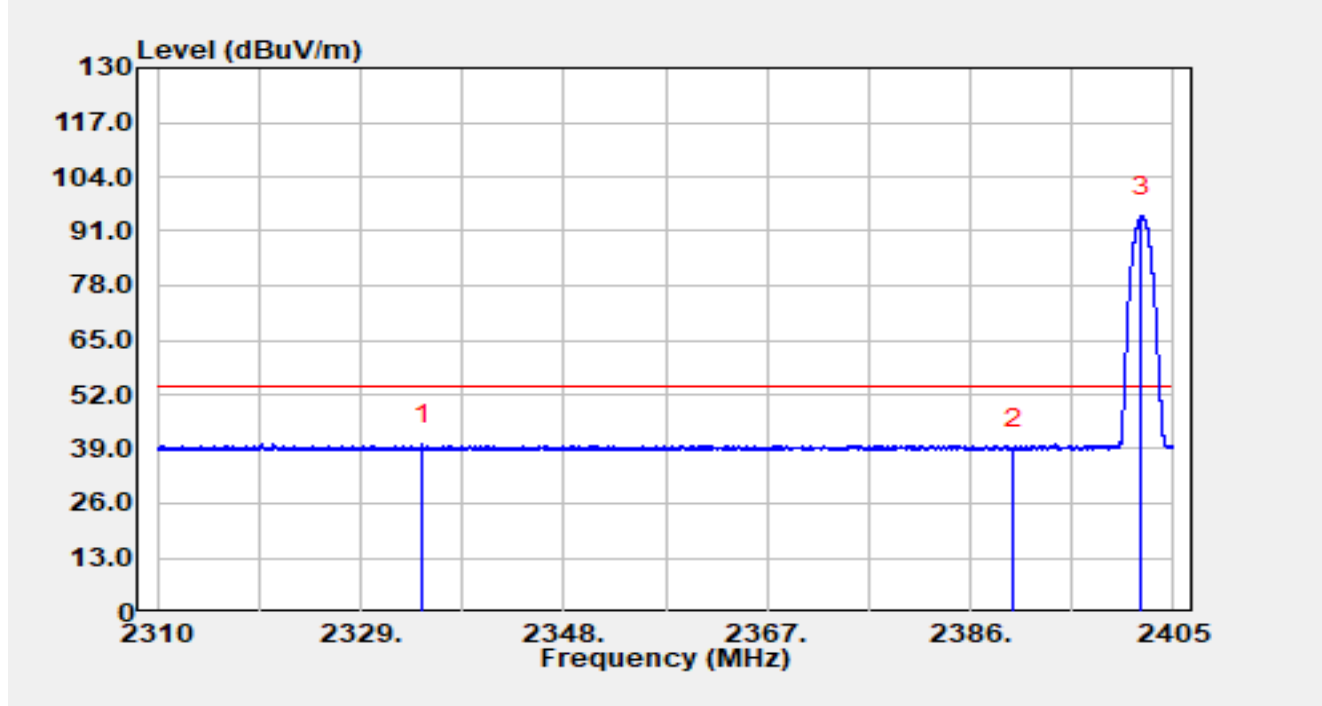


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2334.77	8.15	32.03	40.18	-13.82	54.00	Average
2		2390.00	7.14	31.96	39.09	-14.91	54.00	Average
3		2401.98	62.65	31.90	94.55	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2402MHz		

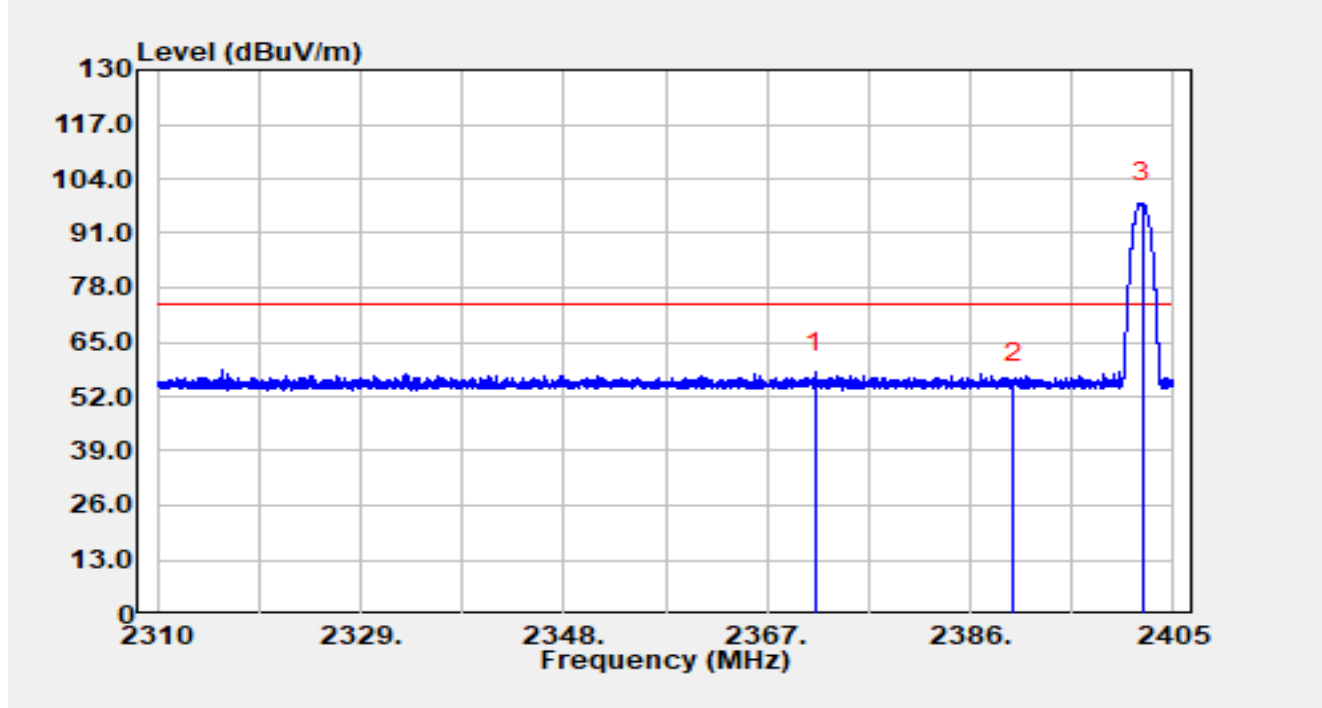


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2371.53	25.90	31.96	57.86	-16.14	74.00	Peak
2		2390.00	23.04	31.96	54.99	-19.01	74.00	Peak
3		2402.13	66.36	31.90	98.25	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2402MHz		

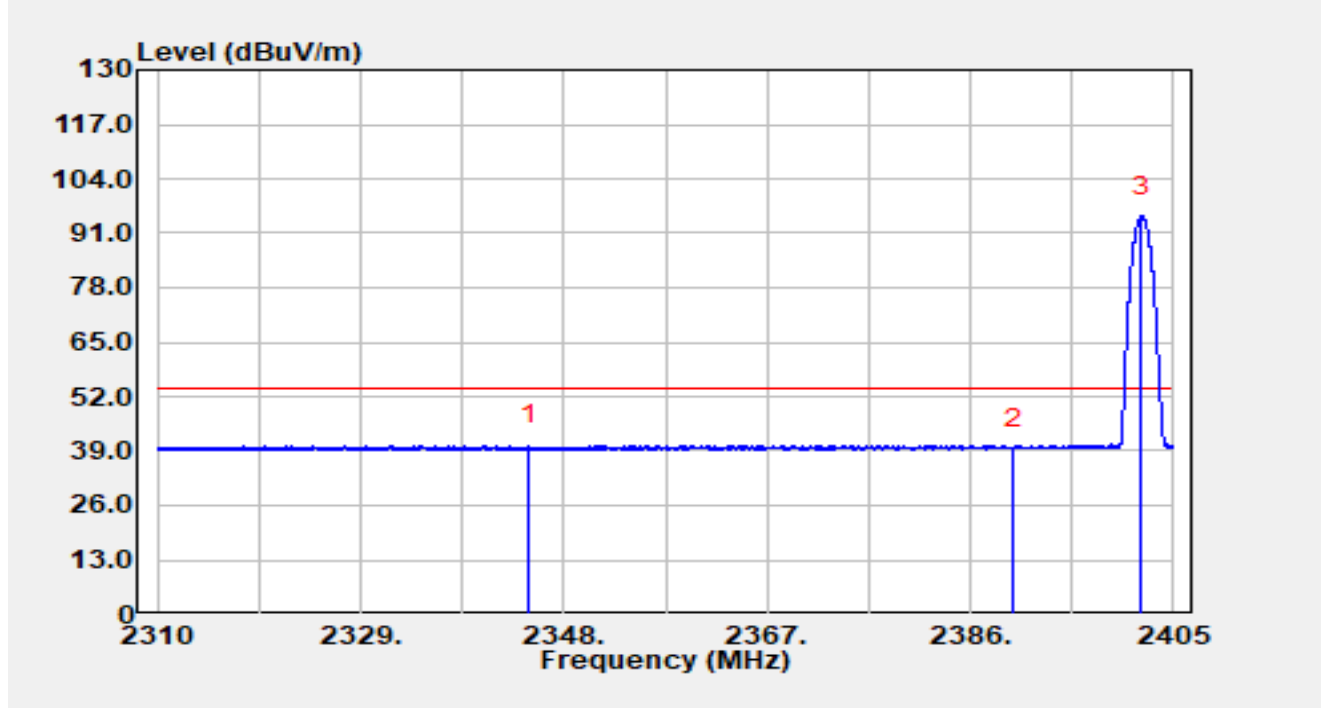


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.72	8.34	31.99	40.33	-13.67	54.00	Average
2		2390.00	7.69	31.96	39.64	-14.36	54.00	Average
3		2402.00	63.11	31.90	95.01	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2480MHz		

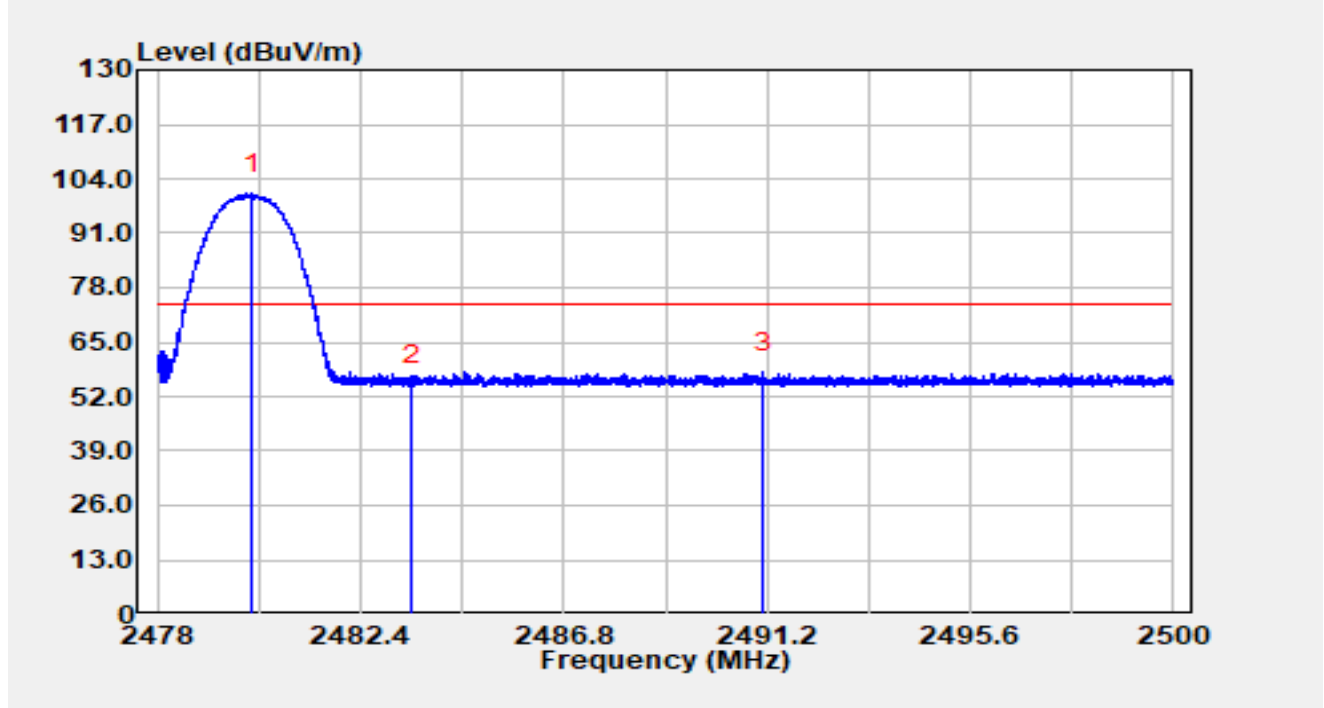


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.04	68.62	31.80	100.42	N/A	N/A	Peak
2		2483.50	23.02	31.81	54.83	-19.17	74.00	Peak
3	*	2491.11	25.95	31.82	57.77	-16.23	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Horizontal
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2480MHz		

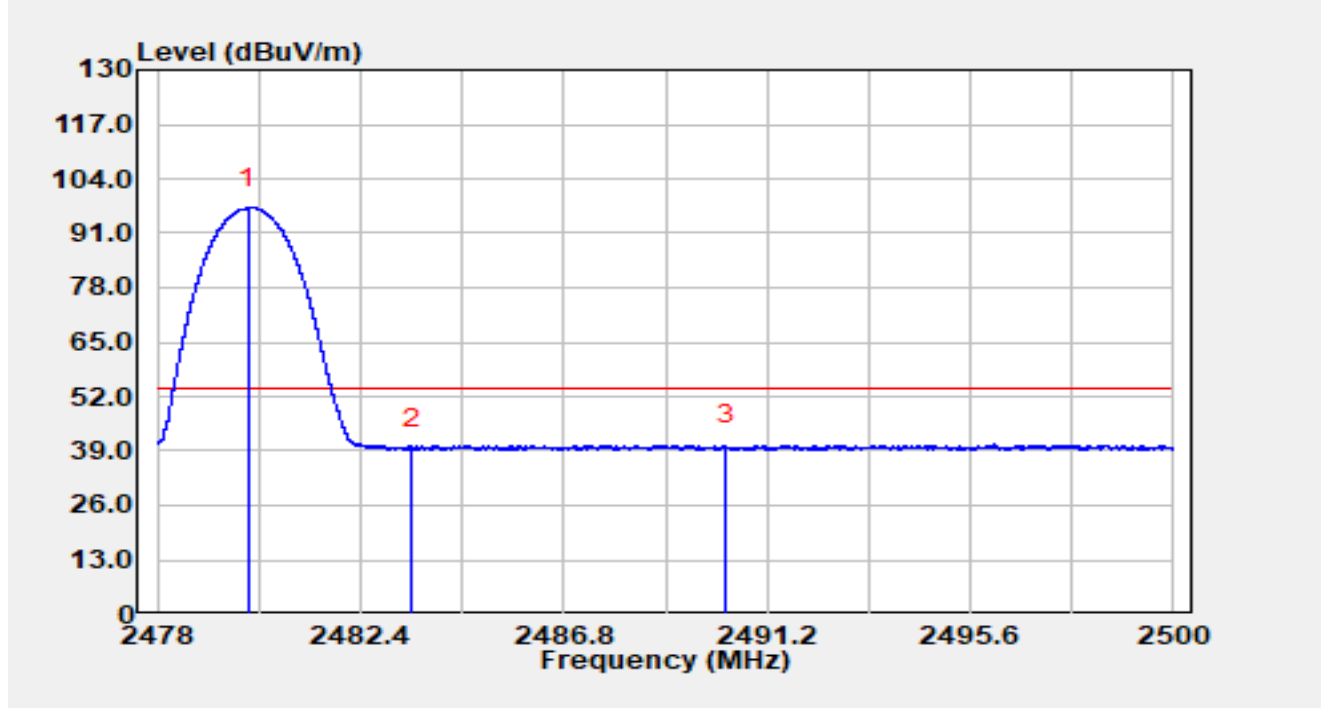


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2479.97	65.24	31.80	97.04	N/A	N/A	Average
2		2483.50	7.78	31.81	39.59	-14.41	54.00	Average
3	*	2490.31	8.52	31.81	40.34	-13.66	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2480MHz		

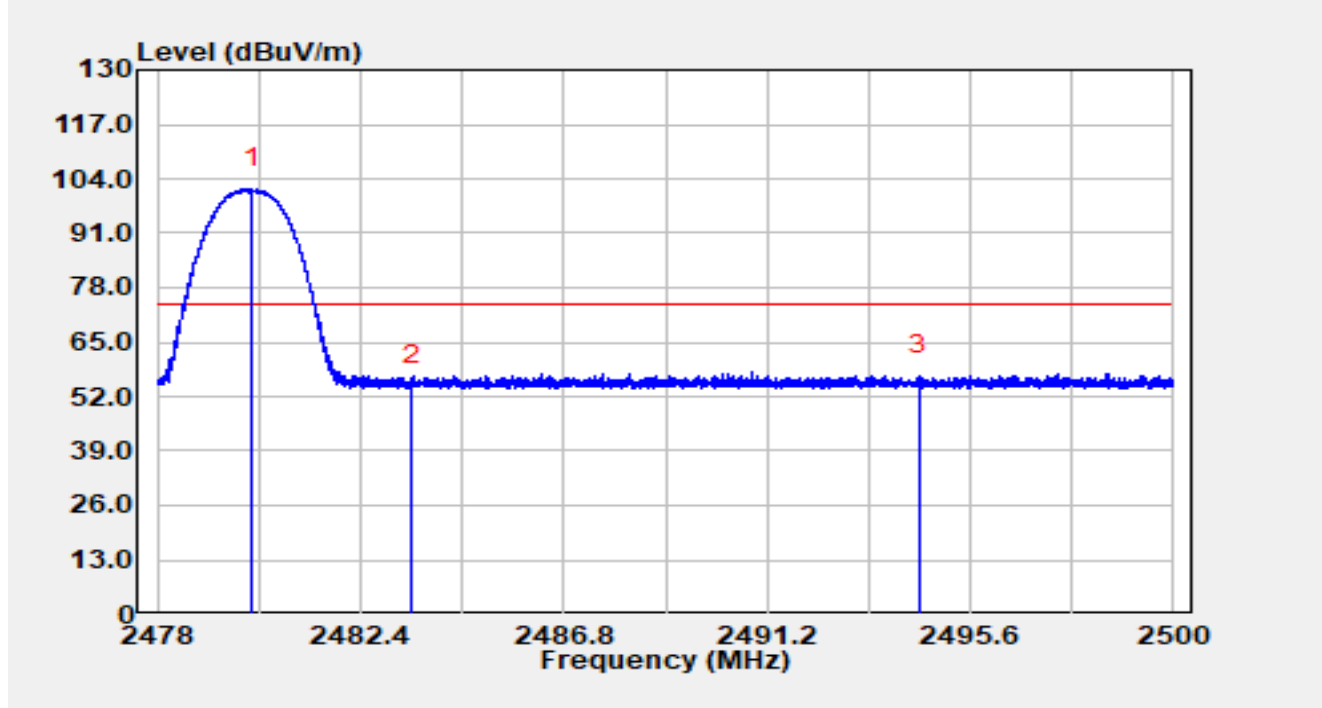


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.05	69.87	31.80	101.67	N/A	N/A	Peak
2		2483.50	22.93	31.81	54.74	-19.26	74.00	Peak
3	*	2494.48	25.27	31.81	57.09	-16.91	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC1	Test Date	2025-05-01
Temperature	23.8 °C	Humidity	40.4 %
Limit	FCC_2.4G_RE (3m)	Test Engineer	Dick Shen
Factor	BBHA 9120D_01167	Polarity	Vertical
EUT	Tablet Computer	Test Voltage	By Battery
Test Mode	Transmit by 3DH5 at 2480MHz		

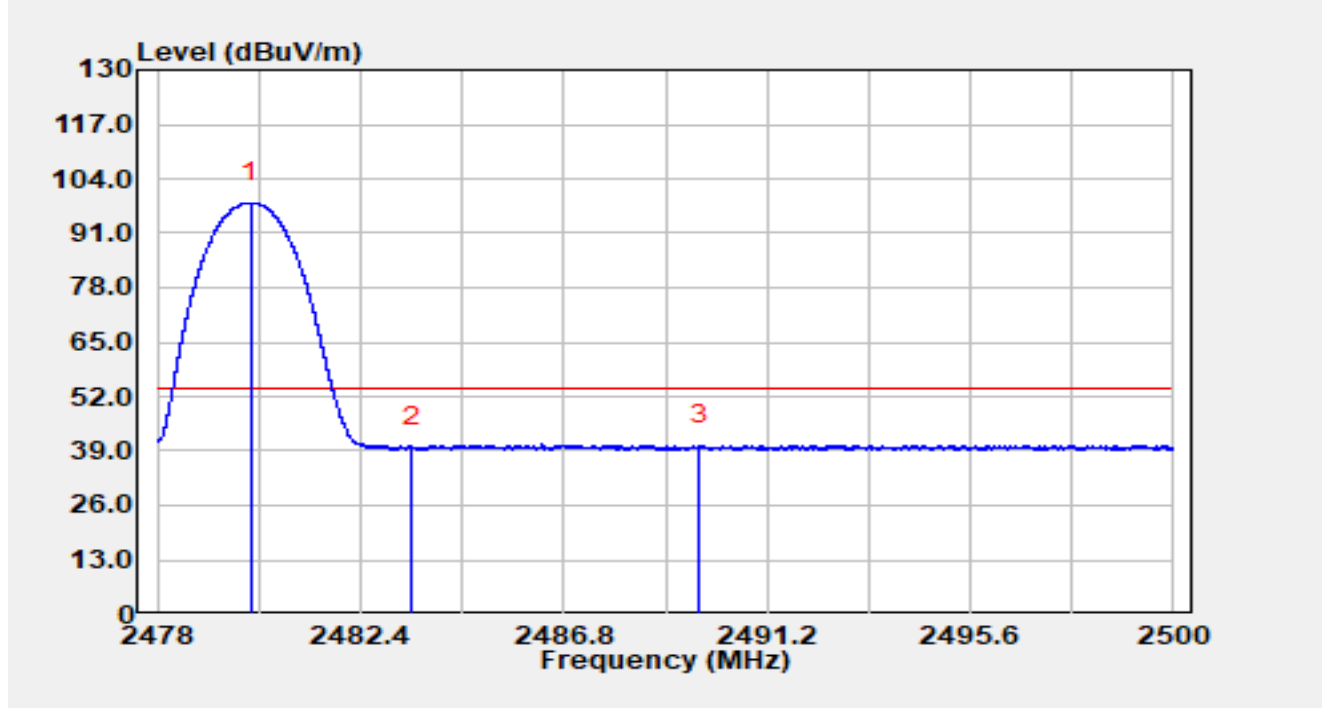


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2480.03	66.38	31.80	98.19	N/A	N/A	Average
2		2483.50	8.20	31.81	40.01	-13.99	54.00	Average
3	*	2489.72	8.66	31.81	40.47	-13.53	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.11 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by DH5 at 2402MHz		

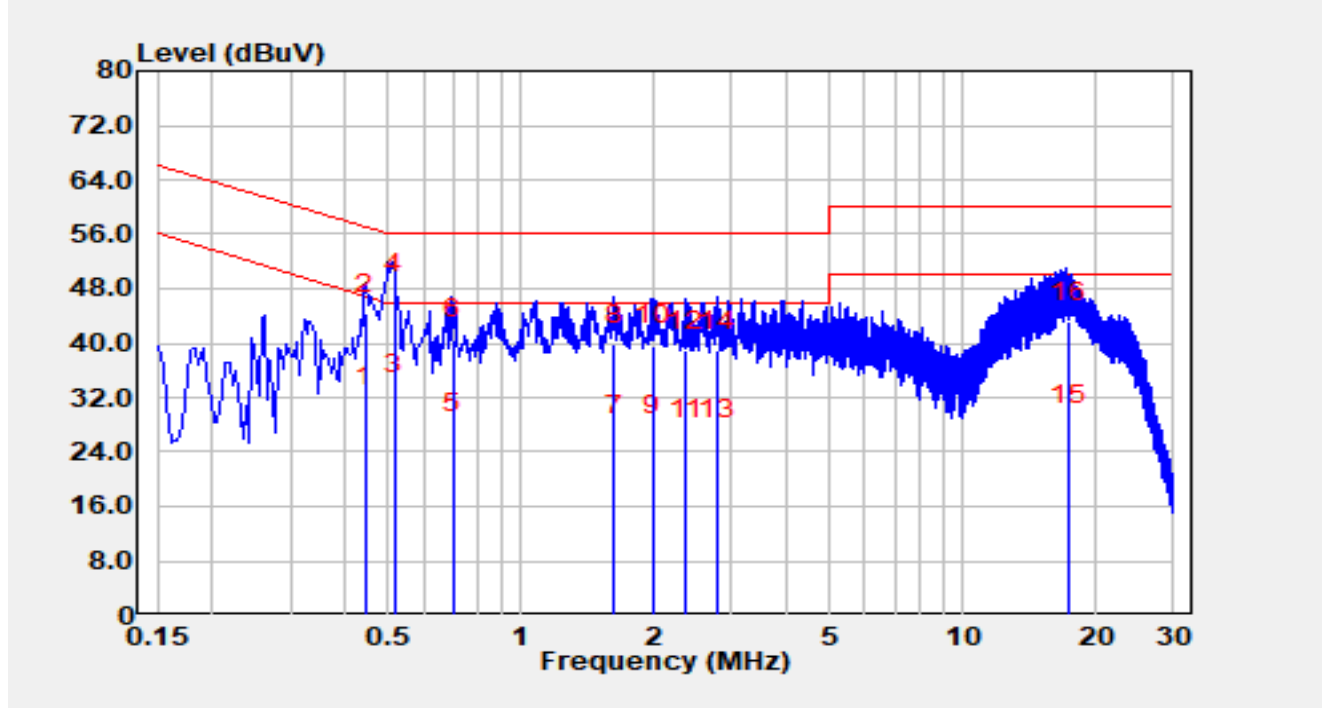


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.44	20.90	9.74	30.64	-16.34	46.99	Average
2		0.44	34.50	9.74	44.24	-12.74	56.99	QP
3		0.52	22.70	9.75	32.45	-13.55	46.00	Average
4	*	0.52	37.60	9.75	47.35	-8.65	56.00	QP
5		0.70	17.00	9.78	26.78	-19.22	46.00	Average
6		0.70	30.70	9.78	40.48	-15.52	56.00	QP
7		1.62	16.60	9.91	26.51	-19.49	46.00	Average
8		1.62	29.80	9.91	39.71	-16.29	56.00	QP
9		1.99	16.40	9.95	26.35	-19.65	46.00	Average
10		1.99	29.60	9.95	39.55	-16.45	56.00	QP
11		2.37	15.80	10.01	25.81	-20.19	46.00	Average
12		2.37	28.80	10.01	38.81	-17.19	56.00	QP
13		2.77	15.80	10.05	25.85	-20.15	46.00	Average

14		2.77	28.80	10.05	38.85	-17.15	56.00	QP
15		17.27	16.90	11.03	27.93	-22.07	50.00	Average
16		17.27	32.10	11.03	43.13	-16.87	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by DH5 at 2402MHz		

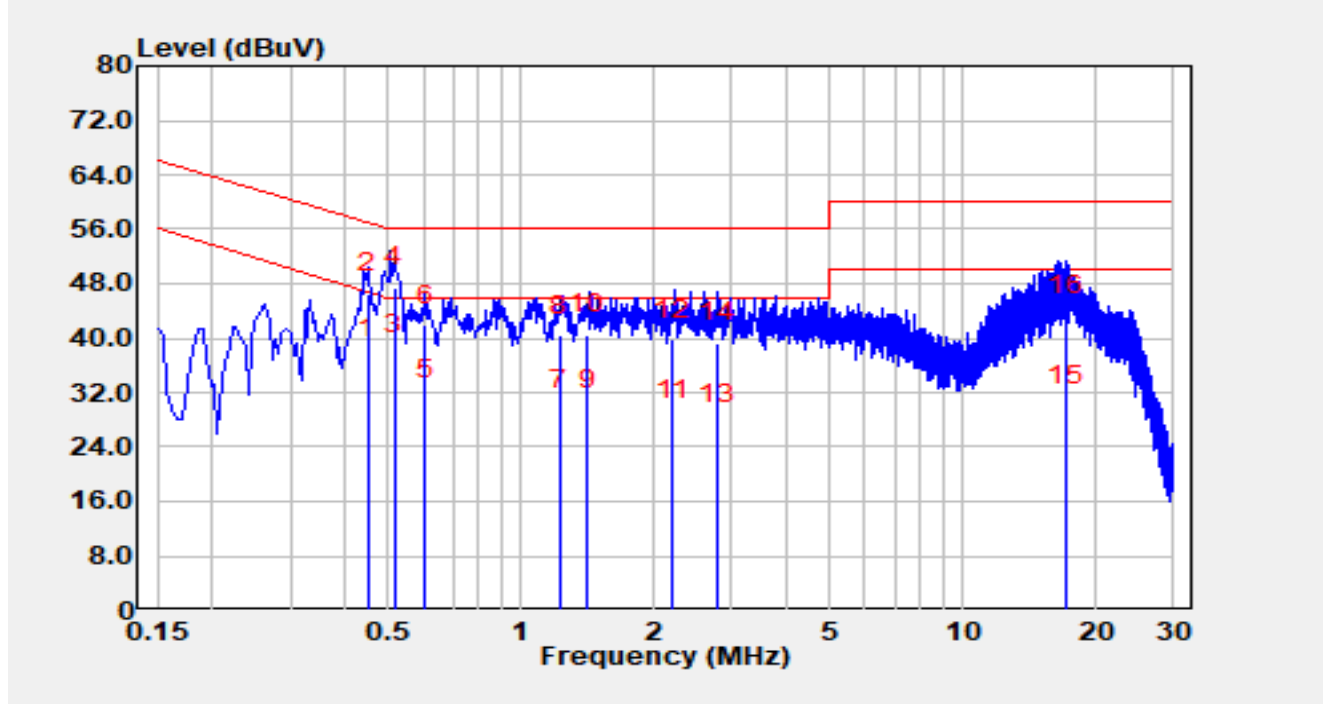

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	27.40	9.73	37.13	-9.76	46.89	Average
2		0.45	36.80	9.73	46.53	-10.36	56.89	QP
3	*	0.52	27.80	9.73	37.53	-8.47	46.00	Average
4		0.52	37.80	9.73	47.53	-8.47	56.00	QP
5		0.61	21.20	9.75	30.95	-15.05	46.00	Average
6		0.61	32.10	9.75	41.85	-14.15	56.00	QP
7		1.22	19.70	9.84	29.54	-16.46	46.00	Average
8		1.22	30.60	9.84	40.44	-15.56	56.00	QP
9		1.41	19.70	9.86	29.56	-16.44	46.00	Average
10		1.41	30.60	9.86	40.46	-15.54	56.00	QP
11		2.20	18.10	9.96	28.06	-17.94	46.00	Average
12		2.20	29.80	9.96	39.76	-16.24	56.00	QP
13		2.77	17.40	10.04	27.44	-18.56	46.00	Average
14		2.77	29.30	10.04	39.34	-16.66	56.00	QP

15		17.25	18.80	11.10	29.90	-20.10	50.00	Average
16		17.25	32.20	11.10	43.30	-16.70	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1020041-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1020041-UE" file.

_____ The End _____