



RF MEASUREMENT REPORT

FCC ID: HD5-EDA10A1
Applicant: Honeywell International Inc
Product: Tablet Computer
Model No.: EDA10A-1
Brand Name: Honeywell
FCC Classification: Part 15 Low Power Communication Device Transmitter (DXX)
FCC Rule Part(s): Part 15 Subpart C (Section 15.225)
Result: Complies
Received Date: 2025-04-08
Test Date: 2025-04-22 ~ 2025-05-24

Reviewed By:

Ada Zhang

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1020041-U203	V01	Initial Report	2025-05-28	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification.....	6
2. Test Configuration.....	7
2.1. Test Mode	7
2.2. Test Configuration and Software.....	7
2.3. Applied Standards	7
2.4. Test Environment Condition	7
3. Antenna Requirements	8
4. Measuring Instrument.....	9
5. Decision Rules and Measurement Uncertainty	10
5.1. Decision Rules	10
5.2. Measurement Uncertainty	10
6. Test Result	11
6.1. Summary	11
6.2. In-band Emission Measurement	12
6.2.1. Test Limit	12
6.2.2. Test Procedure	12
6.2.3. Test Setting.....	12
6.2.4. Test Setup	13
6.2.5. Test Result.....	13
6.3. Out-band Emission Measurement.....	14
6.3.1. Test Limit	14
6.3.2. Test Procedure	14
6.3.3. Test Setting.....	14
6.3.4. Test Setup	16
6.3.5. Test Result.....	16
6.4. Occupied Bandwidth Measurement	17
6.4.1. Test Limit	17
6.4.2. Test Procedure	17
6.4.3. Test Setting.....	17

6.4.4.	Test Setup	18
6.4.5.	Test Result.....	18
6.5.	Frequency Tolerance Measurement	19
6.5.1.	Test Limit	19
6.5.2.	Test Procedure	19
6.5.3.	Test Setting.....	19
6.5.4.	Test Setup	20
6.5.5.	Test Result.....	20
6.6.	AC Conducted Emissions Measurement	21
6.6.1.	Test Limit	21
6.6.2.	Test Setup	21
6.6.3.	Test Result.....	21
Appendix A - Test Result		22
A.1	In-band Emission Test Result	22
A.2	Out-Band Emission Test Result.....	23
A.3	Occupied Bandwidth Test Result	25
A.4	Frequency Tolerance Test Result	26
A.5	AC Conducted Emissions Test Result	27
Appendix B - Test Setup Photograph.....		35
Appendix C - EUT Photograph.....		36

1.1. Applicant

1.2. Manufacturer

1.3. Testing Facility

5 of 36

1.4. Product Information

Product Name	Tablet Computer
Model No.	EDA10A-1
Brand Name	Honeywell
EUT Identification No.	20250408Sample#21
Bluetooth Specification	Dual mode v5.1
Wi-Fi Specification	802.11a/b/g/n/ac/ax/VHT
NFC Specification	13.56MHz
GNSS Specification	GPS, Beidou, Glonass, Galileo
3GPP Specification	GSM 850/PCS 1900 WCDMA Band: II/IV/V LTE Band: 2/4/5/7/12/13/17/25/26/66/38/41/42/43 NR SA Band: n2/5/7/25/26/38/41/66/77/78 NR NSA Band: EN_DC_XA_n41A/EN_DC_XA_n77A/EN_DC_XA_n78A
Antenna Specification	Refer to clause 1.5
Operating Temp.	-20 ~ 50 °C
Power Type	By Rechargeable Li-ion Battery
Accessory	
Rechargeable Li-ion Battery	Model: BAT-EDA10A Nominal Voltage: 3.85Vdc Rated Capacity: 8000mAh Limited Charging Voltage: 4.4Vdc Rated Energy: 30.80Wh
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	13.56MHz
Channel Number	1
Type of modulation	ASK


2. Test Configuration

2.1. Test Mode

Test Mode
Mode 1: Operating Mode

2.2. Test Configuration and Software

The device was tested per the guidance ANSI C63.10-2013 that was used to reference the appropriate EUT setup for radiated spurious emissions and AC line conducted emission testing.

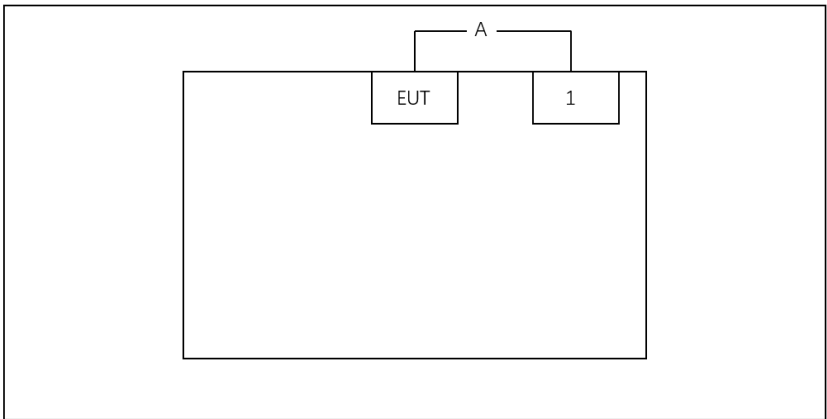Connection Diagram			
			
No.	Cable Type	Cable Spec.	Length
A	USB-C Cable	Shielding	1.2m
No.	Product	Manufacturer	Model No.
1	Adapter	Shenzhen Honor Electronic Co., Ltd	ADS-12B-06 05010E

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.225
- ANSI C63.10-2013

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~75 %RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of this device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2025-12-05	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2025-05-12 2026-05-11	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2026-04-17	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2025-10-13	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2026-01-04	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2025-10-16	WZ-AC1
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2025-09-02	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE11268	1 year	2025-12-10	WZ-TR3
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2025-09-05	WZ-TR3
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2026-04-26	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2026-04-24	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2025-09-05	WZ-SR2

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802	2.03C	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB Vertical: 30MHz~200MHz: 4.07dB

6. Test Result

6.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
15.225 (a), (b), (c)	In-Band Emission	Radiated	Pass
15.225(d)	Out-Band Emission		Pass
15.215(c)	20dB Bandwidth		Pass
15.225(e)	Frequency Tolerance		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Note: For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. In-band Emission Measurement

6.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.225		
Frequency (MHz)	Distance (m)	Level ($\mu\text{V/m}$)
13.553 ~ 13.567	30	15848
13.410 ~ 13.553, 13.567 ~ 13.710	30	334
13.110 ~ 13.410, 13.710 ~ 14.010	30	106
Note 1: The lower limit shall apply at the transition frequency.		
Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.		
Note 3: E field strength ($\text{dB}\mu\text{V/m}$) = $20 \log E$ field strength ($\mu\text{V/m}$)		

6.2.2. Test Procedure


ANSI C63.10 - 2013 - Section 6.4

6.2.3. Test Setting

1. RBW = 9kHz or 10kHz
2. VBW = 3 * RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace to stabilize

6.2.4. Test Setup

9kHz ~ 30MHz Test Setup:

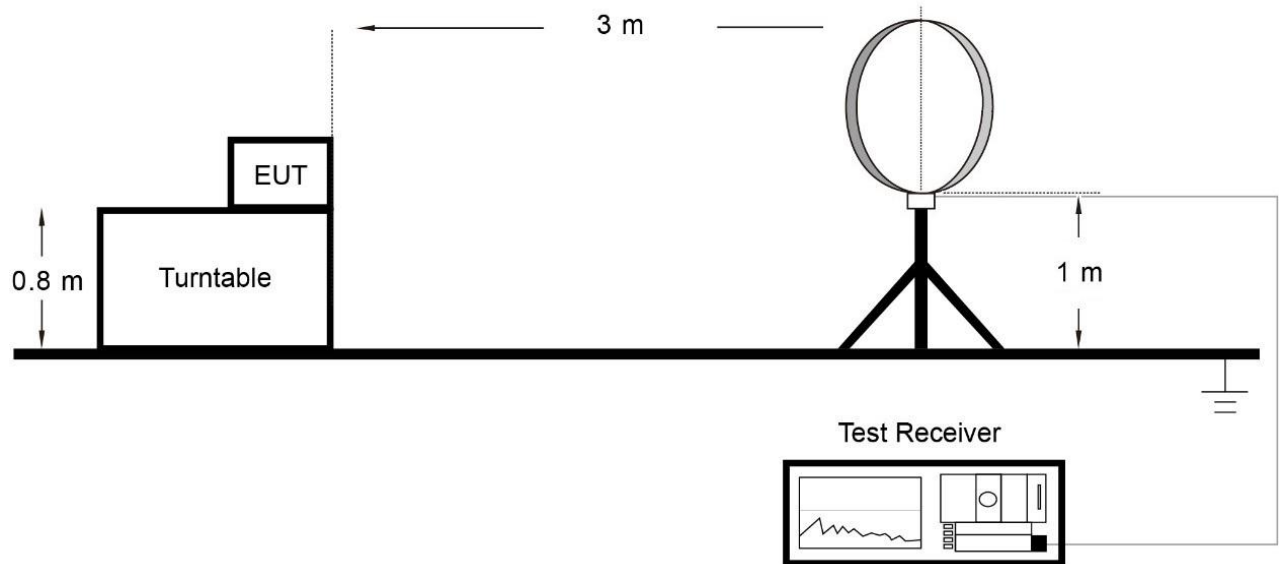

6.2.5. Test Result

Refer to Appendix A.1.

6.3. Out-band Emission Measurement

6.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level ($\mu\text{V/m}$)
0.009 - 0.490	300	2400/F (kHz)
0.490 - 1.705	30	24000/F (kHz)
1.705 - 30	30	30
30 - 88	3	100
88 - 216	3	150

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dB $\mu\text{V/m}$) = 20 log E field strength ($\mu\text{V/m}$)

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

6.3.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Peak Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = 3 * RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

Quasi-Peak Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

6.3.4. Test Setup

9kHz ~ 30MHz Test Setup:

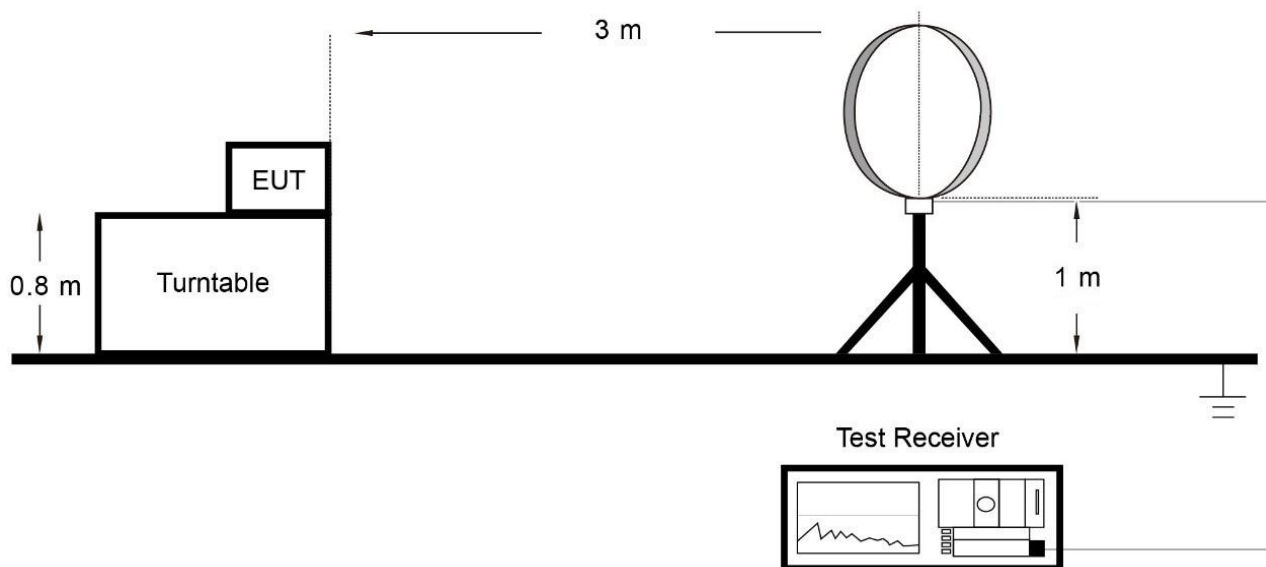

Above 30MHz Test Setup:

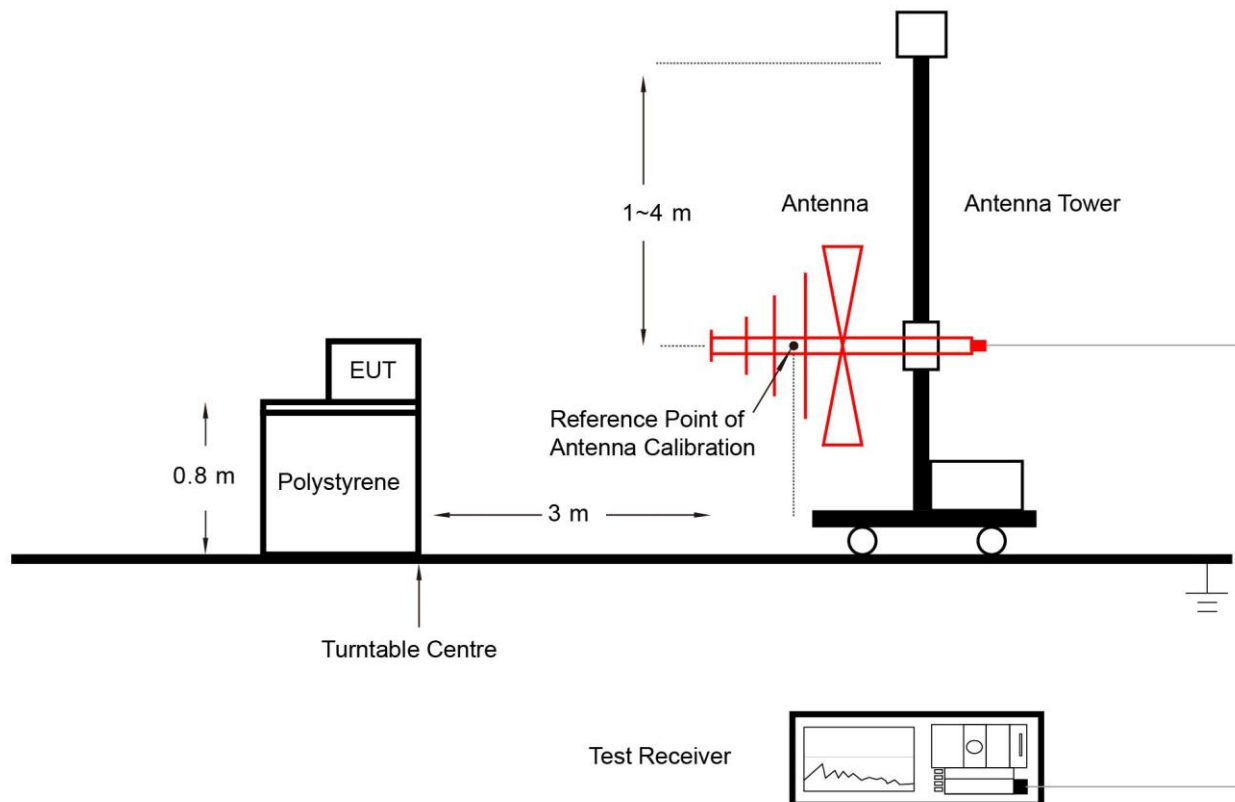

6.3.5. Test Result

Refer to Appendix A.2.

6.4. Occupied Bandwidth Measurement

6.4.1. Test Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.


6.4.2. Test Procedure

ANSI C63.10-2013 - Section 6.9.2

6.4.3. Test Setting

1. Set RBW $\geq$ 1% to 5% of the 20dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20dB bandwidth
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.4.4. Test Setup

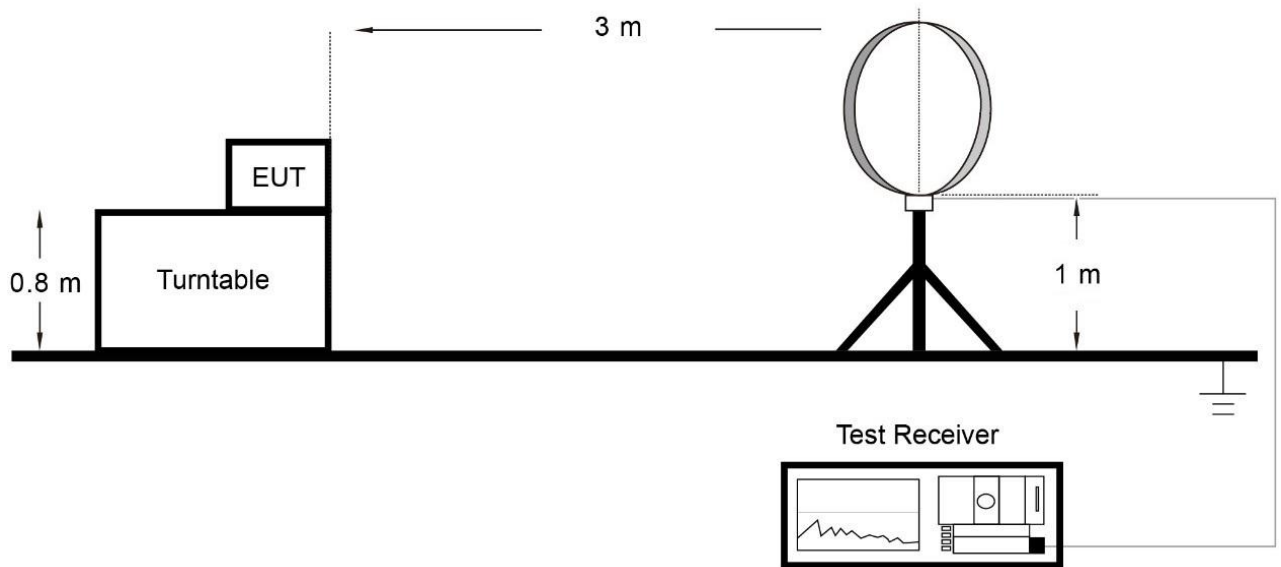

6.4.5. Test Result

Refer to Appendix A.3.

6.5. Frequency Tolerance Measurement

6.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 6.8

6.5.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change. For hand-carried battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

6.5.4. Test Setup

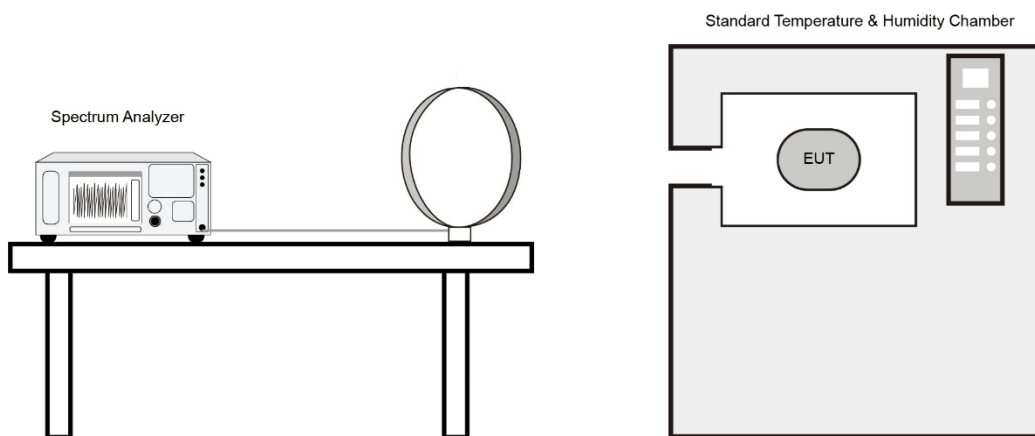

6.5.5. Test Result

Refer to Appendix A.4.

6.6. AC Conducted Emissions Measurement


6.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.6.2. Test Setup

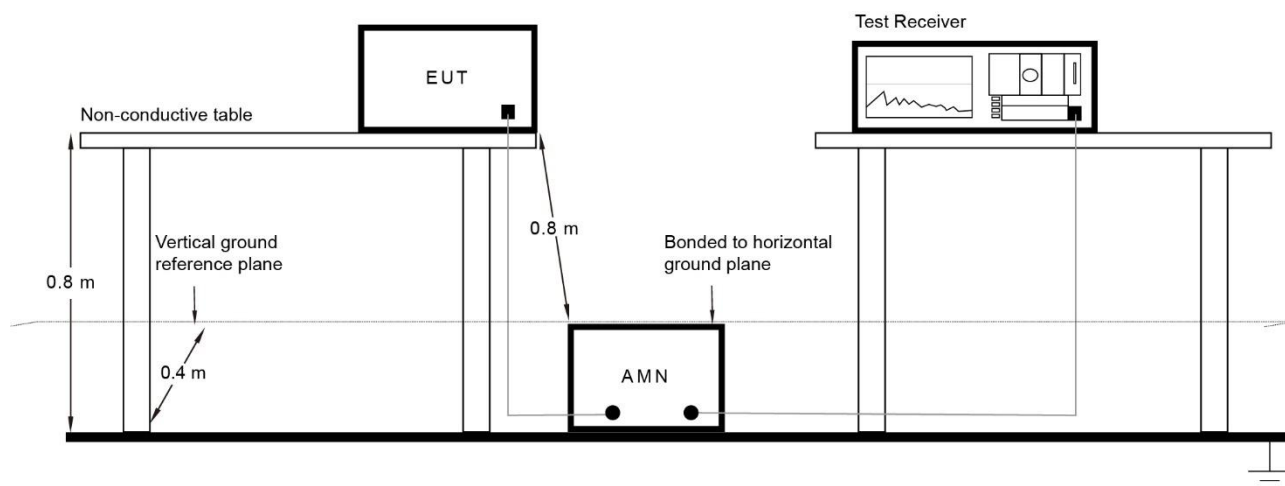

6.6.3. Test Result

Refer to Appendix A.5.

Appendix A - Test Result

A.1 In-band Emission Test Result

Test Site	WZ-AC1	Test Date	2025-04-22
Test Engineer	Lucas Wang	Test Mode	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level@3m (dBμV/m)	Measure Level@30m (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
13.34	14.39	19.14	33.53	-6.47	40.51	-46.98	Peak	Coaxial
13.55	32.04	19.13	51.17	11.17	50.47	-39.30	Peak	Coaxial
13.56	37.45	19.13	56.58	16.58	84.00	-67.42	Peak	Coaxial
13.57	32.03	19.13	51.16	11.16	50.47	-39.31	Peak	Coaxial
13.77	14.71	19.13	33.84	-6.16	40.51	-46.67	Peak	Coaxial
13.36	8.28	19.13	27.41	-12.59	40.51	-53.10	Peak	Coplanar
13.55	28.44	19.13	47.57	7.57	50.47	-42.90	Peak	Coplanar
13.56	35.80	19.13	54.93	14.93	84.00	-69.07	Peak	Coplanar
13.57	29.57	19.13	48.70	8.70	50.47	-41.77	Peak	Coplanar
13.78	13.40	19.13	32.53	-7.47	40.51	-47.98	Peak	Coplanar

Note

- All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (coaxial and coplanar) and the position with the highest emission level was recorded.
- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)
- Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).
Extrapolation Factor = $40 \cdot \log(30/3) = 40$ dB
- All measurements were recorded using an EMI test receiver employing a peak detector.

A.2 Out-Band Emission Test Result

Test Site	WZ-AC1	Test Date	2025-04-22
Test Engineer	Lucas Wang	Test Mode	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level@3m (dBμV/m)	Measure Level@300m or 30m (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
0.02	44.88	19.20	64.08	-15.92	41.58	-57.50	Peak	Coaxial
0.04	44.04	19.07	63.11	-16.89	35.56	-52.45	Peak	Coaxial
0.07	35.74	18.94	54.68	-25.32	30.70	-56.02	Peak	Coaxial
0.65	20.47	19.01	39.48	-0.52	31.35	-31.87	Peak	Coaxial
3.28	10.96	19.34	30.30	-9.70	29.54	-39.24	Peak	Coaxial
27.74	8.57	19.53	28.10	-11.90	29.54	-41.44	Peak	Coaxial
0.02	44.87	19.20	64.07	-15.93	41.58	-57.51	Peak	Coplanar
0.04	40.73	19.07	59.80	-20.20	35.56	-55.76	Peak	Coplanar
0.07	31.68	18.94	50.62	-29.38	30.70	-60.08	Peak	Coplanar
0.96	16.48	19.08	35.56	-4.44	27.96	-32.40	Peak	Coplanar
4.40	13.01	19.38	32.39	-7.61	29.54	-37.15	Peak	Coplanar
22.93	9.46	19.26	28.72	-11.28	29.54	-40.82	Peak	Coplanar

Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)
- Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m or 300m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2). Extrapolation Factor = $40 \cdot \log(300/3) = 80$ dB for range 0.009 ~ 0.490MHz,
Extrapolation Factor = $40 \cdot \log(30/3) = 40$ dB for range 0.490 ~ 30MHz,
- Below 30MHz measurement was performed using a loop antenna. The antenna was positioned in two orthogonal (Coaxial and Coplanar) and the position with the highest emission level was recorded.
- All measurements were recorded using an EMI test receiver employing a peak detector.

Out-Band Emission Above 30MHz							
Polarization	Frequency (MHz)	Reading Level (dBμV/m)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
Horizontal	48.41	-1.36	20.44	19.08	40.00	-20.92	Quasi-peak
Horizontal	52.12	-1.38	20.34	18.96	40.00	-21.04	Quasi-peak
Horizontal	58.99	-1.80	19.58	17.78	40.00	-22.22	Quasi-peak
Horizontal	105.83	0.24	18.62	18.86	43.50	-24.64	Quasi-peak
Horizontal	136.84	2.27	15.10	17.37	43.50	-26.13	Quasi-peak
Horizontal	147.16	-0.83	15.01	14.18	43.50	-29.32	Quasi-peak
Vertical	51.72	6.90	20.37	27.27	40.00	-12.73	Quasi-peak
Vertical	59.11	5.41	19.55	24.96	40.00	-15.04	Quasi-peak
Vertical	69.66	8.69	16.46	25.15	40.00	-14.85	Quasi-peak
Vertical	101.75	6.38	18.67	25.05	43.50	-18.45	Quasi-peak
Vertical	116.28	7.57	17.22	24.79	43.50	-18.71	Quasi-peak
Vertical	137.78	9.30	15.06	24.36	43.50	-19.14	Quasi-peak


Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 2: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

A.3 Occupied Bandwidth Test Result

Test Site	WZ-AC1	Test Date	2025-05-24
Test Engineer	Lucas Wang	Test Mode	Mode 1

Frequency (MHz)	20dB Occupied Bandwidth (kHz)
13.56	428.9

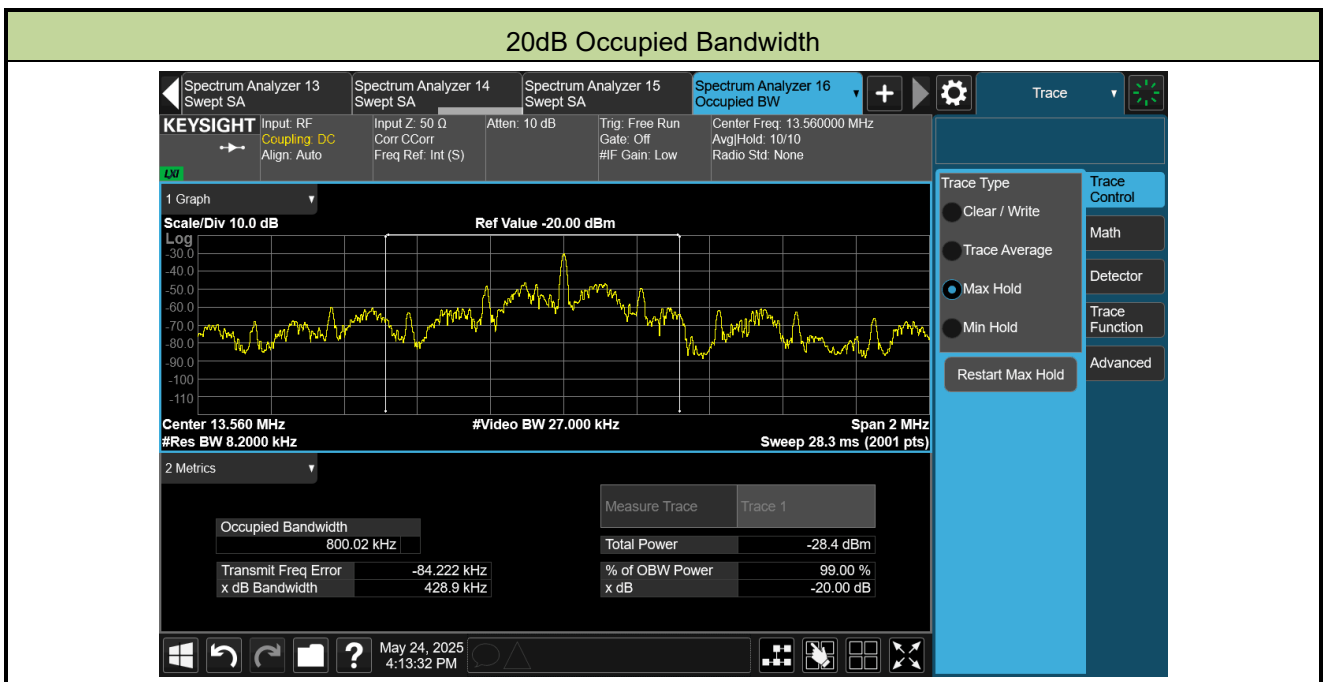


A.4 Frequency Tolerance Test Result

Test Site	WZ-TR3	Test Date	2025-05-14
Test Engineer	Lynn Yang	Test Mode	Mode 1

Deviation Limit: +/- 0.01% = +/- 1356Hz			
Voltage (%)	Power Battery	Temp (°C)	Frequency Deviation (Hz)
100%	4.4V	-20	0
		-10	666
		0	637
		+10	608
		+20	0
		+30	-174
		+40	0
		+50	463
BATT. ENDPOINT	3.45V	+20	-87

A.5 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-05-14
Temperature	23.4 °C	Humidity	48.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1		

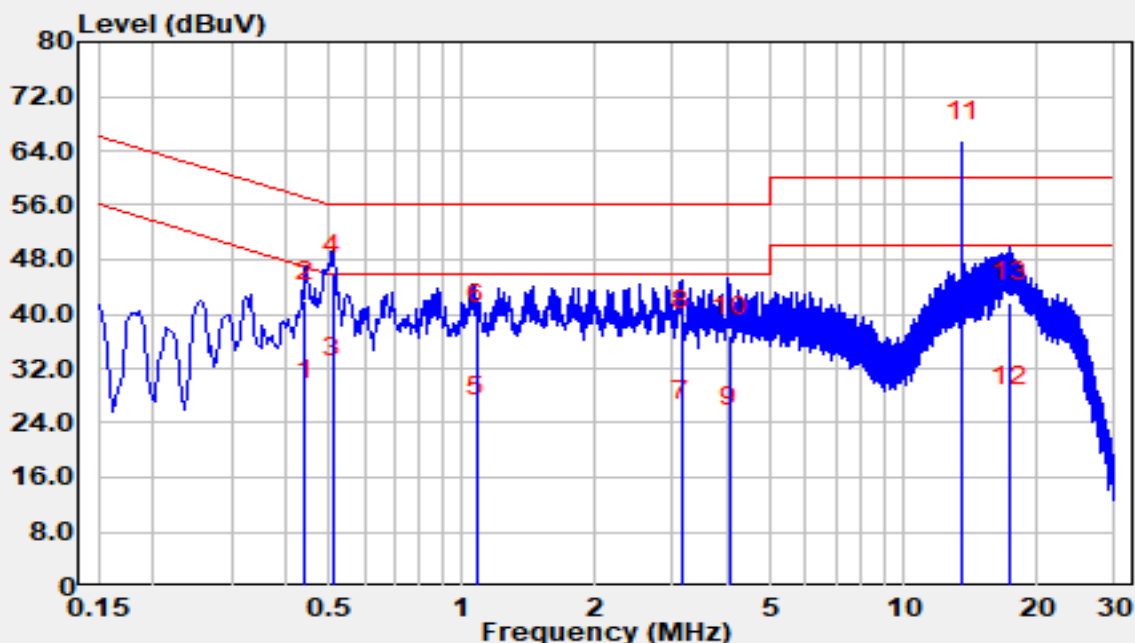


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.44	17.70	9.74	27.44	-19.60	47.04	Average
2		0.44	32.10	9.74	41.84	-15.20	57.04	QP
3		0.51	20.80	9.75	30.55	-15.45	46.00	Average
4	*	0.51	36.10	9.75	45.85	-10.15	56.00	QP
5		1.08	15.20	9.84	25.04	-20.96	46.00	Average
6		1.08	28.50	9.84	38.34	-17.66	56.00	QP
7		3.13	14.10	10.09	24.19	-21.81	46.00	Average
8		3.13	27.40	10.09	37.49	-18.51	56.00	QP
9		4.04	13.30	10.13	23.43	-22.57	46.00	Average
10		4.04	26.70	10.13	36.83	-19.17	56.00	QP
11		13.56	54.60	10.87	65.47	N/A	N/A	Peak
12		17.30	15.40	11.03	26.43	-23.57	50.00	Average
13		17.30	30.70	11.03	41.73	-18.27	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).
4. The point (11) is NFC fundamental frequency that is not evaluated in this standard. Data under the following section indicates that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line.

Site	WZ-SR2	Test Date	2025-05-14
Temperature	23.4 °C	Humidity	48.9 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Mode 1		

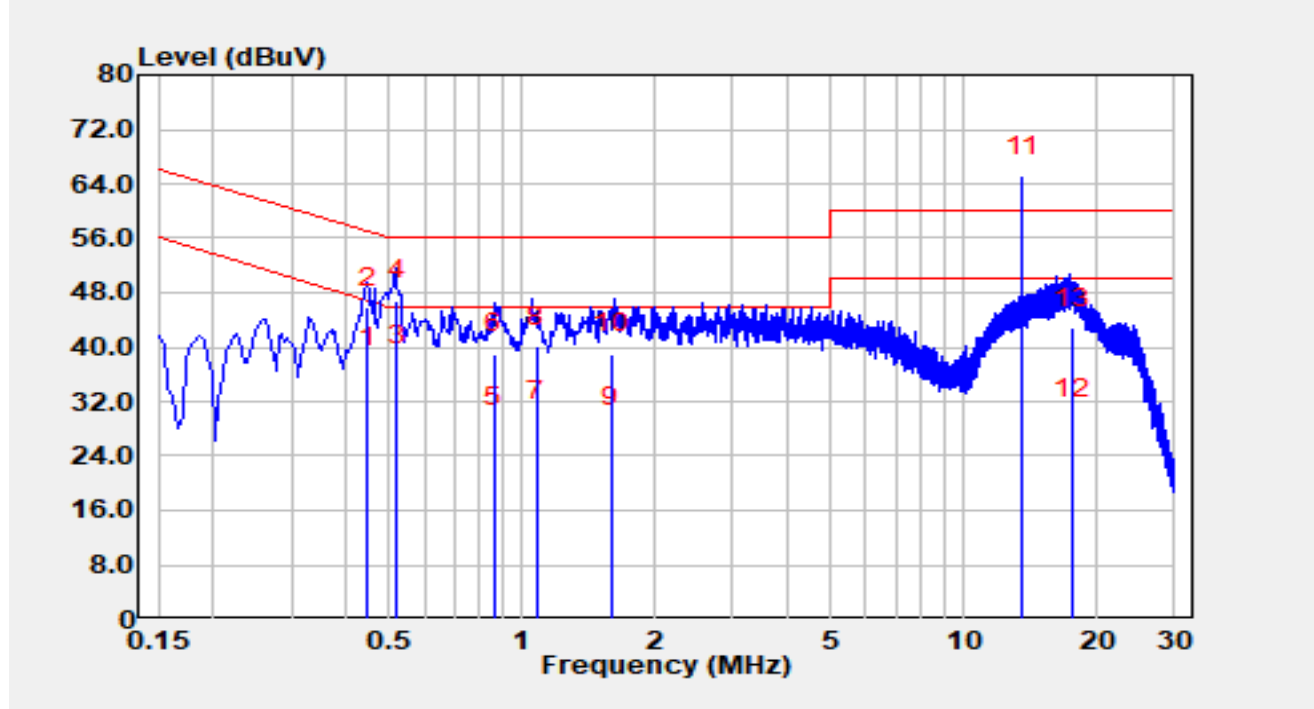


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	27.20	9.73	36.93	-10.02	46.95	Average
2		0.45	36.10	9.73	45.83	-11.12	56.95	QP
3	*	0.52	27.60	9.73	37.33	-8.67	46.00	Average
4		0.52	37.20	9.73	46.93	-9.07	56.00	QP
5		0.87	18.50	9.79	28.29	-17.71	46.00	Average
6		0.87	29.30	9.79	39.09	-16.91	56.00	QP
7		1.08	19.40	9.82	29.22	-16.78	46.00	Average
8		1.08	30.20	9.82	40.02	-15.98	56.00	QP
9		1.59	18.40	9.88	28.28	-17.72	46.00	Average
10		1.59	29.10	9.88	38.98	-17.02	56.00	QP
11		13.56	54.20	10.92	65.12	N/A	N/A	Peak
12		17.64	18.30	11.11	29.41	-20.59	50.00	Average
13		17.64	31.70	11.11	42.81	-17.19	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).
4. The point (11) is NFC fundamental frequency that is not evaluated in this standard. Data under the following section indicates that when the antenna terminal is terminated the fundamental amplitude is lowering below the limit line.

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Antenna terminal terminated		

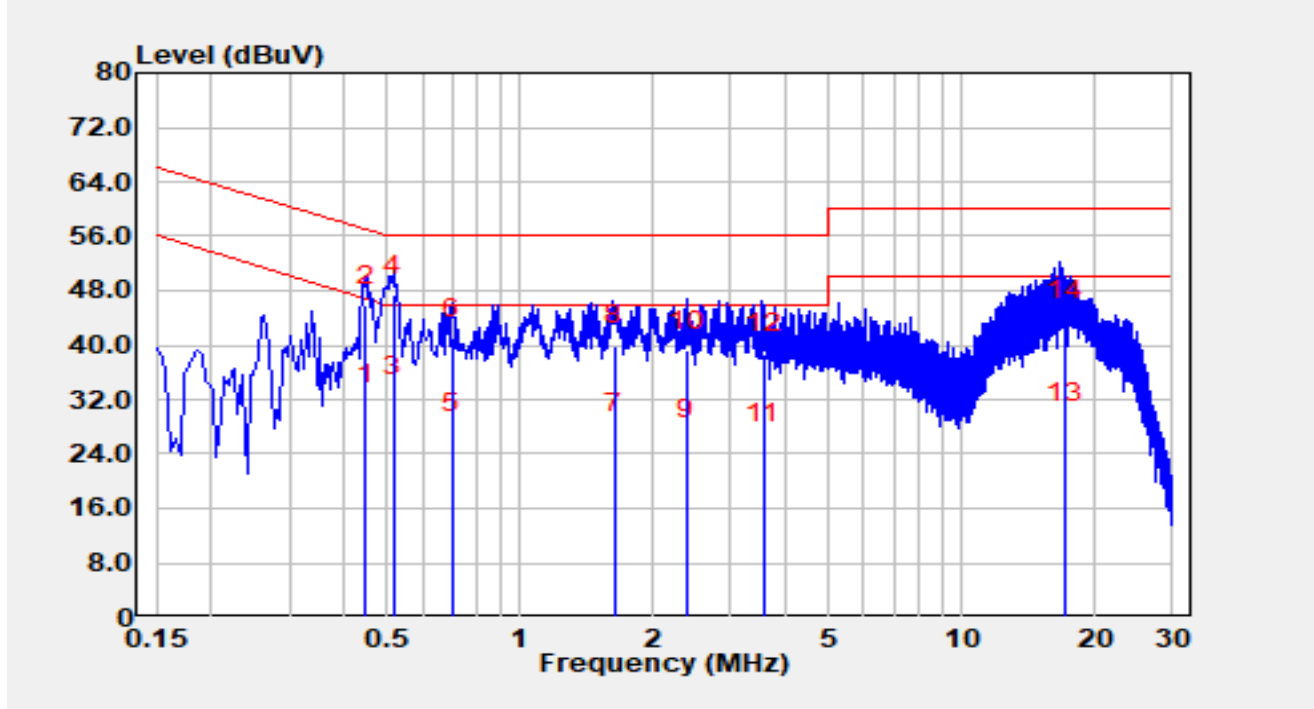


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	21.50	9.74	31.24	-15.69	46.93	Average
2		0.45	36.00	9.74	45.74	-11.19	56.93	QP
3		0.52	22.70	9.75	32.45	-13.55	46.00	Average
4	*	0.52	37.60	9.75	47.35	-8.65	56.00	QP
5		0.70	17.10	9.78	26.88	-19.12	46.00	Average
6		0.70	31.20	9.78	40.98	-15.02	56.00	QP
7		1.63	17.10	9.91	27.01	-18.99	46.00	Average
8		1.63	30.00	9.91	39.91	-16.09	56.00	QP
9		2.38	16.10	10.01	26.11	-19.89	46.00	Average
10		2.38	29.20	10.01	39.21	-16.79	56.00	QP
11		3.56	15.40	10.11	25.51	-20.49	46.00	Average
12		3.56	28.60	10.11	38.71	-17.29	56.00	QP
13		17.13	17.50	11.03	28.53	-21.47	50.00	Average
14		17.13	32.70	11.03	43.73	-16.27	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2025-05-13
Temperature	24.1 °C	Humidity	44.4 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Tablet Computer	Test Voltage	AC 120V/60Hz
Test Mode	Antenna terminal terminated		

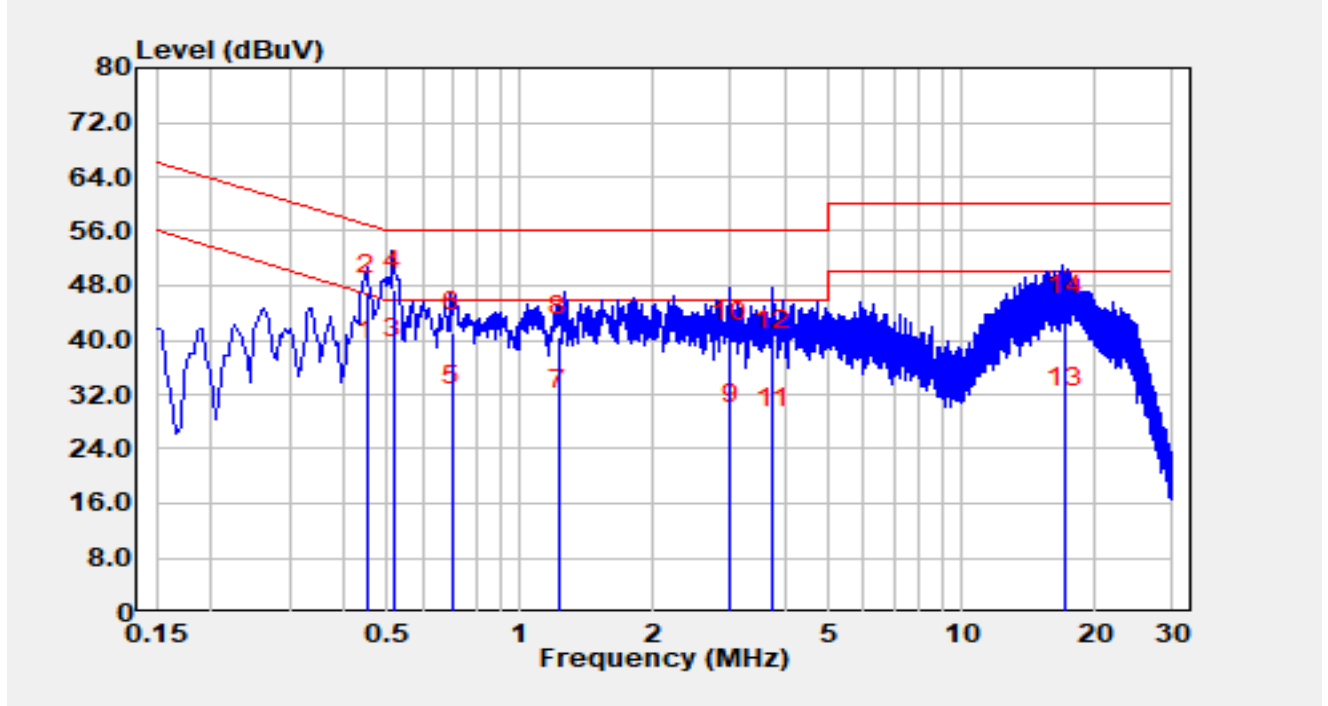

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.45	27.40	9.73	37.13	-9.75	46.88	Average
2		0.45	37.00	9.73	46.73	-10.15	56.88	QP
3	*	0.52	27.60	9.73	37.33	-8.67	46.00	Average
4		0.52	37.60	9.73	47.33	-8.67	56.00	QP
5		0.70	20.70	9.77	30.47	-15.53	46.00	Average
6		0.70	31.40	9.77	41.17	-14.83	56.00	QP
7		1.22	19.90	9.84	29.74	-16.26	46.00	Average
8		1.22	30.70	9.84	40.54	-15.46	56.00	QP
9		2.99	17.60	10.07	27.67	-18.33	46.00	Average
10		2.99	29.50	10.07	39.57	-16.43	56.00	QP
11		3.74	16.90	10.11	27.01	-18.99	46.00	Average
12		3.74	28.50	10.11	38.61	-17.39	56.00	QP
13		17.22	18.90	11.10	30.00	-20.00	50.00	Average
14		17.22	32.50	11.10	43.60	-16.40	60.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1020041-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1020041-UE" file.

The End
