

# MEASUREMENT REPORT

## FCC PART 15.225 NFC 13.56MHz

**FCC ID:** HD5-EDA50211

**APPLICANT:** Honeywell International Inc  
Honeywell Sensing & Productivity Solutions

**Application Type:** Certification

**Product:** Mobile Computer

**Model No.:** EDA50-211

**Brand Name:** Honeywell

**FCC Classification:** Part 15 Low Power Communication Device Transmitter  
(DXX)

**FCC Rule Part(s):** Part 15.225

**Test Procedure(s):** ANSI C63.10-2013

**Test Date:** May 04 ~ June 02, 2017

Reviewed By : Jame Yuan  
( Jame Yuan )

Approved By : Marlinchen  
( Marlin Chen )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

## Revision History

Report No.	Version	Description	Issue Date	Note
1704RSU05706	Rev. 01	Initial report	06-05-2017	Valid

## CONTENTS

Description	Page
<b>§2.1033 General Information</b>	5
<b>1. INTRODUCTION</b>	6
1.1. Scope	6
1.2. MRT Test Location	6
<b>2. PRODUCT INFORMATION</b>	7
2.1. Equipment Description	7
2.2. Test Mode	7
2.3. Device Capabilities	7
2.4. Test Configuration	8
2.5. EMI Suppression Device(s)/Modifications	8
2.6. Labeling Requirements	8
<b>3. DESCRIPTION OF TEST</b>	9
3.1. Evaluation Procedure	9
3.2. AC Line Conducted Emissions	9
3.3. Radiated Emissions	10
<b>4. ANTENNA REQUIREMENTS</b>	11
<b>5. TEST EQUIPMENT CALIBRATION DATE</b>	12
<b>6. MEASUREMENT UNCERTAINTY</b>	13
<b>7. TEST RESULT</b>	14
7.1. Summary	14
7.2. In-band Emission	15
7.2.1. Test Limit	15
7.2.2. Test Procedure Used	15
7.2.3. Test Setup	16
7.2.4. Test Result	17
7.3. Out-band Emission	18
7.3.1. Test Limit	18
7.3.2. Test Procedure Used	18
7.3.3. Test Setup	19
7.3.4. Test Result	20
7.4. 20dB Bandwidth	21
7.4.1. Test Limit	21
7.4.2. Test Procedure Used	21

---

7.4.3.	Test Setup.....	21
7.4.4.	Test Result.....	22
7.5.	Frequency Tolerance.....	23
7.5.1.	Test Limit .....	23
7.5.2.	Test Procedure Used .....	23
7.5.3.	Test Setup.....	23
7.5.4.	Test Result.....	24
7.6.	AC Conducted Emissions Measurement.....	25
7.6.1.	Test Limit .....	25
7.6.2.	Test Setup.....	25
7.6.3.	Test Result.....	26
<b>8.</b>	<b>CONCLUSION.....</b>	<b>28</b>

## §2.1033 General Information

<b>Applicant:</b>	Honeywell International Inc Honeywell Sensing & Productivity Solutions
<b>Applicant Address:</b>	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
<b>Manufacturer:</b>	Honeywell International Inc Honeywell Sensing & Productivity Solutions
<b>Manufacturer Address:</b>	9680 Old Bailes Rd. Fort Mill, SC 29707 United States
<b>Test Site:</b>	MRT Technology (Suzhou) Co., Ltd
<b>Test Site Address:</b>	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
<b>MRT Registration No.:</b>	809388
<b>FCC Rule Part(s):</b>	Part 15.225
<b>Model No.:</b>	EDA50-211
<b>FCC ID:</b>	HD5-EDA50211
<b>Test Device Serial No.:</b>	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering
<b>FCC Classification:</b>	Part 15 Low Power Communication Device Transmitter (DXX)

### Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 809388) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-4179, G-814, C-4664, T-2206) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications and Radio testing for FCC, Industry Canada, EU and TELEC Rules.



## 1. INTRODUCTION

### 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Industry Canada Certification and Engineering Bureau.

### 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2009 on September 30, 2013.



## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

Product Name:	Mobile Computer
Model No.:	EDA50-211
Brand Name:	Honeywell
Hardware Version:	
Software Version:	205.01.00.0006.eng
IMEI:	356074080038511
Wi-Fi Specification:	802.11a/b/g/n
Bluetooth Specification:	v4.0 dual mode
GSM Operation Band (s)	E-GSM 850 / DCS 1900
WCDMA Operation Band (s)	Band II / V
LTE Operation Band (s)	FDD Band 2/4/7
NFC:	13.56MHz
GPS:	1575.42MHz
<b>Components</b>	
Adapter	Model No.: ADS-12B-06 05010E Input Power: 100 - 240V ~ 50/60Hz, Max. 0.3A Output Power: 5VDC 2.0A

### 2.2. Test Mode

Test Mode
Mode 1: Transmit by NFC

### 2.3. Device Capabilities

This device contains the following capabilities:

2.4GHz WLAN (DTS), 5GHz WLAN (UNII), Bluetooth (v4.0 dual mode), NFC, GSM 850/1900  
WCDMA Band II/IV/V LTE FDD Band 2/4/7

## **2.4. Test Configuration**

The **Mobile Computer FCC ID: HD5-EDA50211** was set to continuous transmission. This was performance using manufacturer software loaded on the terminal to allow for continuous transmission. This device was tested in accordance with the guidance of ANSI C63.10-2013. ANSI C63.4-2014 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

## **2.5. EMI Suppression Device(s)/Modifications**

No EMI suppression device(s) were added and/or no modifications were made during testing.

## **2.6. Labeling Requirements**

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

### 3. DESCRIPTION OF TEST

#### 3.1. Evaluation Procedure

The measurement procedures described in the American National Standard for Testing Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the **Mobile Computer FCC ID: HD5-EDA50211**.

Deviation from measurement procedure.....**None**

#### 3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013 at Clause 4.3.

Line conducted emissions test results are shown in Section 7.6.

### 3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 0.8 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

## 4. ANTENNA REQUIREMENTS

### **Excerpt from §15.203 of the FCC Rules/Regulations:**

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the Mobile Computer is **permanently attached**.
- There are no provisions for connection to an external antenna.

### **Conclusion:**

The **Mobile Computer FCC ID: HD5-EDA50211** unit complies with the requirement of §15.203.

## 5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2017/06/20
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2017/06/20
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06181	1 year	2017/12/20
Shielding Anechoic Chamber	Mikebang	Chamber-SR2	MRTSUE06214	1 year	2018/05/09

Radiated Emissions - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9038A	MRTSUE06125	1 year	2017/08/19
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2017/06/21
Loop Antenna	Schwarzbeck	FMZB1519	MRTSUE06025	1 year	2017/11/21
TRILOG Antenna	Schwarzbeck	VULB9168	MRTSUE06172	1 year	2017/11/19
Digital Thermometer & Hygrometer	Minggao	N/A	MRTSUE06170	1 year	2017/12/14
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2017/05/10

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2018/04/25
USB wideband power sensor	Boonton	55006	MRTSUE06109	1 year	2018/04/25
Temperature/Humidity Meter	Yuhuaze	HTC-2	MRTSUE06180	1 year	2017/12/20

Software	Version	Function
e3	V 8.3.5	EMI Test Software

## 6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .

AC Conducted Emission Measurement - SR2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 150kHz~30MHz: 3.46dB
Radiated Emission Measurement - AC2
Measuring Uncertainty for a Level of Confidence of 95% ( $U=2U_{c(y)}$ ): 9kHz ~ 1GHz: 4.18dB 1GHz ~ 25GHz: 4.76dB

## 7. TEST RESULT

### 7.1. Summary

**Product Name:** Mobile Computer  
**FCC ID:** HD5-EDA50211  
**FCC Classification:** Low Power Communication Device Transmitter (DXX)  
**Frequency Examined:** 13.56MHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.225 (a), (b), (c)	In-Band Emission	15,848uV/m @ 30m 13.553 ~ 13.567 MHz 334uV/m @ 30m 13.410 ~ 13.553 MHz 13.567 ~ 13.710 MHz 106uV/m @ 30m 13.110 ~ 13.410 MHz 13.710 ~ 14.010 MHz		Pass	Section 7.2
15.225(d)	Out-Band Emission	Emissions outside of the specified band (13.110~14.010 MHz) must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.3
2.1049	20dB Bandwidth	N/A		Pass	Section 7.4
15.225(e)	Frequency Stability Tolerance	$\pm 0.01\%$ of operating frequency		Pass	Section 7.5
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.6

#### Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

## 7.2. In-band Emission

### 7.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.225		
Frequency (MHz)	Distance (m)	Level (uV/m)
13.553 ~13.567	30	15848
13.410 ~13.553 13.567 ~13.710	30	334
13.110 ~13.410 13.710 ~14.010	30	106

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

### 7.2.2. Test Procedure Used

The EUT was setup according to ANSI C63.4, 2014 and tested according to ANSI C63.10: 2013 for compliance to FCC 47CFR 15.225 requirements.


The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4:2014 on radiated measurement.


The EUT should be operate in transmission mode.

### 7.2.3. Test Setup

#### 9kHz ~ 30MHz Test Setup:

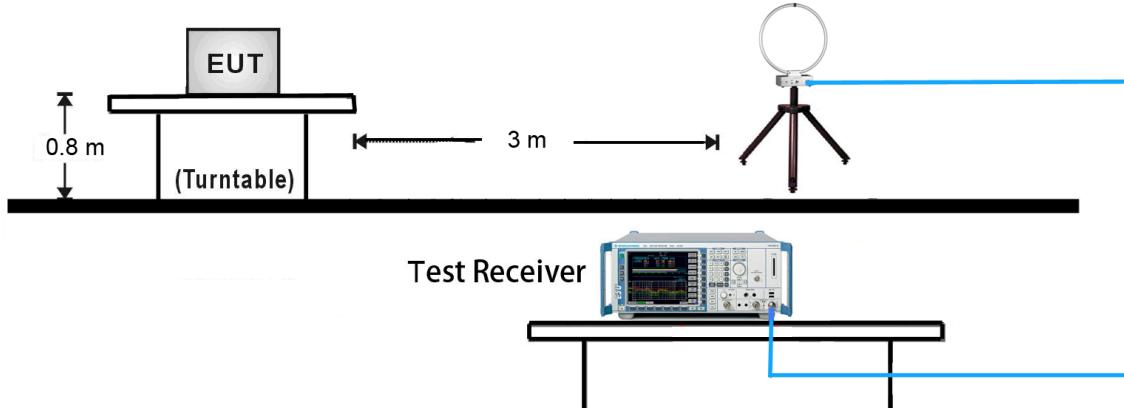

#### 30MHz ~ 1GHz Test Setup:

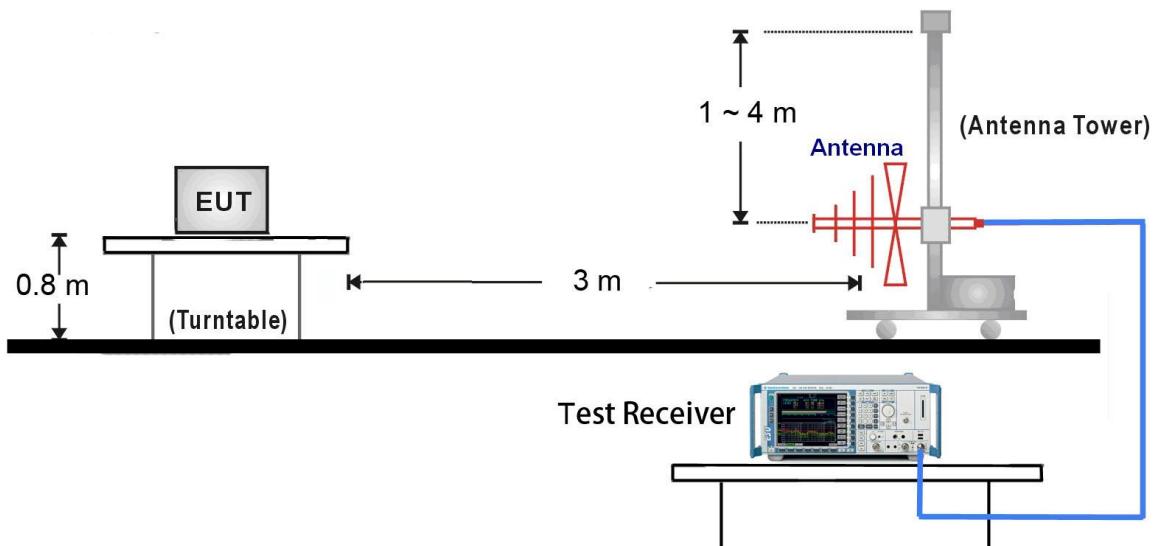

#### 7.2.4. Test Result

Test Engineer	Alex Ma	Temperature	25°C
Test Time	2017/05/25	Relative Humidity	52%
Test Mode	Mode1	Test Site	AC2

Frequency	Reading Level(dBuV/m)	Factor	Measure Level(dBuV/m)	Limit(3m) [dBuV/m]	Margin [dB]
Face On					
13.35	11.38	19.85	31.23	80.51	-49.28
13.53	18.27	19.86	38.13	90.47	-52.34
13.56	35.29	19.87	55.16	123.99	-68.83
13.57	16.76	19.86	36.62	90.47	-53.85
13.77	9.93	19.88	29.81	80.51	-50.70
Face Off					
13.31	8.22	19.85	28.07	80.51	-52.44
13.54	10.44	19.86	30.30	90.47	-60.17
13.56	28.14	19.87	48.01	123.99	-75.98
13.58	12.04	19.86	31.90	90.47	-58.57
13.80	7.74	19.88	27.62	80.51	-52.89

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).

Extrapolation Factor =  $40 * \log(30/3) = 40$  dB

Note3: All measurements were recorded using a EMI test receiver employing a peak detector.

### 7.3. Out-band Emission

#### 7.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level (uV/m)
0.009 - 0.490	300	2400/F (kHz)
0.490 - 1.705	30	2400/F (kHz)
1.705 - 30	30	30
30 - 88	3	100
88 - 216	3	150
216 - 960	3	200
Above 960	3	500

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.


Note 3: E field strength (dBuV/m) = 20 log E field strength (uV/m)

#### 7.3.2. Test Procedure Used


The EUT was tested from 9kHz up to the 1GHz excluding the band 13.110-14.010 MHz. All measurements were recorded with a spectrum analyzer employing an average detector for emissions below 30MHz. Above 30MHz a Quasi-peak detector was used. All out-of-band emissions must not exceed the limits shown as stated per Section 15.209. A loop antenna was used for searching for emissions below 30MHz.

### 7.3.3. Test Setup

#### 9kHz ~ 30MHz Test Setup:

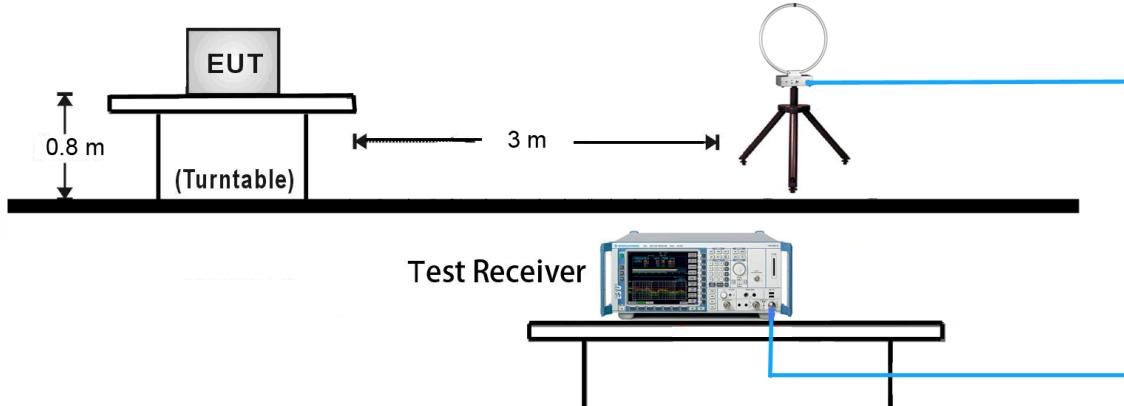

#### 30MHz ~ 1GHz Test Setup:

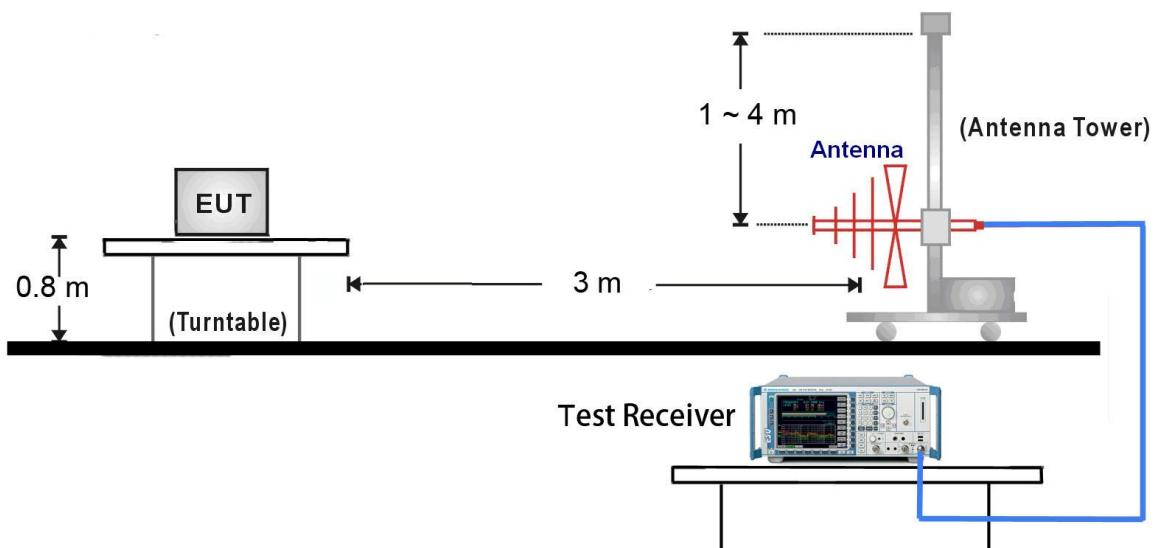

### 7.3.4. Test Result

Test Engineer	Alex Ma	Temperature	25°C
Test Time	2017/05/25	Relative Humidity	52%
Test Mode	Mode1	Test Site	AC2

Out-Band Emission Below 30MHz						
Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
Face On						
27.12	1.56	19.51	21.07	69.54	-48.47	QP
Face Off						
27.12	1.05	19.51	20.56	69.54	-48.98	QP

Out-Band Emission Above 30MHz							
Antenna	Frequency (MHz)	Reading Level (dBuV/m)	Factor (dB)	Measure Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.48	8.91	13.63	22.54	40.00	-17.46	QP
H	56.24	3.71	13.63	17.34	40.00	-22.66	QP
H	69.64	9.52	11.56	21.08	40.00	-18.92	QP
H	81.93	13.52	10.06	23.58	40.00	-16.42	QP
H	153.04	0.51	15.19	15.70	43.50	-27.80	QP
H	255.03	1.23	13.04	14.27	46.00	-31.73	QP
V	30.51	13.56	13.63	27.19	40.00	-12.81	QP
V	45.56	10.35	14.17	24.52	40.00	-15.48	QP
V	55.29	14.36	13.70	28.06	40.00	-11.94	QP
V	65.44	16.52	12.36	28.88	40.00	-11.12	QP
V	85.73	18.05	10.13	28.18	40.00	-11.82	QP
V	98.84	17.50	10.88	28.38	43.50	-15.12	QP

Note1: All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (face on and face off) and the position with the highest emission level was recorded.

Note2: Measurements were tested at 3m and the data was extrapolated to the specified measurement distance of 30m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in &15.31(f)(2).

Extrapolation Factor =  $40 * \log(30/3) = 40$  dB

Note3: All measurements were recorded using a EMI test receiver employing a peak detector.

## 7.4. 20dB Bandwidth


### 7.4.1. Test Limit

N/A

### 7.4.2. Test Procedure Used

The 20dB bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode.


### 7.4.3. Test Setup

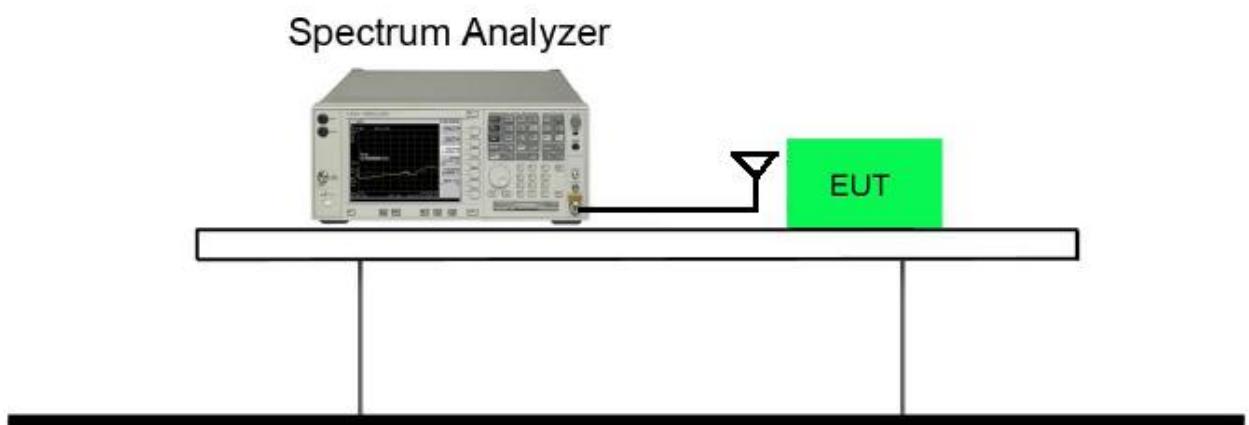

#### 7.4.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	2017/06/02	Relative Humidity	53%
Test Mode	Mode1	Test Site	AC2

Frequency (MHz)	Occupied Bandwidth (kHz)
13.56	134.5

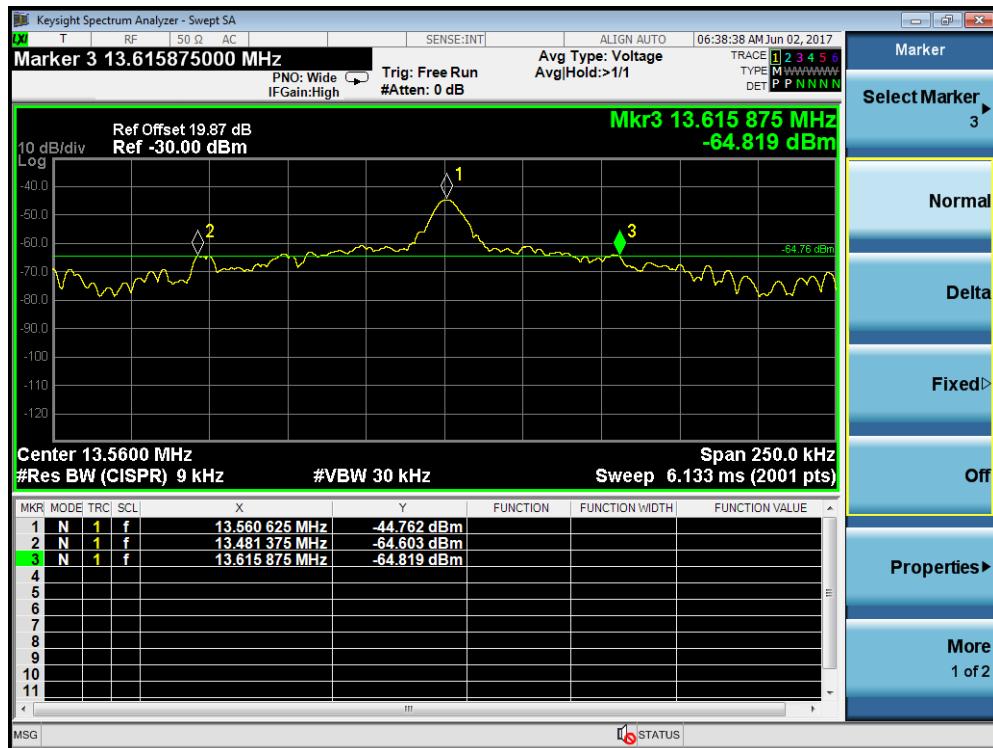

## 7.5. Frequency Tolerance


### 7.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

### 7.5.2. Test Procedure Used

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

### 7.5.3. Test Setup

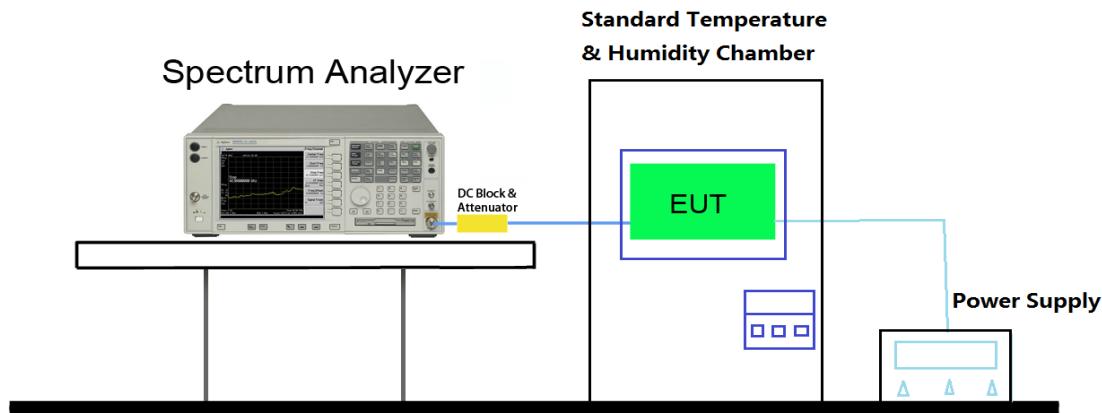

#### 7.5.4. Test Result

Test Engineer	Milo Li	Temperature	26°C
Test Time	2017/06/02	Relative Humidity	53%
Test Mode	Mode1	Test Site	AC2

Operating Frequency: 13.56MHz					
Reference Voltage: 3.8Vdc					
Deviation Limit: +/- 0.01% = 1356Hz					
Voltage (%)	Power Battery	TEMP (°C)	FREQ. (Hz)	FREQ. Dev. (Hz)	Deviation (%)
100%	3.80	+20(Ref)	13,560,676	676	0.004985
100%		-30	13,560,577	577	0.004255
100%		-20	13,560,597	597	0.004403
100%		-10	13,560,683	683	0.005037
100%		0	13,559,440	440	0.003245
100%		+10	13,560,594	594	0.004381
100%		+20	13,559,603	603	0.004447
100%		+30	13,560,528	528	0.003894
100%		+40	13,560,619	619	0.004565
100%		+50	13,560,557	557	0.004108
Battery End Point	3.40	+20	13,559,411	411	0.003031
115%	4.37	+20	13,560,489	489	0.003606

## 7.6. AC Conducted Emissions Measurement


### 7.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

### 7.6.2. Test Setup

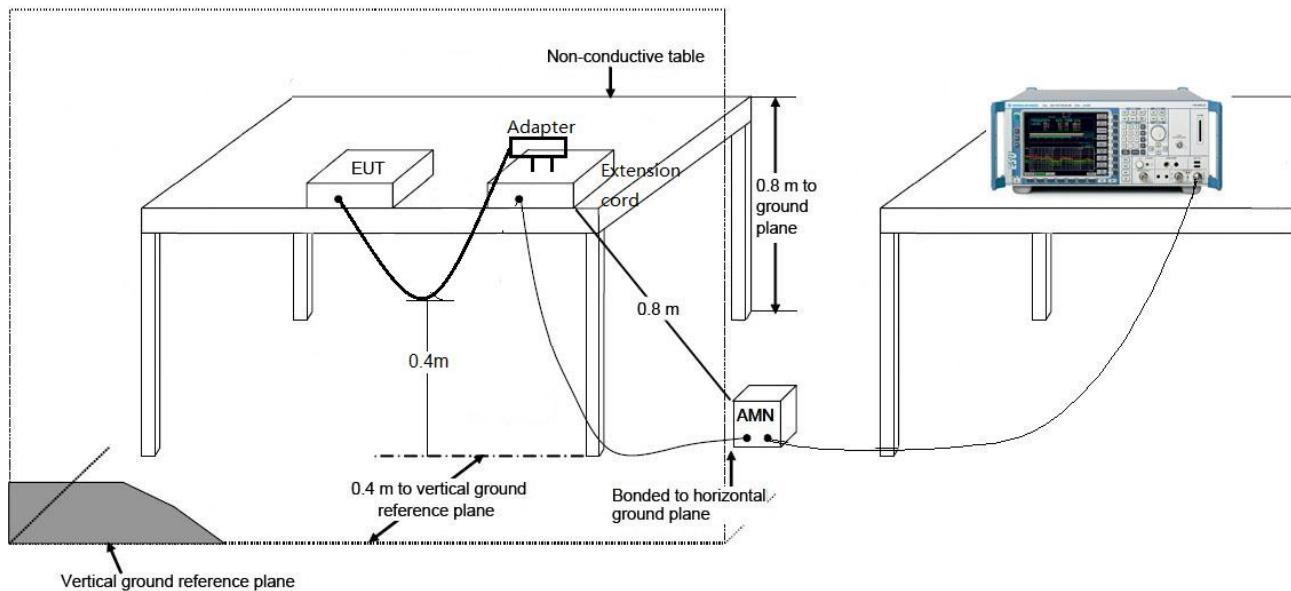

### 7.6.3. Test Result

Site: SR2	Time: 2017/05/26 - 15:52
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Mode 1	

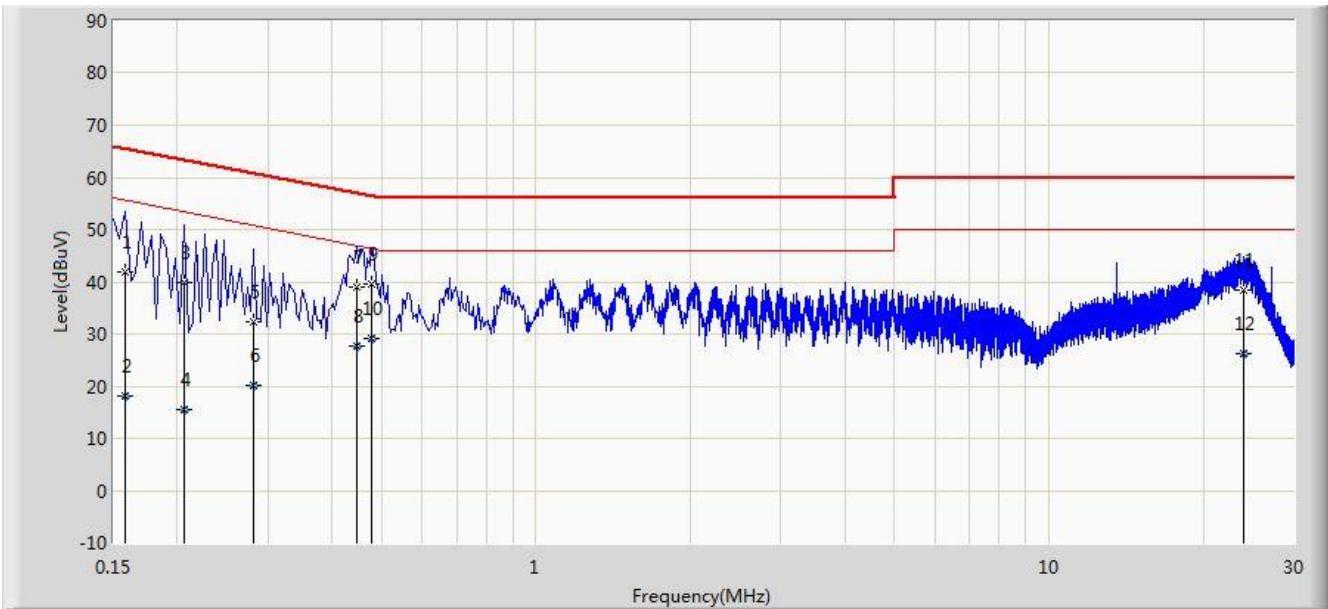


No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V)	Factor (dB)	Type
1			0.158	41.928	31.617	-23.641	65.568	10.311	QP
2			0.158	18.051	7.740	-37.518	55.568	10.311	AV
3			0.206	39.989	30.008	-23.376	63.365	9.981	QP
4			0.206	15.548	5.568	-37.817	53.365	9.981	AV
5			0.282	32.443	22.453	-28.314	60.757	9.990	QP
6			0.282	20.063	10.074	-30.693	50.757	9.990	AV
7			0.446	38.938	28.815	-18.011	56.949	10.123	QP
8			0.446	27.750	17.627	-19.200	46.949	10.123	AV
9	*		0.478	39.554	29.406	-16.820	56.374	10.149	QP
10			0.478	29.241	19.092	-17.133	46.374	10.149	AV
11			23.886	38.302	28.104	-21.698	60.000	10.198	QP
12			23.886	26.290	16.092	-23.710	50.000	10.198	AV

Note: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

Site: SR2	Time: 2017/05/26 - 15:56
Limit: FCC_Part15.207_CE_AC Power	Engineer: Bruce Wang
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Mode 1	

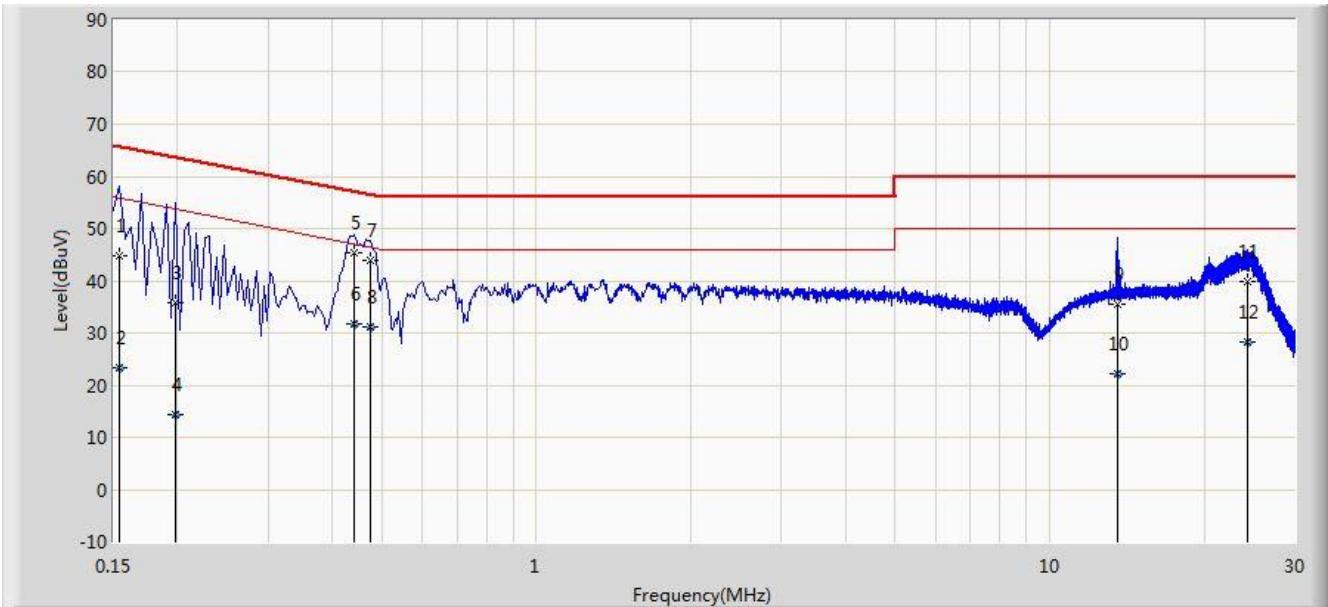

No	Flag	Mark	Frequency (MHz)	Measure Level (dB $\mu$ V)	Reading Level (dB $\mu$ V)	Over Limit (dB)	Limit (dB $\mu$ V)	Factor (dB)	Type
1			0.154	44.856	34.141	-20.925	65.781	10.716	QP
2			0.154	23.198	12.482	-32.583	55.781	10.716	AV
3			0.198	35.903	25.888	-27.791	63.694	10.015	QP
4			0.198	14.313	4.298	-39.381	53.694	10.015	AV
5	*		0.442	45.462	35.318	-11.563	57.024	10.144	QP
6			0.442	31.792	21.648	-15.233	47.024	10.144	AV
7			0.474	43.853	33.686	-12.590	56.444	10.167	QP
8			0.474	31.277	21.109	-15.167	46.444	10.167	AV
9			13.542	35.595	25.498	-24.405	60.000	10.097	QP
10			13.542	22.235	12.137	-27.765	50.000	10.097	AV
11			24.210	39.732	29.446	-20.268	60.000	10.286	QP
12			24.210	28.262	17.976	-21.738	50.000	10.286	AV

Note: Measure Level (dB $\mu$ V) = Reading Level (dB $\mu$ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB).

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Computer FCC ID: HD5-EDA50211** is in compliance with Part 15C of the FCC Rules.

---

The End