



Operation Frequency Range of 20dB Bandwidth within Hopping Mode


DH5 - Channel 00 (2402MHz)

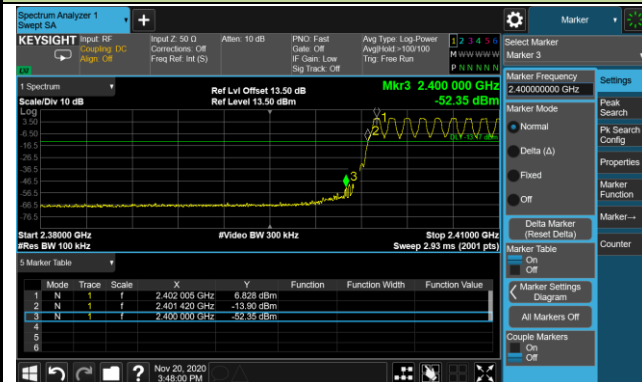

DH5 - Channel 78 (2480MHz)

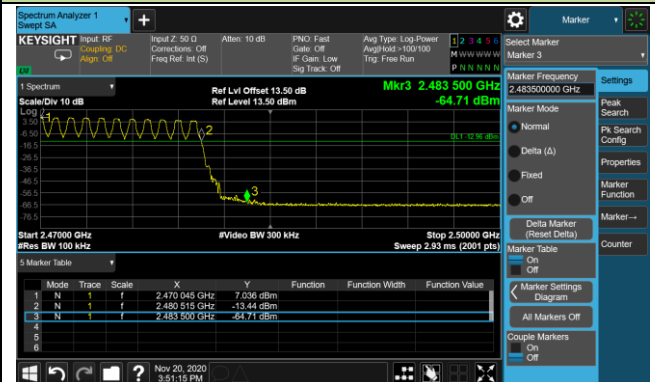


2DH5 - Channel 00 (2402MHz)

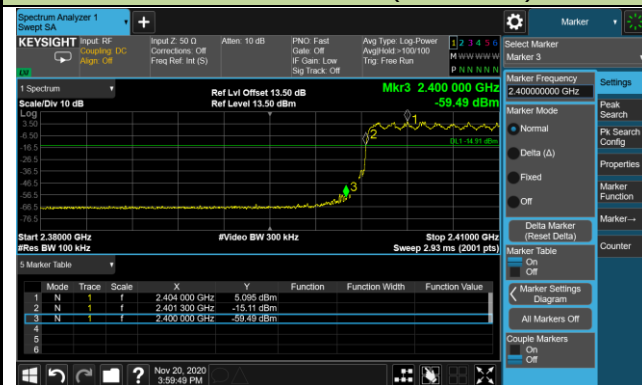


2DH5 - Channel 78 (2480MHz)



3DH5 - Channel 00 (2402MHz)

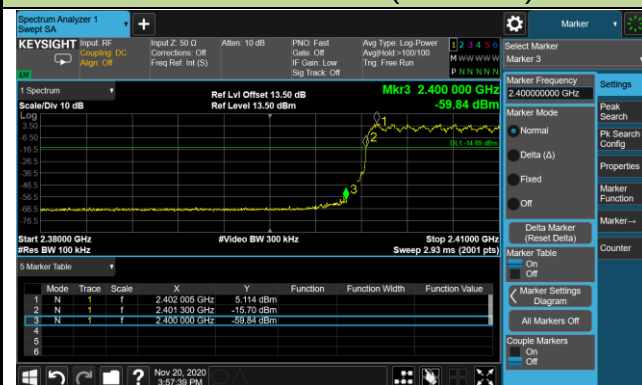

3DH5 - Channel 78 (2480MHz)

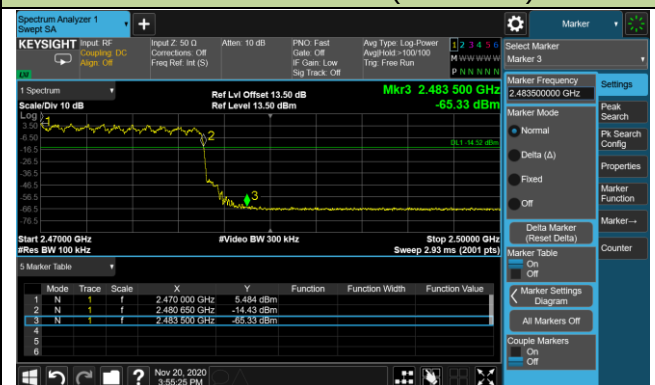

6.8. Conducted Spurious Emissions Measurement

6.8.1. Test Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


6.8.2. Test Procedure Used

ANSI C63.10-2013 - Section 7.8.8

6.8.3. Test Setting

1. Span = Wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize
8. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this section.

6.8.4. Test Setup

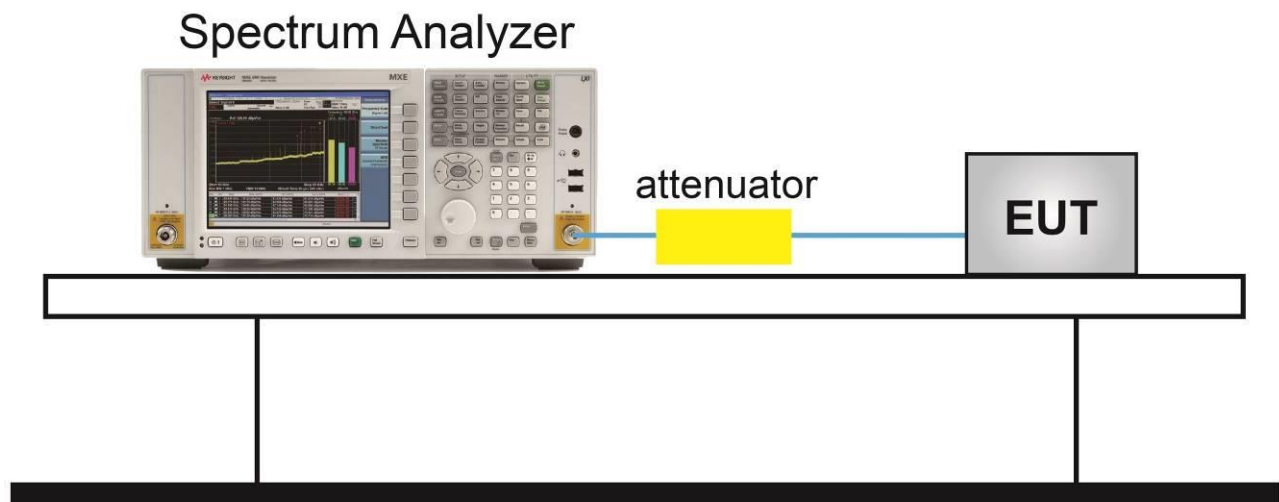


6.8.5. Test Result

Product	Mobile Computer	Test Engineer	Chase Zhu
Test Site	SIP-SR5	Test Date	2020/11/12


Test Mode	Channel No.	Frequency (MHz)	Limit (MHz)	Result
DH5	00	2402	20dBc	Pass
DH5	39	2441	20dBc	Pass
DH5	78	2480	20dBc	Pass
2DH5	00	2402	20dBc	Pass
2DH5	39	2441	20dBc	Pass
2DH5	78	2480	20dBc	Pass
3DH5	00	2402	20dBc	Pass
3DH5	39	2441	20dBc	Pass
3DH5	78	2480	20dBc	Pass

DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

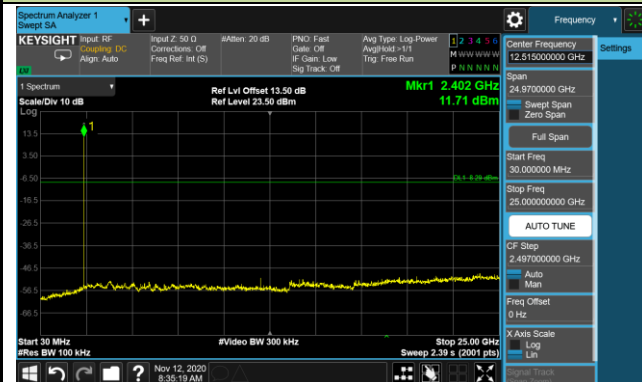

Channel 39 (2441MHz)

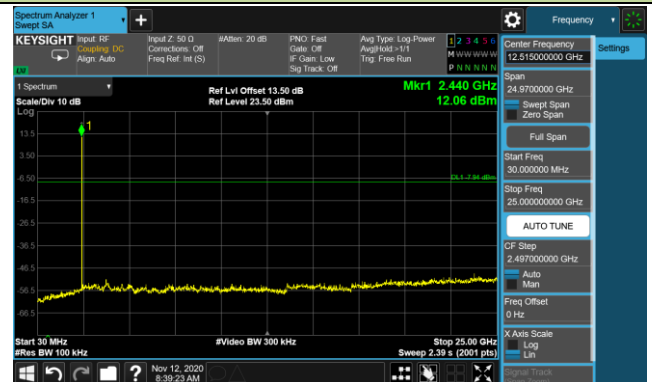


Channel 78 (2480MHz)

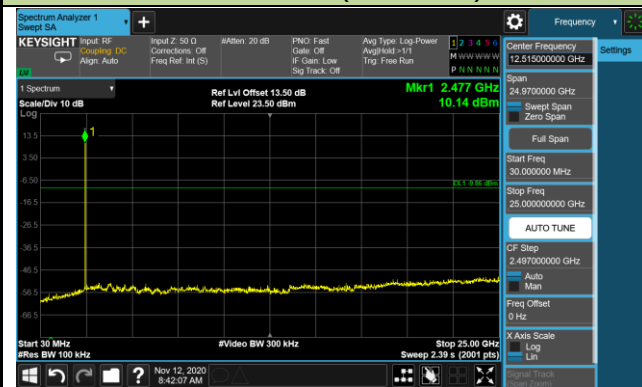


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

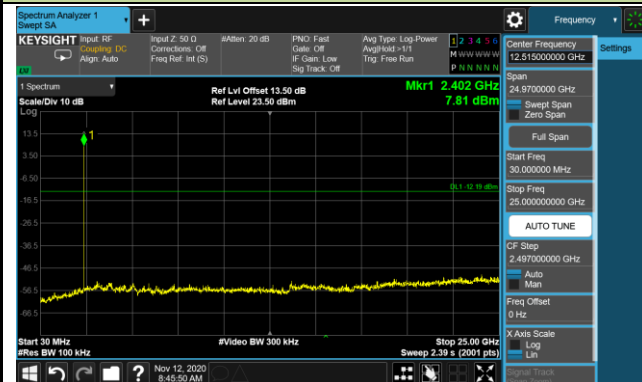

Channel 39 (2441MHz)

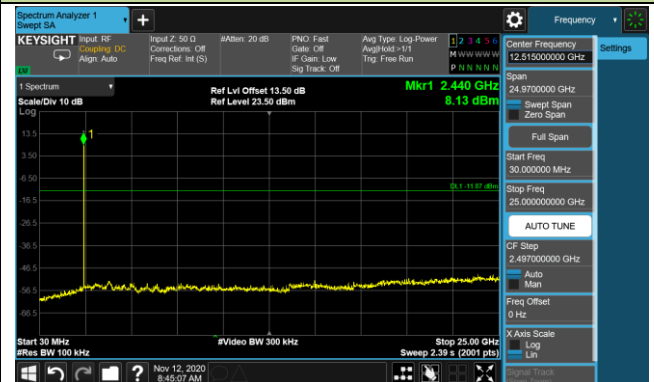


Channel 78 (2480MHz)

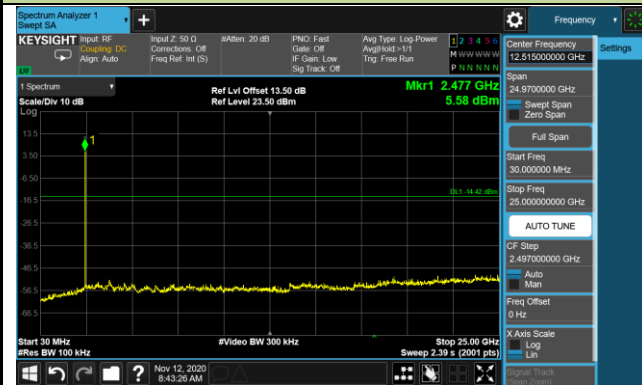


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

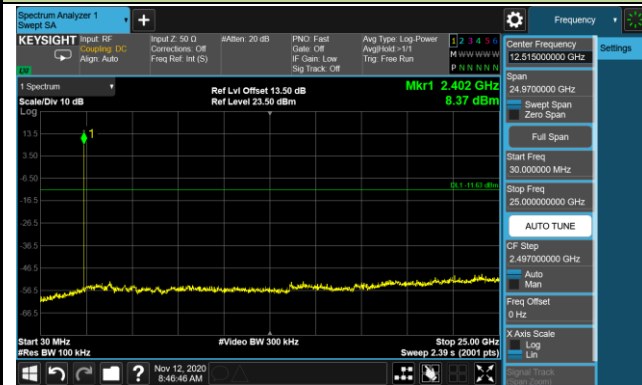

Channel 39 (2441MHz)

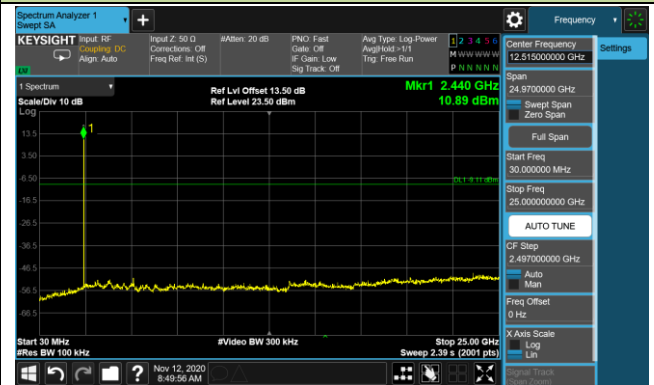

Channel 78 (2480MHz)

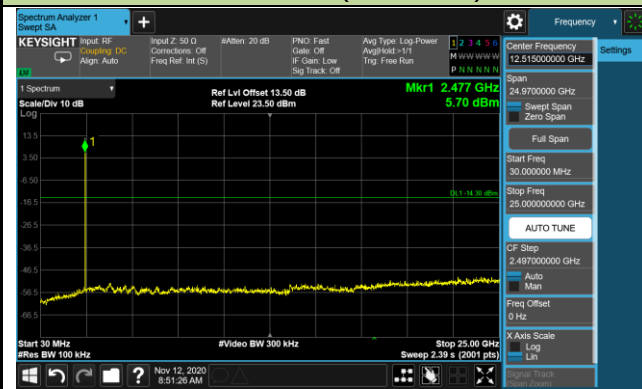

6.9. Radiated Spurious Emission Measurement

6.9.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.4 & 6.5 & 6.6

6.9.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = As specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = Auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Trace was allowed to stabilize

6.9.4. Test Setup

Below 1GHz Test Setup:

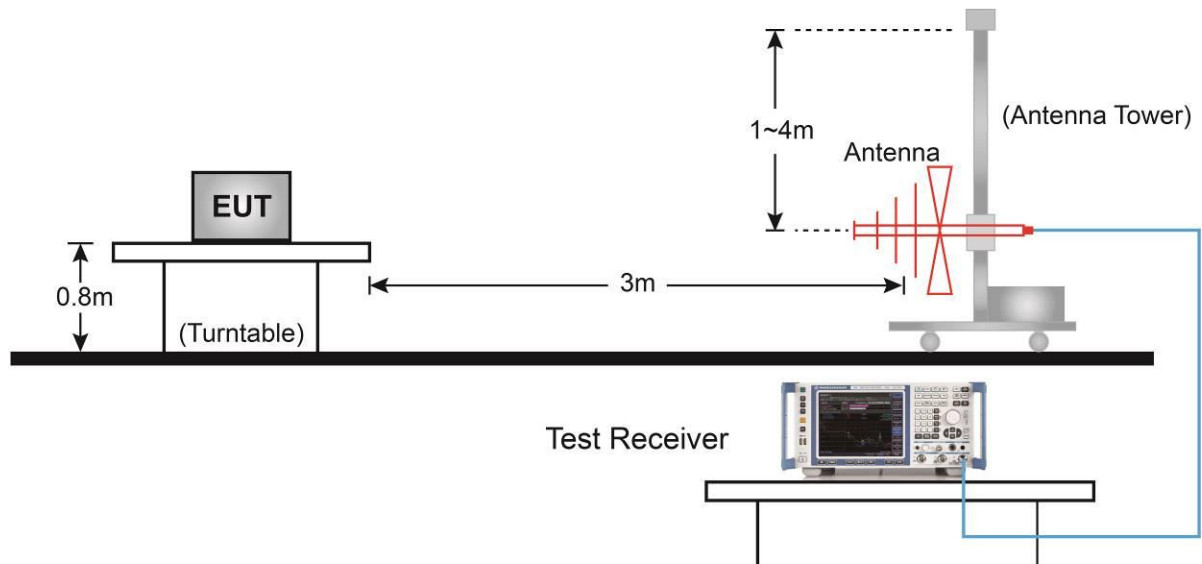

Above 1GHz Test Setup:

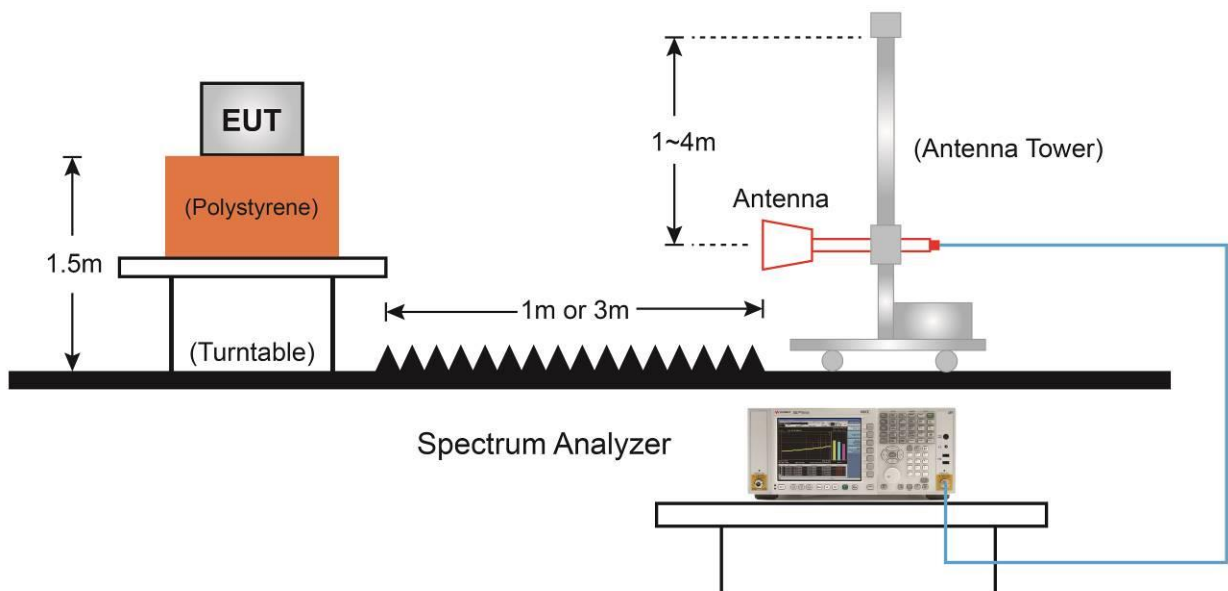

6.9.5. Test Result

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11047.0	-3.7	50.4	46.7	74.0	-27.3	Peak	Horizontal
	11659.0	-3.2	50.1	46.9	74.0	-27.1	Peak	Horizontal
*	14812.5	2.5	48.1	50.6	74.0	-23.4	Peak	Horizontal
*	16691.0	4.6	48.0	52.6	74.0	-21.4	Peak	Horizontal
	11217.0	-4.2	50.5	46.3	74.0	-27.7	Peak	Vertical
	12245.5	-3.4	50.5	47.1	74.0	-26.9	Peak	Vertical
*	14812.5	2.5	47.7	50.2	74.0	-23.8	Peak	Vertical
*	17090.5	4.8	48.3	53.1	74.0	-20.9	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11429.5	-3.8	50.9	47.1	74.0	-26.9	Peak	Horizontal
	11693.0	-3.8	50.6	46.8	74.0	-27.2	Peak	Horizontal
*	14064.5	1.0	48.8	49.8	74.0	-24.2	Peak	Horizontal
*	16572.0	4.5	48.2	52.7	74.0	-21.3	Peak	Horizontal
	10987.5	-3.3	49.8	46.5	74.0	-27.5	Peak	Vertical
	11659.0	-3.2	51.0	47.8	74.0	-26.2	Peak	Vertical
*	13121.0	-1.9	49.5	47.6	74.0	-26.4	Peak	Vertical
*	16929.0	4.8	47.5	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10970.5	-3.2	50.0	46.8	74.0	-27.2	Peak	Horizontal
	12271.0	-3.7	50.7	47.0	74.0	-27.0	Peak	Horizontal
*	14821.0	2.5	47.8	50.3	74.0	-23.7	Peak	Horizontal
*	16555.0	4.5	48.3	52.8	74.0	-21.2	Peak	Horizontal
	10792.0	-3.2	50.2	47.0	74.0	-27.0	Peak	Vertical
	11565.5	-3.7	51.2	47.5	74.0	-26.5	Peak	Vertical
*	14073.0	1.0	49.1	50.1	74.0	-23.9	Peak	Vertical
*	16580.5	4.4	48.4	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	2DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11489.0	-3.1	50.0	46.9	74.0	-27.1	Peak	Horizontal
	11999.0	-2.9	50.0	47.1	74.0	-26.9	Peak	Horizontal
*	14829.5	2.4	47.8	50.2	74.0	-23.8	Peak	Horizontal
*	16810.0	4.6	48.0	52.6	74.0	-21.4	Peak	Horizontal
	11157.5	-3.5	51.0	47.5	74.0	-26.5	Peak	Vertical
	12118.0	-3.0	50.3	47.3	74.0	-26.7	Peak	Vertical
*	14906.0	2.3	48.1	50.4	74.0	-23.6	Peak	Vertical
*	16487.0	4.5	49.0	53.5	74.0	-20.5	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	2DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10826.0	-3.3	50.1	46.8	74.0	-27.2	Peak	Horizontal
	11608.0	-3.6	50.0	46.4	74.0	-27.6	Peak	Horizontal
*	14914.5	2.5	49.1	51.6	74.0	-22.4	Peak	Horizontal
*	16750.5	4.4	48.2	52.6	74.0	-21.4	Peak	Horizontal
	10792.0	-3.2	50.8	47.6	74.0	-26.4	Peak	Vertical
	11608.0	-3.6	50.4	46.8	74.0	-27.2	Peak	Vertical
*	15135.5	2.6	47.6	50.2	74.0	-23.8	Peak	Vertical
*	17371.0	5.5	47.3	52.8	74.0	-21.2	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	2DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10987.5	-3.3	50.7	47.4	74.0	-26.6	Peak	Horizontal
	11897.0	-3.3	51.1	47.8	74.0	-26.2	Peak	Horizontal
*	14897.5	2.3	48.2	50.5	74.0	-23.5	Peak	Horizontal
*	16674.0	4.7	47.5	52.2	74.0	-21.8	Peak	Horizontal
	10826.0	-3.3	50.1	46.8	74.0	-27.2	Peak	Vertical
	11659.0	-3.2	50.3	47.1	74.0	-26.9	Peak	Vertical
*	15144.0	2.8	47.6	50.4	74.0	-23.6	Peak	Vertical
*	17269.0	4.9	47.4	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	3DH5	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11072.5	-3.3	51.0	47.7	74.0	-26.3	Peak	Horizontal
	12007.5	-3.1	50.6	47.5	74.0	-26.5	Peak	Horizontal
*	14710.5	1.9	48.5	50.4	74.0	-23.6	Peak	Horizontal
*	16827.0	4.8	47.4	52.2	74.0	-21.8	Peak	Horizontal
	10732.5	-3.1	49.6	46.5	74.0	-27.5	Peak	Vertical
	12092.5	-3.3	50.3	47.0	74.0	-27.0	Peak	Vertical
*	14829.5	2.4	47.5	49.9	74.0	-24.1	Peak	Vertical
*	16385.0	4.7	47.5	52.2	74.0	-21.8	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	3DH5	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10885.5	-3.5	50.5	47.0	74.0	-27.0	Peak	Horizontal
	12084.0	-3.4	50.1	46.7	74.0	-27.3	Peak	Horizontal
*	13971.0	0.8	48.7	49.5	74.0	-24.5	Peak	Horizontal
*	16818.5	4.7	47.2	51.9	74.0	-22.1	Peak	Horizontal
	10826.0	-3.3	49.9	46.6	74.0	-27.4	Peak	Vertical
	11659.0	-3.2	50.8	47.6	74.0	-26.4	Peak	Vertical
*	13733.0	0.0	49.3	49.3	74.0	-24.7	Peak	Vertical
*	16691.0	4.6	47.7	52.3	74.0	-21.7	Peak	Vertical

Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Mobile Computer	Test Engineer	White Wang
Test Site	SIP-AC3	Test Date	2020/11/15
Test Mode	3DH5	Test Channel	78
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11225.5	-4.0	50.1	46.1	74.0	-27.9	Peak	Horizontal
	11829.0	-3.7	50.4	46.7	74.0	-27.3	Peak	Horizontal
*	13571.5	-0.8	49.9	49.1	74.0	-24.9	Peak	Horizontal
*	16903.5	4.6	47.9	52.5	74.0	-21.5	Peak	Horizontal
	10970.5	-3.2	49.6	46.4	74.0	-27.6	Peak	Vertical
	11786.5	-3.6	50.8	47.2	74.0	-26.8	Peak	Vertical
*	14081.5	0.9	49.0	49.9	74.0	-24.1	Peak	Vertical
*	16648.5	4.3	47.4	51.7	74.0	-22.3	Peak	Vertical


Note 1: "*" means test frequency didn't fall into restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1GHz:

Site: SIP-AC3	Time: 2020/11/20 - 09:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: White Wang
Probe: SIP-AC3_VULB 9168 _20-2000MHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BT at channel 2402MHz	

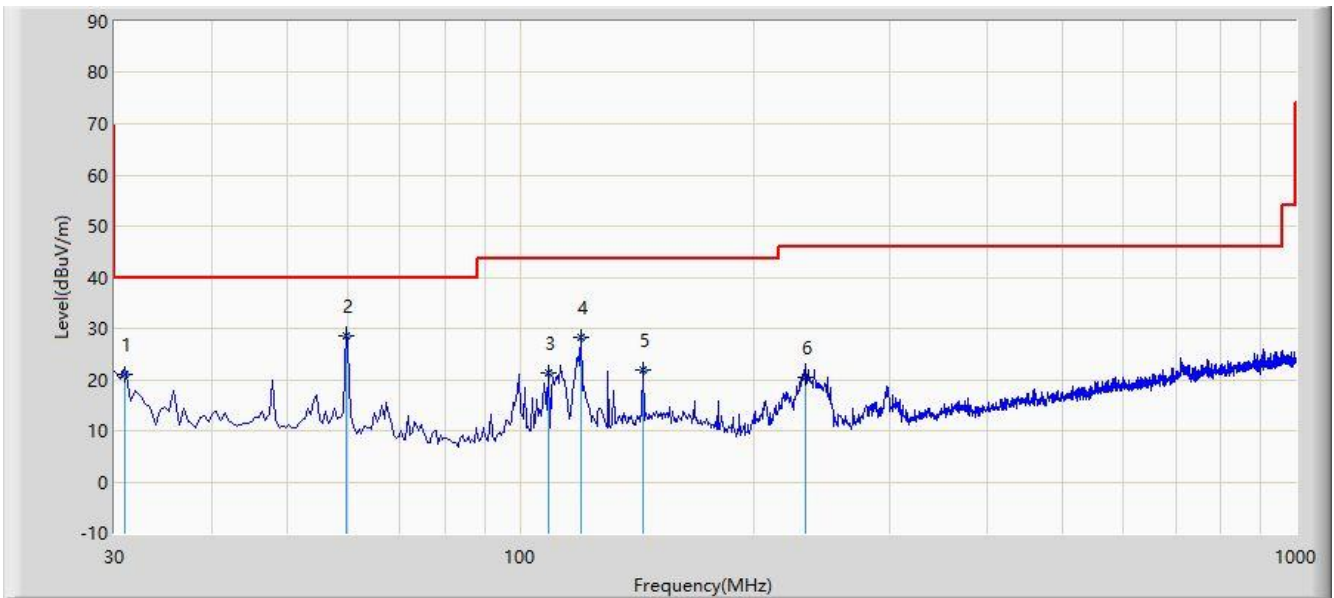

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			30.970	20.978	7.400	-19.022	40.000	13.578	QP
2		*	59.585	28.643	15.400	-11.357	40.000	13.243	QP
3			109.055	21.359	9.700	-22.141	43.500	11.659	QP
4			119.725	28.239	15.400	-15.261	43.500	12.838	QP
5			143.975	21.983	7.500	-21.517	43.500	14.483	QP
6			233.215	20.393	8.200	-25.607	46.000	12.193	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: SIP-AC3	Time: 2020/11/20 - 09:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: White Wang
Probe: SIP-AC3_VULB 9168 _20-2000MHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Worst Case Mode: Transmit by BT at channel 2402MHz	

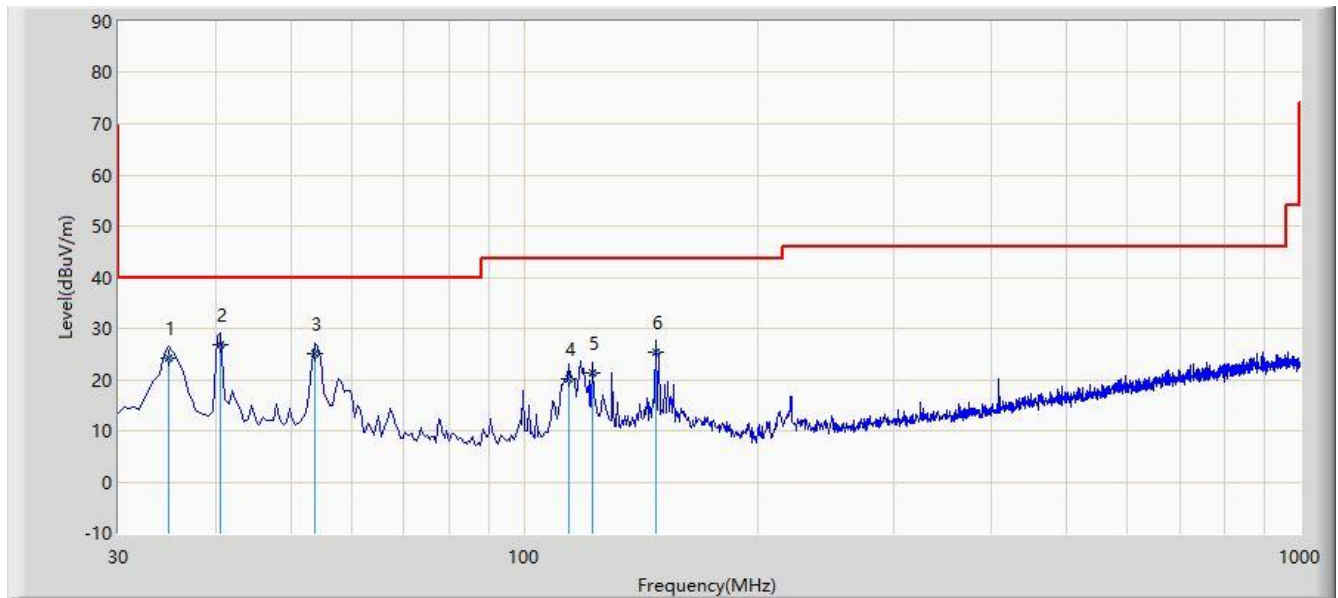

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			34.850	24.079	10.300	-15.921	40.000	13.780	QP
2		*	40.670	26.873	12.500	-13.127	40.000	14.373	QP
3			53.765	25.081	11.400	-14.919	40.000	13.682	QP
4			114.390	20.152	7.900	-23.348	43.500	12.252	QP
5			122.635	21.243	8.200	-22.257	43.500	13.043	QP
6			147.855	25.340	10.600	-18.160	43.500	14.740	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

6.10. Radiated Restricted Band Edge Measurement

6.10.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.10.2.Test Procedure Used

ANSI C63.10-2013 - Section 6.3 & 6.6 & 6.10


6.10.3.Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

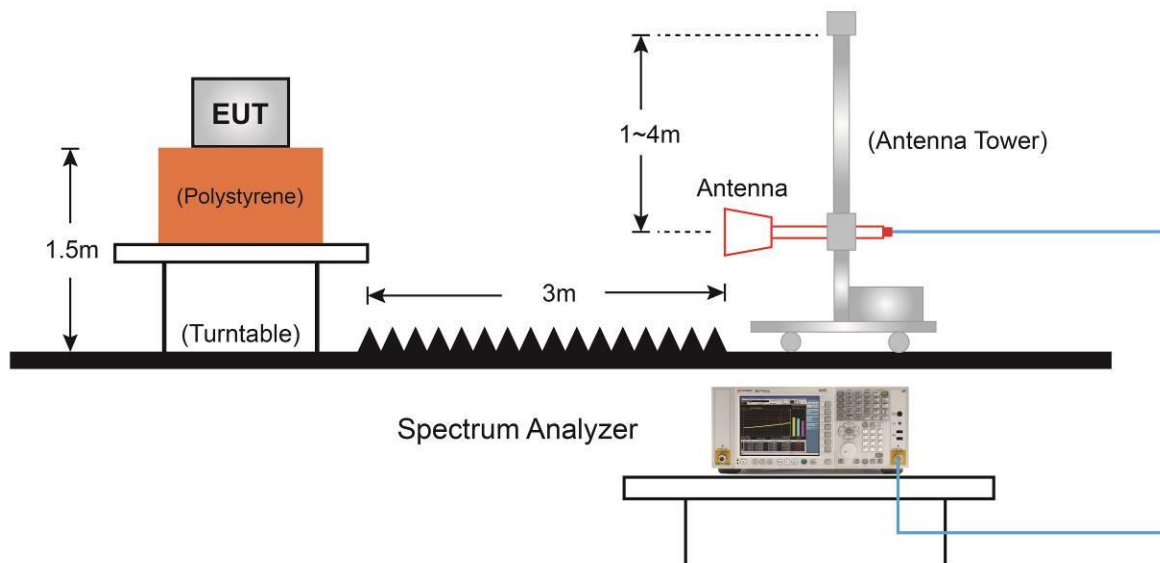6.10.4.Test Setup

6.10.5. Test Result

Site: SIP-AC3	Time: 2020/11/15 - 16:15
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

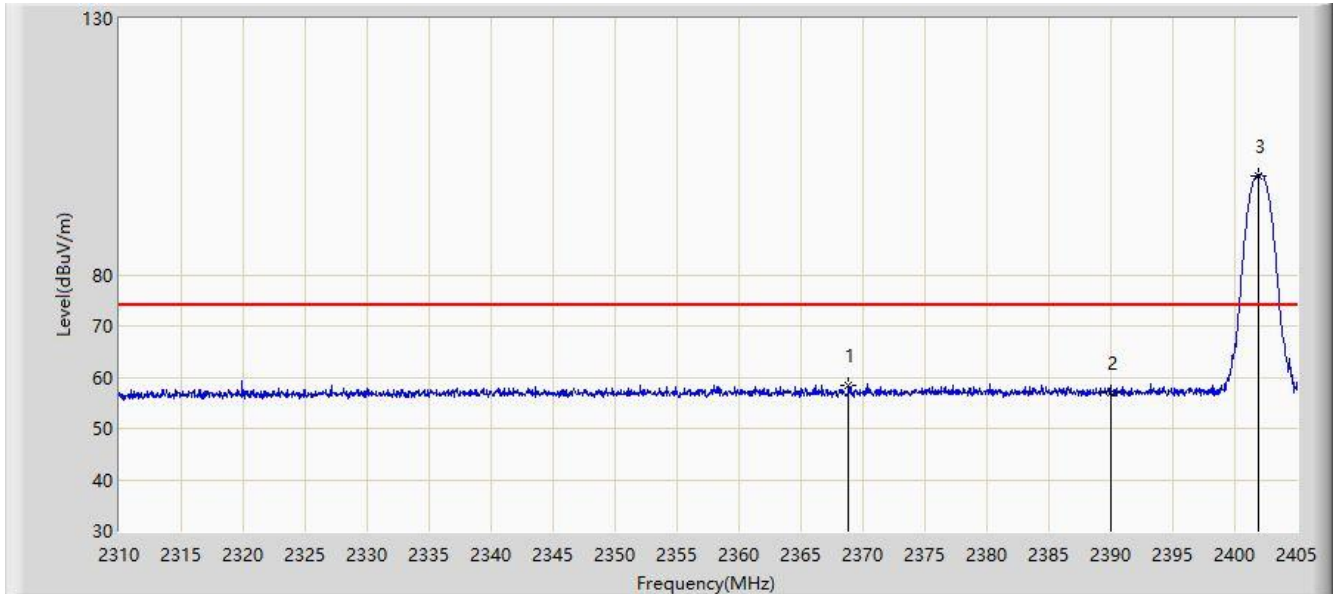


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2368.853	58.455	26.921	-15.545	74.000	31.534	PK
2			2390.000	56.903	25.359	-17.097	74.000	31.544	PK
3		*	2401.913	99.413	67.766	N/A	N/A	31.647	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:21
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

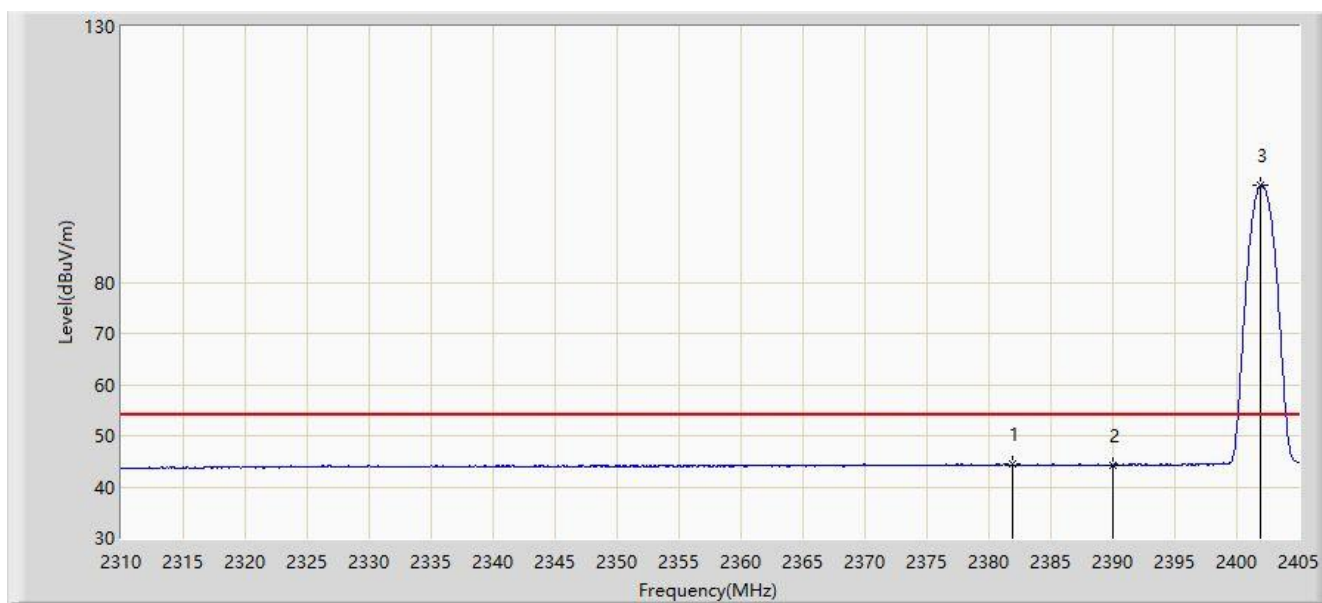


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2381.915	44.441	12.867	-9.559	54.000	31.575	AV
2			2390.000	44.198	12.654	-9.802	54.000	31.544	AV
3		*	2401.913	98.871	67.224	N/A	N/A	31.647	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:23
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

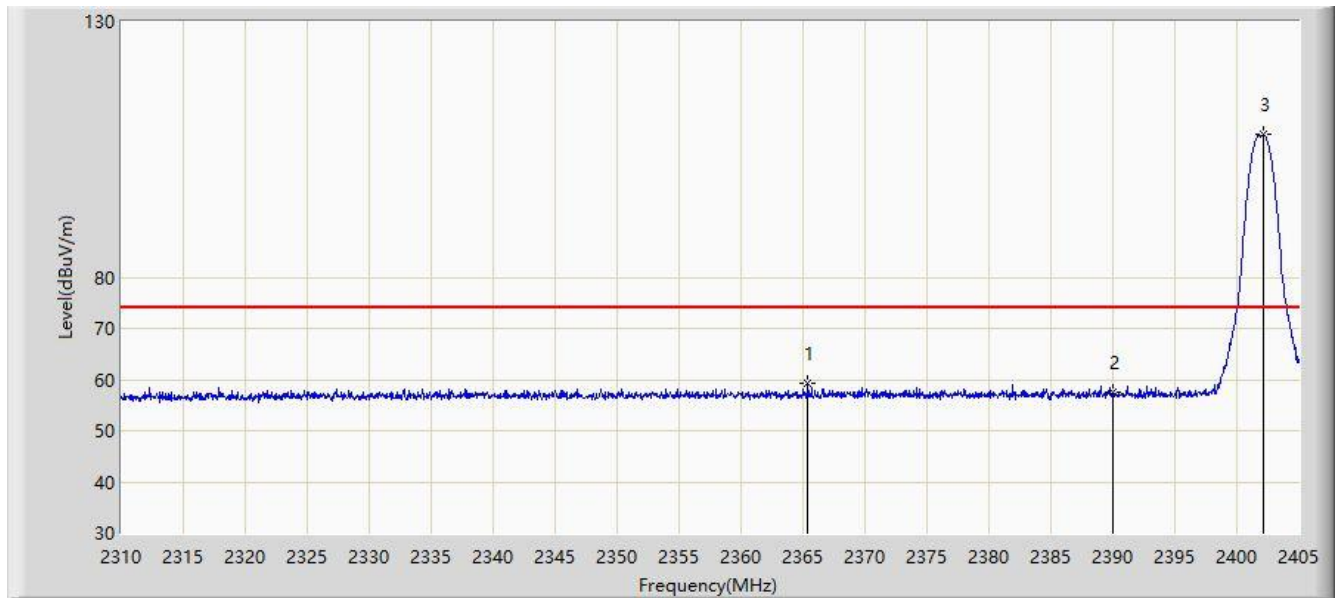


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2365.385	59.259	27.750	-14.741	74.000	31.509	PK
2			2390.000	57.451	25.907	-16.549	74.000	31.544	PK
3		*	2402.150	107.854	76.204	N/A	N/A	31.650	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:26
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2402MHz	

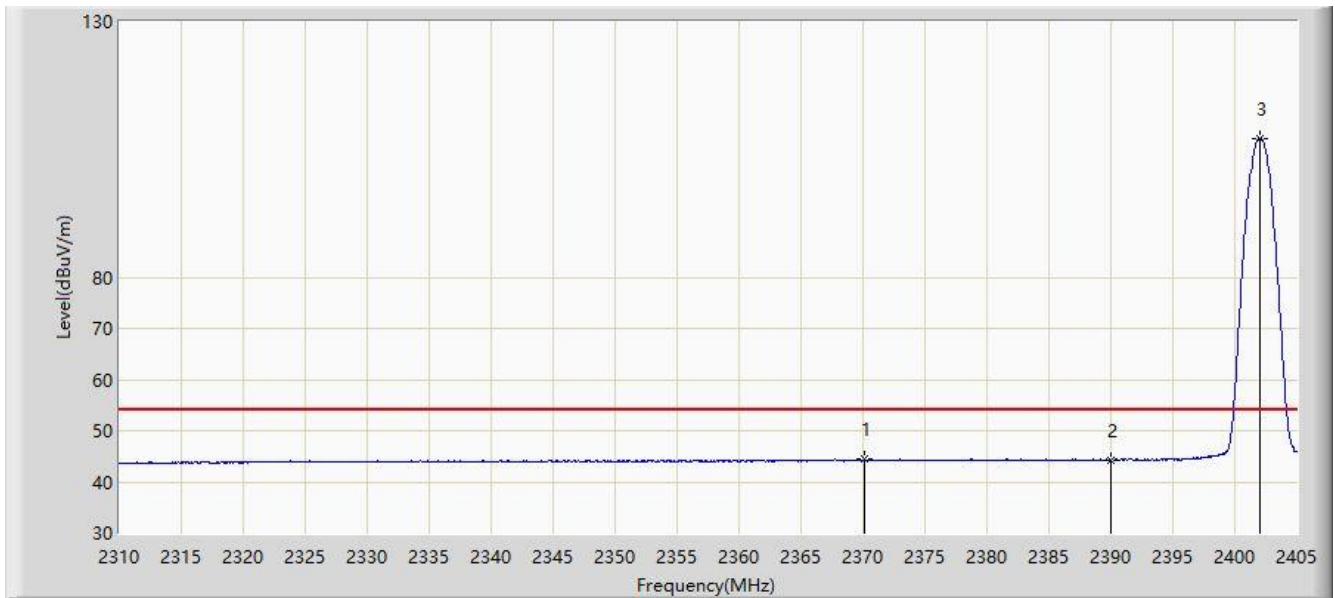


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2370.087	44.416	12.873	-9.584	54.000	31.543	AV
2			2390.000	44.294	12.750	-9.706	54.000	31.544	AV
3		*	2402.008	107.214	75.566	N/A	N/A	31.648	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:27
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

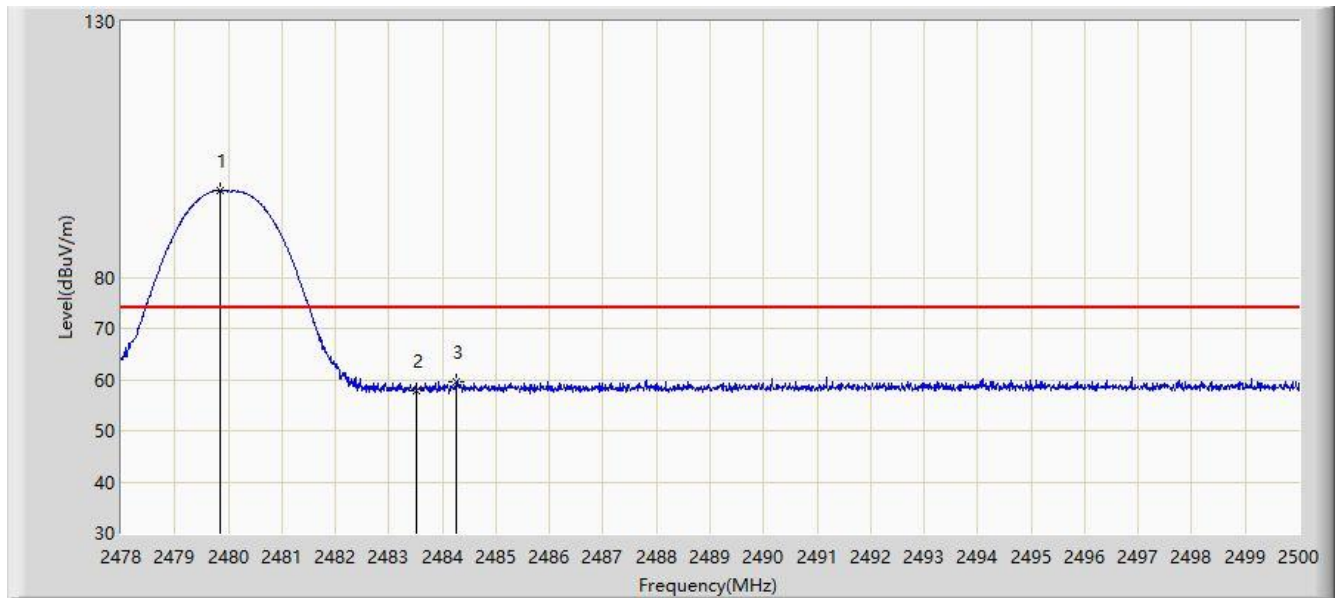

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.837	96.937	64.810	N/A	N/A	32.127	PK
2			2483.500	57.730	25.532	-16.270	74.000	32.197	PK
3			2484.270	59.682	27.469	-14.318	74.000	32.213	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:31
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	95.898	63.767	N/A	N/A	32.131	AV
2			2483.500	45.478	13.280	-8.522	54.000	32.197	AV
3			2488.153	45.697	13.409	-8.303	54.000	32.288	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:32
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	

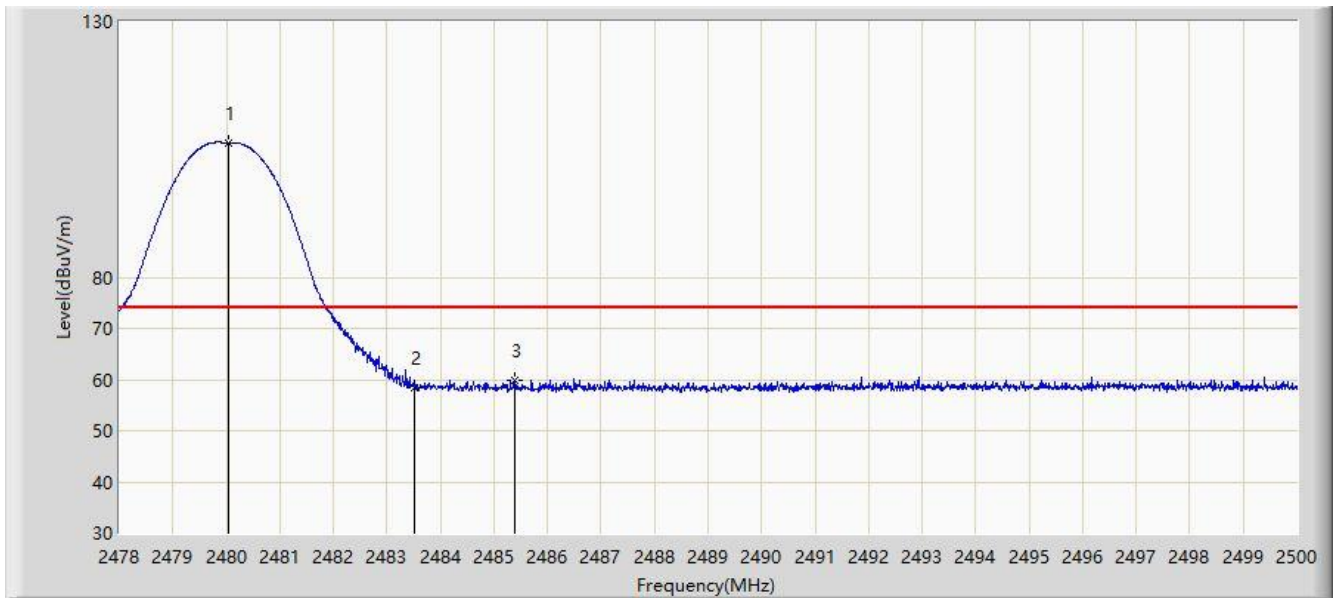

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.046	106.312	74.181	N/A	N/A	32.131	PK
2			2483.500	58.458	26.260	-15.542	74.000	32.197	PK
3			2485.381	59.837	27.603	-14.163	74.000	32.235	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:35
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	105.656	73.524	N/A	N/A	32.132	AV
2			2483.500	45.987	13.789	-8.013	54.000	32.197	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:37
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

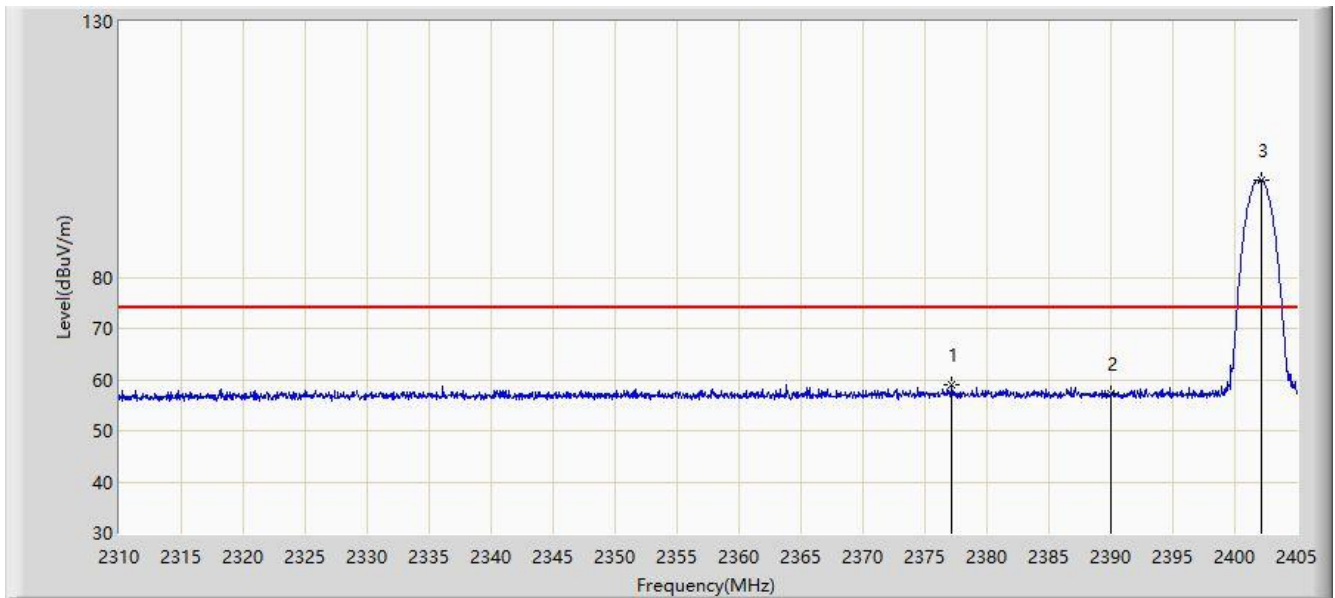


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2377.165	58.955	27.363	-15.045	74.000	31.592	PK
2			2390.000	57.144	25.600	-16.856	74.000	31.544	PK
3		*	2402.150	99.103	67.453	N/A	N/A	31.650	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:42
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

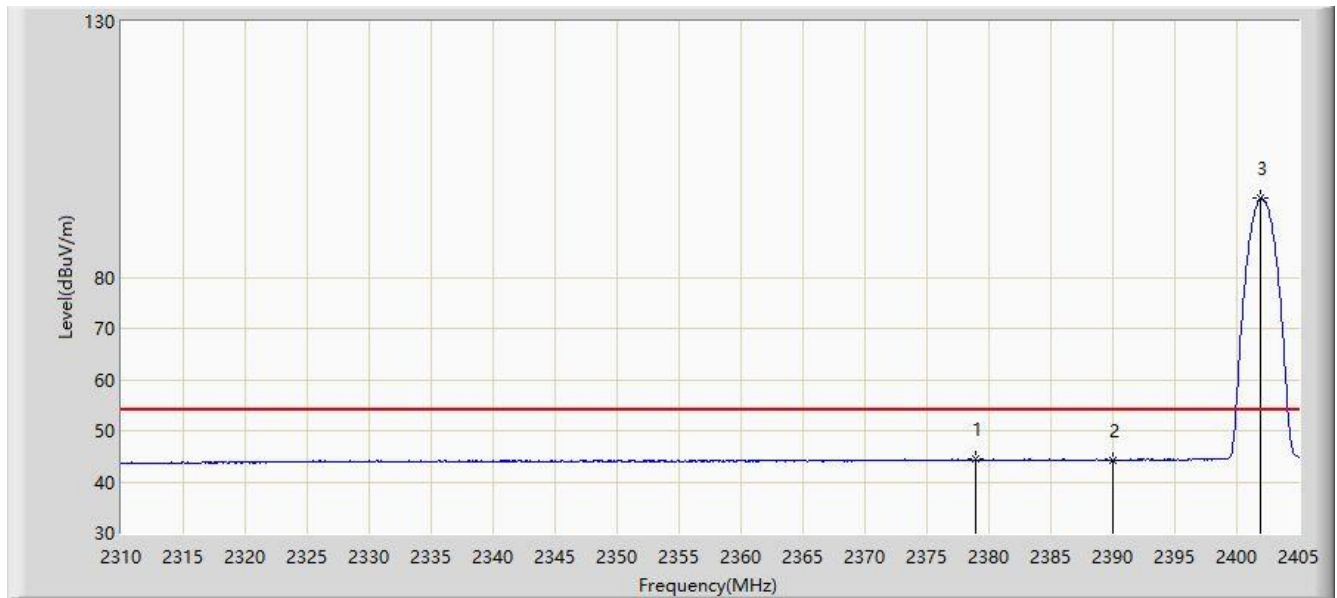


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.923	44.475	12.889	-9.525	54.000	31.586	AV
2			2390.000	44.197	12.653	-9.803	54.000	31.544	AV
3		*	2401.913	95.375	63.728	N/A	N/A	31.647	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:42
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

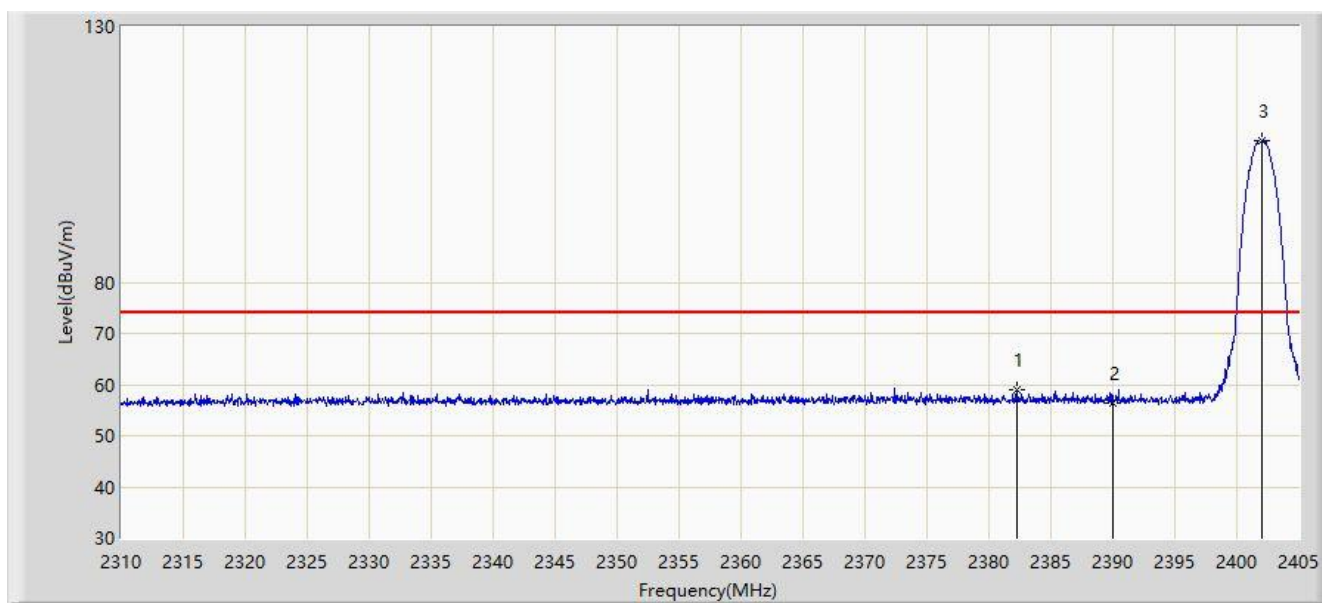


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2382.248	59.126	27.553	-14.874	74.000	31.573	PK
2			2390.000	56.385	24.841	-17.615	74.000	31.544	PK
3		*	2402.055	107.812	76.163	N/A	N/A	31.649	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:46
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2402MHz	

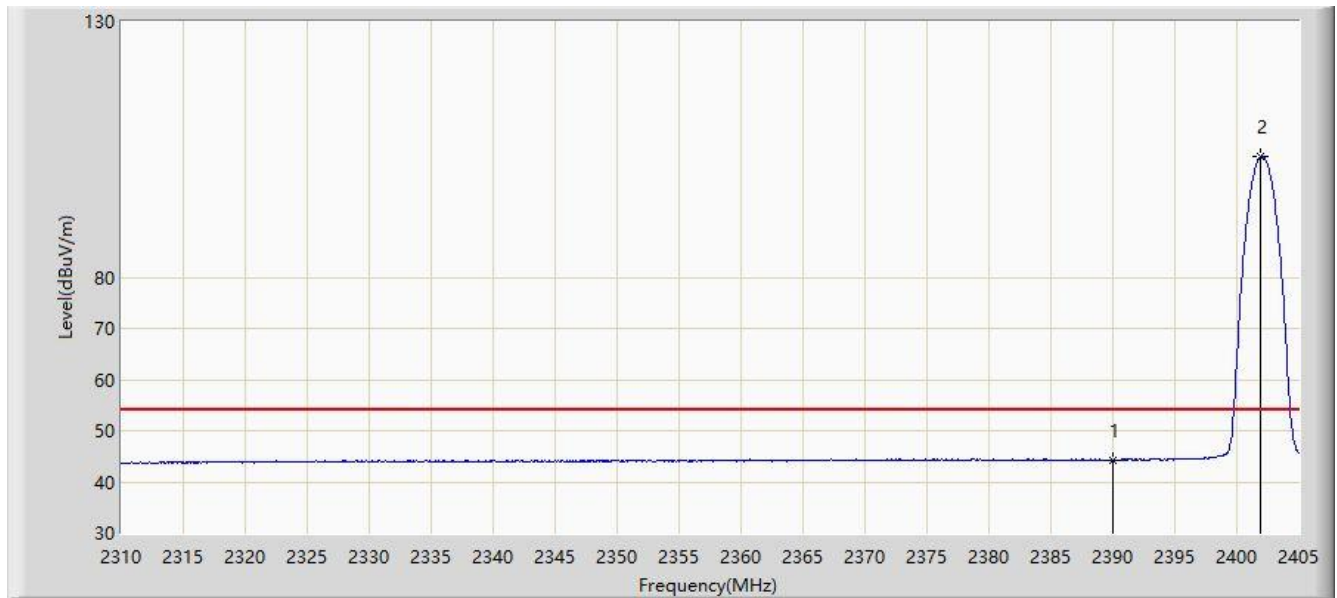


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.315	12.771	-9.685	54.000	31.544	AV
2		*	2401.865	103.530	71.884	N/A	N/A	31.646	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:48
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

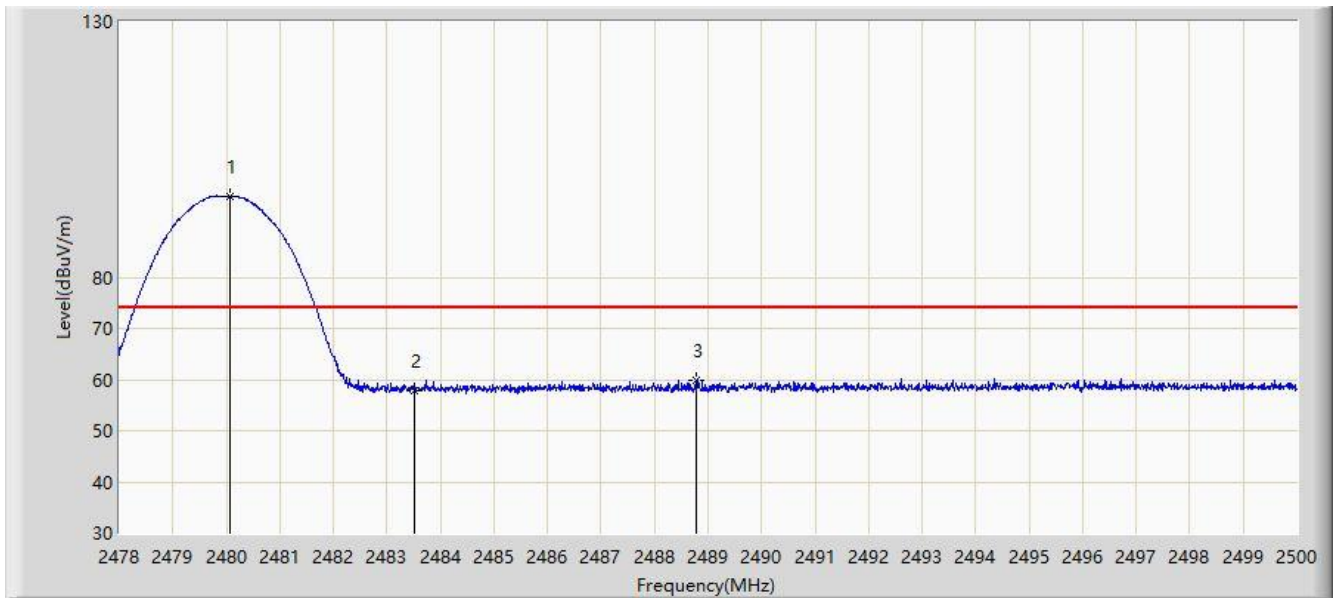


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	95.924	63.792	N/A	N/A	32.132	PK
2			2483.500	57.878	25.680	-16.122	74.000	32.197	PK
3			2488.769	59.764	27.465	-14.236	74.000	32.299	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:52
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

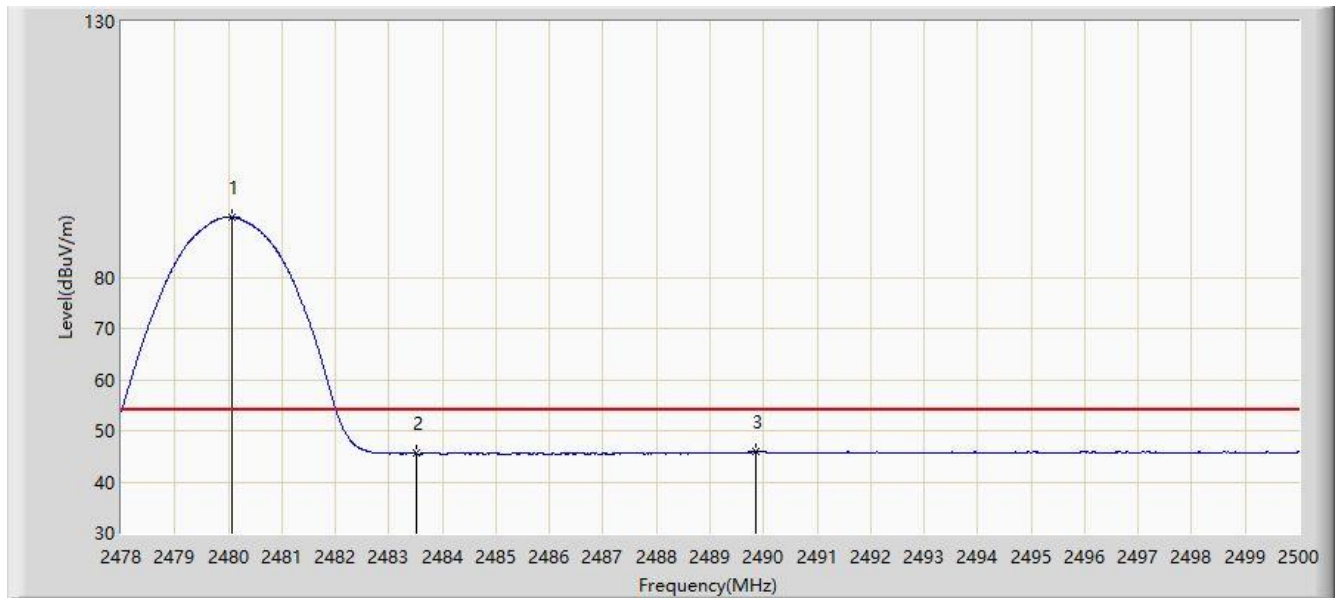


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.079	91.738	59.606	N/A	N/A	32.132	AV
2			2483.500	45.542	13.344	-8.458	54.000	32.197	AV
3			2489.858	46.009	13.689	-7.991	54.000	32.321	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:53
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	

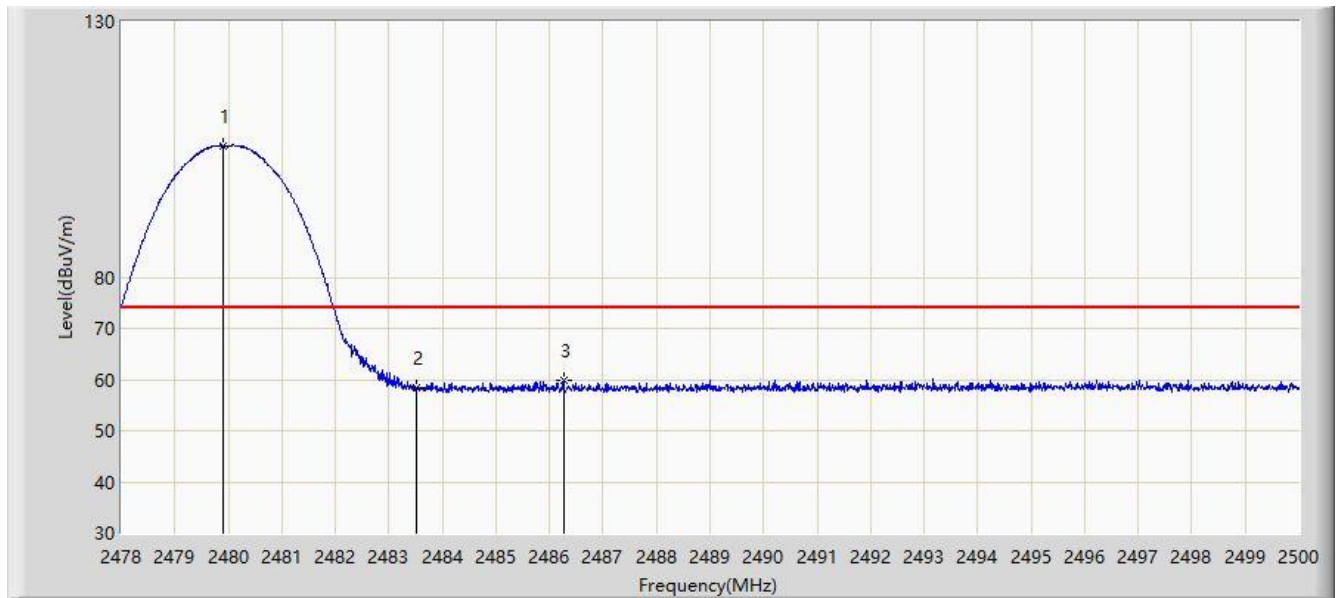

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.903	105.702	73.574	N/A	N/A	32.128	PK
2			2483.500	58.410	26.212	-15.590	74.000	32.197	PK
3			2486.261	59.761	27.510	-14.239	74.000	32.251	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:56
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 2DH5 at channel 2480MHz	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	101.944	69.812	N/A	N/A	32.133	AV
2			2483.500	45.917	13.719	-8.083	54.000	32.197	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 16:58
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

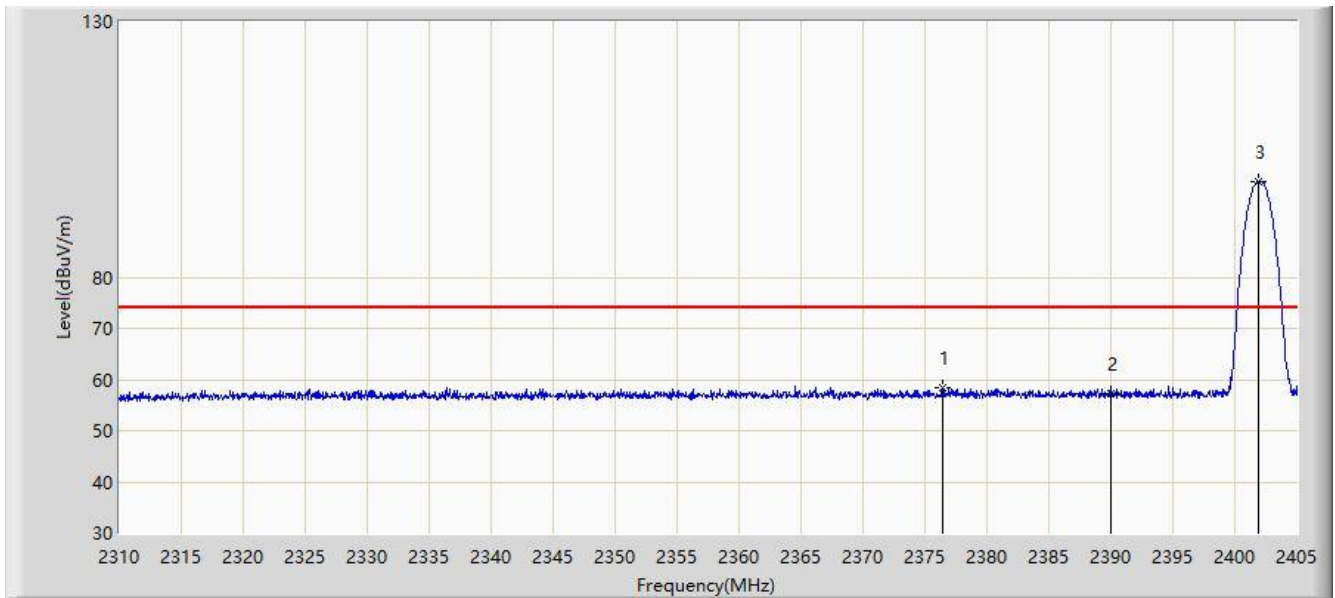


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2376.452	58.463	26.874	-15.537	74.000	31.589	PK
2			2390.000	57.377	25.833	-16.623	74.000	31.544	PK
3		*	2401.913	98.823	67.176	N/A	N/A	31.647	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:02
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

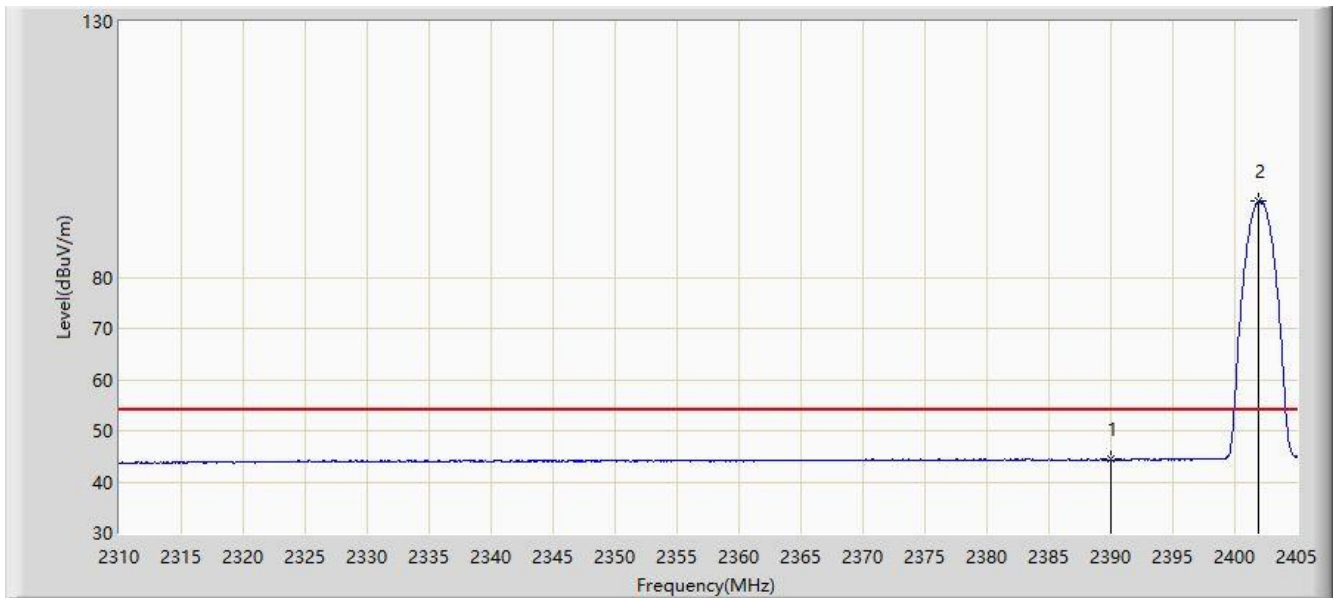


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2390.000	44.359	12.815	-9.641	54.000	31.544	AV
2		*	2401.913	94.825	63.178	N/A	N/A	31.647	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:03
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

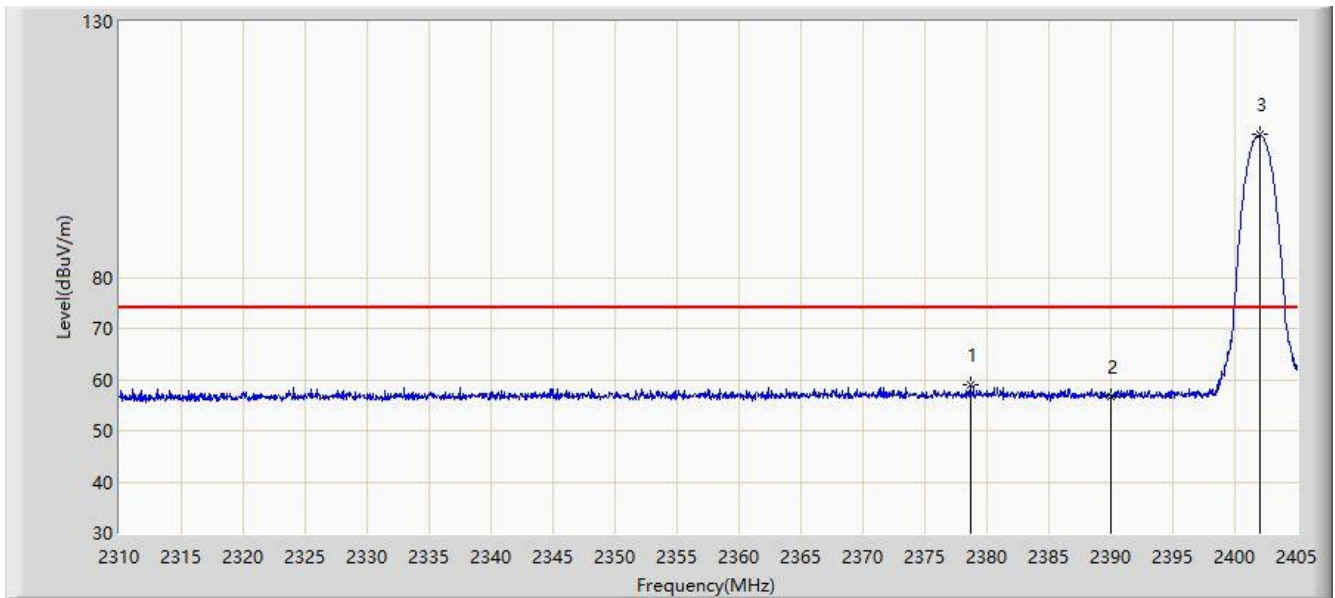


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2378.637	58.890	27.303	-15.110	74.000	31.587	PK
2			2390.000	56.717	25.173	-17.283	74.000	31.544	PK
3		*	2402.008	107.931	76.283	N/A	N/A	31.648	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:06
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

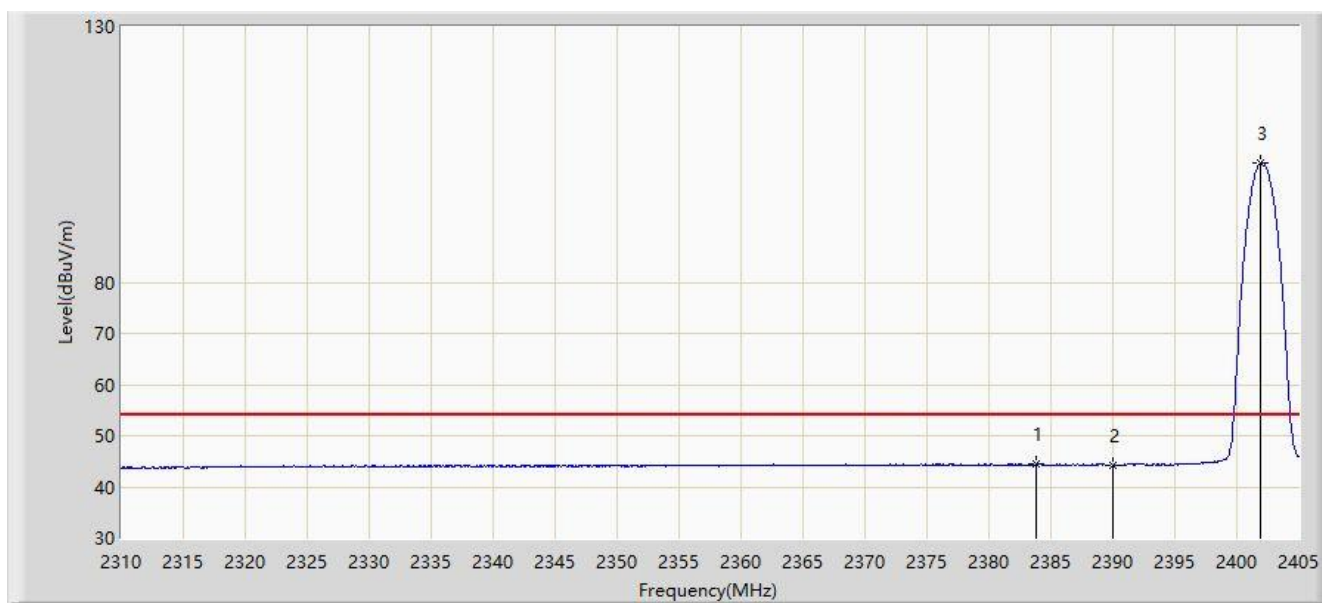


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			2383.863	44.493	12.926	-9.507	54.000	31.567	AV
2			2390.000	44.317	12.773	-9.683	54.000	31.544	AV
3		*	2401.960	103.457	71.810	N/A	N/A	31.648	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:07
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_102861_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

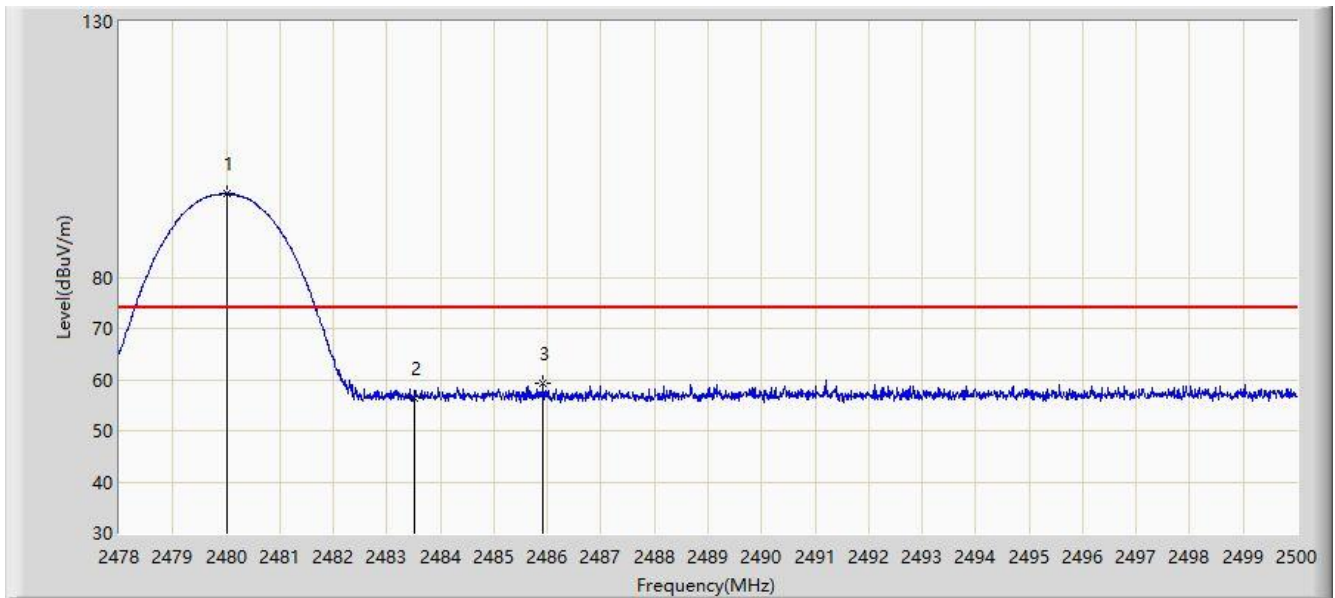


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.002	96.326	64.196	N/A	N/A	32.131	PK
2			2483.500	56.311	24.113	-17.689	74.000	32.197	PK
3			2485.920	59.184	26.939	-14.816	74.000	32.244	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:12
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

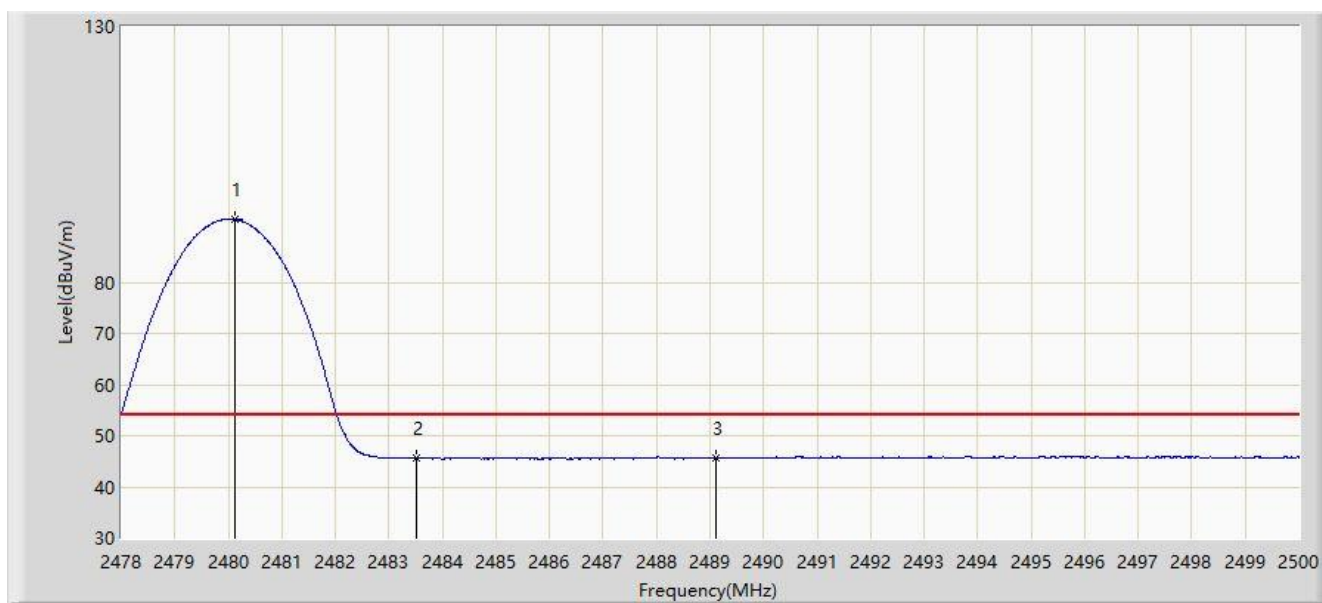


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.112	92.287	60.155	N/A	N/A	32.133	AV
2			2483.500	45.586	13.388	-8.414	54.000	32.197	AV
3			2489.110	45.749	13.443	-8.251	54.000	32.306	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:14
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

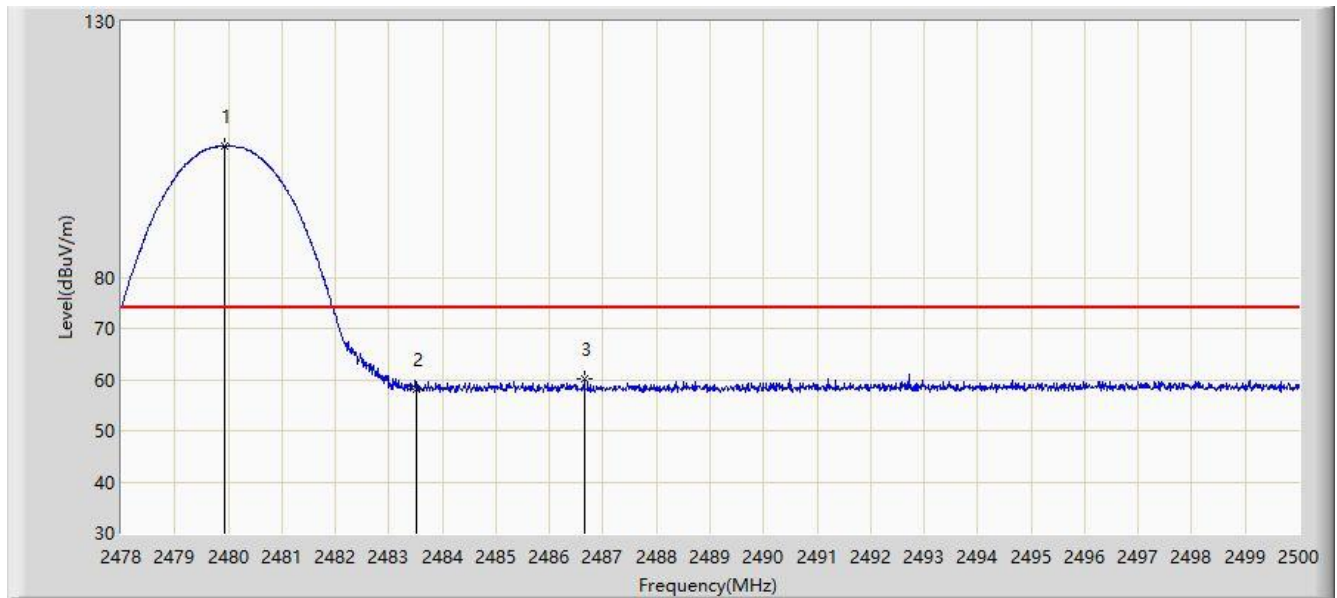


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2479.936	105.734	73.605	N/A	N/A	32.130	PK
2			2483.500	58.191	25.993	-15.809	74.000	32.197	PK
3			2486.646	60.106	27.847	-13.894	74.000	32.259	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: SIP-AC3	Time: 2020/11/15 - 17:17
Limit: FCC_Part15.209_RE(3m)	Engineer: White Wang
Probe: SIP-AC3_HF907_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2480MHz	

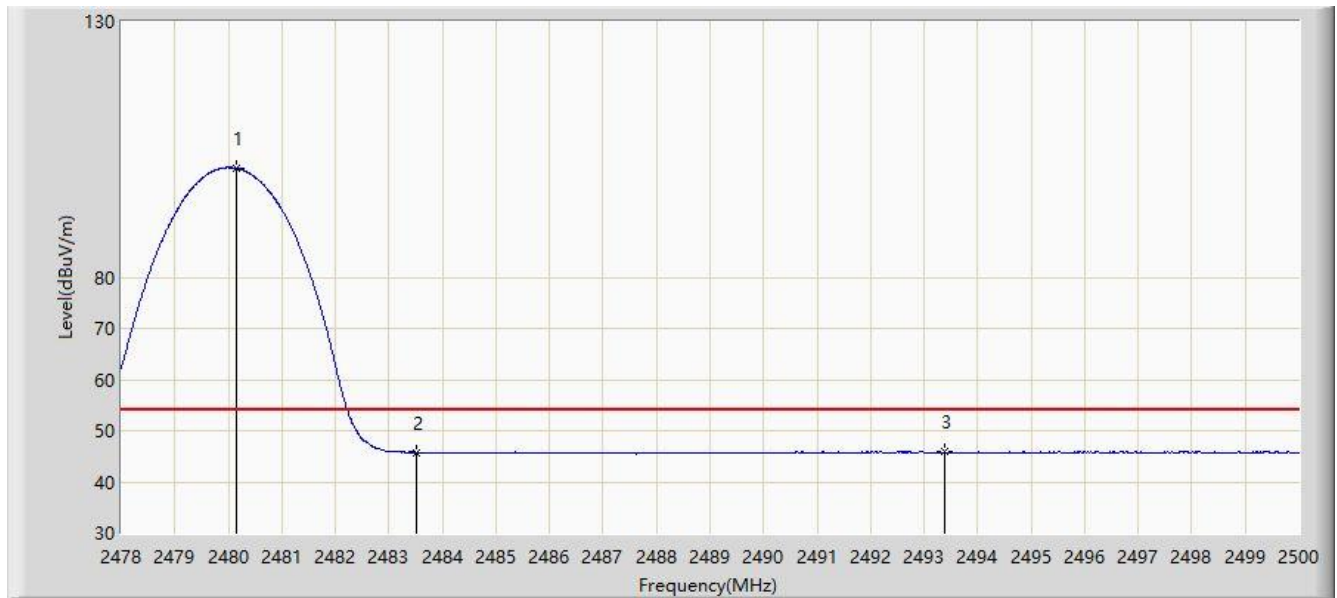

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	2480.145	101.333	69.200	N/A	N/A	32.133	AV
2			2483.500	45.776	13.578	-8.224	54.000	32.197	AV
3			2493.378	45.805	13.417	-8.195	54.000	32.389	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m).

6.11. AC Conducted Emissions Measurement


6.11.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.11.2. Test Setup

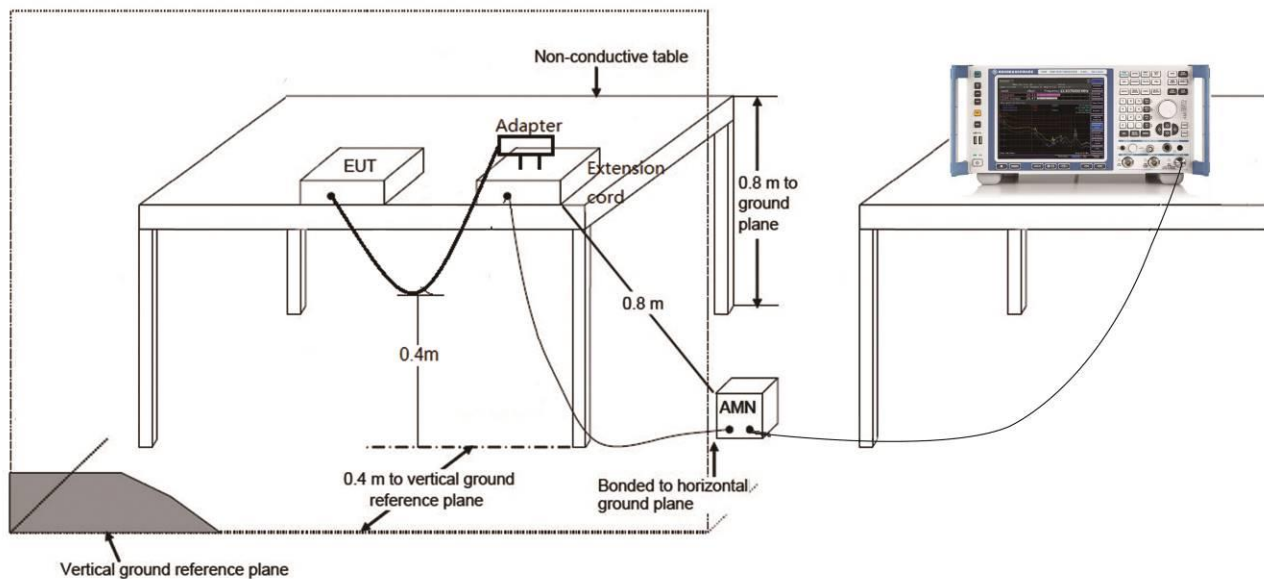

6.11.3.Test Result

Site: SIP-SR2	Time: 2020/11/20 - 16:02
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: ENV216_101684_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

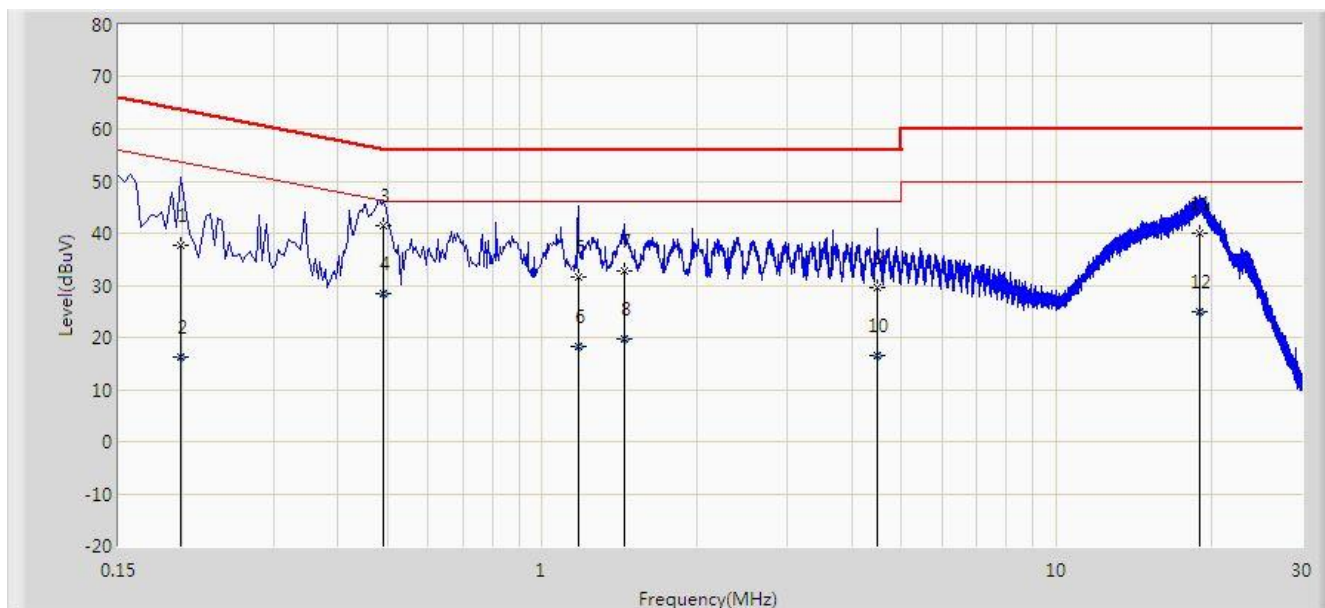


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.198	37.707	27.718	-25.987	63.694	9.989	QP
2			0.198	16.361	6.371	-37.333	53.694	9.989	AV
3		*	0.490	41.429	31.261	-14.738	56.168	10.168	QP
4			0.490	28.339	18.171	-17.828	46.168	10.168	AV
5			1.174	31.492	21.547	-24.508	56.000	9.944	QP
6			1.174	18.308	8.363	-27.692	46.000	9.944	AV
7			1.446	32.808	22.865	-23.192	56.000	9.943	QP
8			1.446	19.744	9.801	-26.256	46.000	9.943	AV
9			4.482	29.537	19.679	-26.463	56.000	9.858	QP
10			4.482	16.635	6.778	-29.365	46.000	9.858	AV
11			19.002	39.906	29.839	-20.094	60.000	10.067	QP
12			19.002	24.946	14.880	-25.054	50.000	10.067	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SIP-SR2	Time: 2020/11/20 - 16:13
Limit: FCC_Part15.207_CE_AC Power	Engineer: Kyrie Xie
Probe: ENV216_101684_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 3DH5 at channel 2402MHz	

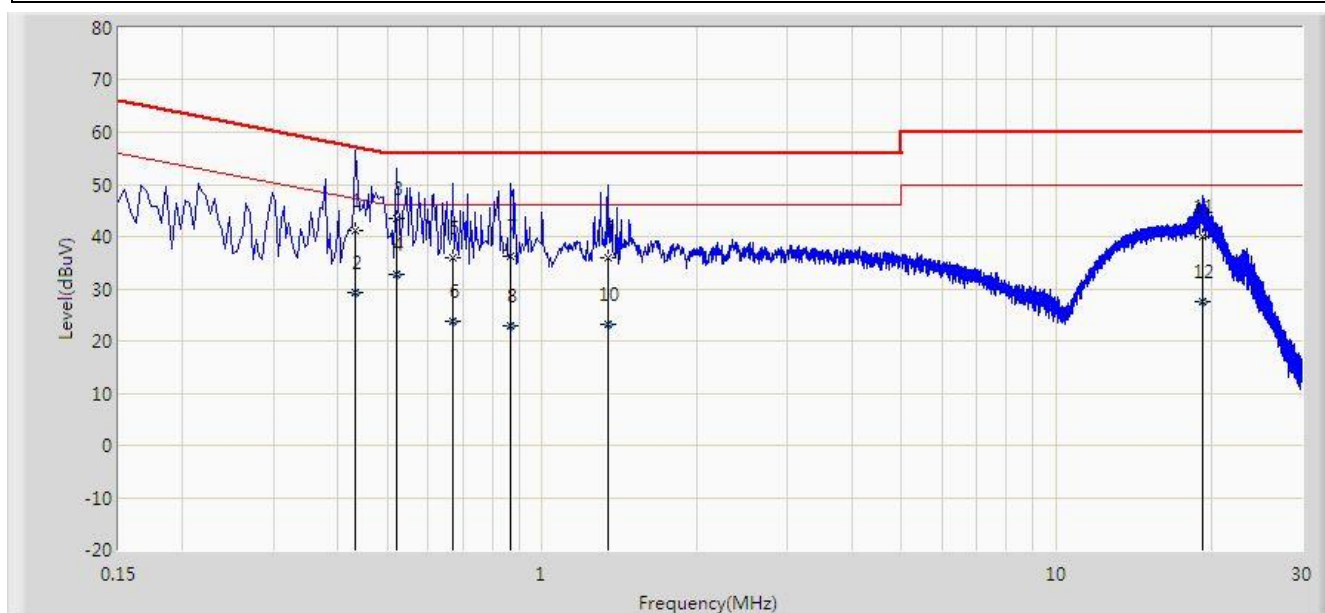

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.434	41.198	31.050	-15.977	57.176	10.148	QP
2			0.434	29.324	19.176	-17.852	47.176	10.148	AV
3		*	0.522	43.335	33.135	-12.665	56.000	10.200	QP
4			0.522	32.726	22.526	-13.274	46.000	10.200	AV
5			0.670	35.858	25.735	-20.142	56.000	10.123	QP
6			0.670	23.873	13.750	-22.127	46.000	10.123	AV
7			0.870	36.112	26.082	-19.888	56.000	10.029	QP
8			0.870	23.040	13.011	-22.960	46.000	10.029	AV
9			1.342	35.868	25.914	-20.132	56.000	9.954	QP
10			1.342	23.075	13.121	-22.925	46.000	9.954	AV
11			19.210	39.869	29.749	-20.131	60.000	10.121	QP
12			19.210	27.505	17.384	-22.495	50.000	10.121	AV

Note: Measure Level (dBuV) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

7. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC rules.

The End

Appendix A - Test Setup Photograph

Refer to “2011RSU005-UT” file.

Appendix B - EUT Photograph

Refer to "2011RSU005-UE" file.