


Site: NS-AC1	Time: 2022/05/15 - 17:57
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 0 at 2412MHz, Ant 2	

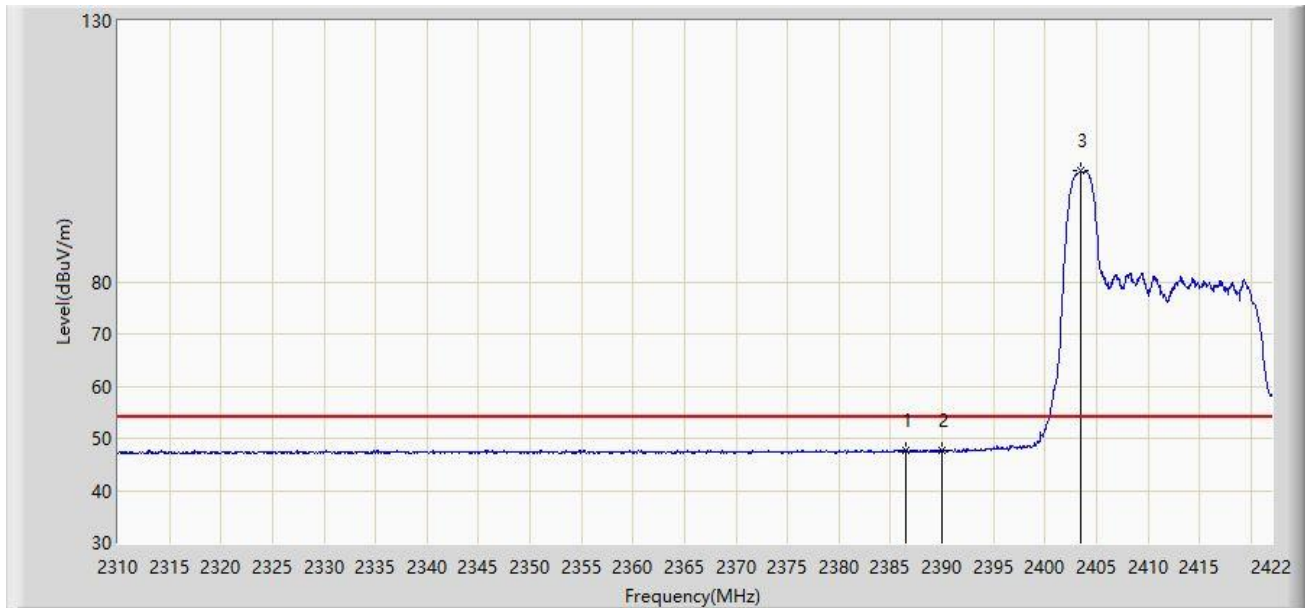


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.440	47.758	16.840	-6.242	54.000	30.918	AV
2		2390.000	47.566	16.649	-6.434	54.000	30.917	AV
3		2403.464	101.164	70.204	N/A	N/A	30.960	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:59
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz, Ant 2	

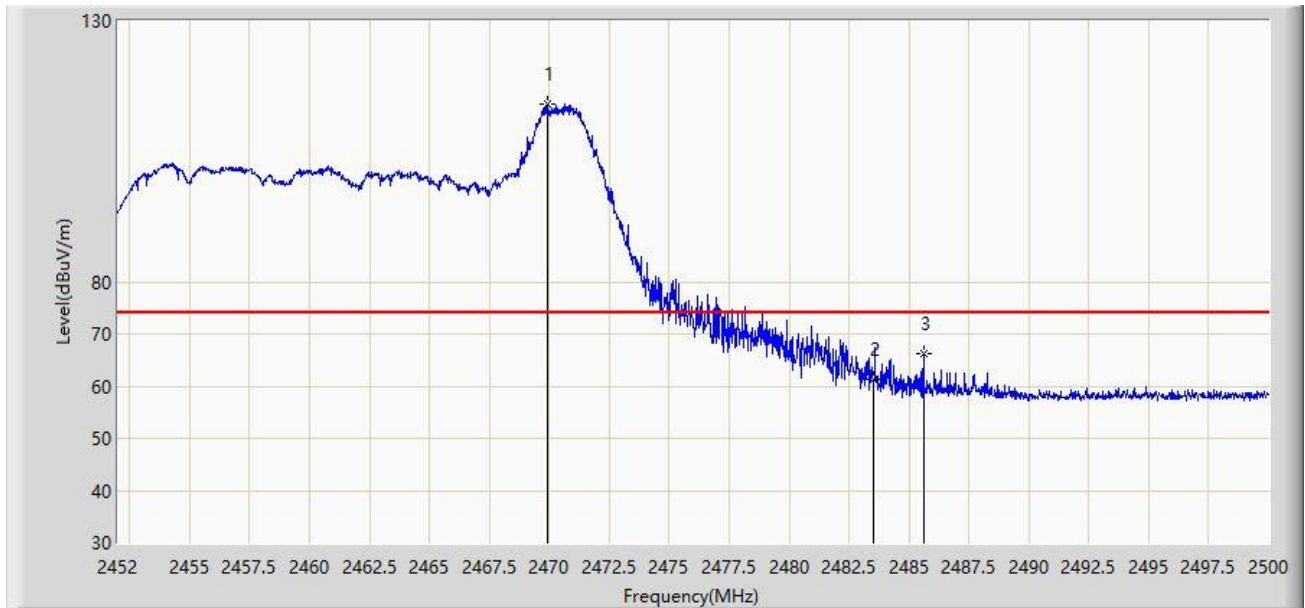


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.904	114.041	83.172	N/A	N/A	30.869	PK
2		2483.500	61.416	30.542	-12.584	74.000	30.874	PK
3	*	2485.600	66.347	35.463	-7.653	74.000	30.883	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:01
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz, Ant 2	

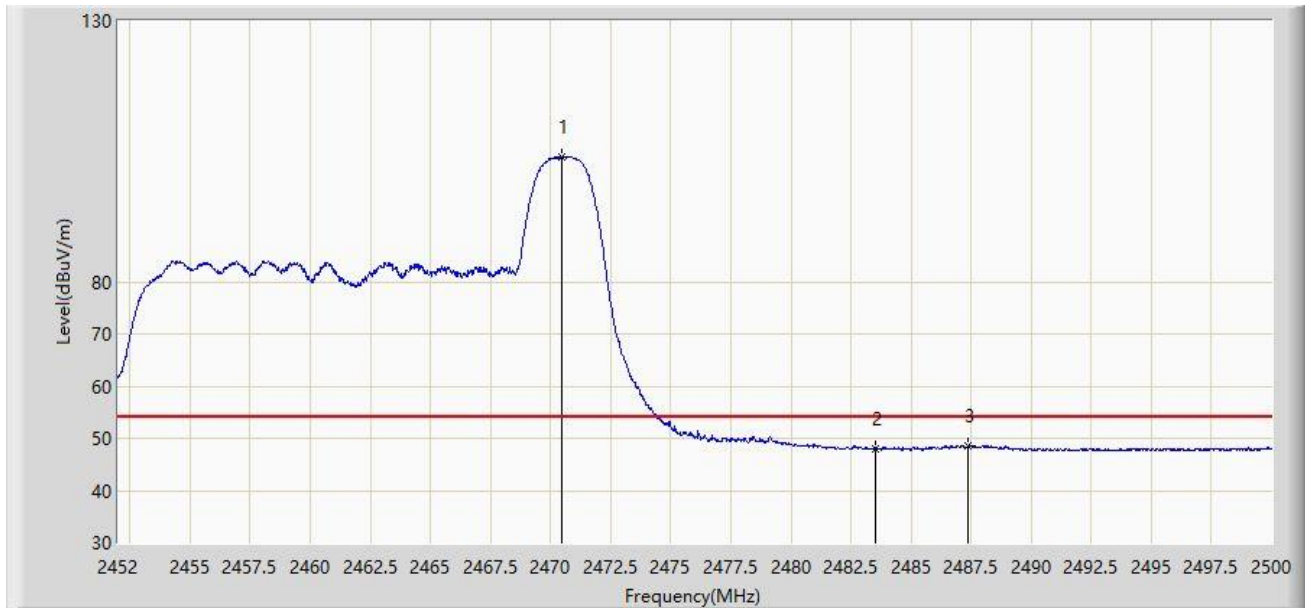


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.480	104.019	73.151	N/A	N/A	30.868	AV
2		2483.500	48.113	17.239	-5.887	54.000	30.874	AV
3	*	2487.352	48.584	17.692	-5.416	54.000	30.892	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:02
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz, Ant 2	

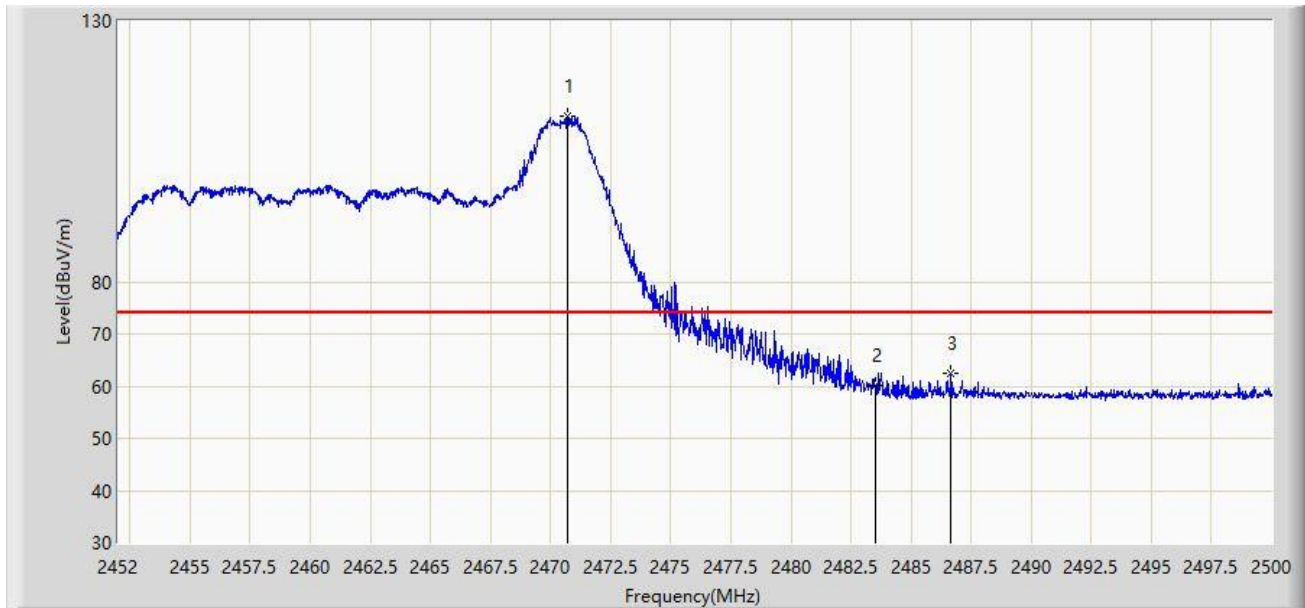


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.720	111.621	80.753	N/A	N/A	30.867	PK
2		2483.500	60.164	29.290	-13.836	74.000	30.874	PK
3	*	2486.656	62.489	31.601	-11.511	74.000	30.889	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:02
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz, Ant 2	

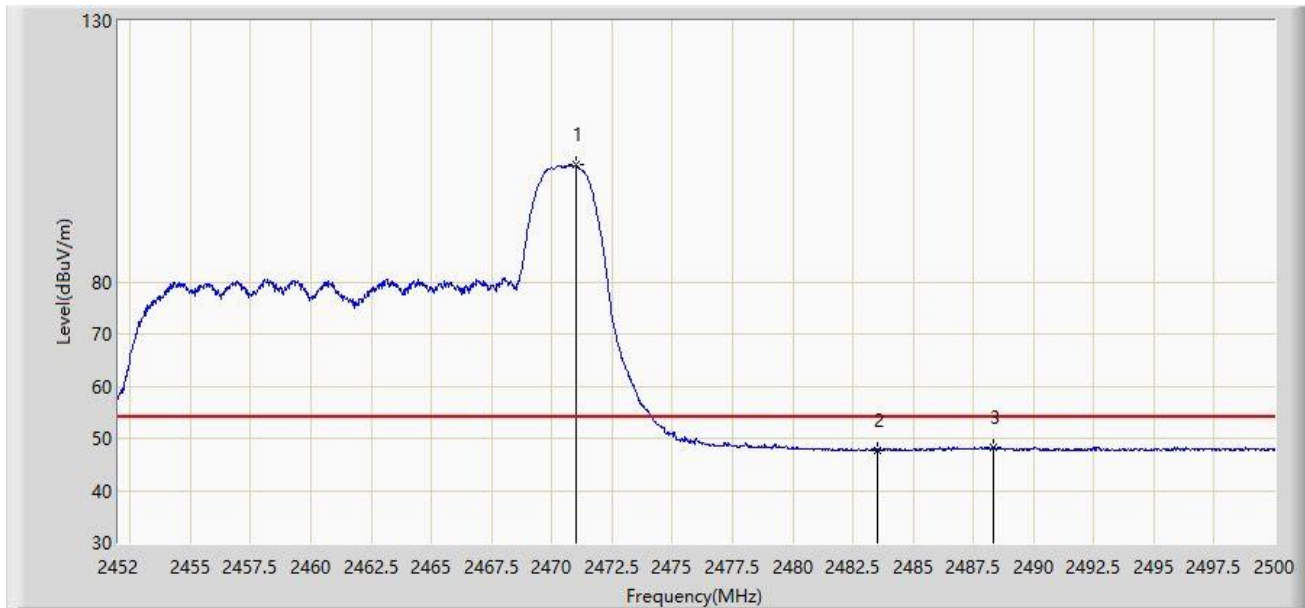


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.984	102.364	71.497	N/A	N/A	30.867	AV
2		2483.500	47.747	16.873	-6.253	54.000	30.874	AV
3	*	2488.336	48.304	17.408	-5.696	54.000	30.896	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:07
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz, Ant 2	

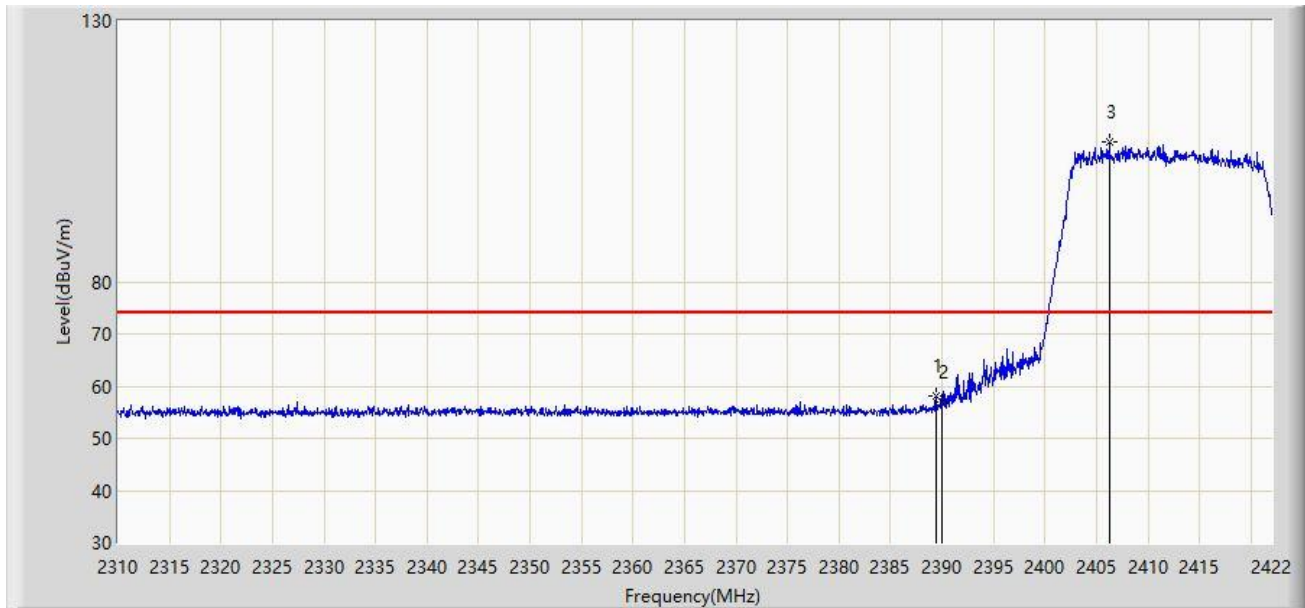


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.408	58.045	27.128	-15.955	74.000	30.917	PK
2		2390.000	56.978	26.061	-17.022	74.000	30.917	PK
3		2406.264	106.740	75.767	N/A	N/A	30.973	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:11
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz, Ant 2	

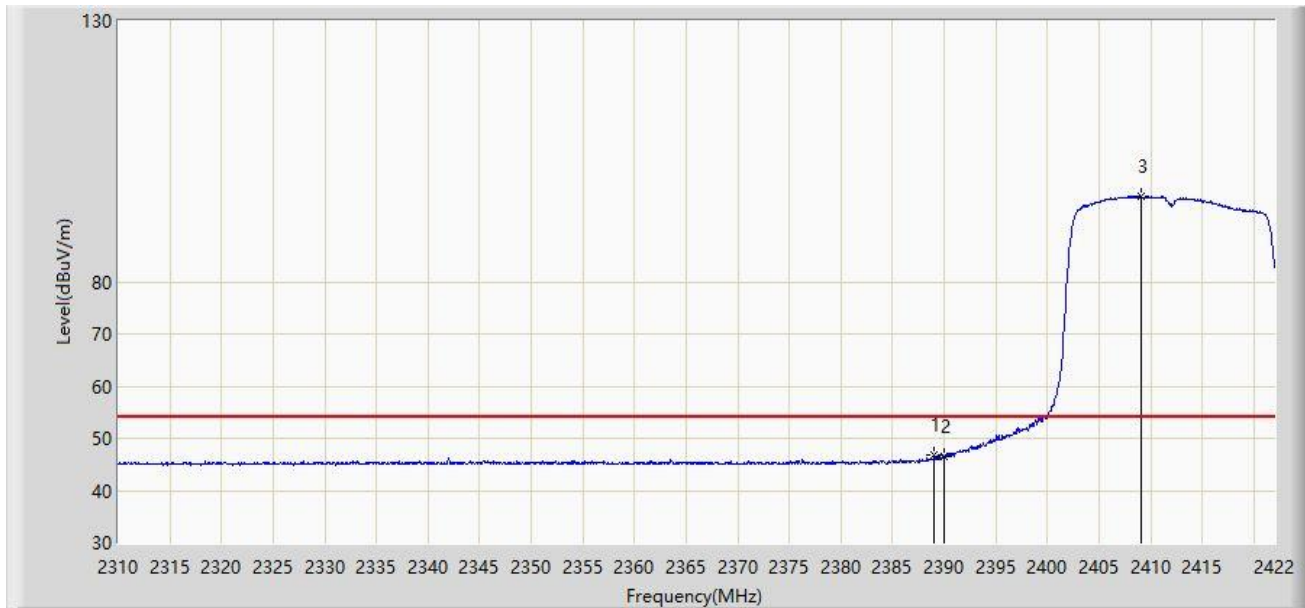


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.072	46.726	15.809	-7.274	54.000	30.917	AV
2		2390.000	46.426	15.509	-7.574	54.000	30.917	AV
3		2409.120	96.413	65.427	N/A	N/A	30.985	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:16
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz, Ant 2	

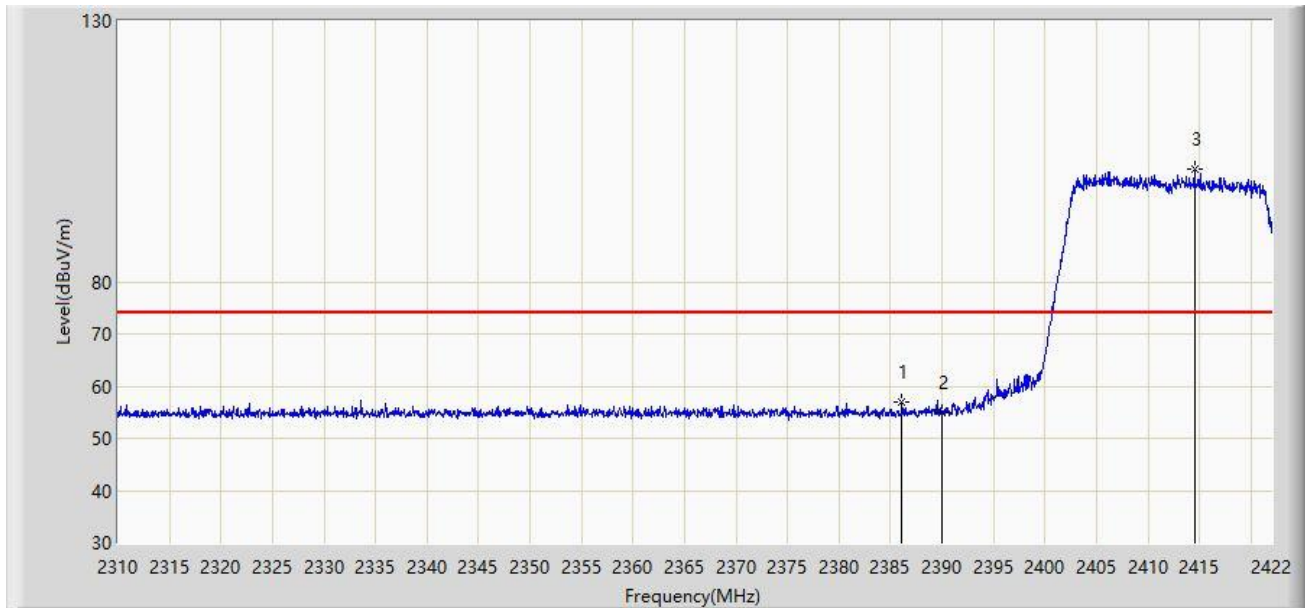


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.104	56.893	25.975	-17.107	74.000	30.918	PK
2		2390.000	54.960	24.043	-19.040	74.000	30.917	PK
3		2414.496	101.516	70.534	N/A	N/A	30.982	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:16
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz, Ant 2	

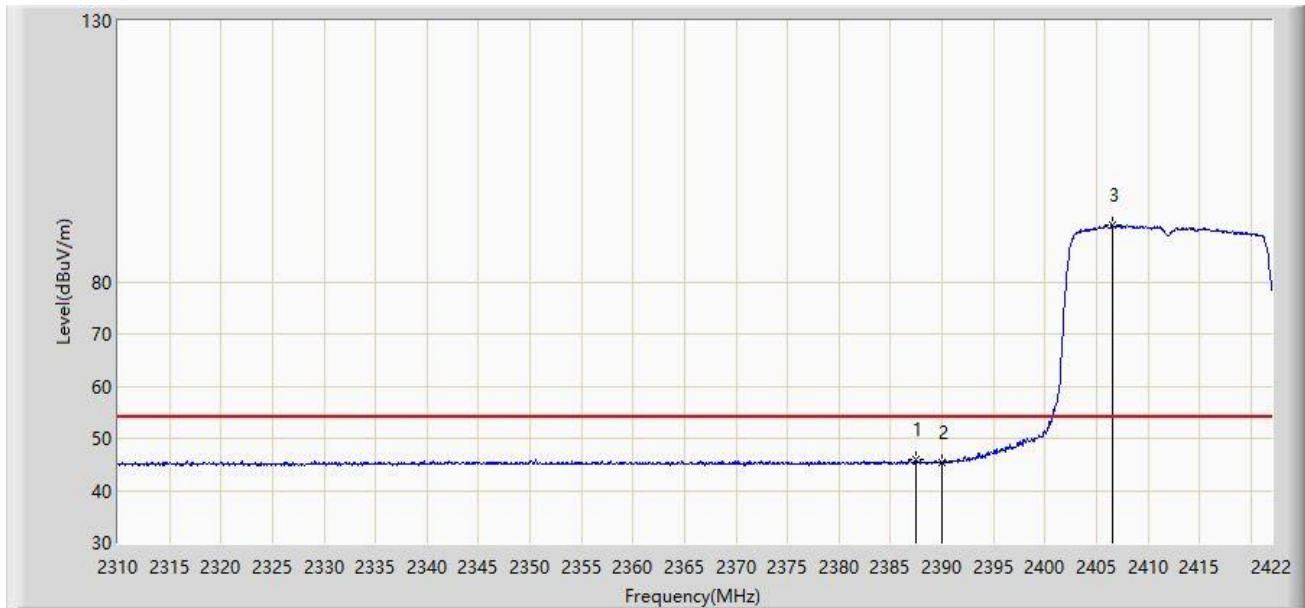


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2387.504	45.849	14.931	-8.151	54.000	30.918	AV
2		2390.000	45.459	14.542	-8.541	54.000	30.917	AV
3		2406.600	90.979	60.005	N/A	N/A	30.974	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:19
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz, Ant 2	

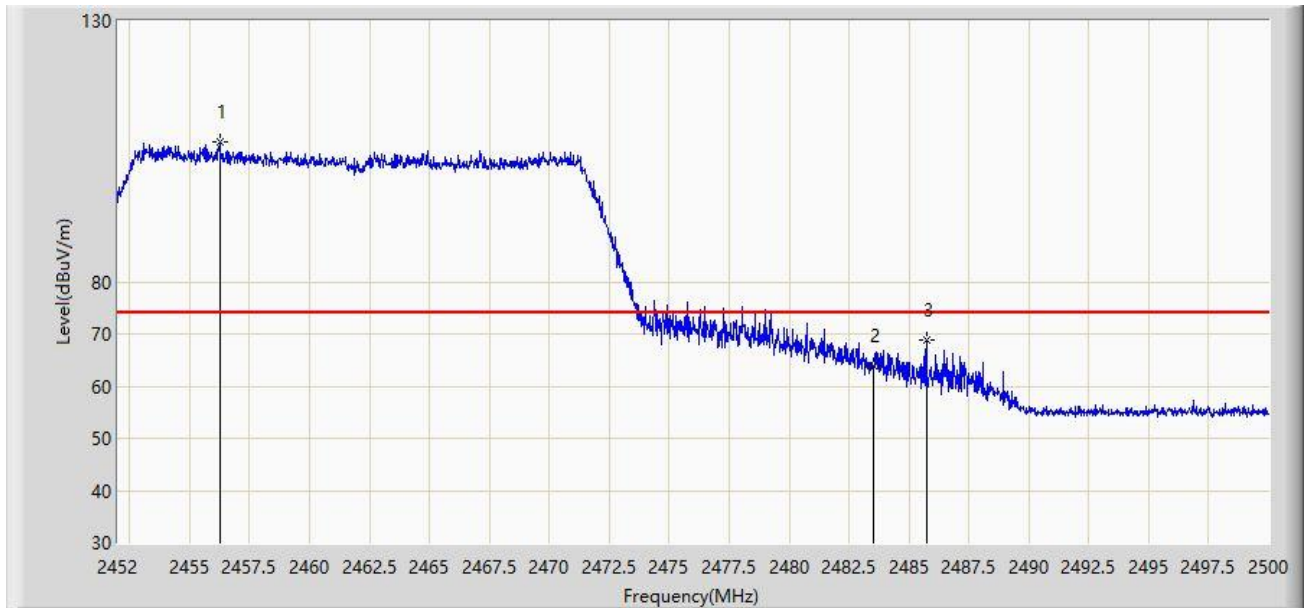


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2456.248	106.862	75.975	N/A	N/A	30.887	PK
2		2483.500	63.921	33.047	-10.079	74.000	30.874	PK
3	*	2485.744	68.891	38.007	-5.109	74.000	30.884	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:19
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz, Ant 2	

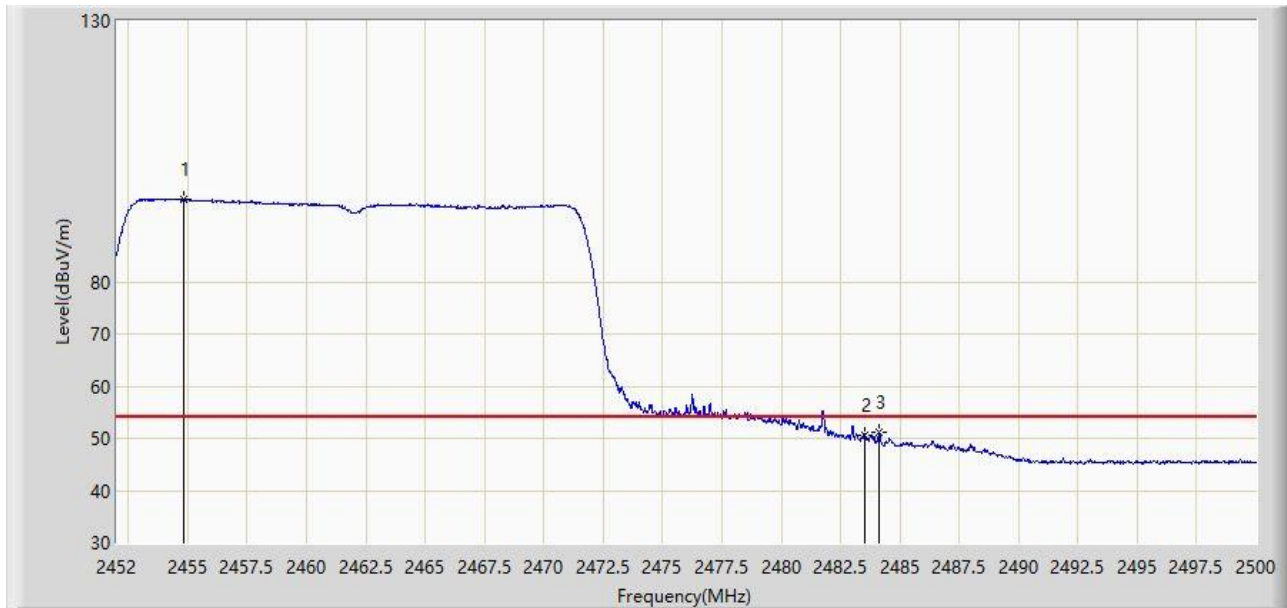


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2454.856	95.934	65.046	N/A	N/A	30.887	AV
2		2483.500	50.500	19.626	-3.500	54.000	30.874	AV
3	*	2484.136	51.085	20.208	-2.915	54.000	30.877	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:22
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz, Ant 2	

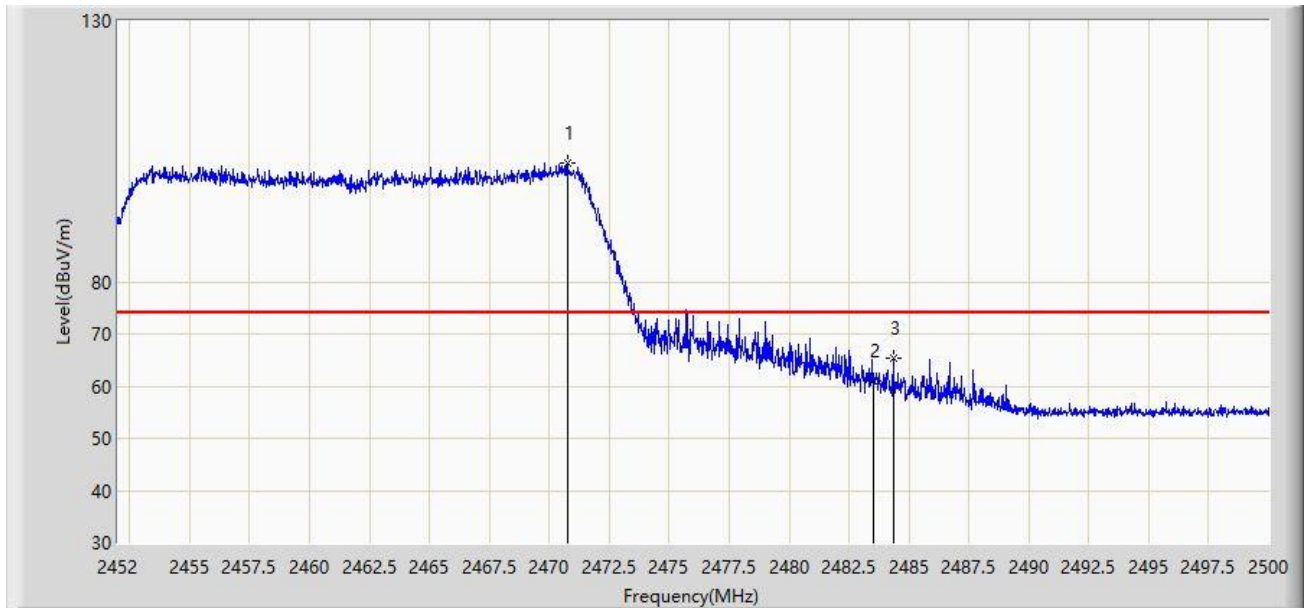


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.744	102.787	71.919	N/A	N/A	30.867	PK
2		2483.500	60.870	29.996	-13.130	74.000	30.874	PK
3	*	2484.352	65.383	34.505	-8.617	74.000	30.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:23
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz, Ant 2	

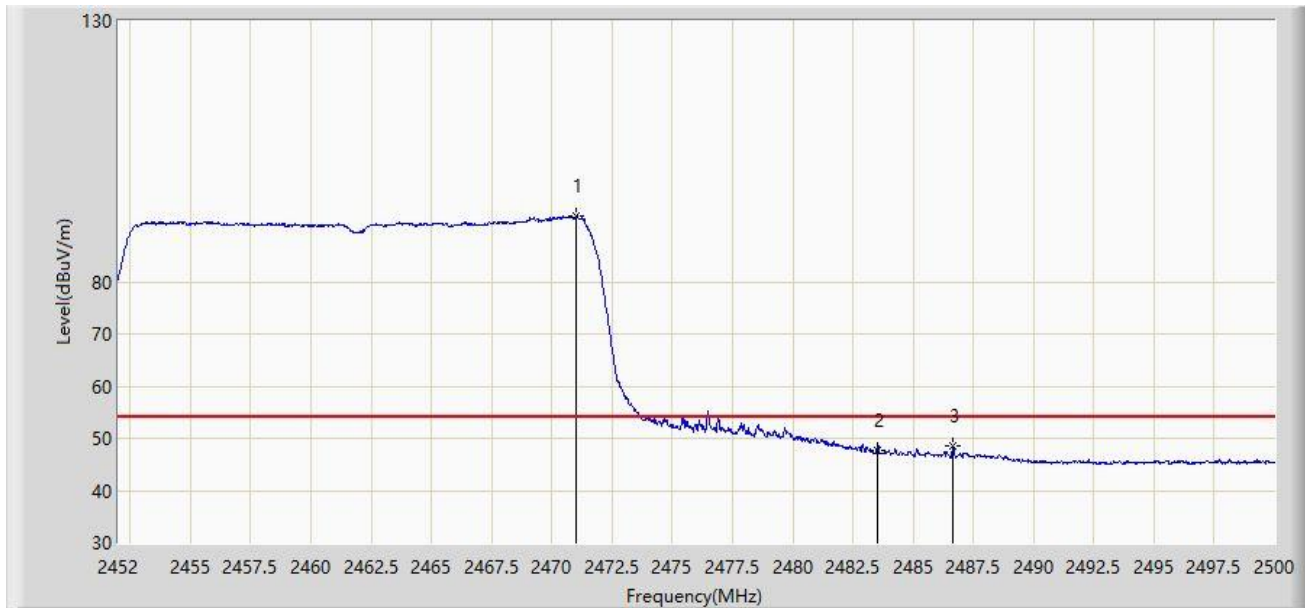


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2471.008	92.627	61.760	N/A	N/A	30.867	AV
2		2483.500	47.719	16.845	-6.281	54.000	30.874	AV
3	*	2486.656	48.432	17.544	-5.568	54.000	30.889	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 18:25
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz, Ant 2	

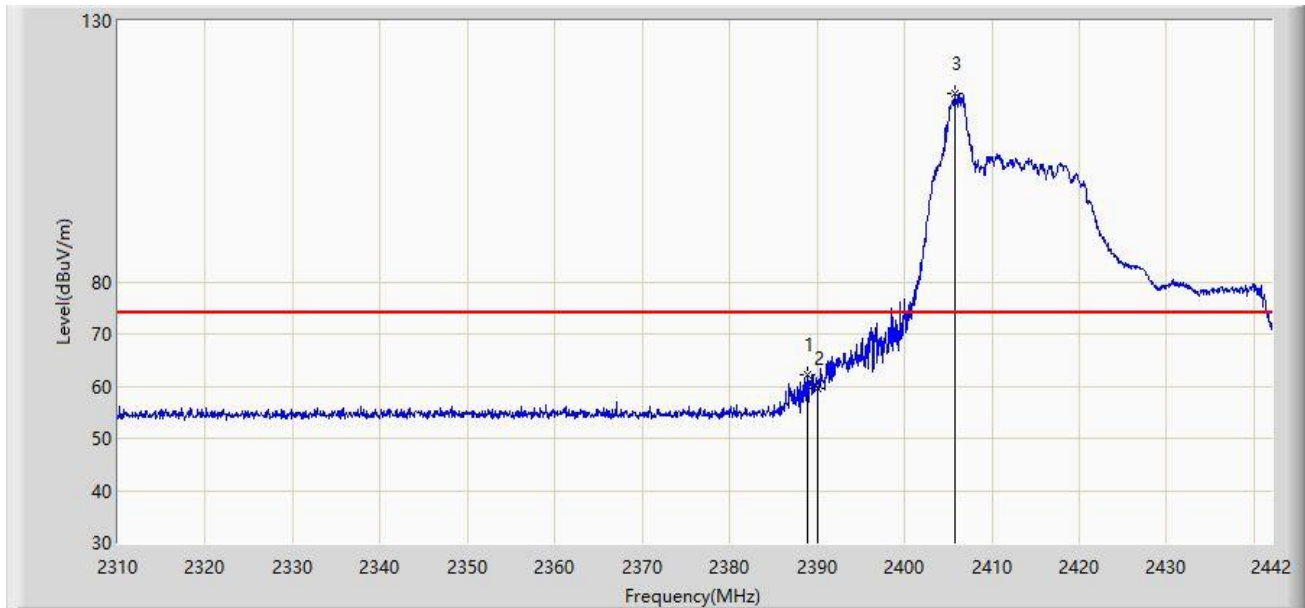


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.936	62.094	31.177	-11.906	74.000	30.917	PK
2		2390.000	59.674	28.757	-14.326	74.000	30.917	PK
3		2405.832	116.179	85.208	N/A	N/A	30.970	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:10
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz, Ant 2	

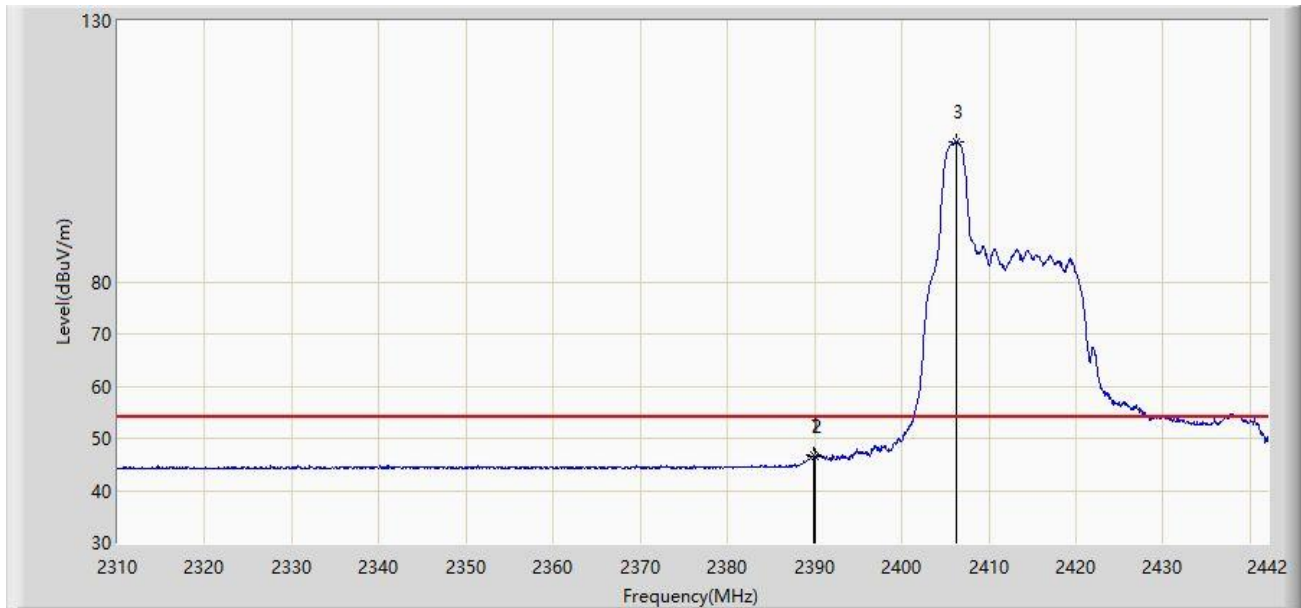


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	46.671	15.754	-7.329	54.000	30.917	AV
2		2390.000	46.603	15.686	-7.397	54.000	30.917	AV
3		2406.294	106.862	75.889	N/A	N/A	30.973	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:12
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz, Ant 2	

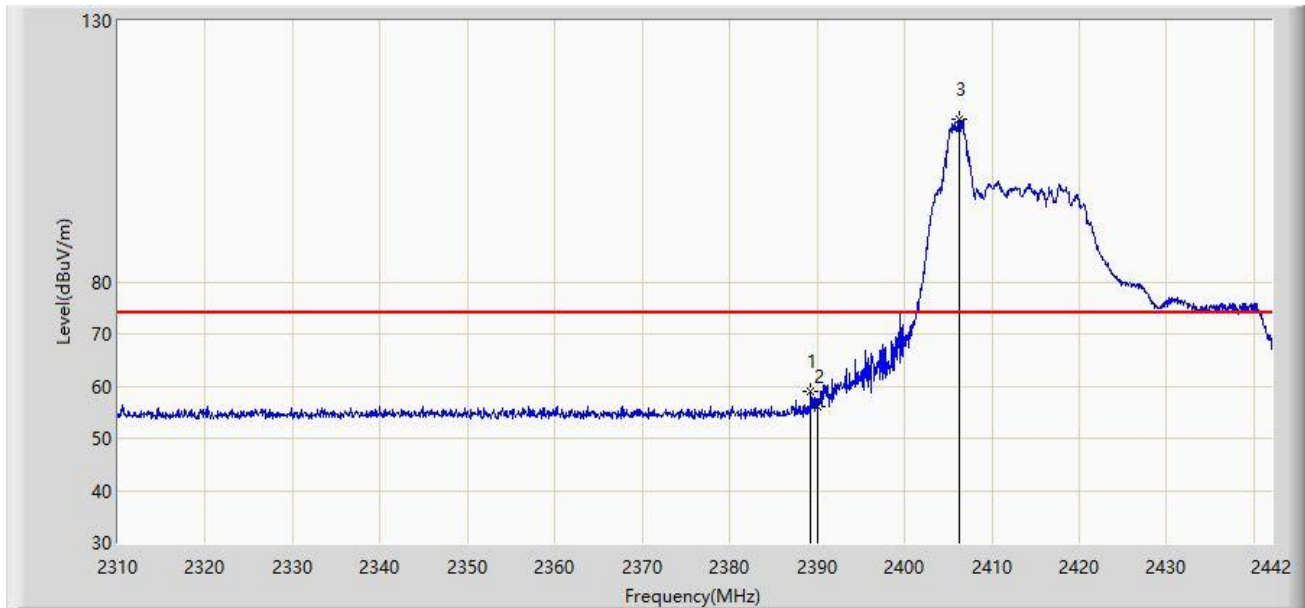


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.266	58.902	27.985	-15.098	74.000	30.917	PK
2		2390.000	56.220	25.303	-17.780	74.000	30.917	PK
3		2406.294	111.140	80.167	N/A	N/A	30.973	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz, Ant 2	

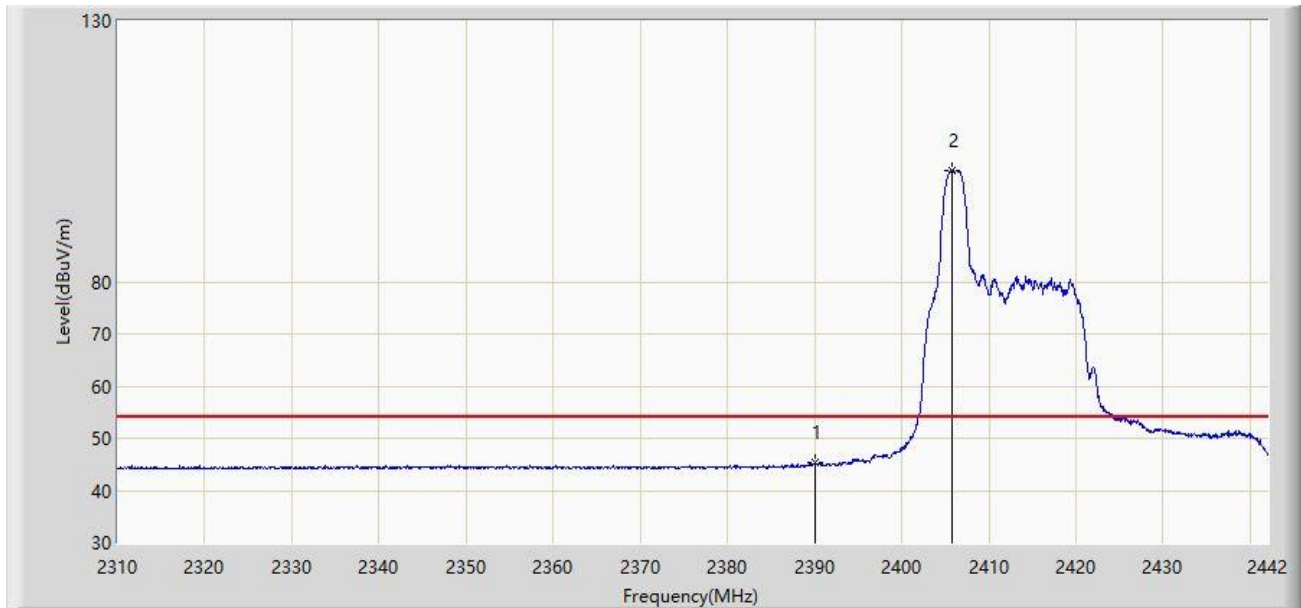


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2390.000	45.257	14.340	-8.743	54.000	30.917	AV
2		2405.700	101.278	70.308	N/A	N/A	30.970	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:15
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz, Ant 2	

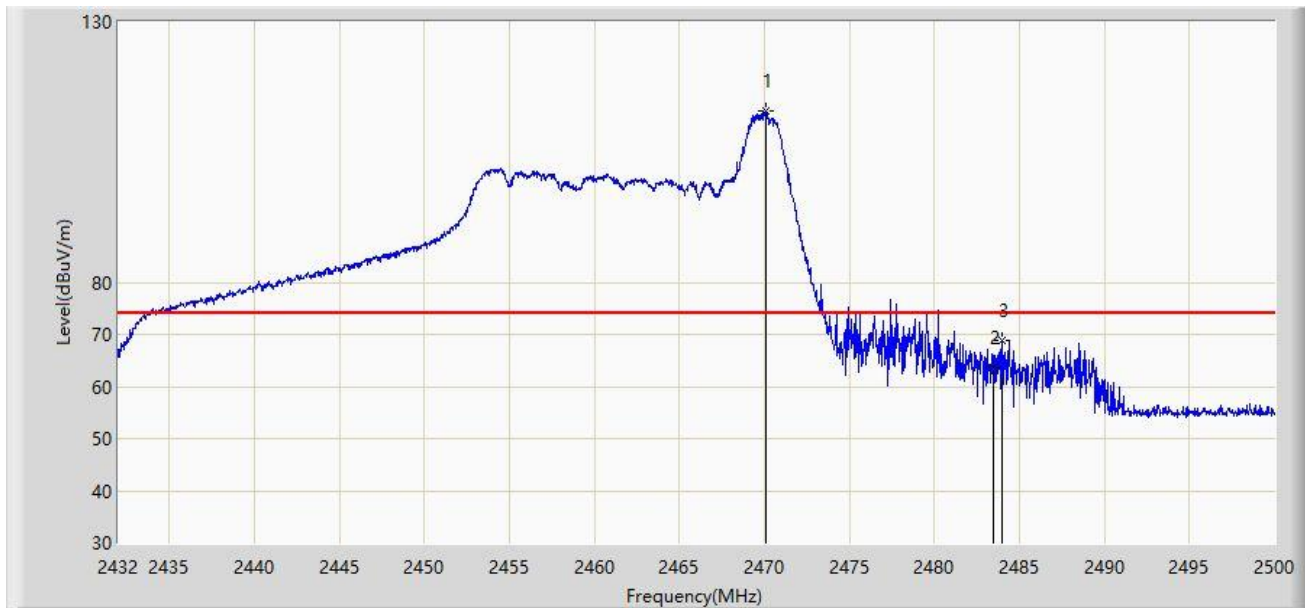


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.080	112.989	82.120	N/A	N/A	30.869	PK
2		2483.500	63.589	32.715	-10.411	74.000	30.874	PK
3	*	2484.020	68.731	37.855	-5.269	74.000	30.876	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:16
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz, Ant 2	

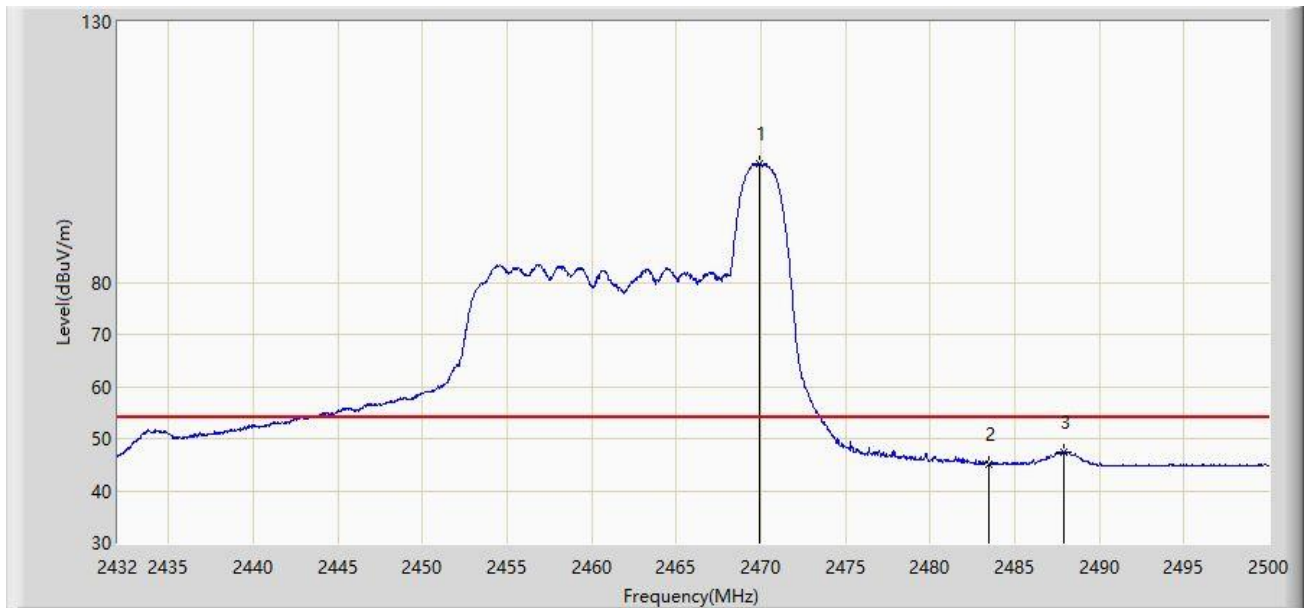


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.910	102.789	71.920	N/A	N/A	30.869	AV
2		2483.500	45.057	14.183	-8.943	54.000	30.874	AV
3	*	2487.930	47.532	16.638	-6.468	54.000	30.894	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:17
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz, Ant 2	

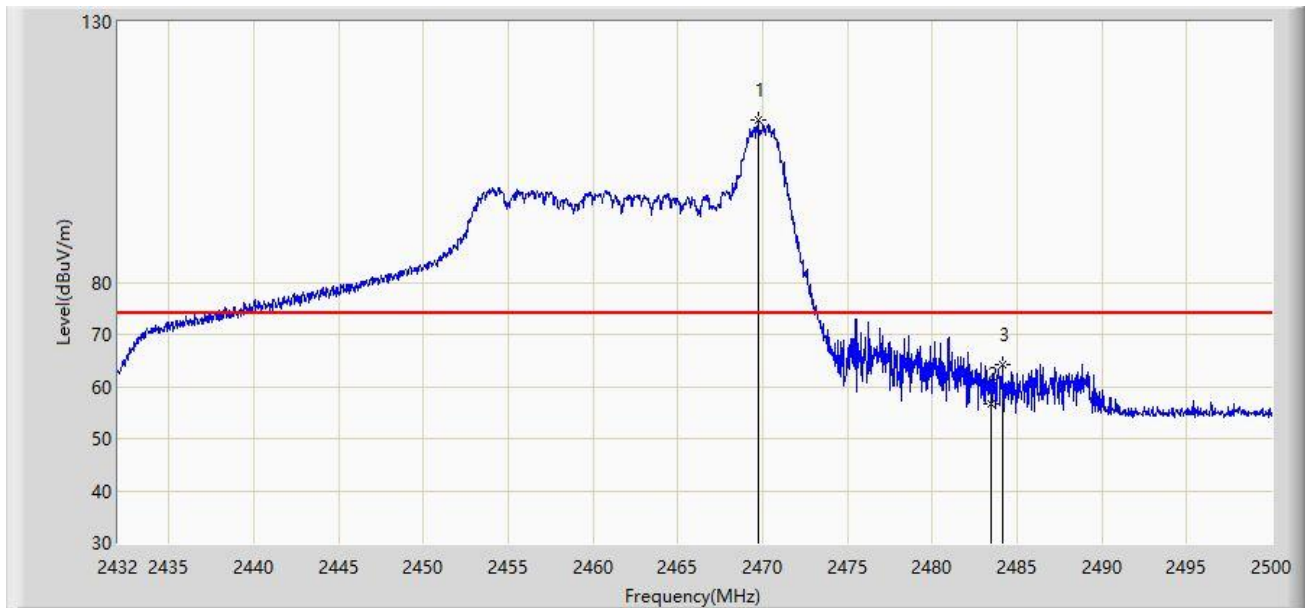


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.740	111.256	80.387	N/A	N/A	30.869	PK
2		2483.500	56.543	25.669	-17.457	74.000	30.874	PK
3	*	2484.122	64.314	33.437	-9.686	74.000	30.877	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:19
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz, Ant 2	

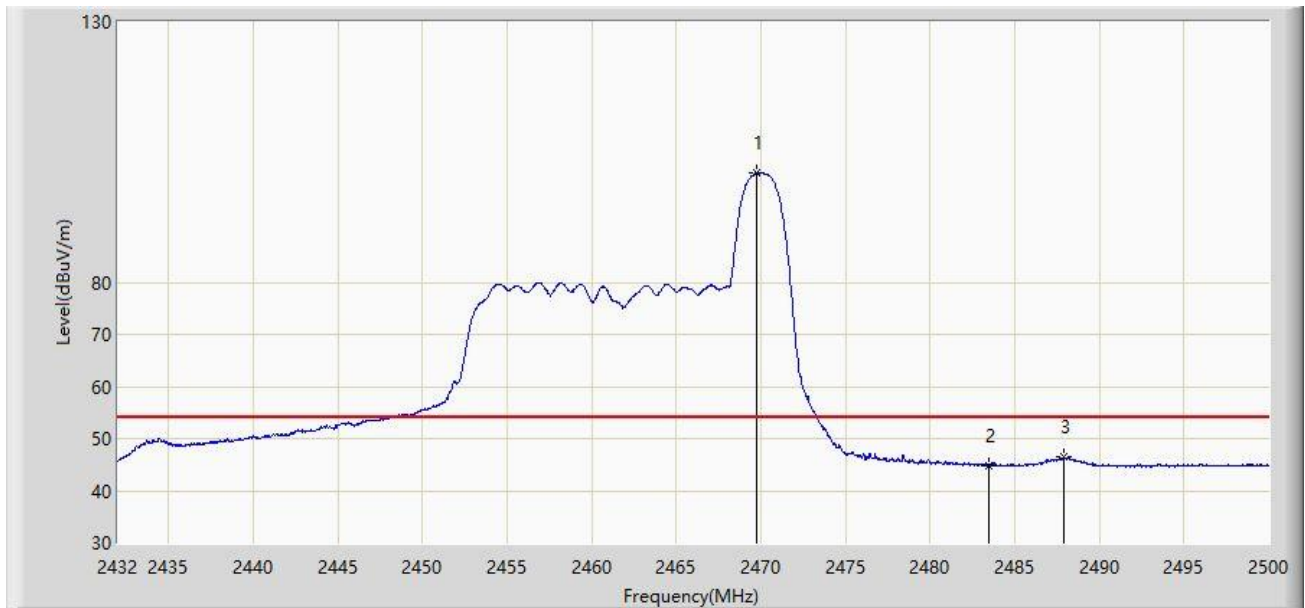


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.740	101.032	70.163	N/A	N/A	30.869	AV
2		2483.500	44.878	14.004	-9.122	54.000	30.874	AV
3	*	2487.930	46.471	15.577	-7.529	54.000	30.894	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:22
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz, Ant 2	

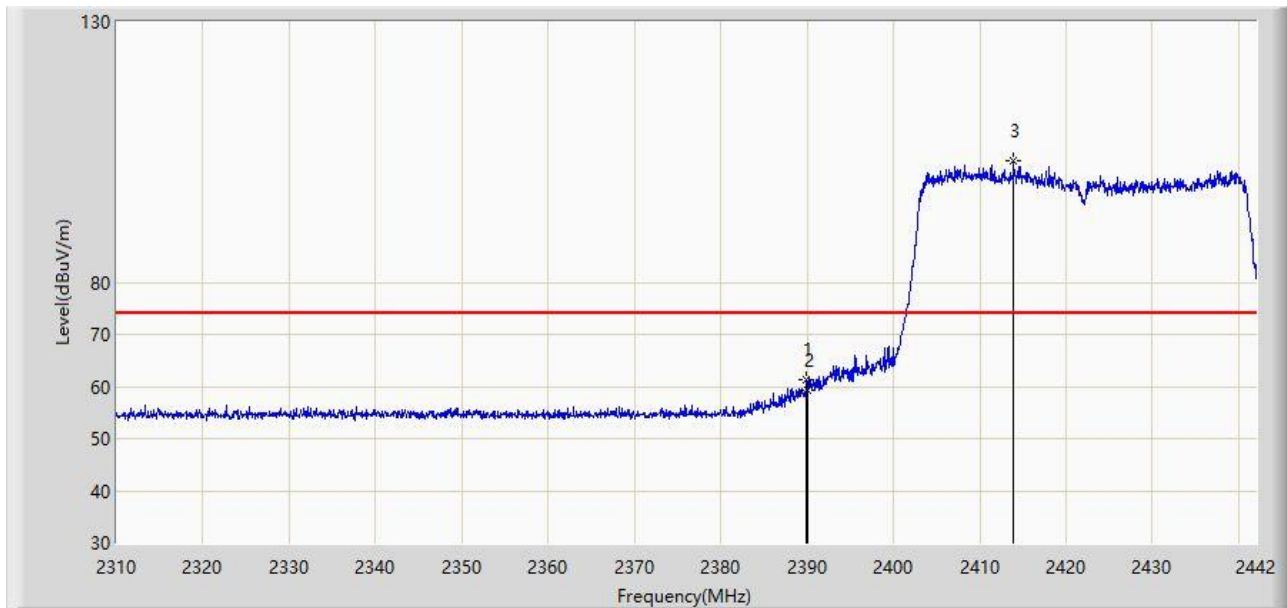


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	61.355	30.438	-12.645	74.000	30.917	PK
2		2390.000	59.371	28.454	-14.629	74.000	30.917	PK
3		2413.950	103.407	72.423	N/A	N/A	30.984	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:26
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz, Ant 2	

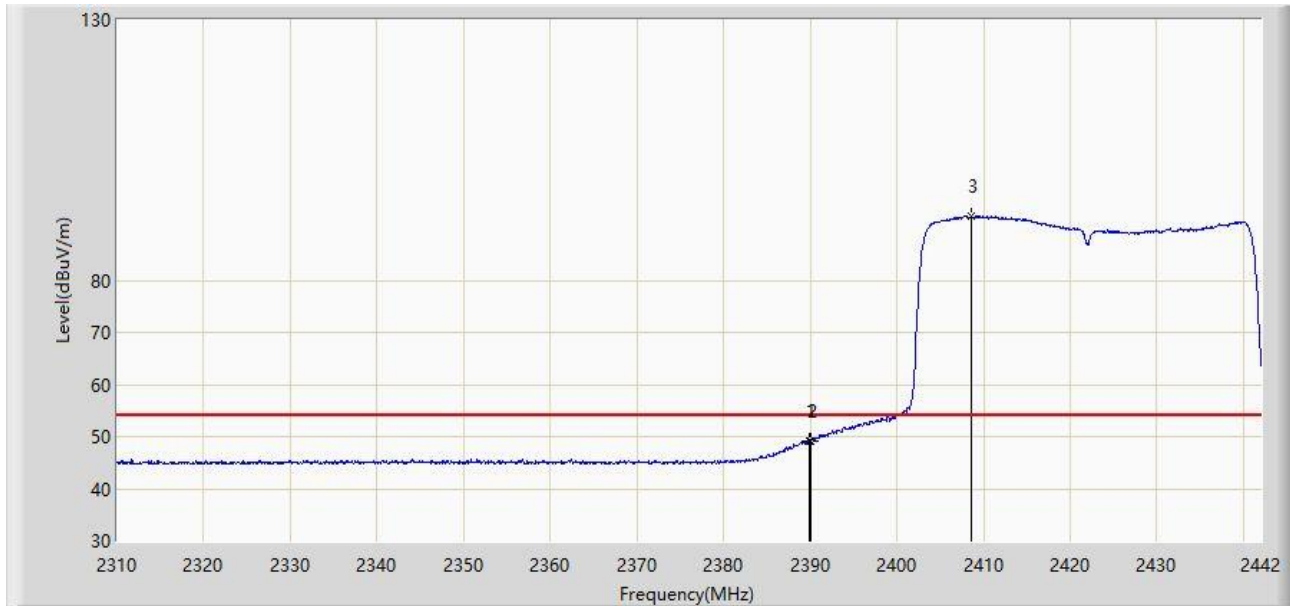


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.926	49.251	18.334	-4.749	54.000	30.917	AV
2		2390.000	49.137	18.220	-4.863	54.000	30.917	AV
3		2408.604	92.410	61.427	N/A	N/A	30.983	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:28
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz, Ant 2	

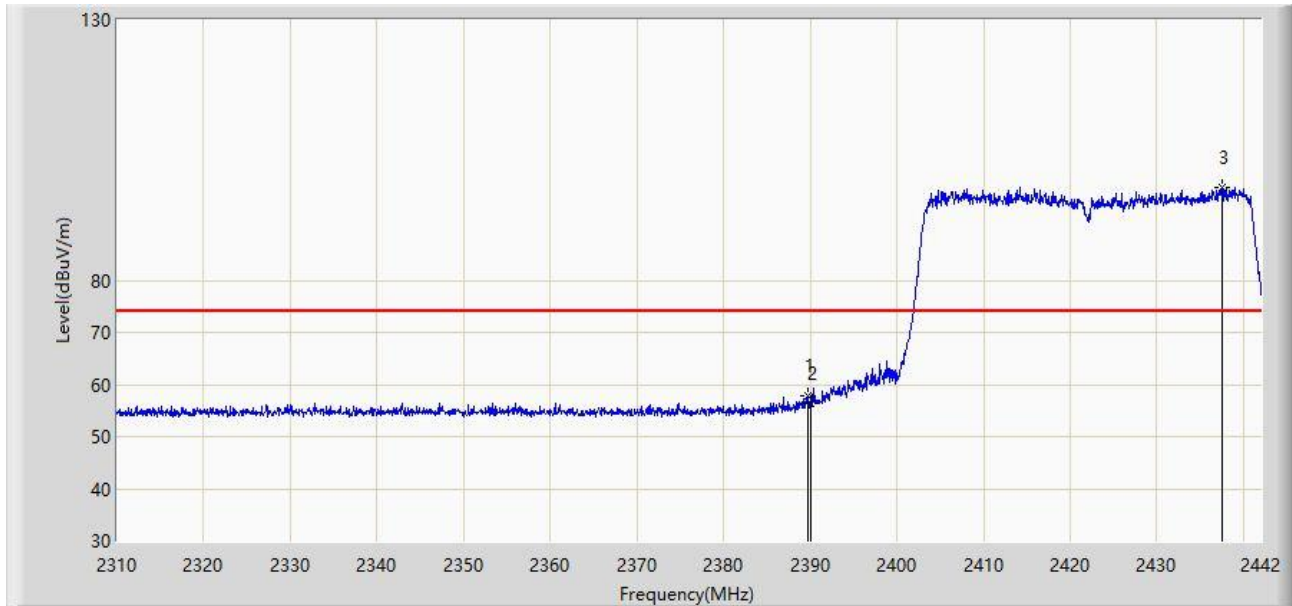


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.728	57.704	26.787	-16.296	74.000	30.917	PK
2		2390.000	56.398	25.481	-17.602	74.000	30.917	PK
3		2437.512	97.962	67.050	N/A	N/A	30.912	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:28
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz, Ant 2	

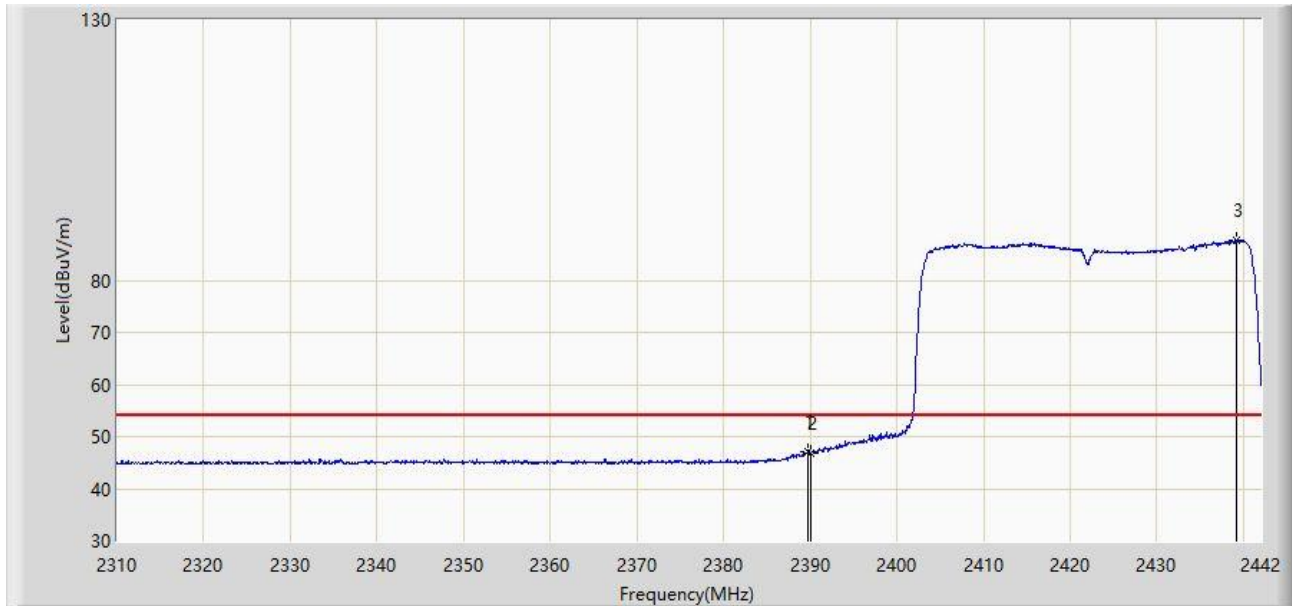


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	47.040	16.123	-6.960	54.000	30.917	AV
2		2390.000	46.780	15.863	-7.220	54.000	30.917	AV
3		2439.228	87.751	56.843	N/A	N/A	30.908	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:31
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz, Ant 2	

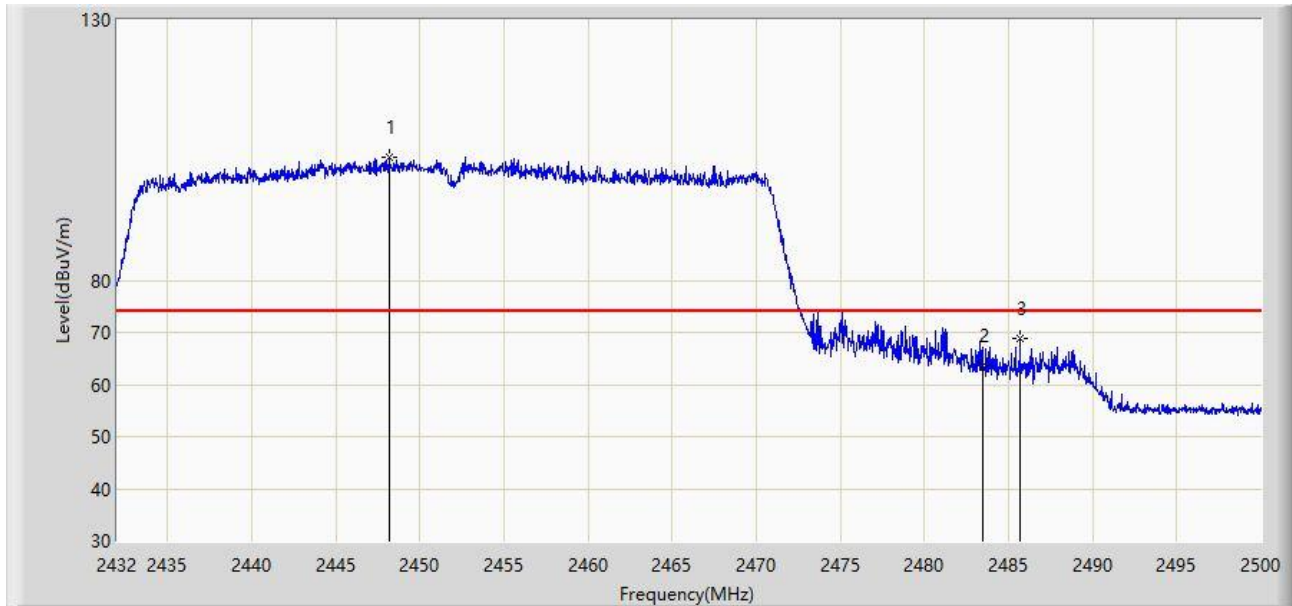


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.150	103.669	72.777	N/A	N/A	30.892	PK
2		2483.500	63.717	32.843	-10.283	74.000	30.874	PK
3	*	2485.686	68.702	37.818	-5.298	74.000	30.884	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:33
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz, Ant 2	

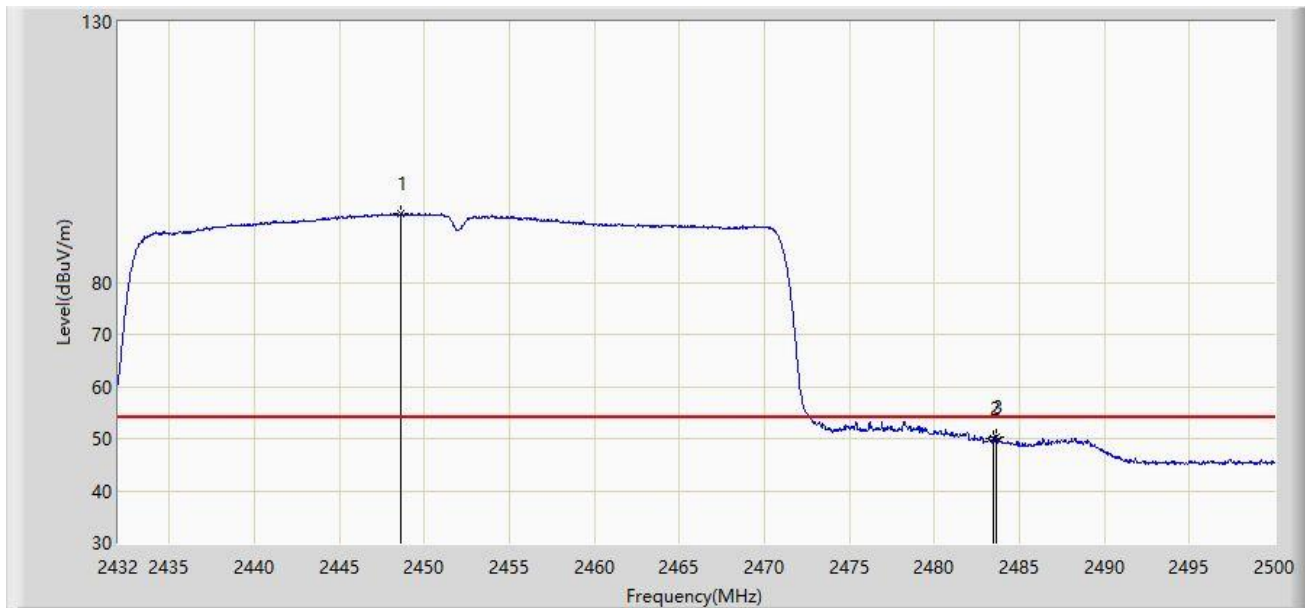


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.592	93.226	62.334	N/A	N/A	30.892	AV
2		2483.500	50.083	19.209	-3.917	54.000	30.874	AV
3	*	2483.646	50.238	19.363	-3.762	54.000	30.875	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:34
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz, Ant 2	

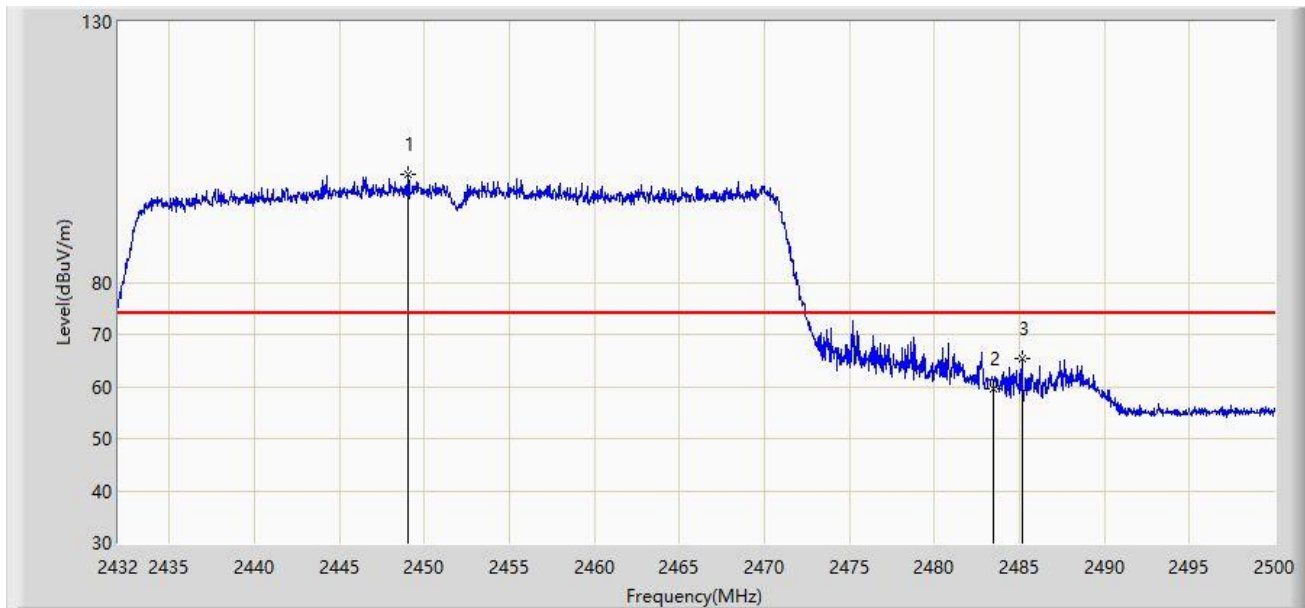


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2449.000	100.714	69.822	N/A	N/A	30.891	PK
2		2483.500	59.650	28.776	-14.350	74.000	30.874	PK
3	*	2485.142	65.318	34.436	-8.682	74.000	30.881	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 19:36
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz, Ant 2	

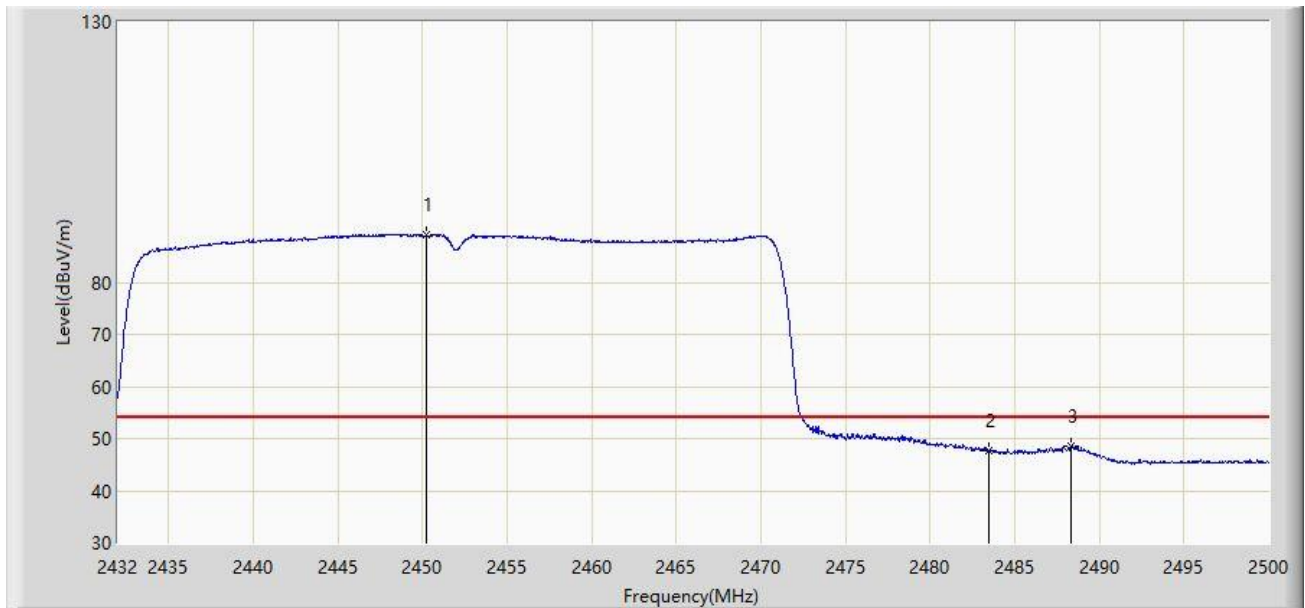

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2450.224	89.274	58.383	N/A	N/A	30.891	AV
2		2483.500	47.608	16.734	-6.392	54.000	30.874	AV
3	*	2488.338	48.460	17.564	-5.540	54.000	30.896	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

MIMO Mode – Partial RU

Site: NS-AC1	Time: 2022/05/15 - 16:16
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 RU 0 26Tone at 2412MHz	

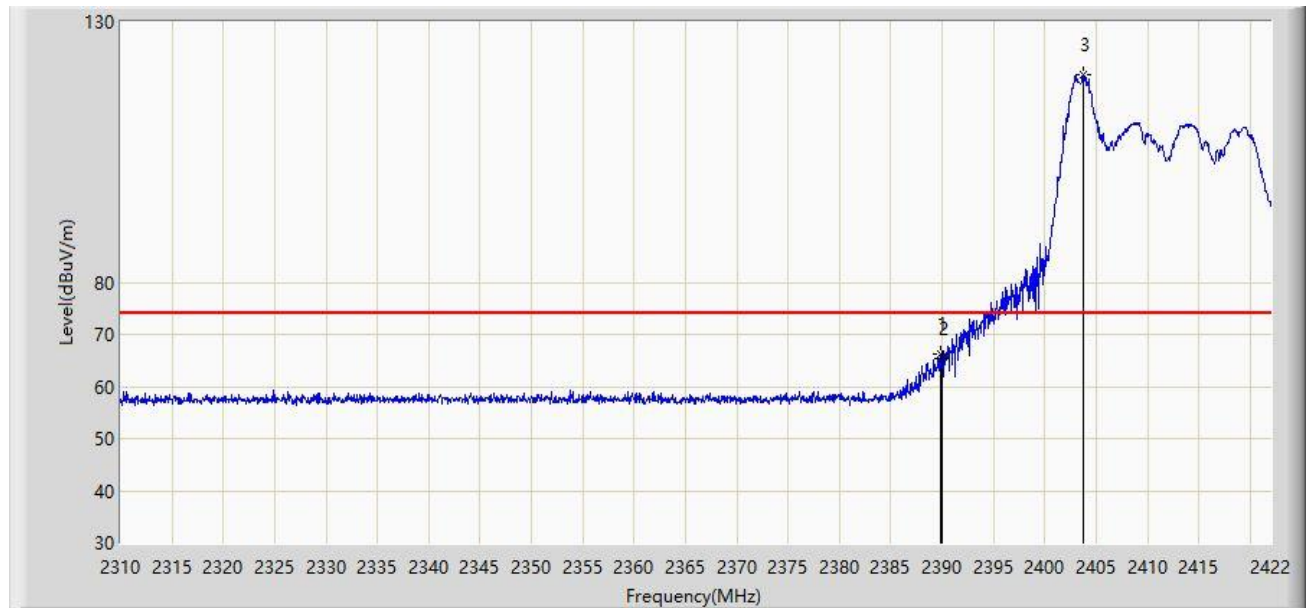


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	66.369	35.452	-7.631	74.000	30.917	PK
2		2390.000	65.235	34.318	-8.765	74.000	30.917	PK
3		2403.688	119.871	88.910	N/A	N/A	30.960	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:20
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 RU 0 26Tone at 2412MHz	

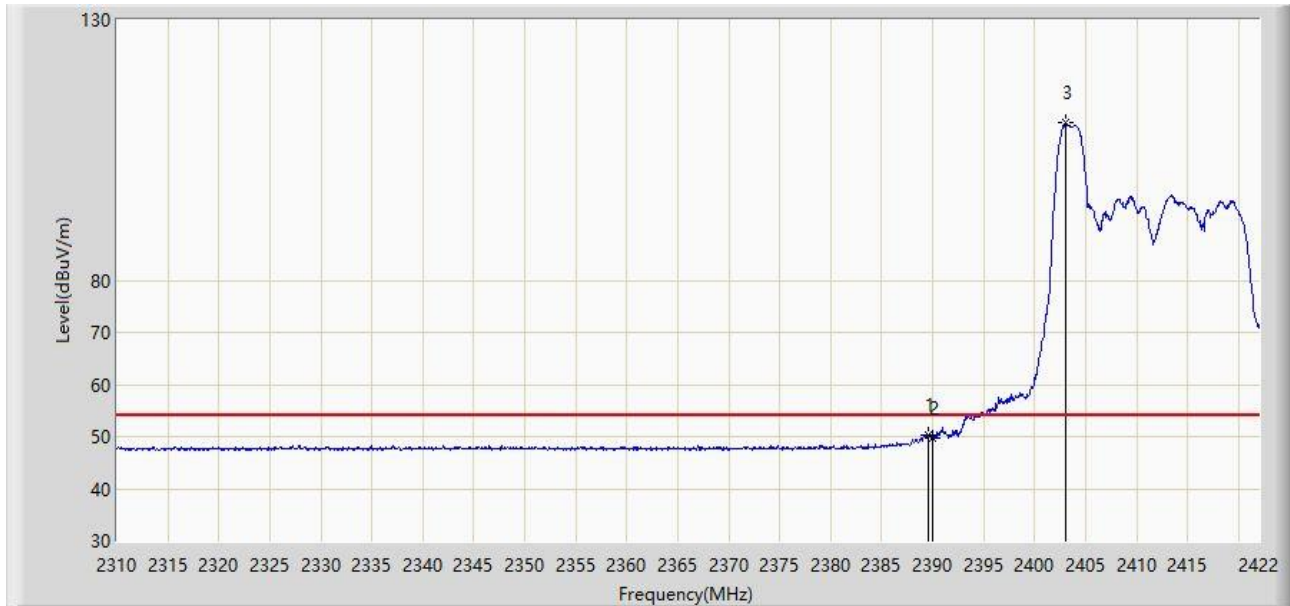


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	50.410	19.493	-3.590	54.000	30.917	AV
2		2390.000	49.722	18.805	-4.278	54.000	30.917	AV
3		2403.072	110.263	79.305	N/A	N/A	30.957	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:22
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 RU 0 26Tone at 2412MHz	

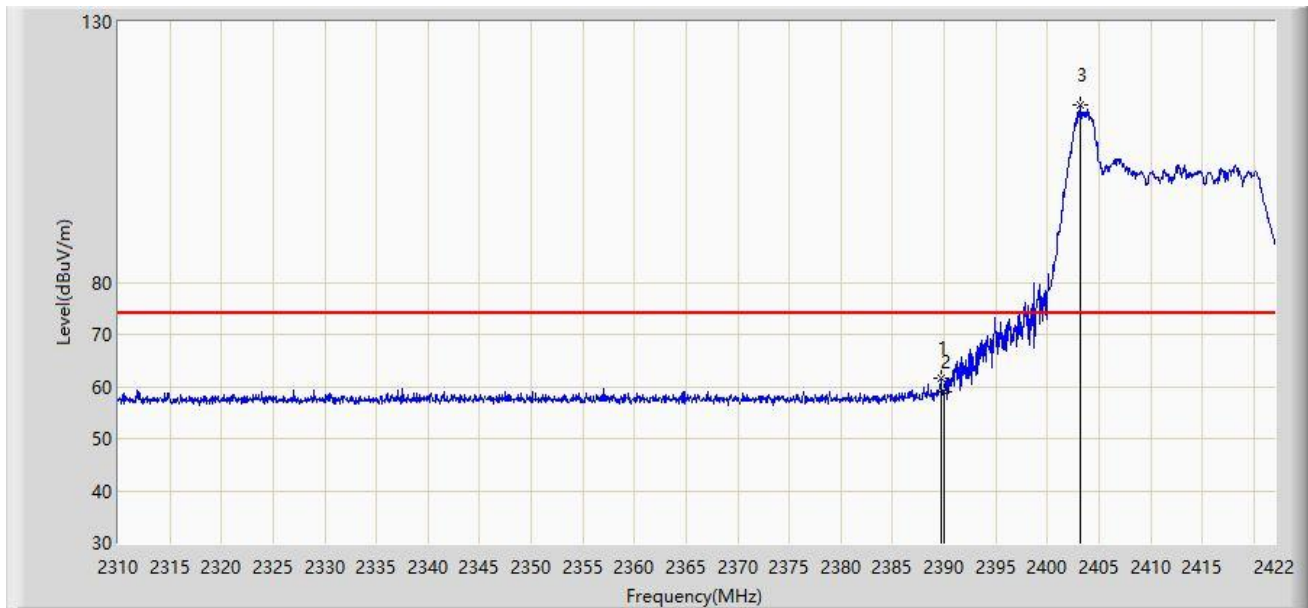


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.688	61.547	30.630	-12.453	74.000	30.917	PK
2		2390.000	59.116	28.199	-14.884	74.000	30.917	PK
3		2403.128	114.129	83.171	N/A	N/A	30.958	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:23
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 RU 0 26Tone at 2412MHz	

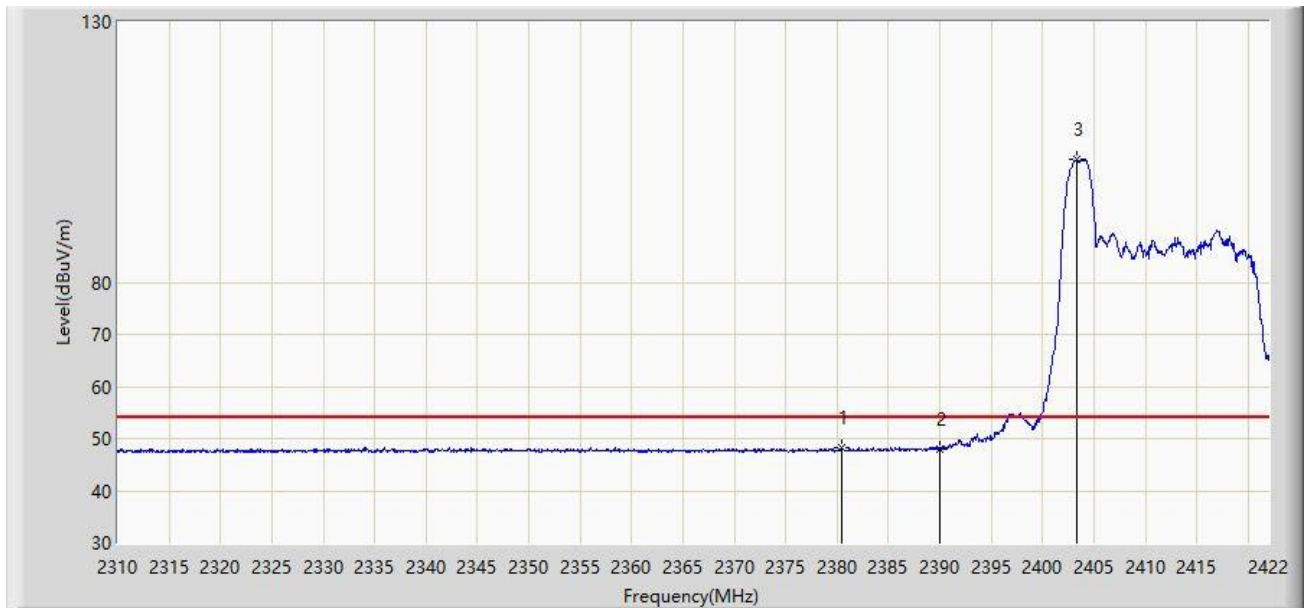


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2380.448	48.404	17.484	-5.596	54.000	30.920	AV
2		2390.000	47.969	17.052	-6.031	54.000	30.917	AV
3		2403.352	103.607	72.648	N/A	N/A	30.959	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:25
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz	

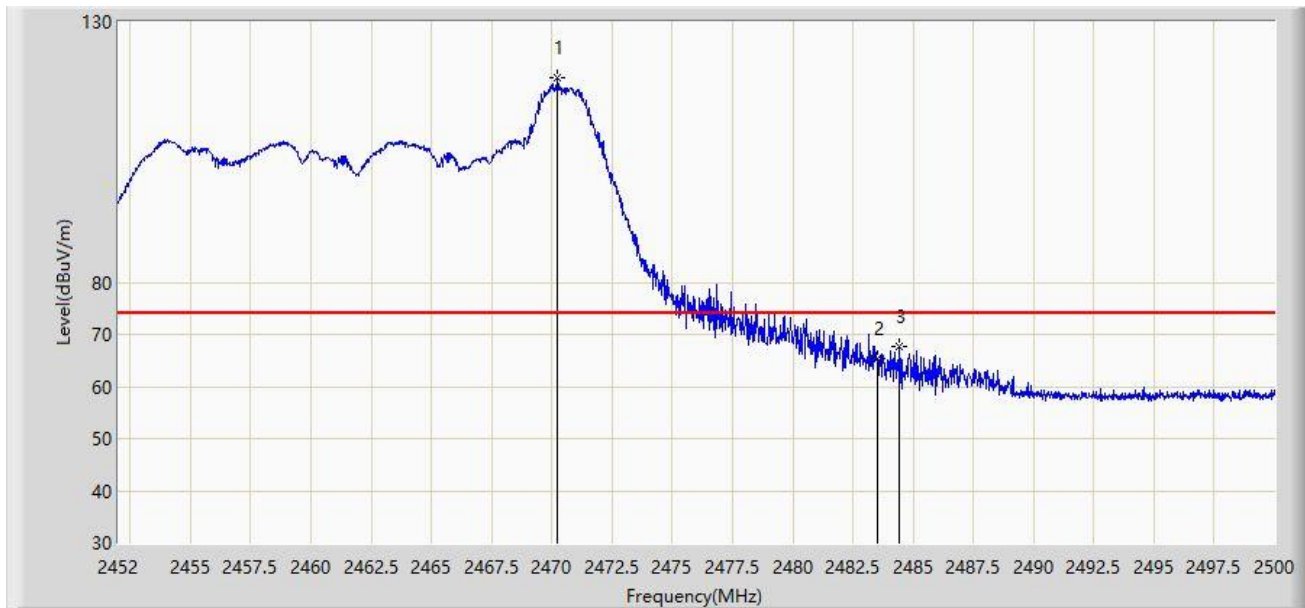


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.240	119.353	88.485	N/A	N/A	30.869	PK
2		2483.500	65.496	34.622	-8.504	74.000	30.874	PK
3	*	2484.424	67.756	36.878	-6.244	74.000	30.878	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:34
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz	

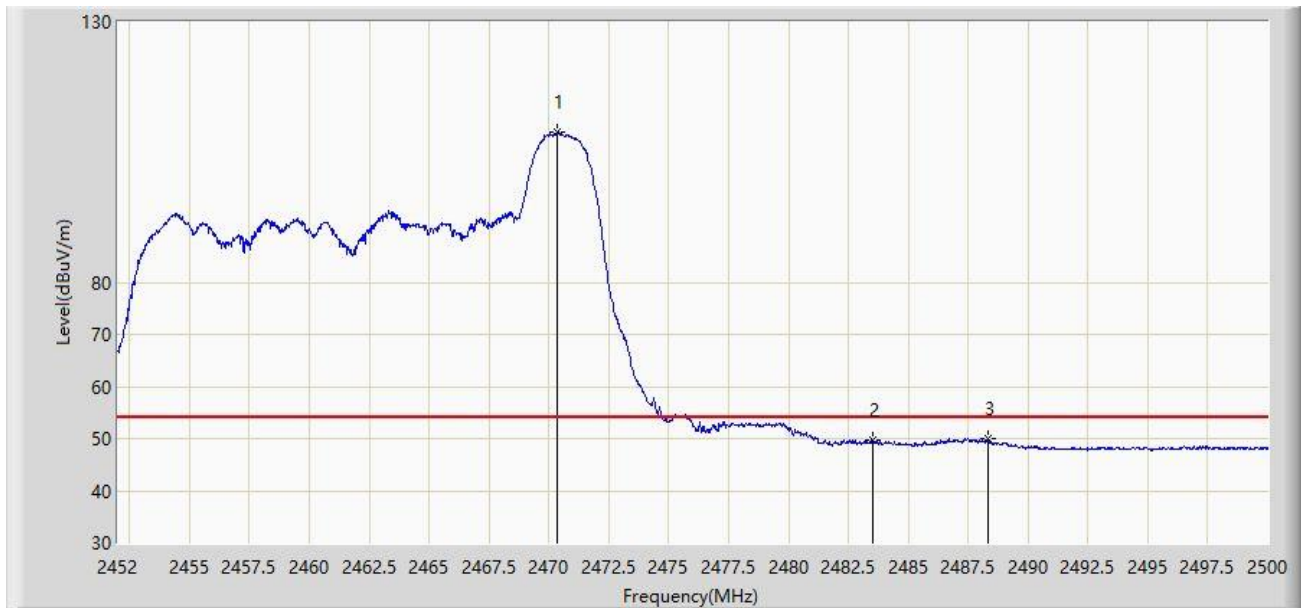


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.360	108.832	77.964	N/A	N/A	30.869	AV
2		2483.500	49.648	18.774	-4.352	54.000	30.874	AV
3	*	2488.312	50.019	19.123	-3.981	54.000	30.896	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:36
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz	

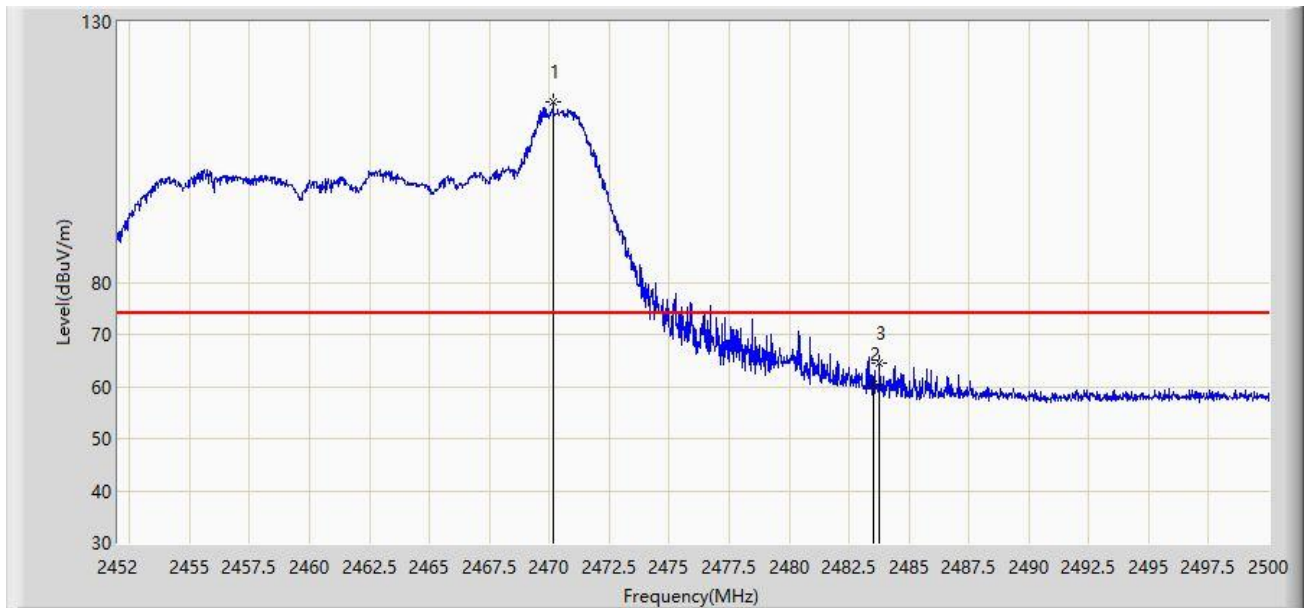


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.168	114.516	83.648	N/A	N/A	30.869	PK
2		2483.500	60.501	29.627	-13.499	74.000	30.874	PK
3	*	2483.776	64.433	33.558	-9.567	74.000	30.875	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:36
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 26Tone RU 8 at 2462MHz	

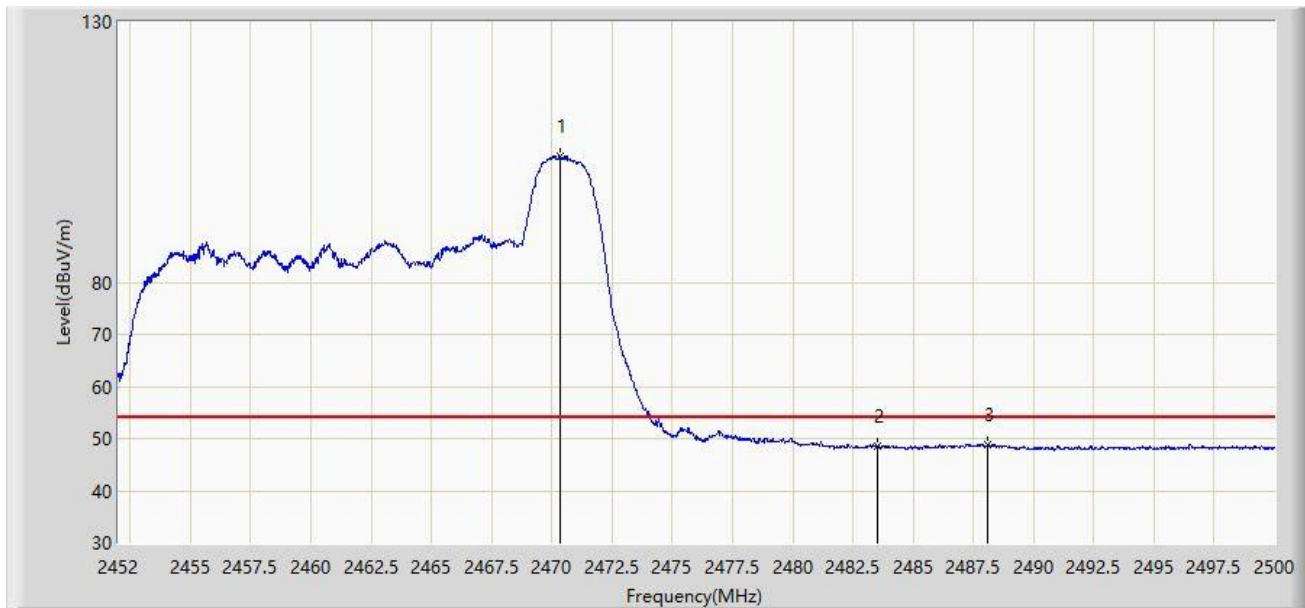


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.336	104.126	73.258	N/A	N/A	30.869	AV
2		2483.500	48.514	17.640	-5.486	54.000	30.874	AV
3	*	2488.096	48.854	17.959	-5.146	54.000	30.895	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:39
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz	

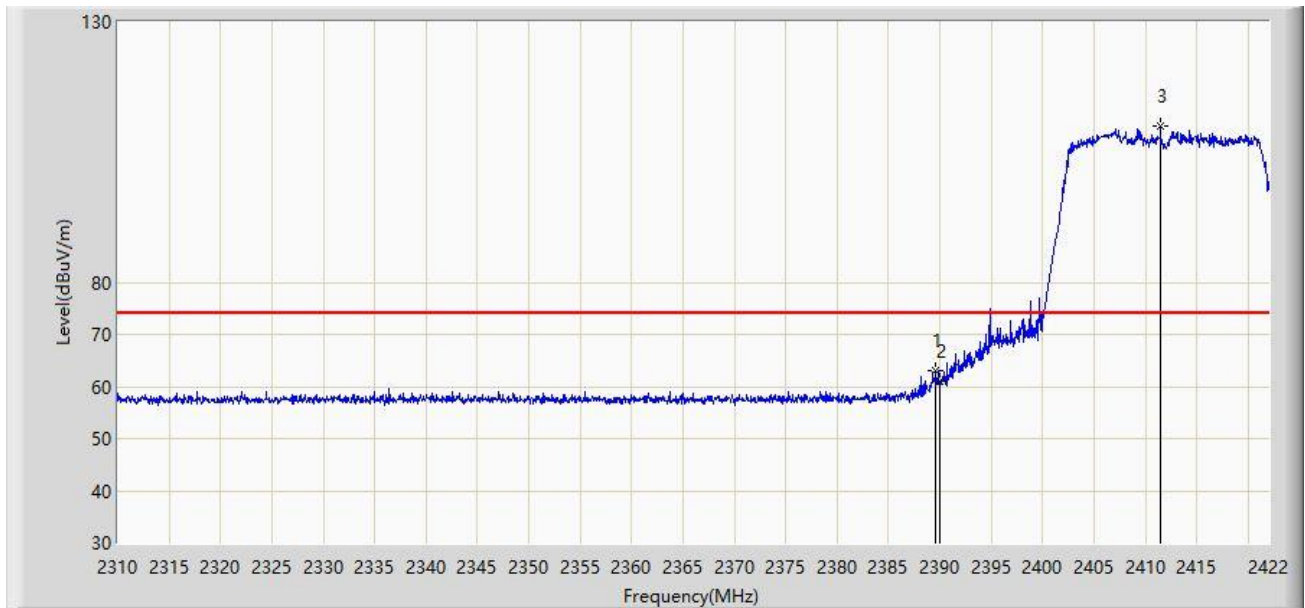


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	63.107	32.190	-10.893	74.000	30.917	PK
2		2390.000	60.982	30.065	-13.018	74.000	30.917	PK
3		2411.472	109.935	78.942	N/A	N/A	30.993	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:40
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz	

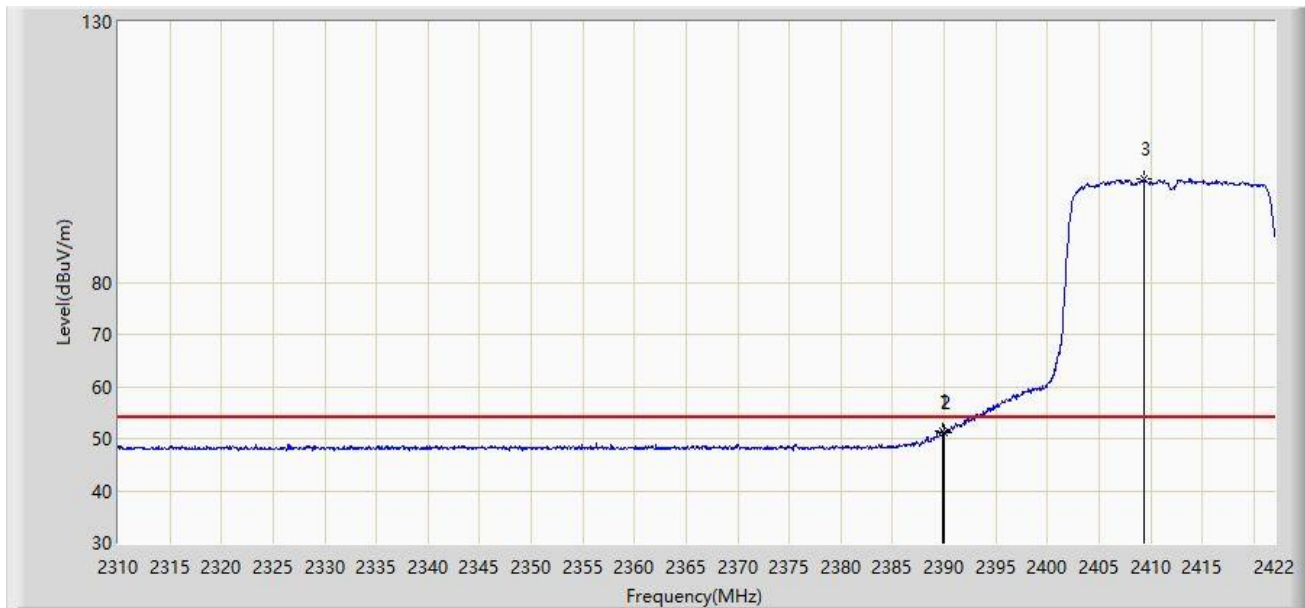


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.800	51.381	20.464	-2.619	54.000	30.917	AV
2		2390.000	51.077	20.160	-2.923	54.000	30.917	AV
3		2409.400	99.854	68.867	N/A	N/A	30.987	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:43
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz	

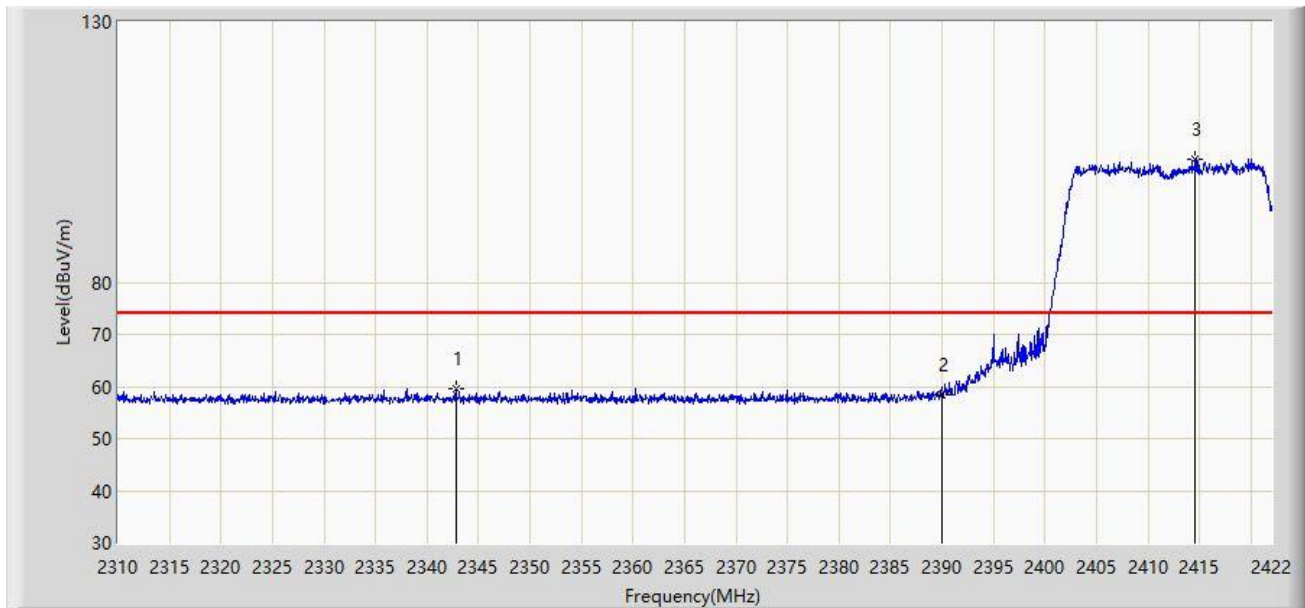


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2342.816	59.485	28.285	-14.515	74.000	31.200	PK
2		2390.000	58.539	27.622	-15.461	74.000	30.917	PK
3		2414.608	103.653	72.671	N/A	N/A	30.982	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:45
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2412MHz	

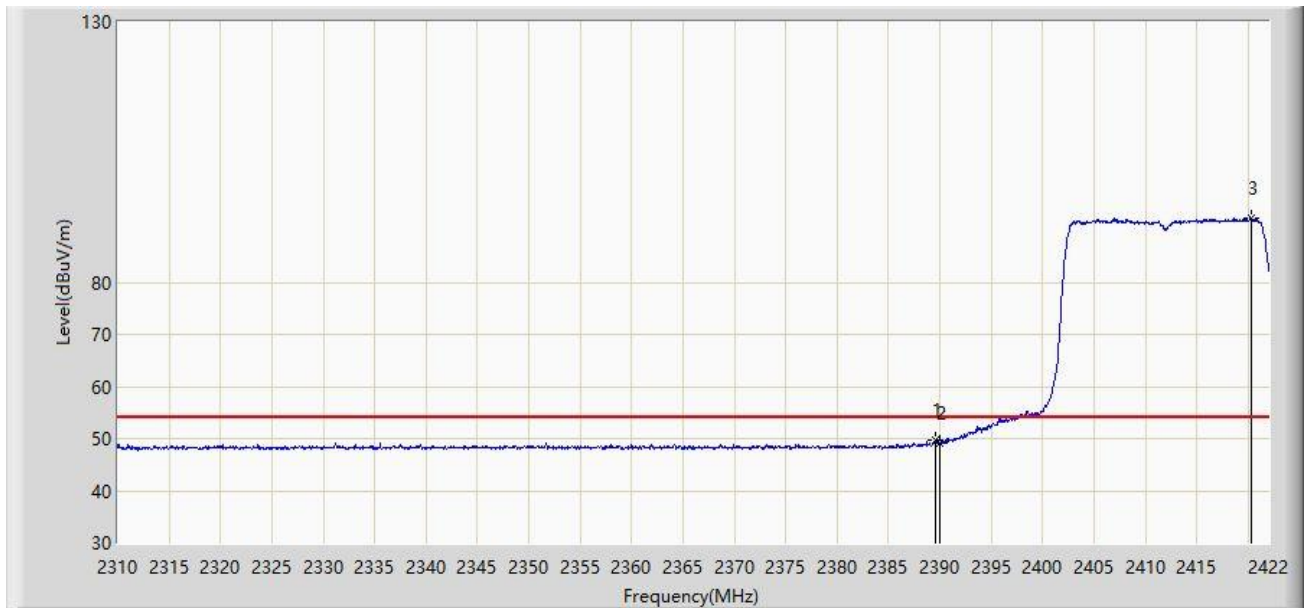


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.576	49.774	18.857	-4.226	54.000	30.917	AV
2		2390.000	49.170	18.253	-4.830	54.000	30.917	AV
3		2420.264	92.292	61.331	N/A	N/A	30.961	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:52
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz	

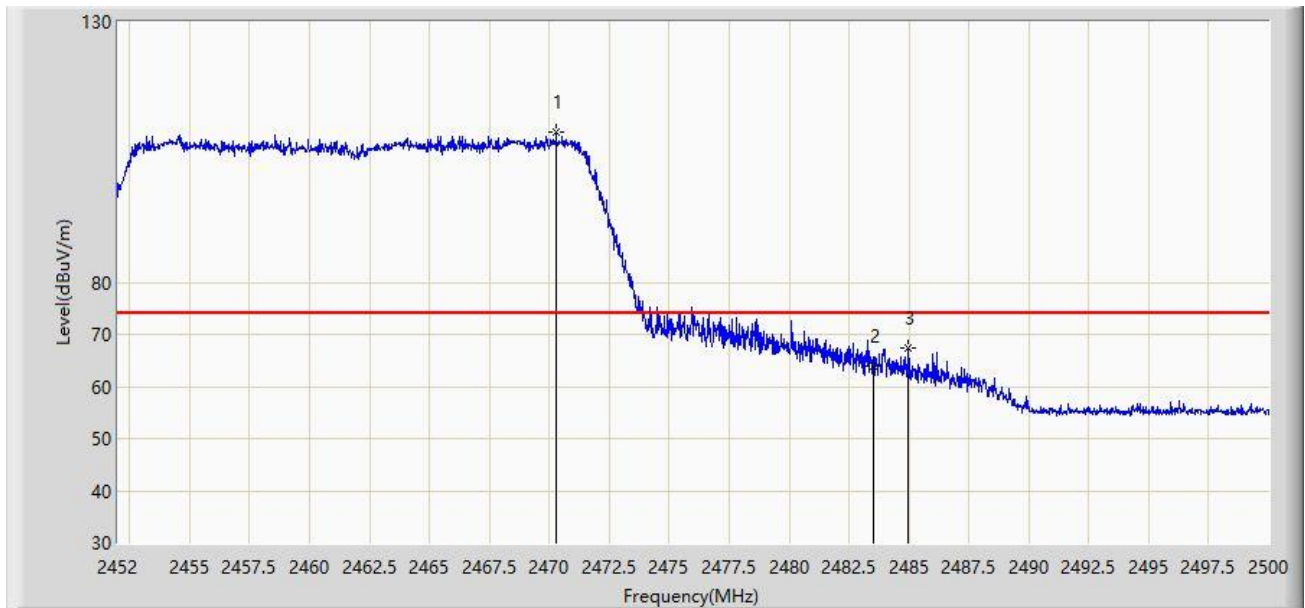


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.288	108.758	77.890	N/A	N/A	30.869	PK
2		2483.500	63.967	33.093	-10.033	74.000	30.874	PK
3	*	2484.976	67.461	36.580	-6.539	74.000	30.881	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:50
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz	

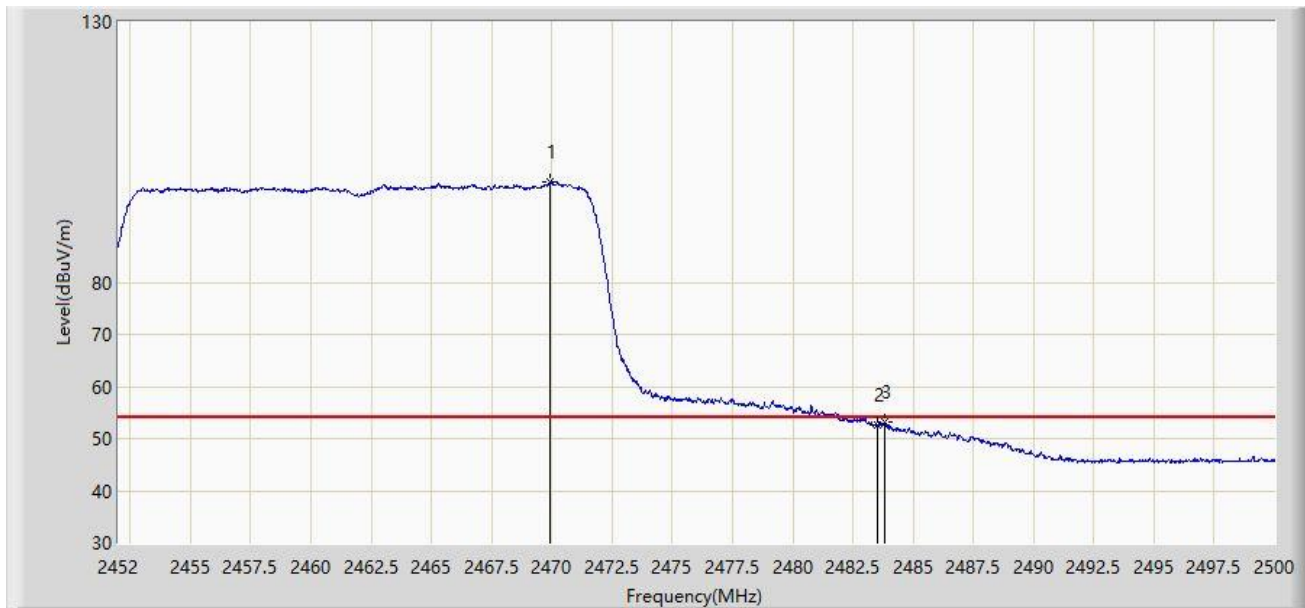


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.928	99.320	68.451	N/A	N/A	30.869	AV
2		2483.500	52.503	21.629	-1.497	54.000	30.874	AV
3	*	2483.824	53.059	22.184	-0.941	54.000	30.875	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:54
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz	

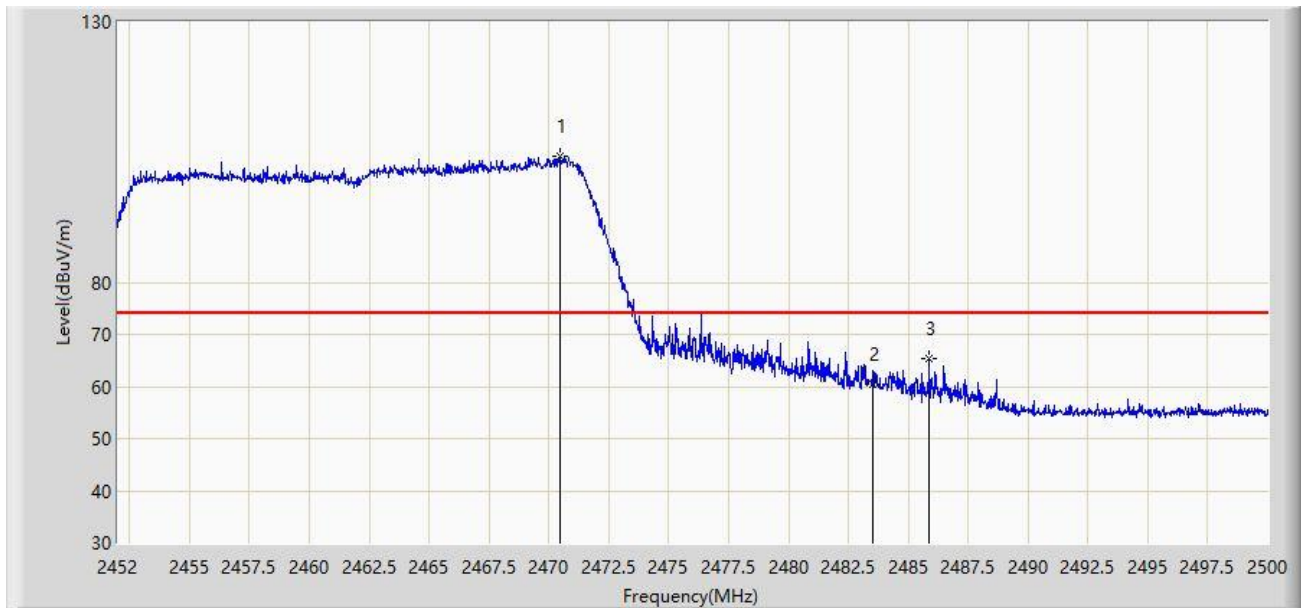


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.480	104.069	73.201	N/A	N/A	30.868	PK
2		2483.500	60.573	29.699	-13.427	74.000	30.874	PK
3	*	2485.864	65.303	34.418	-8.697	74.000	30.885	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:55
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE20 242Tone at 2462MHz	

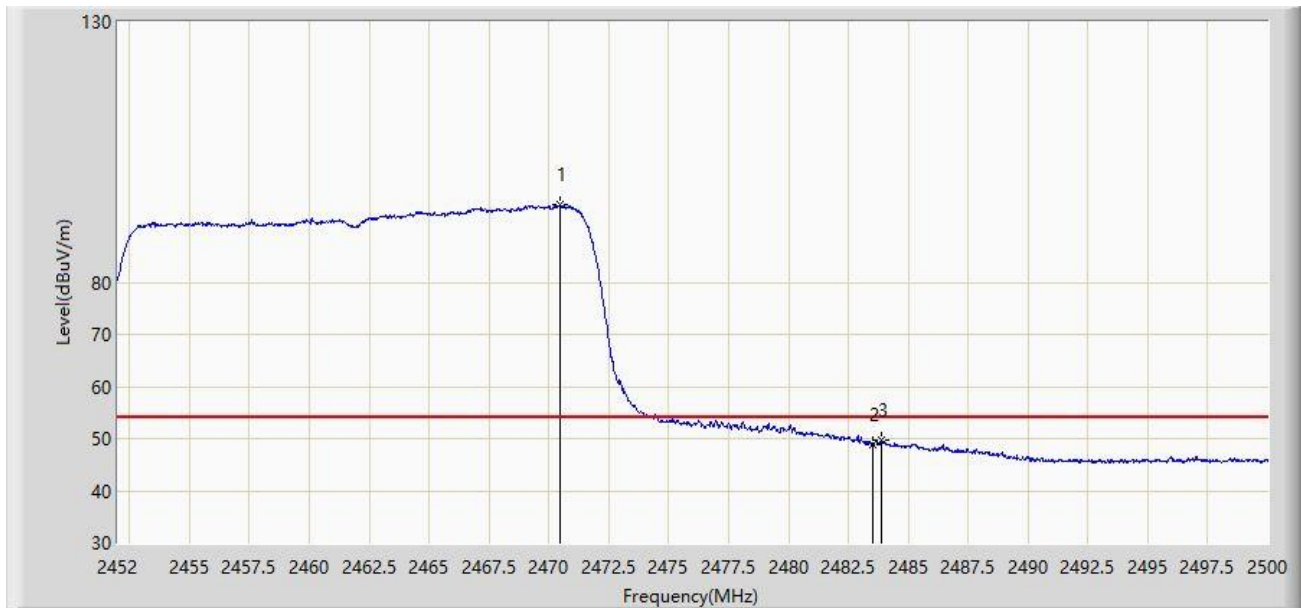


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2470.480	94.798	63.930	N/A	N/A	30.868	AV
2		2483.500	48.974	18.100	-5.026	54.000	30.874	AV
3	*	2483.872	49.650	18.774	-4.350	54.000	30.876	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 16:58
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz	

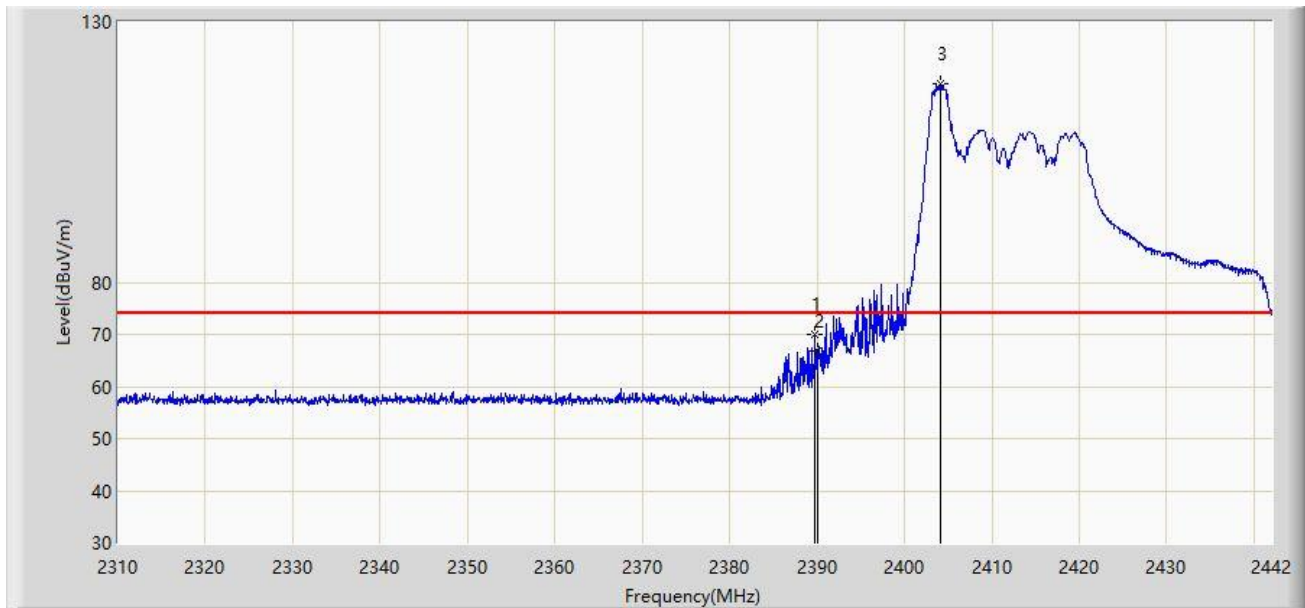


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.794	69.964	39.047	-4.036	74.000	30.917	PK
2		2390.000	66.826	35.909	-7.174	74.000	30.917	PK
3		2404.116	118.186	87.223	N/A	N/A	30.963	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:01
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz	

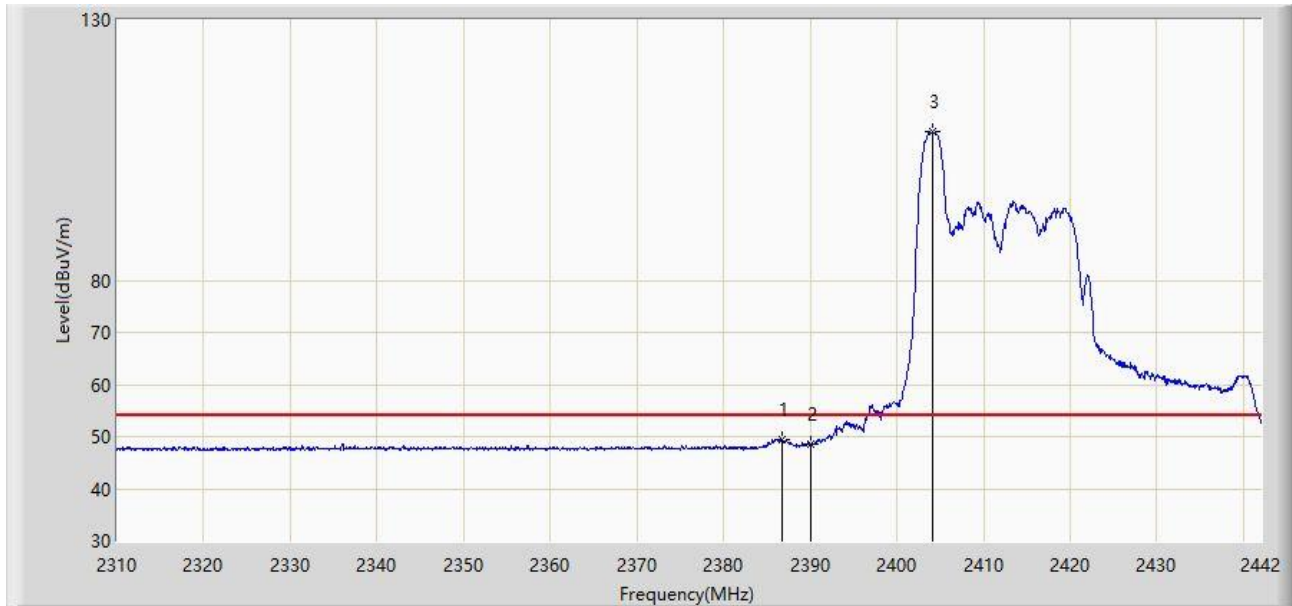


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.758	49.532	18.614	-4.468	54.000	30.917	AV
2		2390.000	48.568	17.651	-5.432	54.000	30.917	AV
3		2404.116	108.649	77.686	N/A	N/A	30.963	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:02
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz	

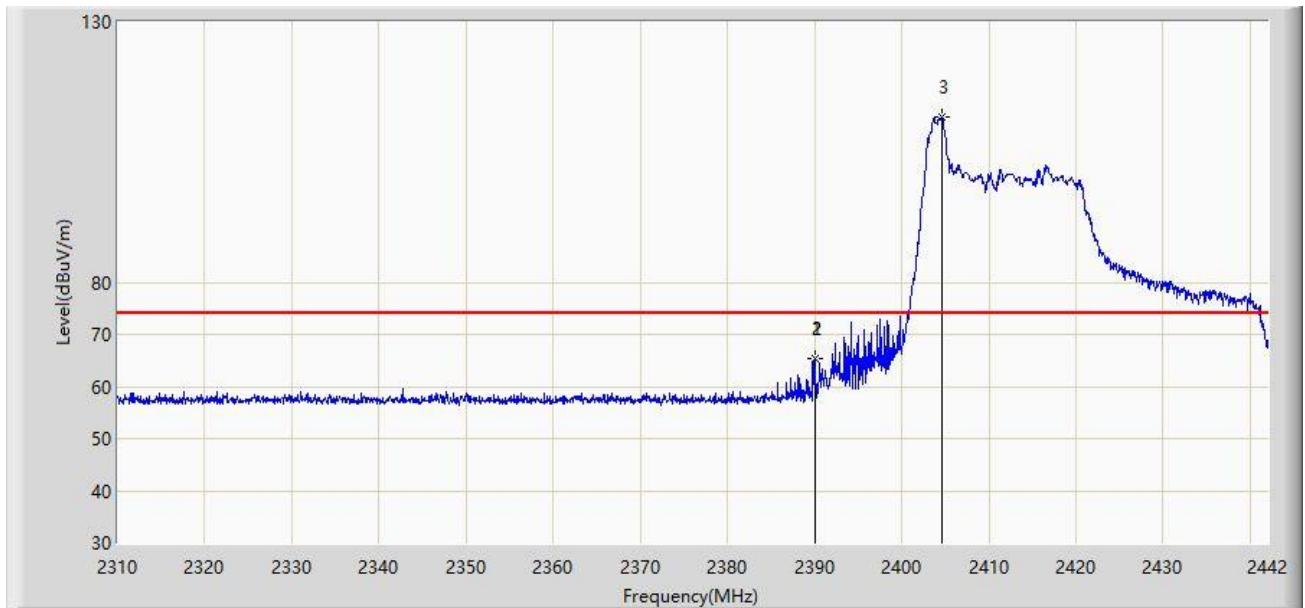


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.992	65.398	34.481	-8.602	74.000	30.917	PK
2		2390.000	65.309	34.392	-8.691	74.000	30.917	PK
3		2404.578	111.639	80.674	N/A	N/A	30.965	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:03
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 0 at 2422MHz	

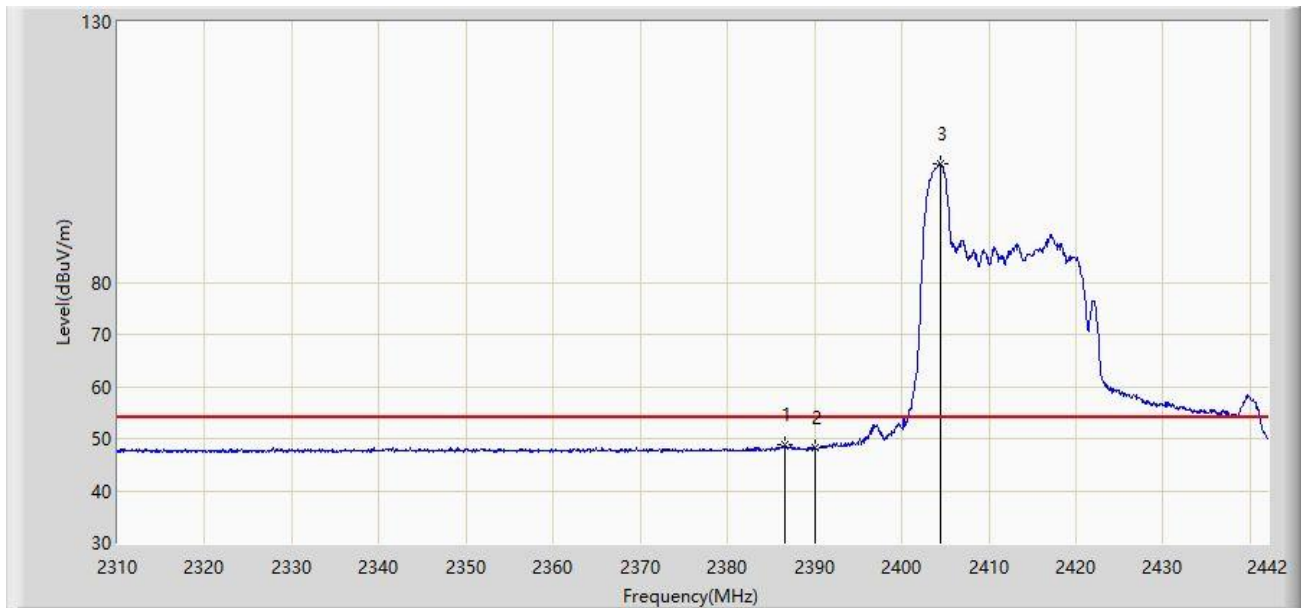


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2386.560	48.708	17.790	-5.292	54.000	30.918	AV
2		2390.000	48.359	17.442	-5.641	54.000	30.917	AV
3		2404.380	102.748	71.784	N/A	N/A	30.964	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:11
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz	

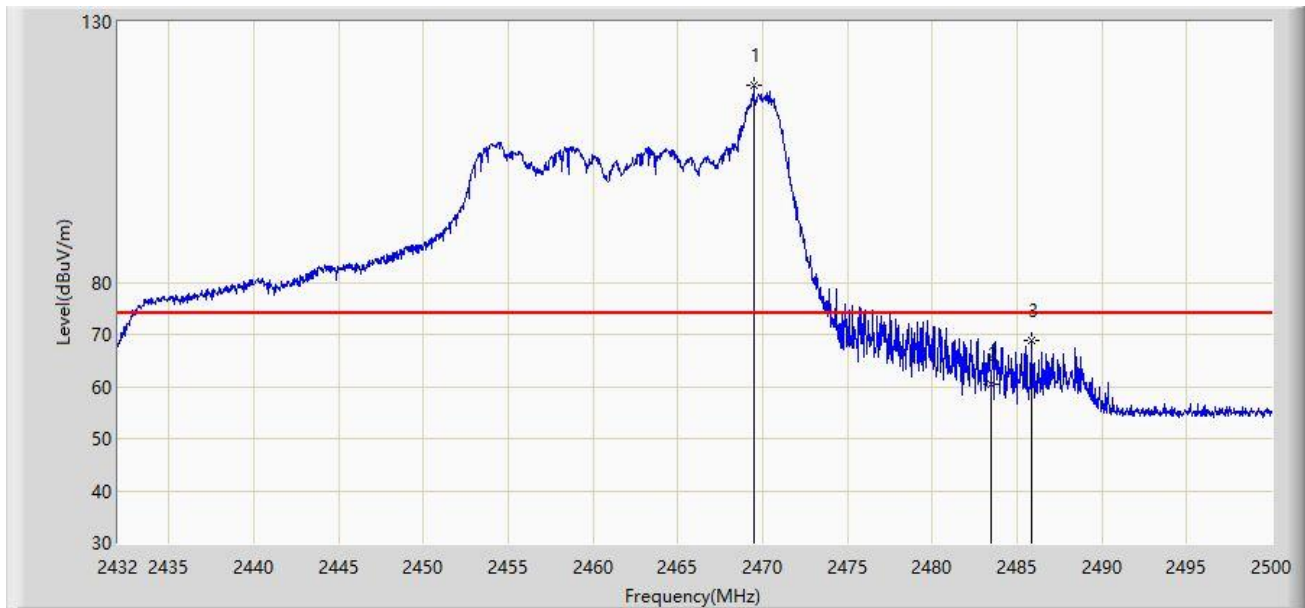


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.502	117.924	87.054	N/A	N/A	30.869	PK
2		2483.500	60.498	29.624	-13.502	74.000	30.874	PK
3	*	2485.856	68.769	37.884	-5.231	74.000	30.885	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:09
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz	

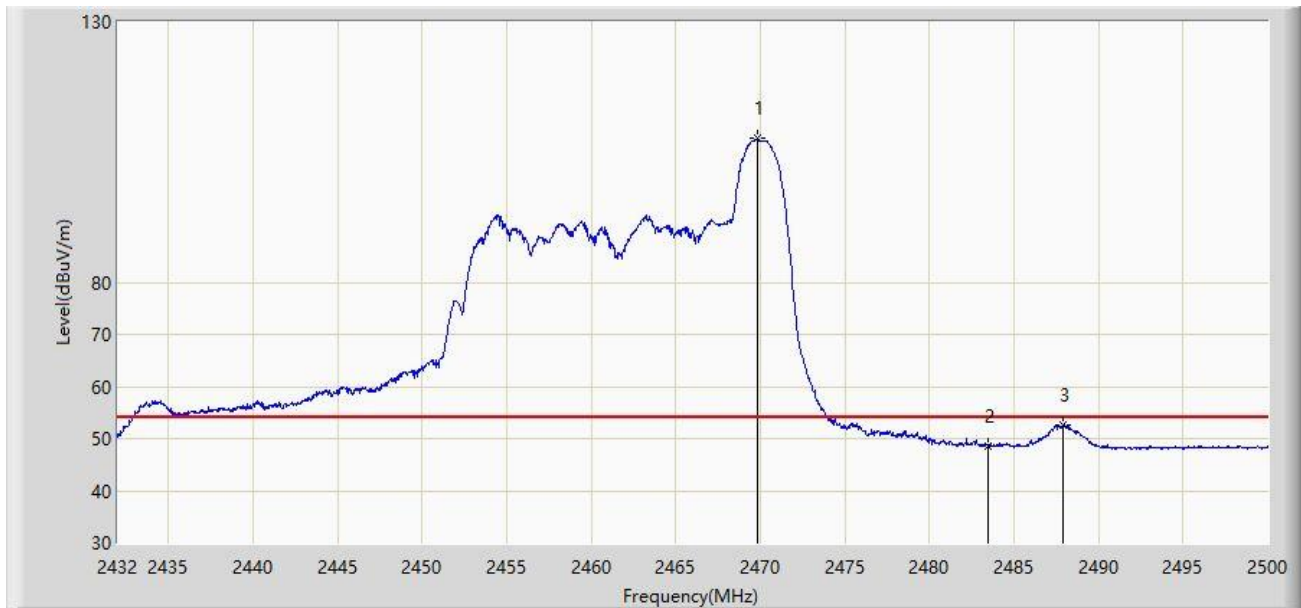


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.808	107.676	76.807	N/A	N/A	30.869	AV
2		2483.500	48.662	17.788	-5.338	54.000	30.874	AV
3	*	2487.930	52.631	21.737	-1.369	54.000	30.894	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:12
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz	

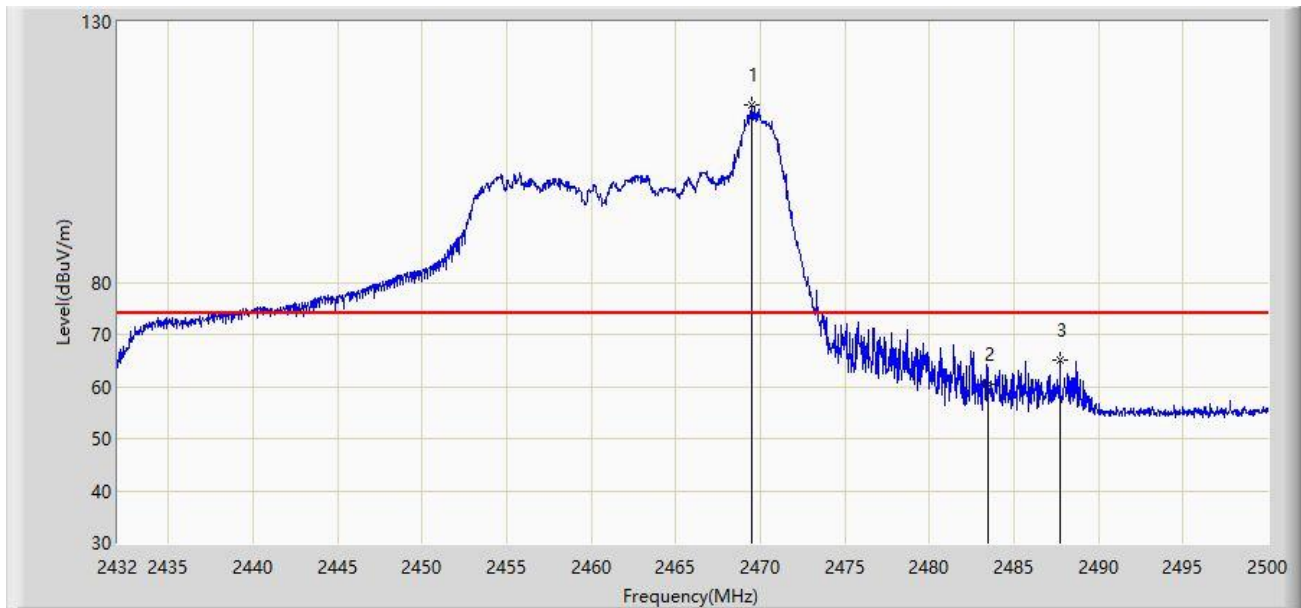


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.536	114.077	83.207	N/A	N/A	30.869	PK
2		2483.500	60.451	29.577	-13.549	74.000	30.874	PK
3	*	2487.726	65.200	34.307	-8.800	74.000	30.893	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:13
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 26Tone RU 17 at 2452MHz	

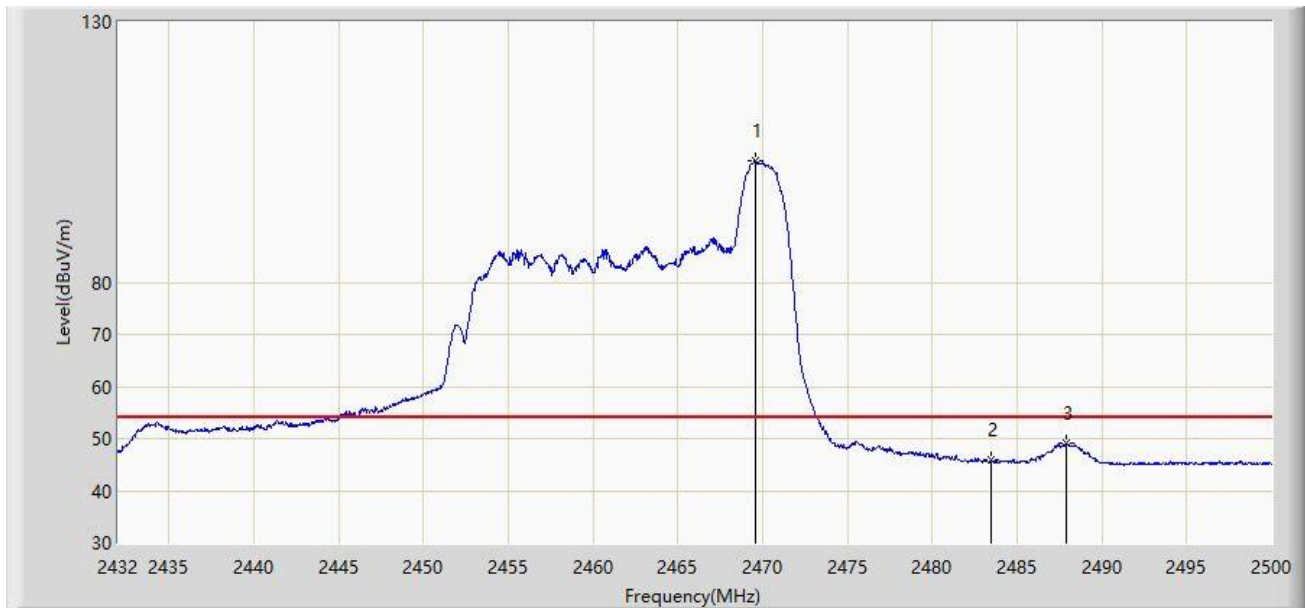


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.570	103.279	72.409	N/A	N/A	30.869	AV
2		2483.500	45.932	15.058	-8.068	54.000	30.874	AV
3	*	2487.930	48.996	18.102	-5.004	54.000	30.894	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone RU 17 at 2422MHz	

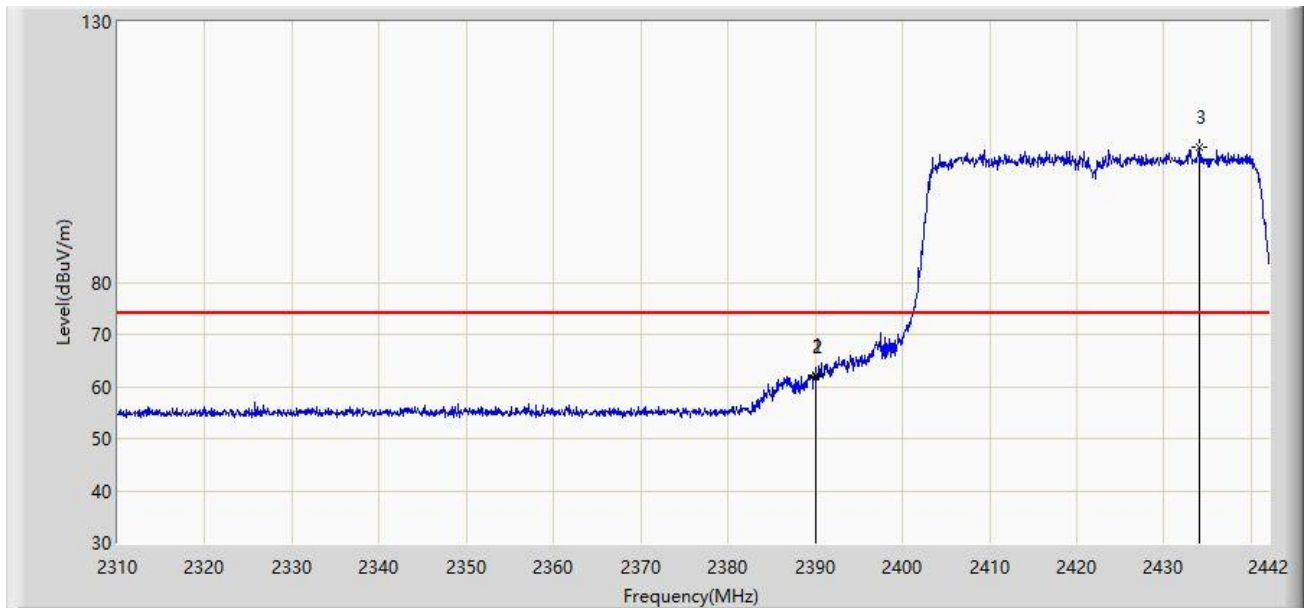


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.992	62.062	31.145	-11.938	74.000	30.917	PK
2		2390.000	61.969	31.052	-12.031	74.000	30.917	PK
3		2434.014	105.971	75.051	N/A	N/A	30.920	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:19
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz	

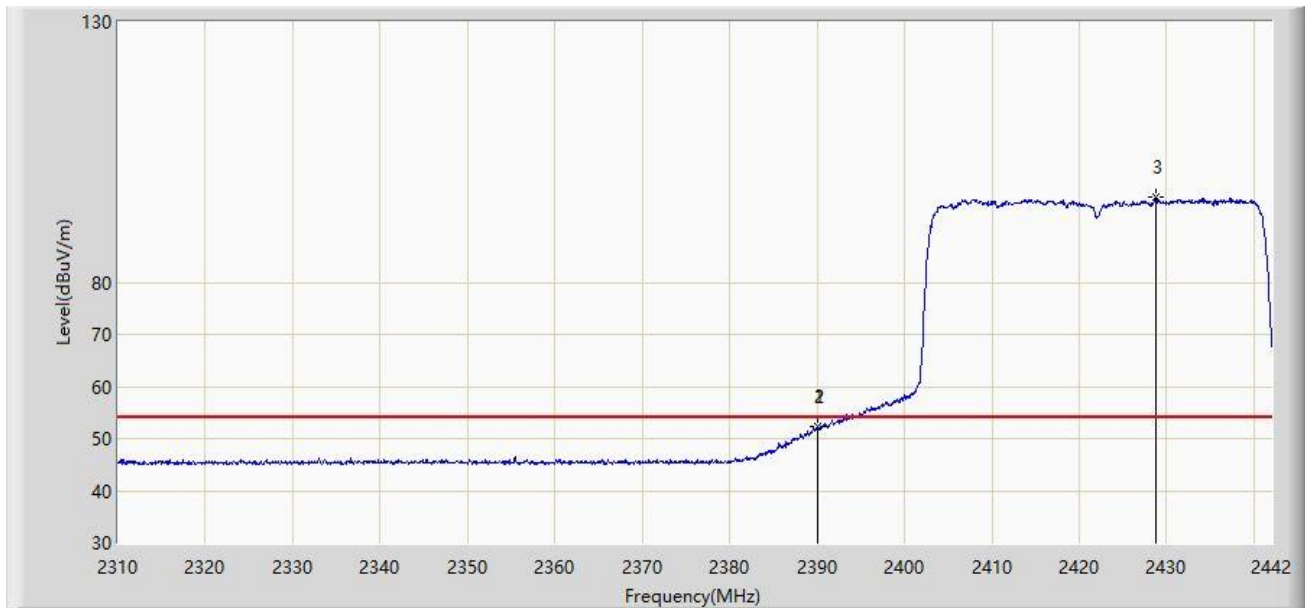


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.992	52.261	21.344	-1.739	54.000	30.917	AV
2		2390.000	52.247	21.330	-1.753	54.000	30.917	AV
3		2428.800	96.487	65.555	N/A	N/A	30.932	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:21
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz	

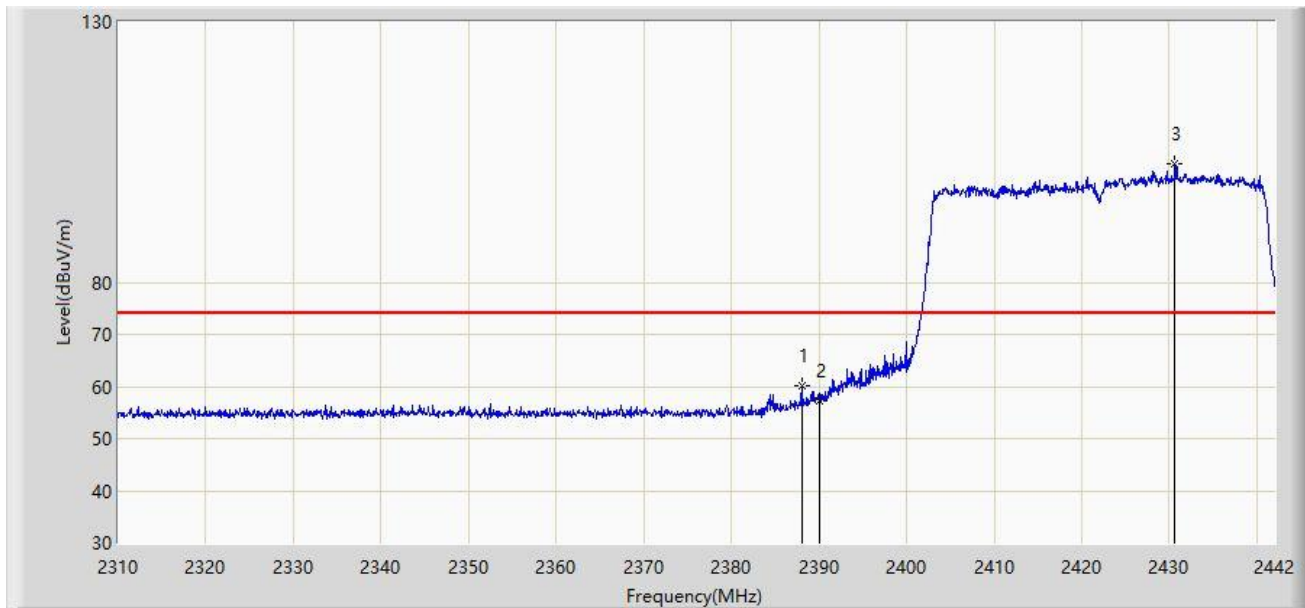


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2388.012	60.101	29.183	-13.899	74.000	30.917	PK
2		2390.000	57.319	26.402	-16.681	74.000	30.917	PK
3		2430.648	102.650	71.722	N/A	N/A	30.927	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:24
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2422MHz	

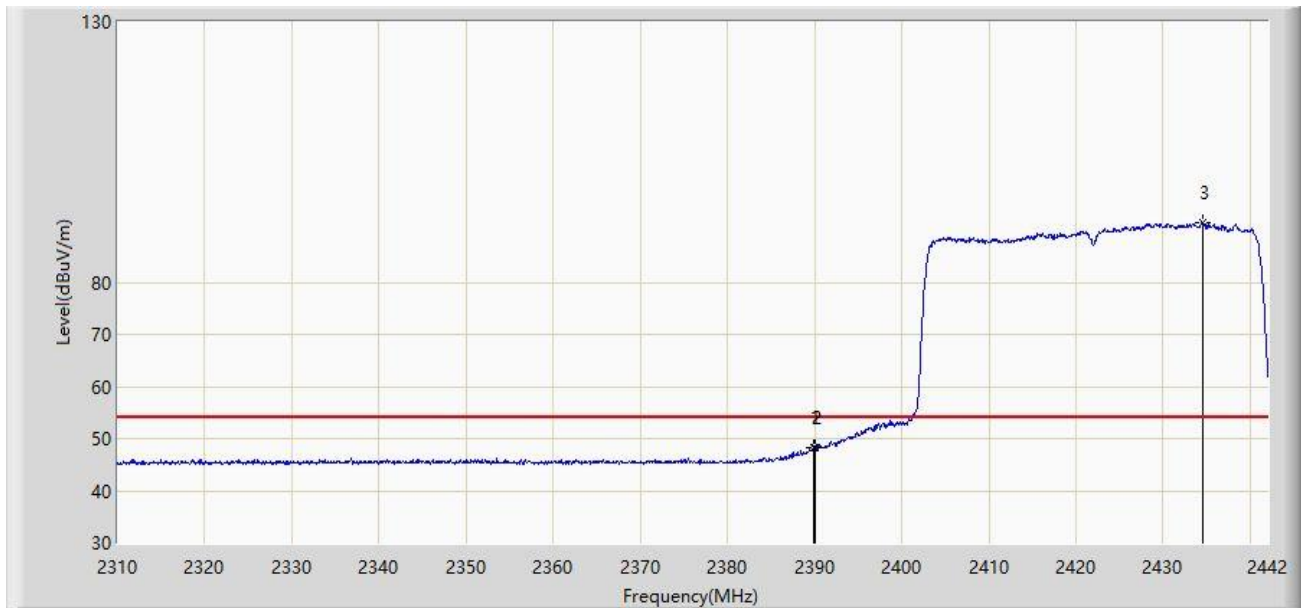


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1	*	2389.860	48.227	17.310	-5.773	54.000	30.917	AV
2		2390.000	48.129	17.212	-5.871	54.000	30.917	AV
3		2434.476	91.504	60.585	N/A	N/A	30.919	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:29
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz	

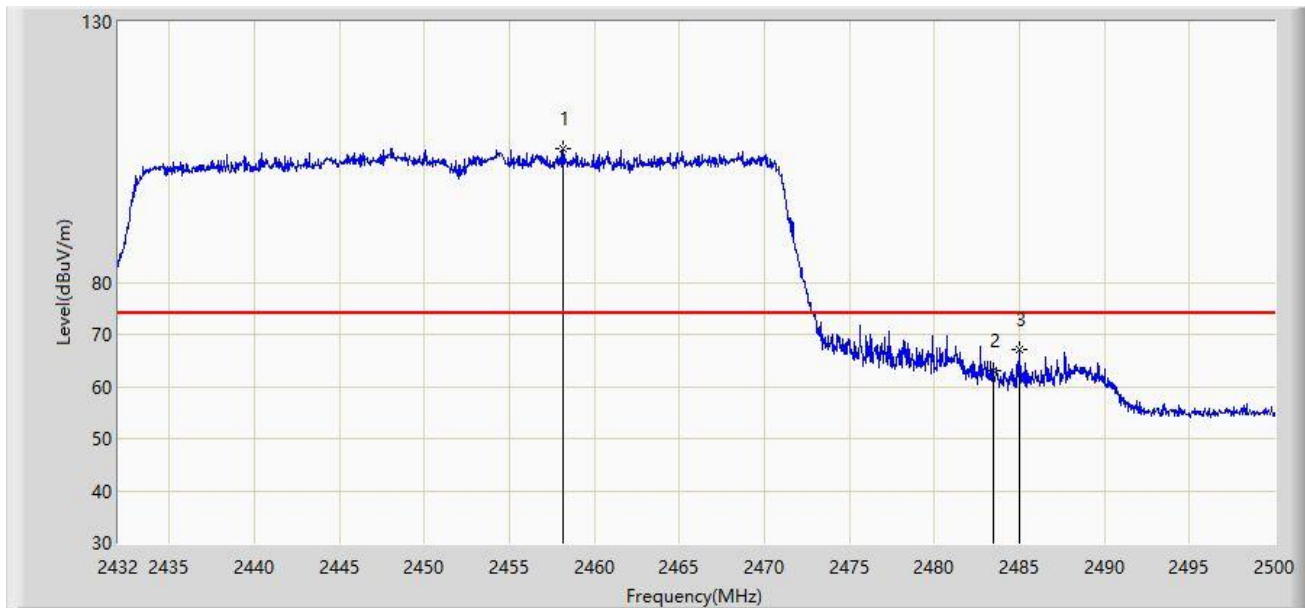


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2458.146	105.752	74.867	N/A	N/A	30.885	PK
2		2483.500	63.129	32.255	-10.871	74.000	30.874	PK
3	*	2484.972	67.060	36.179	-6.940	74.000	30.881	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:28
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz	

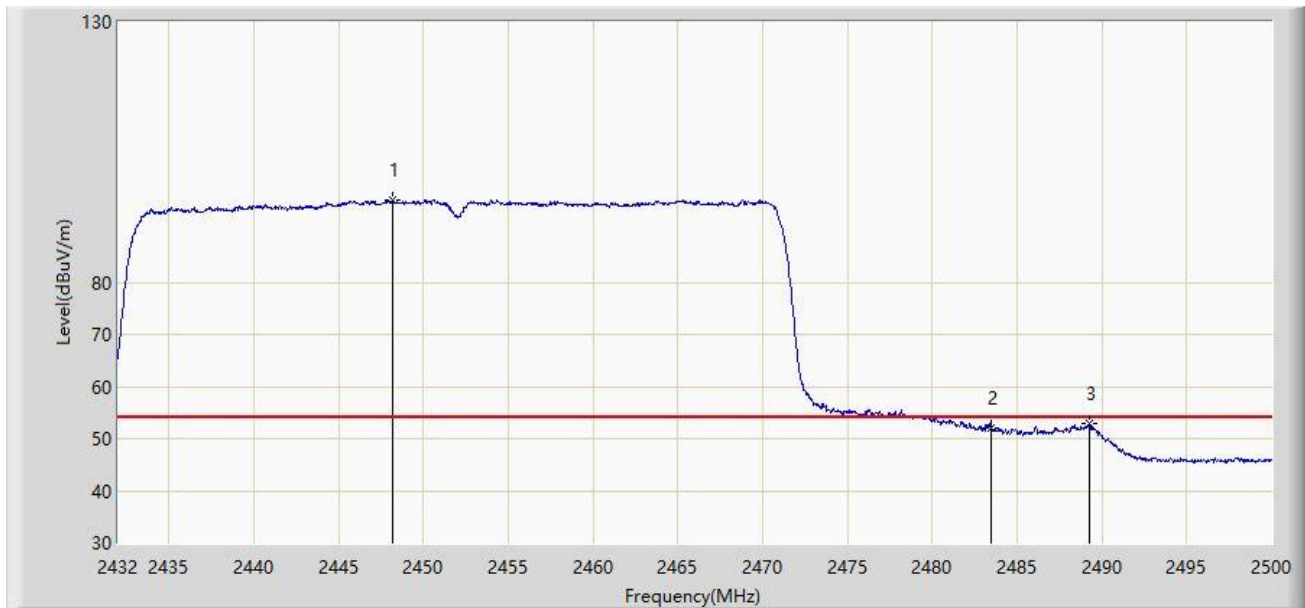


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2448.150	95.878	64.986	N/A	N/A	30.892	AV
2		2483.500	52.103	21.229	-1.897	54.000	30.874	AV
3	*	2489.290	52.767	21.866	-1.233	54.000	30.901	AV

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:31
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz	

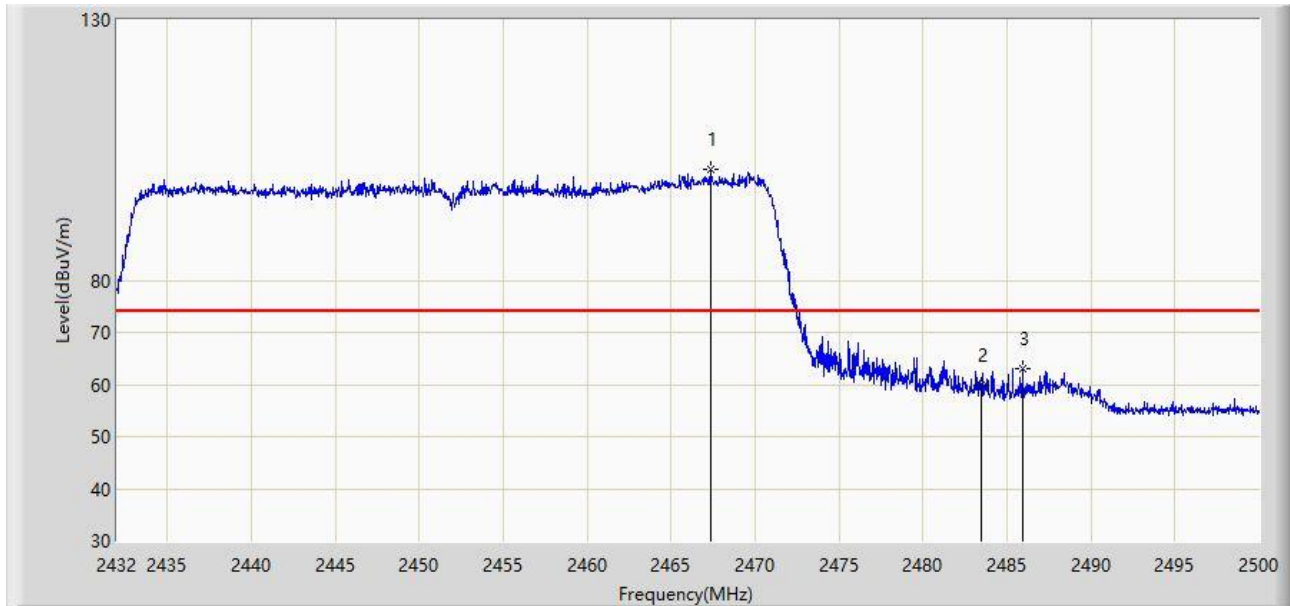


No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2467.326	101.199	70.326	N/A	N/A	30.874	PK
2		2483.500	59.891	29.017	-14.109	74.000	30.874	PK
3	*	2485.924	63.013	32.128	-10.987	74.000	30.885	PK

Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

Site: NS-AC1	Time: 2022/05/15 - 17:31
Limit: FCC_2.4G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By Battery
Test Mode: Transmit by 802.11ax-HE40 484Tone at 2452MHz	

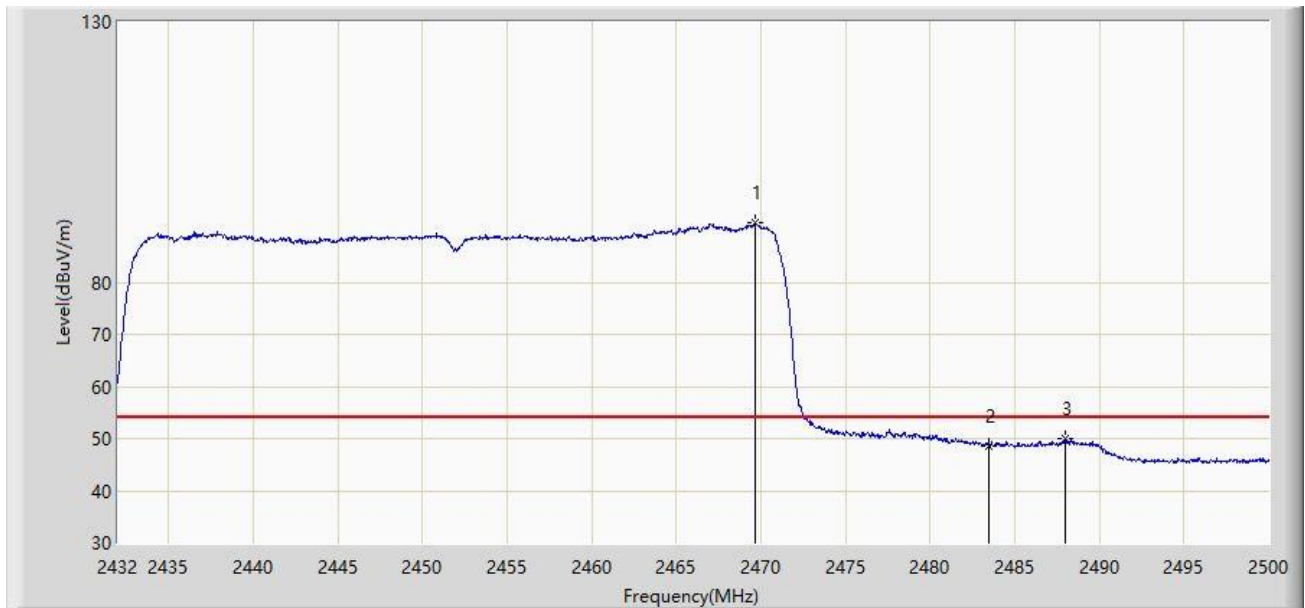

No	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		2469.706	91.471	60.602	N/A	N/A	30.869	AV
2		2483.500	48.692	17.818	-5.308	54.000	30.874	AV
3	*	2487.964	49.875	18.981	-4.125	54.000	30.894	AV


Note 1: " * ", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m).

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m).

A.8 AC Conducted Emissions Test Result

Site: NS-SR2	Test Data: 2022/05/23
Limit: FCC_Part15.207_CE_AC Power	Engineer: Ryan Cai
Probe: ENV216_102493_150KHz~30MHz	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz – MIMO Mode	

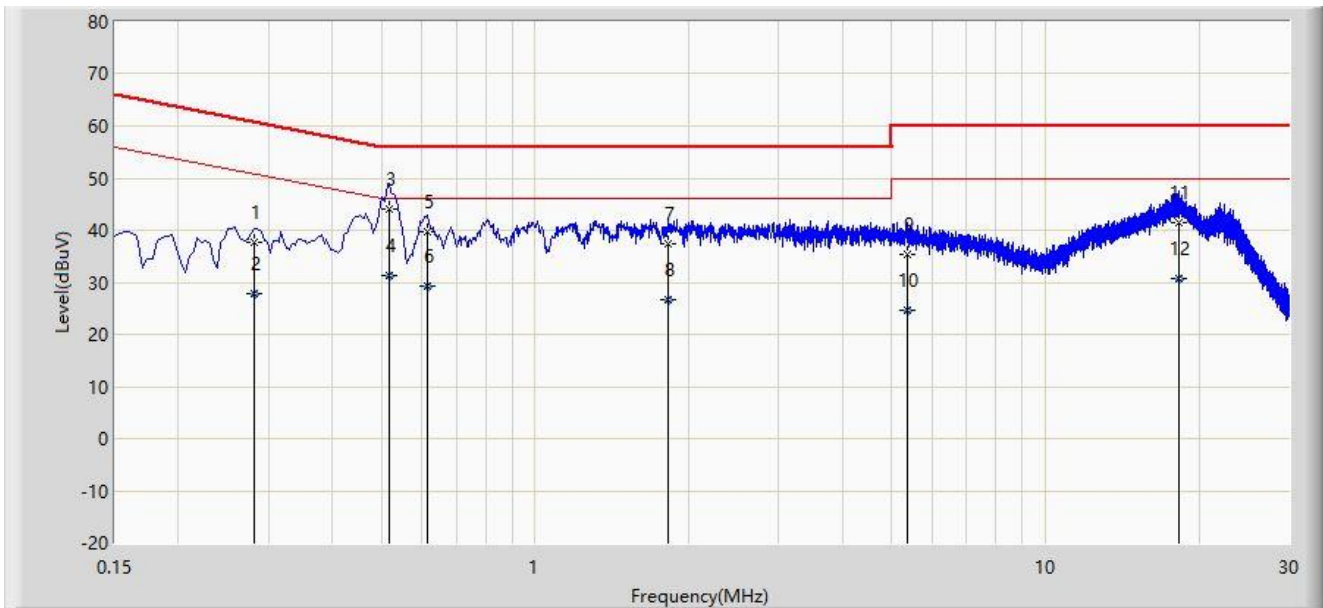


No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.282	37.770	27.688	-22.987	60.757	10.082	QP
2		0.282	27.854	17.772	-22.903	50.757	10.082	AV
3	*	0.518	43.927	34.207	-12.073	56.000	9.720	QP
4		0.518	31.327	21.607	-14.673	46.000	9.720	AV
5		0.614	39.650	29.940	-16.350	56.000	9.710	QP
6		0.614	29.262	19.552	-16.738	46.000	9.710	AV
7		1.826	37.502	27.732	-18.498	56.000	9.770	QP
8		1.826	26.640	16.870	-19.360	46.000	9.770	AV
9		5.346	35.452	25.563	-24.548	60.000	9.889	QP
10		5.346	24.748	14.859	-25.252	50.000	9.889	AV
11		18.254	41.324	30.929	-18.676	60.000	10.394	QP
12		18.254	30.629	20.234	-19.371	50.000	10.394	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: NS-SR2	Test Data: 2022/05/23
Limit: FCC_Part15.207_CE_AC Power	Engineer: Ryan Cai
Probe: ENV216_102493_150KHz~30MHz	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ax-HE40 at 2437MHz – MIMO Mode	

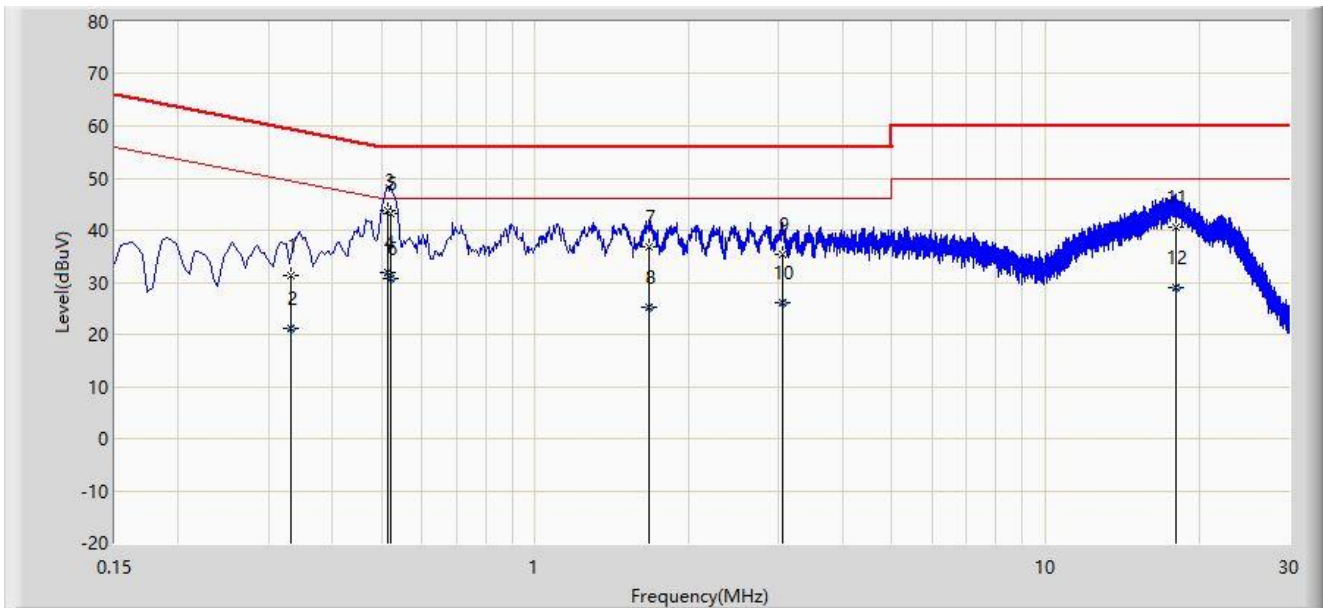

No	Mark	Frequency (MHz)	Measure Level (dBμV)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV)	Factor (dB)	Type
1		0.333	31.425	21.625	-27.956	59.382	9.801	QP
2		0.333	21.078	11.278	-28.304	49.382	9.801	AV
3	*	0.514	43.902	34.224	-12.098	56.000	9.678	QP
4		0.514	31.840	22.161	-14.160	46.000	9.678	AV
5		0.522	43.309	33.625	-12.691	56.000	9.684	QP
6		0.522	30.640	20.957	-15.360	46.000	9.684	AV
7		1.674	36.667	26.933	-19.333	56.000	9.734	QP
8		1.674	25.357	15.623	-20.643	46.000	9.734	AV
9		3.054	35.490	25.702	-20.510	56.000	9.788	QP
10		3.054	26.095	16.306	-19.905	46.000	9.788	AV
11		18.030	40.607	30.157	-19.393	60.000	10.450	QP
12		18.030	28.887	18.437	-21.113	50.000	10.450	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2203RSU084-UT” file.

Appendix C – EUT Photograph

Refer to “2203RSU084-UE” file.

The End
