



SAR MEASUREMENT REPORT

FCC ID: HD5-EDA61K0

Applicant: Honeywell International Inc.
Honeywell Safety and Productivity Solutions.

Application Type: Certification

Product: Mobile Computer

Model No.: EDA61K-0

Brand Name: Honeywell

FCC Classification: Spread Spectrum Transmitter(DSS)
Digital Transmission System (DTS)
Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s): FCC 47 CFR Part 2.1093

Test Procedure(s): IEEE 1528:2013; IEEE C95.1- 2005;
KDB 447498 D01v06; KDB 865664 D01v01r04;
KDB 248227 D01v02r02

Test Date: February 27 ~ 29, 2020

Reviewed By:

Jame Yuan

(Jame Yuan)

Approved By:

Robin Wu

(Robin Wu)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in IEEE1528, KDB 447498 and KDB 865664. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2001RSU045-U6	Rev. 01	Initial Report	03-18-2020	Valid

CONTENTS

Description	Page
1. Introduction.....	6
1.1. Scope	6
1.2. MRT Test Location	6
2. Product Information.....	7
2.1. General Description for EUT	7
2.2. Product Specification Subjective to this Report.....	7
2.3. Description of Available Antennas	8
2.4. Ancillary Equipment	8
3. Summary of Test Result	9
3.1. Test Standards.....	9
3.2. Environment Condition	9
3.3. RF Exposure Limits	9
3.4. Test Result Summary.....	10
4. Specific Absorption Rate (SAR).....	11
4.1. Introduction.....	11
4.2. Definition	11
5. DASY6 Measurement System	12
5.1. Introduction.....	12
5.2. DASY6 Measurement System Diagram	12
5.3. System Components Details.....	13
6. The SAR Measurement Procedure	24
6.1. Measurement Process Diagram.....	24
6.2. Test Position Definition	25
6.3. Test Procedure	28
7. System Verificaiton.....	30
7.1. Tissue Check.....	30
7.2. System Check	32
8. Analysis and Results.....	34
8.1. Antenna Location.....	34
8.2. Conducted Power	35
8.3. SAR Exclusion Analysis.....	39
8.4. Required Configurations of SAR Test.....	52

8.5.	SAR Test Results.....	53
8.6.	Estimated SAR Calculation.....	56
9.	Simultaneous Transmission Analysis	57
10.	Test Equipment Used	58
11.	Measurement Uncertainty	59
	Annex A - System Check Result	61
	Annex B - Test Data Plots.....	65
	Annex C - SAR Test Setup Photos.....	74
	Annex D - EUT External Photos	75
	Annex E - Equipment Calibration Report	76

§2.1033 General Information

Applicant:	Honeywell International Inc. Honeywell Safety and Productivity Solutions
Applicant Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Manufacturer:	Honeywell International Inc. Honeywell Safety and Productivity Solutions
Manufacturer Address:	9680 Old Bailes Road, Fort Mill, SC 29707 United States
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A ☐ Production ☒ Pre-Production ☐ Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC registered (MRT Reg. No. 893164) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LA Cert. No. 3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. Introduction

1.1. Scope

Measurement and determination of specific absorption rate (SAR) of radio frequency devices including intentional and/or unintentional radiators is compliance with the technical rules and regulations of the Federal Communications Commission.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. Product Information

2.1. General Description for EUT

Product Name	Mobile Computer
Model No.	EDA61K-0
Wi-Fi Specification	802.11a/b/g/n/ac
Bluetooth Version	v4.1 dual mode
EUT Type	Portable Device
Exposure Category	General Population/Uncontrolled Exposure

Note: The Mobile Computer has two types of scan engine (N6703 and EX20), except the scan engine, everything else is the same. Full SAR test is performed on Mobile Computer with N6703 and highest reported SAR for each frequency band is repeated on Mobile Computer with EX20.

2.2. Product Specification Subjective to this Report

Wi-Fi Specification	
Frequency Range	<u>For 2.4GHz Wi-Fi</u> 802.11b/g/n-HT20: 2412 ~ 2462 MHz <u>For 5GHz Wi-Fi</u> 802.11a /n-HT20/ac-VHT20: 5180~5240 MHz, 5260~5320 MHz, 5500~5720 MHz, 5745~5825 MHz 802.11n-HT40/ac-VHT40: 5190~5230 MHz, 5270~5310 MHz, 5510~5710 MHz, 5755~5795 MHz 802.11ac-VHT80/ac-VHT80: 5210 MHz, 5290 MHz, 5530 MHz, 5610 MHz, 5690MHz, 5775 MHz
Type of Modulation	802.11b: DSSS 802.11a/g/n/ac: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11a/g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps 802.11ac: up to 433.3Mbps
Bluetooth Specification	
Frequency Range	2400MHz~ 2483.5MHz
Channel Number	For Bluetooth: 79 For BT-LE: 40
Channel Spacing	For Bluetooth: 1MHz For BT-LE: 2MHz
Type of Modulation	1Mbps (GFSK), 2Mbps (Pi/4 DQPSK), 3Mbps (8DPSK)

2.3. Description of Available Antennas

Operating Condition	802.11b/g/n for 2.4GHz Wi-Fi (1Tx, 1Rx) 802.11a/n/ac for 5GHz Wi-Fi (1Tx, 1Rx) Bluetooth BR/EDR/LE (1Tx, 1Rx)
Antenna Type	FPC Antenna
Antenna Gain	2400 ~ 2483.5MHz: 3.30dBi 5150 ~ 5350MHz: 7.93dBi 5470 ~ 5850MHz: 8.26dBi
Simultaneously Transmitting Scenarios	WLAN and Bluetooth share the same antenna path and cannot transmit simultaneously

2.4. Ancillary Equipment

Ancillary Equipment 1	Charger
Model No.	ADS-12B-06 05010E
Input	100-240V ~ 50/60Hz, 0.3A
Output	5V=2.0A
Ancillary Equipment 2	Battery
Brand Name	Honeywell
Model No.	CK65-BTSC
Capacity	7000mAh/ 25.2Wh
Rated Voltage	DC 3.6V

3. Summary of Test Result

3.1. Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
3	IEEE C95.1-2005	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
4	KDB 447498 D01 v06	General RF Exposure Guidance
5	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	KDB 865664 D02 v01r02	RF Exposure Reporting
7	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitter

3.2. Environment Condition

Ambient Temperature	20.5°C~24.0°C
Temperature of Simulant	20.0°C~23.5°C
Relative Humidity	38%RH ~55%RH

3.3. RF Exposure Limits

Human Exposure	Basic restrictions for electric, magnetic and electromagnetic fields. (Unit in mW/g or W/kg)
Spatial Peak SAR ¹ (Head and Body)	1.60
Spatial Average SAR ² (Whole Body)	0.08
Spatial Peak SAR ³ (Arms and Legs)	4.00

Notes:

1. The Spatial Peak value of the SAR averaged over any 1gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over appropriate averaging time.

3.4. Test Result Summary

Worst SAR List

Highest Reported SAR	Body 1g SAR (W/kg)	Extremity 10g SAR (W/kg)
DTS Band Wi-Fi	0.42	0.51
UNII-1 Band Wi-Fi	0.94	0.79
UNII-2C Band Wi-Fi	1.06	0.97
UNII-3 Band Wi-Fi	1.34	1.05
Bluetooth	0.10	N/A

4. Specific Absorption Rate (SAR)

4.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational /controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2. Definition

The SAR in the tissue-equivalent liquid can be determined by the rate of temperature increase or by E-field measurements, according to Formulas (1) or (2):

$$SAR = \frac{\sigma E^2}{\rho} \quad (1)$$

$$SAR = c_h \left. \frac{dT}{dt} \right|_{t=0} \quad (2)$$

where

SAR is the specific absorption rate in W/kg;

E is the rms value of the electric field strength in the tissue medium in V/m;

σ is the electrical conductivity of the tissue medium in S/m;

ρ is the mass density of the tissue medium in kg/m³;

c_h is the specific heat capacity of the tissue medium in J/(kg K);

$\left. \frac{dT}{dt} \right|_{t=0}$ is the initial time derivative of temperature in the tissue medium in K/s.


5. DASY6 Measurement System

5.1. Introduction

DASY6 is the latest generation of the Dosimetric Assessment System optimized for specific absorption rate (SAR) measurements, SAR compliance. DASY6 builds on the power of our industry - leading dosimetric and near-field evaluation system, DASY52. Running on a significantly more robust platform and a more powerful measurement server, DASY6 offers much faster scanning with no sacrifice of measurement precision. All hardware and software are fully compatible with DASY52. The new system seamlessly integrates two software solutions, the novel cDASY V6.6 - optimized for SAR compliance testing to significantly reduce SAR assessment costs - and the widely used DASY V5.2 for generalized near-field evaluations with maximized flexibility.

5.2. DASY6 Measurement System Diagram

The DASY6 system in cDASY6/DASY5 V5.2 SAR Configuration is shown below:

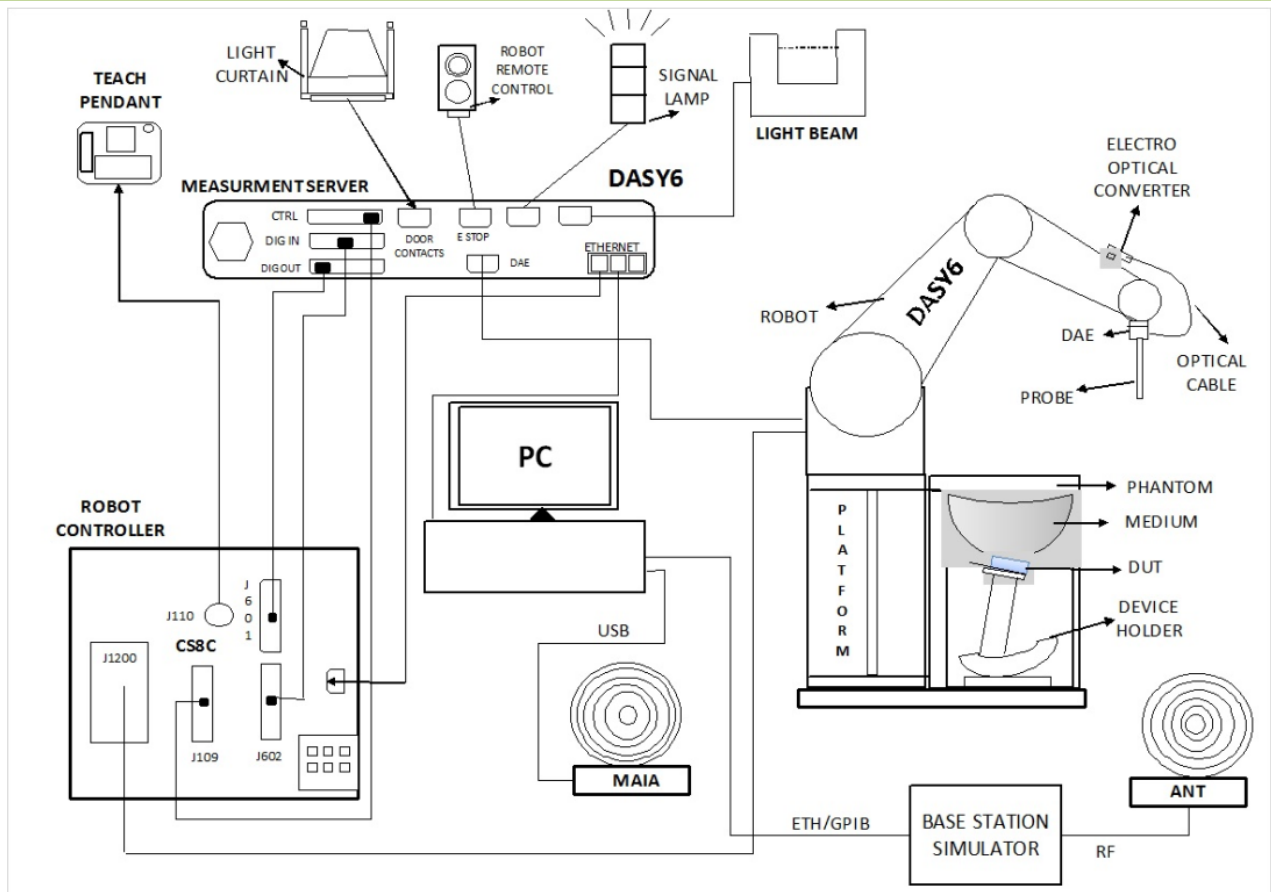

The System consist of the following components:

DASY6 Measurement Server, Data Acquisition Electronics (DAE), Probes, Light-Beam Unit, Phantoms, Media, Device Holder for SAM-Twin Phantom, Laptop Extension Kit to Mounting Device, Robot System Platform & Pedestal, Verification of the Parameters with the Dielectric Assessment Kit (DAK), Modulation and Interference Analyzer (MAIA), Omni-Directional Ultra-Wideband Antenna (ANT), cDASY6 software, DASY5 NEO software and SEMCAD data evaluation software.

5.3. System Components Details

DASY6 Platforms MP6E-TX60L

MP6E-TX60L platform is a compact cost-effective platform based on TX60L. It consists of:

- a stable non-metallic platform for the TX60L robot
- a frame for two standard-size phantoms (1.0×0.5 m)
- a frame for one half-size phantom (0.5×0.5 m)

It includes two easily moveable trolleys for the phone and tablet/computer positioner and two platforms for positioning dipoles and other antennas.



Material The beams consist of a composite of wood and epoxy (permittivity of 3.3 and loss tangent of <0.07)

Size The footprint of the platform is 1590 mm $\times$ 1060 mm.

Robots -TX60L

The MRT DASY6 system uses the high-precision industrial robots TX60L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance-free as all gears are direct drive, no belt drives)
- Jerk-free straight movements (brushless synchron motors, no stepper motors)
- Low extremely low frequency (ELF) interference (motor control fields are shielded by the closed metallic construction)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided on CDs delivered with the robot. Paper manuals are available directly from Staubli upon request.



DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400MHz intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations.



Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.



Probes

E-Field Probe(EX3DV4)

The SAR measurement is conducted with the dosimetric probe manufactured by SPEAG. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 62209-1, IEC 62209, etc.) under ISO 17025.

Construction:

Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Frequency: 4 MHz ~ 10 GHz

Linearity: ± 0.2 dB (30 MHz ~ 10 GHz)

Directivity:

± 0.1 dB in TSL (rotation around probe axis)

± 0.3 dB in TSL (rotation normal to probe axis)

Dynamic Range: 10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)

Dimensions:

Overall length: 337 mm (Tip: 20 mm)

Tip diameter: 2.5 mm (Body: 12 mm)

Typical distance from probe tip to dipole centers: 1 mm

Applications:

High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.



MSTV1 (Mother Scan Teaching V1) Electronics & TP6V2 (Teaching Probe 6V2) Probe

MSTV1 (Mother Scan Teaching V1) electronics together with the TP6V2 (Teaching Probe 6V2) probe is used for mother scan of DASY6 system. This probe uses a 3D Renishaw LP2 sensor which ensures accurate detection of any shape and a measurement repeatability of 8 μ m.



Light-Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm, as well as the probe length and the horizontal probe offset, are measured. The software then corrects all movements within the measurement jobs, such that the robot coordinates are valid for the probe tip.



The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

Phantoms

SAM-Twin Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

SAM-Twin V5.0 and higher has the same shell geometry and is manufactured from the same material as SAM-Twin V4.0, but with the top structure reinforced.

Material Vinyl ester, fiberglass reinforced (VE-GF)

Liquid Compatibility The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).

Shell Thickness 2 ± 0.2 mm (6 ± 0.2 mm at ear point)

Dimensions Length: 1000 mm
(incl. Wooden Width: 500 mm
Support) Height: adjustable feet

Filling Volume approx. 25 liters

Support DASY6: standard-size platform slot
DASY52 stand-alone: SPEAG standard phantom table




ELI phantom

The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 and higher has the same shell geometry and is manufactured from the same material as ELI V4.0, but has reinforced top structure. ELI V6.0, released in August 2014, has the same shell geometry as ELI V4.0 but offers increased longterm stability.


Material	Vinyl ester, fiberglass reinforced (VE-GF)
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2.0 ± 0.2 mm (bottom plate)
Dimensions	Major axis: 600 mm Minor axis: 400 mm
Filling Volume	approx. 30 liters
Support	DASY6: standard-size platform slot DASY52 stand-alone: SPEAG standard phantom table

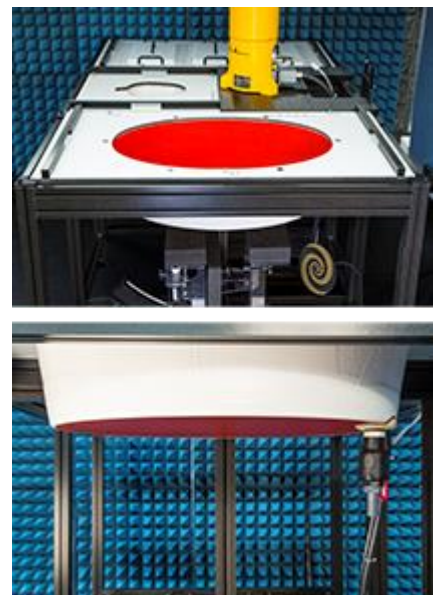

SAM Face Down Phantom

The SAM Face Down Phantom V10 allows assessment of the exposure of the face and in particular the eyes for handheld devices operated in front of the face. e.g., video phones, cameras, organizers, etc. It is manufactured from high precision injection molded polypropylene. The Mounting Device for Transmitters including extensions kit can be used to position the device.


Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2 ± 0.2 mm (6 mm at ear point)
Head Shape	Standard compatible SAM head.

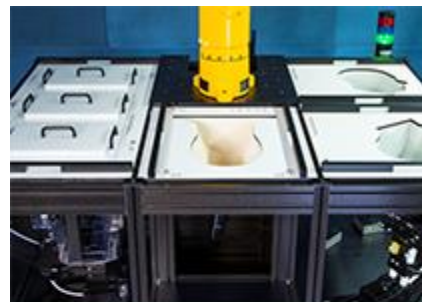

SAM Head Stand Phantom

The SAM Head Stand Phantom V10 allows assessment of the exposure of the top-head or around-the-head wireless accessories, e.g., head-belts, etc. It is manufactured from high precision injection molded polypropylene. The Mounting Device for Transmitters including extensions kit can be used to position the device.

Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	2 ± 0.2 mm (6 mm at ear point)
Head Shape	Standard compatible SAM head.

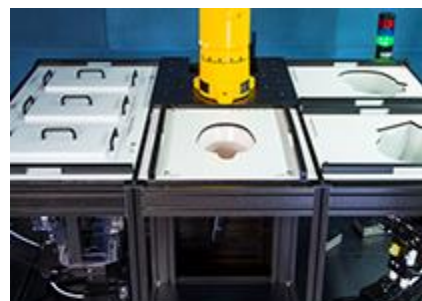

Wrist Phantom

The Wrist Phantom V10 is shape-compatible with the CTIA approved OTA GFPC-V1 and optimized for SAR evaluation of watches and other wireless hand accessories.

Material	Epoxy based
Liquid Compatibility	The phantom shell is compatible with SPEAG tissue simulating liquids (sugar and oil based). Use of other liquids may render the phantom warranty void (see note or consult SPEAG support).
Shell Thickness	Shell Thickness
Wrist Shape	Design compatible with CTIA forearm.



Device Holder for SAM-Twin Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of $\pm 0.5\text{mm}$ would produce uncertainty in the SAR of $\pm 20\%$. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions at which the devices must be measured are defined by the standards.

MD4HHTV5 - Mounting Device for Hand-Held Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).

Material: Polyoxymethylene (POM)



MDA4WTV5 - Mounting Device Adaptor for Ultra Wide Transmitters

An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.

Material: Polyoxymethylene (POM)



MDA4SPV6 - Mounting Device Adaptor for Smart Phones

The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.

Material: ROHACELL



MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.

Material: Polyoxymethylene (POM), PET-G, Foam



MDA4LAP - Mounting Device Adaptor for Laptops

A simple but effective and easy-to-use extension for the Mounting Device; facilitates testing of larger devices (e.g., laptops, cameras, etc.) according to IEC 62209-2; lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin SAM as well as ELI and other Flat Phantoms.

Material: Polyoxymethylene (POM), PET-G, Foam



Modulation and Interference Analyzer(MAIA)

MAIA is a hardware interface used to evaluate the modulation and audio interference characteristics of RF signals in the frequency range 698 - 6000 MHz. DASY6 evaluates the time-domain and frequency domain properties of the uplink signal transmitted by the DUT during SAR measurement with MAIA. MAIA uses USB powered active electronics to identify the modulation of the DUT. It can be operated over the air interface using the built-in ultra-broadband planar log spiral antenna (698 - 6000 MHz) or in conducted mode using the coaxial SMA 50 Ohm connector (300 - 6000 MHz).



To prevent damage in conducted mode due to high peak power, an external RF attenuator may be mounted. The LED on the MAIA hardware also indicates whether it is connected.

DAK-3.5 (200MHz – 20GHz)

This precision dielectric measurement system is designed to cover the 200MHz – 20GHz frequency range with a single open-ended coaxial dielectric probe. The system uses advanced algorithms and novel hardware to measure the dielectric properties of liquids, solids, and semi-solids over a broad range of parameters. The measurement method is fast and non-destructive to the material under test.



Evaluation of reference liquids over a broad frequency range for specific absorption rate (SAR) measurements, in accordance with IEC 62209, IEEE 1528, and several federal regulations.

Evaluating Software: DAK software version 2.0

MRT simulating liquid

Product	Test Frequency (MHz)	Main Ingredients
HSL450	400 – 500	Water, Sucrose, NaCl
MSL450	400 – 500	Water, Sucrose, NaCl

Speag Broad-Band simulating liquid



Product	Test Frequency (MHz)	Main Ingredients
HBBL600-10000V6	600 – 10000	Water, Oil
MBBL600-6000V6	600 – 6000	Water, Oil

6. The SAR Measurement Procedure

6.1. Measurement Process Diagram

General Procedure

For IEEE1528-2013 Head SAR

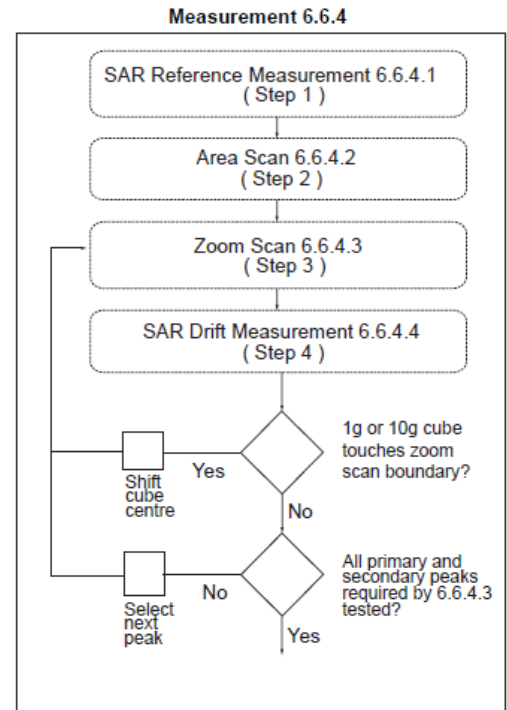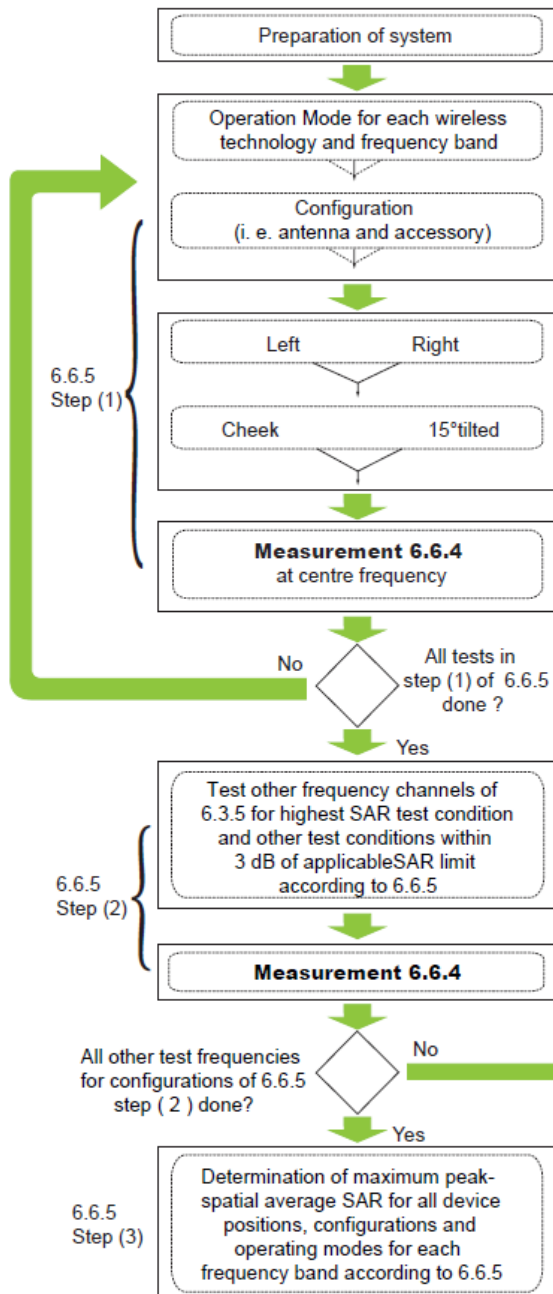



For Body SAR


SAR scan procedures described in section 2.7 of KDB 865664 D01 v01r04 should be applied to body SAR test.

6.2. Test Position Definition

■ Head SAR Test Position


Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output [point A in Fixed case and Clamshell case], and the midpoint of the width w_b at the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output [see Fixed case]. The horizontal line is also tangential to the face of the handset at point A. The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset [see Clamshell case], especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets, the vertical centerline passes through point A but not the tip edge of the phone.

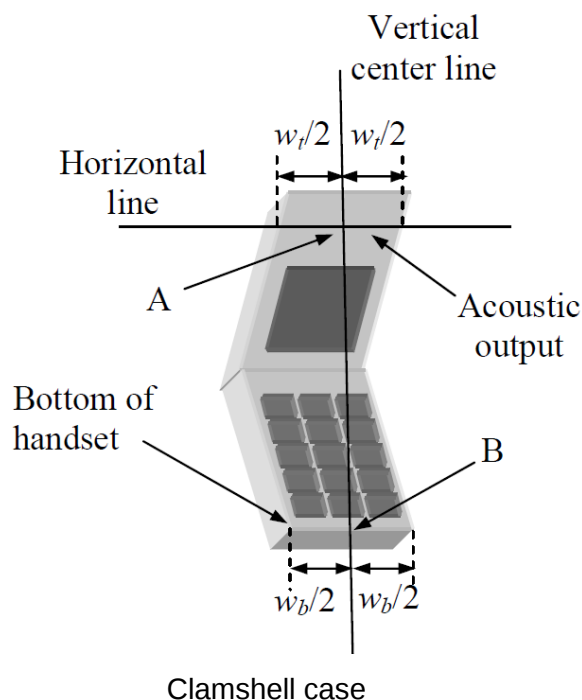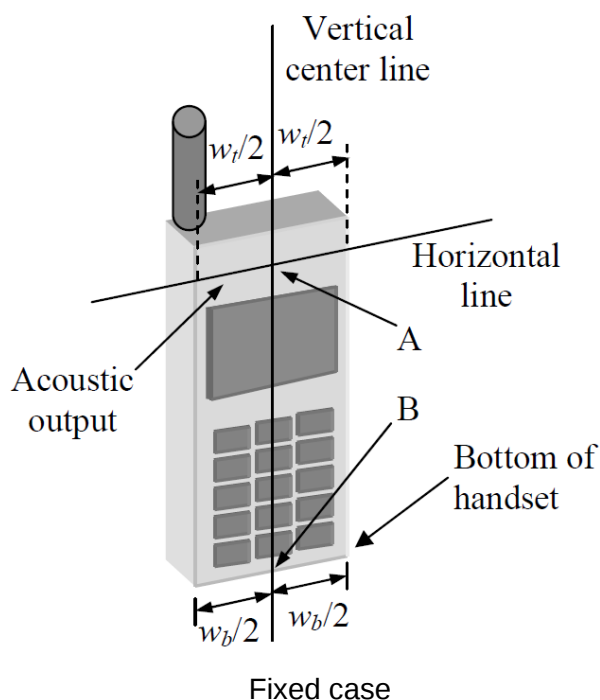

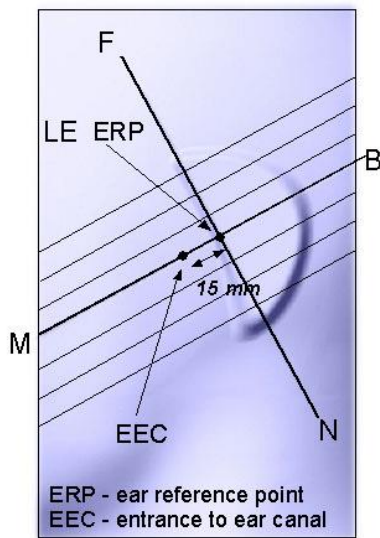

Key

- B Direction of B-M line back endpoint
- F Direction of N-F line front endpoint
- N Direction of N-F line neck endpoint
- M Mouth reference point
- LE Left ear reference point (ERP)

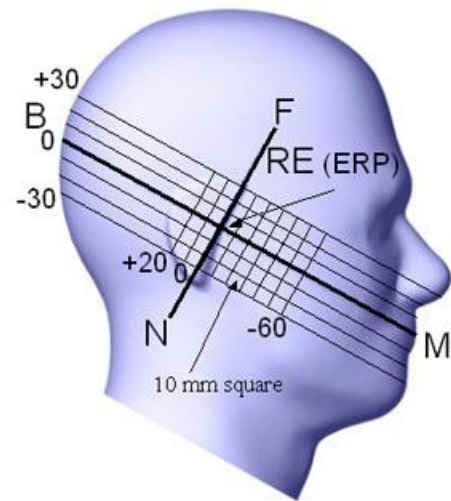


Key

- B Line B-M back endpoint
- M Line B-M front endpoint
- N Line N-F neck endpoint
- F Line N-F front endpoint
- RE Right ear reference point (ERP)

Cheek Position

The cheek position has the following characteristics, based on the geometrical lines described above:

- The N-F line (see above) is in the plane defined by the handset vertical centerline and horizontal line
- Handset touches the pinna
- The handset vertical centerline is aligned with the Reference Plane.

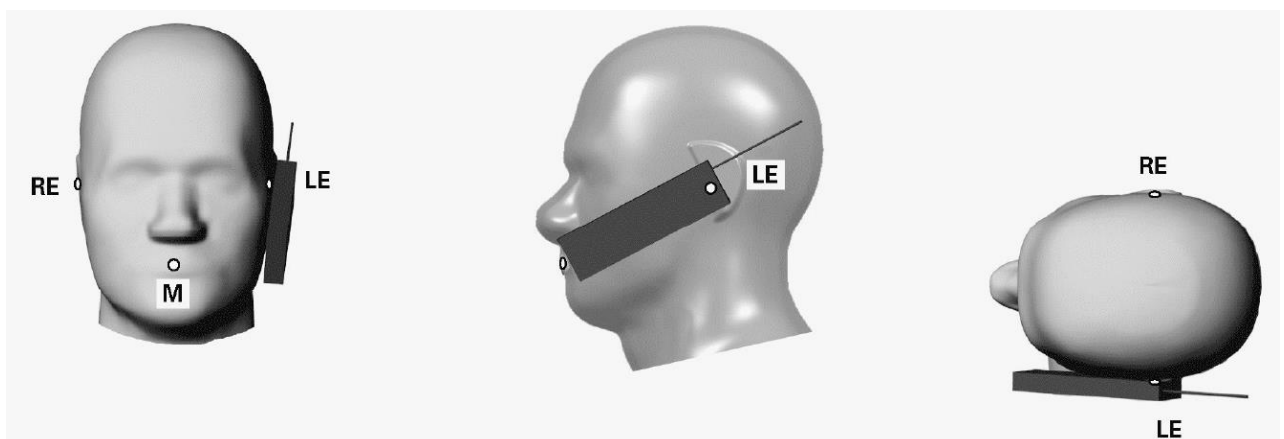


Key

- M Mouth reference point
- LE Left ear reference point
- RE Right ear reference point

Tilt Position

The tilt position is established as follows:

- Repeat the steps to place the device in the cheek position.
- While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
- Rotate the handset around the horizontal line by 15° .
- While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset shall be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point on the handset is in contact with the phantom, e.g., the antenna with the back of the head.

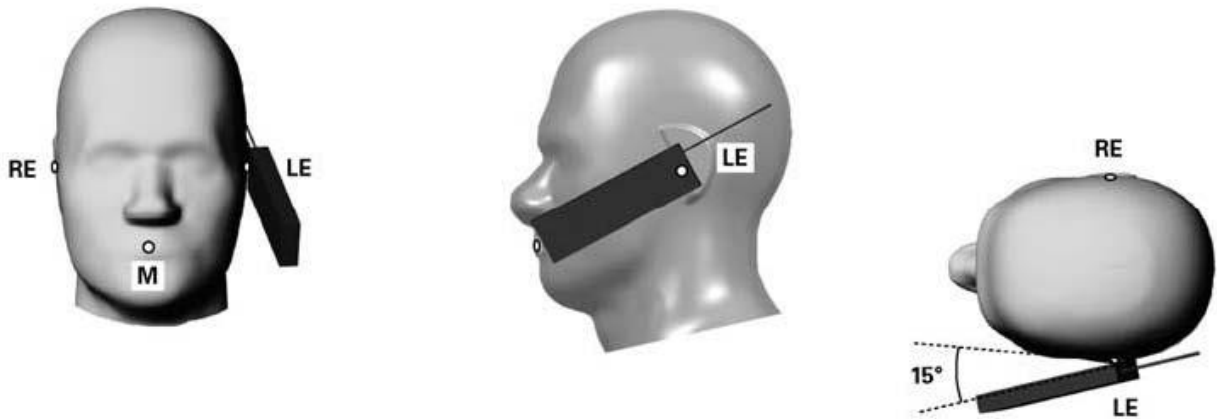

Key

- | | |
|----|---------------------------|
| M | Mouth reference point |
| LE | Left ear reference point |
| RE | Right ear reference point |

■ Body SAR Test Position

For body-worn accessory, hotspot mode and other exposure conditions to human body should be conducted pursuant to the test position requirements of SAR KDBs for certain product.

6.3. Test Procedure

Step 1 Setup a Connection

First, engineer should record the conducted power before the test. Then establish a call in handset at the maximum power level with a base station simulator via air interface, or make the EUT establish transmission by itself in testing band. Place the EUT to certain test position.

Step 2 Power Reference Measurements

To measure the local E-field value at a fixed location which value will be taken as a reference value for calculating a possible power drift.

Step 3 Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01v01r04

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$	≤ 2 GHz: ≤ 15 mm 2 - 3 GHz: ≤ 12 mm	3 - 4 GHz: ≤ 12 mm 4 - 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.		

Step 4 Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 v01r04

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx _{Zoom} , Δy _{Zoom}			≤ 2 GHz: ≤ 8 mm 2 - 3 GHz: ≤ 5 mm*	3 - 4 GHz: ≤ 5 mm* 4 - 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: Δz _{Zoom} (n)		≤ 5 mm	3 - 4 GHz: ≤ 4 mm 4 - 5 GHz: ≤ 3 mm 5 - 6 GHz: ≤ 2 mm
	graded grid	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 - 4 GHz: ≤ 3 mm 4 - 5 GHz: ≤ 2.5 mm 5 - 6 GHz: ≤ 2 mm
		Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δz _{Zoom} (n-1) mm	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3-4 GHz: ≥ 28 mm 4-5 GHz: ≥ 25 mm 5-6 GHz: ≥ 22 mm
Note: * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 5 Power Drift Measurements

Repetition of the E-field measurement at the fixed location mentioned in Step 1 to make sure the two results differ by less than ± 0.2 dB.

Step 6 Test Data


After the test, SAR test data should be exported by SEMCAD.

7. System Verificaiton


7.1. Tissue Check

- Refer to KDB 865664 D01 v01r04, the depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with $\leq \pm 0.5$ cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with $\leq \pm 0.5$ cm variation for measurements > 3 GHz.

15cm Depth Body Tissue for ≤ 3 GHz bands

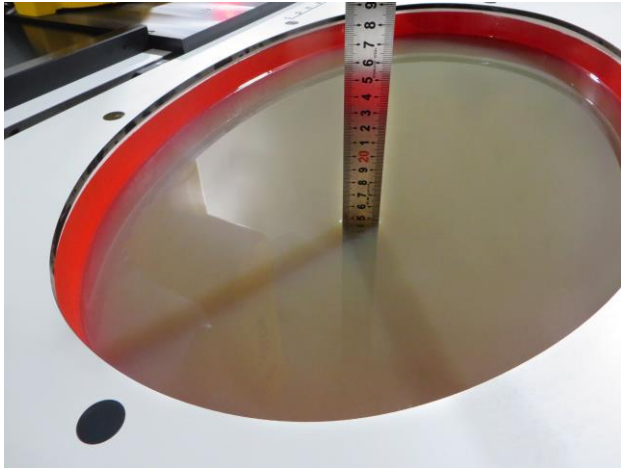

10cm Depth Body Tissue for > 3 GHz band

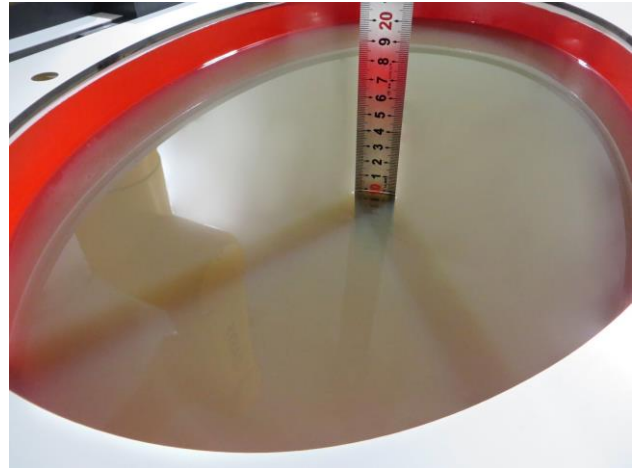

■ Tissue Dielectric Parameters for Head and Body Phantoms

Target Frequency	Head		Body	
(MHz)	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800~2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5200	36.0	4.66	49.0	5.30
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)

Note: Other head and body tissue parameters that have not been specified in IEEE Std 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in IEEE Std 1528.

■ Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using DASY6 Dielectric Assessment Kit and keysight PNA-L Network Analyzer N5234B.

Tissue parameter for Body								
Freq. (MHz)	Perm.	Cond.	Target Perm.	Target Cond.	Deviation Perm. %	Deviation Cond. %	Tissue Temperature	Test Date
2450	53.30	1.92	52.70	1.95	1.14	-1.54	22.5°C	2020.02.27
5250	48.32	5.34	48.95	5.36	-1.29	-0.37	22.5°C	2020.02.28
5600	47.63	5.85	48.47	5.77	-1.73	1.39	22.5°C	2020.02.29
5750	47.34	6.08	48.27	5.94	-1.93	2.36	22.5°C	2020.02.29


Note: The $\pm 5\%$ deviation of tissue parameter is recommended.

7.2. System Check

■ Purpose

The purpose of the system check is to verify that the system operates within its specifications at the device test frequencies. System check verifies the measurement repeatability of a SAR system before compliance testing and is not a validation of all system specifications. The latter is not required for testing a device but is mandatory before the system is deployed.

■ System Performance Check Setup Diagram

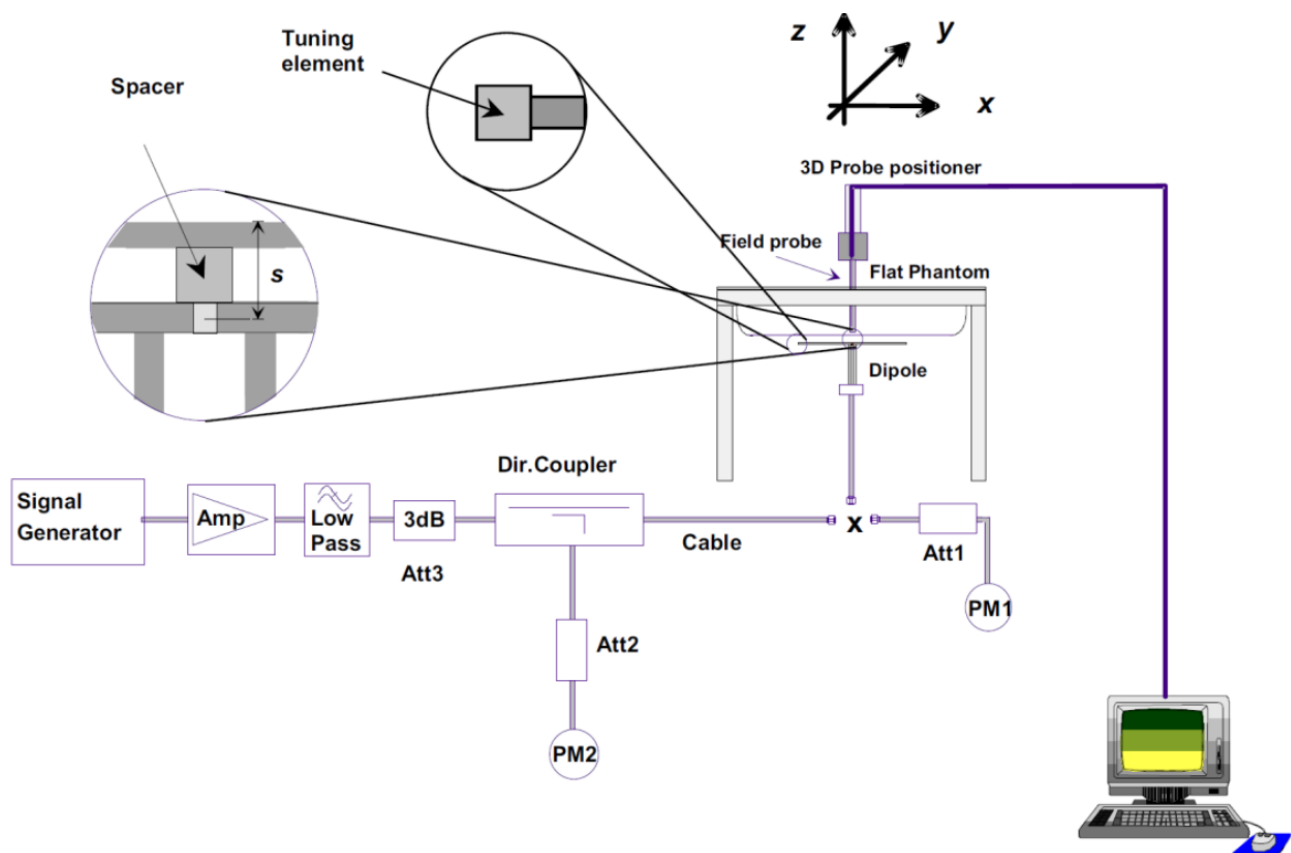

■ System Check Procedure

The system check procedure is a complete 1g and 10g peak spatial-average SAR measurement using a source having a previously determined system check target value. The measured 1g and 10g SAR are normalized to the target input power of the specific source and compared to their respective target values. A description of the different measurement tasks to be performed is given below, together with the information that can be deduced from their results:

- The Power Reference Measurement and Power Drift Measurement are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ± 0.1 dB), the system check should be repeated; some amplifiers have very high drift during warm-up. A

stable amplifier gives drift results in the DASY6 system below ± 0.02 dB.

b. The second step is optional. For probes with integrated optical surface detection sensor this step must be conducted, otherwise the step can be skipped. The Surface Check tests the optical surface detection system of the DASY6 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ± 0.1 mm). In that case it is better to abort the system check and stir the liquid.

c. The Area Scan measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.

d. The Zoom Scan measures the field in a volume around the peak SAR value assessed in the previous Area Scan.

If the system check gives reasonable results, the SAR peak, 1 g and 10 g spatial average SAR values normalized to 1 W dipole input power give reference data for comparisons. The next sections analyze the expected uncertainties of these values, as well as additional checks for further information or troubleshooting.

■ Result of System Performance Check


System check for Body								
Freq. (MHz)	1g SAR (W/kg)	10g SAR (W/kg)	Target 1g SAR (W/kg)	Target 10g SAR (W/kg)	Deviation 1g SAR (%)	Deviation 10g SAR (%)	Tissue Temp.	Test Date
2450	50.80	23.88	50.40	23.60	0.79	1.19	22.5°C	2020.02.27
5250	75.80	21.40	74.80	20.80	1.34	2.88	22.5°C	2020.02.28
5600	74.40	20.80	78.30	21.80	-4.98	-4.59	22.5°C	2020.02.29
5750	77.70	21.90	75.80	21.00	2.51	4.29	22.5°C	2020.02.29

Note:

1. The $\pm 10\%$ deviation of system check result is required.
2. System check value listed above has been harmonized to 1W.

8. Analysis and Results

8.1. Antenna Location

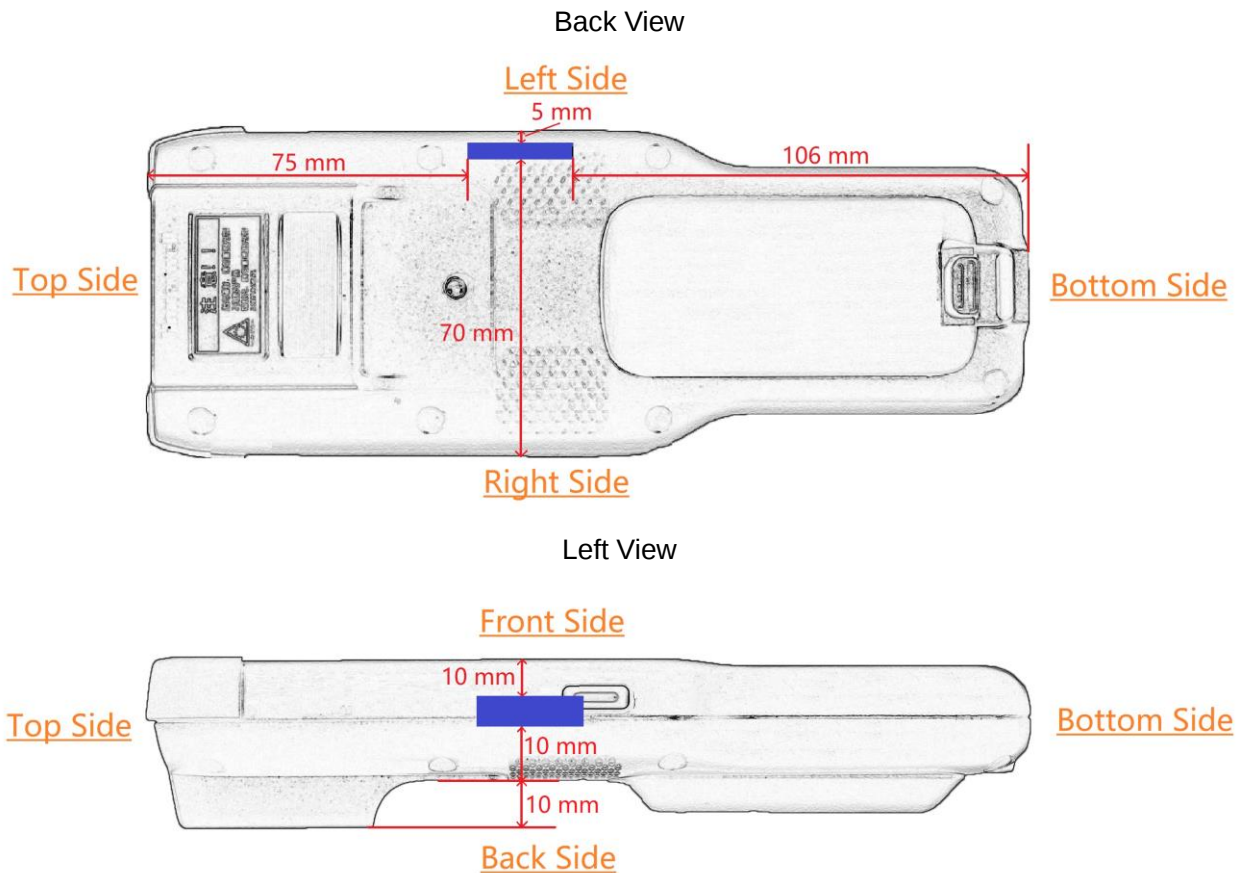

Antenna Distance to Surfaces/Edges (mm)						
Front-side	Back-side ¹	Back-side ²	Left-side	Right-side	Top-side	Bottom-side
10	20	10	5	70	75	106

Note:

1. 20 mm for body exposure conditions.
2. 10 mm for extremity exposure conditions.

8.2. Conducted Power

■ DTS Band Wi-Fi

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
b	1	2412	14.77	15.0	97.33
	6	2437	14.97	15.5	
	11	2462	14.91	15.5	
g	1	2412	12.87	13.5	86.82
	6	2437	12.98	13.5	
	11	2462	12.89	13.5	
n(HT20)	1	2412	11.53	12.0	86.10
	6	2437	11.69	12.0	
	11	2462	11.43	12.0	

■ UNII-1 Band Wi-Fi

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
a	36	5180	12.76	13.0	86.86
	44	5220	12.88	13.0	
	48	5240	12.79	13.0	
n(HT20)	36	5180	11.83	12.0	85.81
	44	5220	11.91	12.5	
	48	5240	11.74	12.0	
n(HT40)	38	5190	9.97	10.5	70.56
	46	5230	9.91	10.5	
ac(VHT20)	36	5180	11.86	12.5	82.40
	44	5220	11.83	12.5	
	48	5240	11.89	12.5	
ac(VHT40)	38	5190	9.95	10.5	69.61
	46	5230	9.81	10.0	
ac(VHT80)	42	5210	7.96	8.5	55.15

■ UNII-2A Band Wi-Fi

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
a	52	5260	13.61	14.0	86.86
	60	5300	13.72	14.0	
	64	5320	13.68	14.0	
n(HT20)	52	5260	11.95	12.5	85.81
	60	5300	11.52	12.0	
	64	5320	11.45	12.0	
n(HT40)	54	5270	9.67	10.0	70.56
	62	5310	9.59	10.0	
ac(VHT20)	52	5260	11.67	12.0	82.40
	60	5300	11.42	12.0	
	64	5320	11.56	12.0	
ac(VHT40)	54	5270	9.63	10.0	69.61
	62	5310	9.65	10.0	
ac(VHT80)	58	5290	7.57	8.0	55.15

■ UNII-2C Band Wi-Fi

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
a	100	5500	13.77	14.0	86.86
	120	5600	13.86	14.0	
	140	5700	13.68	14.0	
	144	5720	13.65	14.0	
n(HT20)	100	5500	11.55	12.0	85.81
	120	5600	11.76	12.0	
	140	5700	11.91	12.5	
	144	5720	11.84	12.0	
n(HT40)	102	5510	9.58	10.0	70.56
	118	5590	9.87	10.0	
	134	5670	9.84	10.0	
	142	5710	9.78	10.0	
ac(VHT20)	100	5500	11.69	12.0	82.40
	120	5600	11.55	12.0	
	140	5700	11.73	12.0	
	144	5720	11.81	12.0	
ac(VHT40)	102	5510	9.62	10.0	69.61
	118	5590	9.92	10.5	
	134	5670	9.72	10.0	
	142	5710	9.93	10.5	
ac(VHT80)	106	5530	7.75	8.0	55.15
	122	5610	7.95	8.5	
	138	5690	7.94	8.5	

■ UNII-3 Band Wi-Fi

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
a	149	5745	13.94	14.5	86.86
	157	5785	13.78	14.0	
	165	5825	13.67	14.0	
n(HT20)	149	5745	11.75	12.0	85.81
	157	5785	11.73	12.0	
	165	5825	11.49	12.0	
n(HT40)	151	5755	9.88	10.0	70.56
	159	5795	9.91	10.5	
ac(VHT20)	149	5745	11.69	12.0	82.40
	157	5785	11.52	12.0	
	165	5825	11.36	11.5	
ac(VHT40)	151	5755	9.79	10.0	69.61
	159	5795	9.81	10.0	
ac(VHT80)	155	5775	7.92	8.5	55.15

■ Bluetooth

Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit Power (dBm)	Duty Cycle %
DH5	0	2402	5.28	5.5	76.80
	39	2441	5.01	5.5	
	78	2480	4.27	4.5	
2DH5	0	2402	4.57	5.0	76.00
	39	2441	4.82	5.0	
	78	2480	3.84	4.0	
3DH5	0	2402	4.46	5.0	76.53
	39	2441	4.95	5.5	
	78	2480	3.67	4.0	
BLE	0	2402	0.96	1.5	61.79
	19	2440	1.37	1.5	
	39	2480	0.13	0.5	

8.3. SAR Exclusion Analysis

Per FCC KDB 447498 D01v06, the SAR exclusion threshold for distances < 50 mm is defined by the following equation:

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Distance (mm)}} \times \sqrt{\text{Frequency (GHz)}} \leq 3.0, \text{ for head and body SAR;}$$

For 100 MHz to 6 GHz and test separation distances > 50 mm, the 1-g and 10-g SAR test exclusion thresholds are determined by the following:

- 1) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm) * (f(MHz)/150)]} mW, for 100 MHz to 1500 MHz
- 2) {[Power allowed at numeric threshold for 50 mm in step a)] + [(test separation distance – 50 mm)*10]} mW, for > 1500 MHz and ≤ 6 GHz

Antenna Distance to User Body (mm)					
Front-side	Back-side	Left-side	Right-side	Top-side	Bottom-side
15	25	10	75	80	111

Antenna Distance to User Extremity (mm)					
Front-side	Back-side	Left-side	Right-side	Top-side	Bottom-side
10	10	5	70	75	106

Note:

1. Antenna to User distance = Antenna to out-surface of EUT distance + Out-surface of EUT to User distance
2. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion

15mm Antenna Distance to Body Front

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	15	28.98	15.0	31.62	Y
		6	2437	15	28.83	15.5	35.48	Y
		11	2462	15	28.68	15.5	35.48	Y
UNII-1	802.11a	36	5180	15	19.77	13.0	19.95	Y
		44	5220	15	19.70	13.0	19.95	Y
		48	5240	15	19.66	13.0	19.95	Y
UNII-2A	802.11a	52	5260	15	19.62	14.0	25.12	Y
		60	5300	15	19.55	14.0	25.12	Y
		64	5320	15	19.51	14.0	25.12	Y
UNII-2C	802.11a	100	5500	15	19.19	14.0	25.12	Y
		120	5600	15	19.02	14.0	25.12	Y
		140	5700	15	18.85	14.0	25.12	Y
		144	5720	15	18.82	14.0	25.12	Y
UNII-3	802.11a	149	5745	15	18.77	14.5	28.18	Y
		157	5785	15	18.71	14.0	25.12	Y
		165	5825	15	18.65	14.0	25.12	Y
DSS	DH5	0	2402	15	29.04	5.5	3.55	N
		39	2441	15	28.80	5.5	3.55	N
		78	2480	15	28.58	4.5	2.82	N

25mm Antenna Distance to Body Back

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	25	48.29	15.0	31.62	N
		6	2437	25	48.04	15.5	35.48	N
		11	2462	25	47.80	15.5	35.48	N
UNII-1	802.11a	36	5180	25	32.95	13.0	19.95	N
		44	5220	25	32.83	13.0	19.95	N
		48	5240	25	32.76	13.0	19.95	N
UNII-2A	802.11a	52	5260	25	32.70	14.0	25.12	N
		60	5300	25	32.58	14.0	25.12	N
		64	5320	25	32.52	14.0	25.12	N
UNII-2C	802.11a	100	5500	25	31.98	14.0	25.12	N
		120	5600	25	31.69	14.0	25.12	N
		140	5700	25	31.41	14.0	25.12	N
		144	5720	25	31.36	14.0	25.12	N
UNII-3	802.11a	149	5745	25	31.29	14.5	28.18	N
		157	5785	25	31.18	14.0	25.12	N
		165	5825	25	31.08	14.0	25.12	N
DSS	DH5	0	2402	25	48.39	5.5	3.55	N
		39	2441	25	48.00	5.5	3.55	N
		78	2480	25	47.63	4.5	2.82	N

10mm Antenna Distance to Body Left

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	10	19.32	15.0	31.62	Y
		6	2437	10	19.22	15.5	35.48	Y
		11	2462	10	19.12	15.5	35.48	Y
UNII-1	802.11a	36	5180	10	13.18	13.0	19.95	Y
		44	5220	10	13.13	13.0	19.95	Y
		48	5240	10	13.11	13.0	19.95	Y
UNII-2A	802.11a	52	5260	10	13.08	14.0	25.12	Y
		60	5300	10	13.03	14.0	25.12	Y
		64	5320	10	13.01	14.0	25.12	Y
UNII-2C	802.11a	100	5500	10	12.79	14.0	25.12	Y
		120	5600	10	12.68	14.0	25.12	Y
		140	5700	10	12.57	14.0	25.12	Y
		144	5720	10	12.54	14.0	25.12	Y
UNII-3	802.11a	149	5745	10	12.52	14.5	28.18	Y
		157	5785	10	12.47	14.0	25.12	Y
		165	5825	10	12.43	14.0	25.12	Y
DSS	DH5	0	2402	10	19.36	5.5	3.55	N
		39	2441	10	19.20	5.5	3.55	N
		78	2480	10	19.05	4.5	2.82	N

75mm Antenna Distance to Body Right

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	75	346.58	15.0	31.62	N
		6	2437	75	346.09	15.5	35.48	N
		11	2462	75	345.60	15.5	35.48	N
UNII-1	802.11a	36	5180	75	315.91	13.0	19.95	N
		44	5220	75	315.65	13.0	19.95	N
		48	5240	75	315.53	13.0	19.95	N
UNII-2A	802.11a	52	5260	75	315.40	14.0	25.12	N
		60	5300	75	315.16	14.0	25.12	N
		64	5320	75	315.03	14.0	25.12	N
UNII-2C	802.11a	100	5500	75	313.96	14.0	25.12	N
		120	5600	75	313.39	14.0	25.12	N
		140	5700	75	312.83	14.0	25.12	N
		144	5720	75	312.72	14.0	25.12	N
UNII-3	802.11a	149	5745	75	312.58	14.5	28.18	N
		157	5785	75	312.36	14.0	25.12	N
		165	5825	75	312.15	14.0	25.12	N
DSS	DH5	0	2402	75	346.78	5.5	3.55	N
		39	2441	75	346.01	5.5	3.55	N
		78	2480	75	345.25	4.5	2.82	N

80mm Antenna Distance to Body Top

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	80	396.58	15.0	31.62	N
		6	2437	80	396.09	15.5	35.48	N
		11	2462	80	395.60	15.5	35.48	N
UNII-1	802.11a	36	5180	80	365.91	13.0	19.95	N
		44	5220	80	365.65	13.0	19.95	N
		48	5240	80	365.53	13.0	19.95	N
UNII-2A	802.11a	52	5260	80	365.40	14.0	25.12	N
		60	5300	80	365.16	14.0	25.12	N
		64	5320	80	365.03	14.0	25.12	N
UNII-2C	802.11a	100	5500	80	363.96	14.0	25.12	N
		120	5600	80	363.39	14.0	25.12	N
		140	5700	80	362.83	14.0	25.12	N
		144	5720	80	362.72	14.0	25.12	N
UNII-3	802.11a	149	5745	80	362.58	14.5	28.18	N
		157	5785	80	362.36	14.0	25.12	N
		165	5825	80	362.15	14.0	25.12	N
DSS	DH5	0	2402	80	396.78	5.5	3.55	N
		39	2441	80	396.01	5.5	3.55	N
		78	2480	80	395.25	4.5	2.82	N

111mm Antenna Distance to Body Bottom

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	111	706.58	15.0	31.62	N
		6	2437	111	706.09	15.5	35.48	N
		11	2462	111	705.60	15.5	35.48	N
UNII-1	802.11a	36	5180	111	675.91	13.0	19.95	N
		44	5220	111	675.65	13.0	19.95	N
		48	5240	111	675.53	13.0	19.95	N
UNII-2A	802.11a	52	5260	111	675.40	14.0	25.12	N
		60	5300	111	675.16	14.0	25.12	N
		64	5320	111	675.03	14.0	25.12	N
UNII-2C	802.11a	100	5500	111	673.96	14.0	25.12	N
		120	5600	111	673.39	14.0	25.12	N
		140	5700	111	672.83	14.0	25.12	N
		144	5720	111	672.72	14.0	25.12	N
UNII-3	802.11a	149	5745	111	672.58	14.5	28.18	N
		157	5785	111	672.36	14.0	25.12	N
		165	5825	111	672.15	14.0	25.12	N
DSS	DH5	0	2402	111	706.78	5.5	3.55	N
		39	2441	111	706.01	5.5	3.55	N
		78	2480	111	705.25	4.5	2.82	N

10mm Antenna Distance to Extremity Front

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	10	48.29	15.0	31.62	N
		6	2437	10	48.04	15.5	35.48	N
		11	2462	10	47.80	15.5	35.48	N
UNII-1	802.11a	36	5180	10	32.95	13.0	19.95	N
		44	5220	10	32.83	13.0	19.95	N
		48	5240	10	32.76	13.0	19.95	N
UNII-2A	802.11a	52	5260	10	32.70	14.0	25.12	N
		60	5300	10	32.58	14.0	25.12	N
		64	5320	10	32.52	14.0	25.12	N
UNII-2C	802.11a	100	5500	10	31.98	14.0	25.12	N
		120	5600	10	31.69	14.0	25.12	N
		140	5700	10	31.41	14.0	25.12	N
		144	5720	10	31.36	14.0	25.12	N
UNII-3	802.11a	149	5745	10	31.29	14.5	28.18	N
		157	5785	10	31.18	14.0	25.12	N
		165	5825	10	31.08	14.0	25.12	N
DSS	DH5	0	2402	10	48.39	5.5	3.55	N
		39	2441	10	48.00	5.5	3.55	N
		78	2480	10	47.63	4.5	2.82	N

10mm Antenna Distance to Extremity Back

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	10	48.29	15.0	31.62	N
		6	2437	10	48.04	15.5	35.48	N
		11	2462	10	47.80	15.5	35.48	N
UNII-1	802.11a	36	5180	10	32.95	13.0	19.95	N
		44	5220	10	32.83	13.0	19.95	N
		48	5240	10	32.76	13.0	19.95	N
UNII-2A	802.11a	52	5260	10	32.70	14.0	25.12	N
		60	5300	10	32.58	14.0	25.12	N
		64	5320	10	32.52	14.0	25.12	N
UNII-2C	802.11a	100	5500	10	31.98	14.0	25.12	N
		120	5600	10	31.69	14.0	25.12	N
		140	5700	10	31.41	14.0	25.12	N
		144	5720	10	31.36	14.0	25.12	N
UNII-3	802.11a	149	5745	10	31.29	14.5	28.18	N
		157	5785	10	31.18	14.0	25.12	N
		165	5825	10	31.08	14.0	25.12	N
DSS	DH5	0	2402	10	48.39	5.5	3.55	N
		39	2441	10	48.00	5.5	3.55	N
		78	2480	10	47.63	4.5	2.82	N

5mm Antenna Distance to Extremity Left

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	5	24.15	15.0	31.62	Y
		6	2437	5	24.02	15.5	35.48	Y
		11	2462	5	23.90	15.5	35.48	Y
UNII-1	802.11a	36	5180	5	16.48	13.0	19.95	Y
		44	5220	5	16.41	13.0	19.95	Y
		48	5240	5	16.38	13.0	19.95	Y
UNII-2A	802.11a	52	5260	5	16.35	14.0	25.12	Y
		60	5300	5	16.29	14.0	25.12	Y
		64	5320	5	16.26	14.0	25.12	Y
UNII-2C	802.11a	100	5500	5	15.99	14.0	25.12	Y
		120	5600	5	15.85	14.0	25.12	Y
		140	5700	5	15.71	14.0	25.12	Y
		144	5720	5	15.68	14.0	25.12	Y
UNII-3	802.11a	149	5745	5	15.65	14.5	28.18	Y
		157	5785	5	15.59	14.0	25.12	Y
		165	5825	5	15.54	14.0	25.12	Y
DSS	DH5	0	2402	5	24.20	5.5	3.55	N
		39	2441	5	24.00	5.5	3.55	N
		78	2480	5	23.81	4.5	2.82	N

70mm Antenna Distance to Extremity Right

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	70	441.46	15.0	31.62	N
		6	2437	70	440.22	15.5	35.48	N
		11	2462	70	438.99	15.5	35.48	N
UNII-1	802.11a	36	5180	70	364.77	13.0	19.95	N
		44	5220	70	364.13	13.0	19.95	N
		48	5240	70	363.82	13.0	19.95	N
UNII-2A	802.11a	52	5260	70	363.51	14.0	25.12	N
		60	5300	70	362.89	14.0	25.12	N
		64	5320	70	362.58	14.0	25.12	N
UNII-2C	802.11a	100	5500	70	359.90	14.0	25.12	N
		120	5600	70	358.47	14.0	25.12	N
		140	5700	70	357.07	14.0	25.12	N
		144	5720	70	356.80	14.0	25.12	N
UNII-3	802.11a	149	5745	70	356.45	14.5	28.18	N
		157	5785	70	355.91	14.0	25.12	N
		165	5825	70	355.38	14.0	25.12	N
DSS	DH5	0	2402	70	441.96	5.5	3.55	N
		39	2441	70	440.02	5.5	3.55	N
		78	2480	70	438.13	4.5	2.82	N

75mm Antenna Distance to Extremity Top

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	75	491.46	15.0	31.62	N
		6	2437	75	490.22	15.5	35.48	N
		11	2462	75	488.99	15.5	35.48	N
UNII-1	802.11a	36	5180	75	414.77	13.0	19.95	N
		44	5220	75	414.13	13.0	19.95	N
		48	5240	75	413.82	13.0	19.95	N
UNII-2A	802.11a	52	5260	75	413.51	14.0	25.12	N
		60	5300	75	412.89	14.0	25.12	N
		64	5320	75	412.58	14.0	25.12	N
UNII-2C	802.11a	100	5500	75	409.90	14.0	25.12	N
		120	5600	75	408.47	14.0	25.12	N
		140	5700	75	407.07	14.0	25.12	N
		144	5720	75	406.80	14.0	25.12	N
UNII-3	802.11a	149	5745	75	406.45	14.5	28.18	N
		157	5785	75	405.91	14.0	25.12	N
		165	5825	75	405.38	14.0	25.12	N
DSS	DH5	0	2402	75	491.96	5.5	3.55	N
		39	2441	75	490.02	5.5	3.55	N
		78	2480	75	488.13	4.5	2.82	N

106mm Antenna Distance to Extremity Bottom

Band	Mode	Channel	Frequency (MHz)	Ant-to-user distance (mm)	Thresholds (mW)	Tune-up Power		SAR Test (Y/N)
						dBm	mW	
DTS	802.11b	1	2412	106	801.46	15.0	31.62	N
		6	2437	106	800.22	15.5	35.48	N
		11	2462	106	798.99	15.5	35.48	N
UNII-1	802.11a	36	5180	106	724.77	13.0	19.95	N
		44	5220	106	724.13	13.0	19.95	N
		48	5240	106	723.82	13.0	19.95	N
UNII-2A	802.11a	52	5260	106	723.51	14.0	25.12	N
		60	5300	106	722.89	14.0	25.12	N
		64	5320	106	722.58	14.0	25.12	N
UNII-2C	802.11a	100	5500	106	719.90	14.0	25.12	N
		120	5600	106	718.47	14.0	25.12	N
		140	5700	106	717.07	14.0	25.12	N
		144	5720	106	716.80	14.0	25.12	N
UNII-3	802.11a	149	5745	106	716.45	14.5	28.18	N
		157	5785	106	715.91	14.0	25.12	N
		165	5825	106	715.38	14.0	25.12	N
DSS	DH5	0	2402	106	801.96	5.5	3.55	N
		39	2441	106	800.02	5.5	3.55	N
		78	2480	106	798.13	4.5	2.82	N

8.4. Required Configurations of SAR Test

Body exposure conditions						
Test Band	Front-side	Back-side	Left-side	Right-side	Top-side	Bottom-side
DTS	Yes	Yes *	Yes	No	No	No
UNII-1	Yes	Yes *	Yes	No	No	No
UNII-2A	Yes	Yes *	Yes	No	No	No
UNII-2C	Yes	Yes *	Yes	No	No	No
UNII-3	Yes	Yes *	Yes	No	No	No
DSS	Yes *	Yes *	Yes *	No	No	No

Extremity exposure conditions						
Test Band	Front-side	Back-side	Left-side	Right-side	Top-side	Bottom-side
DTS	No	No	Yes	No	No	No
UNII-1	No	No	Yes	No	No	No
UNII-2A	No	No	Yes	No	No	No
UNII-2C	No	No	Yes	No	No	No
UNII-3	No	No	Yes	No	No	No
DSS	No	No	No	No	No	No

Note: " * ", marked configuration SAR test is required, which is to get more conservative SAR values.

8.5. SAR Test Results

■ Body exposure

Test Band	Test Mode	CH	Freq. (MHz)	Body Position	Dist. (mm)	Cond. Power (dBm)	Max.Tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Factor	Meas. SAR-1g (W/kg)	Reported SAR-1g (W/kg)	SAR Plot #
DTS	802.11b	1	2412	Left	5	14.77	15.0	1.05	97.33	1.03	0.35	0.38	
		6	2437	Front	5	14.97	15.5	1.13	97.33	1.03	0.04	0.05	
				Back	5	14.97	15.5	1.13	97.33	1.03	0.05	0.06	
				Left	5	14.97	15.5	1.13	97.33	1.03	0.33	0.38	
				Left ^{note 1}	5	14.97	15.5	1.13	97.33	1.03	0.36	0.42	1
		11	2462	Left	5	14.91	15.5	1.15	97.33	1.03	0.30	0.35	
UNII-1	802.11a	36	5180	Left	5	12.76	13.0	1.06	86.86	1.15	0.77	0.94	2
		36	5180	Left ^{note 1}	5	12.76	13.0	1.06	86.86	1.15	0.52	0.63	
		44	5220	Front	5	12.88	13.0	1.03	86.86	1.15	0.01	0.01	
				Back	5	12.88	13.0	1.03	86.86	1.15	0.13	0.15	
				Left	5	12.88	13.0	1.03	86.86	1.15	0.67	0.79	
		48	5240	Left	5	12.79	13.0	1.05	86.86	1.15	0.60	0.72	
UNII-2C	802.11a	100	5500	Left	5	13.77	14.0	1.05	86.86	1.15	0.74	0.90	
		120	5600	Front	5	13.86	14.0	1.03	86.86	1.15	0.01	0.01	
				Back	5	13.86	14.0	1.03	86.86	1.15	0.17	0.20	
				Left	5	13.86	14.0	1.03	86.86	1.15	0.85	1.01	
				Left ^{note 2}	5	13.86	14.0	1.03	86.86	1.15	0.89	1.06	3
				Left ^{note 1}	5	13.86	14.0	1.03	86.86	1.15	0.72	0.86	
		144	5720	Left	5	13.65	14.0	1.08	86.86	1.15	0.80	1.00	
UNII-3	802.11a	144	5720	Left ^{note 2}	5	13.65	14.0	1.08	86.86	1.15	0.80	1.00	
		149	5745	Front	5	13.94	14.5	1.14	86.86	1.15	0.03	0.04	
				Back	5	13.94	14.5	1.14	86.86	1.15	0.25	0.33	
				Left	5	13.94	14.5	1.14	86.86	1.15	0.98	1.28	
				Left ^{note 2}	5	13.94	14.5	1.14	86.86	1.15	1.02	1.34	4
				Left ^{note 1}	5	13.94	14.5	1.14	86.86	1.15	0.71	0.93	
		157	5785	Left	5	13.78	14.0	1.05	86.86	1.15	0.90	1.09	
		157	5785	Left ^{note 2}	5	13.78	14.0	1.05	86.86	1.15	0.81	0.98	
		165	5825	Left	5	13.67	14.0	1.08	86.86	1.15	0.73	0.91	

DSS	DH5	0	2402	Front	5	5.28	5.5	1.05	76.80	1.30	0.01	0.01	
				Back	5	5.28	5.5	1.05	76.80	1.30	0.02	0.03	
				Left	5	5.28	5.5	1.05	76.80	1.30	0.05	0.07	
		39	2441	Left	5	5.01	5.5	1.12	76.80	1.30	0.06	0.09	
		39	2441	Left ^{note 1}	5	5.01	5.5	1.12	76.80	1.30	0.07	0.10	5
		78	2480	Left	5	4.27	4.5	1.05	76.80	1.30	0.03	0.04	

Note:

1. SAR worst case retest on table with scan engines EX20.
2. When the original highest measured SAR is ≥ 0.80 W/kg, only one repeated measurement is required, if the measured SAR value of the initial repeated measurement is < 1.45 W/kg with $\leq 20\%$ variation, per KDB 865664 D01 v01r04 section 2.8.1.
3. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR is not required, per KDB248227 D01 v02r02 section 5.2.2 2).
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n, per KDB248227 D01 v02r02 section 5.3.2 4).
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration, per KDB248227 D01 v02r02 section 5.3.4 b).

■ Extremity exposure

Test Band	Test Mode	CH	Freq. (MHz)	Extremity Position	Dist. (mm)	Cond. Power (dBm)	Max.Tune-up Power (dBm)	Scaling Factor	Duty Cycle (%)	Duty Cycle Factor	Meas. SAR-10g (W/kg)	Reported SAR-10g (W/kg)	SAR Plot #
DTS	802.11b	1	2412	Left	0	14.77	15.0	1.05	97.33	1.03	0.31	0.34	
		6	2437	Left	0	14.97	15.5	1.13	97.33	1.03	0.42	0.49	
				Left ^{note 1}	0	14.97	15.5	1.13	97.33	1.03	0.44	0.51	6
		11	2462	Left	0	14.91	15.5	1.15	97.33	1.03	0.35	0.41	
UNII-1	802.11a	36	5180	Left	0	12.76	13.0	1.06	86.86	1.15	0.65	0.79	7
				Left ^{note 1}	0	12.76	13.0	1.06	86.86	1.15	0.51	0.62	
		44	5220	Left	0	12.88	13.0	1.03	86.86	1.15	0.61	0.72	
		48	5240	Left	0	12.79	13.0	1.05	86.86	1.15	0.58	0.70	
UNII-2C	802.11a	100	5500	Left	0	13.77	14.0	1.05	86.86	1.15	0.71	0.86	
		120	5600	Left	0	13.86	14.0	1.03	86.86	1.15	0.80	0.95	
		144	5720	Left	0	13.65	14.0	1.08	86.86	1.15	0.78	0.97	8
		144	5720	Left ^{note 1}	0	13.65	14.0	1.08	86.86	1.15	0.63	0.79	
UNII-3	802.11a	149	5745	Left	0	13.94	14.5	1.14	86.86	1.15	0.80	1.05	9
				Left ^{note 1}	0	13.94	14.5	1.14	86.86	1.15	0.64	0.84	
		157	5785	Left	0	13.78	14.0	1.05	86.86	1.15	0.83	1.01	
		165	5825	Left	0	13.67	14.0	1.08	86.86	1.15	0.74	0.92	

Note:

1. SAR worst case retest on table with scan engines EX20.
2. When the original highest measured SAR is ≥ 2.0 W/kg, only one repeated measurement is required, if the measured SAR value of the initial repeated measurement is < 3.625 W/kg with $\leq 20\%$ variation, per KDB 865664 D01 v01r04 section 2.8.1.
3. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 3.0 W/kg, 802.11g/n OFDM SAR is not required, per KDB248227 D01 v02r02 section 5.2.2 2).
4. When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n, per KDB248227 D01 v02r02 section 5.3.2 4).
5. When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 3.0 W/kg, SAR is not required for that subsequent test configuration, per KDB248227 D01 v02r02 section 5.3.4 b).

8.6. Estimated SAR Calculation

Per FCC KDB 447498 D01v06 section 4.3.2 b) 1), when an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value was estimated according to the following formula to result in substantially conservative SAR values of $\leq 0.4\text{W/kg}$ for test separation distance $\leq 50\text{mm}$ to determine the simultaneous transmission SAR test exclusion criteria:

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{7.5} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation, mm}}, \text{ for 1-g SAR}$$

$$\text{Estimated SAR} = \frac{\sqrt{f(\text{GHz})}}{18.75} * \frac{(\text{Max Power of channel, mW})}{\text{Min. Separation, mm}}, \text{ for 10-g SAR}$$

When the test separation distance is $> 50\text{ mm}$, estimated 1g-SAR 0.4W/kg /10g-SAR 1.0W/kg is used for simultaneous evaluation.

N/A

9. Simultaneous Transmission Analysis

N/A

10. Test Equipment Used

SR3 - SAR					
Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Stäubli Robot TX60L	Stäubli	TX60L	MRTSUE06412	only once	only once
Robot Controller	Stäubli	CS8C	MRTSUE06412	only once	only once
ELI Phantom Shell	Speag	V8	MRTSUE06420	N/A	N/A
DAK	Speag	DAK-3.5	MRTSUE06435	N/A	N/A
Dipole Validation Kits	Speag	D2450V2	MRTSUE06430	3 year	2021/05/08
Dipole Validation Kits	Speag	D5GHzV2	MRTSUE06434	3 year	2022/04/15
DAE4	Speag	SD 000 D04 BN	MRTSUE06414	1 year	2020/05/22
E-Field Probe	Speag	EX3DV4	MRTSUE06438	1 year	2020/04/17
Network Analyzer	Keysight	N5234B	MRTSUE06454	1 year	2020/07/11
Directional Coupler	Agilent	778D	MRTSUE06083	1 year	2020/03/26
Directional Coupler	Agilent	87301D OPT 292	MRTSUE06082	1 year	2020/03/26
Signal Generator	Keysight	N5183B	MRTSUE06197	1 year	2020/04/15
Power Sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Thermohygrometer	Testo	622	MRTSUE06361	1 year	2020/05/06

Software	Version	Function
DASY NEO	52.10.2.1495	SAR Test Software

11. Measurement Uncertainty

DASY5 Uncertainty Budget, according to IEEE 1528 (0.3 - 3 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.02 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.4 %	R	$\sqrt{3}$	1	1	±0.2 %	±0.2 %	∞
Max. SAR Eval.	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6%	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1%	R	$\sqrt{3}$	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9%	N	1	1	0.84	±1.9 %	±1.6 %	∞
Liquid Cond. (mea.) ^{DAK}	±2.5%	N	1	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Perm. (mea.) ^{DAK}	±2.5%	N	1	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. – Conductivity	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. – Permittivity	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.3%	±11.2%	459
Expanded STD Uncertainty						±22.6%	±22.4%	

DASY5 Uncertainty Budget, according to IEEE 1528 (3 - 6 GHz range)								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (10g)	Std. Unc. (10g)	(vi) v _{eff}
Measurement System								
Probe Calibration	±6.55 %	N	1	1	1	±6.55 %	±6.55 %	∞
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	$\sqrt{3}$	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %	∞
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %	∞
Modulation Response	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.04 %	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Probe Positioning	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %	∞
Max. SAR Eval.	±4.0 %	R	$\sqrt{3}$	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Positioning	±2.9%	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6%	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0%	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %	∞
Power Scaling	±0%	R	$\sqrt{3}$	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.6%	R	$\sqrt{3}$	1	1	±3.8 %	±3.8 %	∞
SAR correction	±1.9%	N	1	1	0.84	±1.9 %	±1.6 %	∞
Liquid Cond. (mea.) ^{DAK}	±2.5%	N	1	0.78	0.71	±2.0 %	±1.8 %	∞
Liquid Perm. (mea.) ^{DAK}	±2.5%	N	1	0.23	0.26	±0.6 %	±0.7 %	∞
Temp. unc. – Conductivity	±3.4%	R	$\sqrt{3}$	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. – Permittivity	±0.4%	R	$\sqrt{3}$	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.9%	±11.8%	569
Expanded STD Uncertainty						±23.8%	±23.6%	

Annex A - System Check Result

Test Date: 02/27/2020

SystemPerformanceCheck-SAM2-D2450MSL

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 53.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7524; ConvF(7.52, 7.52, 7.52) @ 2450 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

configuration/d=10mm, Pin=250mW, dist=4mm (EX-Probe)/Area Scan (7x9x1): Measurement grid:

dx=12mm, dy=12mm; Maximum value of SAR (measured) = 13.7 W/kg

configuration/d=10mm, Pin=250mW, dist=4mm (EX-Probe)/Zoom Scan (7x7x7)/Cube
0: Measurement grid: dx=5mm, dy=5mm, dz=5mm; Reference Value = 99.16 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 24.9 W/kg

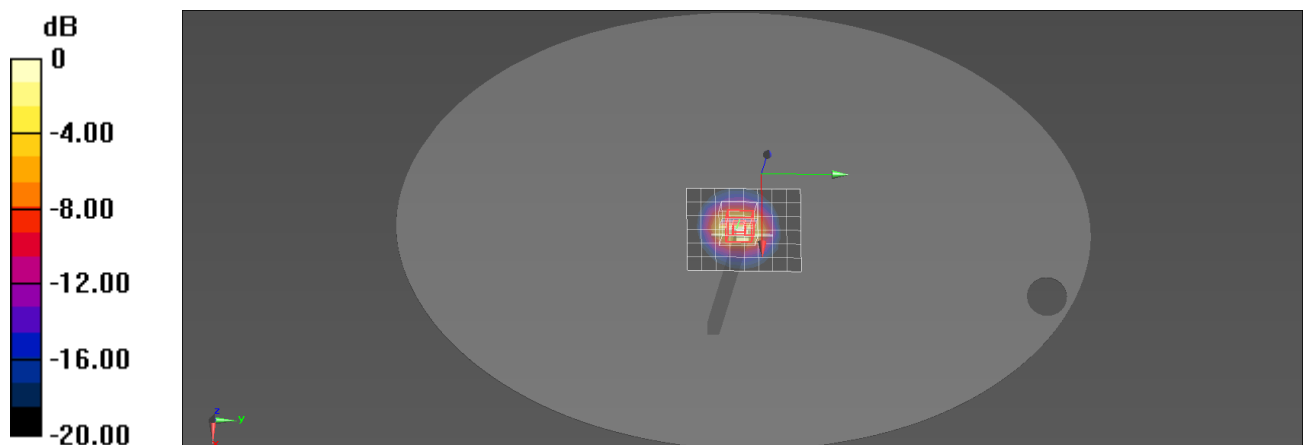SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.97 W/kg Maximum value of SAR (measured) = 14.5 W/kg


0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Date: 02/28/2020

SystemPerformanceCheck-SAM2-D5250MSL

DUT: Dipole D5GHzV2; Type: D5GHzV2

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250 \text{ MHz}$; $\sigma = 5.34 \text{ S/m}$; $\epsilon_r = 48.32$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(5.05, 5.05, 5.05) @ 5250 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/d=10mm, Pin=100 mW, dist=2mm (EX-Probe)/Area Scan (7x9x1): Measurement grid:


$dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 13.3 W/kg

Configuration/d=10mm, Pin=100 mW, dist=2mm (EX-Probe)/Zoom Scan (8x8x8) (8x8x6)/Cube

0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$; Reference Value = 55.14 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 7.58 W/kg; SAR(10 g) = 2.14 W/kg Maximum value of SAR (measured) = 14.9 W/kg

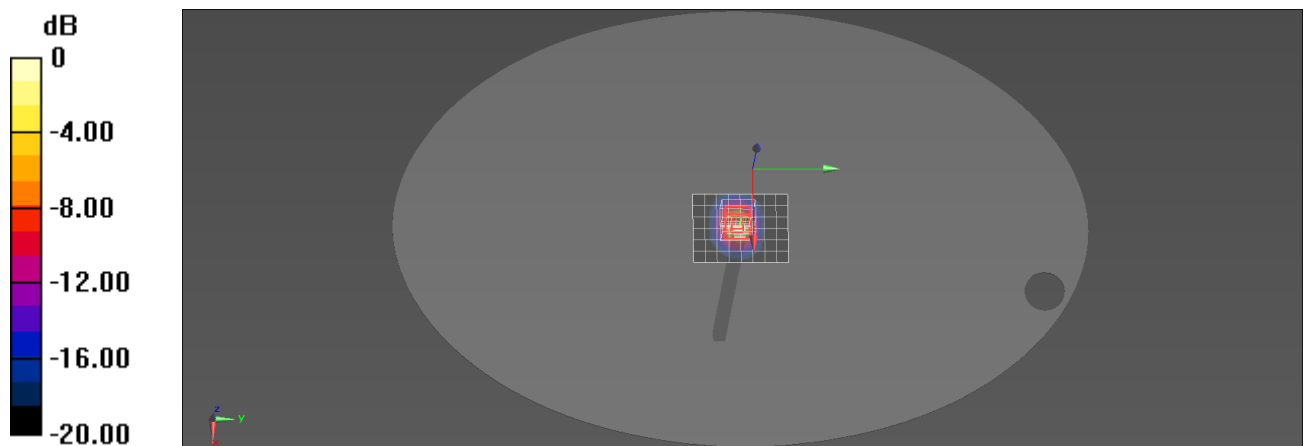

0 dB = 14.9 W/kg = 11.73 dBW/kg

Test Date: 02/29/2020

SystemPerformanceCheck-SAM2-D5600MSL

DUT: Dipole D5GHzV2; Type: D5GHzV2

Communication System: CW; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.85 \text{ S/m}$; $\epsilon_r = 47.63$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(4.4, 4.4, 4.4) @ 5600 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/d=10mm, Pin=100mW, dist=2mm (EX-Probe)/Area Scan (7x9x1): Measurement grid:


$dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 13.5 W/kg

Configuration/d=10mm, Pin=100mW, dist=2mm (EX-Probe)/Zoom Scan (8x8x8) (8x8x6)/Cube

0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$; Reference Value = 52.64 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.44 W/kg; SAR(10 g) = 2.08 W/kg Maximum value of SAR (measured) = 15.0 W/kg

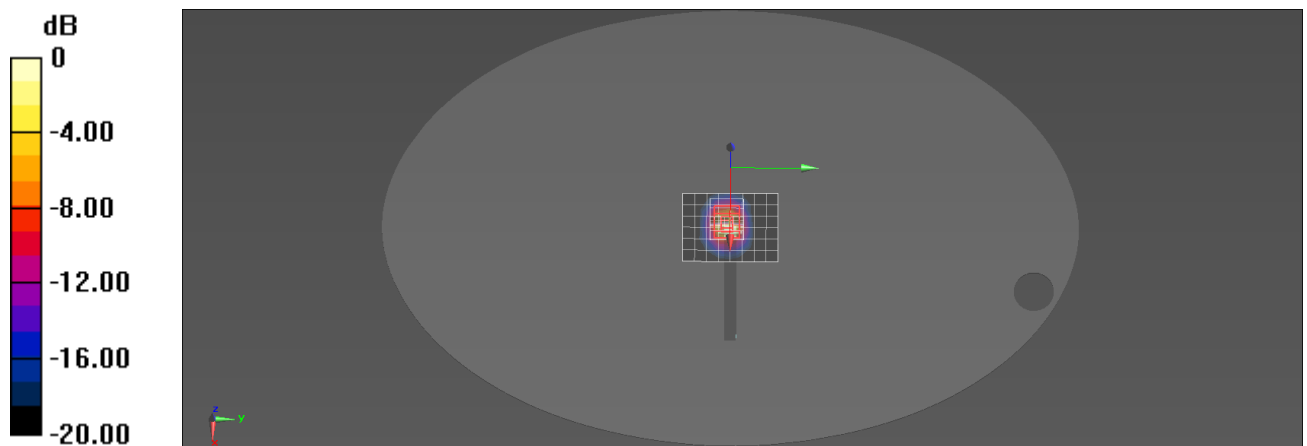

0 dB = 15.0 W/kg = 11.76 dBW/kg

Test Date: 02/29/2020

SystemPerformanceCheck-SAM2-D5750MSL

DUT: Dipole D5GHzV2; Type: D5GHzV2

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 6.08 \text{ S/m}$; $\epsilon_r = 47.34$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(4.45, 4.45, 4.45) @ 5750 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/d=10mm, Pin=100 mW, dist=2mm (EX-Probe)/Area Scan (7x9x1): Measurement grid:


$dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 14.2 W/kg

Configuration/d=10mm, Pin=100 mW, dist=2mm (EX-Probe)/Zoom Scan (8x8x8) (8x8x6)/Cube

0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$; Reference Value = 53.11 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 7.77 W/kg; SAR(10 g) = 2.19 W/kg Maximum value of SAR (measured) = 15.5 W/kg

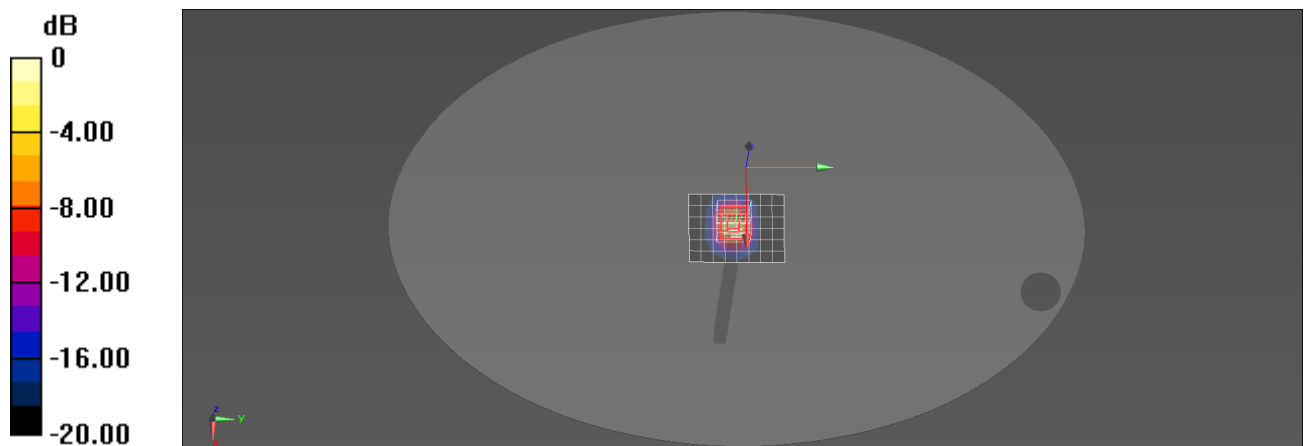

0 dB = 15.5 W/kg = 11.90 dBW/kg

Annex B - Test Data Plots

Plot 1#

Test Date: 02/27/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11b 2437MHz Body Left

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.91 \text{ S/m}$; $\epsilon_r = 53.33$; $\rho = 1000 \text{ kg/m}^3$; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(7.52, 7.52, 7.52) @ 2437 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11b 2437MHz Body Left/Area Scan (6x20x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$; Maximum value of SAR (measured) = 0.410 W/kg

Configuration/802.11b 2437MHz Body Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 10.41 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.733 W/kg

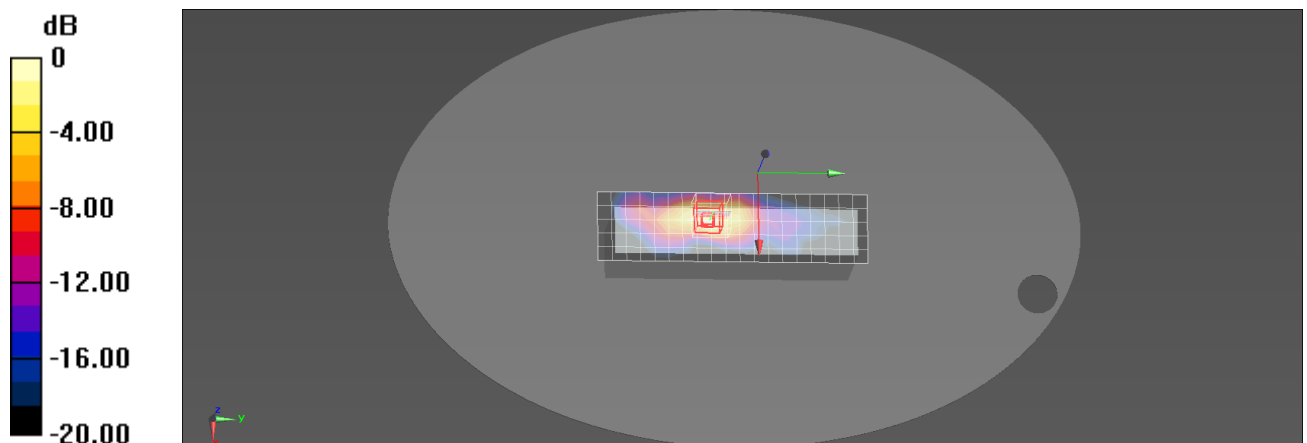SAR(1 g) = 0.361 W/kg; SAR(10 g) = 0.161 W/kg Maximum value of SAR (measured) = 0.421 W/kg


0 dB = 0.421 W/kg = -3.76 dBW/kg

Plot 2#

Test Date: 02/28/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5180MHz Body Left

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(5.05, 5.05, 5.05) @ 5180 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 5180MHz Body Left/Area Scan (7x24x1): Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 1.51 W/kg

Configuration/802.11a 5180MHz Body Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm; Reference Value = 10.34 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 2.87 W/kg

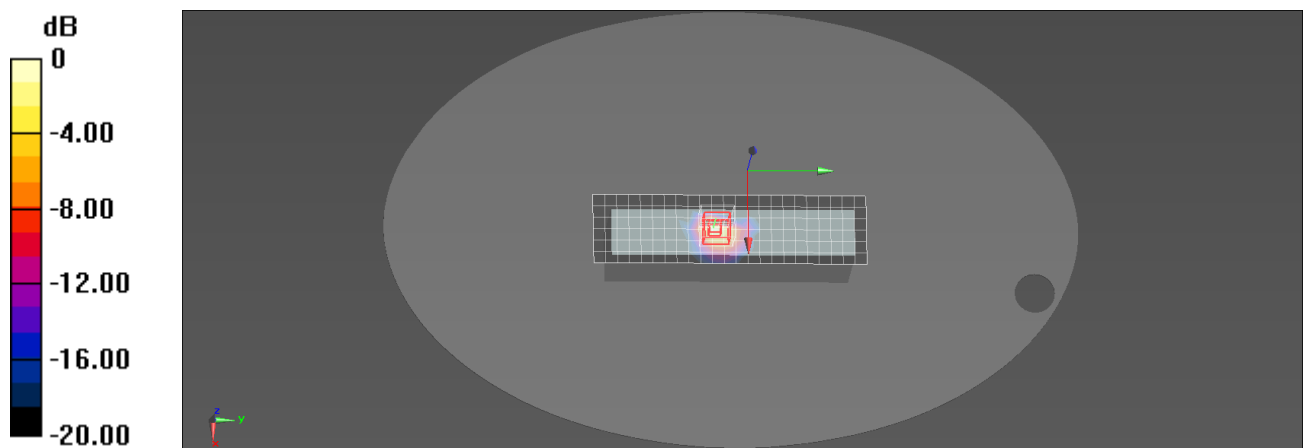SAR(1 g) = 0.770 W/kg; SAR(10 g) = 0.224 W/kg Maximum value of SAR (measured) = 1.58 W/kg


0 dB = 1.58 W/kg = 1.99 dBW/kg

Plot 3#

Test Date: 02/29/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5600MHz Body Left

Communication System: 802.11a; Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600$ MHz; $\sigma = 5.85$ S/m; $\epsilon_r = 47.63$; $\rho = 1000$ kg/m³; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(4.4, 4.4, 4.4) @ 5600 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 5600MHz Body Left/Area Scan (7x24x1): Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 1.89 W/kg

Configuration/802.11a 5600MHz Body Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm; Reference Value = 9.455 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 5.47 W/kg

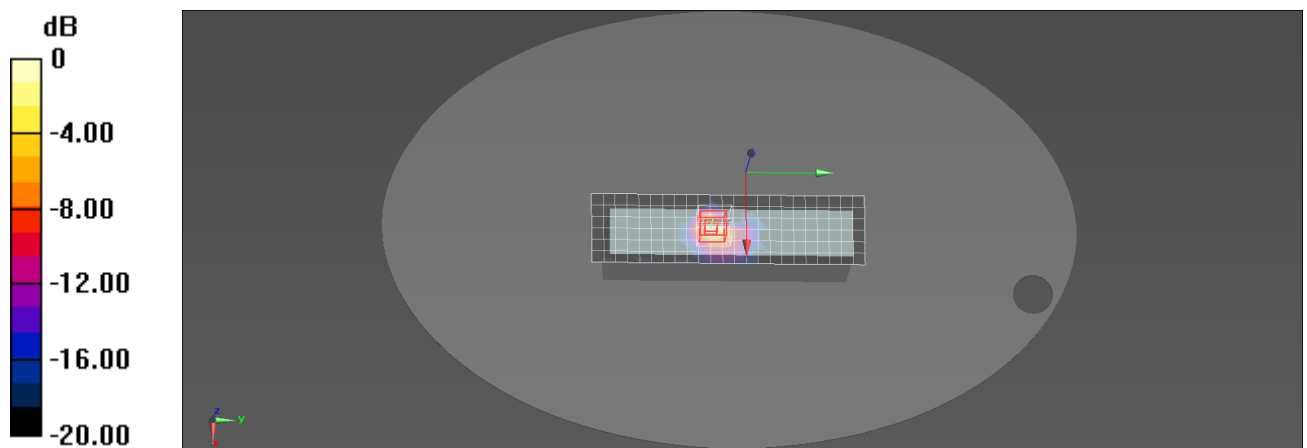SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.247 W/kg Maximum value of SAR (measured) = 1.94 W/kg


0 dB = 1.94 W/kg = 2.88 dBW/kg

Plot 4#

Test Date: 02/29/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5745MHz Body Left

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.07 \text{ S/m}$; $\epsilon_r = 47.35$; $\rho = 1000 \text{ kg/m}^3$; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(4.45, 4.45, 4.45) @ 5745 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 745MHz Body Left/Area Scan (7x24x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 1.80 W/kg

Configuration/802.11a 745MHz Body Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$; Reference Value = 8.563 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 4.40 W/kg

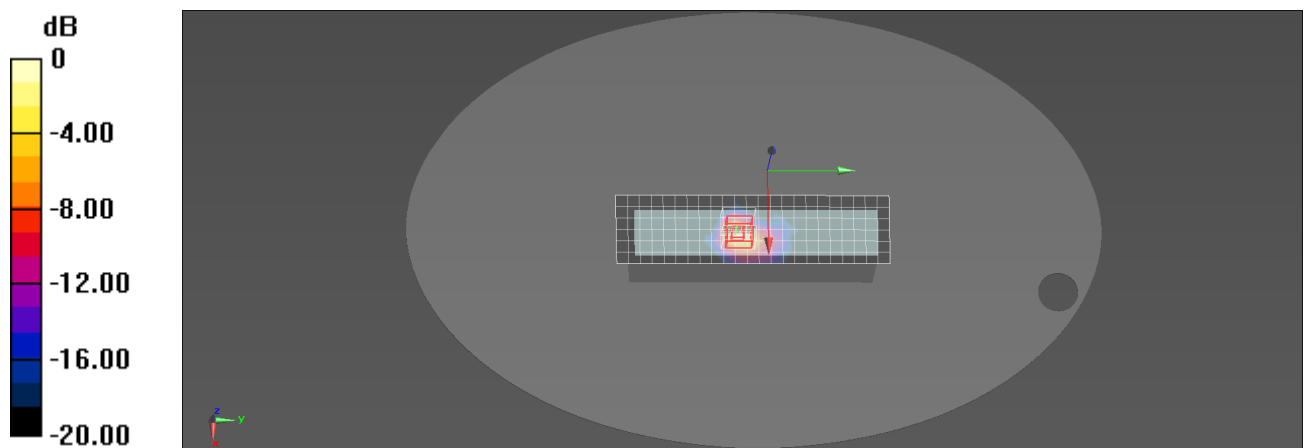SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.281 W/kg Maximum value of SAR (measured) = 2.13 W/kg


0 dB = 2.13 W/kg = 3.28 dBW/kg

Plot 5#

Test Date: 02/27/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: Bluetooth DH5 2441MHz Body Left

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2441 \text{ MHz}$; $\sigma = 1.91 \text{ S/m}$; $\epsilon_r = 53.32$; $\rho = 1000 \text{ kg/m}^3$; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN7524; ConvF(7.52, 7.52, 7.52) @ 2441 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/Bluetooth DH5 2441MHz Body Left/Area Scan (6x20x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$; Maximum value of SAR (measured) = 0.0859 W/kg

Configuration/Bluetooth DH5 2441MHz Body Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$; Reference Value = 3.787 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.150 W/kg

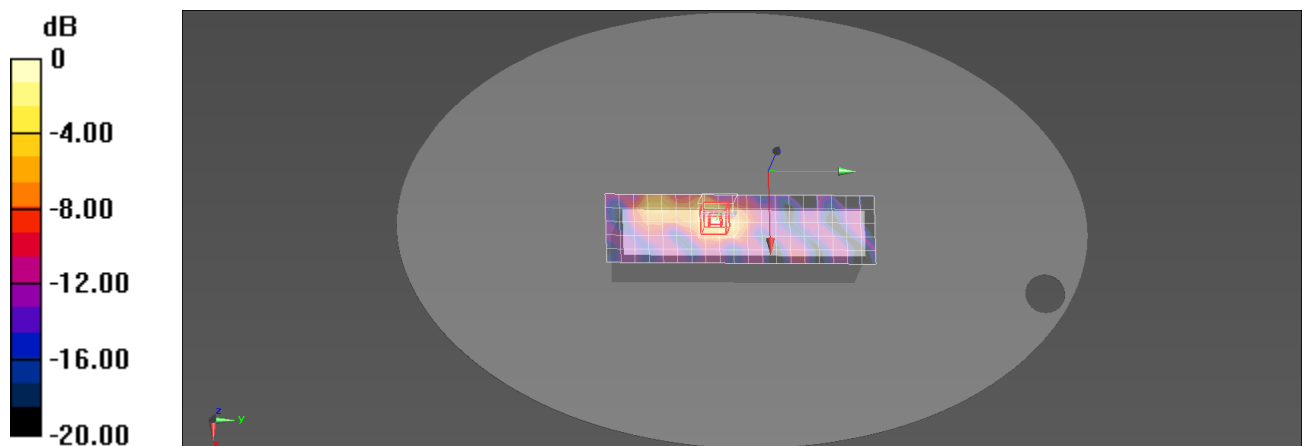SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.030 W/kg Maximum value of SAR (measured) = 0.0860 W/kg


0 dB = 0.0860 W/kg = -10.66 dBW/kg

Plot 6#

Test Date: 02/27/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11b 2437MHz Extremity Left

Communication System: 802.11b; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 53.33$; $\rho = 1000$ kg/m³; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7524; ConvF(7.52, 7.52, 7.52) @ 2437 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11b 2437MHz Extremity Left/Area Scan (6x20x1): Measurement grid: dx=12mm, dy=12mm; Maximum value of SAR (measured) = 1.24 W/kg

Configuration/802.11b 2437MHz Extremity Left/Zoom Scan (7x7x7)/Cube 0: Measurement grid:

dx=5mm, dy=5mm, dz=5mm; Reference Value = 17.68 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.81 W/kg

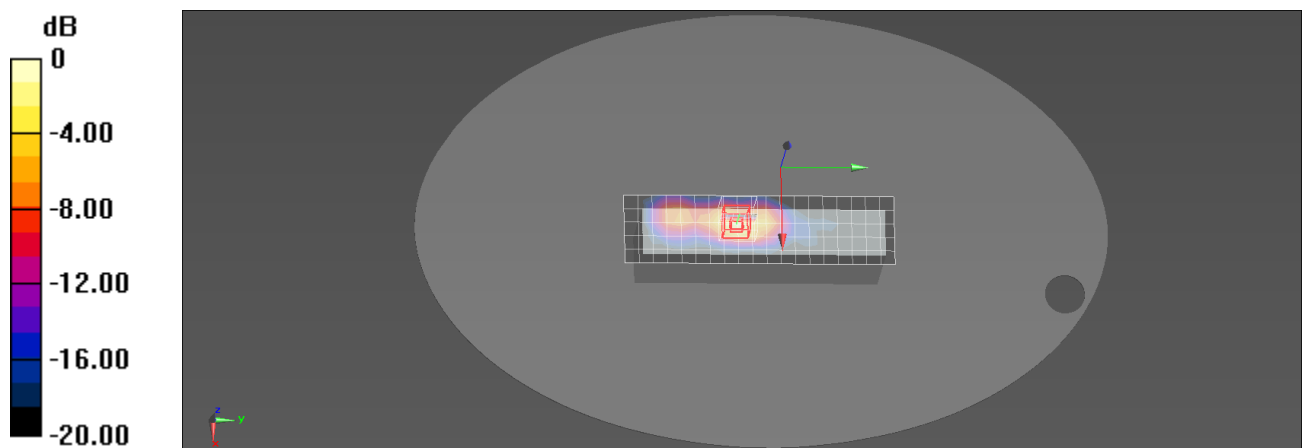SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.436 W/kg Maximum value of SAR (measured) = 1.31 W/kg


0 dB = 1.31 W/kg = 1.17 dBW/kg

Plot 7#

Test Date: 02/28/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5180MHz Extremity Left

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5180$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 48.47$; $\rho = 1000$ kg/m³; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7524; ConvF(5.05, 5.05, 5.05) @ 5180 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 5180MHz Extremity Left/Area Scan (7x24x1): Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 6.19 W/kg

Configuration/802.11a 5180MHz Extremity Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm; Reference Value = 10.70 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 12.2 W/kg

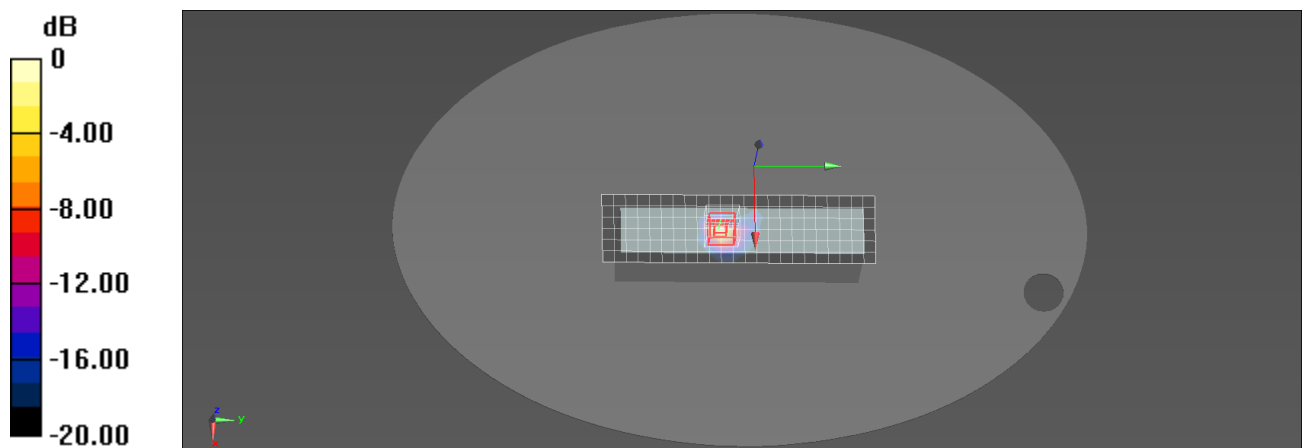SAR(1 g) = 2.78 W/kg; SAR(10 g) = 0.646 W/kg Maximum value of SAR (measured) = 6.29 W/kg


0 dB = 6.29 W/kg = 7.99 dBW/kg

Plot 8#

Test Date: 02/29/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5720MHz Extremity Left

Communication System: 802.11a; Frequency: 5720 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5720$ MHz; $\sigma = 6.03$ S/m; $\epsilon_r = 47.4$; $\rho = 1000$ kg/m³; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7524; ConvF(4.45, 4.45, 4.45) @ 5720 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 5720MHz Extremity Left/Area Scan (7x24x1): Measurement grid: dx=10mm, dy=10mm; Maximum value of SAR (measured) = 7.80 W/kg

Configuration/802.11a 5720MHz Extremity Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid:

dx=4mm, dy=4mm, dz=2mm; Reference Value = 11.55 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 16.5 W/kg

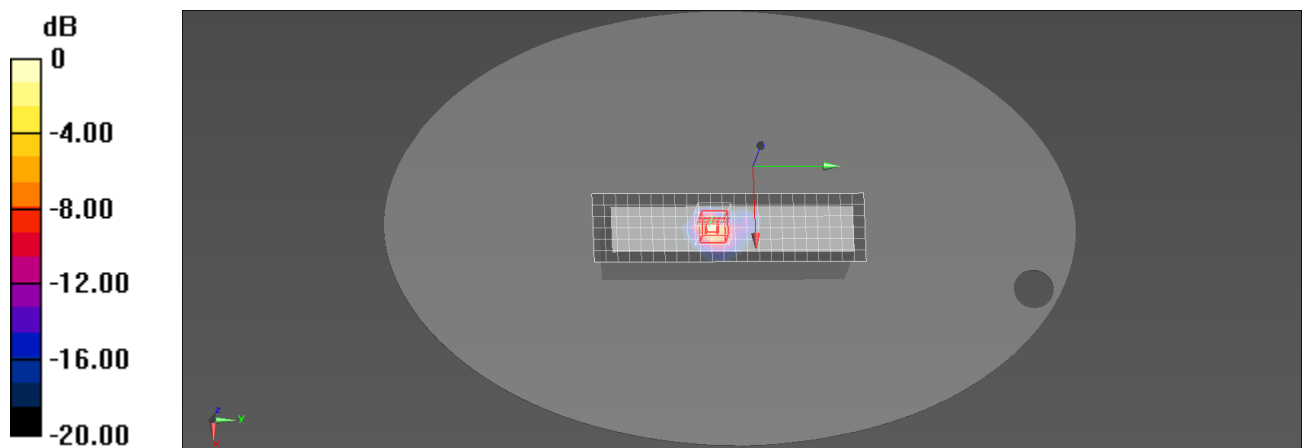SAR(1 g) = 3.33 W/kg; SAR(10 g) = 0.776 W/kg Maximum value of SAR (measured) = 7.01 W/kg


0 dB = 7.01 W/kg = 8.46 dBW/kg

Plot 9#

Test Date: 02/29/2020

DUT: Mobile Computer; Type: EDA61K-0
Procedure Name: 802.11a 5745MHz Extremity Left

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.07 \text{ S/m}$; $\epsilon_r = 47.35$; $\rho = 1000 \text{ kg/m}^3$; Tissue

Temp (celsius)-22.5°C; Phantom section: Flat Section

DASY5 Configuration:


- Probe: EX3DV4 - SN7524; ConvF(4.45, 4.45, 4.45) @ 5745 MHz; Calibrated: 4/18/2019
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1552; Calibrated: 5/23/2019
- Phantom: SAM2; Type: QD OVA 004 AA; Serial: 2089
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7450)

Configuration/802.11a 745MHz Extremity Left/Area Scan (7x24x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$; Maximum value of SAR (measured) = 7.49 W/kg

Configuration/802.11a 745MHz Extremity Left/Zoom Scan (8x8x6)/Cube 0: Measurement grid:

 $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$; Reference Value = 12.05 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 16.5 W/kg

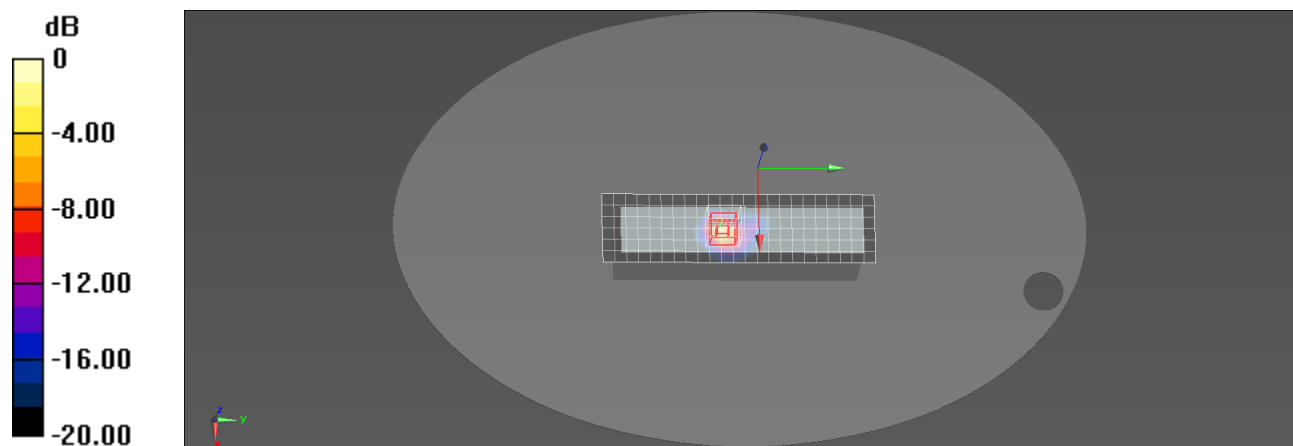SAR(1 g) = 3.41 W/kg; SAR(10 g) = 0.799 W/kg Maximum value of SAR (measured) = 7.34 W/kg


0 dB = 7.34 W/kg = 8.66 dBW/kg

Annex C - SAR Test Setup Photos

Please refer to document “2001RSU045-UT”.

Annex D - EUT External Photos

Please refer to document “2001RSU045-UE”.

Annex E - Equipment Calibration Report

Please refer to document “Annex E - Equipment Calibration Report.pdf”.

The End