



Test Report No.:
FCC2022-0065-RF1

RF Test Report

EUT : **LNK3 Mobile Printer**
MODEL : **LNK3-0**
BRAND NAME : **Honeywell**
APPLICANT : **HONEYWELL INTERNATIONAL INC.**
HONEYWELL SAFETY AND PRODUCTIVITY SOLUTIONS
CLASSIFICATION OF TEST : **N/A**

CVC Testing Technology Co., Ltd.



CVC Testing Technology Co., Ltd.

Test Report No.: FCC2022-0065-RF1

Page 2 of 66

Applicant	Name : HONEYWELL INTERNATIONAL INC. HONEYWELL SAFETY AND PRODUCTIVITY SOLUTIONS Address : 9680 OLD BAILES RD., FORT MILL SC 29707-7539, USA		
Manufacturer	Name : HONEYWELL INTERNATIONAL INC. HONEYWELL SAFETY AND PRODUCTIVITY SOLUTIONS Address : 9680 OLD BAILES RD., FORT MILL SC 29707-7539, USA		
Equipment Under Test	Name: LNX3 Mobile Printer Model/Type: LNX3-0 Brand: Honeywell Serial No.: N/A Sample No.: 3-1		
Date of Receipt.	2022.08.29	Date of Testing	2022.08.30~2022.11.10
Test Specification		Test Result	
FCC Part 15, Subpart C, Section 15.247 Canada RSS-247 Issue 2 (2017-02) Canada RSS-Gen Issue 5+A1+A2 (2021-02)		PASS	
Evaluation of Test Result	The equipment under test was found to comply with the requirements of the standards applied. Seal of CVC Issue Date: 2022.12.29		
Tested by:  Xu ZhenFei Name Signature	Reviewed by:  Liu YongHai Name Signature	Approved by:  Chen HuaWen Name Signature	
Other Aspects: NONE.			
Abbreviations: OK, Pass= passed Fail = failed N/A= not applicable EUT= equipment, sample(s) under tested			

This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.



TABLE OF CONTENTS

1	SUMMARY OF TEST RESULTS	6
1.1	LIST OF TEST AND MEASUREMENT INSTRUMENTS	7
1.2	MEASUREMENT UNCERTAINTY	8
1.3	TEST LOCATION	8
2	GENERAL INFORMATION	9
2.1	GENERAL PRODUCT INFORMATION	9
2.2	OTHER INFORMATION	10
2.3	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
2.4	GENERAL DESCRIPTION OF APPLIED STANDARDS	13
2.5	DESCRIPTION OF SUPPORT UNITS	13
3	TEST TYPES AND RESULTS	14
3.1	CONDUCTED EMISSION MEASUREMENT	14
3.1.1	LIMIT	14
3.1.2	MEASUREMENT PROCEDURE	14
3.1.3	TEST SETUP	14
3.1.4	TEST RESULTS	15
3.2	RADIATED EMISSIONS	17
3.2.1	LIMITS	17
3.2.2	MEASUREMENT PROCEDURE	17
3.2.3	TEST SETUP	19
3.2.4	TEST RESULTS	21
3.3	NUMBER OF HOPPING FREQUENCY USED	29
3.3.1	LIMITS	29
3.3.2	MEASUREMENT PROCEDURE	29
3.3.3	TEST SETUP	29
3.3.4	TEST RESULT	29
3.4	DWELL TIME ON EACH CHANNEL	30
3.4.1	LIMITS	30
3.4.2	MEASUREMENT PROCEDURE	30
3.4.3	TEST SETUP	30
3.4.4	TEST RESULT	30
3.5	20DB EMISSION BANDWIDTH	31
3.5.1	LIMITS	31
3.5.2	MEASUREMENT PROCEDURE	31
3.5.3	TEST SETUP	31
3.5.4	TEST RESULT	31
3.6	HOPPING CHANNEL SEPARATION	32
3.6.1	LIMITS	32
3.6.2	MEASUREMENT PROCEDURE	32
3.6.3	TEST SETUP	32
3.6.4	TEST RESULT	32
3.7	CONDUCTED OUTPUT POWER	33
3.7.1	LIMITS(FCC)	33
3.7.2	LIMITS(IC)	33
3.7.3	MEASUREMENT PROCEDURE	33
3.7.4	TEST SETUP	33
3.7.5	TEST RESULT	33
3.8	OUT OF BAND EMISSION MEASUREMENT	34
3.8.1	LIMITS	34
3.8.2	MEASUREMENT PROCEDURE	34
3.8.3	TEST SETUP	34



3.8.4	TEST RESULT	34
3.9	OCCUPIED BANDWIDTH MEASUREMENT	35
3.9.1	MEASUREMENT PROCEDURE	35
3.9.2	TEST SETUP	35
3.9.3	TEST RESULT	35
4	PHOTOGRAPHS OF TEST SETUP	36
5	PHOTOGRAPHS OF THE EUT	37
6	APPENDIX A	38
6.1	20DB EMISSION BANDWIDTH	38
6.1.1	TEST RESULT	38
6.1.2	TEST GRAPHS	39
6.2	CONDUCTED OUTPUT POWER	42
6.2.1	TEST RESULT PEAK	42
6.2.1	TEST RESULT AVERAGE	42
6.3	HOPPING CHANNEL SEPARATION	43
6.3.1	TEST RESULT	43
6.3.2	TEST GRAPHS	44
6.4	DELL TIME OF EACH CHANNEL	45
6.4.1	TEST RESULT	45
6.4.1	TEST GRAPHS	46
6.5	NUMBER OF HOPPING CHANNELS	49
6.5.1	TEST RESULT	49
6.5.2	TEST GRAPHS	50
6.6	BAND EDGE MEASUREMENTS	51
6.6.1	TEST RESULT	51
6.6.2	TEST GRAPHS	52
6.7	OUT OF BAND EMISSION MEASUREMENT	56
6.7.1	TEST RESULT	56
6.7.1	TEST GRAPHS	57
6.8	OCCUPIED CHANNEL BANDWIDTH	62
6.8.1	TEST RESULT	62
6.8.2	TEST GRAPHS	63



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2022-0065-RF1	Original release	2022.12.29



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15 Subpart C, Canada RSS-247, Canada RSS-Gen			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS	Meet the requirement of limit
RSS-Gen 6.7	Occupied Bandwidth Measurement	PASS	Meet the requirement of limit
FCC Part 15.247(a)(1) RSS-247 5.1(d)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1) RSS-247 5.1(b)	Hopping Channel Separation	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1) RSS-247 5.1(d)	Dwell Time of Each Channel	PASS	Meet the requirement of limit.
FCC Part 15.247(a)(1)	20dB Emissions Bandwidth	PASS	Meet the requirement of limit.
FCC Part 15.247(b) RSS-247 5.4(b)	Conducted Output Power	PASS	Meet the requirement of limit.
FCC Part 15.247(d), FCC Part 15.209,15.205 RSS-Gen 8.10 Table 7 RSS-Gen 8.9 Table 5	Radiated Emissions	PASS	Meet the requirement of limit.
FCC Part 15.247(d) RSS-247 5.5	Out of band Emission Measurement	PASS	Meet the requirement of limit.
FCC Part 15.203 FCC Part 15.247(b)	Antenna Requirement	PASS	No antenna connector is used.



1.1 LIST OF TEST AND MEASUREMENT INSTRUMENTS

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
WIFI & Bluetooth Test System 1					/
Communication Shielded Room 2	4m*3m*3m	CRTDSWKSR44301	VGDS-0700	CRT	2024/04/24
Bluetooth system integration	/	/	-	Tonscend	/
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2023/06/05
Comprehensive Test Instrument	CMW270	100304	DZ-000240-1	R&S	2023/12/06
Analog Signal Generator	SMB100A	181858	DZ-000238-2	R&S	2023/06/05
Vector Signal Generator	SGT100A	111661	DZ-000238-1	R&S	2023/06/05
RF Radio Frequency Switch	JS0806-2	19H9080187		Tonscend	2023/06/06
Programmable DC Power Supply	E3644A	MY58036222	DZ-000178	KEYSIGHT	2023/04/21
Radiation Spurious Test System					/
3m Semi-Anechoic Chamber	FACT-4	ST08035	WKNA-0024	ETS	2024/12/12
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2023/03/02
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2023/03/02
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2023/06/25
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2023/03/04
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWARZBECK	2023/07/31
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2023/06/05
5G Bandstop Filters	WRCJV12-4900-5100-5900-6100-50EE	851770	DZ-000186	WI	2023/12/06
Comprehensive tester	CMW500	159000	DZ-000240-2	R&S	2023/12/06
Conducted emission					/
EMI Test Receiver	ESCI	100857	WKNB-0081	R&S	2023-12-08
EMI Test Receiver	ESR3	102394	VG DY-0705	R&S	2023-03-04
LISN	NSLK 8127	8127644	VG DY-0150	SCHWARZBECK	2023-09-04
LISN	NSLK 8128	8128-316	VG DY-0149	SCHWARZBECK	2023-09-04
LISN	NSLK 8129	8129-268	EM-000388	SCHWARZBECK	2023-03-03
Plus Limiter (#1)	VTSD 9561 F-N	00515	VG DY-0808	SCHWARZBECK	2023-03-04
Plus Limiter (#2)	VTSD 9561	9561-F017	VG DY-0152	SCHWARZBECK	2024-09-04
Impedance Stabilization Network	ISN T800	27095	WKNE-0195	TESEQ	2023-09-04
Impedance Stabilization Network	NTFM8158	8158-0092	VG DY-0356	SCHWARZBECK	2023-06-07
ImpedanceStabilizationNetwork	NTFM8131	#184	EM-000498	SCHWARZBECK	2023-06-07
Voltage Probe	TK9420	9420-499	VG DY-0128	SCHWARZBECK	2023-03-04
Power Divider	4901.17.B	22643830	DB-0016	HUBER+SUHNER	2023-09-01
Video Signal Generator	GV-798+	151064920001	VGDS-0215	PROMAX	2023-05-30
Audio Signal Generator	GAG-810	EK871591	EM-000309	GW	2023-12-08
Shielding Room(#1)	GP1A	001	WKNF-0001	LEINING	2024-08-08
Shielding Room(#2)	GP1A	002	WKNF-0006	LEINING	2024-08-08
Current probe	EZ-17	0816.2063.02	EM-000567	R&S	2023-01-16



1.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	ITEM	FREQUENCY	UNCERTAINTY
1	Conducted Emissions	9kHz~30MHz	±2.66dB
2	Radiated Spurious Emissions	9KHz ~ 30MHz	±0.769dB
		30MHz ~ 1GMHz	±0.877dB
		1GHz ~ 18GHz	±0.777dB
		18GHz ~ 40GHz	±1.315dB

1.3 TEST LOCATION

The tests and measurements refer to this report were performed by EMC testing Lab. of CVC Testing Technology Co., Ltd.

Address: No.3,TiantaiyiRoad,KaitaiAvenue,ScienceCity,Guangzhou,China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: office@cvc.org.cn



2 GENERAL INFORMATION

2.1 GENERAL PRODUCT INFORMATION

PRODUCT	LN3 Mobile Printer
BRAND	Honeywell
MODEL	LN3-0
ADDITIONAL MODEL	N/A
FCC ID	HD5-LN3-0
IC ID	1693B-LN30
POWER SUPPLY	1. DC 7.4V from Li-ion battery 2. DC 5V from Charging base 3. DC 5V from Adapter
MODULATION TYPE	GFSK, $\pi/4$ DQPSK
OPERATING FREQUENCY	2402MHz~2480MHz
NUMBER OF CHANNEL	79
PEAK OUTPUT POWER	4.62dBm (Max. Measured)
ANTENNA TYPE (Remark 4)	PCB Antenna, with 0dBi gain
HARDWARE VERSION:	V1.7
SOFTWARE VERSION:	V1.7
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

Remark:

1. For more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. EUT photo refer to the report (Report NO.: FCC2022-0065).
4. Please refer to the antenna report.
5. The difference between these two models is that the LN3-1 has WiFi and BT modules, while the LN3-0 has only BT modules.
6. Because the models are similar, the LN3-1 model is fully tested for electromagnetic compatibility, and the LN3-0 model is only tested for Radiated Emissions Test, the results of other test items are all referenced from report no.: FCC2022-0062-RF1, which is considered to meet the relevant electromagnetic compatibility requirements.
7. The EUT have SISO function, provides 1 completed transmitter and 1 receiver.



2.2 OTHER INFORMATION

Operation frequency each of channel.

Operation Frequency Each of Channel							
For BT (GFSK, $\pi/4$ DQPSK)							
CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

- The channels which were indicated in bold type of the above channel list were selected as representative test channel. Therefore, only the data of the test channels were recorded in this report.
- By means of test software which provided by manufacture, the power levels during the tests were set according to the following codes:

GFSK		$\pi/4$ -DQPSK	
CHANNEL	POWER SETTING	CHANNEL	POWER SETTING
0	6	0	6
39	6	39	6
78	6	78	6

FIX FREQUENCY SOFTWARE NAME:
BR BLUELETSUITE



2.3 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports

The worst case was found when positioned on xaxis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	APPLICABLE TEST ITEMS				DESCRIPTION
	RSE<1G	RSE≥1G	PLC	APCM	
A	√	√	√	√	BT LINK

Where RSE < 1G: Radiated Emission below 1GHz.

RSE ≥ 1G: Radiated Emission above 1GHz.

PLC: Power Line Conducted Emission.

APCM: Antenna Port Conducted Measurement.

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0	FHSS	GFSK	DH5

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5



POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	BT Link

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
A	0, 39, 78	FHSS	GFSK	DH5
A	0, 39, 78	FHSS	$\pi/4$ DQPSK	2DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE (SYSTEM)	TESTED BY
RSE<1G	25.2deg. C, 54%RH	DC 5V from Adapter	Liu ShiWei
RSE≥1G	25.2deg. C, 54%RH	DC 5V from Adapter	Liu ShiWei
PLC	24.8deg. C, 57%RH	DC 5V from Adapter	Liu ShiWei
APCM	24.8deg. C, 57%RH	DC 5V from Adapter	Liu ShiWei



2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product, according to the specifications of the manufacturers. It must comply with the requirements of the following standards:

FCC PART 15, SUBPART C. SECTION 15.247
KDB 558074 D01 15.247 MEAS GUIDANCE V05R02
ANSI C63.10-2020
CANADA RSS-247 ISSUE 2 (2017-02)
CANADA RSS-GEN ISSUE 5+A1+A2 (2021-02)

All test items have been performed and recorded as per the above standards

2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Support Equipment							
NO	Description	Brand	Model No.	Serial Number	Supplied by		
1	N/A	N/A	N/A	N/A	N/A		
Support Cable							
NO	Description	Quantity (Number)	Length (m)	Detachable (Yes/ No)	Shielded (Yes/ No)	Cores (Number)	Supplied by
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 Limit

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
NOTE: 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.


3.1.2 Measurement procedure


- The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the Test photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source. The equipment under test shall be placed on a support of non-metallic material, the height of which shall be 1.5m above the ground,
- The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
- Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

3.1.3 Test setup



3.1.4 Test results

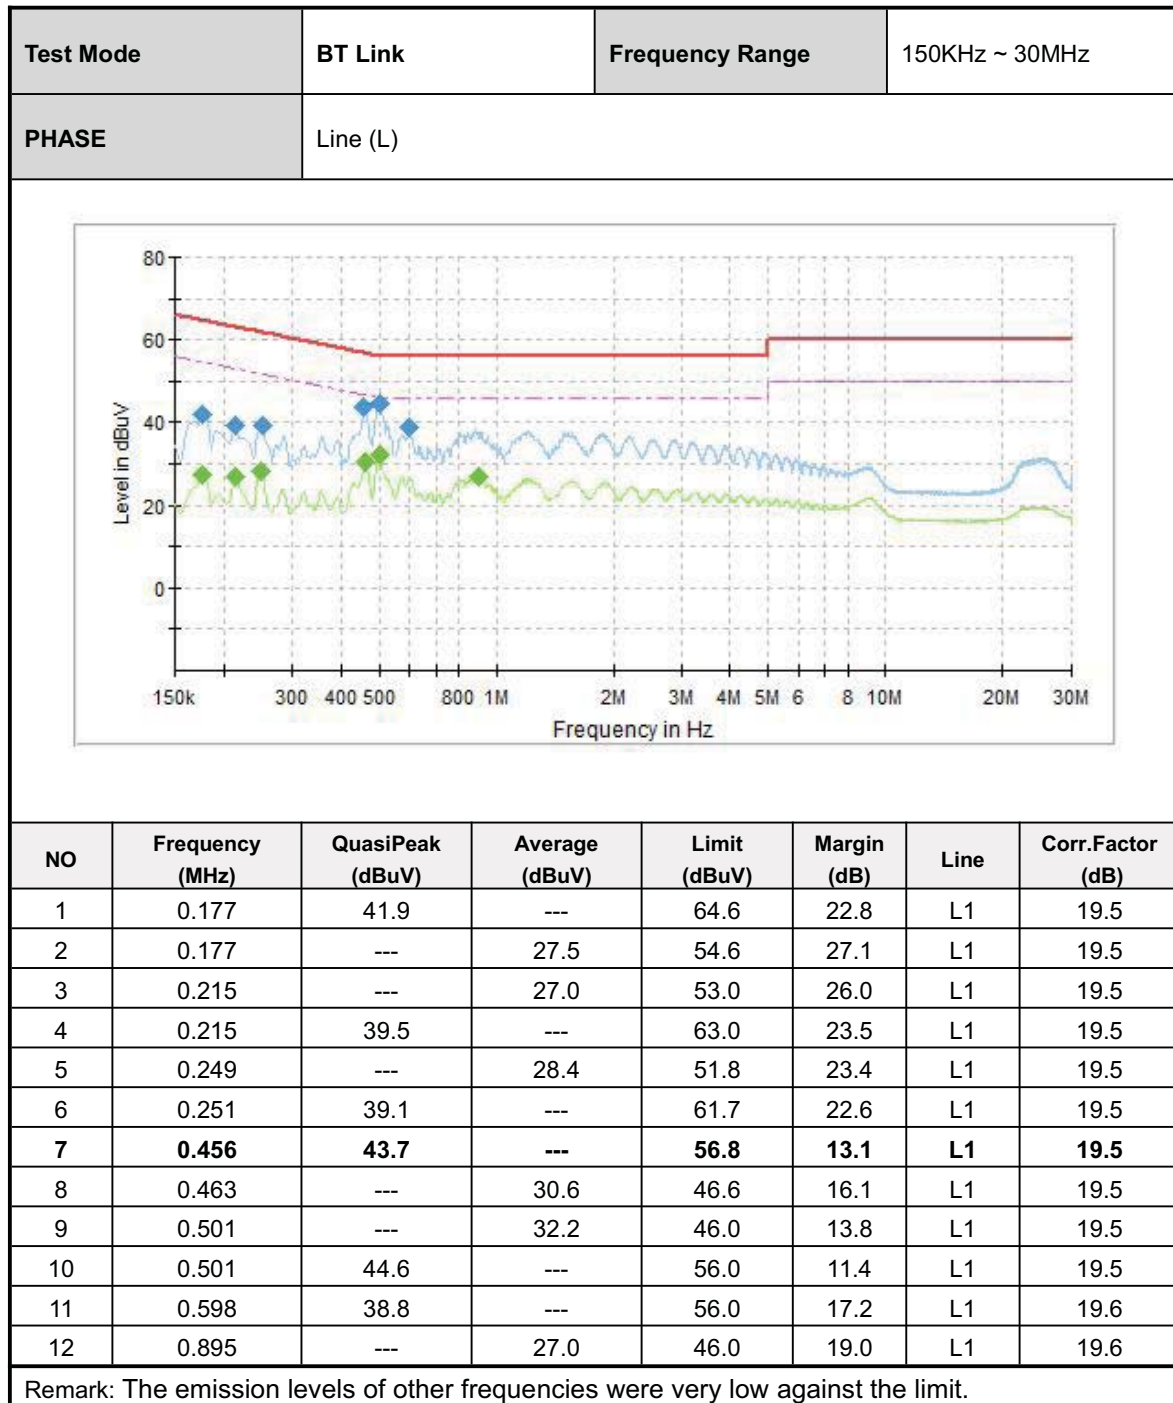

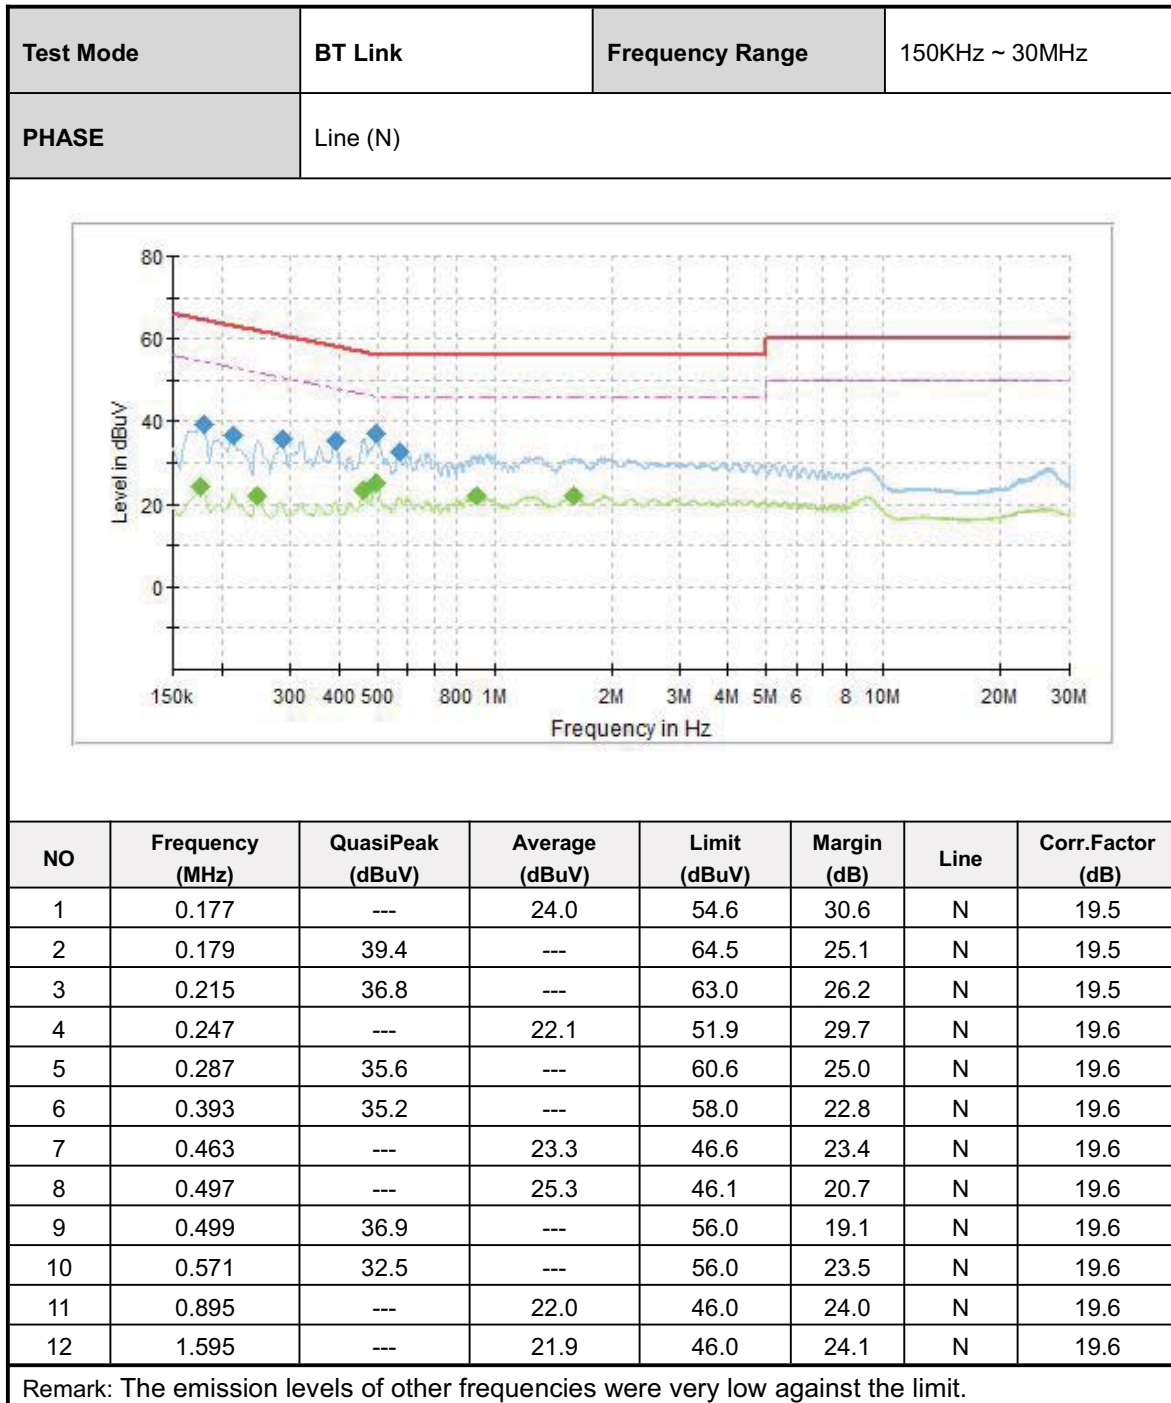



3.2 RADIATED EMISSIONS

3.2.1 Limits

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

FREQUENCIES (MHz)	FIELD STRENGTH (Microvolts/Meter)	MEASUREMENT DISTANCE (Meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE: 1. The lower limit shall apply at the transition frequencies.

NOTE: 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

NOTE: 3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.2.2 Measurement procedure

- The EUT was placed on the top of a rotating table 1.5 meters(above 1GHz) and 0.8 meters(below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.




NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

3.2.3 Test setup


Below 30MHz Test Setup:

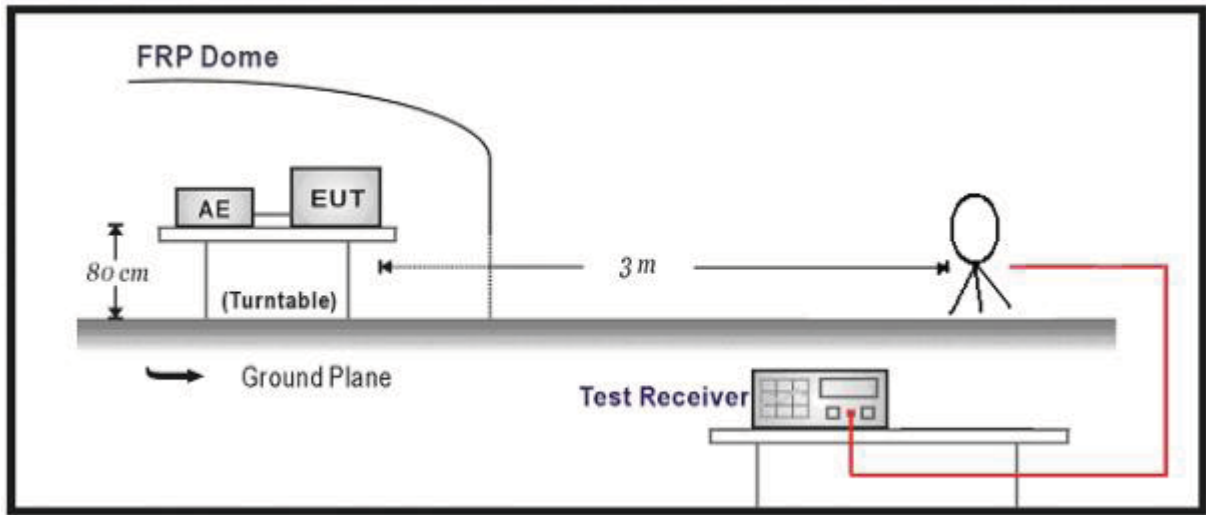

Below 1GHz Test Setup:

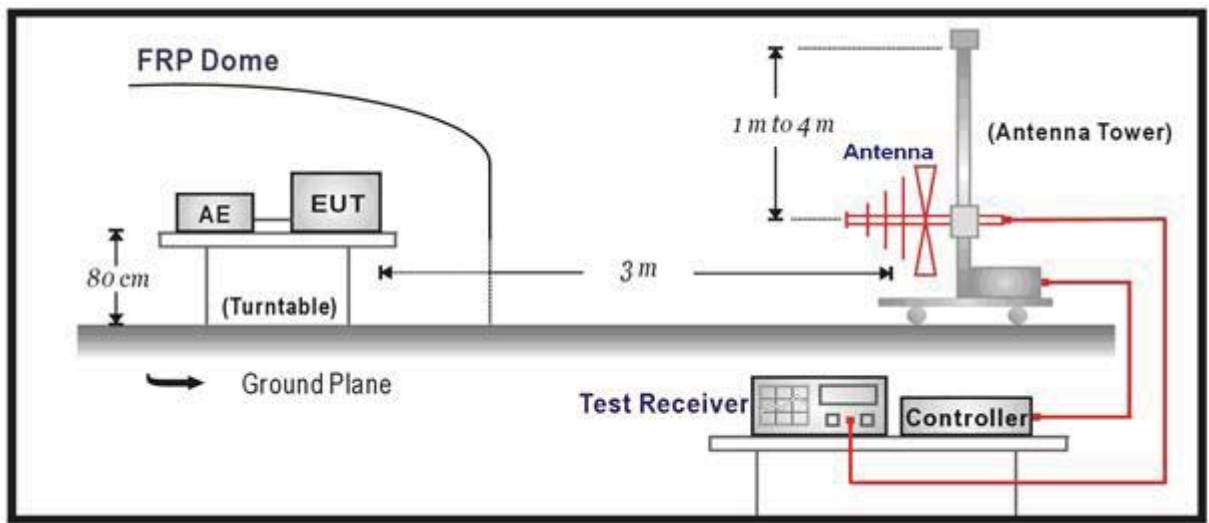


Above 1GHz Test Setup:

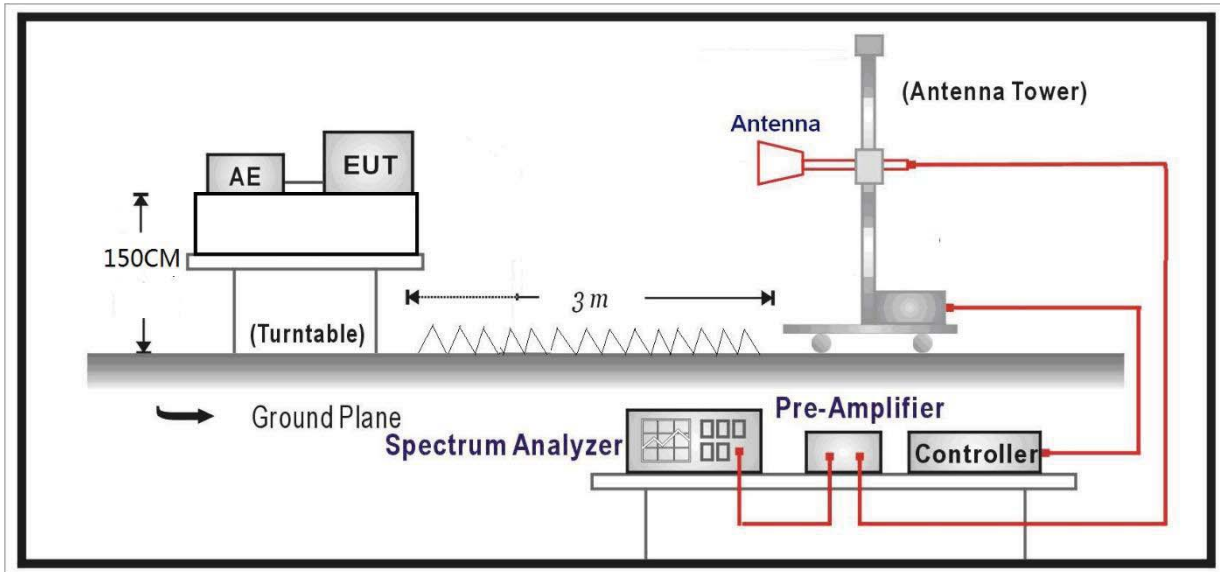




3.2.4 Test results

BELOW 1GHz WORST-CASE DATA:

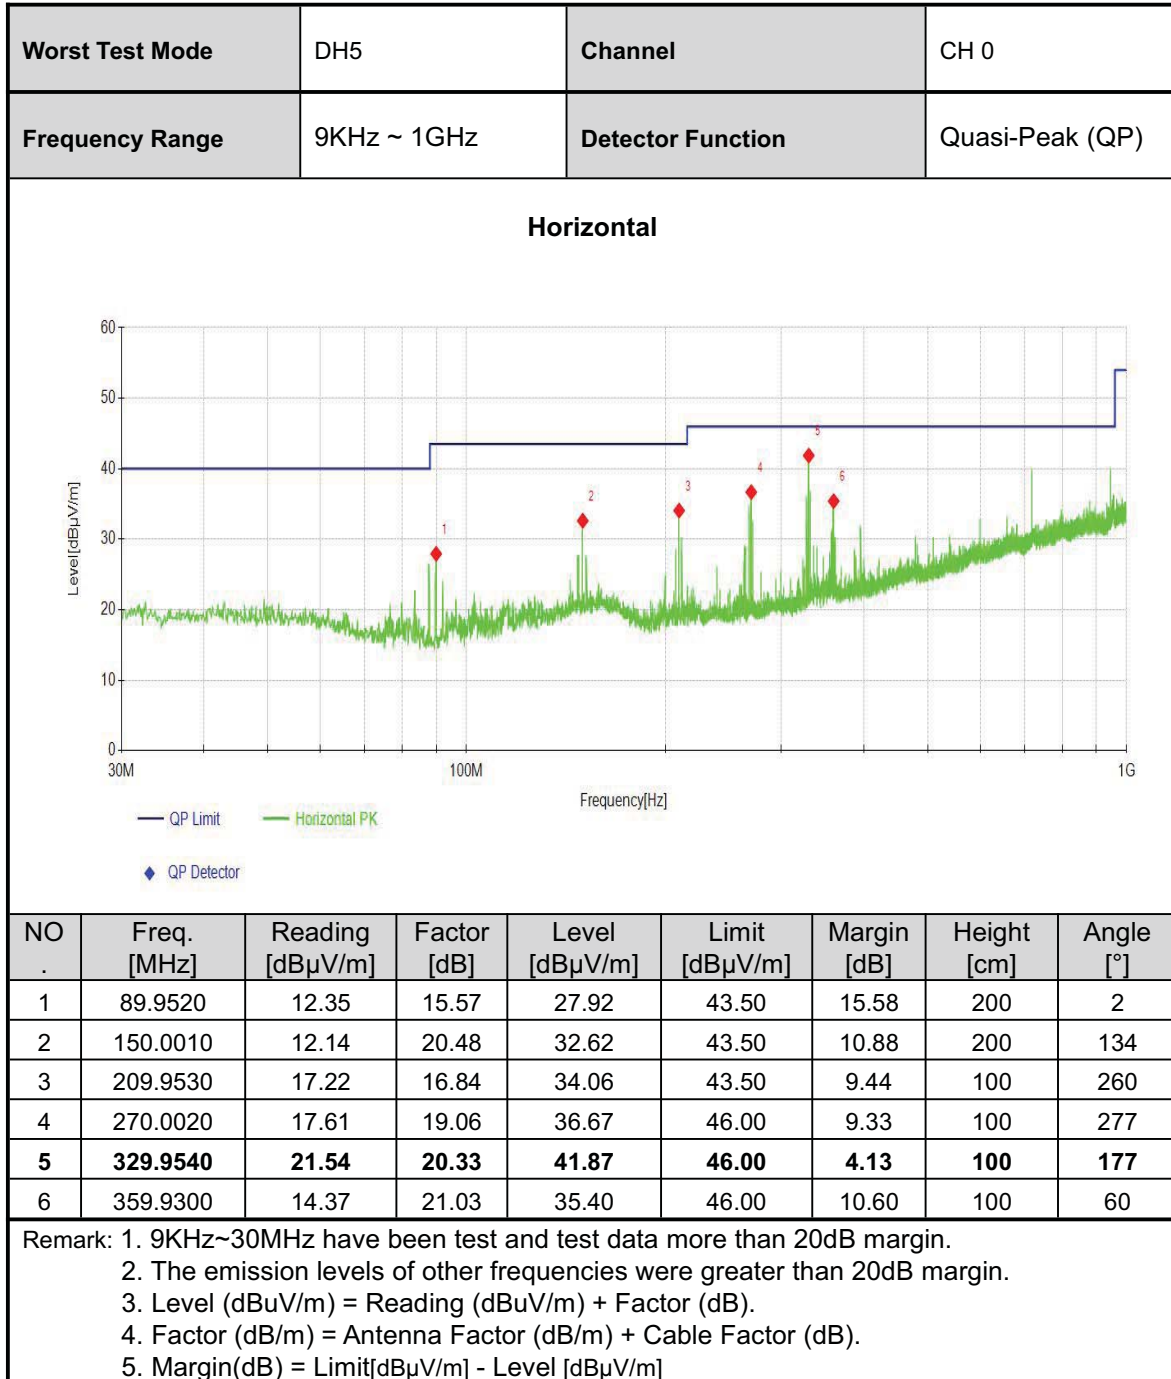

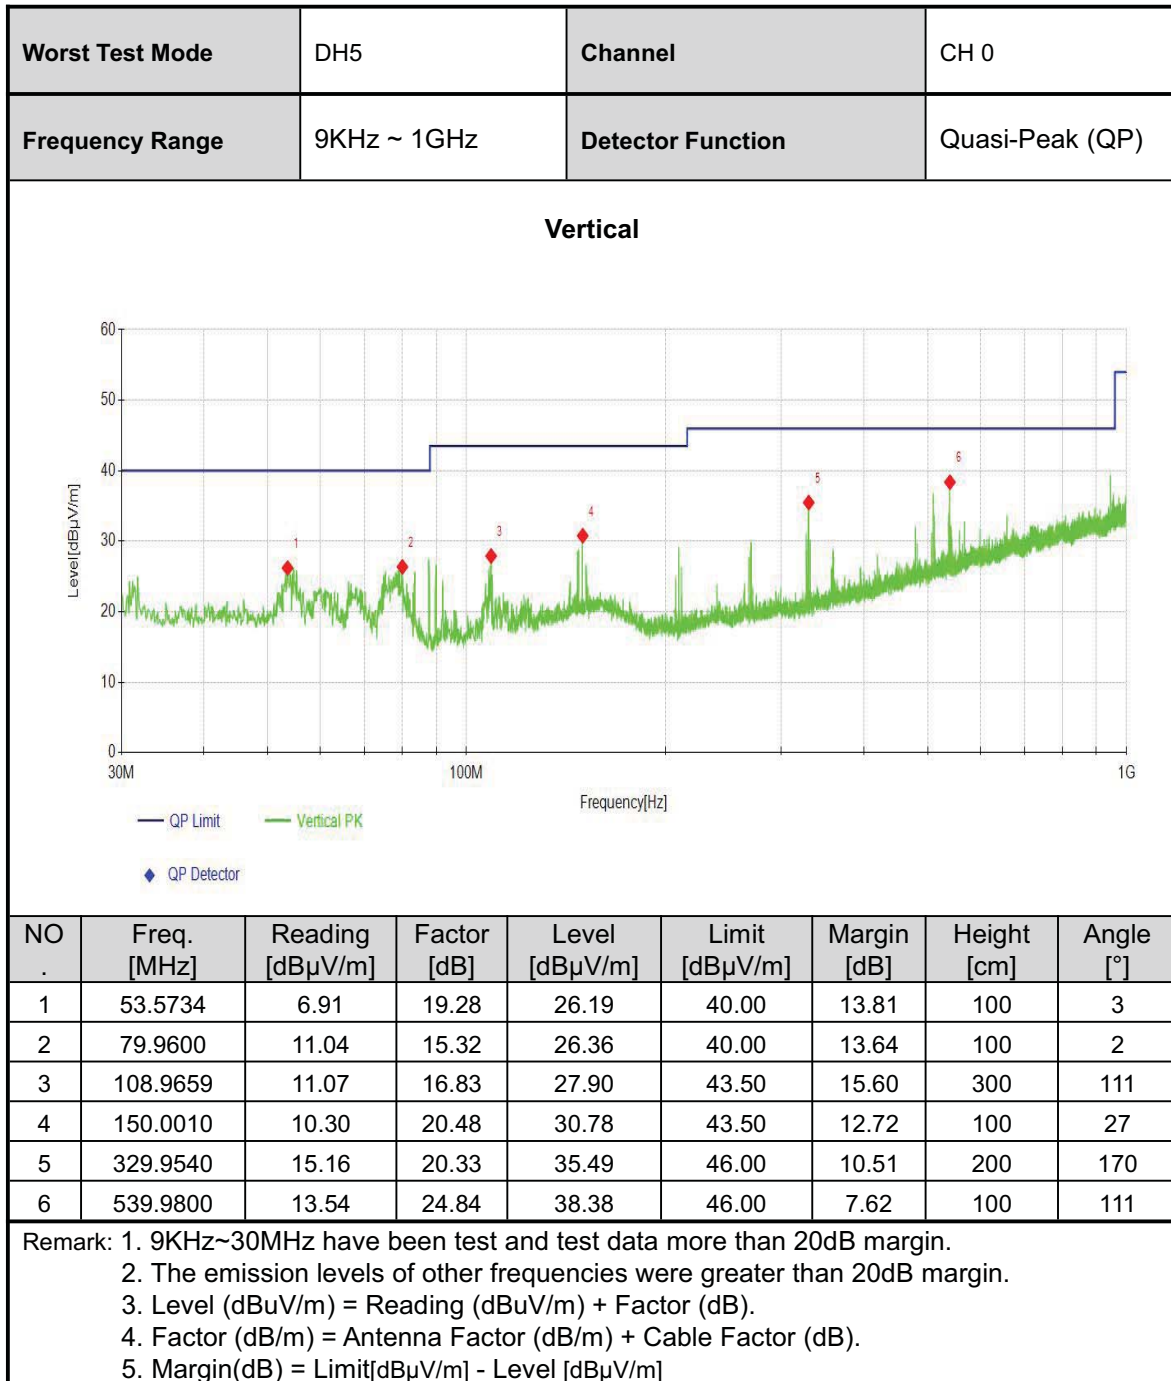

**ABOVE 1GHz DATA****DH5-CH 0**

Channel		CH 0		Frequency		2402MHz			
Frequency Range		Above 1G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390.0000	36.88	-0.15	36.73	54.00	17.27	271	52	PK
2	2390.0000	45.49	-0.15	45.34	74.00	28.66	129	359	AV
3	2401.8742	77.62	-0.03	77.59			201	262	PK
4	2401.8742	77.18	-0.03	77.15			273	262	AV
5	4804.0000	44.30	9.29	53.59	74.00	20.41	282	98	PK
6	4804.0000	36.38	9.29	45.67	54.00	8.33	271	98	AV
7	7206.0000	20.34	12.81	33.15	54.00	20.85	236	292	AV
8	7206.0000	28.05	12.81	40.86	74.00	33.14	260	43	PK
9	9608.0000	27.68	13.32	41.00	74.00	33.00	249	346	PK
10	9608.0000	19.27	13.32	32.59	54.00	21.41	267	138	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390.0000	36.88	-0.15	36.73	54.00	17.27	158	52	AV
2	2390.0000	45.49	-0.15	45.34	74.00	28.66	145	359	PK
3	2401.8742	77.62	-0.03	77.59			278	262	PK
4	2401.8742	77.18	-0.03	77.15			131	262	AV
5	4804.0000	43.07	9.29	52.36	74.00	21.64	203	154	PK
6	4804.0000	35.47	9.29	44.76	54.00	9.24	267	253	AV
7	7206.0000	20.67	12.81	33.48	54.00	20.52	165	244	AV
8	7206.0000	28.22	12.81	41.03	74.00	32.97	186	244	PK
9	9608.0000	27.36	13.32	40.68	74.00	33.32	125	305	PK
10	9608.0000	19.44	13.32	32.76	54.00	21.24	175	301	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBμV/m] - Level [dBμV/m]									



DH5-CH 39

Channel		CH 39		Frequency		2441MHz			
Frequency Range		Above 1G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	44.91	9.84	54.75	74.00	19.25	307	304	PK
2	4882.0000	36.91	9.84	46.75	54.00	7.25	127	68	AV
3	7323.0000	21.09	10.96	32.05	54.00	21.95	217	232	AV
4	7323.0000	29.86	10.96	40.82	74.00	33.18	160	142	PK
5	9764.0000	28.52	13.23	41.75	74.00	32.25	252	302	PK
6	9764.0000	20.43	13.23	33.66	54.00	20.34	178	171	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	43.22	9.84	53.06	74.00	20.94	125	85	PK
2	4882.0000	36.48	9.84	46.32	54.00	7.68	277	85	AV
3	7323.0000	21.80	10.96	32.76	54.00	21.24	124	329	AV
4	7323.0000	29.25	10.96	40.21	74.00	33.79	118	350	PK
5	9764.0000	29.53	13.23	42.76	74.00	31.24	233	145	PK
6	9764.0000	20.19	13.23	33.42	54.00	20.58	146	174	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



DH5-CH 78

Channel		CH 78			Frequency		2480MHz		
Frequency Range		Above 1G			Detector Function		PK/AV		
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480.0250	85.99	0.33	86.32			141	261	PK
2	2480.0290	85.40	0.32	85.72			196	268	AV
3	2483.5000	36.35	0.46	36.81	54.00	17.19	184	137	AV
4	2483.5000	44.89	0.46	45.35	74.00	28.65	258	334	PK
5	4960.0000	48.36	10.69	59.05	74.00	14.95	119	264	PK
6	4960.0000	40.51	10.68	51.19	54.00	2.81	156	276	AV
7	7440.0000	32.06	13.45	45.51	74.00	28.49	304	31	PK
8	7440.0000	20.98	13.72	34.70	54.00	19.30	192	288	AV
9	9920.0000	18.13	17.88	36.01	54.00	17.99	268	272	AV
10	9920.0000	28.13	17.44	45.57	74.00	28.43	252	284	PK
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480.0480	84.15	0.32	84.47			165	243	AV
2	2480.1240	84.57	0.32	84.89			121	243	PK
3	2483.5000	45.13	0.46	45.59	74.00	28.41	238	230	PK
4	2483.5000	37.27	0.46	37.73	54.00	16.27	141	342	AV
5	4960.0000	46.14	10.68	56.82	74.00	17.18	181	105	PK
6	4960.0000	41.17	10.69	51.86	54.00	2.14	213	261	AV
7	7440.0000	21.12	13.73	34.85	54.00	19.15	180	234	AV
8	7440.0000	31.24	12.95	44.19	74.00	29.81	152	8	PK
9	9920.0000	16.12	19.02	35.14	54.00	18.86	272	124	AV
10	9920.0000	25.08	19.35	44.43	74.00	29.57	132	300	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



2DH5-CH 0

Channel		CH 0		Frequency		2402MHz			
Frequency Range		Above 1G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390.0000	36.76	-0.15	36.61	54.00	17.39	282	3	AV
2	2390.0000	44.51	-0.15	44.36	74.00	29.64	164	214	PK
3	2402.0072	83.06	-0.03	83.03			213	286	AV
4	2402.2352	83.81	-0.03	83.78			160	136	PK
5	4804.0000	42.52	9.28	51.80	54.00	2.20	220	83	AV
6	4804.0000	47.91	9.29	57.20	74.00	16.80	130	83	PK
7	7206.0000	30.77	12.17	42.94	74.00	31.06	280	300	PK
8	7206.0000	21.87	12.70	34.57	54.00	19.43	247	211	AV
9	9608.0000	29.55	13.34	42.89	74.00	31.11	247	279	PK
10	9608.0000	22.98	13.32	36.30	54.00	17.70	138	76	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2390.0000	36.29	-0.15	36.14	54.00	17.86	237	16	AV
2	2390.0000	44.35	-0.15	44.20	74.00	29.80	151	88	PK
3	2402.0602	81.55	-0.04	81.51			236	251	AV
4	2402.0982	82.69	-0.04	82.65			195	251	PK
5	4804.0000	39.90	9.29	49.19	54.00	4.81	260	227	AV
6	4804.0000	45.67	9.72	55.39	74.00	18.61	123	354	PK
7	7206.0000	29.63	12.85	42.48	74.00	31.52	162	296	PK
8	7206.0000	20.61	12.81	33.42	54.00	20.58	181	223	AV
9	9608.0000	29.55	13.18	42.73	74.00	31.27	233	7	PK
10	9608.0000	20.52	13.15	33.67	54.00	20.33	236	7	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



2DH5-CH 39

Channel		CH 39		Frequency		2441MHz			
Frequency Range		Above 1G		Detector Function		PK/AV			
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	39.46	9.83	49.29	54.00	4.71	309	276	AV
2	4882.0000	47.54	9.84	57.38	74.00	16.62	232	82	PK
3	7323.0000	20.95	13.32	34.27	54.00	19.73	142	6	AV
4	7323.0000	29.37	13.70	43.07	74.00	30.93	204	104	PK
5	9764.0000	17.87	18.07	35.94	54.00	18.06	220	238	AV
6	9764.0000	26.42	17.41	43.83	74.00	30.17	223	296	PK
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	4882.0000	37.97	9.84	47.81	54.00	6.19	146	256	AV
2	4882.0000	45.02	10.61	55.63	74.00	18.37	220	210	PK
3	7323.0000	20.90	13.61	34.51	54.00	19.49	187	0	AV
4	7323.0000	31.11	13.61	44.72	74.00	29.28	213	0	PK
5	9764.0000	18.60	17.63	36.23	54.00	17.77	148	132	AV
6	9764.0000	27.76	17.65	45.41	74.00	28.59	285	50	PK
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



2DH5-CH 78

Channel		CH 78			Frequency		2480MHz		
Frequency Range		Above 1G			Detector Function		PK/AV		
Horizontal									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480.1620	80.62	0.32	80.94			286	267	PK
2	2480.2000	79.63	0.32	79.95			153	267	AV
3	2483.5000	36.84	0.46	37.30	54.00	16.70	301	91	AV
4	2483.5000	44.92	0.46	45.38	74.00	28.62	152	162	PK
5	4960.0000	44.16	10.69	54.85	74.00	19.15	290	256	PK
6	4960.0000	34.29	10.69	44.98	54.00	9.02	203	150	AV
7	7440.0000	21.47	9.75	31.22	54.00	22.78	160	84	AV
8	7440.0000	29.47	9.75	39.22	74.00	34.78	116	84	PK
9	9920.0000	27.86	13.83	41.69	74.00	32.31	241	198	PK
10	9920.0000	19.31	13.83	33.14	54.00	20.86	237	198	AV
Vertical									
NO	Freq. [MHz]	Reading [dBμV/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Remark
1	2480.1810	78.24	0.32	78.56			228	244	AV
2	2480.2000	79.27	0.32	79.59			200	244	PK
3	2483.5000	36.68	0.46	37.14	54.00	16.86	275	54	AV
4	2483.5000	45.30	0.46	45.76	74.00	28.24	272	205	PK
5	4960.0000	42.50	10.69	53.19	74.00	20.81	205	1	PK
6	4960.0000	34.54	10.69	45.23	54.00	8.77	190	349	AV
7	7440.0000	21.87	9.75	31.62	54.00	22.38	172	271	AV
8	7440.0000	28.81	9.75	38.56	74.00	35.44	197	103	PK
9	9920.0000	27.12	13.83	40.95	74.00	33.05	276	232	PK
10	9920.0000	19.24	13.83	33.07	54.00	20.93	310	103	AV
Remark: 1. The emission levels of other frequencies were greater than 20dB margin. 2. Level (dBuV/m) = Reading (dBuV/m) + Factor (dB). 3. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB). 4. Margin(dB) = Limit[dBuV/m] - Level [dBuV/m]									



3.3 NUMBER OF HOPPING FREQUENCY USED


3.3.1 Limits

At least 15 channels frequencies, and should be equally spaced.

3.3.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- Set the SA on View mode and then plot the result on SA screen.
- Repeat above procedures until all frequencies measured were completed.

3.3.3 Test setup

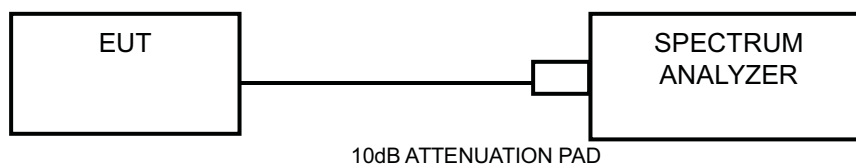

3.3.4 Test result

Refer to Appendix A.



3.4 DWELL TIME ON EACH CHANNEL


3.4.1 Limits

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 Measurement procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

3.4.3 Test setup

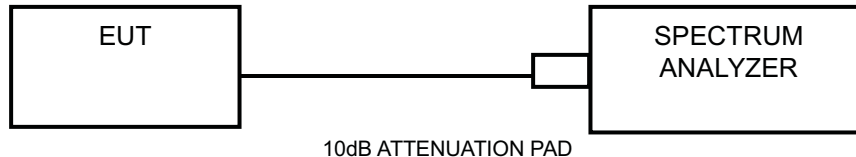

3.4.4 Test result

Refer to Appendix A.



3.5 20dB EMISSION BANDWIDTH


3.5.1 Limits

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation

3.5.2 Measurement procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- Repeat above procedures until all frequencies measured were complete.

3.5.3 Test setup

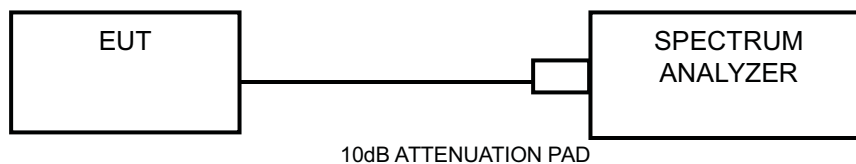

3.5.4 Test result

Refer to Appendix A.



3.6 HOPPING CHANNEL SEPARATION


3.6.1 Limits

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 Measurement procedure

- Span: Wide enough to capture the peaks of two adjacent channels.
- RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- Video (or average) bandwidth (VBW) $\geq$ RBW.
- Sweep: Auto.
- Detector function: Peak.
- Trace: Max hold.
- Allow the trace to stabilize.

3.6.3 Test setup

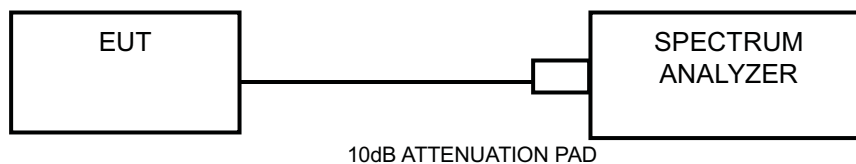

3.6.4 Test result

Refer to Appendix A.



3.7 CONDUCTED OUTPUT POWER

3.7.1 Limits(FCC)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


3.7.2 Limits(IC)

For FHSS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W

3.7.3 Measurement procedure

- A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor and set the detector to PEAK. Record the power level.
- An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor and set the detector to AVERAGE. Record the power level.

3.7.4 Test setup

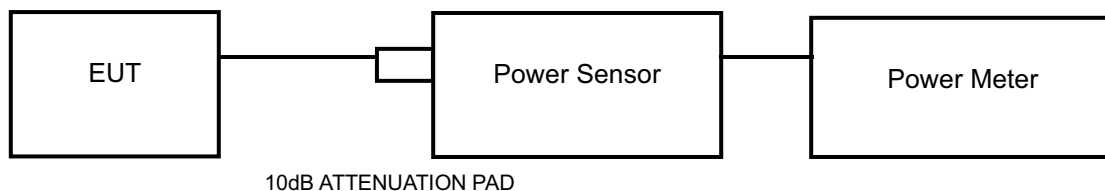

3.7.5 Test result

Refer to Appendix A.



3.8 OUT OF BAND EMISSION MEASUREMENT


3.8.1 Limits

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 Measurement procedure

The transmitter output was connected to the spectrum analyzer via a low loss cable. of Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges was measured and recorded.

3.8.3 Test setup

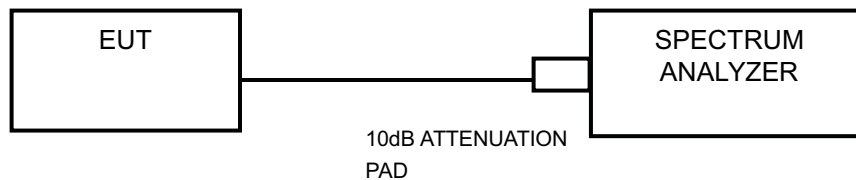

3.8.4 Test result

Refer to Appendix A.



3.9 OCCUPIED BANDWIDTH MEASUREMENT

3.9.1 Measurement procedure

The transmitter antenna output was connected to the spectrum analyzer through an attenuator. The resolution bandwidth shall be set to the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth.

below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

3.9.2 TEST SETUP



3.9.3 Test result

Please refer Annex A.



4 PHOTOGRAPHS OF TEST SETUP

Please refer to the attached file (Test Photos).



5 PHOTOGRAPHS OF THE EUT

Please refer to the attached file (External Photos and Internal Photos).



6 Appendix A

6.1 20dB Emission Bandwidth

6.1.1 Test Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.96	2401.54	2402.50	---	---
		2441	0.99	2440.51	2441.50	---	---
		2480	1.06	2479.47	2480.53	---	---
2DH5	Ant1	2402	1.22	2401.39	2402.62	---	---
		2441	1.23	2440.39	2441.62	---	---
		2480	1.28	2479.39	2480.66	---	---




6.1.2 Test Graphs


DH5_Ant1_2402



DH5_Ant1_2441

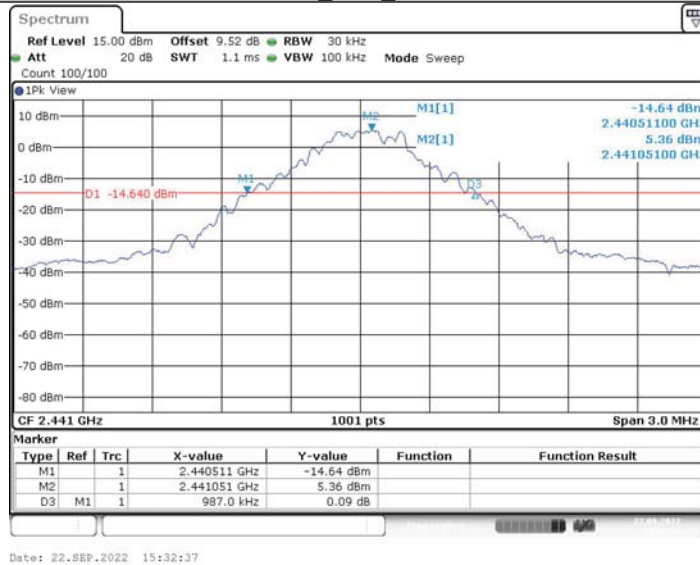


DH5_Ant1_2480

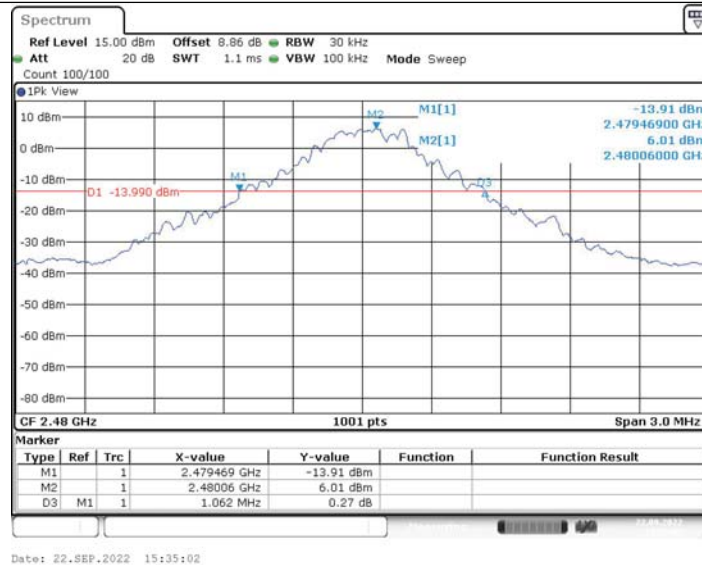

2DH5_Ant1_2402



2DH5_Ant1_2441

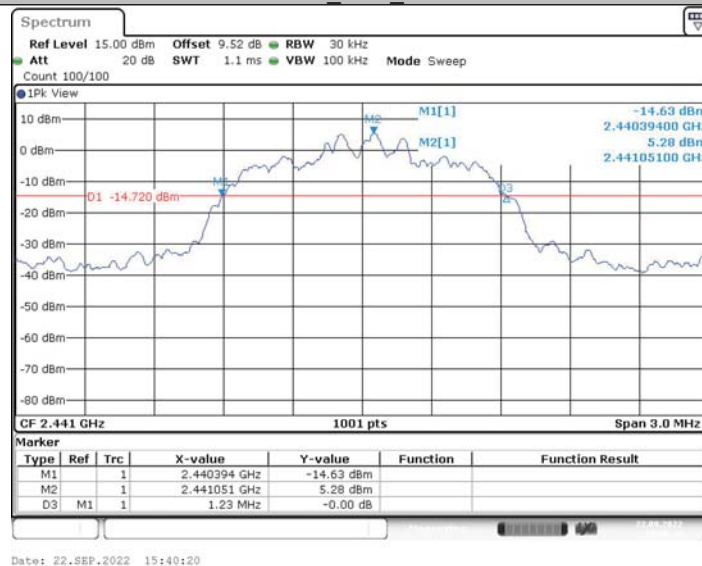




CVC Testing Technology Co., Ltd.

Test Report No.: FCC2022-0065-RF1

Page 41 of 66

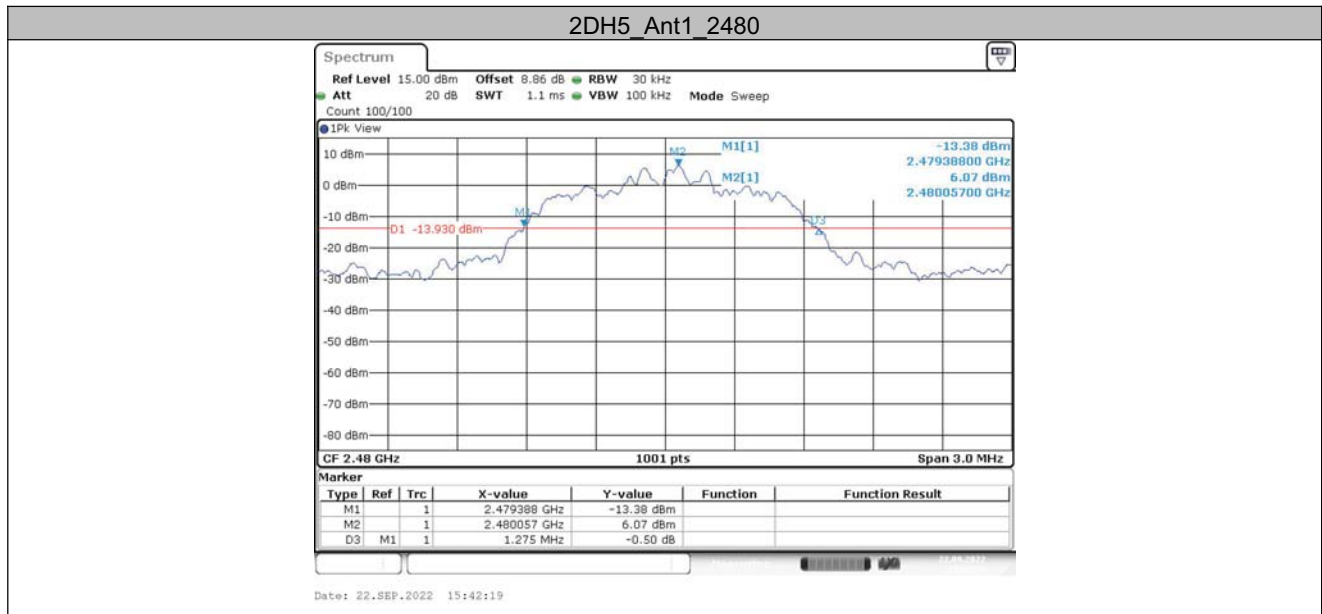



6.2 Conducted Output Power

6.2.1 Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	2.28	≤20.97	PASS
		2441	3.98	≤20.97	PASS
		2480	4.56	≤20.97	PASS
2DH5	Ant1	2402	2.30	≤20.97	PASS
		2441	4.00	≤20.97	PASS
		2480	4.62	≤20.97	PASS

6.2.1 Test Result Average

Test Mode	Antenna	Frequency[MHz]	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
DH5	Ant1	2402	1.13	≤20.97	0	1.13	≤36.00	PASS
		2441	2.76	≤20.97	0	2.76	≤36.00	PASS
		2480	3.43	≤20.97	0	3.43	≤36.00	PASS
2DH5	Ant1	2402	1.15	≤20.97	0	1.15	≤36.00	PASS
		2441	2.79	≤20.97	0	2.79	≤36.00	PASS
		2480	3.42	≤20.97	0	3.42	≤36.00	PASS



6.3 Hopping Channel Separation

6.3.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.014	≥ 0.707	PASS
2DH5	Ant1	Hop	1.003	≥ 0.853	PASS



6.3.2 Test Graphs






6.4 Dell Time of Each Channel


6.4.1 Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
DH3	Ant1	Hop	1.62	160	0.259	≤0.4	PASS
DH5	Ant1	Hop	2.87	106.67	0.306	≤0.4	PASS
2DH1	Ant1	Hop	0.37	320	0.118	≤0.4	PASS
2DH3	Ant1	Hop	1.63	160	0.261	≤0.4	PASS
2DH5	Ant1	Hop	2.88	106.67	0.307	≤0.4	PASS




6.4.1 Test Graphs

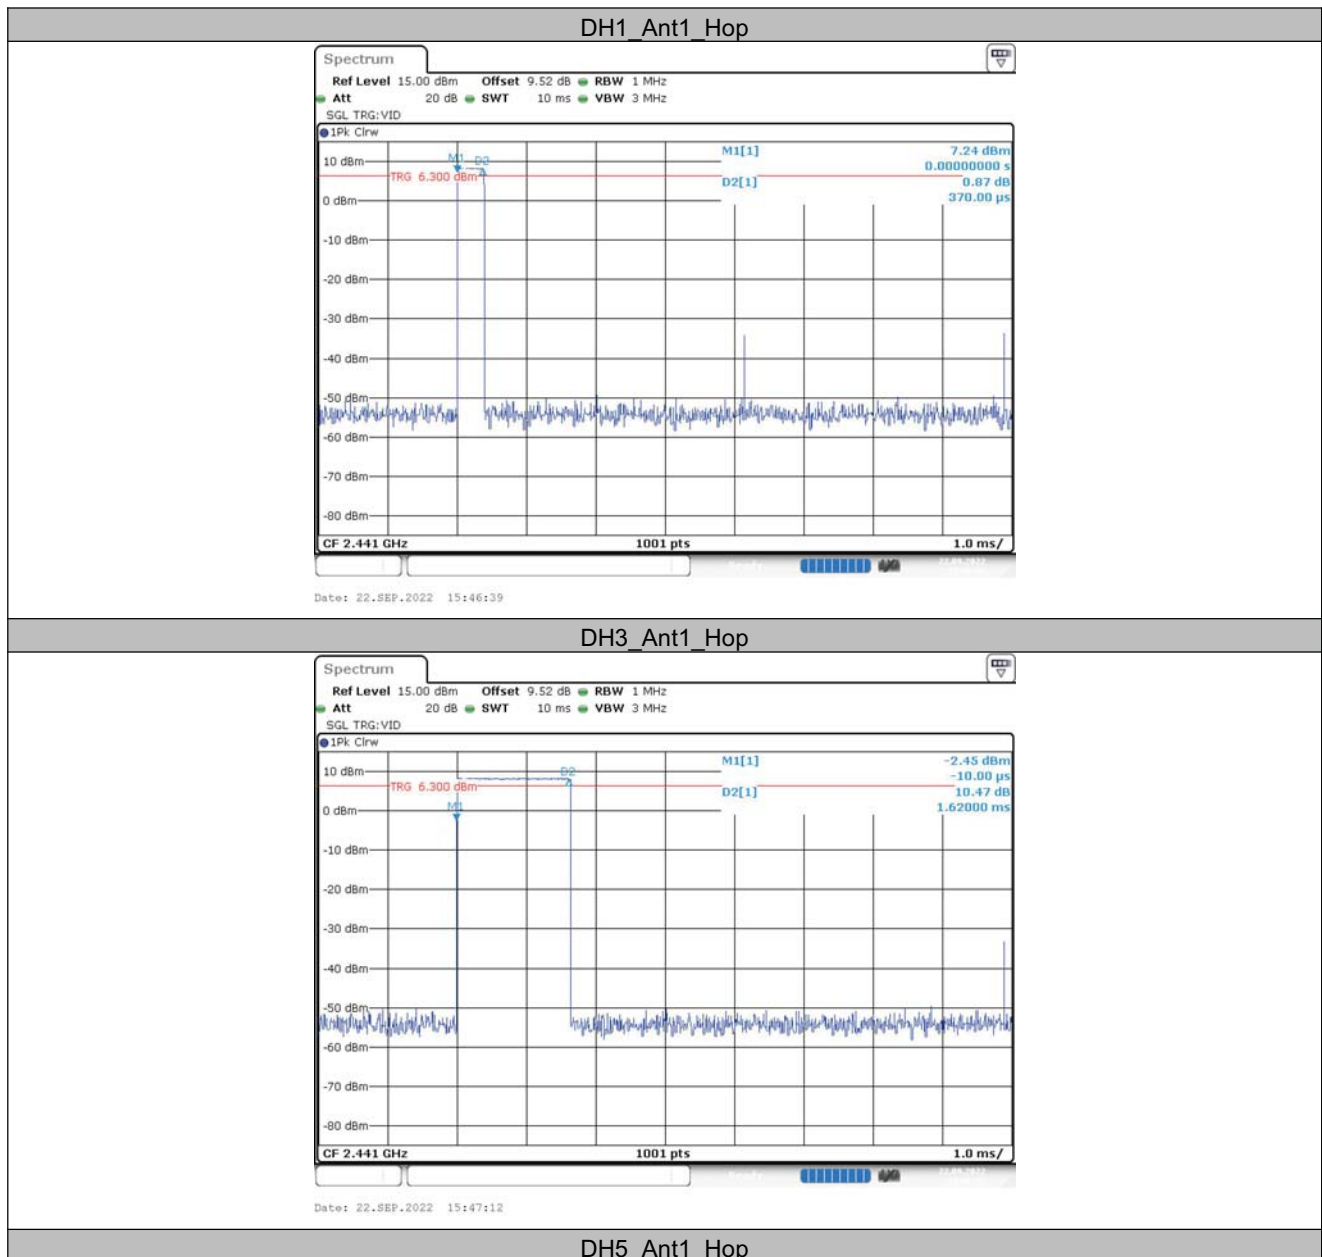


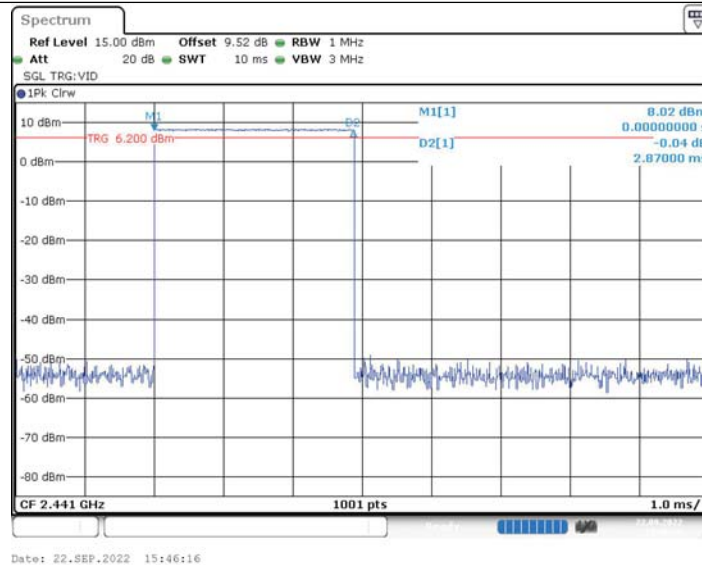


2DH1_Ant1_Hop

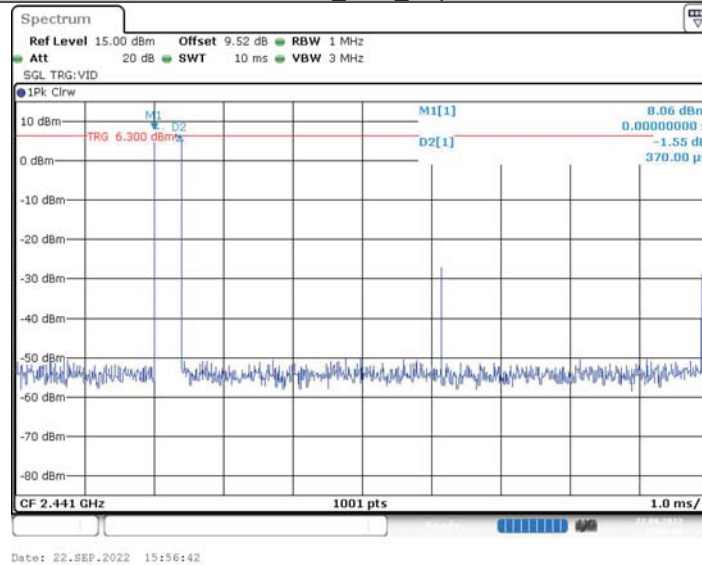

2DH3_Ant1_Hop

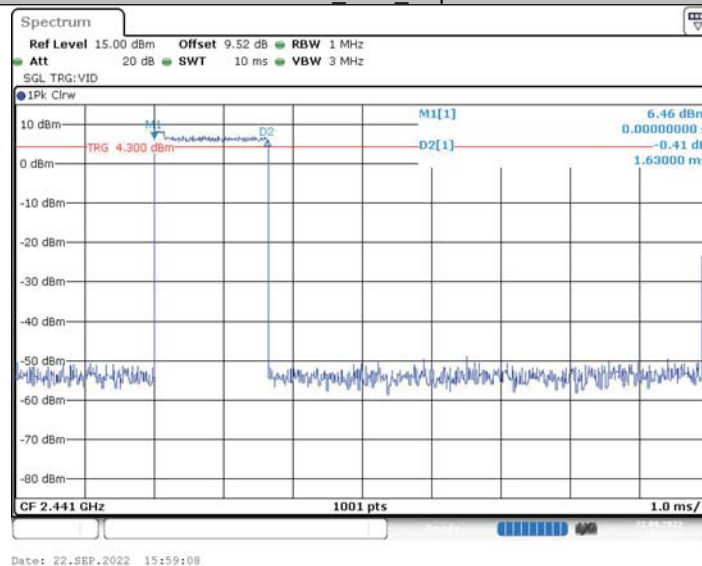

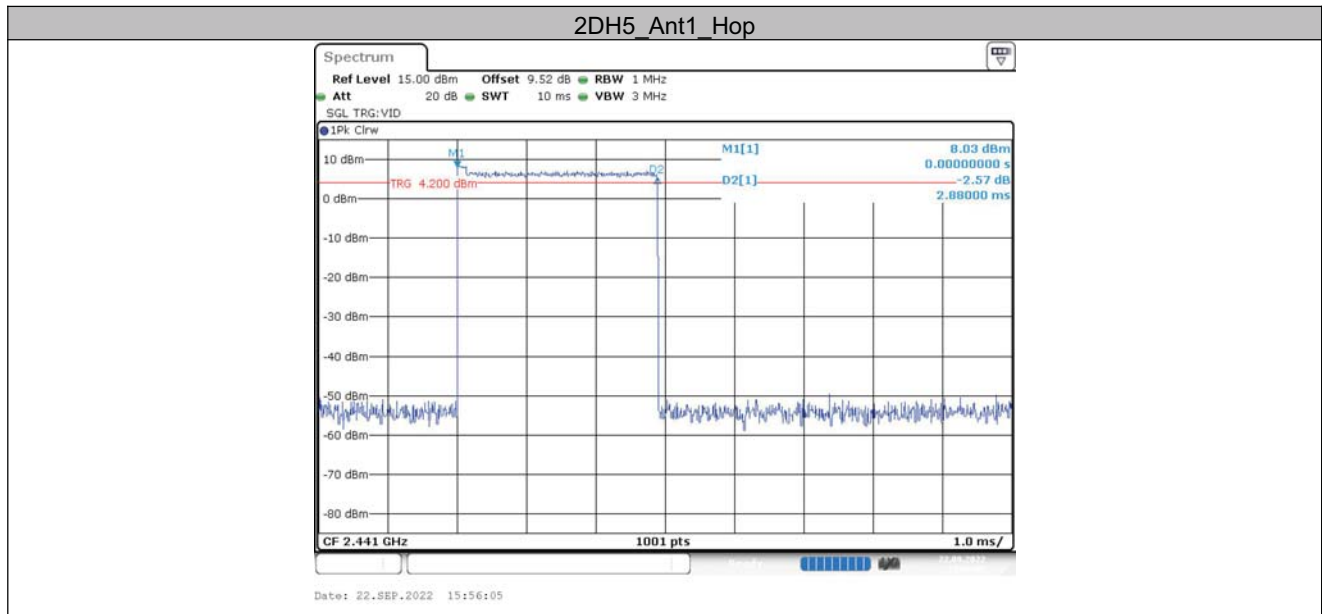



6.5 Number of hopping channels

6.5.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS



6.5.2 Test Graphs





6.6 Band edge measurements


6.6.1 Test Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
DH5	Ant1	Low	2402	6.29	-33.08	≤ -13.71	PASS
		High	2480	8.77	-34.43	≤ -11.23	PASS
		Low	Hop_2402	5.46	-47.93	≤ -14.54	PASS
		High	Hop_2480	8.63	-48.09	≤ -11.37	PASS
2DH5	Ant1	Low	2402	6.16	-35.53	≤ -13.84	PASS
		High	2480	8.59	-36.52	≤ -11.41	PASS
		Low	Hop_2402	5.59	-48.99	≤ -14.41	PASS
		High	Hop_2480	6.93	-52.59	≤ -13.07	PASS




6.6.2 Test Graphs


DH5_Ant1_Low_2402

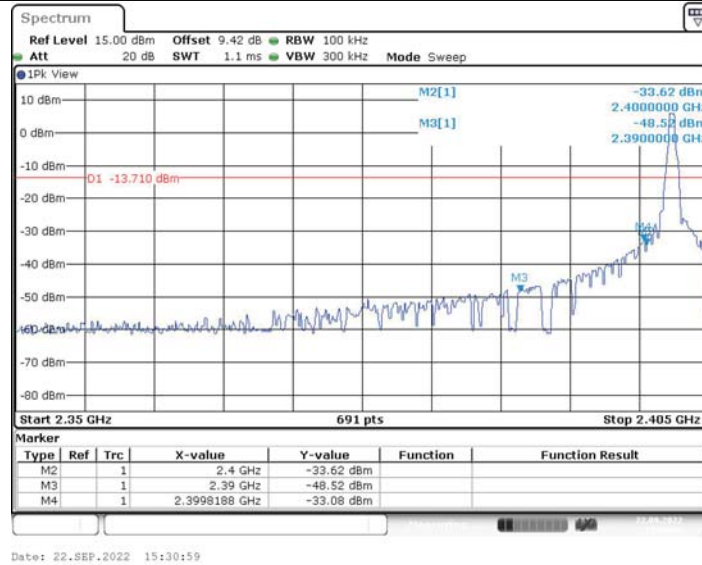


DH5_Ant1_High_2480

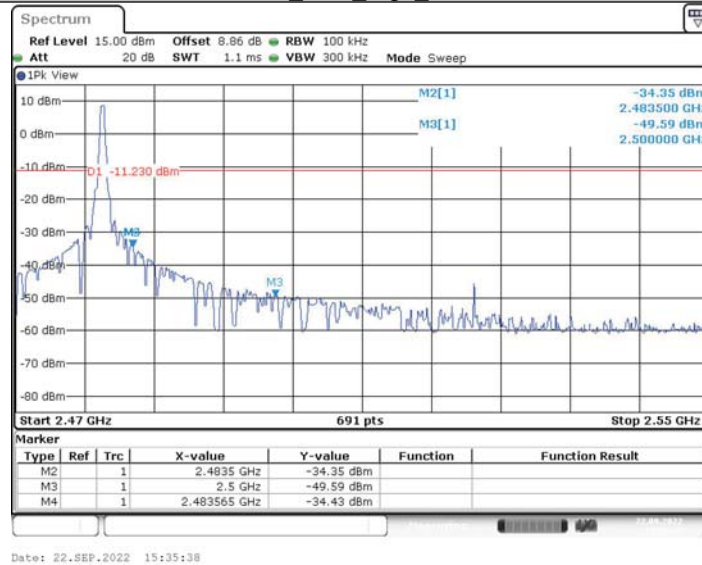


DH5_Ant1_Low_Hop_2402

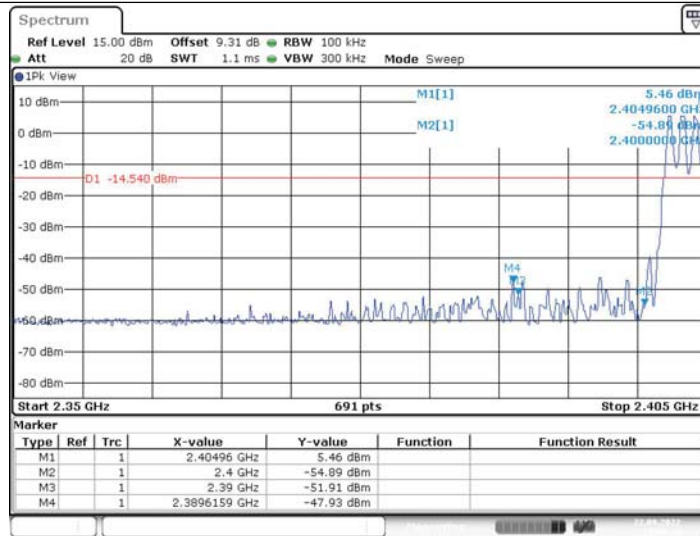

DH5_Ant1_High_Hop_2480

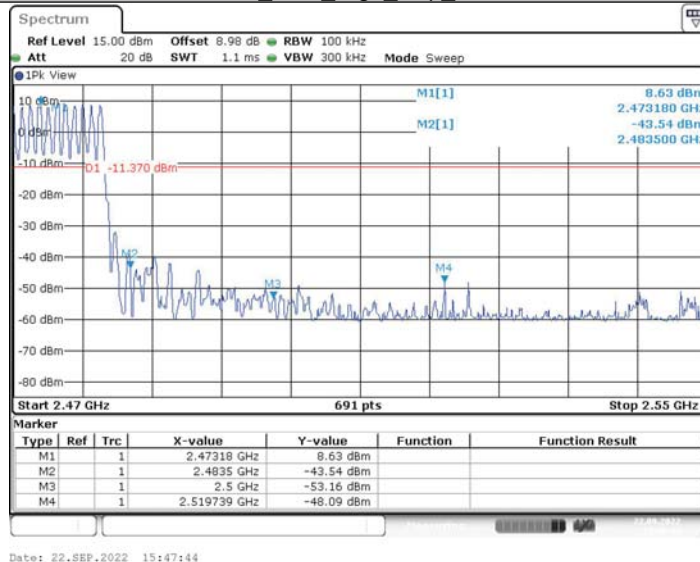


2DH5_Ant1_Low_2402

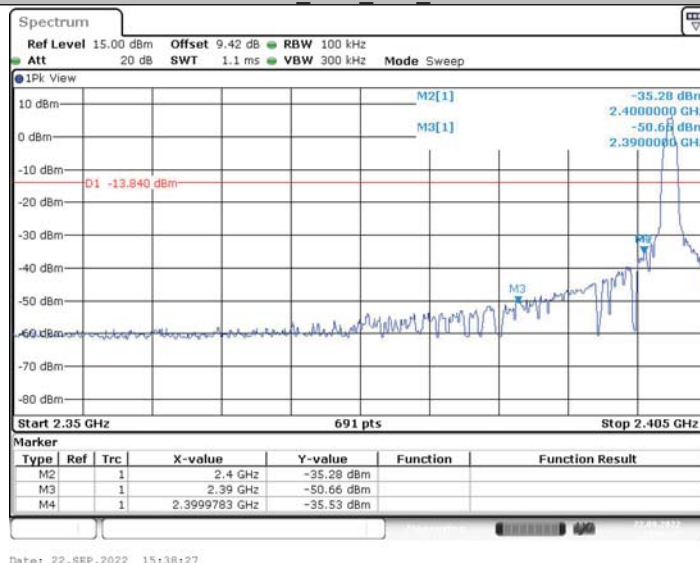





2DH5_Ant1_High_2480

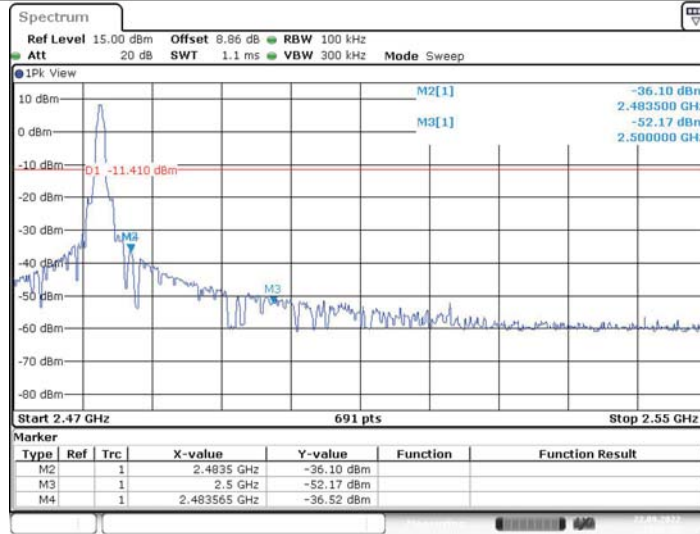

2DH5_Ant1_Low_Hop_2402

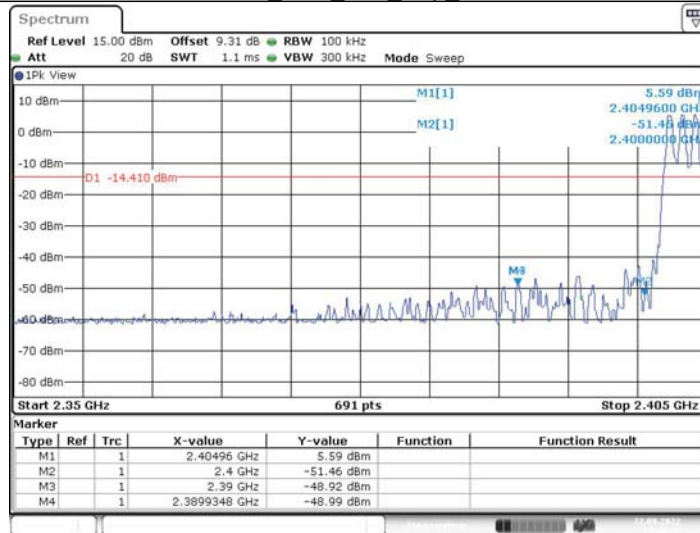

2DH5_Ant1_High_Hop_2480

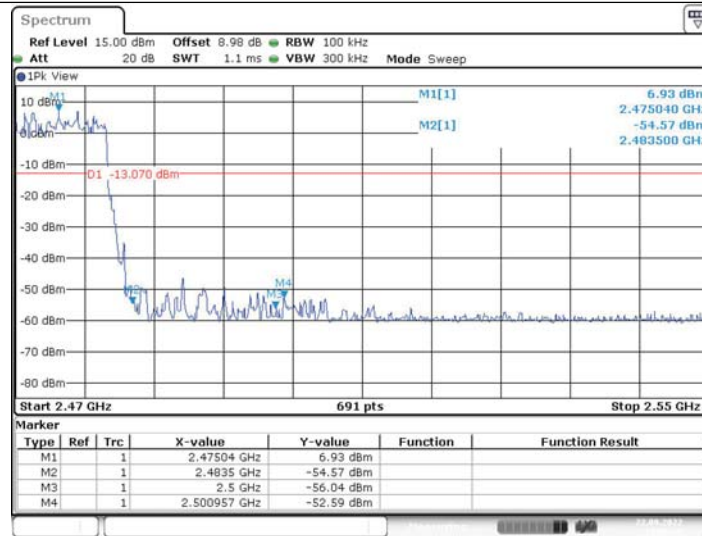




6.7 Out of band Emission Measurement


6.7.1 Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~1000	6.29	-59.14	≤ -13.71	PASS
			1000~26500	6.29	-47.45	≤ -13.71	PASS
		2441	30~1000	7.95	-58.63	≤ -12.05	PASS
			1000~26500	7.95	-47.45	≤ -12.05	PASS
		2480	30~1000	8.77	-59.43	≤ -11.23	PASS
			1000~26500	8.77	-46.61	≤ -11.23	PASS
2DH5	Ant1	2402	30~1000	6.16	-59.36	≤ -13.84	PASS
			1000~26500	6.16	-47.63	≤ -13.84	PASS
		2441	30~1000	7.79	-58.43	≤ -12.21	PASS
			1000~26500	7.79	-47.91	≤ -12.21	PASS
		2480	30~1000	8.59	-58.68	≤ -11.41	PASS
			1000~26500	8.59	-48.28	≤ -11.41	PASS




6.7.1 Test Graphs

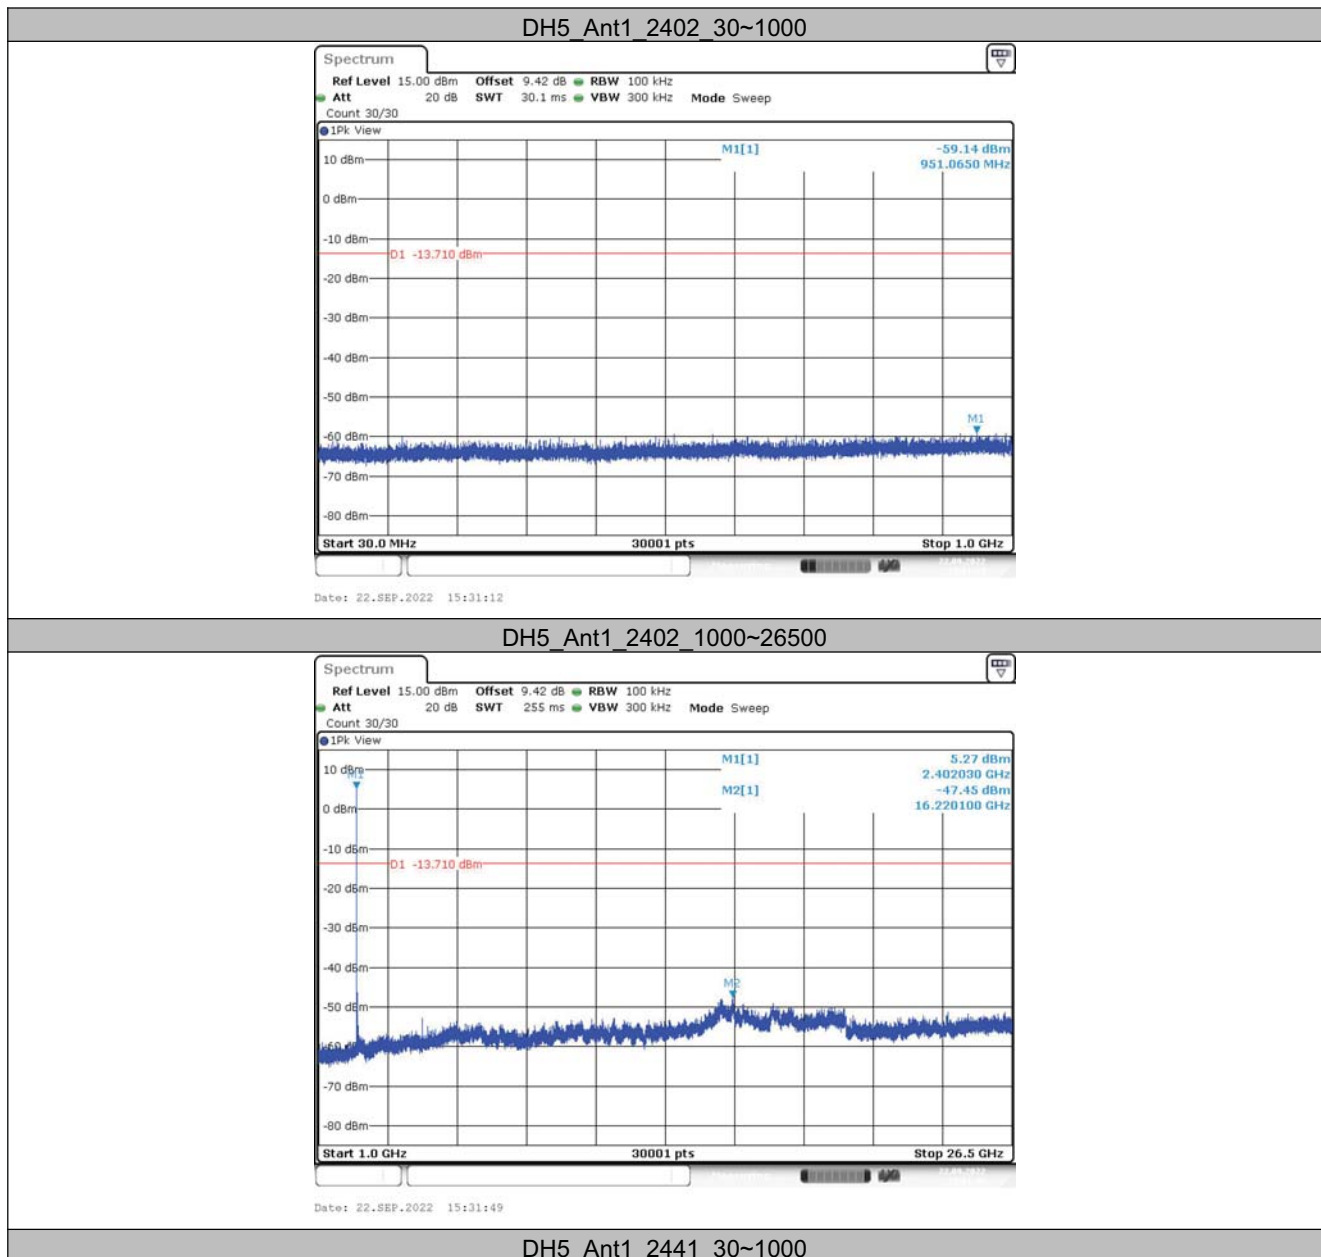


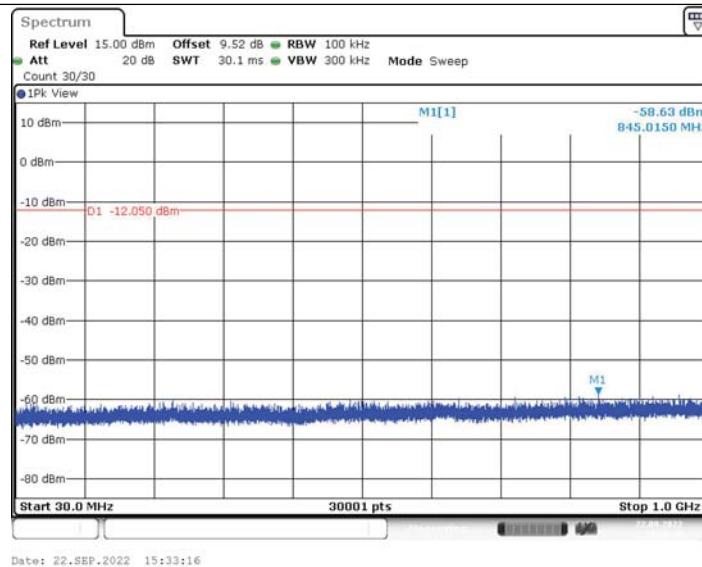

DH5_Ant1_2441_1000~26500

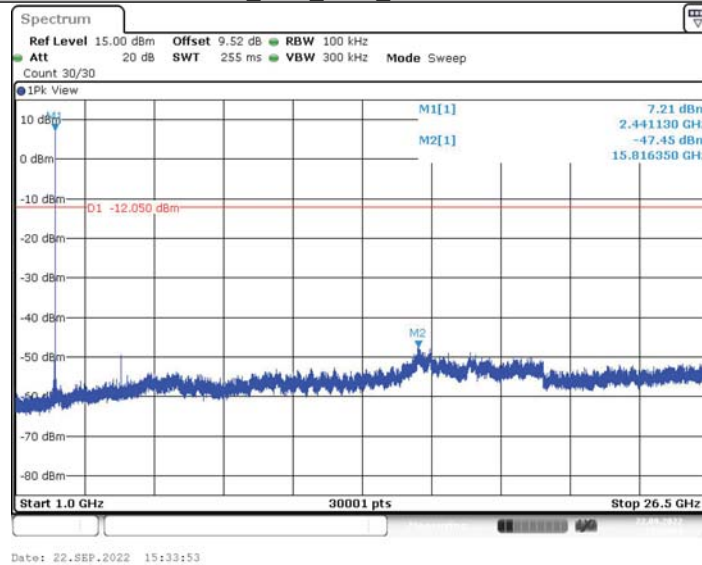


DH5_Ant1_2480_30~1000

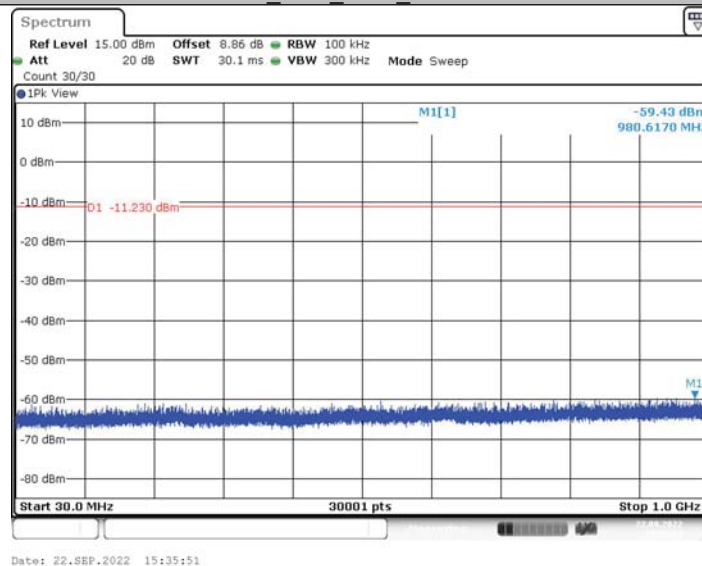




DH5_Ant1_2480_1000~26500

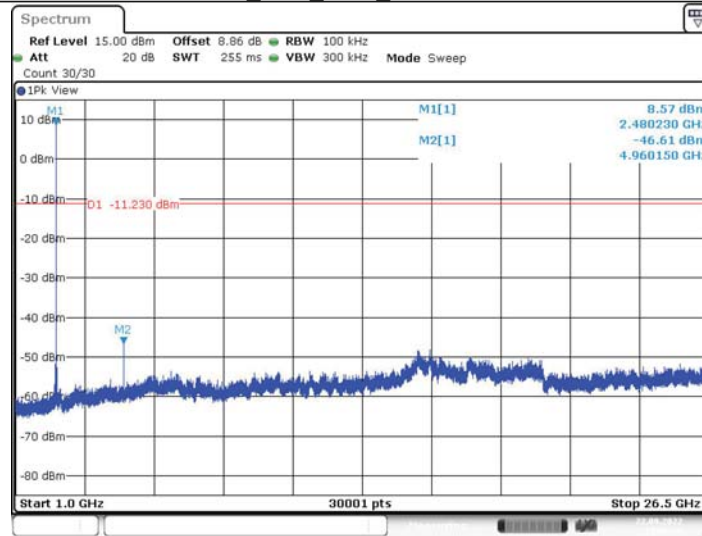


Date: 22.SEP.2022 15:36:28

2DH5_Ant1_2402_30~1000

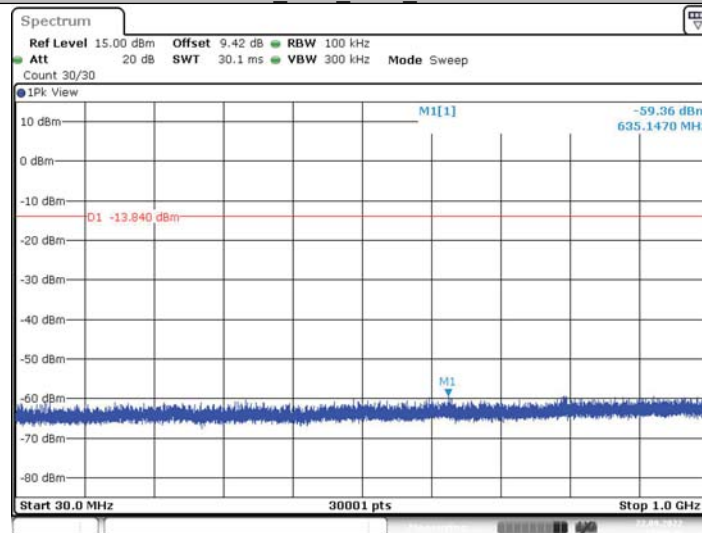


Date: 22.SEP.2022 15:38:41


2DH5_Ant1_2402_1000~26500

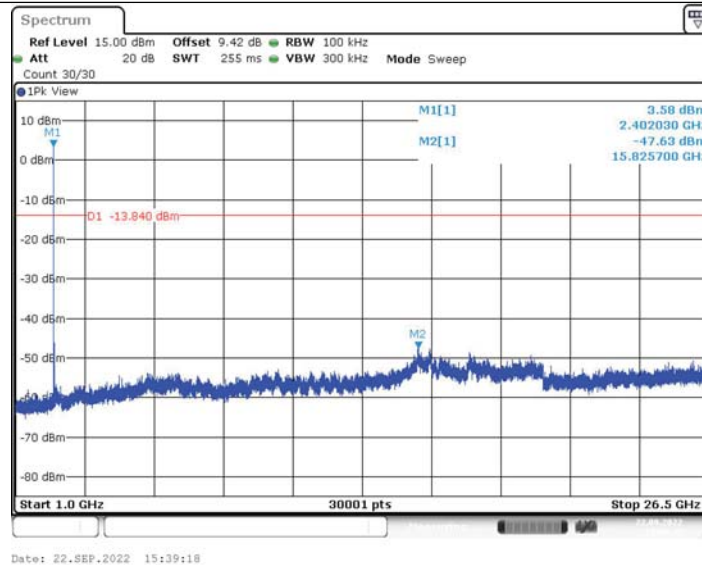

2DH5_Ant1_2441_30~1000

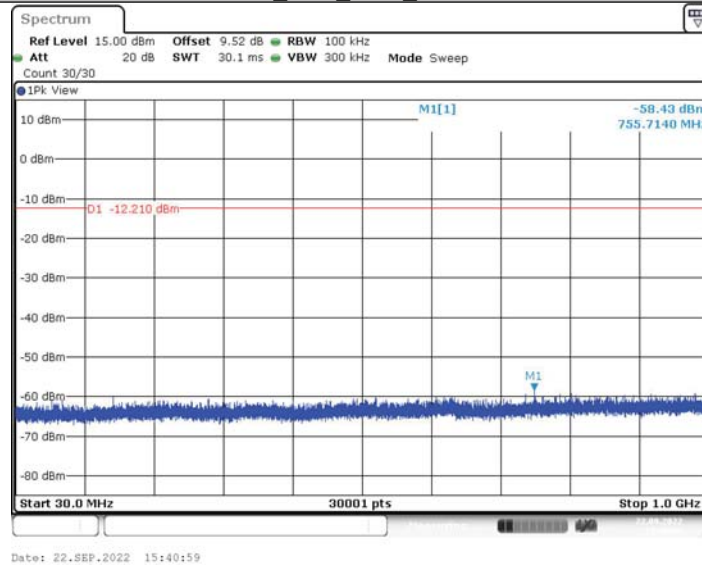


2DH5_Ant1_2441_1000~26500

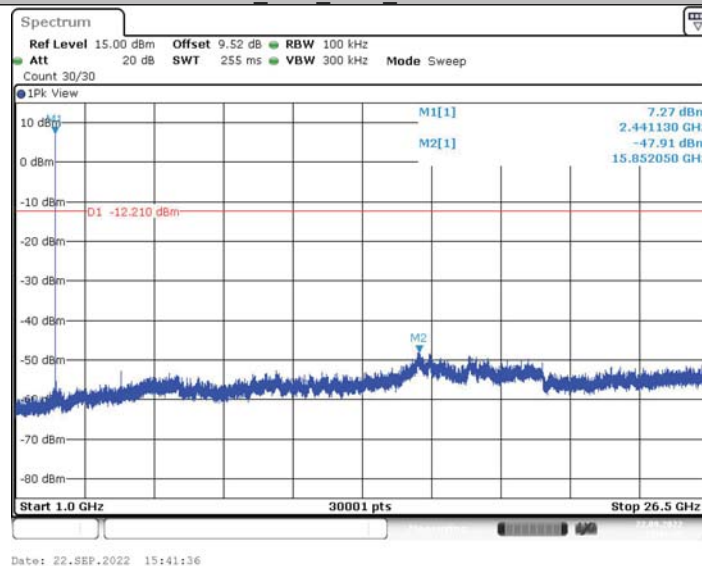




2DH5_Ant1_2480_30~1000

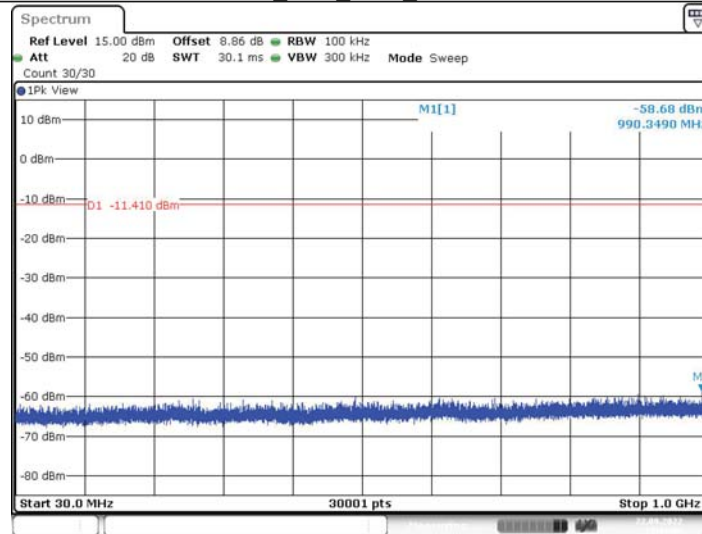

Date: 22.SEP.2022 15:43:09

2DH5_Ant1_2480_1000~26500

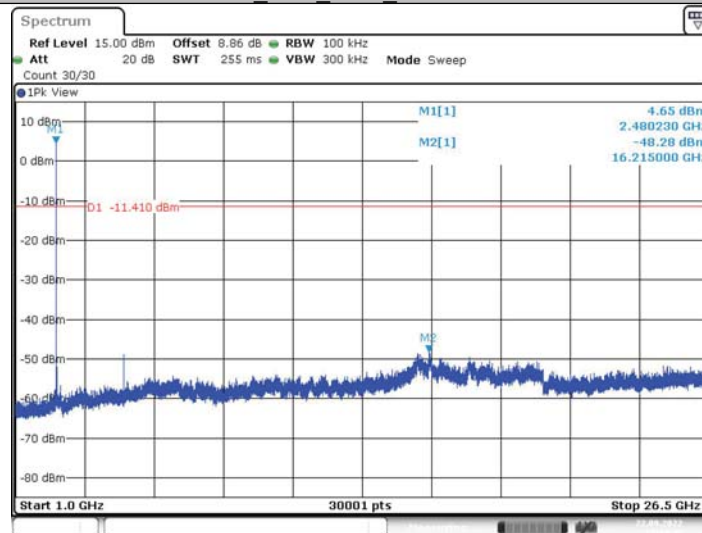

Date: 22.SEP.2022 15:43:45



6.8 Occupied Channel Bandwidth

6.8.1 Test Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.866	2401.574	2402.441	---	---
		2441	0.881	2440.565	2441.447	---	---
		2480	0.956	2479.526	2480.483	---	---
2DH5	Ant1	2402	1.127	2401.446	2402.572	---	---
		2441	1.133	2440.443	2441.575	---	---
		2480	1.199	2479.416	2480.614	---	---



6.8.2 Test Graphs

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



2DH5_Ant1_2402



2DH5_Ant1_2441





CVC Testing Technology Co., Ltd.

Test Report No.: FCC2022-0065-RF1

Page 65 of 66





Important

- (1) The test report is valid without the official stamp of CVC;
- (2) Any part photocopies of the test report are forbidden without the written permission from CVC;
- (3) The test report is invalid without the signatures of Approval and Reviewer;
- (4) The test report is invalid if altered;
- (5) Objections to the test report must be submitted to CVC within 15 days.
- (6) Generally, commission test is responsible for the tested samples only.
- (7) As for the test result “-” or “N” means “not applicable”, “/” means “not test”, “P” means “pass” and “F” means “fail”

The test data and test results given in this test report should only be used for purposes of scientific research, teaching and internal quality control when the CMA symbol is not presented.

Laboratory: CVC Testing Technology Co., Ltd.

Address: No.3, TiantaiyiRoad, KaitaiAvenue, ScienceCity, Guangzhou, China

Post Code: 510663 Tel: 020-32293888

FAX: 020-32293889 E-mail: office@cvc.org.cn