



FCC/IC Test Report

FOR:

Honeywell International Inc

Model: 70eLGN

Product Description: Dolphin 70e Black, Enterprise Digital Assistant (EDA)

FCC ID: HD570ELGN

IC ID: 1693B-70E1

47 CFR Part 15.247 (DSS)

IC RSS-210 Issue 8, Annex 8

TEST REPORT #: EMC_HONEY_095_12003_70eLGN_DSS

DATE: 2013-05-28



**FCC:
Accredited**

**IC recognized #
3462B-1**

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	Assessment	4
2	Administrative Data.....	5
2.1	Identification of the Testing Laboratory Issuing the Test Report.....	5
2.2	Identification of the Client.....	5
2.3	Identification of the Manufacturer.....	5
3	Equipment under Test (EUT).....	6
3.1	Specification of the Equipment under Test	6
3.2	Identification of the Equipment Under Test (EUT).....	7
3.3	Identification of Support Test Equipment	7
3.4	Environmental conditions during Test:.....	7
3.5	Dates of Testing:.....	7
3.6	Other Testing Notes:.....	7
4	Subject of Investigation	8
5	Summary of Measurement Results.....	9
6	Measurements.....	10
6.1	Measurement Method:	10
6.2	Radiated Measurement Procedure	10
6.3	Sample Calculations for Radiated Measurements	12
6.4	Conducted Measurement Procedure	13
6.5	Maximum Peak Output Power	14
6.5.1	Limits:.....	14
6.5.2	Test Conditions:.....	14
6.5.3	Test Procedure:	14
6.5.4	Test Result:	15
6.6	Spectrum Bandwidth/ 20dB Bandwidth	16
6.6.1	Limits:.....	16
6.6.2	Test Conditions:.....	16
6.6.3	Test Procedure:	16
6.6.4	Test Result:	17
6.6.5	Test Data/plots:	18
6.7	Carrier Frequency Separation	23
6.7.1	Limits:.....	23
6.7.2	Test Conditions:.....	23
6.7.3	Test Procedure:	23
6.7.4	Test Data/plot:.....	23
6.7.5	Test Result:	23

6.8	Number of hopping channels	24
6.8.1	Limits:	24
6.8.2	Test Conditions:	24
6.8.3	Test Procedure:	24
6.8.4	Test Data/plot:	24
6.8.5	Test Result:	24
6.9	Time of occupancy (Dwell time)	25
6.9.1	Limits:	25
6.9.2	Test Conditions:	25
6.9.3	Test Procedure:	25
6.9.4	Test Result:	25
6.9.5	Test Dat/plots:	26
6.10	Power Spectral Density (Hybrid system in Inquiry mode/ Page Scan)	28
6.10.1	Limits: § 15.247 (e)	28
6.10.2	Test Result:	28
6.11	Transmitter Spurious Emissions- Conducted	29
6.11.1	Reference and Limits:	29
6.11.2	Test Conditions:	29
6.11.3	Test Procedure:	29
6.11.4	Test Result:	29
6.11.5	Test data/ plots:	30
6.12	Restricted Band Edge Compliance	36
6.12.1	Reference and Limits: §15.247/15.205/15.209; RSS-210 A8.5	36
6.12.2	Test Conditions:	37
6.12.3	Measurement Procedure:	37
6.12.4	Test Data/plots:	38
6.13	Transmitter Spurious Emissions- Radiated	44
6.13.1	Reference and Limits:	44
6.13.2	Test Result:	44
6.13.3	Test Conditions:	44
6.13.4	Measurement Procedure:	44
6.13.5	Testing Notes:	44
6.13.6	Test data/ plots:	46
6.14	AC Power Line Conducted Emissions	54
6.14.1	References:	54
6.14.2	Limits:	54
6.14.3	Test Conditions:	54
6.14.4	Results	54
6.14.5	Test Results:	55
7	Test Equipment and Ancillaries used for tests	56
8	Test Setup Info:	57
9	Revision History	58

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



1 Assessment

The following equipment (and as identified in Ch.3 of this test report) was evaluated against the applicable criteria specified in FCC CFR47 Part 15.247, 15.207, 15.209 and Industry Canada Radio Standard Specification RSS 210 Issue 8, Annex 8.

No deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Honeywell International Inc	Dolphin 70e Black Enterprise Digital Assistant (EDA)	70eLGN

Responsible for Testing Laboratory:

		Franz Engert	
2013-05-28	Compliance	(Acting Lab Manager)	
Date	Section	Name	Signature

Responsible for the Report:

		Tunji Yusuf	
2013-05-28	Compliance	(EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section3.

CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Acting Lab Manager:	Franz Engert
Responsible Project Leader:	Tunji Yusuf

2.2 Identification of the Client

Applicant's Name:	Honeywell International Inc
Street Address:	700 Visions Drive
City/Zip Code	Skaneateles Falls, NY 13153
Country	USA
Contact Person:	Michael Robinson
Phone No.	+1 (315) 554 6387
Fax:	+1 (315) 554 6393
e-mail:	michael.robinson3@honeywell.com

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as client.
Manufacturers Address:	
City/Zip Code	
Country	

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Marketing Name:	Dolphin 70e Black
Model Number:	70eLGN
FCC-ID :	HD570ELGN
IC ID:	1693B-70E1
Product Description:	Dolphin 70e Black Enterprise Digital Assistant (EDA)
Technology / Type(s) of Modulation:	Bluetooth version 2.1+EDR, using Frequency Hopping Spread Spectrum with GFSK or $\pi/4$ DQPSK or 8DPSK modulation
Operating Frequency Ranges (MHz) / Channels:	Nominal band: 2400 – 2483.5; Center to center: 2402(ch 1) – 2480(ch 79), 79 channels
Antenna info:	Internal PIFA Documented max antenna gain(2.4GHz) = 0.7dBi
Max. Output Powers:	Measured Conducted output power: GFSK: 0.9 dBm/0.0012W; $\pi/4$ DQPSK: -1.8 dBm/0.0007W; 8DPSK: -1.0 dBm/0.0008W Calculated Radiated output power: GFSK: 1.6 dBm/0.0015W; $\pi/4$ DQPSK: -1.1 dBm/0.0008W; 8DPSK: -0.3 dBm/0.0009W
Rated Operating Voltage Range:	Vmin: 3.3V/ Vnom: 3.6V/ Vmax: 4.3V
Rated Operating Temperature Range:	Tmin: -30°C/ Tmax: 70°C
Test Sample Status:	Prototype
Other Radios included:	1. Sierra Wireless SL9090 Radio Module 850/900/1800/1900Mhz GSM power class 4/1 GPRS Class B, Multislot 10 operation EDGE Multislot class 12 operation 850/1900/2100 Mhz WCDMA / HSPA+ HSDPA Category 10 data rate - 14.4 Mbps HSUPA Category 6 data rate - 5.76 Mbps 800/1900 Mhz CDMA 1xRTT / EV-D0 CDMA EVDO Rev A data rate - 3.1 Mbps

	2. WLAN 802.11 a/b/g/n Murata LBEH5Z9UWC module with TI WL1273L Chipset 2.4 and 5.0 GHz bands of operation 3. GPS 1575.42 MHz 4. NFC (NXP PN65N Module; 13.56 MHz)
--	--

3.2 Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	Sample	HW/SW Version
1	12359J0015	Conducted	DVT 1.5-9090N/40.00
2	12359J0038	Radiated	DVT 1.5-9090N/40.0

3.3 Identification of Support Test Equipment

STE #	Type	Manufacturer	Model	Serial Number
1	AC Switching Power Supply	PHIHONG	PSAI05R-050Q	P112103004A1

3.4 Environmental conditions during Test:

The following environmental conditions were maintained during the course of testing:

Ambient Temperature: 20-25°C

Relative humidity: 40-60%

3.5 Dates of Testing:

01/08/2013 – 02/08/2013

3.6 Other Testing Notes:

1. The EUT was set in BT Test mode using a development version of the SW available on the device. In this mode, the unit can be connected to a Bluetooth Tester (R&S CBT) to control different modulation schemes, channels etc., as required for testing.
2. The EUT was tested on low, mid and high channels in GFSK, $\pi/4$ DQPSK and 8DPSK modes.

4 Subject of Investigation

The objective of the measurements applied by CETECOM Inc. was to establish compliance of the EUT as described under Ch. 3 of this Test Report, with the applicable criteria specified in

- FCC CFR47 Parts 15.247, 15.207, 15.209 and
- Industry Canada Radio Standard Specifications RSS-210 Issue 8, RSS-Gen Issue 3

This test report is to support a request for new equipment authorization under the FCC ID: **HD570ELGN** and IC ID: **1693B-70E1**.

5 Summary of Measurement Results

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	Fail	NA	NP	Result
§15.247(e) RSS210 A8.2(b)	Power Spectral Density	Nominal	-	☐	☐	■	☐	Note 1
§15.247(a)(1) RSS210 A8.1(b)	Carrier Frequency Separation	Nominal	Hopping	■	☐	☐	☐	Complies
§15.247(a)(1) RSS210 A8.1(d)	Number of Hopping Channels	Nominal	Hopping	■	☐	☐	☐	Complies
§15.247(a)(1)(iii) RSS210 A8.3(1)	Time of occupancy	Nominal	Hopping	■	☐	☐	☐	Complies
§15.247(a)(1) RSS210 A8.2(a)	Spectrum Bandwidth	Nominal	GFSK $\pi/4$ DQPSK 8DPSK	■	☐	☐	☐	Complies
§15.247(b)(1) RSS210 A8.4(2)	Maximum Peak Conducted Output Power	Nominal	GFSK $\pi/4$ DQPSK 8DPSK	■	☐	☐	☐	Complies
§15.247(d) RSS210 A8.5	Band edge compliance-Conducted	Nominal	GFSK $\pi/4$ DQPSK 8DPSK	☐	☐	☐	■	Note 2
§15.247(d) RSS210 A8.5	Band edge compliance-Radiated	Nominal	GFSK $\pi/4$ DQPSK 8DPSK	■	☐	☐	☐	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Conducted	Nominal	GFSK $\pi/4$ DQPSK 8DPSK	■	☐	☐	☐	Complies
§15.247(d) RSS210 A8.5	TX Spurious emissions-Radiated	Nominal	GFSK	■	☐	☐	☐	Complies
§15.209(a) RSS Gen	TX Spurious Emissions Radiated<30MHz	Nominal	GFSK	■	☐	☐	☐	Complies
§15.207(a) RSS Gen	Conducted Emissions <30MHz	Nominal	GFSK	■	☐	☐	☐	Complies

Note: NA= Not Applicable; NP= Not Performed.

1. Power Spectral Density is NOT APPLICABLE for devices with hopping functionality.
2. Band Edge compliance-conducted is NOT PERFORMED as the device passes radiated measurement.

6 Measurements

6.1 Measurement Method:

Ref: FCC Public Notice DA 00-705: Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems|

6.2 Radiated Measurement Procedure

ANSI C63.4 (2009) Section 8.3.1.1: Exploratory radiated emission measurements

Exploratory radiated measurements shall be performed at the measurement distance or at a closer distance than that specified for compliance to determine the emission characteristics of the EUT. At near distances, for EUTs of comparably small size, it is relatively easy to determine the spectrum signature of the EUT and, if applicable, the EUT configuration that produces the maximum level of emissions. A shielded room may be used for exploratory testing, but may have anomalies that can lead to significant errors in amplitude measurements.

Broadband antennas and a spectrum analyzer or a radio-noise meter with a panoramic display are often useful in this type of testing. It is recommended that either a headset or loudspeaker be connected as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT when the exploratory and final testing is performed in an OATS with strong ambient signals. Caution should be taken if either antenna height between 1 and 4 meters or EUT azimuth is not fully explored. Not fully exploring these parameters during exploratory testing may require complete testing at the OATS or semi-anechoic chamber when the final full spectrum testing is conducted.

The EUT should be set up in its typical configuration and arrangement, and operated in its various modes. For tabletop systems, cables or wires should be manipulated within the range of likely arrangements. For floor-standing equipment, the cables or wires should be located in the same manner as the user would install them and no further manipulation is made. For combination EUTs, the tabletop and floor-standing portions of the EUT shall follow the procedures for their respective setups and cable manipulation. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions.

For each mode of operation required to be tested, the frequency spectrum shall be monitored. Variations in antenna height between 1 and 4 m, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) shall be explored to produce the emission that has the highest amplitude relative to the limit. A step-by-step technique for determining this emission can be found in Annex C.

When measuring emissions above 1 GHz, the frequencies of maximum emission shall be determined by manually positioning the antenna close to the EUT and by moving the antenna over all sides of the EUT while observing a spectral display. It will be advantageous to have prior knowledge of the frequencies of emissions above 1 GHz. If the EUT is a device with dimensions approximately equal to that of the measurement antenna beamwidth, the measurement antenna shall be aligned with the EUT.

ANSI C63.4 (2009) Section 8.3.1.2: Final radiated emission measurements

Based on the measurement results in 8.3.1.1, the one EUT, cable and wire arrangement, and mode of operation that produces the emission that has the highest amplitude relative to the limit is selected for the final measurement. The final measurement is then performed on a site meeting the requirements of 5.3, 5.4, or 5.5 as appropriate without variation of the EUT arrangement or EUT mode of operation. If the EUT is relocated from an exploratory test site to a final test site, the highest emission shall be remaximized at the final test location before final radiated emissions measurements are performed. However, antenna height and polarity and EUT azimuth are to be varied. In addition, the full frequency spectrum (for the range to be checked for meeting compliance) shall be investigated.

This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. During the full frequency spectrum investigation, particular focus should be made on those frequencies found in exploratory testing that were used to find the final test configuration, mode of operation, and arrangement (associated with achieving the least margin with respect to the limit). This full spectrum test constitutes the compliance measurement.

For measurements above 1 GHz, use the cable, EUT arrangement, and mode of operation determined in the exploratory testing to produce the emission that has the highest amplitude relative to the limit. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the antenna in the “cone of radiation” from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response. The antenna may have to be higher or lower than the EUT, depending on the EUT’s size and mounting height, but the antenna should be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. If the transmission line for the measurement antenna restricts its range of height and polarization, the steps needed to ensure the correct measurement of the maximum emissions, shall be described in detail in the report of measurements. Data collected shall satisfy the report requirements of Clause 10.

NOTES

1— Where limits are specified by agencies for both average and peak (or quasi-peak) detection, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

2—Use of waveguide and flexible waveguide may be necessary at frequencies above 10 GHz to achieve usable signal-to noise ratios at required measurement distances. If so, it may be necessary to restrict the height search of the antenna, and special care should be taken to ensure that maximum emissions are correctly measured.

3—All presently known devices causing emissions above 10 GHz are physically small compared with the beam-widths of typical horn antennas used for EMC measurements. For such EUTs and frequencies, it may be preferable to vary the height and polarization of the EUT instead of the receiving antenna to maximize the measured emissions.

Measurement Uncertainty: $\pm 3\text{dB}$

6.3 Sample Calculations for Radiated Measurements

6.3.1.1 Field Strength Measurements:

Measurements from the Spectrum Analyzer/ Receiver is used to calculate the Field Strength, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m


FS (dB μ V/m)= Measured Value on SA (dB μ V)+ Cable Loss (dB)+ Antenna Factor (dB/m)

Eg:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the above equation.

6.4 Conducted Measurement Procedure

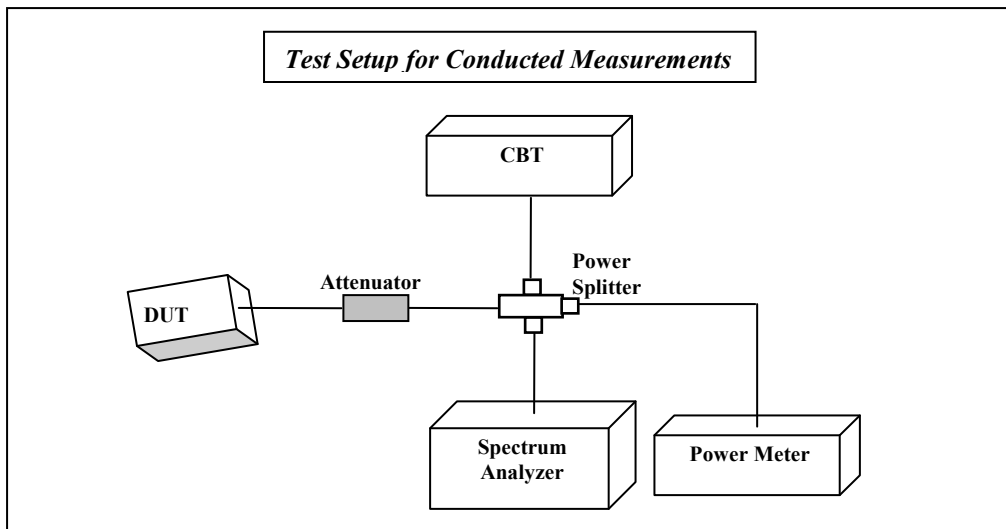

1. Connect the equipment as shown in the above diagram.
2. Adjust the settings of the CBT (Rohde-Schwarz Bluetooth Tester) to connect the EUT at the required mode of test.
3. Measurements are to be performed with the EUT set to the low, middle and high channels and for GFSK, $\pi/4$ DQPSK and 8DPSK modulation schemes.

6.5 Maximum Peak Output Power

6.5.1 Limits:

6.5.1.1 §15.247 (b)(1)

The maximum peak conducted output power of the intentional radiator shall not exceed the following:
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt.
For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

6.5.1.2 RSS 210- A8.4(2)

Nominal Peak Output Power < 30 dBm (1W)

6.5.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6 V

Hopping OFF

6.5.3 Test Procedure:

Measurement according to DA 00-705

Measurement Settings:

Conducted output power measured using a CBT (Bluetooth Tester).

Radiated EIRP calculated using the formula= Conducted Power+ Antenna Gain.

Max. Antenna Gain (dBi): +0.7 dBi

6.5.4 Test Result:

Measured Max Peak Output Power- Conducted (dBm)			
Modulation	Frequency (MHz)		
	2402	2441	2480
GFSK	0.6	0.9	0.9
$\pi/4$ DQPSK	-2.1	-2.1	-1.8
8-DPSK	-1.6	-1.5	-1.0

Calculated Max Peak Output Power- Radiated EIRP (dBm)			
Modulation	Frequency (MHz)		
	2402	2441	2480
GFSK	1.3	1.6	1.6
$\pi/4$ DQPSK	-1.4	-1.4	-1.1
8-DPSK	-0.9	-0.8	-0.3

Note: Radiated EIRP = *Conducted Measurement* + *Antenna Gain*

6.5.4.1 Measurement Verdict:

Pass.

6.6 Spectrum Bandwidth/ 20dB Bandwidth

6.6.1 Limits:

6.6.1.1 §15.247 (a)(1)

6.6.1.2 RSS 210- A8.1(b)

Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

GFSK < 1000 kHz

$\pi / 4$ DQPSK < 1500 kHz

8 dPSK < 1500kHz

6.6.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6V

Hopping OFF

6.6.3 Test Procedure:

Measurement according to DA 00-705

Spectrum Analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Measurements taken at 20dB below peak.

6.6.4 Test Result:


20dB Bandwidth (MHz)			
Modulation	Frequency (MHz)		
	2402	2441	2480
GFSK	0.950	0.958	0.942
$\pi/4$ DQPSK	1.350	1.333	1.333
8-DPSK	1.317	1.300	1.300
Measurement Uncertainty: ± 10 kHz			

6.6.4.1 Measurement Verdict:


Pass.

6.6.5 Test Data/plots:


20dB Bandwidth GFSK 2402MHz

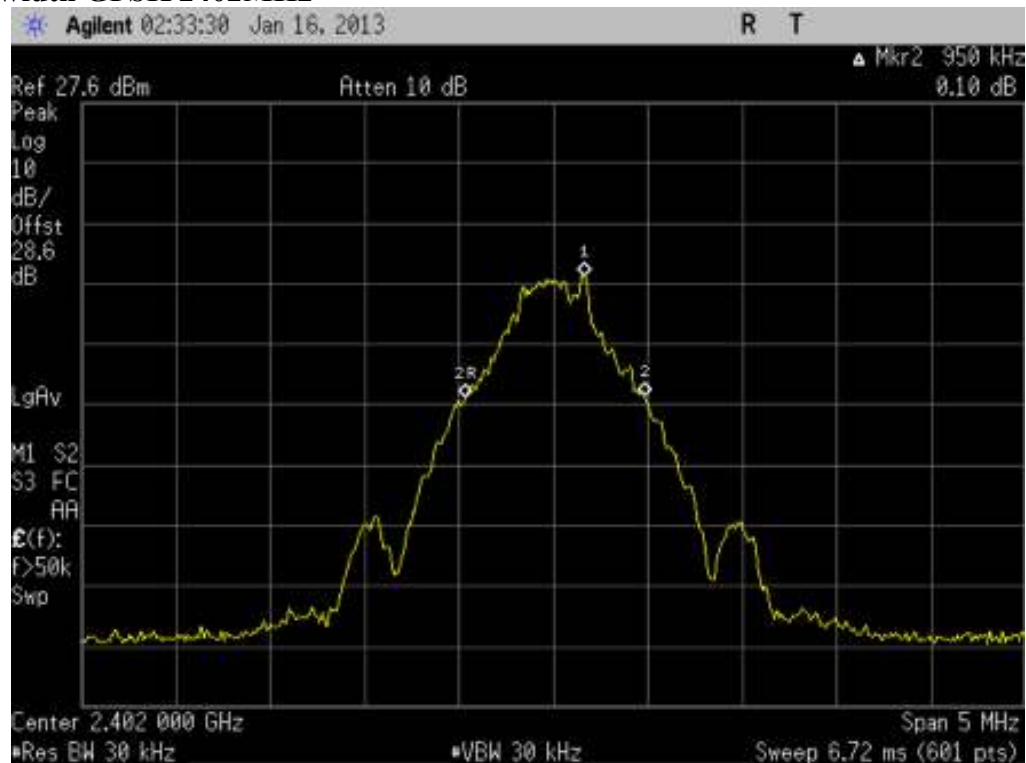


20dB Bandwidth GFSK 2441MHz

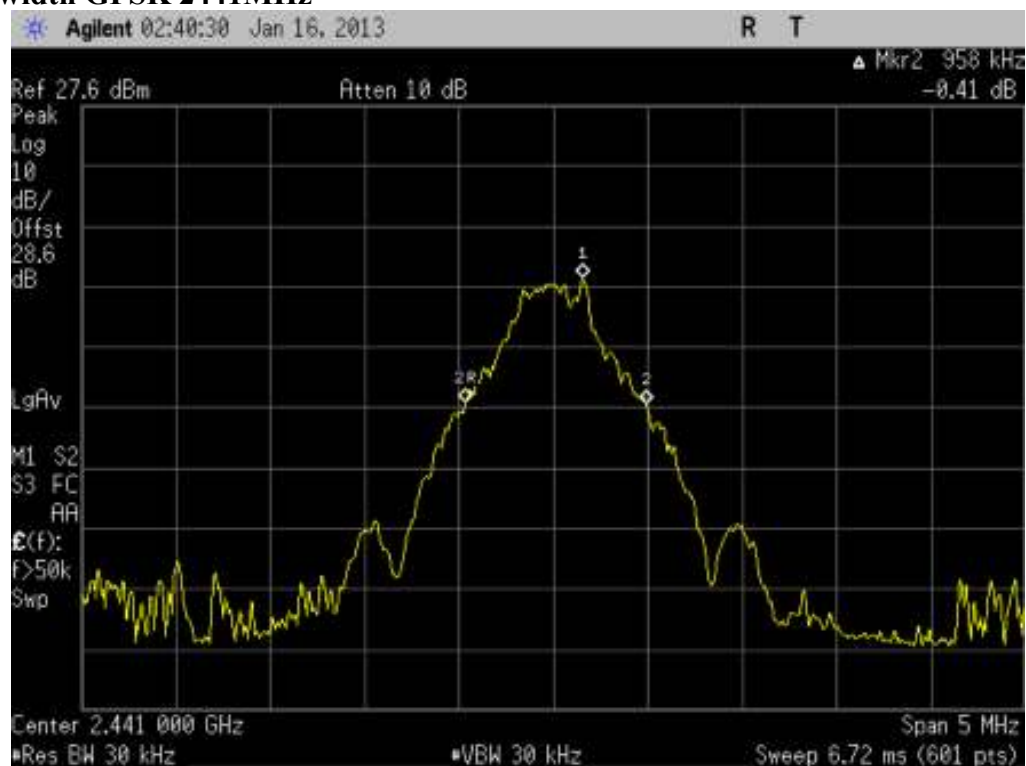

20dB Bandwidth GFSK 2480MHz

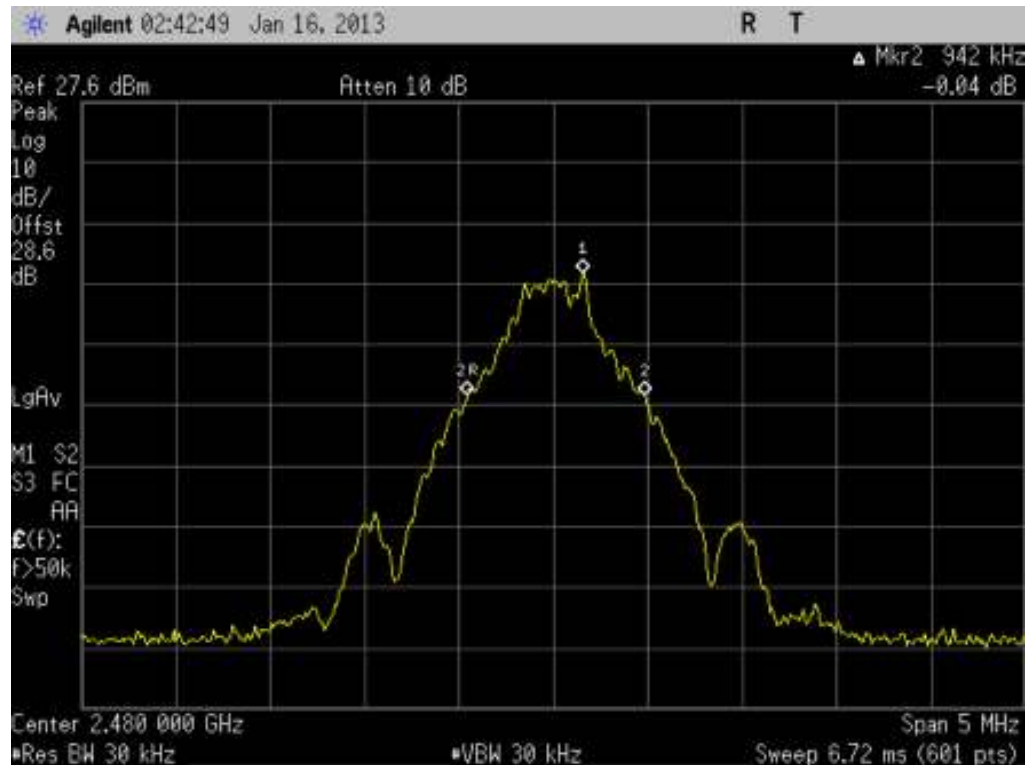

20dB Bandwidth $\pi / 4$ DQPSK 2402MHz

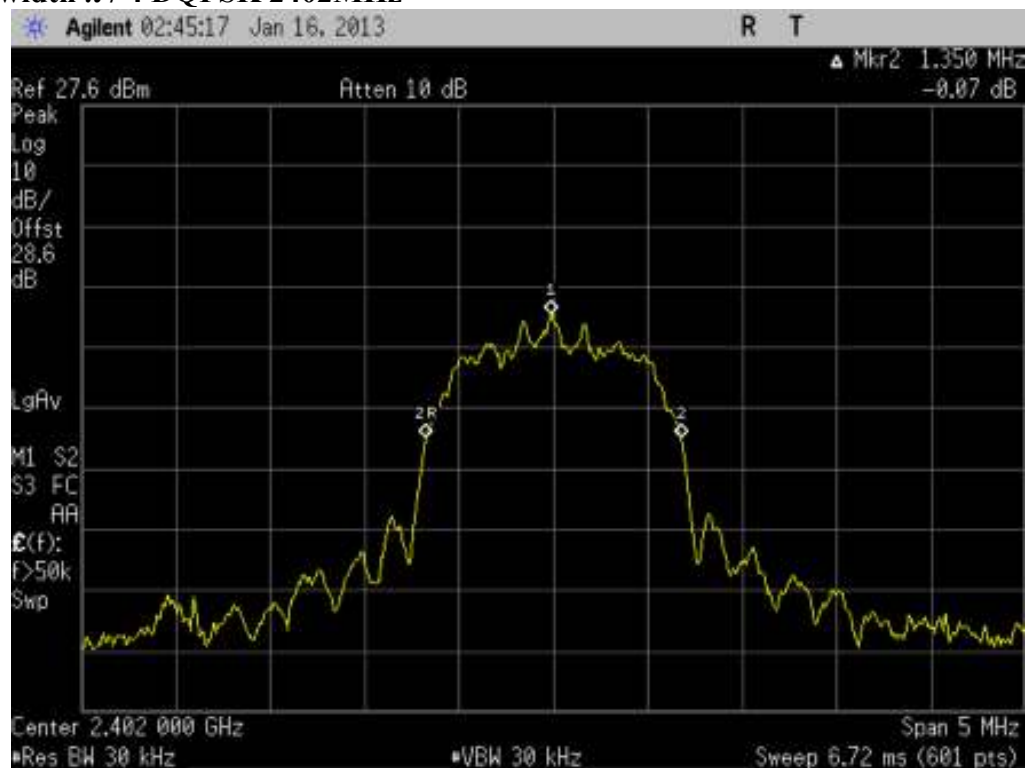

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



20dB Bandwidth $\pi / 4$ DQPSK 2441MHz

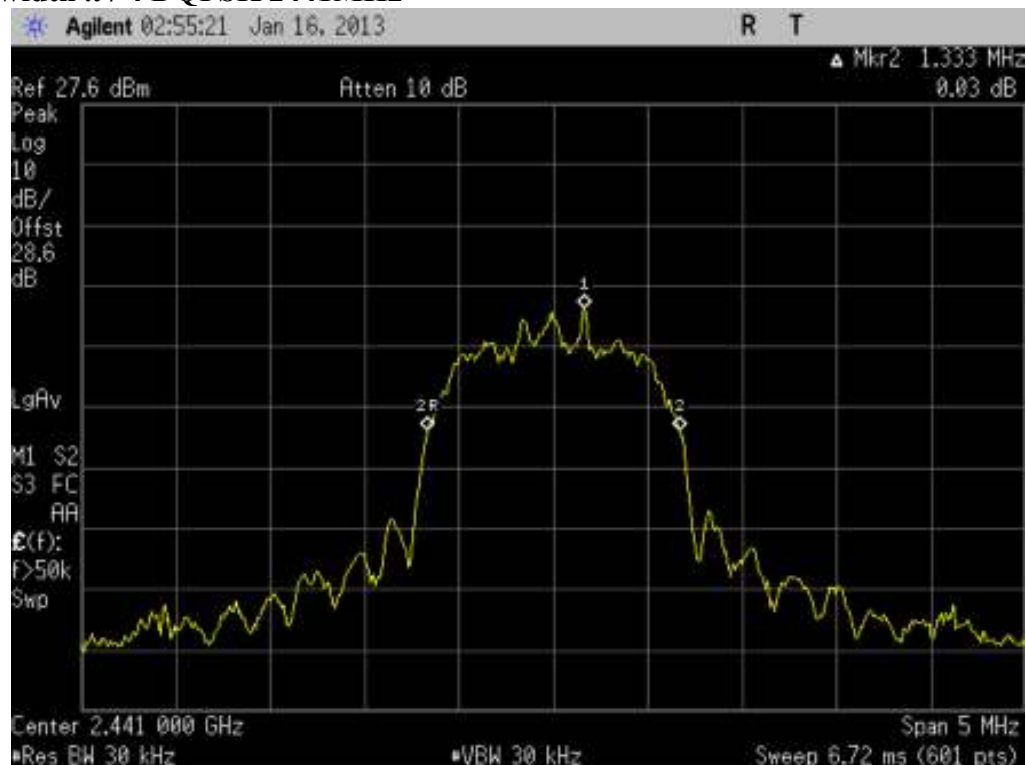

20dB Bandwidth $\pi / 4$ DQPSK 2480MHz



Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN

Date of Report: 2013-05-28


IC ID: 1693B-70E1



20dB Bandwidth 8DPSK 2402MHz



20dB Bandwidth 8DPSK 2441MHz

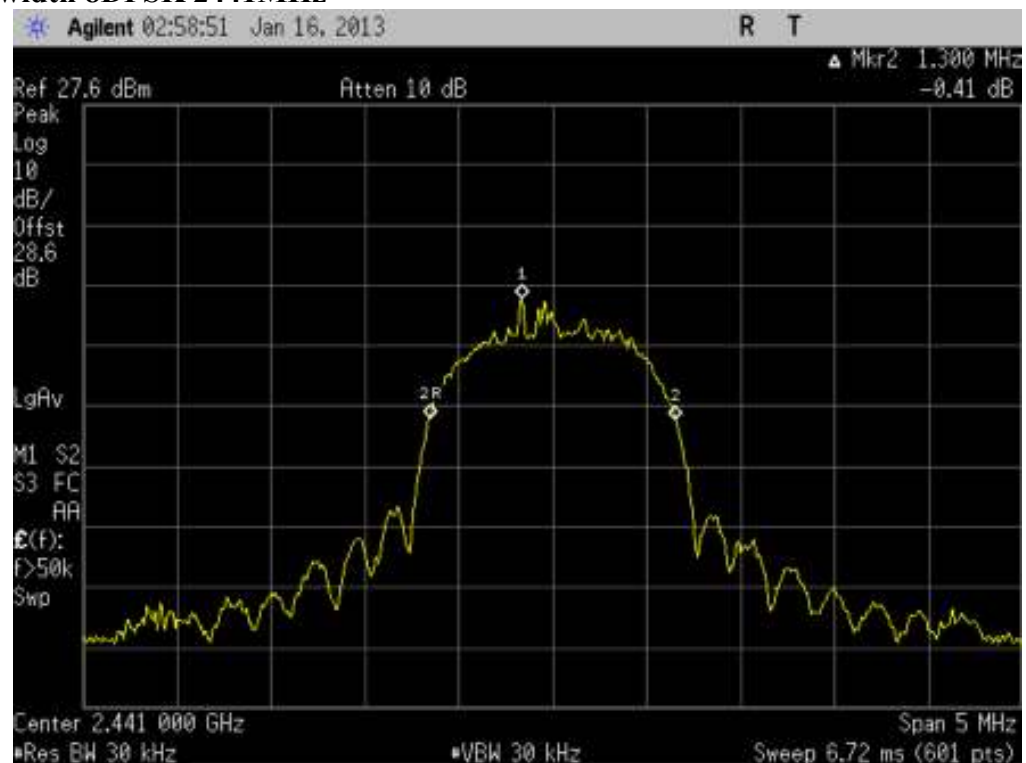


Test Report #: EMC_HONEY-095-12003_70eLGN_DSS
Date of Report: 2013-05-28

FCC ID: HD570ELGN
IC ID: 1693B-70E1



20dB Bandwidth 8DPSK 2480MHz

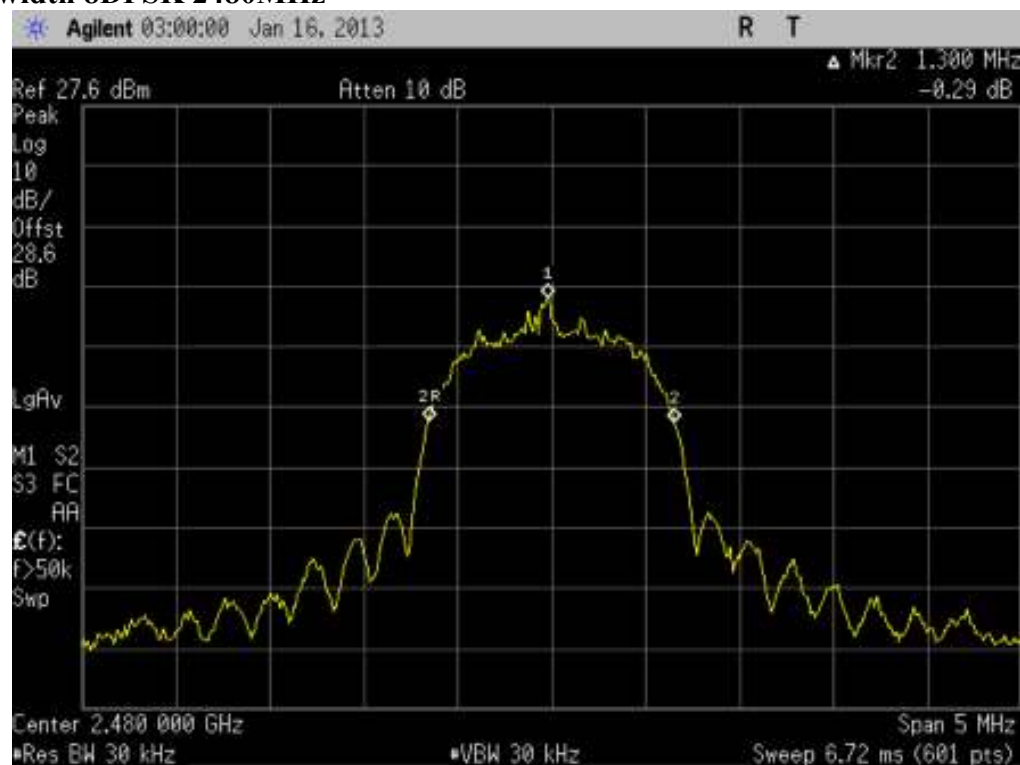

6.7 Carrier Frequency Separation

6.7.1 Limits:

§ 15.247 (a) (1)

RSS 210- A8.1(b)

Minimum 25kHz or 2/3 of the 20dB bandwidth of the hopping system

6.7.2 Test Conditions:

Tnom: 20 C; Vnom: 3.6

Hopping ON

6.7.3 Test Procedure:

Measurement according to DA 00-705

Spectrum Analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto; Detector function = peak; Trace = max hold

6.7.4 Test Data/plot:



6.7.5 Test Result:

Modulation: GFSK

Channel Separation: 1.0 MHz

6.7.5.1 Measurement Verdict:

Pass.

6.8 Number of hopping channels

6.8.1 Limits:

§ 15.247 (a) (1)

RSS 210- A8.1(d)

Atleast 15 non-overlapping channels

6.8.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6 V

Hopping ON

6.8.3 Test Procedure:

Measurement according to DA 00-705

Spectrum Analyzer settings:


Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto; Detector function = peak; Trace = max hold

6.8.4 Test Data/plot:

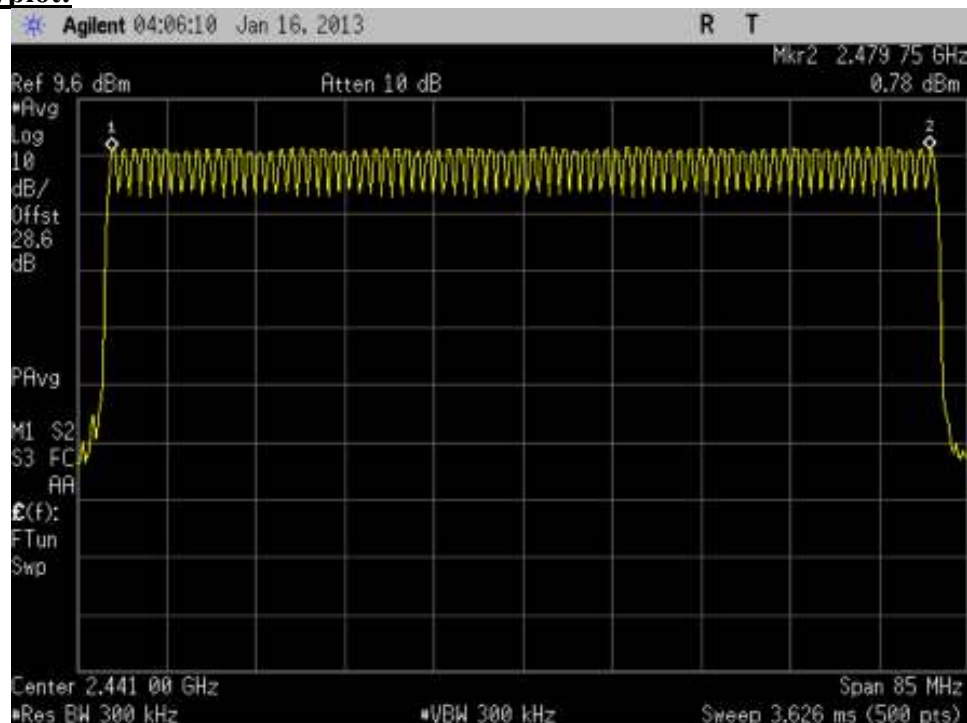

6.8.5 Test Result:

Modulation: GFSK

Number of hopping channels: 79

6.8.5.1 Measurement Verdict:

Pass.

6.9 Time of occupancy (Dwell time)

6.9.1 Limits:

§ 15.247 (a) (1) (iii)

RSS 210- A8.1(d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

6.9.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6 V

Hopping ON

6.9.3 Test Procedure:

Measurement according to DA 00-705

Spectrum Analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

6.9.4 Test Result:


Packet Type	Tx-on Time (ms)	Max. number of transmissions per channel in 31.6 sec	Dwell Time (ms)= (Pulse width * Number of transmissions)	Limit (ms)
DH-1	0.384	320.1	122.9	400
DH-3	1.631	161.16	262.9	400
DH-5	2.89	106.176	306.8	400

6.9.4.1 Measurement Verdict


Pass.

6.9.5 Test Dat/plots:

DH1

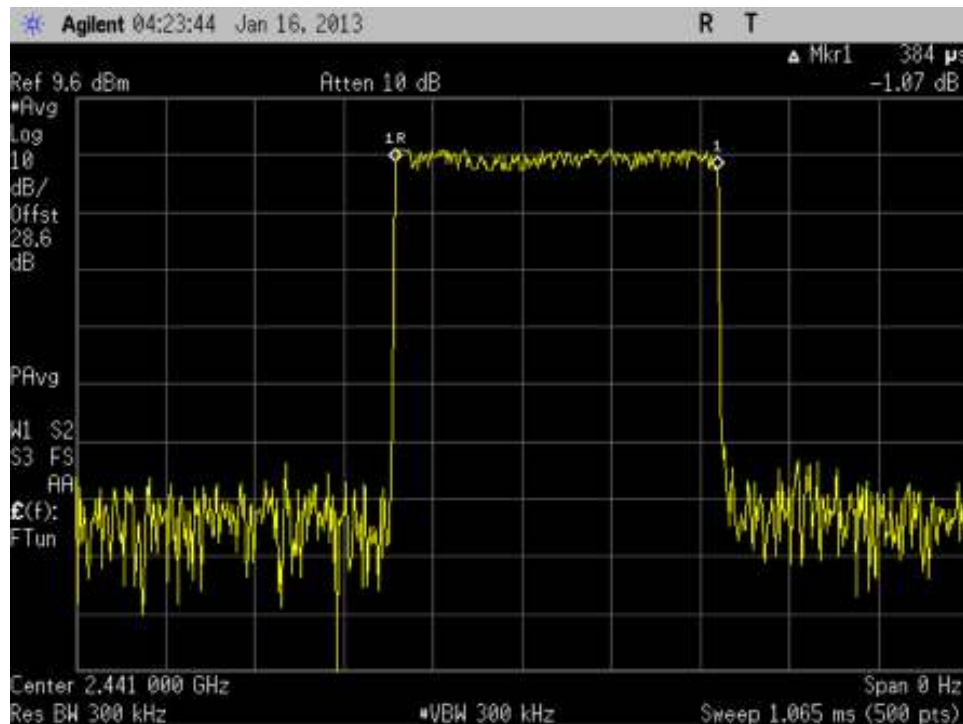

DH3

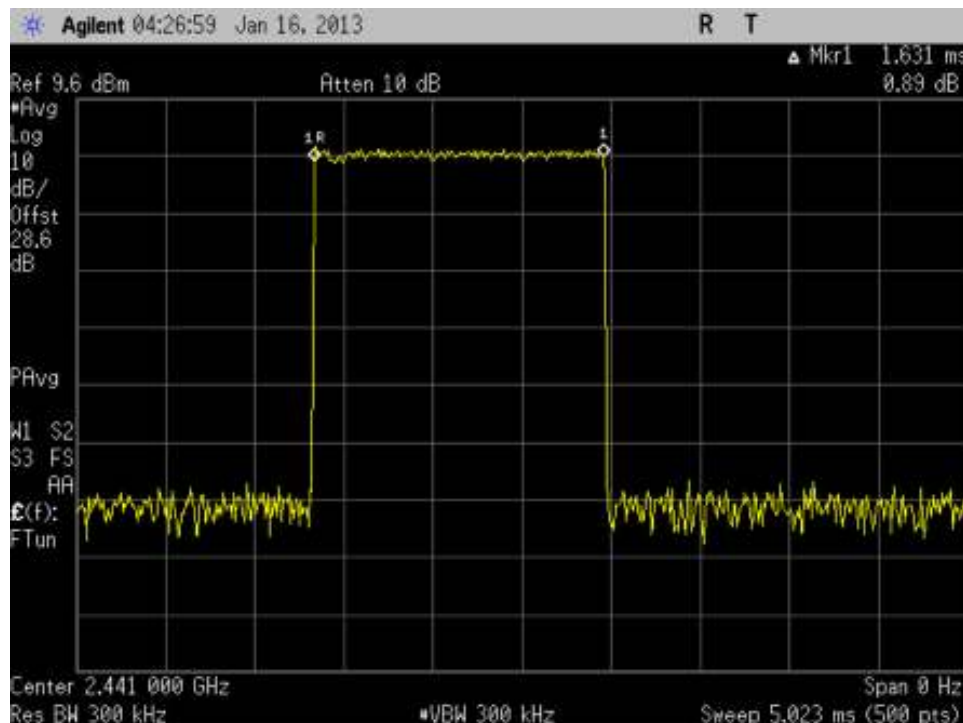

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



DH5

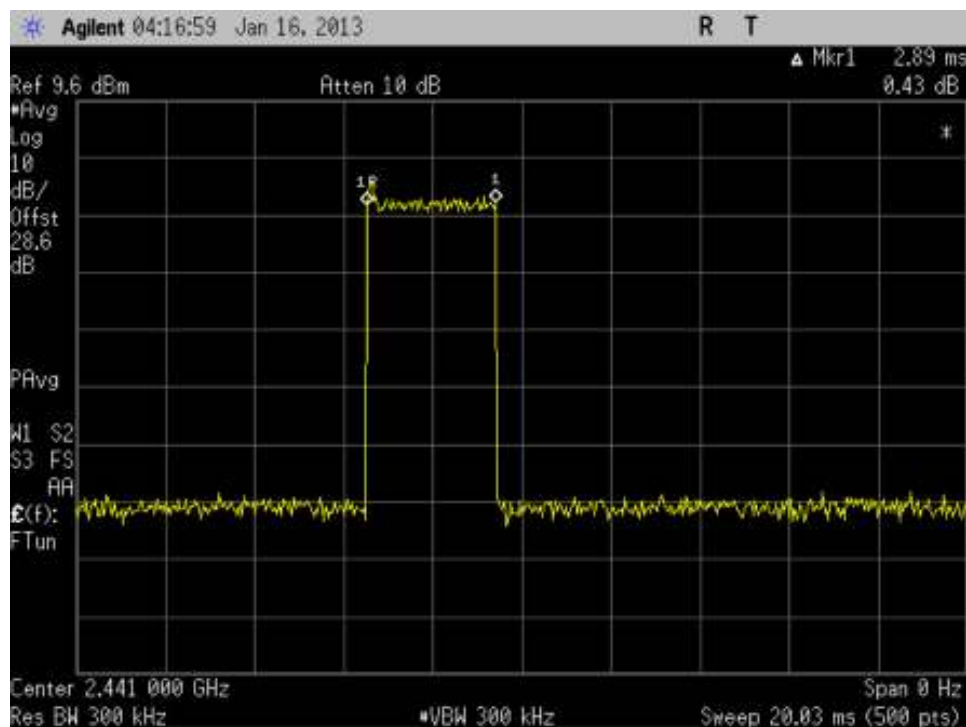

6.10 Power Spectral Density (Hybrid system in Inquiry mode/ Page Scan)

6.10.1 Limits: § 15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

6.10.2 Test Result:

Not Applicable for FHSS systems.

6.11 Transmitter Spurious Emissions- Conducted

6.11.1 Reference and Limits:

6.11.1.1 § 15.247 (d)

6.11.1.2 RSS 210-A8.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the radio frequency power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

-20dBc in the frequency range 30MHz- 25GHz.

6.11.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6 V

Hopping OFF

6.11.3 Test Procedure:

Measurement according to DA 00-705

Spectrum Analyzer settings:

Span = Full

RBW = 100 kHz; VBW ≥ RBW

Sweep = auto


Detector function = peak; Trace = max hold

6.11.4 Test Result:


Conducted Spurious Emissions					
Channel	Frequency (MHz)	Amplitude (dBm)			Limits
		GFSK	$\pi/4$ DQPSK	8DPSK	
Low	2402	0.6	-2.1	-1.6	
	Spurious	All other peaks >20dB below limit			-20dBc
Mid	2441	0.9	-2.1	-1.5	
	Spurious	All other peaks >20dB below limit			-20dBc
High	2480	0.9	-1.8	-1.0	
	Spurious	All other peaks >20dB below limit			-20dBc
Measurement Uncertainty: ± 1.0 dB					

6.11.5 Test data/ plots:

Conducted Spurious Emissions GFSK 2402MHz

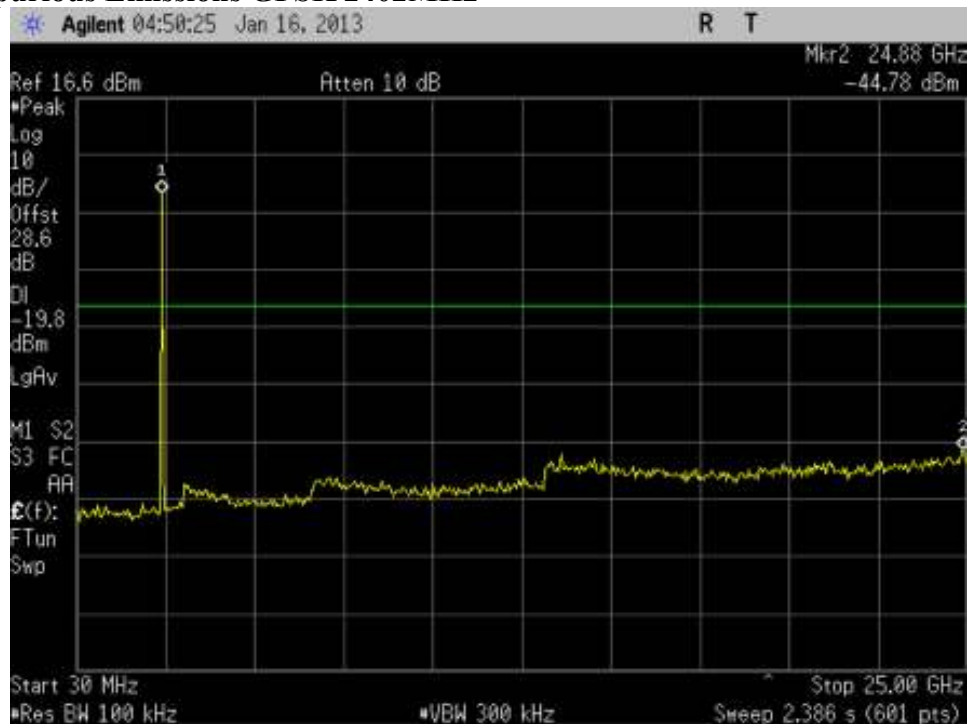

Conducted Spurious Emissions GFSK 2441MHz

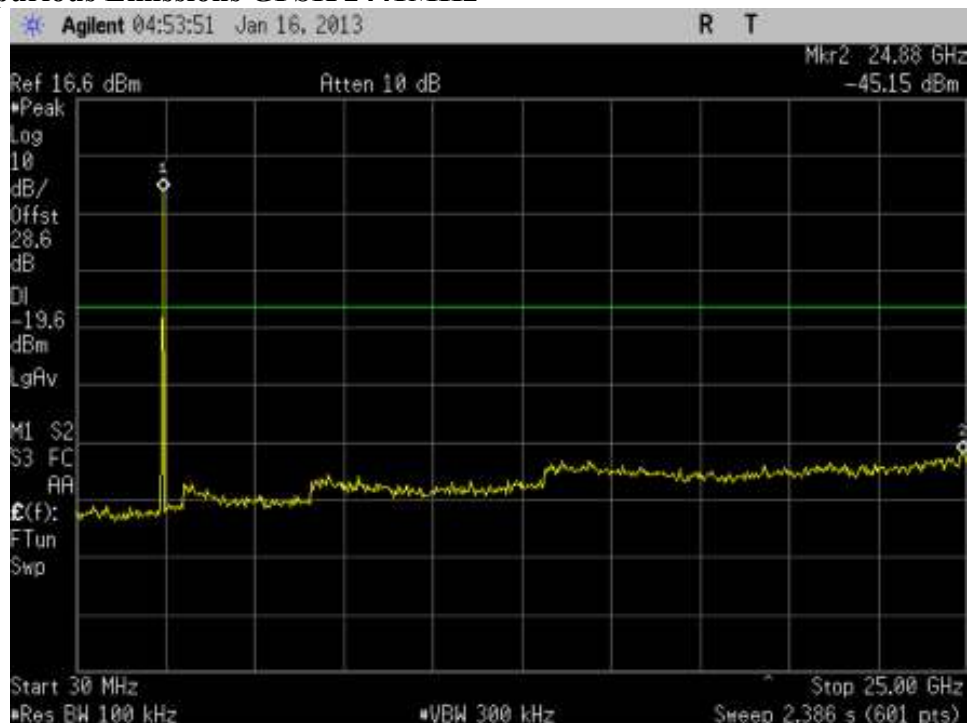

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN


Date of Report: 2013-05-28

IC ID: 1693B-70E1



Conducted Spurious Emissions GFSK 2480MHz

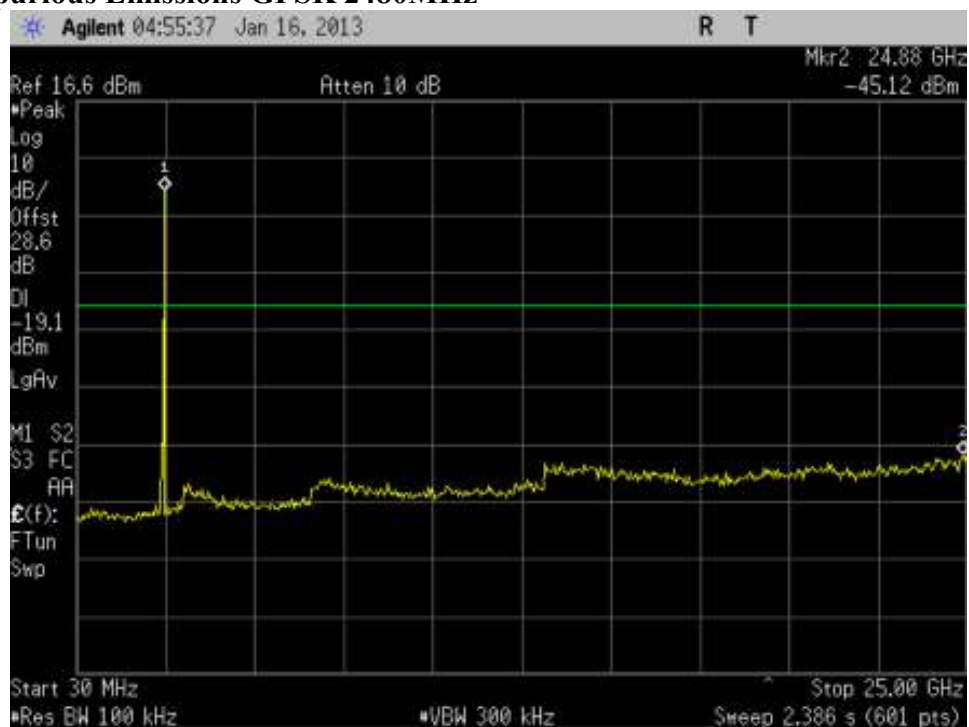

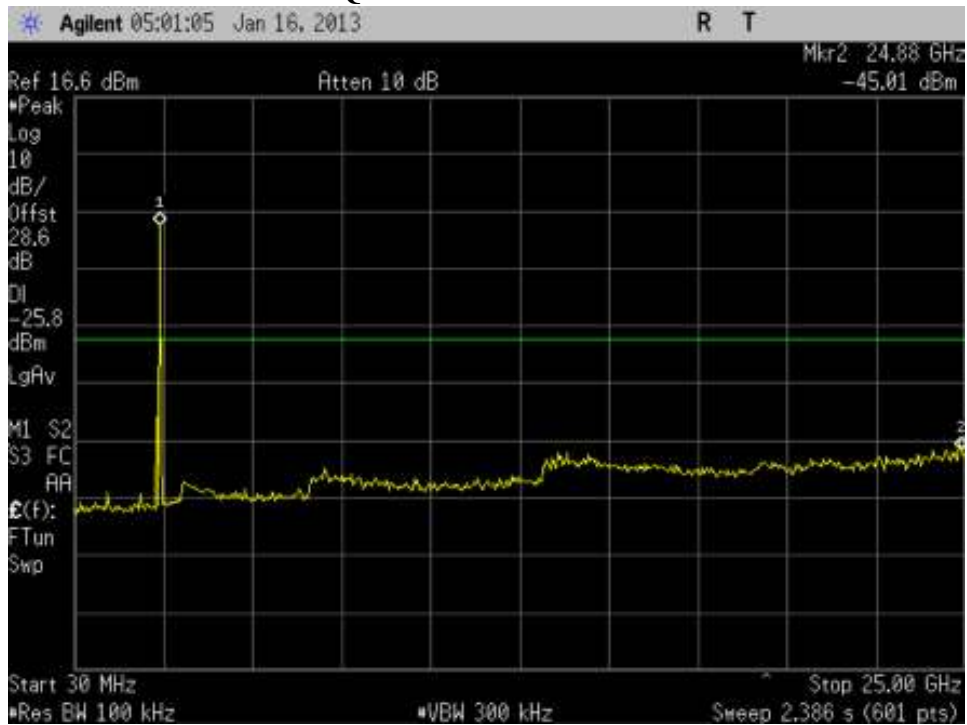Conducted Spurious Emissions $\pi / 4$ DQPSK 2402MHz**Conducted Spurious Emissions $\pi / 4$ DQPSK 2441MHz**

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



Conducted Spurious Emissions $\pi / 4$ DQPSK 2480MHz

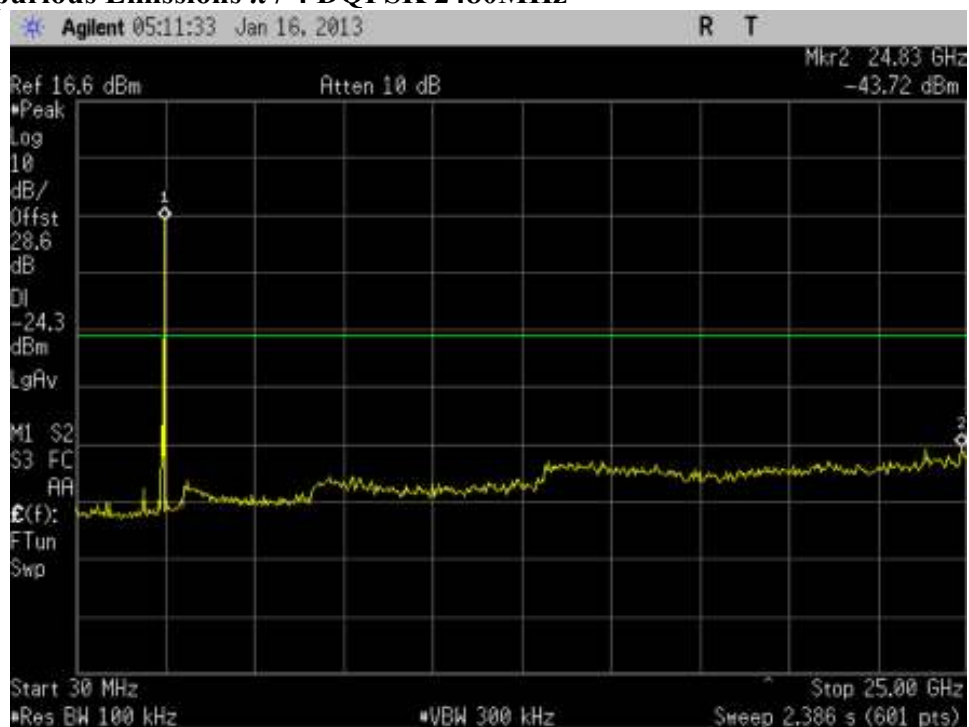

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN

Date of Report: 2013-05-28


IC ID: 1693B-70E1



Conducted Spurious Emissions 8DPSK 2402MHz

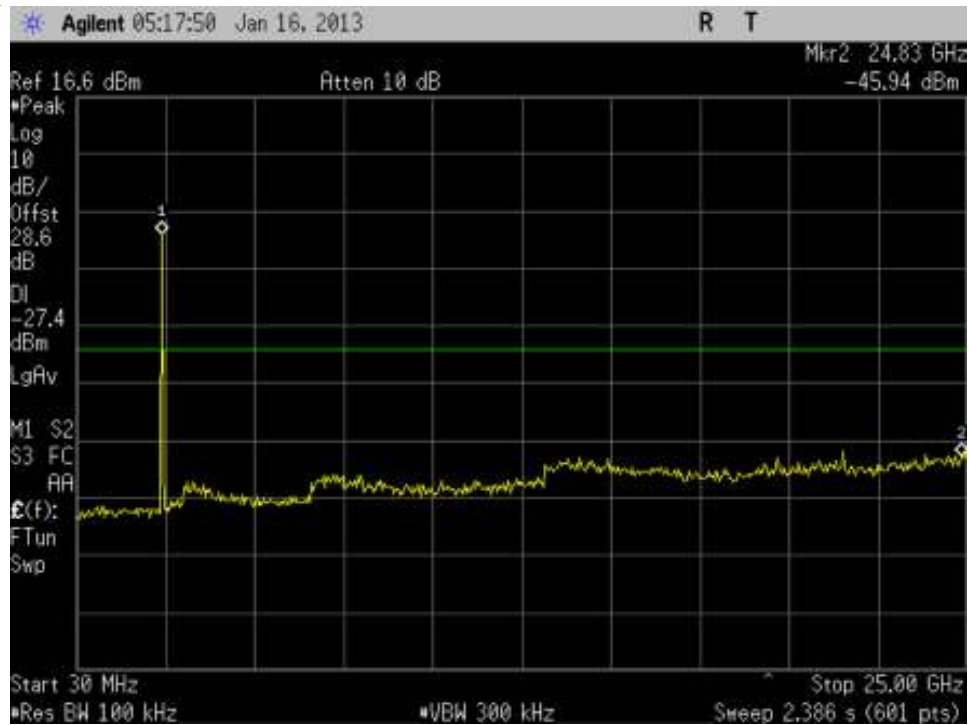

Conducted Spurious Emissions 8DPSK 2441MHz

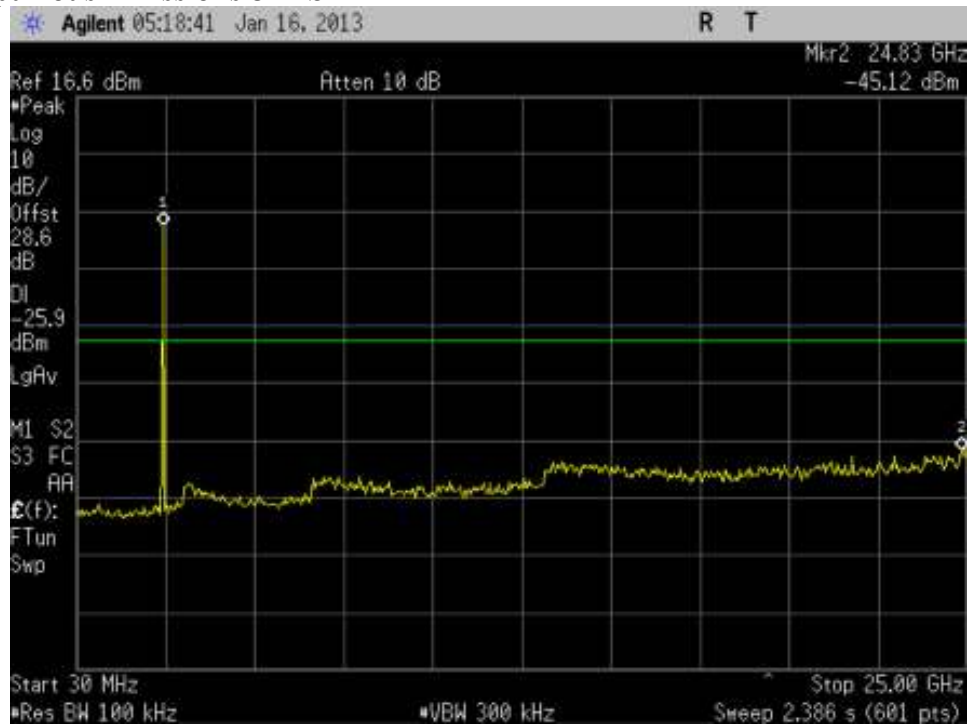

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS


FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



Conducted Spurious Emissions 8DPSK 2480MHz

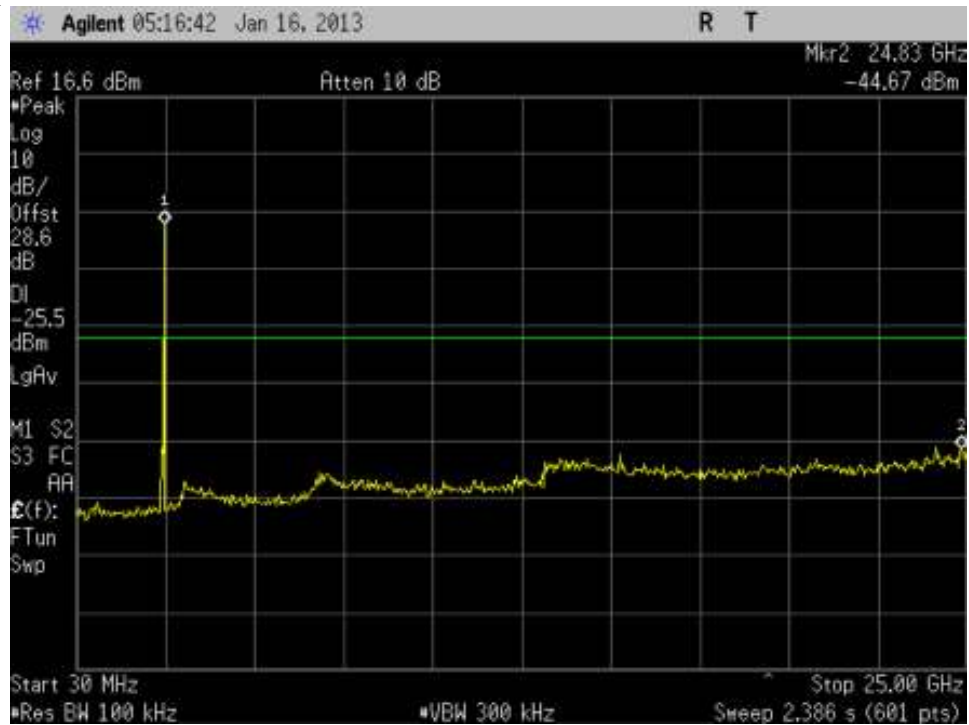

6.11.5.1 Measurement Verdict:

Pass.

6.12 Restricted Band Edge Compliance

6.12.1 Reference and Limits: §15.247/15.205/15.209; RSS-210 A8.5

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

15.209 (a) Emission Limits:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30 (29.5 dBμV/m)	30
30–88	100 (40dBμV/m)	3
88–216	150 (43.5 dBμV/m)	3
216–960	200 (46 dBμV/m)	3
Above 960	500 (54 dBμV/m)	3

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



6.12.2 Test Conditions:

Tnom: 20°C; Vnom: 3.6V

Hopping OFF

6.12.3 Measurement Procedure:

Peak measurements are made using a peak detector and RBW=1MHz.



*PEAK LIMIT= 74dB μ V/m

Average measurements performed using a peak detector and according to video averaging procedure with RBW=1MHz and VBW=10Hz.


*AVG. LIMIT= 54dB μ V/m

6.12.3.1 Measurement Verdict


Pass.

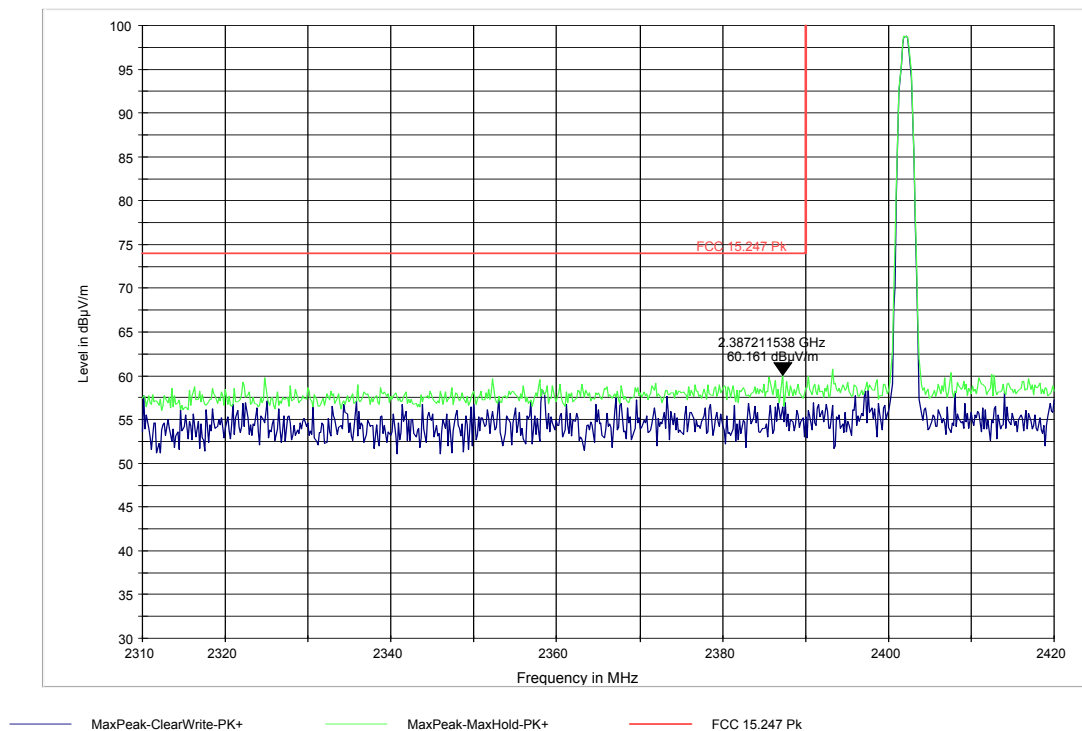
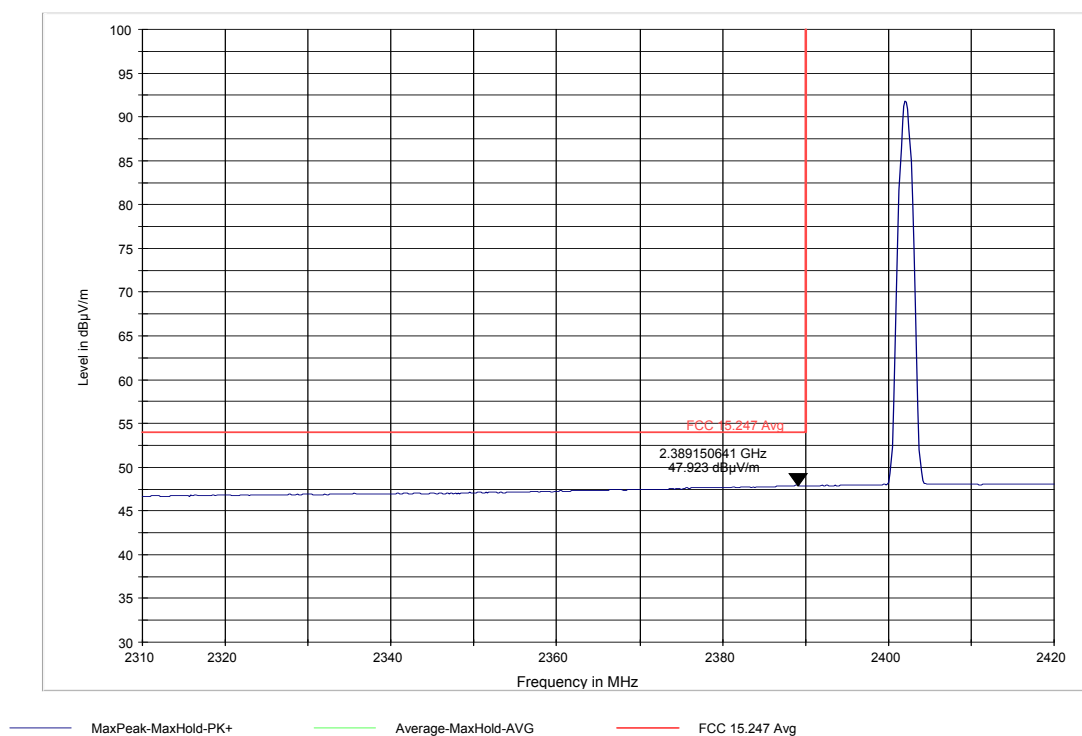
6.12.4 Test Data/plots:**Lower band edge peak -GFSK modulation****Lower band edge average -GFSK modulation**

Higher band edge peak -GFSK modulation

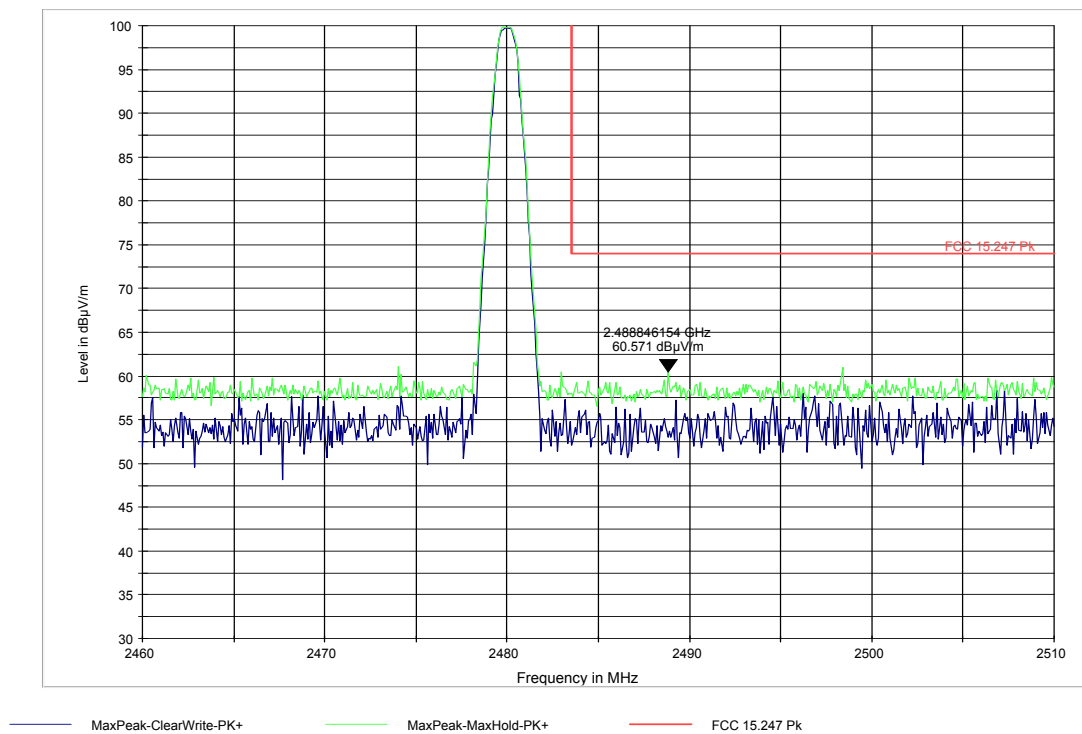


Higher band edge average-GFSK modulation

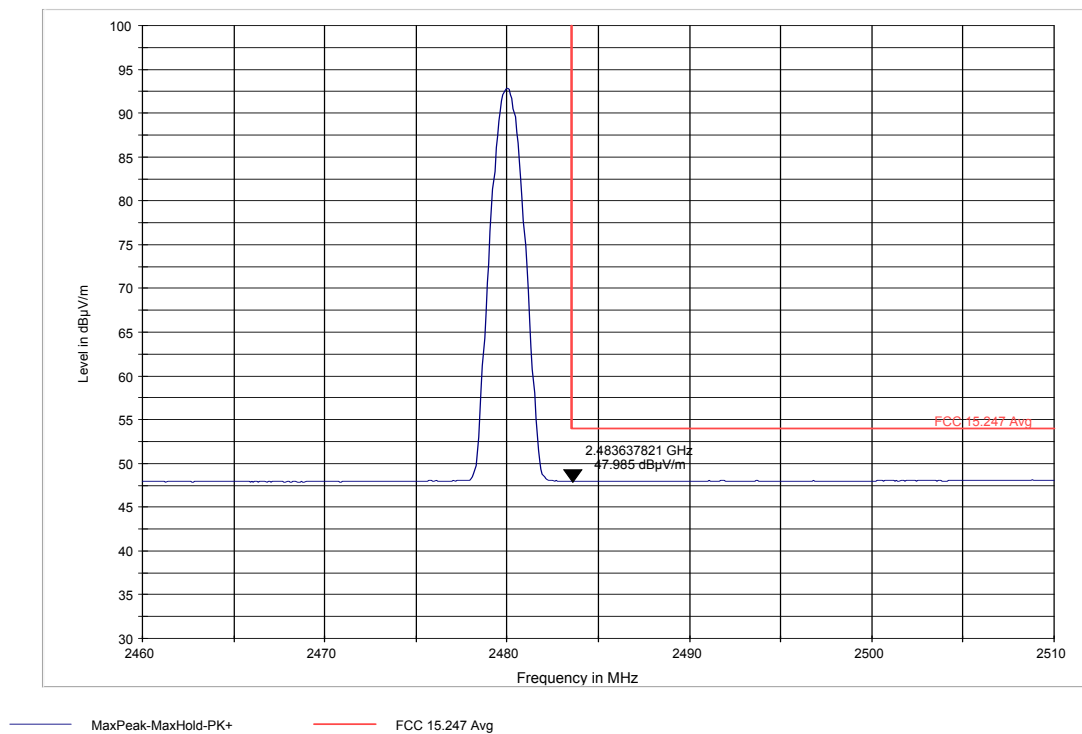


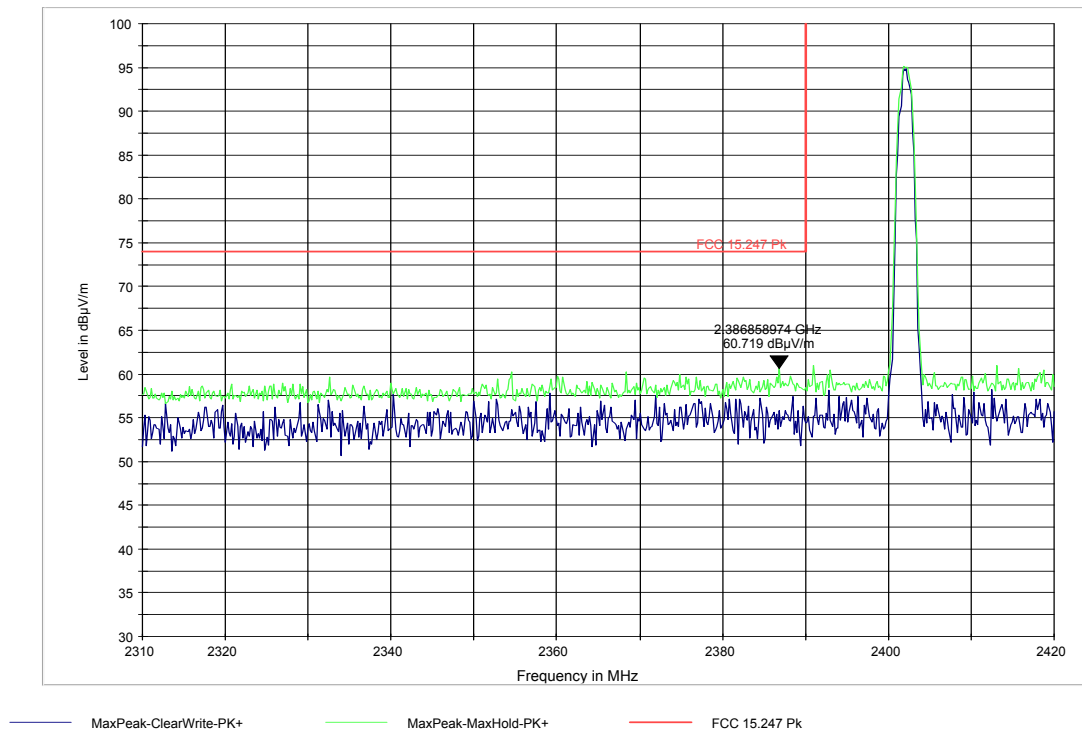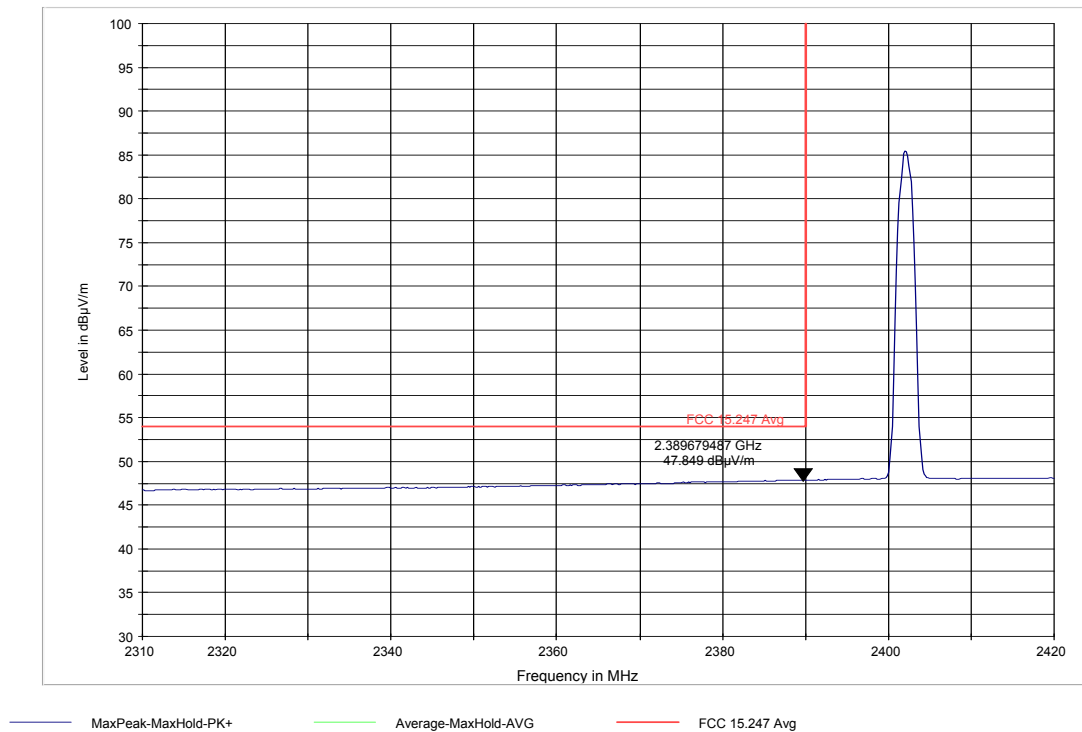Lower band edge peak - $\pi/4$ DQPSK modulation**Lower band edge average - $\pi/4$ DQPSK modulation**


Higher band edge peak $-\pi/4$ DQPSK modulation

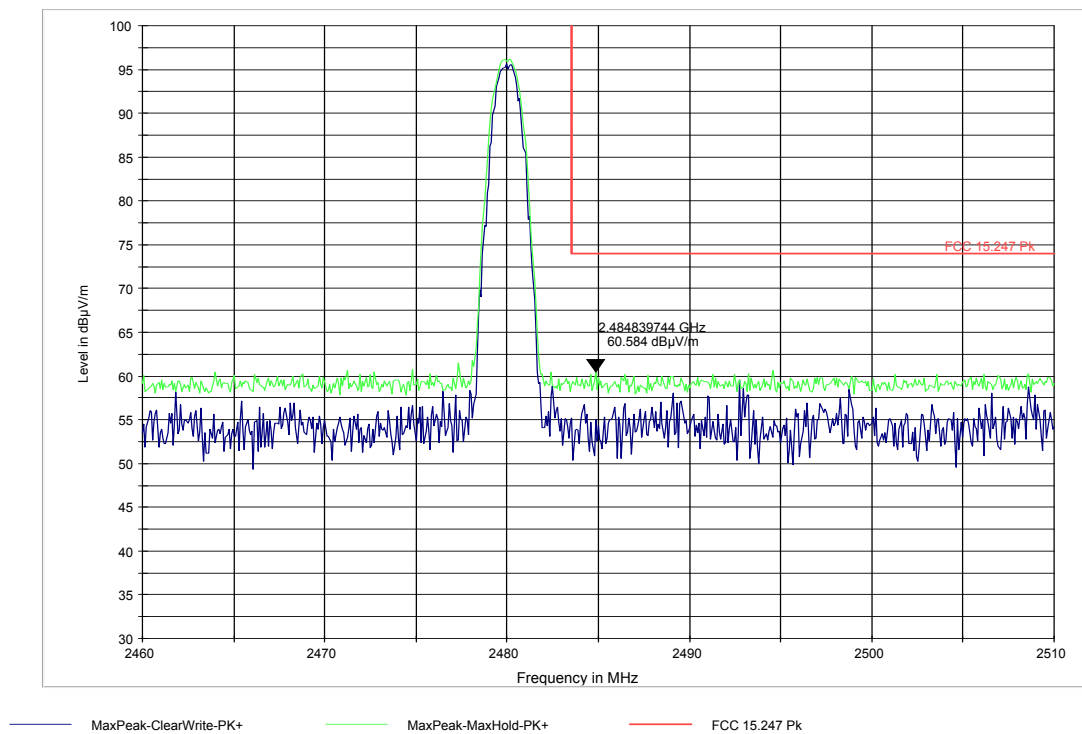


Higher band edge average $-\pi/4$ DQPSK modulation

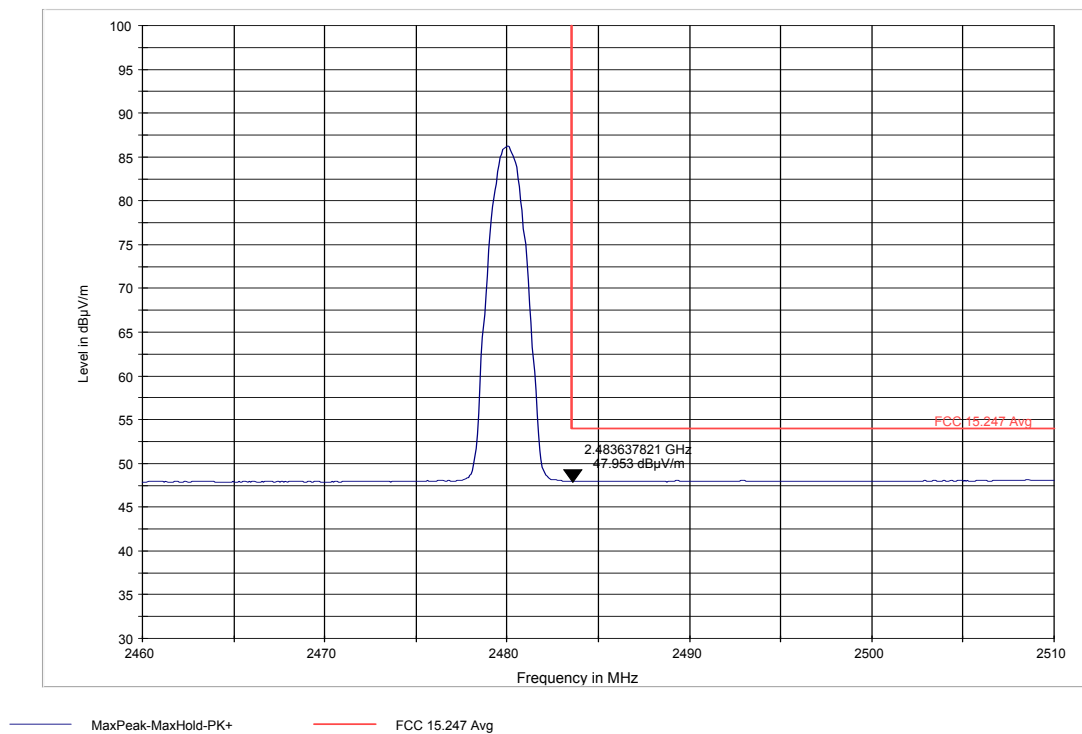


Lower band edge peak - 8DPSK modulation

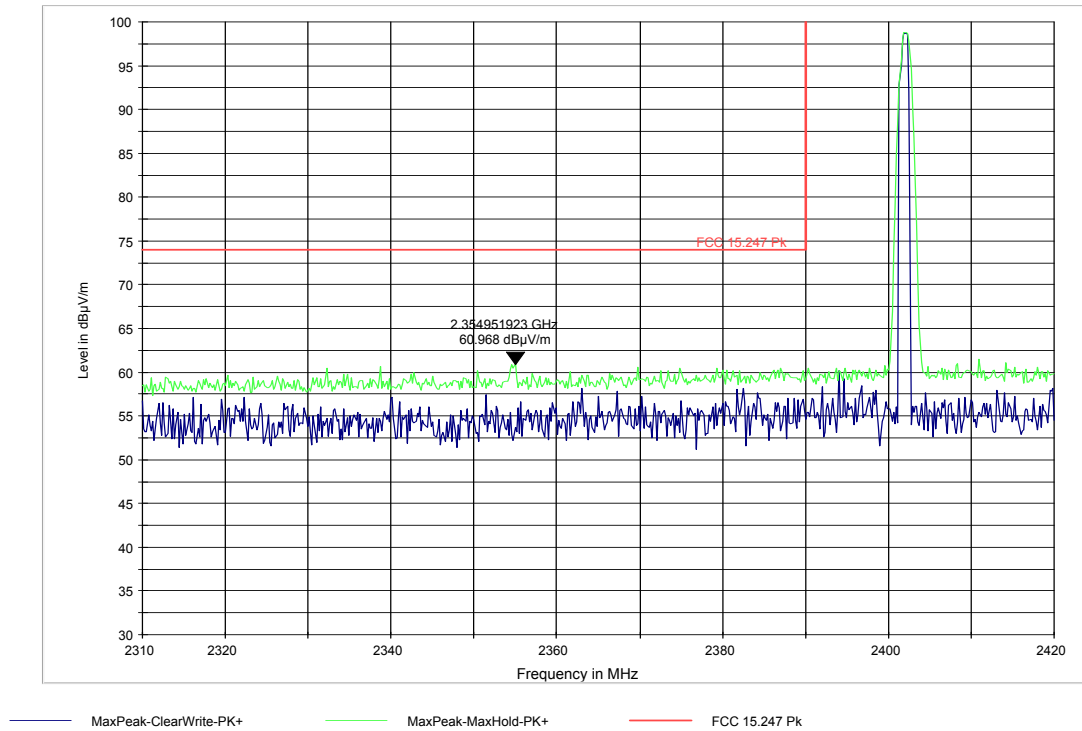


Lower band edge average -8DPSK modulation

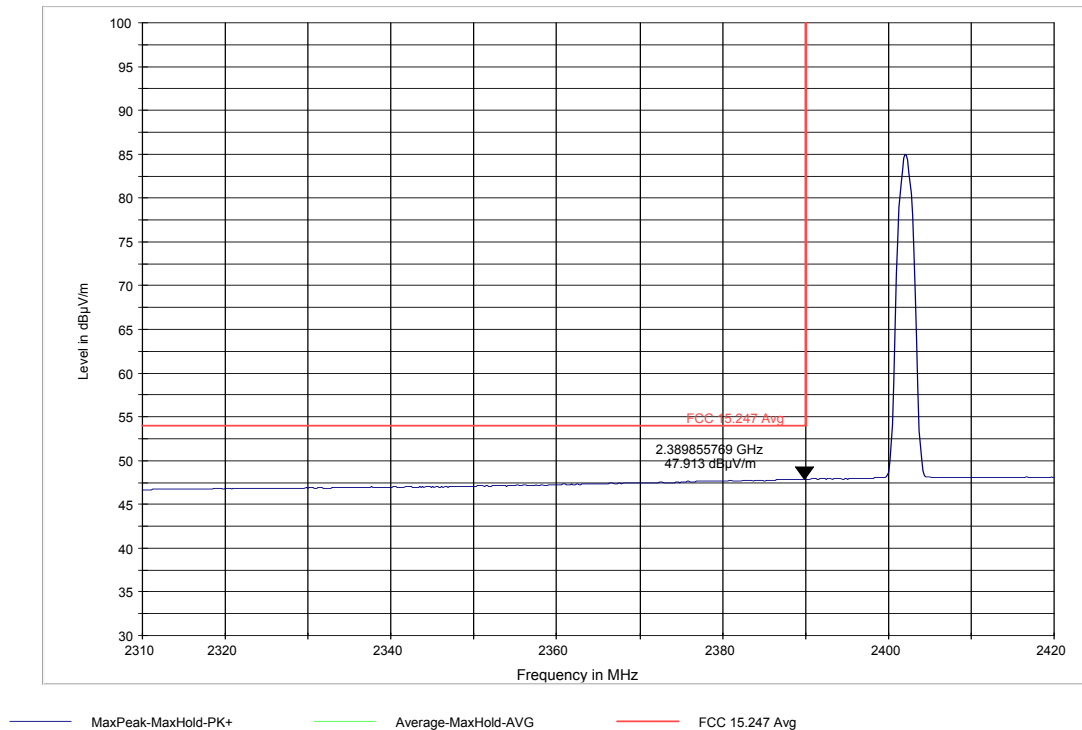

Higher band edge peak - 8DPSK modulation

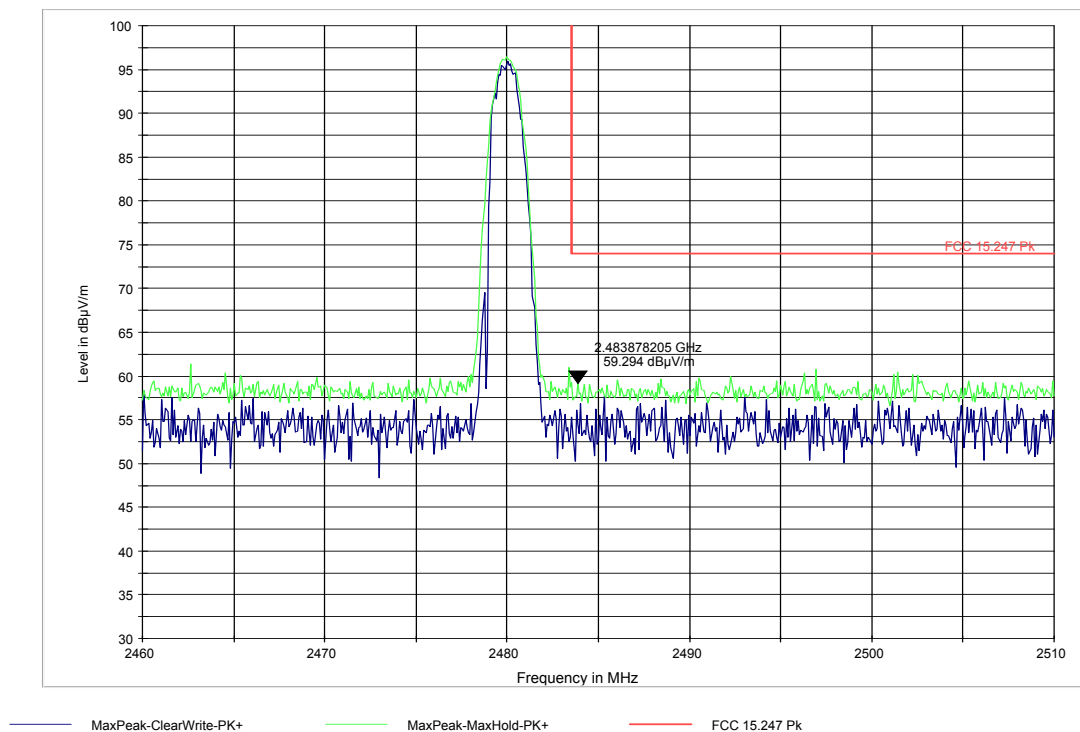

Higher band edge average-8DPSK modulation

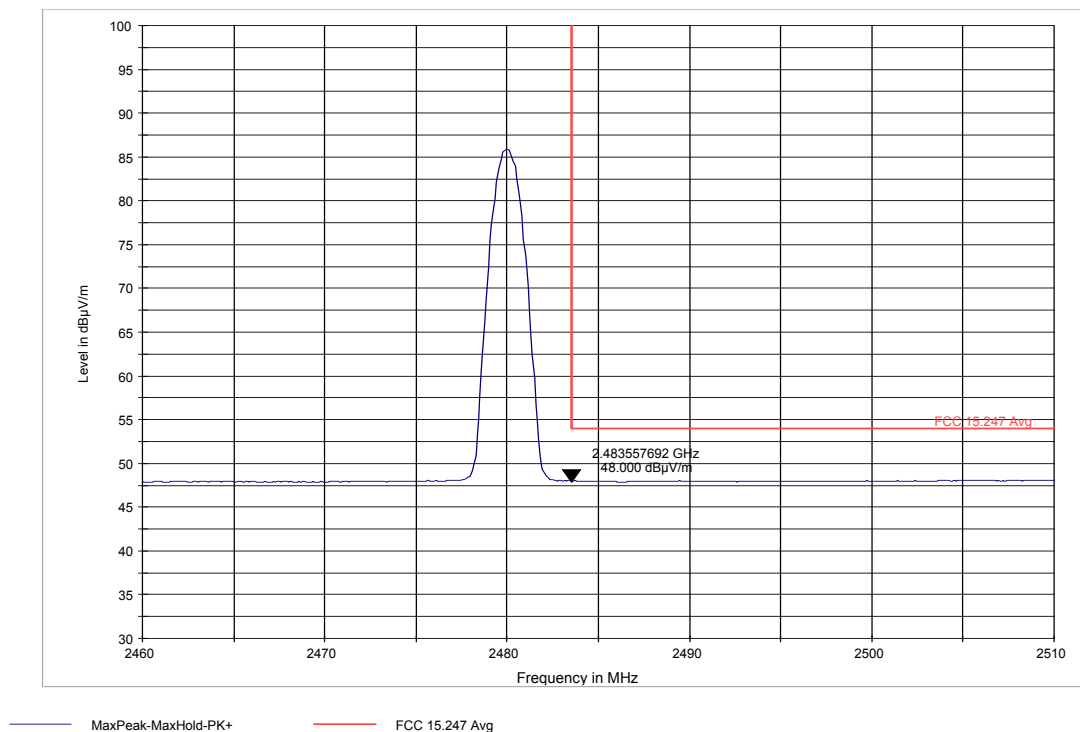

6.13 Transmitter Spurious Emissions- Radiated**6.13.1 Reference and Limits:**

§15.247/15.205/15.209;

RSS-Gen Section 4.9; RSS 210-A8.5

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (m)
0.009–0.490	2400/F(kHz)	300
0.490–1.705	24000/F(kHz)	30
1.705–30.0	30 (29.5 dB μ V/m)	30
30–88	100 (40dB μ V/m)	3
88–216	150 (43.5 dB μ V/m)	3
216–960	200 (46 dB μ V/m)	3
Above 960	500 (54 dB μ V/m)	3

6.13.2 Test Result:

The device was set to operate in GFSK test mode (highest conducted output power) and measurement results as reported here, represents the worst case radiated spurious emissions.

Unless mentioned otherwise, the emissions outside the limit lines in the plots are from the transmit signal.

For radiated measurements, all data in this report shows the worst case emissions data between H/V antenna polarizations and for all 3 orthogonal orientations of the EUT.

6.13.3 Test Conditions:

Tnom: 20°C; Vnom: 3.6 V

Hopping OFF

6.13.4 Measurement Procedure:

Peak measurements are made using a peak detector and RBW=120kHz (<1GHz) and RBW= 1MHz (>1GHz)

6.13.5 Testing Notes:

The following plots show the worst case per frequency range out of all tested modes of operation. For the measurement range up to 30 MHz in the following plots the field strength results from 3m distance measurement are extrapolated to 300m and 30m distance respectively, by 40dB/decade, according to part 15.31(f)(2), per antenna factor scaling.

The red limit line shows the 300 m limit up to 490 kHz, the 30m limit up to 30 MHz and 3m limit above 30MHz.

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN


Date of Report: 2013-05-28

IC ID: 1693B-70E1




6.13.5.1 Measurements Verdict

Pass.

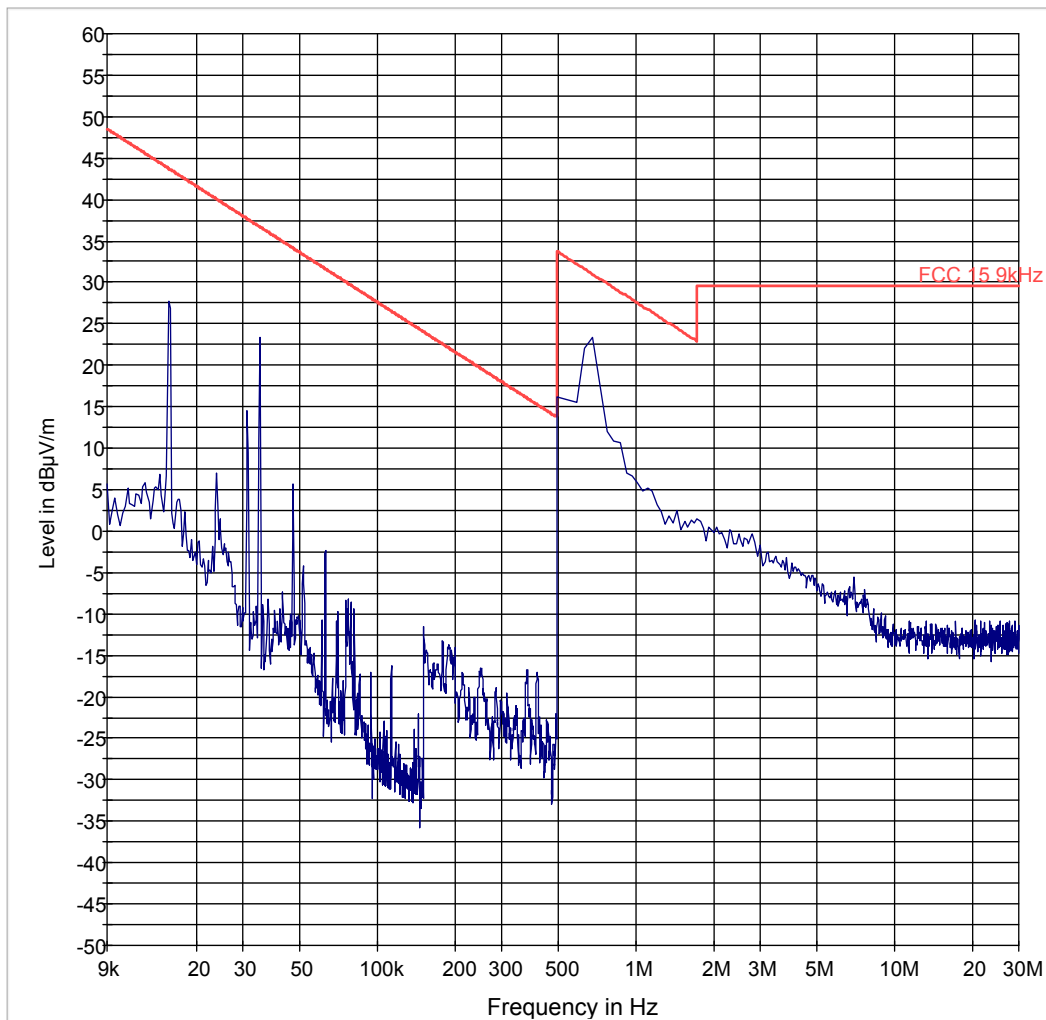6.13.6 Test data/ plots:**Transmitter Radiated Spurious Emission: Ch39- 9kHz-30MHz**


— FCC 15.9kHz — Preview Result 1-PK+

Transmitter Radiated Spurious Emission- Ch0- 30MHz-1GHz

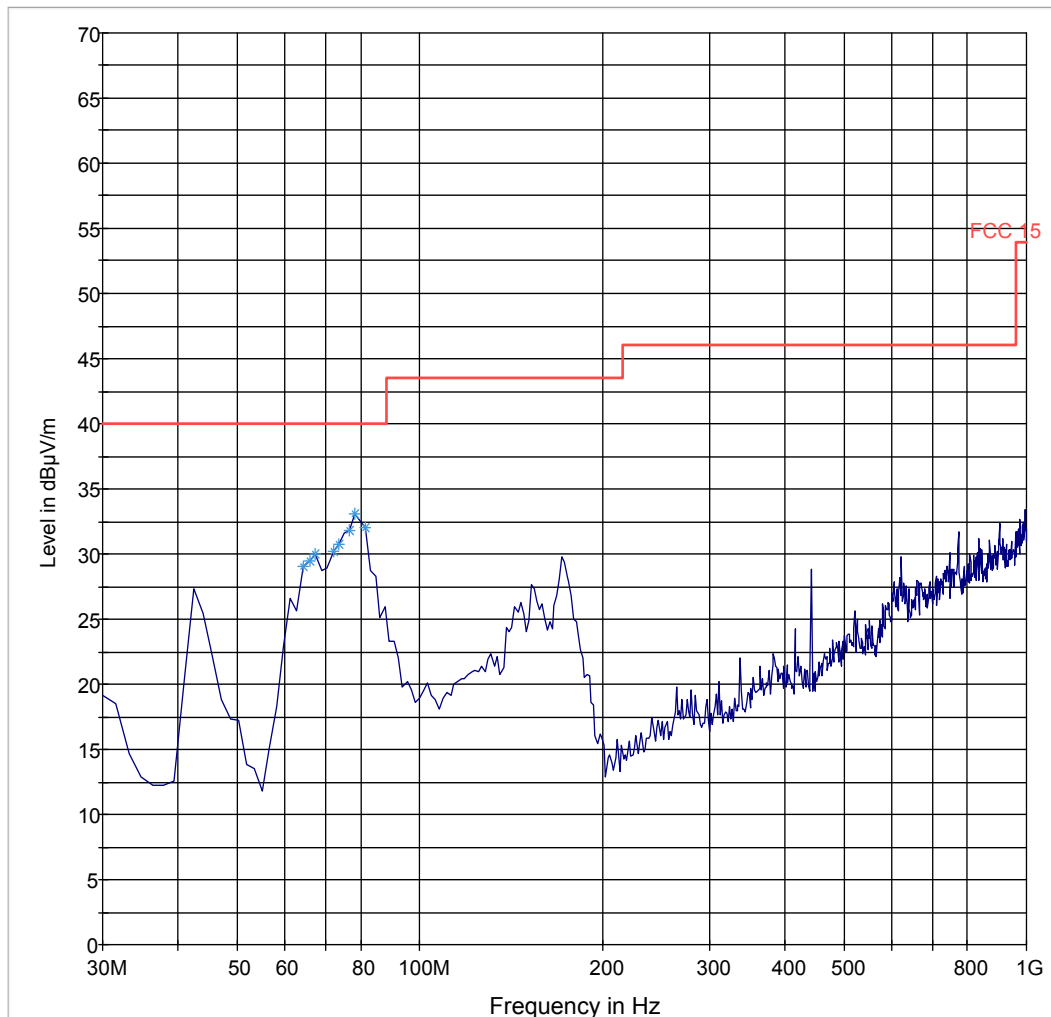


— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [3]-PK+

Transmitter Radiated Spurious Emission- Ch0- 1GHz-18GHz

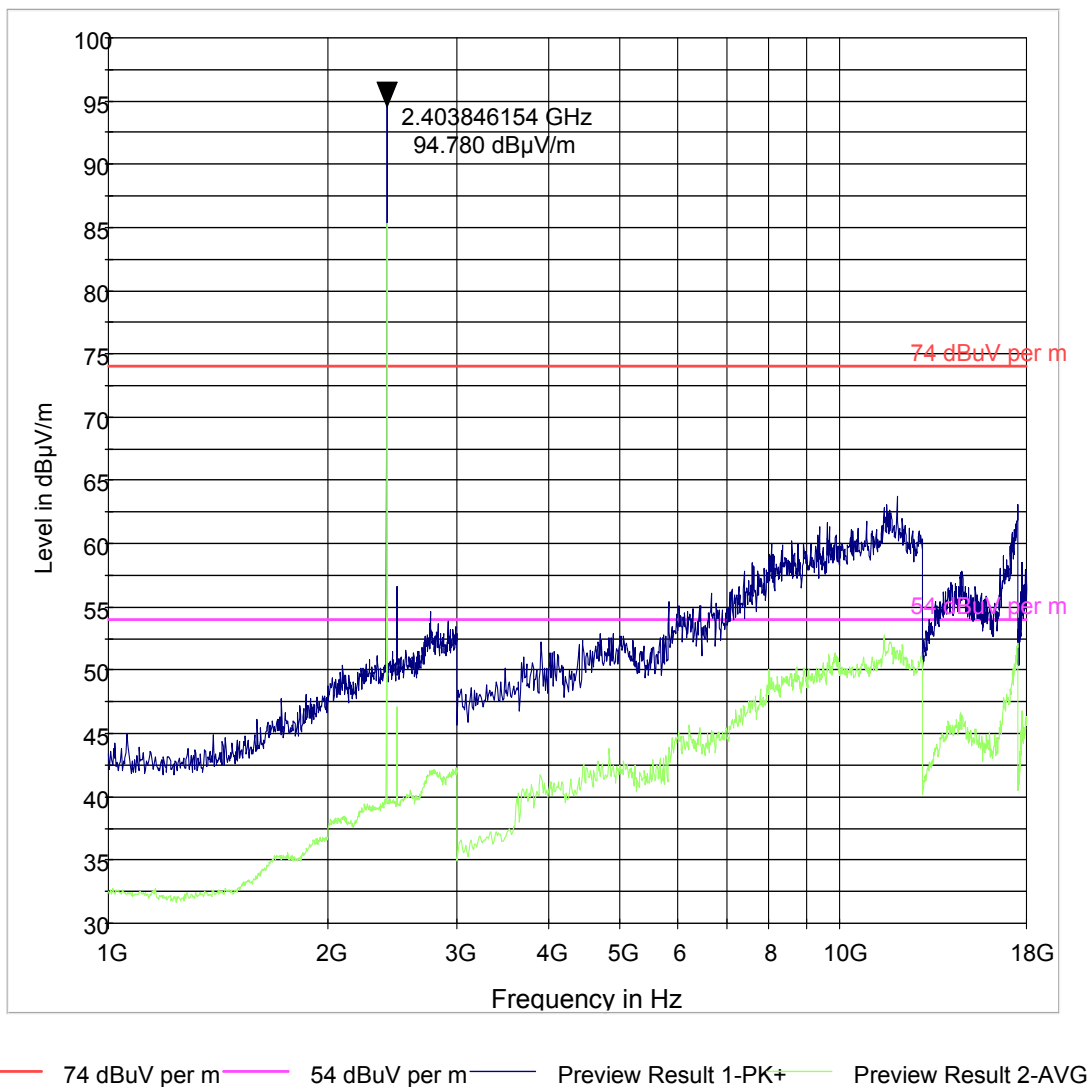


Transmitter Radiated Spurious Emission- Ch39- 30MHz-1GHz

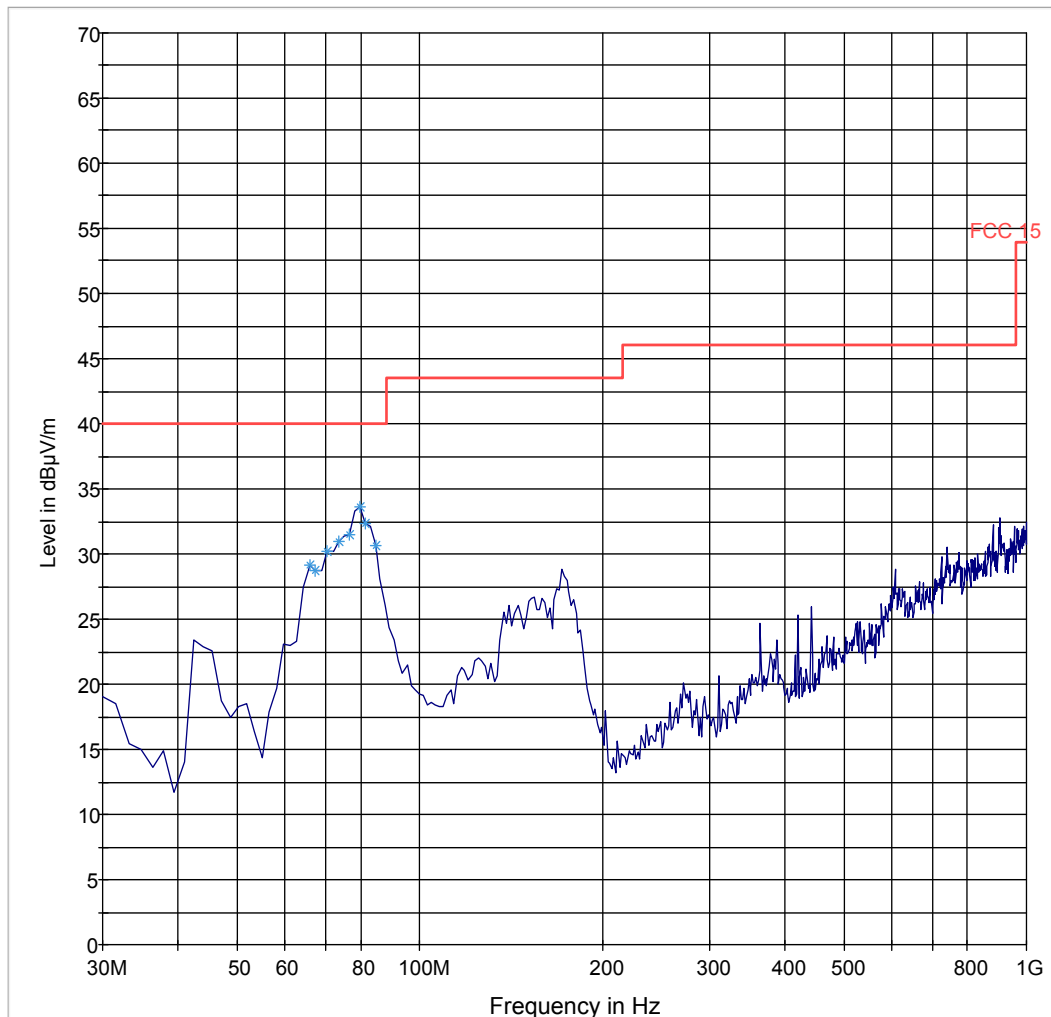

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [3]-PK+


Transmitter Radiated Spurious Emission- Ch39- 1GHz-18GHz

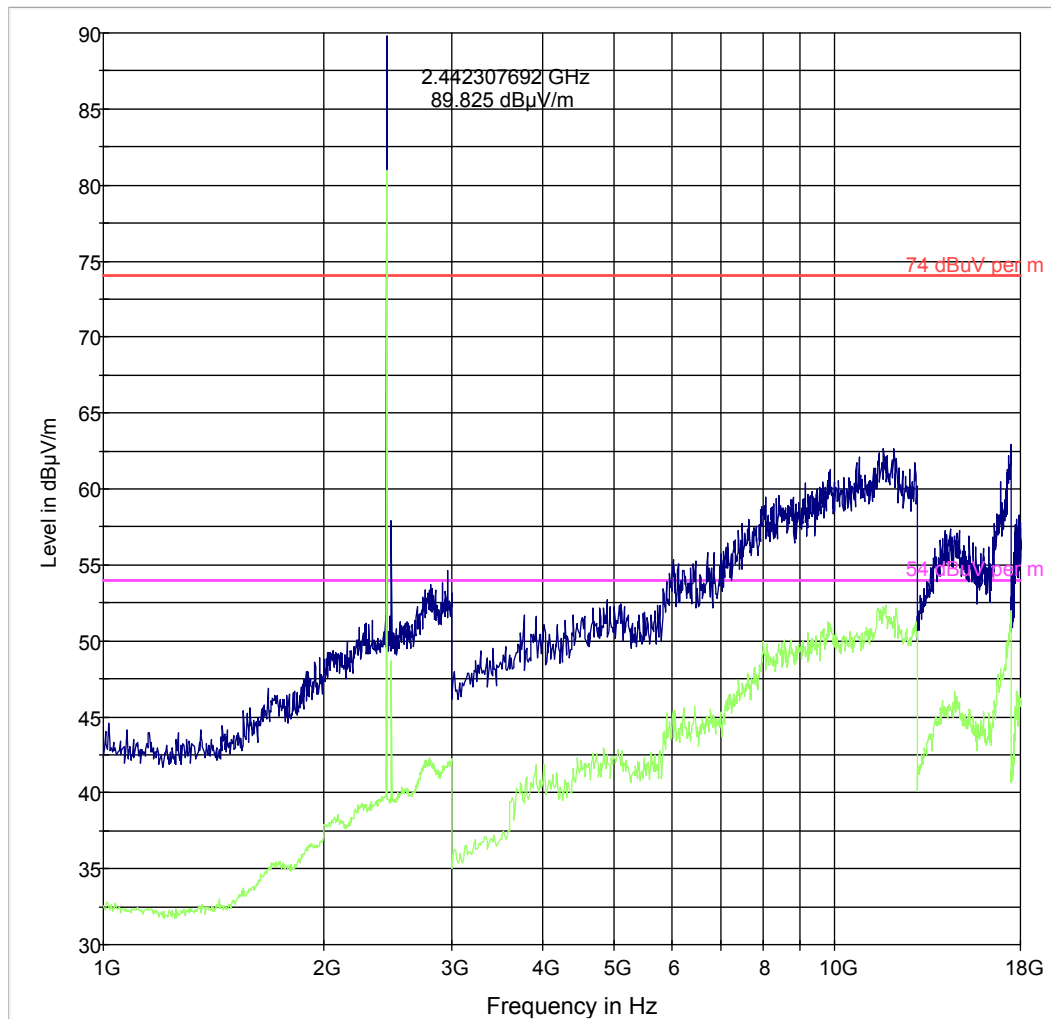


— 74 dBuV per m — 54 dBuV per m — Preview Result 1-PK+ — Preview Result 2-AVG

Transmitter Radiated Spurious Emission- Ch39- 18GHz-26GHz

NOTE: Worst case representation for all modes of operation in this range of test.

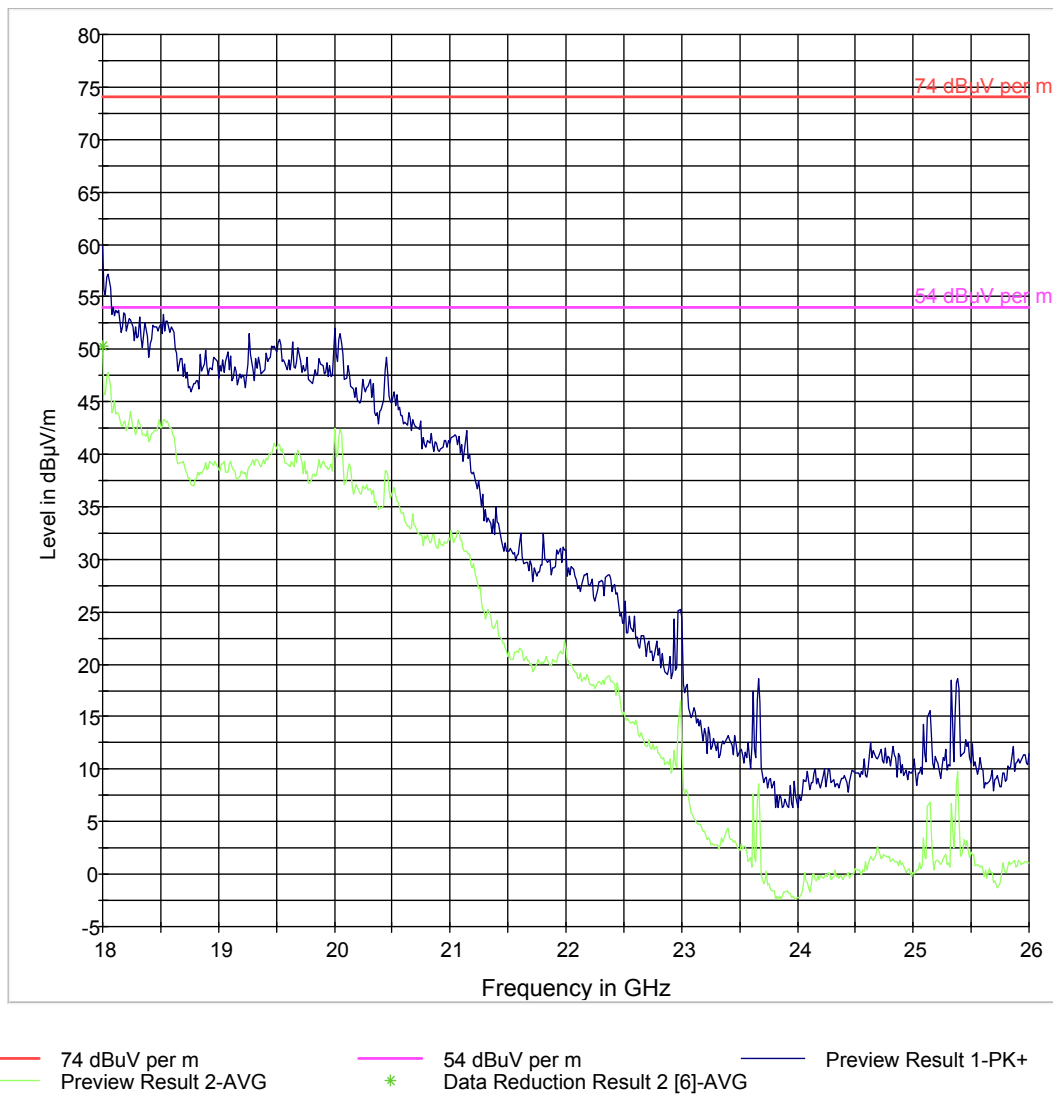


Transmitter Radiated Spurious Emission: Ch78- 30-1GHz

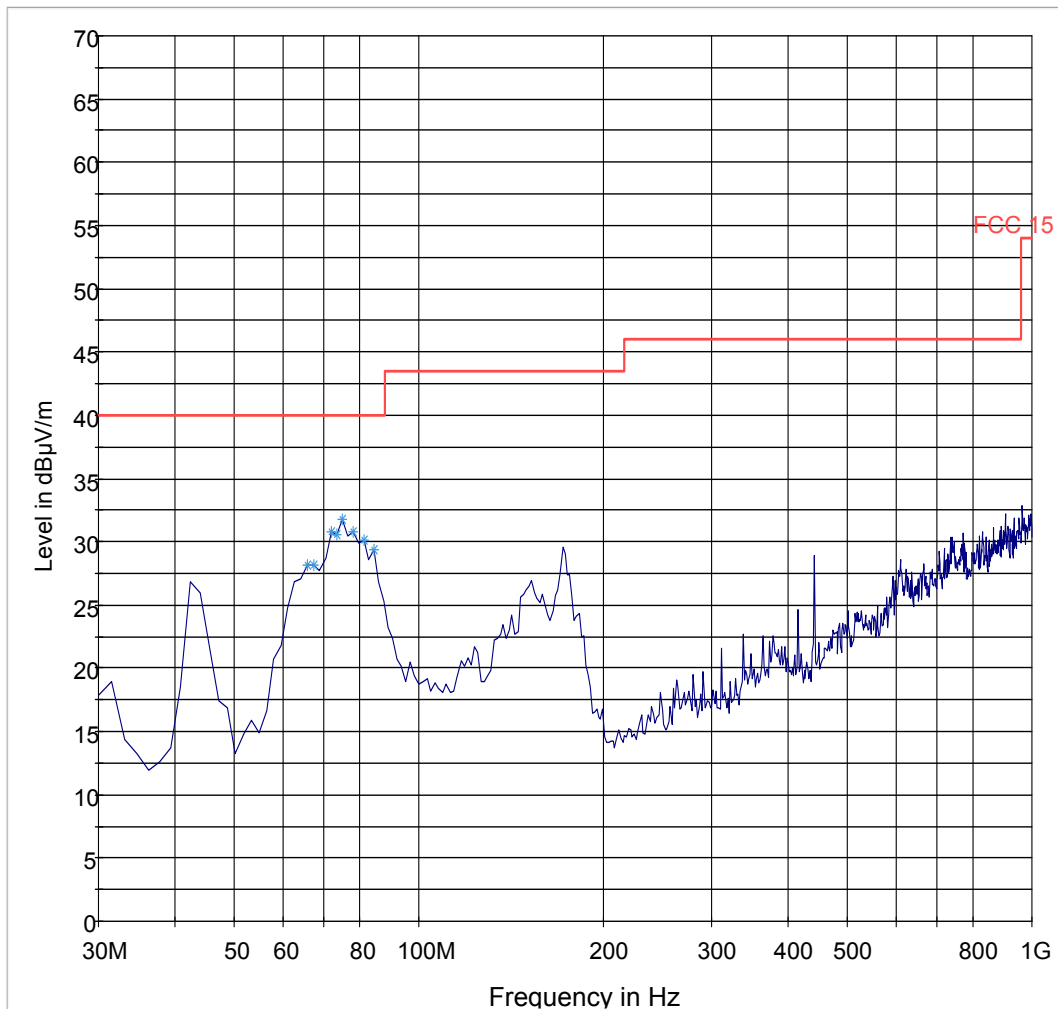

— FCC 15 — Preview Result 1-PK+ * Data Reduction Result 1 [3]-PK+

Transmitter Radiated Spurious Emission- Ch78- 1GHz-18GHz

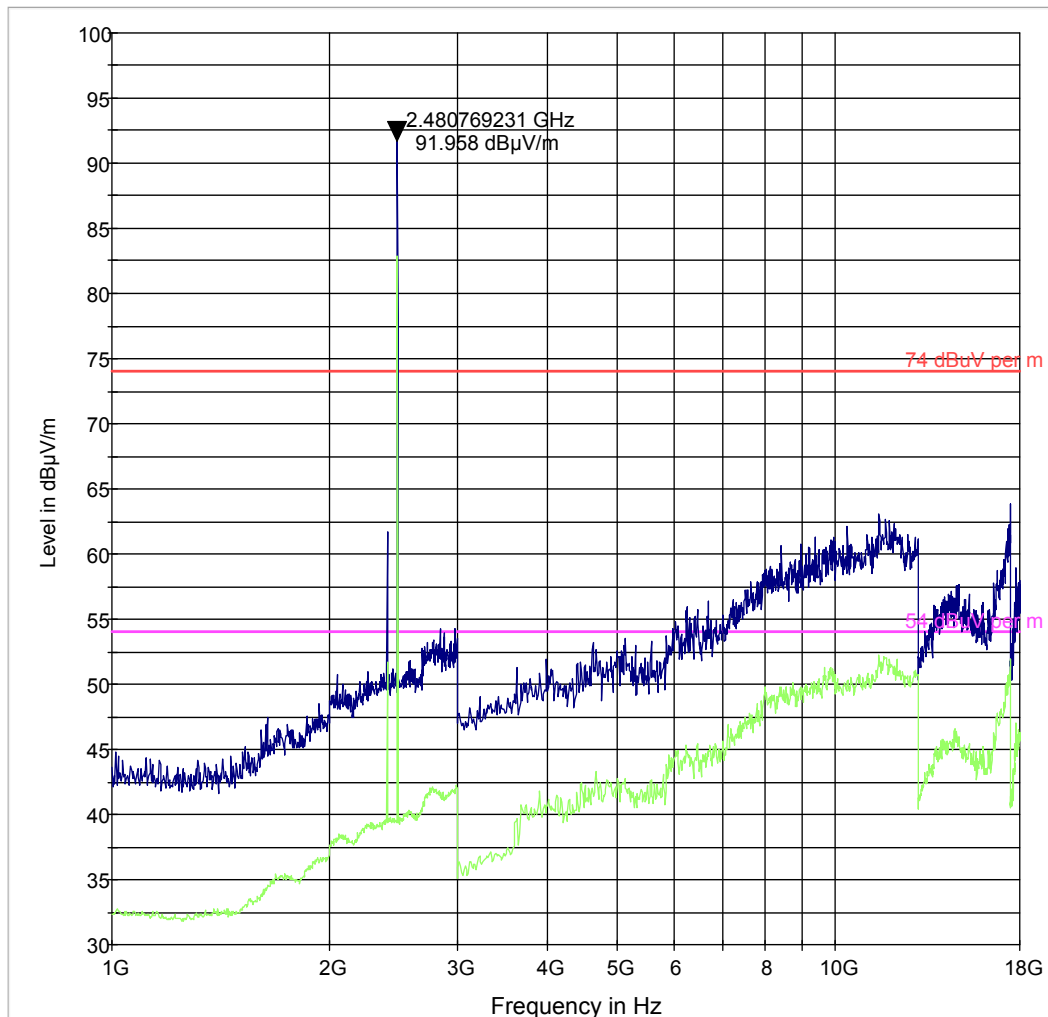

— 74 dBμV per m — 54 dBμV per m — Preview Result 1-PK+ — Preview Result 2-AVG

6.14 AC Power Line Conducted Emissions

6.14.1 References:

FCC: CFR Part 15.207

IC: RSS-Gen Section 7.2.2

The purpose of this test is to measure unwanted radio frequency currents induced in any AC conductor external to the equipment which could conduct interference to other equipment via the AC electrical network.

6.14.2 Limits:

6.14.2.1 §15.207 Conducted limits- Intentional Radiators:

(a) Except as shown in paragraphs (b) and (c) of this section of the CFR, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table (1), as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

6.14.2.2 RSS-Gen 7.2.2

Except when the requirements applicable to a given device state otherwise, for any license-exempt radio communication device equipped to operate from the public utility AC power supply, either directly or indirectly, the radio frequency voltage that is conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown below. The tighter limit applies at the frequency range boundaries.

Table 1:

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Analyzer Settings: CISPR Bandwidth- 9KHz.

6.14.3 Test Conditions:

Modulation: GFSK- Transmit modes of operation

Measurement Uncertainty: ± 3.0 dB

6.14.4 Results


Plots shown here represent the combined worse case emissions for power lines, phases and neutral line.

6.14.4.1 Measurement Result

Pass.

6.14.5 Test Results:

BT TX Mode:

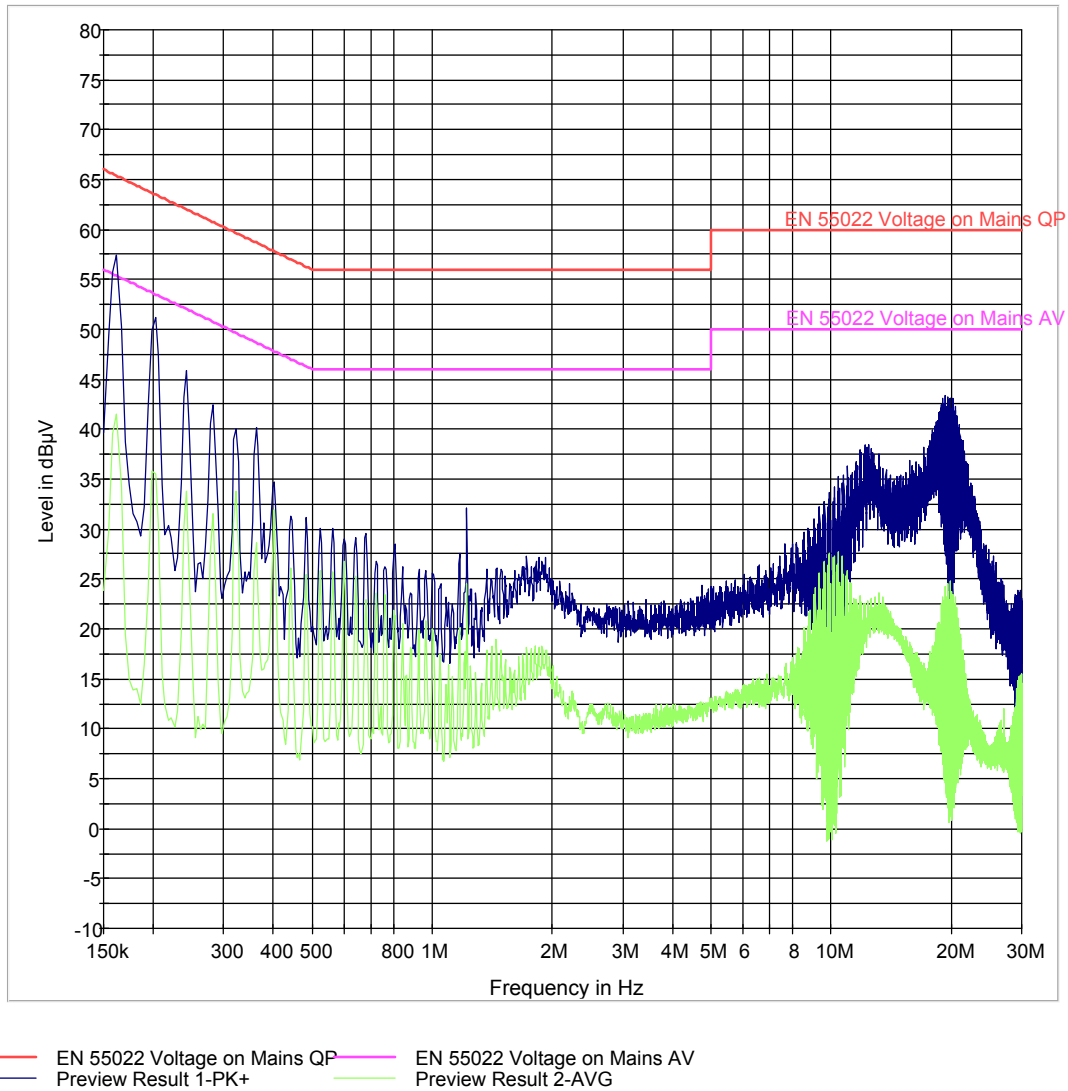

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS**FCC ID:** HD570ELGN**Date of Report:** 2013-05-28**IC ID:** 1693B-70E1**7 Test Equipment and Ancillaries used for tests**

No.	Equipment Name	Manufacturer	Type/model	Serial No.	Cal Date	Cal Interval
3m Semi- Anechoic Chamber:						
	Turntable	EMCO	2075	N/A	N/A	N/A
	MAPS Position Controller	ETS Lindgren	2092	0004-1510	N/A	N/A
	Antenna Mast	EMCO	2075	N/A	N/A	N/A
	Relay Switch Unit	Rohde&Schwarz	RSU	338964/001	N/A	N/A
	EMI Receiver/Analyzer	Rohde&Schwarz	ESU 40	100251	Aug 2012	1 Year
	Spectrum Analyzer	Agilent	E4440A	MY46186445	Dec 2012	1 Year
	1500MHz HP Filter	Filtek	HP12/1700	14c48	N/A	N/A
	2800 MHZ HP Filter	Filtek	HP12/2800	14C47	N/A	N/A
	Pre-Amplifier	Miteq	JS40010260	340125	N/A	N/A
	Binconilog Antenna	EMCO	3141	0005-1186	Apr 2012	3 Years
	Binconilog Antenna	ETS	3149	J000123908	Feb 2012	3 years
	Horn Antenna	EMCO	3115	35114	Mar 2012	3 Years
Ancillary equipment						
	Multimeter	Klein Tools	MM200	001	Apr 2011	2 Years
	Humidity Temperature Logger	Dickson	TM320	03280063	Mar 2012	1 Year
	Digital Barometer	VWR	35519-055	91119547	Nov 2011	2 Years
	Climatic Chamber	Votsch	VT4004	G1115	N/A	N/A
	DC Power Supply	HP	E3610A	KR83023316	N/A	N/A
	DC Power Supply	Protek	3003B	H012771	N/A	N/A
	Communication Antenna	IBP5-900/1940	Kathrein	N/A	N/A	N/A



Calibration status valid at the time of testing.

Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels.

Calibration due dates, unless defined specifically, falls on the last day of the month.

Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

8 **Test Setup Info:**

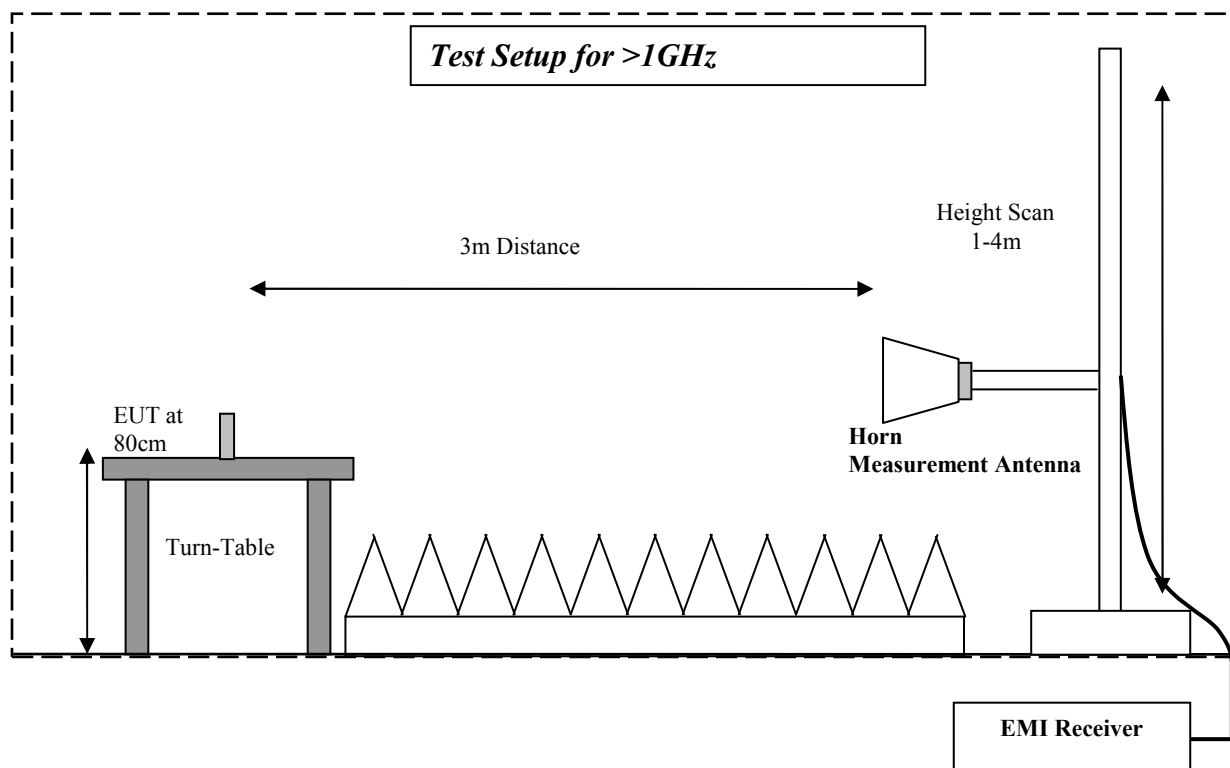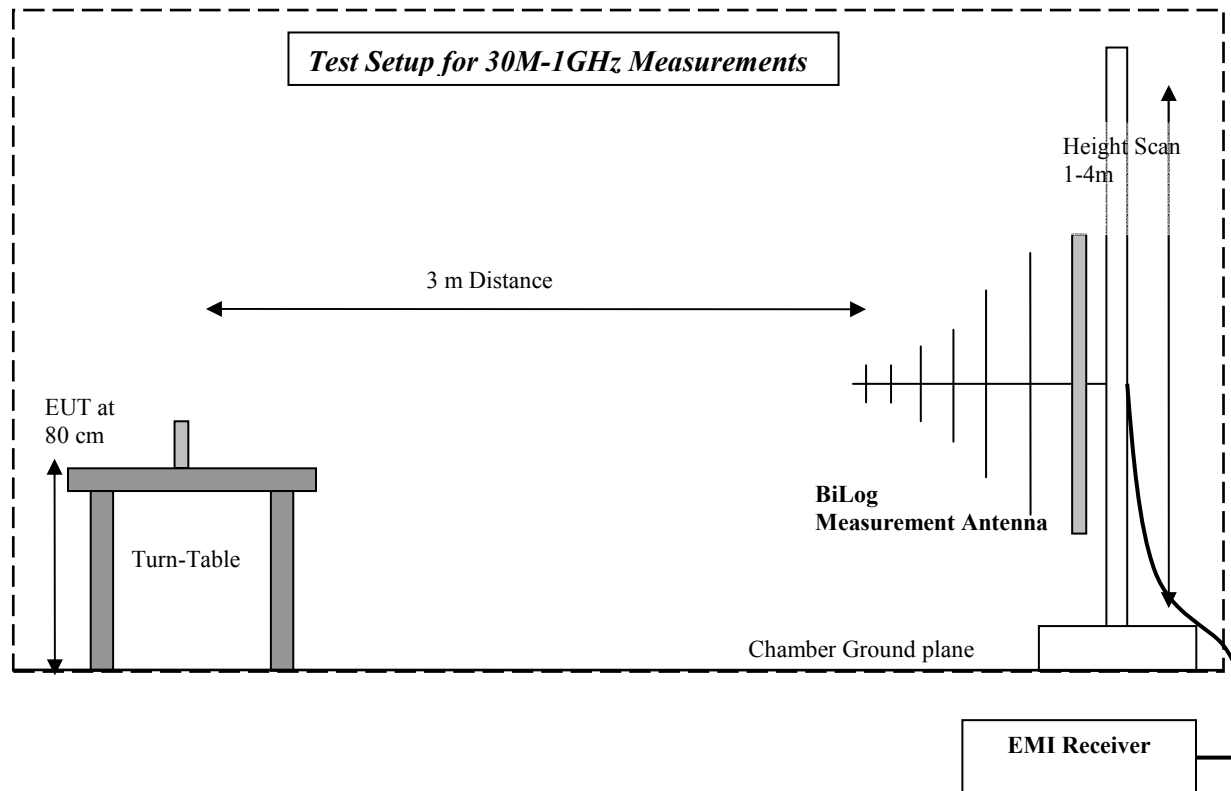

Test Report #: EMC_HONEY-095-12003_70eLGN_DSS

FCC ID: HD570ELGN

Date of Report: 2013-05-28

IC ID: 1693B-70E1



9 Revision History

Date	Report Name	Changes to report	Report prepared by
2013-05-28	EMC_HONEY-095-12003_70eLGN_DSS	First Version	Tunji Yusuf