



Test Report

Product Name : DOLPHIN 7600 II Mobile
Computer
Model No : DOLPHIN 7600 II
FCC ID : HD5760004

Applicant : Honeywell International Inc.
Address : 700 Visions Drive, PO Box 208
Skaneateles Falls, NY 13153-0208

Date of Receipt : 2007/07/18
Issued Date : 2008/04/07
Report No. : 077258R-HPUSP07V01
Version : V1.1

The test results relate only to the samples tested.
The test report shall not be reproduced except in full without the written approval of Quie Tek Corporation.
This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issued Date : 2008/04/07

Report No.: 077258R-HPUSP07V01



Accredited by NIST (NVLAP)

NVLAP Lab Code: 200533-0


Product Name : DOLPHIN 7600 II Mobile Computer
Applicant : Honeywell International Inc.
Address : 700 Visions Drive, PO Box 208 Skaneateles Falls, NY
13153-0208
Manufacturer : E-TEN Information Systems Co., Ltd.
Trade Name : Honeywell
Model No. : DOLPHIN 7600 II
Rated Voltage : AC 120V/60Hz
EUT Voltage : DC 3.7V (Battery)
Measurement Standard : FCC CFR Title 47 Part 2 22 24
Measurement Reference : TIA/EIA 603-C
Test Result : Complied

Test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quie Tek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By :



(Engineering Adm.
Assistant / Nicole
Huang)

Tested By :



(Engineer / Paddy Chen)

Approved By :



(Deputy Manager
/ Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	4
1.1. EUT Description	4
1.2. Operational Description.....	4
1.3. Configuration of tested System	5
1.4. EUT Setup Procedures	5
1.5. Test Facility	6
1.6. Type of Emission	7
1.7. DC voltages and DC currents	7
2. Peak Power Output	8
2.1. Test Equipment.....	8
2.2. Test Setup	8
2.3. Limits	9
2.4. Test Procedure.....	9
2.5. Test Specification	9
2.6. Test Result of Peak Power Output	10
3. Modulation Characteristics	22
3.1. Test Equipment.....	22
3.2. Test Setup	22
3.3. Modulation Description.....	22
3.4. Test Specification	23
3.5. Test Result of Modulation	24
4. Occupied Bandwidth.....	27
4.1. Test Equipment.....	27
4.2. Test Setup	27
4.3. Test Procedure.....	27
4.4. Test Specification	28
4.5. Test Result of Occupied Bandwidth	29
5. Spurious Emission At Antenna Terminals (+/-1MHz)	41
5.1. Test Equipment.....	41
5.2. Setup	41
5.3. Limits	42
5.4. Test Procedure.....	42
5.5. Test Specification	42
5.6. Test Result of Spurious Emission At Antenna Terminals (+/-1MHz).....	43
6. Spurious Emission	49
6.1. Test Equipment.....	49
6.2. Test Setup	49
6.3. Limits	50
6.4. Test Procedure.....	50
6.5. Test Specification	51
6.6. Test Result of Spurious Emission	52
7. Frequency Stability Under Temperature & Voltage Variations	76
7.1. Test Equipment.....	76
7.2. Test Setup	76
7.3. Limits	76
7.4. Test Procedure.....	77
7.5. Test Specification	77
7.6. Test Result of Frequency Stability Under Temperature Variations	78
8. EMI Reduction Method During Compliance Testing	84
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	DOLPHIN 7600 II Mobile Computer
Model No.	DOLPHIN 7600 II
Trade Name	Honeywell
IMEI No.	011247000000277
FCC ID.	HD5760004
Antenna Type	Internal
TX Frequency	824MHz~849MHz(GSM 850) 1850MHz ~ 1910MHz(PCS 1900)
Rx Frequency	869MHz~894MHz(GSM 850) 1930MHz ~ 1990MHz(PCS 1900)
Function	GSM/GPRS/EGPRS
Hardware version	B400
Firmware version	04.001.
Battery Pack	DC 3.7V (Battery), 3240mAh

1.2. Operational Description

The information contained within this report is intended to show verification of compliance of the 850/1900MHz Mobile Phone to the requirements of 47CFR2, 22 and 24.


The EUT operates from a 120Vac/60Hz adapter where GSM 850/PCS 1900 is Power Class 4/Class 1, operating with a maximum output power of 2watt/1watt.

Quie Tek has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode:	GSM 850
	PCS 1900

1.3. Configuration of tested System

(a) Configuration of Radiated measurement

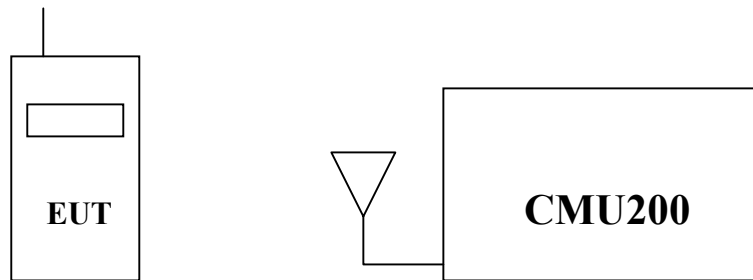

(b) Configuration of Conducted measurement

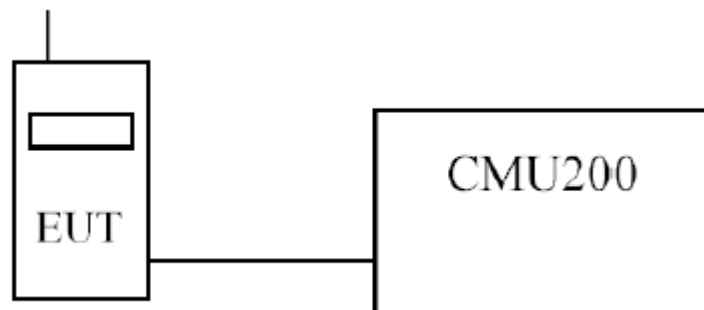

1.4. EUT Setup Procedures

- (1) Setup the EUT and simulators as shown on 1.3
- (2) Turn on the power of all equipments.
- (3) The EUT was set to communicate with CMU200.
- (4) Repeat the above procedure (3).

1.5. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

Site Description: File on

Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046
FCC Registration Number :92195



July 03, 2001 Accreditation on NVLAP
NVLAP Lab Code: 200533-0



Site Name: Quiet Tek Corporation

Linkou Testing Laboratory:

No. 5, Ruei-Shu Valley, Ruei-Ping Tsuen,
Lin-Kou Shiang, Taipei,
Taiwan, R.O.C.
TEL : 886-2-8601-3788 / FAX : 886-2-8601-3789
E-Mail : service@quietek.com

FCC Accreditation Number: TW1014



1.6. Type of Emission

GSM: 300KGXW
GPRS/EGPRS: 300KG7W

1.7. DC voltages and DC currents

GSM 850 EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.65A EUT Standby : DC voltage : 3.7V , DC current : 0.25A	PCS 1900 EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.50A EUT Standby : DC voltage : 3.7V , DC current : 0.26A
GSM 850-GPRS EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.64A EUT Standby : DC voltage : 3.7V , DC current : 0.24A	PCS 1900-GPRS EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.49A EUT Standby : DC voltage : 3.7V , DC current : 0.25A
GSM 850-EGPRS EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.64A EUT Standby : DC voltage : 3.7V , DC current : 0.25A	PCS 1900-EGPRS EUT Transmitting (in maximum power) : DC voltage : 3.7V , DC current : 0.51A EUT Standby : DC voltage : 3.7V , DC current : 0.24A

2. Peak Power Output

2.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒OATS 3	Test Receiver	R & S	ESCS 30 / 100122	Feb., 2008
	Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
	Spectrum Analyzer	Advantest	R3162 / 120300652	Feb., 2008
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
	Horn Antenna	ETS	3115 / 0005-6160	Jul., 2007
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	Jul., 2007


Note: 1. All equipments that need to be calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

2.2. Test Setup

Radiated Power Measurement

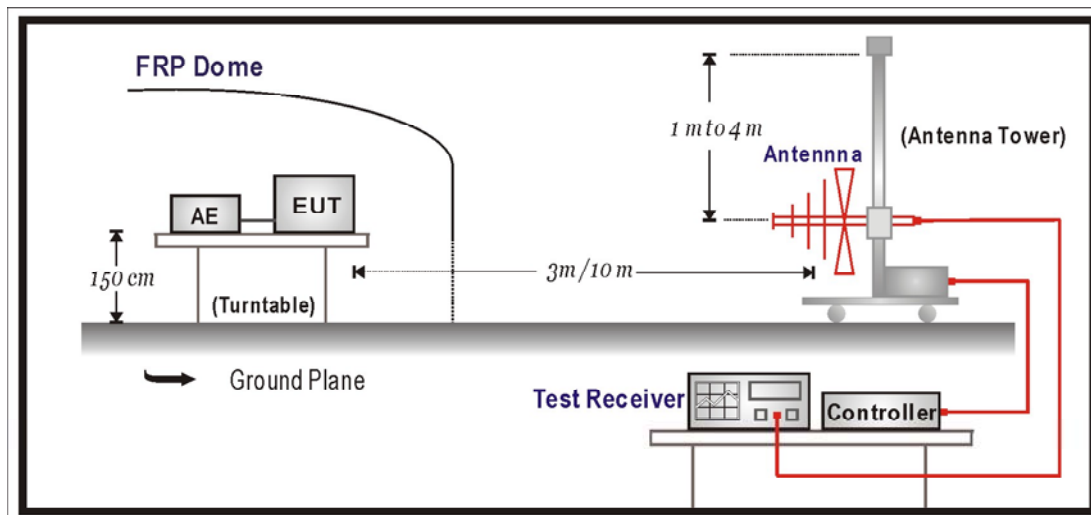

Conducted Power Measurement

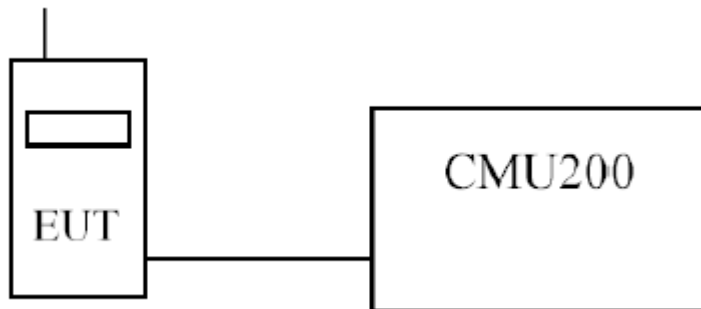

2.3. Limits

GSM850	<7W
PCS1900	<2W or +33dBm

2.4. Test Procedure

➤RF Out Power (Radiated)

The Spectrum Analyzer was tuned to the test frequency. The device was put into Transmit mode then rotated through 360 degrees until the highest power level was observed in both horizontal and vertical polarization. The device was then replaced with a substitution antenna, which input signal was adjusted until the received level matched that of the previously detected emission. The resolution bandwidth was 1MHz.

➤RF Out Power (Conducted)

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals. The EUT support GSM/GPRS/EGPRS. The device is class 4(GSM850) and class1(PCS1900) module.

2.5. Test Specification

According to Part 2.1046, 22.913,24.232.

2.6. Test Result of Peak Power Output

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850		

Maximum Power-GSM 850

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
824.2	31.67	0.4	32.07	1.45
836.4	31.80	0.4	32.20	1.48
848.8	31.94	0.4	32.34	1.48

Note:

1. EUT complies with CFR 47.2.1046 and 22.913(a). The EUT does not exceed 7W at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900		

Maximum Power-PCS 1900

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1850.2	28.84	0.6	29.44	0.87
1880	28.98	0.6	29.58	0.89
1909.8	28.95	0.6	29.55	0.91

Note:

1. EUT complies with CFR 47.2.1046 and 24.232(b). The EUT does not exceed 2W or +33dBm at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 GPRS		

Maximum Power-GSM 850 GPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
824.2	31.80	0.4	32.20	1.66
836.4	31.88	0.4	32.28	1.69
848.8	31.96	0.4	32.36	1.72

Note:

1. EUT complies with CFR 47.2.1046 and 22.913(a). The EUT does not exceed 7W at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 GPRS		

Maximum Power-PCS 1900 GPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1850.2	29.17	0.6	29.77	0.95
1880	29.05	0.6	29.65	0.92
1909.8	28.83	0.6	29.43	0.88

Note:

1. EUT complies with CFR 47.2.1046 and 24.232(b). The EUT does not exceed 2W or +33dBm at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 EGPRS		

Maximum Power-GSM 850 EGPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
824.2	25.72	0.4	26.12	0.41
836.4	25.70	0.4	26.10	0.41
848.8	25.59	0.4	25.99	0.40

Note:

1. EUT complies with CFR 47.2.1046 and 22.913(a). The EUT does not exceed 7W at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 EGPRS		

Maximum Power-PCS 1900 EGPRS

Frequency (MHz)	Output Power (dBm)	Path Loss (dB)	Result (dBm)	Result (W)
1850.2	24.62	0.6	25.22	0.33
1880	24.56	0.6	25.16	0.33
1909.8	24.43	0.6	25.03	0.32

Note:

1. EUT complies with CFR 47.2.1046 and 24.232(b). The EUT does not exceed 2W or +33dBm at the measured frequencies.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	GSM 850		

Maximum Power-GSM 850

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBd)	Cable Loss (dB)	Result ERP (dBm)	Result ERP (W)
824.2	21.29	24.23	4.45	0.51	28.17	0.66
836.4	22.24	25.21	4.45	0.51	29.15	0.82
848.8	23.02	26.00	4.45	0.51	29.94	0.99

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 22, Section 22.913(a) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	PCS 1900		

Maximum Power-PCS 1900

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Result EIRP (dBm)	Result EIRP (W)
1850.2	17.19	18.89	10.4	1.02	28.27	0.67
1880.0	16.72	18.40	10.4	1.02	27.28	0.53
1909.8	19.02	20.97	10.4	1.02	30.35	1.08

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 24, Section 24.232(b) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	GSM 850 GPRS		

Maximum Power-GSM 850 GPRS

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBd)	Cable Loss (dB)	Result ERP (dBm)	Result ERP (W)
824.2	20.23	23.15	4.45	0.51	27.09	0.51
836.4	21.25	24.19	4.45	0.51	28.13	0.65
848.8	21.81	24.77	4.45	0.51	28.71	0.74

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 22, Section 22.913(a) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	PCS 1900 GPRS		

Maximum Power-PCS 1900 GPRS

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Result EIRP (dBm)	Result EIRP (W)
1850.2	16.68	18.36	10.4	1.02	27.74	0.59
1880.0	16.09	17.74	10.4	1.02	27.12	0.52
1909.8	17.99	19.71	10.4	1.02	29.09	0.81

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 24, Section 24.232(b) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	GSM 850 EGPRS		

Maximum Power-GSM 850 EGPRS

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBd)	Cable Loss (dB)	Result ERP (dBm)	Result ERP (W)
824.2	14.66	17.50	4.45	0.51	21.44	0.14
836.4	15.72	18.56	4.45	0.51	22.50	0.18
848.8	19.70	16.10	4.45	0.51	23.64	0.23

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 22, Section 22.913(a) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	RF Output Power (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	PCS 1900 EGPRS		

Maximum Power-PCS 1900 EGPRS

Frequency (MHz)	Reading Level (dBm)	Substitution Level (dBm)	Substitution Antenna Gain (dBi)	Cable Loss (dB)	Result EIRP (dBm)	Result EIRP (W)
1850.2	13.22	14.77	10.4	1.02	24.15	0.26
1880.0	12.45	13.98	10.4	1.02	23.36	0.22
1909.8	15.17	16.79	10.4	1.02	26.17	0.41

Note:

1. The EUT meets the requirements of FCC CFR 47: Part 24, Section 24.232(b) for Effective Radiated Power.
2. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
3. Result EIRP = Substitution Level + Substitution Antenna Gain - Cable Loss

3. Modulation Characteristics


3.1. Test Equipment

The following test equipment are used during the modulation characteristics test:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2007
Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
Directional couple	Agilent	87300C / 3239A01864	N/A

Note: All equipments that need to be calibrated are with calibration period of 1 year.

3.2. Test Setup

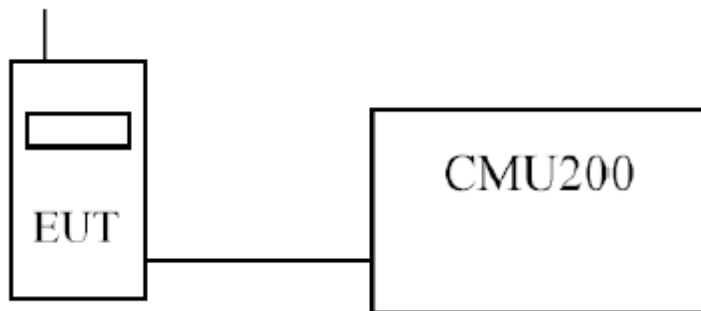

3.3. Modulation Description

GMSK is a form of binary signaling schemes which represent digital states as a shift between discrete sinusoidal frequencies called Frequency Shift Keying (FSK). Minimum Shift Keying (MSK) is continuous phase FSK with the smallest possible modulation index h . Modulation index is defined as:

$$h = 2 \cdot F \cdot T_b$$

where F = Peak frequency deviation in Hz and T_b = Bit period in seconds

Two discrete frequencies, representing two distinct digital states, with equal phases at switch time $t = 0$ requires a minimum value of $h = 0.5$. The Gaussian part of GMSK describes the fact that the digital pulses are filtered in the time domain. This results in bits which are sinusoidal rather than square. The effective spectrum is then compressed with the average carrier frequency in the center of the passband. This is a great advantage because of the significantly reduced bandwidth. GMSK is utilized because of these bandwidth conservation properties.

The bandwidth for GSM850 is a 25MHz up-link at 824-849Mhz and down-link at 869-894MHz. The PCS1900 is a 60MHz up-link at 1850-1910 MHz and down-link at 1930-1990 MHz. The 65 MHz is divided into 299 channels, each of which is 200 kHz wide. Slight spectral spillage is allowed into neighboring channels (which is minimized by GMSK). This separated transmit/receive frequencies scheme under GSM enables easier duplex filtering.

Within the bandwidth, individual channels are subdivided into multiframes (made of 26 frames), frames (made of 8 time slots), and time slots (made of 8 fields). The time slots are 0.57 ms long allowing 156.25 bits of information including overhead.

The modulation used in GPRS is the same used in GSM. The modulation of EGPRS is 8PSK. A GSM channel contains eight timeslots, each timeslot is dedicated to one circuit switched call. For GPRS/EGPRS the timeslots are assigned on an as needed basis, and more than one timeslot can be assigned for a particular transmission depending on the network and the device.


3.4. Test Specification

According to Part 2.1047(d)


3.5. Test Result of Modulation

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Modulation		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 PCS1900		

Circuit Switched (GSM 850)

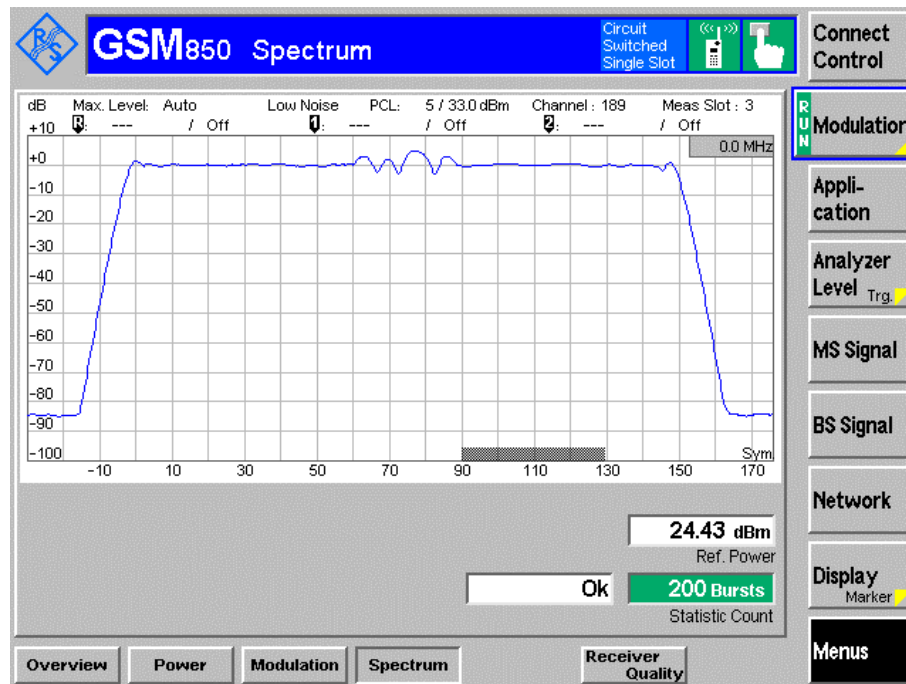


Circuit Switched (PCS 1900)

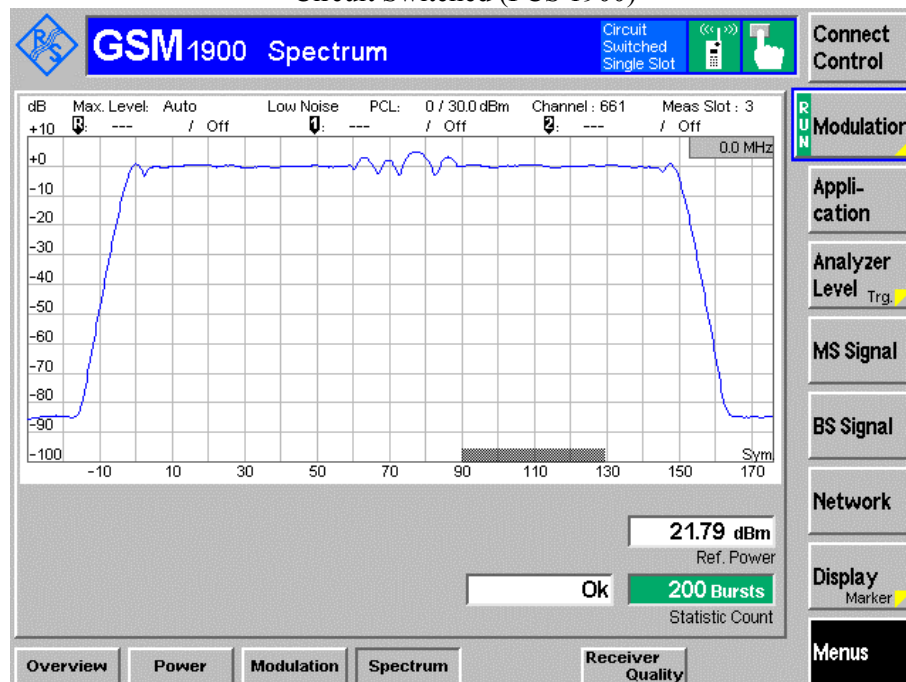


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Modulation		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 GPRS PCS1900 GPRS		

Packet Switched (GSM 850 GPRS)

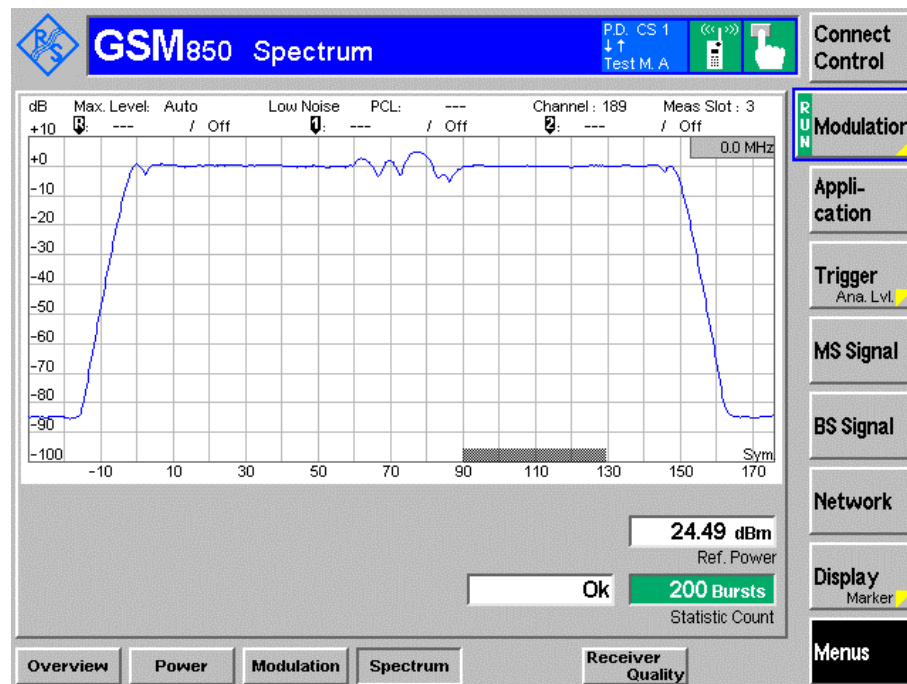


Packet Switched (PCS 1900 GPRS)

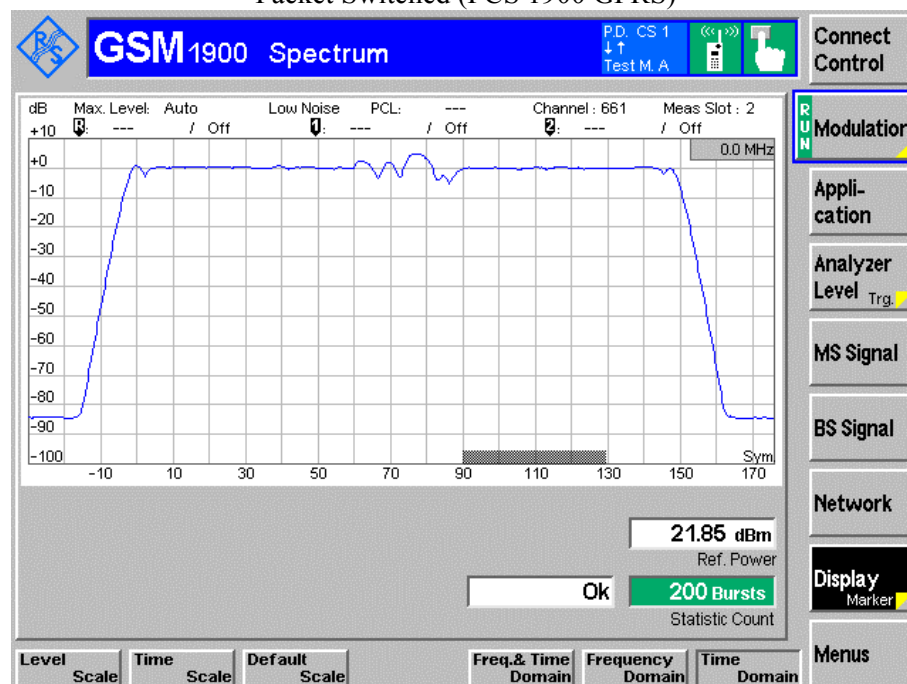


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Modulation		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 EGPRS PCS1900 EGPRS		

Packet Switched (GSM 850 EGPRS)

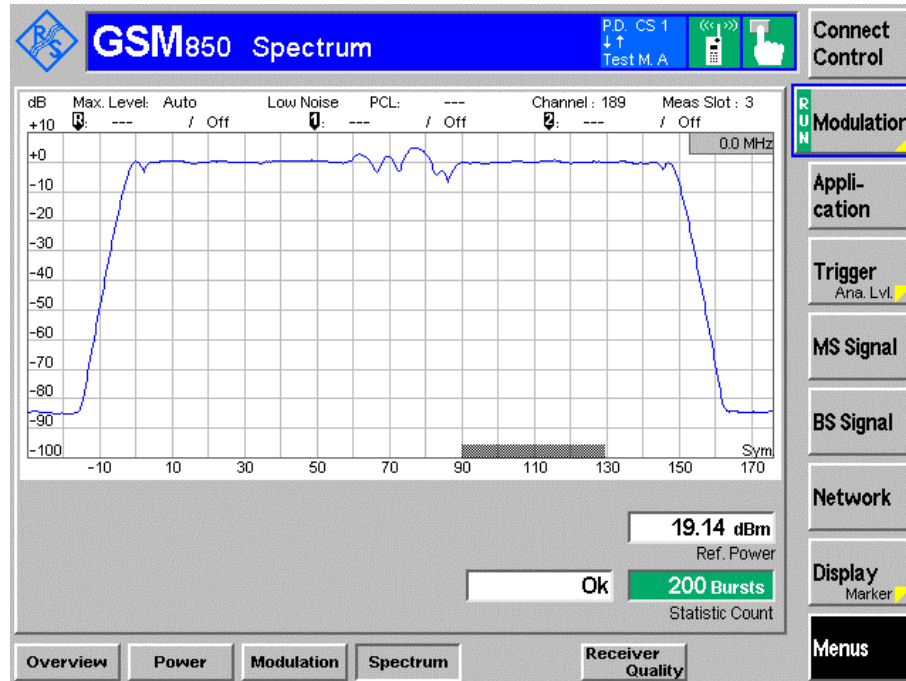

Packet Switched (PCS 1900 EGPRS)

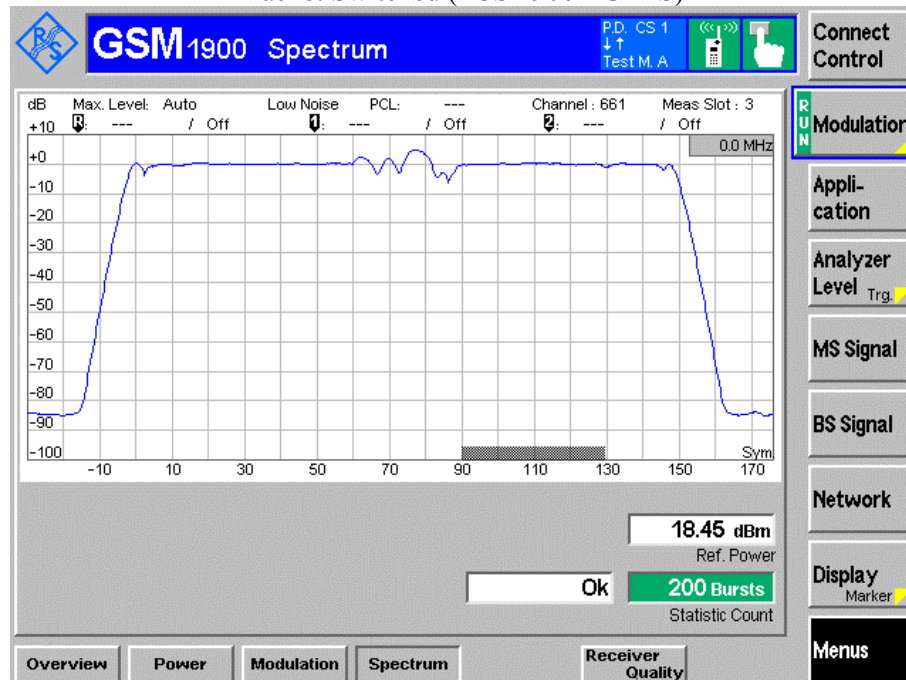

4. Occupied Bandwidth


4.1. Test Equipment

The following test equipments are used during the occupied bandwidth tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2007
Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
Directional coupler	Agilent	87300C / 3239A01864	N/A

Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

4.2. Test Setup

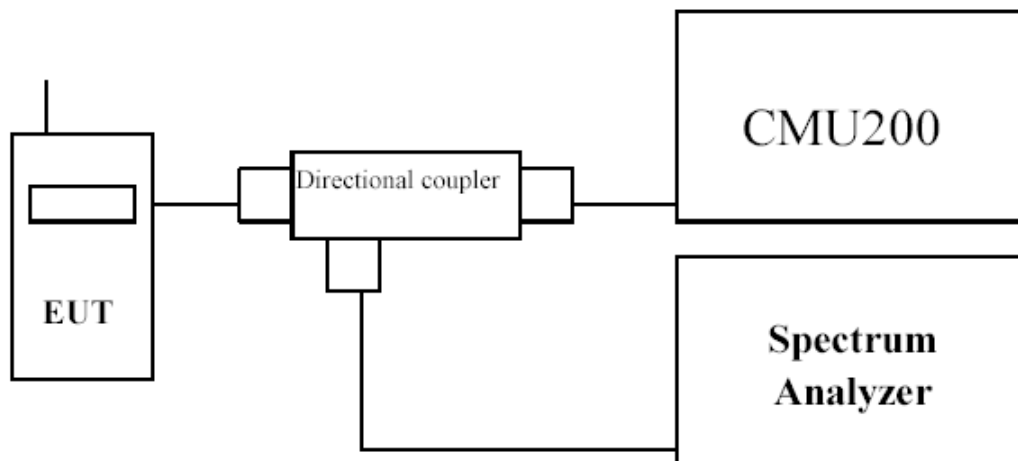

4.3. Test Procedure

➤GSM/GPRS/EGPRS

The EUT was set to transmit on maximum power and measurements were made on Timeslot 3.

Using a resolution bandwidth of 3kHz and a video bandwidth of 10kHz, the -26dBc points were established and the emission bandwidth determined.

The plots below show the resultant display from the Spectrum Analyzer.


4.4. Test Specification

According to Part 2.1049, 22.917(b), 24.238(b).


4.5. Test Result of Occupied Bandwidth

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850		

GSM 850 - Circuit Switched (GSM Mode CH 128)

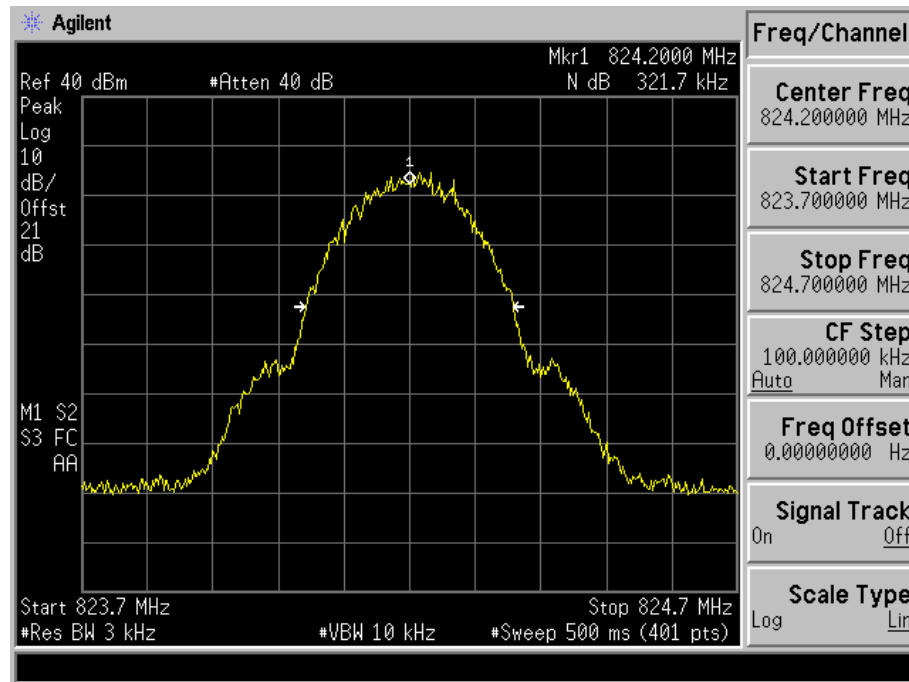


GSM 850 - Circuit Switched (GSM Mode CH189)

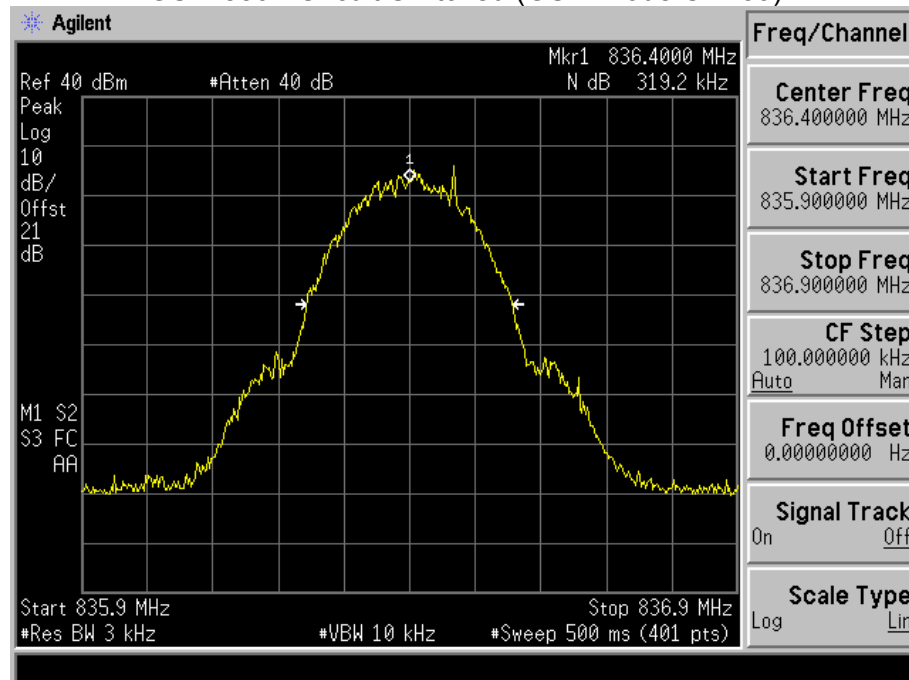


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850		

GSM 850 - Circuit Switched (GSM Mode CH 251)

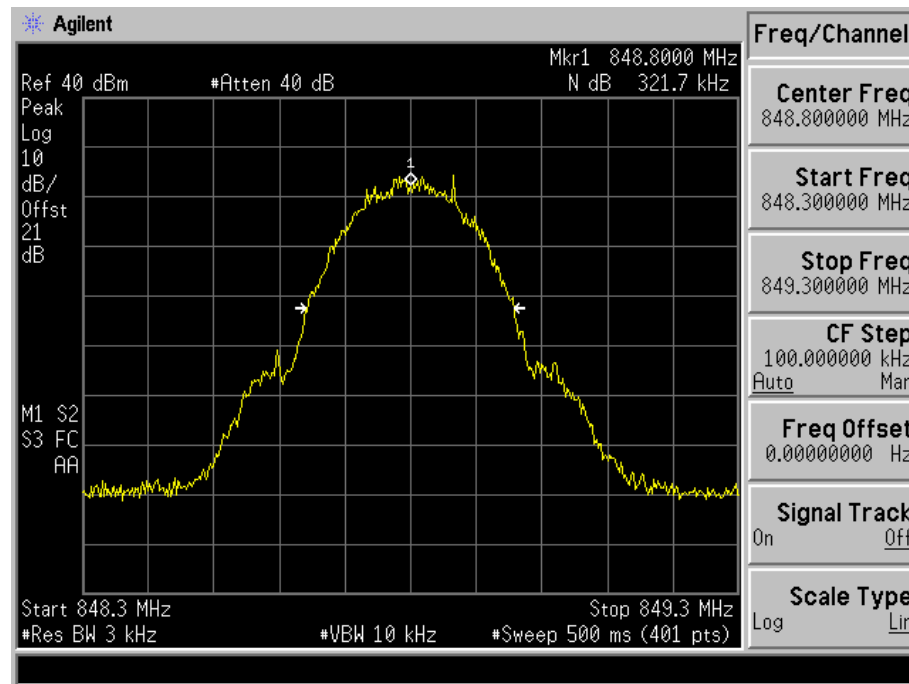


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900		

PCS1900 - Circuit Switched (PCS Mode CH 512)

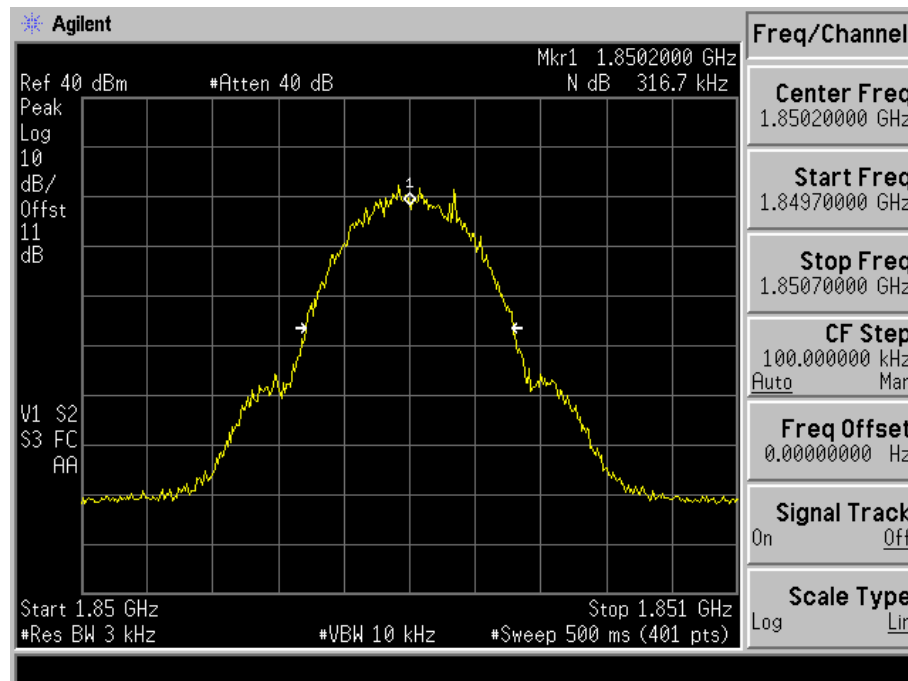


PCS1900 - Circuit Switched (PCS Mode CH661)

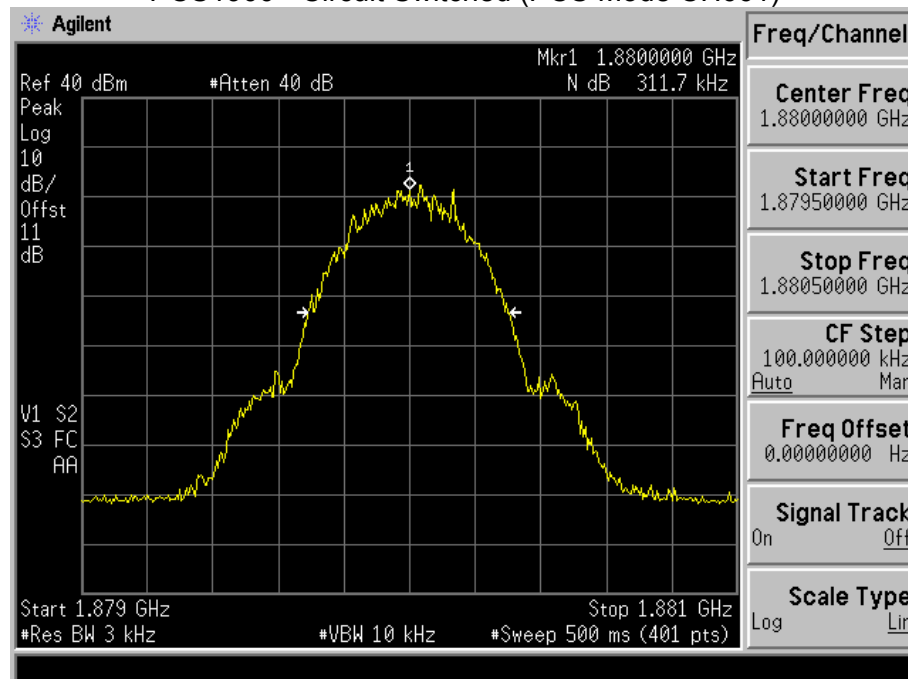


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900		

PCS1900 - Circuit Switched (PCS Mode CH 810)

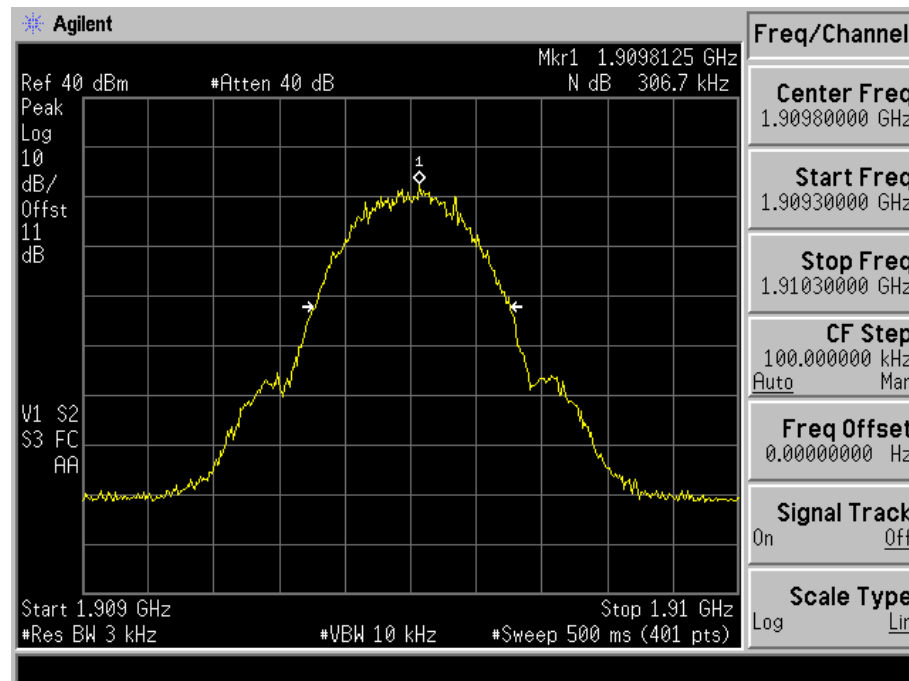


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 GPRS		

GSM 850 GPRS - Packet Switched (GSM Mode CH 128)

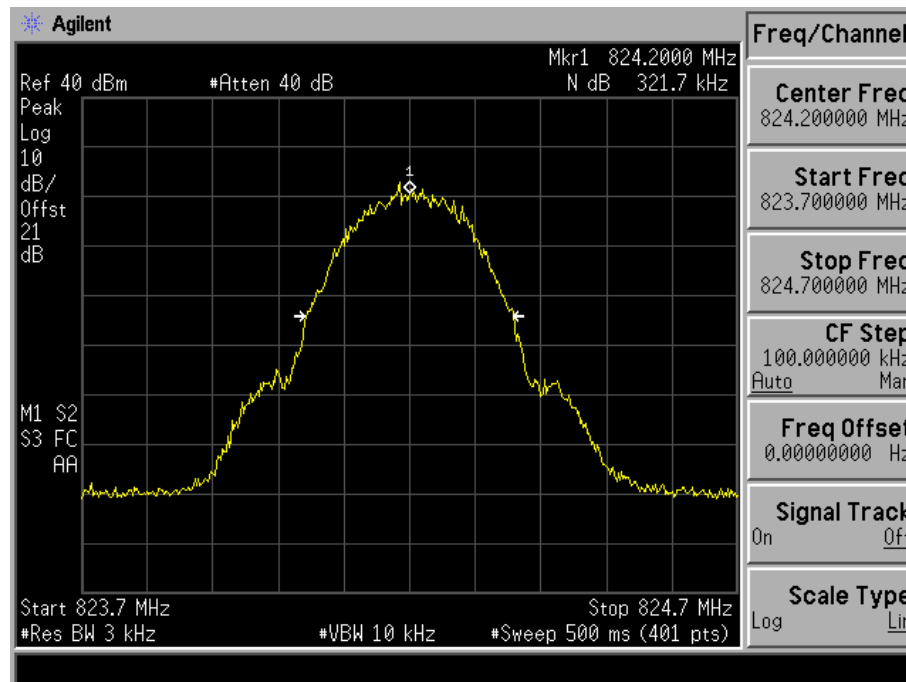


GSM 850 GPRS - Packet Switched (GSM Mode CH189)

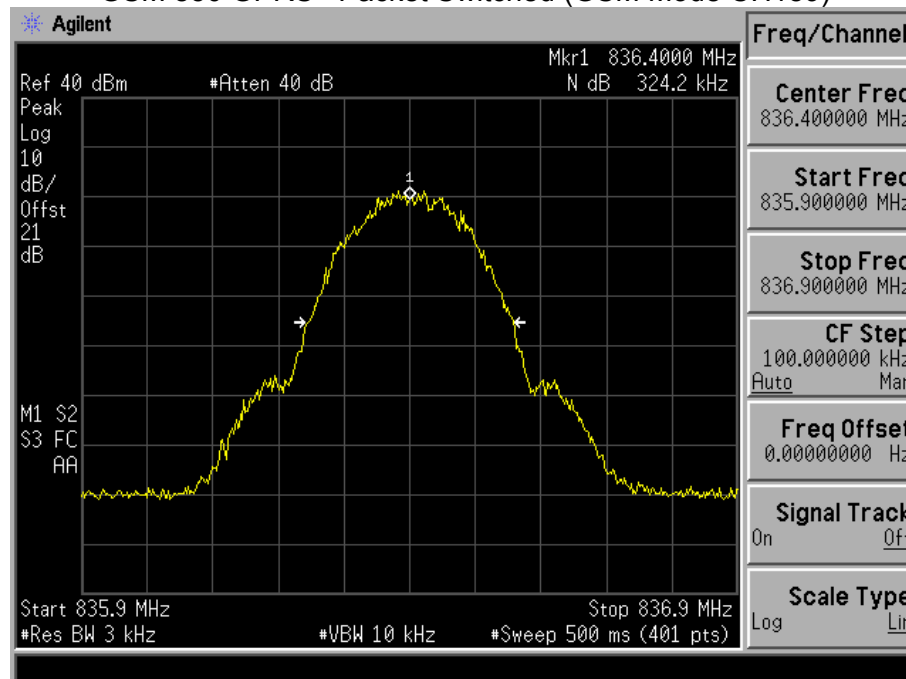


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 GPRS		

GSM 850 GPRS - Packet Switched (GSM Mode CH 251)

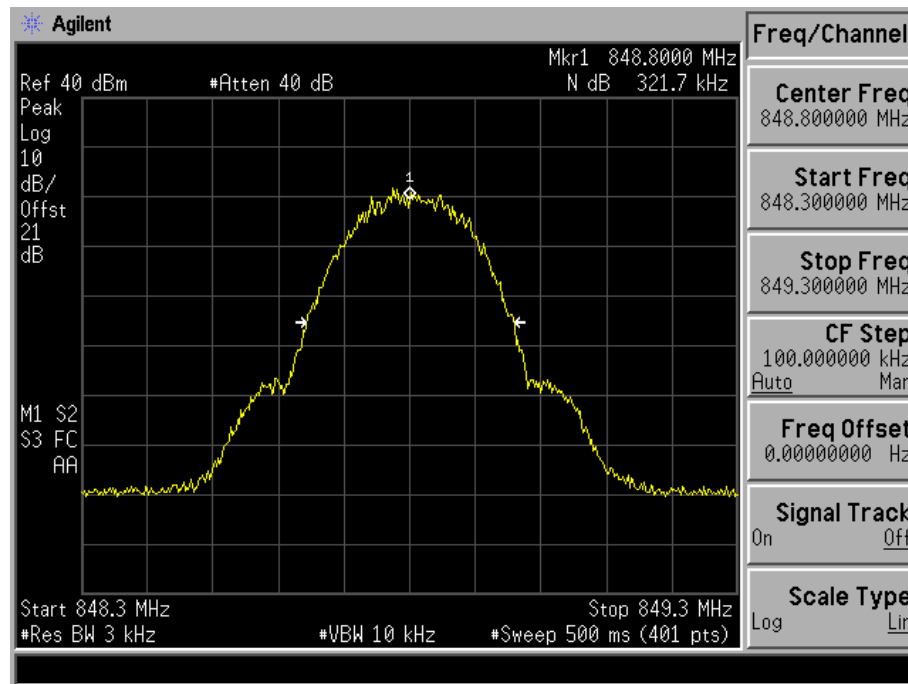


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 GPRS		

PCS1900 GPRS - Packet Switched (PCS Mode CH 512)

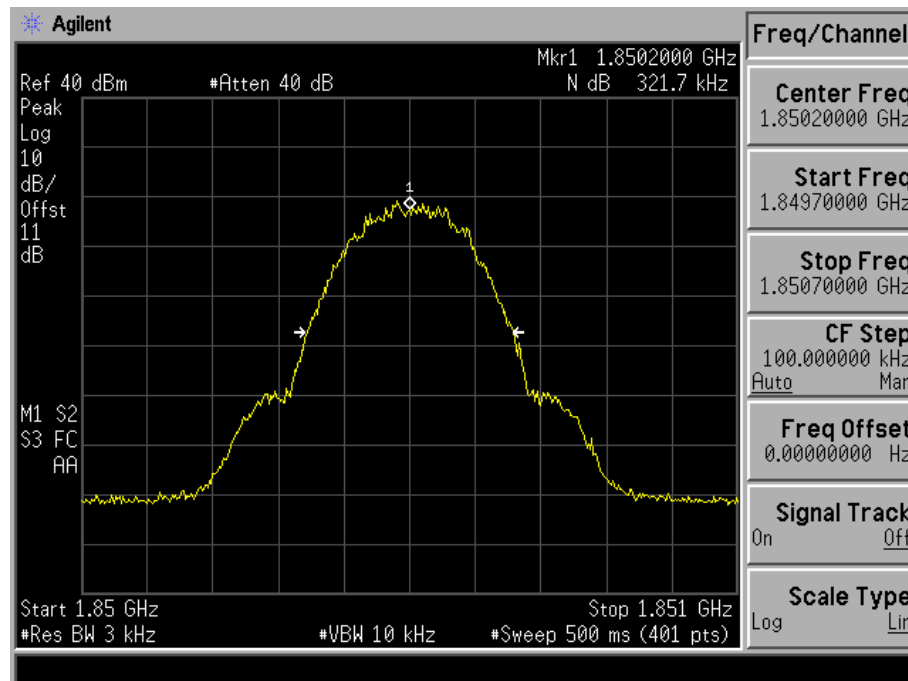


PCS1900 GPRS - Packet Switched (PCS Mode CH661)

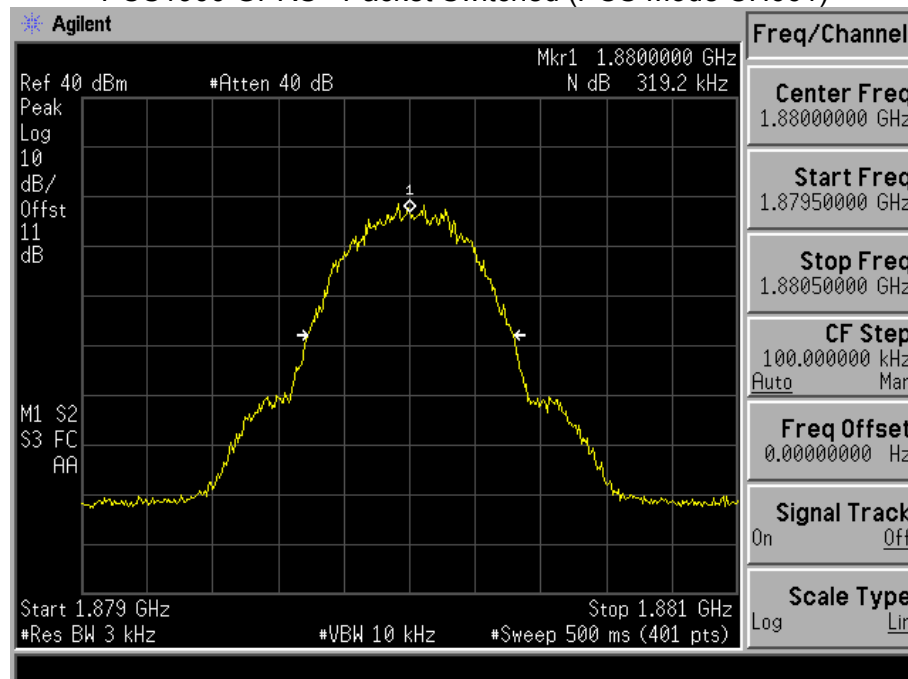


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 GPRS		

PCS1900 GPRS - Packet Switched (PCS Mode CH 810)

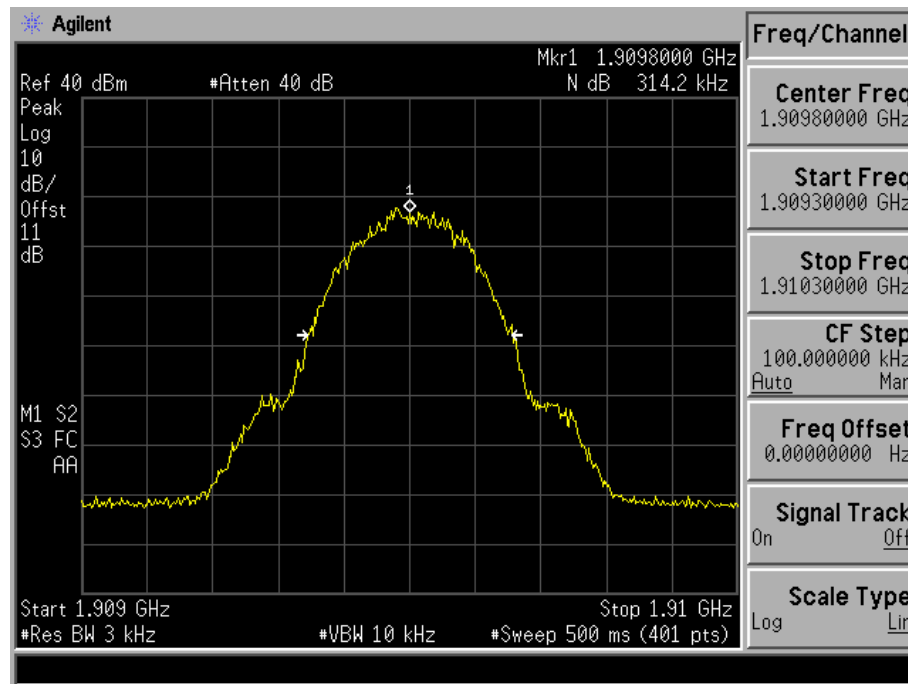


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 EGPRS		

GSM 850 EGPRS - Packet Switched (GSM Mode CH 128)

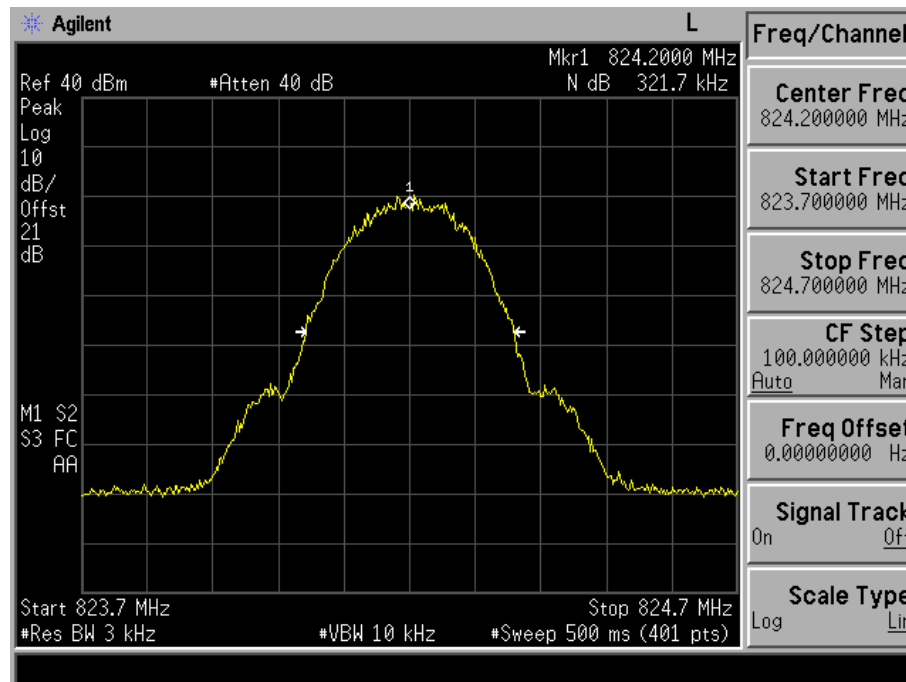


GSM 850 EGPRS - Packet Switched (GSM Mode CH189)

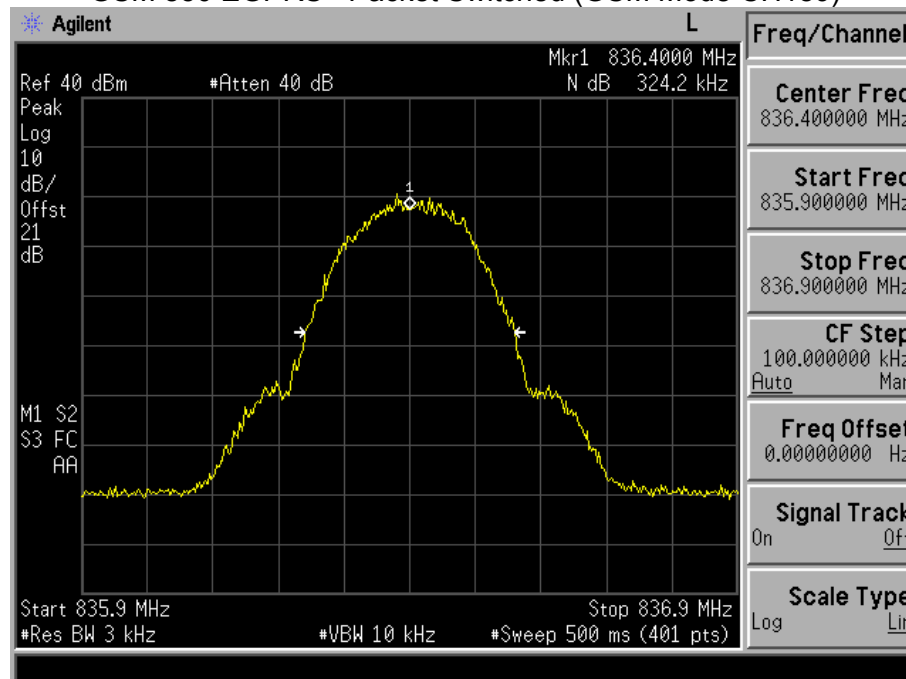


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 EGPRS		

GSM 850 EGPRS - Packet Switched (GSM Mode CH 251)

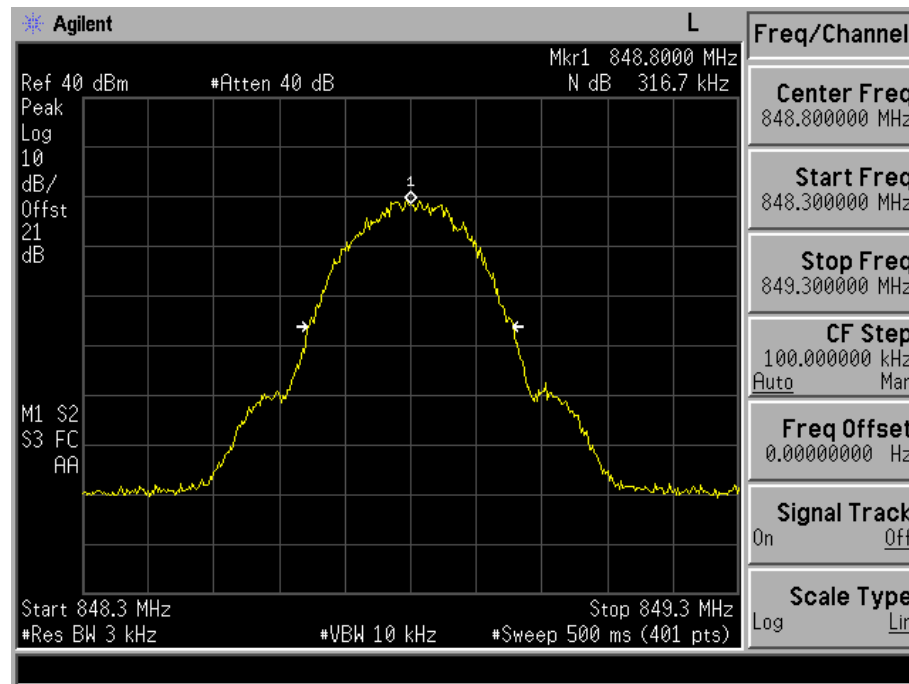


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 EGPRS		

PCS1900 EGPRS - Packet Switched (PCS Mode CH 512)

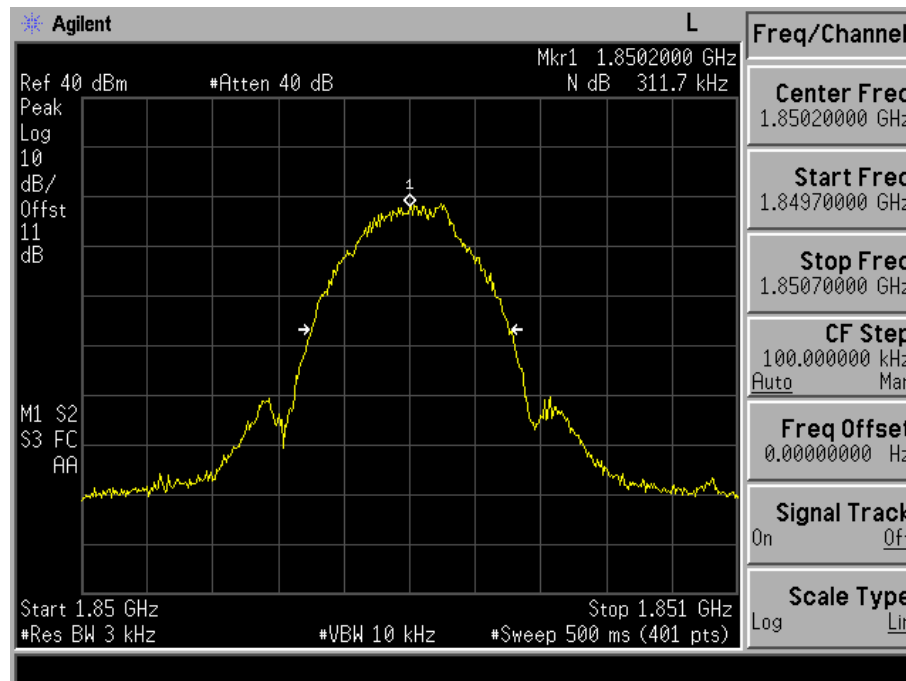


PCS1900 EGPRS - Packet Switched (PCS Mode CH661)

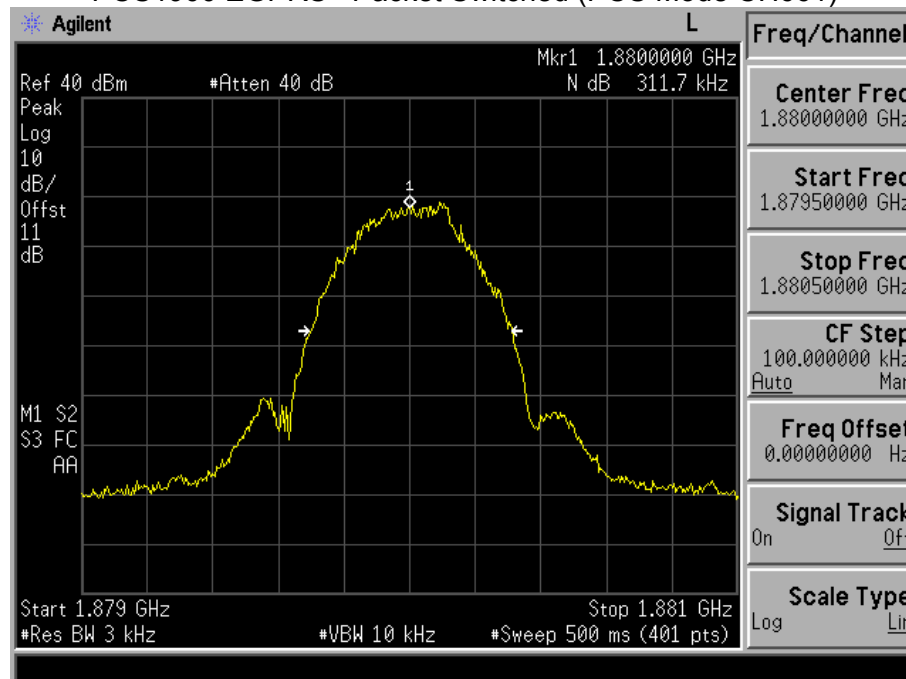

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Occupied Bandwidth		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS1900 EGPRS		

PCS1900 EGPRS - Packet Switched (PCS Mode CH 810)

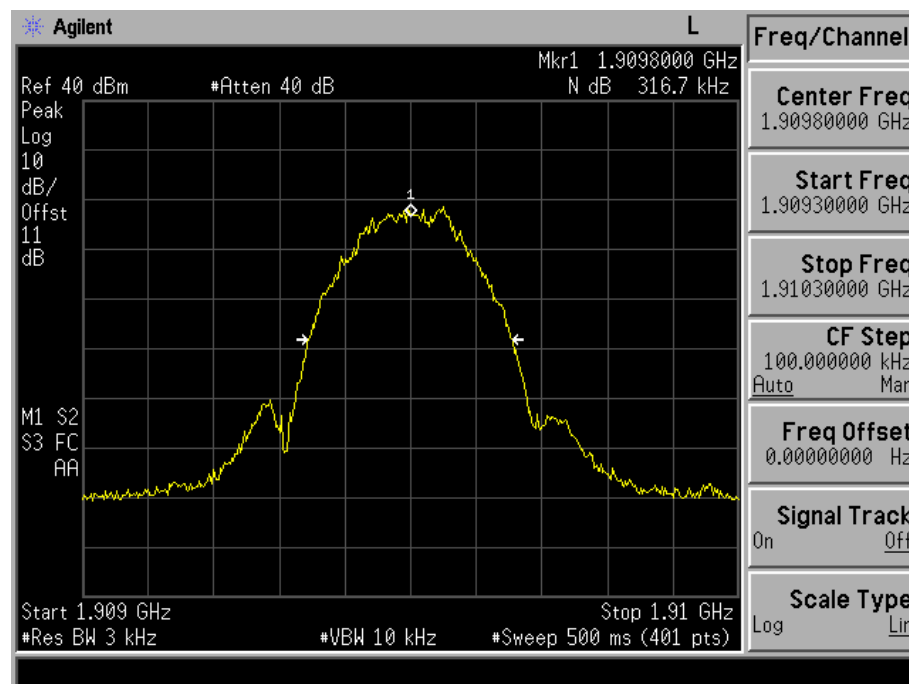

5. Spurious Emission At Antenna Terminals (+/-1MHz)


5.1. Test Equipment

The following test equipments are used during the spurious emission test

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	Advantest	R3182 / 100803470	May, 2007
Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
Directional coupler	Agilent	87300C / 3239A01864	N/A

Note: All equipments upon which need to be calibrated are with calibration period of 1 year.

5.2. Setup

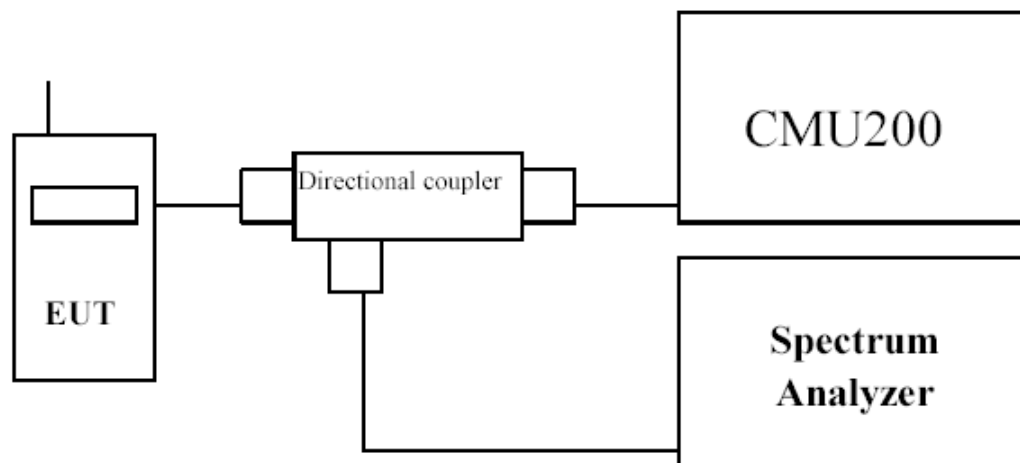

5.3. Limits

GSM850 Transmitter limits for narrowband spurious emission

Lower Block Edge Test Frequencies	Upper Block Edge Test Frequencies
Block A Channel : 128 Frequency : 824.2 MHz	Block B Channel : 251 Frequency : 848.2 MHz

PCS 1900 Transmitter limits for narrowband spurious emission

Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
Block A Channel : 512 Frequency : 1850.2 MHz	Block C Channel : 810 Frequency : 1909.8 MHz

5.4. Test Procedure

In accordance with Part 22.917 and 24.238, at least 1% of the emission bandwidth was used for the resolution and video bandwidths up to 1MHz away from the Block Edge. At greater than 1MHz, the resolution and video bandwidth were increased to 1MHz.

The reference power and path losses of all channels used for testing in each frequency block were measured.


5.5. Test Specification

According to Part 2.1049, 22.917,24.238.


5.6. Test Result of Spurious Emission At Antenna Terminals (+/-1MHz)

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (GSM 850)		

GSM 850 Lower Channel 128 (824.2MHz)

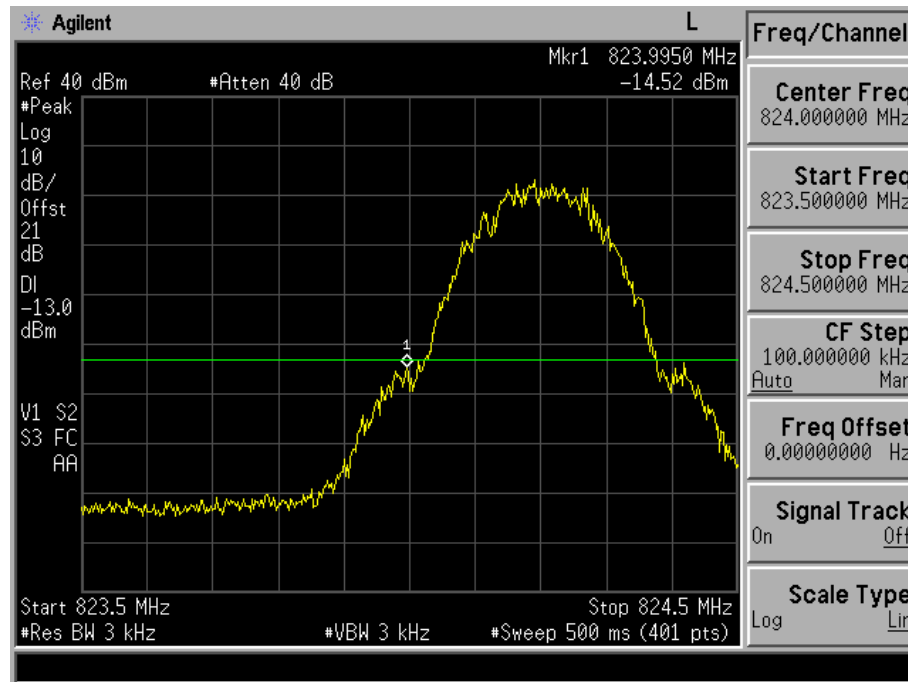


GSM 850 Upper Channel 251(848.8MHz)

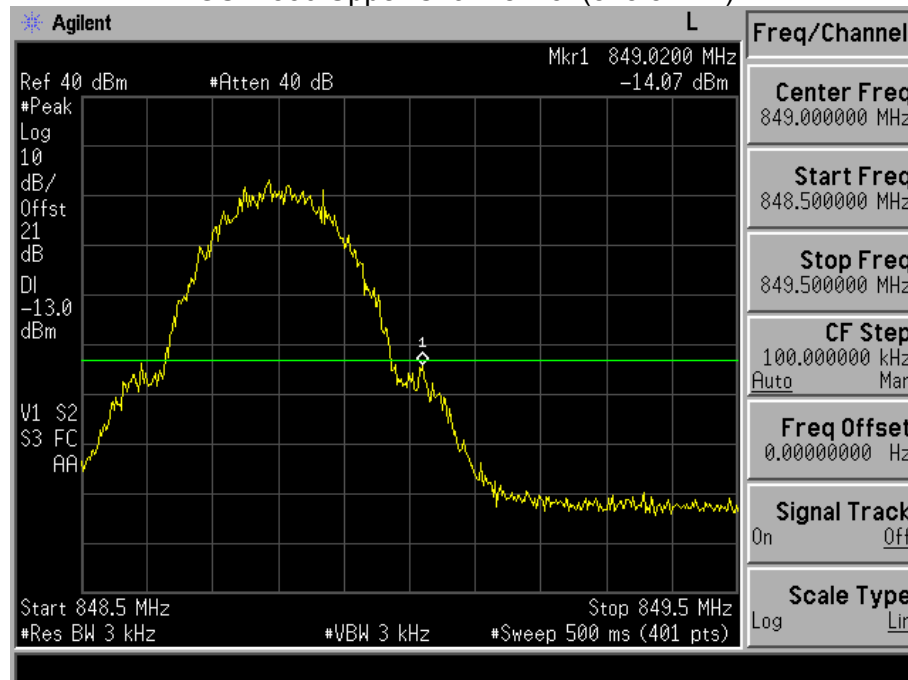


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (PCS 1900)		

PCS 1900 Lower Channel 512 (1850.2MHz)

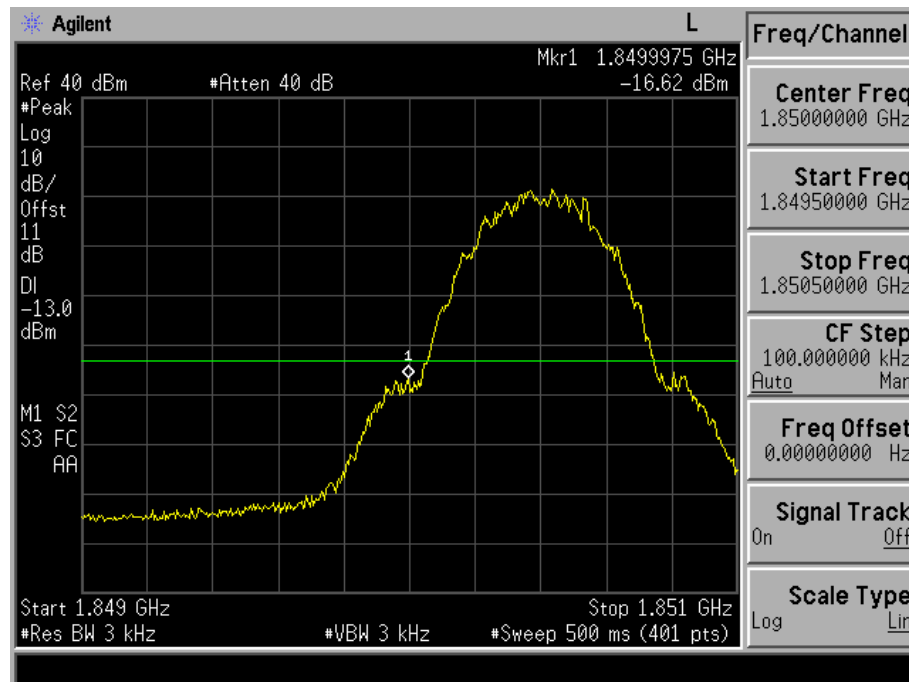


PCS 1900 Upper Channel 810(1910.0MHz)

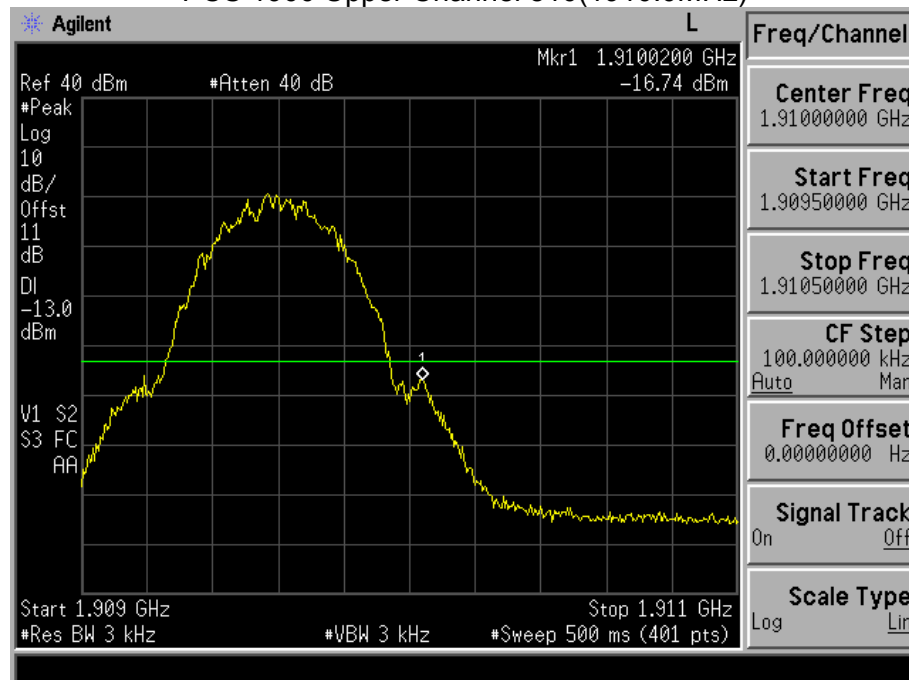


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (GSM 850 GPRS)		

GSM 850 GPRS Lower Channel 128 (824.2MHz)

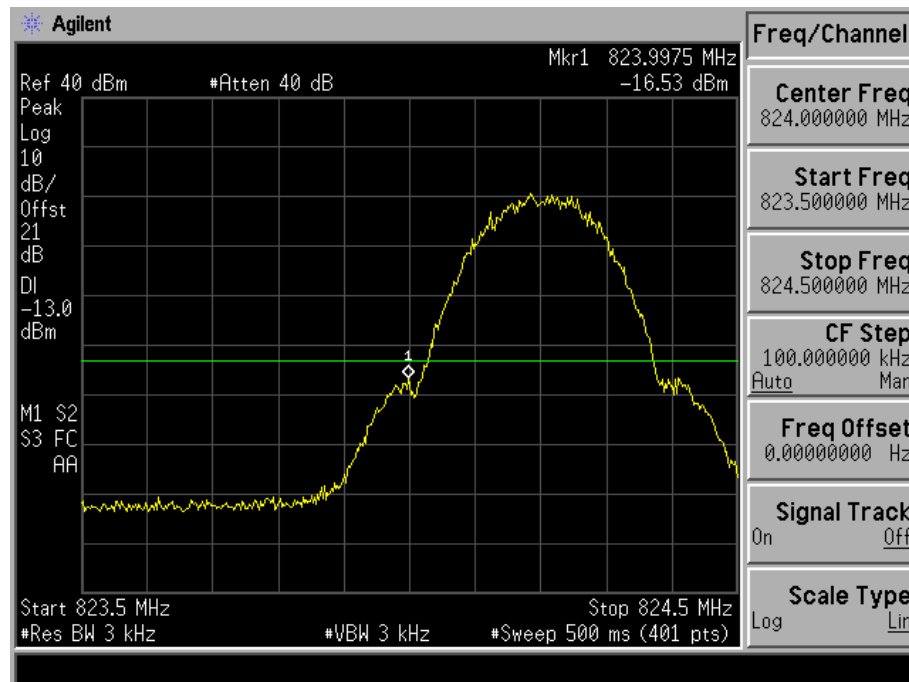


GSM 850 GPRS Upper Channel 251(848.8MHz)

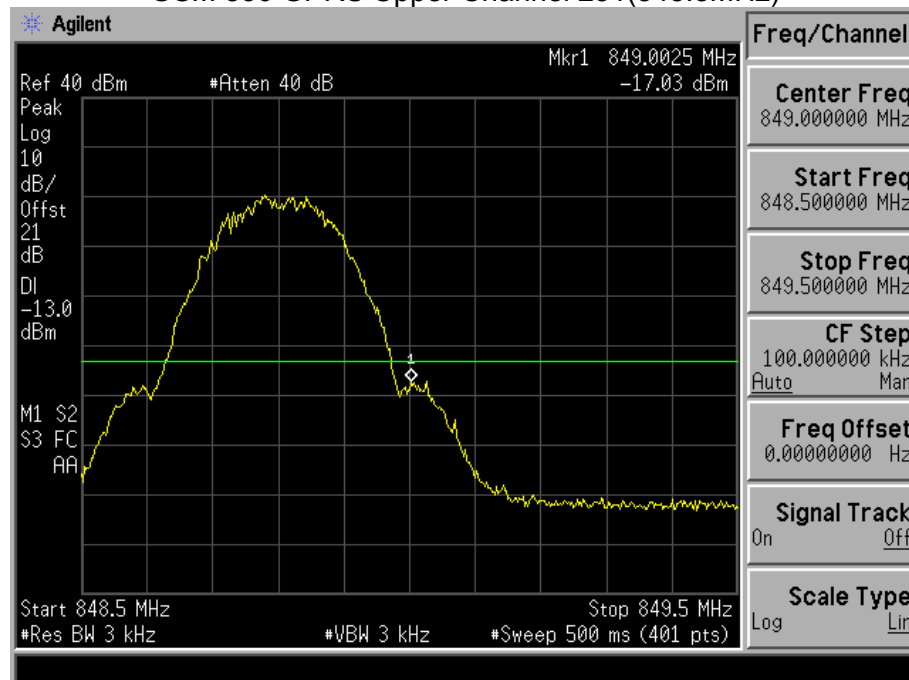


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (PCS 1900 GPRS)		

PCS 1900 GPRS Lower Channel 512 (1850.2MHz)

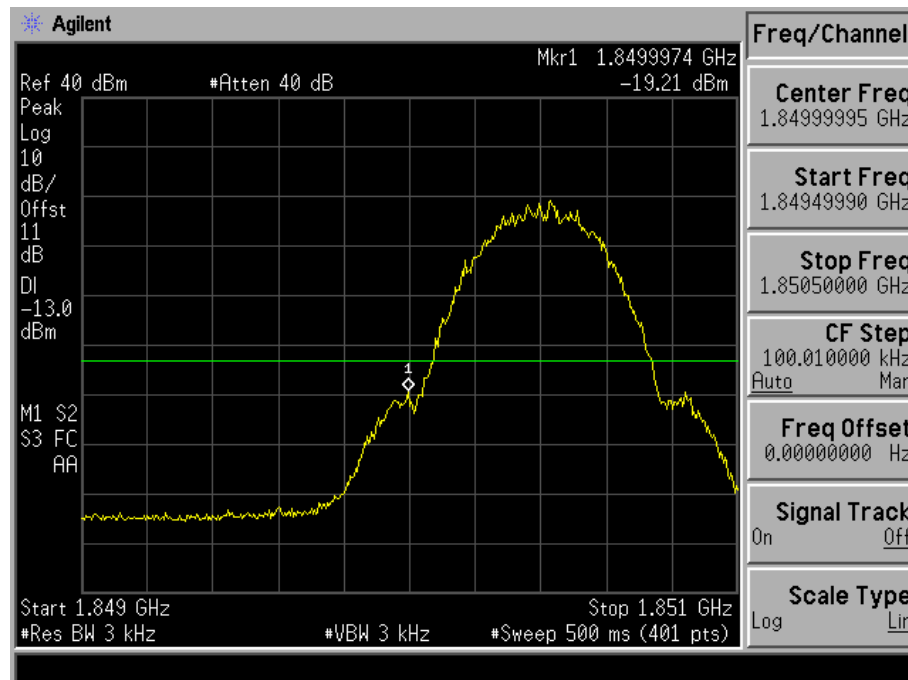


PCS 1900 GPRS Upper Channel 810(1910.0MHz)

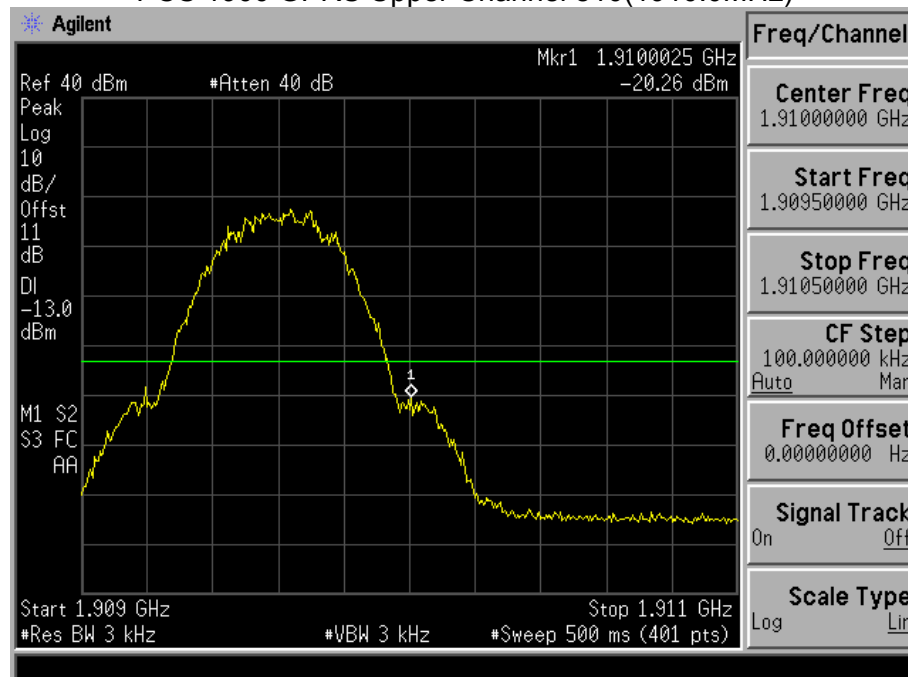


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (GSM 850 EGPRS)		

GSM 850 EGPRS Lower Channel 128 (824.2MHz)

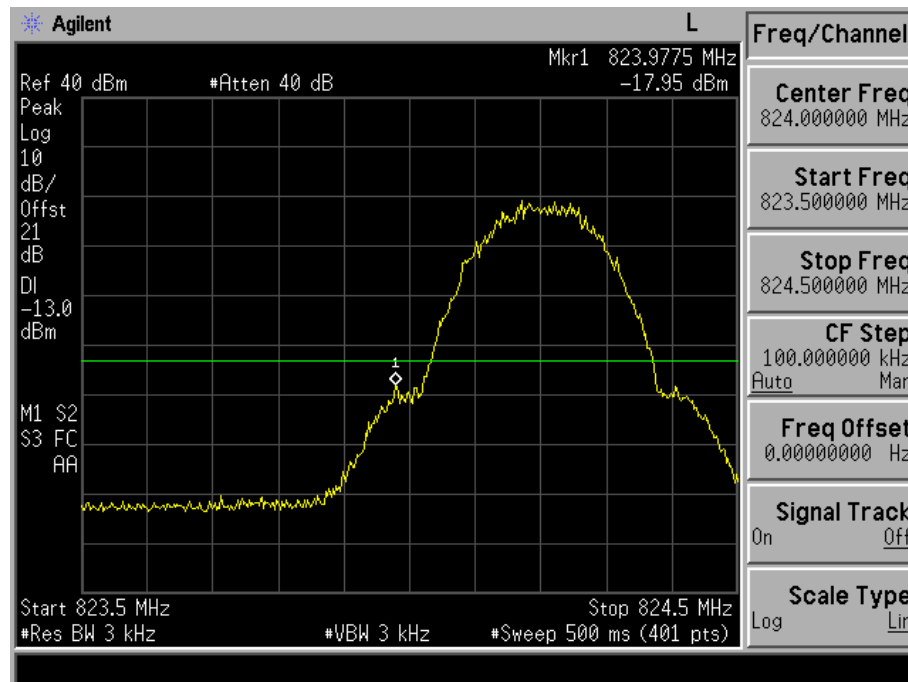


GSM 850 EGPRS Upper Channel 251(848.8MHz)

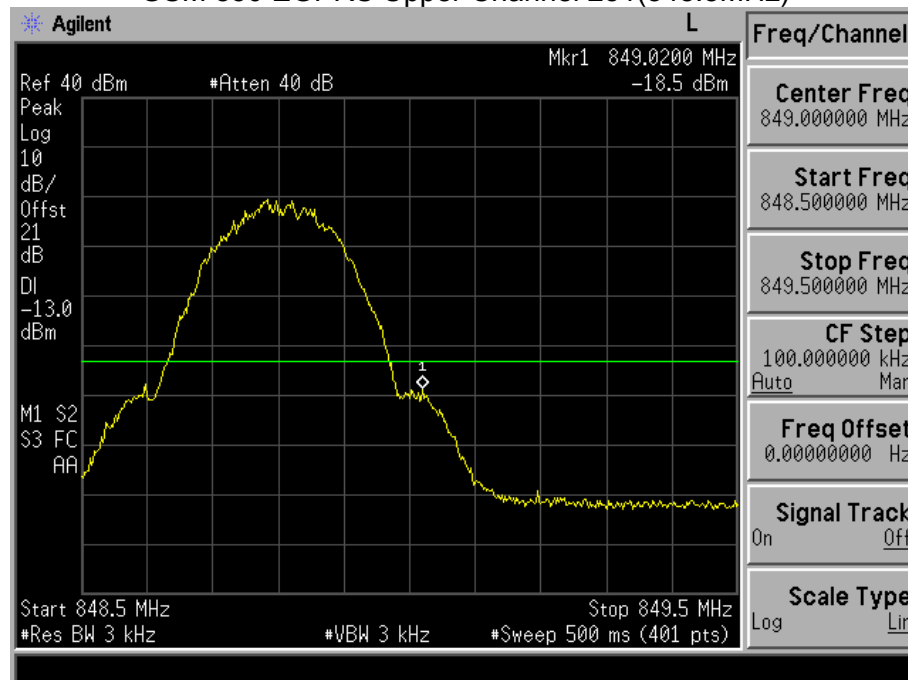


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission At Antenna Terminals (+/-1MHz)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	Block Edge Test (PCS 1900 EGPRS)		

PCS 1900 EGPRS Lower Channel 512 (1850.2MHz)

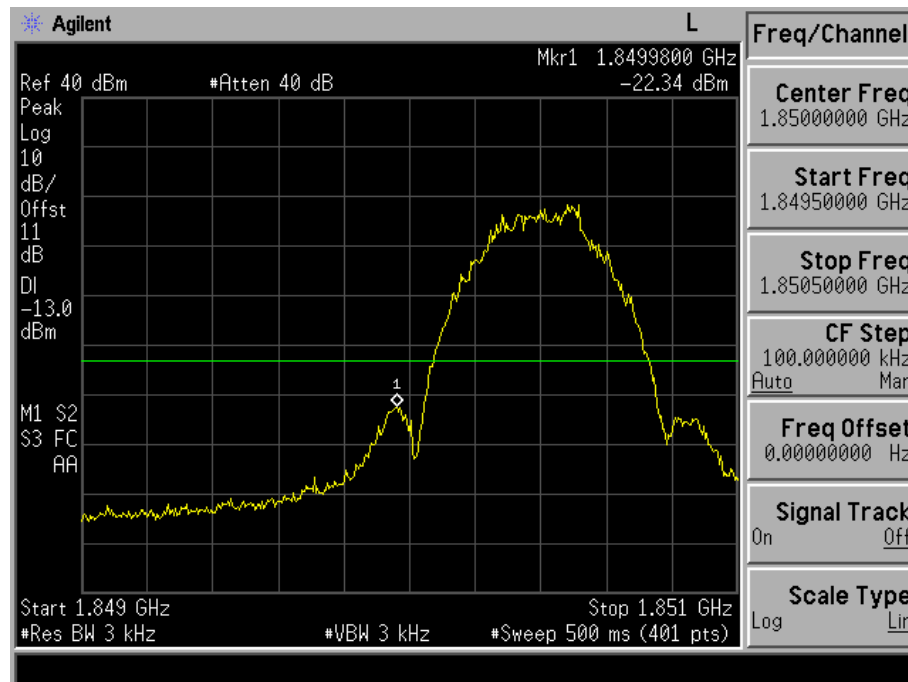

PCS 1900 EGPRS Upper Channel 810(1910.0MHz)

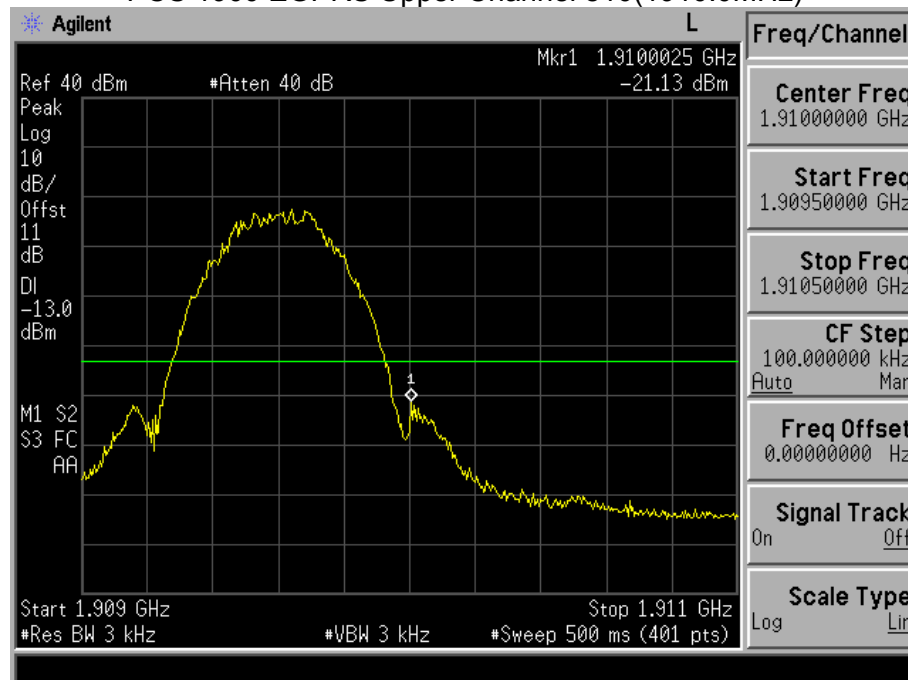

6. Spurious Emission

6.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒OATS 3	Test Receiver	R & S	ESCS 30 / 100122	Feb., 2008
	Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
	Spectrum Analyzer	Advantest	R3162 / 120300652	Feb., 2008
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2007
	Bilog Antenna	SCHAFFNER	CBL6112B / 2697	May, 2007
	Horn Antenna	ETS	3115 / 0005-6160	Jul., 2007
	Pre-Amplifier	QTK	QTK-AMP-01 / 0001	Jul., 2007


Note: 1. All equipments that need to be calibrated are with calibration period of 1 year.
2. Mark "X" test instruments are used to measure the final test results.

6.2. Test Setup

6.2.1.1 Spurious emissions at antenna terminals.

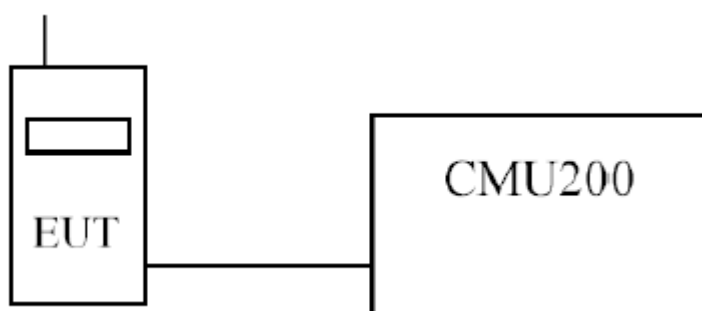

6.2.1.2 Field strength of spurious radiation.

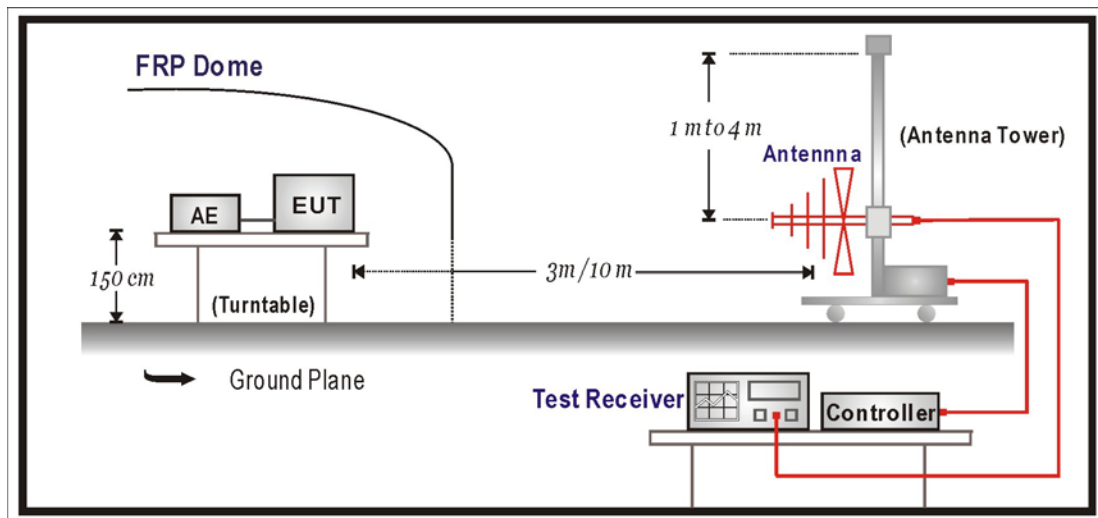

6.3 Limits

Limit	<-13dBm
-------	---------

$43 + 10\log(P)$ down on the carrier where P is the power in Watts.

6.4 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9kHz to 20GHz. The EUT was set to transmit on full power. The EUT was tested on bottom, middle and top channels for both power levels. The resolution and video bandwidth was set to 1MHz in accordance with Part 24.238. The spectrum analyzer detector was set to Max Hold.

In addition, measurements were made up to the 10th harmonic of the fundamental.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to

TIA/EIA 603-C on radiated measurement.

All measurements of conducted emissions were done 3 channels (High, Middle, Low), and the margin is far away from -13dBm. The worst case is at middle channel, and show the worst case in this report.

6.5 Test Specification


According to Part 2.1051, 2.1053, 22.917(a), 24.238(b).



6.6 Test Result of Spurious Emission


Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850	Test Range	9KHz~10GHz

GSM850 Mid-Channel 189

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
1670	-55.66	0.58	-55.08	-13
2509.2	-55.10	0.7	-54.40	-13
3345.6	-60.73	1.01	-59.72	-13
4182	-64.88	1.18	-63.70	-13
5018.4	-64.91	1.23	-63.68	-13
5854.8	-64.48	1.45	-63.03	-13
6691.2	-63.88	1.56	-62.32	-13
7527.6	-62.26	1.59	-60.67	-13
8364	-57.17	1.82	-55.35	-13

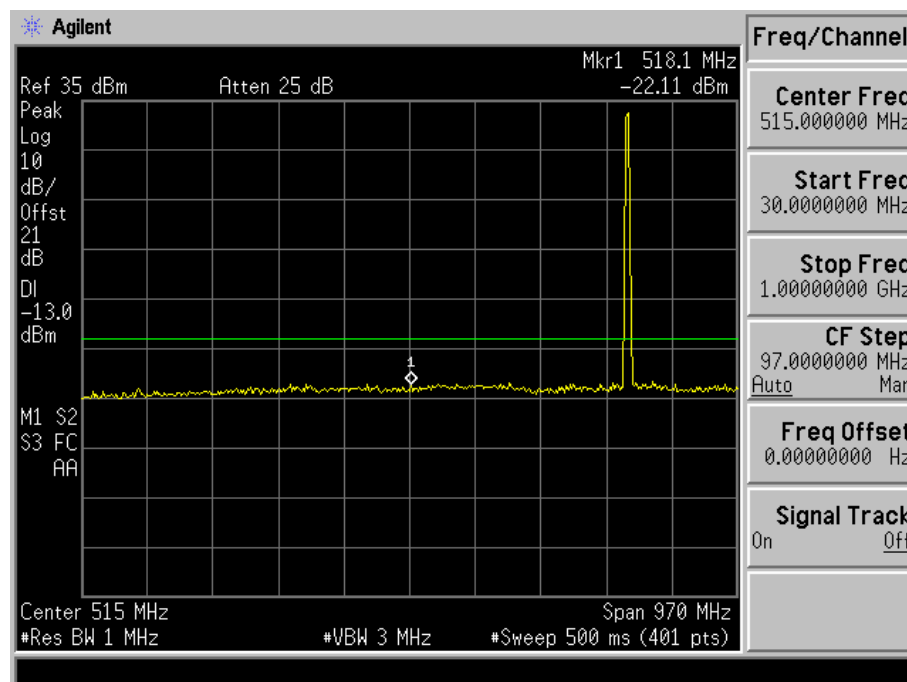

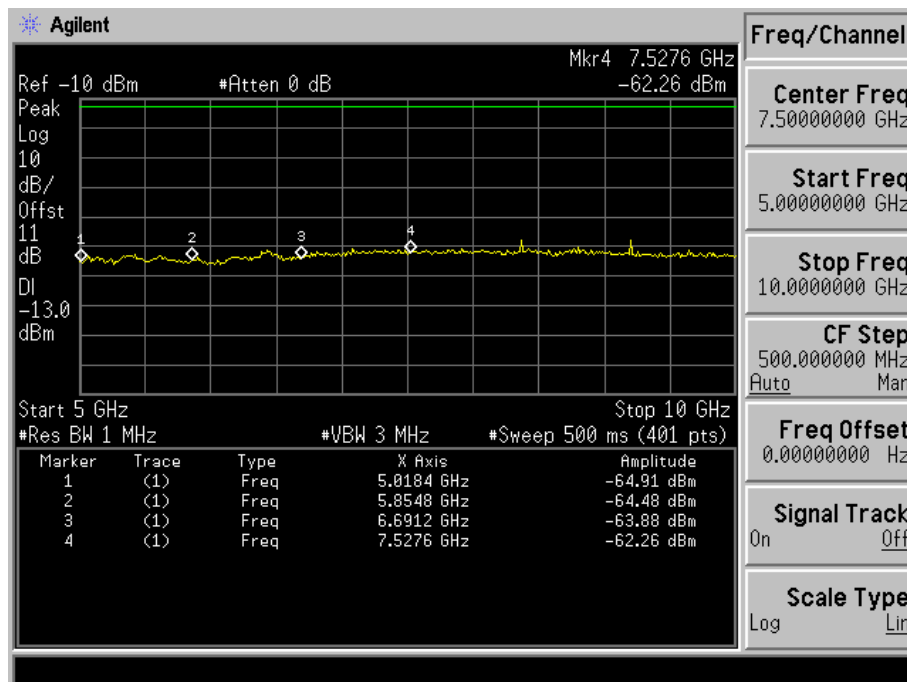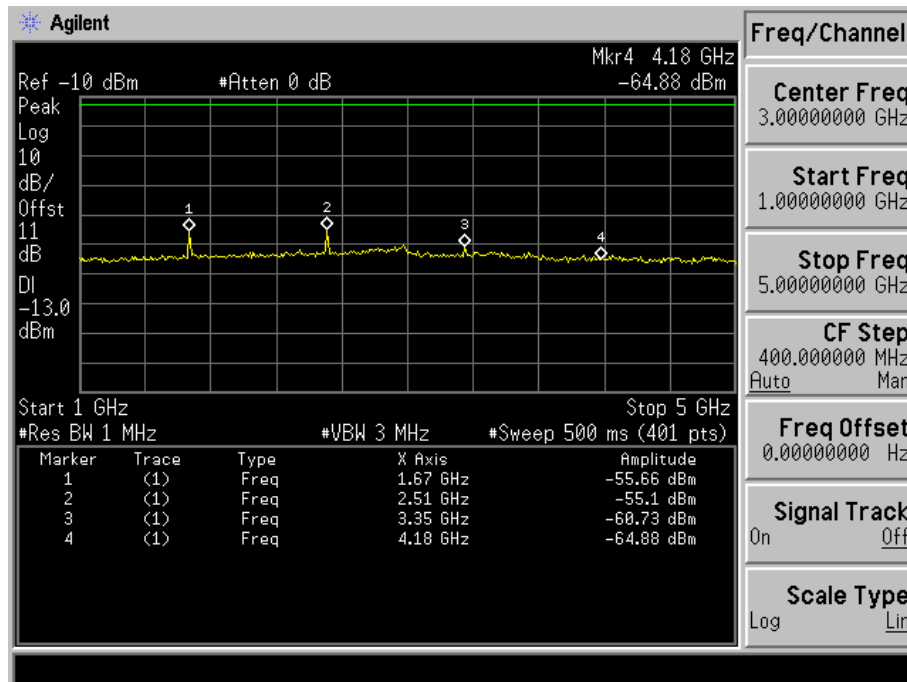



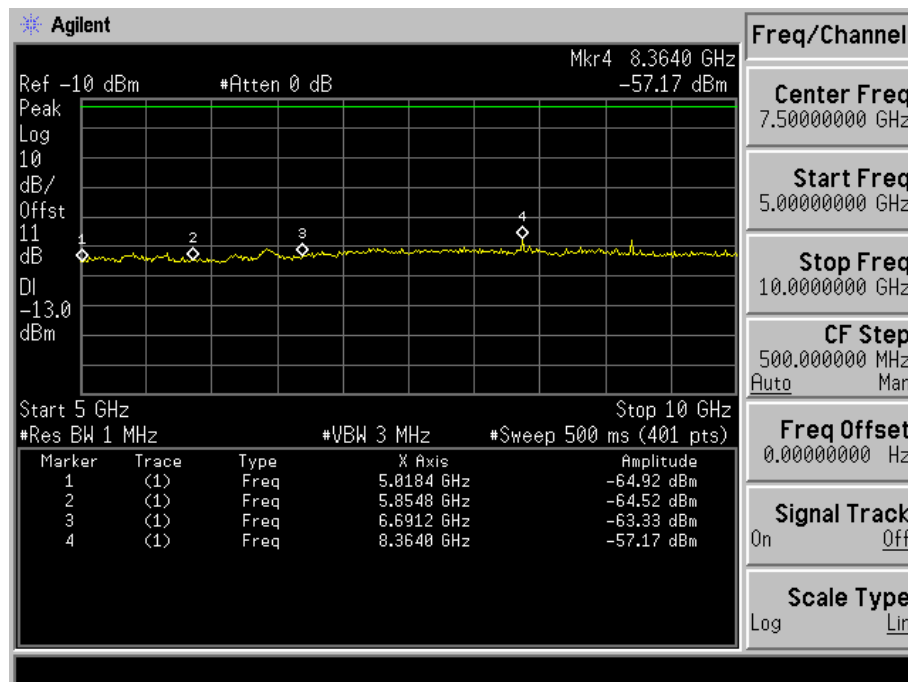




Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS 1900	Test Range	9KHz~20GHz

PCS1900 Mid-Channel 661

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
3760	-53.77	1.1	-52.67	-13
5640	-63.25	1.23	-62.02	-13
7520	-61.78	1.59	-60.19	-13
9400	-56.86	1.89	-54.97	-13
11280	-42.38	2.07	-40.31	-13
13160	-62.50	2.26	-60.24	-13
15040	-60.92	2.64	-58.28	-13
16920	-60.22	3.5	-56.72	-13
18800	-60.60	3.7	-56.90	-13

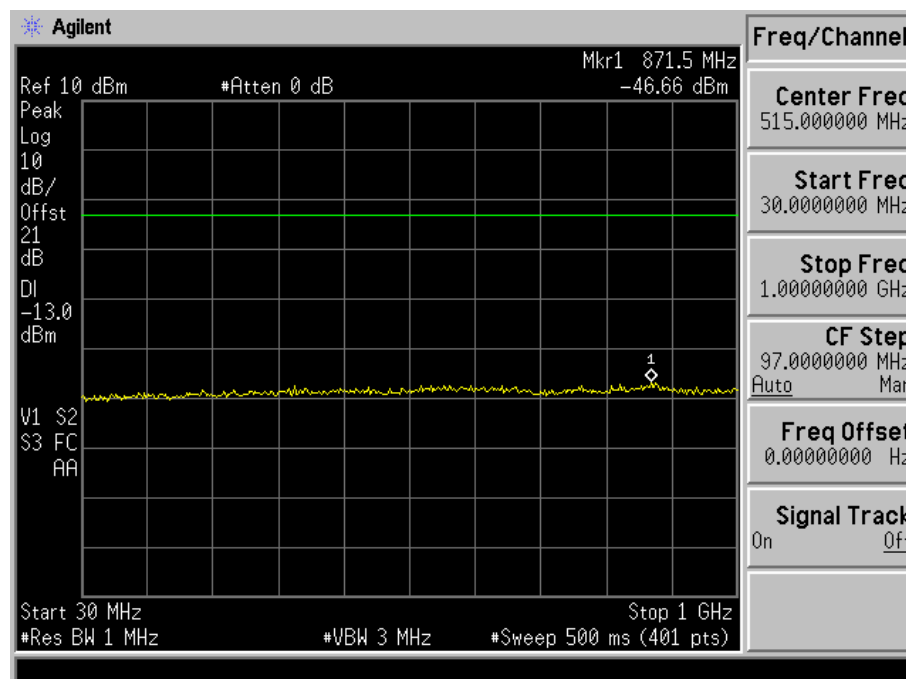

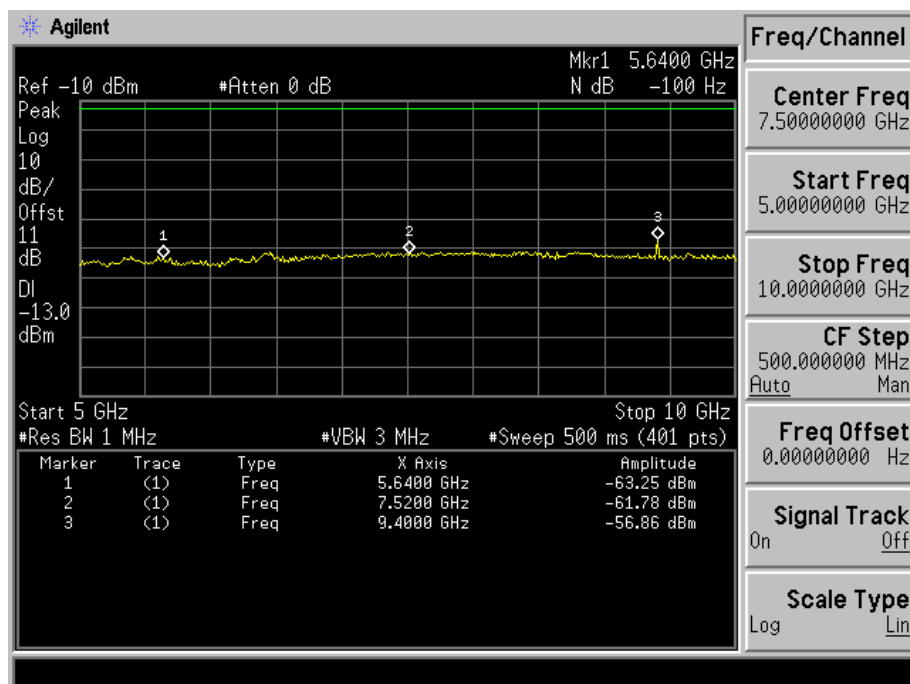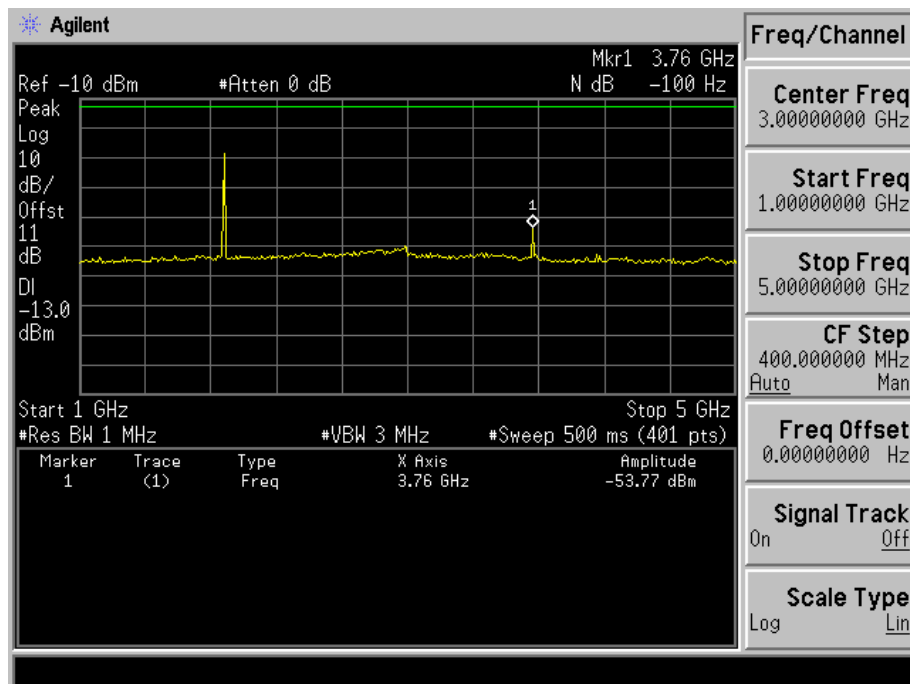


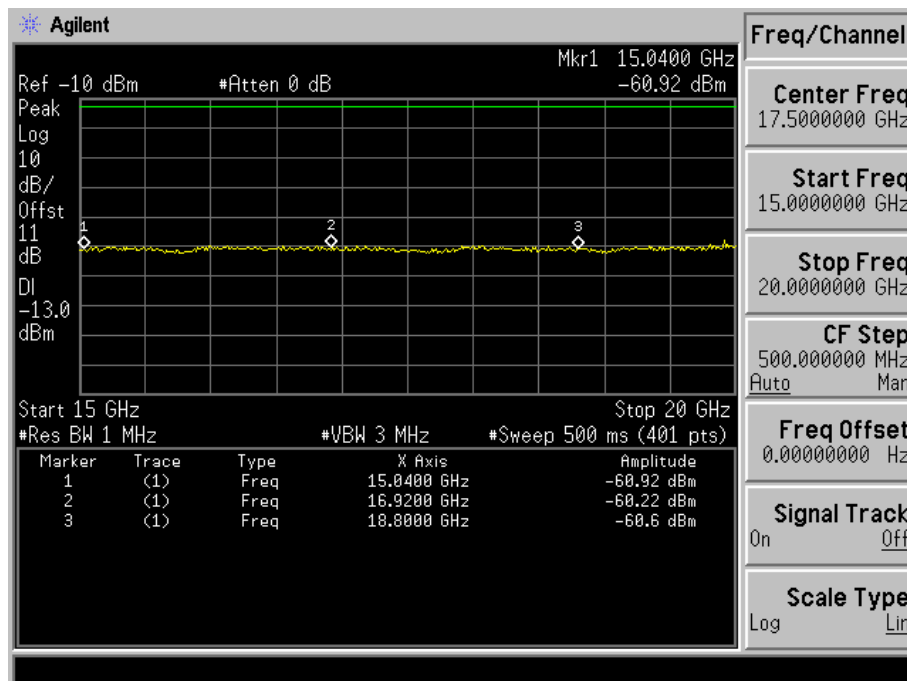
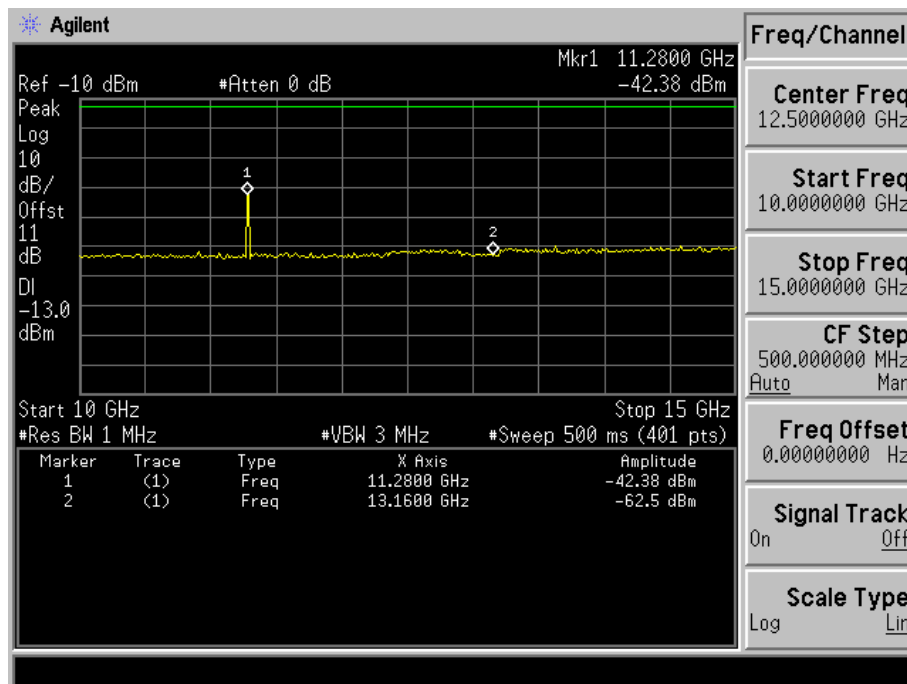



Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 GPRS	Test Range	9KHz~10GHz

GSM 850 GPRS Mid-Channel 189

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
1670	-58.02	0.58	-57.44	-13
2509.2	-58.07	0.7	-57.37	-13
3345.6	-60.09	1.01	-59.08	-13
4182	-64.58	1.18	-63.4	-13
5018.4	-65.47	1.23	-64.24	-13
5854.8	-64.75	1.45	-63.3	-13
6691.2	-63.57	1.56	-62.01	-13
7527.6	-62.06	1.59	-60.47	-13
8364	-62.19	1.82	-60.37	-13

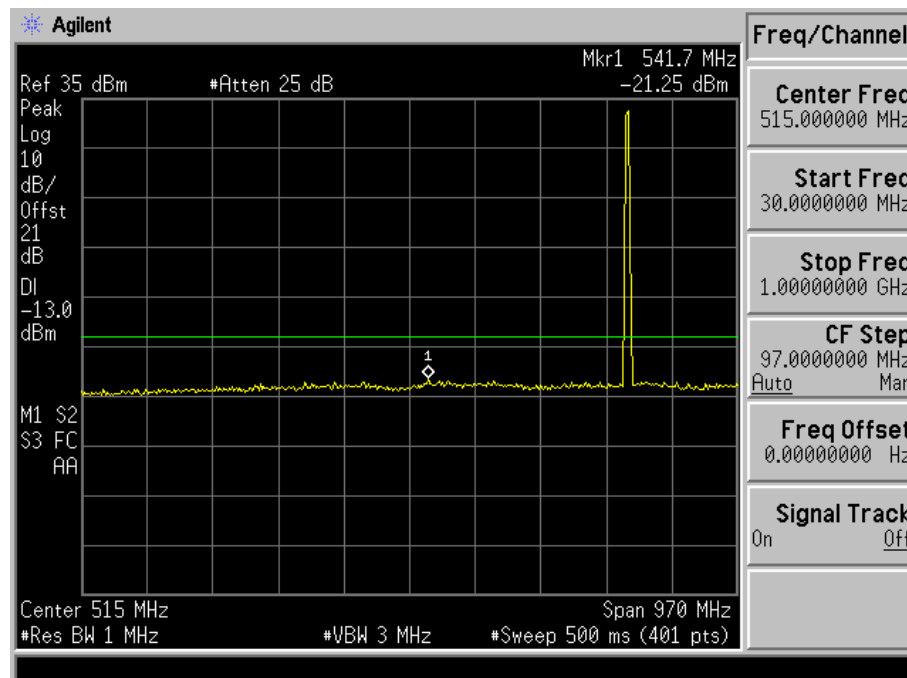

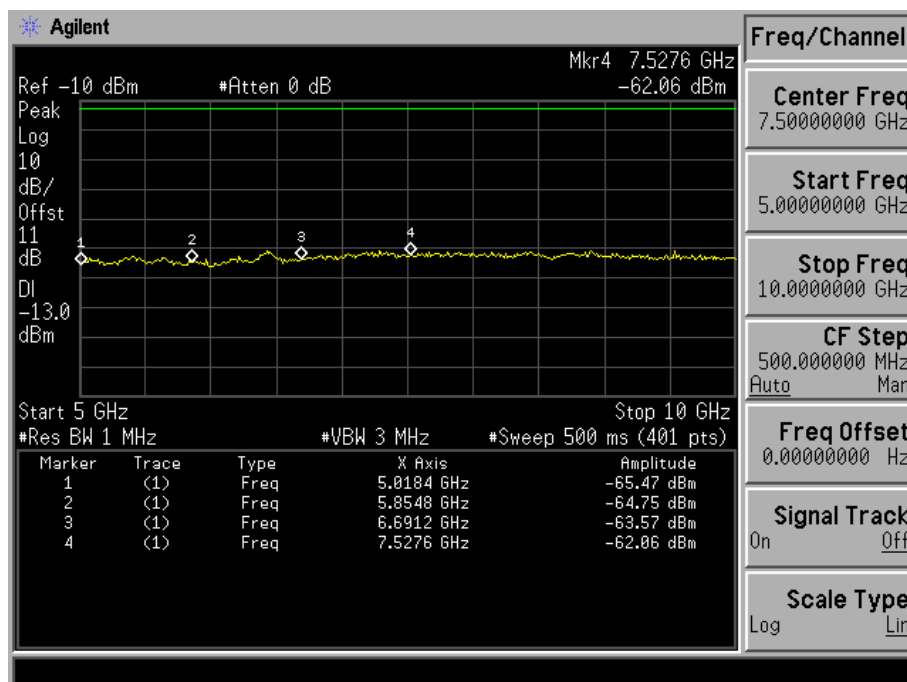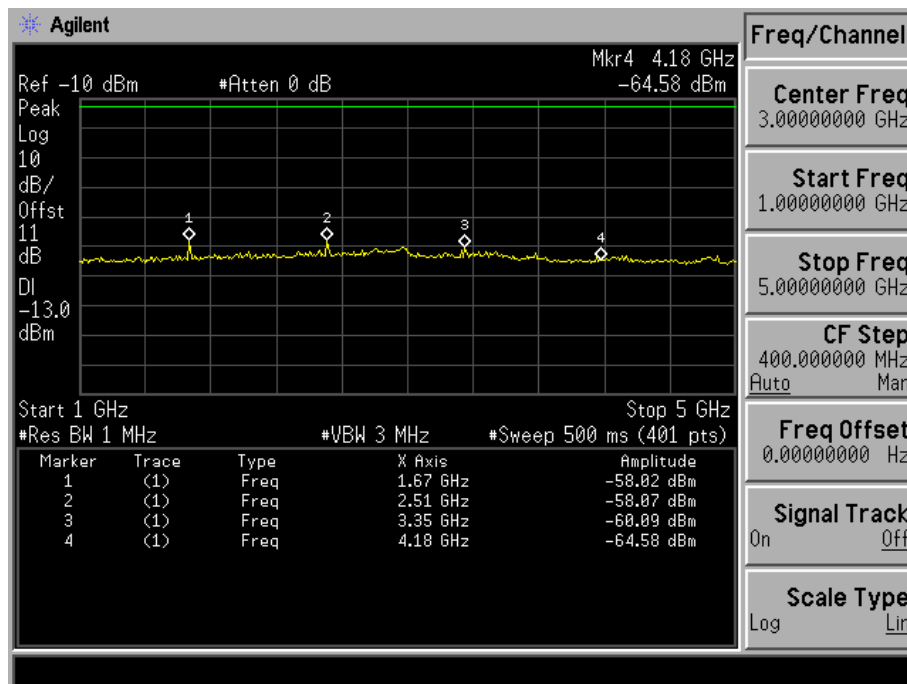



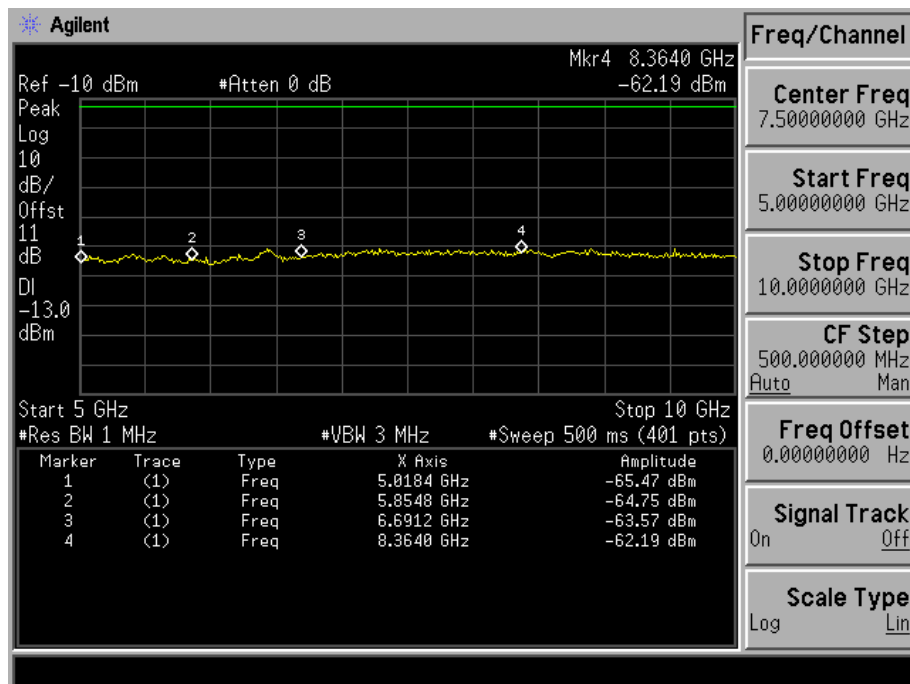




Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS 1900 GPRS	Test Range	9KHz~20GHz

PCS 1900 GPRS Mid-Channel 661

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
3760	-50.84	1.1	-49.74	-13
5640	-63.66	1.23	-62.43	-13
7520	-61.12	1.59	-59.53	-13
9400	-60.87	1.89	-58.98	-13
11280	-46.42	2.07	-44.35	-13
13160	-62.55	2.26	-60.29	-13
15040	-60.37	2.64	-57.73	-13
16920	-61.20	3.5	-57.70	-13
18800	-61.25	3.7	-57.55	-13

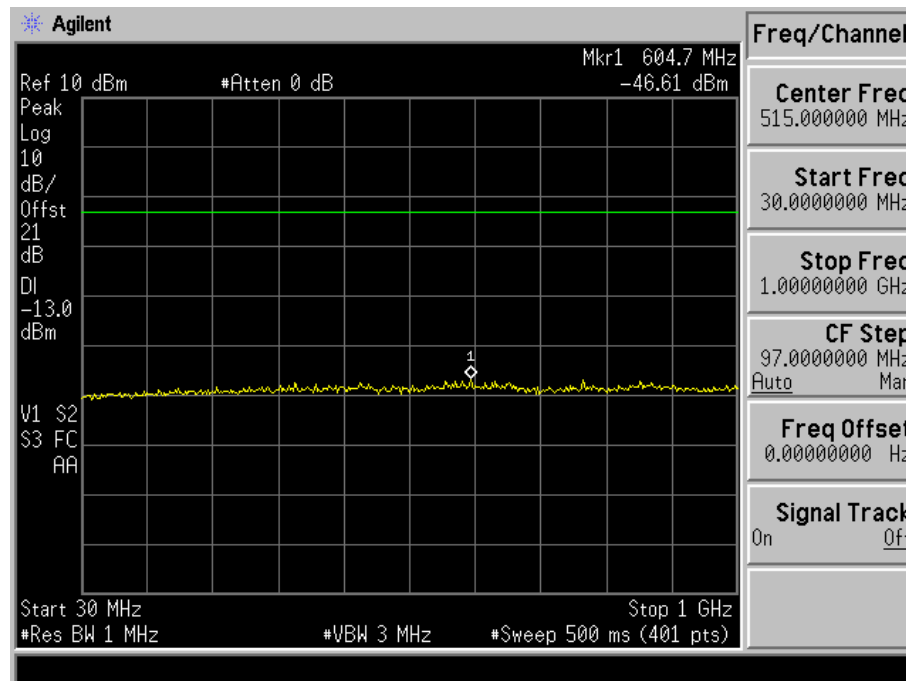

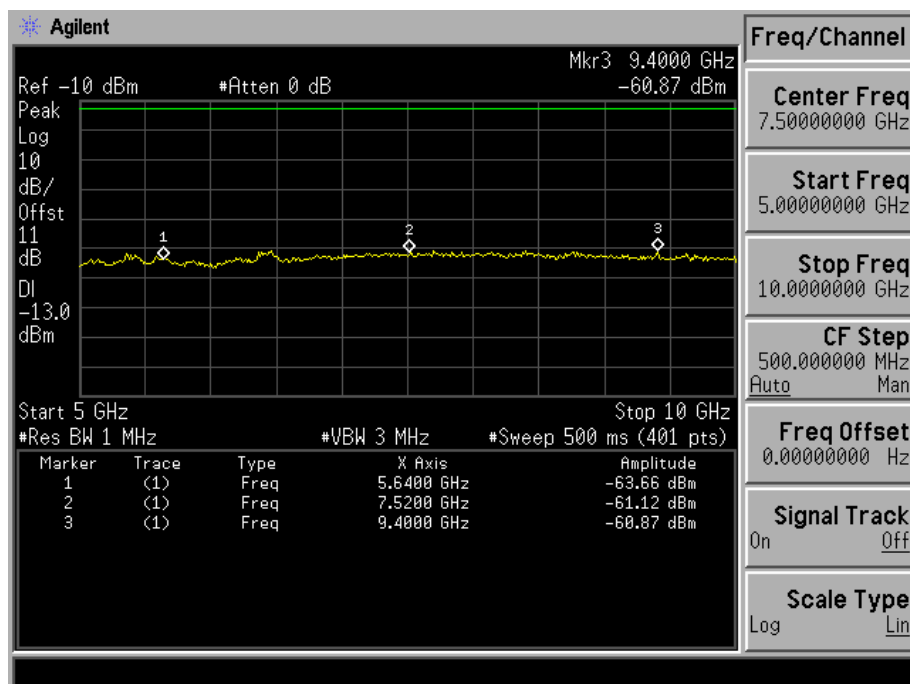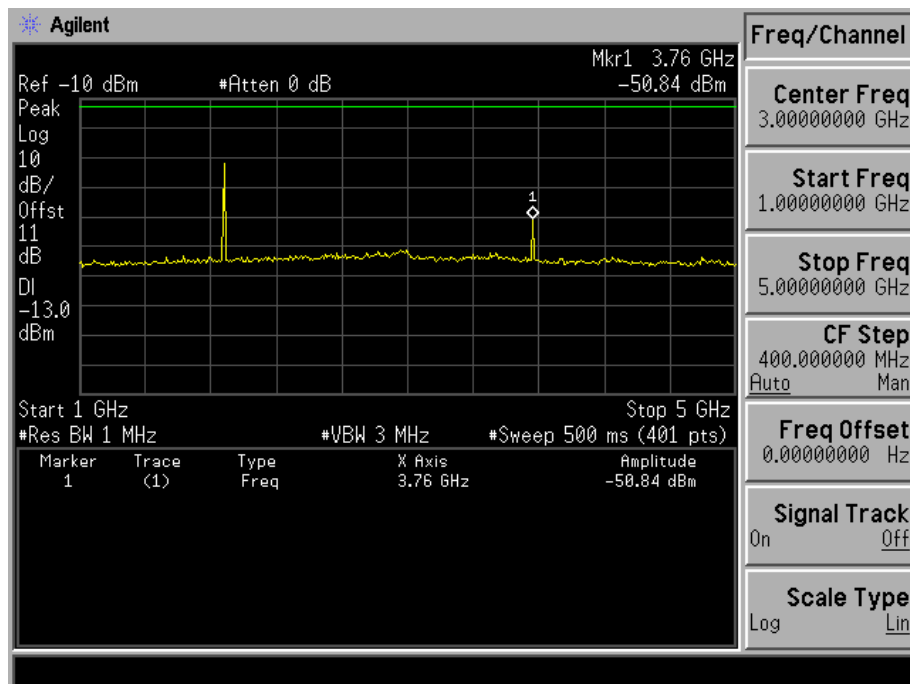


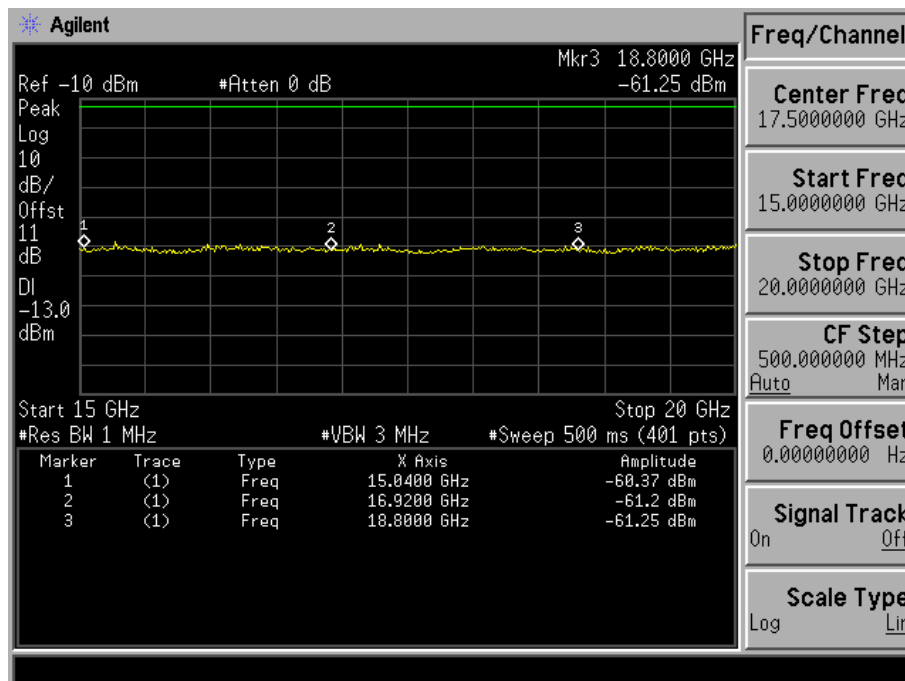
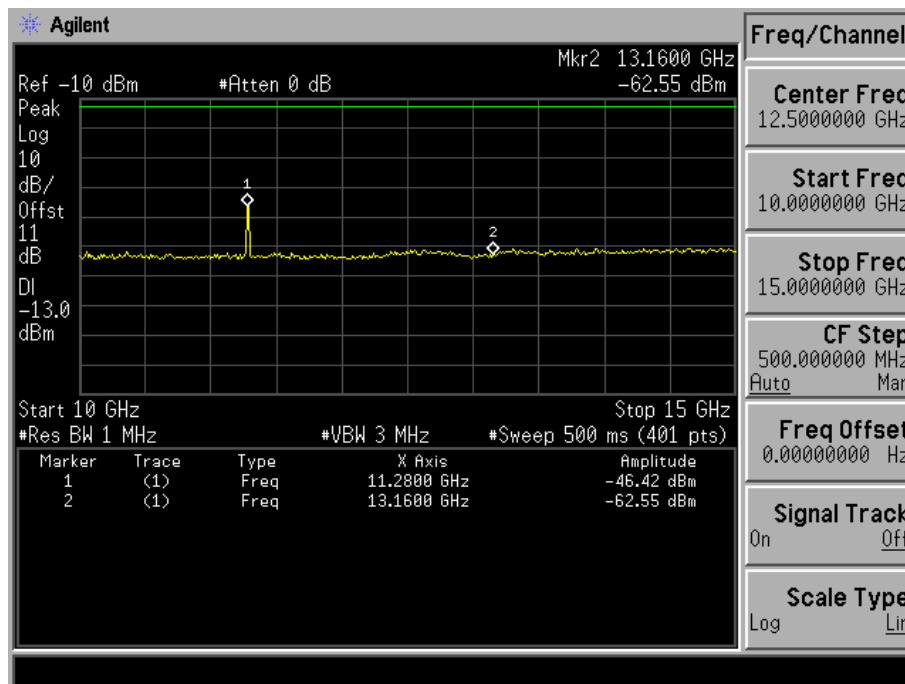



Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	GSM 850 EGPRS	Test Range	9KHz~10GHz

GSM 850 EGPRS Mid-Channel 189

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
1670	-57.53	0.58	-56.95	-13
2509.2	-56.80	0.7	-56.10	-13
3345.6	-62.24	1.01	-61.23	-13
4182	-64.84	1.18	-63.66	-13
5018.4	-65.79	1.23	-64.56	-13
5854.8	-64.90	1.45	-63.45	-13
6691.2	-64.51	1.56	-62.95	-13
7527.6	-62.39	1.59	-60.80	-13
8364	-62.31	1.82	-60.49	-13

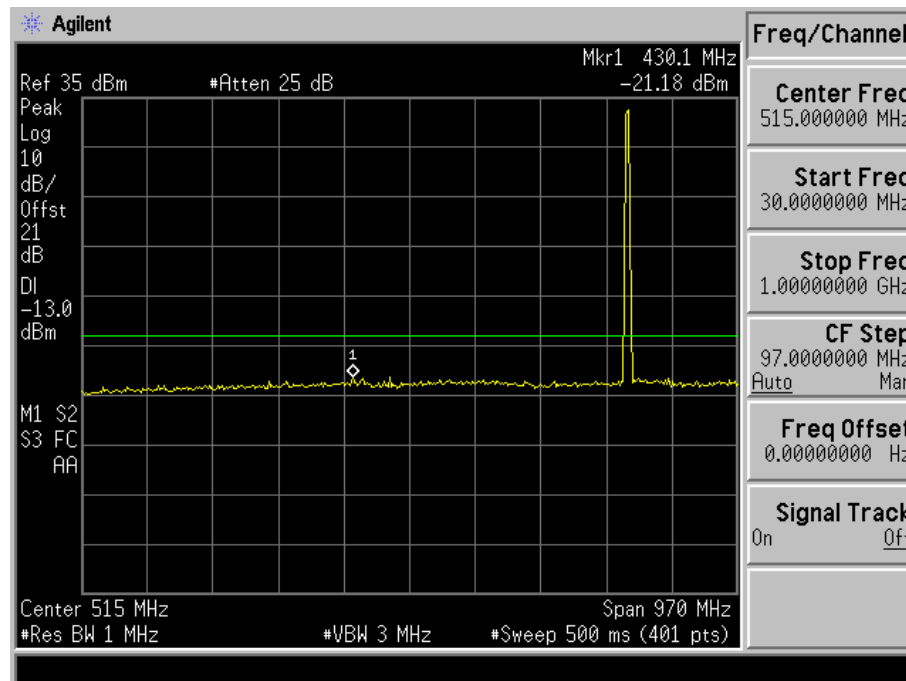

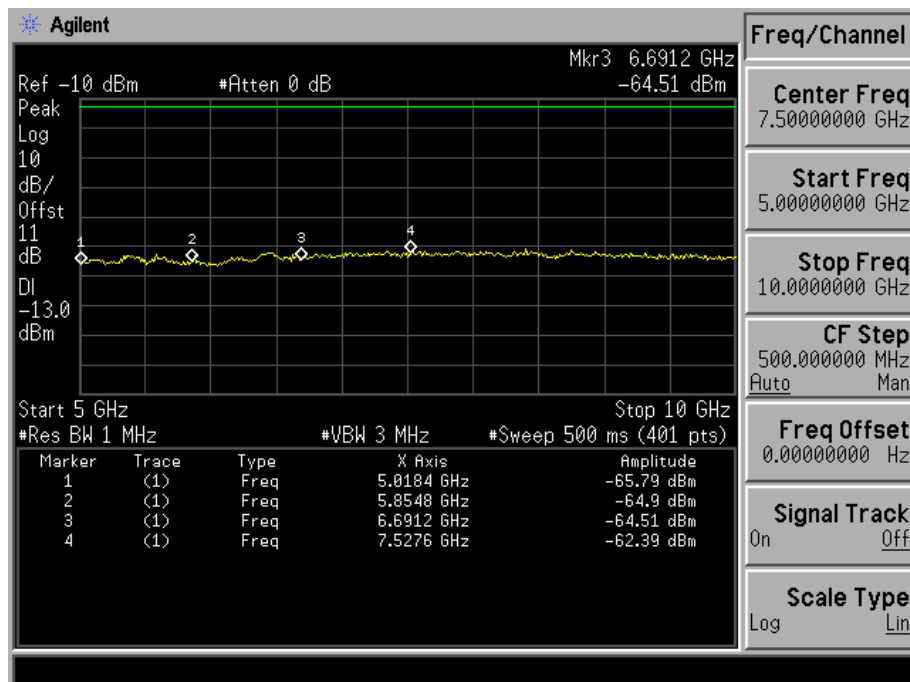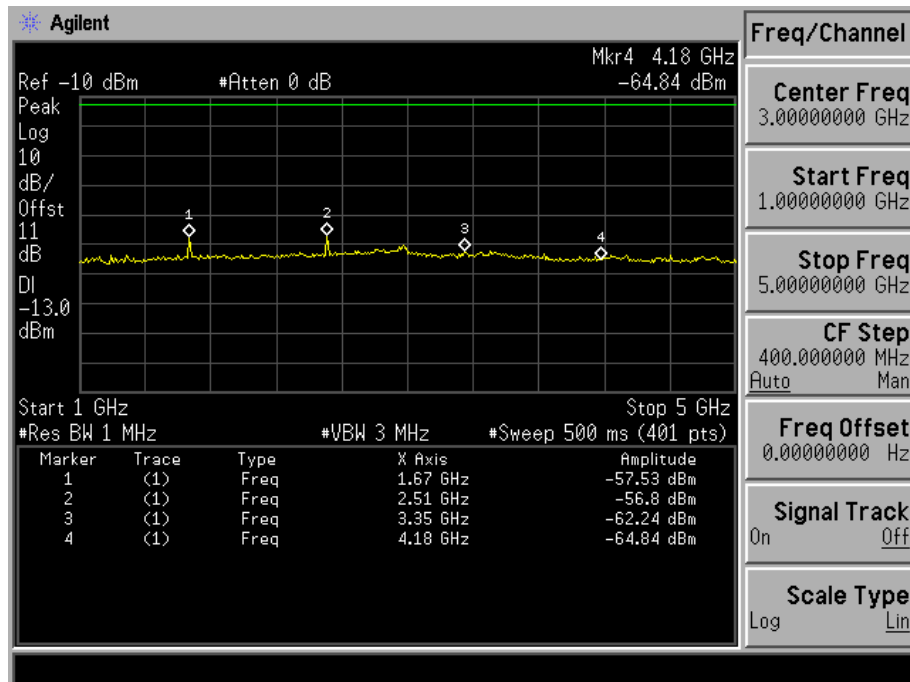



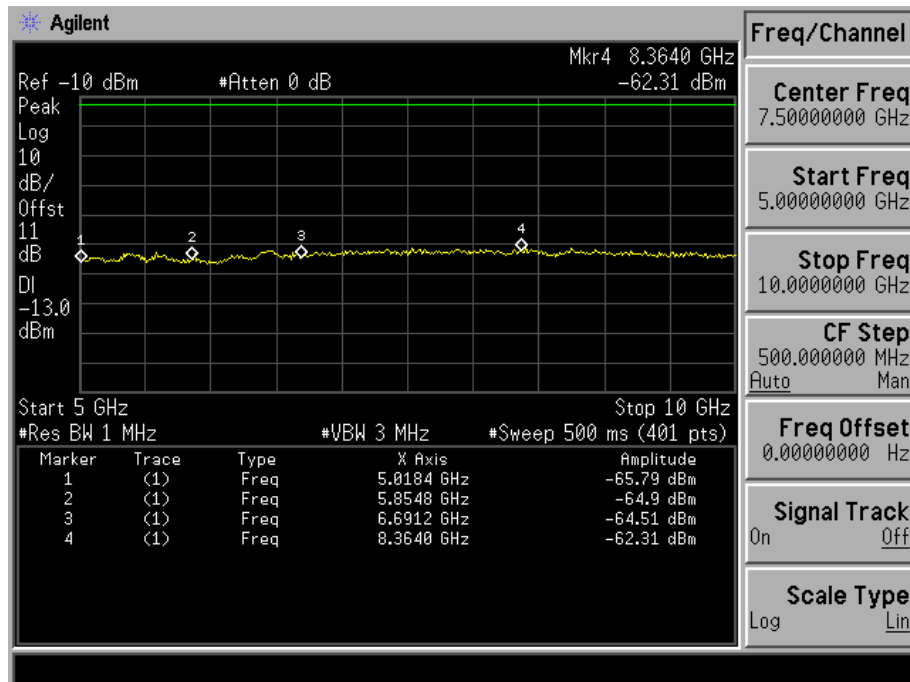




Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Conducted)		
Date of Test	2008/03/28	Test Site	CB5
Test Condition	PCS 1900 EGPRS	Test Range	9KHz~20GHz

PCS 1900 EGPRS Mid-Channel 661

Frequency (MHz)	Reading Level (dBm)	Path Loss (dB)	Emission Level (dBm)	Limit (dBm)
3760	-53.53	1.1	-52.43	-13
5640	-64.99	1.23	-63.76	-13
7520	-62.85	1.59	-61.26	-13
9400	-59.77	1.89	-57.88	-13
11280	-44.99	2.07	-42.92	-13
13160	-65.19	2.26	-62.93	-13
15040	-63.58	2.64	-60.94	-13
16920	-64.47	3.5	-60.97	-13
18800	-65.24	3.7	-61.54	-13

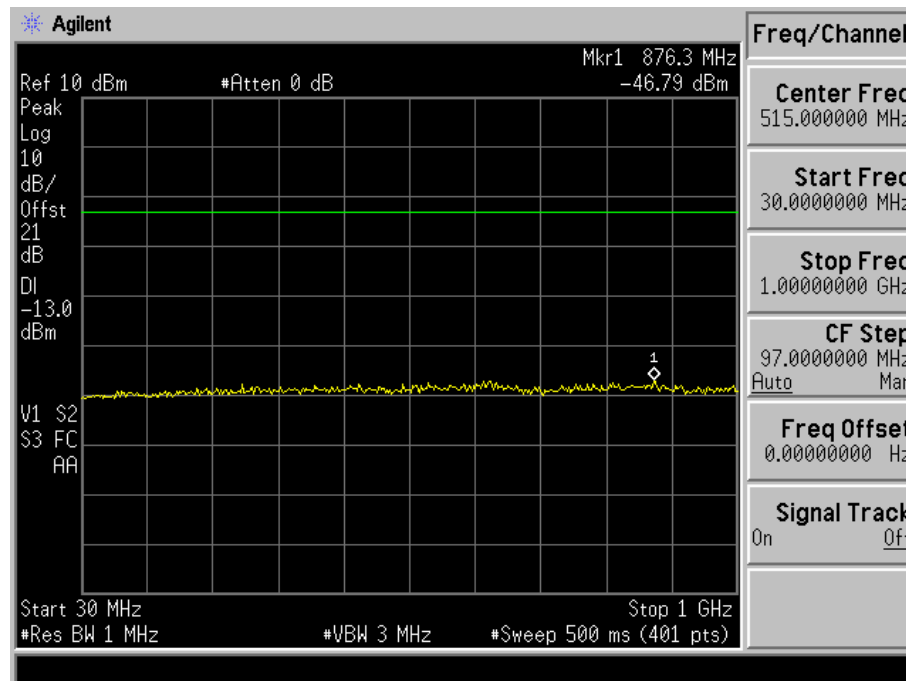

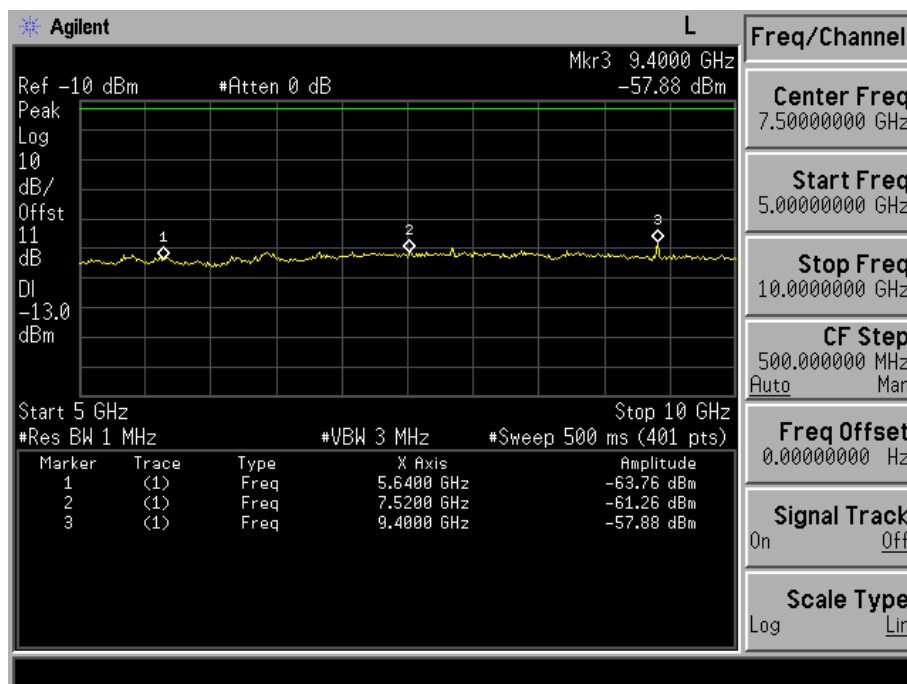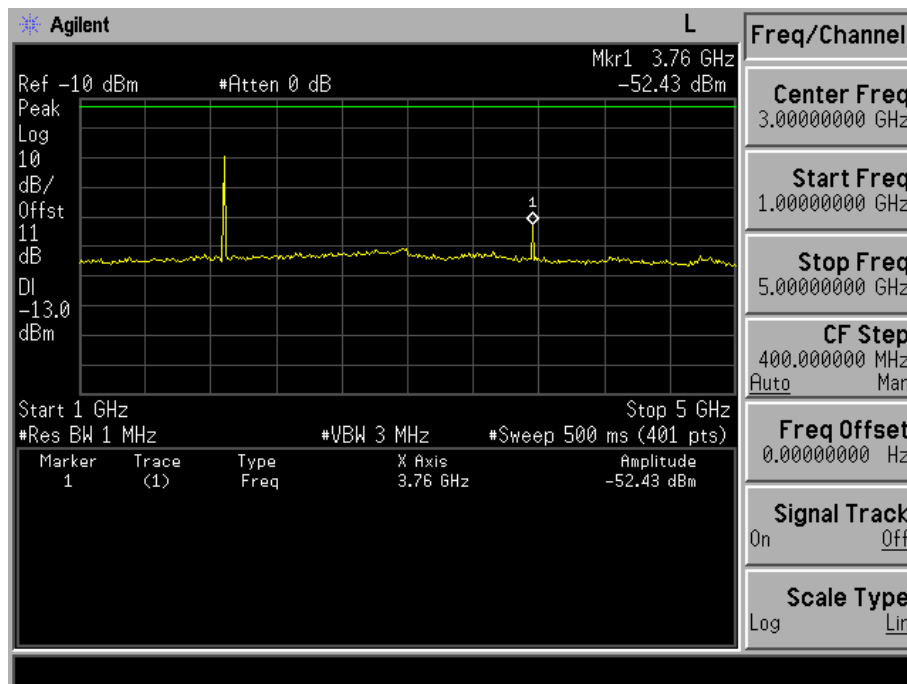

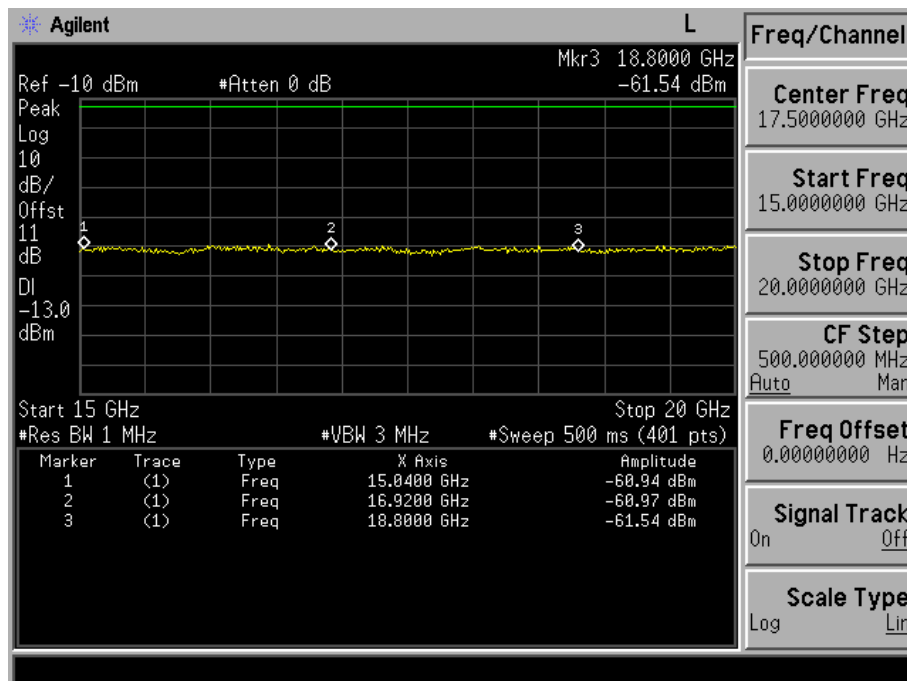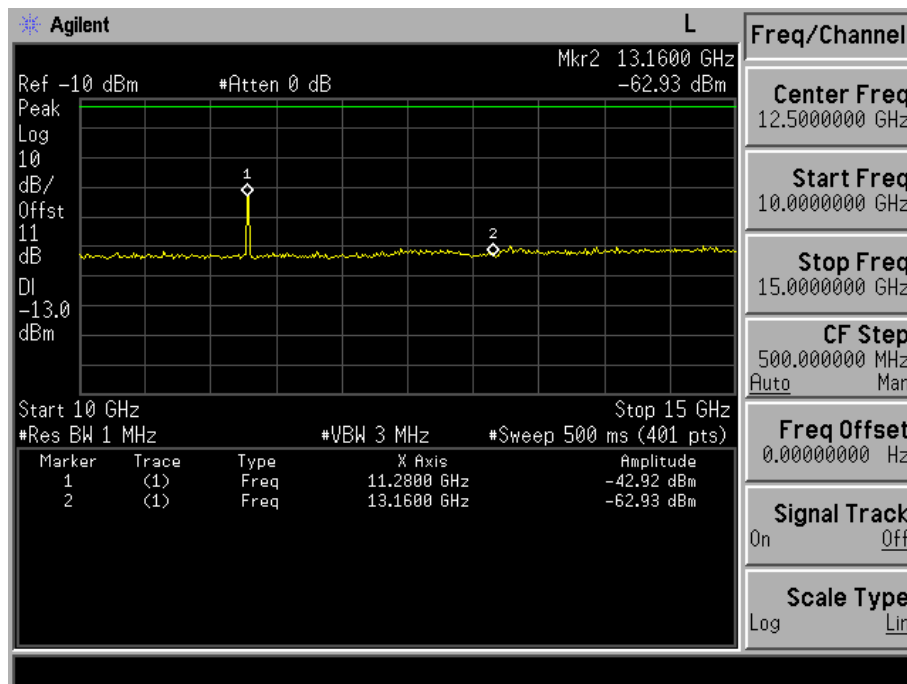

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 189 (GSM 850)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

1672.8	-53.8	-56.93	1.41	9.8	-48.54	-13
2509.2	-60.88	-63.46	1.56	10.6	-54.42	-13
3345.6	-64.42	-65.24	2.01	12.3	-54.95	-13
4182	-65.78	-65.67	2.74	12.6	-55.81	-13
5018.4	-65.83	-65.14	2.64	12.7	-55.08	-13
5854.8	-65.49	-65.55	2.36	13	-54.91	-13

Vertical Emissions

1672.8	-41.08	-40.55	1.41	9.8	-32.16	-13
2509.2	-55.23	-55.04	1.56	10.6	-46.00	-13
3345.6	-64.73	-65.05	2.01	12.3	-54.76	-13
4182	-65.46	-65.55	2.74	12.6	-55.69	-13
5018.4	-65.54	-65.35	2.64	12.7	-55.29	-13
5854.8	-65.40	-64.82	2.36	13	-54.18	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. ERP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 6 GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 661 (PCS1900)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

3760	-64.23	-65.39	1.41	12.6	-53.81	-13
5640	-64.87	-65.58	1.56	13.1	-53.46	-13
7520	-63.73	-58.59	2.01	11.5	-49.10	-13
9400	-64.78	-64.07	2.74	12	-54.81	-13
11280	-62.77	-54.52	2.64	12	-45.16	-13

Vertical Emissions

3760	-63.71	-65.11	1.41	12.6	-53.92	-13
5640	-65.57	-65.35	1.56	13.1	-54.03	-13
7520	-64.2	-59.91	2.01	11.5	-50.42	-13
9400	-64.88	-62.34	2.74	12	-53.08	-13
11280	-63.53	-56.72	2.64	12	-47.36	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. EIRP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 12GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 189 (GSM 850 GPRS)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

1672.8	-48.17	-48.65	1.41	9.8	-40.26	-13
2509.2	-53.89	-52.65	1.56	10.6	-43.61	-13
3345.6	-66.27	-65.31	2.01	12.3	-55.02	-13
4182	-65.41	-65.27	2.74	12.6	-55.41	-13
5018.4	-66.15	-64.98	2.64	12.7	-54.92	-13
5854.8	-65.31	-64.38	2.36	13	-53.74	-13

Vertical Emissions

1672.8	-41.39	-40.92	1.41	9.8	-32.53	-13
2509.2	-55.96	-56.24	1.56	10.6	-47.20	-13
3345.6	-66.24	-64.15	2.01	12.3	-53.86	-13
4182	-65.77	-65.97	2.74	12.6	-56.11	-13
5018.4	-66.79	-64.85	2.64	12.7	-54.79	-13
5854.8	-64.95	-64.04	2.36	13	-53.40	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. ERP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 6 GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 661 (PCS1900 GPRS)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

3760	-65.98	-65.31	1.41	12.6	-54.12	-13
5640	-65.99	-64.57	1.56	13.1	-53.03	-13
7520	-64.60	-62.75	2.01	11.5	-53.26	-13
9400	-64.27	-62.19	2.74	12	-52.93	-13
11280	-64.07	-60.66	2.64	12	-51.30	-13

Vertical Emissions

3760	-65.76	-65.34	1.41	12.6	-54.15	-13
5640	-65.65	-64.57	1.56	13.1	-53.03	-13
7520	-63.99	-59.33	2.01	11.5	-49.84	-13
9400	-64.44	-59.64	2.74	12	-50.38	-13
11280	-64.03	-58	2.64	12	-48.64	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. EIRP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 12GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 189 (GSM 850 EGPRS)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

1672.8	-51.18	-52.87	1.41	9.8	-44.48	-13
2509.2	-53.44	-51.99	1.56	10.6	-42.95	-13
3345.6	-63.84	-64.38	2.01	12.3	-54.09	-13
4182	-65.46	-65.69	2.74	12.6	-55.83	-13
5018.4	-65.84	-65.33	2.64	12.7	-55.27	-13
5854.8	-66.50	-64.88	2.36	13	-54.24	-13

Vertical Emissions

1672.8	-40.63	-40.03	1.41	9.8	-31.64	-13
2509.2	-55.36	-55.25	1.56	10.6	-46.21	-13
3345.6	-65.08	-65.18	2.01	12.3	-54.89	-13
4182	-65.06	-65.39	2.74	12.6	-55.53	-13
5018.4	-66.17	-64.28	2.64	12.7	-54.22	-13
5854.8	-65.61	-64.92	2.36	13	-54.28	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. ERP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 6 GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Spurious Emission (Radiated)		
Date of Test	2008/03/28	Test Site	OATS 3
Test Condition	Channel 661 (PCS1900 EGPRS)	Test Range	9KHz ~20GHz

Frequency	Reading Level	Signal Generator Level	Cable Loss	Antenna Gain	EIRP Value	Limit
(GHz)	(dBm)	(dBm)	(dB)	(dBi)	(dBm)	(dBm)

Horizontal Emissions

3760	-65.87	-64.38	1.41	12.6	-53.19	-13
5640	-66.27	-65.22	1.56	13.1	-53.68	-13
7520	-65.24	-65.91	2.01	11.5	-56.42	-13
9400	-65.51	-64.38	2.74	12	-55.12	-13
11280	-64.17	-61.01	2.64	12	-51.65	-13

Vertical Emissions

3760	-65.14	-65.38	1.41	12.6	-54.19	-13
5640	-66.41	-64.88	1.56	13.1	-53.34	-13
7520	-65.12	-64.89	2.01	11.5	-55.40	-13
9400	-65.19	-64.77	2.74	12	-55.51	-13
11280	-65.25	-63.79	2.64	12	-54.43	-13

Note:

1. Receiver setting (Peak Detector) : RBW:1MHz; VBW:3MHz
2. EIRP Value = Signal Generator Level + Antenna Gain - Cable Loss
3. Spurious emissions past 12GHz are not shown, due to the magnitude of spurious emissions attenuated more than 20 dB below the limit.

7 Frequency Stability Under Temperature & Voltage Variations


7.2 Test Equipment

The following test equipments are used during the frequency stability test:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Universal Radio Communication Tester	R & S	CMU200 / 104846	Apr., 2008
Standard Temperature & Humidity Chamber	WIT	TH-1S-B / 108210	Aug., 2007
DC Power Supply	Topward	6303D / 670302	N/A

Note: All equipments upon which need to be calibrated are with calibration period of 1 year

7.3 Test Setup

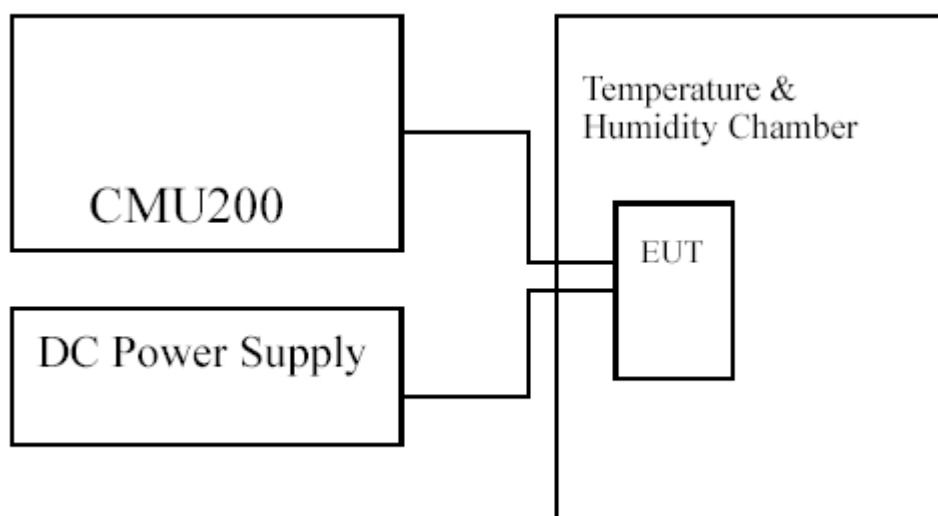

7.4 Limits

Limit	<±2.5ppm
-------	----------

7.5 Test Procedure

GSM/GPRS/EGPRS

The EUT was set to transmit on maximum power and measurements were made on Timeslot3. Universal Radio Communication Tester, (CMU200), was used to measure The Frequency Error. The maximum result of measurements made over 200 bursts was recorded.

7.6 Test Specification

According to Part 2.1055, 24.235

7.7 Test Result of Frequency Stability Under Temperature Variations

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	GSM 850 / Channel 189	Test Range	-30°C ~+50°C

GSM-Circuit Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	0.836	-16	±2.09
-20	0.836	-18	±2.09
-10	0.836	-14	±2.09
0	0.836	-15	±2.09
10	0.836	-13	±2.09
20	0.836	-15	±2.09
30	0.836	-13	±2.09
40	0.836	-9	±2.09
50	0.836	-20	±2.09

GSM-Circuit Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	0.836	24	±2.09
3.7	0.836	29	±2.09
4.225	0.836	22	±2.09

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	PCS 1900 / Channel 661	Test Range	-30°C ~+50°C

PCS-Circuit Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	1.88	31	±4.7
-20	1.88	-18	±4.7
-10	1.88	35	±4.7
0	1.88	37	±4.7
10	1.88	25	±4.7
20	1.88	40	±4.7
30	1.88	30	±4.7
40	1.88	34	±4.7
50	1.88	32	±4.7

PCS-Circuit Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	1.88	44	±4.7
3.7	1.88	42	±4.7
4.225	1.88	40	±4.7

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	GSM 850 GPRS / Channel 189	Test Range	-30°C ~+50°C

GSM-Packet Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	0.836	-21	±2.09
-20	0.836	-13	±2.09
-10	0.836	-13	±2.09
0	0.836	-12	±2.09
10	0.836	-18	±2.09
20	0.836	-20	±2.09
30	0.836	-12	±2.09
40	0.836	-18	±2.09
50	0.836	-17	±2.09

GSM-Packet Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	0.836	21	±2.09
3.7	0.836	24	±2.09
4.225	0.836	29	±2.09

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	PCS 1900 GPRS / Channel 661	Test Range	-30°C ~+50°C

PCS-Packet Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	1.88	28	±4.7
-20	1.88	-17	±4.7
-10	1.88	36	±4.7
0	1.88	35	±4.7
10	1.88	24	±4.7
20	1.88	25	±4.7
30	1.88	26	±4.7
40	1.88	29	±4.7
50	1.88	39	±4.7

PCS-Packet Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	1.88	29	±4.7
3.7	1.88	34	±4.7
4.225	1.88	31	±4.7

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	GSM 850 EGPRS / Channel 189	Test Range	-30°C ~+50°C

GSM-Packet Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	0.836	-20	±2.09
-20	0.836	-12	±2.09
-10	0.836	-15	±2.09
0	0.836	-11	±2.09
10	0.836	-12	±2.09
20	0.836	21	±2.09
30	0.836	-18	±2.09
40	0.836	-10	±2.09
50	0.836	-16	±2.09

GSM-Packet Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	0.836	27	±2.09
3.7	0.836	20	±2.09
4.225	0.836	26	±2.09

Product	DOLPHIN 7600 II Mobile Computer		
Test Mode	Frequency Stability Under Temperature Variations & Voltage Variations		
Date of Test	2008/03/28	Test Site	CB4
Test Condition	PCS 1900 EGPRS / Channel 661	Test Range	-30°C ~+50°C

PCS-Packet Switched

Temperature Interval(°C)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
-30	1.88	26	±4.7
-20	1.88	16	±4.7
-10	1.88	34	±4.7
0	1.88	31	±4.7
10	1.88	29	±4.7
20	1.88	-44	±4.7
30	1.88	29	±4.7
40	1.88	26	±4.7
50	1.88	31	±4.7

PCS-Packet Switched

DC Voltage (V)	Test Frequency (GHz)	Deviation (Hz)	Limit (KHz)
3.145	1.88	46	±4.7
3.7	1.88	49	±4.7
4.225	1.88	41	±4.7

8 EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 1: EUT Test Setup Photographs

Front View of Conducted Test



Back View of Conducted Test



Front View of Radiated Test



Back View of Radiated Test



Front View of Radiated Test (Horn)



Back View of Radiated Test (Horn)



Attachment 2: EUT Detailed Photographs

Attachment 2 : EUT Detailed Photographs

(1) EUT Photo



(2) EUT Photo



(3) EUT Photo



(4) EUT Photo



(5) EUT Photo



(6) EUT Photo



(7) EUT Photo



(8) EUT Photo



(9) EUT Photo




(10) EUT Photo




(11) EUT Photo



(12) EUT Photo

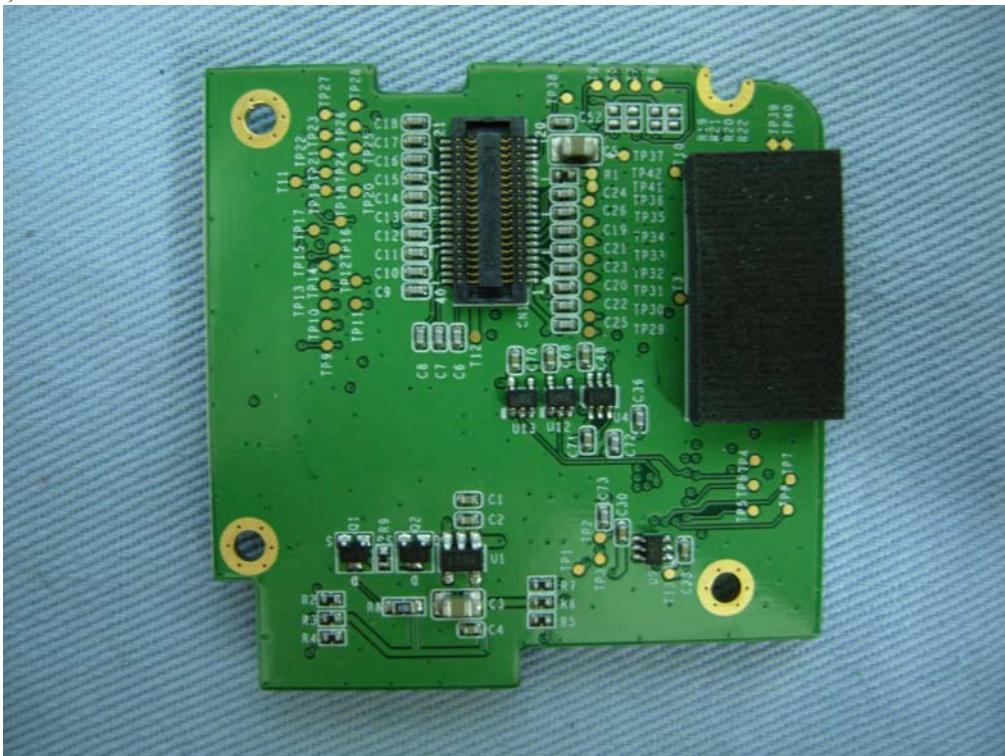


(13) EUT Photo

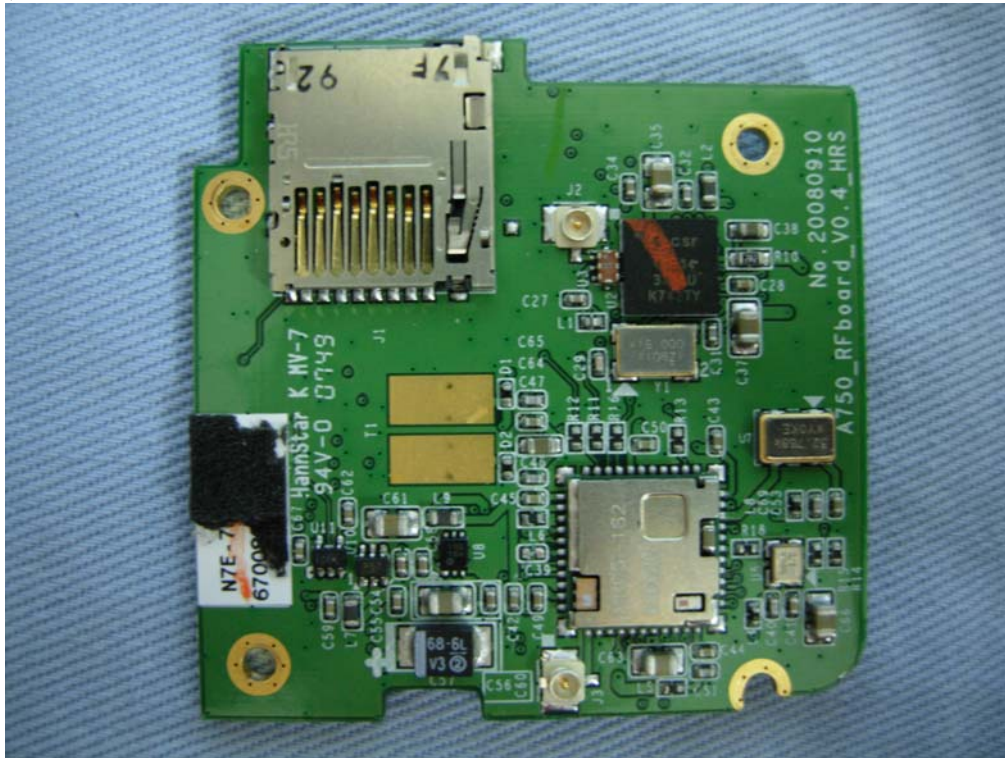


(14) EUT Photo




(15) EUT Photo

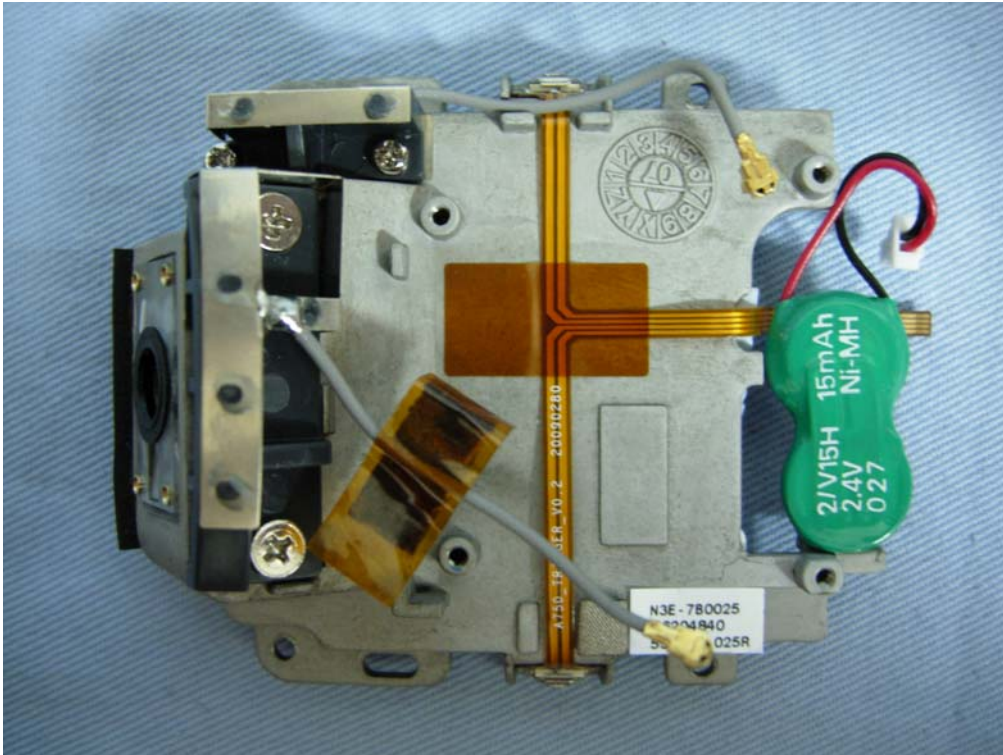


(16) EUT Photo

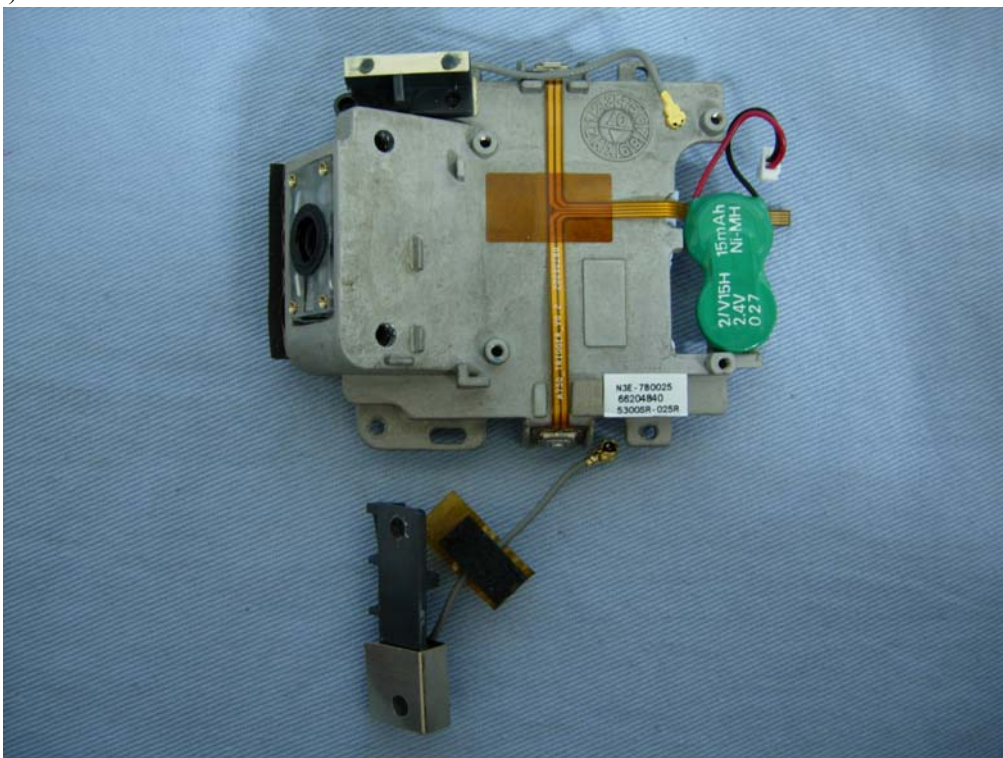

(17) EUT Photo

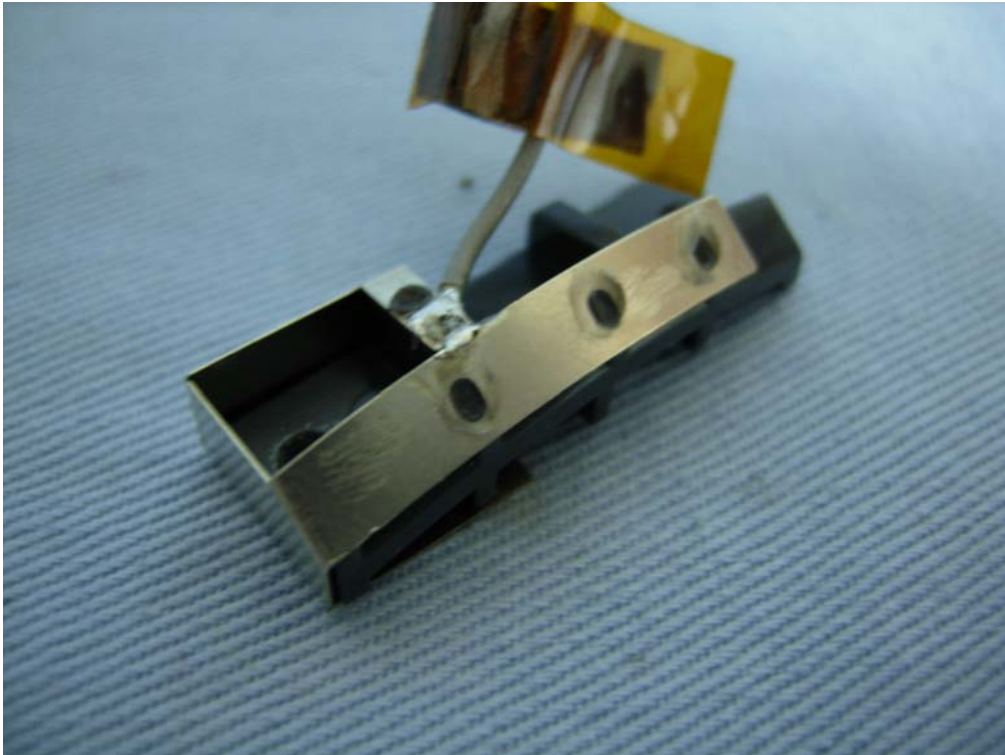

(18) EUT Photo

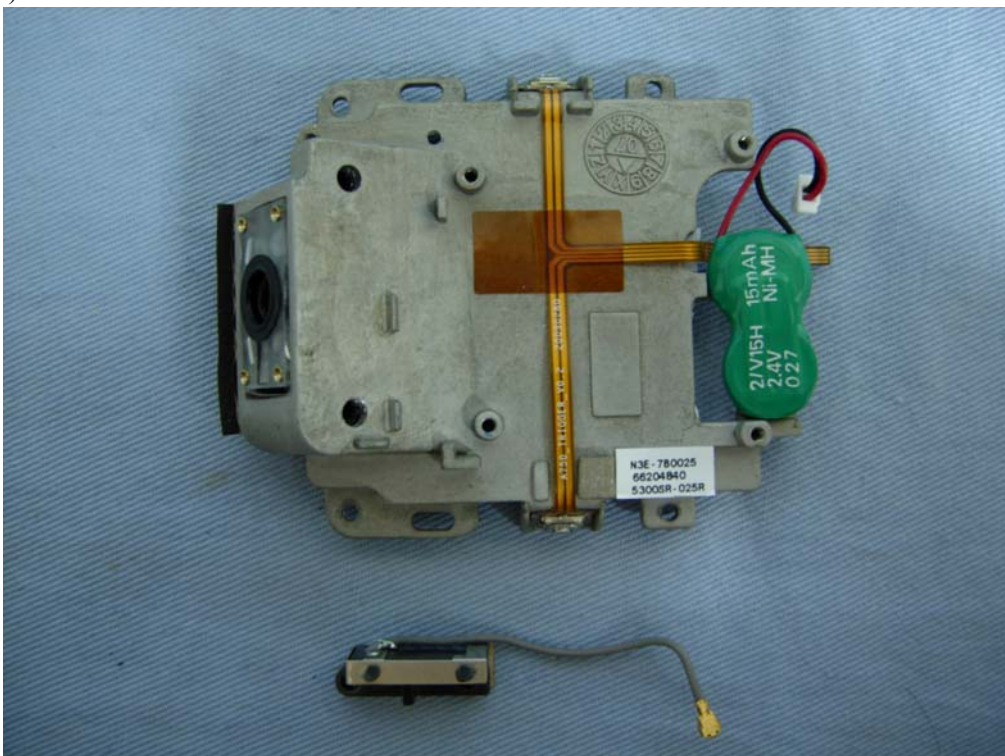


(19) EUT Photo



(20) EUT Photo



(21) EUT Photo

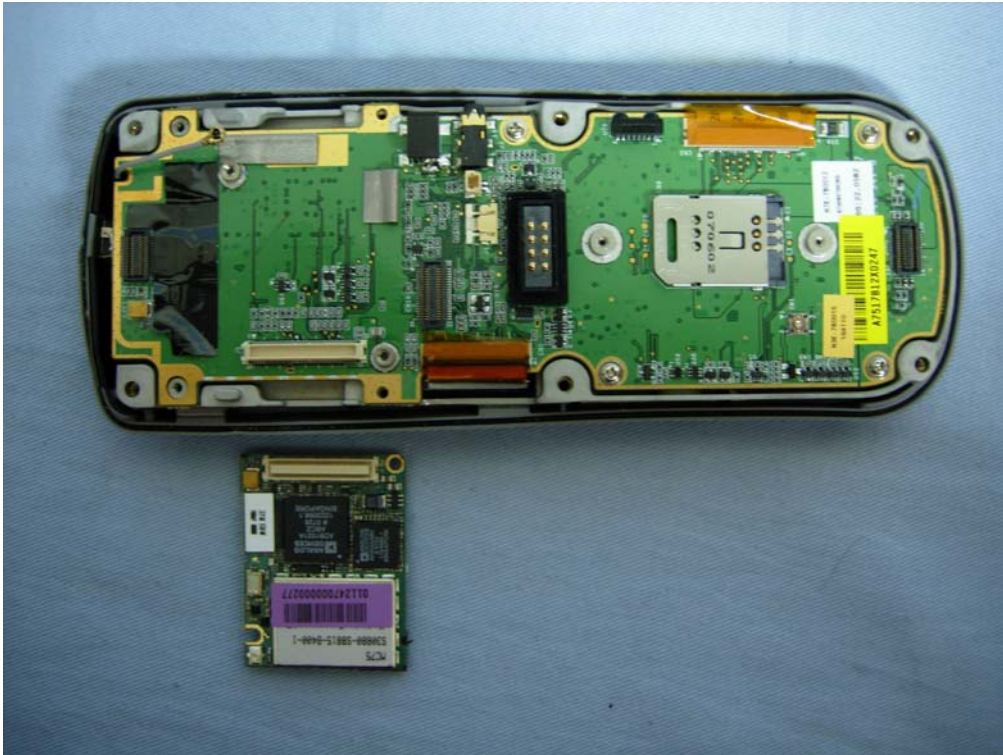


(22) EUT Photo



(23) EUT Photo




(24) EUT Photo

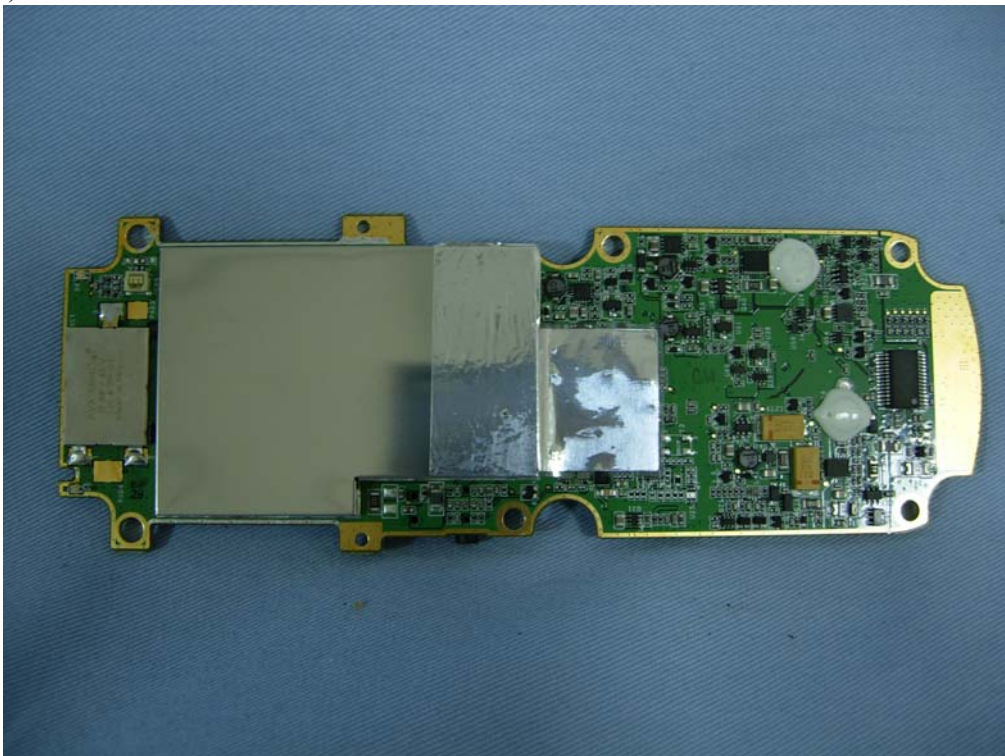

(25) EUT Photo



(26) EUT Photo

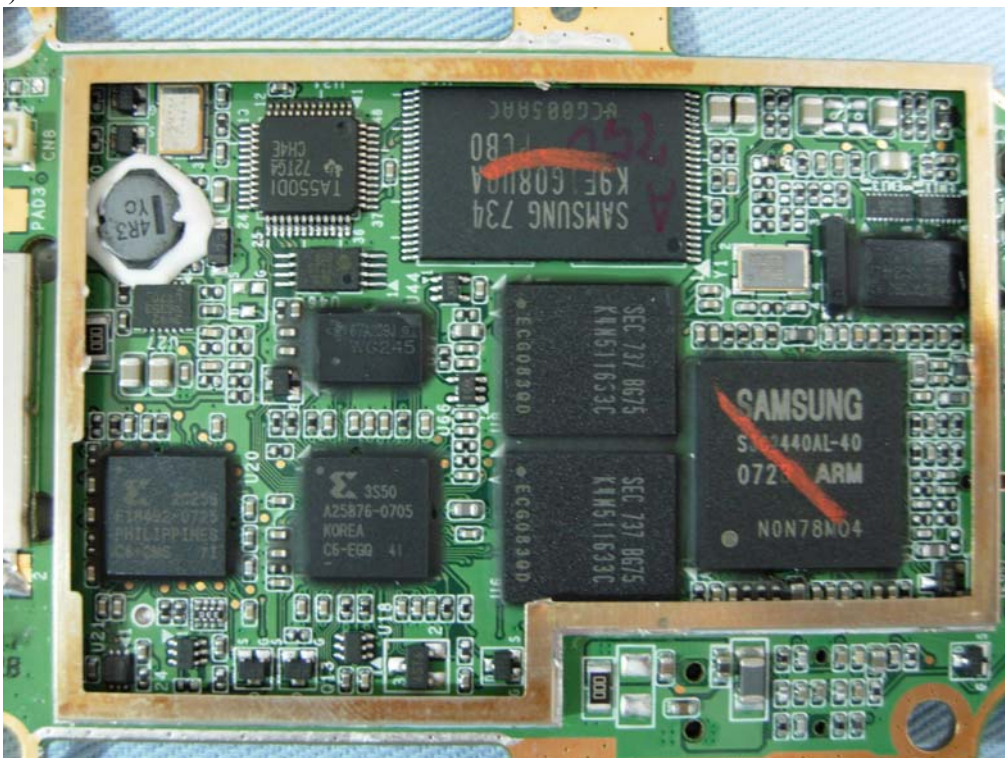

(27) EUT Photo



(28) EUT Photo



(29) EUT Photo




(30) EUT Photo




(31) EUT Photo




(32) EUT Photo

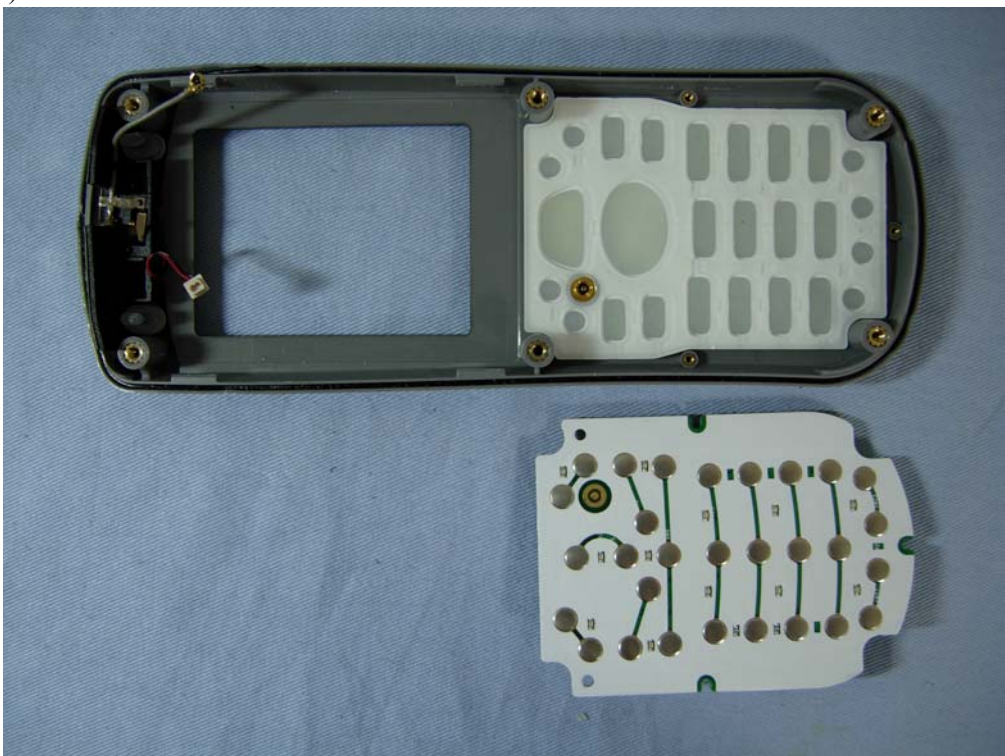

(33) EUT Photo

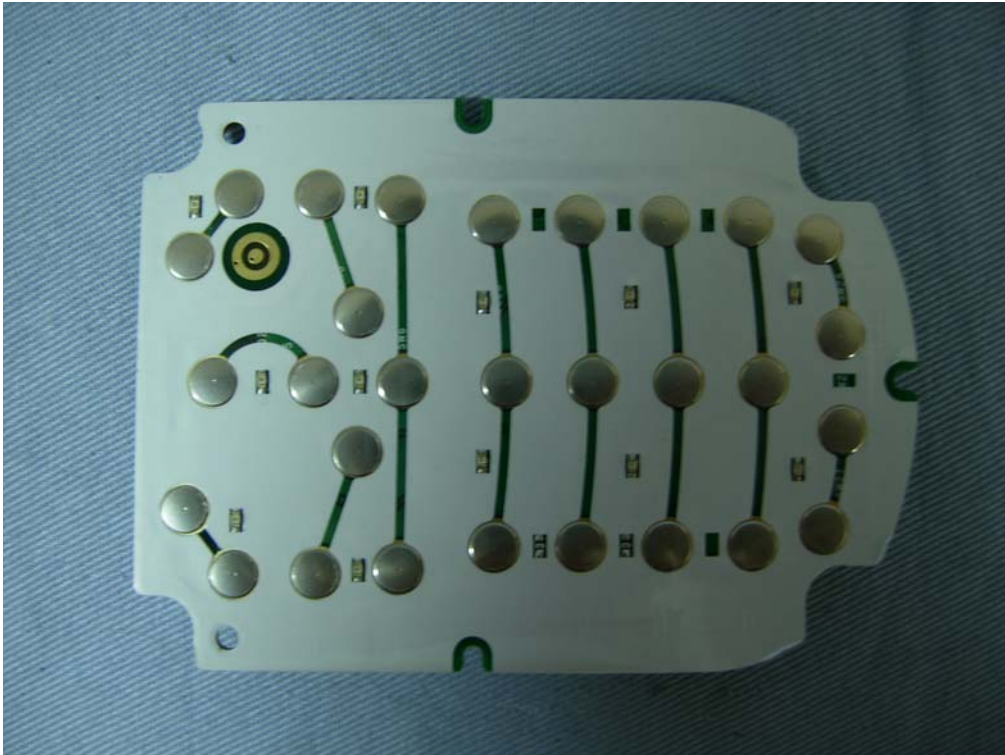


(34) EUT Photo

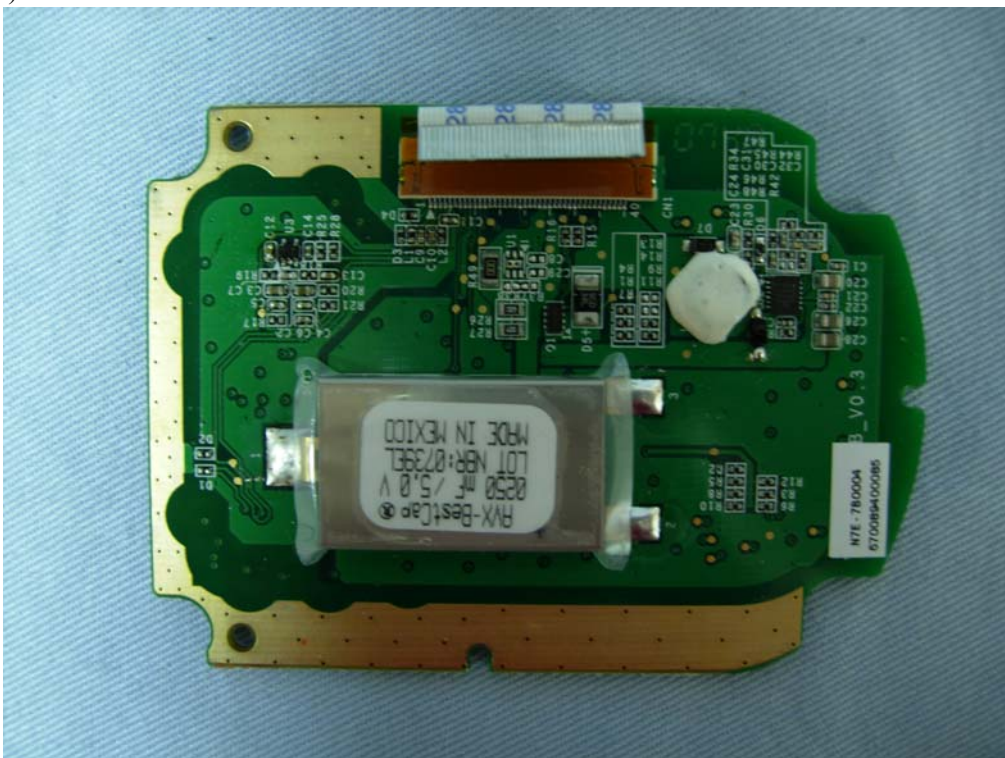

(35) EUT Photo



(36) EUT Photo

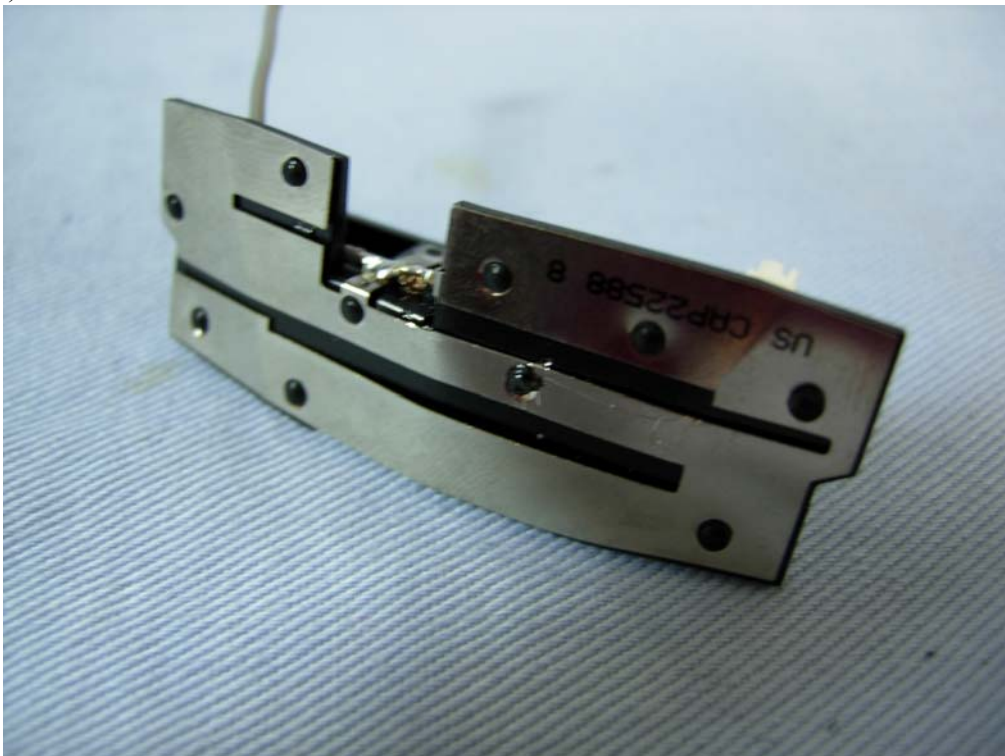

(37) EUT Photo



(38) EUT Photo



(39) EUT Photo

