



System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/15/2008 3:37:17 PM	DUT Battery Model/No:	
Filename:	body.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7600 II	Relative Permittivity:	53.67
Relative Humidity:	45.6%	Conductivity:	1.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-1.20 mm
DUT Position:	Body touch	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Integral	Max E Field:	9.06 V/m
Test Frequency:	2437MHz	SAR 1g:	0.203 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.07 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	set by power table	Extrapolation:	poly4

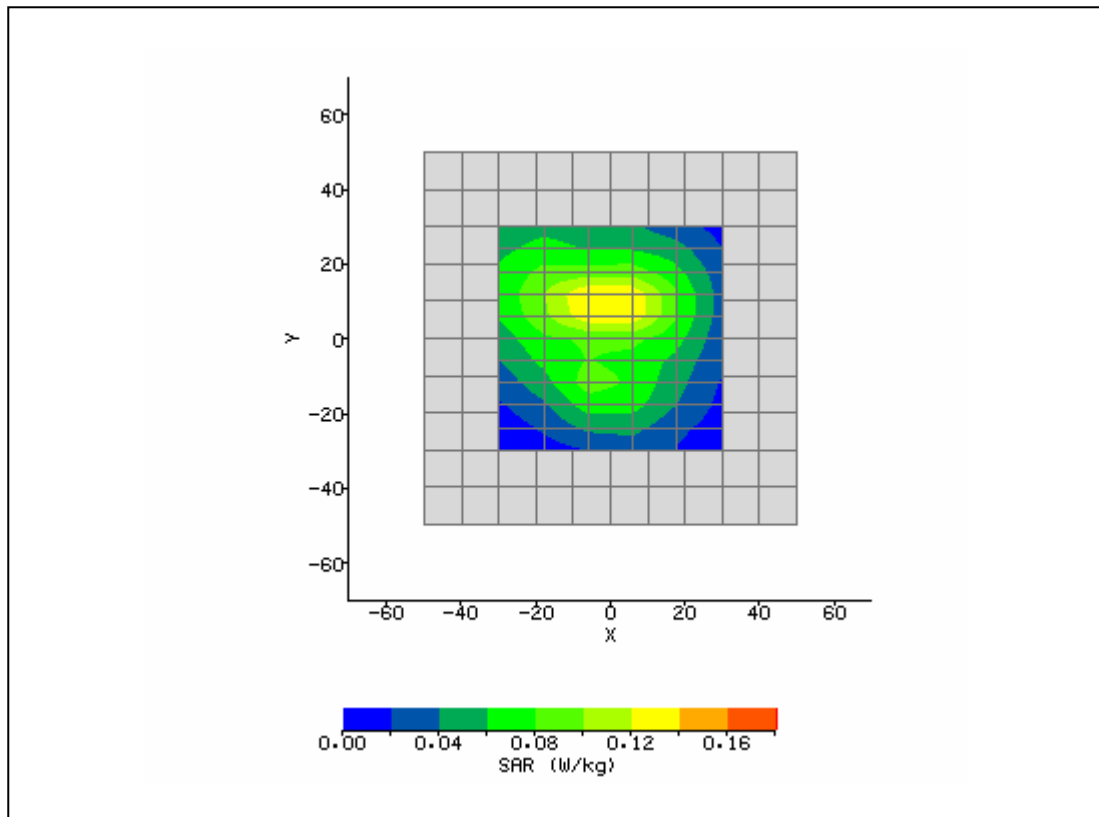

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/15/2008 4:17:17 PM	DUT Battery Model/No:	
Filename:	right_tilt_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7600 II	Relative Permittivity:	53.67
Relative Humidity:	45.6%	Conductivity:	1.986
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Body touch	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Integral	Max E Field:	9.44 V/m
Test Frequency:	2437+2480MHz	SAR 1g:	0.212 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.013 W/kg
Type of Modulation:		SAR End:	0.013 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.93 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	set by power table	Extrapolation:	poly4

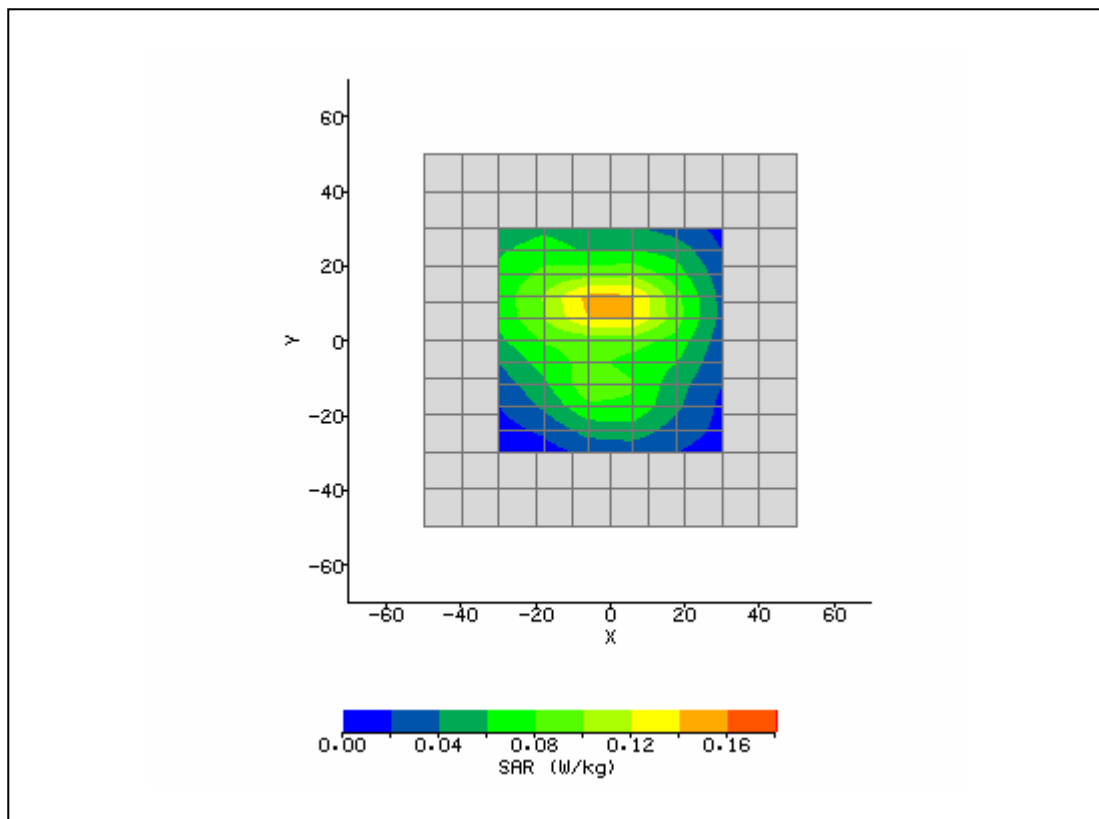

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/15/2008 2:16:27 PM	DUT Battery Model/No:	
Filename:	right_tilt_384.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.96
Relative Humidity:	45.6%	Conductivity:	1.868
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	9.60 mm
Antenna Configuration:	Dipole	Max E Field:	132.32 V/m
Test Frequency:	2450MHz	SAR 1g:	48.544 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.129 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.981 W/kg
Type of Modulation:		SAR End:	3.006 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.86 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/15/08
Input Power Level:	1W	Extrapolation:	poly4

