



FCC RF Test Report

APPLICANT : Honeywell International Inc
EQUIPMENT : Dolphin 7800
BRAND NAME : Honeywell
MODEL NAME : Dolphin® 7800
FCC ID : HD57800LG
STANDARD : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
CLASSIFICATION : PCS Licensed Transmitter (PCB)
Tx/Rx FREQUENCY RANGE : GSM850 : 824.2 ~ 848.8 MHz /
869.2 ~ 893.8 MHz
GSM1900 : 1850.2 ~ 1909.8 MHz /
1930.2 ~ 1989.8 MHz
WCDMA Band V : 826.4 ~ 846.6 MHz /
871.4 ~ 891.6 MHz
WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz
2112.4 MHz ~ 2152.6 MHz
WCDMA Band II : 1852.4 ~ 1907.6 MHz /
1932.4 ~ 1987.6 MHz
CDMA2000 BC0 : 824.70 ~ 848.31 MHz /
869.70 ~ 893.31 MHz
CDMA2000 BC1 : 1851.25 ~ 1908.75 MHz /
1931.25 ~ 1988.75 MHz
MAX. ERP/EIRP POWER : <EUT with Keypad 1>
GSM850 (GPRS 8) : 0.23 W
GSM850 (EDGE 8) : 0.06 W
GSM1900 (GPRS 8) : 0.21 W
GSM1900 (EDGE 8) : 0.06 W
WCDMA Band V (RMC 12.2Kbps) : 0.06 W
WCDMA Band IV (RMC 12.2Kbps) : 0.15 W
WCDMA Band II (RMC 12.2Kbps) : 0.06 W
CDMA2000 BC0 : 0.05 W
CDMA2000 BC1 : 0.08 W
<EUT with Keypad 2>
GSM850 (GPRS 8) : 0.26 W
GSM1900 (GPRS 8) : 0.23 W
WCDMA Band IV (RMC 12.2Kbps) : 0.15 W

The product was received on Jun. 20, 2011 and completely tested on Nov. 02, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

TABLE OF CONTENTS

REVISION HISTORY	4
SUMMARY OF TEST RESULT	5
1 GENERAL DESCRIPTION	6
1.1 Applicant.....	6
1.2 Manufacturer	6
1.3 Feature of Equipment Under Test.....	7
1.4 Emission Designator and Maximum ERP/EIRP Power	8
1.5 Testing Site.....	8
1.6 Applied Standards	9
1.7 Ancillary Equipment List.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode.....	10
2.2 Connection Diagram of Test System	12
3 TEST RESULT	13
3.1 Conducted Output Power Measurement.....	13
3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement	21
3.3 Occupied Bandwidth Measurement	30
3.4 Band Edge Measurement.....	40
3.5 Conducted Emission Measurement	59
3.6 Field Strength of Spurious Radiation Measurement	83
3.7 Frequency Stability Measurement.....	109
4 LIST OF MEASURING EQUIPMENTS.....	116
5 UNCERTAINTY OF EVALUATION	117
APPENDIX A. PHOTOGRAPHS OF EUT	
APPENDIX B. SETUP PHOTOGRAPHS	

[illegible]

SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	§2.1046	N/A	Conducted Output Power	N/A	PASS	-
3.2	§22.913(a)(2)	RSS-132(4.4) SRSP-503(5.1.3)	Effective Radiated Power	< 7 Watts	PASS	-
3.2	§24.232(c)	RSS-133 (6.4) SRSP-510(5.1.2)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.2	§27.50(d)(2)	RSS-139 (6.4) SRSP-513(5.1.2)	Equivalent Isotropic Radiated Power	< 1 Watts	PASS	-
3.3	§2.1049 §22.917(a) §24.238(a) §27.53(g)	N/A	Occupied Bandwidth	N/A	PASS	-
3.4	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Band Edge Measurement	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1051 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Conducted Emission	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	-
3.6	§2.1053 §22.917(a) §24.238(a) §27.53(g)	RSS-132 (4.5.1) RSS-133 (6.5.1) RSS-139 (6.5)	Field Strength of Spurious Radiation	$< 43 + 10\log_{10}(P[\text{Watts}])$	PASS	Under limit 23.61 dB at 9396 MHz
3.7	§2.1055 §22.355 §24.235 §27.54	RSS-132 (4.3) RSS-133 (6.3) RSS-139 (6.3)	Frequency Stability for Temperature & Voltage	< 2.5 ppm	PASS	-



1 General Description

1.1 Applicant

Honeywell International Inc
9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.2 Manufacturer

Honeywell International Inc
9680 Old Bailes Road, Fort Mill, SC 29707 USA

1.3 Feature of Equipment Under Test

Product Feature & Specification	
Equipment	Dolphin 7800
Brand Name	Honeywell
Model Name	Dolphin® 7800
FCC ID	HD57800LG
Integrated Module	Brand Name : Sierra wireless Model Name : MC8355
Tx Frequency	GSM850 : 824 MHz ~ 849 MHz GSM1900 : 1850 MHz ~ 1910 MHz WCDMA Band V : 824 MHz ~ 849 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band II : 1850 MHz ~ 1910 MHz CDMA2000 BC0 : 824 MHz ~ 849 MHz CDMA2000 BC1 : 1850 MHz ~1910 MHz
Rx Frequency	GSM850 : 869 MHz ~ 894 MHz GSM1900 : 1930 MHz ~ 1990 MHz WCDMA Band V : 869 MHz ~ 894 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band II : 1930 MHz ~ 1990 MHz CDMA2000 BC0 : 869 MHz ~ 894 MHz CDMA2000 BC1 : 1930 MHz ~ 1990 MHz
Maximum Output Power to Antenna	GSM850 : 32.28 dBm GSM1900 : 29.55 dBm WCDMA Band V : 23.84 dBm WCDMA Band IV : 23.15 dBm WCDMA Band II : 24.09 dBm CDMA2000 BC0 : 23.74 dBm CDMA2000 BC1 : 24.13 dBm
Antenna Type	Fixed Internal Antenna
HW Version	010
SW Version	01
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA: QPSK (Uplink) HSDPA: QPSK (Uplink) HSUPA: QPSK (Uplink) CDMA2000 : QPSK
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Emission Designator and Maximum ERP/EIRP Power

<EUT with Keypad 1>

FCC Rule	System	Type of Modulation	Emission Designator	Maximum ERP/EIRP
Part 22	GSM850 GPRS 8	GMSK	242KGXW	0.23 W
Part 22	GSM850 EDGE 8	GMSK / 8PSK	248KG7W	0.06 W
Part 22	WCDMA Band V RMC 12.2Kbps	QPSK (Uplink)	4M16F9W	0.06 W
Part 22	CDMA2000 BC0 1xEV-DO Rev. 0	QPSK	1M28F9W	0.05 W
Part 24	GSM1900 GPRS 8	GMSK	248KGXW	0.21 W
Part 24	GSM1900 EDGE 8	GMSK / 8PSK	248KG7W	0.06 W
Part 24	WCDMA Band II RMC 12.2Kbps	QPSK (Uplink)	4M16F9W	0.06 W
Part 24	CDMA2000 BC1 1xEV-DO Rev. 0	QPSK	1M28F9W	0.08 W
Part 27	WCDMA Band IV RMC 12.2Kbps	QPSK (Uplink)	4M14F9W	0.15 W

1.5 Testing Site

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		FCC/IC Registration No.
	TH02-HY	03CH07-HY	722060/4086B-1

1.6 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ Preliminary Guidance for Receiving Applications for Certification of 3G Device. May 9, 2006.
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ IC RSS-132 Issue 2
- ♦ IC RSS-133 Issue 5
- ♦ IC RSS-139 Issue 2

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.7 Ancillary Equipment List

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	P20G	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
2.	System Simulator	R&S	CMU200	N/A	N/A	Unshielded, 1.8 m

2 Test Configuration of Equipment Under Test

2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is as follows:

1. 30 MHz to 9000 MHz for GSM850, WCDMA Band V and CDMA2000 BC0.
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19000 MHz for GSM1900, WCDMA Band II and CDMA2000 BC1.

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM 850	■ GPRS 8 Link for Keypad 1 ■ EDGE 8 Link for Keypad 1 ■ GPRS 8 Link for Keypad 2	■ GPRS 8 Link ■ EDGE 8 Link
GSM 1900	■ GPRS 8 Link for Keypad 1 ■ EDGE 8 Link for Keypad 1	■ GPRS 8 Link ■ EDGE 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link for Keypad 1	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link for Keypad 1 ■ RMC 12.2Kbps Link for Keypad 2	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link for Keypad 1	■ RMC 12.2Kbps Link
CDMA2000 BC0	■ 1xEV-DO Rev. 0 Link Mode for Keypad 1	■ 1xEV-DO Rev. 0 Link Mode
CDMA2000 BC1	■ 1xEV-DO Rev. 0 Link Mode for Keypad 1 ■ 1xEV-DO Rev. 0 Link Mode for Keypad 2	■ 1xEV-DO Rev. 0 Link Mode

Note:

1. The maximum power levels are GPRS multi-slot class 8 mode for GMSK link, EDGE multi-slot class 8 mode for 8PSK link, RMC 12.2Kbps mode for WCDMA band V, RMC 12.2Kbps mode for WCDMA band IV, RMC 12.2Kbps mode for WCDMA band II, 1xEVDO RTAP 153.6K mode for CDMA2000 BC0 and 1xEVDO RTAP 153.6K mode for CDMA2000 BC1 on QPSK Link, only these modes were used for all tests.
2. Because there are individual antennas for each WWAN, WLAN, and Bluetooth, the co-location test modes are not required.


The conducted power tables are as follows:

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GPRS 8	32.03	31.74	32.28	29.55	29.43	29.14
GPRS 10	32.01	31.69	32.28	29.43	29.27	29.01
EGPRS 8	26.78	26.73	26.77	25.79	25.76	25.57
EGPRS 10	26.69	26.66	26.69	25.69	25.67	25.51

Conducted Power (*Unit: dBm)									
Band	WCDMA Band V			WCDMA Band II			WCDMA Band IV		
Tx Channel	4132	4182	4233	9262	9400	9538	1312	1413	1513
Rx Channel	4357	4408	4458	9662	9800	9938	1537	1638	1738
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	23.71	23.77	23.84	23.51	24.09	23.86	23.01	23.15	23.14
HSDPA Subtest-1	23.16	23.11	23.56	23.37	23.83	23.74	22.46	22.63	22.55
HSDPA Subtest-2	23.15	23.22	23.43	23.05	23.22	23.33	22.47	22.60	22.63
HSDPA Subtest-3	22.71	22.76	22.77	22.77	23.09	23.06	21.95	22.15	22.13
HSDPA Subtest-4	22.78	22.81	22.72	22.72	23.19	22.92	22.10	22.30	22.15
HSUPA Subtest-1	22.34	22.41	21.73	22.55	22.35	22.05	22.40	22.57	22.34
HSUPA Subtest-2	21.05	21.18	21.06	21.09	21.46	21.72	21.02	21.23	21.31
HSUPA Subtest-3	21.35	21.47	21.15	21.72	21.65	21.44	21.25	21.08	21.38
HSUPA Subtest-4	21.41	21.56	21.31	21.74	22.00	21.88	21.36	21.61	21.55
HSUPA Subtest-5	22.45	22.41	21.63	22.67	22.40	22.01	22.54	21.87	22.62

Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	23.45	23.59	23.29	23.97	23.55	23.33
1xRTT RC3+SO55	23.48	23.56	23.71	23.97	23.56	23.34
1xRTT RC3+SO32 (+F-SCH)	23.51	23.56	23.24	23.95	23.53	23.33
1xRTT RC3+SO32 (+SCH)	23.48	23.57	23.23	23.96	23.51	23.30
1xEVDO RTAP 153.6K	23.60	23.74	23.73	24.13	23.75	23.69
1xEVDO RETAP 4096K	23.58	23.68	23.70	24.02	23.72	23.65

2.2 Connection Diagram of Test System

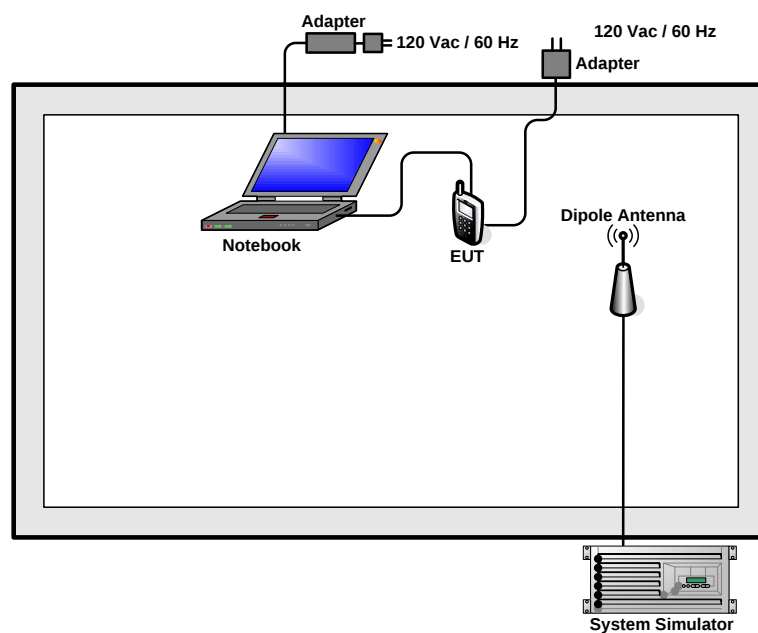

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.1.4 Test Setup

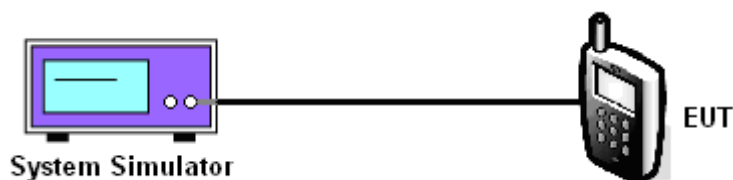

3.1.5 Test Result of Conducted Output Power

Cellular Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM850 (GPRS 8)	128 (Low)	824.2	32.03	1.60
	189 (Mid)	836.4	31.74	1.49
	251 (High)	848.8	32.28	1.69
GSM850 (EDGE 8)	128 (Low)	824.2	26.78	0.48
	189 (Mid)	836.4	26.73	0.47
	251 (High)	848.8	26.77	0.48
WCDMA Band V (RMC 12.2Kbps)	4132 (Low)	826.4	23.71	0.23
	4182 (Mid)	836.4	23.77	0.24
	4233 (High)	846.6	23.84	0.24

PCS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
GSM1900 (GPRS 8)	512 (Low)	1850.2	29.55	0.90
	661 (Mid)	1880.0	29.43	0.88
	810 (High)	1909.8	29.14	0.82
GSM1900 (EDGE 8)	512 (Low)	1850.2	25.79	0.38
	661 (Mid)	1880.0	25.76	0.38
	810 (High)	1909.8	25.57	0.36
WCDMA Band II (RMC 12.2Kbps)	9262 (Low)	1852.4	23.51	0.22
	9400 (Mid)	1880.0	24.09	0.26
	9538 (High)	1907.6	23.86	0.24


AWS Band				
Modes	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
WCDMA Band IV (RMC 12.2Kbps)	1312 (Low)	1712.4	23.01	0.20
	1413 (Mid)	1732.6	23.15	0.21
	1513 (High)	1752.6	23.14	0.21

CDMA2000 BC0					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xEV-DO Rev. 0	RTAP 153.6K	1013 (Low)	824.70	23.60	0.23
		384 (Mid)	836.52	23.74	0.24
		777 (High)	848.31	23.73	0.24

CDMA2000 BC1					
Test Mode	Test Status	Channel	Frequency (MHz)	Conducted Power (dBm)	Conducted Power (Watts)
CDMA 2000 1xEV-DO Rev. 0	RTAP 153.6K	25 (Low)	1851.25	24.13	0.26
		600 (Mid)	1880.00	23.75	0.24
		1175 (High)	1908.75	23.69	0.23


3.1.6 Peak to Average Power Ratio

GSM850 (GPRS 8) CCDF

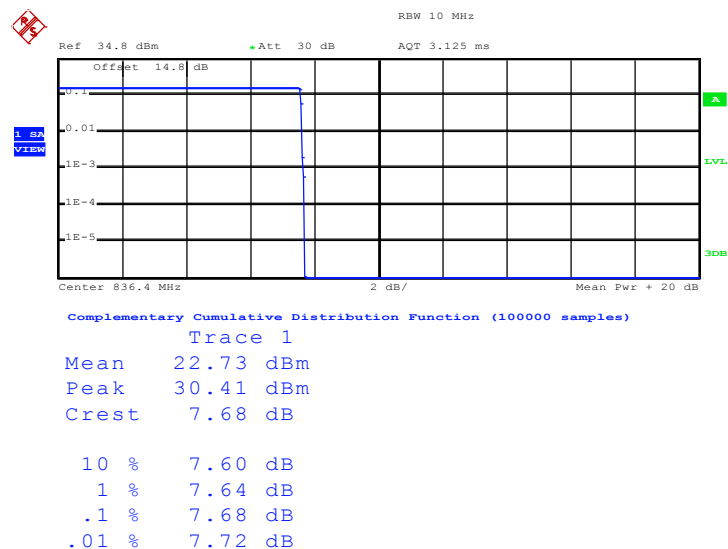


Date: 26.SEP.2011 16:35:56


GSM850 (EDGE 8) CCDF

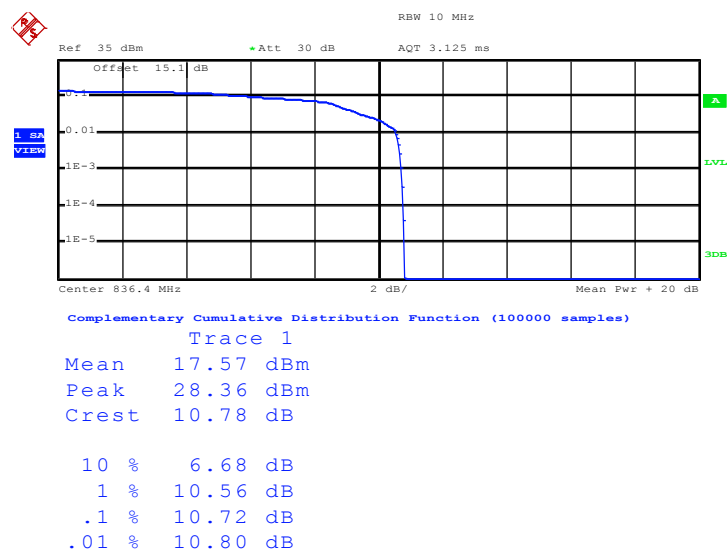

Date: 26.SEP.2011 17:29:12

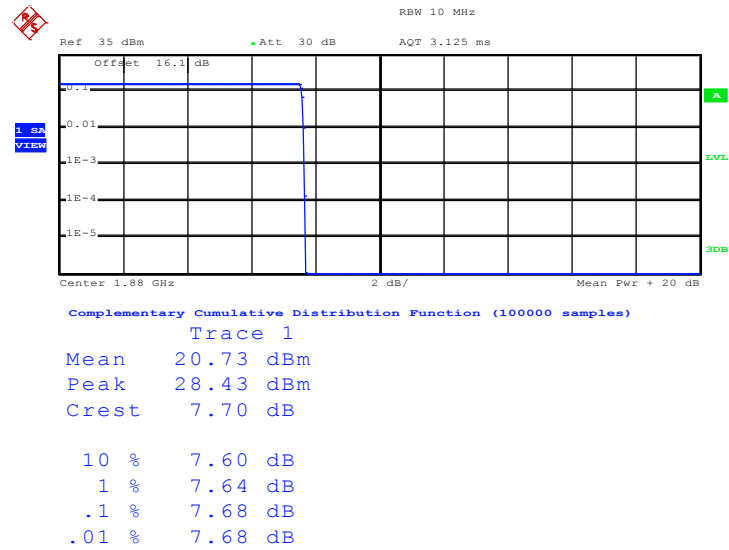
GSM1900 (GPRS 8) CCDF


Date: 26.SEP.2011 16:57:04

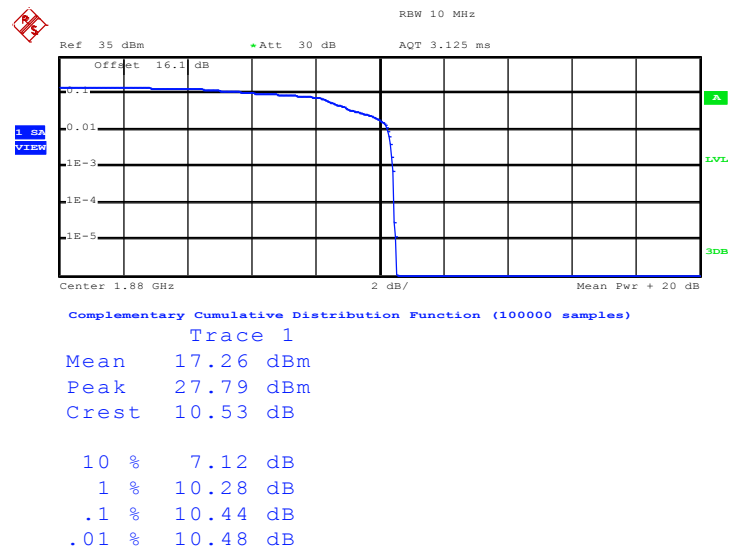GSM1900 (EDGE 8) CCDF


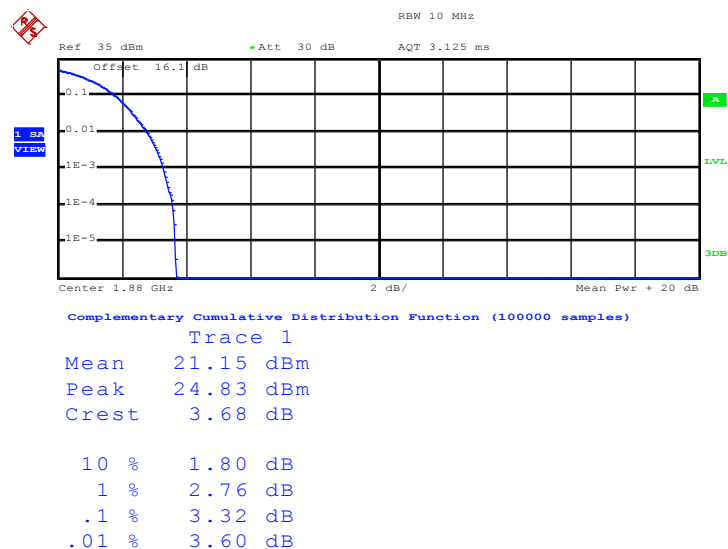
Date: 26.SEP.2011 17:16:47

WCDMA Band V CCDF

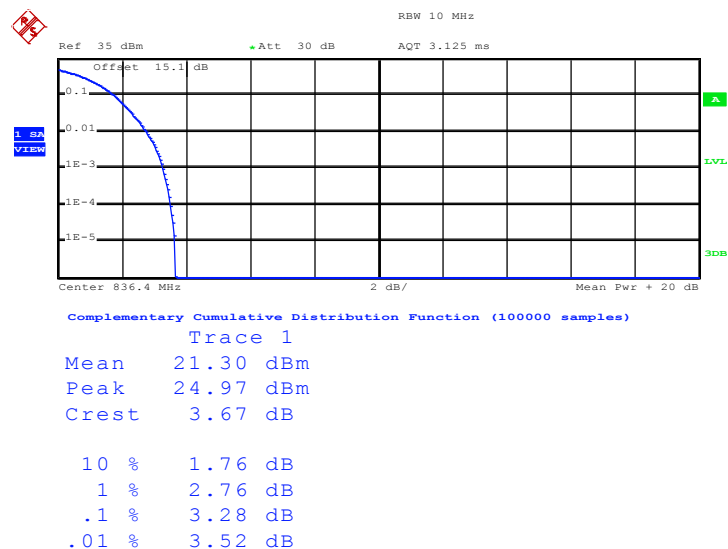


Date: 26.SEP.2011 18:14:51

WCDMA Band II CCDF




Date: 26.SEP.2011 17:55:40

WCDMA Band IV CCDF

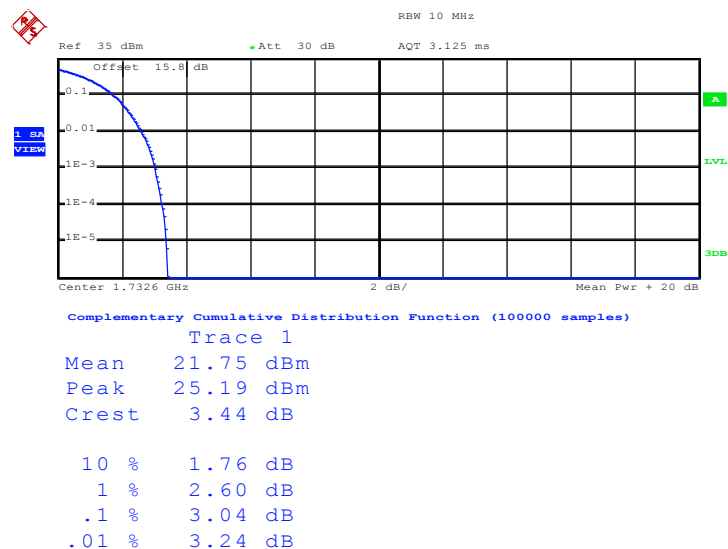


Date: 27.SEP.2011 20:13:13

CDMA2000 BC0 CCDF

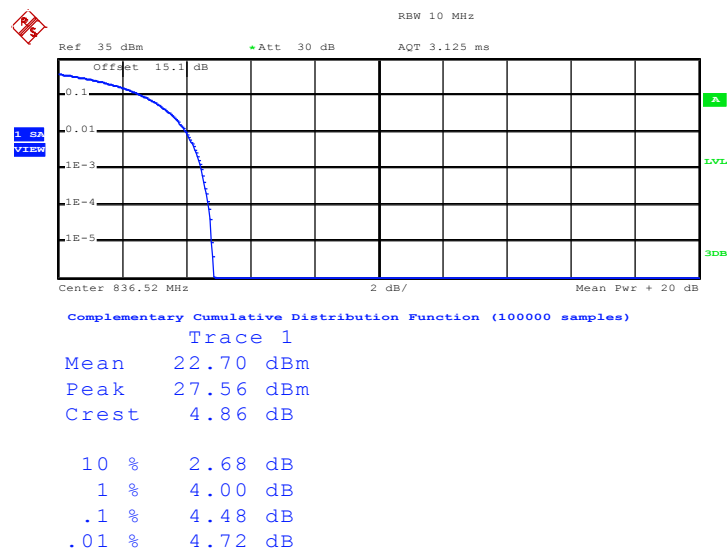

Date: 28.OCT.2011 14:09:04

CDMA2000 BC1 CCDF

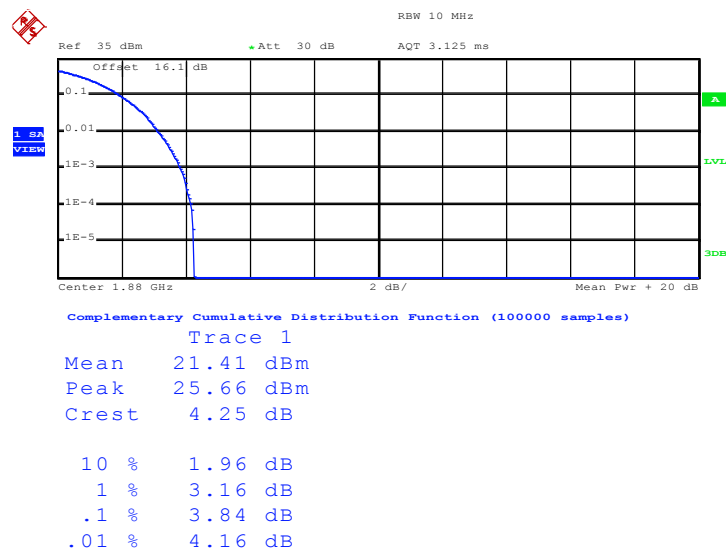

Date: 24.AUG.2011 10:00:42

3.2 Effective Radiated Power and Effective Isotropic Radiated Power Measurement

3.2.1 Description of the ERP/EIRP Measurement

ERP/EIRP is measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The ERP of mobile transmitters must not exceed 7 Watts. The EIRP of mobile transmitters are limited to 2 Watts for 1850~1910 MHz and 1 watt for 1710~1755 MHz.


3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

3.2.3 Test Procedures

1. The EUT was placed on an non-conductive rotating platform with 0.8 meter height in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RBW= 3MHz,VBW= 3MHz, and peak detector settings.
2. During the measurement, the EUT was enforced in maximum power and linked with a base station. The highest emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.

3.2.4 Test Setup

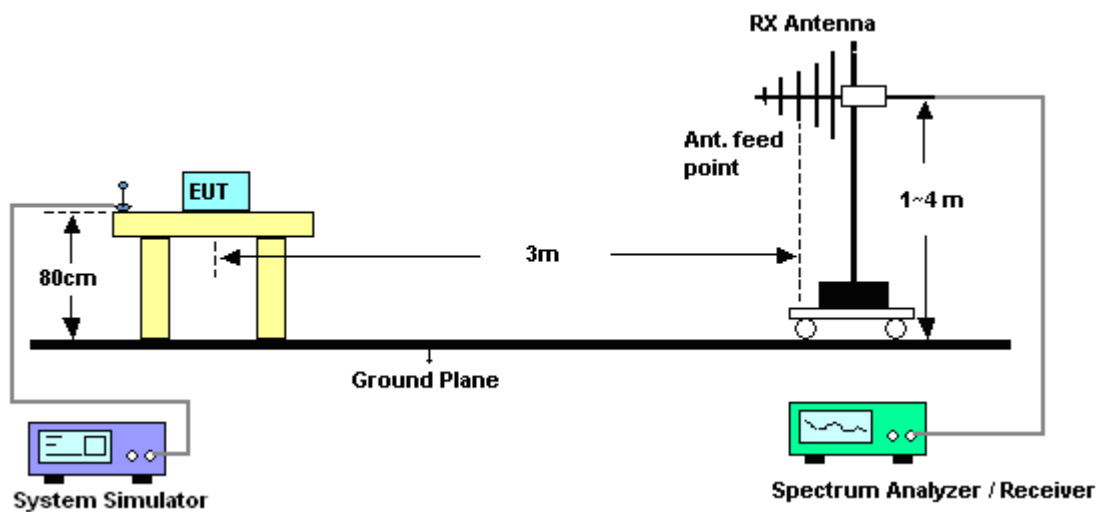

3.2.5 Test Result of ERP

<EUT with Keypad 1>

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-7.60	30.89	21.14	0.13
836.4	-6.88	31.13	22.10	0.16
848.8	-9.75	31.62	19.72	0.09
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-11.59	35.93	22.19	0.17
836.4	-11.34	34.95	21.46	0.14
848.8	-8.96	34.71	23.60	0.23

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

GSM850 (EDGE 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-13.92	30.89	14.82	0.03
836.4	-12.26	31.13	16.72	0.05
848.8	-14.27	31.62	15.20	0.03
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-15.88	35.93	17.90	0.06
836.4	-17.10	34.95	15.70	0.04
848.8	-14.45	34.71	18.11	0.06

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

WCDMA Band V (RMC 12.2Kbps) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-14.36	30.89	14.38	0.03
836.4	-13.74	31.13	15.24	0.03
846.6	-14.51	31.62	14.96	0.03
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
826.4	-16.95	35.93	16.83	0.05
836.4	-17.94	34.95	14.86	0.03
846.6	-14.69	34.71	17.87	0.06

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

CDMA2000 BC0 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-13.06	30.89	15.68	0.04
836.52	-13.65	31.13	15.33	0.03
848.31	-12.09	31.62	17.38	0.05
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	-17.81	35.93	15.97	0.04
836.52	-17.83	34.95	14.97	0.03
848.31	-15.95	34.71	16.61	0.05

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

<EUIT with Keypad 2>

GSM850 (GPRS 8) Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-6.57	30.89	22.17	0.16
836.4	-6.56	31.13	22.42	0.17
848.8	-5.38	31.62	24.09	0.26
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.2	-12.51	35.93	21.27	0.13
836.4	-10.02	34.95	22.78	0.19
848.8	-9.02	34.71	23.54	0.23

* ERP = LVL (dBm) + Correction Factor (dB) – 2.15

3.2.6 Test Result of EIRP

<EUT with Keypad 1>

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-17.99	41.24	23.25	0.21
1880.0	-18.65	41.46	22.81	0.19
1909.8	-18.91	41.21	22.30	0.17
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-21.54	41.52	19.98	0.10
1880.0	-21.14	43.10	21.96	0.16
1909.8	-22.21	42.73	20.52	0.11

* EIRP = LVL (dBm) + Correction Factor (dB)

GSM1900 (EDGE 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-23.20	41.24	18.04	0.06
1880.0	-23.81	41.46	17.65	0.06
1909.8	-23.09	41.21	18.12	0.06
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-25.54	41.52	15.98	0.04
1880.0	-25.80	43.10	17.30	0.05
1909.8	-26.91	42.73	15.82	0.04

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-20.44	39.24	18.80	0.08
1732.6	-18.64	40.25	21.61	0.14
1752.6	-18.41	40.31	21.90	0.15
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-22.95	44.11	21.16	0.13
1732.6	-22.96	42.66	19.70	0.09
1752.6	-22.60	41.70	19.10	0.08

* EIRP = LVL (dBm) + Correction Factor (dB)

WCDMA Band II (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-23.67	41.24	17.57	0.06
1880.0	-23.39	41.46	18.07	0.06
1907.6	-23.97	41.21	17.24	0.05
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1852.4	-26.26	41.52	15.26	0.03
1880.0	-26.43	43.10	16.67	0.05
1907.6	-26.94	42.73	15.79	0.04

* EIRP = LVL (dBm) + Correction Factor (dB)

CDMA2000 BC1 1xEV-DO Rev. 0_RTAP 153.6K Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-22.12	41.24	19.12	0.08
1880.00	-22.48	41.46	18.98	0.08
1908.75	-23.04	41.21	18.17	0.07
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	-24.59	41.52	16.93	0.05
1880.00	-25.73	43.1	17.37	0.05
1908.75	-26.49	42.73	16.24	0.04

* EIRP = LVL (dBm) + Correction Factor (dB)

<EUT with Keypad 2>

GSM1900 (GPRS 8) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-17.65	41.24	23.59	0.23
1880.0	-18.45	41.46	23.01	0.20
1909.8	-18.78	41.21	22.43	0.17
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1850.2	-21.24	41.52	20.28	0.11
1880.0	-21.56	43.10	21.54	0.14
1909.8	-21.66	42.73	21.07	0.13

WCDMA Band IV (RMC 12.2Kbps) Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-20.49	39.24	18.75	0.07
1732.6	-18.48	40.25	21.77	0.15
1752.6	-18.46	40.31	21.85	0.15
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1712.4	-22.83	44.11	21.28	0.13
1732.6	-22.86	42.66	19.80	0.10
1752.6	-22.18	41.70	19.52	0.09

3.3 Occupied Bandwidth Measurement

3.3.1 Description of Occupied Bandwidth Measurement

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.3.2 Measuring Instruments

See list of measuring instruments of this test report.

3.3.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers were measured.


3.3.4 Test Setup

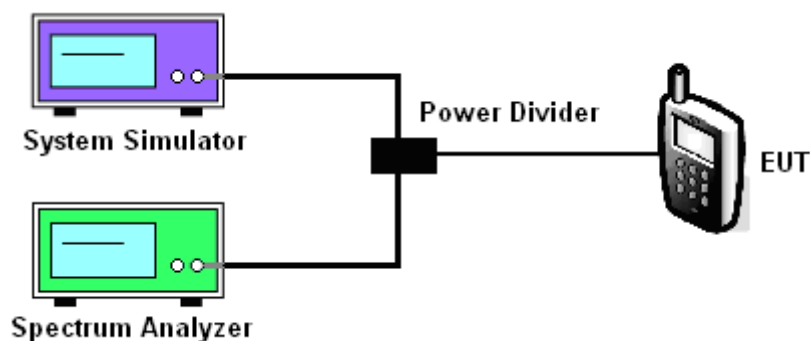

3.3.5 Test Result (Plots) of Occupied Bandwidth


Band :	GSM 850	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 189

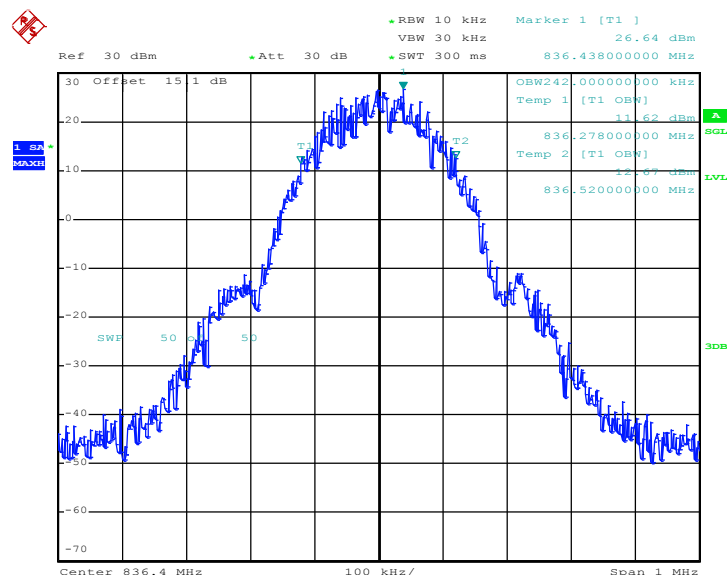


Date: 28.OCT.2011 11:50:18

26dB Bandwidth Plot on Channel 189

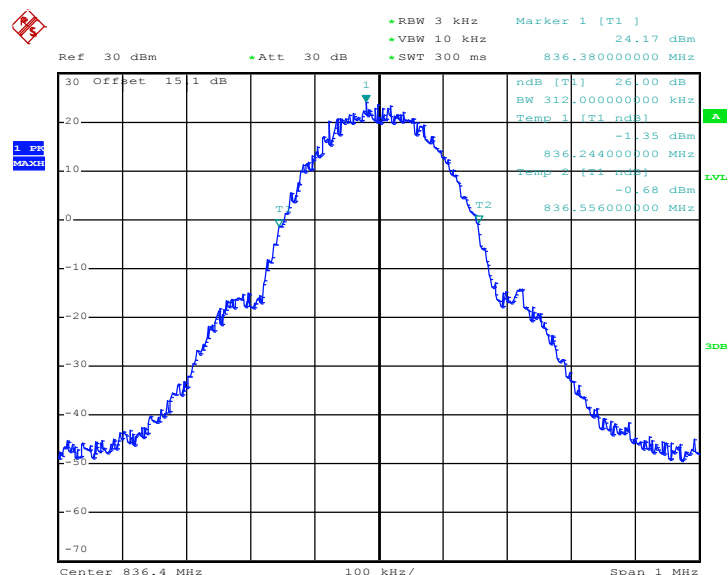


Date: 26.SEP.2011 16:38:43

Band :	GSM 850	Power Stage :	High
Test Mode :	EDGE 8 Link		

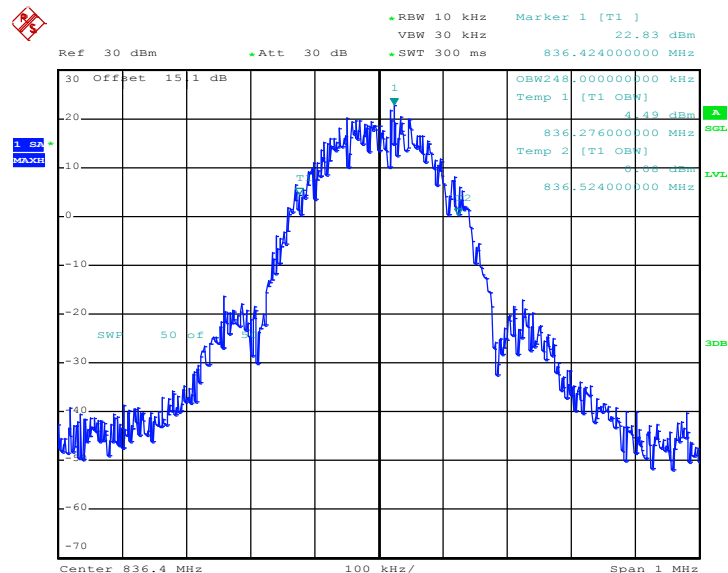99% Occupied Bandwidth Plot on Channel 189


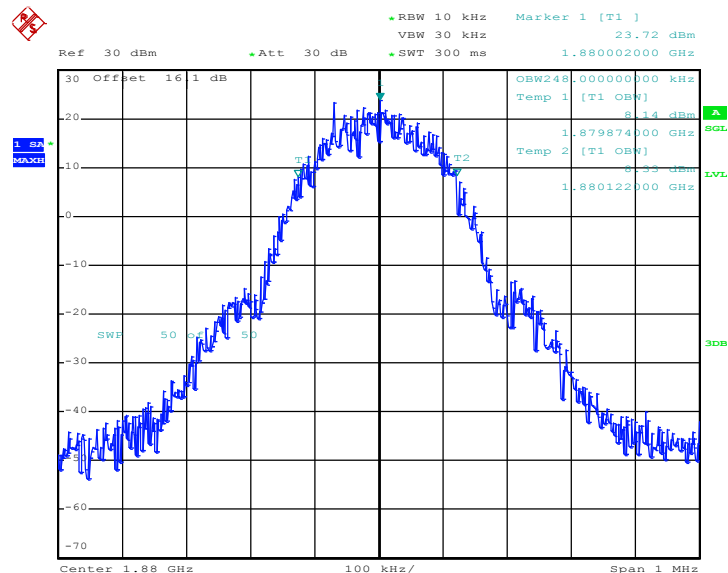
Date: 28.OCT.2011 13:46:47

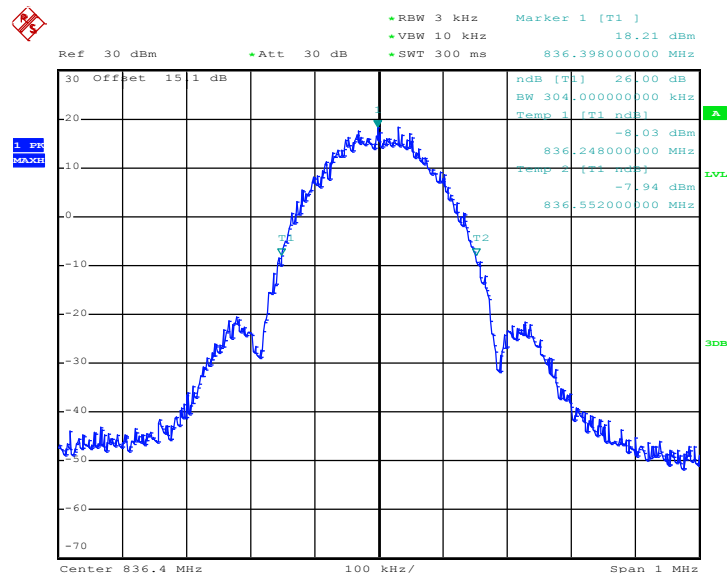26dB Bandwidth Plot on Channel 189


Date: 26.SEP.2011 17:30:29


Band :	GSM 1900	Power Stage :	High
Test Mode :	GPRS 8 Link		

99% Occupied Bandwidth Plot on Channel 661



Date: 28.OCT.2011 11:58:07


26dB Bandwidth Plot on Channel 661

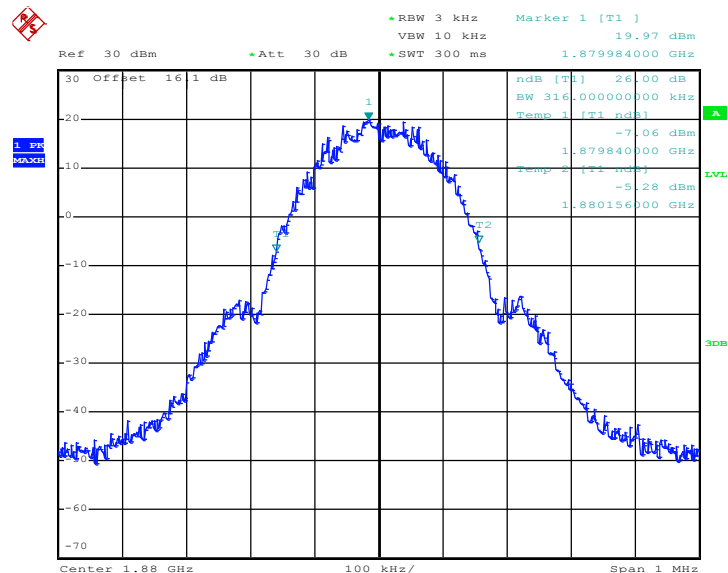

Date: 26.SEP.2011 16:58:37


Band :	GSM 1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

99% Occupied Bandwidth Plot on Channel 661

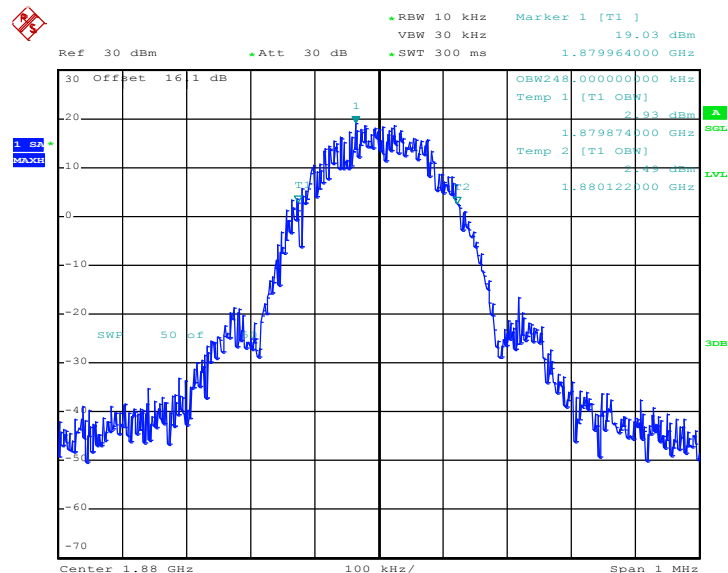


Date: 28.OCT.2011 13:36:56

26dB Bandwidth Plot on Channel 661

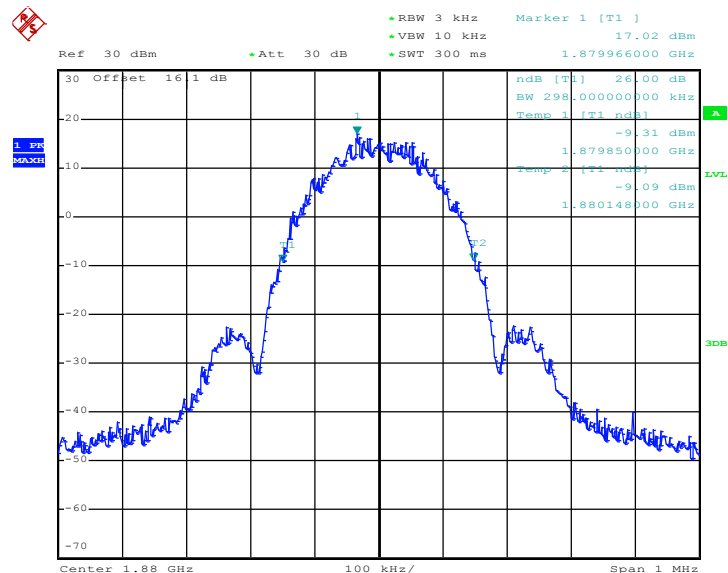


Date: 26.SEP.2011 17:17:39

Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

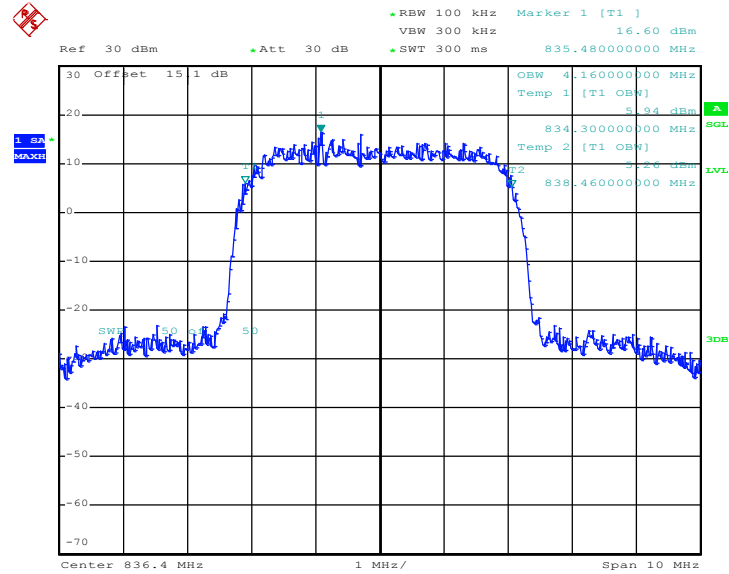99% Occupied Bandwidth Plot on Channel 4182


Date: 28.OCT.2011 17:48:18

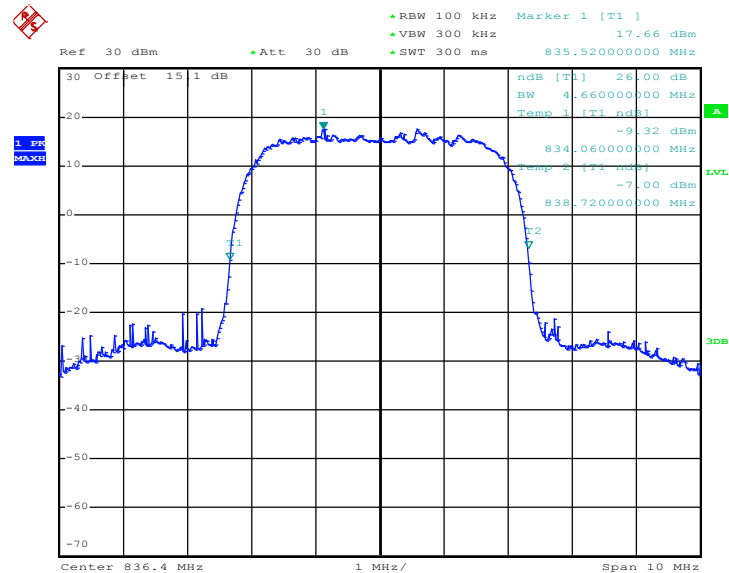
26dB Bandwidth Plot on Channel 4182


Date: 26.SEP.2011 18:18:14




Band :	WCDMA Band IV	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

99% Occupied Bandwidth Plot on Channel 1413

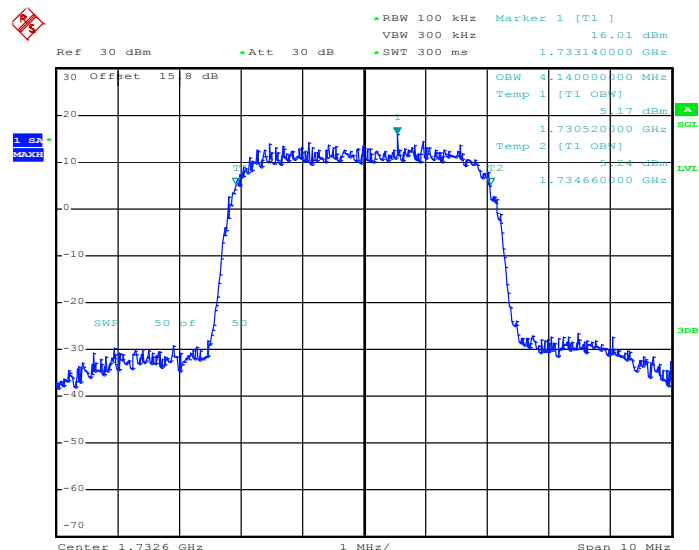


Date: 28.OCT.2011 17:54:00

26dB Bandwidth Plot on Channel 1413

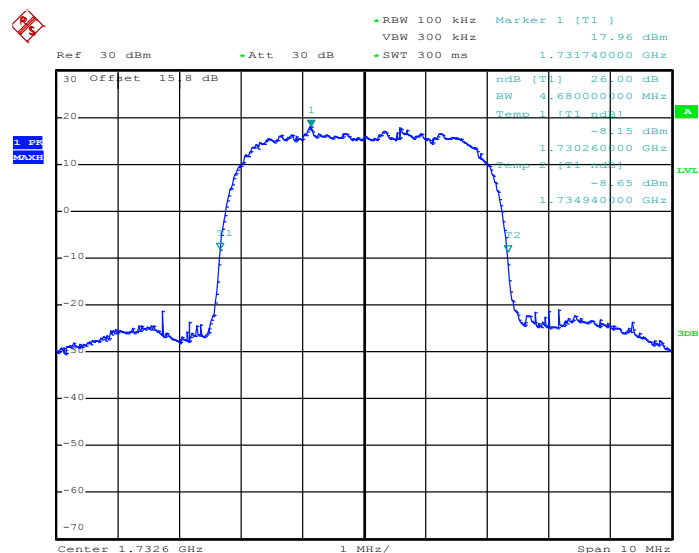


Date: 27.SEP.2011 20:14:38

Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

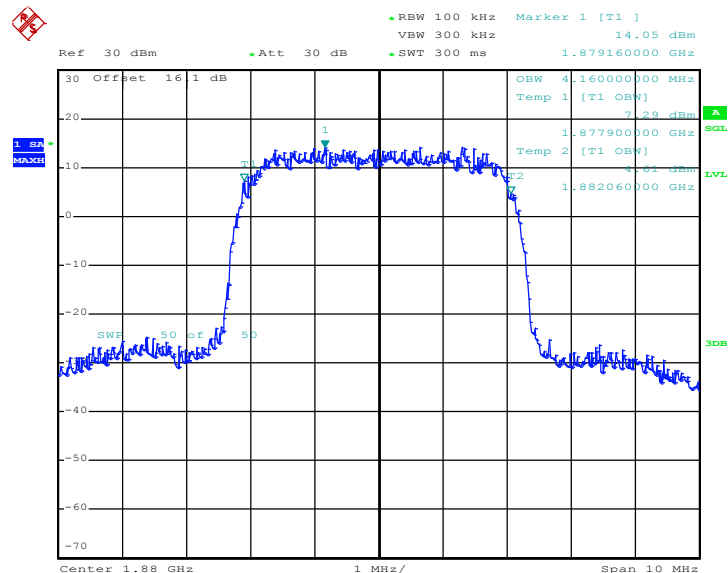
99% Occupied Bandwidth Plot on Channel 9400


Date: 28.OCT.2011 17:40:28

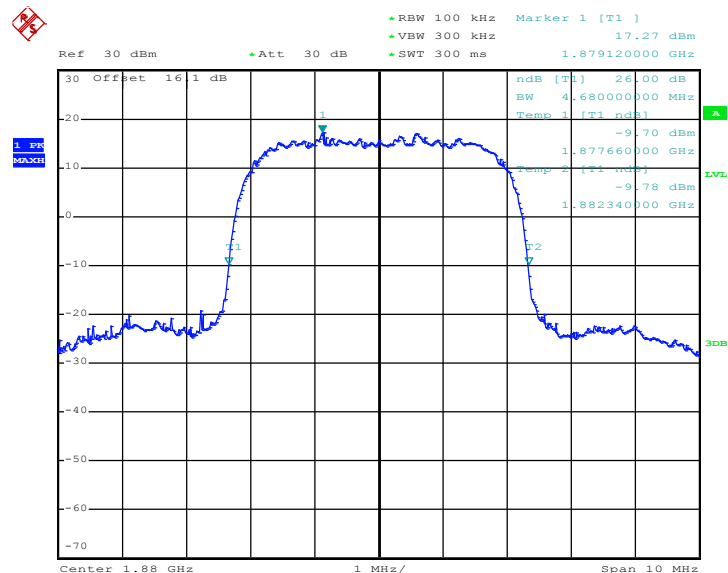
26dB Bandwidth Plot on Channel 9400


Date: 26.SEP.2011 17:50:33

Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

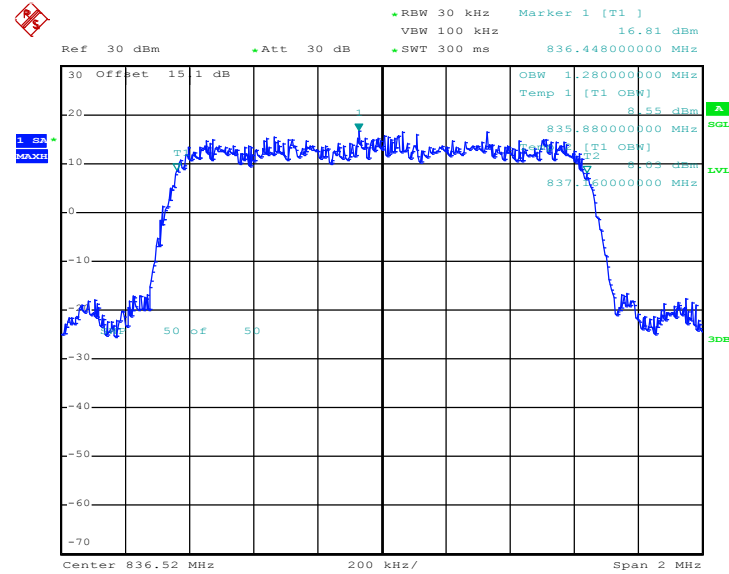99% Occupied Bandwidth Plot on Channel 384


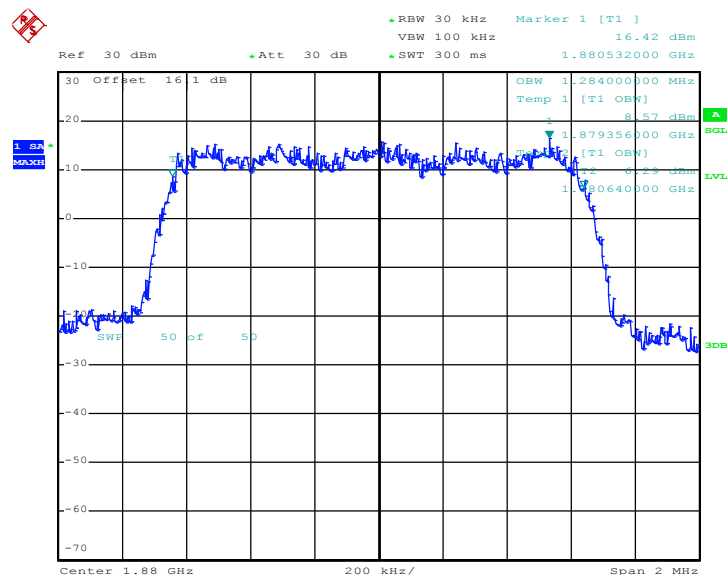
Date: 28.OCT.2011 18:06:39

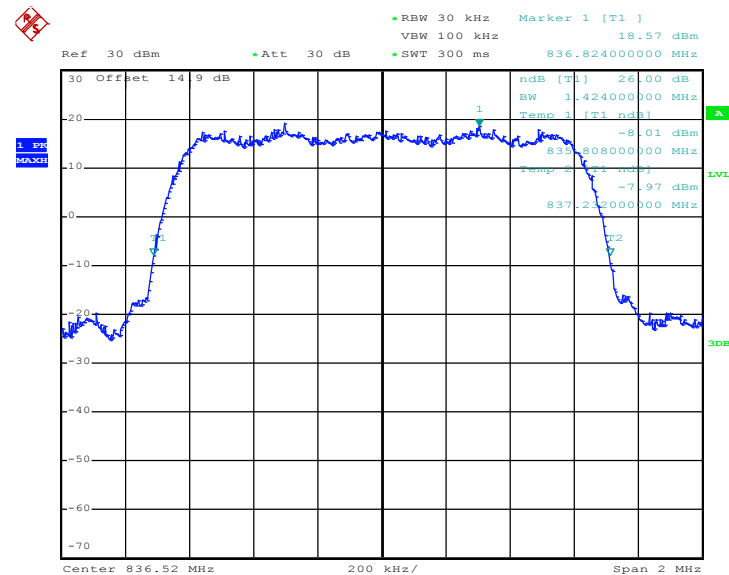26dB Bandwidth Plot on Channel 384


Date: 10.MAR.2011 09:15:45


Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

99% Occupied Bandwidth Plot on Channel 600



Date: 28.OCT.2011 18:13:09

26dB Bandwidth Plot on Channel 600

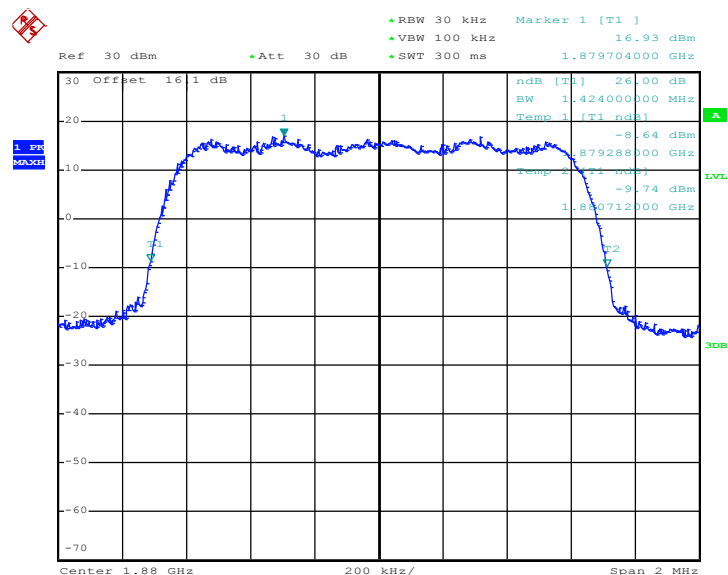

Date: 24.AUG.2011 10:03:24

3.4 Band Edge Measurement

3.4.1 Description of Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.


3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

3.4.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. The RBW was replaced by 10 kHz, due to the spectrum analyzer IF-Filter including an excess of the limit. A worst case correction factor of $10 \log (1\% \text{ BW/measurement RBW})$ was implemented.


3.4.4 Test Setup

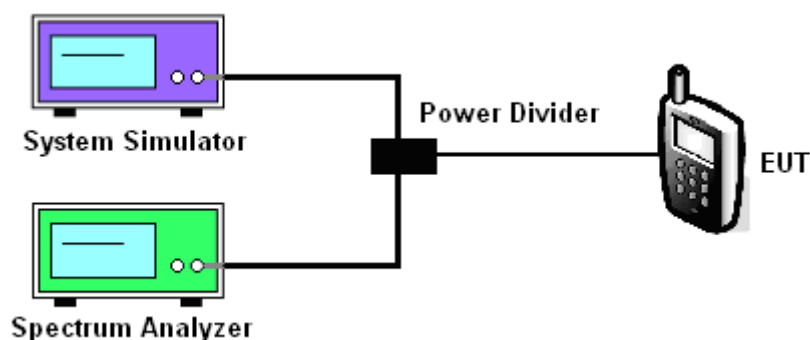


3.4.5 Test Result (Plots) of Conducted Band Edge

Band :	GSM850	Power Stage :	High
Test Mode :	GPRS 8 Link		

Lower Band Edge Plot on Channel 128

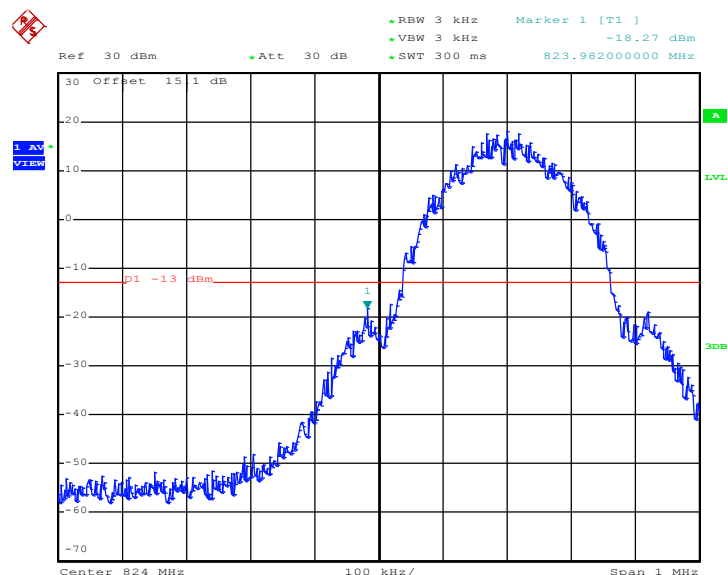


Date: 26.SEP.2011 16:51:03

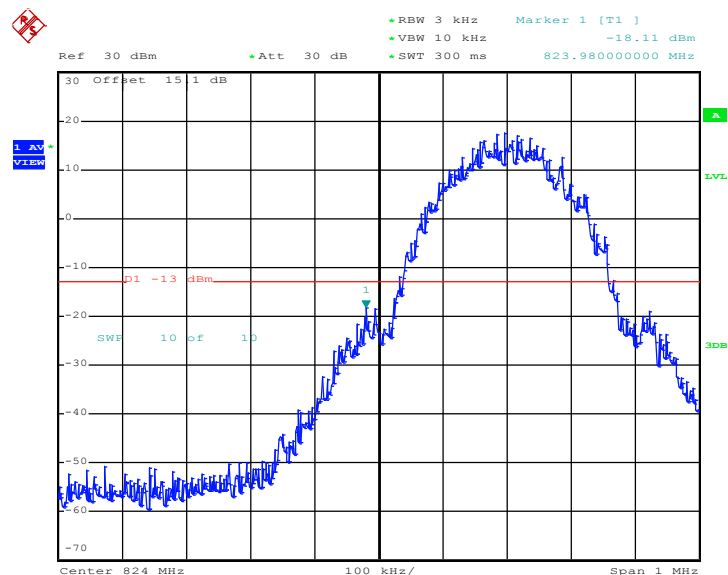


Date: 26.SEP.2011 16:51:38

Higher Band Edge Plot on Channel 251

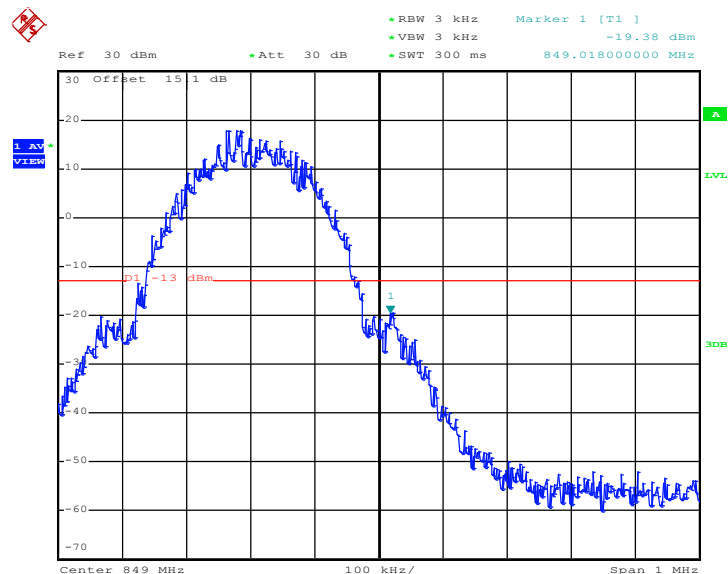

Date: 26.SEP.2011 16:49:40

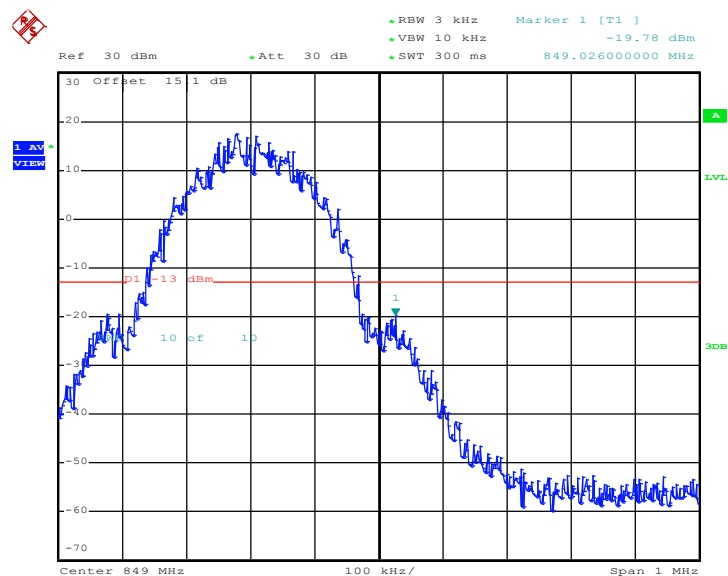


Date: 26.SEP.2011 16:52:19




Band :	GSM850	Power Stage :	High
Test Mode :	EDGE 8 Link		


Lower Band Edge Plot on Channel 128

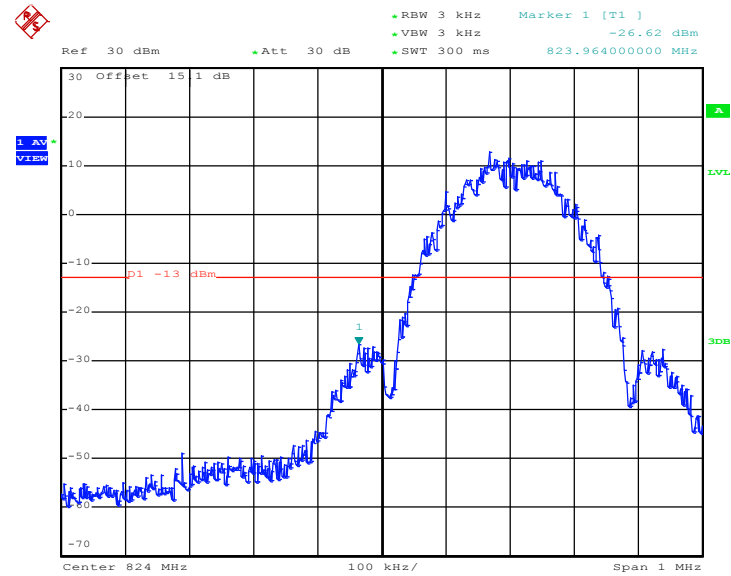

Date: 26.SEP.2011 17:40:09

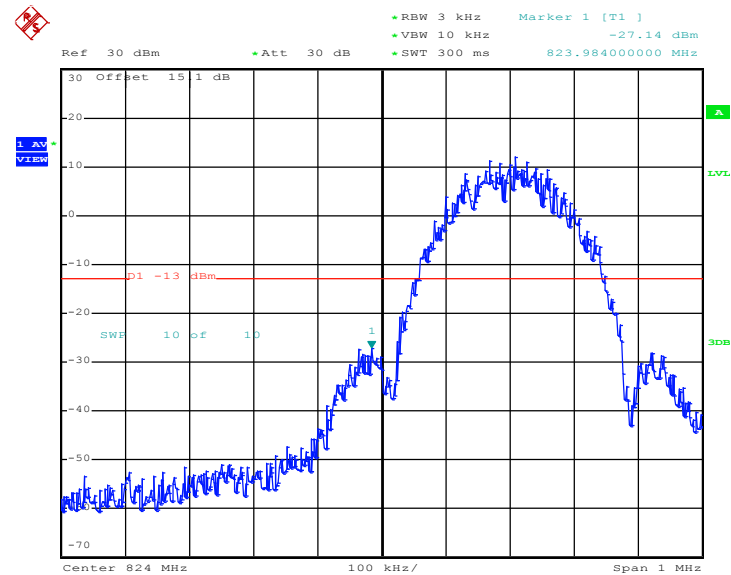


Date: 26.SEP.2011 17:40:43






Band :	GSM1900	Power Stage :	High
Test Mode :	GPRS 8 Link		


Lower Band Edge Plot on Channel 512

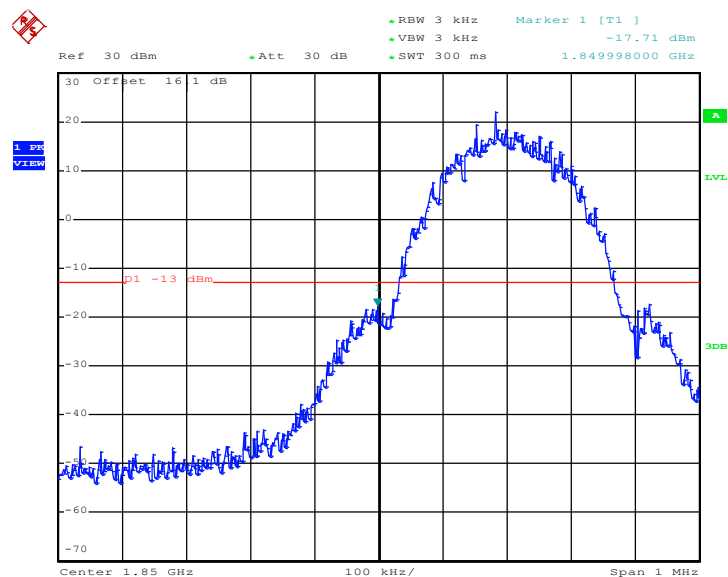

Date: 26.SEP.2011 17:07:19

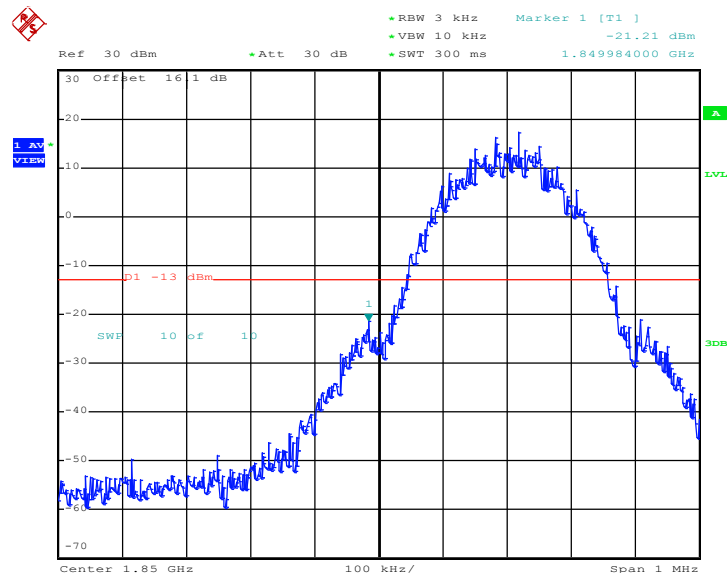


Date: 26.SEP.2011 17:08:32






Band :	GSM1900	Power Stage :	High
Test Mode :	EDGE 8 Link		

Lower Band Edge Plot on Channel 512

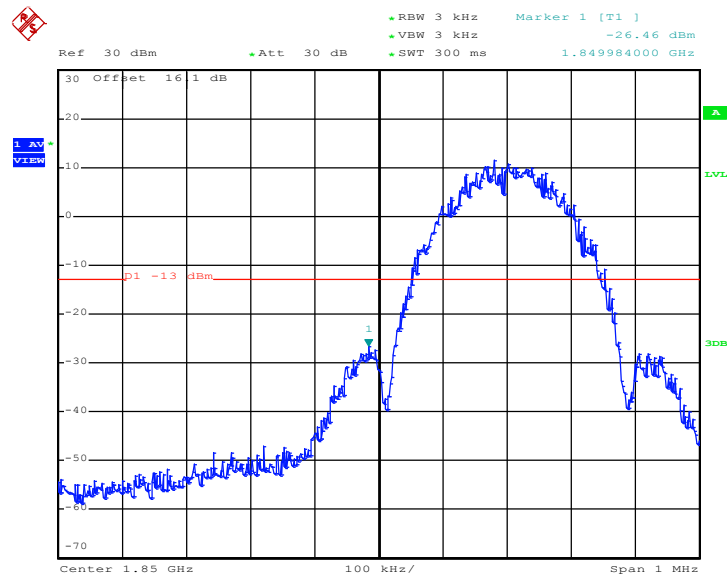


Date: 26.SEP.2011 17:26:29

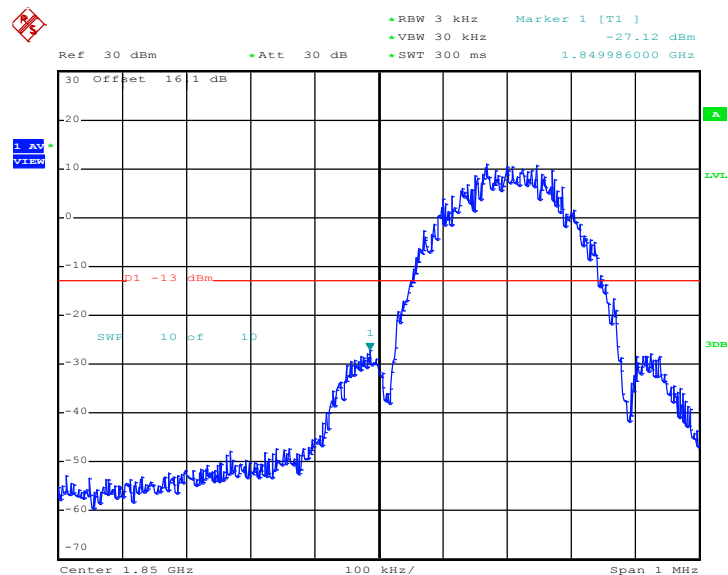


Date: 26.SEP.2011 17:27:20

Higher Band Edge Plot on Channel 810

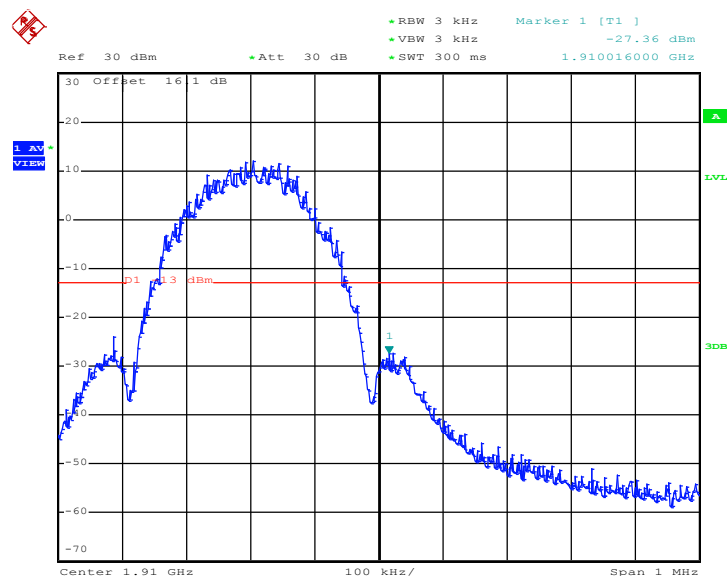

Date: 26.SEP.2011 17:25:29

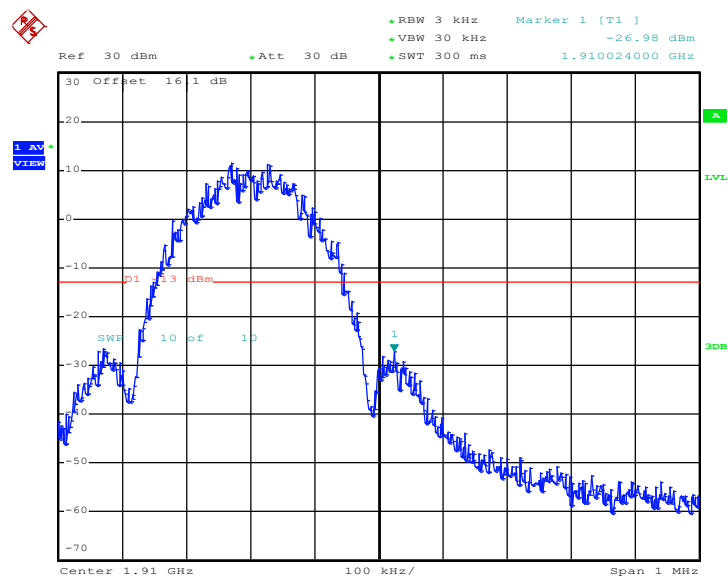


Date: 26.SEP.2011 17:27:55




Band :	WCDMA Band V	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 4132

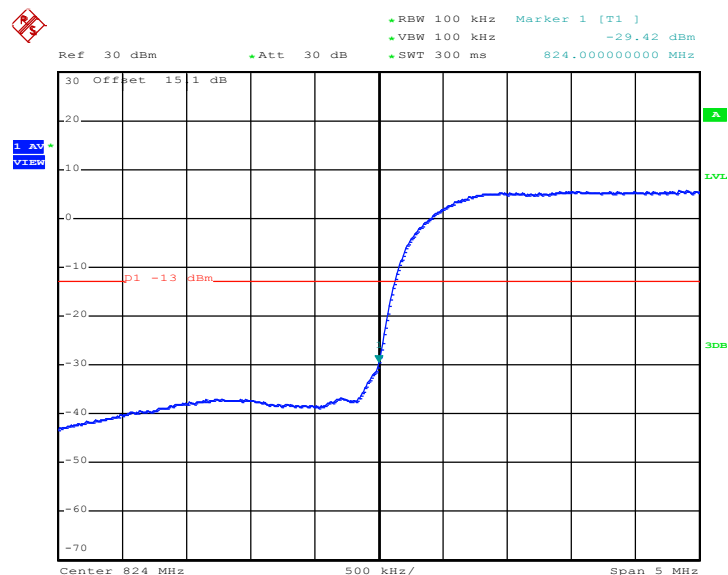

Date: 27.SEP.2011 20:10:46

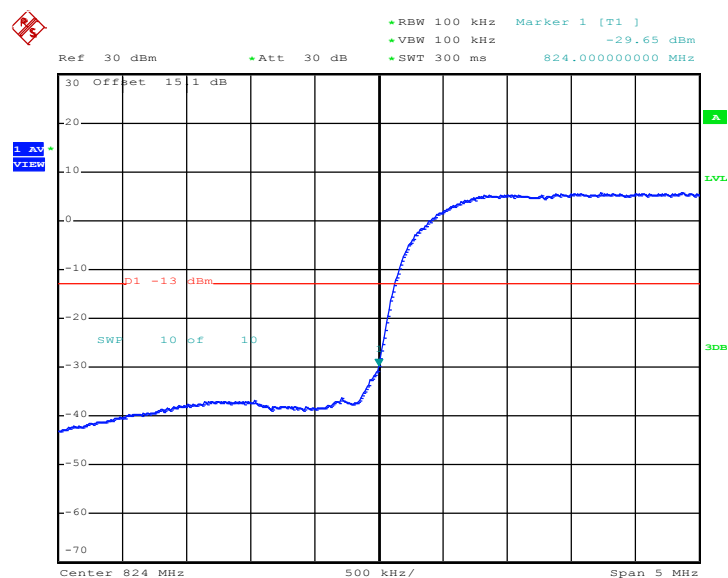

Date: 27.SEP.2011 20:11:01



Ref 30 dBm Att 30 dB RBW 100 kHz VBW 100 kHz SWT 300 ms Marker 1 [T1] -29.83 dBm


1. AV VIEW

Offset 15.1 dB

dBm

Center 849 MHz Span 5 MHz

Date: 27.SEP.2011 20:11:41

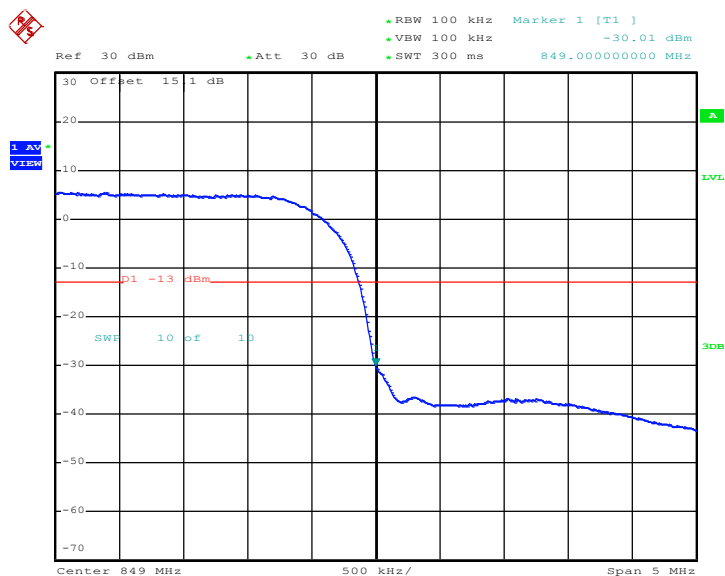


Date: 27.SEP.2011 20:11:27




Band :	WCDMA Band IV	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 1312

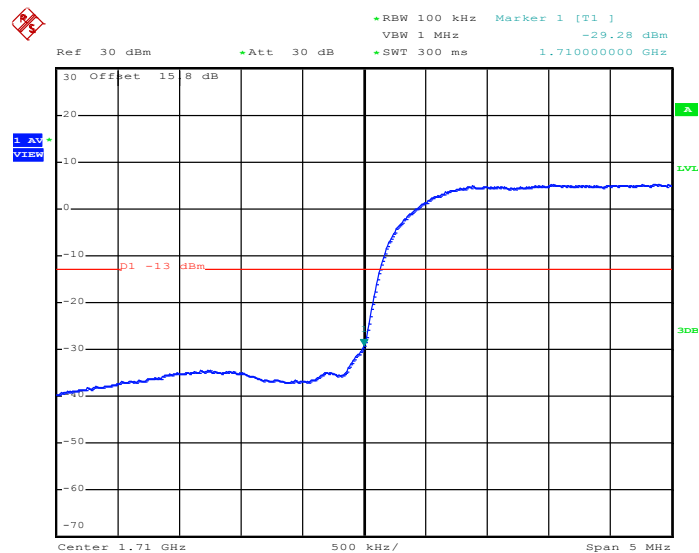


Date: 27.SEP.2011 20:20:29

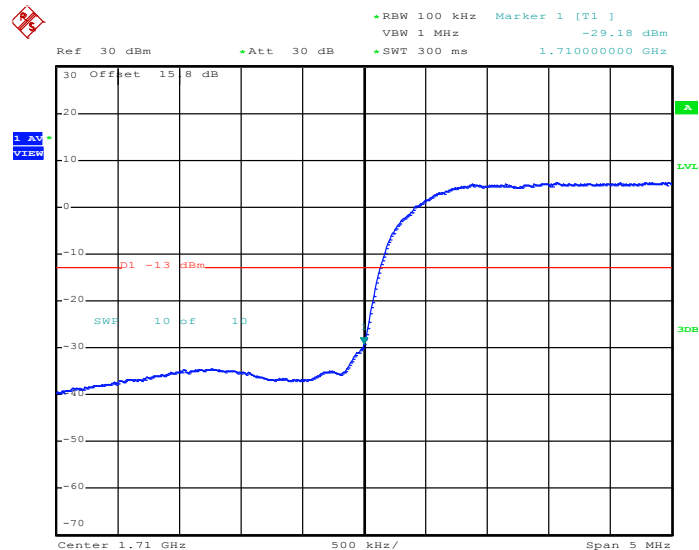


Date: 27.SEP.2011 20:20:44

Higher Band Edge Plot on Channel 1513

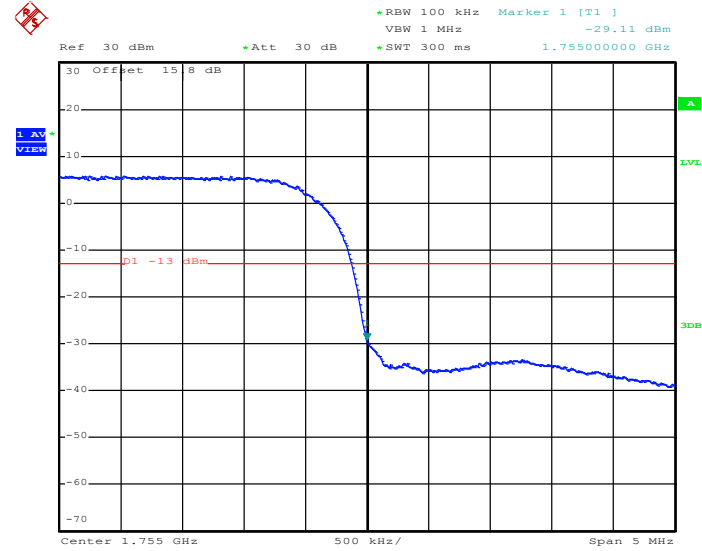

Date: 27.SEP.2011 20:21:59

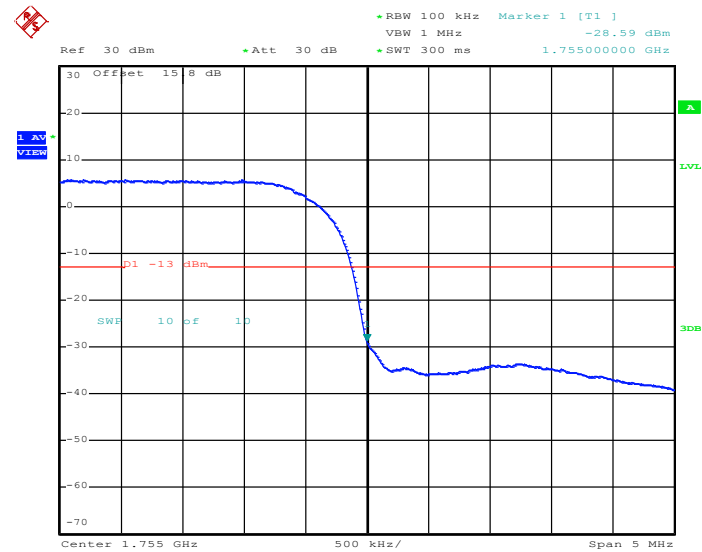


Date: 27.SEP.2011 20:21:44




Band :	WCDMA Band II	Power Stage :	High
Test Mode :	RMC 12.2Kbps Link		

Lower Band Edge Plot on Channel 9262

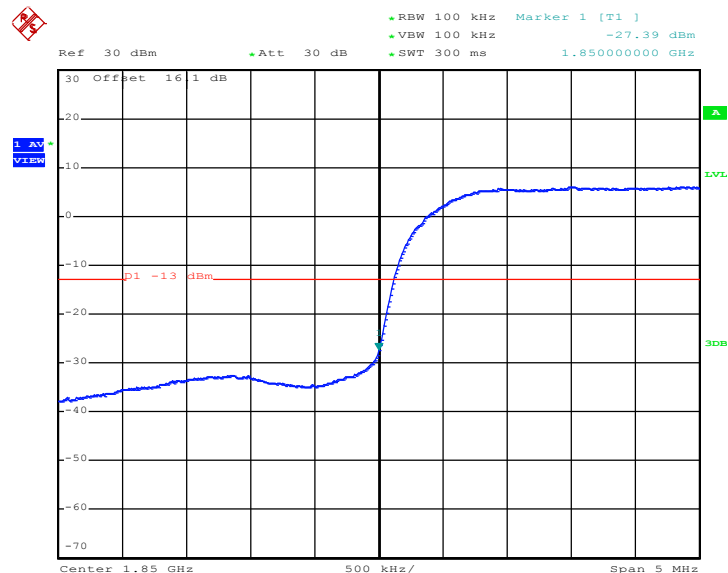


Date: 27.SEP.2011 20:08:48

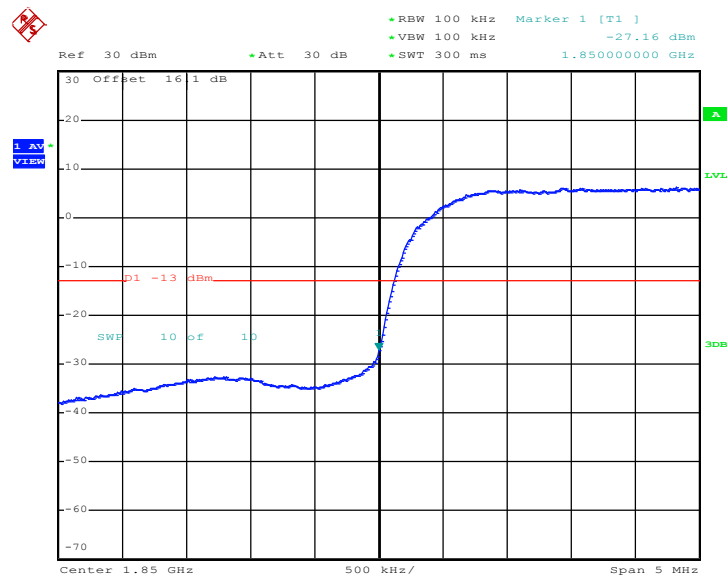


Date: 27.SEP.2011 20:09:06



Higher Band Edge Plot on Channel 9538

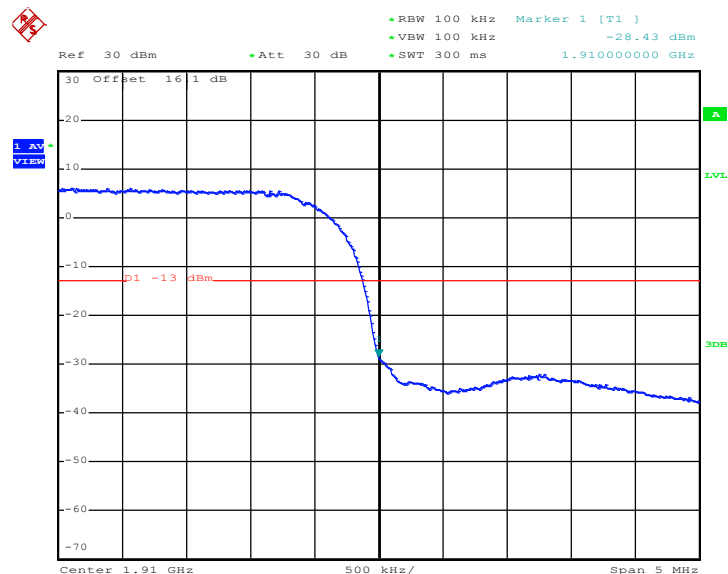

Date: 27.SEP.2011 20:10:01

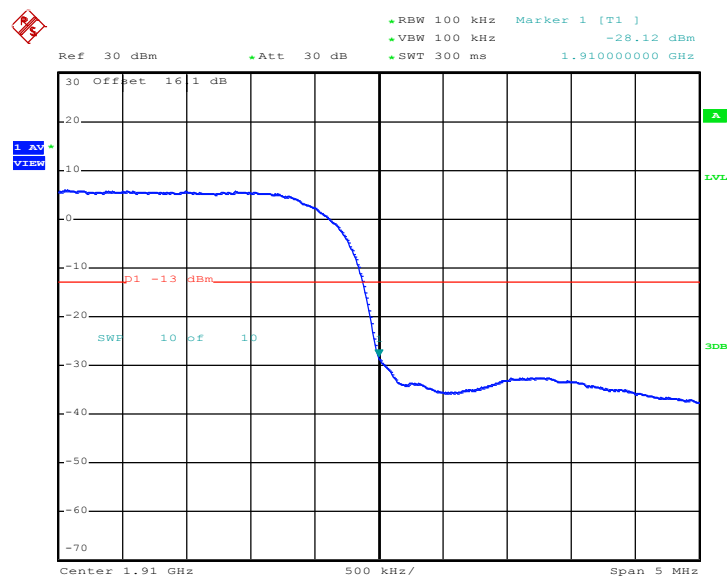


Date: 27.SEP.2011 20:09:40




Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		


Lower Band Edge Plot on Channel 1013

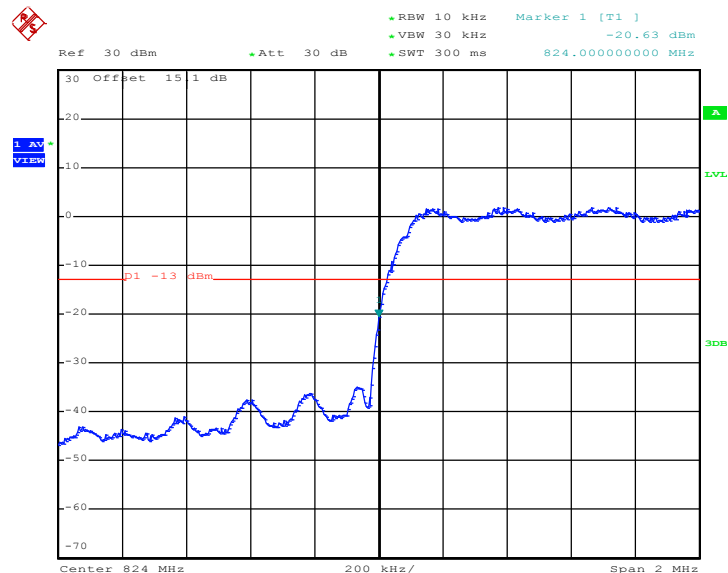


Date: 24.AUG.2011 09:48:39

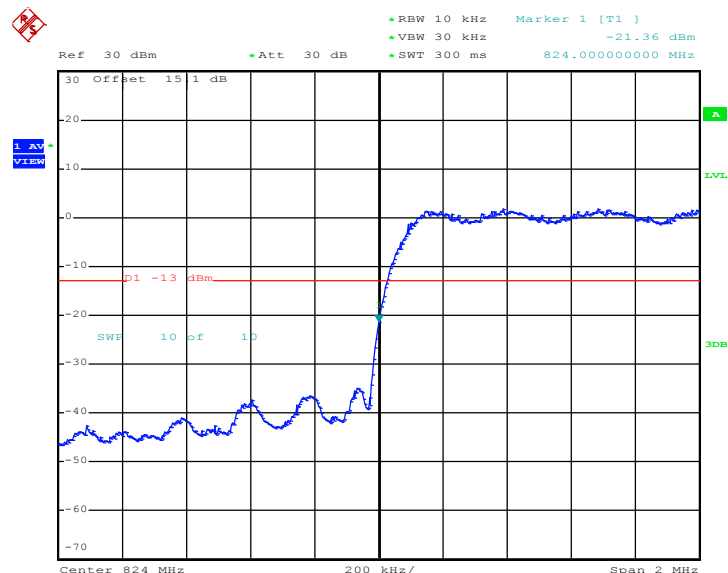

Date: 24.AUG.2011 09:49:00

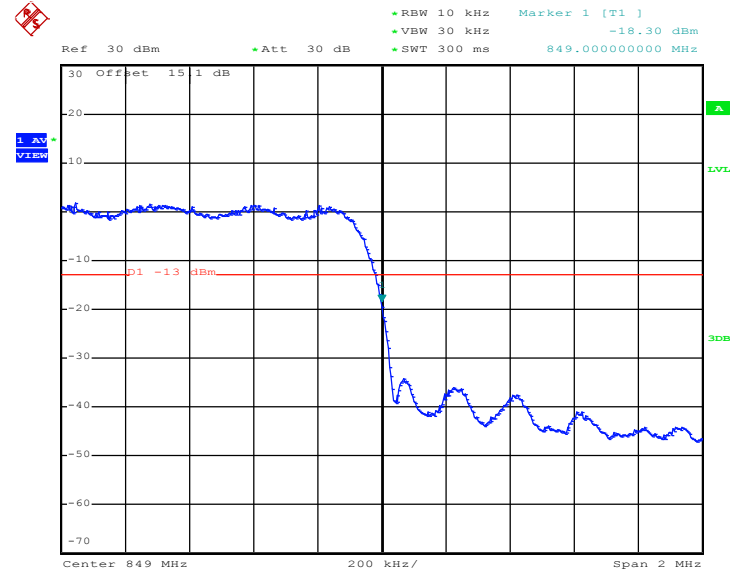Higher Band Edge Plot on Channel 777


Date: 24.AUG.2011 09:49:47

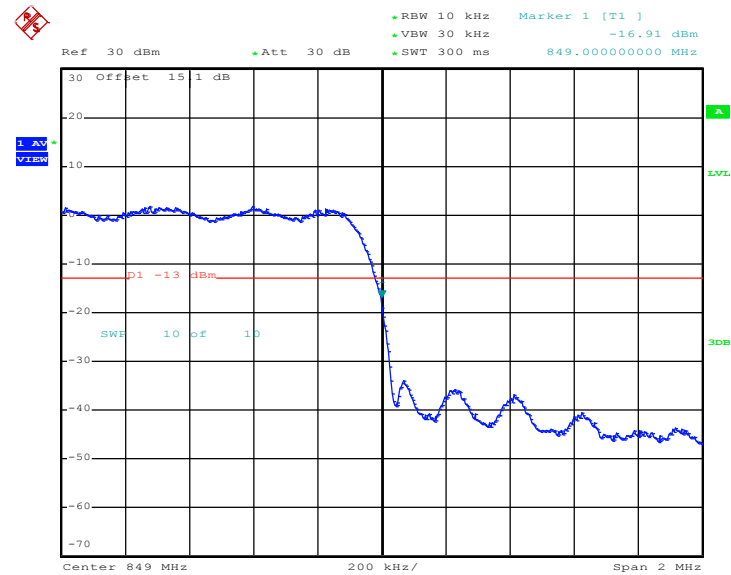


Date: 24.AUG.2011 09:49:25




Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Lower Band Edge Plot on Channel 25

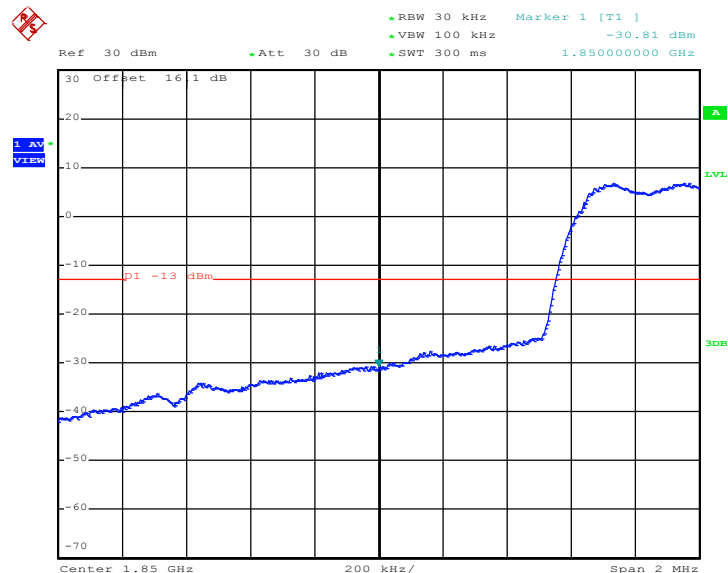

Date: 24.AUG.2011 10:12:39

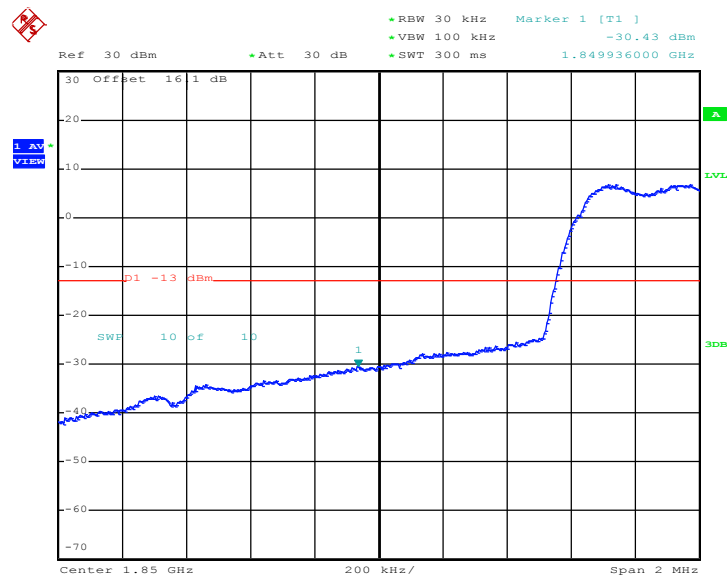


Date: 24.AUG.2011 10:13:25



The screenshot displays a Spectrum Analyzer interface. At the top, a red and white logo is on the left. The top status bar shows the following parameters: Ref 30 dBm, Att 30 dB, RBW 30 kHz, VBW 100 kHz, Marker 1 [T1], -34.02 dBm, and 1.910052000 GHz. The main plot area shows a blue trace representing the signal spectrum. The y-axis is labeled from -70 to 30 dBm, and the x-axis is labeled from 1.91 GHz to 2.00 GHz. A red horizontal line is drawn at -13 dBm, labeled 'p1 -13 dBm'. A green triangle marker is placed on the trace at 1.91 GHz, with a value of -34.02 dBm. The trace shows a sharp drop in power around 1.91 GHz, followed by a relatively flat region with some noise. A blue button labeled '1. AV VIEW' is visible on the left side of the plot area.

Date: 24.AUG.2011 10:14:21

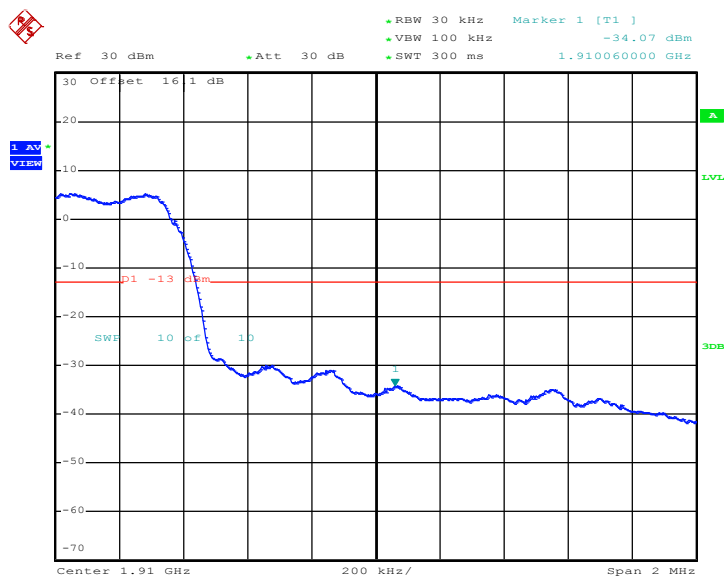

Date: 24.AUG.2011 10:14:00

3.5 Conducted Emission Measurement

3.5.1 Description of Conducted Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.


3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

3.5.3 Test Procedures


4. The EUT was connected to spectrum analyzer and base station via power divider.
5. The middle channel for the highest RF power within the transmitting frequency was measured.
6. The conducted spurious emission for the whole frequency range was taken.

3.5.4 Test Setup

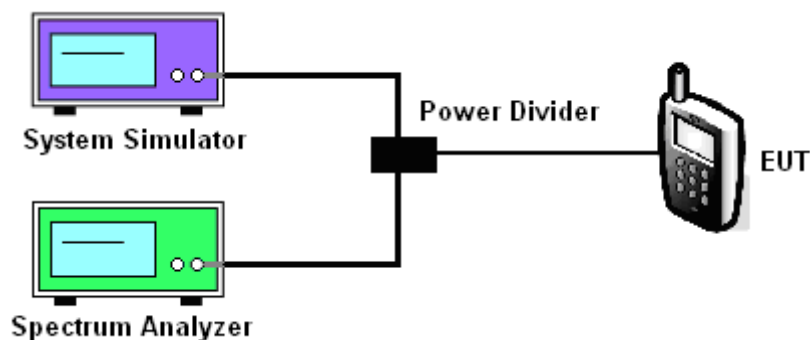


3.5.5 Test Result (Plots) of Conducted Emission

Band :	GSM850	Channel :	CH189
Test Mode :	GPRS 8 Link		

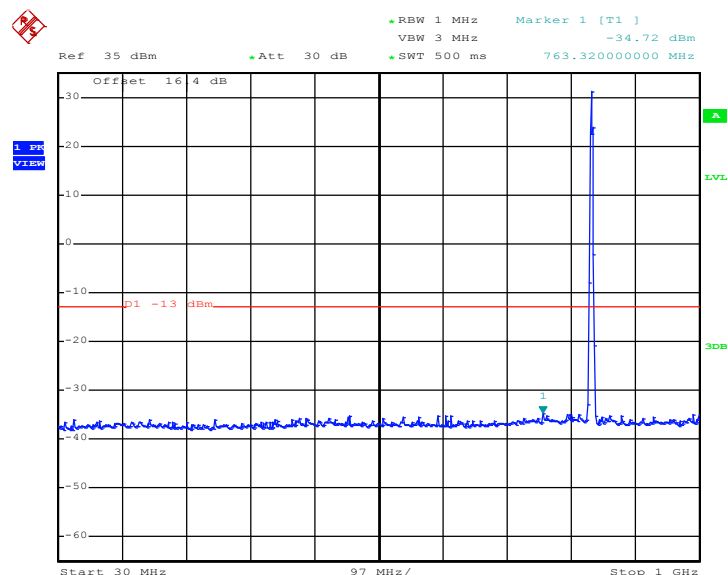
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 24.AUG.2011 11:53:11

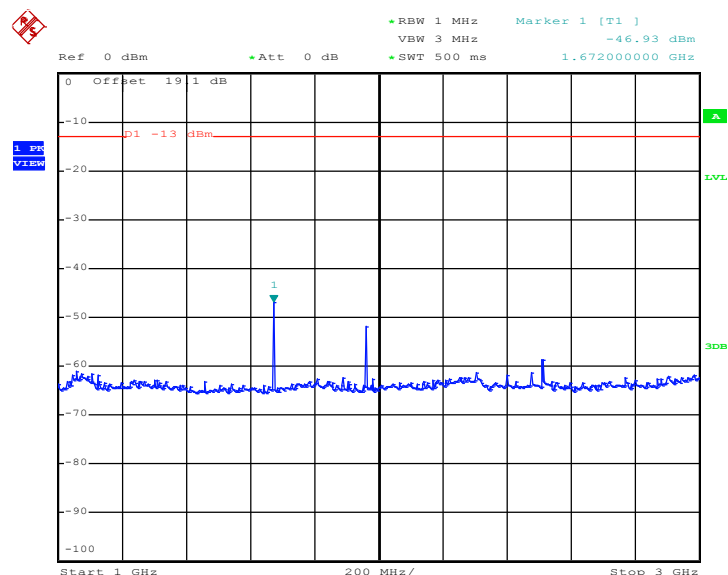Conducted Emission Plot between 1GHz ~ 3GHz


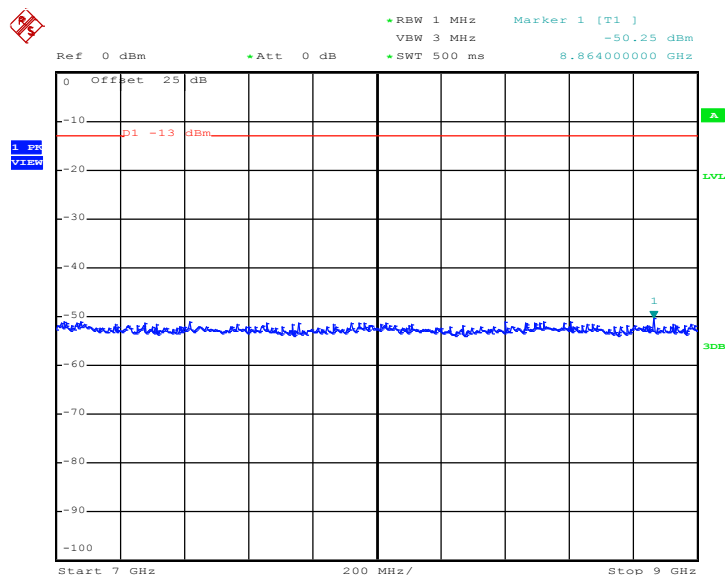
Date: 24.AUG.2011 11:54:57

Conducted Emission Plot between 3GHz ~ 7GHz

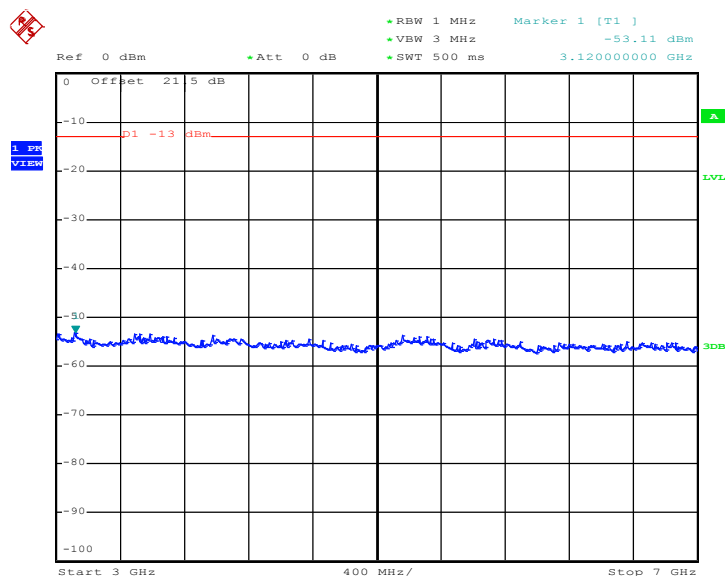

Date: 2.NOV.2011 09:16:06


Conducted Emission Plot between 7GHz ~ 9GHz



Date: 24.AUG.2011 11:56:09


Band :	GSM850	Channel :	CH189
Test Mode :	EDGE 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

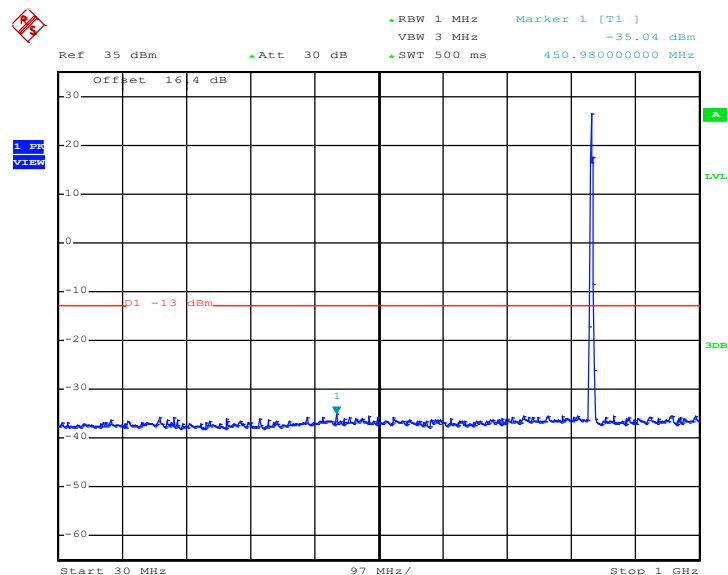


Date: 24.AUG.2011 10:51:59

Conducted Emission Plot between 1GHz ~ 3GHz

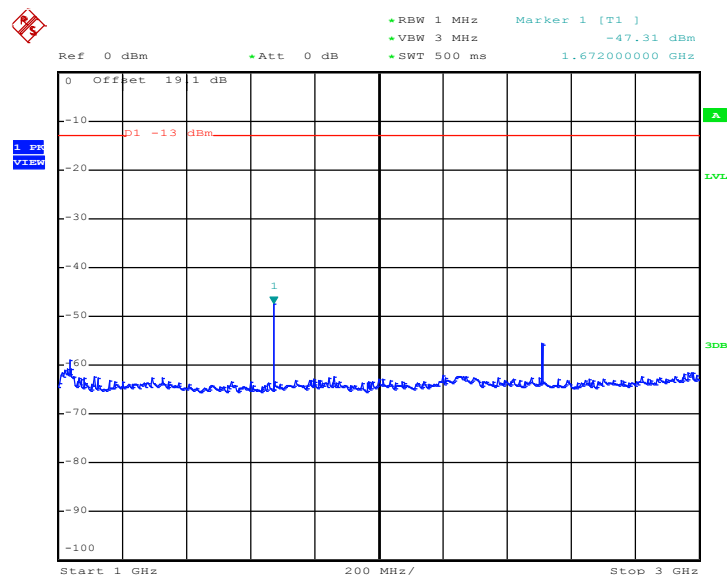


Date: 24.AUG.2011 10:50:18

Conducted Emission Plot between 3GHz ~ 7GHz

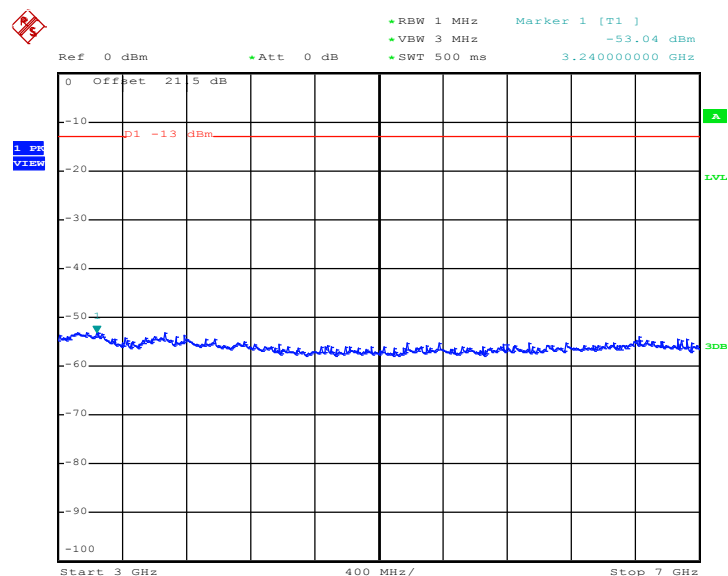

Date: 24.AUG.2011 10:49:32


Conducted Emission Plot between 7GHz ~ 9GHz

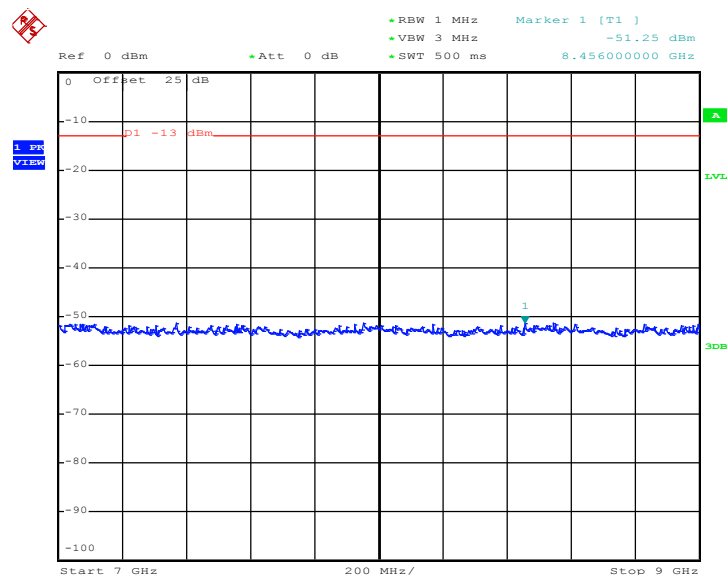

Date: 24.AUG.2011 10:48:35


Band :	GSM1900	Channel :	CH661
Test Mode :	GPRS 8 Link		

Conducted Emission Plot between 30MHz ~ 1GHz

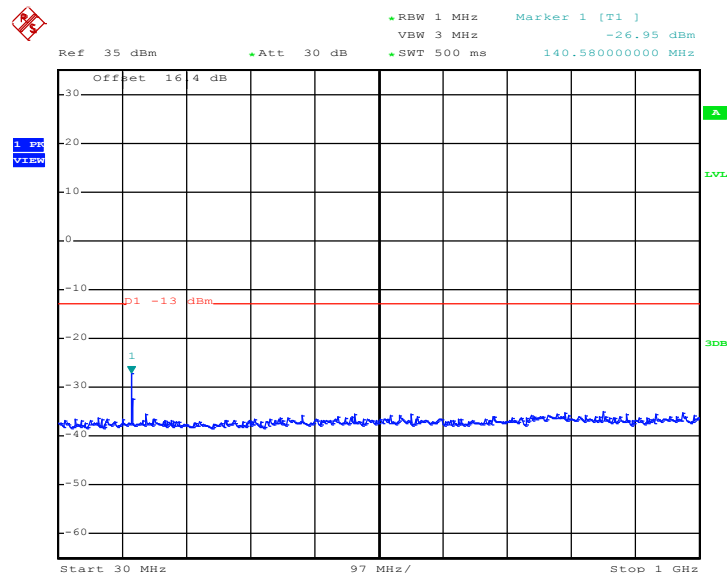


Date: 24.AUG.2011 11:41:49

Conducted Emission Plot between 1GHz ~ 3GHz

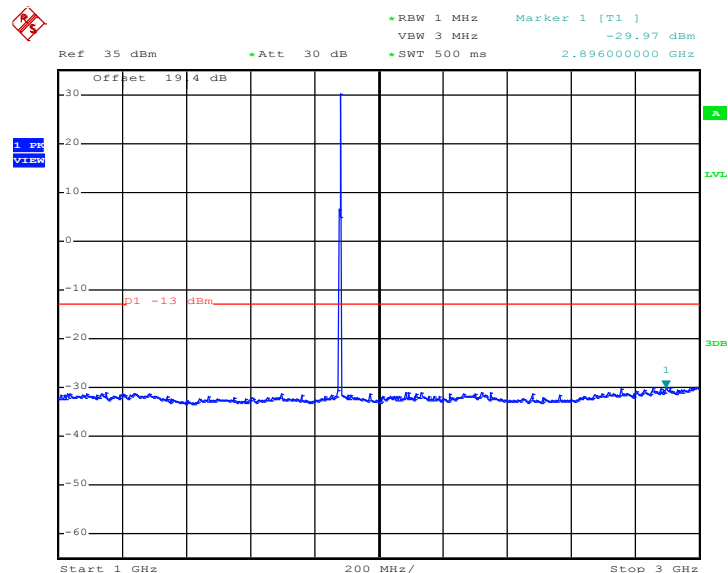


Date: 1.NOV.2011 10:14:50

Conducted Emission Plot between 3GHz ~ 7GHz

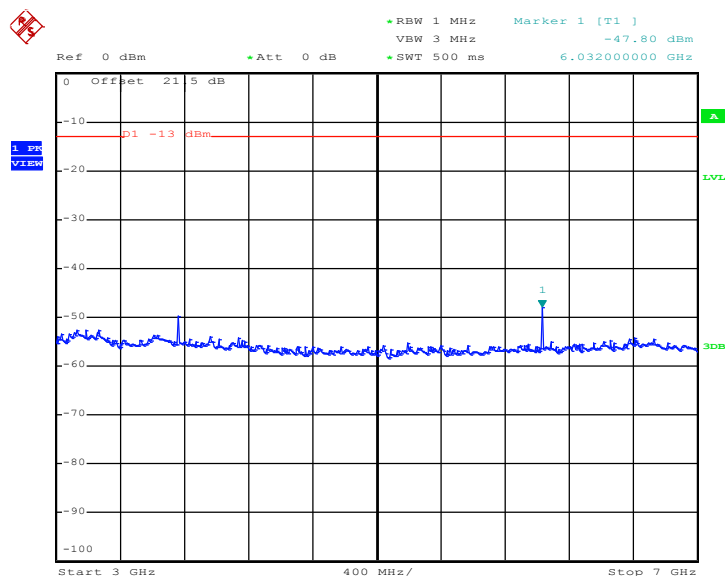

Date: 24.AUG.2011 11:40:02


Conducted Emission Plot between 7GHz ~ 13.6G

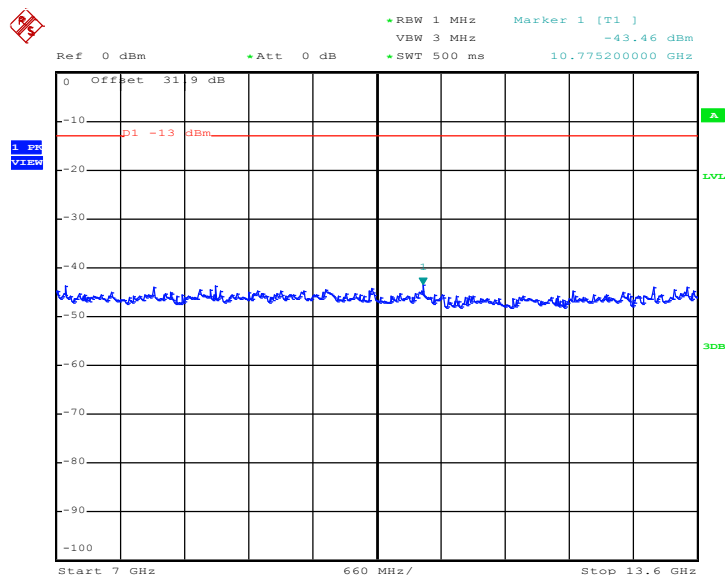

Date: 24.AUG.2011 11:11:33




Conducted Emission Plot between 13.6GHz ~ 19.1GHz

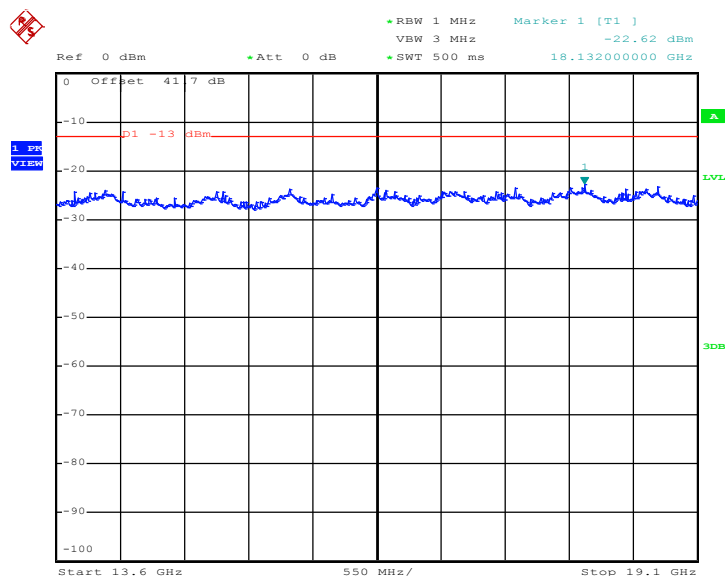


Date: 24.AUG.2011 11:10:22

Band :	GSM1900	Channel :	CH661
Test Mode :	EDGE 8 Link		

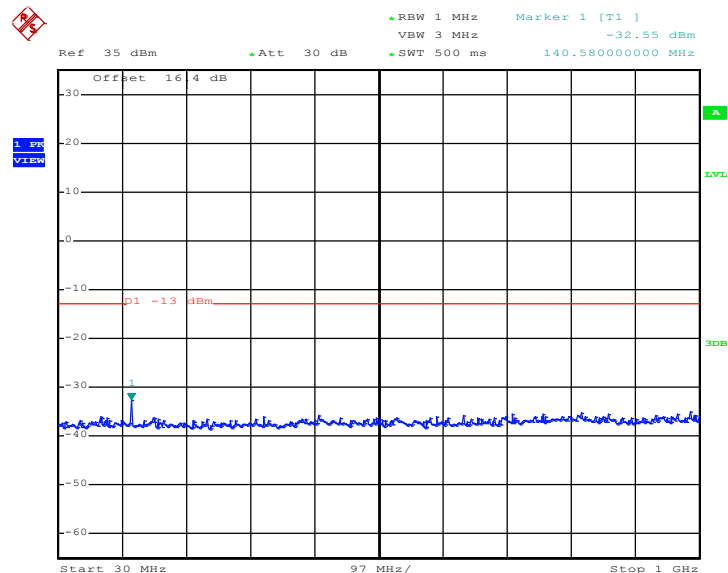
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 24.AUG.2011 10:54:53

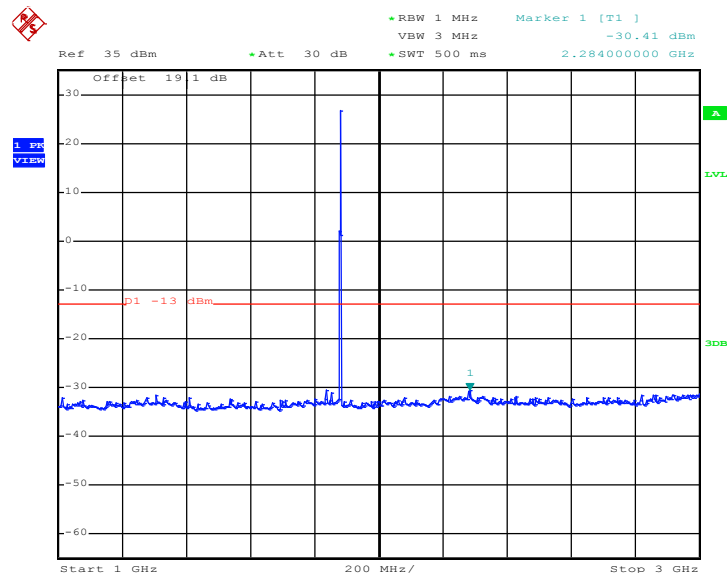Conducted Emission Plot between 1GHz ~ 3GHz


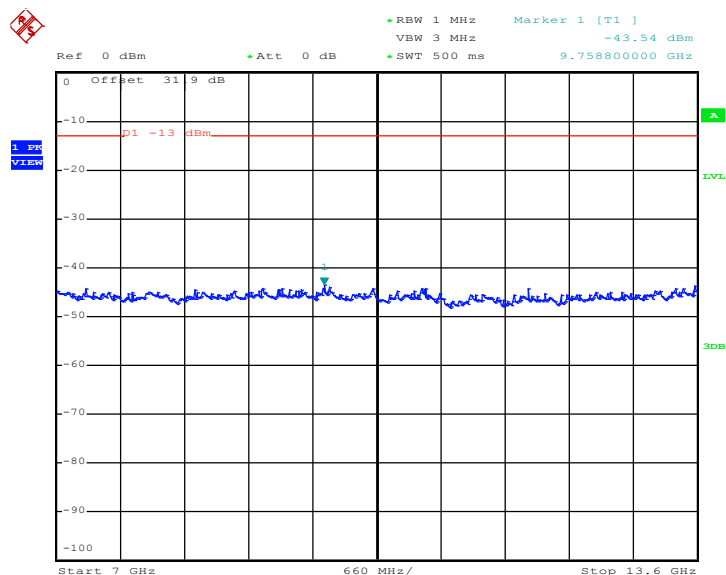
Date: 24.AUG.2011 10:57:36

Conducted Emission Plot between 3GHz ~ 7GHz

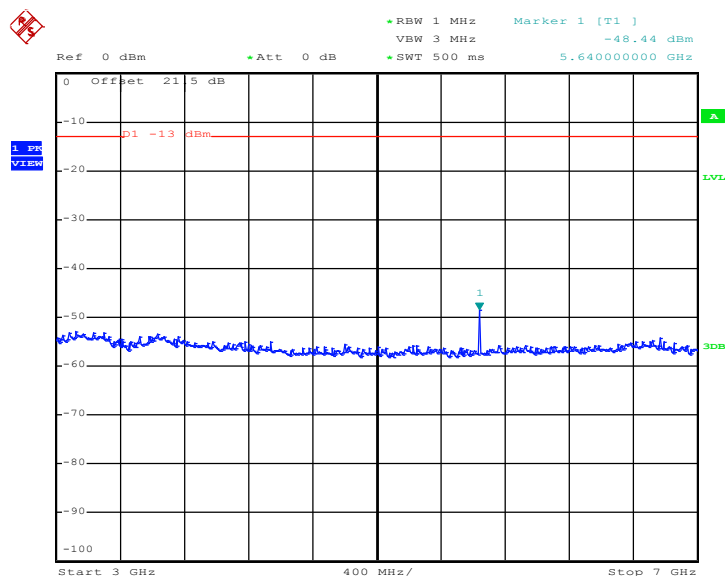

Date: 24.AUG.2011 11:03:24


Conducted Emission Plot between 7GHz ~ 13.6GHz



Date: 24.AUG.2011 11:05:33




Conducted Emission Plot between 13.6GHz ~ 19.1GHz

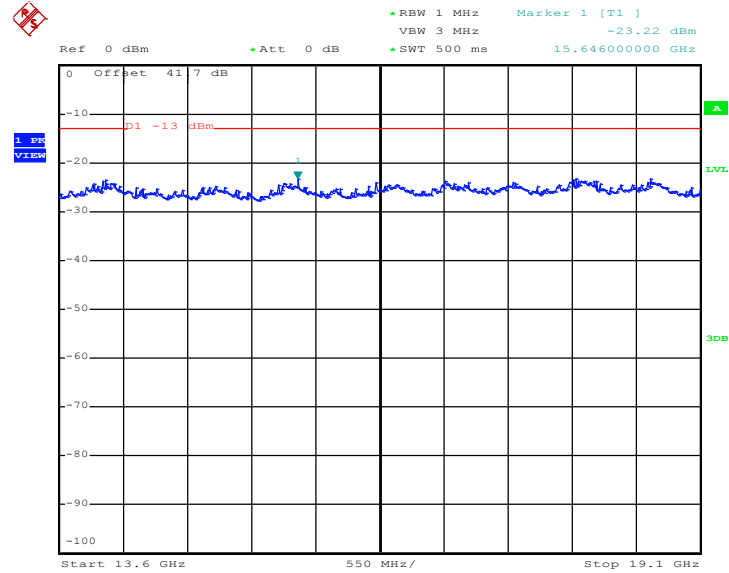

Date: 24.AUG.2011 11:06:13


Band :	WCDMA Band V	Channel :	CH4182
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

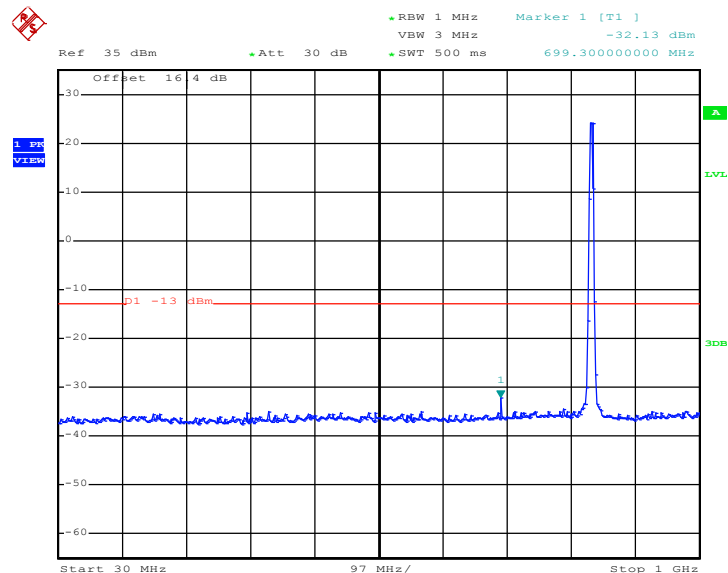

Date: 24.AUG.2011 11:59:23

Conducted Emission Plot between 1GHz ~ 3GHz

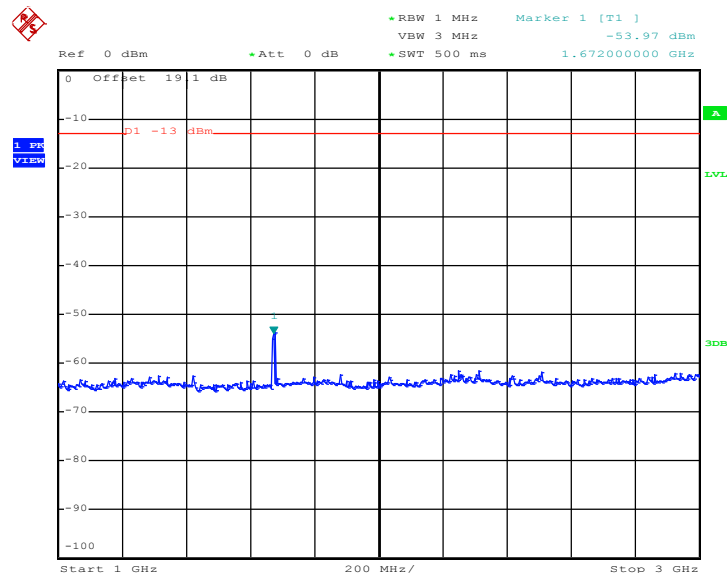

Date: 24.AUG.2011 12:00:13




Conducted Emission Plot between 7GHz ~ 9GHz






Band :	WCDMA Band IV	Channel :	CH1413
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

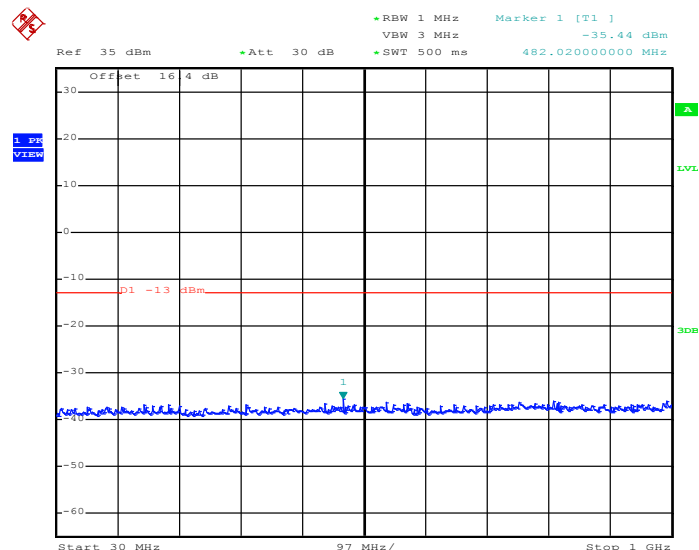

Date: 27.SEP.2011 20:25:48

Conducted Emission Plot between 1GHz ~ 3GHz

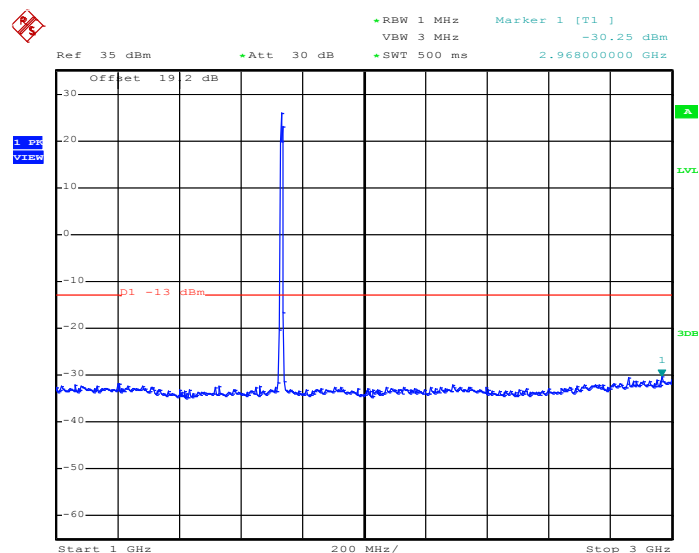

Date: 31.OCT.2011 20:02:57



The screenshot shows a Spectrum Analyzer interface. The top status bar displays the following information:

- Ref: 0 dBm
- Att: 0 dB
- RBW: 1 MHz
- VBW: 3 MHz
- SWT: 500 ms
- Marker 1 [T1]: -51.84 dBm
- Frequency: 3.456000000 GHz

The main display area shows a frequency spectrum from 3 GHz to 7 GHz. The vertical axis represents power in dBm, ranging from -100 to 0. A red horizontal line is drawn at -13 dBm, labeled "P1 -13 dBm". A blue trace shows the noise floor, which is approximately -55 dBm. A green cursor is positioned at the noise floor, labeled "1".

Date: 27.SEP.2011 20:28:53

Ref 0 dBm Att 0 dB RBW 1 MHz Marker 1 [T1] -43.92 dBm
VBW 3 MHz SWT 500 ms 13.481200000 GHz

0 Offset 31 4 dB

-10
-20
-30
-40
-50
-60
-70
-80
-90
-100


1. dB VIEW

Start 7 GHz 660 MHz/ Stop 13.6 GHz

Date: 27.SEP.2011 20:30:01




Conducted Emission Plot between 13.6GHz ~ 19.1GHz

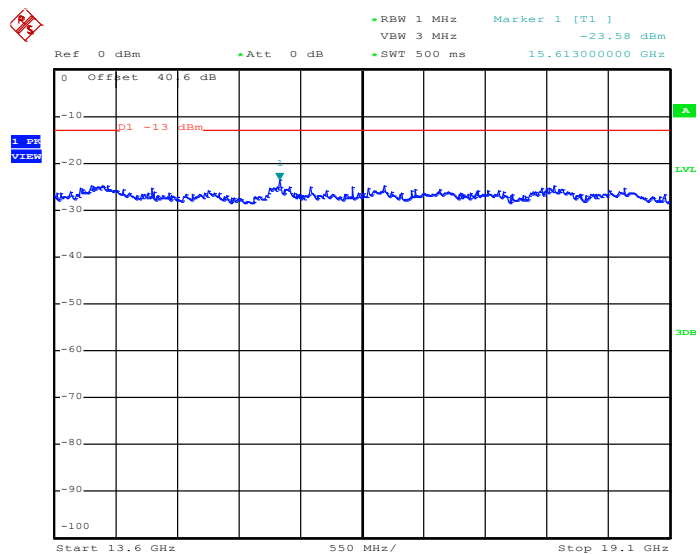

Date: 27.SEP.2011 20:30:40


Band :	WCDMA Band II	Channel :	CH9400
Test Mode :	RMC 12.2Kbps Link		

Conducted Emission Plot between 30MHz ~ 1GHz

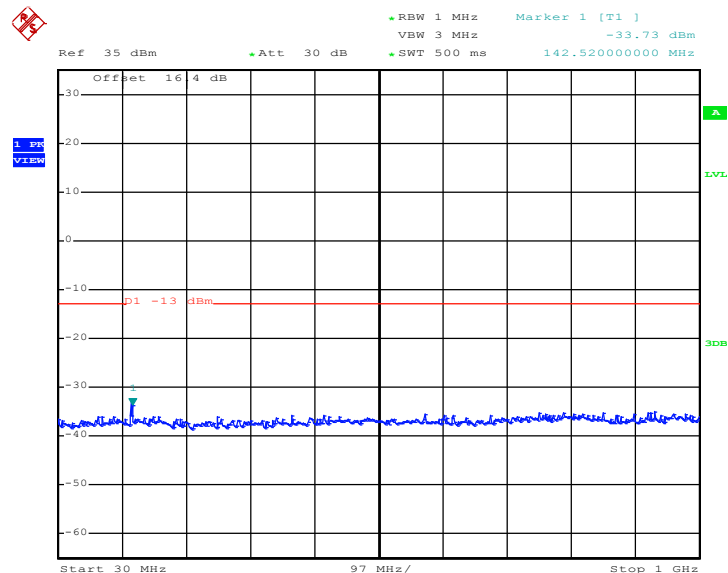


Date: 24.AUG.2011 12:03:41

Conducted Emission Plot between 1GHz ~ 3GHz

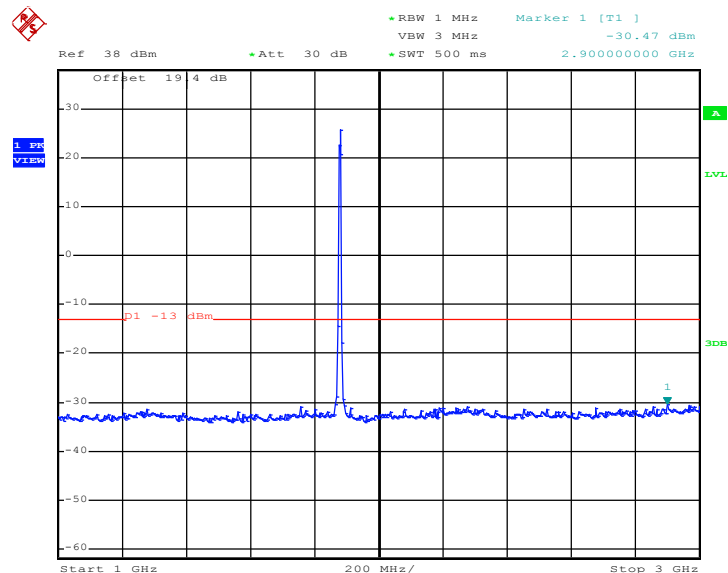


Date: 24.AUG.2011 12:04:52

Conducted Emission Plot between 3GHz ~ 7GHz

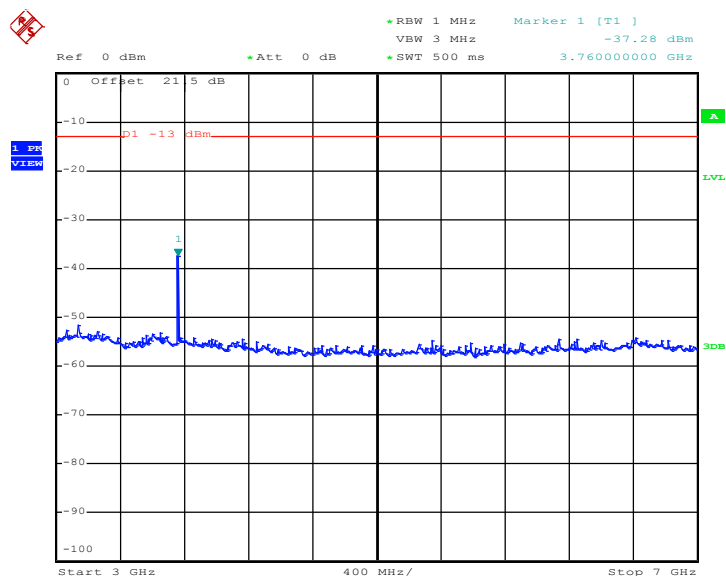

Date: 24.AUG.2011 12:05:33


Conducted Emission Plot between 7GHz ~ 13.6GHz

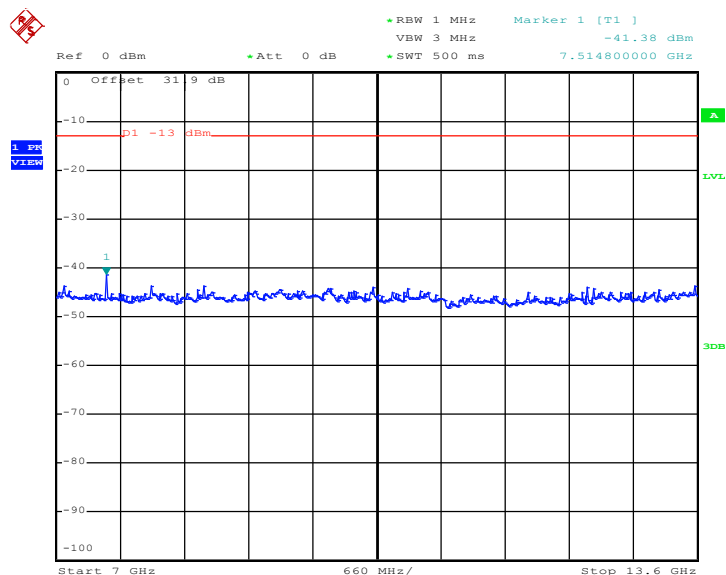

Date: 24.AUG.2011 12:06:34




Conducted Emission Plot between 13.6GHz ~ 19.1GHz

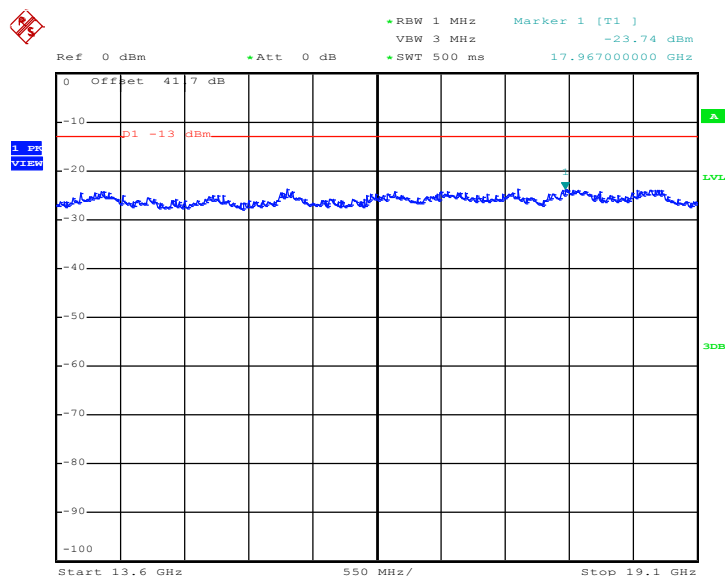

Date: 24.AUG.2011 12:07:08


Band :	CDMA2000 BC0	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

Conducted Emission Plot between 30MHz ~ 1GHz

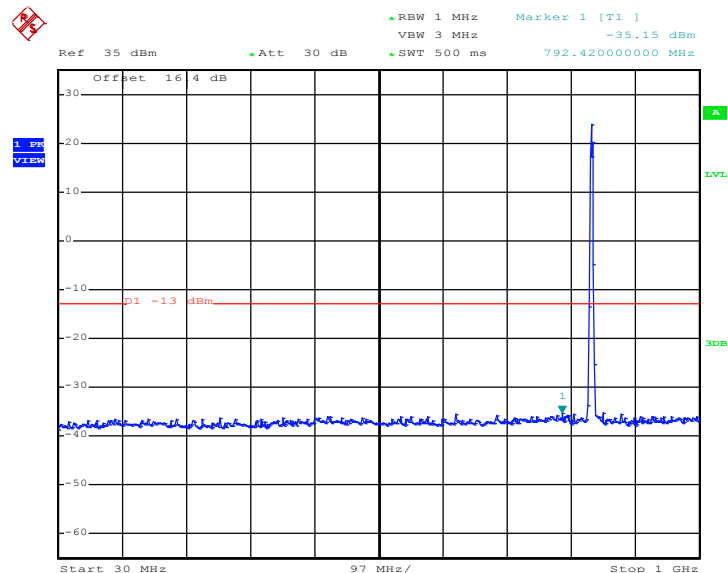


Date: 24.AUG.2011 10:40:26

Conducted Emission Plot between 1GHz ~ 3GHz

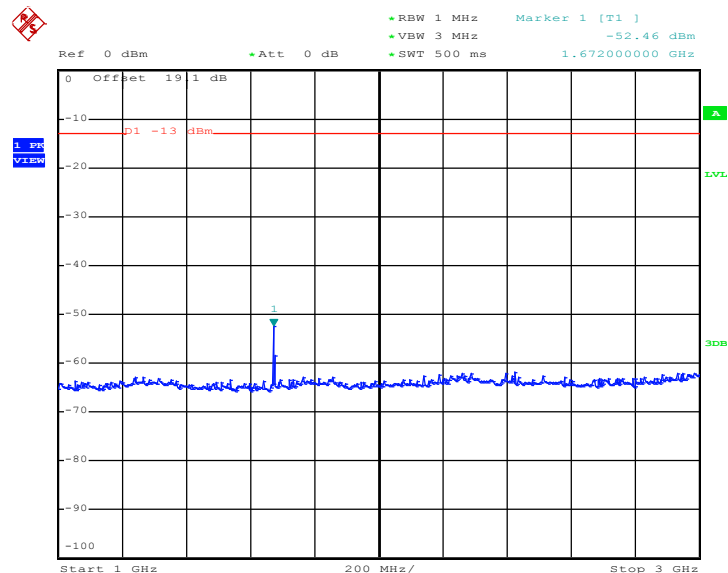


Date: 24.AUG.2011 10:42:16

Conducted Emission Plot between 3GHz ~ 7GHz

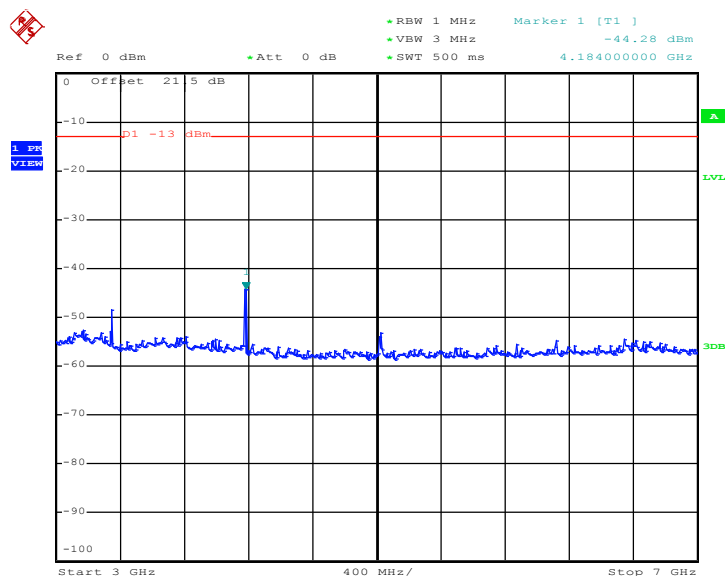


Date: 24.AUG.2011 10:43:17

Conducted Emission Plot between 7GHz ~ 9GHz

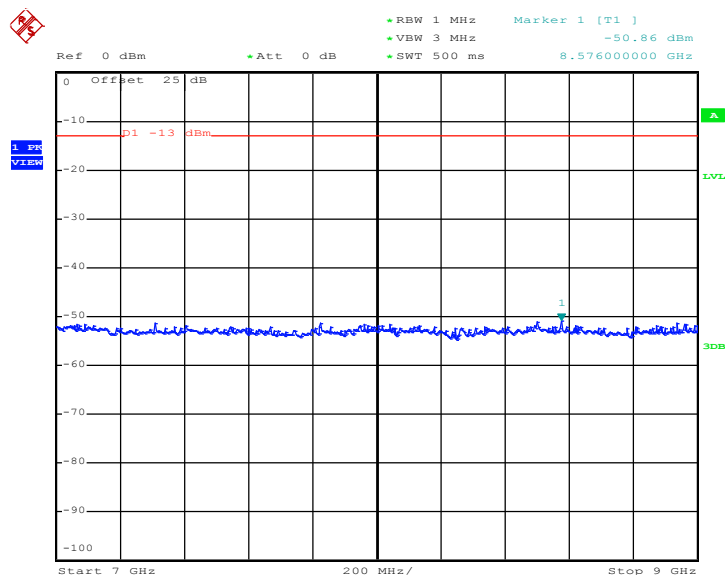


Date: 24.AUG.2011 10:43:53

Band :	CDMA2000 BC1	Power Stage :	High
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K		

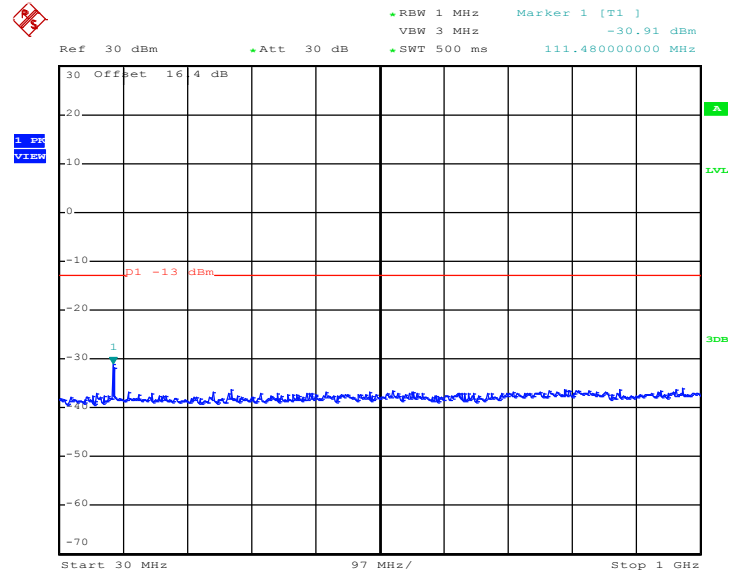
Conducted Emission Plot between 30MHz ~ 1GHz


Date: 24.AUG.2011 10:24:07

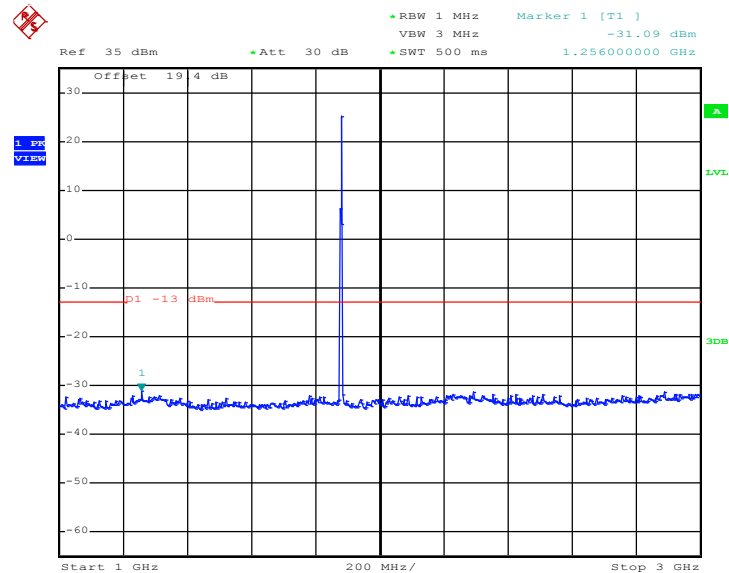Conducted Emission Plot between 1GHz ~ 3GHz


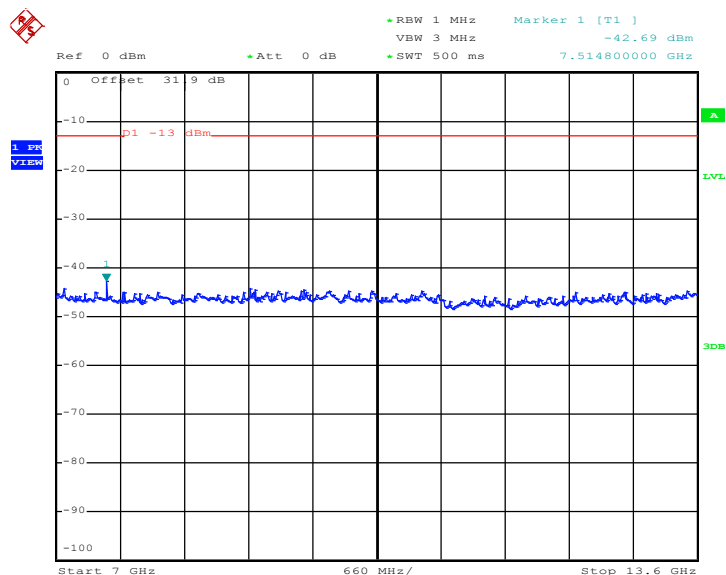
Date: 24.AUG.2011 10:31:38

Conducted Emission Plot between 3GHz ~ 7GHz

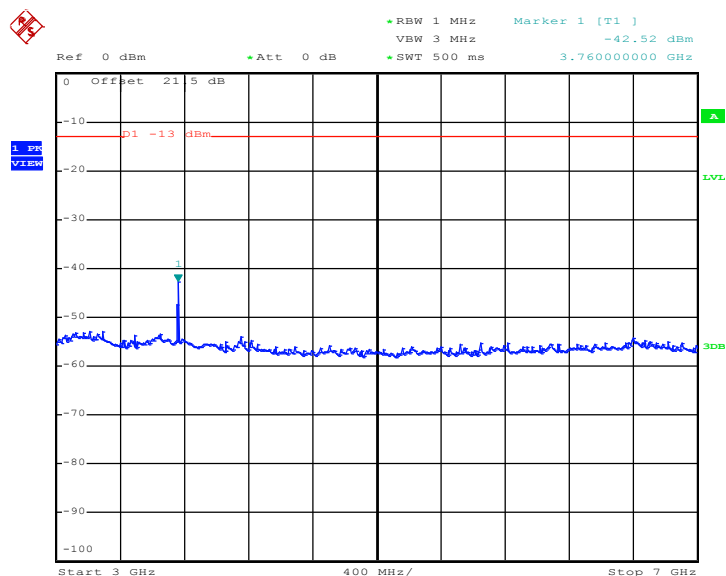

Date: 24.AUG.2011 10:34:29


Conducted Emission Plot between 7GHz ~ 13.6GHz



Date: 24.AUG.2011 10:35:49



Conducted Emission Plot between 13.6GHz ~ 19.1GHz

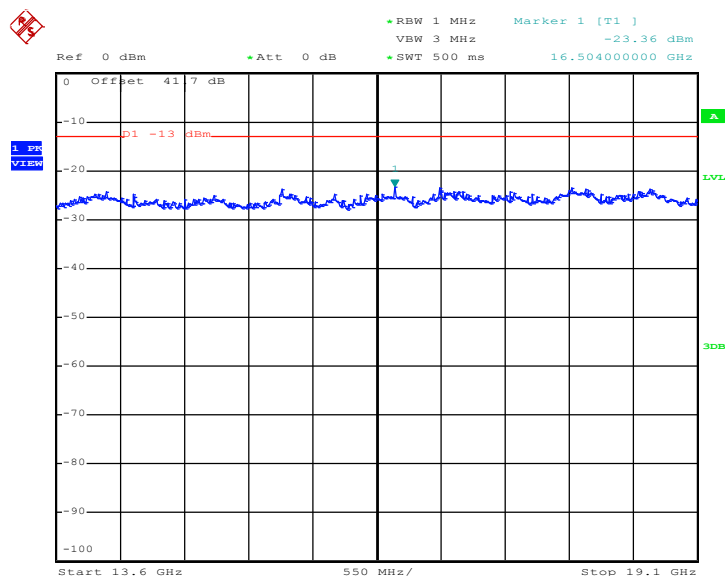

Date: 24.AUG.2011 10:36:45

3.6 Field Strength of Spurious Radiation Measurement

3.6.1 Description of Field Strength of Spurious Radiated Measurement

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-C-2004. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

3.6.3 Test Procedures


1. The EUT was placed on a rotatable wooden table with 0.8 meter about ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$

3.6.4 Test Setup

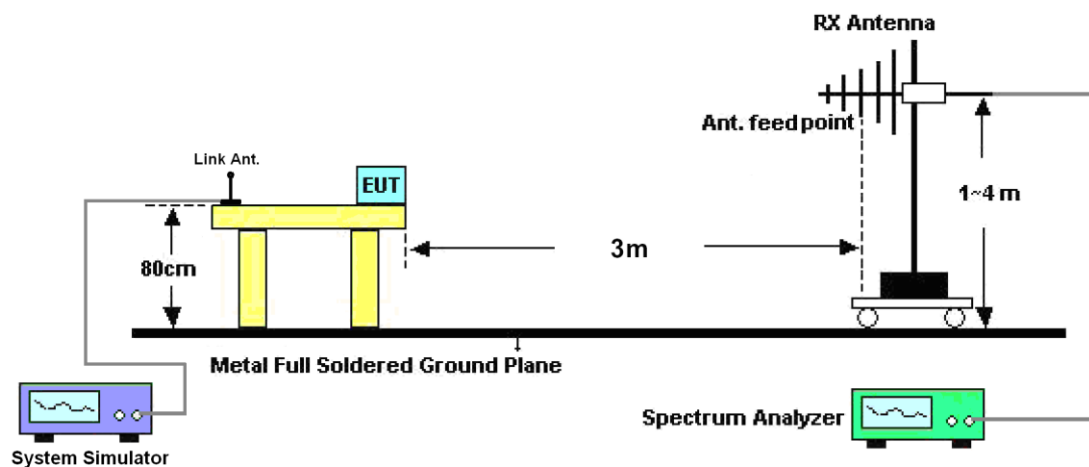


3.6.5 Test Result of Field Strength of Spurious Radiated

Band :	GSM850	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

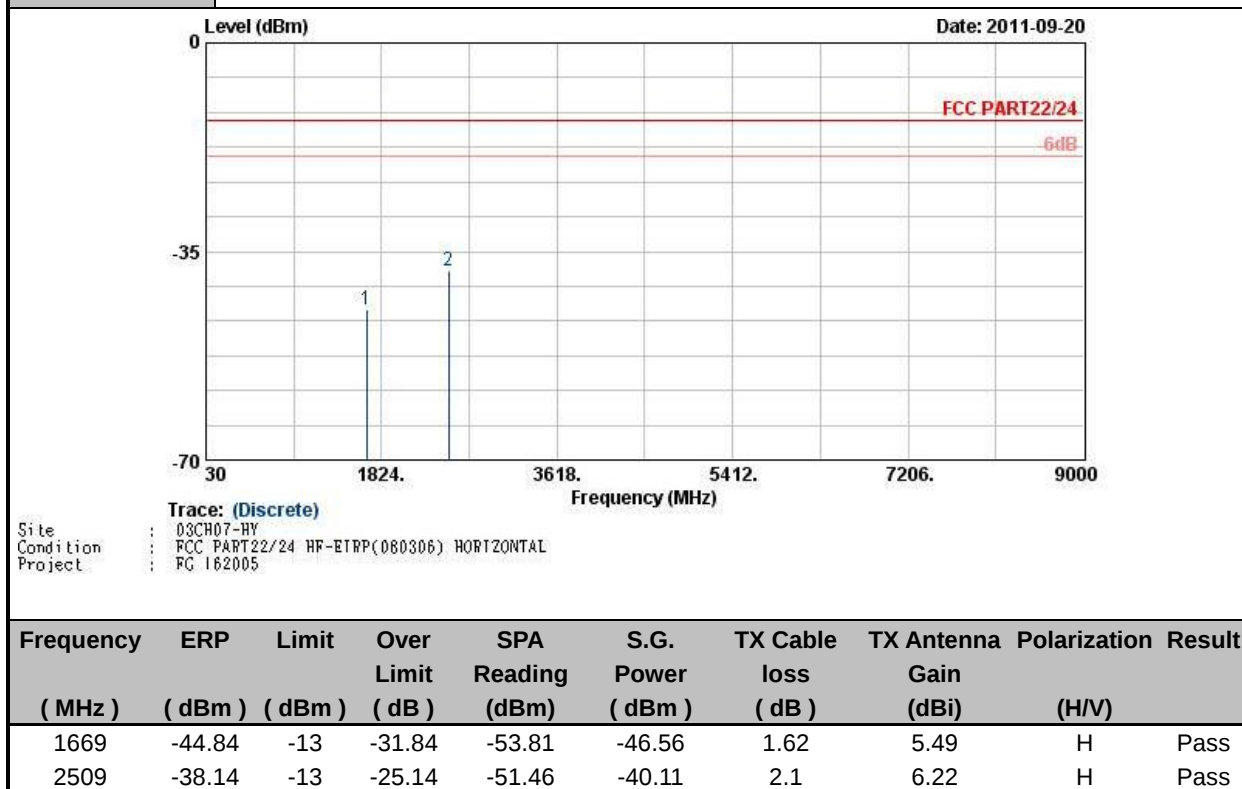


Band :	GSM850	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

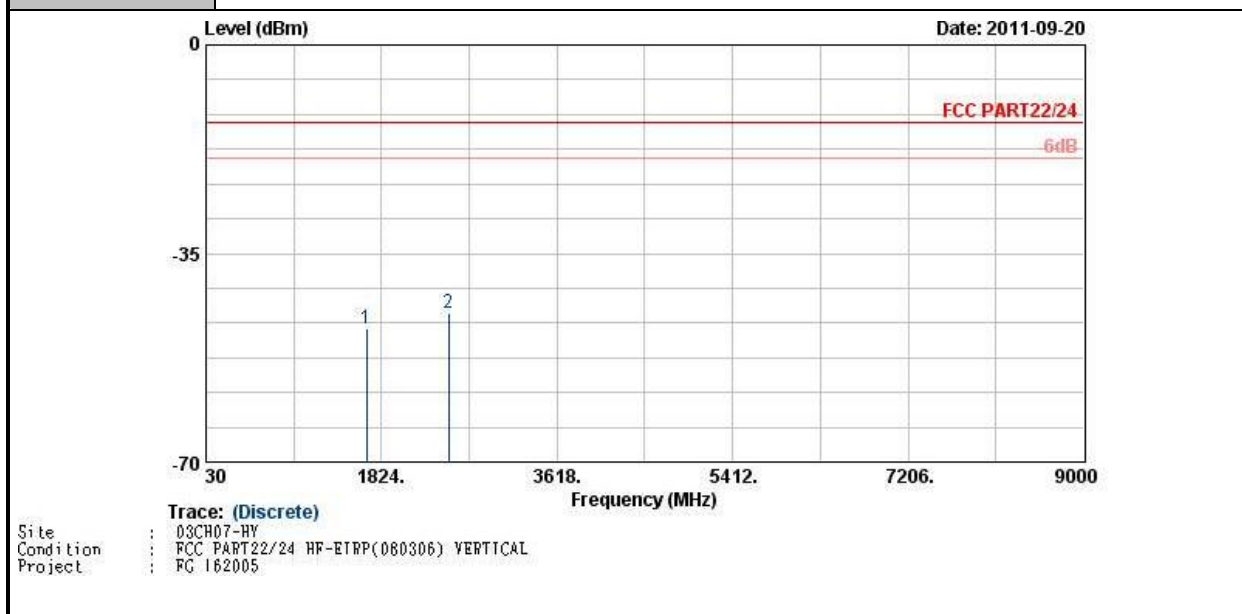

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-47.61	-13	-34.61	-58.77	-49.33	1.62	5.49	V	Pass
2509	-45.07	-13	-32.07	-58.84	-47.04	2.1	6.22	V	Pass




Band :	GSM850	Temperature :	22~26°C
Test Mode :	EDGE 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

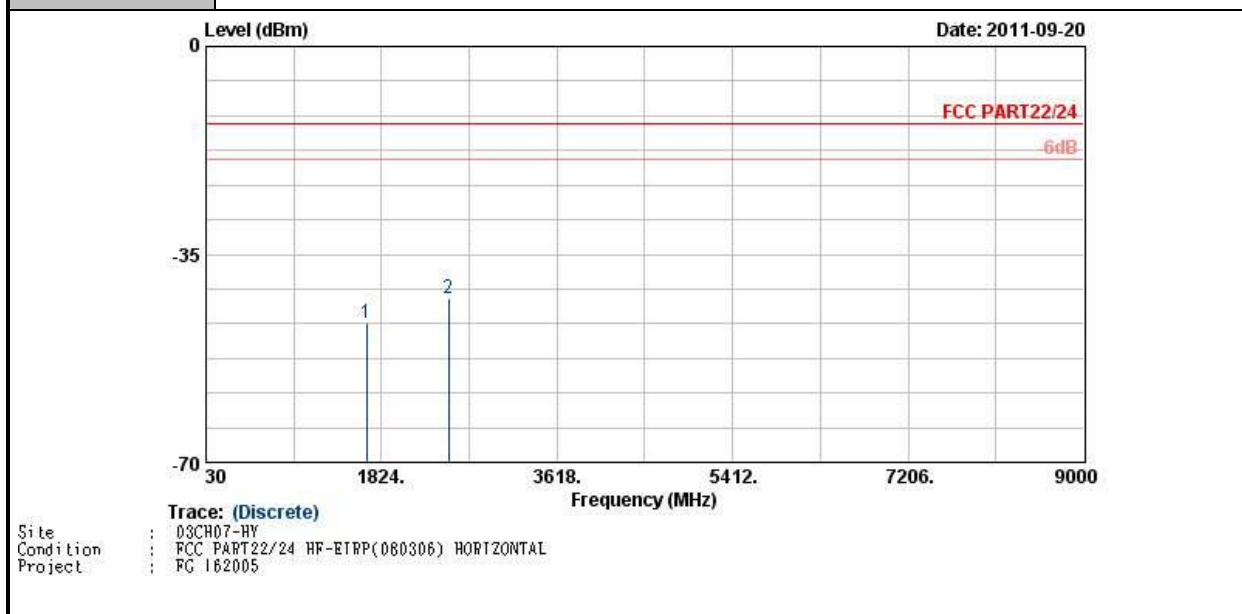

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-46.62	-13	-33.62	-55.54	-48.34	1.62	5.49	H	Pass
2509	-42.41	-13	-29.41	-55.83	-44.38	2.1	6.22	H	Pass




Band :	GSM850	Temperature :	22~26°C
Test Mode :	EDGE 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

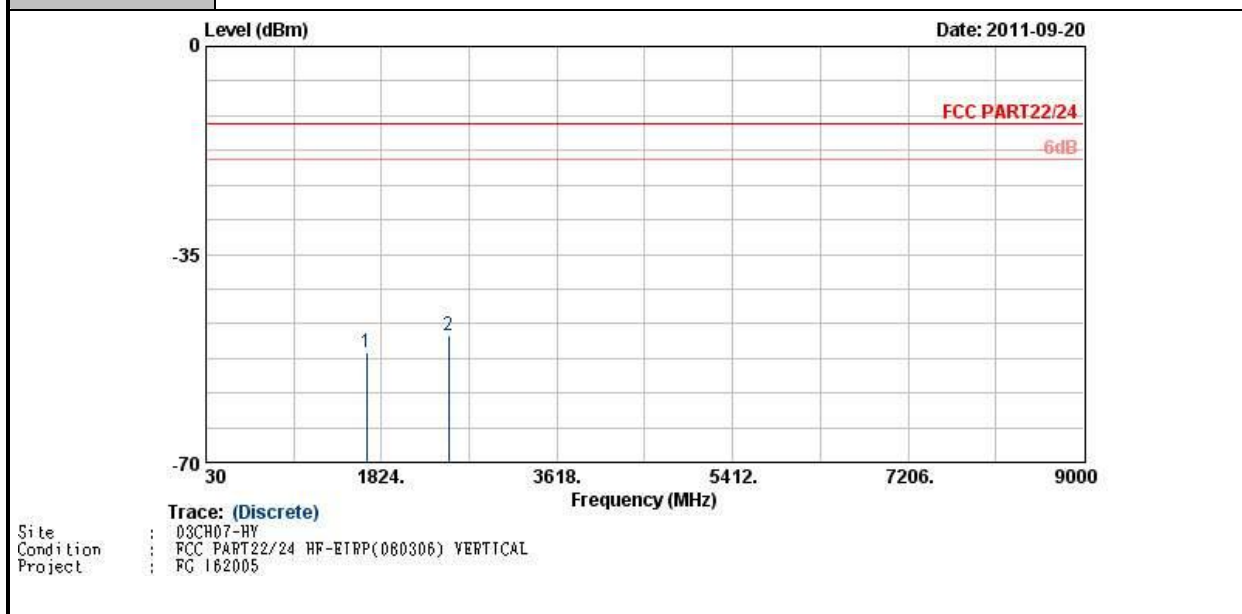

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-51.45	-13	-38.45	-62.59	-53.17	1.62	5.49	V	Pass
2509	-48.64	-13	-35.64	-62.47	-50.61	2.1	6.22	V	Pass




Band :	GSM850	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

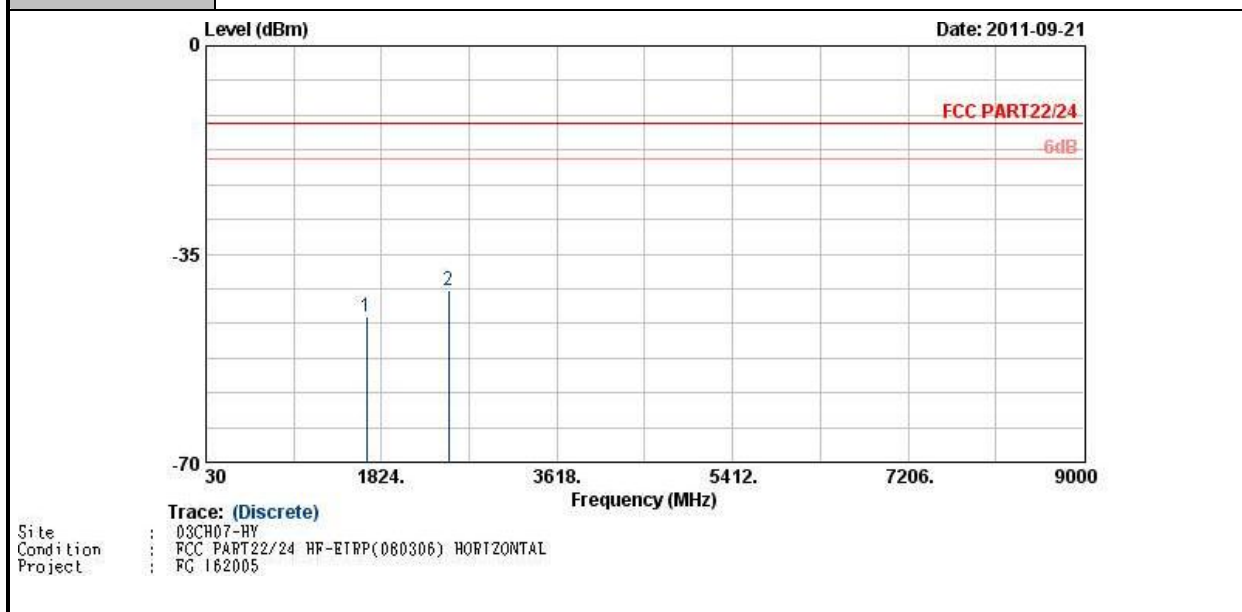

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-45.60	-13	-32.60	-55.13	-47.32	1.62	5.49	H	Pass
2509	-41.22	-13	-28.22	-55.83	-43.19	2.1	6.22	H	Pass




Band :	GSM850	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

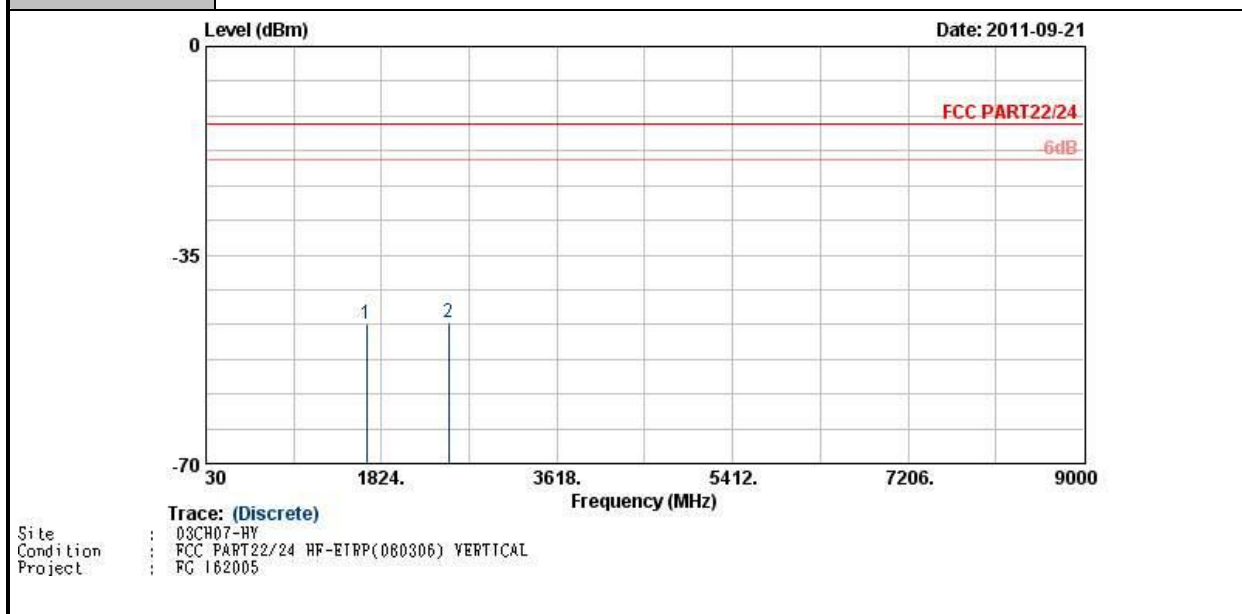

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1672	-46.64	-13	-33.64	-58.8	-48.36	1.62	5.49	V	Pass
2509	-46.34	-13	-33.34	-61.35	-48.31	2.1	6.22	V	Pass




Band :	GSM1900	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

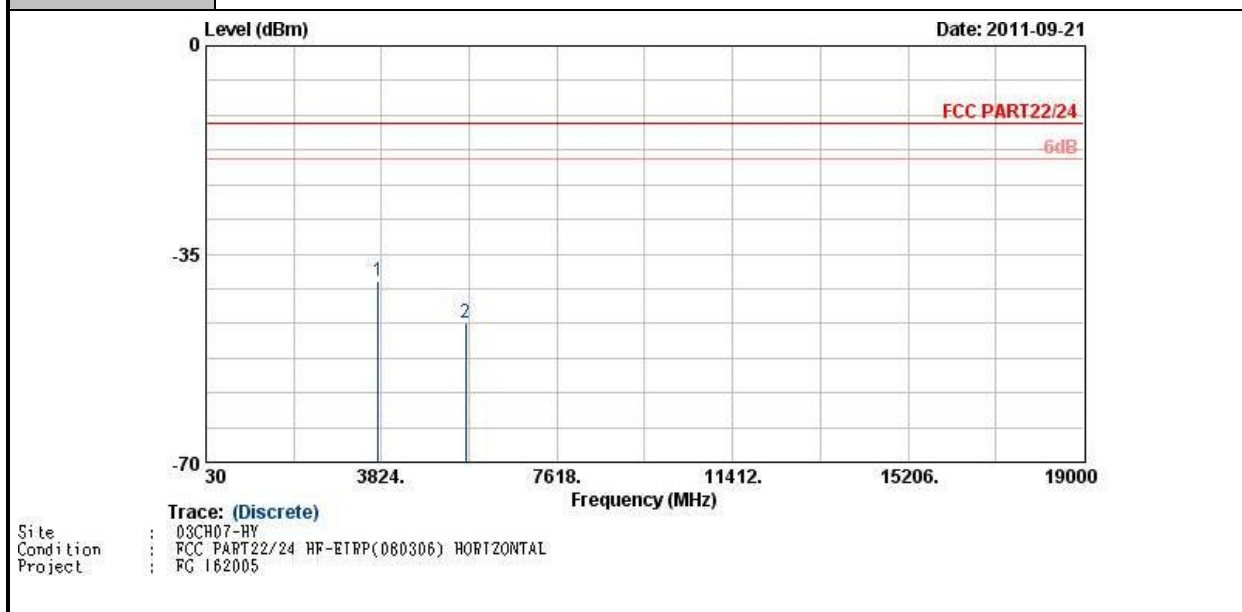

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-39.56	-13	-26.56	-54.99	-45.86	2.51	8.81	H	Pass
5636	-46.48	-13	-33.48	-67.39	-54.19	2.99	10.70	H	Pass




Band :	GSM1900	Temperature :	22~26°C
Test Mode :	GPRS 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

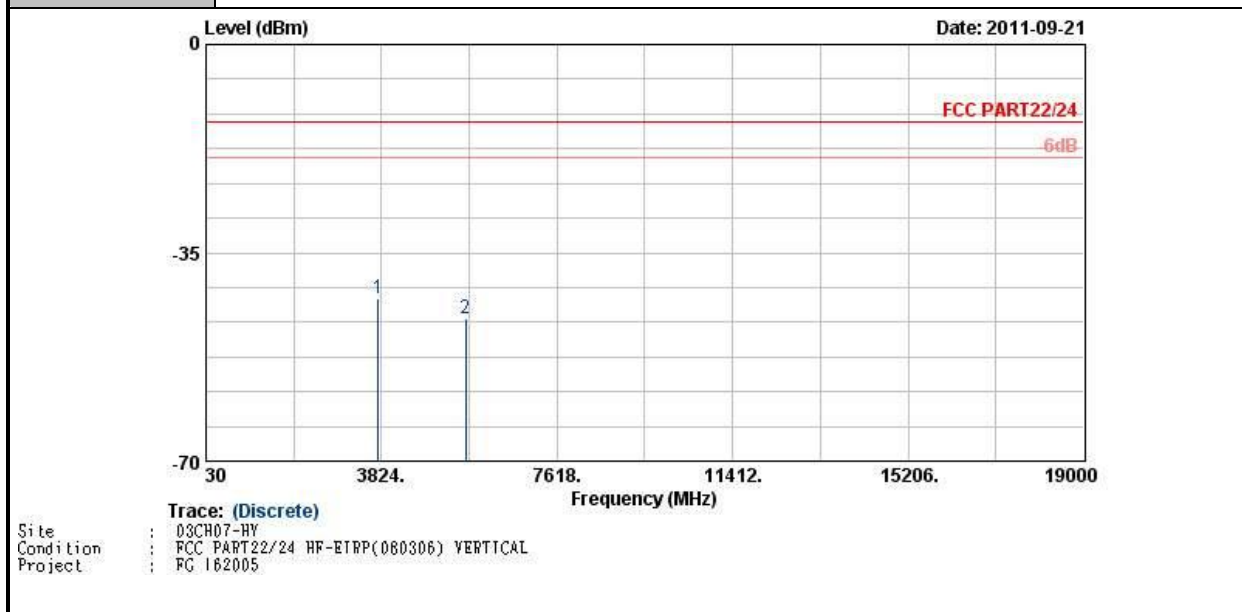

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.67	-13	-29.67	-59.07	-48.97	2.51	8.81	V	Pass
5636	-46.18	-13	-33.18	-66.77	-53.89	2.99	10.70	V	Pass




Band :	GSM1900	Temperature :	22~26°C
Test Mode :	EDGE 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

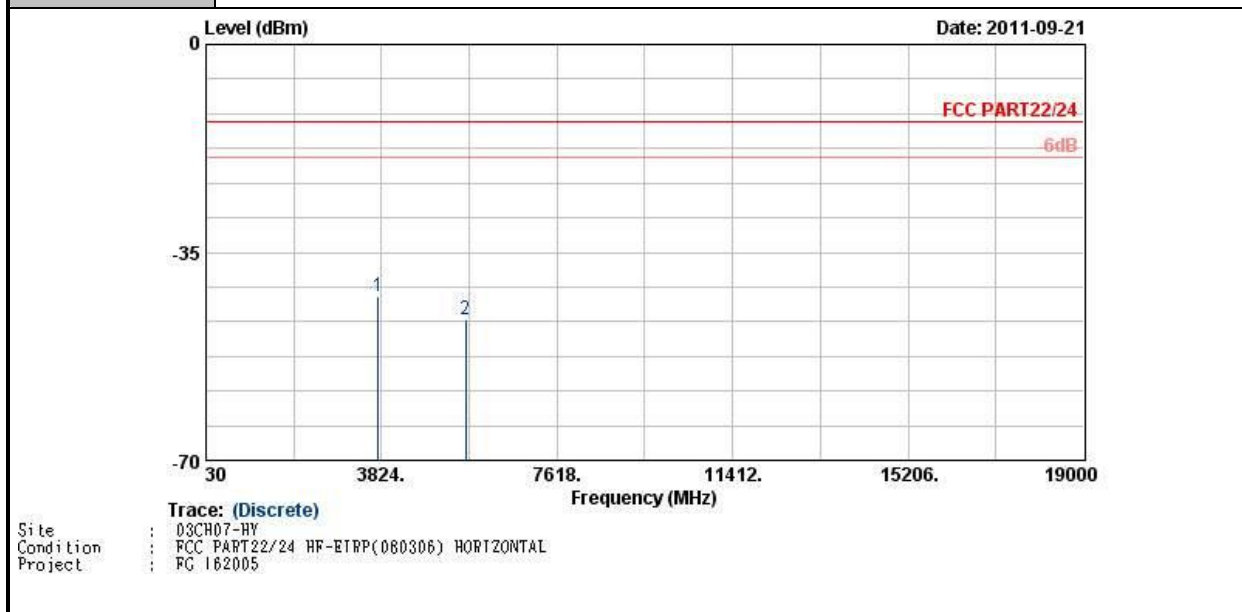

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-42.39	-13	-29.39	-57.76	-48.69	2.51	8.81	H	Pass
5636	-46.40	-13	-33.40	-67.34	-54.11	2.99	10.70	H	Pass




Band :	GSM1900	Temperature :	22~26°C
Test Mode :	EDGE 8 Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

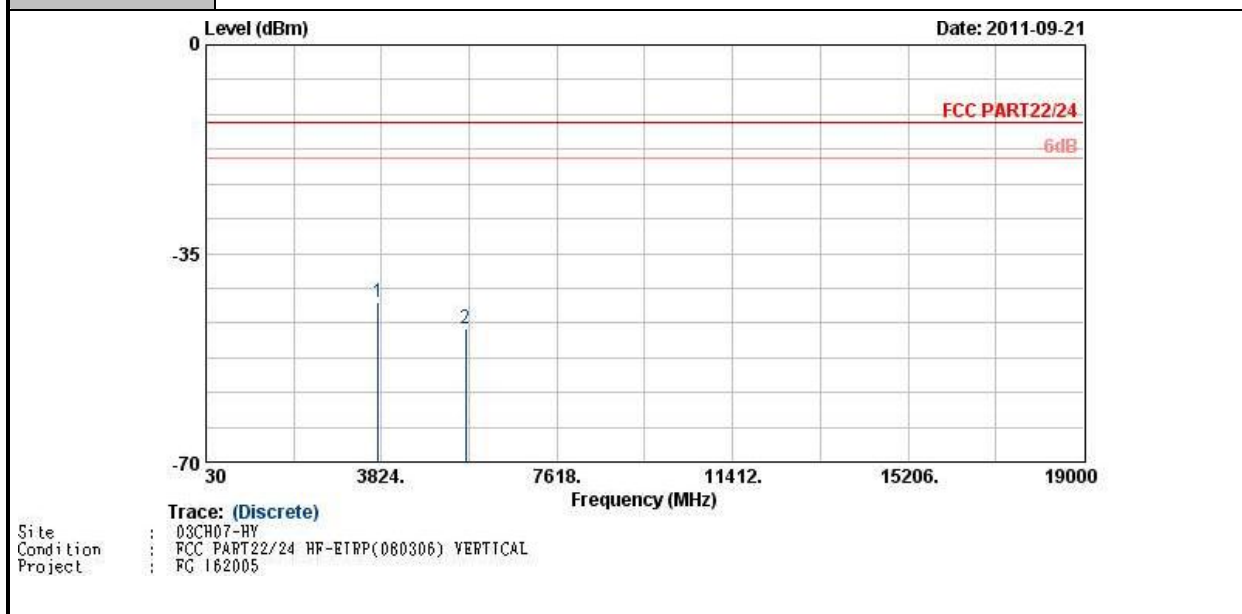

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-43.16	-13	-30.16	-59.52	-49.46	2.51	8.81	V	Pass
5636	-47.53	-13	-34.53	-68.11	-55.24	2.99	10.70	V	Pass




Band :	WCDMA Band V	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

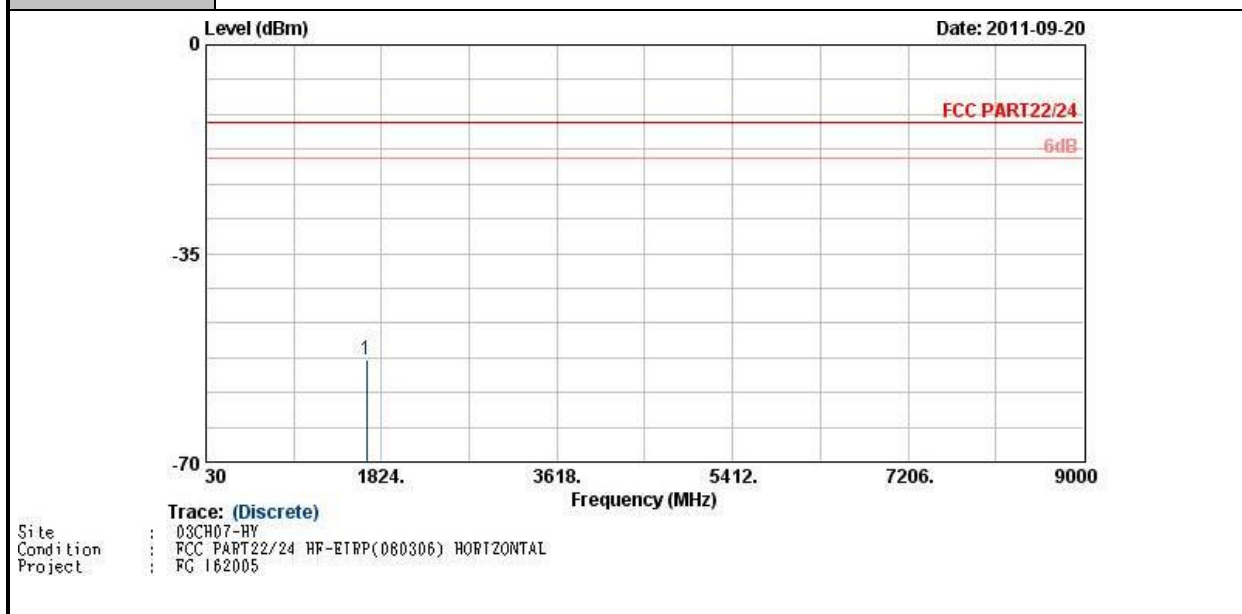

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-52.70	-13	-39.70	-61.68	-54.42	1.62	5.49	H	Pass




Band :	WCDMA Band V	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

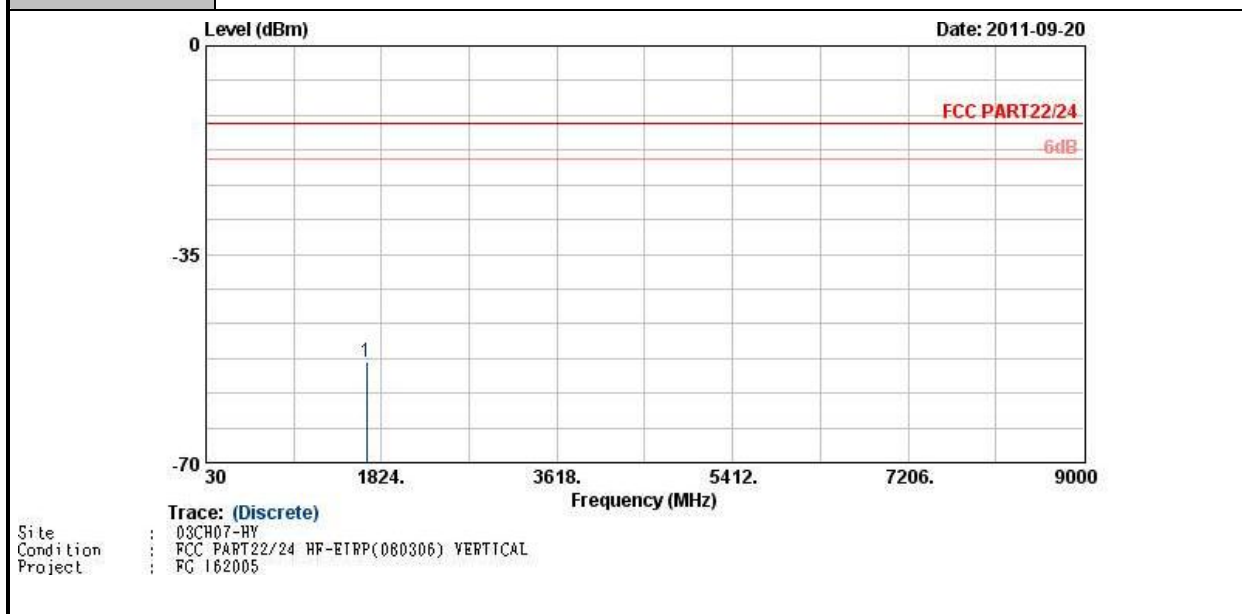


Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.17	-13	-40.17	-64.34	-54.89	1.62	5.49	V	Pass


Band :	WCDMA Band IV	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

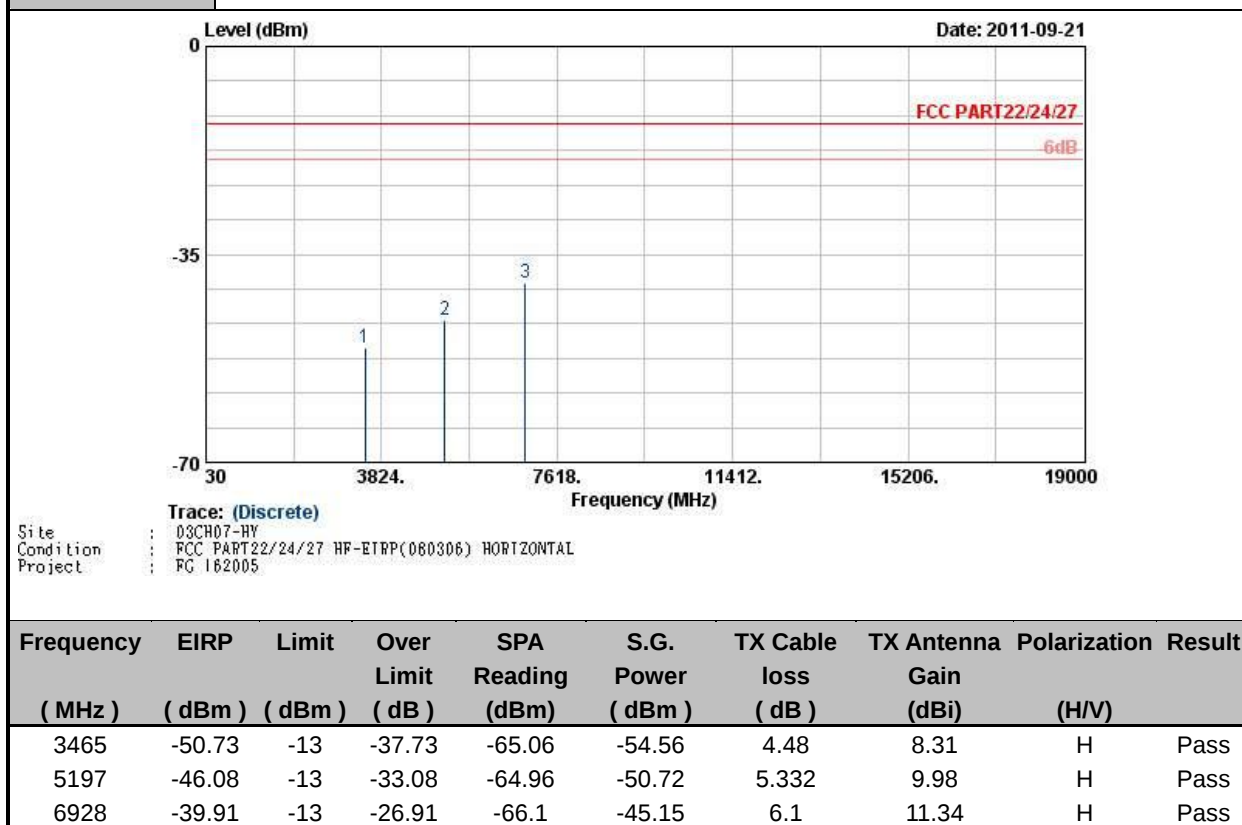


Band :	WCDMA Band IV	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

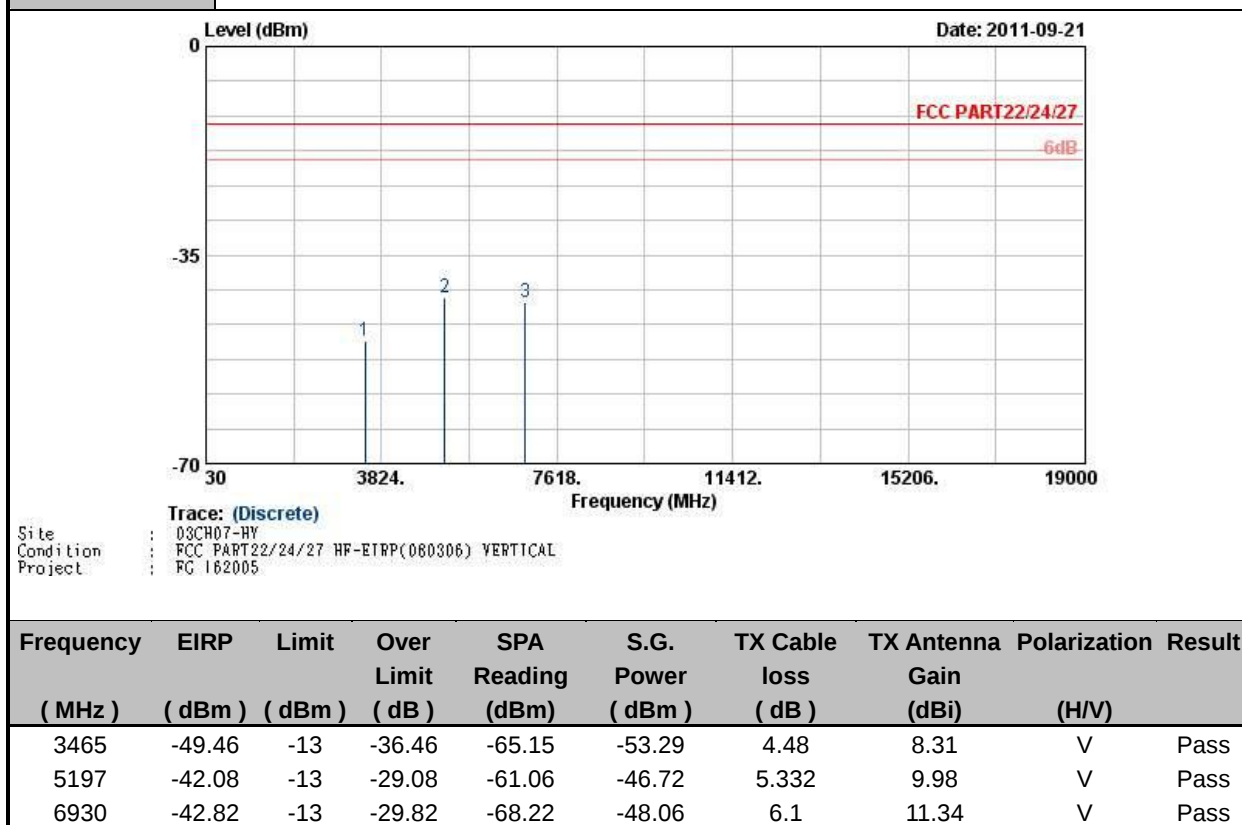

Band :	WCDMA Band IV	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

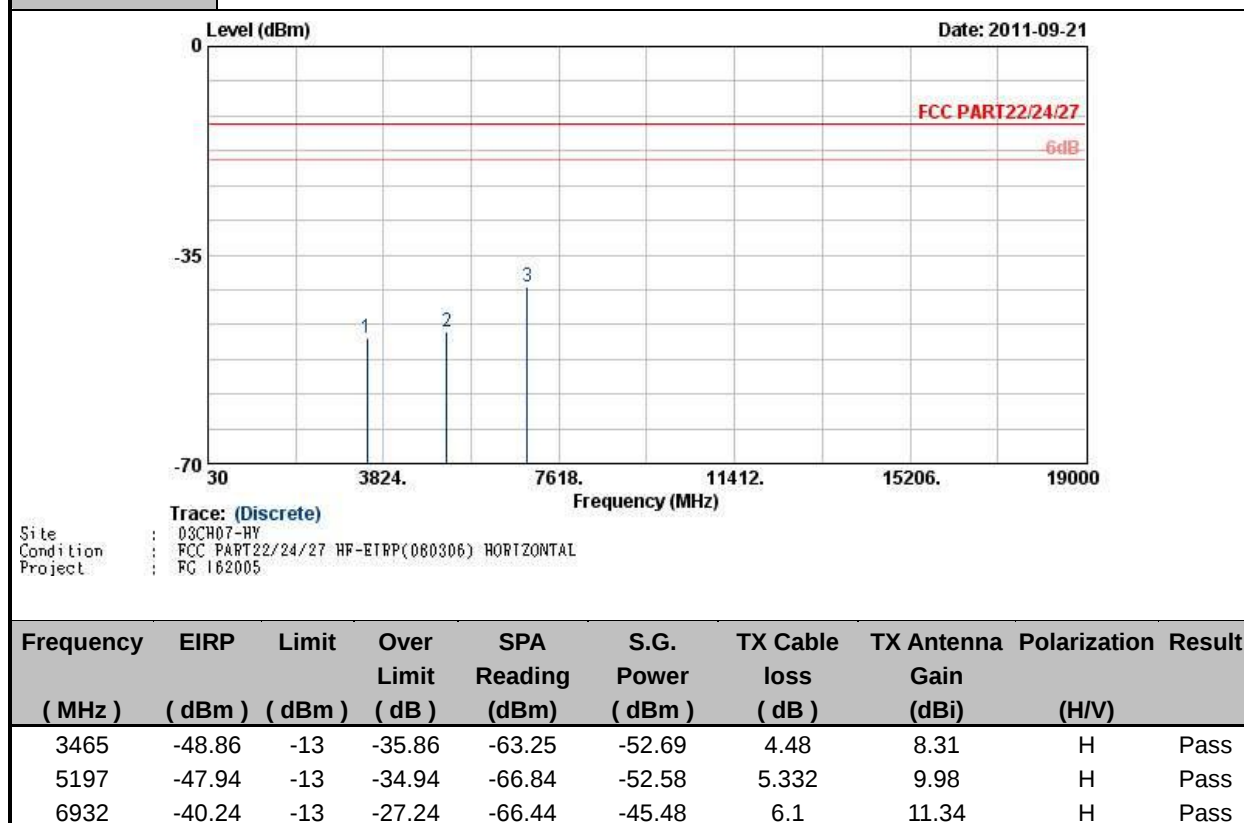


Band :	WCDMA Band IV	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

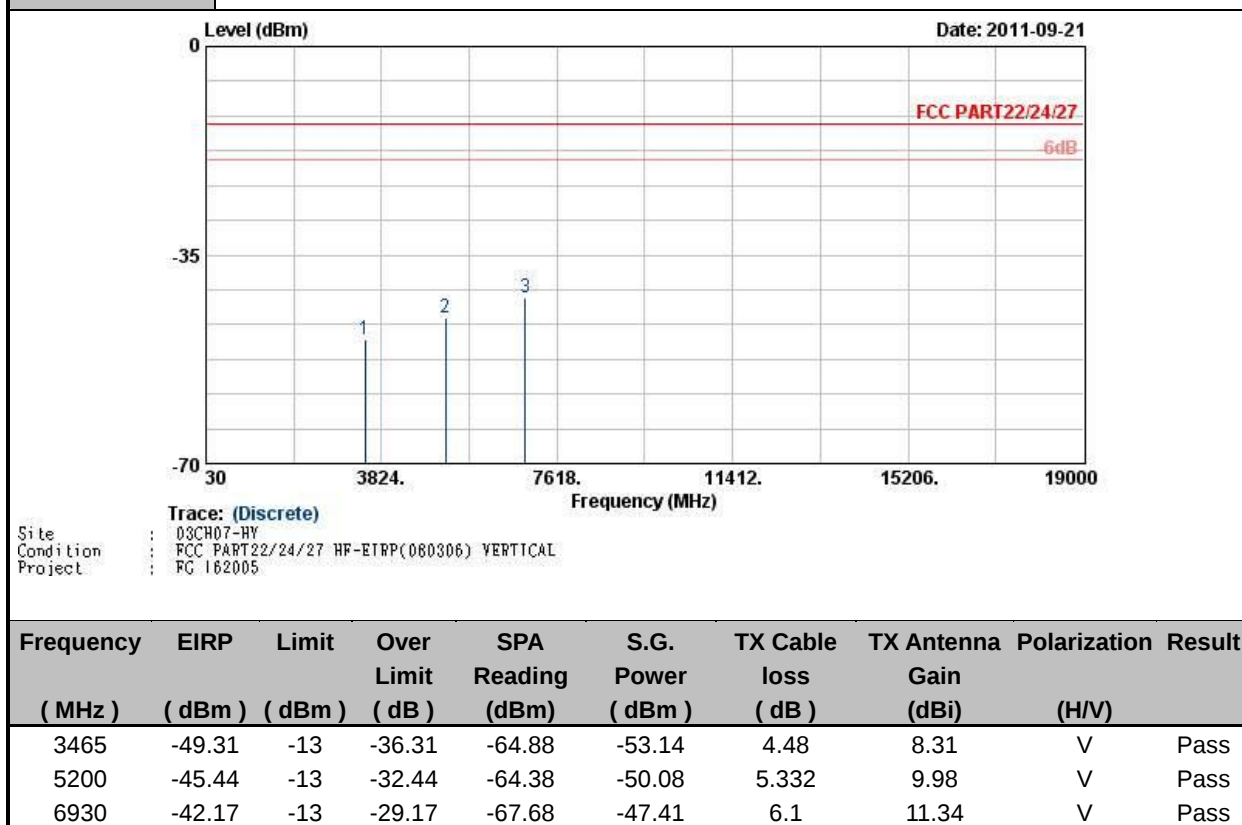




Band :	WCDMA Band II	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

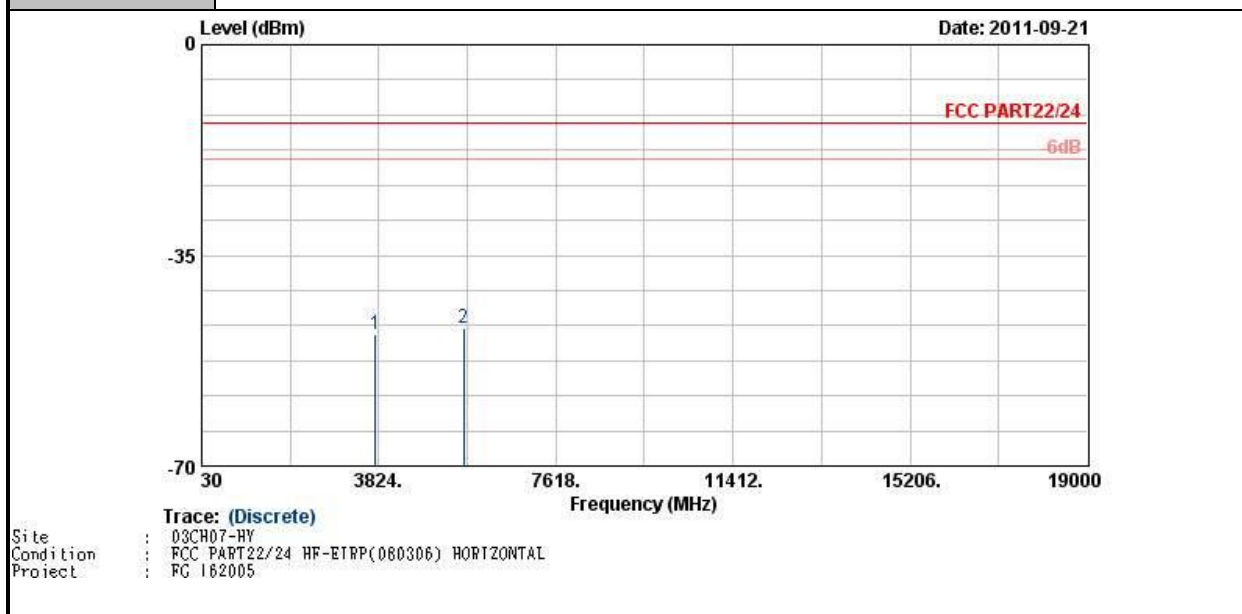

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-48.23	-13	-35.23	-63.74	-54.53	2.51	8.81	H	Pass
5636	-47.15	-13	-34.15	-67.99	-54.86	2.99	10.70	H	Pass


Band :	WCDMA Band II	Temperature :	22~26°C
Test Mode :	RMC 12.2Kbps Link for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

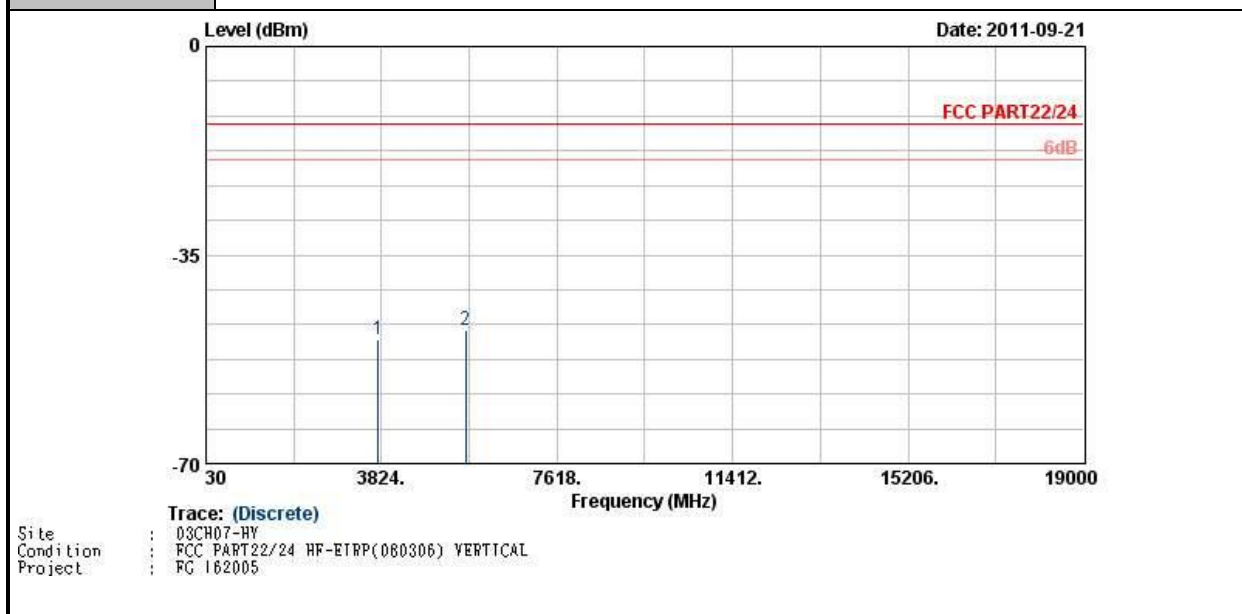

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-49.31	-13	-36.31	-65.74	-55.61	2.51	8.81	V	Pass
5636	-47.71	-13	-34.71	-68.37	-55.42	2.99	10.70	V	Pass




Band :	CDMA2000 BC0	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

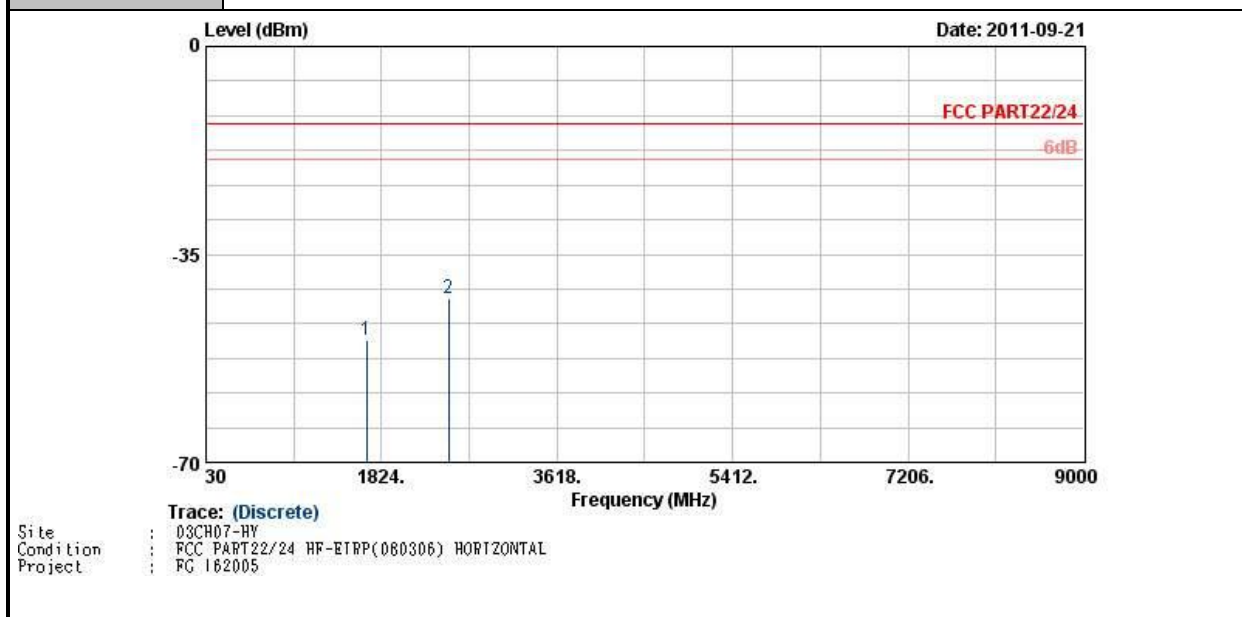

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-49.37	-13	-36.37	-58.3	-51.09	1.62	5.49	H	Pass
2509	-42.49	-13	-29.49	-55.85	-44.46	2.1	6.22	H	Pass




Band :	CDMA2000 BC0	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

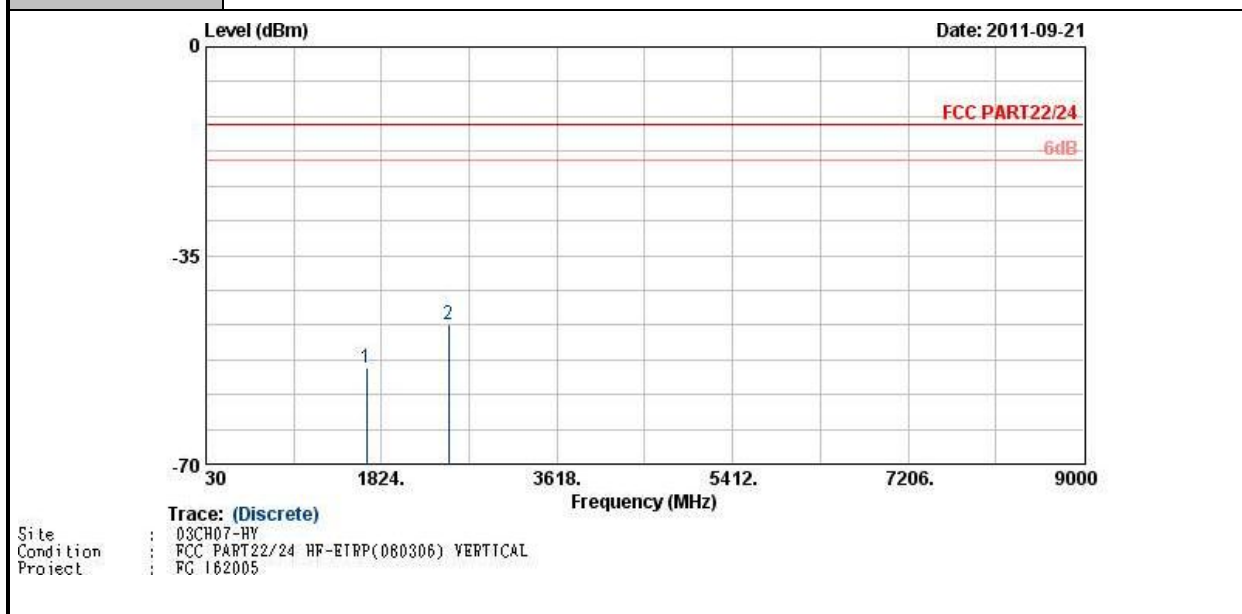

Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
1669	-53.79	-13	-40.79	-64.95	-55.51	1.62	5.49	V	Pass
2509	-46.65	-13	-33.65	-60.49	-48.62	2.1	6.22	V	Pass




Band :	CDMA2000 BC1	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

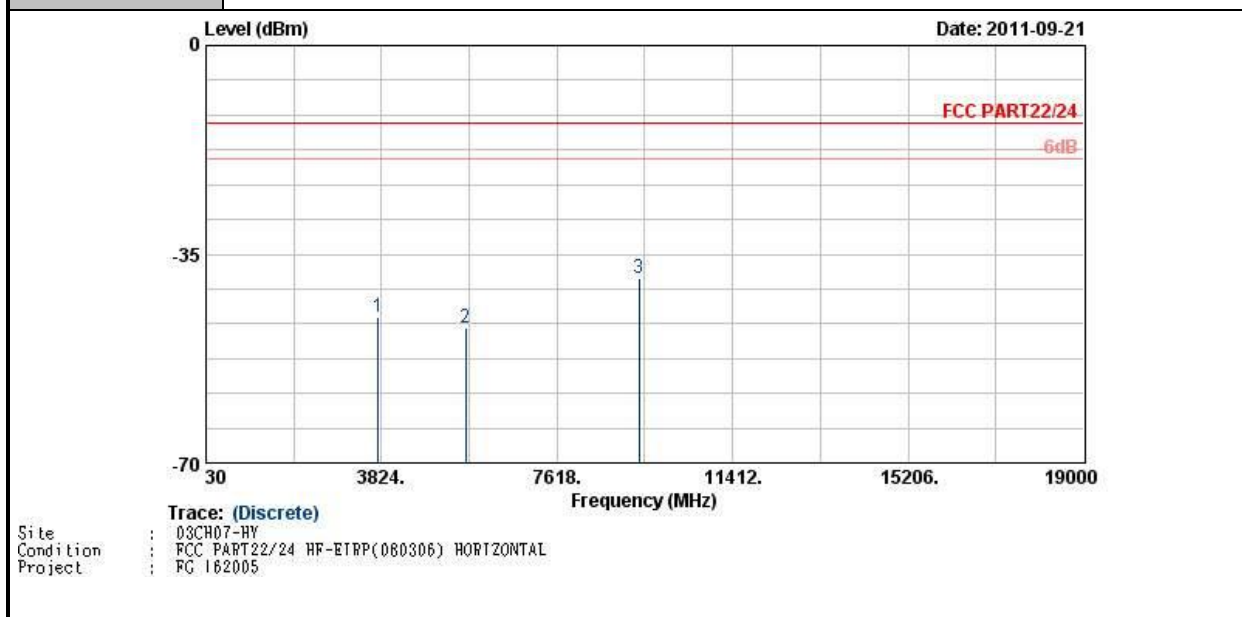


Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-45.50	-13	-32.50	-60.92	-51.8	2.51	8.81	H	Pass
5636	-47.39	-13	-34.39	-68.17	-55.1	2.99	10.70	H	Pass
9396	-38.96	-13	-25.96	-65.52	-48.06	4.1	13.20	H	Pass

Band :	CDMA2000 BC1	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 1	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

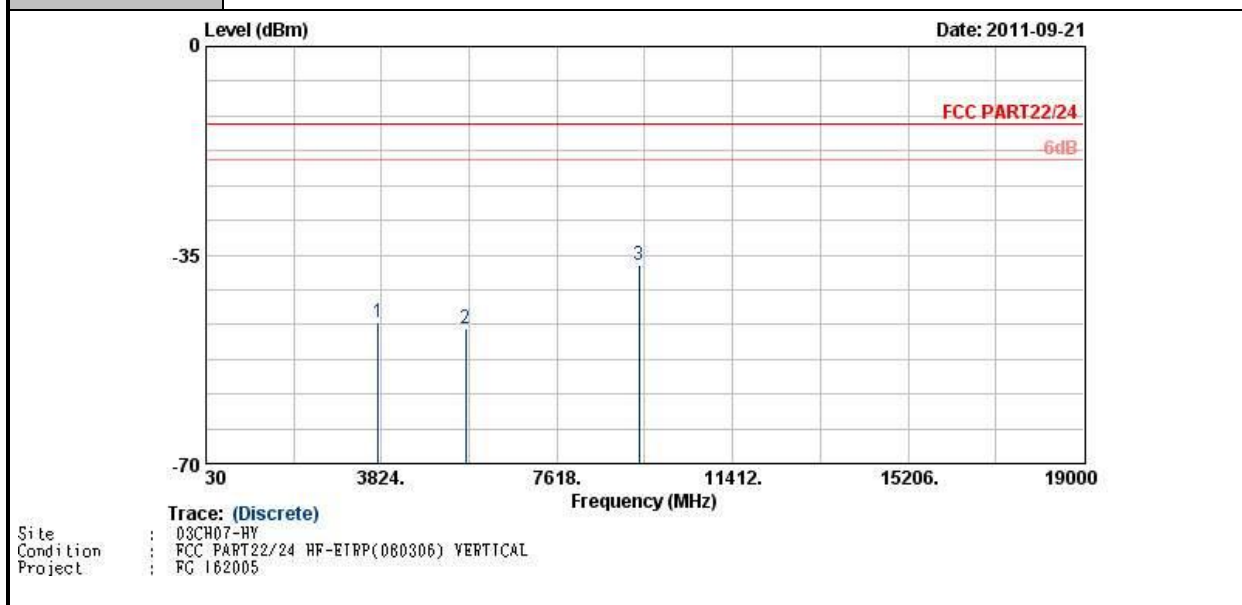

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.38	-13	-33.38	-62.74	-52.68	2.51	8.81	V	Pass
5636	-47.33	-13	-34.33	-67.96	-55.04	2.99	10.70	V	Pass
9396	-36.61	-13	-23.61	-62.99	-45.71	4.1	13.20	V	Pass


Band :	CDMA2000 BC1	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Horizontal
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

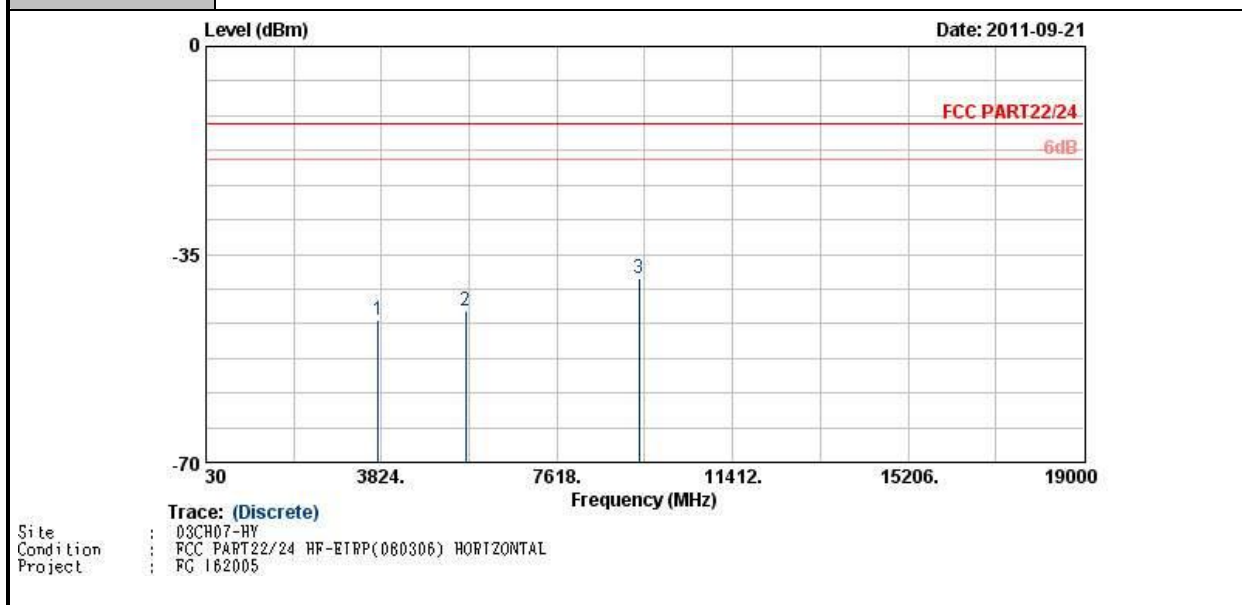

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-46.13	-13	-33.13	-61.57	-52.43	2.51	8.81	H	Pass
5636	-44.50	-13	-31.50	-65.36	-52.21	2.99	10.70	H	Pass
9396	-39.10	-13	-26.10	-65.66	-48.2	4.1	13.20	H	Pass



Band :	CDMA2000 BC1	Temperature :	22~26°C
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K for Keypad 2	Relative Humidity :	49~51%
Test Engineer :	David Yang	Polarization :	Vertical
Remark :	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.		

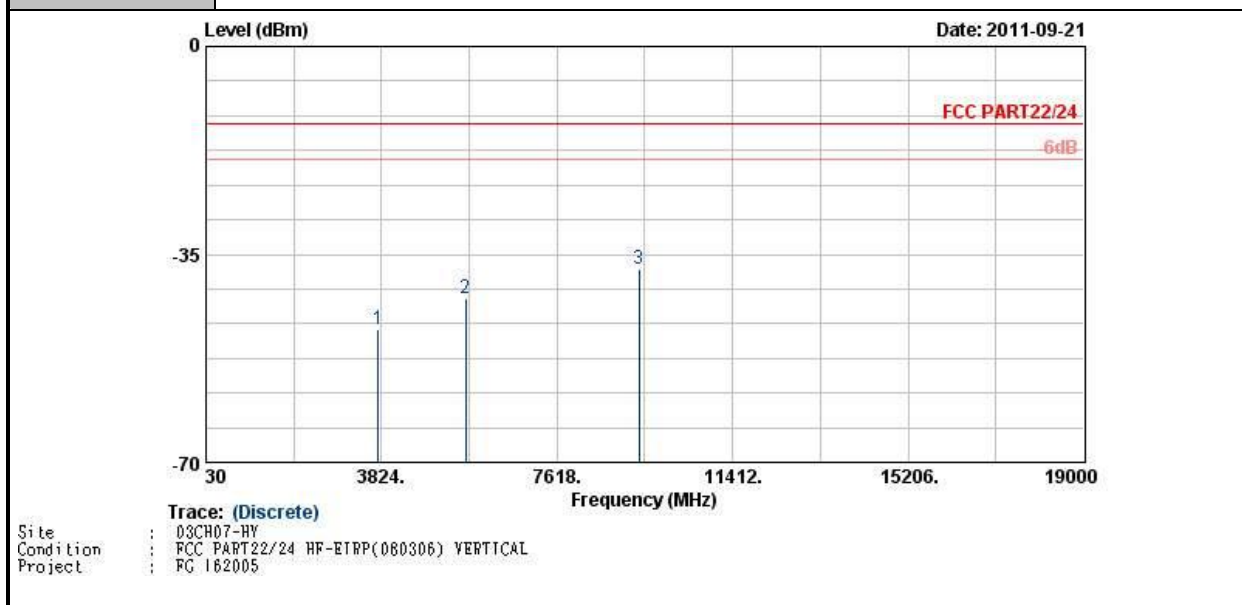

Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	Result
3760	-47.75	-13	-34.75	-63.05	-54.05	2.51	8.81	V	Pass
5636	-42.43	-13	-29.43	-63.09	-50.14	2.99	10.70	V	Pass
9396	-37.49	-13	-24.49	-63.93	-46.59	4.1	13.20	V	Pass

3.7 Frequency Stability Measurement

3.7.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.7.2 Measuring Instruments

See list of measuring instruments of this test report.


3.7.3 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.
4. If the EUT cannot be turned on at -30°C , the testing lowest temperature will be raised in 10°C step until the EUT can be turned on.

3.7.4 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

3.7.5 Test Setup

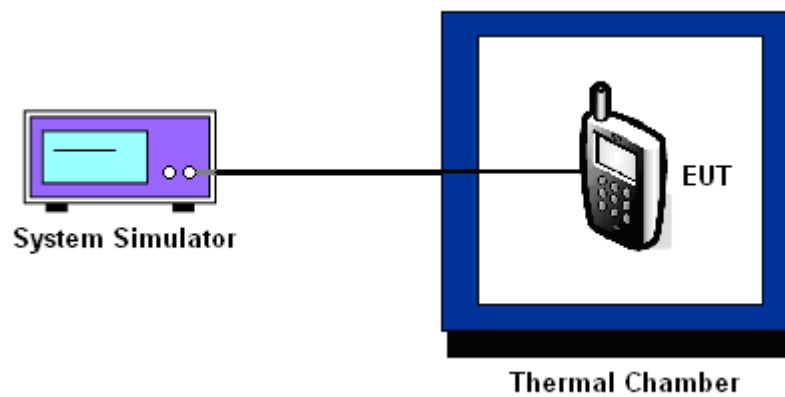

3.7.6 Test Result of Temperature Variation

Band :	GSM 850	Channel :	189
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	N/A	N/A	N/A	N/A	
-10	-42	-0.05	-37	-0.04	
0	-39	-0.05	-35	-0.04	
10	-41	-0.05	-33	-0.04	
20	-35	-0.04	-34	-0.04	
30	-33	-0.04	-30	-0.04	
40	-29	-0.03	-29	-0.03	
50	-34	-0.04	-31	-0.04	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

Band :	GSM 1900	Channel :	661
Limit (ppm) :	2.5		

Temperature (°C)	GPRS 8		EDGE 8		Result
	Freq. Dev. (Hz)	Deviation (ppm)	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	N/A	N/A	PASS
-20	N/A	N/A	N/A	N/A	
-10	-61	-0.03	-64	-0.03	
0	-57	-0.03	-55	-0.03	
10	-52	-0.03	-56	-0.03	
20	-54	-0.03	-54	-0.03	
30	-46	-0.02	-53	-0.03	
40	-48	-0.03	-51	-0.03	
50	-49	-0.03	-53	-0.03	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

Band :	WCDMA Band V	Channel :	4182
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	11	0.01	
0	13	0.02	
10	10	0.01	
20	9	0.01	
30	8	0.01	
40	9	0.01	
50	11	0.01	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

Band :	WCDMA Band IV	Channel :	1413
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-16	-0.01	
0	-19	-0.01	
10	-15	-0.01	
20	-14	-0.01	
30	-12	-0.01	
40	-16	-0.01	
50	-13	-0.01	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

Band :	WCDMA Band II	Channel :	9400
Limit (ppm) :	2.5		

Temperature (°C)	RMC 12.2Kbps		Result
	Freq. Dev. (Hz)	Deviation (ppm)	
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	16	0.01	
0	15	0.01	
10	15	0.01	
20	13	0.01	
30	12	0.01	
40	12	0.01	
50	14	0.01	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

Band :	CDMA2000 BC0	Channel :	384
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	-26	-0.03	
0	-24	-0.03	
10	-22	-0.03	
20	-12	-0.01	
30	-14	-0.02	
40	-8	-0.01	
50	-9	-0.01	

Note: The EUT stops transmitting at temperature -20°C and -30°C.



Band :	CDMA2000 BC1	Channel :	600
Test Mode :	1xEV-DO Rev. 0_RTAP 153.6K	Limit (ppm) :	2.5

Temperature (°C)	Freq. Dev. (Hz)	Deviation (ppm)	Result
-30	N/A	N/A	PASS
-20	N/A	N/A	
-10	12	0.01	
0	11	0.01	
10	13	0.01	
20	12	0.01	
30	10	0.01	
40	9	0.00	
50	8	0.00	

Note: The EUT stops transmitting at temperature -20°C and -30°C.

3.7.7 Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Freq. Dev. (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 CH189	GPRS 8	3.7	-29	-0.03	2.5	PASS
		BEP	-28	-0.03		
		4.2	-31	-0.04		
	EDGE 8	3.7	-29	-0.03		
		BEP	-24	-0.03		
		4.2	-30	-0.04		
GSM 1900 CH661	GPRS 8	3.7	-49	-0.03		
		BEP	-44	-0.02		
		4.2	-52	-0.03		
	EDGE 8	3.7	-52	-0.03		
		BEP	-55	-0.03		
		4.2	-59	-0.03		
WCDMA Band V CH4182	RMC 12.2Kbps	3.7	8	0.01		
		BEP	7	0.01		
		4.2	10	0.01		
WCDMA Band IV CH1413	RMC 12.2Kbps	3.7	-9	-0.01		
		BEP	-13	-0.01		
		4.2	-17	-0.01		
WCDMA Band II CH9400	RMC 12.2Kbps	3.7	13	0.01		
		BEP	14	0.01		
		4.2	14	0.01		
CDMA2000 BC0 CH384	1xEV-DO Rev. 0 RTAP 153.6K	3.7	-13	-0.02		
		BEP	-10	-0.01		
		4.2	-15	-0.02		
CDMA2000 BC1 CH600	1xEV-DO Rev. 0 RTAP 153.6K	3.7	12	0.01		
		BEP	11	0.01		
		4.2	12	0.01		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.4 V.

4 List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Due Date	Remark
System Simulator	R&S	CMU200	117995	N/A	Jun. 08, 2009	Jun. 07, 2011	Conducted (TH02-HY)
System Simulator	R&S	CMU200	117995	N/A	Jul. 28, 2011	Jul. 27, 2012	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 11, 2010	Jun. 10, 2011	Conducted (TH02-HY)
Spectrum Analyzer	R&S	FSP40	100055	9kHz~40GHz	Jun. 13, 2011	Jun. 12, 2012	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D35P	TBN-930701	N/A	Jul. 27, 2011	Jul. 26, 2012	Conducted (TH02-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2726	30MHz ~ 1GHz	Oct. 30, 2010	Oct. 29, 2011	Radiation (03CH07-HY)
Spectrum Analyzer	R&S	FSP30	101067	9KHz ~ 30GHz	Dec. 03, 2010	Dec. 02, 2011	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ESCO	3117	00075962	1GHz ~ 18GHz	Aug. 10, 2011	Aug. 09, 2012	Radiation (03CH07-HY)
Pre Amplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Dec. 06, 2010	Dec. 05, 2011	Radiation (03CH07-HY)
Pre Amplifier	COM-POWER	PA-103A	161241	10-1000MHz.32dB. GAIN	Mar. 29, 2011	Mar. 28, 2012	Radiation (03CH07-HY)
EMI TEST RECEIVER	R&S	ESCI 7	100724	9kHz~7GHz	Aug. 22, 2011	Aug. 21, 2012	Radiation (03CH07-HY)
Pre Amplifier	MITEQ	AMF-7D-00 101800-30-1	159088	1GHz ~ 18GHz	Feb. 21, 2011	Feb. 20, 2012	Radiation (03CH07-HY)
System Simulator	R&S	CMU200	112403	N/A	Feb. 22, 2011	Feb. 21, 2012	Radiation (03CH07-HY)

5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Contribution	Uncertainty of X_i		$u(X_i)$
	dB	Probability Distribution	
Receiver Reading	0.41	Normal (k=2)	0.21
Antenna Factor Calibration	0.83	Normal (k=2)	0.42
Cable Loss Calibration	0.25	Normal (k=2)	0.13
Pre-Amplifier Gain Calibration	0.27	Normal (k=2)	0.14
RCV/SPA Specification	2.50	Rectangular	0.72
Antenna Factor Interpolation for Frequency	1.00	Rectangular	0.29
Site Imperfection	1.43	Rectangular	0.83
Mismatch	+0.39 / -0.41	U-Shape	0.28
Combined Standard Uncertainty $U_c(y)$	1.27		
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	2.54		

Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Contribution	Uncertainty of X_i		$u(X_i)$	C_i	$C_i * u(X_i)$
	dB	Probability Distribution			
Receiver Reading	± 0.10	Normal (k=2)	0.10	1	0.10
Antenna Factor Calibration	± 1.70	Normal (k=2)	0.85	1	0.85
Cable Loss Calibration	± 0.50	Normal (k=2)	0.25	1	0.25
Receiver Correction	± 2.00	Rectangular	1.15	1	1.15
Antenna Factor Directional	± 1.50	Rectangular	0.87	1	0.87
Site Imperfection	± 2.80	Triangular	1.14	1	1.14
Mismatch Receiver VSWR $\Gamma_1 = 0.197$ Antenna VSWR $\Gamma_2 = 0.194$ Uncertainty = $20\text{Log}(1-\Gamma_1\Gamma_2)$	+0.34 / -0.35	U-Shape	0.244	1	0.244
Combined Standard Uncertainty $U_c(y)$	2.36				
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.72				



Appendix A. Photographs of EUT

Please refer to Sporton report number EP162005 as below.