



# FCC SAR Test Report

**APPLICANT** : Honeywell International Inc  
**EQUIPMENT** : Dolphin 7800  
**BRAND NAME** : Honeywell  
**MODEL NAME** : Dolphin® 7800  
**FCC ID** : HD57800LW  
**STANDARD** : FCC 47 CFR Part 2 (2.1093)  
IEEE C95.1-1991  
IEEE 1528-2003  
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was received on Oct. 05, 2011 and completely tested on Oct. 28, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



**SPORTON INTERNATIONAL INC.**  
No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



## Table of Contents

<b>1. Statement of Compliance .....</b>	<b>4</b>
<b>2. Administration Data .....</b>	<b>5</b>
2.1 Testing Laboratory.....	5
2.2 Applicant .....	5
2.3 Manufacturer.....	5
2.4 Application Details.....	5
<b>3. General Information .....</b>	<b>6</b>
3.1 Description of Device Under Test (DUT) .....	6
3.2 Product Photos.....	8
3.3 Applied Standards.....	8
3.4 Device Category and SAR Limits .....	8
3.5 Test Conditions.....	8
<b>4. Specific Absorption Rate (SAR).....</b>	<b>9</b>
4.1 Introduction .....	9
4.2 SAR Definition.....	9
<b>5. SAR Measurement System.....</b>	<b>10</b>
5.1 E-Field Probe .....	11
5.2 Data Acquisition Electronics (DAE) .....	12
5.3 Robot .....	12
5.4 Measurement Server.....	13
5.5 Phantom.....	13
5.6 Device Holder.....	14
5.7 Data Storage and Evaluation .....	16
5.8 Test Equipment List .....	18
<b>6. Tissue Simulating Liquids.....</b>	<b>20</b>
<b>7. Uncertainty Assessment .....</b>	<b>22</b>
<b>8. SAR Measurement Evaluation .....</b>	<b>25</b>
8.1 Purpose of System Performance check .....	25
8.2 System Setup.....	25
8.3 Validation Results.....	26
<b>9. DUT Testing Position.....</b>	<b>28</b>
<b>10. Measurement Procedures .....</b>	<b>31</b>
10.1 Spatial Peak SAR Evaluation.....	31
10.2 Area & Zoom Scan Procedures.....	32
10.3 Volume Scan Procedures.....	32
10.4 SAR Averaged Methods .....	32
10.5 Power Drift Monitoring.....	32
<b>11. SAR Test Configurations.....</b>	<b>33</b>
11.1 Exposure Positions Consideration.....	33
11.2 Simultaneous Transmitting Configurations .....	34
<b>12. SAR Test Results .....</b>	<b>35</b>
12.1 Conducted Power (Unit: dBm).....	35
12.2 Test Records for Head SAR Test.....	40
12.3 Test Records for Body-worn SAR Test .....	42
12.4 Simultaneous Multi-band Transmission.....	45
<b>13. References.....</b>	<b>46</b>

**Appendix A. Plots of System Performance Check****Appendix B. Plots of SAR Measurement****Appendix C. DASY Calibration Certificate****Appendix D. Product Photos****Appendix E. Test Setup Photos**



## Revision History



## 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Honeywell International Inc Dolphin 7800 Honeywell Dolphin® 7800** are as follows.

### <Standalone SAR>

Band	Position	SAR <sub>1g</sub> (W/kg)
GSM850	Head	0.314
	Body with Holster (0 cm Gap)	0.475
	Body-worn (1.5 cm Gap)	0.454
GSM1900	Head	0.153
	Body with Holster (0 cm Gap)	0.232
	Body-worn (1.5 cm Gap)	0.364
WCDMA Band V	Head	0.335
	Body with Holster (0 cm Gap)	0.346
	Body-worn (1.5 cm Gap)	0.31
WCDMA Band IV	Head	0.223
	Body with Holster (0 cm Gap)	0.343
	Body-worn (1.5 cm Gap)	0.474
WCDMA Band II	Head	0.364
	Body with Holster (0 cm Gap)	0.413
	Body-worn (1.5 cm Gap)	0.568
802.11 b/g/n	Head	0.07
	Body with Holster (0 cm Gap)	0.092
	Body-worn (1.5 cm Gap)	0.092
802.11 a/n	Head	0.046
	Body with Holster (0 cm Gap)	0.188
	Body-worn (1.5 cm Gap)	0.14
Bluetooth	Head	N/A
	Body with Holster (0 cm Gap)	N/A
	Body-worn (1.5 cm Gap)	N/A

**Note:** BT SAR not tested due to that average power is below the FCC procedure thresholds, per KDB 648474.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1991, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



## **2. Administration Data**

### **2.1 Testing Laboratory**

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978

### **2.2 Applicant**

<b>Company Name</b>	Honeywell International Inc
<b>Address</b>	9680 Old Bailes Road, Fort Mill, SC 29707 USA

### **2.3 Manufacturer**

<b>Company Name</b>	Honeywell International Inc
<b>Address</b>	9680 Old Bailes Road, Fort Mill, SC 29707 USA

### **2.4 Application Details**

<b>Date of Receipt of Application</b>	Oct. 05, 2011
<b>Date of Start during the Test</b>	Oct. 05, 2011
<b>Date of End during the Test</b>	Oct. 28, 2011



### **3. General Information**

#### **3.1 Description of Device Under Test (DUT)**

Product Feature & Specification	
<b>DUT Type</b>	Dolphin 7800
<b>Brand Name</b>	Honeywell
<b>Model Name</b>	Dolphin® 7800
<b>FCC ID</b>	HD57800LW
<b>Integrated WWAN Module</b>	Brand Name : Cinterion Wireless Modules Model Name : PH8
<b>Integrated WLAN Module</b>	Brand Name : Murata Model Name : LBEH1Z9PFC-TEMP
<b>Tx Frequency</b>	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz WCDMA Band IV : 1710 MHz ~ 1755 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz 802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n: 5150 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Rx Frequency</b>	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz WCDMA Band IV : 2110 MHz ~ 2155 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz 802.11b/g/n: 2400 MHz ~ 2483.5 MHz 802.11a/n: 5150 MHz ~ 5350 MHz; 5470 MHz ~ 5725 MHz; 5725 MHz ~ 5850 MHz Bluetooth: 2400 MHz ~ 2483.5 MHz
<b>Maximum Output Power to Antenna</b>	GSM850 : 32.82 dBm GSM1900 : 29.22 dBm WCDMA Band V : 23.61 dBm WCDMA Band IV : 23.67 dBm WCDMA Band II : 23.57 dBm 802.11b : 17.70 dBm 802.11g : 16.46 dBm 802.11n (BW 20MHz) (2.4GHz) : 16.37 dBm 802.11a : 15.70 dBm 802.11n (BW 20MHz) (5GHz) : 15.54 dBm Bluetooth: 3.32 dBm
<b>Antenna Type</b>	WWAN : Fixed Internal Antenna WLAN : PIFA Antenna Bluetooth : PIFA Antenna
<b>HW Version</b>	010
<b>SW Version</b>	01



Product Feature & Specification	
<b>Type of Modulation</b>	GSM : GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA : QPSK (Uplink) HSDPA : QPSK (Uplink) HSUPA : QPSK (Uplink) 802.11b : DSSS (BPSK / QPSK / CCK) 802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
<b>Dual Transfer Mode (DTM) Category</b>	Class B – DUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
<b>DUT Stage</b>	Production Unit
<b>Remark:</b> The above DUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	



### **3.2 Product Photos**

Please refer to Appendix D.

### **3.3 Applied Standards**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- IEEE C95.1-1991
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v04
- FCC KDB 648474 D01 v01r05
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 248227 D01 v01r02

### **3.4 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

### **3.5 Test Conditions**

#### **3.5.1. Ambient Condition**

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

#### **3.5.2. Test Configuration**

The device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.



## **4. Specific Absorption Rate (SAR)**

### **4.1 Introduction**

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### **4.2 SAR Definition**

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \left( \frac{\delta T}{\delta t} \right)$$


Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement System

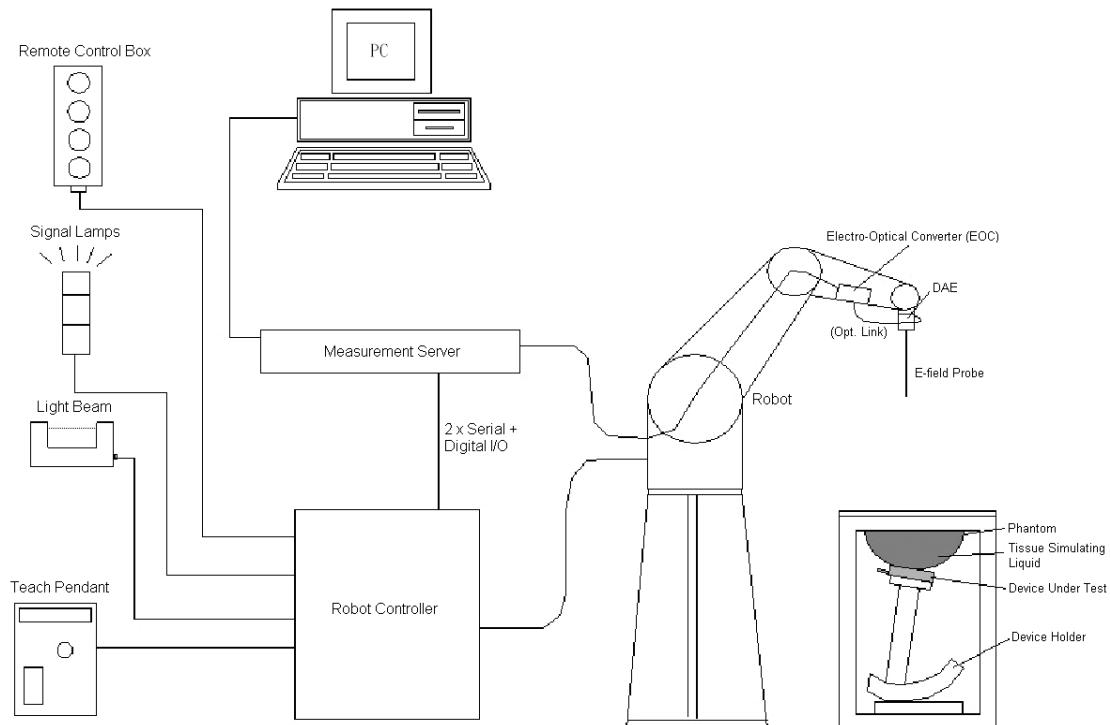

**Fig 5.1 SPEAG DASY4 or DASY5 System Configurations**

The DASY4 or DASY5 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 or DASY5 software
- Remote control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Some of the components are described in details in the following sub-sections.

## 5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### 5.1.1. *E-Field Probe Specification*

#### <ET3DV6 Probe >

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.2$ dB in HSL (rotation around probe axis) $\pm 0.4$ dB in HSL (rotation normal to probe axis)	
<b>Dynamic Range</b>	5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB	
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

**Fig 5.2 Photo of ET3DV6**

#### <EX3DV4 Probe >

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB	
<b>Directivity</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)	
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

**Fig 5.3 Photo of EX3DV4**

### 5.1.2. E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.4 Photo of DAE

## 5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability  $\pm 0.035$  mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.5 Photo of DASY4



Fig 5.6 Photo of DASY5

#### 5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chipdisk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.7 Photo of Server for DASY4



Fig 5.8 Photo of Server for DASY5

#### 5.5 Phantom

##### <SAM Twin Phantom>

<b>Shell Thickness</b>	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
<b>Filling Volume</b>	Approx. 25 liters	
<b>Dimensions</b>	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
<b>Measurement Areas</b>	Left Hand, Right Hand, Flat Phantom	

Fig 5.9 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

**<ELI4 Phantom>**

<b>Shell Thickness</b>	2 ± 0.2 mm (sagging: <1%)
<b>Filling Volume</b>	Approx. 30 liters
<b>Dimensions</b>	Major ellipse axis: 600 mm Minor axis: 400 mm



**Fig 5.10 Photo of ELI4 Phantom**

The ELI4 phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

## **5.6 Device Holder**

**<Device Holder for SAM Twin Phantom>**

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.11 Device Holder

**<Laptop Extension Kit>**

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

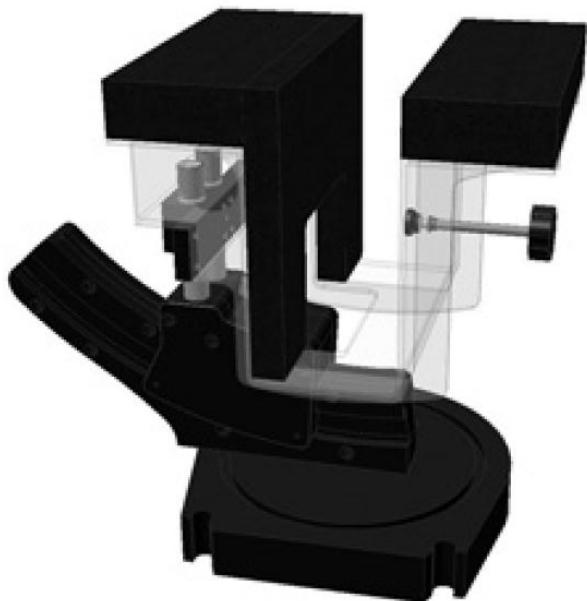


Fig 5.12 Laptop Extension Kit



## 5.7 Data Storage and Evaluation

### 5.7.1. Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2. Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.



The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcpi}$$

with  $V_i$  = compensated signal of channel i, ( $i = x, y, z$ )  
 $U_i$  = input signal of channel i, ( $i = x, y, z$ )  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcpi$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i, ( $i = x, y, z$ )  
 $\text{Norm}_i$  = sensor sensitivity of channel i, ( $i = x, y, z$ ),  $\mu\text{V}/(\text{V}/\text{m})^2$  for E-field Probes  
 $\text{ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in V/m  
 $H_i$  = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $\text{SAR}$  = local specific absorption rate in  $\text{mW}/\text{g}$   
 $E_{\text{tot}}$  = total field strength in  $\text{V}/\text{m}$   
 $\sigma$  = conductivity in [ $\text{mho}/\text{m}$ ] or [ $\text{Siemens}/\text{m}$ ]  
 $\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



### 5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Field Probe	EX3DV4	3754	Jan. 11, 2011	Jan. 10, 2012
SPEAG	Dosimetric E-Field Probe	EX3DV4	3697	Sep. 02, 2011	Sep. 01, 2012
SPEAG	Dosimetric E-Filed Probe	EX3DV4	3792	Jun. 20, 2011	Jun. 19, 2012
SPEAG	Dosimetric E-Filed Probe	ES3DV3	3270	Sep. 12, 2011	Sep. 11, 2012
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 22, 2010	Mar. 21, 2012
SPEAG	1800MHz System Validation Kit	D1800V2	2d076	Jul. 22, 2011	Jul. 21, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 23, 2010	Mar. 22, 2012
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2012
SPEAG	5GHz System Validation Kit	D5GHzV2	1040	Jun. 21, 2011	Jun. 20, 2012
SPEAG	Data Acquisition Electronics	DAE3	577	Jan. 13, 2011	Jan. 12, 2012
SPEAG	Data Acquisition Electronics	DAE4	778	Oct. 11, 2011	Oct. 10, 2012
SPEAG	Data Acquisition Electronics	DAE4	905	Jun. 24, 2011	Jun. 23, 2012
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1478	NCR	NCR
SPEAG	SAM Phantom	QD 000 P41 C	TP-1150	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 CD	TP-1644	NCR	NCR
SPEAG	SAM Phantom	SM 000 T01 DA	TP-1542	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 002 AA	TP-1127	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 002 AA	TP-1131	NCR	NCR



Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Last Cal.
Agilent	ENA Series Network Analyzer	E5071C	MY46100746	Jun. 10, 2011	Jun. 09, 2012
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Jan. 12, 2010	Jan. 11, 2012
Agilent	Wireless Communication Test Set	E5515C	GB46311322	Mar. 23, 2011	Mar. 22, 2013
Agilent	Wireless Communication Test Set	E5515C	MY50264370	Apr. 19, 2011	Apr. 18, 2013
R&S	Universal Radio Communication Tester	CMU200	114256	Feb. 08, 2010	Feb. 07, 2012
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR
R&S	Spectrum Analyzer	FSP7	101131	Jul. 29, 2011	Jul. 28, 2012
R&S	Spectrum Analyzer	FSP30	101329	May. 03, 2011	May. 02, 2012

**Table 5.1 Test Equipment List**

**Note:** The calibration certificate of DASY can be referred to appendix C of this report.

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



**Fig 6.1 Photo of Liquid Height for Head SAR**



**Fig 6.2 Photo of Liquid Height for Body SAR**

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
<b>For Head</b>								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
<b>For Body</b>								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

**Table 6.1 Recipes of Tissue Simulating Liquid**



## Recipes of 5GHz Head (or Body) Tissue Simulating Liquid

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq.	Liquid Type	Temp. (°C)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Conductivity Target ( $\sigma$ )	Permittivity Target ( $\epsilon_r$ )	Delta ( $\sigma$ ) (%)	Delta ( $\epsilon_r$ ) (%)	Limit (%)	Date
835	Head	21.6	0.881	42.2	0.9	41.5	-2.11	1.69	$\pm 5$	Oct. 05, 2011
1800	Head	21.2	1.45	39.8	1.4	40	3.57	-0.50	$\pm 5$	Oct. 05, 2011
1900	Head	21.2	1.45	38.3	1.4	40	3.57	-4.25	$\pm 5$	Oct. 05, 2011
2450	Head	21.5	1.83	39.4	1.8	39.2	1.67	0.51	$\pm 5$	Oct. 12, 2011
5200	Head	21.5	4.8	35.5	4.66	36	3.00	-1.39	$\pm 5$	Oct. 28, 2011
5500	Head	21.5	5.12	35	4.96	35.6	3.23	-1.69	$\pm 5$	Oct. 28, 2011
5800	Head	21.5	5.41	34.4	5.27	35.3	2.66	-2.55	$\pm 5$	Oct. 28, 2011
835	Body	21.3	0.994	54.7	0.97	55.2	2.47	-0.91	$\pm 5$	Oct. 06, 2011
1800	Body	21.3	1.58	51.6	1.52	53.3	3.95	-3.19	$\pm 5$	Oct. 05, 2011
1800	Body	21.2	1.58	51.7	1.52	53.3	3.95	-3.00	$\pm 5$	Oct. 06, 2011
1900	Body	21.2	1.52	53.3	1.52	53.3	0.00	0.00	$\pm 5$	Oct. 05, 2011
1900	Body	21.4	1.53	52	1.52	53.3	0.66	-2.44	$\pm 5$	Oct. 06, 2011
2450	Body	21.4	1.93	53.6	1.95	52.7	-1.03	1.71	$\pm 5$	Oct. 12, 2011
5200	Body	21.4	5.28	47.5	5.3	49	-0.38	-3.06	$\pm 5$	Oct. 27, 2011
5500	Body	21.4	5.68	47	5.65	48.6	0.53	-3.29	$\pm 5$	Oct. 27, 2011
5800	Body	21.4	6.18	46.4	6	48.2	3.00	-3.73	$\pm 5$	Oct. 27, 2011

Table 6.2 Measuring Results for Simulating Liquid



## 7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacturer's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity  
(b)  $k$  is the coverage factor

**Table 7.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed in Table 7.2.



Error Description	Uncertainty Value ( $\pm$ %)	Probability Distribution	Divisor	Ci (1g)	Standard Uncertainty (1g)
<b>Measurement System</b>					
Probe Calibration	6.0	Normal	1	1	$\pm 6.0 \%$
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	$\pm 1.9 \%$
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	$\pm 3.9 \%$
Boundary Effects	1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$
Linearity	4.7	Rectangular	$\sqrt{3}$	1	$\pm 2.7 \%$
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$
Readout Electronics	0.3	Normal	1	1	$\pm 0.3 \%$
Response Time	0.8	Rectangular	$\sqrt{3}$	1	$\pm 0.5 \%$
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	$\pm 1.5 \%$
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$
Probe Positioner	0.4	Rectangular	$\sqrt{3}$	1	$\pm 0.2 \%$
Probe Positioning	2.9	Rectangular	$\sqrt{3}$	1	$\pm 1.7 \%$
Max. SAR Eval.	1.0	Rectangular	$\sqrt{3}$	1	$\pm 0.6 \%$
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	$\pm 2.9 \%$
Device Holder	3.6	Normal	1	1	$\pm 3.6 \%$
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	$\pm 2.9 \%$
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	$\pm 2.3 \%$
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	$\pm 1.8 \%$
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	$\pm 1.6 \%$
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	$\pm 1.7 \%$
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	$\pm 1.5 \%$
<b>Combined Standard Uncertainty</b>					$\pm 10.99 \%$
<b>Coverage Factor for 95 %</b>					K = 2
<b>Expanded Uncertainty</b>					$\pm 21.97 \%$

Table 7.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz



Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (10g)	Standard Uncertainty (10g)
<b>Measurement System</b>					
Probe Calibration	6.55	Normal	1	1	± 6.55 %
Axial Isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	± 3.9 %
Boundary Effects	2.0	Rectangular	$\sqrt{3}$	1	± 1.2 %
Linearity	4.7	Rectangular	$\sqrt{3}$	1	± 2.7 %
System Detection Limits	1.0	Rectangular	$\sqrt{3}$	1	± 0.6 %
Readout Electronics	0.3	Normal	1	1	± 0.3 %
Response Time	0.8	Rectangular	$\sqrt{3}$	1	± 0.5 %
Integration Time	2.6	Rectangular	$\sqrt{3}$	1	± 1.5 %
RF Ambient Noise	3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	$\sqrt{3}$	1	± 1.7 %
Probe Positioner	0.8	Rectangular	$\sqrt{3}$	1	± 0.5 %
Probe Positioning	9.9	Rectangular	$\sqrt{3}$	1	± 5.7 %
Max. SAR Eval.	4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %
<b>Test Sample Related</b>					
Device Positioning	2.9	Normal	1	1	± 2.9 %
Device Holder	3.6	Normal	1	1	± 3.6 %
Power Drift	5.0	Rectangular	$\sqrt{3}$	1	± 2.9 %
<b>Phantom and Setup</b>					
Phantom Uncertainty	4.0	Rectangular	$\sqrt{3}$	1	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.64	± 1.8 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	± 1.6 %
Liquid Permittivity (Target)	5.0	Rectangular	$\sqrt{3}$	0.6	± 1.7 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	± 1.5 %
<b>Combined Standard Uncertainty</b>					
<b>Coverage Factor for 95 %</b>					
<b>Expanded Uncertainty</b>					
± 12.79 %					
K = 2					
± 25.58 %					

Table 7.3 Uncertainty Budget of DASY for frequency range 3 GHz to 6 GHz

## 8. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:


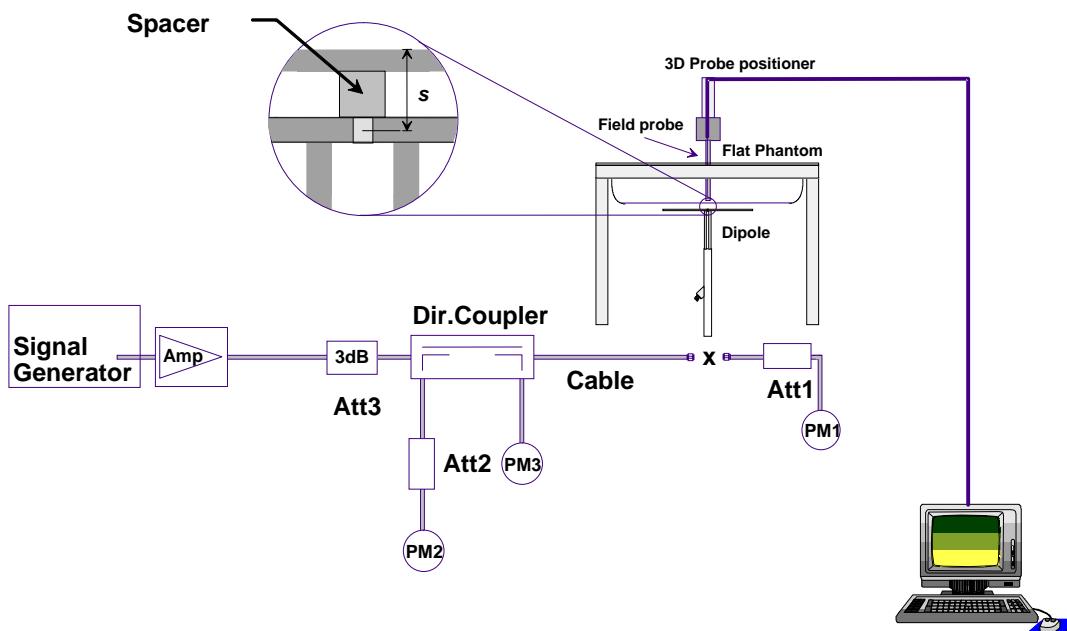


Fig 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected.

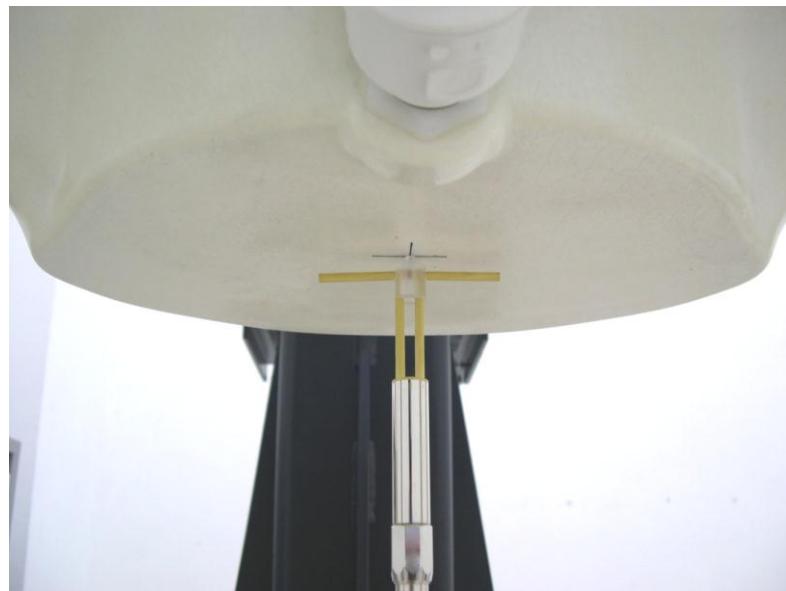

**Fig 8.2 Photo of Dipole Setup**

### **8.3 Validation Results**

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.



Measurement Date	Frequency (MHz)	Liquid Type	Targeted SAR <sub>1g</sub> (W/kg)	Measured SAR <sub>1g</sub> (W/kg)	Normalized SAR <sub>1g</sub> (W/kg)	Deviation (%)
Oct. 05, 2011	835	Head	9.710	2.330	9.32	-4.02
Oct. 05, 2011	1800	Head	38.600	10.000	40.00	3.63
Oct. 05, 2011	1900	Head	39.800	9.310	37.24	-6.43
Oct. 12, 2011	2450	Head	54.800	13.800	55.20	0.73
Oct. 28, 2011	5200	Head	81.200	21.300	85.20	4.93
Oct. 28, 2011	5500	Head	85.600	22.500	90.00	5.14
Oct. 28, 2011	5800	Head	78.900	18.800	75.20	-4.69
Oct. 06, 2011	835	Body	9.820	2.320	9.28	-5.50
Oct. 05, 2011	1800	Body	38.800	9.430	37.72	-2.78
Oct. 06, 2011	1800	Body	38.800	8.960	35.84	-7.63
Oct. 05, 2011	1900	Body	40.000	9.700	38.80	-3.00
Oct. 06, 2011	1900	Body	40.000	9.720	38.88	-2.80
Oct. 12, 2011	2450	Body	52.300	13.000	52.00	-0.57
Oct. 27, 2011	5200	Body	76.000	18.500	74.00	-2.63
Oct. 27, 2011	5500	Body	81.700	21.200	84.80	3.79
Oct. 27, 2011	5800	Body	75.400	19.900	79.60	5.57

**Table 8.1 Target and Measurement SAR after Normalized**

## 9. DUT Testing Position

This DUT was tested in eight different positions. They are right cheek, right tilted, left cheek, left tilted, Front of the DUT with phantom 1.5 cm gap, Back of the DUT with phantom 1.5 cm gap, Front of the DUT and holster with phantom 0 cm gap, Back of the DUT and holster with phantom 0 cm gap, as illustrated below:

### 1. Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- (c) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

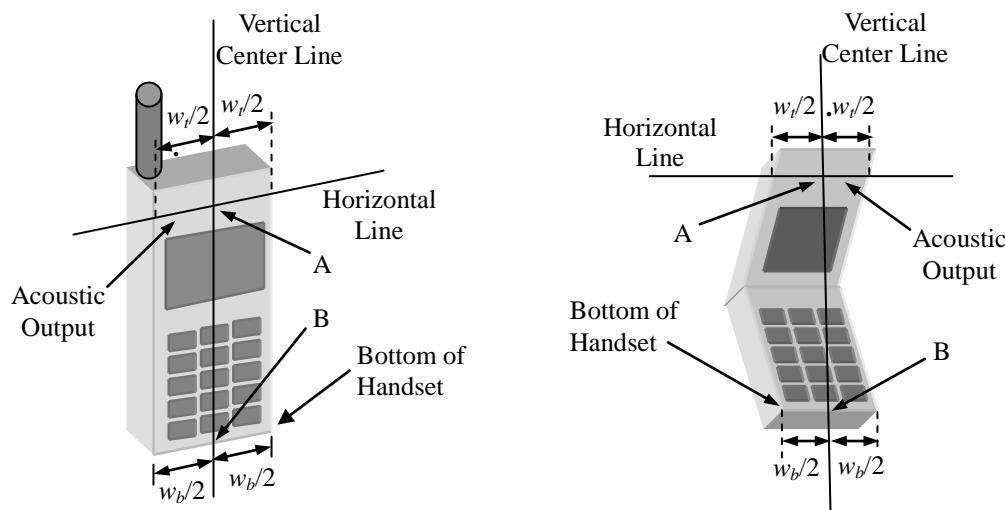


Fig 9.1 Illustration for Handset Vertical and Horizontal Reference Lines

## 2. Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 9.2).

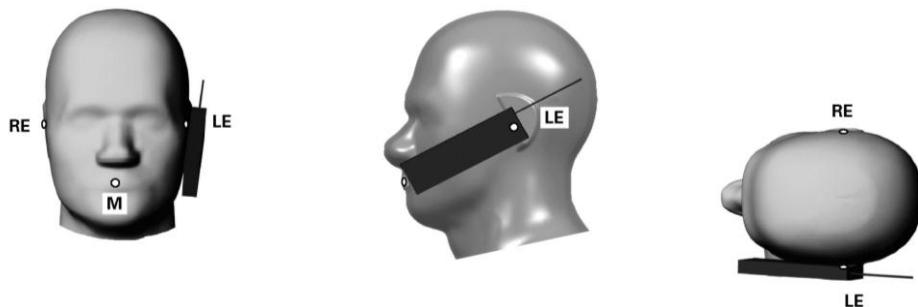


Fig 9.2 Illustration for Cheek Position

## 3. Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 9.3).


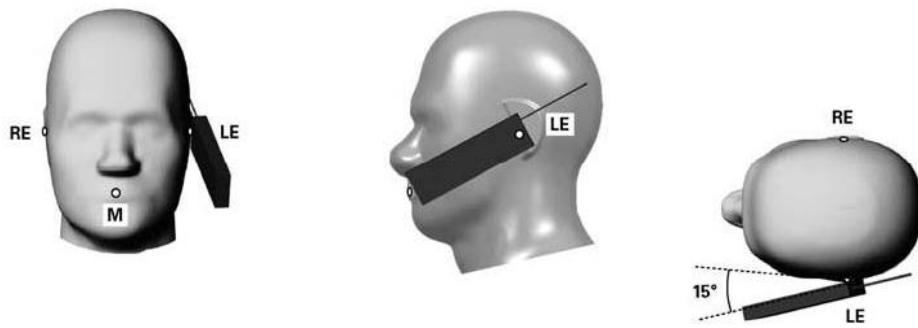


Fig 9.3 Illustration for Tilted Position

#### **4. Body Worn Position**

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm or holster surface and the flat phantom to 0 cm.

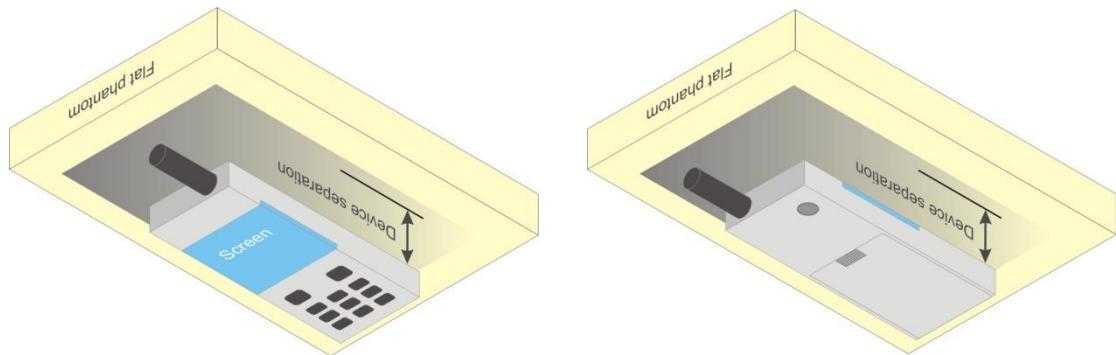

**Fig 9.4 Illustration for Body Worn Position**

#### **<DUT Setup Photos>**

Please refer to Appendix E for the test setup photos.

## **10. Measurement Procedures**

The measurement procedures are as follows:

- (a) Use base station or engineering software (if applicable) to transmit RF power continuously (continuous Tx) in the highest power channel Set base station emulator to allow DUT to radiate maximum output power.
- (b) Measure output power through RF cable and power meter.
- (c) Place the DUT in the positions as Appendix E demonstrates.
- (d) Set scan area, grid size and other setting on the DASY software.
- (e) Measure SAR results for the highest power channel on each testing position.
- (f) Find out the largest SAR result on these testing positions of each band
- (g) Measure SAR results for other channels in worst SAR testing position if the SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g



## **10.2 Area & Zoom Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 300 MHz to 3 GHz, and 8x8x8 points with step size 4, 4 and 2.5 mm for 3 GHz to 6 GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

## **10.3 Volume Scan Procedures**

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing (step-size is 4, 4 and 2.5 mm). When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

## **10.4 SAR Averaged Methods**

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## **10.5 Power Drift Monitoring**

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

## **11. SAR Test Configurations**

### **11.1 Exposure Positions Consideration**

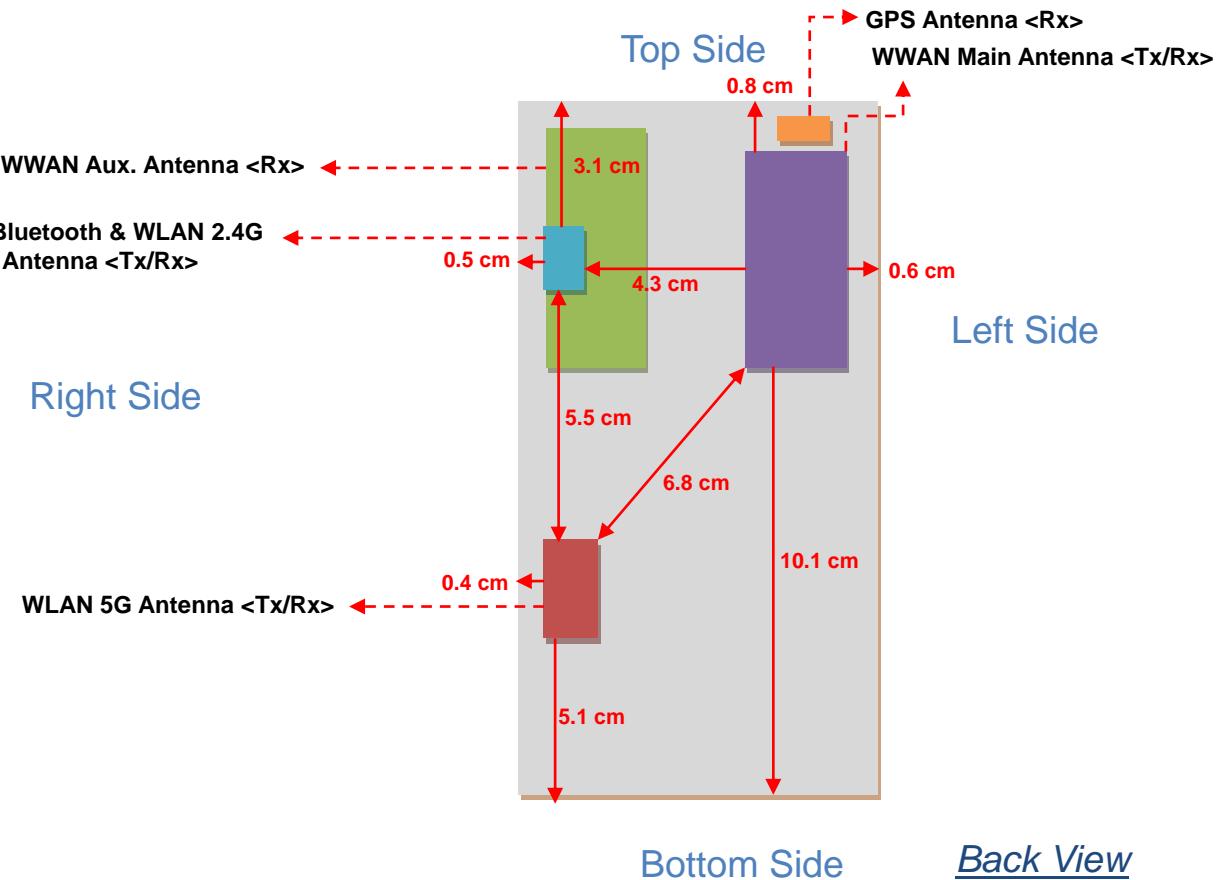

<b>WWAN Main</b>	WWAN Main Antenna <Tx/Rx>
<b>WWAN Aux.</b>	WWAN Aux. Antenna <Rx>
<b>WLAN 2.4G &amp; Bluetooth antenna</b>	WLAN 2.4G & Bluetooth <Tx/Rx>
<b>WLAN 5G antenna</b>	WLAN 5G Antenna <Tx/Rx>
<b>GPS Antenna</b>	GPS Antenna <Rx>



## **11.2 Simultaneous Transmitting Configurations**

	Applicable Combination
Simultaneous Transmission	2G/3G+WLAN
	2G/3G+BT

**Note:**

1. WLAN2.4G and BT share the same antenna, thus they cannot transmit simultaneously.
2. Per KDB KDB 648474 D01, Bluetooth output power  $\leq$  Pref and the distance to WWAN antenna  $\geq$  2.5cm, therefore stand-alone SAR is not required.
3. The GPRS/EDGE and WCDMA share the same WWAN transmitting antenna, and GPRS/EDGE will not transmit simultaneously with WCDMA.
4. DUT will choose either WLAN2.4G or WLAN5G according to the network signal condition, therefore, WLAN2.4G transmission will not exist with WLAN5G at the same time.
5. DUT will choose either BT or WLAN5G according to the network signal condition, therefore, BT transmission will not exist with WLAN5G at the same time.



## 12. SAR Test Results

### 12.1 Conducted Power (Unit: dBm)

&lt;GSM/GPRS/EDGE&gt;

Burst Average Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (1 Uplink)	32.82	32.74	32.37	28.79	28.81	29.22
GPRS 8 (1 Uplink) – CS1	32.81	32.73	32.37	28.77	28.80	29.20
GPRS 10 (2 Uplink) – CS1	32.46	32.30	32.03	28.49	28.50	28.97
EDGE 8 (GMSK, 1 Uplink) – MCS1	32.76	32.64	32.35	28.71	28.70	29.13
EDGE 10 (GMSK, 2 Uplink) – MCS1	32.44	32.33	32.04	28.45	28.48	28.95
EDGE 8 (8PSK, 1 Uplink) – MCS9	26.43	26.40	26.32	24.83	24.76	24.90
EDGE 10 (8PSK, 2 Uplink) – MCS9	26.25	26.22	26.17	24.57	24.55	24.65

Source-Based Time-Averaged Power						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency (MHz)	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM (1 Uplink)	23.82	23.74	23.37	19.79	19.81	20.22
GPRS 8 (1 Uplink) – CS1	23.81	23.73	23.37	19.77	19.80	20.20
GPRS 10 (2 Uplink) – CS1	26.46	26.30	26.03	22.49	22.50	22.97
EDGE 8 (GMSK, 1 Uplink) – MCS1	23.76	23.64	23.35	19.71	19.70	20.13
EDGE 10 (GMSK, 2 Uplink) – MCS1	26.44	26.33	26.04	22.45	22.48	22.95
EDGE 8 (8PSK, 1 Uplink) – MCS9	17.43	17.40	17.32	15.83	15.76	15.90
EDGE 10 (8PSK, 2 Uplink) – MCS9	20.25	20.22	20.17	18.57	18.55	18.65

**Remark:** The source-based time-averaged power is linearly scaled the maximum burst averaged power based on time slots. The calculated method are shown as below:  
Source based time averaged power = Maximum burst averaged power (1 Uplink) - 9 dB  
Source based time averaged power = Maximum burst averaged power (2 Uplink) - 6 dB

#### Note:

- For Head SAR testing, GSM should be evaluated, therefore the DUT was set in GSM for GSM850 and set in GSM for GSM1900 due to its highest source-based time-average power.
- For Body-worn SAR testing, GSM, GPRS and EDGE should be evaluated, therefore the DUT was set in GPRS 10 for GSM850 and set in GPRS 10 for GSM1900 due to its highest source-based time-average power.
- Per 2010/10 workshop, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- EDGE tests with MCS1 setting, GMSK modulation. Burst average power with MCS9 setting 8 PSK modulation, is provided voluntary for reference.
- The DUT do not support DTM function.



## &lt;WCDMA&gt;

Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
<b>Frequency (MHz)</b>	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>	<b>1852.4</b>	<b>1880.0</b>	<b>1907.6</b>
<b>AMR</b>	23.35	23.50	23.30	23.64	23.44	23.45
<b>RMC 12.2K</b>	23.40	23.61	23.37	23.67	23.45	23.48
<b>HSDPA Subtest-1</b>	23.27	23.32	23.20	23.41	23.21	23.14
<b>HSDPA Subtest-2</b>	23.04	23.25	23.14	23.45	23.20	23.21
<b>HSDPA Subtest-3</b>	22.53	22.75	22.70	23.01	22.70	22.73
<b>HSDPA Subtest-4</b>	22.61	22.45	22.71	22.91	22.68	22.75
<b>HSUPA Subtest-1</b>	23.28	22.73	22.40	23.38	22.50	22.88
<b>HSUPA Subtest-2</b>	21.54	21.80	21.73	21.83	21.79	21.85
<b>HSUPA Subtest-3</b>	21.71	22.10	21.94	22.09	21.96	21.90
<b>HSUPA Subtest-4</b>	21.75	22.04	21.67	22.01	21.89	21.82
<b>HSUPA Subtest-5</b>	22.96	22.80	22.51	23.21	22.69	22.91

Band	WCDMA Band IV		
Channel	4132	4182	4233
<b>Frequency (MHz)</b>	<b>826.4</b>	<b>836.4</b>	<b>846.6</b>
<b>AMR</b>	23.26	23.54	23.31
<b>RMC 12.2K</b>	23.30	23.57	23.33
<b>HSDPA Subtest-1</b>	23.25	23.48	23.18
<b>HSDPA Subtest-2</b>	22.72	23.02	22.82
<b>HSDPA Subtest-3</b>	22.72	23.02	22.82
<b>HSDPA Subtest-4</b>	22.65	22.88	22.75
<b>HSUPA Subtest-1</b>	22.51	23.01	23.15
<b>HSUPA Subtest-2</b>	21.61	22.02	21.30
<b>HSUPA Subtest-3</b>	22.01	22.41	22.01
<b>HSUPA Subtest-4</b>	21.91	22.25	22.20
<b>HSUPA Subtest-5</b>	22.67	23.04	23.02

3GPP Requirement		MPR					
		WCDMA band V			WCDMA band II		
0	<b>HSDPA Subtest-1</b>	0.00	0.00	0.00	0.00	0.00	0.00
0	<b>HSDPA Subtest-2</b>	0.23	0.07	0.06	-0.04	0.01	-0.07
0.5	<b>HSDPA Subtest-3</b>	0.74	0.57	0.50	0.40	0.51	0.41
0.5	<b>HSDPA Subtest-4</b>	0.66	0.87	0.49	0.50	0.53	0.39
0	<b>HSUPA Subtest-1</b>	-0.32	0.07	0.11	-0.17	0.19	0.03
2	<b>HSUPA Subtest-2</b>	1.42	1.00	0.78	1.38	0.90	1.06
1	<b>HSUPA Subtest-3</b>	1.25	0.70	0.57	1.12	0.73	1.01
2	<b>HSUPA Subtest-4</b>	1.21	0.76	0.84	1.20	0.80	1.09
0	<b>HSUPA Subtest-5</b>	0.00	0.00	0.00	0.00	0.00	0.00



MPR				
3GPP Requirement		WCDMA band IV		
0	<b>HSDPA Subtest-1</b>	0.00	0.00	0.00
0	<b>HSDPA Subtest-2</b>	0.53	0.46	0.36
0.5	<b>HSDPA Subtest-3</b>	0.53	0.46	0.36
0.5	<b>HSDPA Subtest-4</b>	0.60	0.60	0.43
0	<b>HSUPA Subtest-1</b>	0.16	0.03	-0.13
2	<b>HSUPA Subtest-2</b>	1.06	1.02	1.72
1	<b>HSUPA Subtest-3</b>	0.66	0.63	1.01
2	<b>HSUPA Subtest-4</b>	0.76	0.79	0.82
0	<b>HSUPA Subtest-5</b>	0.00	0.00	0.00

**Note:**

1. For Head SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 1/4 dB higher than RMC, SAR tests with AMR 12.2kbps can be excluded.
2. For Body-worn SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA subset-1 and HSUPA subset-5 output power is < 1/4 dB higher than RMC, and SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/kg}$ , HSDPA and HSUPA SAR evaluation can be excluded.
3. DUT is declared to follow the MPR of 3GPP Table 5.2B.1 specification, and the specification will set during the production. Since there is tolerance in measuring 3G output power, the difference between the measured value and the specification is treated as tolerance. According to KDB 941225 D02 v02, 1)b), the MPR implementation information is provided here.



## &lt;WLAN&gt;

Band	802.11b			802.11g		
Channel	1	6	11	1	6	11
Frequency (MHz)	2412	2437	2462	2412	2437	2462
Average Power	17.44	17.70	17.66	11.47	16.46	11.68

Band	802.11n (BW 20MHz)		
Channel	1	6	11
Frequency (MHz)	2412	2437	2462
Average Power	11.36	16.37	11.61

## Note:

1. Per KDB 248227, 11g and 11n output power is less than 1/4 dB higher than 11b mode, thus the SAR can be excluded.
2. Per 2010/4 TCB workshop, choose the highest output power channel to test SAR and determine further SAR exclusion, and CH 6 is chosen here.

Band	802.11a											
Channel	36	40	44	48	52	56	60	64	100	104	108	112
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320	5500	5520	5540	5560
Average Power	15.05	15.01	15.48	15.49	15.70	15.34	15.34	15.26	15.49	15.19	15.04	15.20

Band	802.11a									
Channel	116	132	136	140	149	153	157	161	165	
Frequency (MHz)	5580	5660	5680	5700	5745	5765	5785	5805	5825	
Average Power	15.00	15.03	15.16	15.37	15.08	15.38	15.05	15.48	15.07	



Band	802.11n (BW 20MHz)											
Channel	36	40	44	48	52	56	60	64	100	104	108	112
Frequency (MHz)	5180	5200	5220	5240	5260	5280	5300	5320	5500	5520	5540	5560
Average Power	14.98	15.34	15.33	15.40	15.54	15.18	15.16	15.16	15.38	15.14	15.3	15.05

Band	802.11n (BW 20MHz)									
Channel	116	132	136	140	149	153	157	161	165	
Frequency (MHz)	5580	5660	5680	5700	5745	5765	5785	5805	5825	
Average Power	15.29	15.30	15.03	15.24	15.03	15.23	15.00	15.39	15.01	

**Note:**

1. Per KDB 248227, 11n output power is less than 1/4 dB higher than 11a mode, thus SAR can be excluded.
2. Per 2010/10 TCB workshop and KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion. Therefore CH 48, CH 52, CH100, and CH 161 are chosen first for SAR testing.

Band	Bluetooth		
Channel	0	39	78
Frequency	2402	2441	2480
Average Power	2.95	3.32	3.27

**Note:** Bluetooth standalone SAR is not required because the Bluetooth highest average power (3.32 dBm) is less than 60/f.



## 12.2 Test Records for Head SAR Test

### <GSM>

Plot No.	Band	Mode	Test Position	Ch.	Keypad	SAR <sub>1g</sub> (W/kg)
1	<b>GSM850</b>	<b>GSM</b>	<b>Right Cheek</b>	<b>128</b>	1	<b>0.314</b>
2	GSM850	GSM	Right Tilted	128	1	0.27
3	GSM850	GSM	Left Cheek	128	1	0.2
4	GSM850	GSM	Left Tilted	128	1	0.184
5	GSM850	GSM	Right Cheek	128	2	0.309
6	<b>GSM1900</b>	<b>GSM</b>	<b>Right Cheek</b>	<b>810</b>	1	<b>0.153</b>
7	GSM1900	GSM	Right Tilted	810	1	0.114
8	GSM1900	GSM	Left Cheek	810	1	0.101
9	GSM1900	GSM	Left Tilted	810	1	0.135
10	GSM1900	GSM	Right Cheek	810	2	0.153

### <WCDMA>

Plot No.	Band	Mode	Test Position	Ch.	Keypad	SAR <sub>1g</sub> (W/kg)
11	<b>WCDMA V</b>	<b>RMC12.2K</b>	<b>Right Cheek</b>	<b>4182</b>	1	<b>0.335</b>
12	WCDMA V	RMC12.2K	Right Tilted	4182	1	0.304
13	WCDMA V	RMC12.2K	Left Cheek	4182	1	0.237
14	WCDMA V	RMC12.2K	Left Tilted	4182	1	0.214
15	WCDMA V	RMC12.2K	Right Cheek	4182	2	0.321
16	<b>WCDMA IV</b>	<b>RMC12.2K</b>	<b>Right Cheek</b>	<b>1413</b>	1	<b>0.223</b>
17	WCDMA IV	RMC12.2K	Right Tilted	1413	1	0.141
18	WCDMA IV	RMC12.2K	Left Cheek	1413	1	0.176
19	WCDMA IV	RMC12.2K	Left Tilted	1413	1	0.209
20	WCDMA IV	RMC12.2K	Right Cheek	1413	2	0.223
21	<b>WCDMA II</b>	<b>RMC12.2K</b>	<b>Right Cheek</b>	<b>9262</b>	1	<b>0.364</b>
22	WCDMA II	RMC12.2K	Right Tilted	9262	1	0.291
23	WCDMA II	RMC12.2K	Left Cheek	9262	1	0.249
24	WCDMA II	RMC12.2K	Left Tilted	9262	1	0.313
25	WCDMA II	RMC12.2K	Right Cheek	9262	2	0.359



## &lt;WLAN&gt;

Plot No.	Band	Mode	Test Position	Ch.	Keypad	SAR <sub>1g</sub> (W/kg)
59	802.11b	-	Right Cheek	6	1	0.036
60	802.11b	-	Right Tilted	6	1	0.037
<b>61</b>	<b>802.11b</b>	-	<b>Left Cheek</b>	<b>6</b>	<b>1</b>	<b>0.07</b>
62	802.11b	-	Left Tilted	6	1	0.043
63	802.11b	-	Left Cheek	6	2	0.068
94	802.11a	-	Right Cheek	48	1	0.042
95	802.11a	-	Right Tilted	48	1	0.00937
96	802.11a	-	Left Cheek	48	1	0.014
97	802.11a	-	Left Tilted	48	1	0.0000154
98	802.11a	-	Right Cheek	48	2	0.041
<b>99</b>	<b>802.11a</b>	-	<b>Right Cheek</b>	<b>52</b>	<b>1</b>	<b>0.046</b>
100	802.11a	-	Right Tilted	52	1	0.00911
101	802.11a	-	Left Cheek	52	1	0.011
102	802.11a	-	Left Tilted	52	1	0.00289
103	802.11a	-	Right Cheek	52	2	0.039
104	802.11a	-	Right Cheek	100	1	0.045
105	802.11a	-	Right Tilted	100	1	0.00628
106	802.11a	-	Left Cheek	100	1	0.00000191
107	802.11a	-	Left Tilted	100	1	0.00113
108	802.11a	-	Right Cheek	100	2	0.043
109	802.11a	-	Right Cheek	161	1	0.027
110	802.11a	-	Right Tilted	161	1	0.00629
111	802.11a	-	Left Cheek	161	1	0.0000334
112	802.11a	-	Left Tilted	161	1	0.0000456
113	802.11a	-	Right Cheek	161	2	0.021

**Note:** Per KDB 648474, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.



### **12.3 Test Records for Body-worn SAR Test**

<DUT without Holster>

<GSM>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
41	GSM850	GRPS10	Front	1.5	128	1	-	0.262
<b>42</b>	<b>GSM850</b>	<b>GRPS10</b>	<b>Back</b>	<b>1.5</b>	<b>128</b>	<b>1</b>	<b>-</b>	<b>0.454</b>
43	GSM850	GRPS10	Back	1.5	128	2	-	0.45
29	GSM1900	GRPS10	Front	1.5	810	1	-	0.083
<b>30</b>	<b>GSM1900</b>	<b>GRPS10</b>	<b>Back</b>	<b>1.5</b>	<b>810</b>	<b>1</b>	<b>-</b>	<b>0.364</b>
31	GSM1900	GRPS10	Back	1.5	810	2	-	0.33

<WCDMA>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
38	WCDMA V	RMC12.2K	Front	1.5	4182	1	-	0.15
<b>39</b>	<b>WCDMA V</b>	<b>RMC12.2K</b>	<b>Back</b>	<b>1.5</b>	<b>4182</b>	<b>1</b>	<b>-</b>	<b>0.31</b>
40	WCDMA V	RMC12.2K	Back	1.5	4182	2	-	0.286
35	WCDMA IV	RMC12.2K	Front	1.5	1413	1	-	0.07
<b>36</b>	<b>WCDMA IV</b>	<b>RMC12.2K</b>	<b>Back</b>	<b>1.5</b>	<b>1413</b>	<b>1</b>	<b>-</b>	<b>0.474</b>
37	WCDMA IV	RMC12.2K	Back	1.5	1413	2	-	0.455
32	WCDMA II	RMC12.2K	Front	1.5	9262	1	-	0.113
<b>33</b>	<b>WCDMA II</b>	<b>RMC12.2K</b>	<b>Back</b>	<b>1.5</b>	<b>9262</b>	<b>1</b>	<b>-</b>	<b>0.568</b>
34	WCDMA II	RMC12.2K	Back	1.5	9262	2	-	0.539



## &lt;WLAN&gt;

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
64	802.11b	-	Front	1.5	6	1	-	0.016
<b>65</b>	<b>802.11b</b>	-	<b>Back</b>	<b>1.5</b>	<b>6</b>	<b>1</b>	-	<b>0.092</b>
66	802.11b	-	Back	1.5	6	2	-	0.088
70	802.11a	-	Front	1.5	48	1	-	0.011
<b>71</b>	<b>802.11a</b>	-	<b>Back</b>	<b>1.5</b>	<b>48</b>	<b>1</b>	-	<b>0.14</b>
72	802.11a	-	Back	1.5	48	2	-	0.137
73	802.11a	-	Front	1.5	52	1	-	0.02
74	802.11a	-	Back	1.5	52	1	-	0.098
75	802.11a	-	Back	1.5	52	2	-	0.092
76	802.11a	-	Front	1.5	100	1	-	0.042
77	802.11a	-	Back	1.5	100	1	-	0.052
78	802.11a	-	Back	1.5	100	2	-	0.045
79	802.11a	-	Front	1.5	161	1	-	0.035
80	802.11a	-	Back	1.5	161	1	-	0.139
81	802.11a	-	Back	1.5	161	2	-	0.132



<DUT with Holster>  
<GSM>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
44	GSM850	GRPS10	Front	-	128	1	v	0.325
<b>45</b>	<b>GSM850</b>	<b>GRPS10</b>	<b>Back</b>	-	<b>128</b>	<b>1</b>	<b>v</b>	<b>0.475</b>
46	GSM850	GRPS10	Back	-	128	2	v	0.445
50	GSM1900	GRPS10	Front	-	810	1	v	0.09
<b>51</b>	<b>GSM1900</b>	<b>GRPS10</b>	<b>Back</b>	-	<b>810</b>	<b>1</b>	<b>v</b>	<b>0.232</b>
52	GSM1900	GRPS10	Back	-	810	2	v	0.207

## &lt;WCDMA&gt;

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
47	WCDMA V	RMC12.2K	Front	-	4182	1	v	0.198
<b>48</b>	<b>WCDMA V</b>	<b>RMC12.2K</b>	<b>Back</b>	-	<b>4182</b>	<b>1</b>	<b>v</b>	<b>0.346</b>
49	WCDMA V	RMC12.2K	Back	-	4182	2	v	0.308
56	WCDMA IV	RMC12.2K	Front	-	1413	1	v	0.065
<b>57</b>	<b>WCDMA IV</b>	<b>RMC12.2K</b>	<b>Back</b>	-	<b>1413</b>	<b>1</b>	<b>v</b>	<b>0.343</b>
58	WCDMA IV	RMC12.2K	Back	-	1413	2	v	0.334
53	WCDMA II	RMC12.2K	Front	-	9262	1	v	0.116
<b>54</b>	<b>WCDMA II</b>	<b>RMC12.2K</b>	<b>Back</b>	-	<b>9262</b>	<b>1</b>	<b>v</b>	<b>0.413</b>
55	WCDMA II	RMC12.2K	Back	-	9262	2	v	0.36

## &lt;WLAN&gt;

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Keypad	Holster	SAR <sub>1g</sub> (W/kg)
67	802.11b	-	Front	-	6	1	v	0.013
<b>68</b>	<b>802.11b</b>	<b>-</b>	<b>Back</b>	-	<b>6</b>	<b>1</b>	<b>v</b>	<b>0.092</b>
69	802.11b	-	Back	-	6	2	v	0.089
82	802.11a	-	Front	-	48	1	v	0.033
83	802.11a	-	Back	-	48	1	v	0.179
84	802.11a	-	Back	-	48	2	v	0.159
85	802.11a	-	Front	-	52	1	v	0.026
<b>86</b>	<b>802.11a</b>	<b>-</b>	<b>Back</b>	-	<b>52</b>	<b>1</b>	<b>v</b>	<b>0.188</b>
87	802.11a	-	Back	-	52	2	v	0.141
88	802.11a	-	Front	-	100	1	v	0.037
89	802.11a	-	Back	-	100	1	v	0.122
90	802.11a	-	Back	-	100	2	v	0.096
91	802.11a	-	Front	-	161	1	v	0.028
92	802.11a	-	Back	-	161	1	v	0.057
93	802.11a	-	Back	-	161	2	v	0.049

**Note:** Per KDB 648474, if the highest output channel SAR for each exposure position  $\leq 0.8$  W/kg other channels SAR tests are not necessary.



## 12.4 Simultaneous Multi-band Transmission

### <Simultaneous Transmission – Head SAR>

	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band II	WCDMA Band IV	802.11b/g	802.11a	Max. SAR Summation
Right Cheek	0.314	0.153	0.335	<b>0.364</b>	0.223	0.036	<b>0.046</b>	0.410
Right Tilted	0.27	0.114	<b>0.304</b>	0.291	0.141	<b>0.037</b>	0.00937	0.341
Left Cheek	0.2	0.101	0.237	<b>0.249</b>	0.176	<b>0.07</b>	0.014	0.319
Left Tilted	0.184	0.135	0.214	<b>0.313</b>	0.209	<b>0.043</b>	0.00289	0.356

### <Simultaneous Transmission –Body-worn SAR>

	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band II	WCDMA Band IV	802.11b/g	802.11a	Max. SAR Summation
Front	<b>0.262</b>	0.083	0.15	0.113	0.07	0.016	<b>0.042</b>	0.304
Back	0.454	0.364	0.31	<b>0.568</b>	0.474	0.092	<b>0.14</b>	0.708

### <Simultaneous Transmission –Body-worn SAR-Holster>

	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band II	WCDMA Band IV	802.11b/g	802.11a	Max. SAR Summation
Front	<b>0.325</b>	0.09	0.198	0.116	0.065	0.013	<b>0.037</b>	0.362
Back	<b>0.475</b>	0.232	0.346	0.413	0.343	0.092	<b>0.188</b>	0.663

#### Note:

- 1 The maximum SAR summation is calculated based on the same configuration and test position.
- 2 For 1g-SAR scalar summation < 1.6W/kg, simultaneous SAR measurement is not necessary.
- 3 If SPLSR < 0.3, volume scan is not necessary; referring to KDB 648474.
- 4 Per KDB KDB 648474 D01, Bluetooth output power ≤ Pref and the distance to WWAN antenna ≥ 2.5cm, therefore stand-alone SAR and simultaneous SAR is not required.

Test Engineer : Jason Wang, Aaron Chen, Vic Yang, Angelo Chang, and Jack Wu



### **13. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] IEEE Std. C95.1-1991, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1991
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v04, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", November 2009
- [8] FCC KDB 447498 D02 v02, "SAR Measurement Procedures for USB Dongle Transmitters", November 2009
- [9] FCC KDB 616217 D01 v01r01, "SAR Evaluation Considerations for Laptop Computers with Antennas Built-in on Display Screens", November 2009
- [10] FCC KDB 616217 D03 v01, "SAR Evaluation Considerations for Laptop/Notebook/Netbook and Tablet Computers", November 2009
- [11] FCC KDB 648474 D01 v01r05, "SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas", September 2008
- [12] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [13] FCC KDB 941225 D02 v02 "3GPP R6 HSPA and R7 HSPA+ SAR Guidance", December 2009.
- [14] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [15] FCC KDB 941225 D04 v01, "Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode", January 27 2010



## **Appendix A. Plots of System Performance Check**

The plots are shown as follows.



## **Appendix B. Plots of SAR Measurement**

The plots are shown as follows.



## **Appendix C. DASY Calibration Certificate**

The DASY calibration certificates are shown as follows.