

# FCC RF Test Report

APPLICANT : Honeywell International Inc  
EQUIPMENT : Dolphin 7800  
BRAND NAME : Honeywell  
MODEL NAME : Dolphin® 7800  
FCC ID : HD57800LW  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : Digital Transmission System (DTS)

The product was received on Jun. 20, 2011 and completely tested on Oct. 30, 2011. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.4-2003 and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



---

Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.

## TABLE OF CONTENTS

|                                                    |     |
|----------------------------------------------------|-----|
| REVISION HISTORY .....                             | 3   |
| SUMMARY OF TEST RESULT .....                       | 4   |
| 1 GENERAL DESCRIPTION .....                        | 5   |
| 1.1 Applicant .....                                | 5   |
| 1.2 Manufacturer .....                             | 5   |
| 1.3 Feature of Equipment Under Test .....          | 5   |
| 1.4 Testing Site .....                             | 6   |
| 1.5 Applied Standards .....                        | 6   |
| 1.6 Ancillary Equipment List .....                 | 7   |
| 2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... | 8   |
| 2.1 RF Power .....                                 | 8   |
| 2.2 Test Mode .....                                | 10  |
| 2.3 Connection Diagram of Test System .....        | 12  |
| 2.4 RF Utility .....                               | 12  |
| 3 TEST RESULT .....                                | 13  |
| 3.1 6dB and 99% Bandwidth Measurement .....        | 13  |
| 3.2 Output Power Measurement .....                 | 34  |
| 3.3 Band Edges Measurement .....                   | 37  |
| 3.4 Spurious Emission Measurement .....            | 49  |
| 3.5 Power Spectral Density Measurement .....       | 65  |
| 3.6 AC Conducted Emission Measurement .....        | 76  |
| 3.7 Radiated Emission Measurement .....            | 80  |
| 3.8 Antenna Requirements .....                     | 113 |
| 4 LIST OF MEASURING EQUIPMENT .....                | 114 |
| 5 UNCERTAINTY OF EVALUATION .....                  | 115 |
| APPENDIX A. PHOTOGRAPHS OF EUT                     |     |
| APPENDIX B. SETUP PHOTOGRAPHS                      |     |



## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION             | ISSUED DATE   |
|--------------|---------|-------------------------|---------------|
| FR162005-01B | Rev. 01 | Initial issue of report | Nov. 14, 2011 |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |
|              |         |                         |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule              | IC Rule   | Description                   | Limit                    | Result | Remark                                   |
|----------------|-----------------------|-----------|-------------------------------|--------------------------|--------|------------------------------------------|
| 3.1            | 15.247(a)(2)          | A8.2(a)   | 6dB Bandwidth                 | $\geq 0.5\text{MHz}$     | Pass   | -                                        |
| 3.1            | -                     | Gen 4.6.1 | 99% Bandwidth                 | -                        | Pass   | -                                        |
| 3.2            | 15.247(b)             | A8.4      | Power Output Measurement      | $\leq 30\text{dBm}$      | Pass   | -                                        |
| 3.3            | 15.247(d)             | A8.5      | Frequency Band Edges          | $\leq 20\text{dBc}$      | Pass   | -                                        |
| 3.4            | 15.247(d)             | A8.5      | Spurious Emission             | $< 20\text{ dBc}$        | Pass   | -                                        |
| 3.5            | 15.247(e)             | A8.2(b)   | Power Spectral Density        | $\leq 8\text{dBm}$       | Pass   | -                                        |
| 3.6            | 15.207                | Gen 7.2.4 | AC Conducted Emission         | 15.207(a)                | Pass   | Under limit<br>13.9 dB at<br>0.222 MHz   |
| 3.7            | 15.247(d)             | A8.5      | Transmitter Radiated Emission | 15.209(a) &<br>15.247(d) | Pass   | Under limit<br>7.61 dB at<br>2491.45 MHz |
| 3.8            | 15.203 &<br>15.247(b) | A8.4      | Antenna Requirement           | N/A                      | Pass   | -                                        |

# 1 General Description

## 1.1 Applicant

**Honeywell International Inc**  
9680 Old Bailes Road, Fort Mill, SC 29707 USA

## 1.2 Manufacturer

**Honeywell International Inc**  
9680 Old Bailes Road, Fort Mill, SC 29707 USA

## 1.3 Feature of Equipment Under Test

| Product Feature & Specification        |                                                                                                                                                                                                                                                                            |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Equipment</b>                       | Dolphin 7800                                                                                                                                                                                                                                                               |
| <b>Brand Name</b>                      | Honeywell                                                                                                                                                                                                                                                                  |
| <b>Model Name</b>                      | Dolphin® 7800                                                                                                                                                                                                                                                              |
| <b>FCC ID</b>                          | HD57800LW                                                                                                                                                                                                                                                                  |
| <b>Integrated Module</b>               | Brand Name : Murata<br>Model Name : LBEH1Z9PFC-TEMP                                                                                                                                                                                                                        |
| <b>Tx/Rx Frequency Range</b>           | 802.11b/g/n : 2400 MHz ~ 2483.5 MHz<br>802.11a/n : 5725 MHz ~ 5850 MHz                                                                                                                                                                                                     |
| <b>Channel Spacing</b>                 | 802.11b/g : 5 MHz<br>802.11a : 20 MHz                                                                                                                                                                                                                                      |
| <b>Maximum Output Power to Antenna</b> | <b>&lt;2400 MHz ~ 2483.5 MHz&gt;</b><br>802.11b : 19.88 dBm (0.0973 W)<br>802.11g : 23.78 dBm (0.2388 W)<br>802.11n (BW 20MHz) : 23.79 dBm (0.2393 W)<br><b>&lt;5725 MHz ~ 5850 MHz&gt;</b><br>802.11a : 22.31 dBm (0.1702 W)<br>802.11n (BW 20MHz) : 22.29 dBm (0.1694 W) |
| <b>Antenna Type</b>                    | 802.11b/g/n : PIFA Antenna with gain 2.95 dBi<br>802.11a/n : PIFA Antenna with gain 1.60 dBi                                                                                                                                                                               |
| <b>HW Version</b>                      | 010                                                                                                                                                                                                                                                                        |
| <b>SW Version</b>                      | 01                                                                                                                                                                                                                                                                         |
| <b>Type of Modulation</b>              | 802.11b : DSSS (BPSK / QPSK / CCK)<br>802.11a/g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                                                     |
| <b>EUT Stage</b>                       | Production Unit                                                                                                                                                                                                                                                            |

### Remark:

1. For other wireless features of this EUT, test report will be issued separately.
2. This test report recorded only product characteristics and test results of Digital Transmission System (DTS).
3. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Testing Site

|                           |                                                                                                                                                              |                                |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| <b>Test Site</b>          | SPORTON INTERNATIONAL INC.                                                                                                                                   |                                |
| <b>Test Site Location</b> | No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park,<br>Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL: +886-3-3273456 / FAX: +886-3-3284978 |                                |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                      | <b>FCC/IC Registration No.</b> |
|                           | CO05-HY                                                                                                                                                      | 722060/4086B-1                 |

|                           |                                                                                                                  |  |
|---------------------------|------------------------------------------------------------------------------------------------------------------|--|
| <b>Test Site</b>          | SPORTON INTERNATIONAL (KUNSHAN) INC.                                                                             |  |
| <b>Test Site Location</b> | No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P.R.C.<br>TEL: +86-0512-5790-0158<br>FAX: +86-0512-5790-0958 |  |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                          |  |
|                           | 03CH01-KS                                                                                                        |  |

## 1.5 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 (Measurement Guidelines of DTS)
- ♦ ANSI C63.4-2003
- ♦ IC RSS-210 Issue 8
- ♦ IC RSS-Gen Issue 3

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.6 Ancillary Equipment List

| Item | Equipment          | Trade Name | Model Name  | FCC ID       | Data Cable      | Power Cord                                                 |
|------|--------------------|------------|-------------|--------------|-----------------|------------------------------------------------------------|
| 1.   | System Simulator   | R&S        | CMU 200     | N/A          | N/A             | Unshielded, 1.8 m                                          |
| 2.   | GPS Station        | T&E        | GS-50       | N/A          | N/A             | Unshielded, 1.8 m                                          |
| 3.   | WLAN AP            | D-Link     | DIR-628     | KA2DIR628A2  | N/A             | Unshielded, 1.8 m                                          |
| 4.   | Notebook           | DELL       | Vostro 1510 | FCC DoC      | N/A             | AC I/P:<br>Unshielded, 1.2 m<br>DC O/P:<br>Shielded, 1.8 m |
| 5.   | Notebook           | Dell       | P08S        | QDS-BRCM1030 | N/A             | AC I/P:<br>Unshielded, 1.84m<br>DC O/P:<br>Shielded, 0.9m  |
| 6.   | LCD Monitor        | Lenovo     | 6135-AB1    | FCC DoC      | Shielded, 1.6 m | Unshielded, 1.8 m                                          |
| 7.   | LCD Monitor        | Dell       | ST2220Lb    | Fcc DoC      | Shielded, 1.6m  | Unshielded,1.8m                                            |
| 8.   | Bluetooth Earphone | Nokia      | BH-102      | PYAHS-107W   | N/A             | N/A                                                        |
| 9.   | iPod               | Apple      | A1199       | FCC DoC      | Shielded, 1.0 m | N/A                                                        |
| 10.  | iPod               | Apple      | A1285       | FCC DoC      | Shielded, 1.0 m | N/A                                                        |

## 2 Test Configuration of Equipment Under Test

### 2.1 RF Power

Preliminary tests were performed in different data rate and recorded the RF power output in the following table:

| Channel | Frequency | 2.4GHz 802.11b RF Power (dBm) |        |          |         |
|---------|-----------|-------------------------------|--------|----------|---------|
|         |           | DSSS Data Rate                |        |          |         |
|         |           | 1 Mbps                        | 2 Mbps | 5.5 Mbps | 11 Mbps |
| CH 01   | 2412 MHz  | 19.63                         | -      | -        | -       |
| CH 06   | 2437 MHz  | 19.88                         | 19.87  | 19.63    | 19.66   |
| CH 11   | 2462 MHz  | 19.84                         | -      | -        | -       |

| Channel | Frequency | 2.4GHz 802.11g RF Power (dBm) |        |         |         |         |         |         |         |
|---------|-----------|-------------------------------|--------|---------|---------|---------|---------|---------|---------|
|         |           | OFDM Data Rate                |        |         |         |         |         |         |         |
|         |           | 6 Mbps                        | 9 Mbps | 12 Mbps | 18 Mbps | 24 Mbps | 36 Mbps | 48 Mbps | 54 Mbps |
| CH 01   | 2412 MHz  | 22.24                         | -      | -       | -       | -       | -       | -       | -       |
| CH 06   | 2437 MHz  | 23.78                         | 23.76  | 23.77   | 23.76   | 23.77   | 23.77   | 23.74   | 23.75   |
| CH 11   | 2462 MHz  | 22.36                         | -      | -       | -       | -       | -       | -       | -       |

| Channel | Frequency | 2.4GHz 802.11n (BW 20MHz) RF Power (dBm) |       |       |       |       |       |       |       |
|---------|-----------|------------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |           | OFDM Data Rate                           |       |       |       |       |       |       |       |
|         |           | MCS0                                     | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH 01   | 2412 MHz  | 22.34                                    | -     | -     | -     | -     | -     | -     | -     |
| CH 06   | 2437 MHz  | 23.79                                    | 23.78 | 23.76 | 23.72 | 23.76 | 23.77 | 23.75 | 23.64 |
| CH 11   | 2462 MHz  | 22.55                                    | -     | -     | -     | -     | -     | -     | -     |

| Channel | Frequency | 5GHz 802.11a RF Power (dBm) |        |         |         |         |         |         |         |
|---------|-----------|-----------------------------|--------|---------|---------|---------|---------|---------|---------|
|         |           | OFDM Data Rate              |        |         |         |         |         |         |         |
|         |           | 6 Mbps                      | 9 Mbps | 12 Mbps | 18 Mbps | 24 Mbps | 36 Mbps | 48 Mbps | 54 Mbps |
| CH149   | 5745 MHz  | 22.31                       | 22.30  | 22.21   | 22.20   | 22.30   | 22.21   | 22.07   | 22.11   |
| CH157   | 5785 MHz  | 21.84                       | -      | -       | -       | -       | -       | -       | -       |
| CH165   | 5825 MHz  | 22.11                       | -      | -       | -       | -       | -       | -       | -       |

| Channel | Frequency | 5GHz 802.11n (BW 20MHz) RF Power (dBm) |       |       |       |       |       |       |       |
|---------|-----------|----------------------------------------|-------|-------|-------|-------|-------|-------|-------|
|         |           | OFDM Data Rate                         |       |       |       |       |       |       |       |
|         |           | MCS0                                   | MCS1  | MCS2  | MCS3  | MCS4  | MCS5  | MCS6  | MCS7  |
| CH149   | 5745 MHz  | 22.29                                  | 22.27 | 22.24 | 22.28 | 22.23 | 22.26 | 22.06 | 21.92 |
| CH157   | 5785 MHz  | 21.72                                  | -     | -     | -     | -     | -     | -     | -     |
| CH165   | 5825 MHz  | 22.08                                  | -     | -     | -     | -     | -     | -     | -     |

**Remark:**

1. The EUT is programmed to transmit signals continuously for all testing.
2. The data rates of WLAN 802.11a/b/g/n were set in 1Mbps for 802.11b, 6Mbps for 802.11g, MCS0 for 802.11n (BW 20MHz), 6Mbps for 802.11a, and MCS0 for 802.11n (BW 20MHz) for all the test cases due to the highest RF output power.
3. Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

## 2.2 Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2003 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz), radiated emission (30 MHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Pre-scanned tests, X, Y, Z in three orthogonal panels, were conducted to determine the final configuration from all possible combinations.


The following table is showing the total pre-scanned test modes, and the worst cases (H plane) are recorded in this report only.

| Test Cases           |                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                           |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Item            | 802.11b (Modulation : DSSS)<br>802.11g/n (Modulation : OFDM)                                                                                                                                                                                                                                                                     | 802.11a/n (Modulation : OFDM)                                                                                                                                                                                                             |
| <b>Conducted TCs</b> | Mode 1: 802.11b_CH01_2412 MHz<br>Mode 2: 802.11b_CH06_2437 MHz<br>Mode 3: 802.11b_CH11_2462 MHz<br>Mode 4: 802.11g_CH01_2412 MHz<br>Mode 5: 802.11g_CH06_2437 MHz<br>Mode 6: 802.11g_CH11_2462 MHz<br>Mode 7: 802.11n_CH01_2412 MHz (BW 20M)<br>Mode 8: 802.11n_CH06_2437 MHz (BW 20M)<br>Mode 9: 802.11n_CH11_2462 MHz (BW 20M) | Mode 10: 802.11a_CH149_5745 MHz<br>Mode 11: 802.11a_CH157_5785 MHz<br>Mode 12: 802.11a_CH165_5825 MHz<br>Mode 13: 802.11n_CH149_5745 MHz (BW 20M)<br>Mode 14: 802.11n_CH157_5785 MHz (BW 20M)<br>Mode 15: 802.11n_CH165_5825 MHz (BW 20M) |
| <b>Radiated TCs</b>  | Mode 1: 802.11b_CH01_2412 MHz<br>Mode 2: 802.11b_CH06_2437 MHz<br>Mode 3: 802.11b_CH11_2462 MHz<br>Mode 4: 802.11g_CH01_2412 MHz<br>Mode 5: 802.11g_CH06_2437 MHz<br>Mode 6: 802.11g_CH11_2462 MHz<br>Mode 7: 802.11n_CH01_2412 MHz (BW 20M)<br>Mode 8: 802.11n_CH06_2437 MHz (BW 20M)<br>Mode 9: 802.11n_CH11_2462 MHz (BW 20M) | Mode 10: 802.11a_CH149_5745 MHz<br>Mode 11: 802.11a_CH157_5785 MHz<br>Mode 12: 802.11a_CH165_5825 MHz<br>Mode 13: 802.11n_CH149_5745 MHz (BW 20M)<br>Mode 14: 802.11n_CH157_5785 MHz (BW 20M)<br>Mode 15: 802.11n_CH165_5825 MHz (BW 20M) |


| Test Cases                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AC<br>Conducted<br>Emission                                                                                                                                                                                                                                                                                                               | Mode 1 : GSM850 (GPRS 8) Idle + Bluetooth Link + WLAN Link (2.4G) + GPS Rx + USB Charging<br>Cable with AC Power + USB Cable (Data Link with Notebook) for Keypad 1<br><br>Mode 2 : WCDMA Band IV Idle + Bluetooth Link + WLAN Link (5G) + GPS Rx + USB Charging<br>Cable with AC Power + USB Cable (Data Link with Notebook) for Keypad 2 |
| <b>Remark:</b><br><ol style="list-style-type: none"><li>1. The worst case of conducted emission is mode 2; only the test data of it was reported.</li><li>2. Link with Notebook means data application transferred mode between DUT and Notebook.</li><li>3. The cases of the Radiated Emission were performance with Keypad 1.</li></ol> |                                                                                                                                                                                                                                                                                                                                            |

## 2.3 Connection Diagram of Test System

### <WLAN Tx Mode>

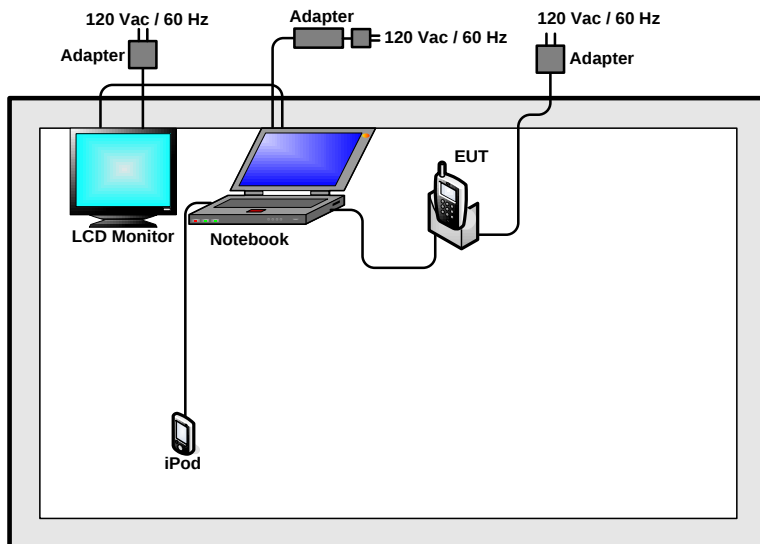

### <AC Conducted Emission Mode>

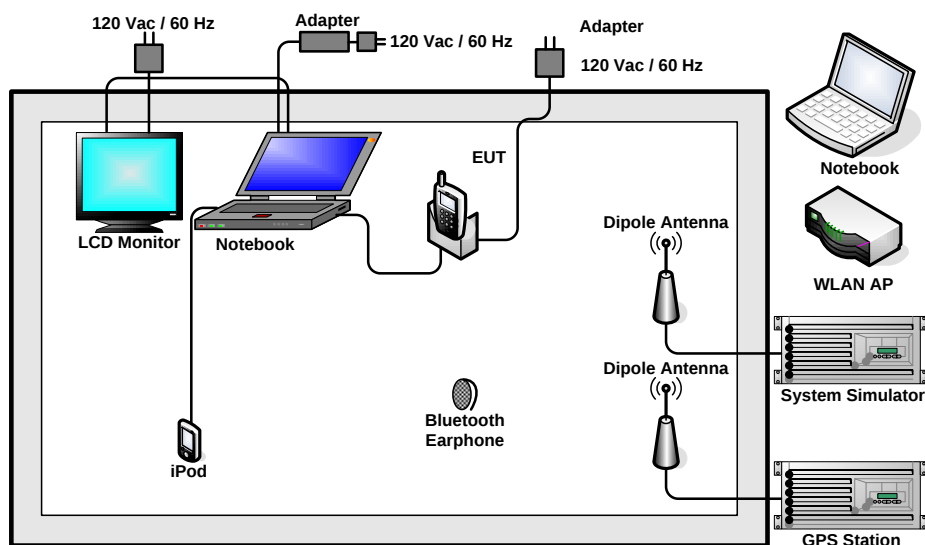

## 2.4 RF Utility

The programmed RF utility “Wifi Test Tool”, is installed in EUT to provide channel selection, power level, data rate and the application type. RF Utility can send transmitting signal for all testing. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.
4. The marker-delta reading at this point is the 6 dB bandwidth of the emission.

##### 3.1.4 Test Setup



**3.1.5 Test Result of 6dB Bandwidth**

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11b<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|-----------------|--------------------------------|-----------------------------------|-----------|
| 01      | 2412            | 9.04                           | 0.5                               | Pass      |
| 06      | 2437            | 9.06                           | 0.5                               | Pass      |
| 11      | 2462            | 9.08                           | 0.5                               | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11g<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|-----------------|--------------------------------|-----------------------------------|-----------|
| 01      | 2412            | 15.52                          | 0.5                               | Pass      |
| 06      | 2437            | 15.64                          | 0.5                               | Pass      |
| 11      | 2462            | 15.52                          | 0.5                               | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11n (BW 20MHz)<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|-----------------|-------------------------------------------|-----------------------------------|-----------|
| 01      | 2412            | 15.80                                     | 0.5                               | Pass      |
| 06      | 2437            | 15.32                                     | 0.5                               | Pass      |
| 11      | 2462            | 15.66                                     | 0.5                               | Pass      |

|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 10, 11, 12 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11a<br>6dB Bandwidth (MHz) | 6dB Bandwidth<br>Min. Limit (MHz) | Pass/Fail |
|---------|-----------------|--------------------------------|-----------------------------------|-----------|
| 149     | 5745            | 15.60                          | 0.5                               | Pass      |
| 157     | 5785            | 15.55                          | 0.5                               | Pass      |
| 165     | 5825            | 15.65                          | 0.5                               | Pass      |



|                        |                 |                            |        |
|------------------------|-----------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 13, 14, 15 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53% |

| <b>Channel</b> | <b>Frequency (MHz)</b> | <b>802.11n (BW 20MHz)<br/>6dB Bandwidth (MHz)</b> | <b>6dB Bandwidth<br/>Min. Limit (MHz)</b> | <b>Pass/Fail</b> |
|----------------|------------------------|---------------------------------------------------|-------------------------------------------|------------------|
| 149            | 5745                   | 15.80                                             | 0.5                                       | Pass             |
| 157            | 5785                   | 16.25                                             | 0.5                                       | Pass             |
| 165            | 5825                   | 15.35                                             | 0.5                                       | Pass             |

**3.1.6 Test Result of 99% Occupied Bandwidth**

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11b<br>99% Occupied Bandwidth (MHz) | Pass/Fail |
|---------|-----------------|-----------------------------------------|-----------|
| 01      | 2412            | 14.05                                   | Pass      |
| 06      | 2437            | 14.10                                   | Pass      |
| 11      | 2462            | 14.10                                   | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11g<br>99% Occupied Bandwidth (MHz) | Pass/Fail |
|---------|-----------------|-----------------------------------------|-----------|
| 01      | 2412            | 18.10                                   | Pass      |
| 06      | 2437            | 18.25                                   | Pass      |
| 11      | 2462            | 18.05                                   | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11n (BW 20MHz)<br>99% Occupied Bandwidth (MHz) | Pass/Fail |
|---------|-----------------|----------------------------------------------------|-----------|
| 01      | 2412            | 19.05                                              | Pass      |
| 06      | 2437            | 19.30                                              | Pass      |
| 11      | 2462            | 19.05                                              | Pass      |

|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 10, 11, 12 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11a<br>99% Occupied Bandwidth (MHz) | Pass/Fail |
|---------|-----------------|-----------------------------------------|-----------|
| 149     | 5745            | 18.15                                   | Pass      |
| 157     | 5785            | 18.05                                   | Pass      |
| 165     | 5825            | 17.95                                   | Pass      |




|                        |                 |                            |        |
|------------------------|-----------------|----------------------------|--------|
| <b>Test Mode :</b>     | Mode 13, 14, 15 | <b>Temperature :</b>       | 24~26℃ |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53% |

| <b>Channel</b> | <b>Frequency<br/>(MHz)</b> | <b>802.11n (BW 20MHz)<br/>99% Occupied Bandwidth (MHz)</b> | <b>Pass/Fail</b> |
|----------------|----------------------------|------------------------------------------------------------|------------------|
| 149            | 5745                       | 19.20                                                      | Pass             |
| 157            | 5785                       | 19.15                                                      | Pass             |
| 165            | 5825                       | 19.15                                                      | Pass             |


### 3.1.7 Test Result of 6dB Bandwidth Plots

#### Mode 1 : 6 dB Bandwidth Plot on 802.11b Channel 01

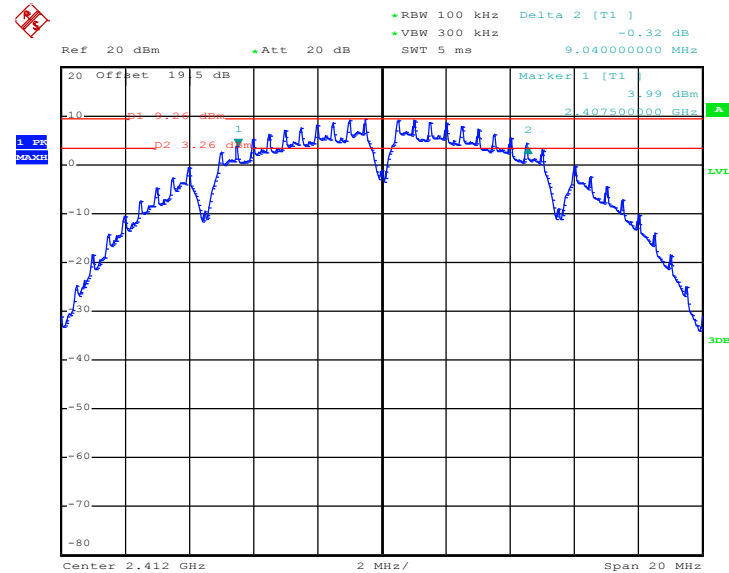


Date: 12.OCT.2011 01:10:02


#### Mode 2 : 6 dB Bandwidth Plot on 802.11b Channel 06

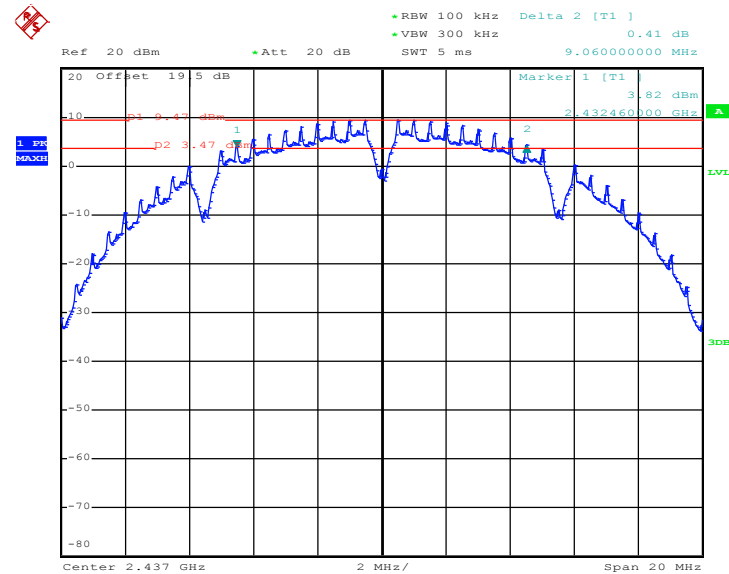


Date: 11.OCT.2011 23:26:29

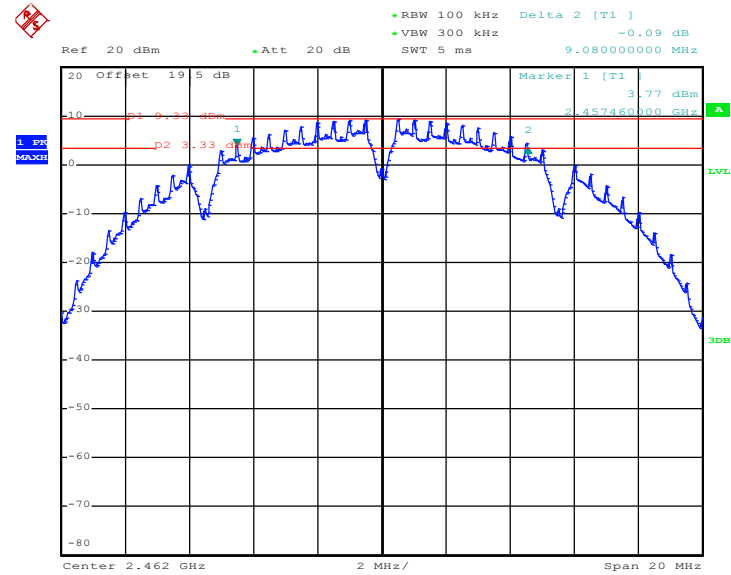**Mode 3 : 6 dB Bandwidth Plot on 802.11b Channel 11**


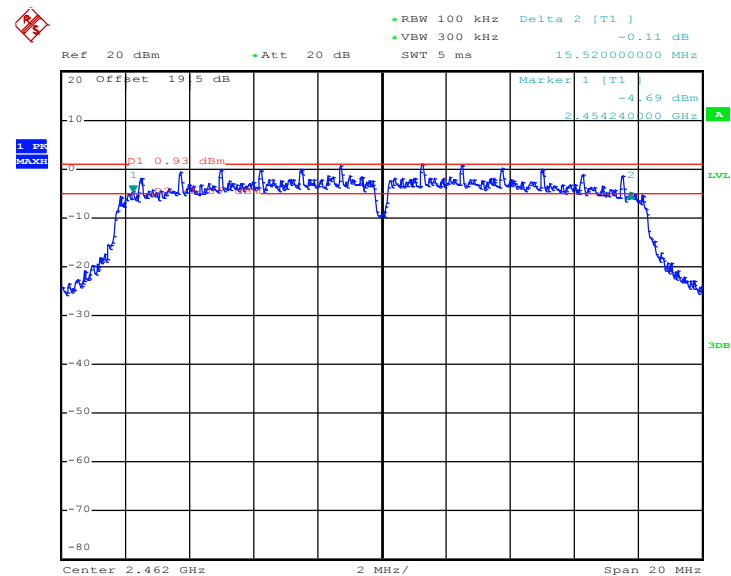
Date: 11.OCT.2011 23:30:06

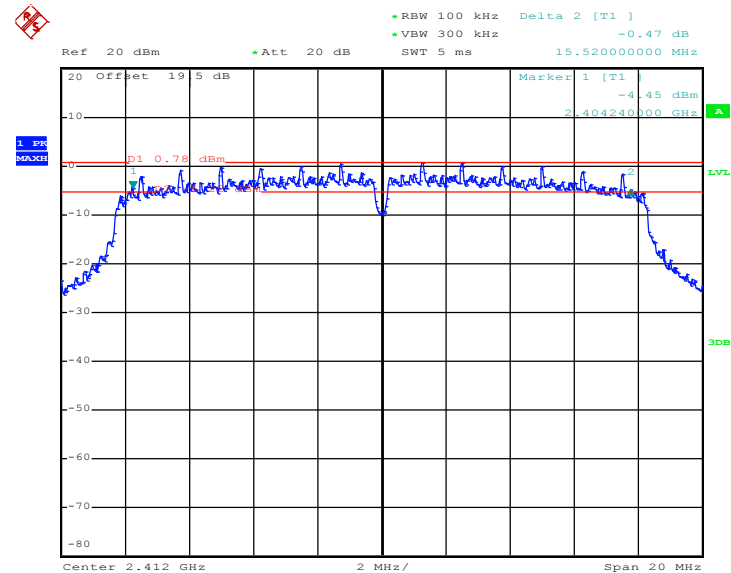**Mode 4 : 6 dB Bandwidth Plot on 802.11g Channel 01**


Date: 11.OCT.2011 23:43:31

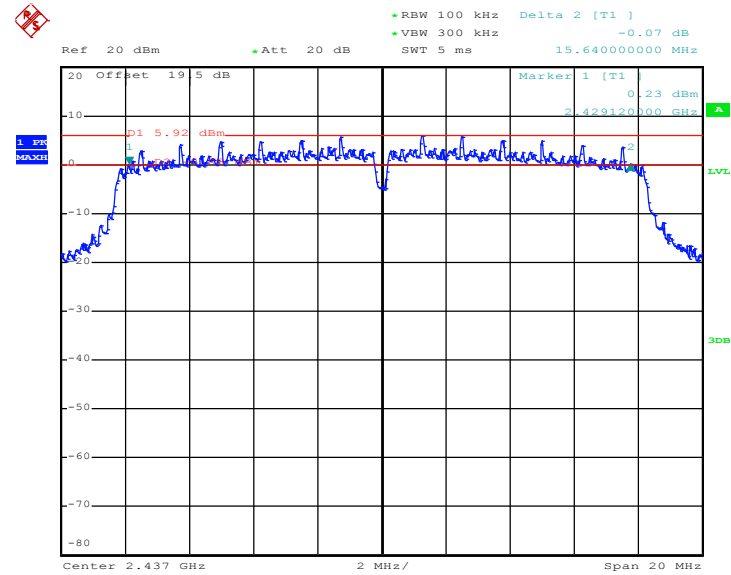**Mode 5 : 6 dB Bandwidth Plot on 802.11g Channel 06**


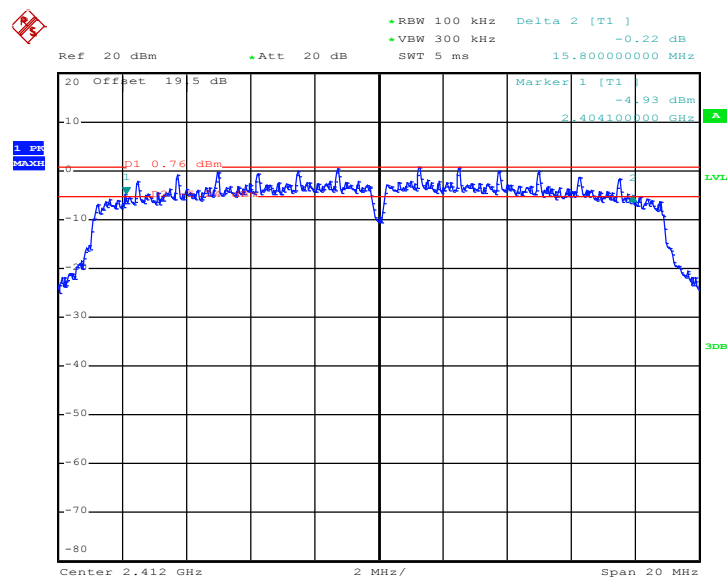
Date: 11.OCT.2011 23:59:38

**Mode 6 : 6 dB Bandwidth Plot on 802.11g Channel 11**


Date: 12.OCT.2011 00:12:27




Mode 7 : 6 dB Bandwidth Plot on 802.11n Channel 01



Date: 12.OCT.2011 00:25:43

Mode 8 : 6 dB Bandwidth Plot on 802.11n Channel 06

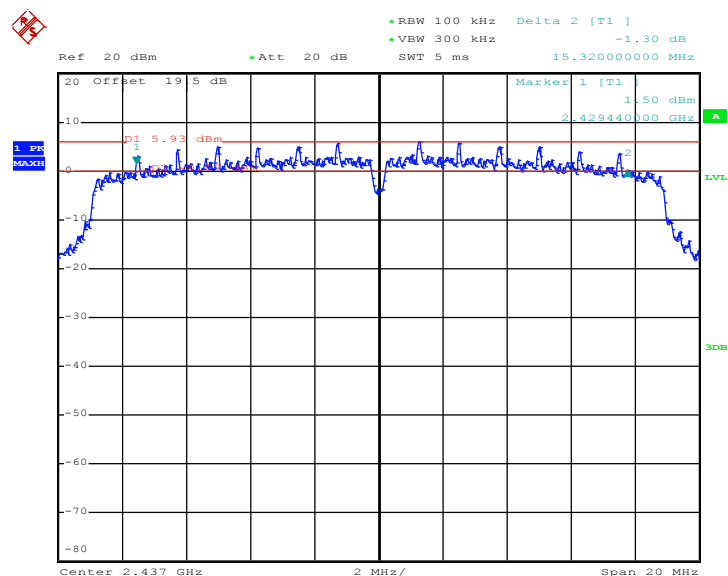

Date: 12.OCT.2011 00:39:03



1.56 MHz

Ref 20 dBm Att 20 dB RBW 100 kHz Delta 2 [T1] -0.02 dB VBW 300 kHz SWT 5 ms 15.660000000 MHz

20 Offset 19.5 dB

Marker 1 [T1] -4.93 dBm 2.454240000 GHz

0.88 dBm

Center 2.462 GHz 2 MHz/ Span 20 MHz

Date: 13.OCT.2011 09:15:41

• RBW 100 kHz Delta 2 [T1]  
 • VBW 300 kHz -0.39 dB  
 Att 20 dB SWT 20 ms 15.600000000 MHz

Ref 20 dBm  
 Offset 22.9 dB

Marker 1 [T1]  
 -1.70 dBm  
 5.737200000 GHz

1. Vg  
 PDSCH


p1 3.81 dBm  
 p2 -2.19 dBm

Center 5.745 GHz  
 Span 50 MHz

Date: 13.OCT.2011 09:27:58




### Mode 11: 6 dB Bandwidth Plot on 802.11a Channel 157

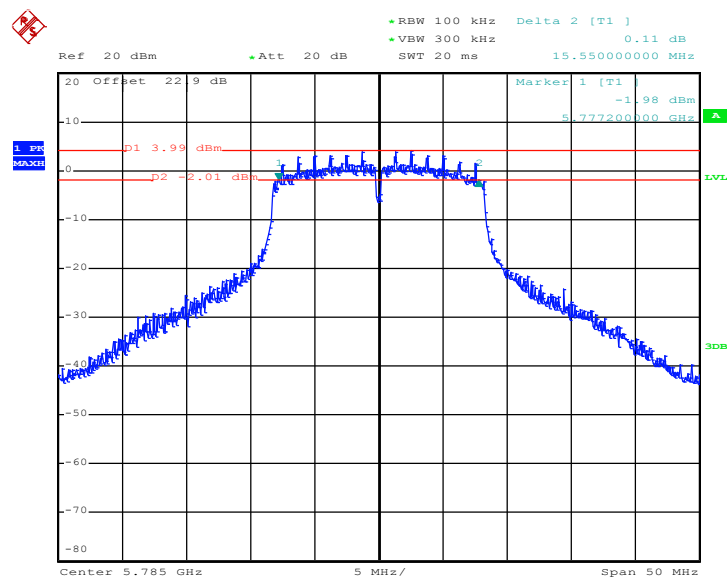

Date: 13.OCT.2011 09:53:05

### Mode 12: 6 dB Bandwidth Plot on 802.11a Channel 165

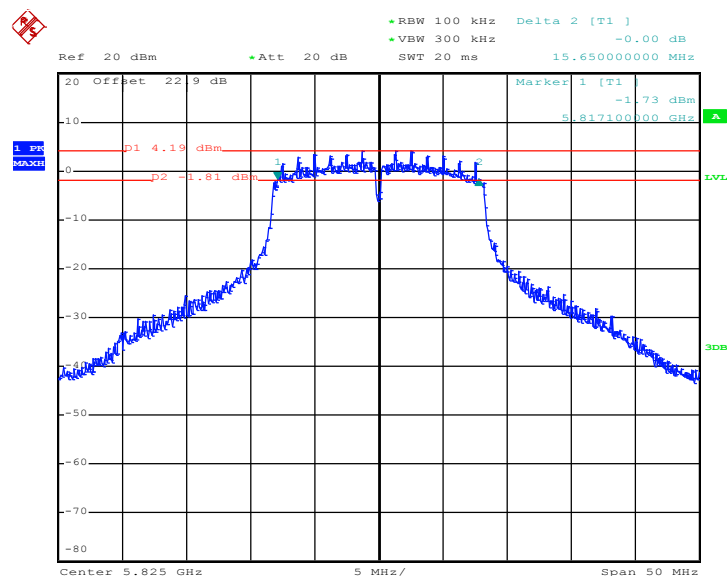

Date: 13.OCT.2011 10:00:52



Ref 20 dBm Att 20 dB RBW 100 kHz VBW 300 kHz SWT 20 ms Delta 2 [T1] 0.07 dB 15.800000000 MHz

Marker 1 [T1] -2.21 dBm 5.737100000 GHz

p1 3.65 dBm p2 -2.35 dBm

Center 5.745 GHz 5 MHz/ Span 50 MHz

Date: 13.OCT.2011 09:37:09

Ref 20 dBm Att 20 dB

RBW 100 kHz Delta 2 [T1] -0.14 dB  
VBW 300 kHz

SWT 20 ms 16.250000000 MHz

Marker 1 [T1] -2.21 dBm  
5.777150000 GHz


p1 3.62 dBm  
p2 -2.38 dBm

Center 5.785 GHz Span 50 MHz

Date: 13.OCT.2011 11:32:36



Mode 15: 6 dB Bandwidth Plot on 802.11n Channel 165

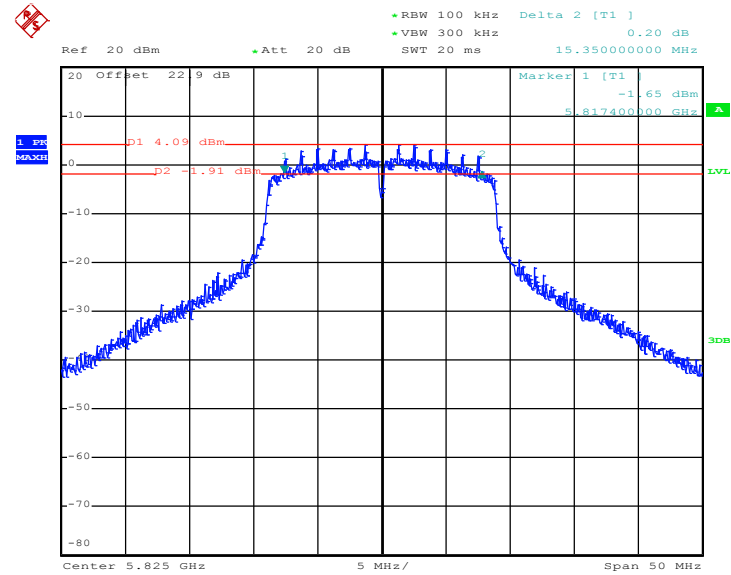


Date: 13.OCT.2011 10:06:24




### 3.1.8 Test Result of 99% Bandwidth Plots

#### Mode 1 : 99% Occupied Bandwidth Plot on 802.11b Channel 01

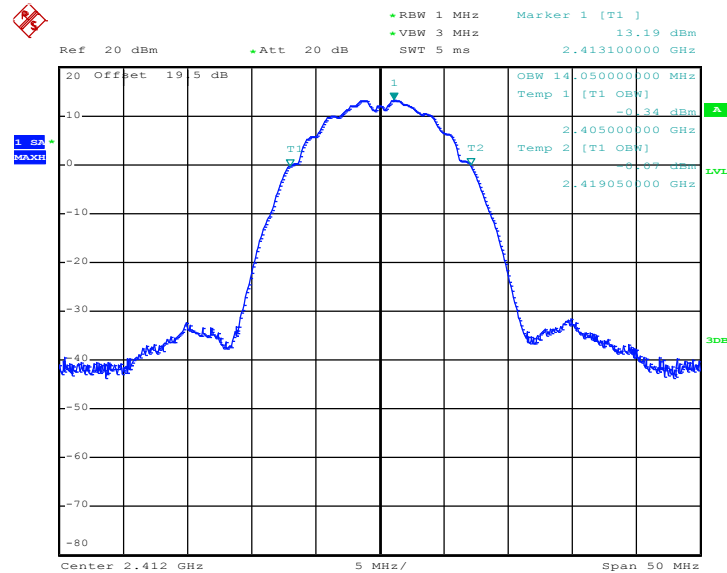


Date: 11.OCT.2011 22:34:21


#### Mode 2 : 99% Occupied Bandwidth Plot on 802.11b Channel 06

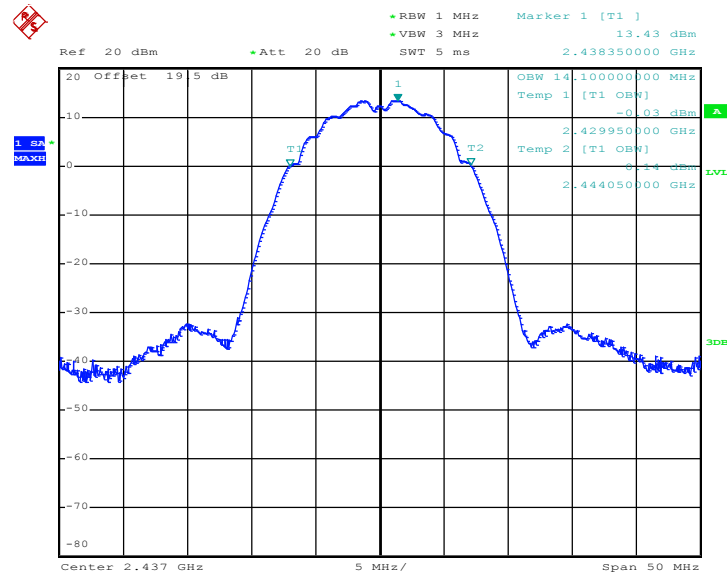

Date: 11.OCT.2011 23:26:59

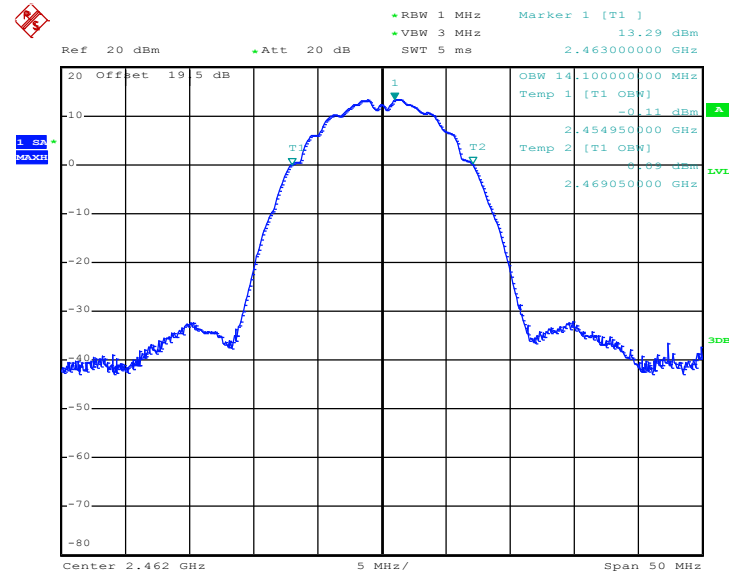**Mode 3 : 99% Occupied Bandwidth Plot on 802.11b Channel 11**


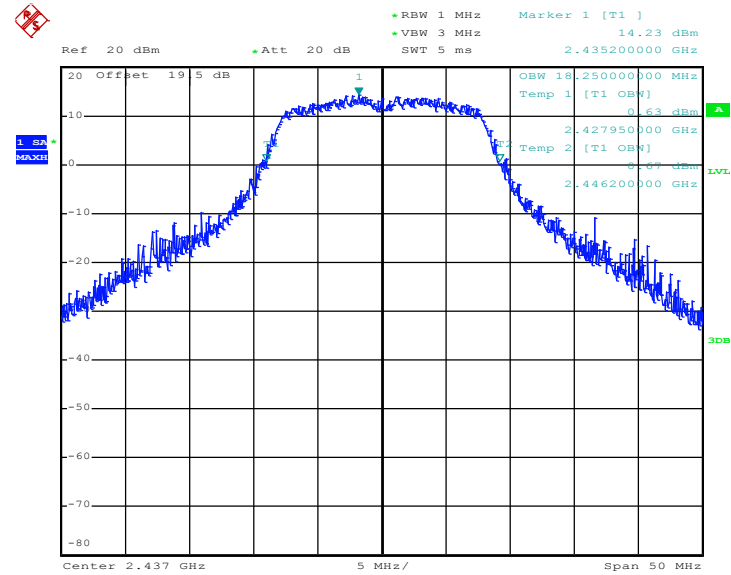
Date: 11.OCT.2011 23:31:19

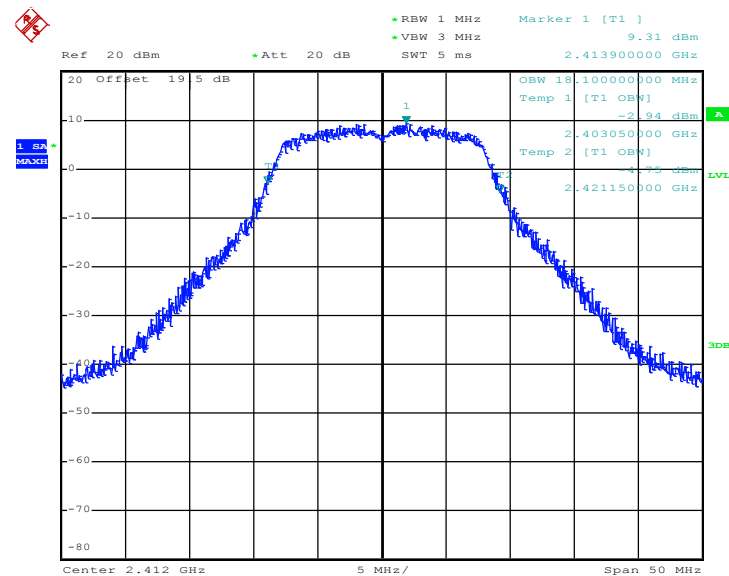**Mode 4 : 99% Occupied Bandwidth Plot on 802.11g Channel 01**


Date: 11.OCT.2011 23:45:05




Mode 5 : 99% Occupied Bandwidth Plot on 802.11g Channel 06



Date: 12.OCT.2011 00:00:08

Mode 6 : 99% Occupied Bandwidth Plot on 802.11g Channel 11

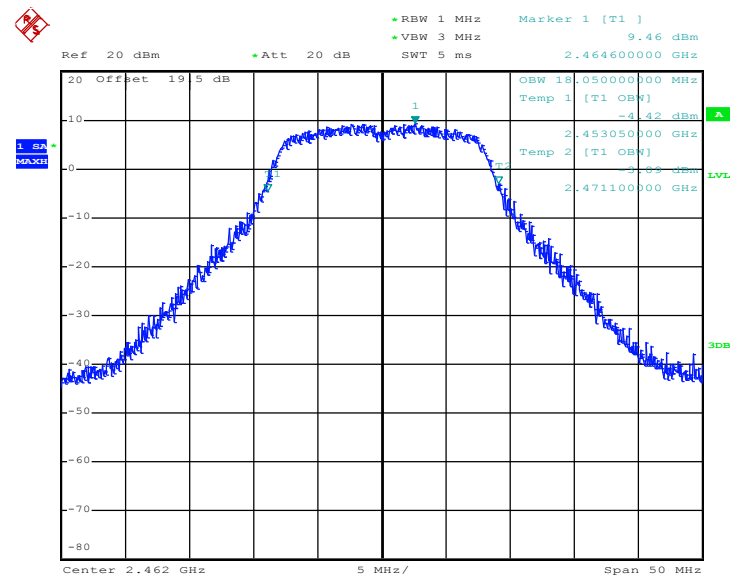

Date: 12.OCT.2011 00:13:40

[illegible]

Date: 12.OCT.2011 00:27:17

1.5A  
PASH

Ref 20 dBm Att 20 dB RBW 1 MHz VBW 3 MHz SWT 5 ms Marker 1 [T1] 14.70 dBm 2.437850000 GHz

20 OffSet 19.5 dB

1 1.34 dBm 2.427350000 GHz


2 1.43 dBm 2.446650000 GHz

Center 2.437 GHz 5 MHz/ Span 50 MHz

Date: 12.OCT.2011 00:39:33




Mode 9 : 99% Occupied Bandwidth Plot on 802.11n Channel 11

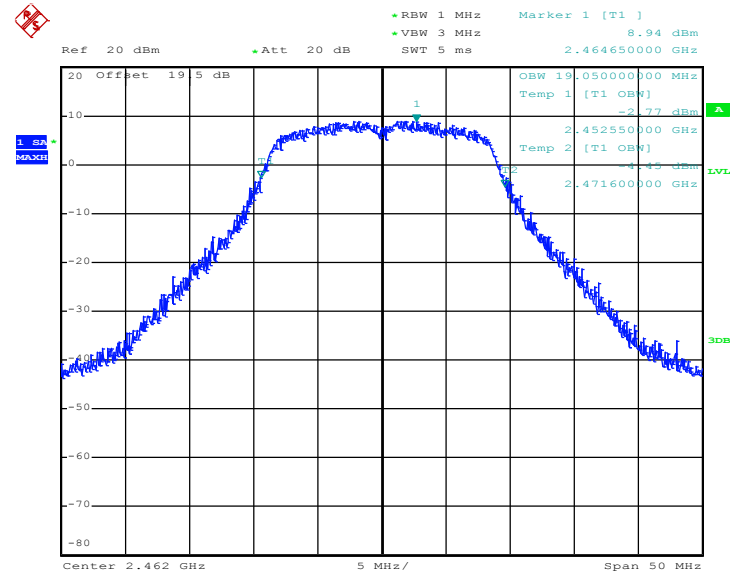

Date: 12.OCT.2011 00:54:45


Mode 10: 99% Occupied Bandwidth Plot on 802.11a Channel 149

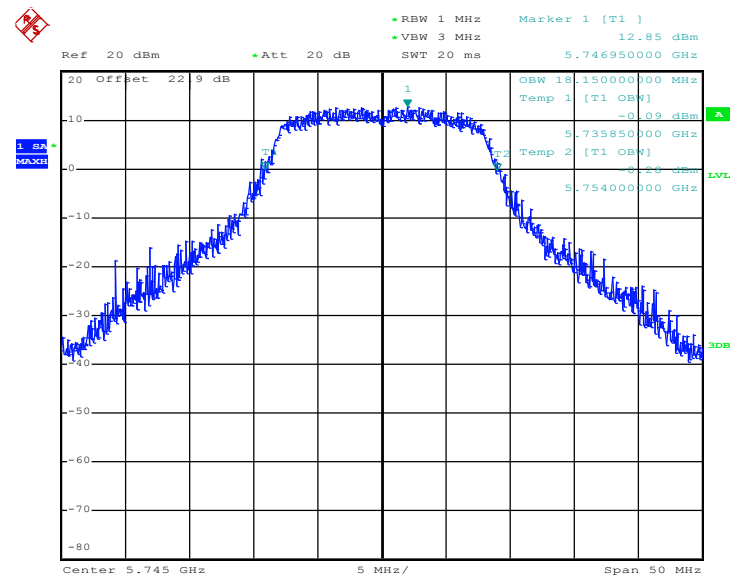

Date: 13.OCT.2011 00:01:22




Mode 11: 99% Occupied Bandwidth Plot on 802.11a Channel 157

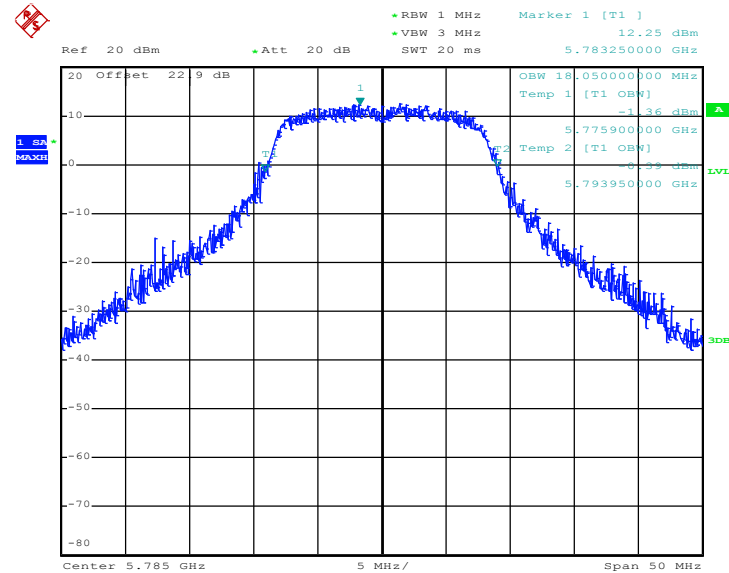

Date: 13.OCT.2011 00:14:29


Mode 12: 99% Occupied Bandwidth Plot on 802.11a Channel 165

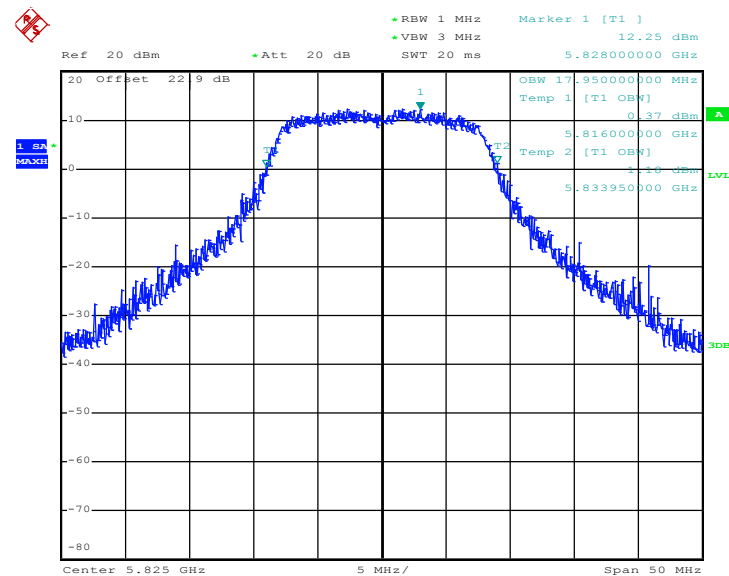

Date: 13.OCT.2011 00:26:57




Mode 13: 99% Occupied Bandwidth Plot on 802.11n Channel 149

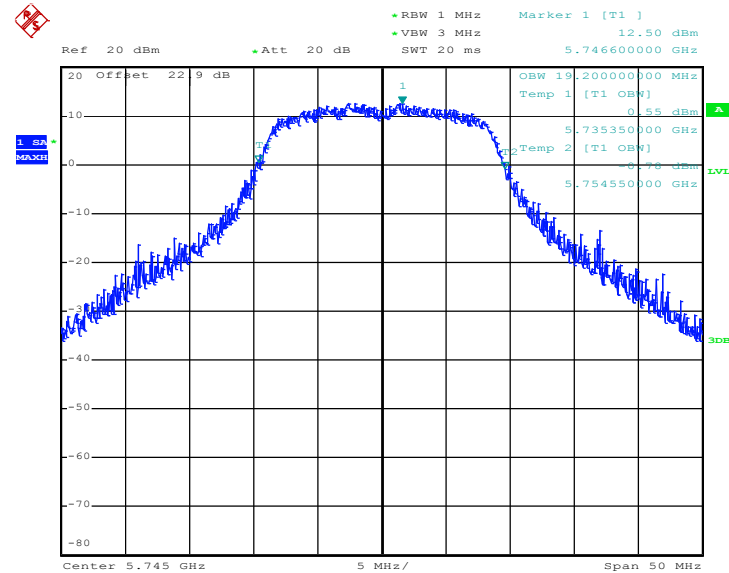

Date: 13.OCT.2011 00:44:46


Mode 14: 99% Occupied Bandwidth Plot on 802.11n Channel 157

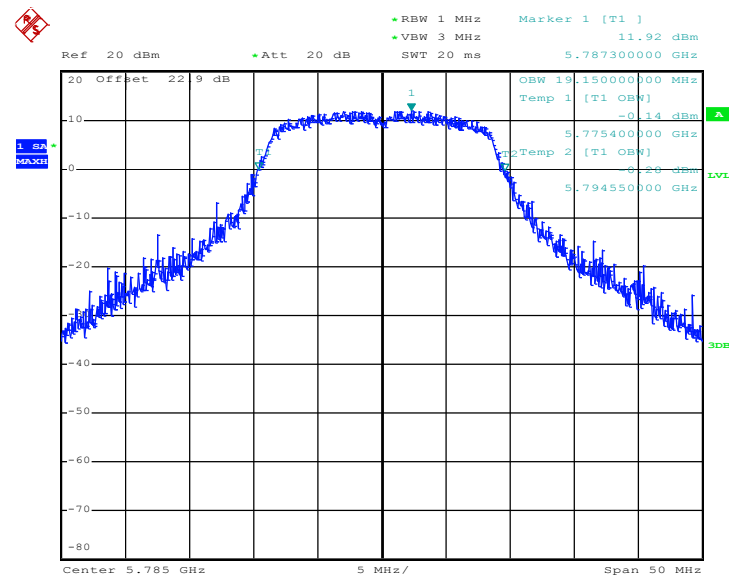

Date: 13.OCT.2011 01:06:23



Mode 15: 99% Occupied Bandwidth Plot on 802.11n Channel 165

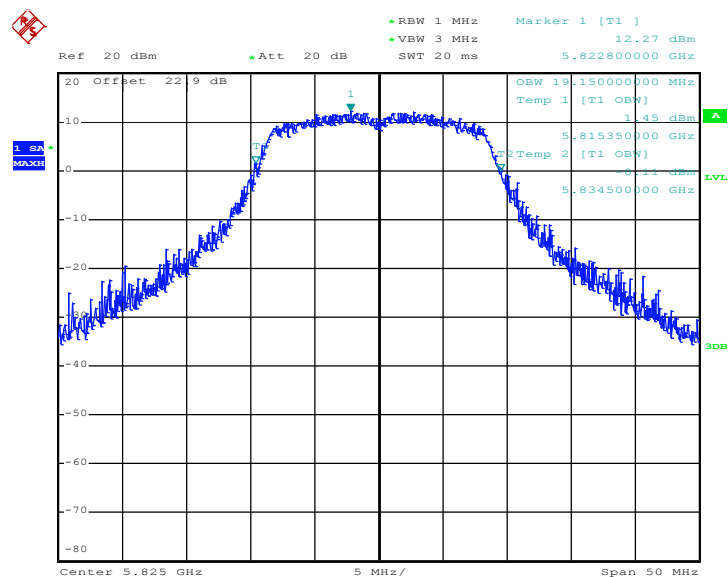

Date: 13.OCT.2011 01:36:36

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz and 5725-5850MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

See list of measuring instruments of this test report.

### 3.2.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the power meter by a low loss cable.
3. Measure the power by power meter.

### 3.2.4 Test Setup

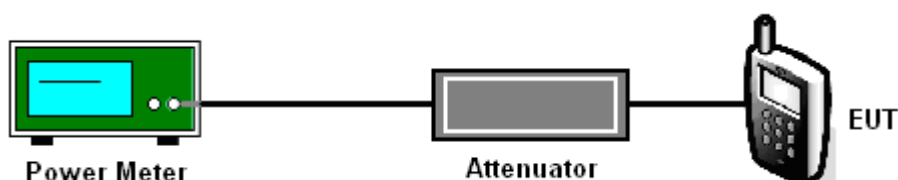

### 3.2.5 Test Result of Output Power

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11b<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------------------|-------------------|-----------|
| 01      | 2412            | 19.63                                  | 30                | Pass      |
| 06      | 2437            | 19.88                                  | 30                | Pass      |
| 11      | 2462            | 19.84                                  | 30                | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11g<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------------------|-------------------|-----------|
| 01      | 2412            | 22.24                                  | 30                | Pass      |
| 06      | 2437            | 23.78                                  | 30                | Pass      |
| 11      | 2462            | 22.36                                  | 30                | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11n (BW 20MHz)<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|---------------------------------------------------|-------------------|-----------|
| 01      | 2412            | 22.34                                             | 30                | Pass      |
| 06      | 2437            | 23.79                                             | 30                | Pass      |
| 11      | 2462            | 22.55                                             | 30                | Pass      |

|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 10, 11, 12 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11a<br>Measured Output Power (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------------------|-------------------|-----------|
| 149     | 5745            | 22.31                                  | 30                | Pass      |
| 157     | 5785            | 21.84                                  | 30                | Pass      |
| 165     | 5825            | 22.11                                  | 30                | Pass      |



|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 13, 14, 15 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| <b>Channel</b> | <b>Frequency (MHz)</b> | <b>802.11n (BW 20MHz)<br/>Measured Output Power (dBm)</b> | <b>Max. Limits (dBm)</b> | <b>Pass/Fail</b> |
|----------------|------------------------|-----------------------------------------------------------|--------------------------|------------------|
| 149            | 5745                   | 22.29                                                     | 30                       | Pass             |
| 157            | 5785                   | 21.72                                                     | 30                       | Pass             |
| 165            | 5825                   | 22.08                                                     | 30                       | Pass             |

### **3.3 Band Edges Measurement**

#### **3.3.1 Limit of Band Edges**

In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the radiated power. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

#### **3.3.2 Measuring Instruments**


See list of measuring instruments of this test report.

#### **3.3.3 Test Procedures**


1. The testing follows the guidelines in ANSI C63.4-2003 and FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. Conducted emission test: Set RBW = 100 kHz, Video bandwidth (VBW) > RBW. Band edge emissions must be at least 20 dB below the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the output power of this device was measured by power meter, the attenuation under this paragraph shall be 30 dB instead of 20 dB.
3. Radiated emission test: Apply to band edge emissions that fall in the restricted bands listed in FCC Section 15.205. The maximum permitted average field strength is listed in FCC Section 15.209. A pre-amp is necessary for this measurement. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep=Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation as in FCC Section 15.35(b) and (c).

### 3.3.4 Test Setup

#### <Radiated Band Edges>

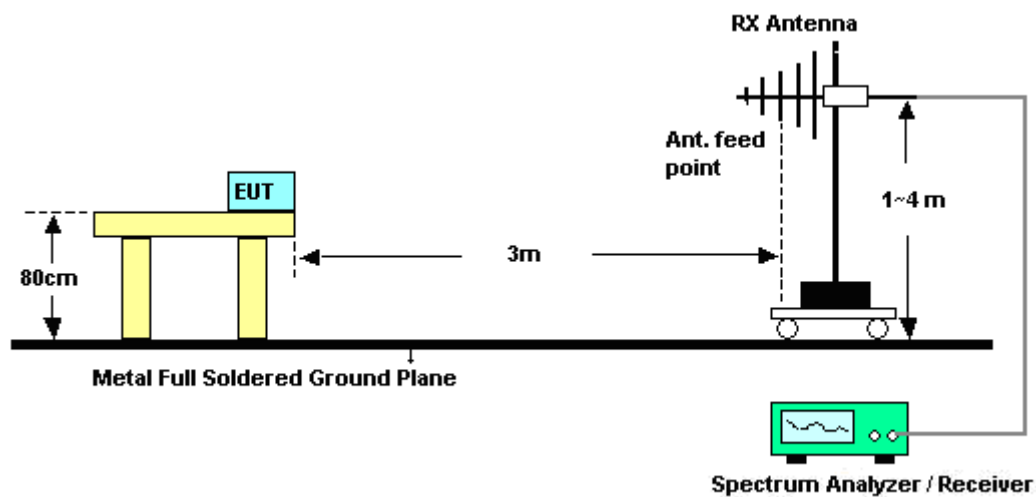

#### <Conducted Band Edges>

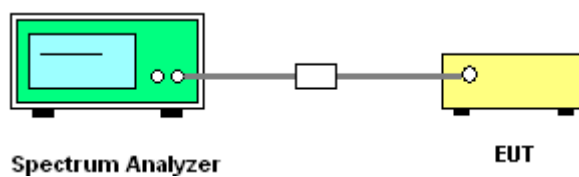

### 3.3.5 Test Result of Radiated Band Edges

|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 1  | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11b | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 01      | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2385.81                       | 52.13               | -21.87                  | 74                          | 49.85                     | 32.86                       | 3.47                    | 34.05                      | 115                  | 339                     | Peak    |
| 2385.81                       | 45.31               | -8.69                   | 54                          | 43.03                     | 32.86                       | 3.47                    | 34.05                      | 115                  | 339                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2385.24                     | 52.75               | -21.25                  | 74                          | 50.51                     | 32.83                       | 3.42                    | 34.01                      | 100                  | 339                     | Peak    |
| 2385.24                     | 42.4                | -11.6                   | 54                          | 40.16                     | 32.83                       | 3.42                    | 34.01                      | 100                  | 339                     | Average |

|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 3  | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11b | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 11      | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2491.45                       | 55.36               | -18.64                  | 74                          | 52.82                     | 33.05                       | 3.72                    | 34.23                      | 131                  | 304                     | Peak    |
| 2491.45                       | 46.39               | -7.61                   | 54                          | 43.85                     | 33.05                       | 3.72                    | 34.23                      | 131                  | 304                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2488.98                     | 52.14               | -21.86                  | 74                          | 49.6                      | 33.05                       | 3.72                    | 34.23                      | 200                  | 342                     | Peak    |
| 2488.98                     | 41.83               | -12.17                  | 54                          | 39.29                     | 33.05                       | 3.72                    | 34.23                      | 200                  | 342                     | Average |



|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 4  | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11g | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 01      | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2336.79                       | 49.54               | -24.46                  | 74                          | 47.37                     | 32.78                       | 3.33                    | 33.94                      | 100                  | 103                     | Peak    |
| 2336.79                       | 36.43               | -17.57                  | 54                          | 34.26                     | 32.78                       | 3.33                    | 33.94                      | 100                  | 103                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2362.44                     | 49.47               | -24.53                  | 74                          | 47.26                     | 32.81                       | 3.38                    | 33.98                      | 100                  | 102                     | Peak    |
| 2362.44                     | 36.73               | -17.27                  | 54                          | 34.52                     | 32.81                       | 3.38                    | 33.98                      | 100                  | 102                     | Average |

|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 6  | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11g | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 11      | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.85                       | 54.4                | -19.6                   | 74                          | 51.91                     | 33.01                       | 3.68                    | 34.2                       | 132                  | 355                     | Peak    |
| 2483.85                       | 40.47               | -13.53                  | 54                          | 37.98                     | 33.01                       | 3.68                    | 34.2                       | 132                  | 355                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2486.51                     | 52.93               | -21.07                  | 74                          | 50.44                     | 33.01                       | 3.68                    | 34.2                       | 200                  | 331                     | Peak    |
| 2486.51                     | 39.37               | -14.63                  | 54                          | 36.88                     | 33.01                       | 3.68                    | 34.2                       | 200                  | 331                     | Average |



|                       |                    |                            |              |
|-----------------------|--------------------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 7             | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 01                 | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2387.33                       | 47.5                | -26.5                   | 74                          | 45.22                     | 32.86                       | 3.47                    | 34.05                      | 112                  | 301                     | Peak    |
| 2387.33                       | 36.59               | -17.41                  | 54                          | 34.31                     | 32.86                       | 3.47                    | 34.05                      | 112                  | 301                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2389.61                     | 49.29               | -24.71                  | 74                          | 47.01                     | 32.86                       | 3.47                    | 34.05                      | 110                  | 102                     | Peak    |
| 2389.61                     | 37.74               | -16.26                  | 54                          | 35.46                     | 32.86                       | 3.47                    | 34.05                      | 110                  | 102                     | Average |

|                       |                    |                            |              |
|-----------------------|--------------------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 9             | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 11                 | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.66                       | 53.66               | -20.34                  | 74                          | 51.17                     | 33.01                       | 3.68                    | 34.2                       | 120                  | 100                     | Peak    |
| 2483.66                       | 39.95               | -14.05                  | 54                          | 37.46                     | 33.01                       | 3.68                    | 34.2                       | 120                  | 100                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.66                     | 54.29               | -19.71                  | 74                          | 51.8                      | 33.01                       | 3.68                    | 34.2                       | 200                  | 360                     | Peak    |
| 2483.66                     | 40.61               | -13.39                  | 54                          | 38.12                     | 33.01                       | 3.68                    | 34.2                       | 200                  | 360                     | Average |



|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 10 | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11a | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 149     | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5725                          | 66.99               | -16.86                  | 83.85                       | 59.47                     | 35.52                       | 5.55                    | 33.55                      | 100                  | 102                     | Peak   |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5725                        | 63.35               | -16.9                   | 80.25                       | 55.83                     | 35.52                       | 5.55                    | 33.55                      | 125                  | 220                     | Peak   |

|                       |         |                            |              |
|-----------------------|---------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 12 | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11a | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 165     | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5850                          | 60.44               | -26.12                  | 86.56                       | 53.01                     | 35.56                       | 5.64                    | 33.77                      | 100                  | 129                     | Peak   |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5850                        | 54.95               | -25.43                  | 80.38                       | 47.52                     | 35.56                       | 5.64                    | 33.77                      | 163                  | 291                     | Peak   |



|                       |                    |                            |              |
|-----------------------|--------------------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 13            | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 149                | <b>Test Engineer :</b>     | Chenmy Cheng |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5725                          | 68.89               | -18.36                  | 87.25                       | 61.37                     | 35.52                       | 5.55                    | 33.55                      | 200                  | 308                     | Peak   |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5725                        | 65.29               | -15.24                  | 80.53                       | 57.77                     | 35.52                       | 5.55                    | 33.55                      | 100                  | 90                      | Peak   |

|                       |                    |                            |              |
|-----------------------|--------------------|----------------------------|--------------|
| <b>Test Mode :</b>    | Mode 15            | <b>Temperature :</b>       | 22~23°C      |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 46~47%       |
| <b>Test Channel :</b> | 165                | <b>Test Engineer :</b>     | Chenmy Cheng |


| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-------------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )          | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5850                          | 63.81               | -21.62                  | 85.43                       | 56.38                     | 35.56                       | 5.64                    | 33.77                      | 100                  | 100                     | Peak   |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                           |                             |                         |                            |                      |                         |        |
|-----------------------------|---------------------|-------------------------|-----------------------------|---------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|--------|
| Frequency<br>( MHz )        | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>( dBuV ) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark |
| 5850                        | 57.18               | -23.37                  | 80.55                       | 49.75                     | 35.56                       | 5.64                    | 33.77                      | 100                  | 30                      | Peak   |

### 3.3.6 Test Result of Conducted Band Edges


|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | Mode 1 and 3 | Temperature :       | 24~26℃   |
| Test Band :    | 802.11b      | Relative Humidity : | 50~53%   |
| Test Channel : | 01 and 11    | Test Engineer :     | Alan Liu |

**Low Band Edge Plot on 802.11b Channel 01**

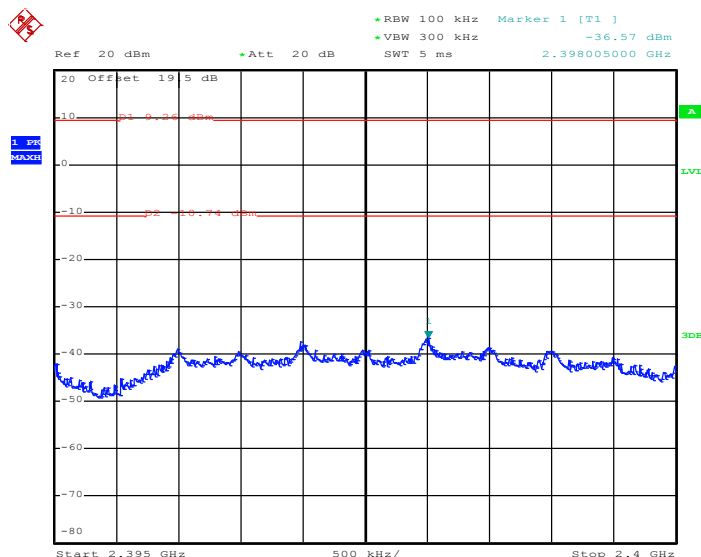

Date: 12.OCT.2011 01:11:11


**High Band Edge Plot on 802.11b Channel 11**

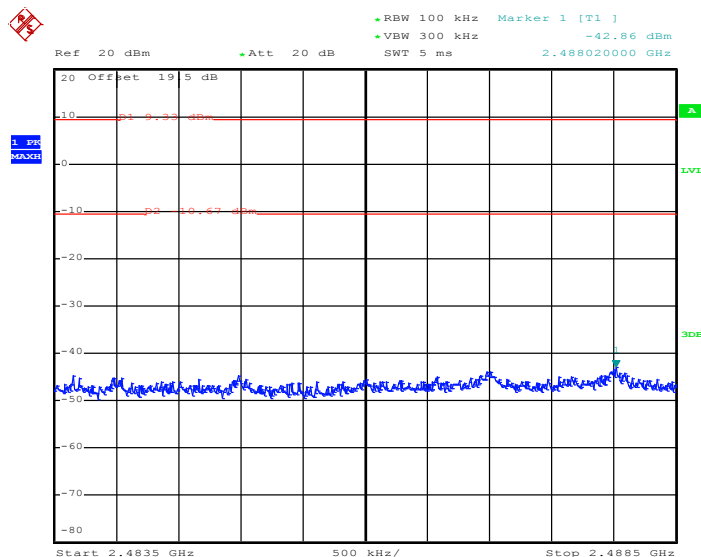


Date: 11.OCT.2011 23:30:53



|                |              |                     |          |
|----------------|--------------|---------------------|----------|
| Test Mode :    | Mode 4 and 6 | Temperature :       | 24~26°C  |
| Test Band :    | 802.11g      | Relative Humidity : | 50~53%   |
| Test Channel : | 01 and 11    | Test Engineer :     | Alan Liu |

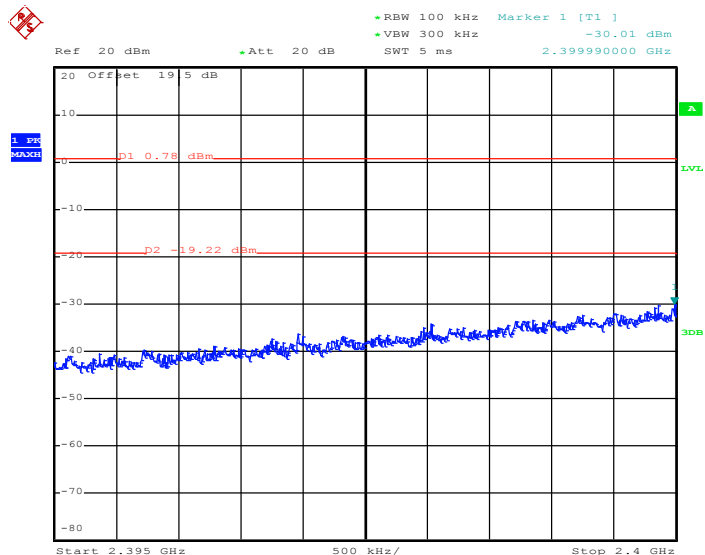**Low Band Edge Plot on 802.11g Channel 01**

Date: 11.OCT.2011 23:44:40

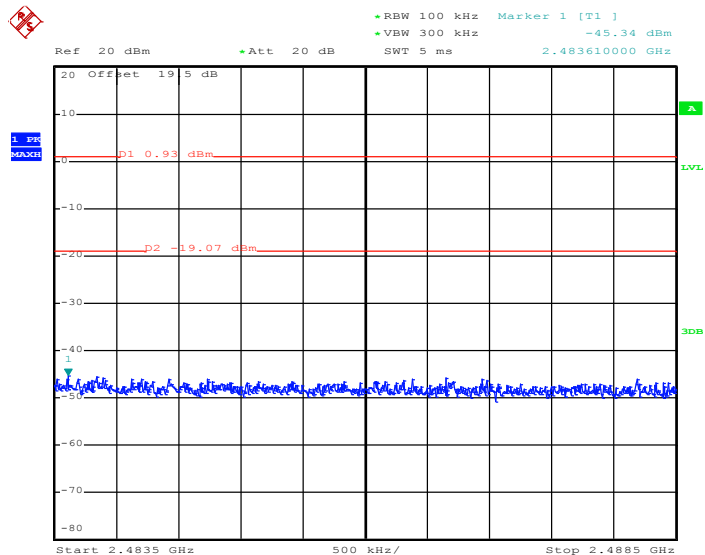
**High Band Edge Plot on 802.11g Channel 11**

Date: 12.OCT.2011 00:13:14




|                |                    |                     |          |
|----------------|--------------------|---------------------|----------|
| Test Mode :    | Mode 7 and 9       | Temperature :       | 24~26°C  |
| Test Band :    | 802.11n (BW 20MHz) | Relative Humidity : | 50~53%   |
| Test Channel : | 01 and 11          | Test Engineer :     | Alan Liu |

Low Band Edge Plot on 802.11n Channel 01

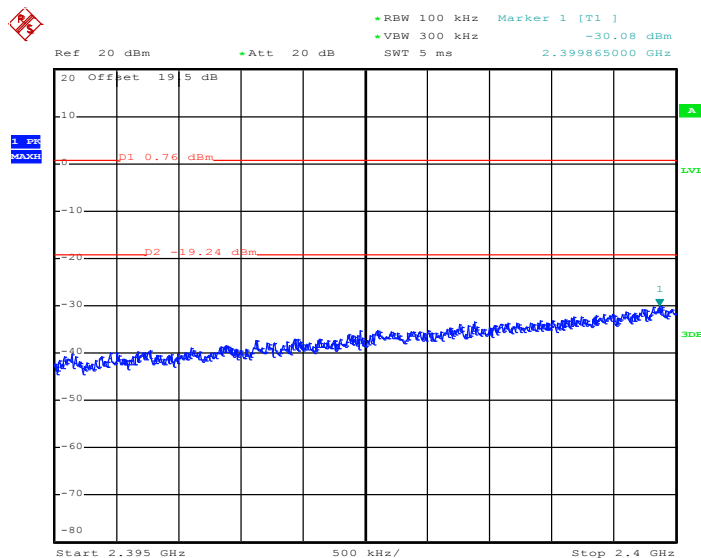

Date: 12.OCT.2011 00:26:52

High Band Edge Plot on 802.11n Channel 11

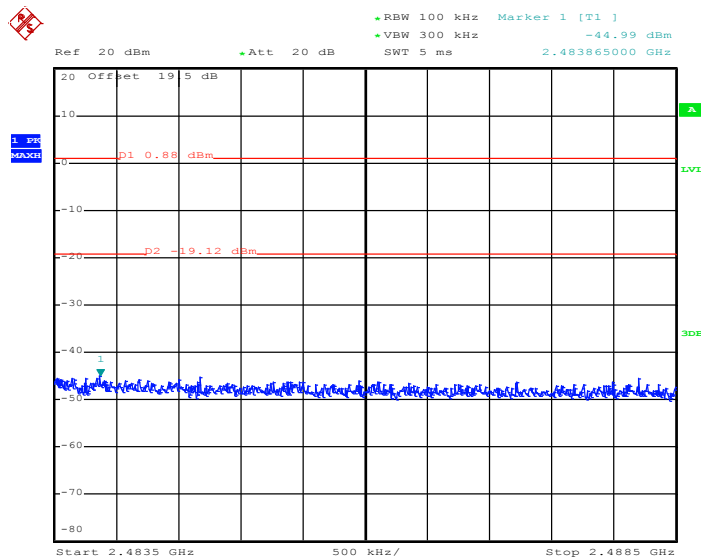


Date: 13.OCT.2011 09:18:14




|                |                |                     |          |
|----------------|----------------|---------------------|----------|
| Test Mode :    | Mode 10 and 12 | Temperature :       | 24~26°C  |
| Test Band :    | 802.11a        | Relative Humidity : | 50~53%   |
| Test Channel : | 149 and 165    | Test Engineer :     | Alan Liu |

Low Band Edge Plot on 802.11a Channel 149

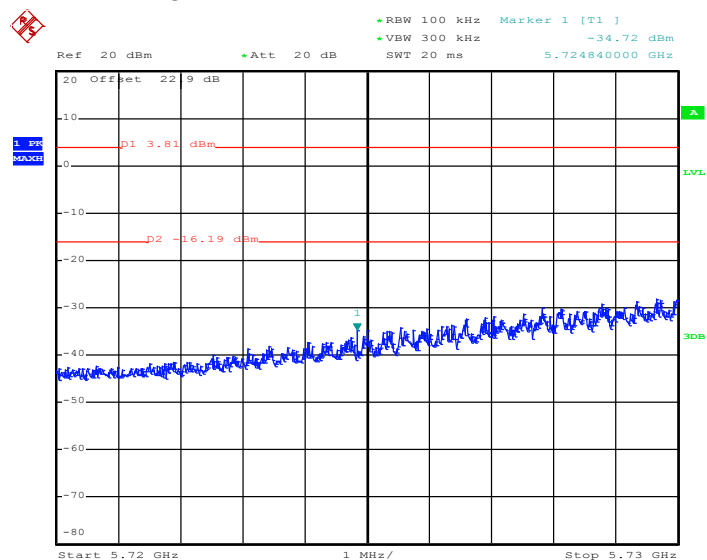

Date: 13.OCT.2011 09:28:48

High Band Edge Plot on 802.11a Channel 165

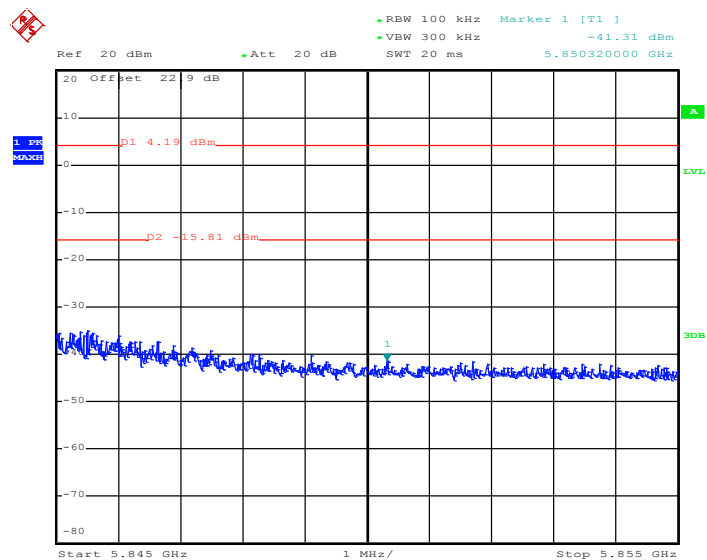


Date: 13.OCT.2011 10:02:39




|                |                    |                     |          |
|----------------|--------------------|---------------------|----------|
| Test Mode :    | Mode 13 and 15     | Temperature :       | 24~26°C  |
| Test Band :    | 802.11n (BW 20MHz) | Relative Humidity : | 50~53%   |
| Test Channel : | 149 and 165        | Test Engineer :     | Alan Liu |

Low Band Edge Plot on 802.11n Channel 149

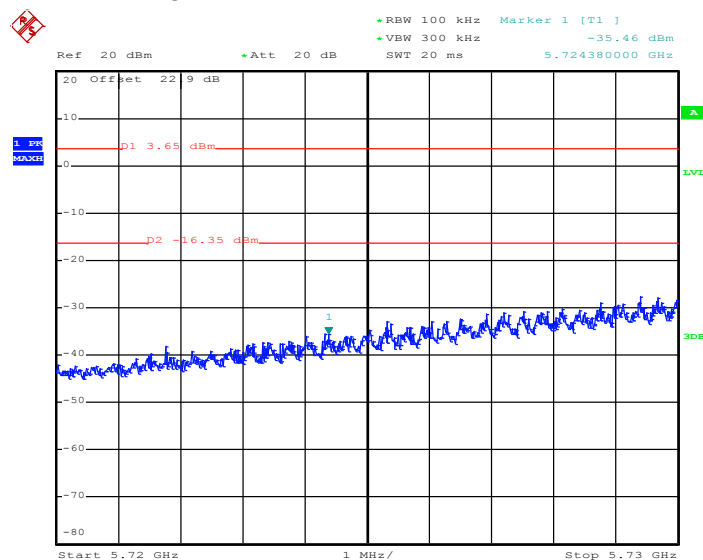

Date: 13.OCT.2011 09:38:28

High Band Edge Plot on 802.11n Channel 165

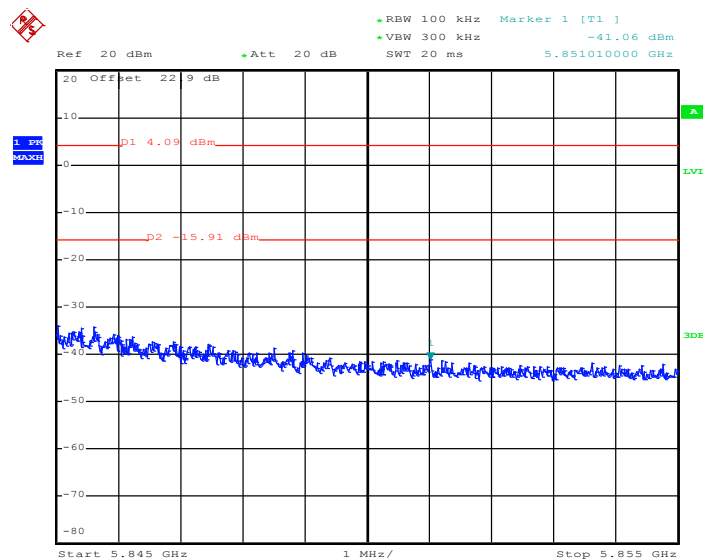

Date: 13.OCT.2011 10:08:29

### 3.4 Spurious Emission Measurement

#### 3.4.1 Limit of Spurious Emission Measurement

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


#### 3.4.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.4.3 Test Procedure

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.


#### 3.4.4 Test Setup



### 3.4.5 Test Result


|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 1  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11b | Relative Humidity : | 50~53%   |
| Test Channel : | 01      | Test Engineer :     | Alan Liu |

#### Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

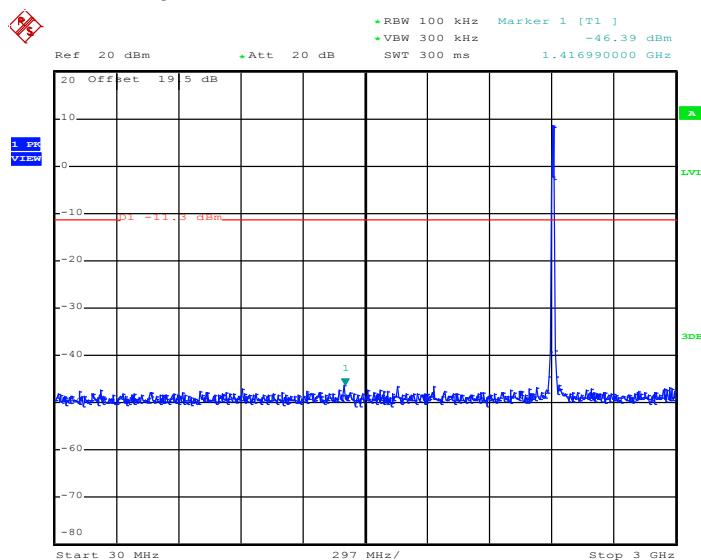


Date: 11.OCT.2011 22:47:01

#### Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

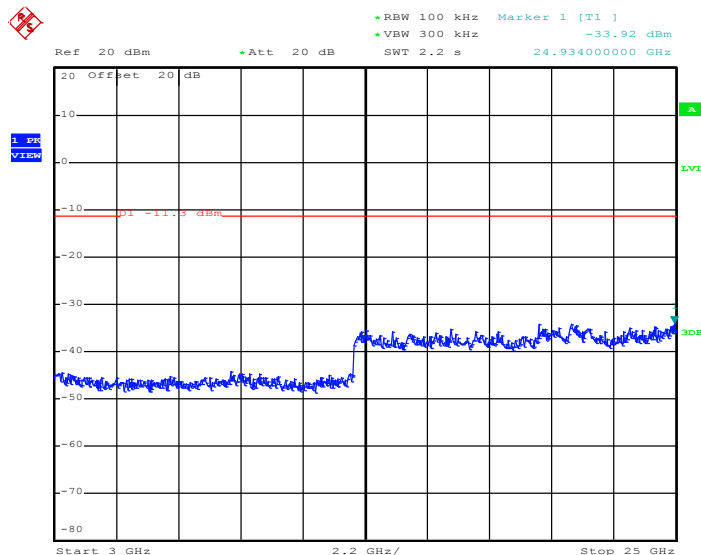


Date: 11.OCT.2011 22:47:18

|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 2  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11b | Relative Humidity : | 50~53%   |
| Test Channel : | 06      | Test Engineer :     | Alan Liu |

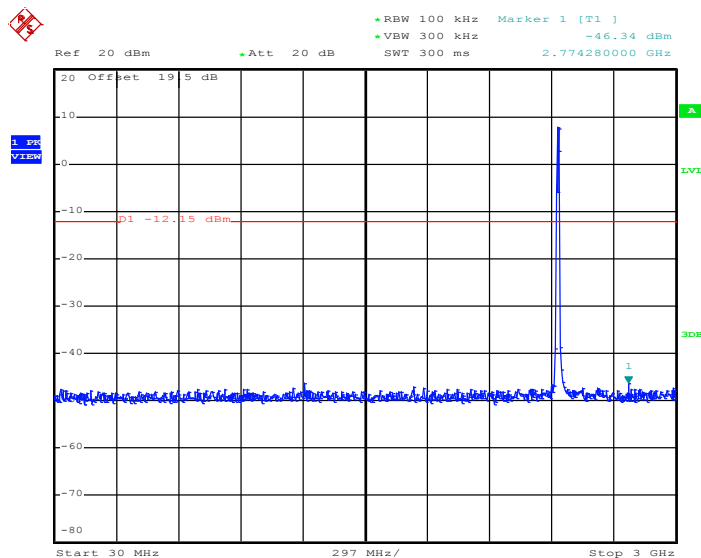
**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 11.OCT.2011 23:27:20

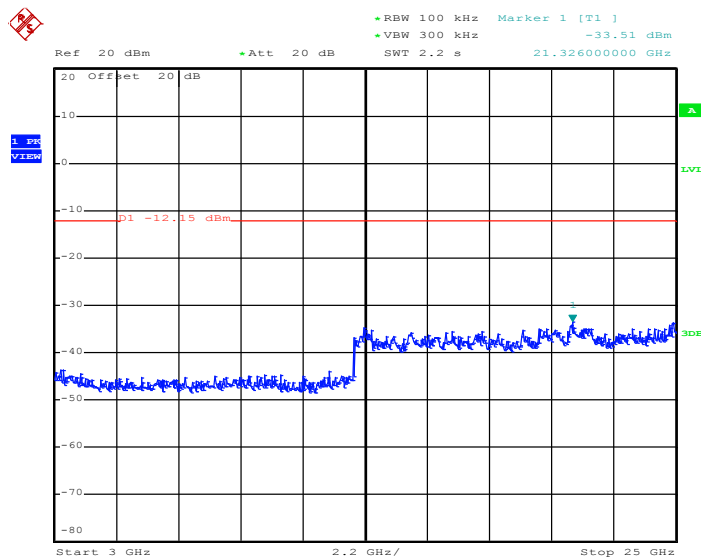
**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**


Date: 11.OCT.2011 23:27:37

|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 3  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11b | Relative Humidity : | 50~53%   |
| Test Channel : | 11      | Test Engineer :     | Alan Liu |

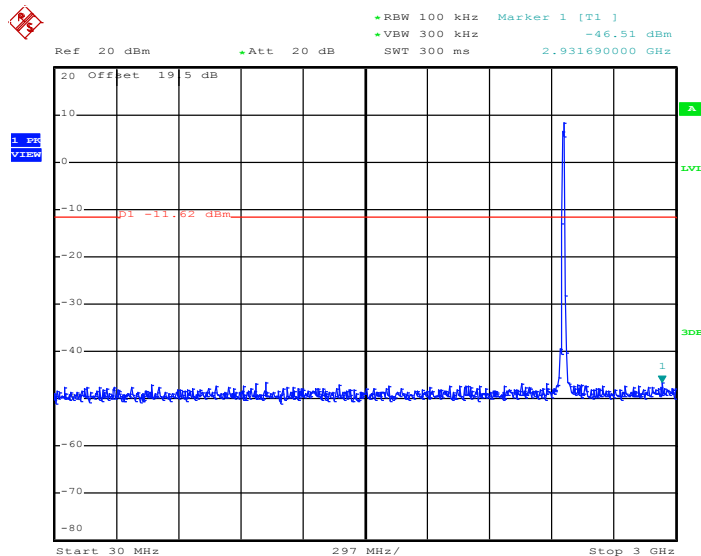**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 11.OCT.2011 23:40:24

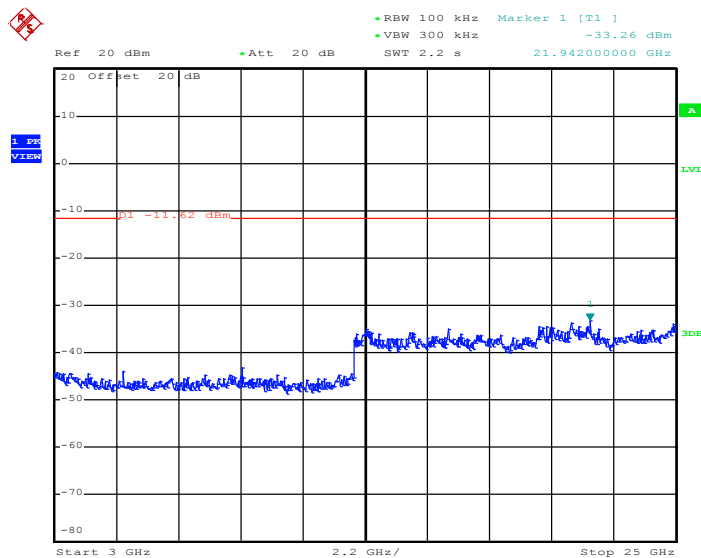
**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**


Date: 11.OCT.2011 23:40:41




|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 4  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11g | Relative Humidity : | 50~53%   |
| Test Channel : | 01      | Test Engineer :     | Alan Liu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

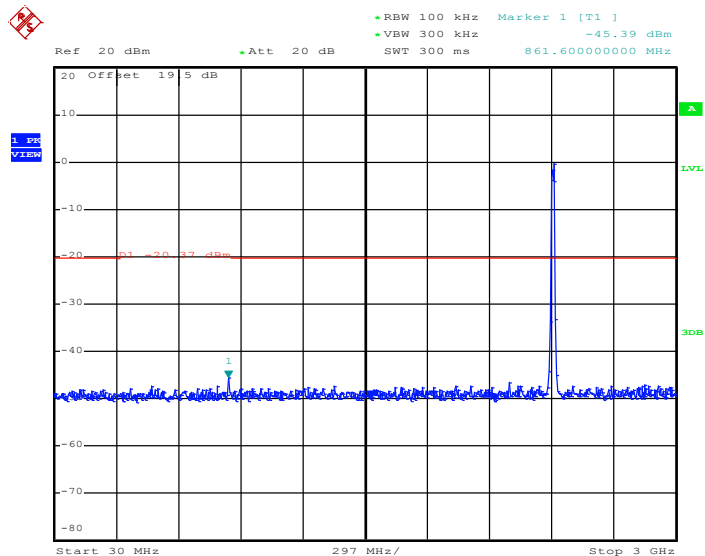

Date: 11.OCT.2011 23:54:00

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

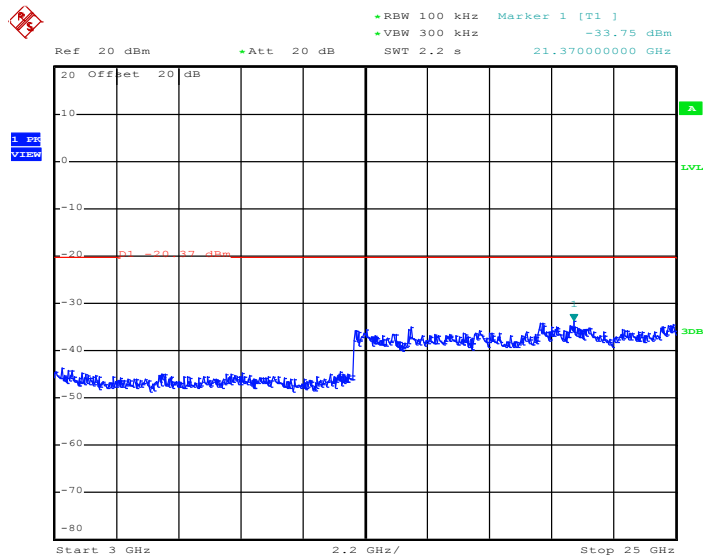


Date: 11.OCT.2011 23:54:18




|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 5  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11g | Relative Humidity : | 50~53%   |
| Test Channel : | 06      | Test Engineer :     | Alan Liu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

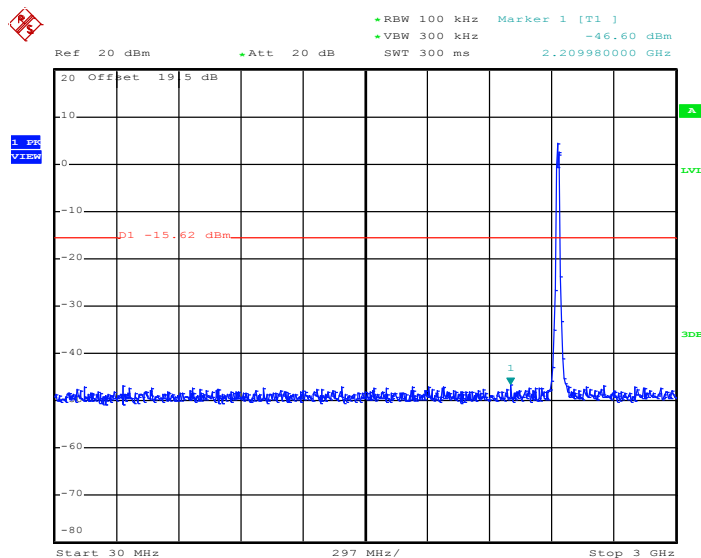

Date: 12.OCT.2011 00:09:49


Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

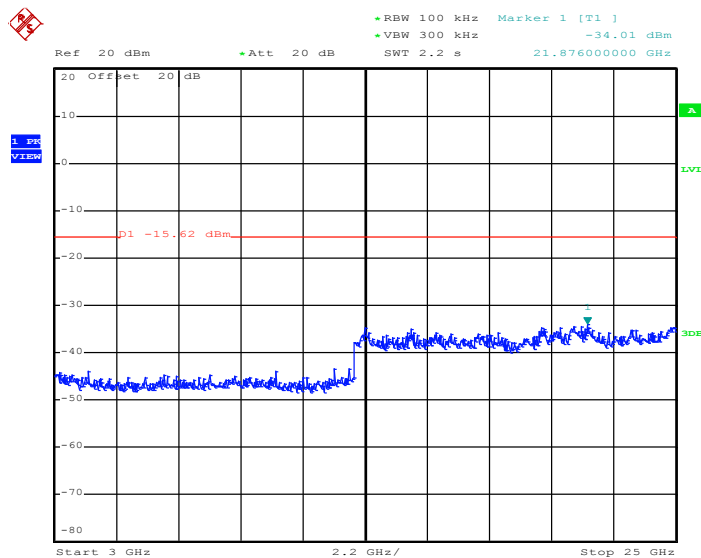


Date: 12.OCT.2011 00:10:07



|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 6  | Temperature :       | 24~26°C  |
| Test Band :    | 802.11g | Relative Humidity : | 50~53%   |
| Test Channel : | 11      | Test Engineer :     | Alan Liu |

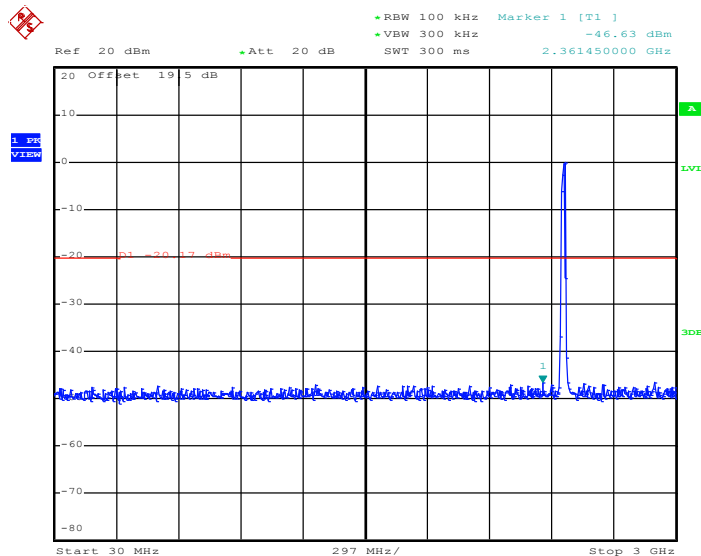
**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**

Date: 12.OCT.2011 00:22:35

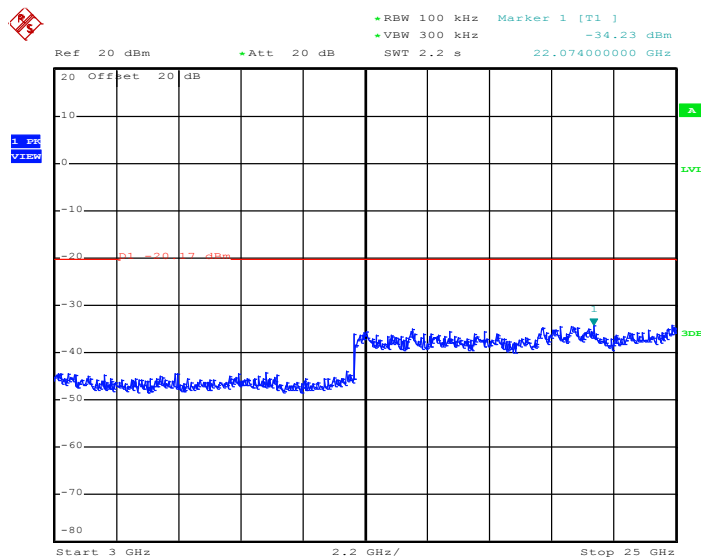
**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**

Date: 12.OCT.2011 00:22:52

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 7             | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 01                 | <b>Test Engineer :</b>     | Alan Liu |

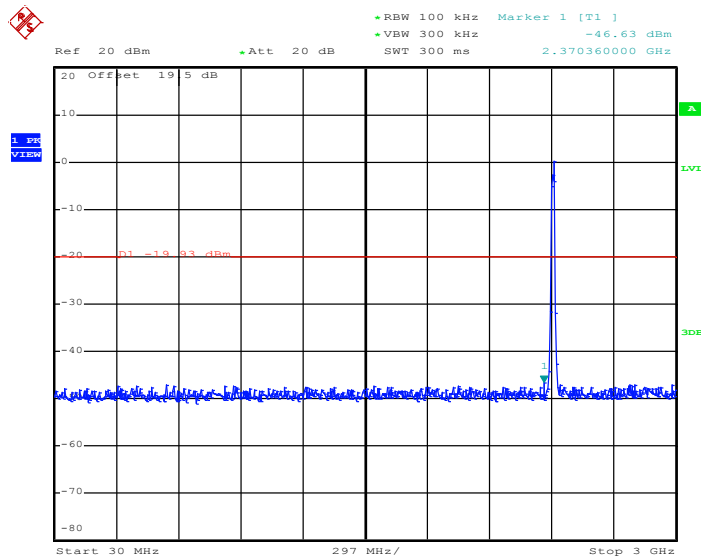**Conducted Spurious Emission Plot between 30MHz ~ 3 GHz**


Date: 12.OCT.2011 00:36:15

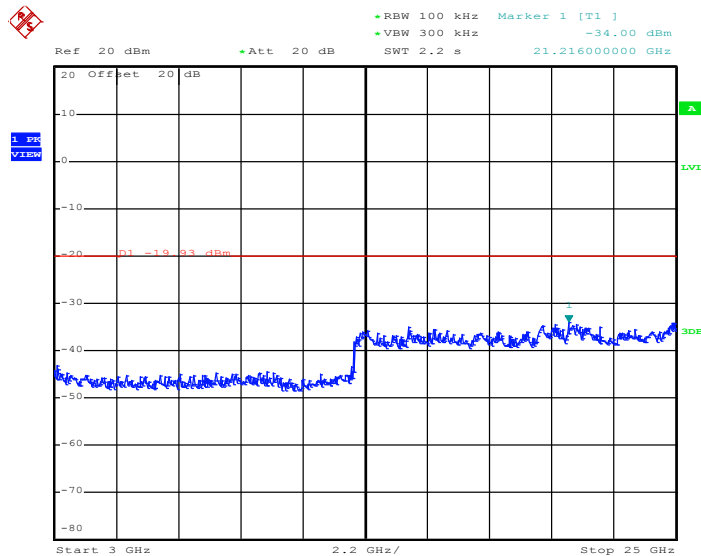
**Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz**


Date: 12.OCT.2011 00:36:32




|                |                    |                     |          |
|----------------|--------------------|---------------------|----------|
| Test Mode :    | Mode 8             | Temperature :       | 24~26°C  |
| Test Band :    | 802.11n (BW 20MHz) | Relative Humidity : | 50~53%   |
| Test Channel : | 06                 | Test Engineer :     | Alan Liu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

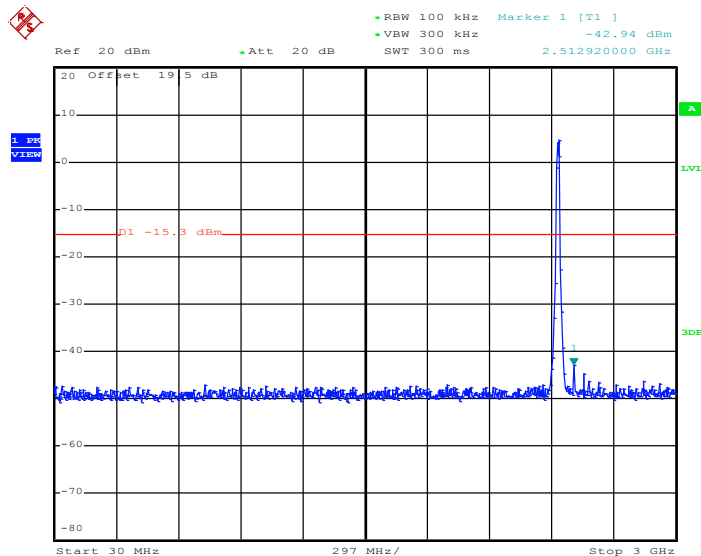

Date: 12.OCT.2011 00:50:28

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

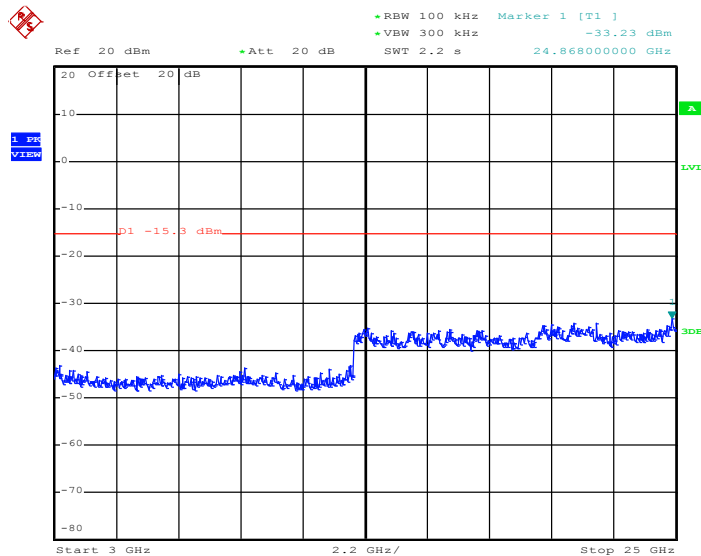


Date: 12.OCT.2011 00:50:45




|                |                    |                     |          |
|----------------|--------------------|---------------------|----------|
| Test Mode :    | Mode 9             | Temperature :       | 24~26°C  |
| Test Band :    | 802.11n (BW 20MHz) | Relative Humidity : | 50~53%   |
| Test Channel : | 11                 | Test Engineer :     | Alan Liu |

Conducted Spurious Emission Plot between 30MHz ~ 3 GHz

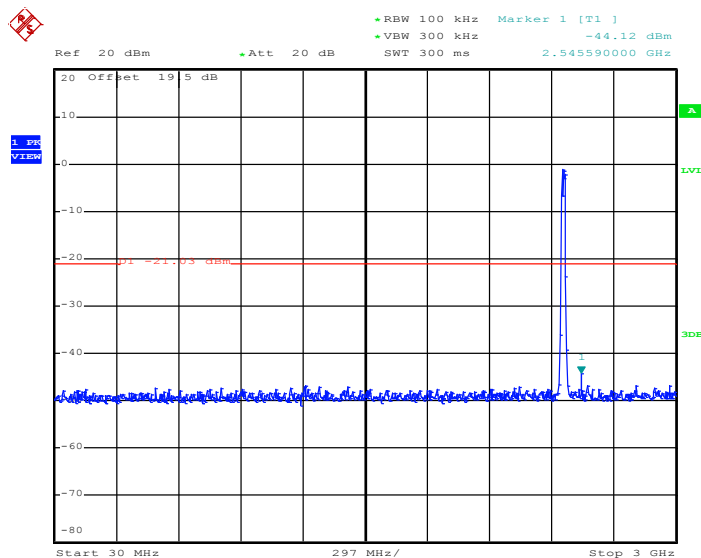


Date: 12.OCT.2011 01:04:56

Conducted Spurious Emission Plot between 3 GHz ~ 25 GHz

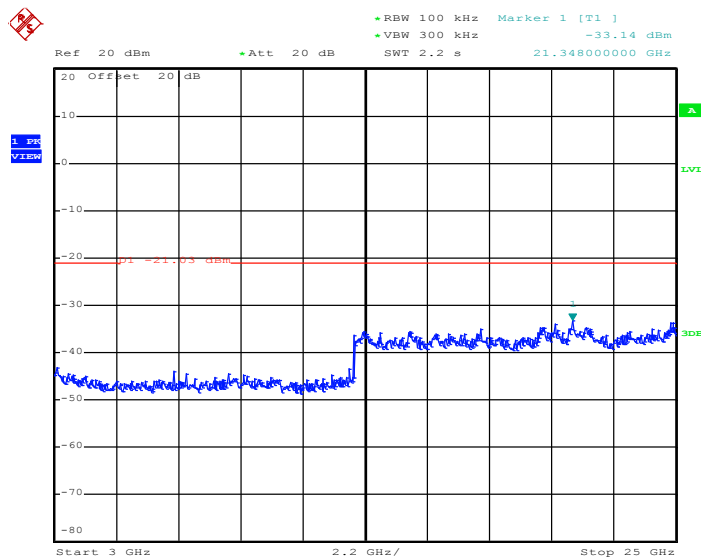


Date: 12.OCT.2011 01:05:13

|                |         |                     |          |
|----------------|---------|---------------------|----------|
| Test Mode :    | Mode 10 | Temperature :       | 24~26°C  |
| Test Band :    | 802.11a | Relative Humidity : | 50~53%   |
| Test Channel : | 149     | Test Engineer :     | Alan Liu |

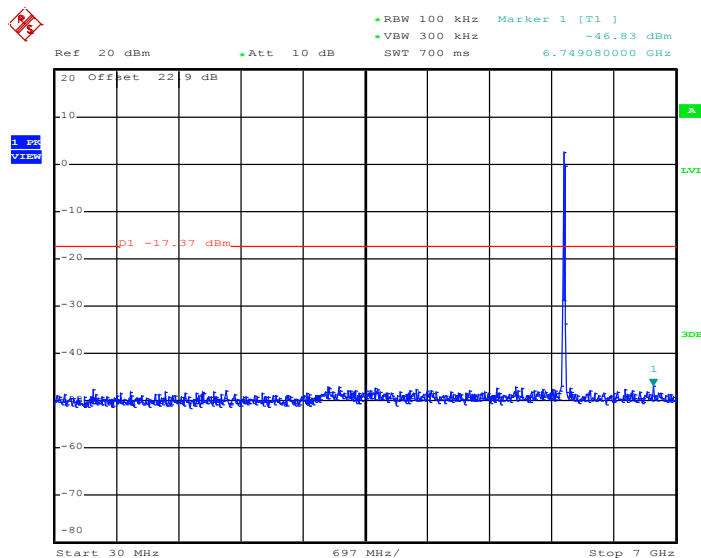
**Conducted Spurious Emission Plot between 30MHz ~ 7 GHz**


Date: 13.OCT.2011 09:50:43

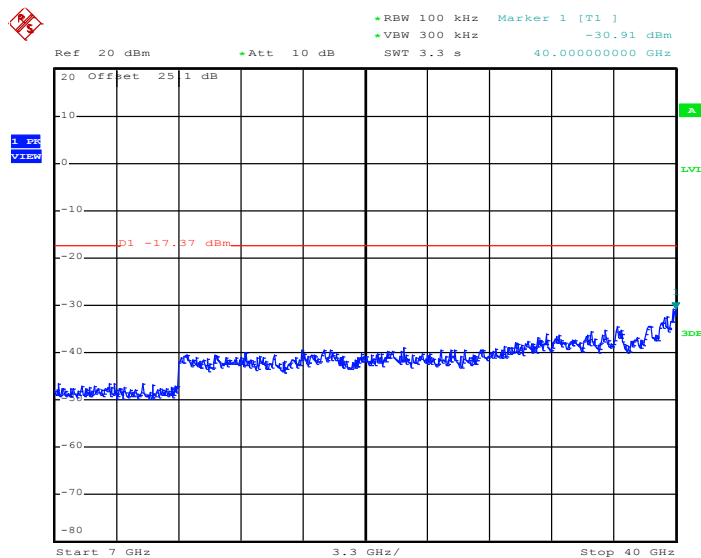
**Conducted Spurious Emission Plot between 7 GHz ~ 40 GHz**


Date: 13.OCT.2011 09:51:01

|                       |         |                            |          |
|-----------------------|---------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 11 | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Band :</b>    | 802.11a | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 157     | <b>Test Engineer :</b>     | Alan Liu |

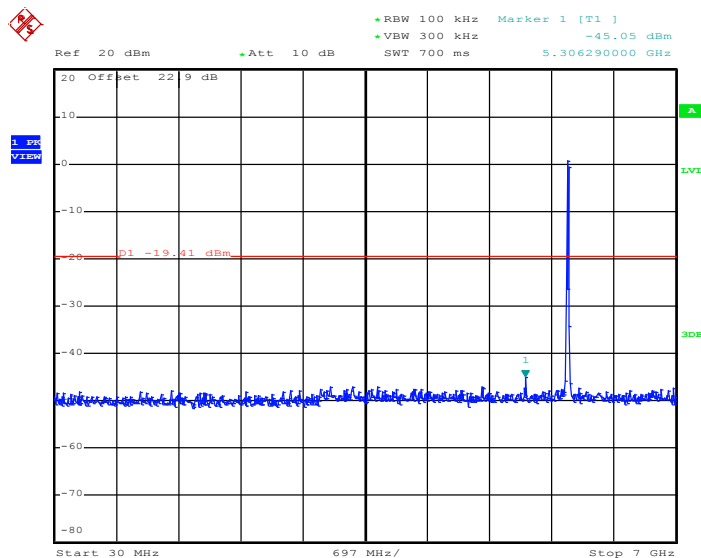**Conducted Spurious Emission Plot between 30MHz ~ 7 GHz**


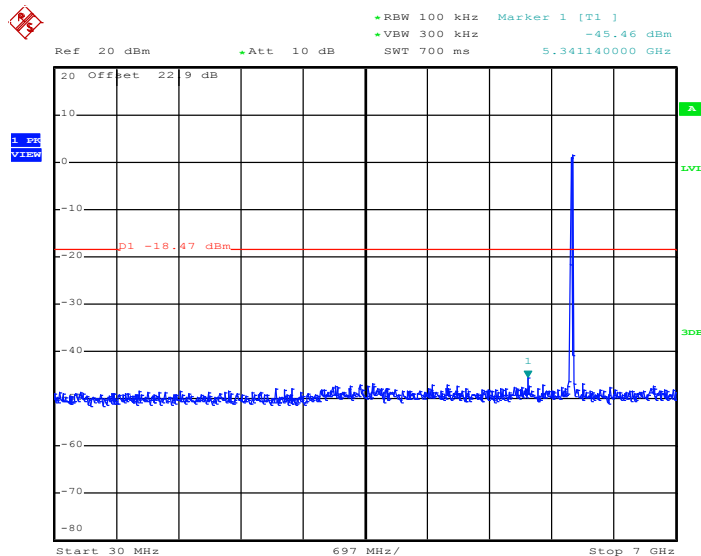
Date: 13.OCT.2011 09:53:42

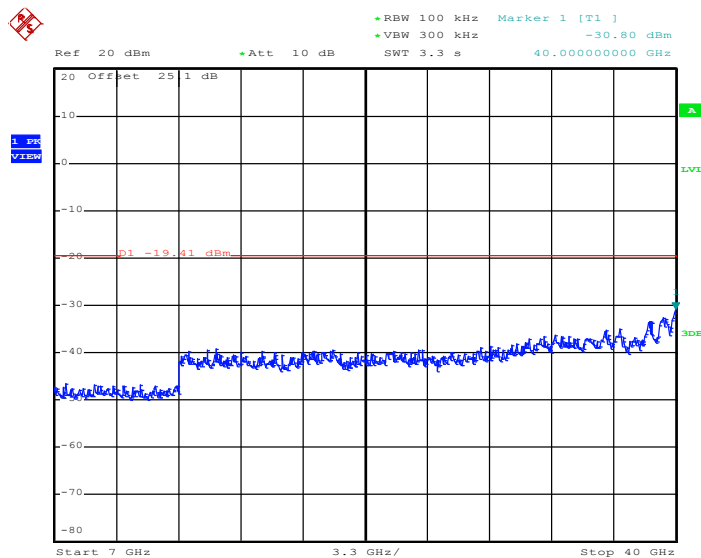**Conducted Spurious Emission Plot between 7 GHz ~ 40 GHz**


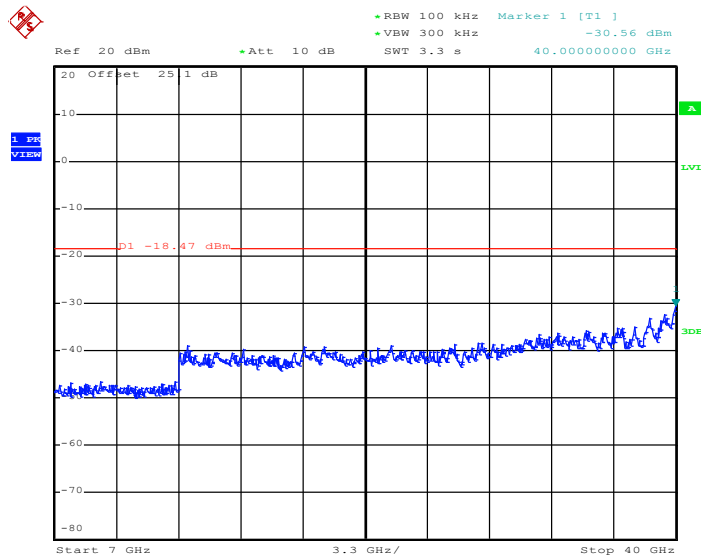
Date: 13.OCT.2011 09:53:59



|                       |         |                            |          |
|-----------------------|---------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 12 | <b>Temperature :</b>       | 24~26℃   |
| <b>Test Band :</b>    | 802.11a | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 165     | <b>Test Engineer :</b>     | Alan Liu |




Date: 13.OCT.2011 10:03:10




Date: 13.OCT.2011 10:03:27

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 13            | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 149                | <b>Test Engineer :</b>     | Alan Liu |

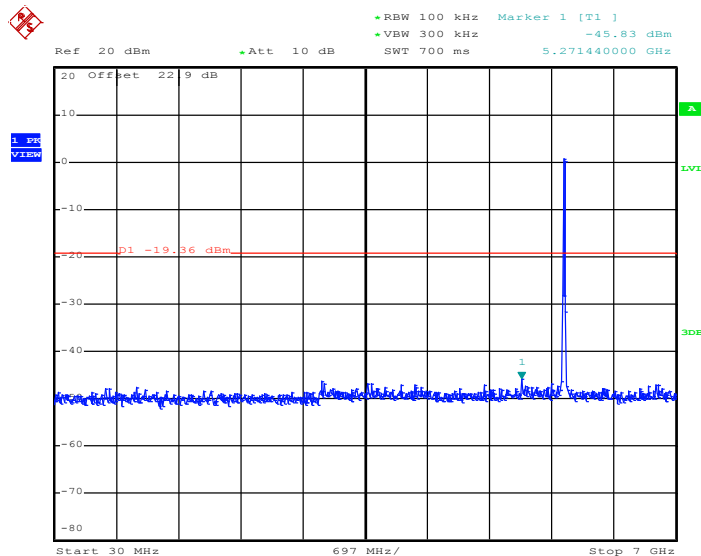
**Conducted Spurious Emission Plot between 30MHz ~ 7 GHz**


Date: 13.OCT.2011 09:49:48

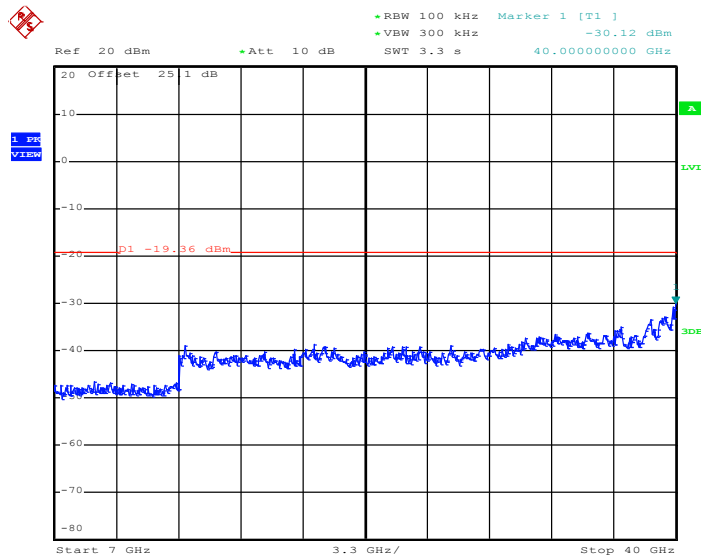
**Conducted Spurious Emission Plot between 7 GHz ~ 40 GHz**


Date: 13.OCT.2011 09:50:05

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 14            | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 157                | <b>Test Engineer :</b>     | Alan Liu |

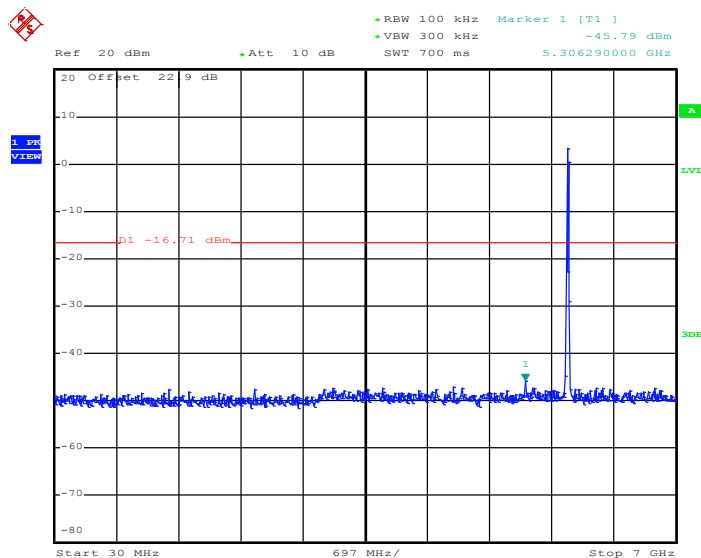
**Conducted Spurious Emission Plot between 30MHz ~ 7 GHz**


Date: 13.OCT.2011 09:48:49

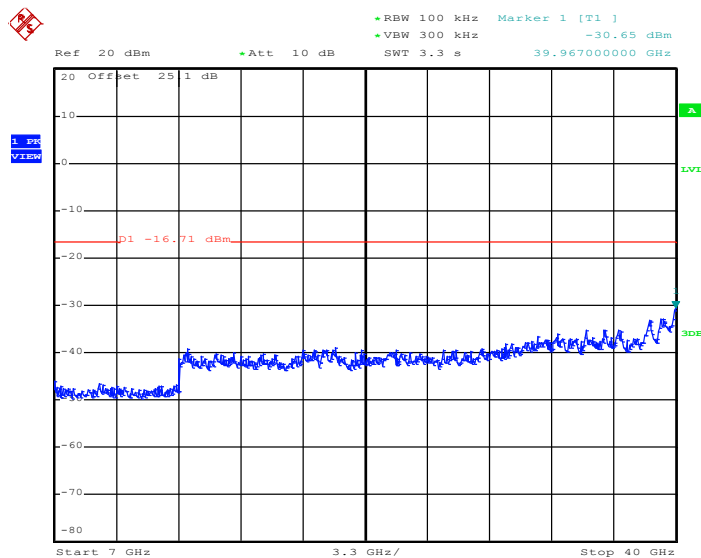
**Conducted Spurious Emission Plot between 7 GHz ~ 40 GHz**


Date: 13.OCT.2011 09:49:06

|                       |                    |                            |          |
|-----------------------|--------------------|----------------------------|----------|
| <b>Test Mode :</b>    | Mode 15            | <b>Temperature :</b>       | 24~26°C  |
| <b>Test Band :</b>    | 802.11n (BW 20MHz) | <b>Relative Humidity :</b> | 50~53%   |
| <b>Test Channel :</b> | 165                | <b>Test Engineer :</b>     | Alan Liu |

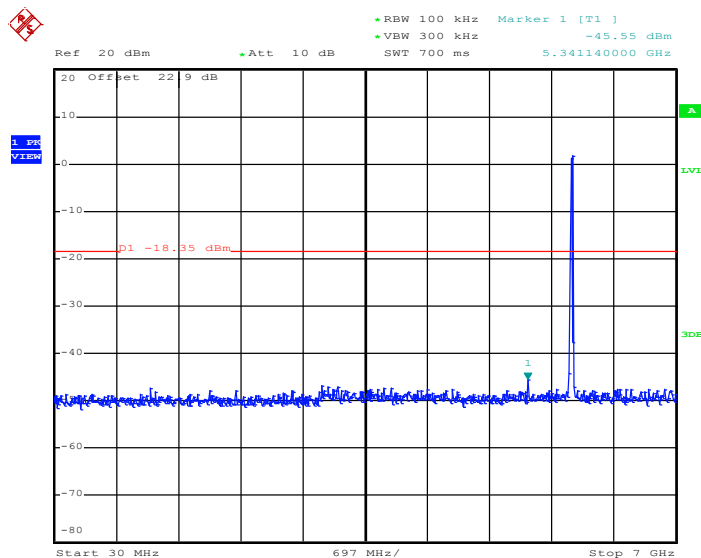**Conducted Spurious Emission Plot between 30MHz ~ 7 GHz**


Date: 13.OCT.2011 10:09:01

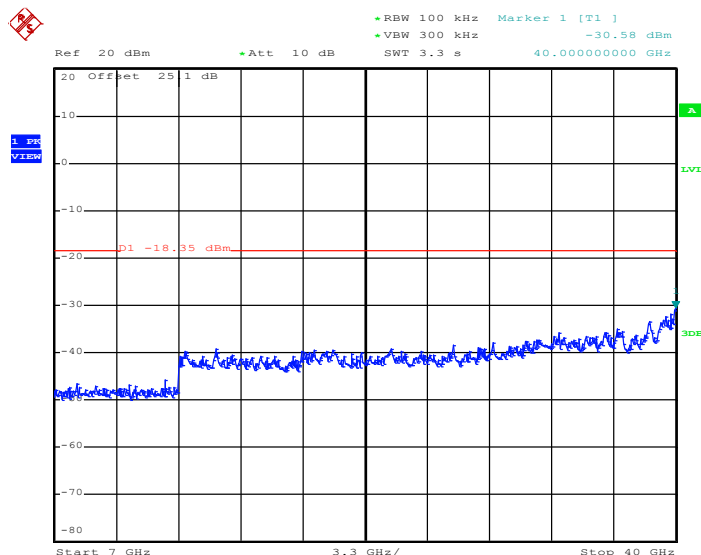**Conducted Spurious Emission Plot between 7 GHz ~ 40 GHz**


Date: 13.OCT.2011 10:09:18

### 3.5 Power Spectral Density Measurement

#### 3.5.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.5.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.5.3 Test Procedures

1. The test follows FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Take the measured data from spectrum analyzer.

#### 3.5.4 Test Setup

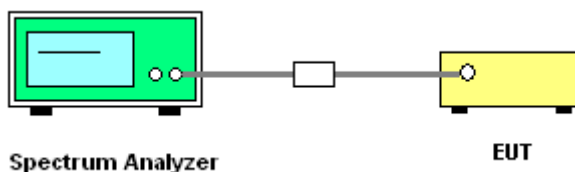

### 3.5.5 Test Result of Power Spectral Density

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 1, 2, 3 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11b Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------|-----------|
| 01      | 2412            | -3.67                      | 8                 | Pass      |
| 06      | 2437            | -3.55                      | 8                 | Pass      |
| 11      | 2462            | -3.52                      | 8                 | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 4, 5, 6 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11g Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------|-----------|
| 01      | 2412            | -12.56                     | 8                 | Pass      |
| 06      | 2437            | -7.63                      | 8                 | Pass      |
| 11      | 2462            | -12.66                     | 8                 | Pass      |

|                        |              |                            |         |
|------------------------|--------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 7, 8, 9 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu     | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11n (BW 20MHz) Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|---------------------------------------|-------------------|-----------|
| 01      | 2412            | -12.38                                | 8                 | Pass      |
| 06      | 2437            | -7.36                                 | 8                 | Pass      |
| 11      | 2462            | -12.10                                | 8                 | Pass      |

|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 10, 11, 12 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11a Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|----------------------------|-------------------|-----------|
| 149     | 5745            | -9.02                      | 8                 | Pass      |
| 157     | 5785            | -9.48                      | 8                 | Pass      |
| 165     | 5825            | -9.51                      | 8                 | Pass      |




|                        |                 |                            |         |
|------------------------|-----------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 13, 14, 15 | <b>Temperature :</b>       | 24~26°C |
| <b>Test Engineer :</b> | Alan Liu        | <b>Relative Humidity :</b> | 50~53%  |

| Channel | Frequency (MHz) | 802.11n (BW 20MHz)<br>Measured PSD (dBm) | Max. Limits (dBm) | Pass/Fail |
|---------|-----------------|------------------------------------------|-------------------|-----------|
| 149     | 5745            | -8.67                                    | 8                 | Pass      |
| 157     | 5785            | -9.09                                    | 8                 | Pass      |
| 165     | 5825            | -9.00                                    | 8                 | Pass      |




### 3.5.6 Test Result of Power Spectral Density Plots

#### Mode 1 : PSD Plot on 802.11b Channel 01

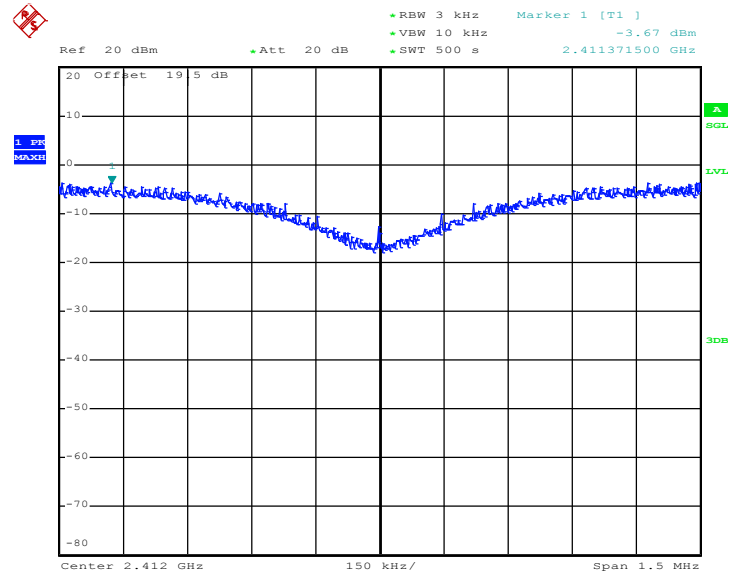


Date: 11.OCT.2011 22:46:21


#### Mode 2 : PSD Plot on 802.11b Channel 06

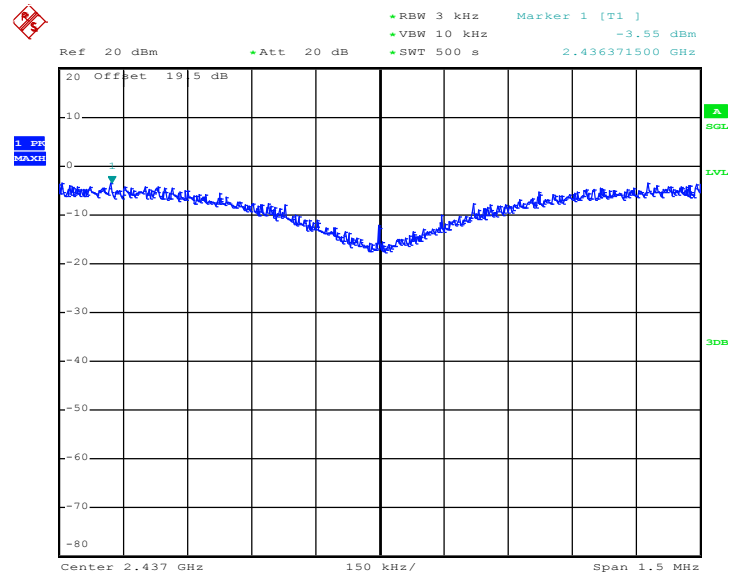


Date: 11.OCT.2011 23:22:54

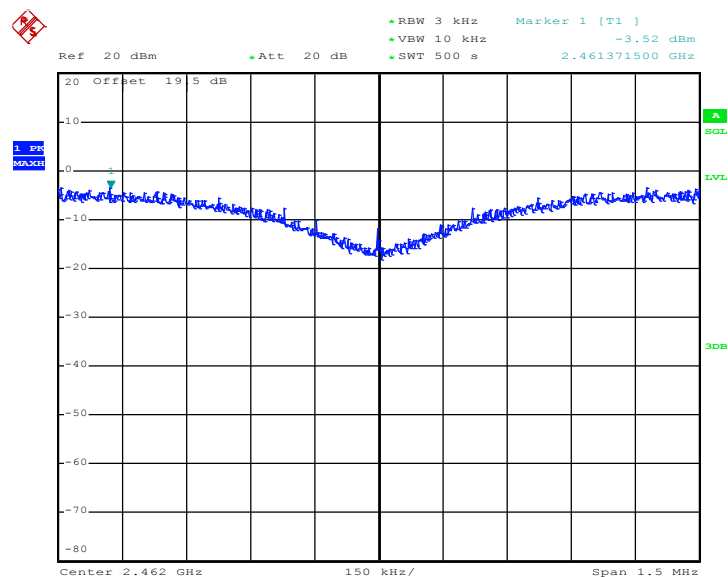**Mode 3 : PSD Plot on 802.11b Channel 11**


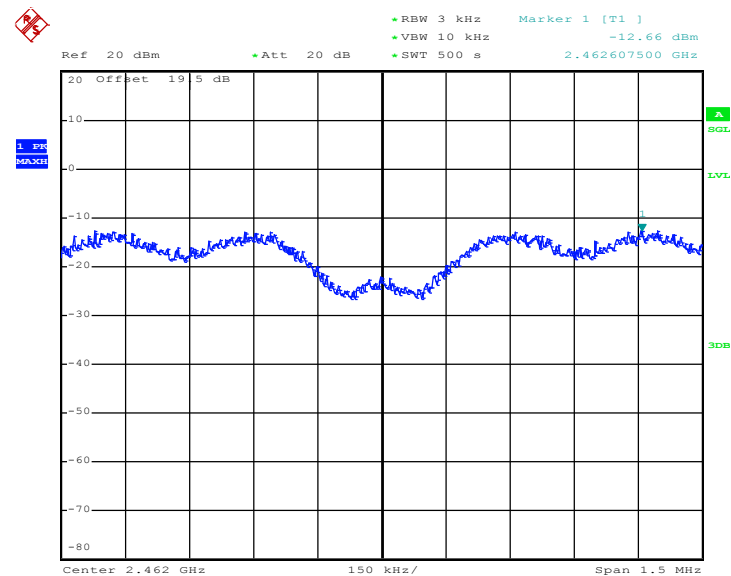
Date: 11.OCT.2011 23:40:03

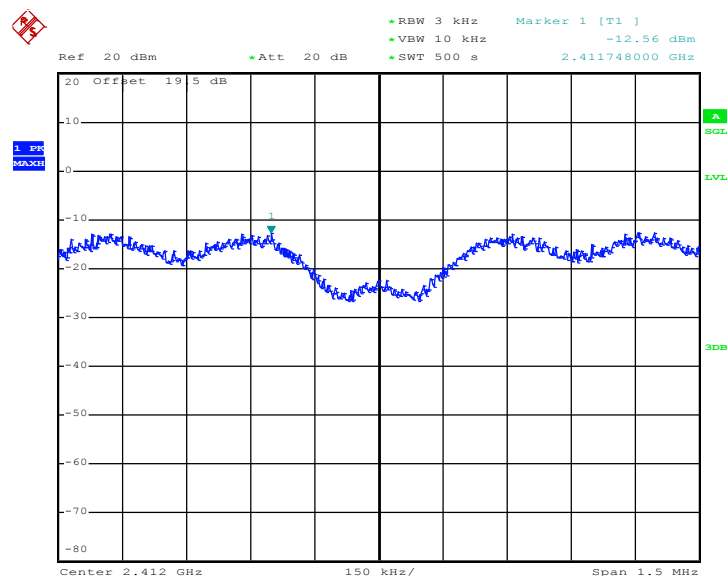**Mode 4 : PSD Plot on 802.11g Channel 01**


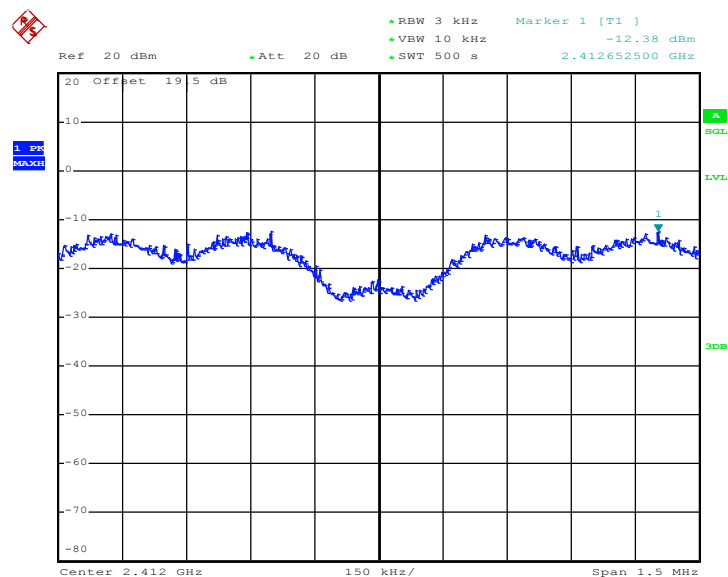
Date: 11.OCT.2011 23:53:39

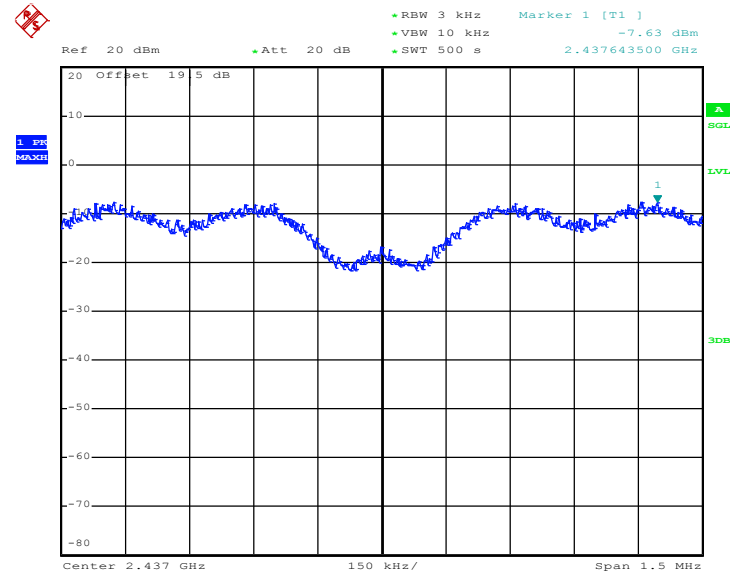**Mode 5 : PSD Plot on 802.11g Channel 06**


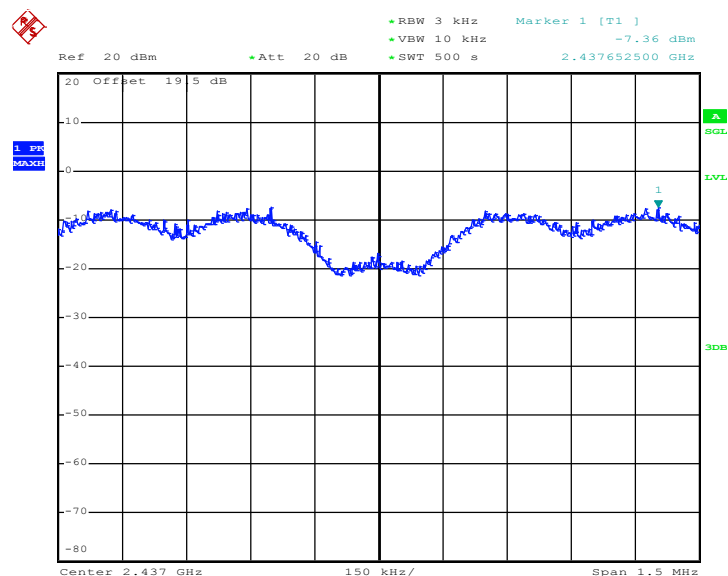
Date: 12.OCT.2011 00:08:42

**Mode 6 : PSD Plot on 802.11g Channel 11**


Date: 12.OCT.2011 00:22:14


**Mode 7 : PSD Plot on 802.11n Channel 01**


Date: 12.OCT.2011 00:35:54

**Mode 8 : PSD Plot on 802.11n Channel 06**


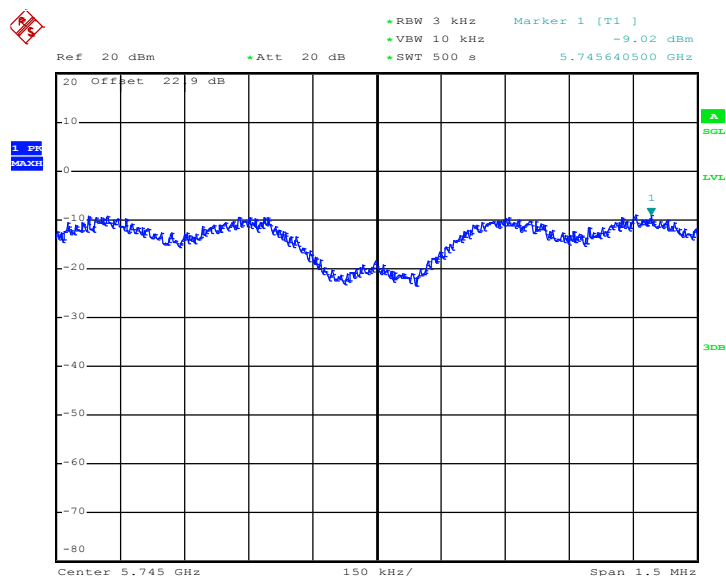
Date: 12.OCT.2011 00:49:21

## Mode 9 : PSD Plot on 802.11n Channel 11

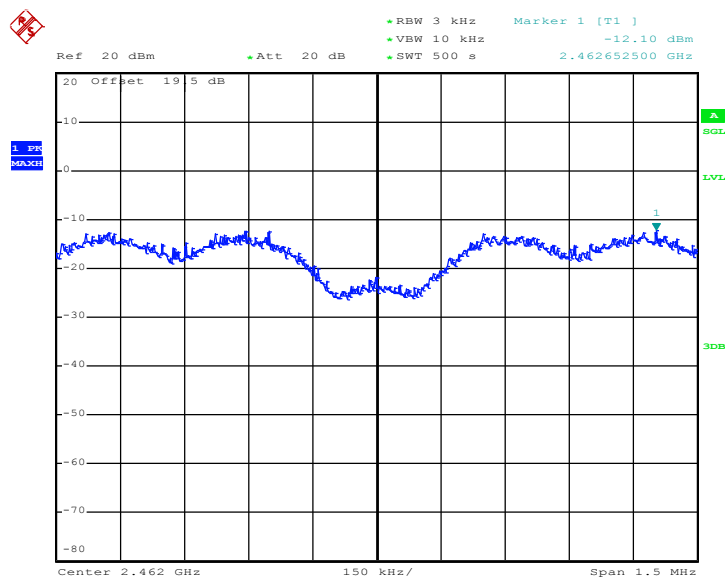


Date: 12.OCT.2011 01:03:48

## Mode 10: PSD Plot on 802.11a Channel 149




Date: 13.OCT.2011 00:10:07

## Mode 11: PSD Plot on 802.11a Channel 157

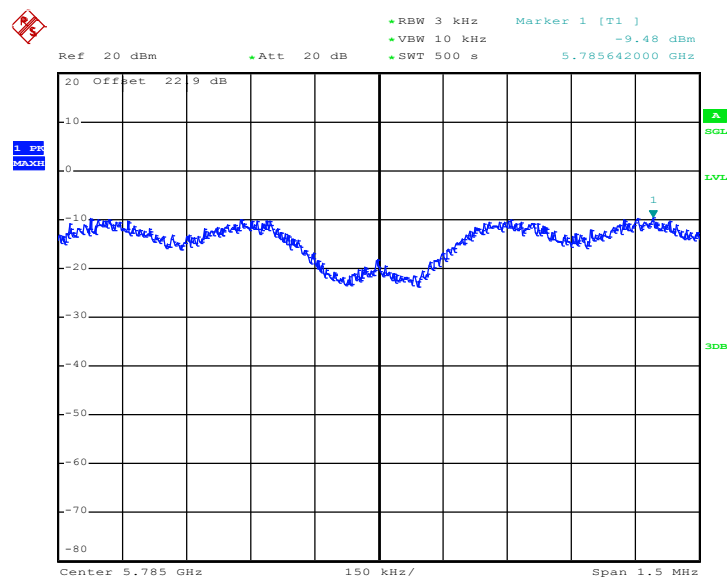

Date: 13.OCT.2011 00:23:10


## Mode 12: PSD Plot on 802.11a Channel 165

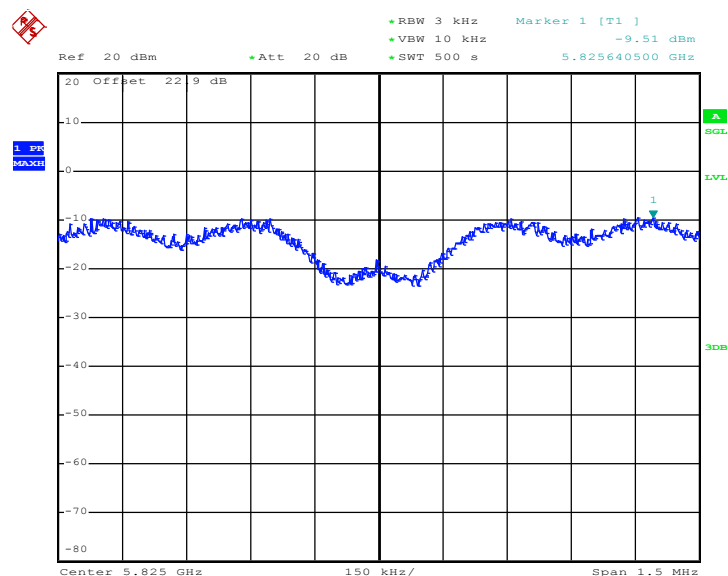

Date: 13.OCT.2011 00:35:42




Mode 13: PSD Plot on 802.11n Channel 149

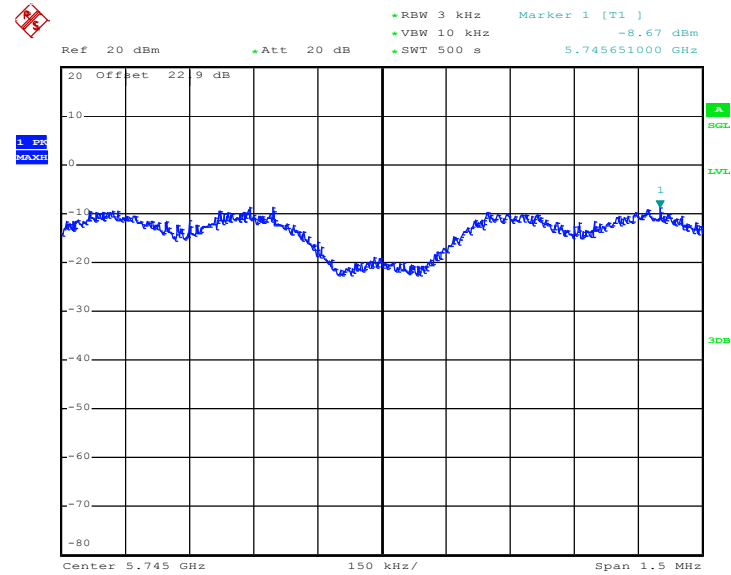


Date: 13.OCT.2011 00:53:28

Mode 14: PSD Plot on 802.11n Channel 157

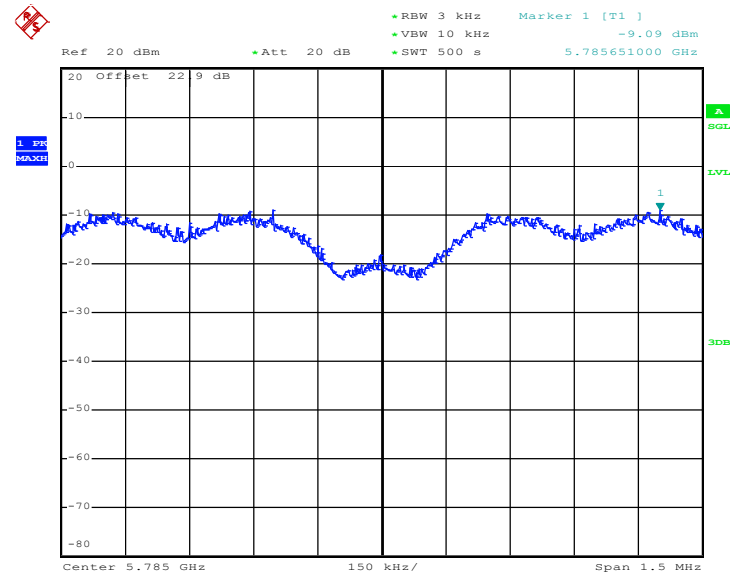

Date: 13.OCT.2011 01:15:00



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of Emission<br>(MHz) | Conducted Limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-Peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

See list of measuring instruments of this test report.

#### 3.6.3 Test Procedures


4. The testing follows the guidelines in ANSI C63.4-2003.
5. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
6. Connect EUT to the power mains through a line impedance stabilization network (LISN).
7. All the support units are connecting to the other LISN.
8. The LISN provides 50 ohm coupling impedance for the measuring instrument.
9. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
10. Both sides of AC line were checked for maximum conducted interference.
11. The frequency range from 150 kHz to 30 MHz was searched.
12. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.6.4 Test Setup

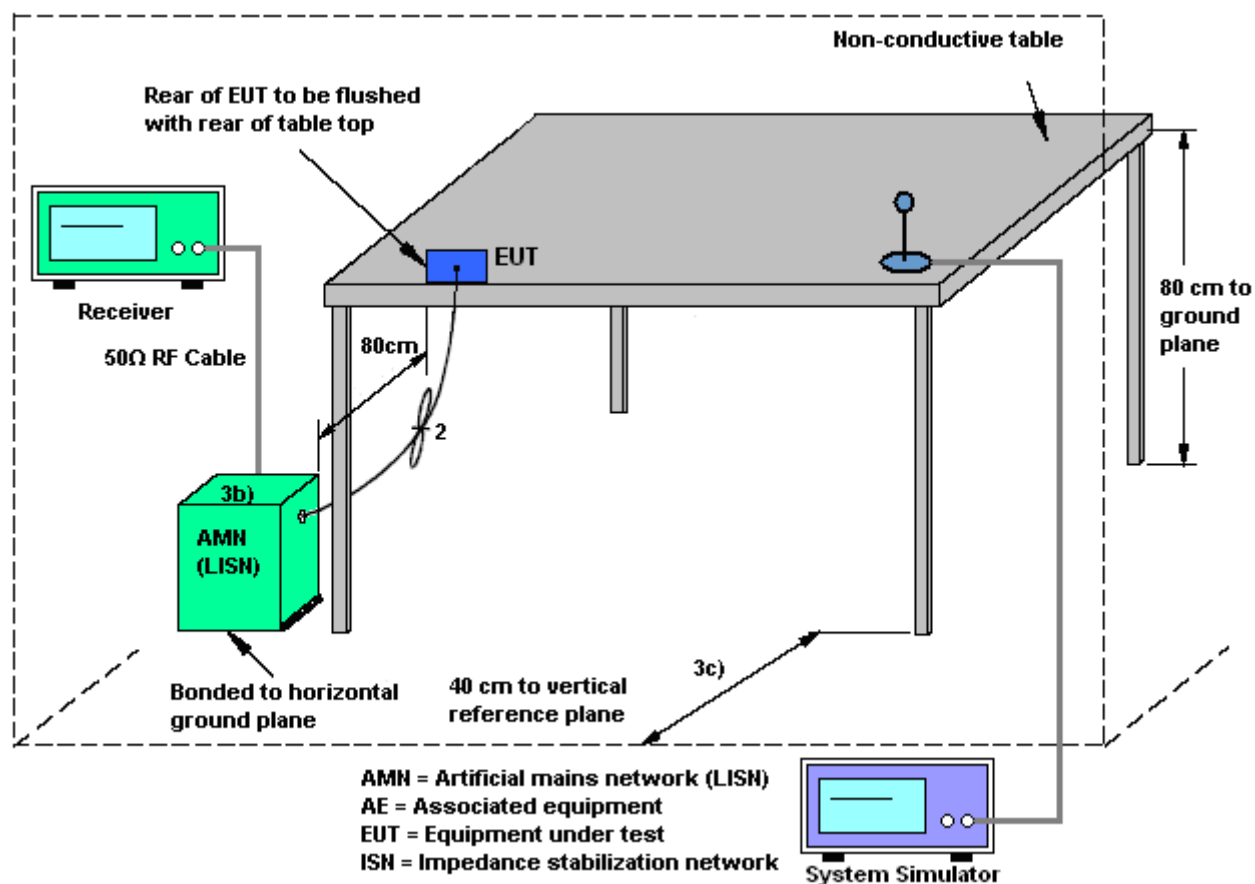

### 3.6.5 Test Result of AC Conducted Emission

|                        |                                                                                                                                                     |                            |         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 2                                                                                                                                              | <b>Temperature :</b>       | 21~23°C |
| <b>Test Engineer :</b> | Kai-Chun Chu                                                                                                                                        | <b>Relative Humidity :</b> | 40~42%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                                                                       | <b>Phase :</b>             | Line    |
| <b>Function Type :</b> | WCDMA Band IV Idle + Bluetooth Link + WLAN Link (5G) + GPS Rx + USB Charging Cable with AC Power + USB Cable (Data Link with Notebook) for Keypad 2 |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.                                                                     |                            |         |

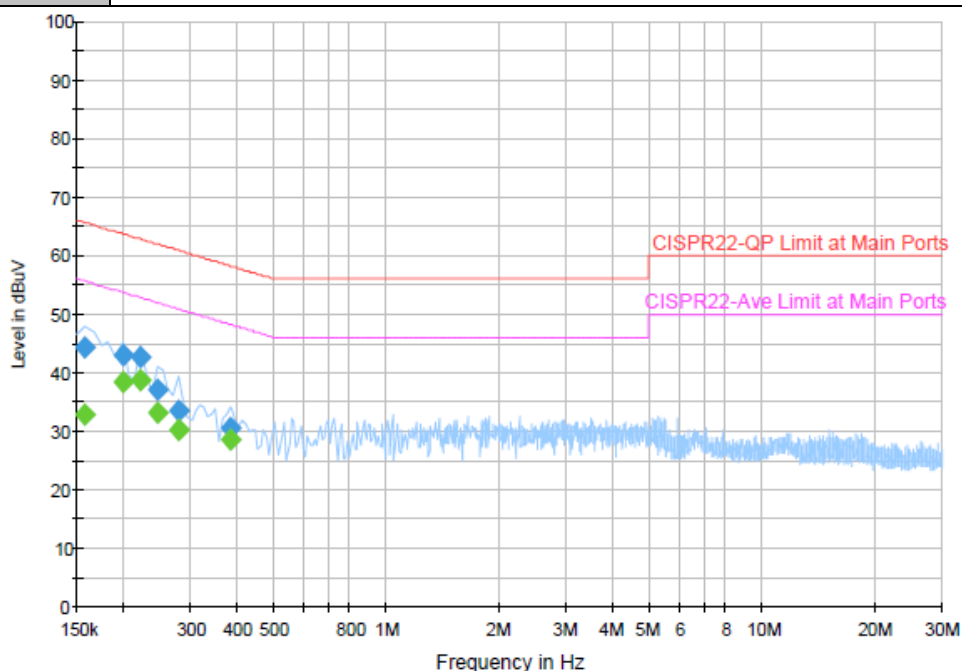


#### Final Result 1

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.158000        | 44.2             | Off    | L1   | 19.4       | 21.4        | 65.6         |
| 0.198000        | 42.8             | Off    | L1   | 19.4       | 20.9        | 63.7         |
| 0.222000        | 42.7             | Off    | L1   | 19.4       | 20.0        | 62.7         |
| 0.246000        | 37.1             | Off    | L1   | 19.4       | 24.8        | 61.9         |
| 0.278000        | 33.4             | Off    | L1   | 19.4       | 27.5        | 60.9         |
| 0.382000        | 30.4             | Off    | L1   | 19.4       | 27.8        | 58.2         |

#### Final Result 2

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.158000        | 32.7           | Off    | L1   | 19.4       | 22.9        | 55.6         |
| 0.198000        | 38.4           | Off    | L1   | 19.4       | 15.3        | 53.7         |
| 0.222000        | 38.8           | Off    | L1   | 19.4       | 13.9        | 52.7         |
| 0.246000        | 33.1           | Off    | L1   | 19.4       | 18.8        | 51.9         |
| 0.278000        | 30.1           | Off    | L1   | 19.4       | 20.8        | 50.9         |
| 0.382000        | 28.6           | Off    | L1   | 19.4       | 19.6        | 48.2         |

|                        |                                                                                                                                                     |                            |         |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Mode :</b>     | Mode 2                                                                                                                                              | <b>Temperature :</b>       | 21~23℃  |
| <b>Test Engineer :</b> | Kai-Chun Chu                                                                                                                                        | <b>Relative Humidity :</b> | 40~42%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                                                                                       | <b>Phase :</b>             | Neutral |
| <b>Function Type :</b> | WCDMA Band IV Idle + Bluetooth Link + WLAN Link (5G) + GPS Rx + USB Charging Cable with AC Power + USB Cable (Data Link with Notebook) for Keypad 2 |                            |         |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit.                                                                     |                            |         |

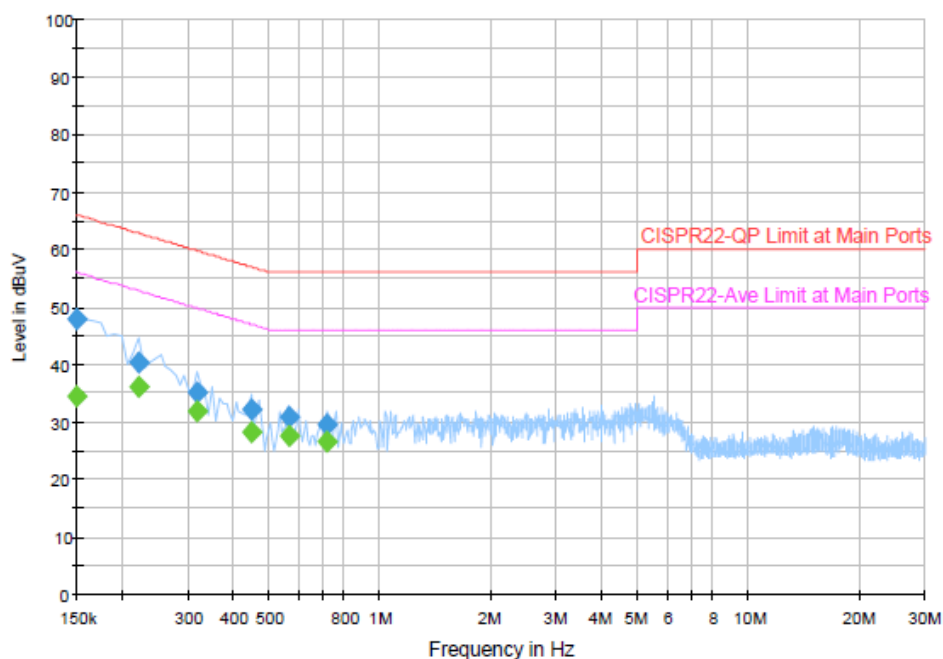
**Final Result 1**

| Frequency (MHz) | QuasiPeak (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|------------------|--------|------|------------|-------------|--------------|
| 0.150000        | 47.9             | Off    | N    | 19.4       | 18.1        | 66.0         |
| 0.222000        | 40.2             | Off    | N    | 19.4       | 22.5        | 62.7         |
| 0.318000        | 35.0             | Off    | N    | 19.4       | 24.8        | 59.8         |
| 0.446000        | 32.0             | Off    | N    | 19.4       | 24.9        | 56.9         |
| 0.566000        | 30.7             | Off    | N    | 19.4       | 25.3        | 56.0         |
| 0.718000        | 29.6             | Off    | N    | 19.5       | 26.4        | 56.0         |

**Final Result 2**

| Frequency (MHz) | Average (dBμV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000        | 34.3           | Off    | N    | 19.4       | 21.7        | 56.0         |
| 0.222000        | 36.0           | Off    | N    | 19.4       | 16.7        | 52.7         |
| 0.318000        | 31.8           | Off    | N    | 19.4       | 18.0        | 49.8         |
| 0.446000        | 28.3           | Off    | N    | 19.4       | 18.6        | 46.9         |
| 0.566000        | 27.5           | Off    | N    | 19.4       | 18.5        | 46.0         |
| 0.718000        | 26.4           | Off    | N    | 19.5       | 19.6        | 46.0         |

## 3.7 Radiated Emission Measurement

### 3.7.1 Limit of Radiated Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.7.2 Measuring Instruments


See list of measuring instruments of this test report.

### 3.7.3 Test Procedures


- The testing follows the guidelines in FCC KDB Publication No. 558074 (Measurement Guidelines of DTS).
- Use the following spectrum analyzer settings:
  - Span = wide enough to fully capture the emission being measured; RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold.
  - Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.  
Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$  (dB)
- Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

### 3.7.4 Test Setup


For radiated emissions below 30MHz

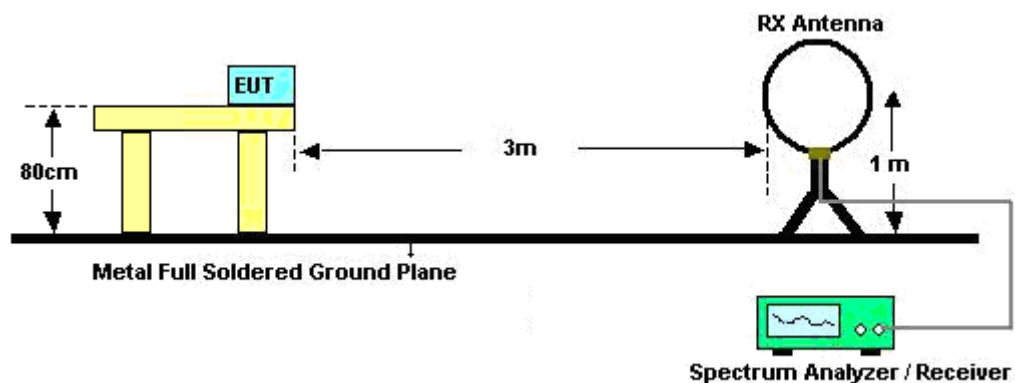

For radiated emissions from 30MHz to 1GHz

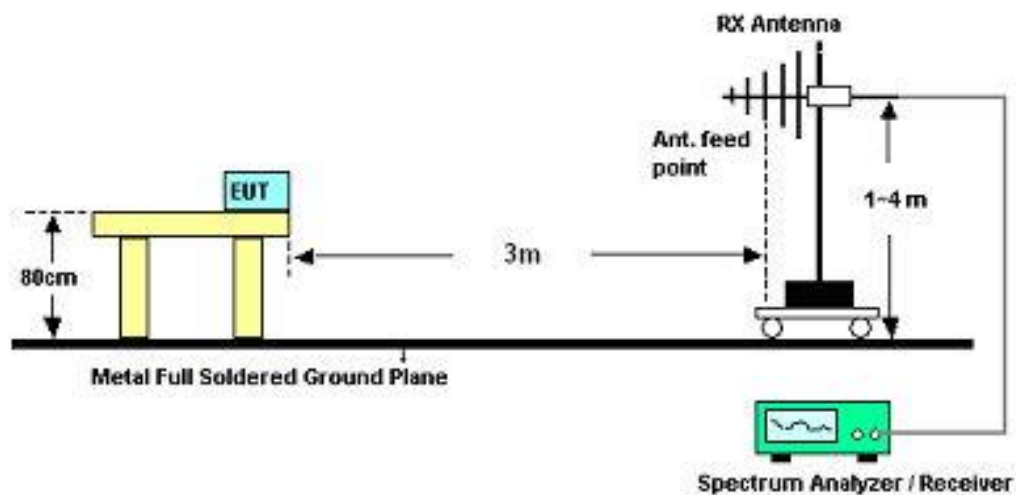

For radiated emissions above 1GHz

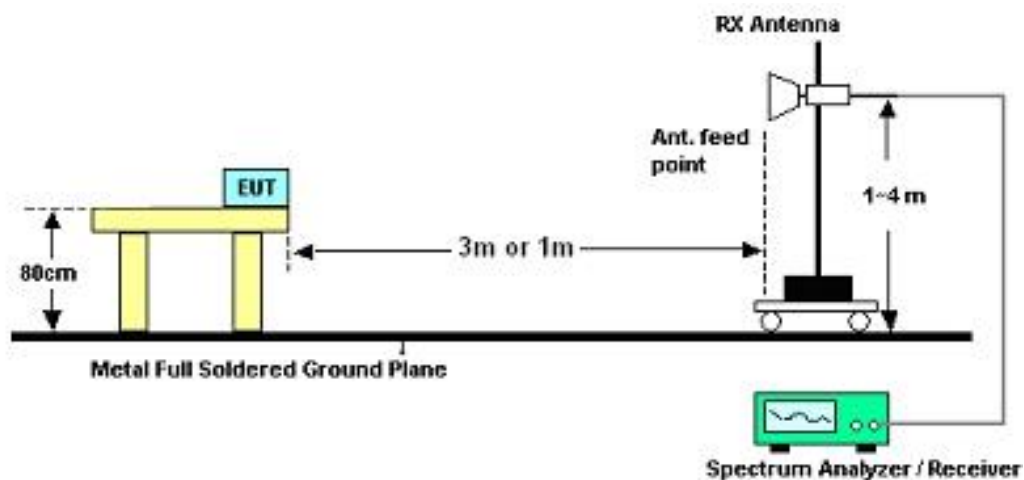

### 3.7.5 Test Results of Radiated Emissions (9kHz ~ 30MHz)

|                 |              |                     |         |  |
|-----------------|--------------|---------------------|---------|--|
| Test Engineer : | Chenmy Cheng | Temperature :       | 22~23°C |  |
|                 |              | Relative Humidity : | 46~47%  |  |

| Frequency (MHz) | Level (dBuV) | Over Limit (dB) | Limit Line (dBuV) | Remark   |
|-----------------|--------------|-----------------|-------------------|----------|
| -               | -            | -               | -                 | See Note |

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

**3.7.6 Test Result of Radiated Emission (30MHz ~ 10<sup>th</sup> Harmonic)**

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 1                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 35.94                | 24.33               | -15.67                  | 40                          | 39.53                   | 14.65                       | 0.23                    | 30.08                      | -                    | -                       | Peak    |
| 126.12               | 19.51               | -23.99                  | 43.5                        | 37.29                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 260.04               | 23.47               | -22.53                  | 46                          | 40.5                    | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 356.7                | 30.22               | -15.78                  | 46                          | 44.68                   | 14.65                       | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 873.3                | 31.25               | -14.75                  | 46                          | 39.06                   | 20.48                       | 1.29                    | 29.58                      | 100                  | 0                       | Peak    |
| 949.6                | 38.05               | -15.95                  | 54                          | 45.53                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2385.81              | 52.13               | -21.87                  | 74                          | 49.85                   | 32.86                       | 3.47                    | 34.05                      | 115                  | 339                     | Peak    |
| 2385.81              | 45.31               | -8.69                   | 54                          | 43.03                   | 32.86                       | 3.47                    | 34.05                      | 115                  | 339                     | Average |
| 2412                 | 107.08              | -                       | -                           | 104.75                  | 32.89                       | 3.52                    | 34.08                      | 172                  | 328                     | Peak    |
| 2412                 | 108.47              | -                       | -                           | 106.14                  | 32.89                       | 3.52                    | 34.08                      | 172                  | 328                     | Average |
| 2492.78              | 59.35               | -14.65                  | 74                          | 56.81                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 360                     | Peak    |
| 2492.78              | 38.2                | -15.8                   | 54                          | 35.66                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 360                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 1                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.16                | 26.61               | -13.39                  | 40                          | 39.91                   | 16.55                       | 0.24                    | 30.09                      | 132                  | 156                     | Peak    |
| 53.49                | 24.06               | -15.94                  | 40                          | 47.1                    | 6.8                         | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 126.12               | 23.33               | -20.17                  | 43.5                        | 41.11                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 624.1                | 24.76               | -21.24                  | 46                          | 34.58                   | 18.73                       | 1.08                    | 29.63                      | -                    | -                       | Peak    |
| 873.3                | 32.01               | -13.99                  | 46                          | 39.82                   | 20.48                       | 1.29                    | 29.58                      | -                    | -                       | Peak    |
| 949.6                | 37.21               | -16.79                  | 54                          | 44.69                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2385.24              | 52.75               | -21.25                  | 74                          | 50.51                   | 32.83                       | 3.42                    | 34.01                      | 100                  | 339                     | Peak    |
| 2385.24              | 42.4                | -11.6                   | 54                          | 40.16                   | 32.83                       | 3.42                    | 34.01                      | 100                  | 339                     | Average |
| 2412                 | 105.74              | -                       | -                           | 103.41                  | 32.89                       | 3.52                    | 34.08                      | 102                  | 35                      | Peak    |
| 2412                 | 101.93              | -                       | -                           | 99.6                    | 32.89                       | 3.52                    | 34.08                      | 102                  | 35                      | Average |
| 2490.5               | 55.27               | -18.73                  | 74                          | 52.73                   | 33.05                       | 3.72                    | 34.23                      | 108                  | 21                      | Peak    |
| 2490.5               | 39.01               | -14.99                  | 54                          | 36.47                   | 33.05                       | 3.72                    | 34.23                      | 108                  | 21                      | Average |



|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 2                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.16                | 23.7                | -16.3                   | 40                          | 37                      | 16.55                       | 0.24                    | 30.09                      | -                    | -                       | Peak    |
| 126.12               | 19.93               | -23.57                  | 43.5                        | 37.71                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 260.04               | 23.27               | -22.73                  | 46                          | 40.3                    | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 355.3                | 29.17               | -16.83                  | 46                          | 43.68                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 873.3                | 31.62               | -14.38                  | 46                          | 39.43                   | 20.48                       | 1.29                    | 29.58                      | 200                  | 0                       | Peak    |
| 950.3                | 36.38               | -17.62                  | 54                          | 43.86                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2390                 | 48.01               | -25.99                  | 74                          | 45.73                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 37.78               | -16.22                  | 54                          | 35.5                    | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2437                 | 108.82              | -                       | -                           | 106.42                  | 32.95                       | 3.6                     | 34.15                      | 102                  | 322                     | Peak    |
| 2437                 | 105.39              | -                       | -                           | 102.99                  | 32.95                       | 3.6                     | 34.15                      | 102                  | 322                     | Average |
| 2483.5               | 51                  | -23                     | 74                          | 48.51                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Peak    |
| 2483.5               | 38.47               | -15.53                  | 54                          | 35.98                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 2                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 52.95                | 23.59               | -16.41                  | 40                          | 46.63                   | 6.8                         | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 126.12               | 24.21               | -19.29                  | 43.5                        | 41.99                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 162.03               | 23.16               | -20.34                  | 43.5                        | 43.03                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 624.1                | 24.27               | -21.73                  | 46                          | 34.09                   | 18.73                       | 1.08                    | 29.63                      | -                    | -                       | Peak    |
| 872.6                | 32.85               | -13.15                  | 46                          | 40.66                   | 20.48                       | 1.29                    | 29.58                      | 178                  | 238                     | Peak    |
| 950.3                | 36.45               | -17.55                  | 54                          | 43.93                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2390                 | 47.85               | -26.15                  | 74                          | 45.57                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 38.86               | -15.14                  | 54                          | 36.58                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2437                 | 106.37              | -                       | -                           | 103.97                  | 32.95                       | 3.6                     | 34.15                      | 174                  | 17                      | Peak    |
| 2437                 | 101.97              | -                       | -                           | 99.57                   | 32.95                       | 3.6                     | 34.15                      | 174                  | 17                      | Average |
| 2483.5               | 48.6                | -25.4                   | 74                          | 46.11                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Peak    |
| 2483.5               | 39.99               | -14.01                  | 54                          | 37.5                    | 33.01                       | 3.68                    | 34.2                       | 100                  | 0                       | Average |



|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 3                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.43                | 25.82               | -14.18                  | 40                          | 39.63                   | 16.04                       | 0.24                    | 30.09                      | 103                  | 357                     | Peak    |
| 126.12               | 20.53               | -22.97                  | 43.5                        | 38.31                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 260.04               | 23.2                | -22.8                   | 46                          | 40.23                   | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 360.2                | 29.77               | -16.23                  | 46                          | 44.15                   | 14.72                       | 0.82                    | 29.92                      | -                    | -                       | Peak    |
| 872.6                | 31.47               | -14.53                  | 46                          | 39.28                   | 20.48                       | 1.29                    | 29.58                      | -                    | -                       | Peak    |
| 949.6                | 38.05               | -15.95                  | 54                          | 45.53                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2390                 | 47.64               | -26.36                  | 74                          | 45.36                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 37.48               | -16.52                  | 54                          | 35.2                    | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2462                 | 110.27              | -                       | -                           | 107.82                  | 32.98                       | 3.64                    | 34.17                      | 122                  | 304                     | Peak    |
| 2462                 | 105.07              | -                       | -                           | 102.62                  | 32.98                       | 3.64                    | 34.17                      | 122                  | 304                     | Average |
| 2491.45              | 55.36               | -18.64                  | 74                          | 52.82                   | 33.05                       | 3.72                    | 34.23                      | 131                  | 304                     | Peak    |
| 2491.45              | 46.39               | -7.61                   | 54                          | 43.85                   | 33.05                       | 3.72                    | 34.23                      | 131                  | 304                     | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 3                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.43                | 24.43               | -15.57                  | 40                          | 38.24                   | 16.04                       | 0.24                    | 30.09                      | -                    | -                       | Peak    |
| 126.12               | 24.17               | -19.33                  | 43.5                        | 41.95                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 162.03               | 21.93               | -21.57                  | 43.5                        | 41.8                    | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 624.1                | 23.24               | -22.76                  | 46                          | 33.06                   | 18.73                       | 1.08                    | 29.63                      | -                    | -                       | Peak    |
| 873.3                | 31.14               | -14.86                  | 46                          | 38.95                   | 20.48                       | 1.29                    | 29.58                      | 200                  | 346                     | Peak    |
| 950.3                | 38.2                | -15.8                   | 54                          | 45.68                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2390                 | 48.73               | -25.27                  | 74                          | 46.45                   | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Peak    |
| 2390                 | 35.38               | -18.62                  | 54                          | 33.1                    | 32.86                       | 3.47                    | 34.05                      | 100                  | 0                       | Average |
| 2462                 | 106.98              | -                       | -                           | 104.53                  | 32.98                       | 3.64                    | 34.17                      | 177                  | 16                      | Peak    |
| 2462                 | 102.85              | -                       | -                           | 100.4                   | 32.98                       | 3.64                    | 34.17                      | 177                  | 16                      | Average |
| 2488.98              | 52.14               | -21.86                  | 74                          | 49.6                    | 33.05                       | 3.72                    | 34.23                      | 200                  | 342                     | Peak    |
| 2488.98              | 41.83               | -12.17                  | 54                          | 39.29                   | 33.05                       | 3.72                    | 34.23                      | 200                  | 342                     | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 4                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30                   | 19.67               | -20.33                  | 40                          | 31.49                   | 18                          | 0.26                    | 30.08                      | -                    | -                       | Peak    |
| 126.12               | 20.33               | -23.17                  | 43.5                        | 38.11                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 260.04               | 22.39               | -23.61                  | 46                          | 39.42                   | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 349                  | 28.9                | -17.1                   | 46                          | 43.54                   | 14.48                       | 0.82                    | 29.94                      | -                    | -                       | Peak    |
| 873.3                | 30.16               | -15.84                  | 46                          | 37.97                   | 20.48                       | 1.29                    | 29.58                      | 188                  | 335                     | Peak    |
| 949.6                | 33.28               | -20.72                  | 54                          | 40.76                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2336.79              | 49.54               | -24.46                  | 74                          | 47.37                   | 32.78                       | 3.33                    | 33.94                      | 100                  | 103                     | Peak    |
| 2336.79              | 36.43               | -17.57                  | 54                          | 34.26                   | 32.78                       | 3.33                    | 33.94                      | 100                  | 103                     | Average |
| 2412                 | 98.1                | -                       | -                           | 95.77                   | 32.89                       | 3.52                    | 34.08                      | 178                  | 245                     | Peak    |
| 2412                 | 85.65               | -                       | -                           | 83.32                   | 32.89                       | 3.52                    | 34.08                      | 178                  | 245                     | Average |
| 2487.46              | 54.31               | -19.69                  | 74                          | 51.82                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 228                     | Peak    |
| 2487.46              | 38.72               | -15.28                  | 54                          | 36.23                   | 33.01                       | 3.68                    | 34.2                       | 100                  | 228                     | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 4                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.49                | 23.86               | -16.14                  | 40                          | 46.9                    | 6.8                         | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 126.12               | 23.7                | -19.8                   | 43.5                        | 41.48                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 162.03               | 23.74               | -19.76                  | 43.5                        | 43.61                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 354.6                | 29.35               | -16.65                  | 46                          | 43.86                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 872.6                | 29.89               | -16.11                  | 46                          | 37.7                    | 20.48                       | 1.29                    | 29.58                      | 100                  | 0                       | Peak    |
| 949.6                | 33.04               | -20.96                  | 54                          | 40.52                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2362.44              | 49.47               | -24.53                  | 74                          | 47.26                   | 32.81                       | 3.38                    | 33.98                      | 100                  | 102                     | Peak    |
| 2362.44              | 36.73               | -17.27                  | 54                          | 34.52                   | 32.81                       | 3.38                    | 33.98                      | 100                  | 102                     | Average |
| 2412                 | 100.48              | -                       | -                           | 98.15                   | 32.89                       | 3.52                    | 34.08                      | 100                  | 55                      | Peak    |
| 2412                 | 88.88               | -                       | -                           | 86.55                   | 32.89                       | 3.52                    | 34.08                      | 100                  | 55                      | Average |
| 2492.02              | 51.01               | -22.99                  | 74                          | 48.47                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 126                     | Peak    |
| 2492.02              | 36.57               | -17.43                  | 54                          | 34.03                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 126                     | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 5                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30                   | 21.75               | -18.25                  | 40                          | 33.57                   | 18                          | 0.26                    | 30.08                      | -                    | -                       | Peak    |
| 126.12               | 21.46               | -22.04                  | 43.5                        | 39.24                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 22.47               | -23.53                  | 46                          | 40.07                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 353.9                | 28.96               | -17.04                  | 46                          | 43.49                   | 14.58                       | 0.82                    | 29.93                      | 103                  | 346                     | Peak    |
| 873.3                | 28.65               | -17.35                  | 46                          | 36.46                   | 20.48                       | 1.29                    | 29.58                      | -                    | -                       | Peak    |
| 941.9                | 32.45               | -21.55                  | 54                          | 39.95                   | 20.7                        | 1.33                    | 29.53                      | -                    | -                       | Peak    |
| 2366.05              | 35.36               | -18.64                  | 54                          | 33.15                   | 32.81                       | 3.38                    | 33.98                      | 122                  | 47                      | Average |
| 2366.05              | 46.72               | -27.28                  | 74                          | 44.51                   | 32.81                       | 3.38                    | 33.98                      | 122                  | 47                      | Peak    |
| 2437                 | 102.21              | -                       | -                           | 99.81                   | 32.95                       | 3.6                     | 34.15                      | 130                  | 37                      | Peak    |
| 2437                 | 89.62               | -                       | -                           | 87.22                   | 32.95                       | 3.6                     | 34.15                      | 130                  | 37                      | Average |
| 2487.08              | 48.99               | -25.01                  | 74                          | 46.5                    | 33.01                       | 3.68                    | 34.2                       | 103                  | 344                     | Peak    |
| 2487.08              | 36.83               | -17.17                  | 54                          | 34.34                   | 33.01                       | 3.68                    | 34.2                       | 103                  | 344                     | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 5                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 54.03                | 20.41               | -19.59                  | 40                          | 43.76                   | 6.49                        | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 126.12               | 21.34               | -22.16                  | 43.5                        | 39.12                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 162.03               | 18.76               | -24.74                  | 43.5                        | 38.63                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 354.6                | 26.76               | -19.24                  | 46                          | 41.27                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 872.6                | 28.63               | -17.37                  | 46                          | 36.44                   | 20.48                       | 1.29                    | 29.58                      | 137                  | 249                     | Peak    |
| 941.9                | 29.46               | -24.54                  | 54                          | 36.96                   | 20.7                        | 1.33                    | 29.53                      | -                    | -                       | Peak    |
| 2359.02              | 46.54               | -27.46                  | 74                          | 44.33                   | 32.81                       | 3.38                    | 33.98                      | 125                  | 298                     | Peak    |
| 2359.02              | 34.36               | -19.64                  | 54                          | 32.15                   | 32.81                       | 3.38                    | 33.98                      | 125                  | 298                     | Average |
| 2437                 | 102.38              | -                       | -                           | 99.98                   | 32.95                       | 3.6                     | 34.15                      | 133                  | 236                     | Peak    |
| 2437                 | 89.29               | -                       | -                           | 86.89                   | 32.95                       | 3.6                     | 34.15                      | 133                  | 236                     | Average |
| 2484.04              | 49.69               | -24.31                  | 74                          | 47.2                    | 33.01                       | 3.68                    | 34.2                       | 102                  | 334                     | Peak    |
| 2484.04              | 37.05               | -16.95                  | 54                          | 34.56                   | 33.01                       | 3.68                    | 34.2                       | 102                  | 334                     | Average |



|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 6                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.16                | 25.91               | -14.09                  | 40                          | 39.21                   | 16.55                       | 0.24                    | 30.09                      | 122                  | 31                      | Peak    |
| 162.03               | 20                  | -23.5                   | 43.5                        | 39.87                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 260.04               | 22.1                | -23.9                   | 46                          | 39.13                   | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 354.6                | 29.59               | -16.41                  | 46                          | 44.1                    | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 872.6                | 30.61               | -15.39                  | 46                          | 38.42                   | 20.48                       | 1.29                    | 29.58                      | -                    | -                       | Peak    |
| 949.6                | 30.21               | -23.79                  | 54                          | 37.69                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2353.32              | 46.08               | -27.92                  | 74                          | 43.87                   | 32.81                       | 3.38                    | 33.98                      | 120                  | 0                       | Peak    |
| 2353.32              | 34.42               | -19.58                  | 54                          | 32.21                   | 32.81                       | 3.38                    | 33.98                      | 120                  | 0                       | Average |
| 2462                 | 100.53              | -                       | -                           | 98.08                   | 32.98                       | 3.64                    | 34.17                      | 102                  | 341                     | Peak    |
| 2462                 | 89.65               | -                       | -                           | 87.2                    | 32.98                       | 3.64                    | 34.17                      | 102                  | 341                     | Average |
| 2483.85              | 54.4                | -19.6                   | 74                          | 51.91                   | 33.01                       | 3.68                    | 34.2                       | 132                  | 355                     | Peak    |
| 2483.85              | 40.47               | -13.53                  | 54                          | 37.98                   | 33.01                       | 3.68                    | 34.2                       | 132                  | 355                     | Average |

|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 6                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 54.03                | 23.76               | -16.24                  | 40                          | 47.11                   | 6.49                        | 0.29                    | 30.13                      | -                    | -                       | Peak    |
| 126.12               | 23.77               | -19.73                  | 43.5                        | 41.55                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 162.03               | 22.64               | -20.86                  | 43.5                        | 42.51                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 354.6                | 27.53               | -18.47                  | 46                          | 42.04                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 873.3                | 30.1                | -15.9                   | 46                          | 37.91                   | 20.48                       | 1.29                    | 29.58                      | 120                  | 100                     | Peak    |
| 949.6                | 30.12               | -23.88                  | 54                          | 37.6                    | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2316.08              | 45.64               | -28.36                  | 74                          | 43.55                   | 32.73                       | 3.22                    | 33.86                      | 188                  | 3                       | Peak    |
| 2316.08              | 34.76               | -19.24                  | 54                          | 32.67                   | 32.73                       | 3.22                    | 33.86                      | 188                  | 3                       | Average |
| 2462                 | 100.13              | -                       | -                           | 97.68                   | 32.98                       | 3.64                    | 34.17                      | 177                  | 48                      | Peak    |
| 2462                 | 87.07               | -                       | -                           | 84.62                   | 32.98                       | 3.64                    | 34.17                      | 177                  | 48                      | Average |
| 2486.51              | 52.93               | -21.07                  | 74                          | 50.44                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 331                     | Peak    |
| 2486.51              | 39.37               | -14.63                  | 54                          | 36.88                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 331                     | Average |



|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 7                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.08                | 19.4                | -20.6                   | 40                          | 31.94                   | 17.29                       | 0.25                    | 30.08                      | -                    | -                       | Peak    |
| 126.12               | 19.07               | -24.43                  | 43.5                        | 36.85                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 260.04               | 21.87               | -24.13                  | 46                          | 38.9                    | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 311.9                | 27.28               | -18.72                  | 46                          | 43.19                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 350.4                | 30.52               | -15.48                  | 46                          | 45.14                   | 14.5                        | 0.82                    | 29.94                      | 100                  | 112                     | Peak    |
| 426                  | 24.6                | -21.4                   | 46                          | 37.38                   | 16.16                       | 0.87                    | 29.81                      | -                    | -                       | Peak    |
| 2387.33              | 47.5                | -26.5                   | 74                          | 45.22                   | 32.86                       | 3.47                    | 34.05                      | 112                  | 301                     | Peak    |
| 2387.33              | 36.59               | -17.41                  | 54                          | 34.31                   | 32.86                       | 3.47                    | 34.05                      | 112                  | 301                     | Average |
| 2412                 | 97.28               | -                       | -                           | 94.95                   | 32.89                       | 3.52                    | 34.08                      | 108                  | 334                     | Peak    |
| 2412                 | 86.21               | -                       | -                           | 83.88                   | 32.89                       | 3.52                    | 34.08                      | 108                  | 334                     | Average |
| 2492.97              | 51.55               | -22.45                  | 74                          | 49.01                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 360                     | Peak    |
| 2492.97              | 41.25               | -12.75                  | 54                          | 38.71                   | 33.05                       | 3.72                    | 34.23                      | 100                  | 360                     | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 7                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 01                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2412 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.49                | 23.68               | -16.32                  | 40                          | 46.72                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 23                      | Peak    |
| 126.12               | 21.83               | -21.67                  | 43.5                        | 39.61                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 23.79               | -22.21                  | 46                          | 41.39                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 350.4                | 23.47               | -22.53                  | 46                          | 38.09                   | 14.5                        | 0.82                    | 29.94                      | -                    | -                       | Peak    |
| 580                  | 22.44               | -23.56                  | 46                          | 32.48                   | 18.56                       | 1.04                    | 29.64                      | -                    | -                       | Peak    |
| 936.3                | 26.56               | -19.44                  | 46                          | 34.1                    | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 2389.61              | 49.29               | -24.71                  | 74                          | 47.01                   | 32.86                       | 3.47                    | 34.05                      | 110                  | 102                     | Peak    |
| 2389.61              | 37.74               | -16.26                  | 54                          | 35.46                   | 32.86                       | 3.47                    | 34.05                      | 110                  | 102                     | Average |
| 2412                 | 96.94               | -                       | -                           | 94.61                   | 32.89                       | 3.52                    | 34.08                      | 103                  | 36                      | Peak    |
| 2412                 | 86.35               | -                       | -                           | 84.02                   | 32.89                       | 3.52                    | 34.08                      | 103                  | 36                      | Average |
| 2498.29              | 53.34               | -20.66                  | 74                          | 50.8                    | 33.05                       | 3.72                    | 34.23                      | 112                  | 23                      | Peak    |
| 2498.29              | 39.95               | -14.05                  | 54                          | 37.41                   | 33.05                       | 3.72                    | 34.23                      | 112                  | 23                      | Average |

|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 8                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.54                | 20.04               | -19.96                  | 40                          | 32.58                   | 17.29                       | 0.25                    | 30.08                      | -                    | -                       | Peak    |
| 180.12               | 21.18               | -22.32                  | 43.5                        | 42.1                    | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 22.65               | -23.35                  | 46                          | 40.25                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 27.76               | -18.24                  | 46                          | 43.67                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 363.7                | 30.28               | -15.72                  | 46                          | 44.55                   | 14.83                       | 0.82                    | 29.92                      | 100                  | 223                     | Peak    |
| 949.6                | 27.51               | -26.49                  | 54                          | 34.99                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2386.19              | 46.12               | -27.88                  | 74                          | 43.84                   | 32.86                       | 3.47                    | 34.05                      | 132                  | 155                     | Peak    |
| 2386.19              | 34.72               | -19.28                  | 54                          | 32.44                   | 32.86                       | 3.47                    | 34.05                      | 132                  | 155                     | Average |
| 2437                 | 101.92              | -                       | -                           | 99.52                   | 32.95                       | 3.6                     | 34.15                      | 105                  | 323                     | Peak    |
| 2437                 | 90.53               | -                       | -                           | 88.13                   | 32.95                       | 3.6                     | 34.15                      | 105                  | 323                     | Average |
| 2484.42              | 50.07               | -23.93                  | 74                          | 47.58                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 0                       | Peak    |
| 2484.42              | 38.16               | -15.84                  | 54                          | 35.67                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 0                       | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 8                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 06                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2437 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.49                | 23.01               | -16.99                  | 40                          | 46.05                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 28                      | Peak    |
| 126.12               | 21.67               | -21.83                  | 43.5                        | 39.45                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 23.65               | -22.35                  | 46                          | 41.25                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 355.3                | 23.86               | -22.14                  | 46                          | 38.37                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 675.9                | 22.96               | -23.04                  | 46                          | 32.43                   | 19.11                       | 1.11                    | 29.69                      | -                    | -                       | Peak    |
| 949.6                | 27.15               | -26.85                  | 54                          | 34.63                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2351.23              | 48.05               | -25.95                  | 74                          | 45.88                   | 32.78                       | 3.33                    | 33.94                      | 109                  | 67                      | Peak    |
| 2351.23              | 35.66               | -18.34                  | 54                          | 33.49                   | 32.78                       | 3.33                    | 33.94                      | 109                  | 67                      | Average |
| 2437                 | 101.7               | -                       | -                           | 99.3                    | 32.95                       | 3.6                     | 34.15                      | 102                  | 119                     | Peak    |
| 2437                 | 87.75               | -                       | -                           | 85.35                   | 32.95                       | 3.6                     | 34.15                      | 102                  | 119                     | Average |
| 2485.18              | 52.49               | -21.51                  | 74                          | 50                      | 33.01                       | 3.68                    | 34.2                       | 123                  | 241                     | Peak    |
| 2485.18              | 39.77               | -14.23                  | 54                          | 37.28                   | 33.01                       | 3.68                    | 34.2                       | 123                  | 241                     | Average |



|                        |                                                       |                            |            |
|------------------------|-------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 9                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.35                | 20.3                | -19.7                   | 40                          | 32.84                   | 17.29                       | 0.25                    | 30.08                      | -                    | -                       | Peak    |
| 180.12               | 22.35               | -21.15                  | 43.5                        | 43.27                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 22.22               | -23.78                  | 46                          | 39.82                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 27.48               | -18.52                  | 46                          | 43.39                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 351.1                | 28.41               | -17.59                  | 46                          | 43.01                   | 14.52                       | 0.82                    | 29.94                      | 200                  | 302                     | Peak    |
| 950.3                | 25.85               | -28.15                  | 54                          | 33.33                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2311.71              | 45.79               | -28.21                  | 74                          | 43.7                    | 32.73                       | 3.22                    | 33.86                      | 156                  | 360                     | Peak    |
| 2311.71              | 33.96               | -20.04                  | 54                          | 31.87                   | 32.73                       | 3.22                    | 33.86                      | 156                  | 360                     | Average |
| 2462                 | 98.76               | -                       | -                           | 96.31                   | 32.98                       | 3.64                    | 34.17                      | 105                  | 339                     | Peak    |
| 2462                 | 90.49               | -                       | -                           | 88.04                   | 32.98                       | 3.64                    | 34.17                      | 105                  | 339                     | Average |
| 2483.66              | 53.66               | -20.34                  | 74                          | 51.17                   | 33.01                       | 3.68                    | 34.2                       | 120                  | 100                     | Peak    |
| 2483.66              | 39.95               | -14.05                  | 54                          | 37.46                   | 33.01                       | 3.68                    | 34.2                       | 120                  | 100                     | Average |



|                        |                                                       |                            |          |
|------------------------|-------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 9                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 11                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                          | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 2462 MHz is Fundamental Signals which can be ignored. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.22                | 24.02               | -15.98                  | 40                          | 47.06                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 218                     | Peak    |
| 126.12               | 20.17               | -23.33                  | 43.5                        | 37.95                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 21.99               | -24.01                  | 46                          | 39.59                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 350.4                | 26.11               | -19.89                  | 46                          | 40.73                   | 14.5                        | 0.82                    | 29.94                      | -                    | -                       | Peak    |
| 519.8                | 22.95               | -23.05                  | 46                          | 34.02                   | 17.67                       | 0.97                    | 29.71                      | -                    | -                       | Peak    |
| 950.3                | 26.5                | -27.5                   | 54                          | 33.98                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 2334.89              | 46.42               | -27.58                  | 74                          | 44.25                   | 32.78                       | 3.33                    | 33.94                      | 194                  | 346                     | Peak    |
| 2334.89              | 34.33               | -19.67                  | 54                          | 32.16                   | 32.78                       | 3.33                    | 33.94                      | 194                  | 346                     | Average |
| 2462                 | 100.08              | -                       | -                           | 97.63                   | 32.98                       | 3.64                    | 34.17                      | 177                  | 48                      | Peak    |
| 2462                 | 87.01               | -                       | -                           | 84.56                   | 32.98                       | 3.64                    | 34.17                      | 177                  | 48                      | Average |
| 2483.66              | 54.29               | -19.71                  | 74                          | 51.8                    | 33.01                       | 3.68                    | 34.2                       | 200                  | 360                     | Peak    |
| 2483.66              | 40.61               | -13.39                  | 54                          | 38.12                   | 33.01                       | 3.68                    | 34.2                       | 200                  | 360                     | Average |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 10                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 149                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5745 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 31.35                | 19.65               | -20.35                  | 40                          | 32.19                   | 17.29                       | 0.25                    | 30.08                      | -                    | -                       | Peak    |
| 180.12               | 20.29               | -23.21                  | 43.5                        | 41.21                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 21.96               | -24.04                  | 46                          | 39.56                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 26.41               | -19.59                  | 46                          | 42.32                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 368.6                | 30.19               | -15.81                  | 46                          | 44.28                   | 14.98                       | 0.83                    | 29.9                       | 100                  | 220                     | Peak    |
| 949.6                | 25.88               | -28.12                  | 54                          | 33.36                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 5725                 | 66.99               | -16.86                  | 83.85                       | 59.47                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 102                     | Peak    |
| 5745                 | 103.85              | -                       | -                           | 96.35                   | 35.52                       | 5.56                    | 33.58                      | 154                  | 353                     | Peak    |
| 5745                 | 95.74               | -                       | -                           | 88.24                   | 35.52                       | 5.56                    | 33.58                      | 154                  | 353                     | Average |
| 5850                 | 50.13               | -33.72                  | 83.85                       | 42.7                    | 35.56                       | 5.64                    | 33.77                      | 100                  | 223                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 10                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 149                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5745 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 32.97                | 21.94               | -18.06                  | 40                          | 35.75                   | 16.04                       | 0.24                    | 30.09                      | -                    | -                       | Peak    |
| 53.22                | 23.83               | -16.17                  | 40                          | 46.87                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 126                     | Peak    |
| 126.12               | 22.05               | -21.45                  | 43.5                        | 39.83                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 356                  | 21.88               | -24.12                  | 46                          | 36.36                   | 14.63                       | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 580.7                | 22.81               | -23.19                  | 46                          | 32.83                   | 18.57                       | 1.05                    | 29.64                      | -                    | -                       | Peak    |
| 949.6                | 26.34               | -27.66                  | 54                          | 33.82                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 5725                 | 63.35               | -16.9                   | 80.25                       | 55.83                   | 35.52                       | 5.55                    | 33.55                      | 125                  | 220                     | Peak    |
| 5745                 | 92.52               | -                       | -                           | 85.02                   | 35.52                       | 5.56                    | 33.58                      | 109                  | 355                     | Average |
| 5745                 | 100.25              | -                       | -                           | 92.75                   | 35.52                       | 5.56                    | 33.58                      | 109                  | 355                     | Peak    |
| 5850                 | 50.26               | -29.99                  | 80.25                       | 42.83                   | 35.56                       | 5.64                    | 33.77                      | 182                  | 228                     | Peak    |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 11                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 157                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5785 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 30.27                | 20.54               | -19.46                  | 40                          | 32.36                   | 18                          | 0.26                    | 30.08                      | -                    | -                       | Peak    |
| 180.12               | 21.67               | -21.83                  | 43.5                        | 42.59                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 24.36               | -21.64                  | 46                          | 41.96                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 28.35               | -17.65                  | 46                          | 44.26                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 364.4                | 29.19               | -16.81                  | 46                          | 43.42                   | 14.86                       | 0.82                    | 29.91                      | 100                  | 328                     | Peak    |
| 936.3                | 26.41               | -19.59                  | 46                          | 33.95                   | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 52.03               | -35.75                  | 87.78                       | 44.51                   | 35.52                       | 5.55                    | 33.55                      | 108                  | 229                     | Peak    |
| 5785                 | 107.78              | -                       | -                           | 100.3                   | 35.53                       | 5.59                    | 33.64                      | 102                  | 351                     | Peak    |
| 5785                 | 97.86               | -                       | -                           | 90.38                   | 35.53                       | 5.59                    | 33.64                      | 102                  | 351                     | Average |
| 5850                 | 50.98               | -36.8                   | 87.78                       | 43.55                   | 35.56                       | 5.64                    | 33.77                      | 103                  | 228                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 11                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 157                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5785 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.22                | 24.52               | -15.48                  | 40                          | 47.56                   | 6.8                         | 0.29                    | 30.13                      | 128                  | 210                     | Peak    |
| 126.12               | 21.03               | -22.47                  | 43.5                        | 38.81                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 22.37               | -23.63                  | 46                          | 39.97                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 355.3                | 25.64               | -20.36                  | 46                          | 40.15                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 871.2                | 25.02               | -20.98                  | 46                          | 32.83                   | 20.49                       | 1.29                    | 29.59                      | -                    | -                       | Peak    |
| 942.6                | 27.34               | -26.66                  | 54                          | 34.84                   | 20.7                        | 1.33                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 50.48               | -30.46                  | 80.94                       | 42.96                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 12                      | Peak    |
| 5785                 | 92.29               | -                       | -                           | 84.81                   | 35.53                       | 5.59                    | 33.64                      | 123                  | 330                     | Average |
| 5785                 | 100.94              | -                       | -                           | 93.46                   | 35.53                       | 5.59                    | 33.64                      | 123                  | 330                     | Peak    |
| 5850                 | 50                  | -30.94                  | 80.94                       | 42.57                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 24                      | Peak    |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 12                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 165                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5825 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 126.12               | 21.31               | -22.19                  | 43.5                        | 39.09                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 180.12               | 24.75               | -18.75                  | 43.5                        | 45.67                   | 8.4                         | 0.56                    | 29.88                      | 100                  | 352                     | Peak    |
| 240.06               | 24.18               | -21.82                  | 46                          | 41.78                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 25.07               | -20.93                  | 46                          | 40.98                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 359.5                | 24.69               | -21.31                  | 46                          | 39.07                   | 14.72                       | 0.82                    | 29.92                      | -                    | -                       | Peak    |
| 943.3                | 26.04               | -27.96                  | 54                          | 33.53                   | 20.71                       | 1.33                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 51.96               | -34.6                   | 86.56                       | 44.44                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 182                     | Peak    |
| 5825                 | 106.56              | -                       | -                           | 99.12                   | 35.55                       | 5.63                    | 33.74                      | 100                  | 335                     | Peak    |
| 5825                 | 97.59               | -                       | -                           | 90.15                   | 35.55                       | 5.63                    | 33.74                      | 100                  | 335                     | Average |
| 5850                 | 60.44               | -26.12                  | 86.56                       | 53.01                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 129                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 12                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 165                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5825 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 52.95                | 23.42               | -16.58                  | 40                          | 46.46                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 268                     | Peak    |
| 126.12               | 20.98               | -22.52                  | 43.5                        | 38.76                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 180.12               | 19.82               | -23.68                  | 43.5                        | 40.74                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 351.8                | 28.12               | -17.88                  | 46                          | 42.7                    | 14.54                       | 0.82                    | 29.94                      | -                    | -                       | Peak    |
| 871.9                | 26.01               | -19.99                  | 46                          | 33.82                   | 20.49                       | 1.29                    | 29.59                      | -                    | -                       | Peak    |
| 942.6                | 26.02               | -27.98                  | 54                          | 33.52                   | 20.7                        | 1.33                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 51.28               | -29.1                   | 80.38                       | 43.76                   | 35.52                       | 5.55                    | 33.55                      | 117                  | 263                     | Peak    |
| 5825                 | 90.07               | -                       | -                           | 82.63                   | 35.55                       | 5.63                    | 33.74                      | 110                  | 356                     | Average |
| 5825                 | 100.38              | -                       | -                           | 92.94                   | 35.55                       | 5.63                    | 33.74                      | 110                  | 356                     | Peak    |
| 5850                 | 54.95               | -25.43                  | 80.38                       | 47.52                   | 35.56                       | 5.64                    | 33.77                      | 163                  | 291                     | Peak    |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 13                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 149                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5745 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 180.12               | 20.34               | -23.16                  | 43.5                        | 41.26                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 20.49               | -25.51                  | 46                          | 38.09                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 260.04               | 21.51               | -24.49                  | 46                          | 38.54                   | 12.15                       | 0.68                    | 29.86                      | -                    | -                       | Peak    |
| 311.9                | 27.09               | -18.91                  | 46                          | 43                      | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 360.9                | 30.22               | -15.78                  | 46                          | 44.57                   | 14.75                       | 0.82                    | 29.92                      | 156                  | 225                     | Peak    |
| 936.3                | 27.68               | -18.32                  | 46                          | 35.22                   | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 68.89               | -18.36                  | 87.25                       | 61.37                   | 35.52                       | 5.55                    | 33.55                      | 200                  | 308                     | Peak    |
| 5745                 | 97.23               | -                       | -                           | 89.73                   | 35.52                       | 5.56                    | 33.58                      | 102                  | 330                     | Average |
| 5745                 | 107.25              | -                       | -                           | 99.75                   | 35.52                       | 5.56                    | 33.58                      | 102                  | 330                     | Peak    |
| 5850                 | 50.28               | -36.97                  | 87.25                       | 42.85                   | 35.56                       | 5.64                    | 33.77                      | 152                  | 331                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 13                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 149                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5745 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 52.95                | 24.19               | -15.81                  | 40                          | 47.23                   | 6.8                         | 0.29                    | 30.13                      | 112                  | 36                      | Peak    |
| 162.03               | 21.46               | -22.04                  | 43.5                        | 41.33                   | 9.53                        | 0.53                    | 29.93                      | -                    | -                       | Peak    |
| 240.06               | 22.12               | -23.88                  | 46                          | 39.72                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 356                  | 24.14               | -21.86                  | 46                          | 38.62                   | 14.63                       | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 573                  | 22.75               | -23.25                  | 46                          | 32.83                   | 18.54                       | 1.03                    | 29.65                      | -                    | -                       | Peak    |
| 936.3                | 27.38               | -18.62                  | 46                          | 34.92                   | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 65.29               | -15.24                  | 80.53                       | 57.77                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 90                      | Peak    |
| 5745                 | 91.52               | -                       | -                           | 84.02                   | 35.52                       | 5.56                    | 33.58                      | 109                  | 353                     | Average |
| 5745                 | 100.53              | -                       | -                           | 93.03                   | 35.52                       | 5.56                    | 33.58                      | 109                  | 353                     | Peak    |
| 5850                 | 50.98               | -29.55                  | 80.53                       | 43.55                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 28                      | Peak    |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 14                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 157                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5785 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 126.12               | 20.45               | -23.05                  | 43.5                        | 38.23                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 180.12               | 20.79               | -22.71                  | 43.5                        | 41.71                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 22.91               | -23.09                  | 46                          | 40.51                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 311.9                | 27.58               | -18.42                  | 46                          | 43.49                   | 13.3                        | 0.74                    | 29.95                      | -                    | -                       | Peak    |
| 363.7                | 28.43               | -17.57                  | 46                          | 42.7                    | 14.83                       | 0.82                    | 29.92                      | 200                  | 206                     | Peak    |
| 936.3                | 27.86               | -18.14                  | 46                          | 35.4                    | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 53.59               | -33.69                  | 87.28                       | 46.07                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 178                     | Peak    |
| 5785                 | 98.24               | -                       | -                           | 90.76                   | 35.53                       | 5.59                    | 33.64                      | 147                  | 349                     | Average |
| 5785                 | 107.28              | -                       | -                           | 99.8                    | 35.53                       | 5.59                    | 33.64                      | 147                  | 349                     | Peak    |
| 5850                 | 52.99               | -34.29                  | 87.28                       | 45.56                   | 35.56                       | 5.64                    | 33.77                      | 200                  | 289                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 14                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 157                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5785 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.49                | 24.28               | -15.72                  | 40                          | 47.32                   | 6.8                         | 0.29                    | 30.13                      | 116                  | 23                      | Peak    |
| 126.12               | 21.27               | -22.23                  | 43.5                        | 39.05                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 23.42               | -22.58                  | 46                          | 41.02                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 493.9                | 23.16               | -22.84                  | 46                          | 34.84                   | 17.11                       | 0.95                    | 29.74                      | -                    | -                       | Peak    |
| 871.2                | 24.3                | -21.7                   | 46                          | 32.11                   | 20.49                       | 1.29                    | 29.59                      | -                    | -                       | Peak    |
| 936.3                | 27.78               | -18.22                  | 46                          | 35.32                   | 20.67                       | 1.32                    | 29.53                      | -                    | -                       | Peak    |
| 5725                 | 51.11               | -29.9                   | 81.01                       | 43.59                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 178                     | Peak    |
| 5785                 | 101.01              | -                       | -                           | 93.53                   | 35.53                       | 5.59                    | 33.64                      | 103                  | 335                     | Peak    |
| 5785                 | 91.14               | -                       | -                           | 83.66                   | 35.53                       | 5.59                    | 33.64                      | 103                  | 335                     | Average |
| 5850                 | 50.57               | -30.44                  | 81.01                       | 43.14                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 203                     | Peak    |

|                        |                                                                                                                        |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 15                                                                                                                | <b>Temperature :</b>       | 22~23°C    |
| <b>Test Channel :</b>  | 165                                                                                                                    | <b>Relative Humidity :</b> | 46~47%     |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 5825 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 126.12               | 20.11               | -23.39                  | 43.5                        | 37.89                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 180.12               | 23.19               | -20.31                  | 43.5                        | 44.11                   | 8.4                         | 0.56                    | 29.88                      | -                    | -                       | Peak    |
| 240.06               | 23.38               | -22.62                  | 46                          | 40.98                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 351.8                | 29.23               | -16.77                  | 46                          | 43.81                   | 14.54                       | 0.82                    | 29.94                      | 100                  | 23                      | Peak    |
| 871.2                | 25.31               | -20.69                  | 46                          | 33.12                   | 20.49                       | 1.29                    | 29.59                      | -                    | -                       | Peak    |
| 949.6                | 27.62               | -26.38                  | 54                          | 35.1                    | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 5725                 | 51.14               | -34.29                  | 85.43                       | 43.62                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 201                     | Peak    |
| 5825                 | 105.43              | -                       | -                           | 97.99                   | 35.55                       | 5.63                    | 33.74                      | 101                  | 335                     | Peak    |
| 5825                 | 96.51               | -                       | -                           | 89.07                   | 35.55                       | 5.63                    | 33.74                      | 101                  | 335                     | Average |
| 5850                 | 63.81               | -21.62                  | 85.43                       | 56.38                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 100                     | Peak    |

|                        |                                                                                                                        |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 15                                                                                                                | <b>Temperature :</b>       | 22~23°C  |
| <b>Test Channel :</b>  | 165                                                                                                                    | <b>Relative Humidity :</b> | 46~47%   |
| <b>Test Engineer :</b> | Chenmy Cheng                                                                                                           | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 5825 MHz is Fundamental Signals which can be ignored.<br>2. 5725 MHz and 5850 MHz are not within a restricted band. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBuV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>( dBuV/m ) | Read<br>Level<br>(dBuV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 53.22                | 23.77               | -16.23                  | 40                          | 46.81                   | 6.8                         | 0.29                    | 30.13                      | 100                  | 223                     | Peak    |
| 126.12               | 21.06               | -22.44                  | 43.5                        | 38.84                   | 11.74                       | 0.46                    | 29.98                      | -                    | -                       | Peak    |
| 240.06               | 21.71               | -24.29                  | 46                          | 39.31                   | 11.56                       | 0.66                    | 29.82                      | -                    | -                       | Peak    |
| 355.3                | 27.83               | -18.17                  | 46                          | 42.34                   | 14.6                        | 0.82                    | 29.93                      | -                    | -                       | Peak    |
| 573.7                | 22.05               | -23.95                  | 46                          | 32.12                   | 18.55                       | 1.03                    | 29.65                      | -                    | -                       | Peak    |
| 949.6                | 27.3                | -26.7                   | 54                          | 34.78                   | 20.73                       | 1.33                    | 29.54                      | -                    | -                       | Peak    |
| 5725                 | 50.73               | -29.82                  | 80.55                       | 43.21                   | 35.52                       | 5.55                    | 33.55                      | 100                  | 28                      | Peak    |
| 5825                 | 100.55              | -                       | -                           | 93.11                   | 35.55                       | 5.63                    | 33.74                      | 152                  | 354                     | Peak    |
| 5825                 | 90.96               | -                       | -                           | 83.52                   | 35.55                       | 5.63                    | 33.74                      | 152                  | 354                     | Average |
| 5850                 | 57.18               | -23.37                  | 80.55                       | 49.75                   | 35.56                       | 5.64                    | 33.77                      | 100                  | 30                      | Peak    |

## **3.8 Antenna Requirements**

### **3.8.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.8.2 Antenna Connected Construction**

The antennas type used in this product is PIFA Antenna without connector and it is considered to meet antenna requirement.

### **3.8.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

| Instrument                | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Due Date      | Remark                |
|---------------------------|--------------|-----------|------------|-----------------|------------------|---------------|-----------------------|
| Spectrum Analyzer         | R&S          | FSP40     | 100055     | 9kHz~40GHz      | Jun. 13, 2011    | Jun. 12, 2012 | Conducted (TH02-HY)   |
| Power Meter               | Anritsu      | ML2495A   | 0932001    | N/A             | Sep. 18, 2011    | Sep. 17, 2012 | Conducted (TH02-HY)   |
| Power Sensor              | Anritsu      | MA2411B   | 0846202    | N/A             | Sep. 18, 2011    | Sep. 17, 2012 | Conducted (TH02-HY)   |
| Power Meter               | Agilent      | E4416A    | GB41292344 | N/A             | Feb. 18, 2011    | Feb. 17, 2012 | Conducted (TH02-HY)   |
| Power Sensor              | Agilent      | E9327A    | US40441548 | N/A             | Feb. 18, 2011    | Feb. 17, 2012 | Conducted (TH02-HY)   |
| EMI Test Receive          | R&S          | ESCI 7    | 100724     | 9kHz~7GHz       | Aug. 22, 2011    | Aug. 21, 2012 | Conduction (CO05-HY)  |
| Two-LISN                  | R&S          | ENV216    | 11-100081  | 9KHz – 30MHz    | Dec. 03, 2010    | Dec. 02, 2011 | Conduction (CO05-HY)  |
| Two-LISN                  | R&S          | ENV216    | 11-100080  | 9KHz – 30MHz    | Dec. 01, 2010    | Nov. 30, 2011 | Conduction (CO05-HY)  |
| AC Power Source           | APC          | APC-1000W | N/A        | N/A             | N/A              | N/A           | Conduction (CO05-HY)  |
| System Simulator          | R&S          | CMU200    | 114256     | N/A             | Feb. 15, 2011    | Feb. 14, 2012 | Conduction (CO05-HY)  |
| GPS Station               | T&E          | GS-50     | N/A        | N/A             | N/A              | N/A           | Conduction (CO05-HY)  |
| EMI Test Receiver         | R&S          | ESCI      | 100534     | 9kHz~3GHz       | Nov. 16, 2010    | Nov. 15, 2011 | Radiation (03CH01-KS) |
| Spectrum Analyzer         | R&S          | FSP40     | 100319     | 9kHz~40GHz      | Jan. 07, 2011    | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Spectrum Analyzer         | R&S          | FSP30     | 101400     | 9kHz~30GHz      | Jun. 02, 2011    | Jun. 01, 2012 | Radiation (03CH01-KS) |
| Bilog Antenna             | SCHAFFNER    | CBL6112D  | 23182      | 25MHz~2GHz      | Dec. 07, 2010    | Dec. 06, 2011 | Radiation (03CH01-KS) |
| Double Ridge Horn Antenna | EMCO         | 3117      | 00075959   | 1GHz~18GHz      | Jan. 07, 2011    | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Amplifier                 | Wireless     | FPA-6592G | 060029     | 9KHz~2GHz       | Jan. 10, 2011    | Jan. 09, 2012 | Radiation (03CH01-KS) |
| Amplifier                 | Agilent      | 8449B     | 3008A02370 | 1GHz~26.5GHz    | Jan. 07, 2011    | Jan. 06, 2012 | Radiation (03CH01-KS) |
| Active horn antenna       | com-power    | AHA-118   | 701023     | 1G-18GHz        | Nov. 09, 2010    | Nov. 08, 2011 | Radiation (03CH01-KS) |
| SHF-EHF Horn              | Schwarzbeck  | BBHA 9170 | BBHA170249 | 15-40GHz        | Oct. 11, 2011    | Oct. 10, 2012 | Radiation (03CH01-KS) |

## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

| Contribution                                                                             | Uncertainty of $X_i$ |                          | $u(X_i)$ |
|------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                                          | dB                   | Probability Distribution |          |
| Receiver Reading                                                                         | 0.10                 | Normal (k=2)             | 0.05     |
| Cable Loss                                                                               | 0.10                 | Normal (k=2)             | 0.05     |
| AMN Insertion Loss                                                                       | 2.50                 | Rectangular              | 0.63     |
| Receiver Specification                                                                   | 1.50                 | Rectangular              | 0.43     |
| Site Imperfection                                                                        | 1.39                 | Rectangular              | 0.80     |
| Mismatch                                                                                 | +0.34 / -0.35        | U-Shape                  | 0.24     |
| <b>Combined Standard Uncertainty <math>U_c(y)</math></b>                                 | <b>1.13</b>          |                          |          |
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b> | <b>2.26</b>          |                          |          |

### Uncertainty of Radiated Emission Measurement (30MHz ~ 1000MHz)

| Contribution                                                                             | Uncertainty of $X_i$ |                          | $u(X_i)$ |
|------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|
|                                                                                          | dB                   | Probability Distribution |          |
| Receiver Reading                                                                         | 0.41                 | Normal (k=2)             | 0.21     |
| Antenna Factor Calibration                                                               | 0.83                 | Normal (k=2)             | 0.42     |
| Cable Loss Calibration                                                                   | 0.25                 | Normal (k=2)             | 0.13     |
| Pre-Amplifier Gain Calibration                                                           | 0.27                 | Normal (k=2)             | 0.14     |
| RCV/SPA Specification                                                                    | 2.50                 | Rectangular              | 0.72     |
| Antenna Factor Interpolation for Frequency                                               | 1.00                 | Rectangular              | 0.29     |
| Site Imperfection                                                                        | 1.43                 | Rectangular              | 0.83     |
| Mismatch                                                                                 | +0.39 / -0.41        | U-Shape                  | 0.28     |
| <b>Combined Standard Uncertainty <math>U_c(y)</math></b>                                 | <b>1.27</b>          |                          |          |
| <b>Measuring Uncertainty for a Level of Confidence of 95% (<math>U = 2U_c(y)</math>)</b> | <b>2.54</b>          |                          |          |

**Uncertainty of Radiated Emission Measurement (1GHz ~ 40GHz)**

| Contribution                                                                                                                         | Uncertainty of $X_i$ |                          | $u(X_i)$ | $C_i$ | $C_i * u(X_i)$ |
|--------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------|----------|-------|----------------|
|                                                                                                                                      | dB                   | Probability Distribution |          |       |                |
| Receiver Reading                                                                                                                     | $\pm 0.10$           | Normal (k=2)             | 0.10     | 1     | 0.10           |
| Antenna Factor Calibration                                                                                                           | $\pm 1.70$           | Normal (k=2)             | 0.85     | 1     | 0.85           |
| Cable Loss Calibration                                                                                                               | $\pm 0.50$           | Normal (k=2)             | 0.25     | 1     | 0.25           |
| Receiver Correction                                                                                                                  | $\pm 2.00$           | Rectangular              | 1.15     | 1     | 1.15           |
| Antenna Factor Directional                                                                                                           | $\pm 1.50$           | Rectangular              | 0.87     | 1     | 0.87           |
| Site Imperfection                                                                                                                    | $\pm 2.80$           | Triangular               | 1.14     | 1     | 1.14           |
| Mismatch<br>Receiver VSWR $\Gamma_1 = 0.197$<br>Antenna VSWR $\Gamma_2 = 0.194$<br>Uncertainty = $20\text{Log}(1-\Gamma_1*\Gamma_2)$ | +0.34 / -0.35        | U-Shape                  | 0.244    | 1     | 0.244          |
| <b>Combined Standard Uncertainty<br/><math>U_c(y)</math></b>                                                                         | <b>2.36</b>          |                          |          |       |                |
| <b>Measuring Uncertainty for a<br/>Level of Confidence of 95%<br/>(<math>U = 2U_c(y)</math>)</b>                                     | <b>4.72</b>          |                          |          |       |                |



## **Appendix A. Photographs of EUT**

Please refer to Sporton report number EP162005-01 as below.