




System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	5/9/2007 4:26:37 PM	DUT Battery Model/No:	
Filename:	LeftTch6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7850	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.40 mm
DUT Position:	Left Touch	Max SAR Y-axis Location:	30.00 mm
Antenna Configuration:	Integral	Max E Field:	2.95 V/m
Test Frequency:	2437MHz	SAR 1g:	0.007 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.003 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.19 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	05/09/07
Input Power Level:	Max .	Extrapolation:	poly4

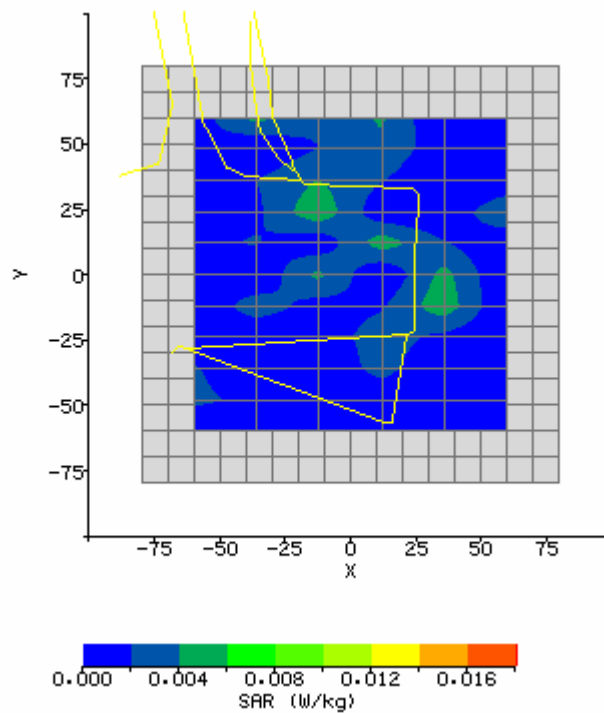

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	5/9/2007 5:10:26 PM	DUT Battery Model/No:	
Filename:	RightTch6_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7850	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.909
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.40 mm
DUT Position:	Right Touch	Max SAR Y-axis Location:	-48.00 mm
Antenna Configuration:	Integral	Max E Field:	4.08 V/m
Test Frequency:	2437MHz	SAR 1g:	0.022 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.008 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	05/09/07
Input Power Level:	Max .	Extrapolation:	poly4

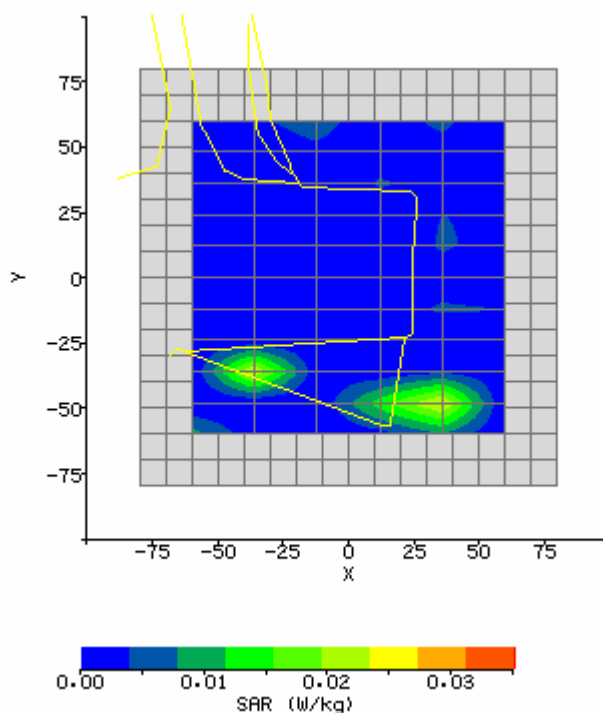

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	5/9/2007 5:40:55 PM	DUT Battery Model/No:	
Filename:	RightTch1_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7850	Relative Permittivity:	50.52
Relative Humidity:	30%	Conductivity:	1.869
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	14.40 mm
DUT Position:	Right Touch	Max SAR Y-axis Location:	46.80 mm
Antenna Configuration:	Integral	Max E Field:	4.30 V/m
Test Frequency:	2412MHz	SAR 1g:	0.033 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.013 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.64 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	05/09/07
Input Power Level:	Max .	Extrapolation:	poly4

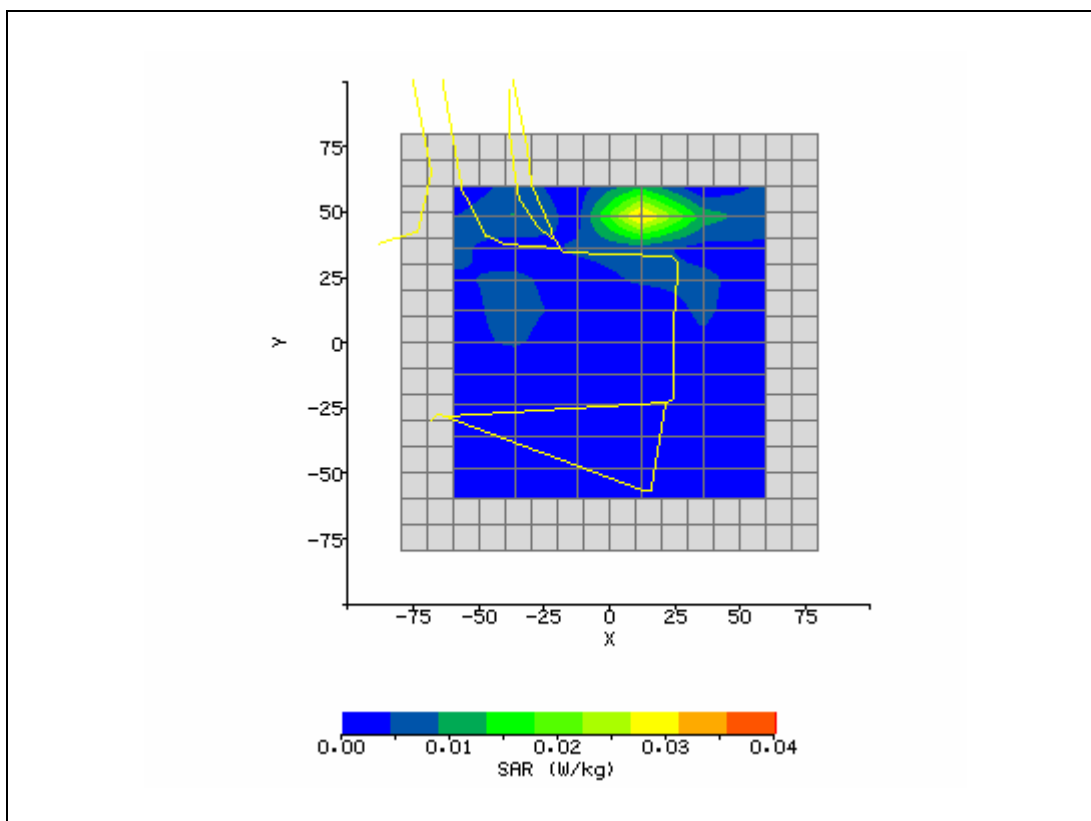

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	5/9/2007 4:47:44 PM	DUT Battery Model/No:	
Filename:	RightTch11_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.8°C	Liquid Simulant:	2450
Device Under Test:	Dolphin 7850	Relative Permittivity:	50.99
Relative Humidity:	30%	Conductivity:	1.921
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-60.00 mm
DUT Position:	Right Touch	Max SAR Y-axis Location:	-42.00 mm
Antenna Configuration:	Integral	Max E Field:	1.78 V/m
Test Frequency:	2462MHz	SAR 1g:	0.007 W/kg
Air Factors:	488 / 373 / 340	SAR 10g:	0.002 W/kg
Conversion Factors:	.692 / .692 / .692	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.04 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	05/09/07
Input Power Level:	Max .	Extrapolation:	poly4

