

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 1 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 9:07:01 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.09
Relative Humidity:	30%	Conductivity:	0.917
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-104.80 mm
Antenna Configuration:	integral	Max E Field:	17.13 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.257 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.184 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.158 W/kg
Type of Modulation:		SAR End:	0.155 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.90 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

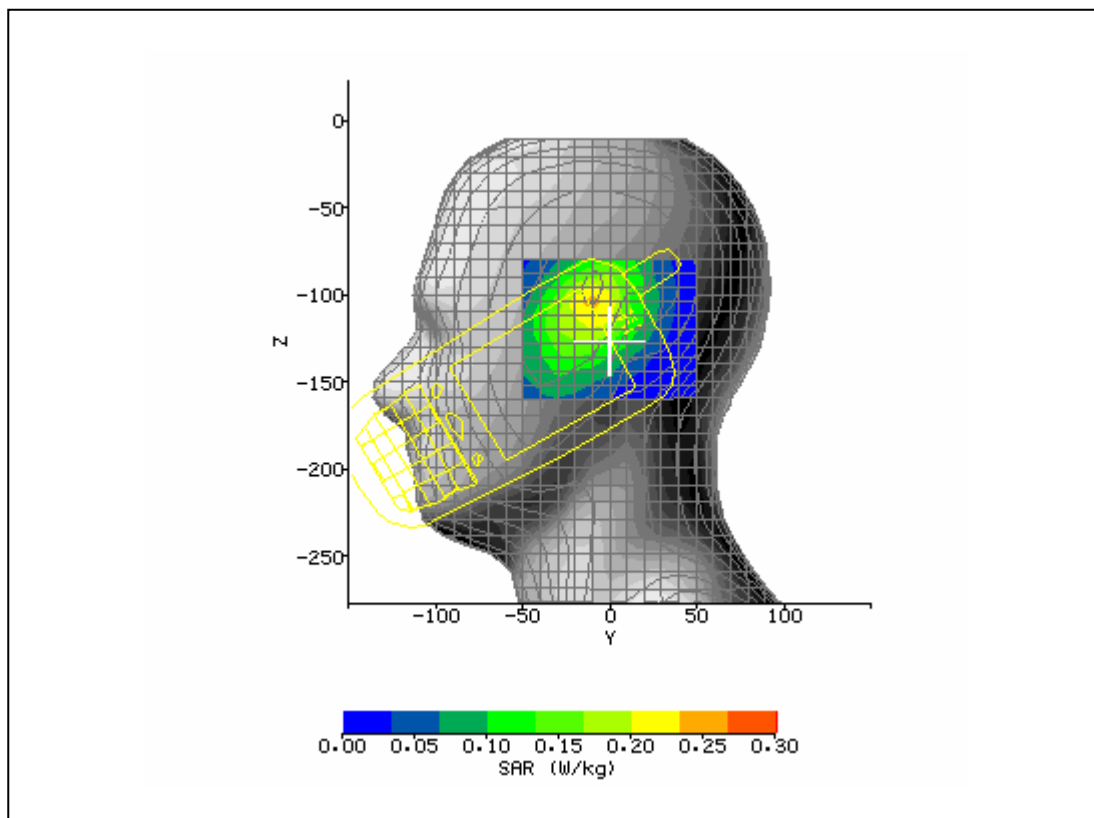

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 2 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 9:32:21 AM	DUT Battery Model/No:	
Filename:	lefttch190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.09
Relative Humidity:	30%	Conductivity:	0.917
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-98.40 mm
Antenna Configuration:	integral	Max E Field:	17.29 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.249 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.180 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.149 W/kg
Type of Modulation:		SAR End:	0.152 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

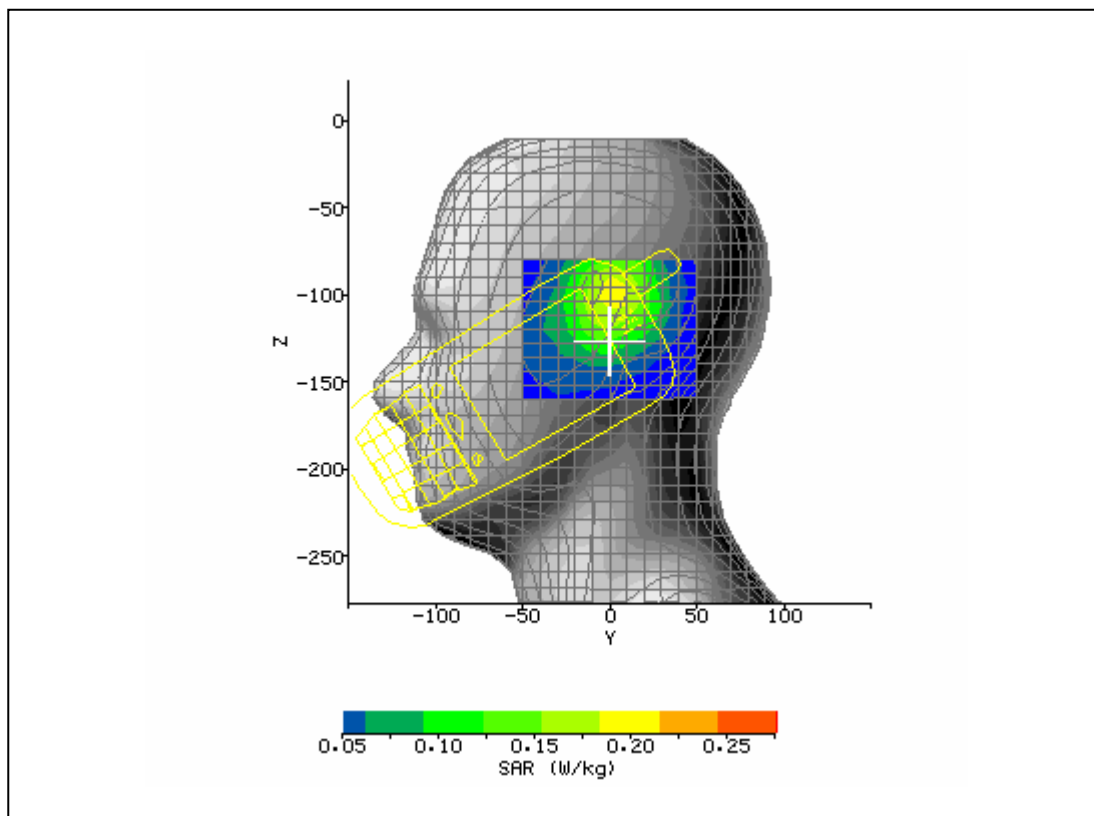

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 3 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 10:10:51 AM	DUT Battery Model/No:	
Filename:	lefttlt190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.09
Relative Humidity:	30%	Conductivity:	0.917
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-135.00 mm
Antenna Configuration:	integral	Max E Field:	14.05 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.179 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.135 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.117 W/kg
Type of Modulation:		SAR End:	0.113 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.90 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

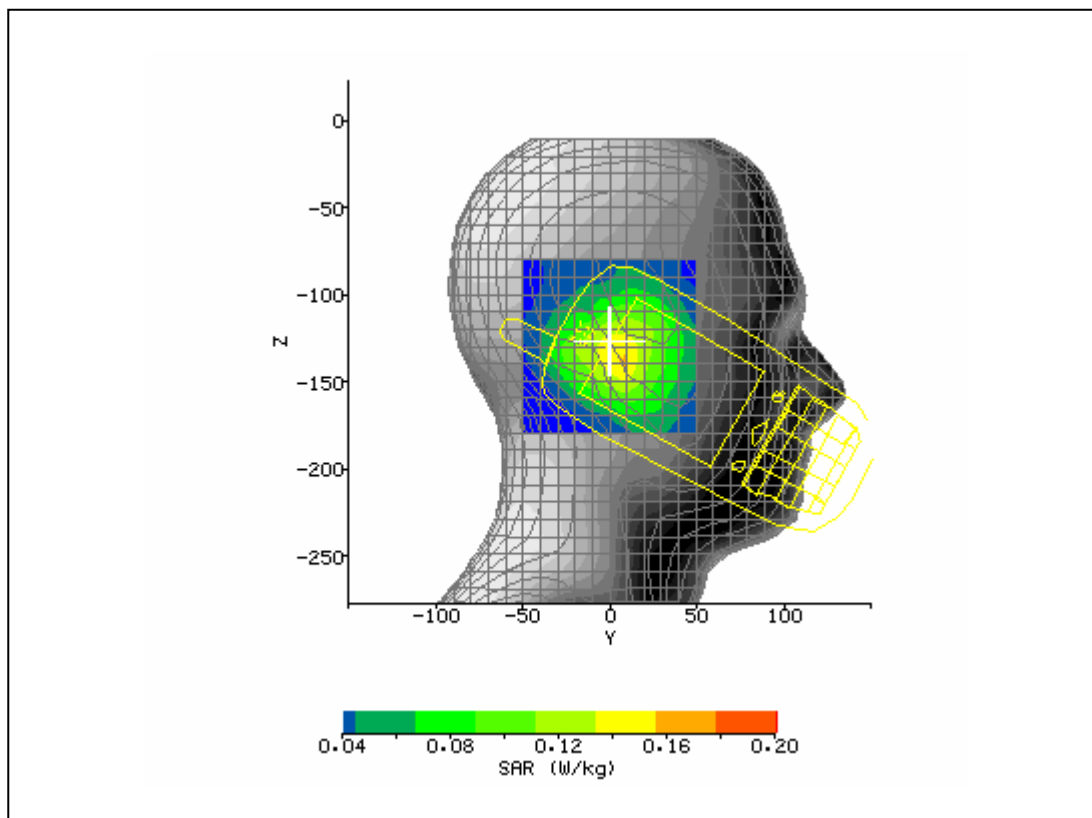

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 4 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 11:46:53 AM	DUT Battery Model/No:	
Filename:	righttch190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.09
Relative Humidity:	30%	Conductivity:	0.917
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-7.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-130.00 mm
Antenna Configuration:	integral	Max E Field:	13.97 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.158 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.122 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.109 W/kg
Type of Modulation:		SAR End:	0.107 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.33 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

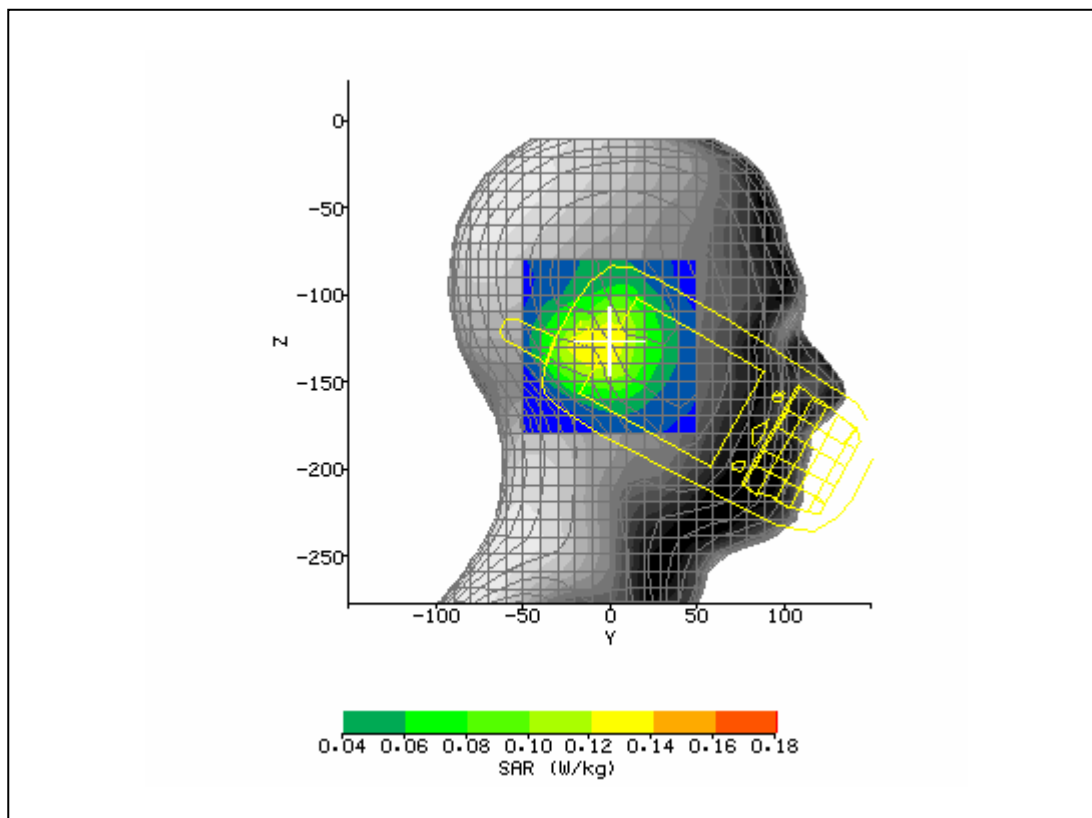

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 5 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 12:15:37 PM	DUT Battery Model/No:	
Filename:	righttlt190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.95
Relative Humidity:	30%	Conductivity:	0.911
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-104.00 mm
Antenna Configuration:	integral	Max E Field:	17.19 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.246 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.183 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.148 W/kg
Type of Modulation:		SAR End:	0.156 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.87 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

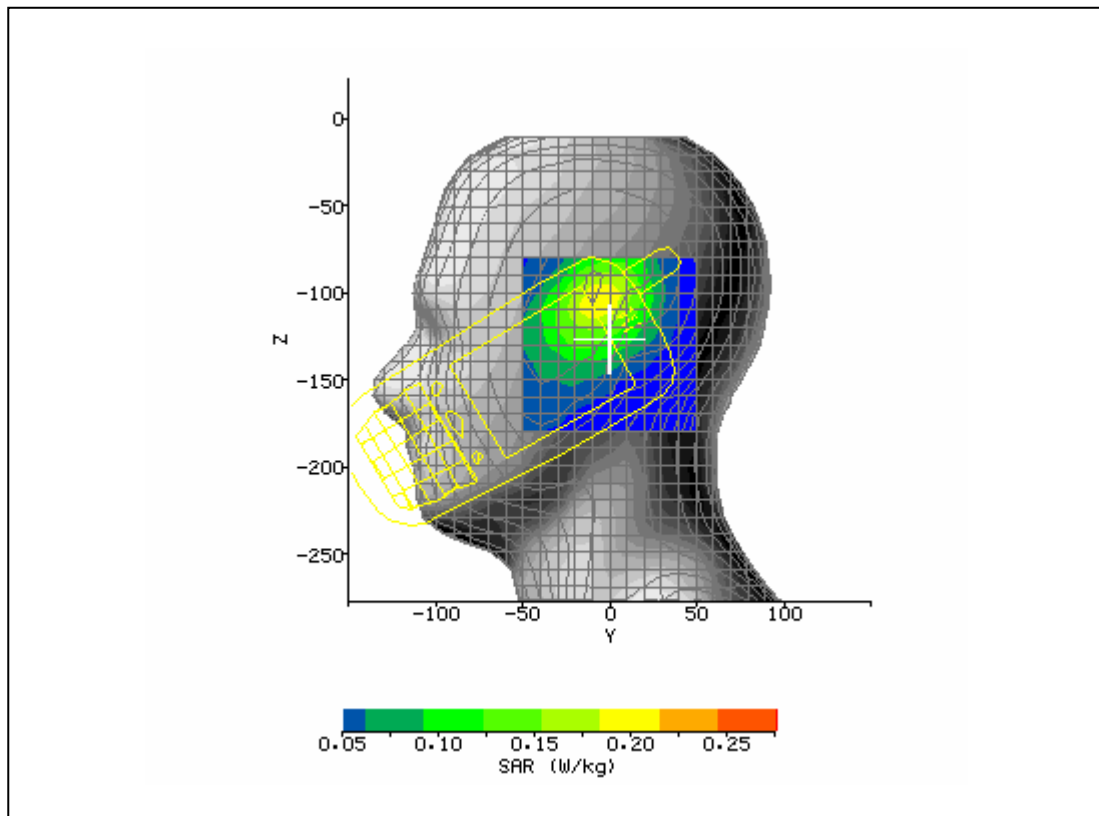

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 6 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 12:37:44 PM	DUT Battery Model/No:	
Filename:	lefttch128.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	41.38
Relative Humidity:	30%	Conductivity:	0.923
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-103.00 mm
Antenna Configuration:	integral	Max E Field:	17.29 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.271 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.188 W/kg
Conversion Factors:	.273 / .273 / .273	SAR Start:	0.151 W/kg
Type of Modulation:		SAR End:	0.149 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.11 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

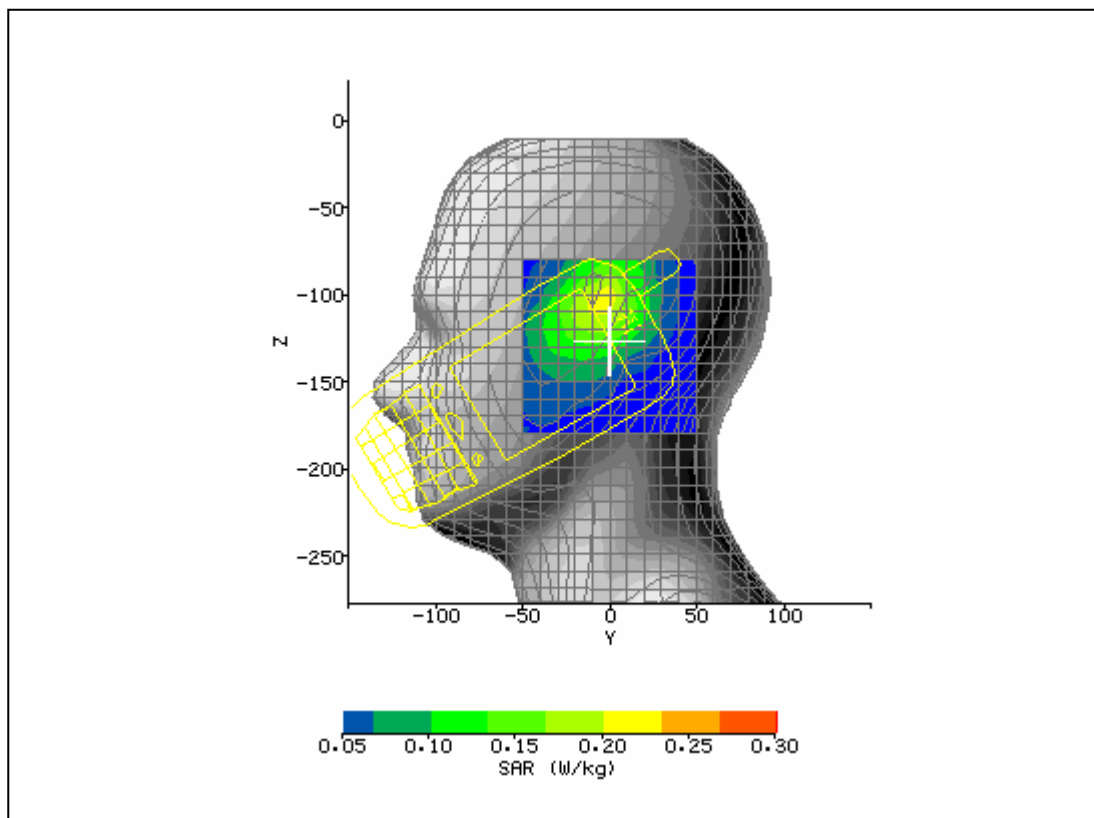

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 7 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 2:18:34 PM	DUT Battery Model/No:	
Filename:	body128.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.66
Relative Humidity:	30%	Conductivity:	0.961
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	2.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	integral	Max E Field:	16.36 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.283 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.208 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.104 W/kg
Type of Modulation:		SAR End:	0.105 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.05 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

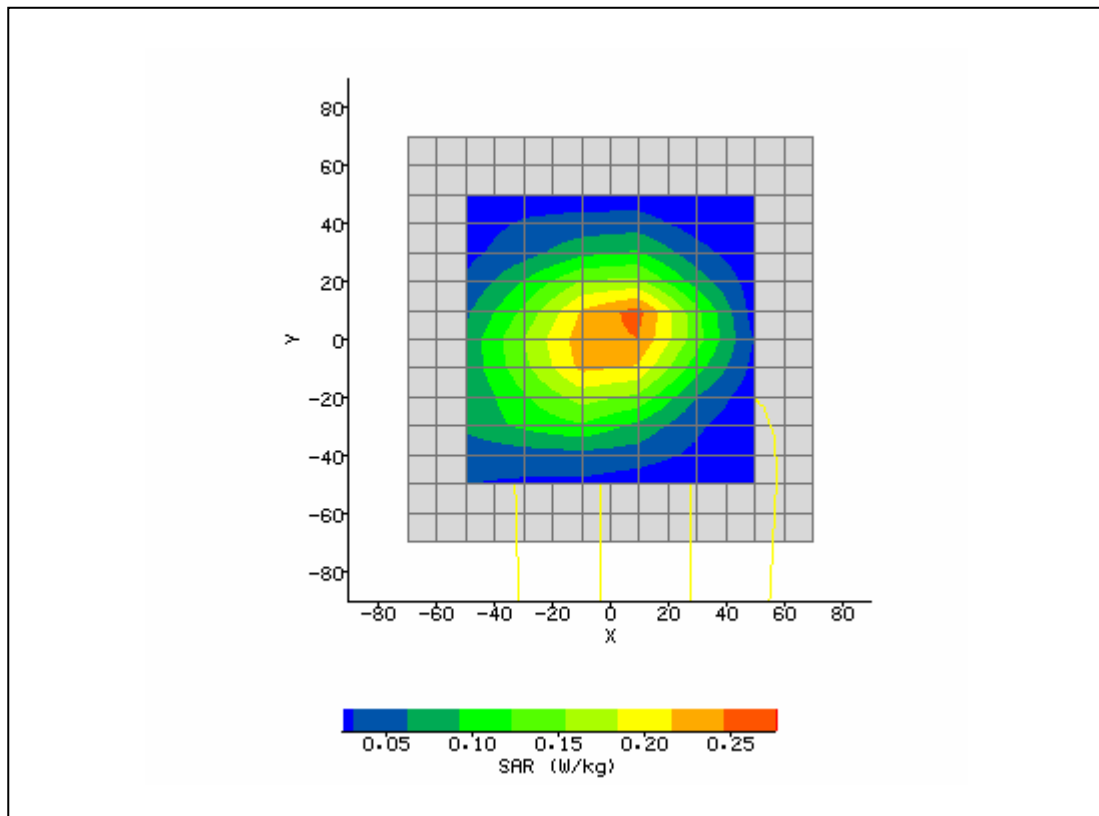

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 8 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 1:59:23 PM	DUT Battery Model/No:	
Filename:	body810.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.82
Relative Humidity:	30%	Conductivity:	0.958
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	3.00 mm
Antenna Configuration:	integral	Max E Field:	14.33 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.222 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.163 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.084 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

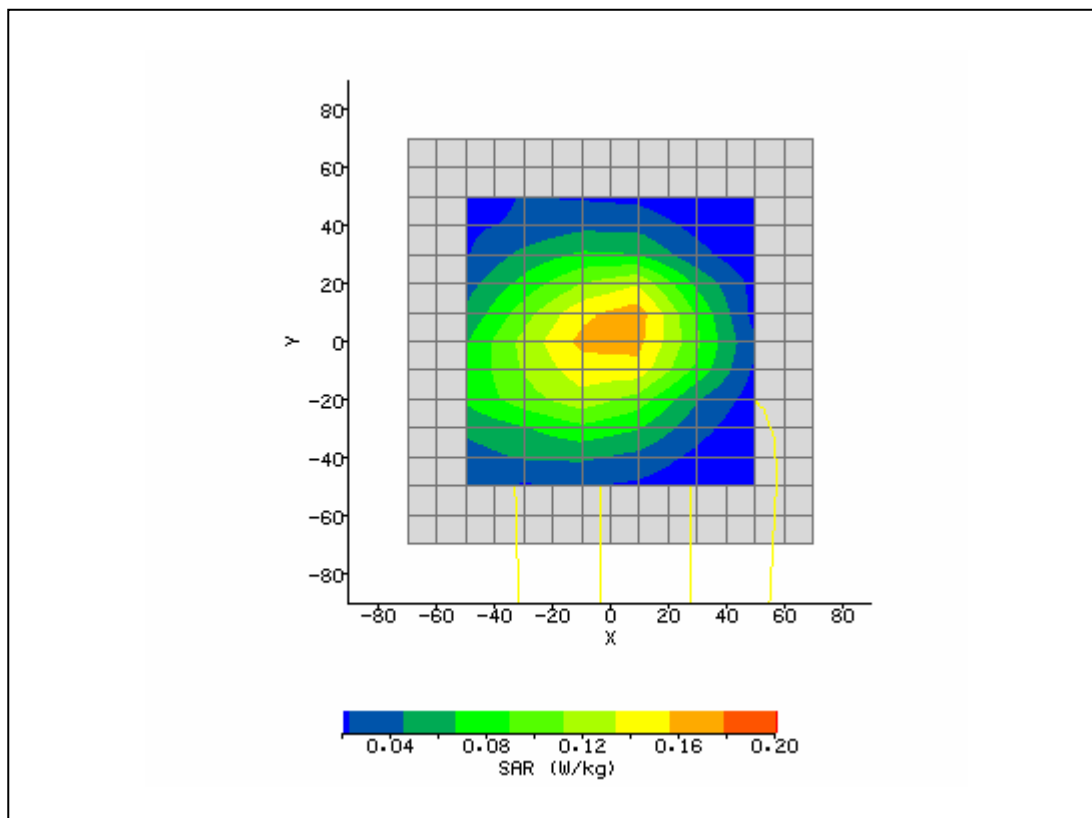

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 9 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 2:35:57 PM	DUT Battery Model/No:	
Filename:	body190.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.56
Relative Humidity:	30%	Conductivity:	0.967
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	2.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	2.00 mm
Antenna Configuration:	integral	Max E Field:	19.02 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.383 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.287 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.147 W/kg
Type of Modulation:		SAR End:	0.146 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

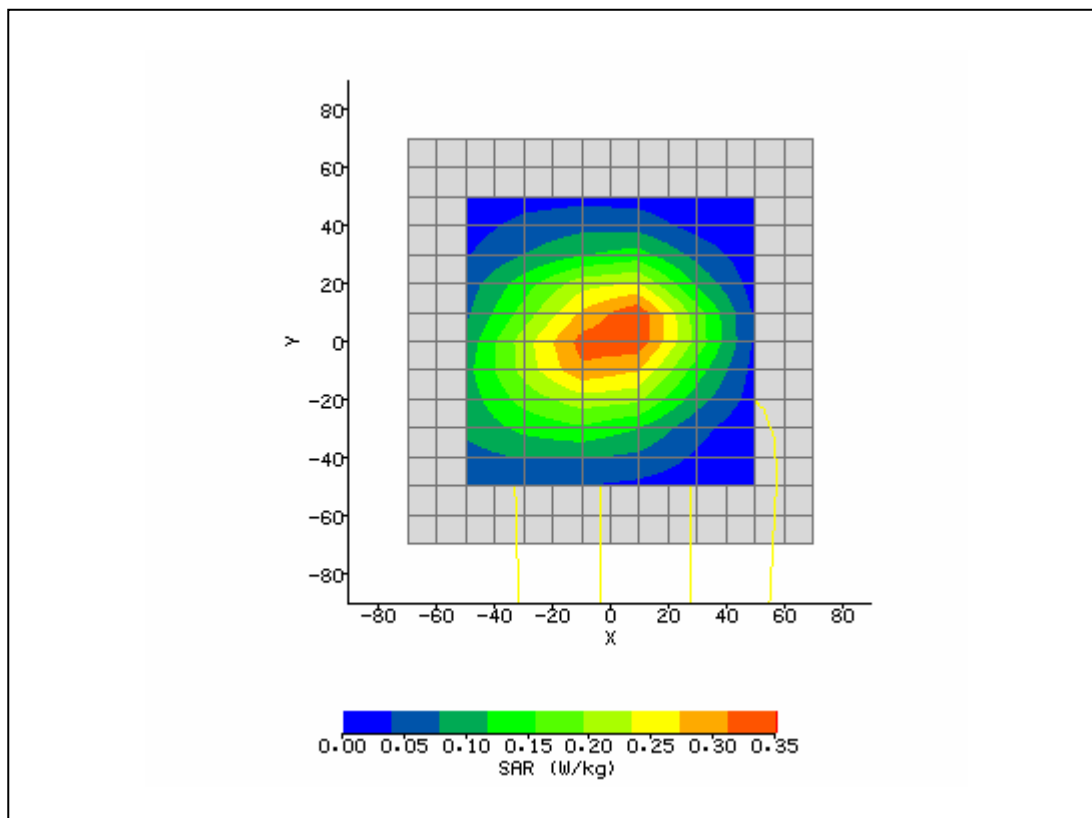

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006


Appendix A Plots

Page 10 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 1:01:16 PM	DUT Battery Model/No:	
Filename:	lefttch251.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-13.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-105.00 mm
Antenna Configuration:	integral	Max E Field:	14.46 V/m
Test Frequency:	1880MHz	SAR 1g:	0.230 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.138 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.092 W/kg
Type of Modulation:		SAR End:	0.090 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

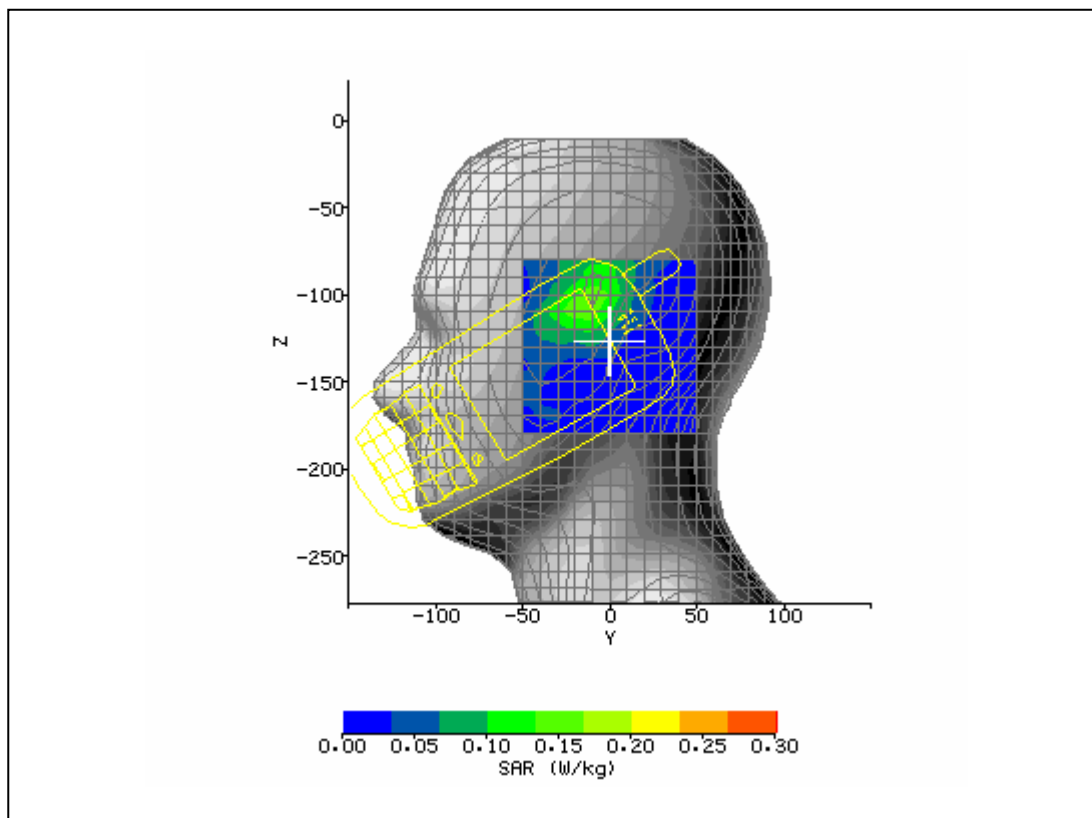

System / software:	SARA2 / 2.40 VPM		Input Power Drift:	
Date / Time:	8/8/2006 1:36:12 PM		DUT Battery Model/No:	
Filename:	lefttch661.txt		Probe Serial Number:	M0016
Ambient Temperature:	22.8°C		Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75		Relative Permittivity:	39.38
Relative Humidity:	30%		Conductivity:	1.424
Phantom S/No:	Head04_37.csv		Liquid Temperature:	22.0°C
Phantom Rotation:	0°		Max SAR Y-axis Location:	-7.00 mm
DUT Position:	left tilt		Max SAR Z-axis Location:	-103.00 mm
Antenna Configuration:	integral		Max E Field:	13.43 V/m
Test Frequency:	1880MHz		SAR 1g:	0.226 W/kg
Air Factors:	2390 / 2143 / 2668		SAR 10g:	0.134 W/kg
Conversion Factors:	.418 / .418 / .418		SAR Start:	0.096 W/kg
Type of Modulation:			SAR End:	0.092 W/kg
Modn. Duty Cycle:			SAR Drift during Scan:	-4.12 %
Diode Compression Factors (V*200):	20 / 20 / 20		Probe battery last changed:	8/7/06
Input Power Level:	max		Extrapolation:	poly4

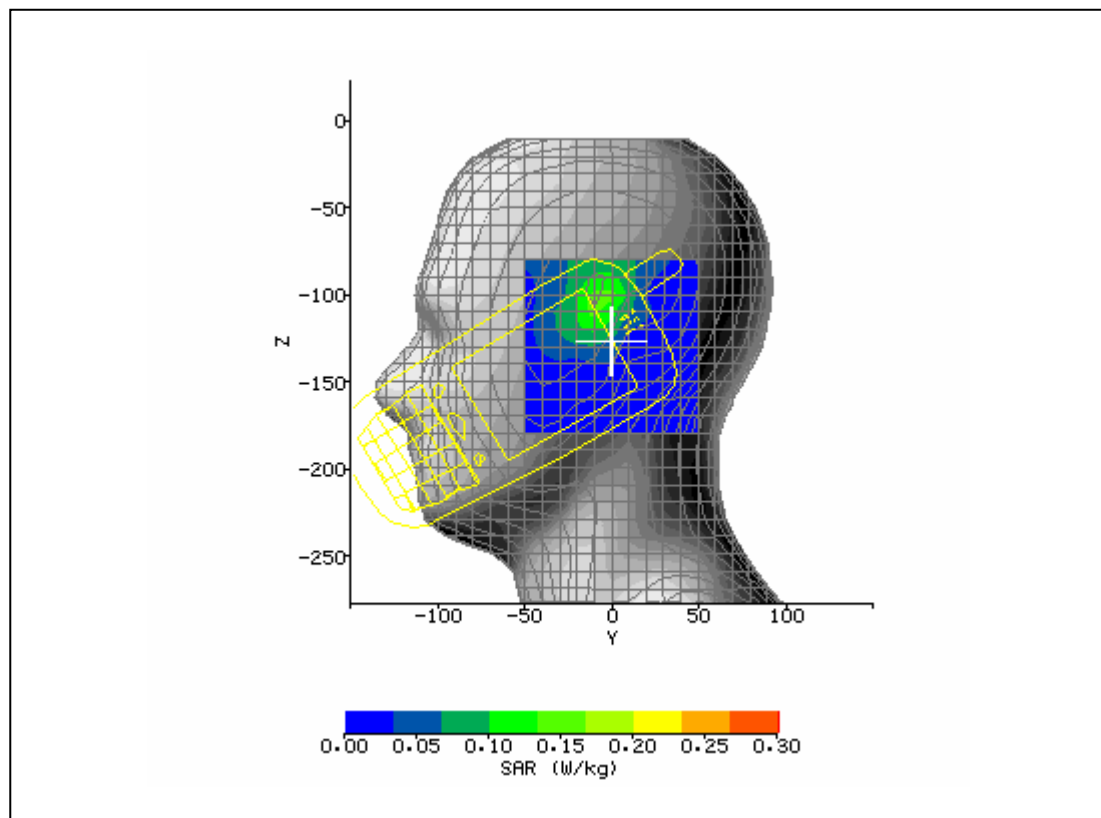

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 12 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 2:01:12 PM	DUT Battery Model/No:	
Filename:	lefttlt661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-133.00 mm
Antenna Configuration:	integral	Max E Field:	8.66 V/m
Test Frequency:	1880MHz	SAR 1g:	0.094 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.056 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.032 W/kg
Type of Modulation:		SAR End:	0.033 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.13 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

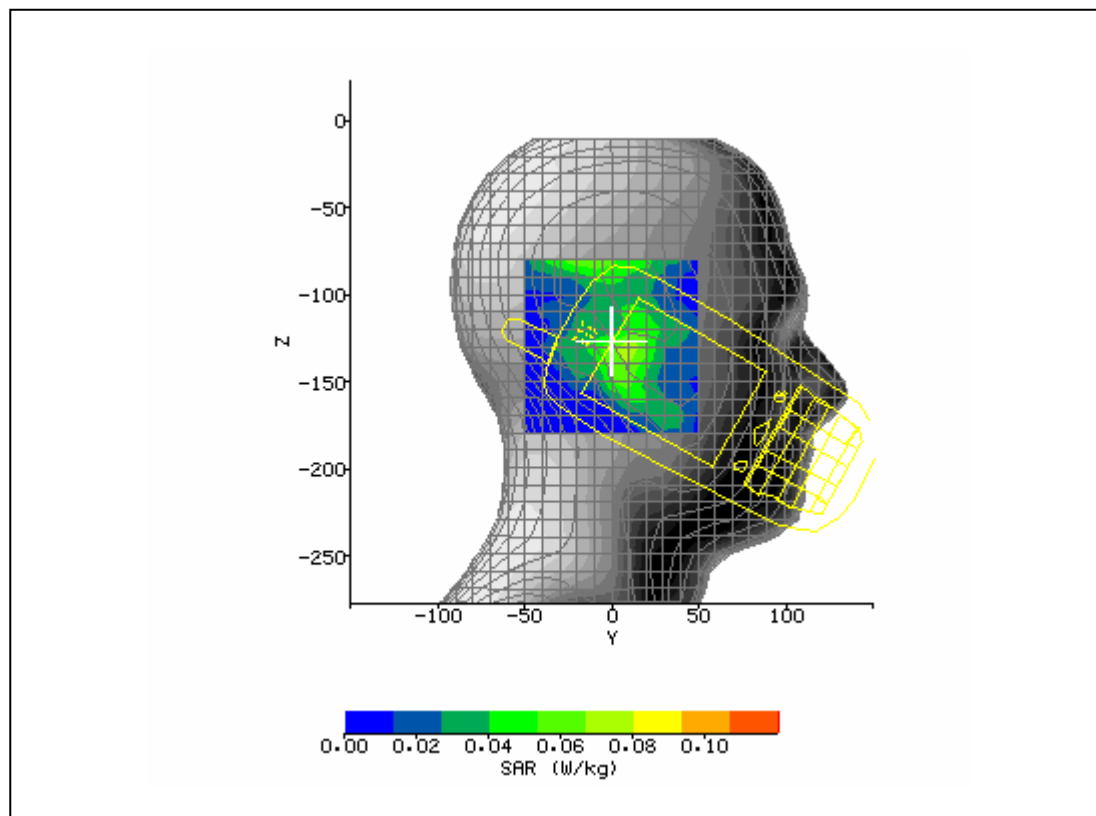

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 13 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 2:22:03 PM	DUT Battery Model/No:	
Filename:	righttch661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	7.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-129.00 mm
Antenna Configuration:	integral	Max E Field:	8.31 V/m
Test Frequency:	1880MHz	SAR 1g:	0.088 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.051 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.034 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.03 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

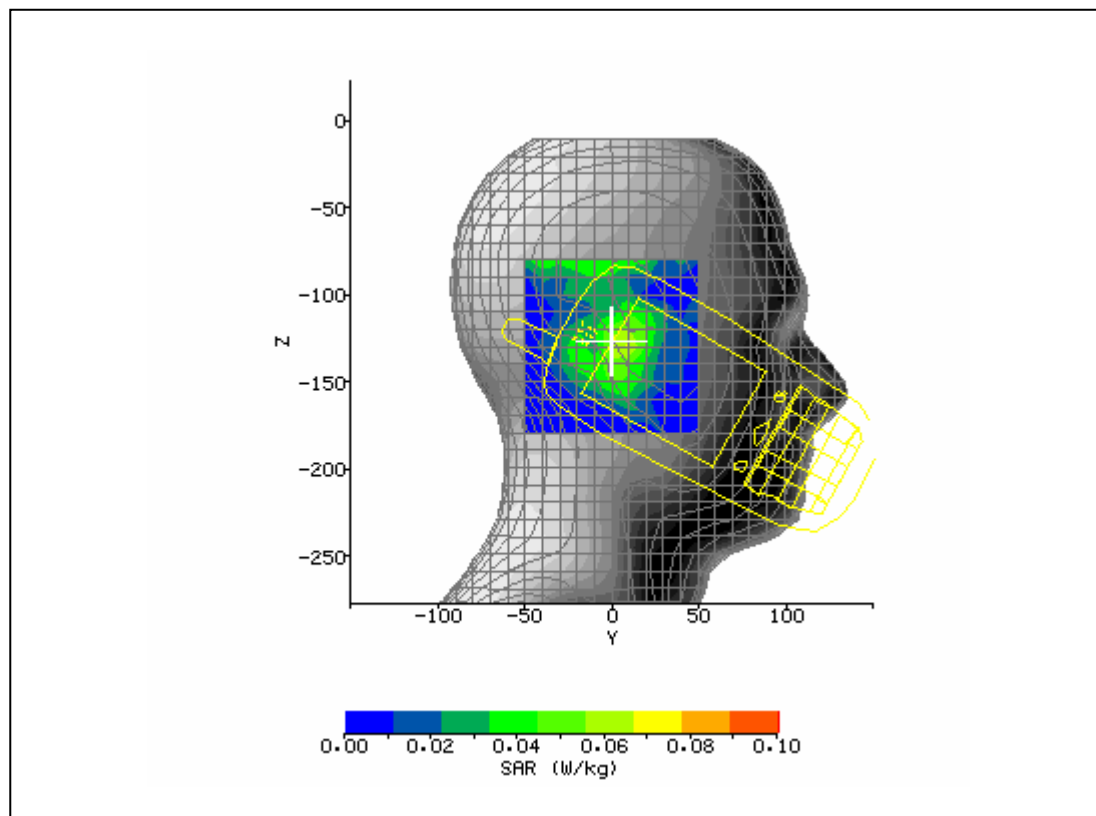

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 14 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 2:55:39 PM	DUT Battery Model/No:	
Filename:	righttlt661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.66
Relative Humidity:	30%	Conductivity:	1.403
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-109.00 mm
Antenna Configuration:	integral	Max E Field:	14.25 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.227 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.139 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.082 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.62 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

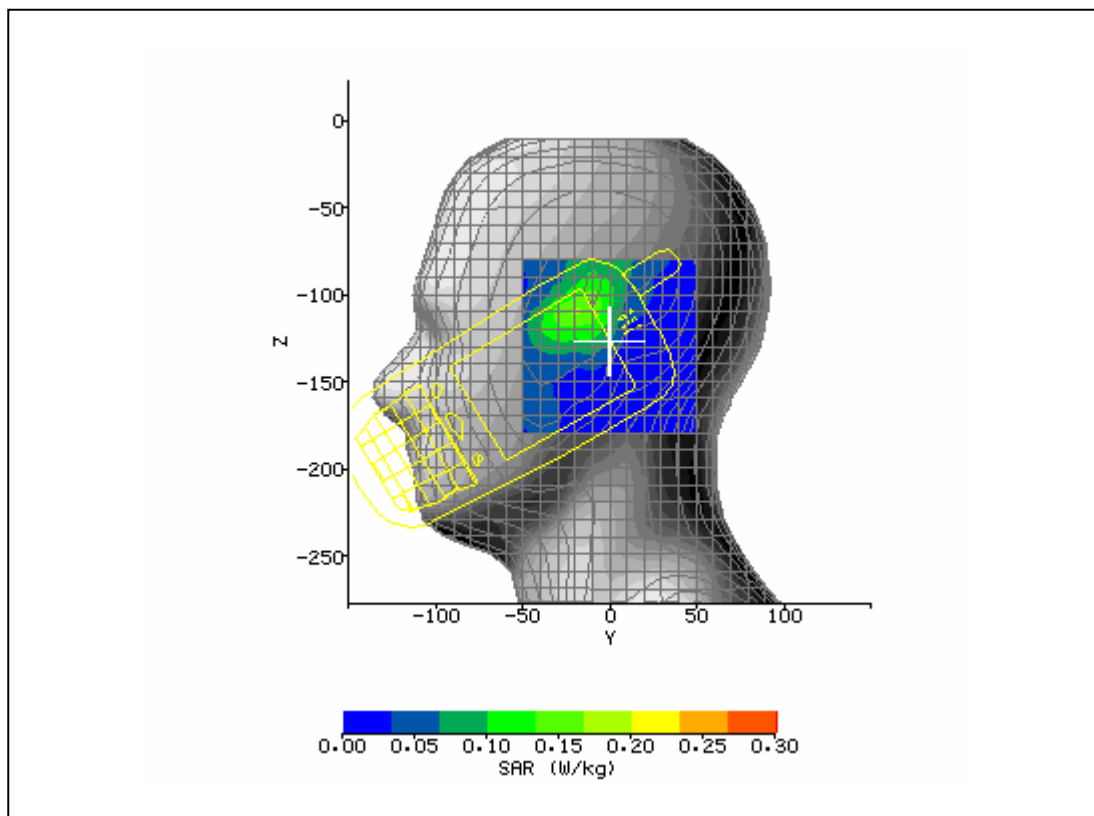

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 15 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 3:24:06 PM	DUT Battery Model/No:	
Filename:	lefttch512.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.12
Relative Humidity:	30%	Conductivity:	1.45
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-109.00 mm
Antenna Configuration:	integral	Max E Field:	13.62 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.223 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.129 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.081 W/kg
Type of Modulation:		SAR End:	0.081 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.35 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

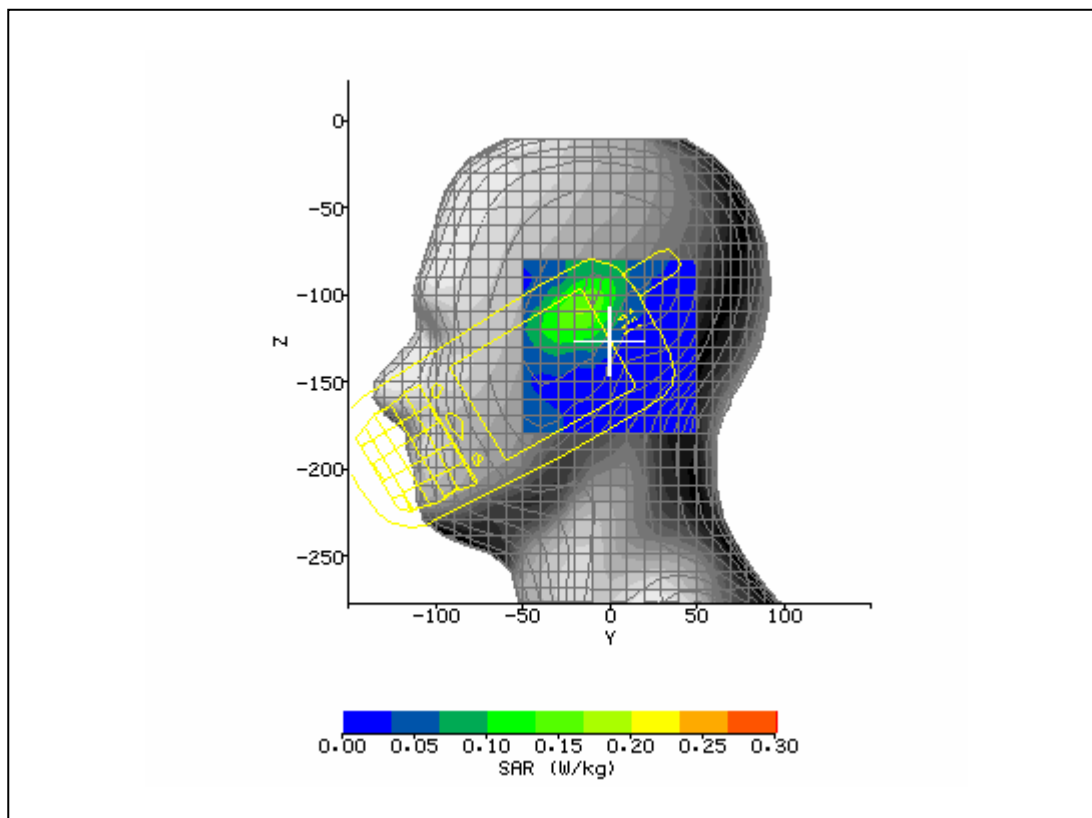

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 16 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 1:09:53 PM	DUT Battery Model/No:	
Filename:	body512.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	52.43
Relative Humidity:	30%	Conductivity:	1.55
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	17.00 mm
Antenna Configuration:	integral	Max E Field:	7.88 V/m
Test Frequency:	1880MHz	SAR 1g:	0.126 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.075 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

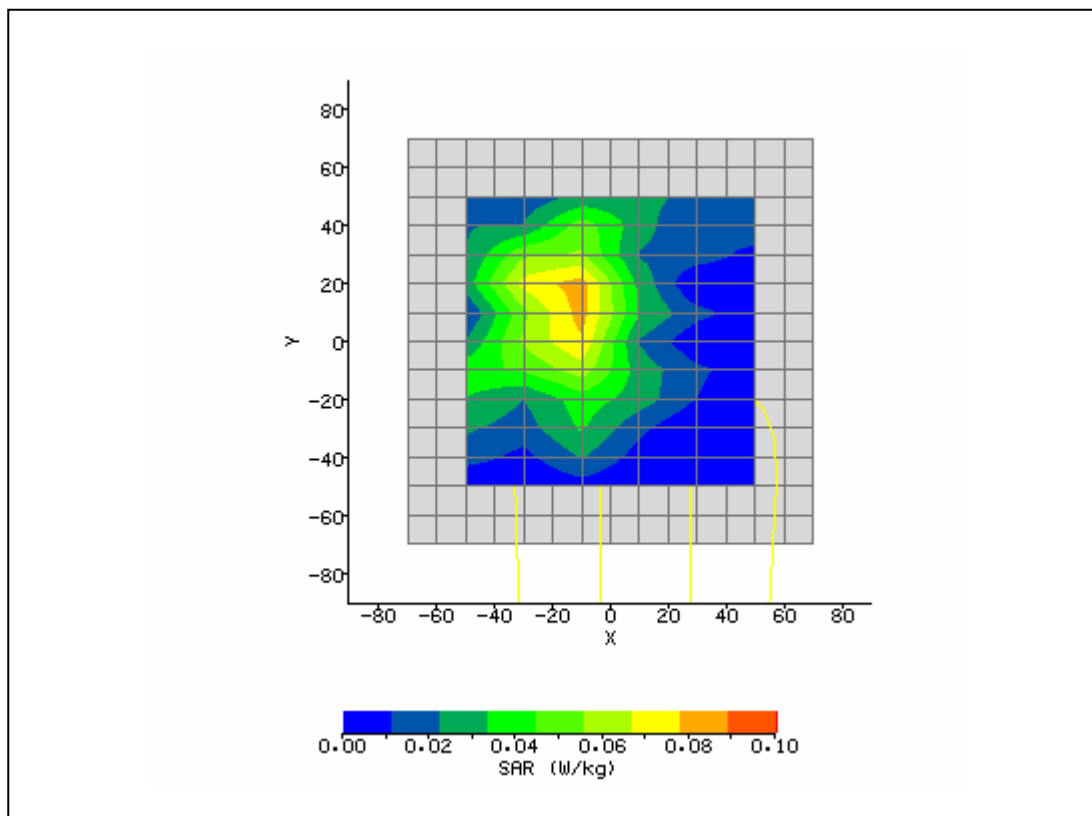

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 17 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 12:50:40 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	52.63
Relative Humidity:	30%	Conductivity:	1.515
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	4.00 mm
Antenna Configuration:	integral	Max E Field:	8.65 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.158 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.087 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.83 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

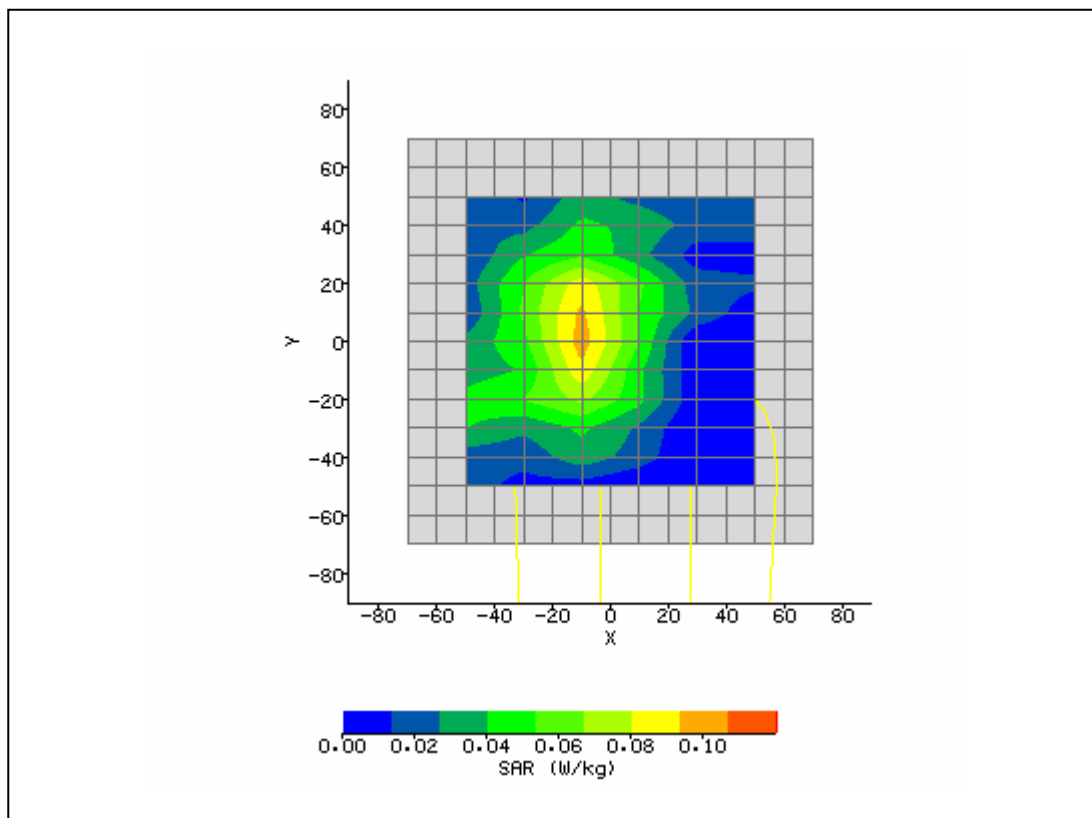

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 18 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/7/2006 1:26:46 PM	DUT Battery Model/No:	
Filename:	body661.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	52.27
Relative Humidity:	30%	Conductivity:	1.564
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-16.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	integral	Max E Field:	6.95 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.100 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.055 W/kg
Conversion Factors:	.473 / .473 / .473	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.55 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

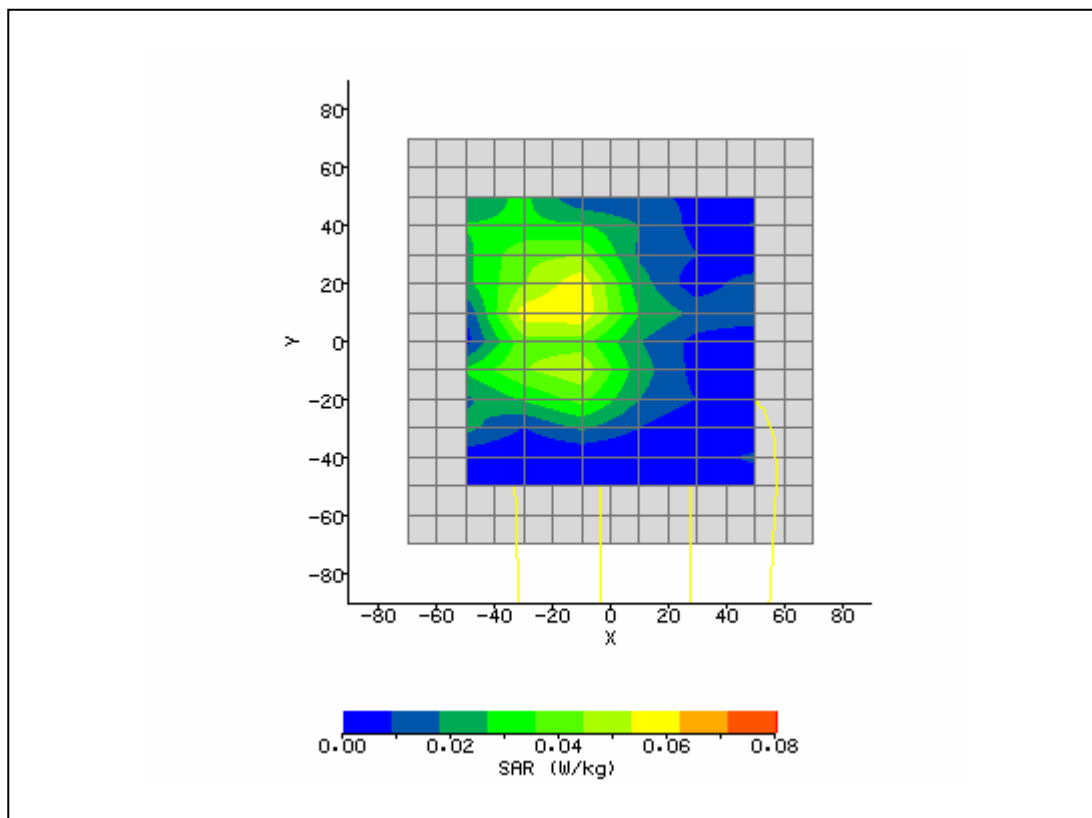

SAR Test Report No.:


SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 19 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 4:36:07 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	850
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	54.56
Relative Humidity:	30%	Conductivity:	0.967
Phantom S/No:	HeadBox1.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	16.00 mm
DUT Position:	back touching phantom	Max SAR Y-axis Location:	-18.00 mm
Antenna Configuration:	integral	Max E Field:	17.78 V/m
Test Frequency:	848.8MHz & 2402 BT	SAR 1g:	0.389 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.239 W/kg
Conversion Factors:	.384 / .384 / .384	SAR Start:	0.088 W/kg
Type of Modulation:		SAR End:	0.086 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.27 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

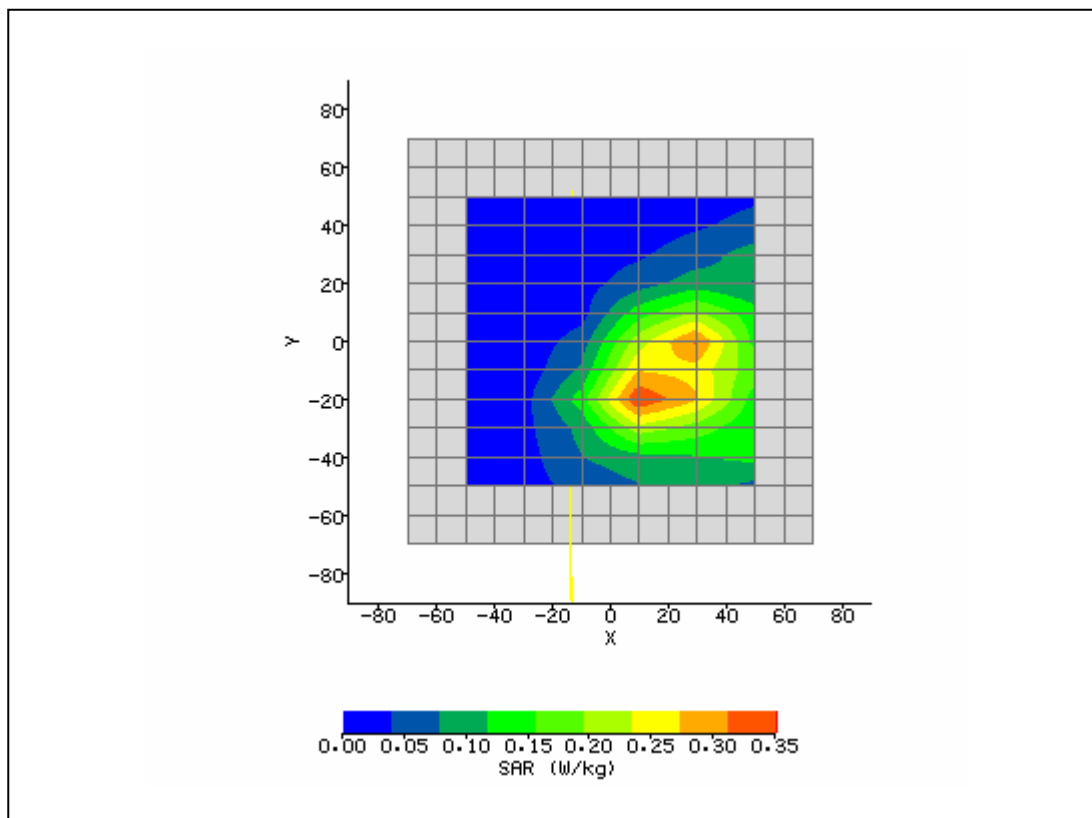

SAR Test Report No.:

SAR_HANDH_015_06002_D7900_MC75_850_1900_2400BT

Date of Report: 8/28/2006

Appendix A Plots

Page 20 of 20

System / software:	SARA2 / 2.40 VPM	Input Power Drift:	
Date / Time:	8/8/2006 4:51:12 PM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	M0016
Ambient Temperature:	22.8°C	Liquid Simulant:	1900
Device Under Test:	HHP D7900 MC75	Relative Permittivity:	39.38
Relative Humidity:	30%	Conductivity:	1.424
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-97.00 mm
Antenna Configuration:	integral	Max E Field:	14.93 V/m
Test Frequency:	1880MHz & 2402 BT	SAR 1g:	0.254 W/kg
Air Factors:	2390 / 2143 / 2668	SAR 10g:	0.227 W/kg
Conversion Factors:	.418 / .418 / .418	SAR Start:	0.146 W/kg
Type of Modulation:		SAR End:	0.149 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	8/7/06
Input Power Level:	max	Extrapolation:	poly4

