




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/8/2004 1:54:23 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	HHP D7900	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.927
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-57.00 mm
DUT Position:	body belt clip to phantom	Max SAR Z-axis Location:	-124.40 mm
Antenna Configuration:	Integral	Max E Field:	8.65 V/m
Test Frequency:	2412MHz	SAR 1g:	0.112 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.060 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.030 W/kg
Type of Modulation:		SAR End:	0.029 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.08 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	7/22/2004
Input Power Level:	maximum	Extrapolation:	poly4

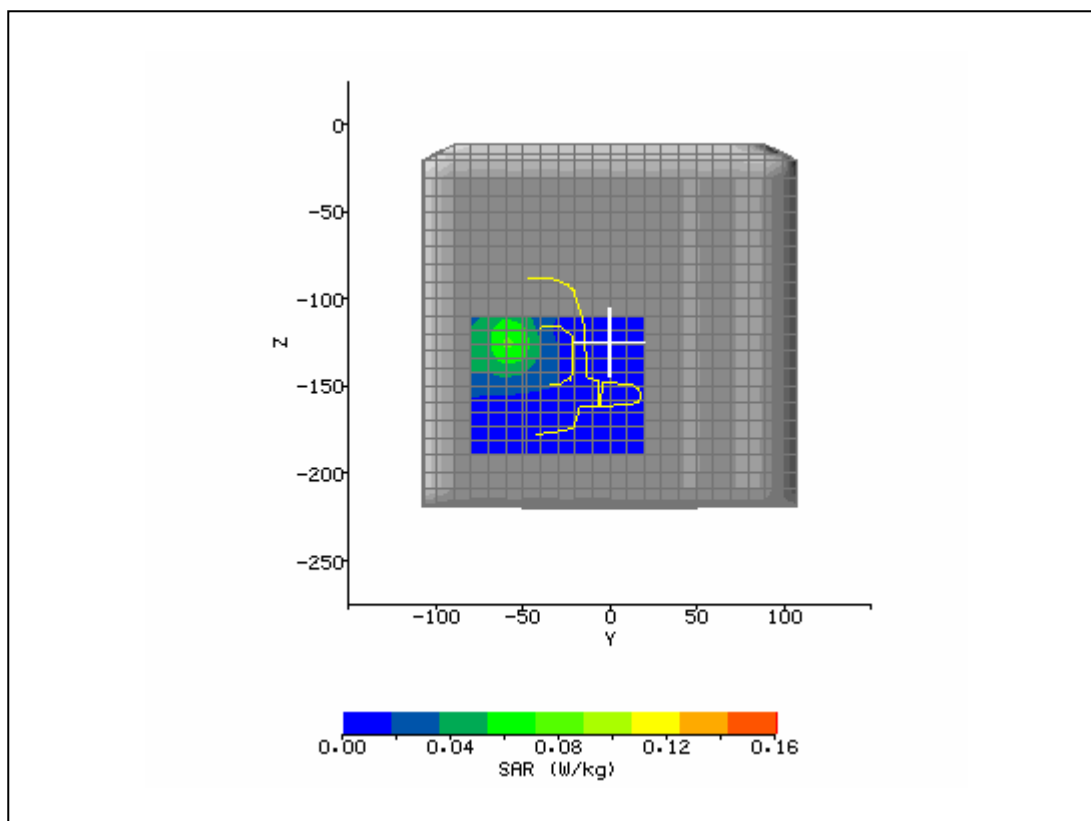

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/8/2004 2:35:39 PM	DUT Battery Model/No:	
Filename:	2412_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	HHP D7900	Relative Permittivity:	51.16
Relative Humidity:	50%	Conductivity:	1.942
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-52.00 mm
DUT Position:	body belt clip to phantom	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	Integral	Max E Field:	9.61 V/m
Test Frequency:	2437MHz	SAR 1g:	0.139 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.074 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.036 W/kg
Type of Modulation:		SAR End:	0.037 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.16 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	7/22/2004
Input Power Level:	maximum	Extrapolation:	poly4

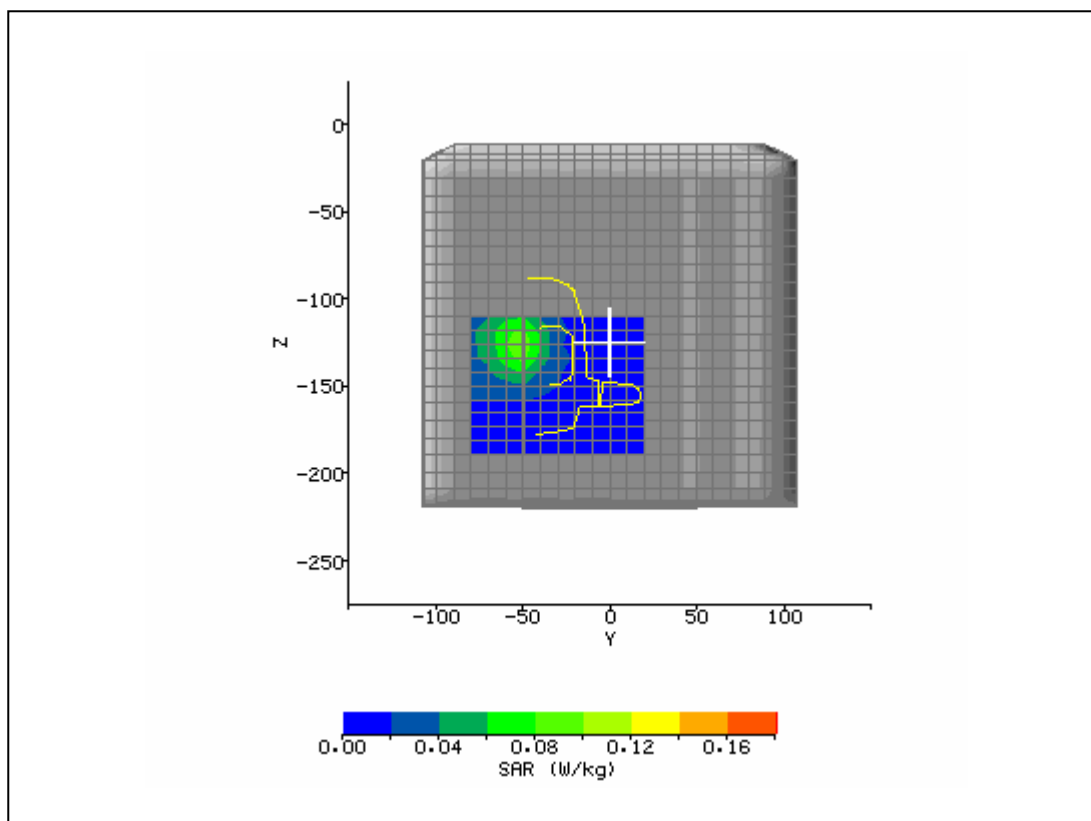

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/8/2004 3:13:29 PM	DUT Battery Model/No:	
Filename:	2437_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	HHP D7900	Relative Permittivity:	51.21
Relative Humidity:	50%	Conductivity:	1.958
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-56.00 mm
DUT Position:	body belt clip to phantom	Max SAR Z-axis Location:	-126.80 mm
Antenna Configuration:	Integral	Max E Field:	7.78 V/m
Test Frequency:	2462MHz	SAR 1g:	0.092 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.049 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.025 W/kg
Type of Modulation:		SAR End:	0.025 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	7/22/2004
Input Power Level:	maximum	Extrapolation:	poly4

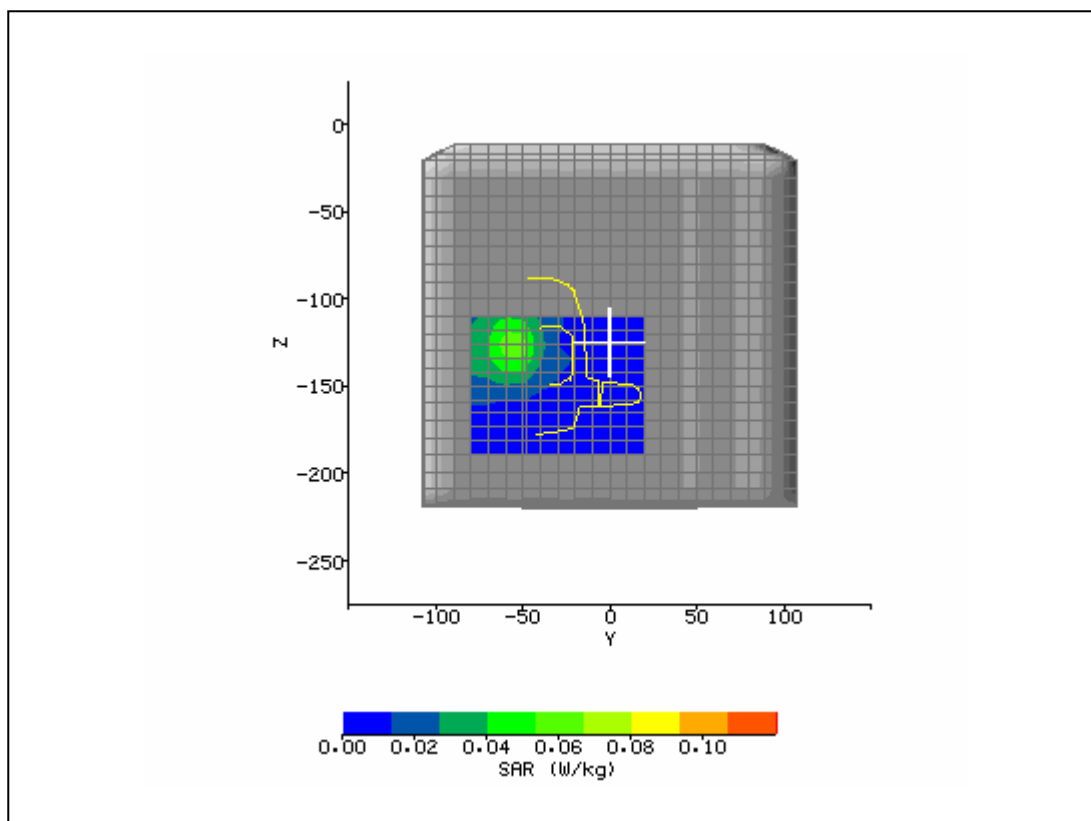

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	9/9/2004 12:19:00 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	HHP D7900	Relative Permittivity:	50.89
Relative Humidity:	50%	Conductivity:	1.921
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.50 mm
DUT Position:	body belt clip to phantom	Max SAR Z-axis Location:	-150.00 mm
Antenna Configuration:	Integral	Max E Field:	1.53 V/m
Test Frequency:	2402 MHz BT	SAR 1g:	0.003 W/kg
Air Factors:	415 / 805 / 371	SAR 10g:	0.002 W/kg
Conversion Factors:	0.585 / 0.585 / 0.585	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.64 dB
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	7/22/2004
Input Power Level:	maximum	Extrapolation:	poly4

