



FCC Test Report

FCC Part 15.247 for DSSS systems /
CANADA RSS-210

FOR:

Handheld PC with WLAN

MODEL #: D9500LUPE, D9500LU0E

Hand Held Products, Inc.
700 Vision Drive
Skaneateles Falls, NY 13153
U.S.A

FCC ID: HD59500LUPE, HD59500LU0E
IC-ID : 1693B-95E

Test report no.: EMC_HANDH_014_06002_FCC15.247_WLAN



FCC listed#
101450

IC recognized #
3925

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:

EMC Engineer: Harpreet Sidhu

1.2 Testing laboratory
CETECOM Inc.
411 Dixon Landing Road, Milpitas, CA-95035, USA
Phone: +1 408 586 6200 Fax: +1 408 586 6299
E-mail: lothar.schmidt@cetekomusa.com
Internet: www.cetekom.com

1.3 Details of applicant

Name : Hand Held Products, Inc.
Street : 700 Vision Drive
City / Zip Code : Skaneateles Falls, NY 13153
Country : U.S.A
Contact : Naveen Velagapudi
Telephone : +1 315 685 2931
Tele-fax : +1 315 685 1210
e-mail : velagapudin@hhp.com

1.4 Application details

Date of receipt test item : 2004-12-15
Date of test : 2004-12-15/16

1.5 Test item

Manufacturer : Applicant
Marketing Name : Dolphin 9500
Model No. : **D9500LUPE, D9500LU0E,**
[Description](#) : [Dolphin 9500 is a ruggedized handheld computer which can read barcodes and other auto ID codes. It contains three different transmitters \(BT, WLAN and GSM\) to send and receive data.](#)
FCC-ID : D9500LUPE, D9500LU0E

Additional information

Frequency : 2412MHz – 2462MHz
Type of modulation : DSSS
Number of channels : 11
Antenna : External
Output power : 16.0dBm (0.04W) conducted peak power

1.6 Test standards: FCC Part 15 §15.247 / CANADA RSS-210

PROJECT OVERVIEW:

NOTE: This test report covers all radiated measurements as per FCC15.247 for WLAN module in HHP handheld computer model#D9500LUPE. For all conducted measurements please refer to *test report# 2L0523RUS1_WLAN_cond*

2. Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests Performed	
Final Verdict: (Only “passed” if all single measurements are “passed”)	Passed

Technical responsibility for area of testing:

2006-06-23 EMC & Radio Lothar Schmidt (Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2006-06-23 EMC & Radio Michael Grings (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no.: EMC_HANDH_014_06002_FCC15.247_WLAN

TEST REPORT REFERENCE

LIST OF MEASUREMENTS		PAGE
MAXIMUM PEAK OUTPUT POWER	§15.247 (b) (1)	8
BAND EDGE COMPLIANCE	§15.247 (c)	13
EMISSION LIMITATIONS	§15.247 (c) (1)	17
COLLOCATION BT & WLAN:		28
CONDUCTED EMISSIONS	§15.107/207	30
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		35
BLOCK DIAGRAMS		36

**MAXIMUM PEAK OUTPUT POWER
(Conducted)****§ 15.247 (b) (1)**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		2412	2437	2462	
T _{nom} (23)°C	V _{nom}	Pk	16.0	16.0	16.0
Measurement uncertainty		±0.5dBm			

LIMIT**SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt / 30dBm conducted

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)**

§ 15.247 (b) (1)

EIRP:


TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		2412	2437	2462
T _{nom} (23)°C	V _{nom}	14.98	16.64	16.45
Measurement uncertainty		±0.5dBm		

LIMIT


SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	30dBm on Conducted


EIRP: 2412MHz

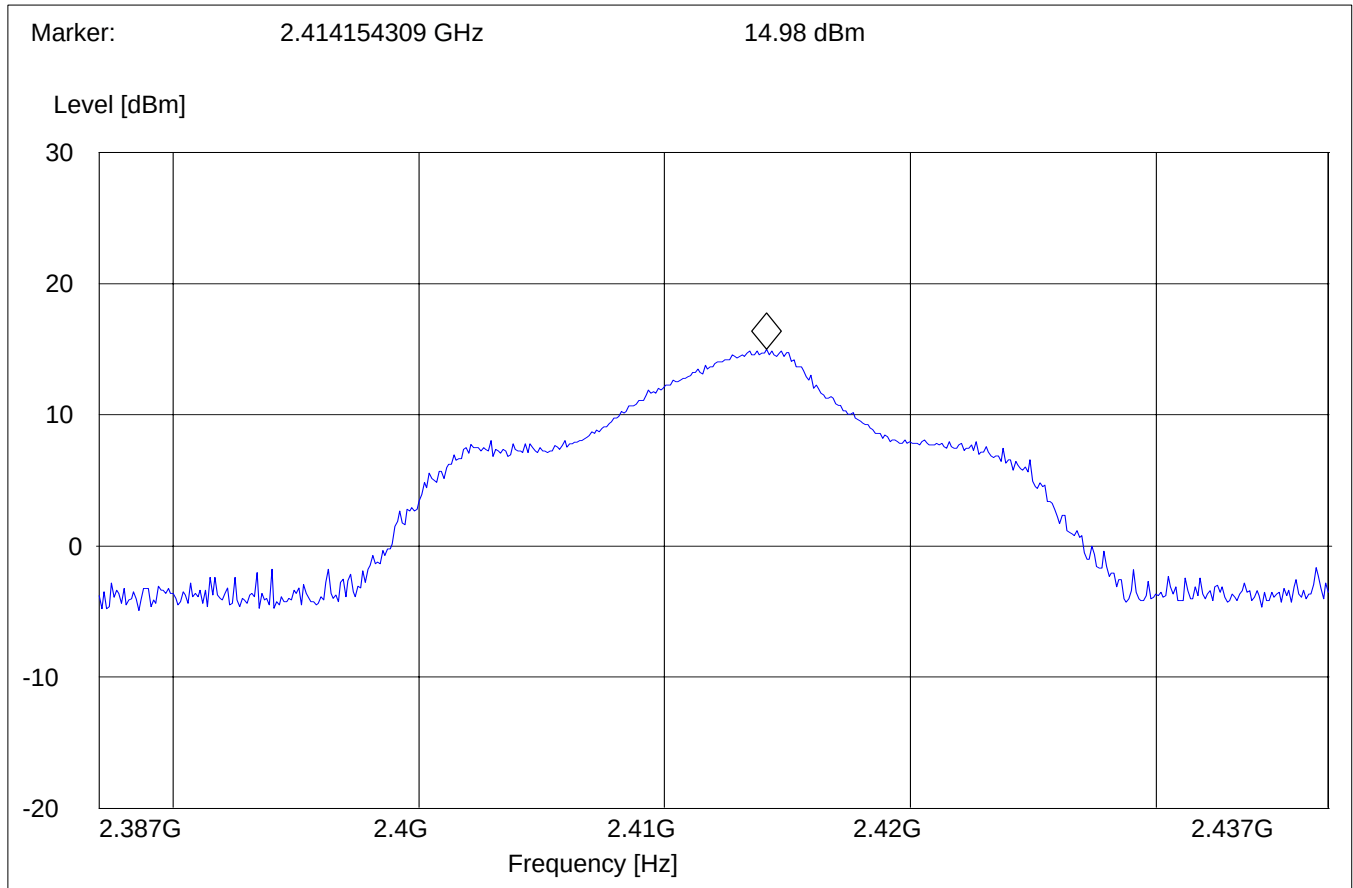

EIRP: 2437MHz

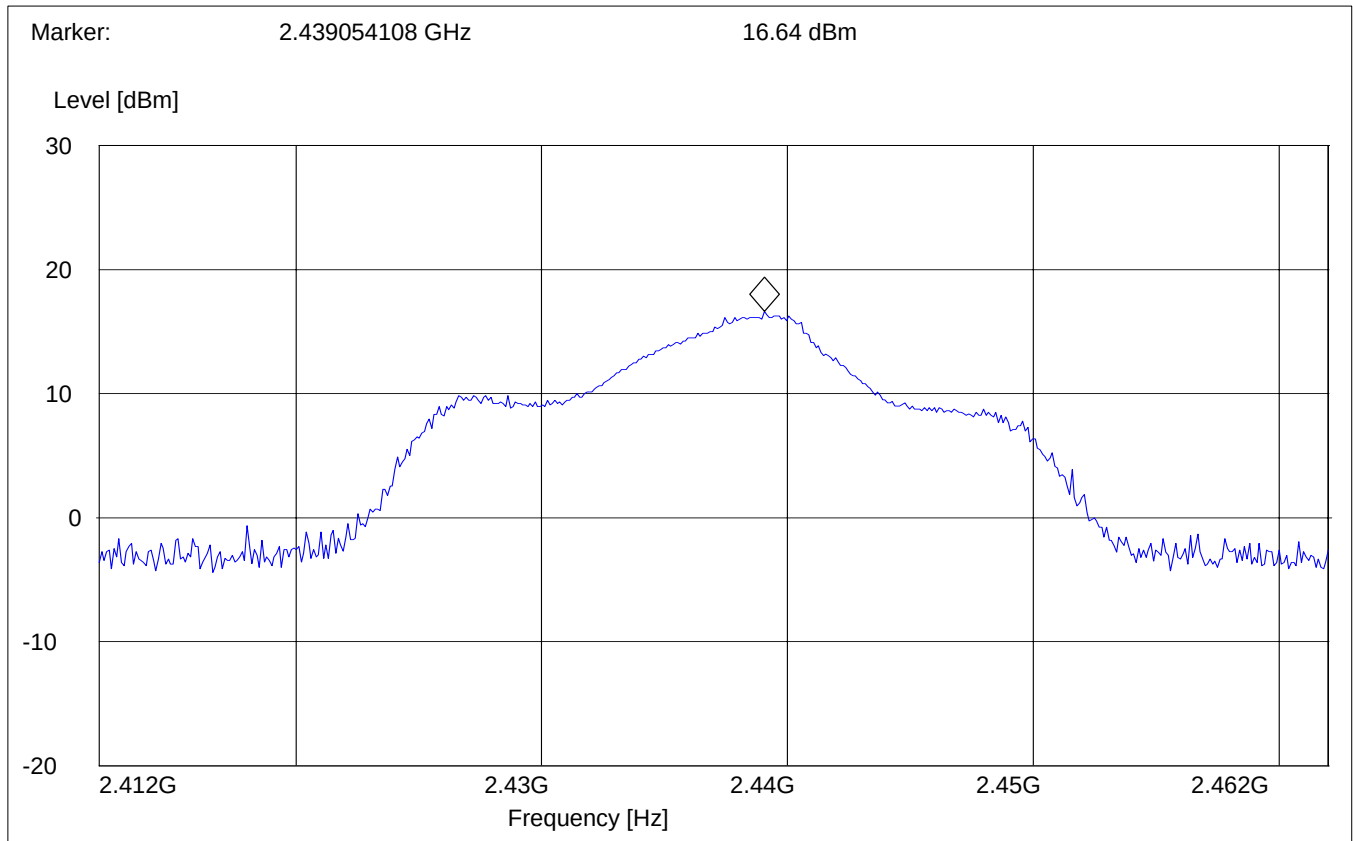

EIRP: 2462MHz

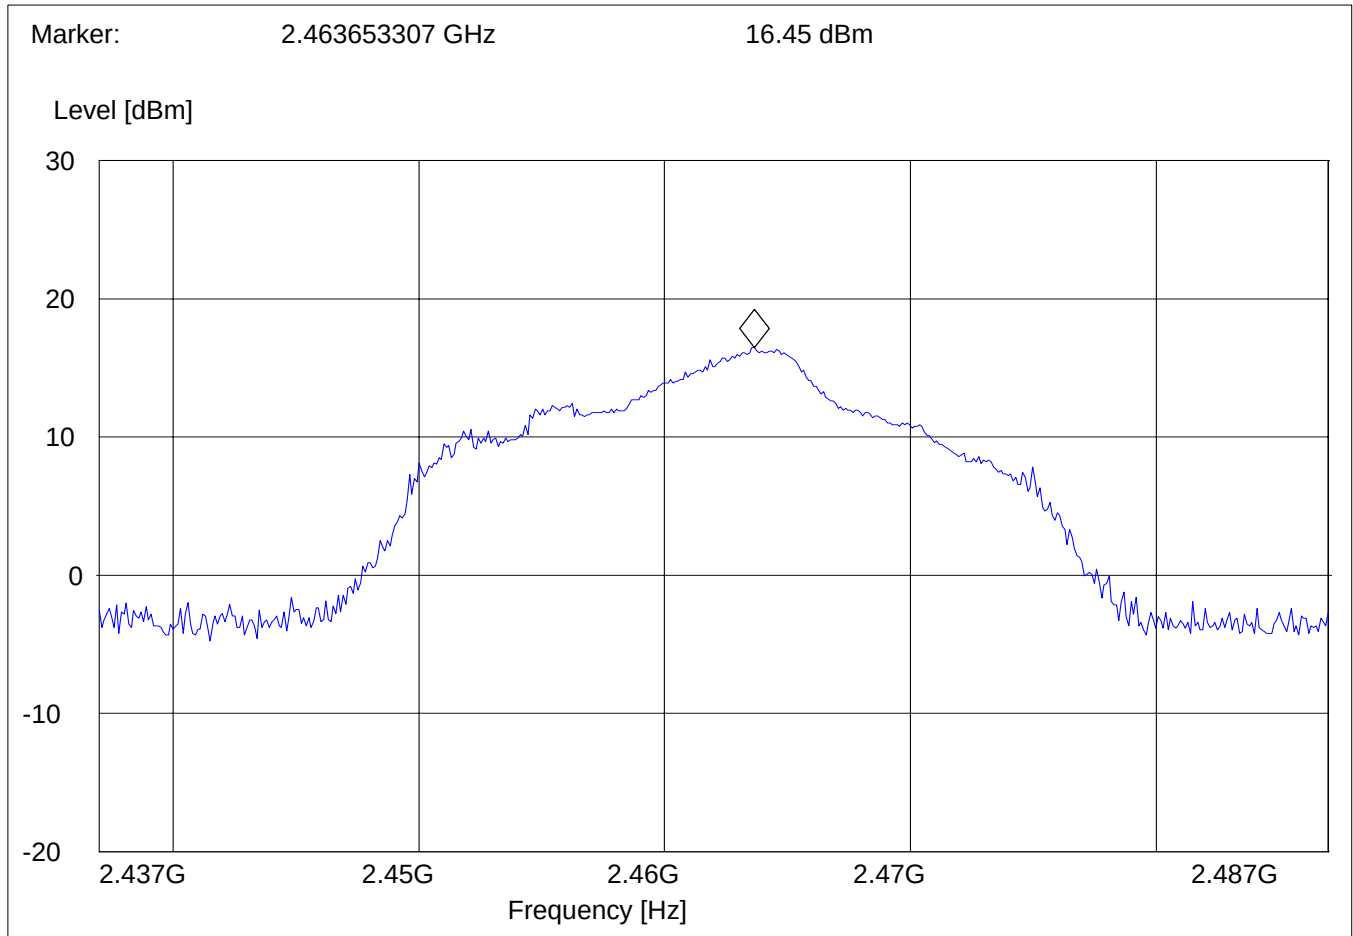


BAND EDGE COMPLIANCE

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz) (Average measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

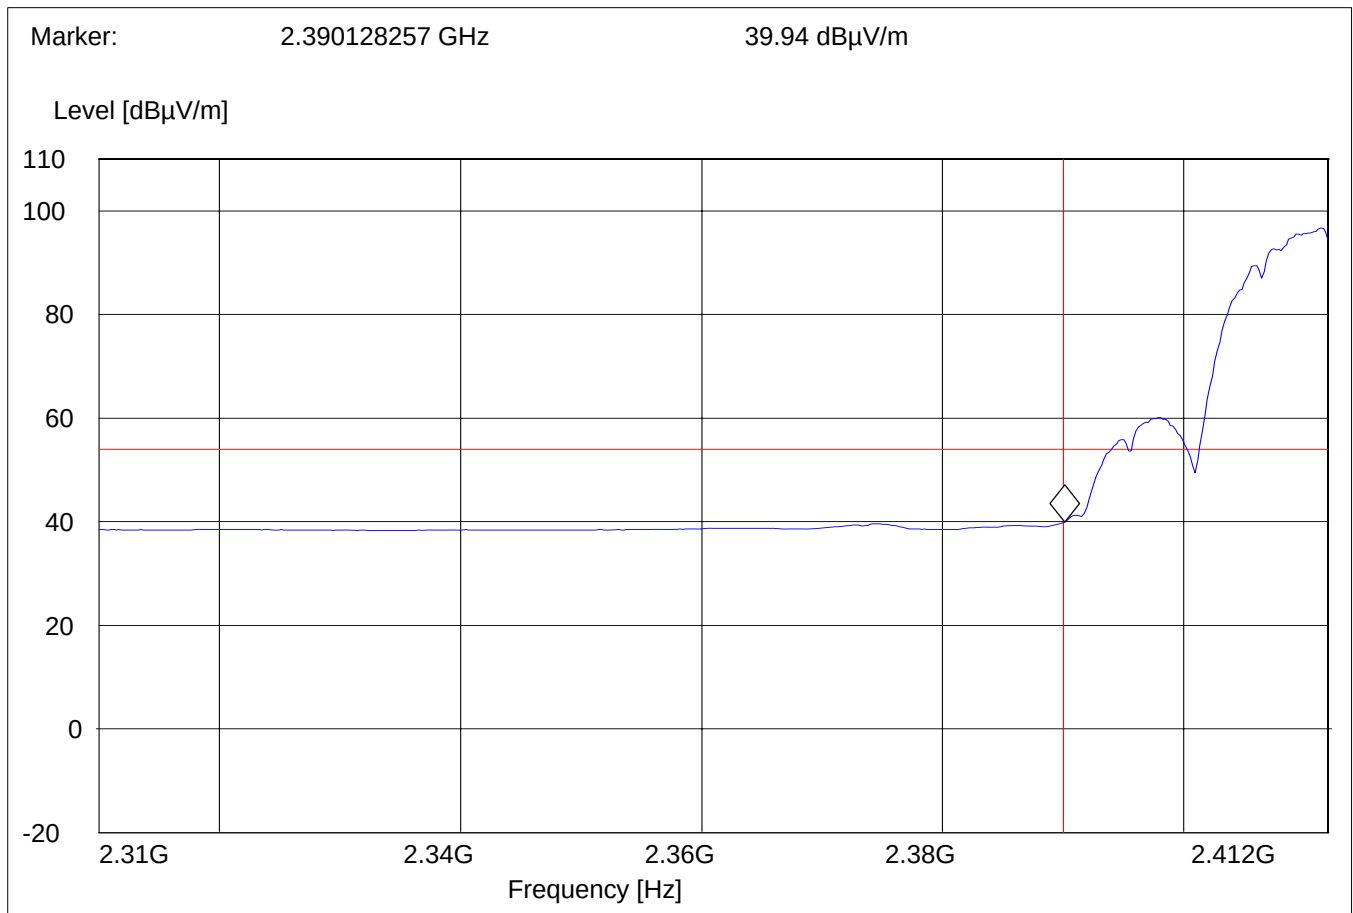


BAND EDGE COMPLIANCE

§15.247 (c)

Low frequency section (spurious in the restricted band 2310 – 2390 MHz) (Peak measurement)

Operating condition : Tx at 2412MHz
 SWEEP TABLE : "FCC15.247 LBE_Pk"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
2.31 GHz	2.412 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

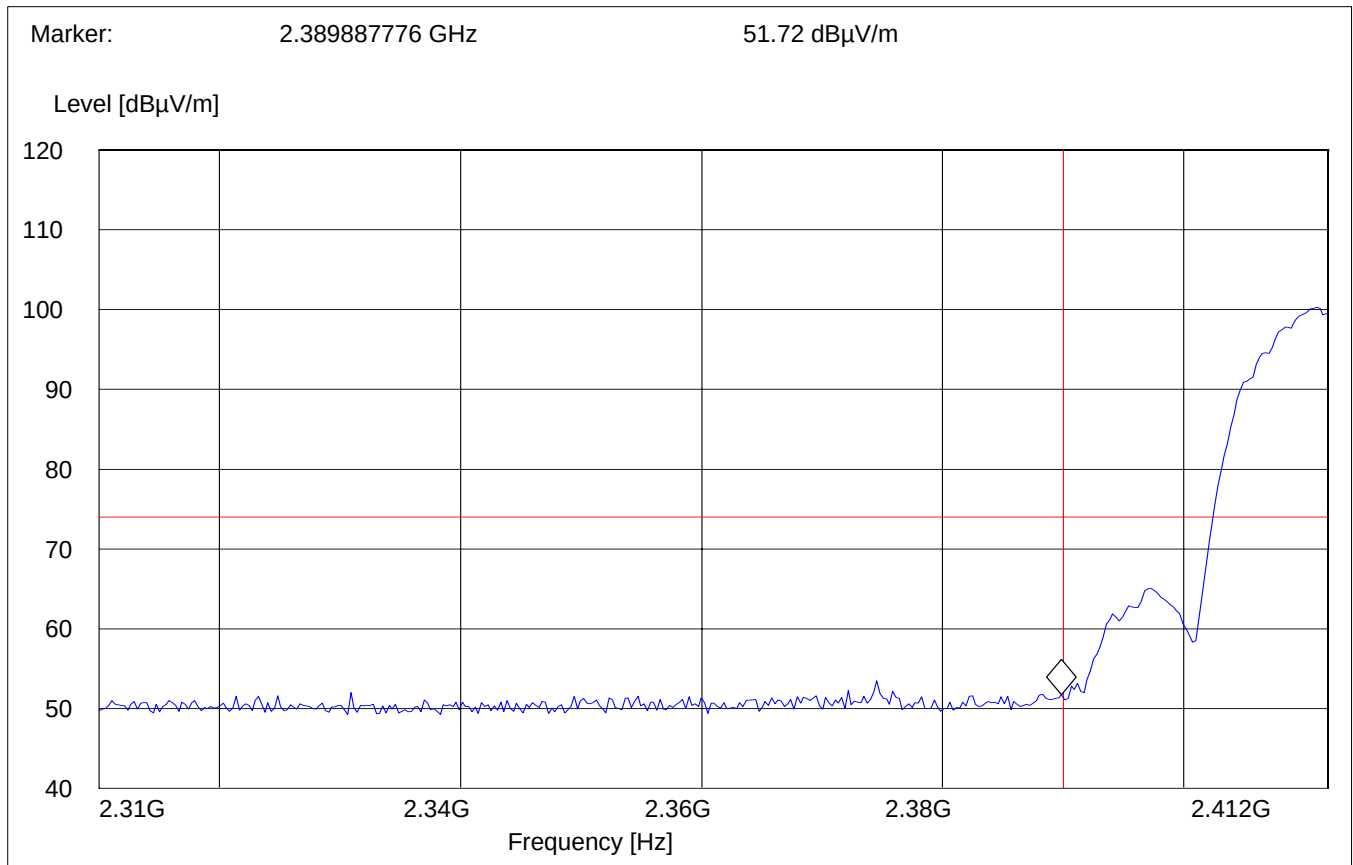


BAND EDGE COMPLIANCE

§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz) (Average measurement)

Operating condition : Tx at 2462MHz
 SWEEP TABLE : "FCC15.247 HBE_AVG"
 Limit Line : 54dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

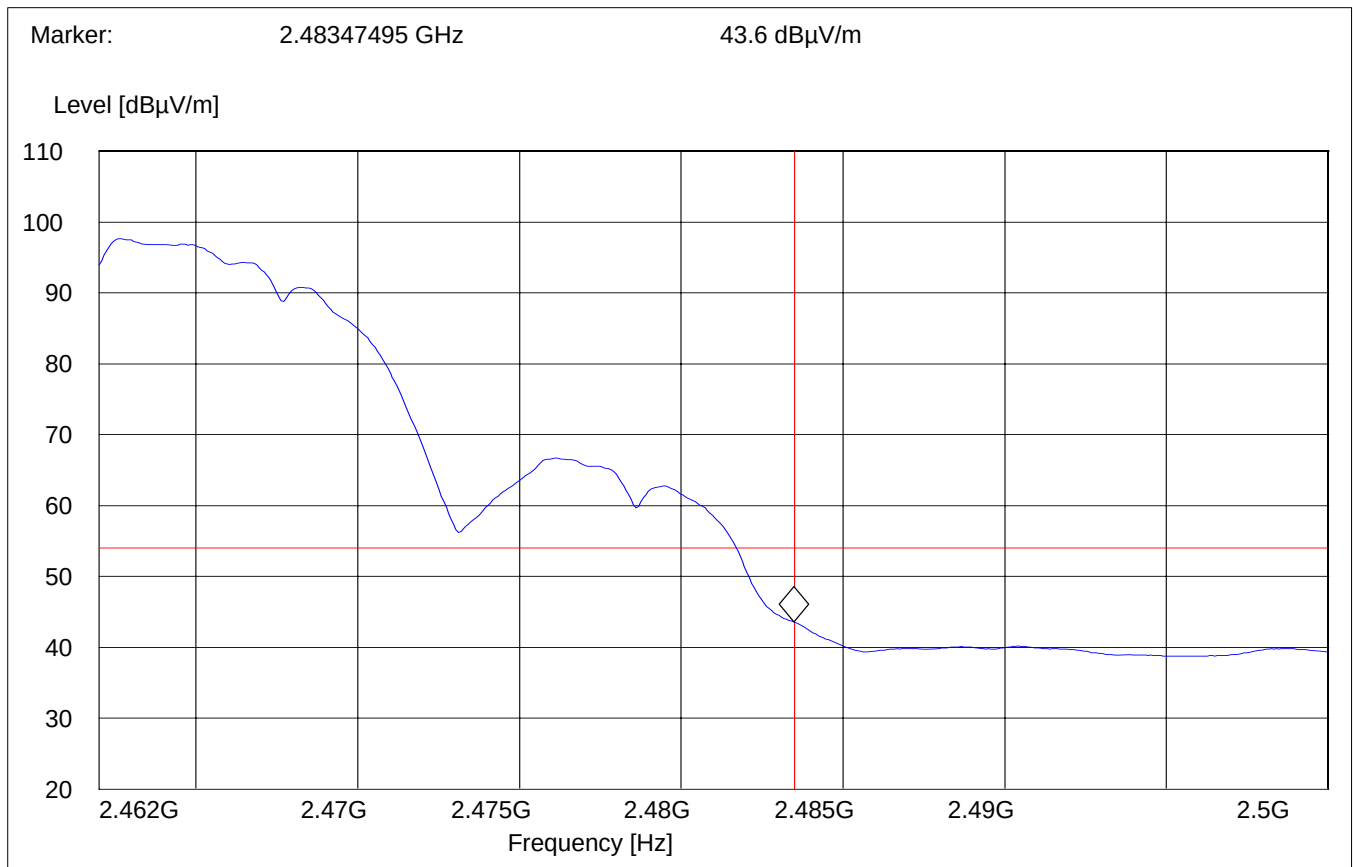


BAND EDGE COMPLIANCE

§15.247 (c)

High frequency section (spurious in the restricted band 2483.5 – 2500 MHz) (Peak measurement)

Operating condition : Tx at 2462MHz
 SWEEP TABLE : "FCC15.247 HBE_PK"
 Limit Line : 74dBμV

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
2.462 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

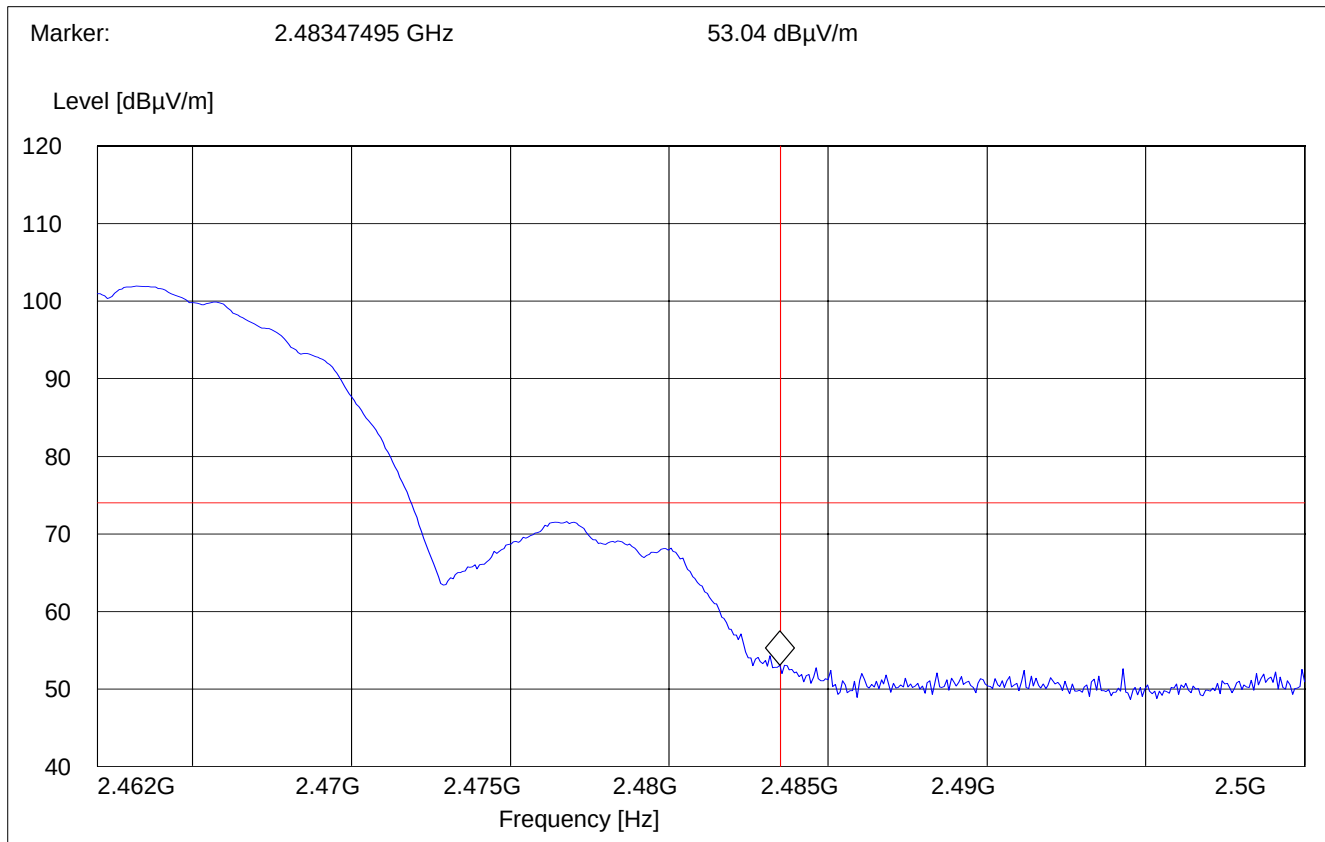

EMISSION LIMITATIONS
Transmitter (Radiated)**§ 15.247 (c) (1)****LIMITS**

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions, which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode unless specified with the plots.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Transmit at Lowest channel Frequency 2412MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Middle channel Frequency 2437MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Highest channel Frequency 2462MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel (2412MHz): 30MHz – 1GHz

Antenna: Vertical

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

		"Spuri hi 30-1G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

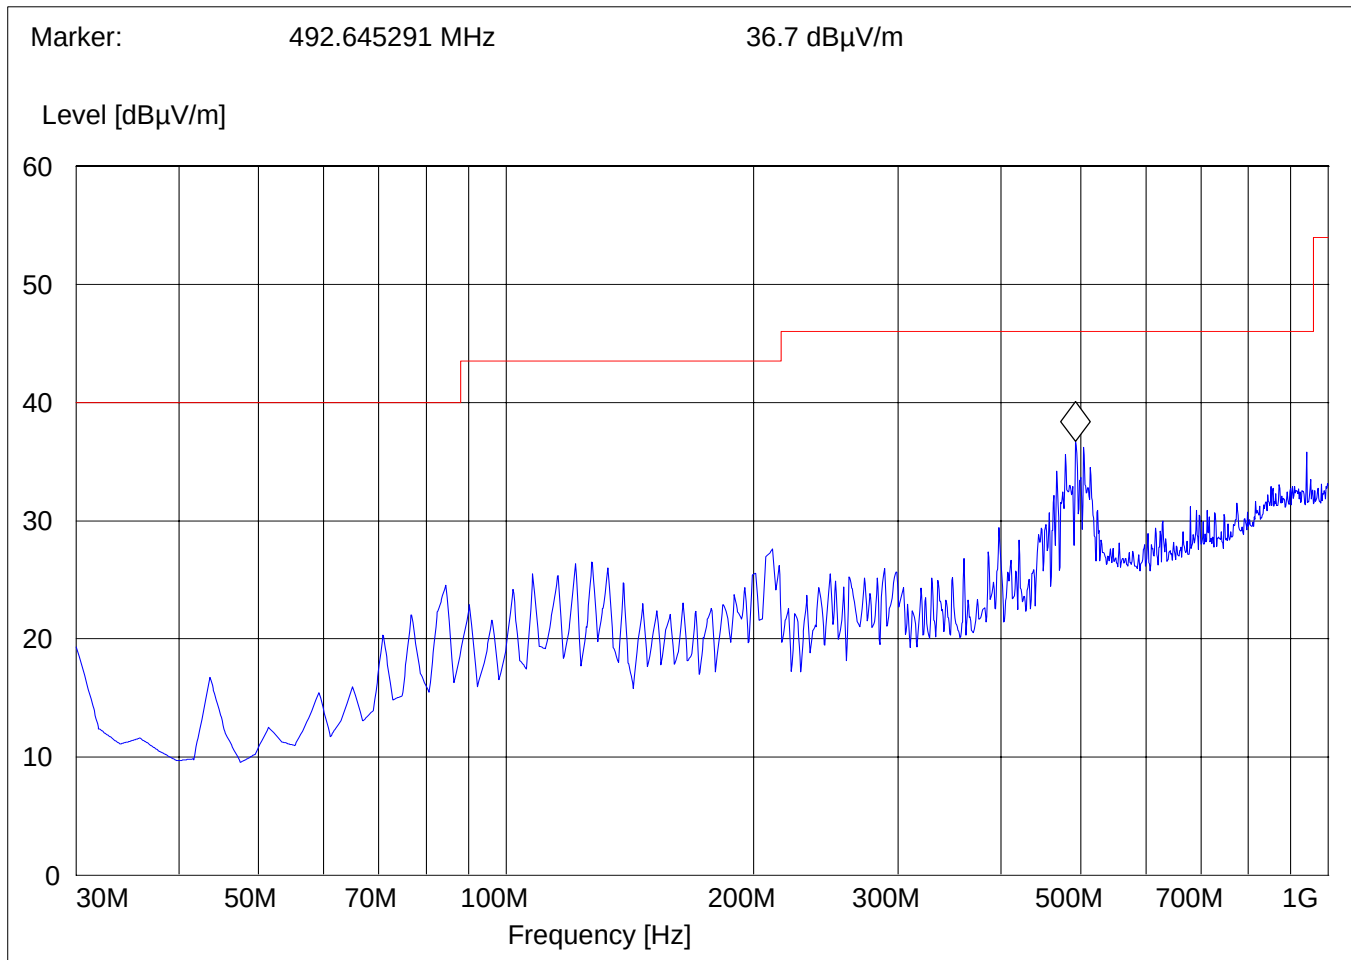

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

Lowest Channel (2412MHz): 30MHz – 1GHz


Antenna: Horizontal

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

"Spuri hi 30-1G"

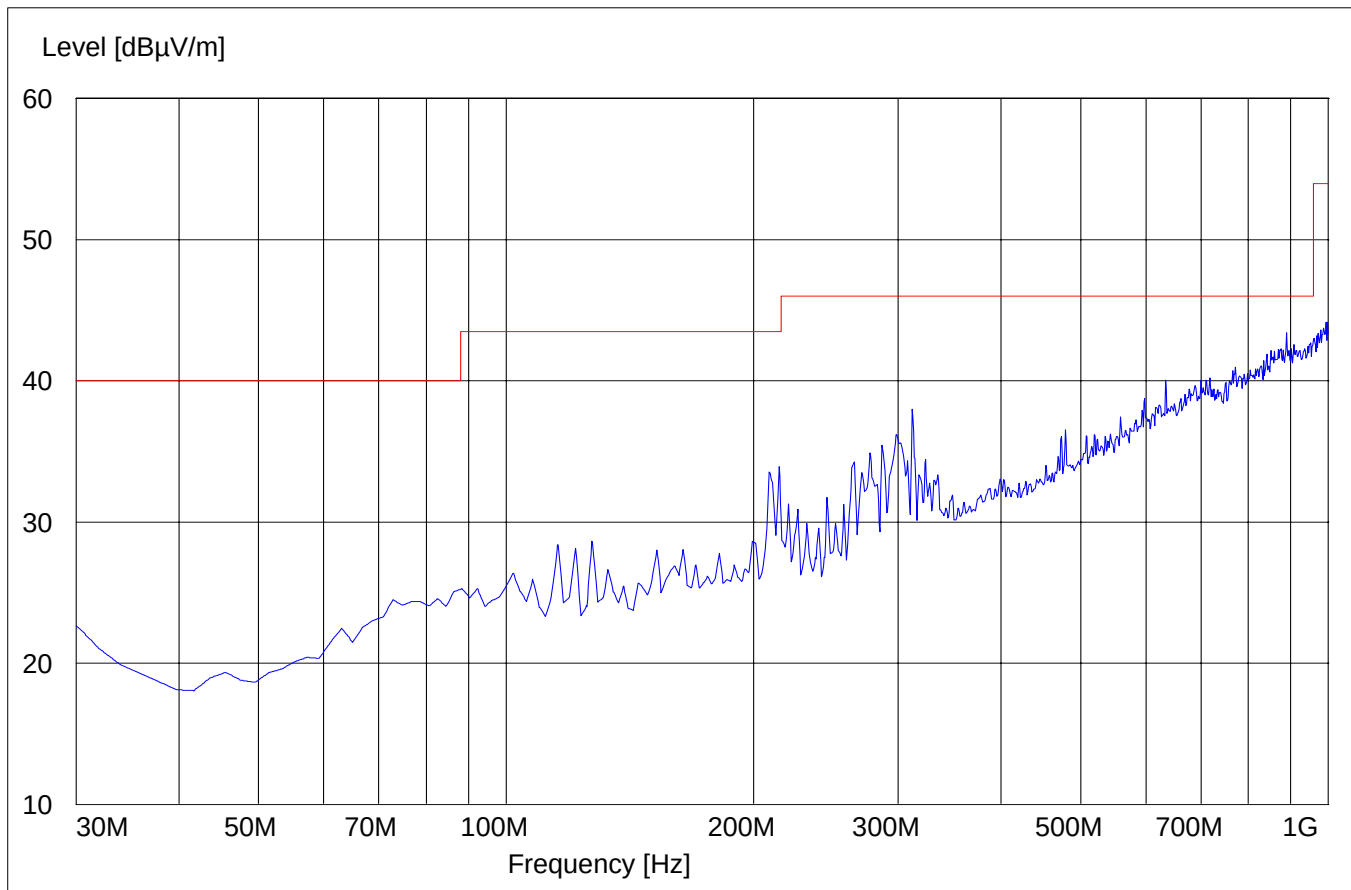

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Lowest Channel (2412MHz): 1GHz – 3GHz

Note: Peak above the limit line is the carrier freq.

SWEEP TABLE:

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

"Spuri hi 1-3G"

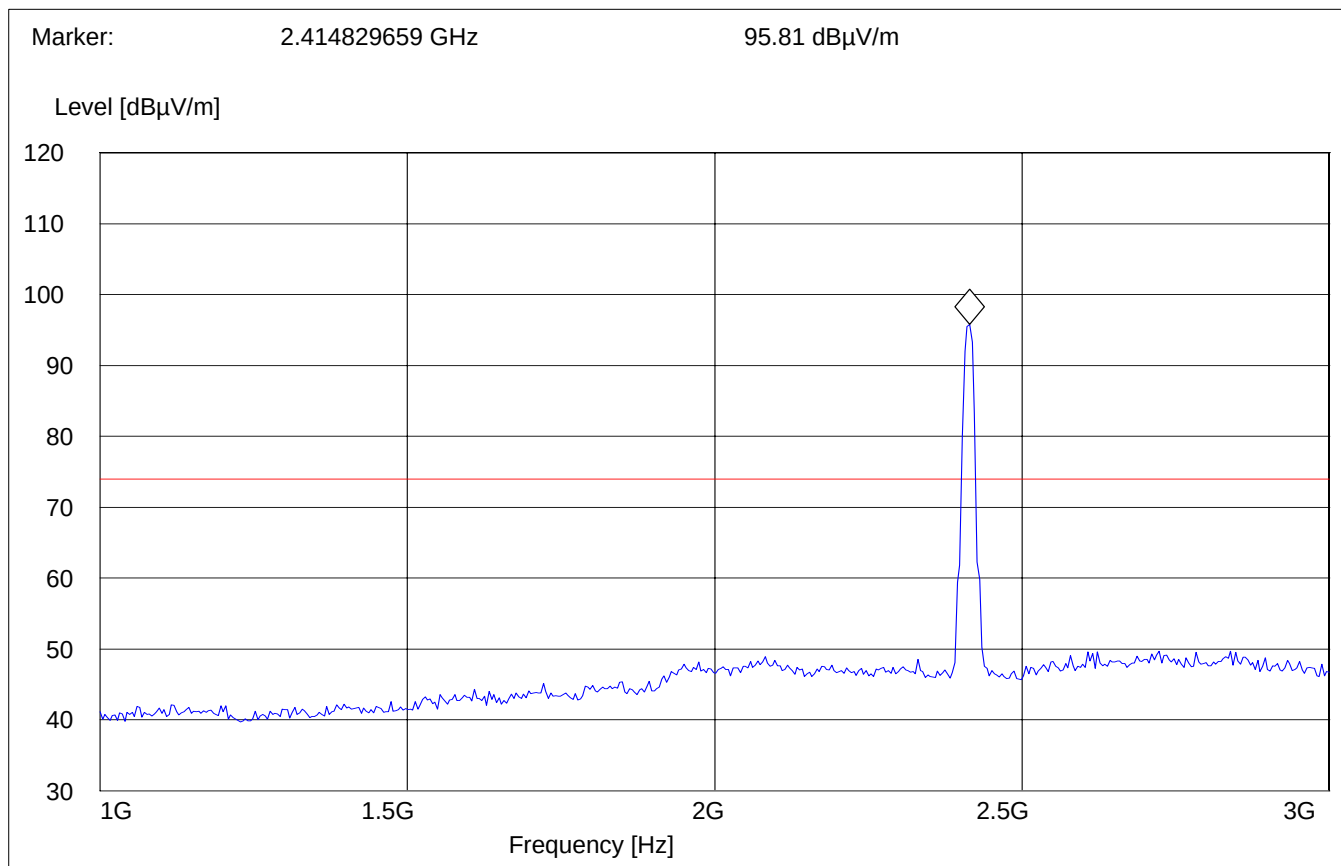

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

Lowest Channel (2412MHz): 3GHz – 18GHz

SWEEP TABLE:

"Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

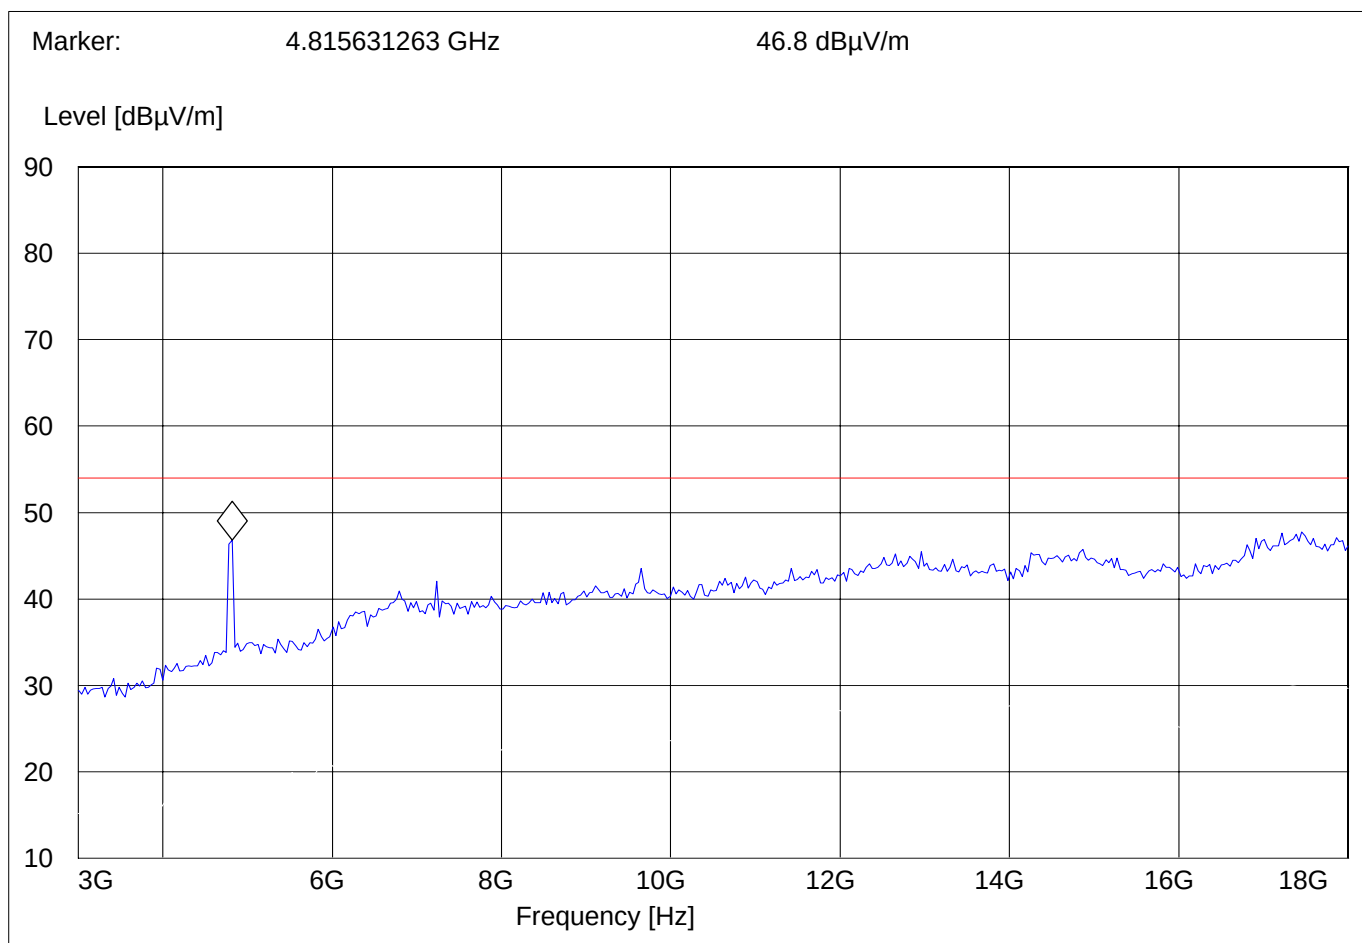


EMISSION LIMITATIONS - Radiated (Transmitter)
Mid Channel (2437MHz): 1GHz – 3GHz

§ 15.247 (c) (1)

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:		"Spuri hi 1-3G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

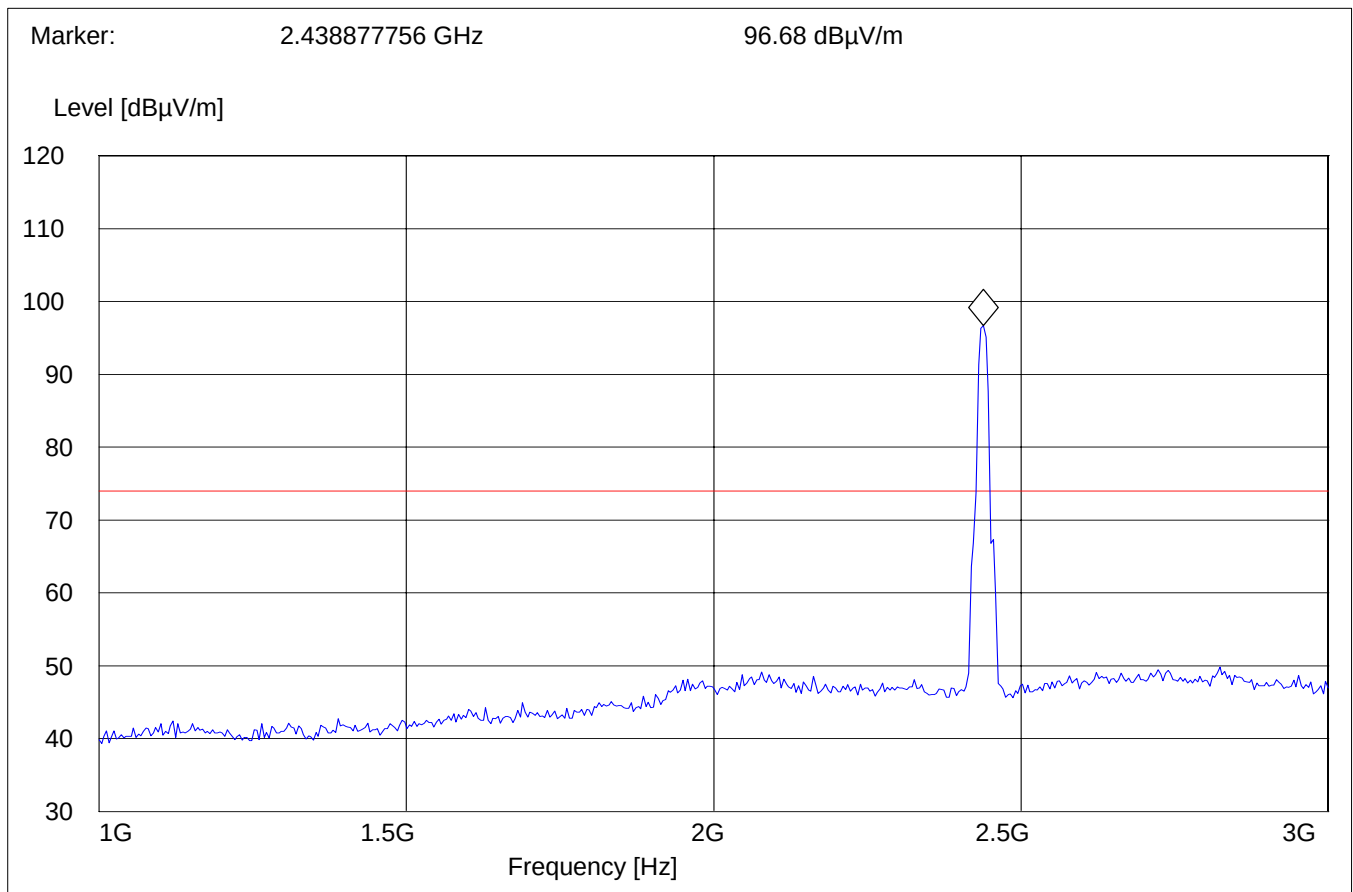

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Mid Channel (2437MHz): 3GHz – 18GHz

Average Measurement

SWEEP TABLE:

"Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

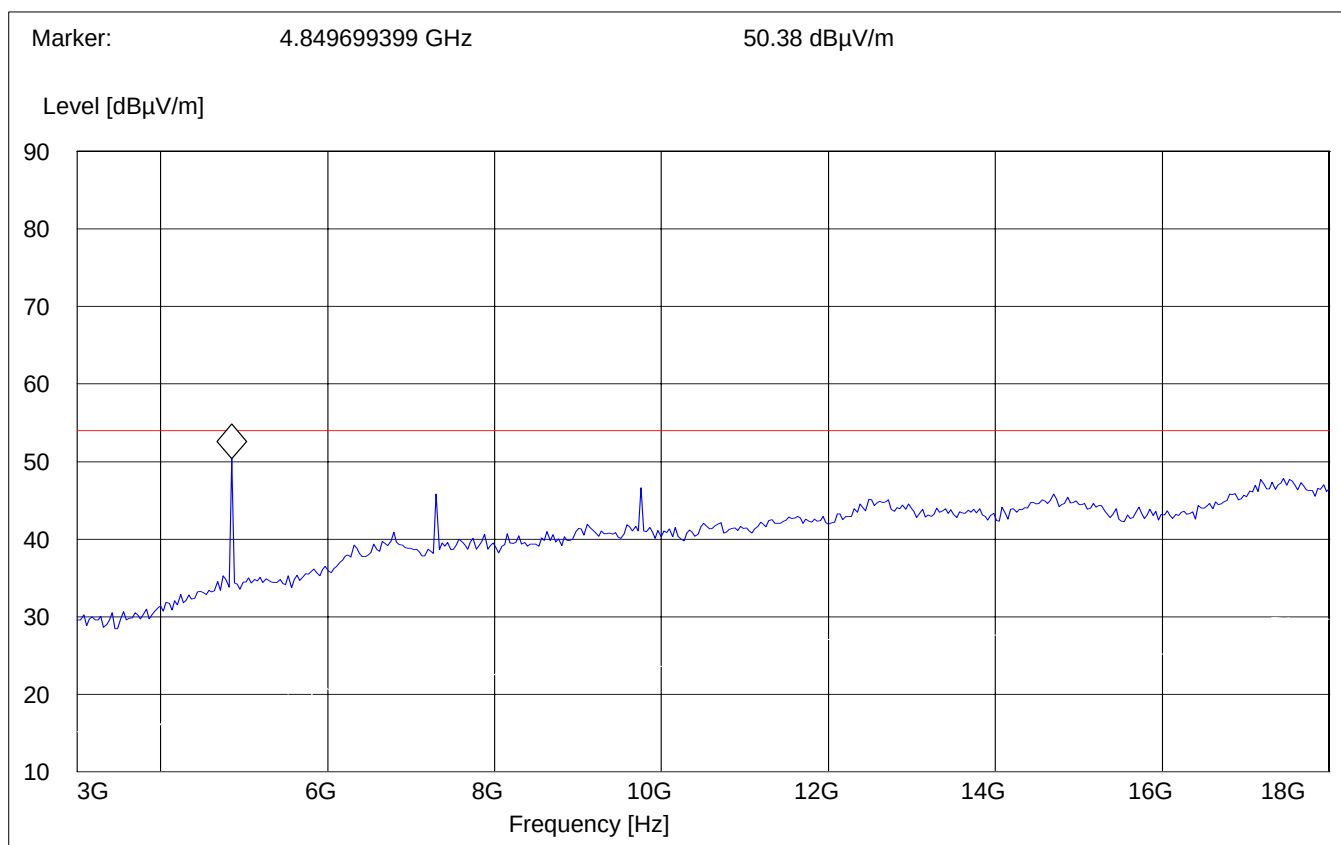

EMISSION LIMITATIONS - Radiated (Transmitter)
Highest Channel (2462MHz): 1GHz – 3GHz


§ 15.247 (c) (1)

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

"Spuri hi 1-3G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

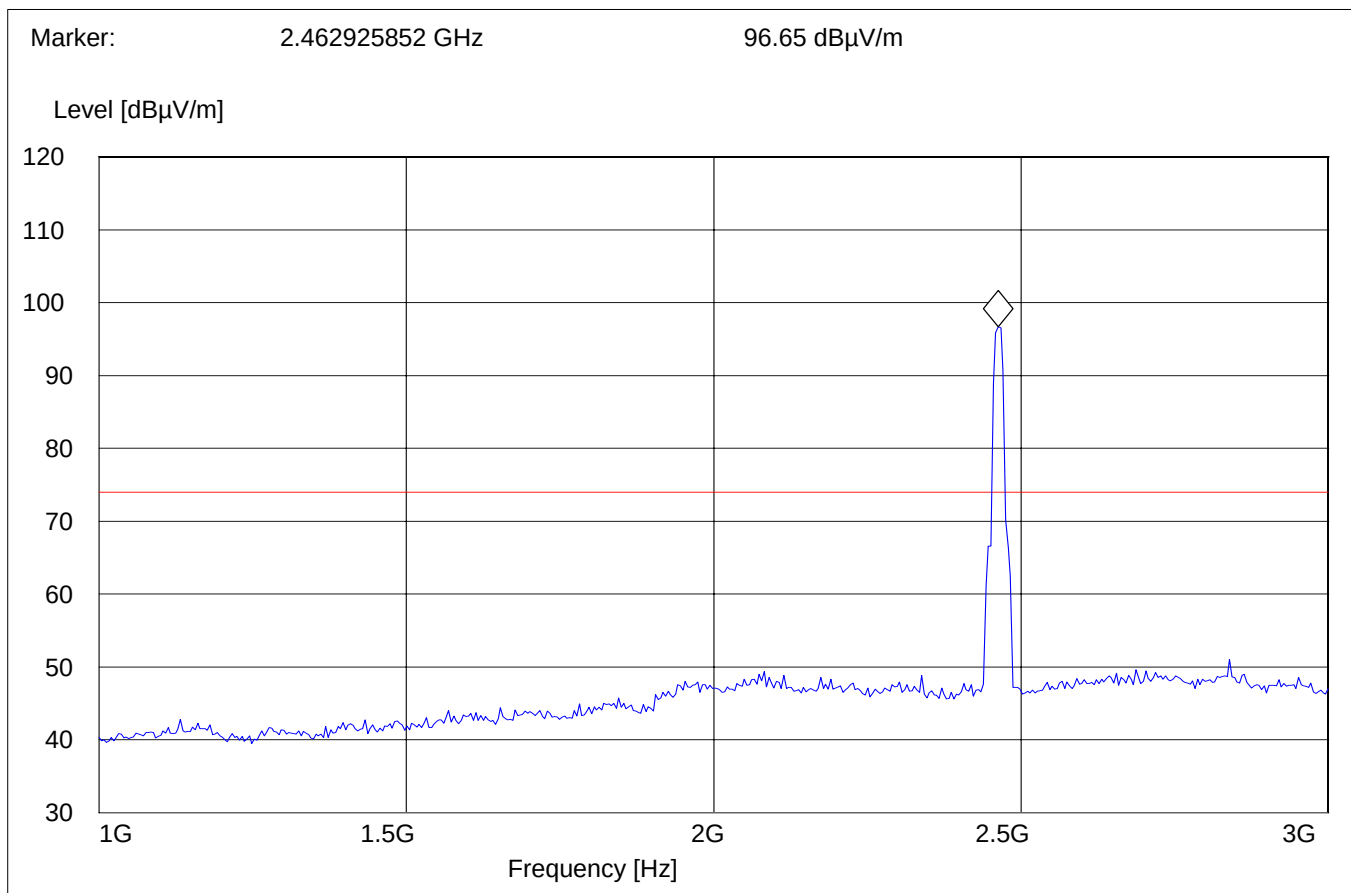

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


Highest Channel (2462MHz): 3GHz – 18GHz

Average Measurement

SWEEP TABLE:

"Spuri hi 3-18G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

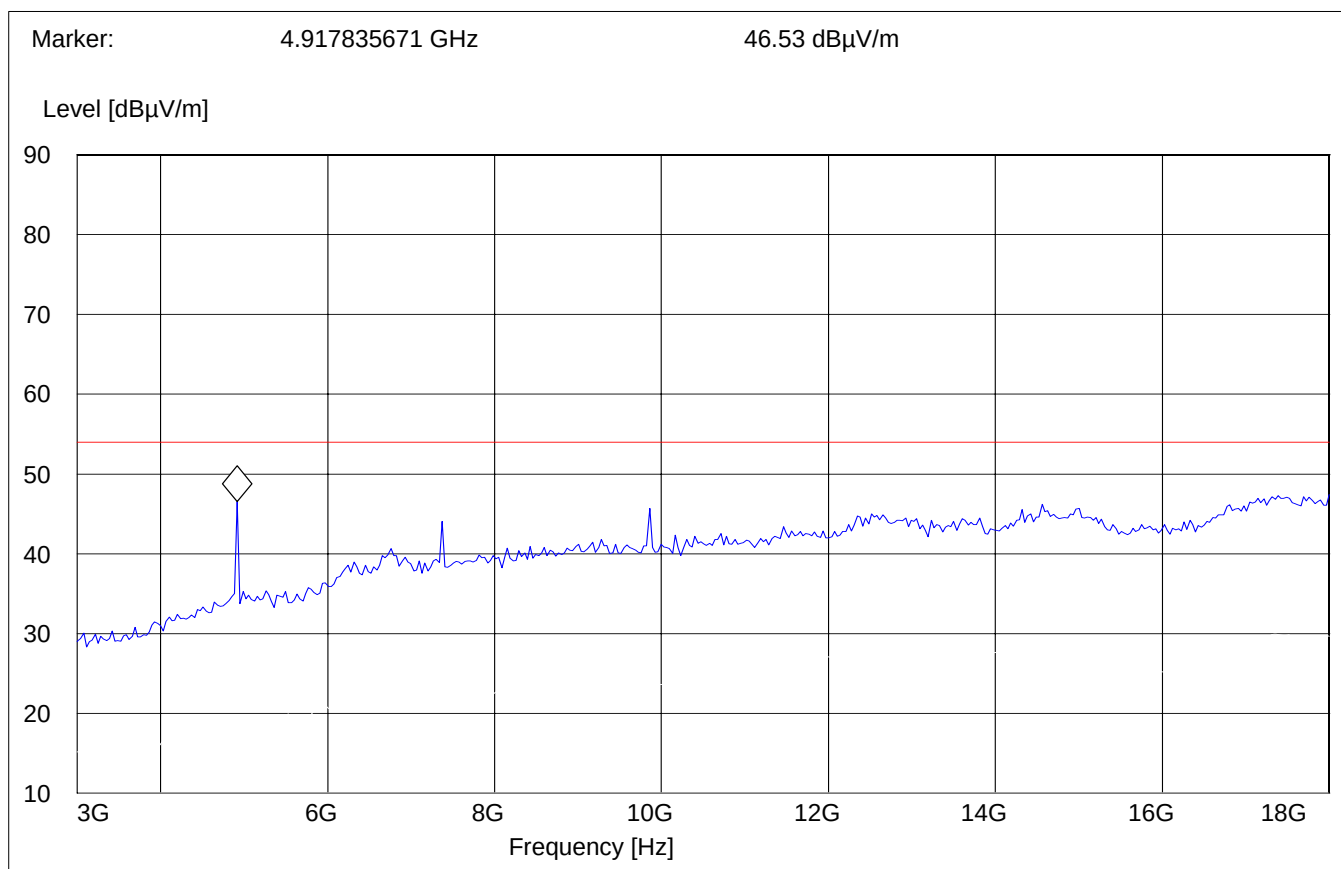

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)


18GHz – 26.5GHz

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE:

"Spuri hi 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

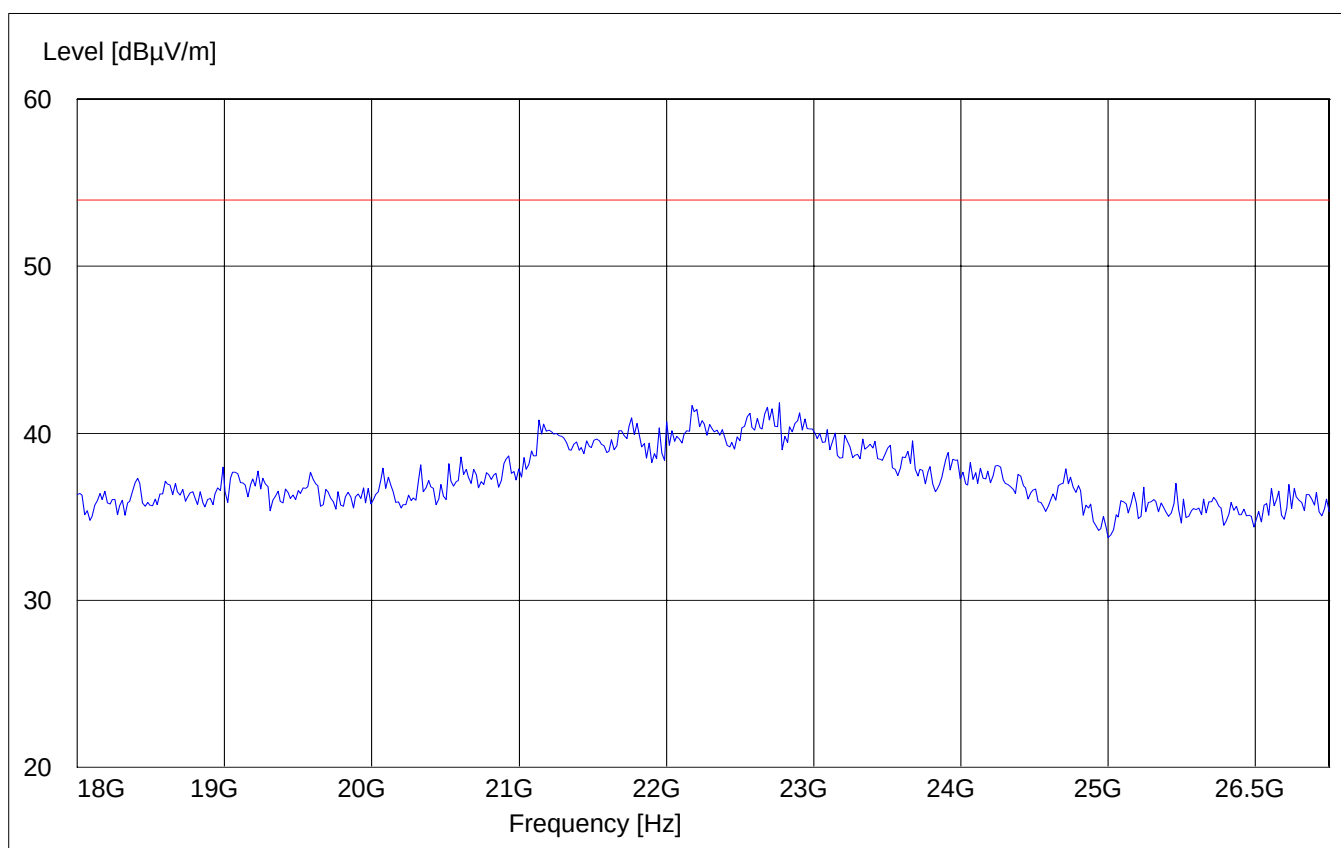

COLLOCATION BT & WLAN:

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

1-3GHz

BT Tx @ 2480MHz

WLAN Tx @ 2412MHz

NOTE: The peaks above the limit are above mentioned carrier frequencies.


SWEEP TABLE:

"Spuri hi 1-3G"

Short Description:

Bluetooth Spurious 1-3GHz

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
1.0 GHz	3.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

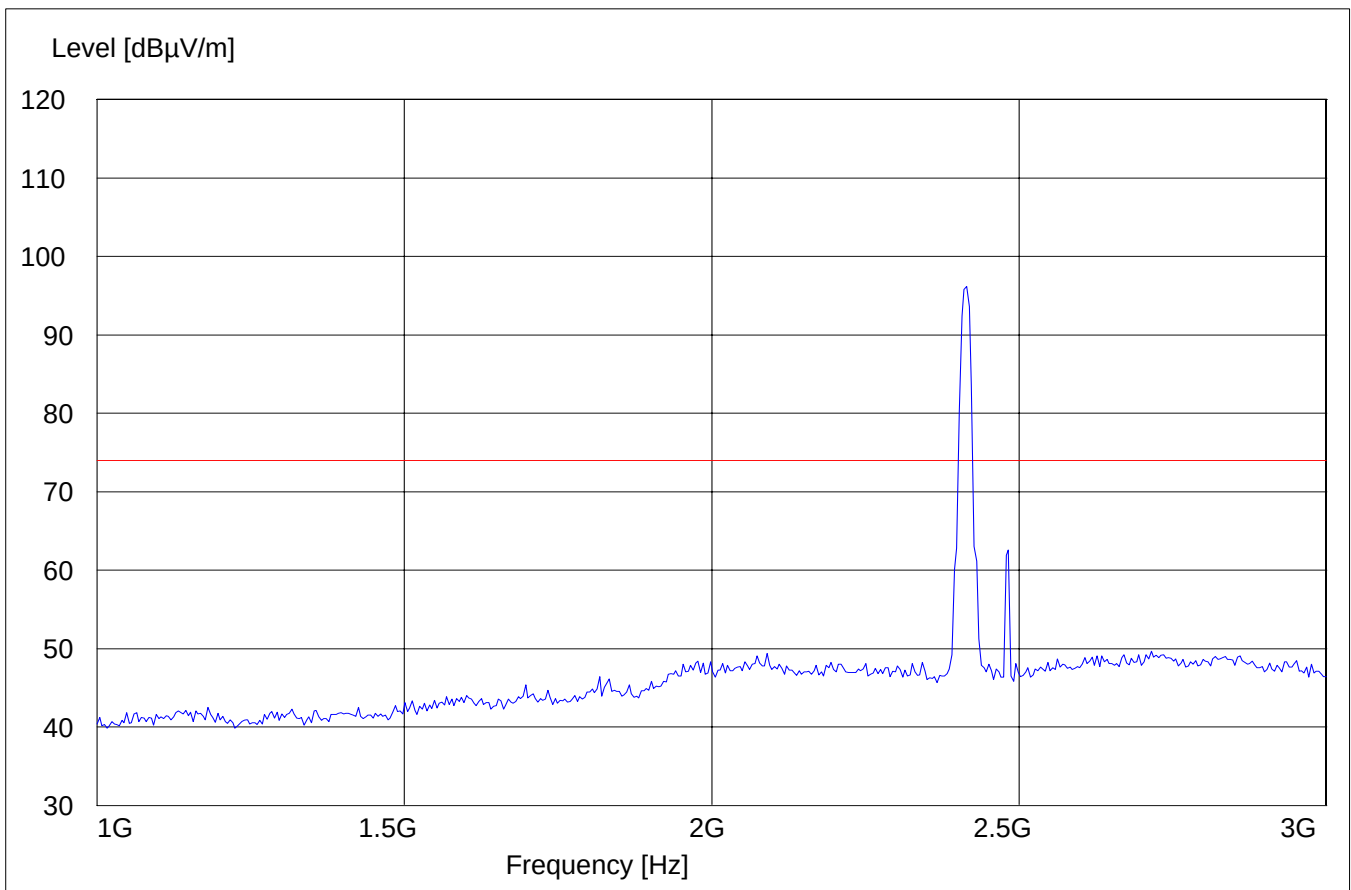

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.247 (c) (1)

3-18GHz

BT Tx @ 2480MHz

WLAN Tx @ 2412MHz

SWEEP TABLE:		"Spuri hi 3-18G"			
Short Description:		Bluetooth Spurious 3-18 GHz			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
3.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

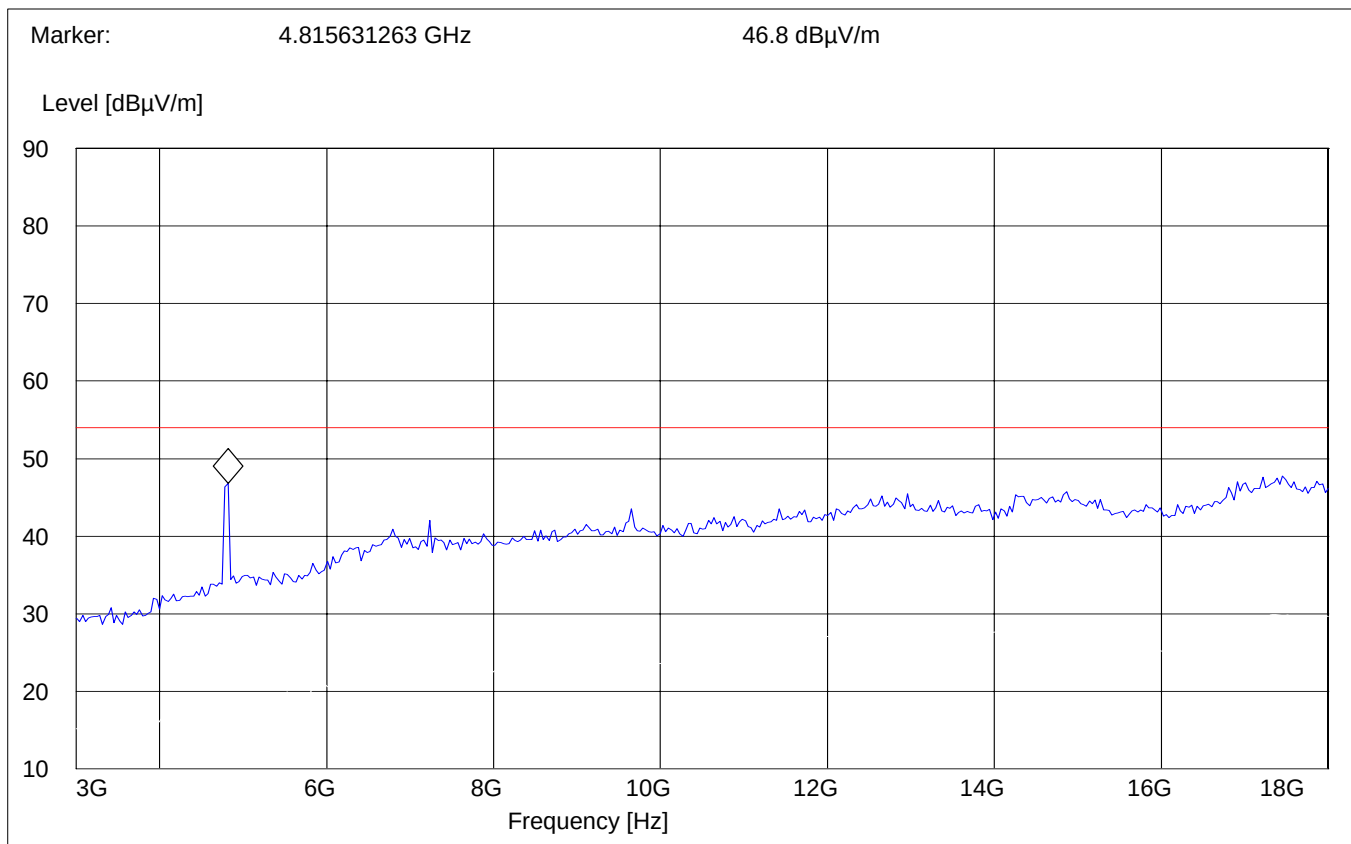

RECEIVER RADIATED EMISSIONS**§ 2.1053 / RSS-GEN****NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3GHz and 26.5GHz very short cable connections to the antenna was used to minimize the noise level.
2. Receiver emissions were measured to at least 3 time the fundamental emission.
3. Receiver emissions were measured with device receiving on a channel in the 2400 MHz band.

Limits**SUBCLAUSE § RSS-133**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Spurious on EUT

RECEIVER RADIATED EMISSIONS

30MHz – 1GHz

Antenna: vertical

Note: Peak Reading Vs. Quasi-Peak Limit.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER

Voltage: AC ADAPTOR


Sweep: CANADA RE 30M-1G VER

SWEEP TABLE: "CANADA RE_30M-1G_Ver"

Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

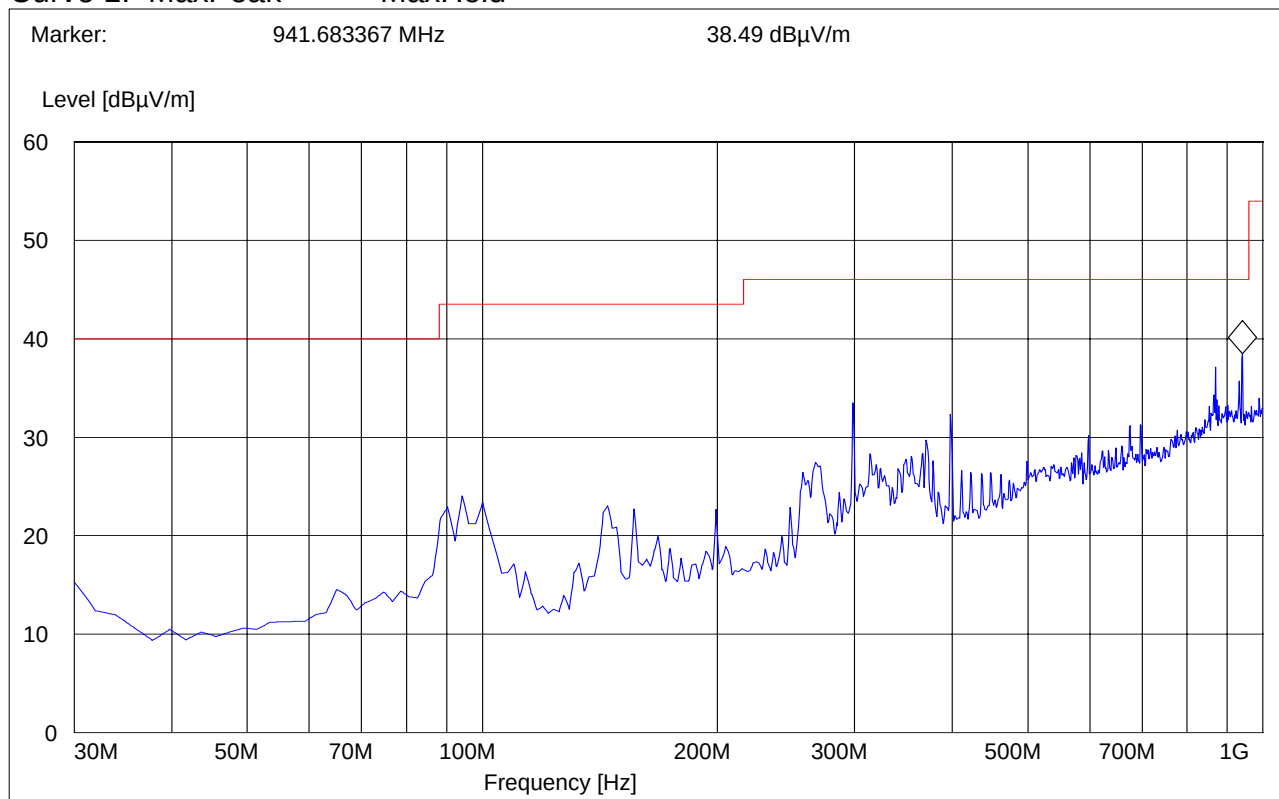

RECEIVER RADIATED EMISSIONS

1GHz – 3GHz

Note: Peak Reading Vs. Average Limit.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER

Voltage: AC ADAPTOR


Sweep: CANADA RE 1-3G

SWEEP TABLE: "CANADA RE_1-3G"

Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

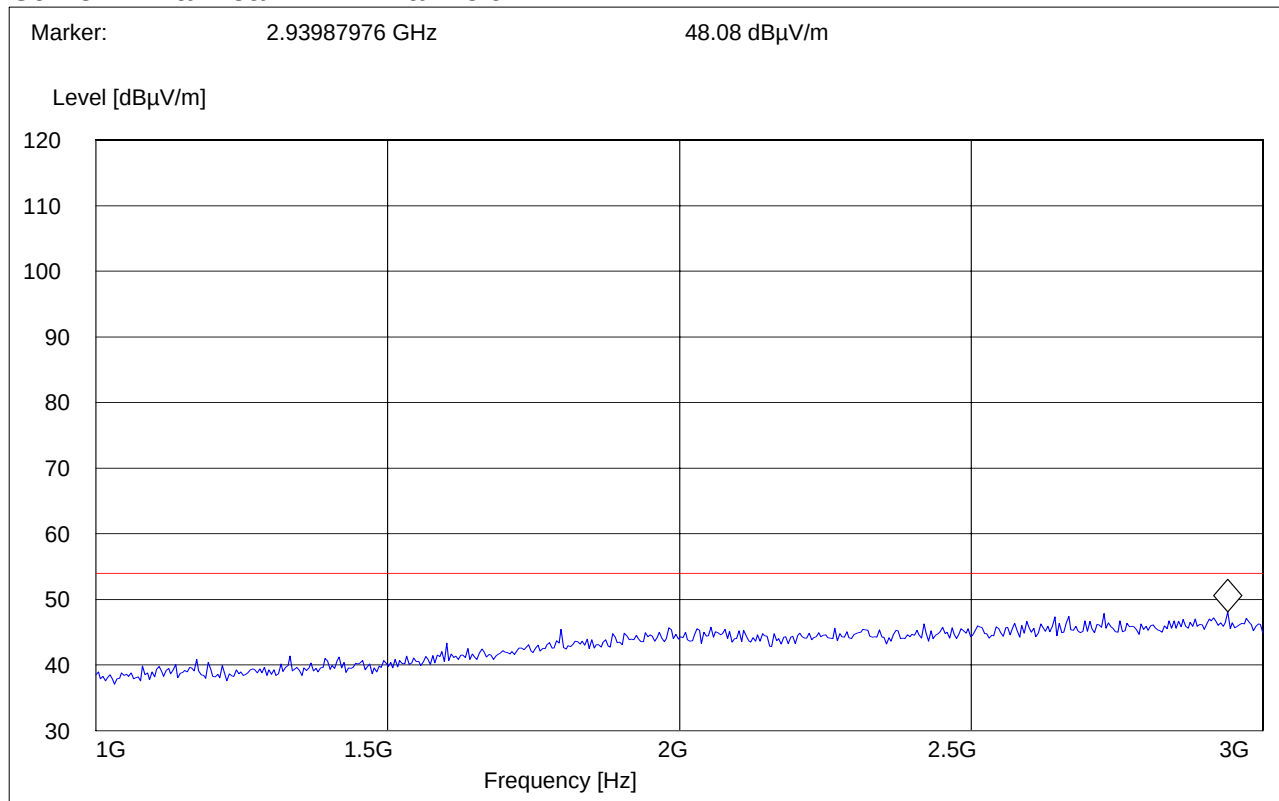

RECEIVER RADIATED EMISSIONS

3GHz – 18GHz

Note: Peak Reading Vs. Average Limit.

CETECOM Inc.

411 Dixon Landing Road, Milpitas CA 95035, USA

EUT / Description: D9500 UNIT 1

Customer: HHP

Operating Mode: RX

Antenna: V

EUT: V

Test Engineer: PETER

Voltage: AC ADAPTOR


Sweep: CANADA RE 1-18G

SWEEP TABLE: "CANADA RE_3-18G"

Unit: dB μ V/m

Detector: Mode:

Curve 1: MaxPeak MaxHold

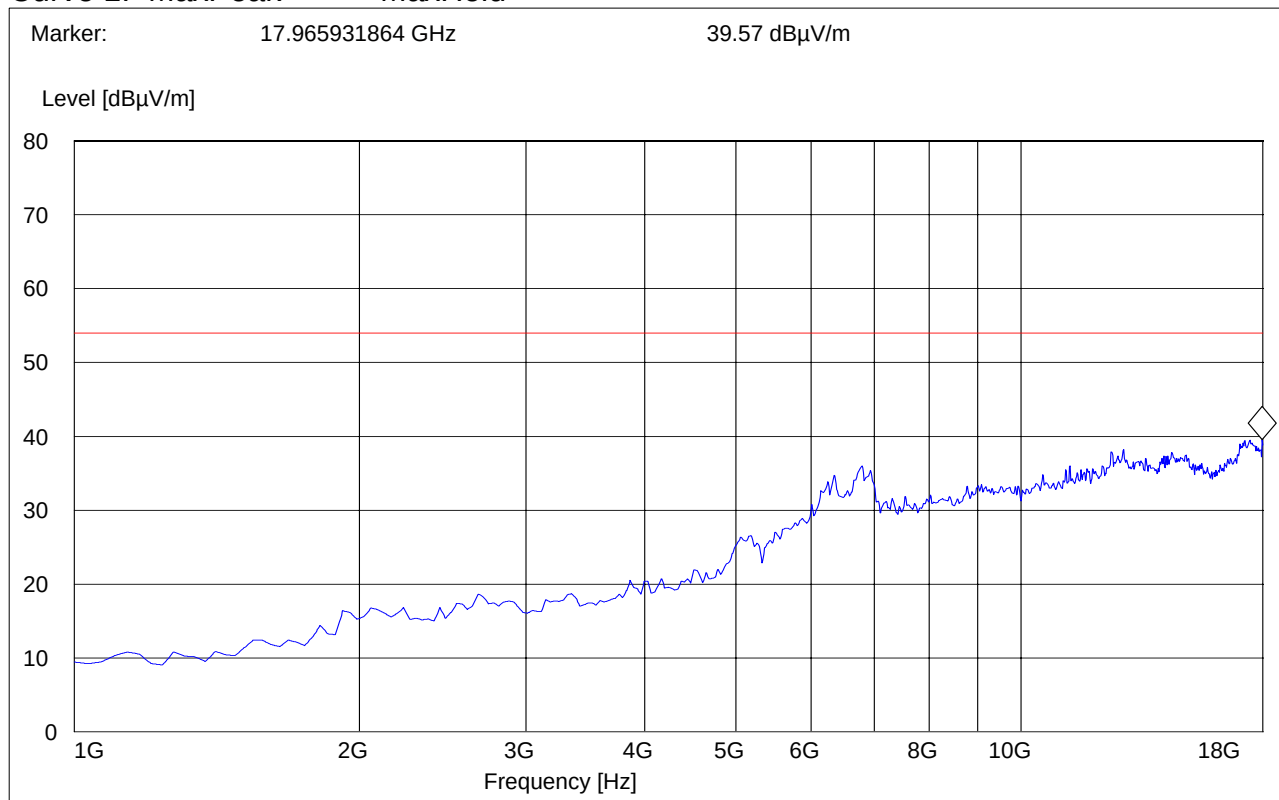

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

SWEEP TABLE: "55022 cond"

Short Description: EN 55022 for 150KHz-30MHz
 Start Stop Detector Meas IF Transducer
 Frequency Frequency Time Bandw.
 150.0 kHz 30.0 MHz MaxPeak Coupled 10 kHz None

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)

Limit


Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz VBW = 10KHz

MEASUREMENT RESULT: "test_fin AV"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.675000	35.70	0.0	46	10.3	N	GND

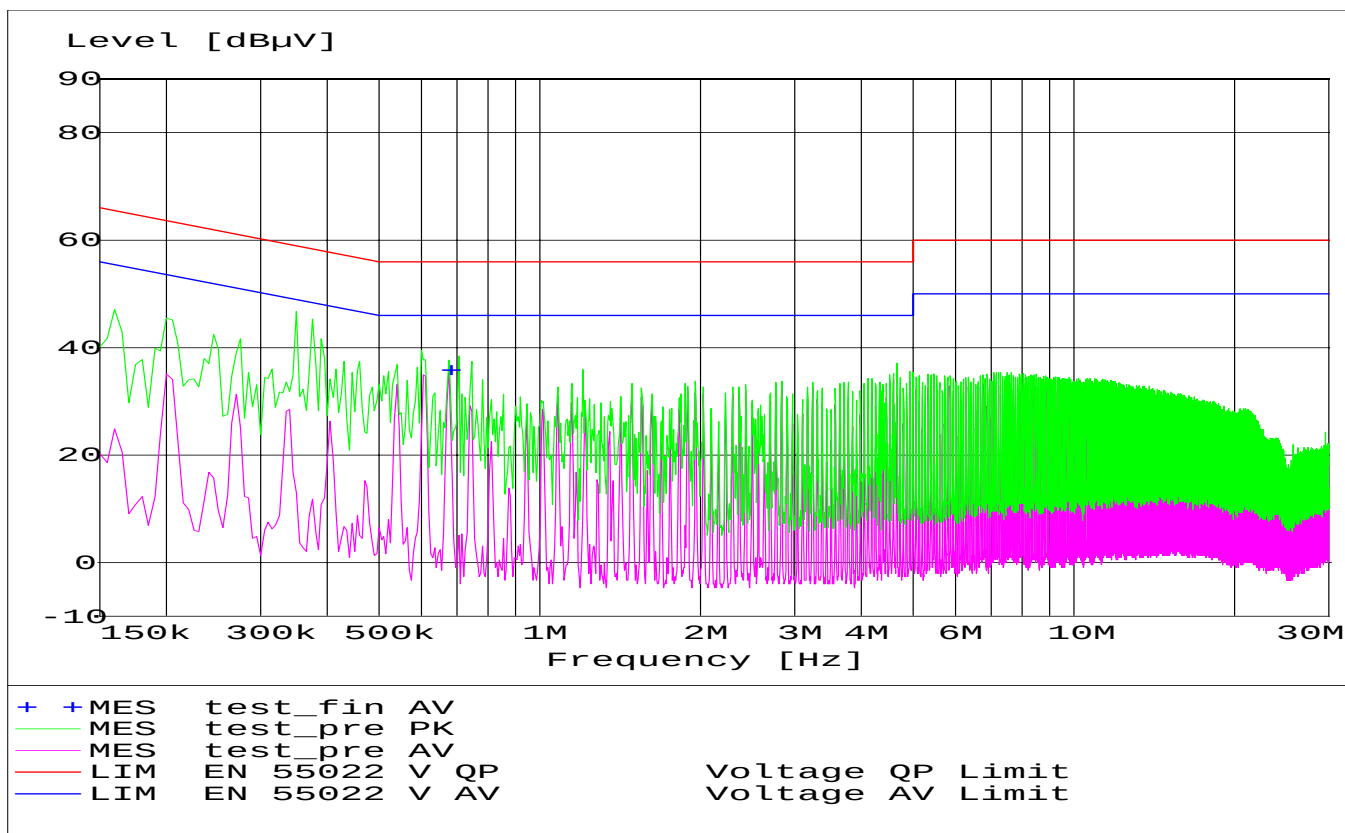

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2007	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2007	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2007	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2007	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2007	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2007	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2007	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2007	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2007	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2007	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2007	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2007	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2007	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2007	2 years

BLOCK DIAGRAMS
Radiated Testing

ANECHOIC CHAMBER

