




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 3:05:14 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	41.86
Relative Humidity:	50%	Conductivity:	0.899
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.00 mm
DUT Position:	Left touch	Max SAR Z-axis Location:	-101.00 mm
Antenna Configuration:	Integral	Max E Field:	18.81 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.286 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.187 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.123 W/kg
Type of Modulation:		SAR End:	0.124 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

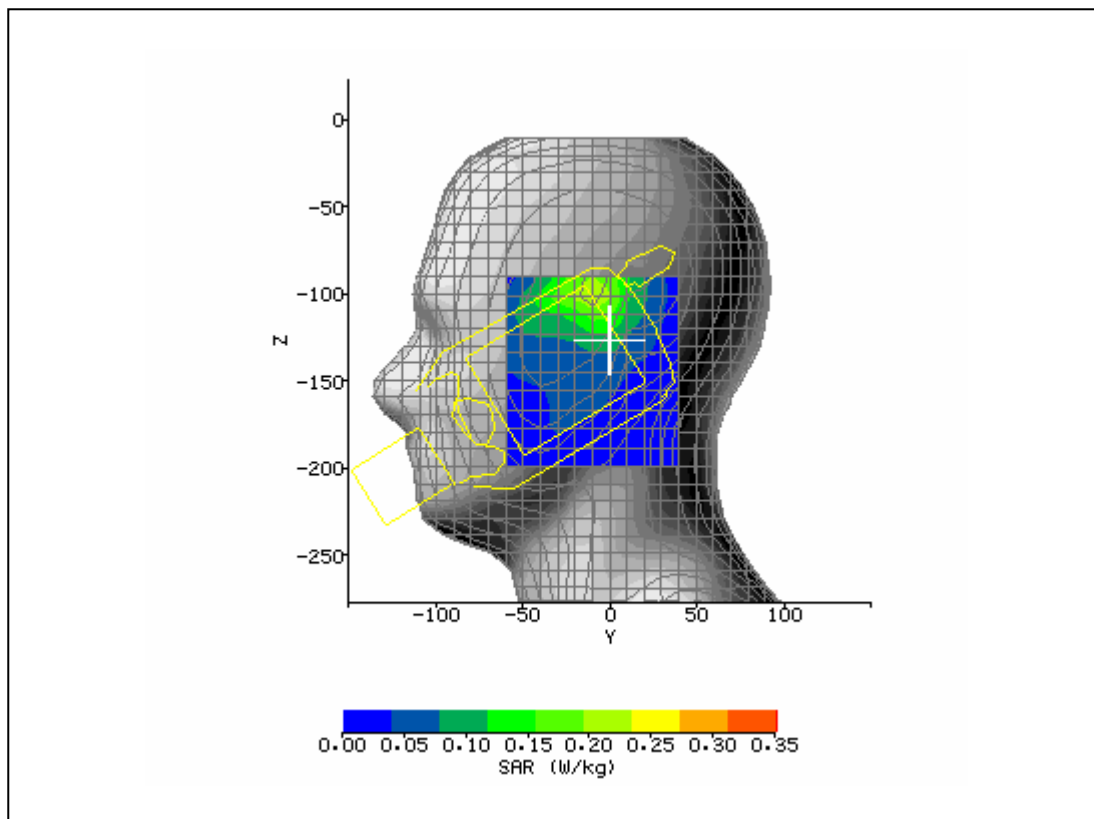


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 3:44:56 PM	DUT Battery Model/No:	
Filename:	lefttch190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	41.86
Relative Humidity:	50%	Conductivity:	0.899
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-101.00 mm
Antenna Configuration:	Integral	Max E Field:	19.62 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.308 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.195 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.128 W/kg
Type of Modulation:		SAR End:	0.129 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

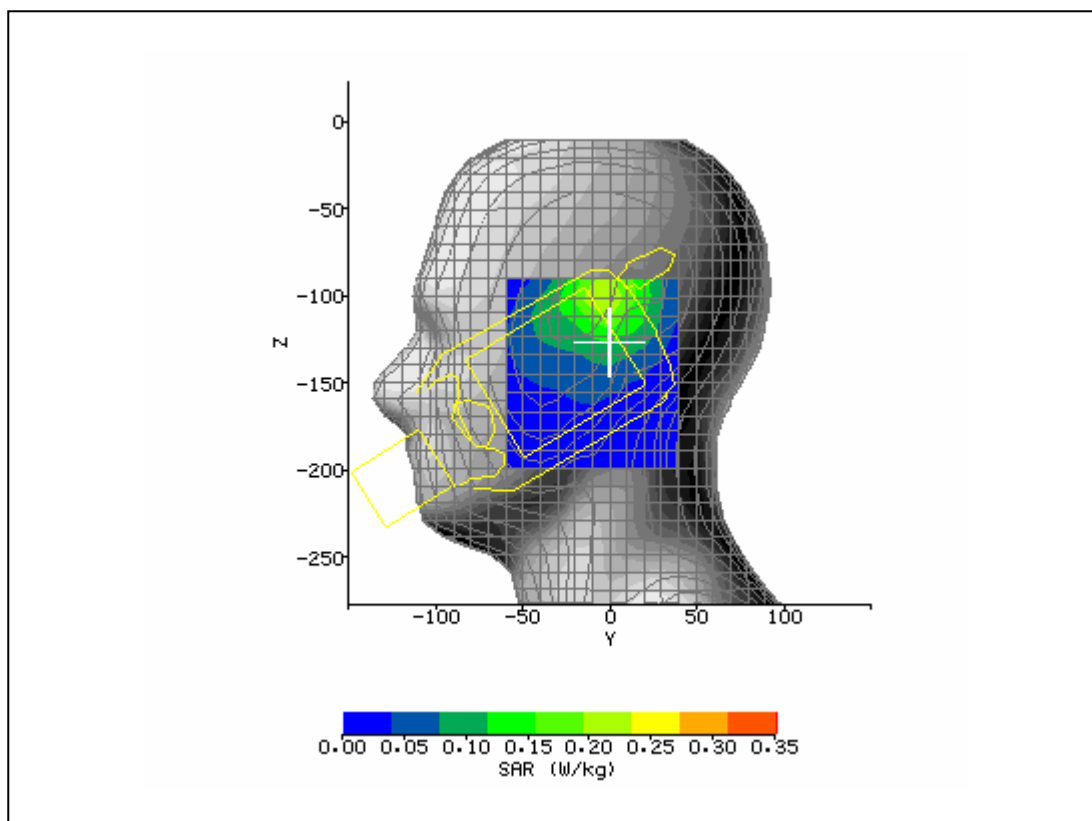


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 4:25:21 PM	DUT Battery Model/No:	
Filename:	lefttlt190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	41.86
Relative Humidity:	50%	Conductivity:	0.899
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	9.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-112.00 mm
Antenna Configuration:	Integral	Max E Field:	17.27 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.245 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.168 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.120 W/kg
Type of Modulation:		SAR End:	0.121 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

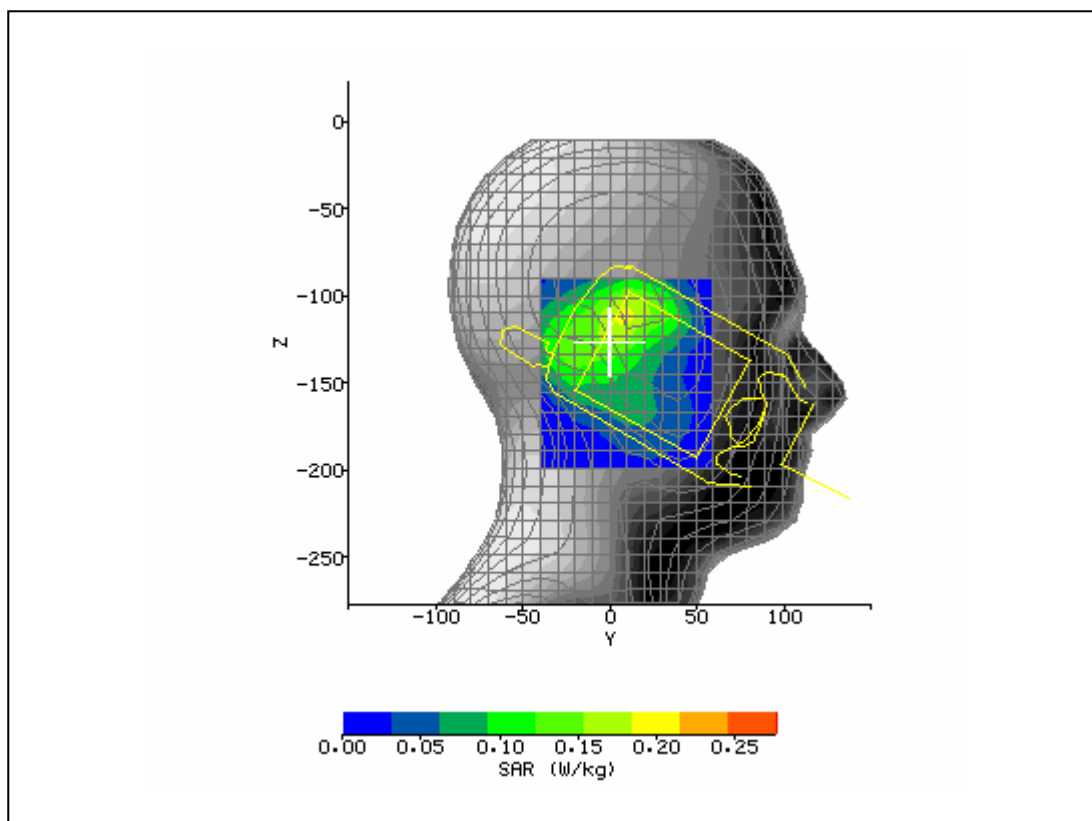


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 4:55:02 PM	DUT Battery Model/No:	
Filename:	righttch190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	41.86
Relative Humidity:	50%	Conductivity:	0.899
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	1.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-123.00 mm
Antenna Configuration:	Integral	Max E Field:	18.60 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.276 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.192 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.134 W/kg
Type of Modulation:		SAR End:	0.134 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

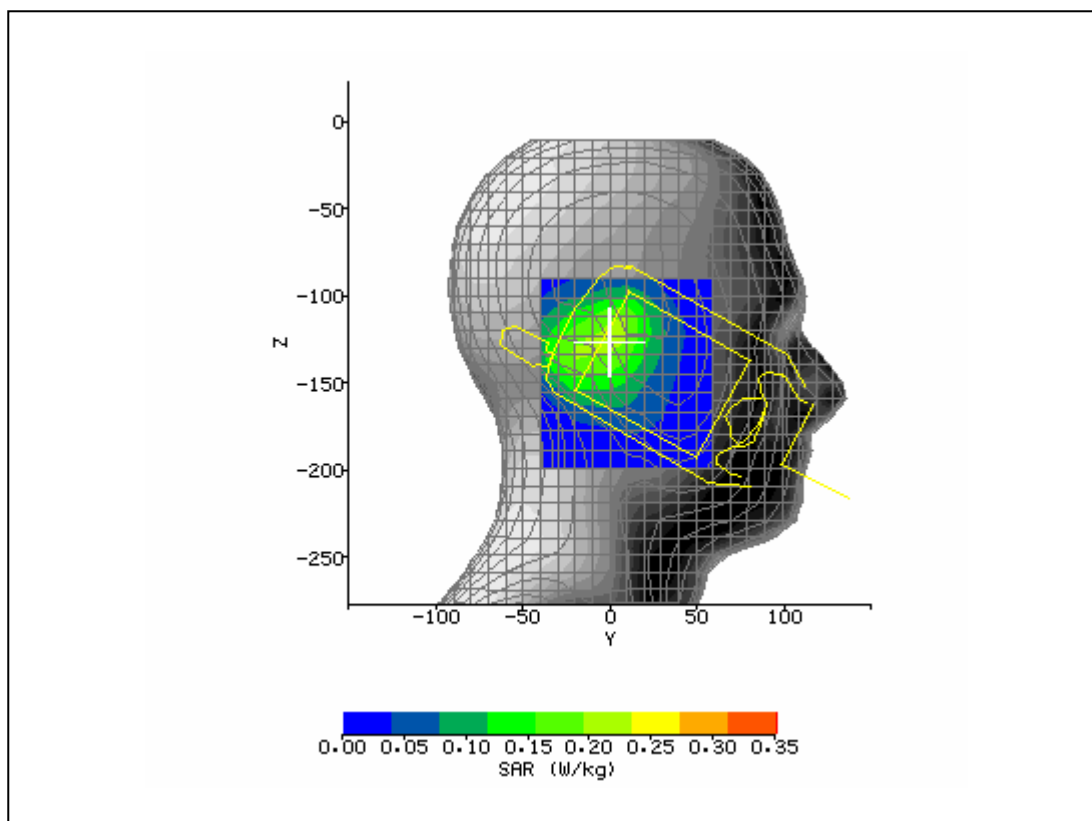


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 5:32:40 PM	DUT Battery Model/No:	
Filename:	righttlt190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	42.02
Relative Humidity:	50%	Conductivity:	0.889
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-6.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-103.00 mm
Antenna Configuration:	Integral	Max E Field:	15.83 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.222 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.140 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.095 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

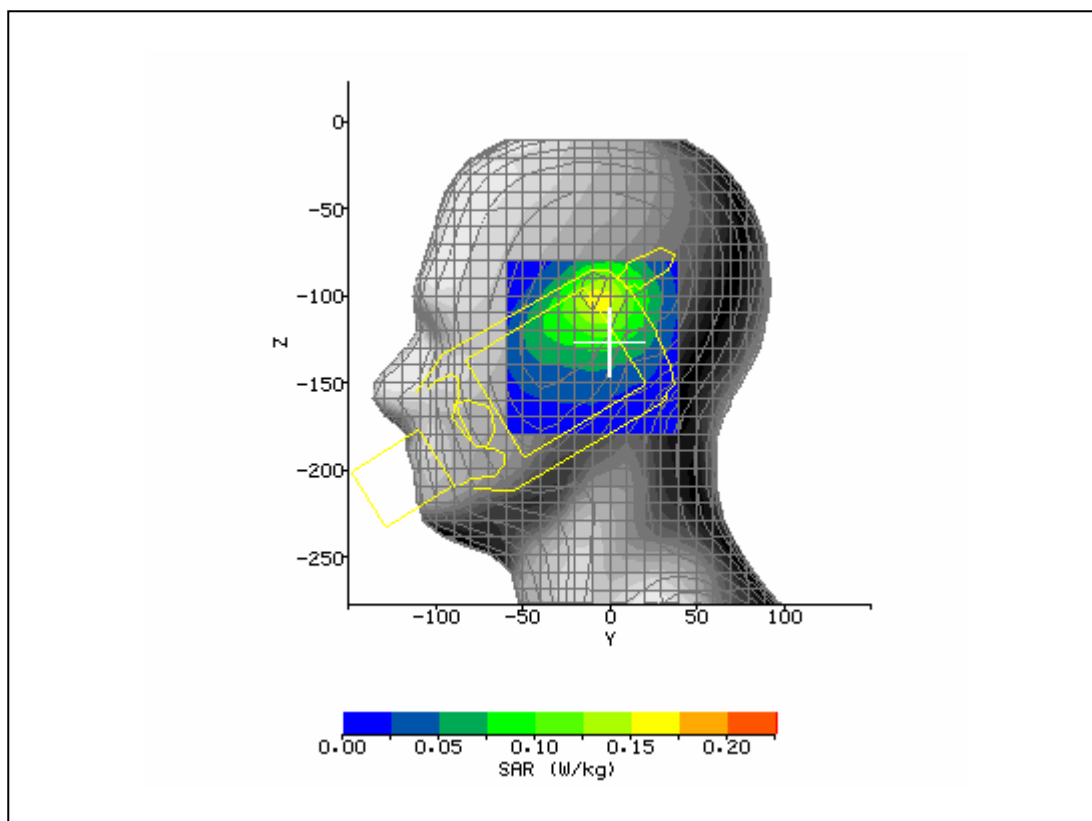


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 9:28:37 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	41.68
Relative Humidity:	50%	Conductivity:	0.912
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-9.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-101.00 mm
Antenna Configuration:	Integral	Max E Field:	20.15 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.341 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.218 W/kg
Conversion Factors:	.510 / .510 / .510	SAR Start:	0.147 W/kg
Type of Modulation:		SAR End:	0.146 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

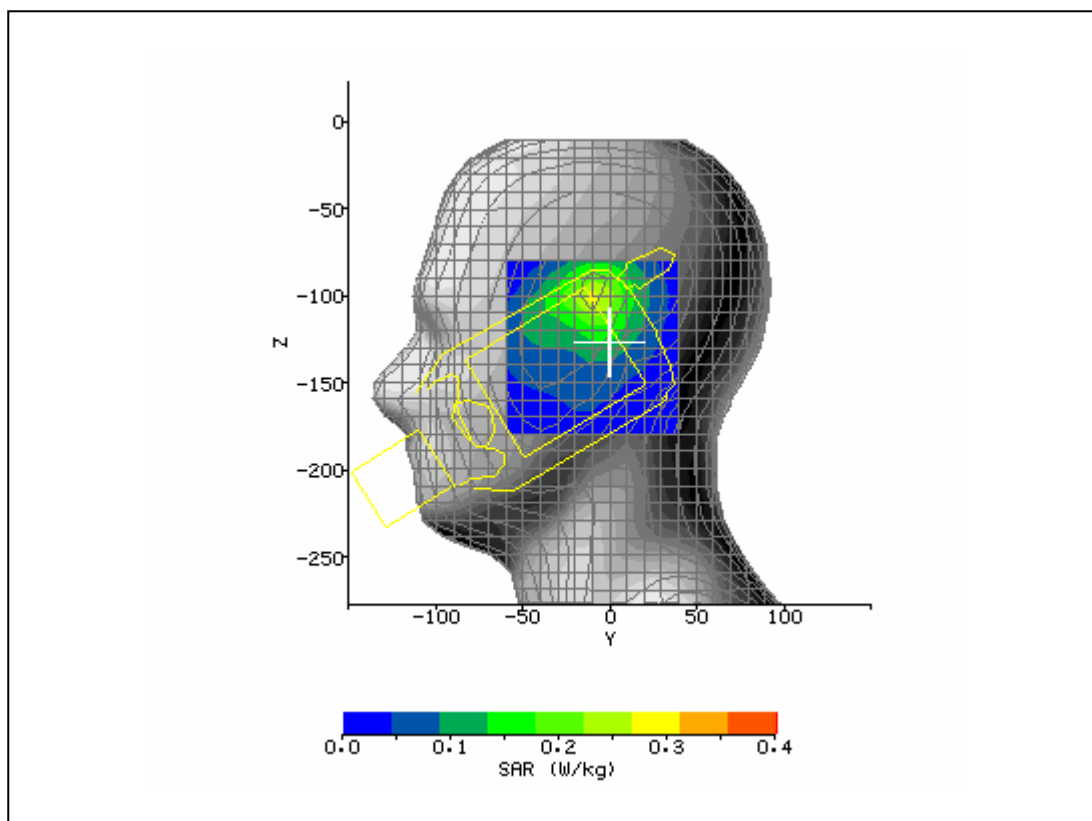


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 12:18:37 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	56.56
Relative Humidity:	50%	Conductivity:	0.981
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-154.10 mm
Antenna Configuration:	Integral	Max E Field:	16.66 V/m
Test Frequency:	824.2MHz	SAR 1g:	0.238 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.157 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.094 W/kg
Type of Modulation:		SAR End:	0.092 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.10 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

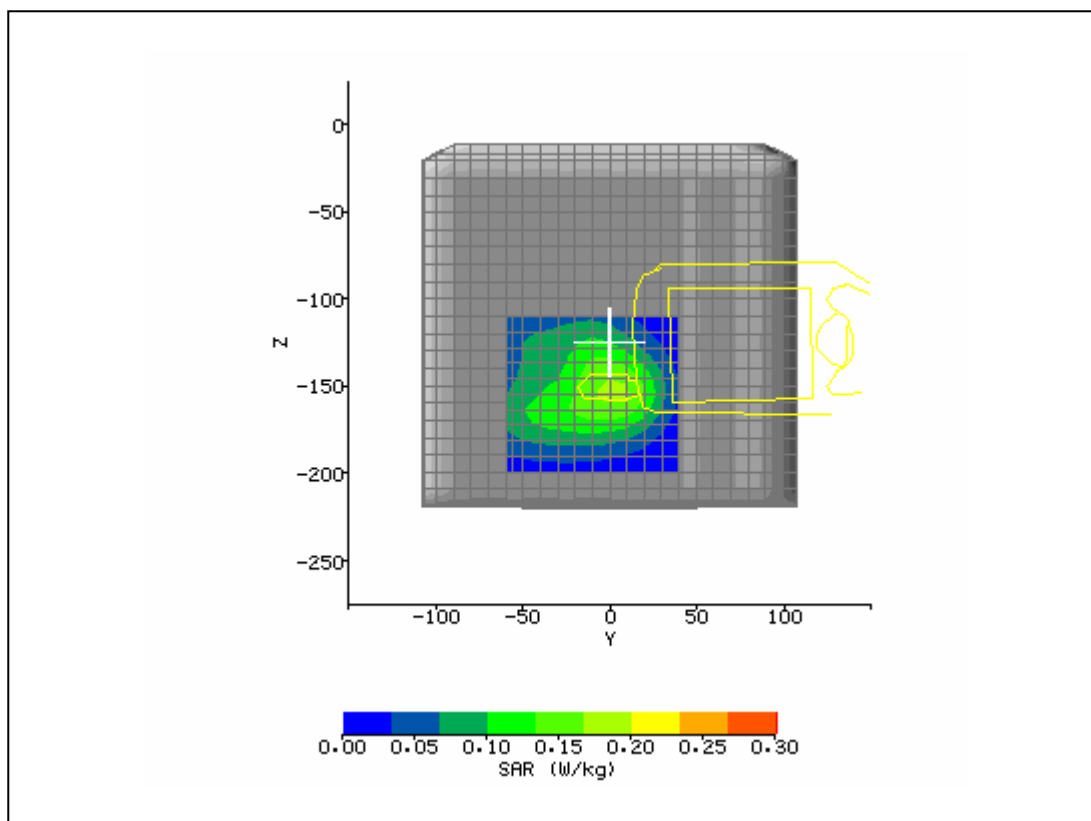


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 12:49:14 PM	DUT Battery Model/No:	
Filename:	128_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	56.17
Relative Humidity:	50%	Conductivity:	0.989
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-153.20 mm
Antenna Configuration:	Integral	Max E Field:	19.92 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.341 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.226 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.135 W/kg
Type of Modulation:		SAR End:	0.134 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

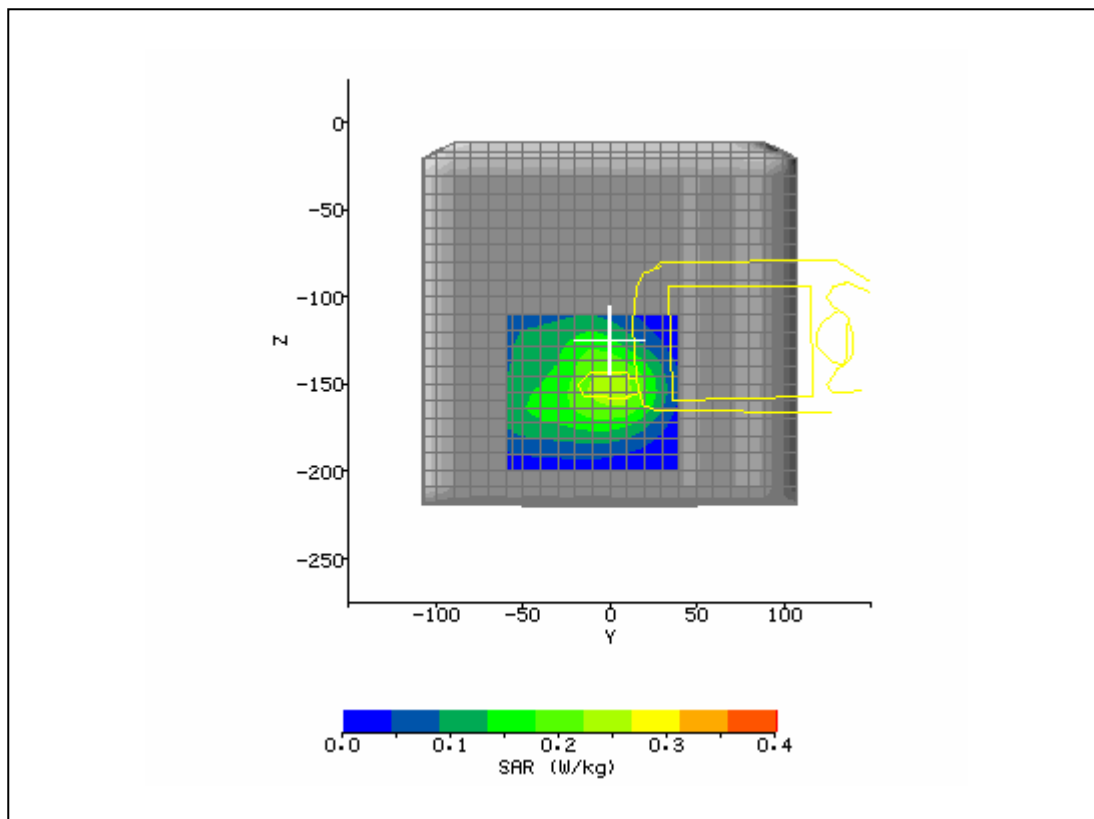


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 1:20:23 PM	DUT Battery Model/No:	
Filename:	190_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	55.82
Relative Humidity:	50%	Conductivity:	0.993
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-154.10 mm
Antenna Configuration:	Integral	Max E Field:	23.67 V/m
Test Frequency:	848.8MHz	SAR 1g:	0.481 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.318 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.188 W/kg
Type of Modulation:		SAR End:	0.188 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

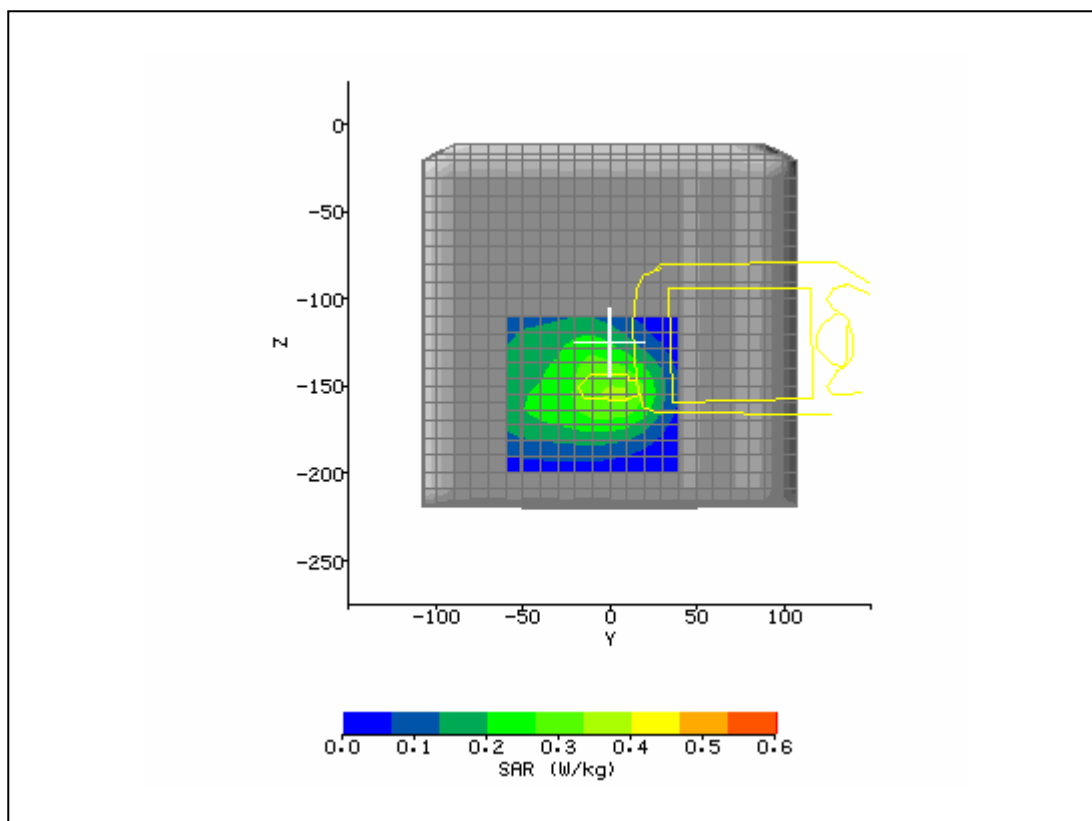


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 10:10:21 AM	DUT Battery Model/No:	
Filename:	leftlt251_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.45
Relative Humidity:	50%	Conductivity:	1.420
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-10.00 mm
DUT Position:	left touch	Max SAR Z-axis Location:	-99.00 mm
Antenna Configuration:	Integral	Max E Field:	22.45 V/m
Test Frequency:	1880MHz	SAR 1g:	0.643 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.376 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.202 W/kg
Type of Modulation:		SAR End:	0.202 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

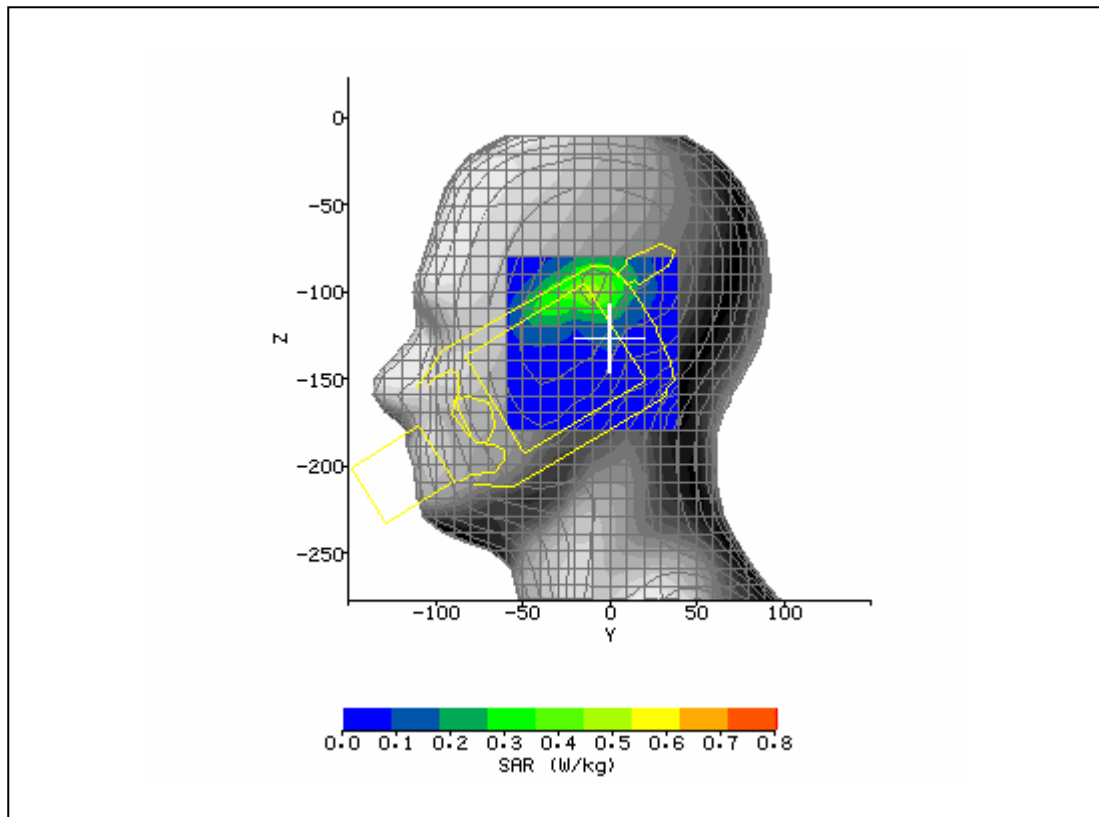


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 10:39:00 AM	DUT Battery Model/No:	
Filename:	lefttch661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.45
Relative Humidity:	50%	Conductivity:	1.420
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-100.00 mm
Antenna Configuration:	Integral	Max E Field:	23.76 V/m
Test Frequency:	1880MHz	SAR 1g:	0.718 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.404 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.224 W/kg
Type of Modulation:		SAR End:	0.224 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

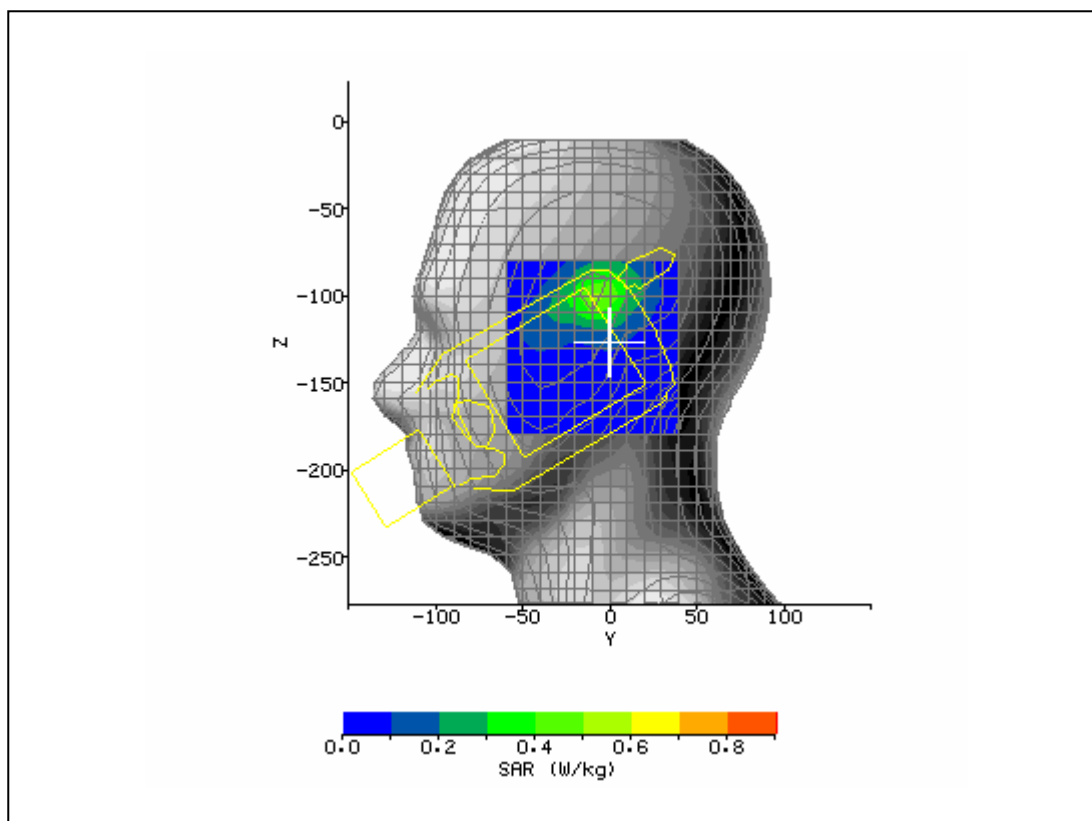


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 11:12:36 AM	DUT Battery Model/No:	
Filename:	lefttl661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.45
Relative Humidity:	50%	Conductivity:	1.420
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	right touch	Max SAR Z-axis Location:	-131.00 mm
Antenna Configuration:	Integral	Max E Field:	16.89 V/m
Test Frequency:	1880MHz	SAR 1g:	0.345 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.208 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.119 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.02 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

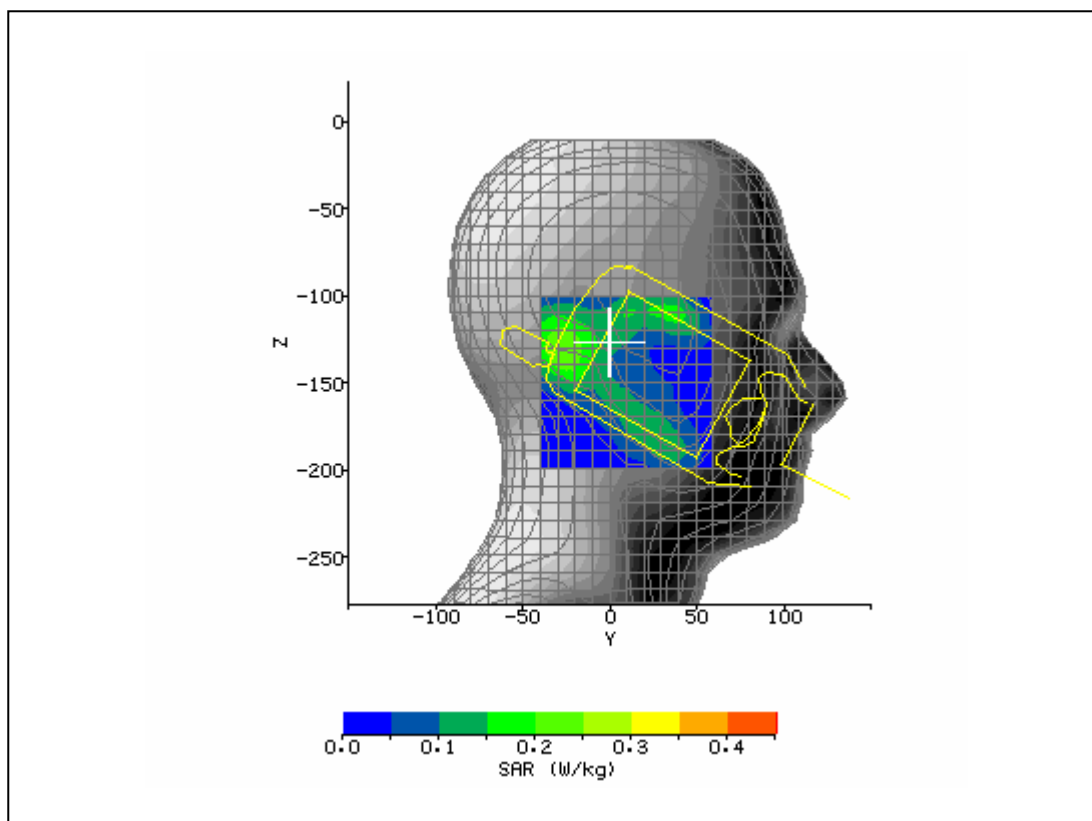


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 1:37:11 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.45
Relative Humidity:	50%	Conductivity:	1.420
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR Y-axis Location:	-25.00 mm
DUT Position:	right tilt	Max SAR Z-axis Location:	-136.00 mm
Antenna Configuration:	Integral	Max E Field:	16.74 V/m
Test Frequency:	1880MHz	SAR 1g:	0.370 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.222 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.119 W/kg
Type of Modulation:		SAR End:	0.118 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

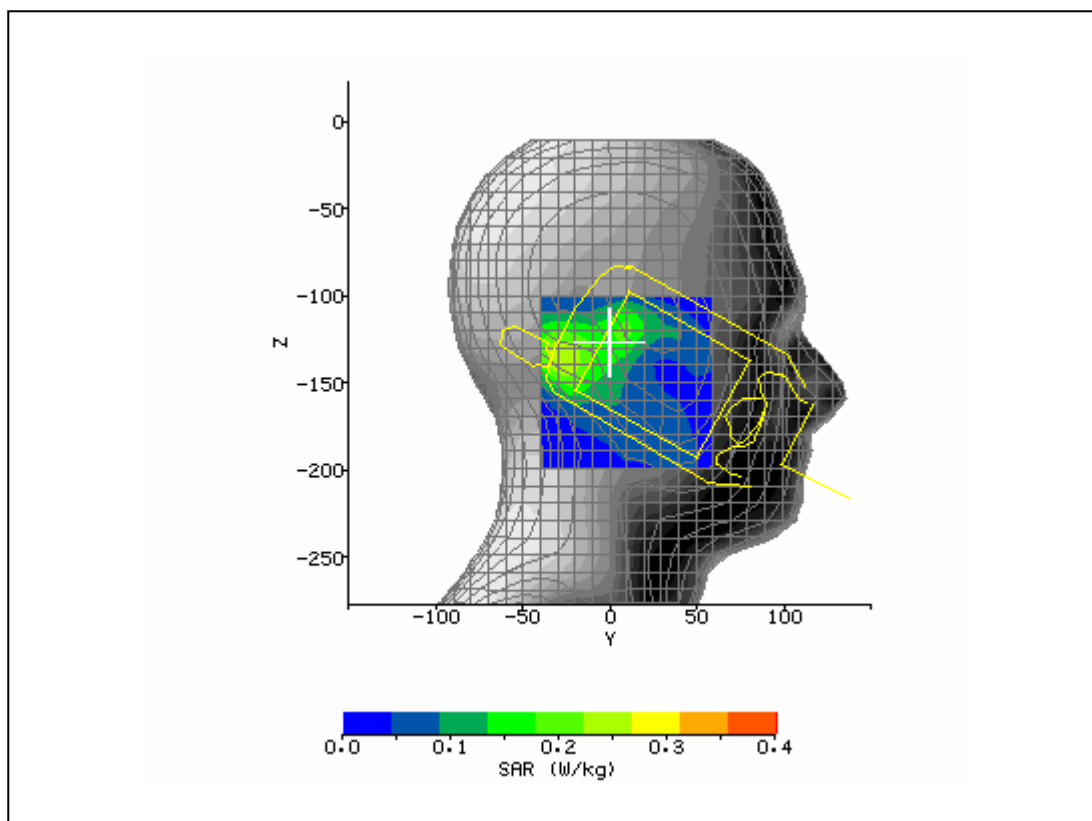


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 2:15:10 PM	DUT Battery Model/No:	
Filename:	righttlt661_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.69
Relative Humidity:	50%	Conductivity:	1.401
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-99.00 mm
Antenna Configuration:	Integral	Max E Field:	21.21 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.537 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.312 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.174 W/kg
Type of Modulation:		SAR End:	0.175 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.04 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

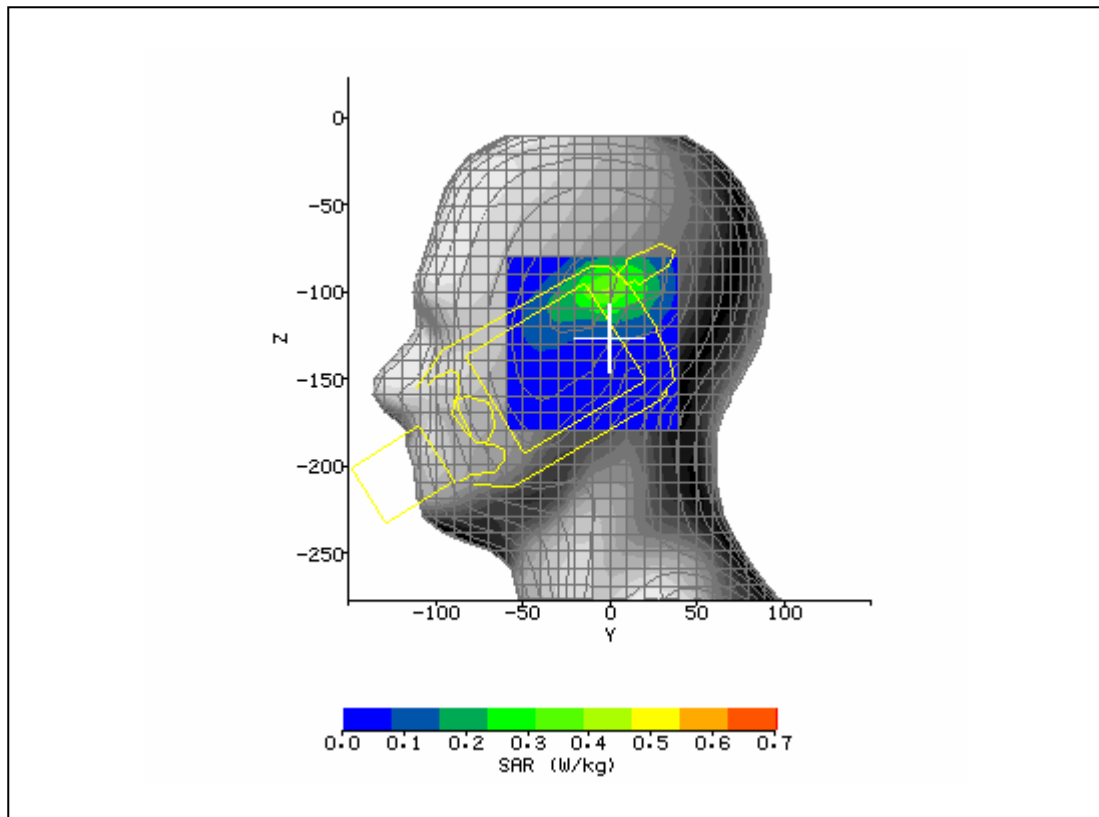


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 2:44:59 PM	DUT Battery Model/No:	
Filename:	lefttilt512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	39.21
Relative Humidity:	50%	Conductivity:	1.448
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-2.00 mm
DUT Position:	left tilt	Max SAR Z-axis Location:	-99.00 mm
Antenna Configuration:	Integral	Max E Field:	21.45 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.568 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.327 W/kg
Conversion Factors:	0.558 / 0.558 / 0.558	SAR Start:	0.176 W/kg
Type of Modulation:		SAR End:	0.177 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

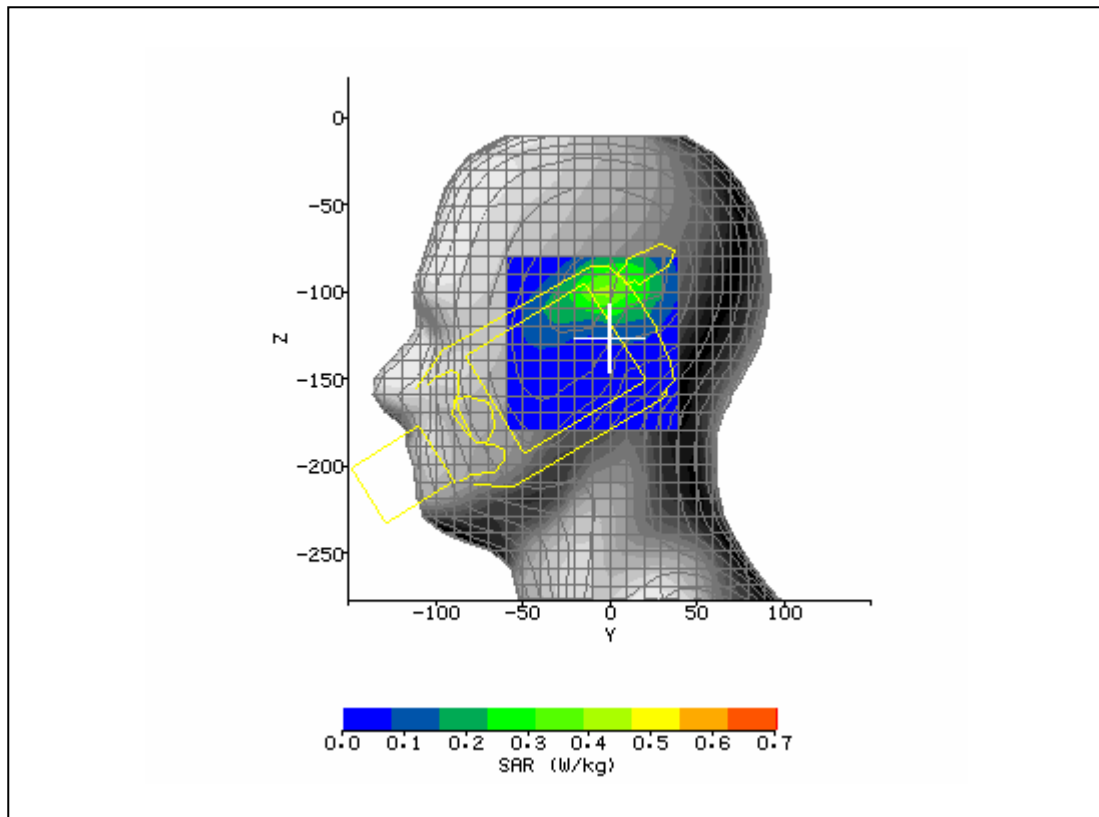


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2004 4:00:32 PM	DUT Battery Model/No:	
Filename:	661_3D.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.32
Relative Humidity:	50%	Conductivity:	1.563
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	19.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-155.00 mm
Antenna Configuration:	Integral	Max E Field:	23.74 V/m
Test Frequency:	1850.2MHz	SAR 1g:	0.787 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.596 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.463 W/kg
Type of Modulation:		SAR End:	0.464 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

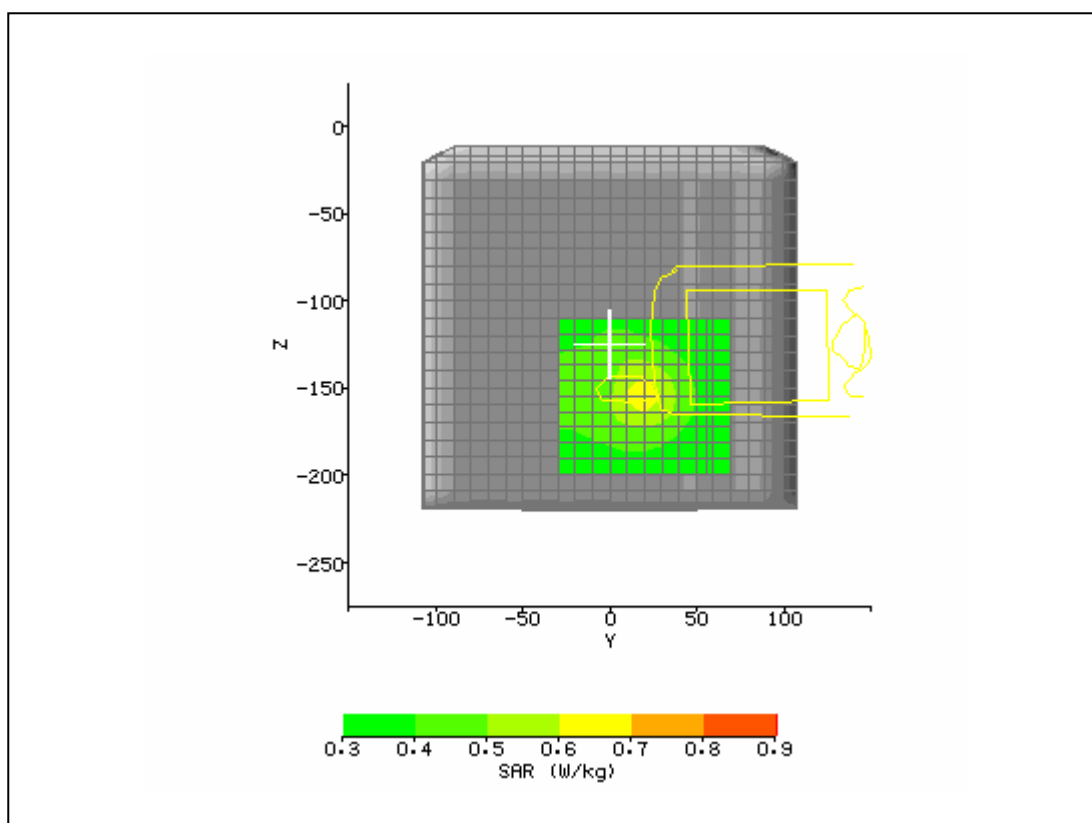


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2004 3:28:58 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.19
Relative Humidity:	50%	Conductivity:	1.577
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	19.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-154.10 mm
Antenna Configuration:	Integral	Max E Field:	23.13 V/m
Test Frequency:	1880MHz	SAR 1g:	0.755 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.576 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.449 W/kg
Type of Modulation:		SAR End:	0.452 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.03 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

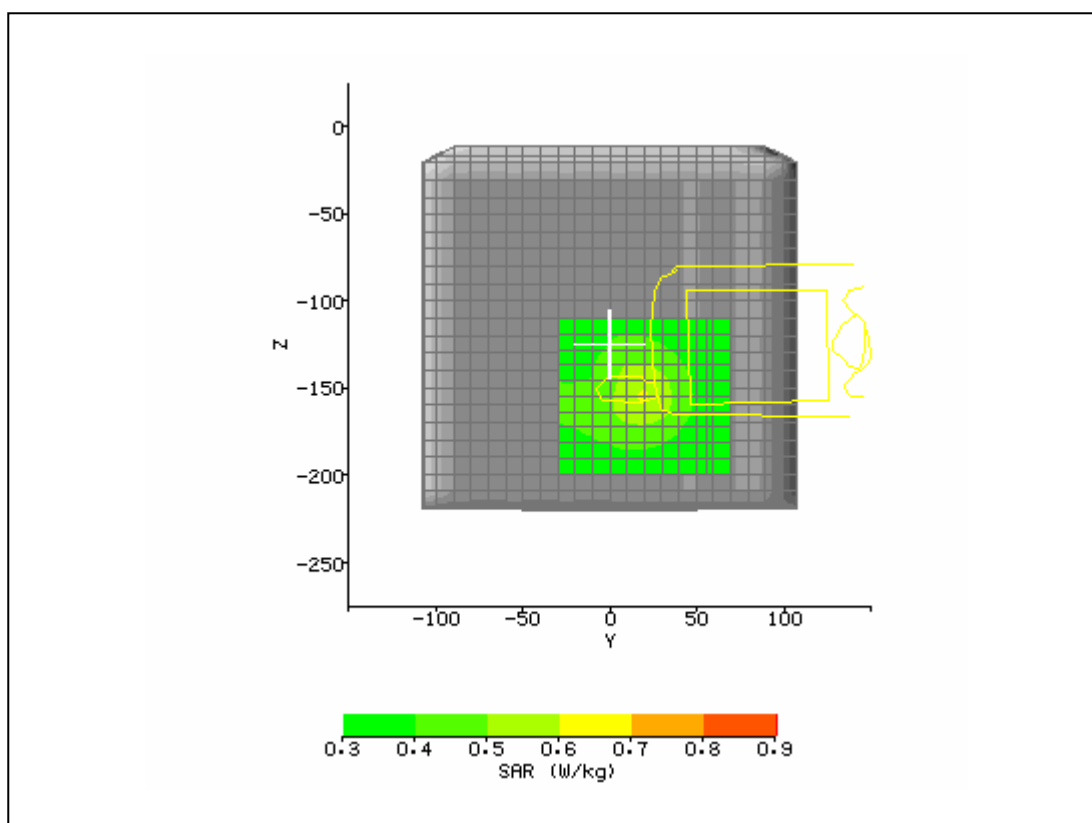


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2004 4:34:51 PM	DUT Battery Model/No:	
Filename:	512_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	52.99
Relative Humidity:	50%	Conductivity:	1.581
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	19.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-154.10 mm
Antenna Configuration:	Integral	Max E Field:	22.03 V/m
Test Frequency:	1909.8MHz	SAR 1g:	0.692 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.540 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.431 W/kg
Type of Modulation:		SAR End:	0.431 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

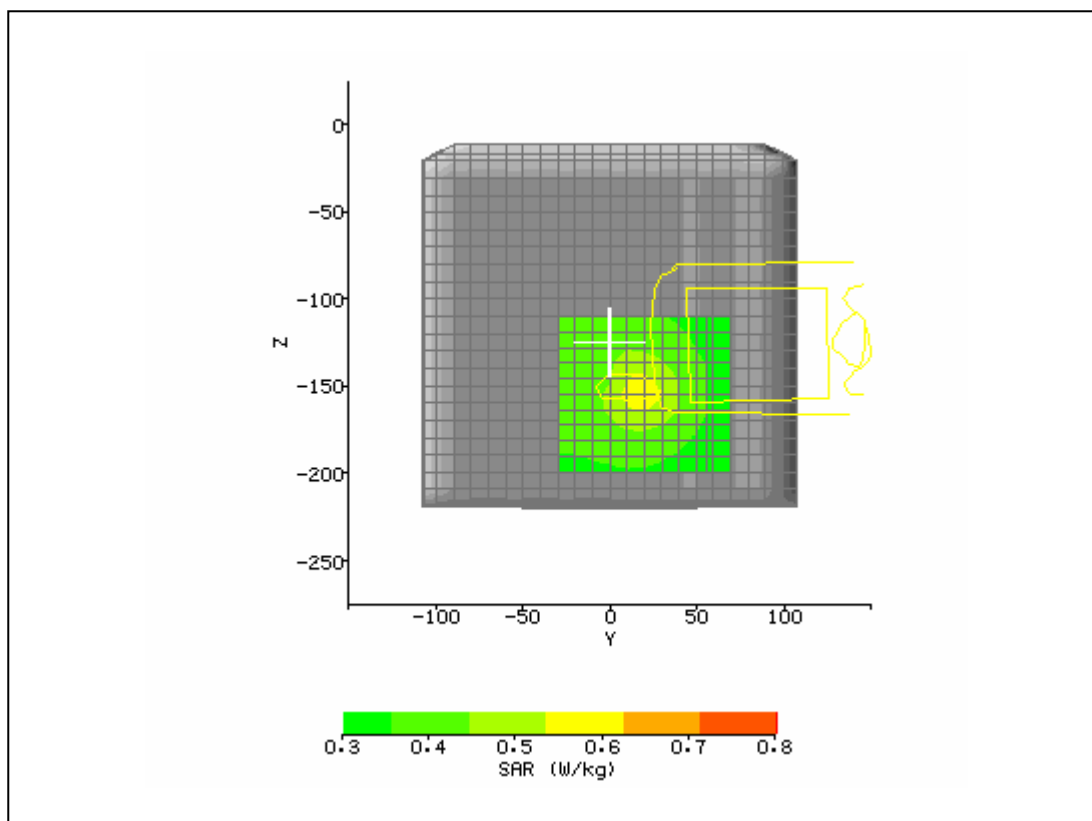


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 4:32:17 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.96
Relative Humidity:	50%	Conductivity:	1.863
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-127.00 mm
Antenna Configuration:	Integral	Max E Field:	8.18 V/m
Test Frequency:	2412MHz	SAR 1g:	0.099 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.052 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.021 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

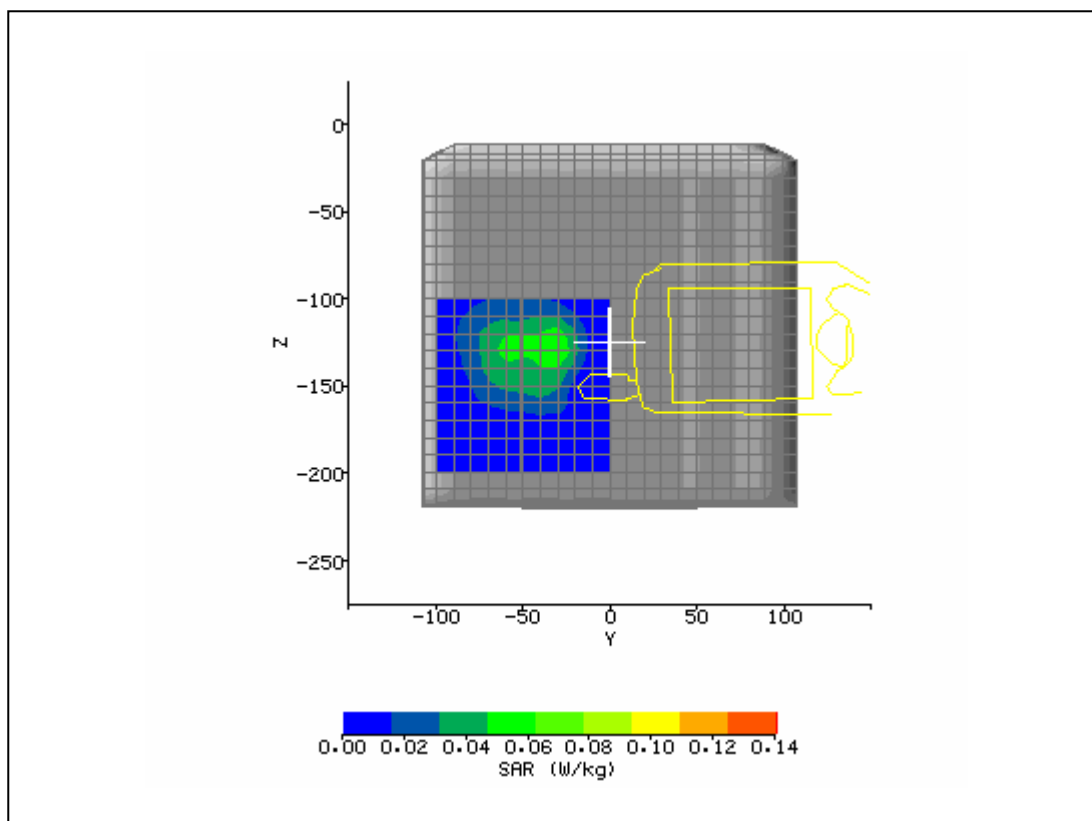


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 5:02:37 PM	DUT Battery Model/No:	
Filename:	2412_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.912
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	Integral	Max E Field:	8.33 V/m
Test Frequency:	2437MHz	SAR 1g:	0.104 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.055 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.32 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

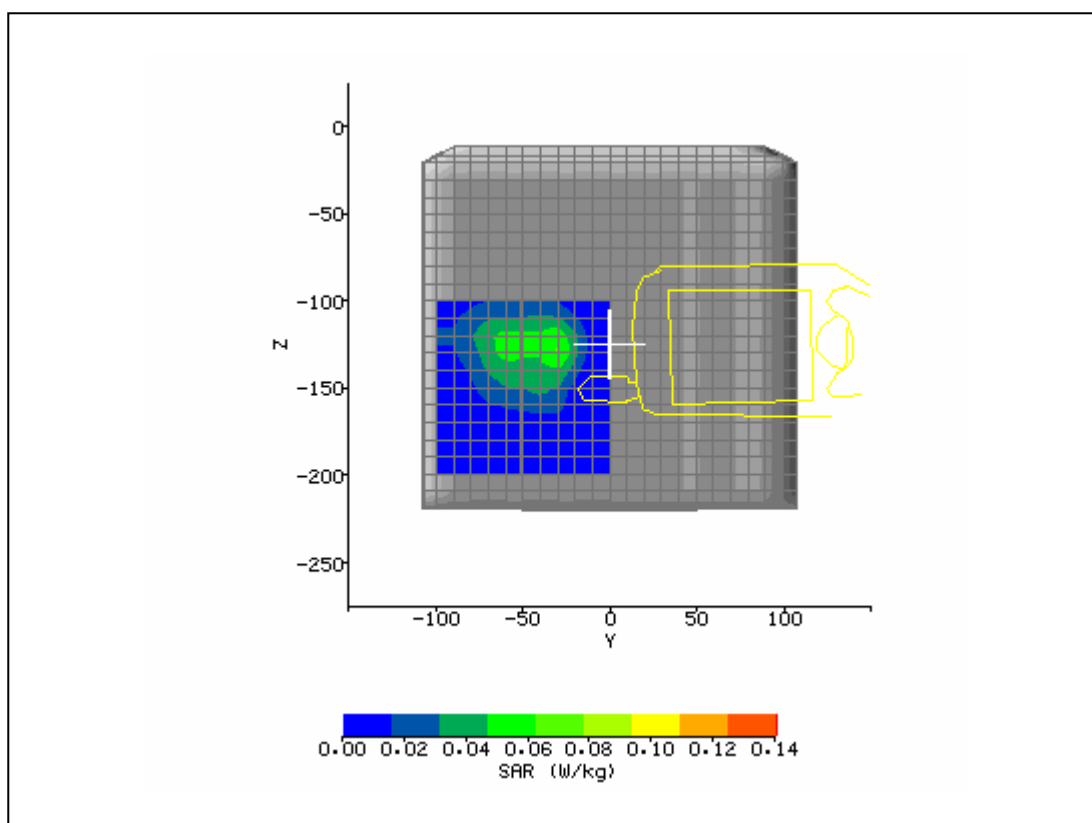


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 6:07:51 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.88
Relative Humidity:	50%	Conductivity:	1.936
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-126.00 mm
Antenna Configuration:	Integral	Max E Field:	8.41 V/m
Test Frequency:	2462MHz	SAR 1g:	0.107 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.055 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.021 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.13 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

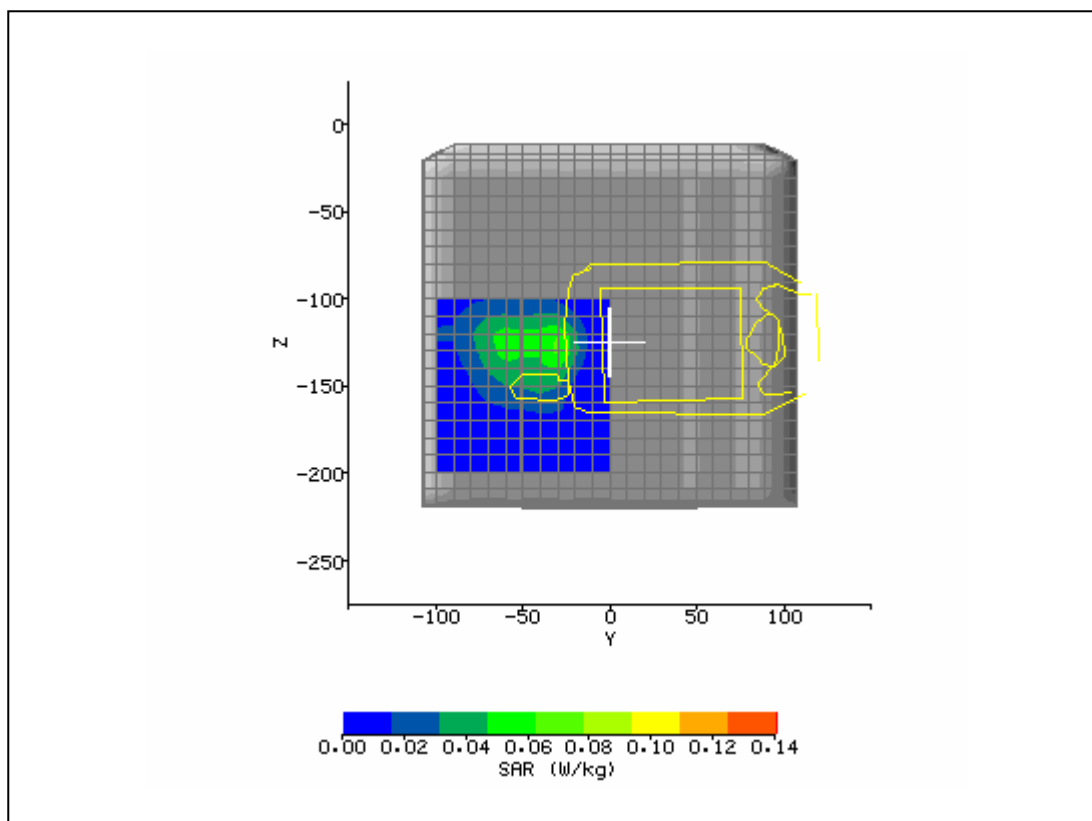

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/20/2004 1:33:13 PM	DUT Battery Model/No:	
Filename:	190_3dBT.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	850
Device Under Test:	HHP D9500	Relative Permittivity:	55.82
Relative Humidity:	50%	Conductivity:	0.993
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-154.10 mm
Antenna Configuration:	Integral	Max E Field:	23.67 V/m
Test Frequency:	848.8MHz & 2402 BT	SAR 1g:	0.488 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.322 W/kg
Conversion Factors:	.522 / .522 / .522	SAR Start:	0.190 W/kg
Type of Modulation:		SAR End:	0.190 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

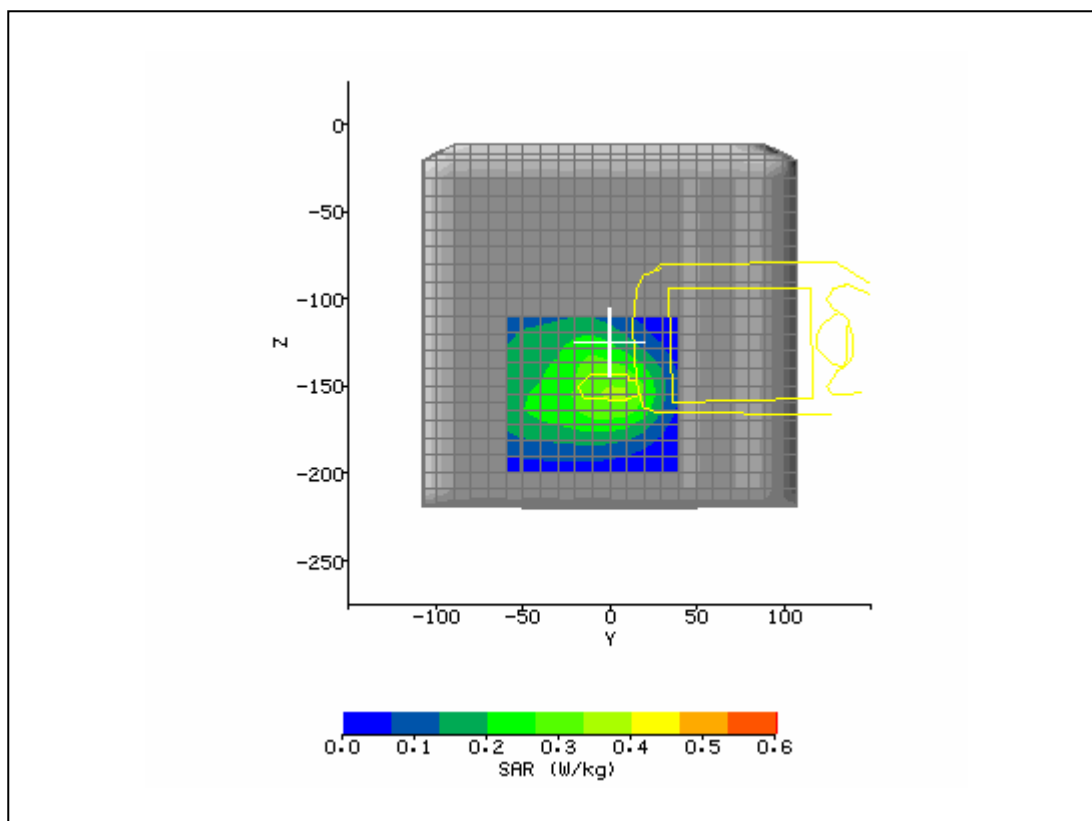

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/15/2004 5:34 PM	DUT Battery Model/No:	
Filename:	661_3D.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	1900
Device Under Test:	HHP D9500	Relative Permittivity:	53.32
Relative Humidity:	50%	Conductivity:	1.563
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	19.00 mm
DUT Position:	back of unit against phantom	Max SAR Z-axis Location:	-155.00 mm
Antenna Configuration:	Integral	Max E Field:	23.74 V/m
Test Frequency:	1850.2MHz & 2402 BT	SAR 1g:	0.792 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.613 W/kg
Conversion Factors:	0.666 / 0.666 / 0.666	SAR Start:	0.467 W/kg
Type of Modulation:		SAR End:	0.467 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	10 / 11.7 / 7.7	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

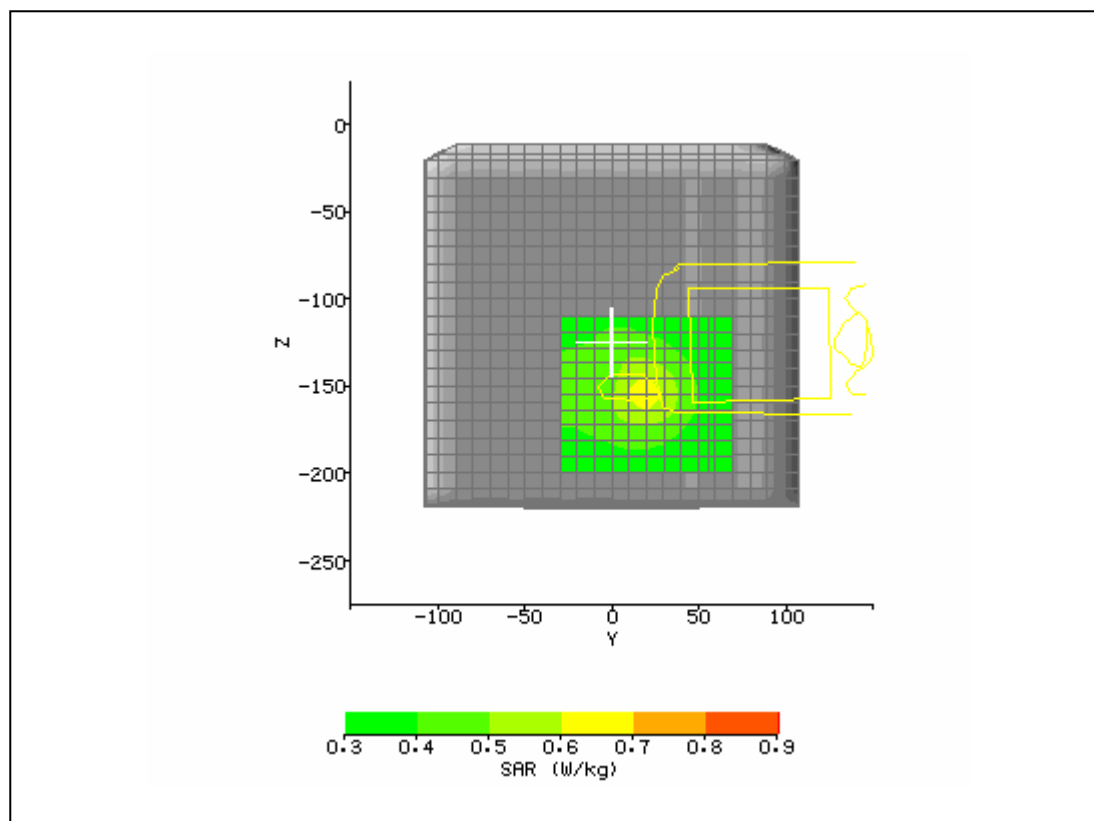

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/21/2004 6:38:20 PM	DUT Battery Model/No:	
Filename:	2462_3d.txt	Probe Serial Number:	0106
Ambient Temperature:	22.0°C	Liquid Simulant:	2400
Device Under Test:	HHP D9500	Relative Permittivity:	50.88
Relative Humidity:	50%	Conductivity:	1.936
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	back surface to phantom	Max SAR Z-axis Location:	-127.00 mm
Antenna Configuration:	Integral	Max E Field:	8.45 V/m
Test Frequency:	2462 and 2402 with BTMHz	SAR 1g:	0.108 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.056 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.022 W/kg
Type of Modulation:		SAR End:	0.022 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/30/04
Input Power Level:	maximum	Extrapolation:	poly4

