


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	9/22/2008 2:26:26 PM	DUT Battery Model/No:	
Filename:	384_Left_Touch.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	D9950	Relative Permittivity:	50.94
Relative Humidity:	45.6%	Conductivity:	2.009
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	belt holster	Max SAR Y-axis Location:	-13.00 mm
Antenna Configuration:	Integral	Max E Field:	10.49 V/m
Test Frequency:	2437MHz	SAR 1g:	0.304 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.185 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.033 W/kg
Type of Modulation:		SAR End:	0.032 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.25 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/22/08
Input Power Level:	set by software	Extrapolation:	poly4



System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	9/22/2008 9:00:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	37.72
Relative Humidity:	45.9%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.4°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	13.00 mm
Antenna Configuration:	Dipole	Max E Field:	112.39 V/m
Test Frequency:	2450MHz	SAR 1g:	48.081 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	23.216 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	2.413 W/kg
Type of Modulation:		SAR End:	2.354 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.43 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	9/22/08
Input Power Level:	1W	Extrapolation:	poly4

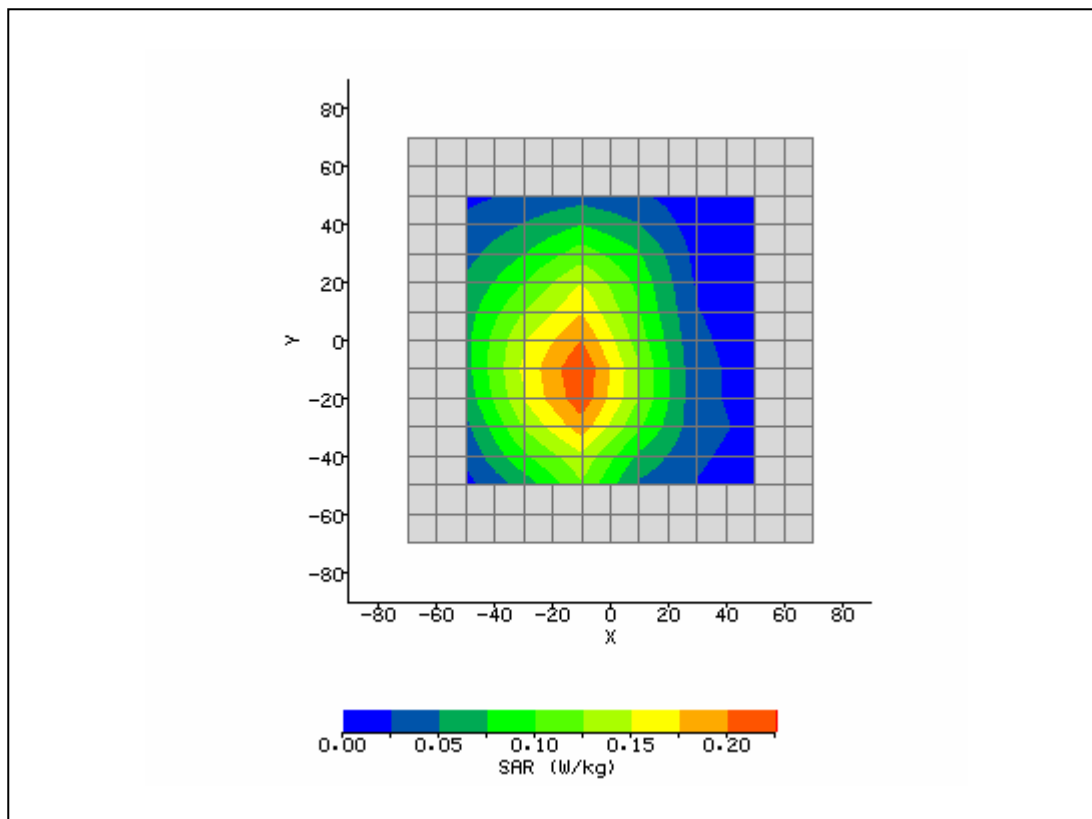