

#01 802.11b_Front_1.5cm_Ch11_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (61x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.016 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.838 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.00939 mW/g; SAR(10 g) = 0.00431 mW/g

Maximum value of SAR (measured) = 0.011 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.838 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00719 mW/g; SAR(10 g) = 0.00325 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

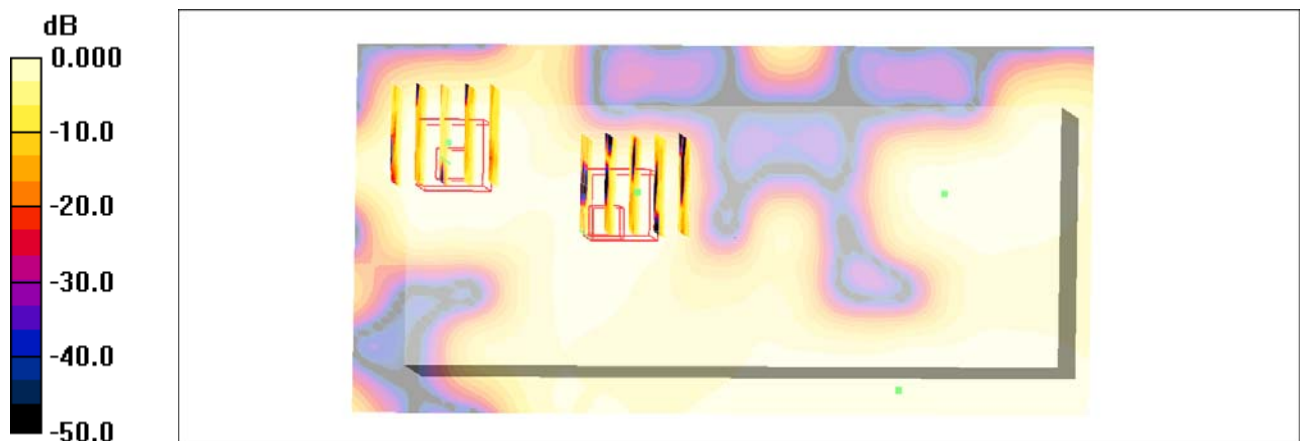

0 dB = 0.009mW/g

#02 802.11b_Left Side_1.5cm_Ch11_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.010 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.55 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.018 W/kg

SAR(1 g) = 0.00657 mW/g; SAR(10 g) = 0.00336 mW/g

Maximum value of SAR (measured) = 0.008 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.55 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.000987 mW/g; SAR(10 g) = 0.000102 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

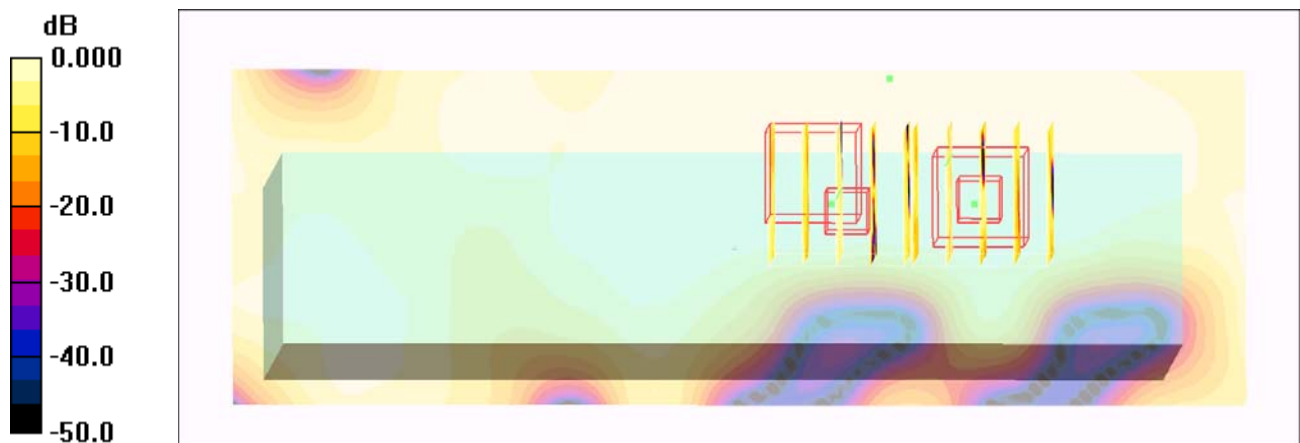

0 dB = 0.007mW/g

#03 802.11b_Righe Side_1.5cm_Ch11_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.092 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.79 V/m; Power Drift = -0.104 dB

Peak SAR (extrapolated) = 0.155 W/kg

SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.047 mW/g

Maximum value of SAR (measured) = 0.089 mW/g



0 dB = 0.089mW/g

#07 802.11b_Front_0cm_Ch11_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (61x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.014 mW/g



Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.12 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.015 W/kg

SAR(1 g) = 0.00136 mW/g; SAR(10 g) = 0.00047 mW/g

Maximum value of SAR (measured) = 0.015 mW/g

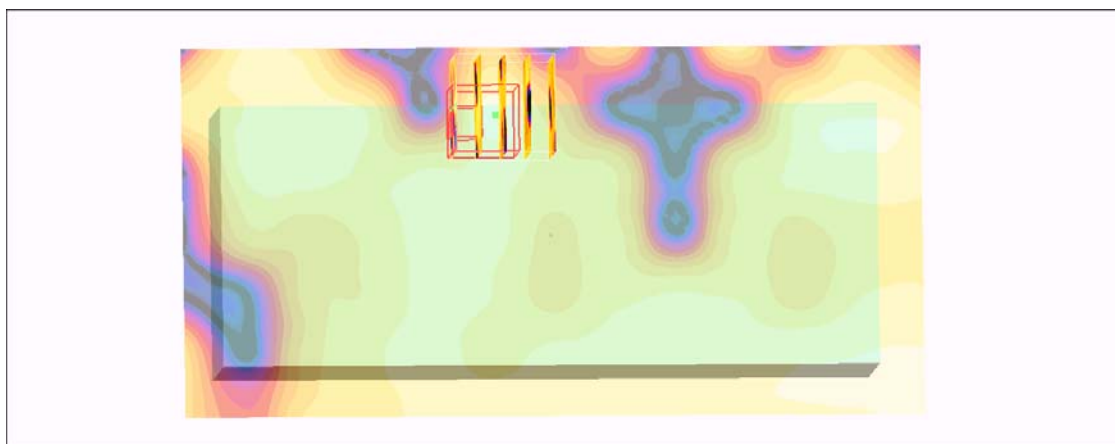

0 dB = 0.015mW/g

#08 802.11b_Left Side_0cm_Ch11_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.018 mW/g



Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.80 V/m; Power Drift = 0.163 dB

Peak SAR (extrapolated) = 0.021 W/kg

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00604 mW/g

Maximum value of SAR (measured) = 0.013 mW/g

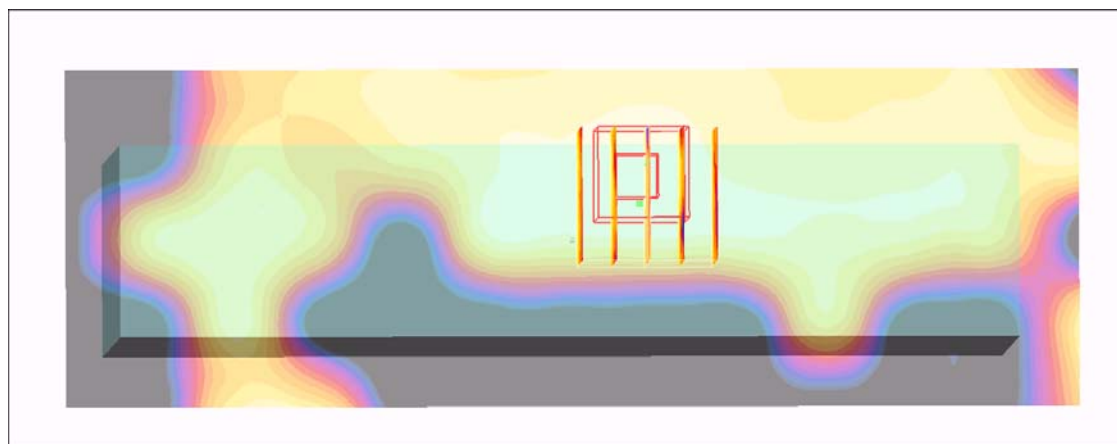

0 dB = 0.013mW/g

#09 802.11b_Right Side_0cm_Ch11_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.105 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.11 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.109 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.11 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

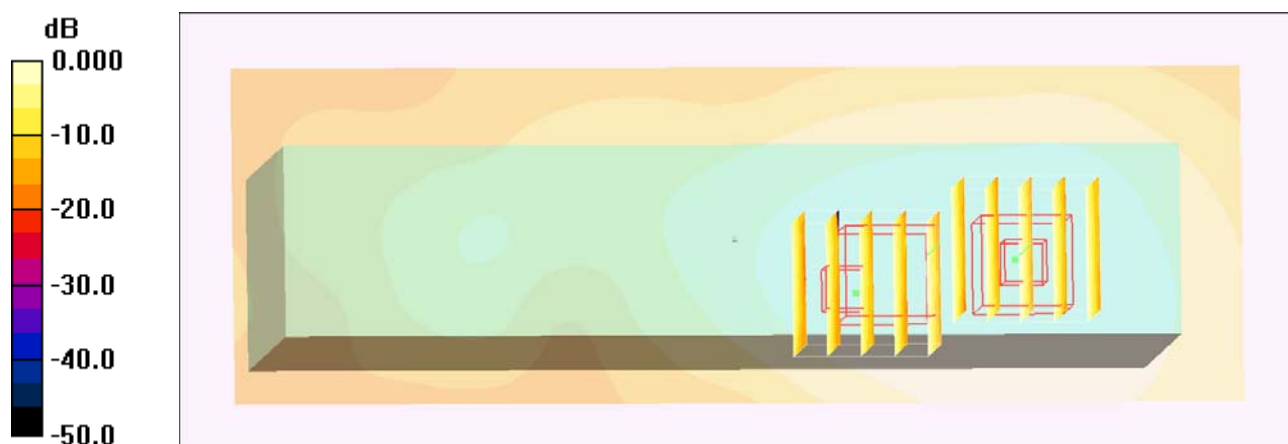

0 dB = 0.084mW/g

#09 802.11b_Right Side_0cm_Ch11_Battery2_Keypad1_Holster_2D

DUT: 0D0904-14

Communication System: 802.11b ; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_110709 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.04$ mho/m; $\epsilon_r = 53.9$;

$\rho = 1000$ kg/m³

Ambient Temperature : 22.1 °C ; Liquid Temperature : 21.1 °C

DASY4 Configuration:

- Probe: ES3DV3 - SN3071; ConvF(3.89, 3.89, 3.89); Calibrated: 2011/6/22
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1279; Calibrated: 2011/6/17
- Phantom: ELI 4.0_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x121x1): Measurement grid: dx=20mm, dy=20mm

Maximum value of SAR (interpolated) = 0.105 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.11 V/m; Power Drift = 0.100 dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.057 mW/g

Maximum value of SAR (measured) = 0.109 mW/g

Ch11/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.11 V/m; Power Drift = 0.100 dB


Peak SAR (extrapolated) = 0.152 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

1g/10g Averaged SAR

SAR; Zoom Scan: Value Along Z, X=2, Y=2

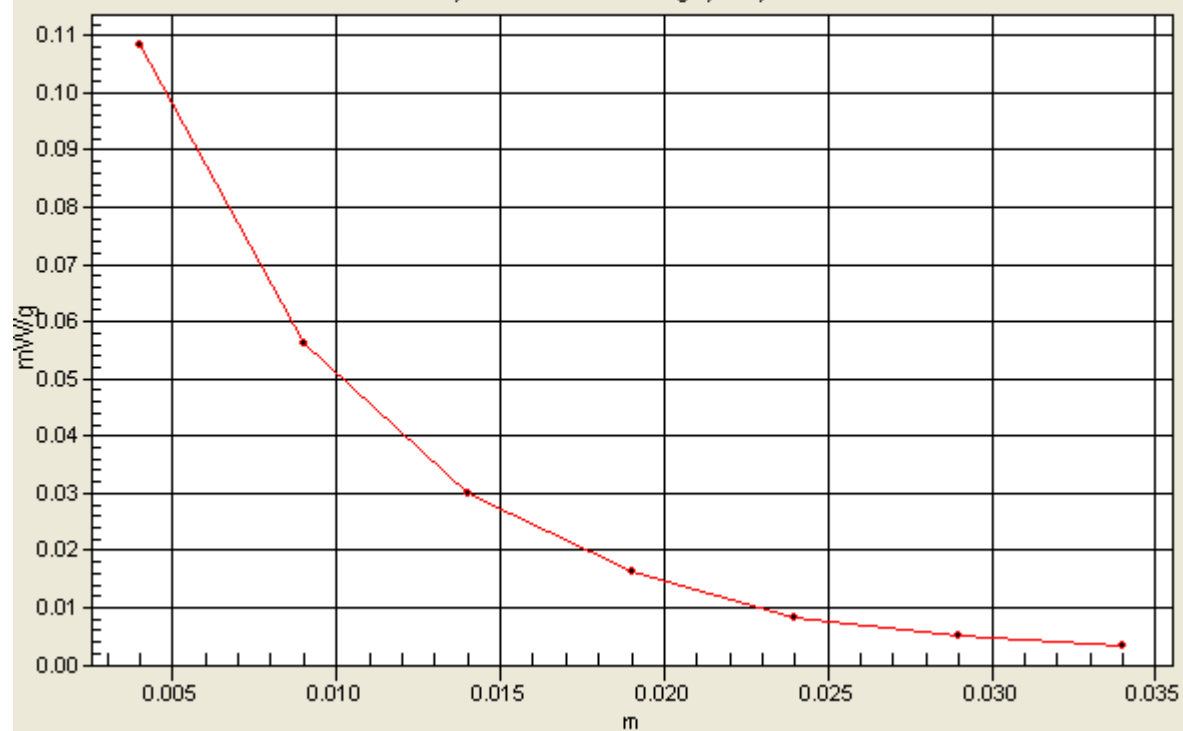

#13 802.11a_Front_1.5cm_Ch36_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.002 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.414 V/m; Power Drift = 0.166 dB

Peak SAR (extrapolated) = 0.007 W/kg

SAR(1 g) = 4.44e-005 mW/g; SAR(10 g) = 7.73e-006 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

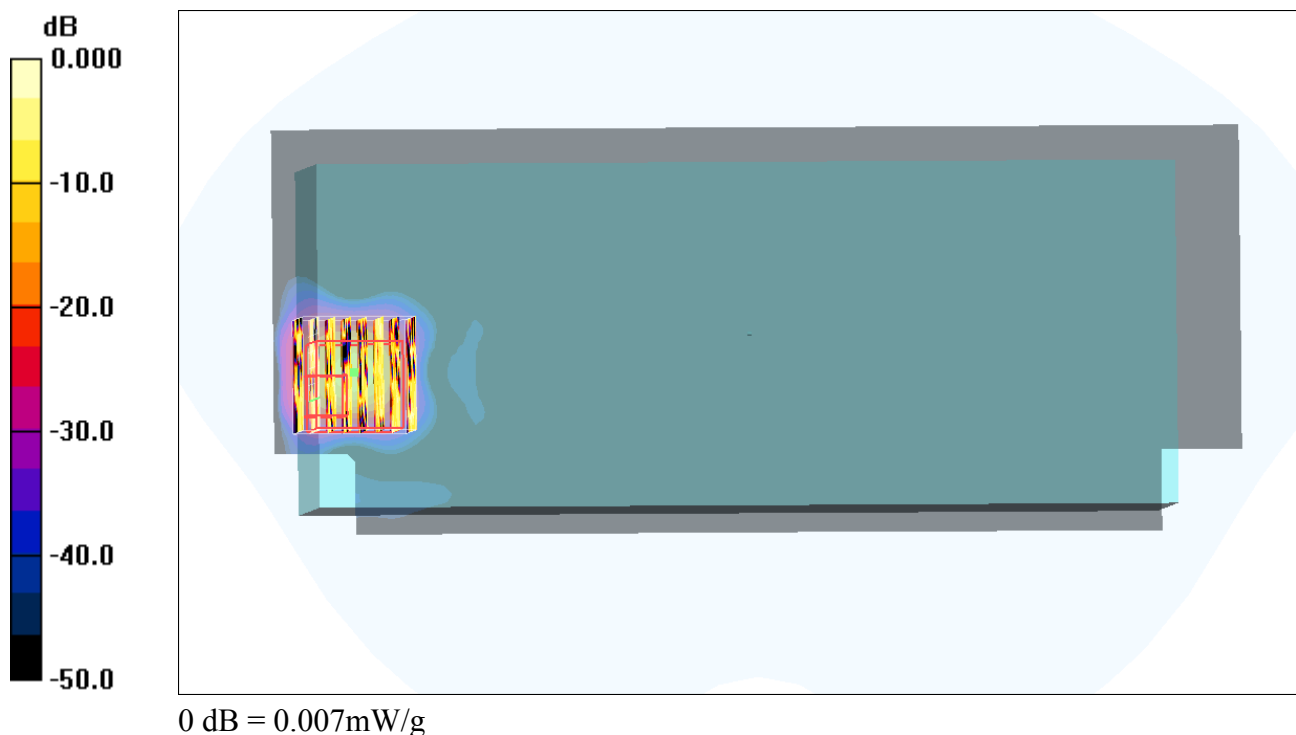

#14 802.11a_Left Side_1.5cm_Ch36_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.001 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.815 V/m; Power Drift = 0.129 dB

Peak SAR (extrapolated) = 0.006 W/kg

SAR(1 g) = 5.26e-005 mW/g; SAR(10 g) = 1.62e-005 mW/g

Maximum value of SAR (measured) = 0.006 mW/g

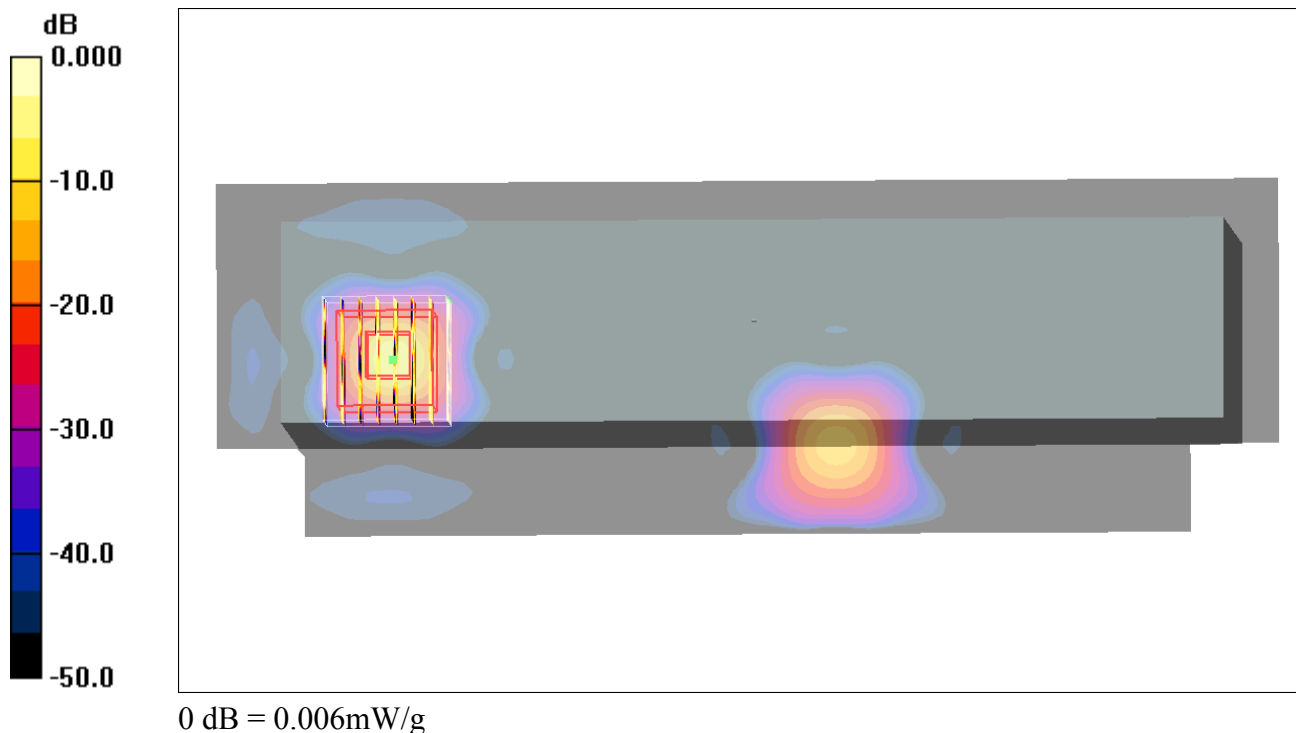

#15 802.11a_Right Side_1.5cm_Ch36_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (61x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.053 mW/g

Ch36/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.13 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.117 W/kg

SAR(1 g) = 0.037 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.067 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.13 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.036 mW/g; SAR(10 g) = 0.015 mW/g

Maximum value of SAR (measured) = 0.068 mW/g

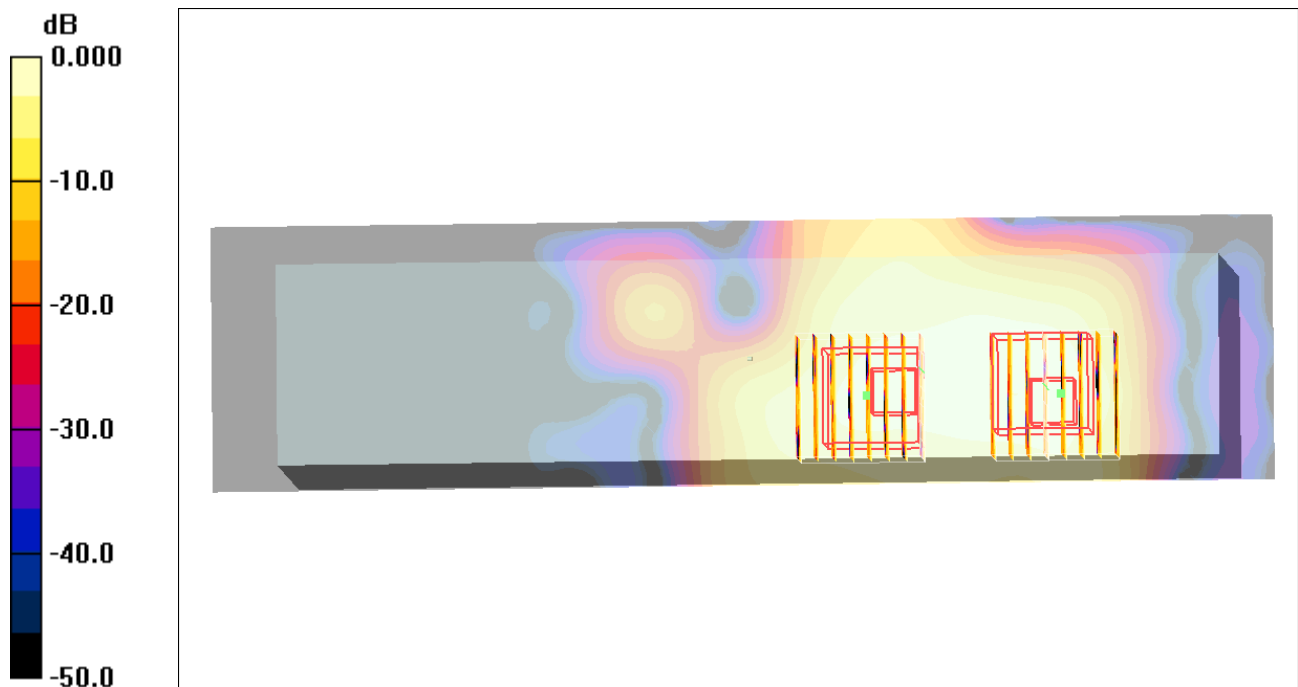

0 dB = 0.068mW/g

#19 802.11a_Front_0cm_Ch36_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.005 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.068 V/m; Power Drift = 0.188 dB

Peak SAR (extrapolated) = 0.023 W/kg

SAR(1 g) = 0.00145 mW/g; SAR(10 g) = 0.000292 mW/g

Maximum value of SAR (measured) = 0.006 mW/g

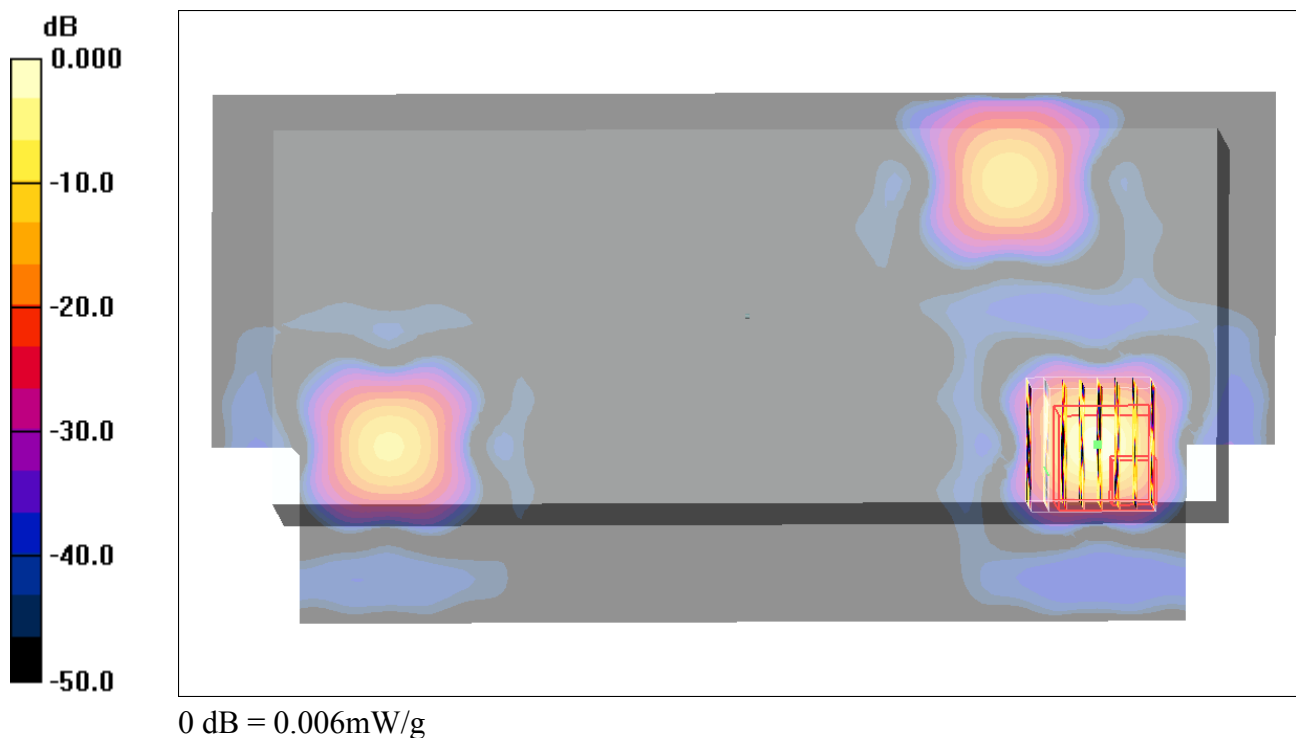

#20 802.11a_Left Side_0cm_Ch36_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.008 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.436 V/m; Power Drift = 0.145 dB

Peak SAR (extrapolated) = 0.048 W/kg

SAR(1 g) = 0.00949 mW/g; SAR(10 g) = 0.00327 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

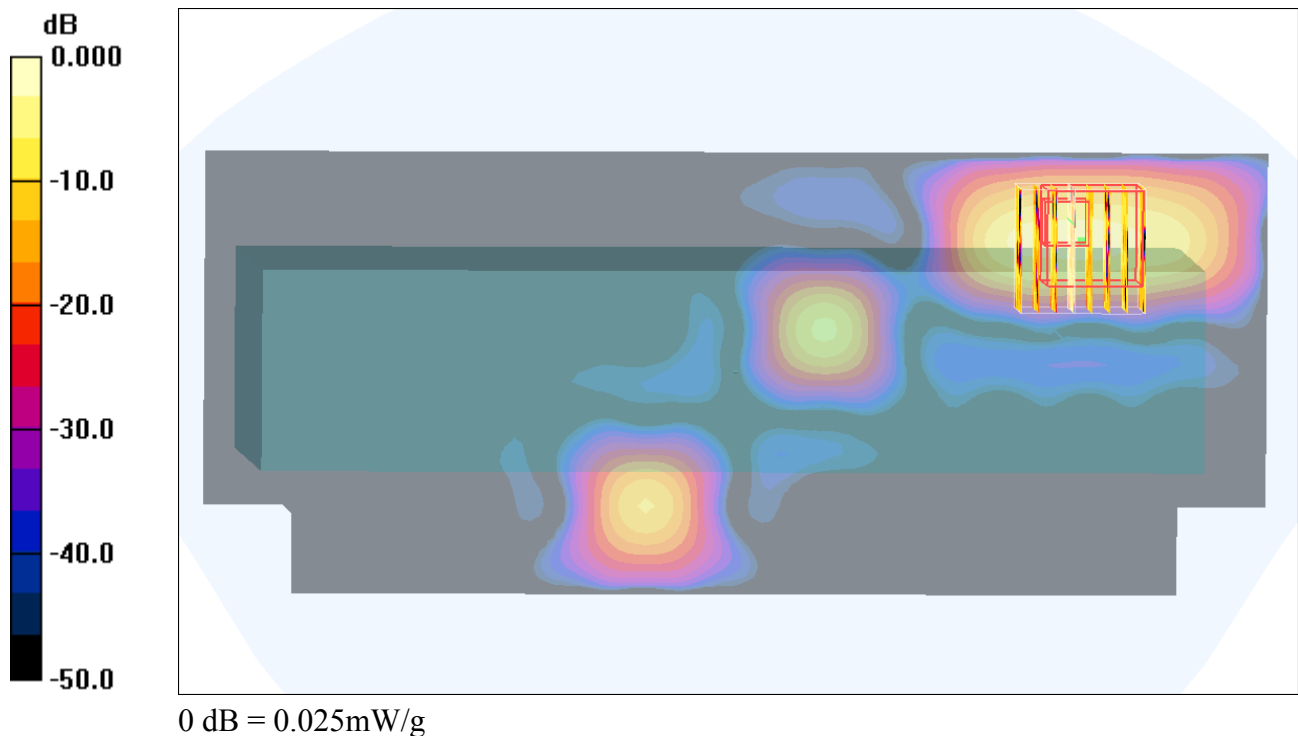

#21 802.11a_Right Side_0cm_Ch36_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.120 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.714 V/m; Power Drift = 0.127 dB

Peak SAR (extrapolated) = 0.372 W/kg

SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.206 mW/g

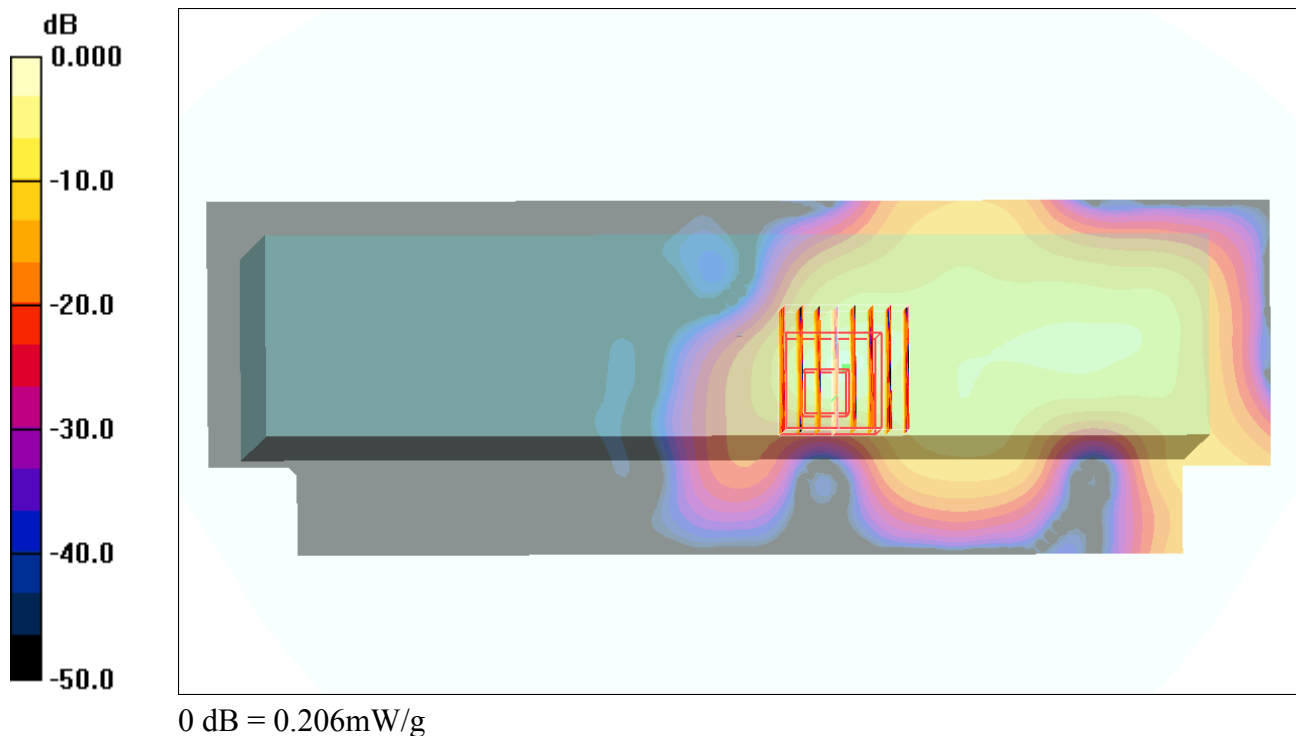

#25 802.11a_Front_1.5cm_Ch60_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.27$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.93, 3.93, 3.93); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch60/Area Scan (141x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.021 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.120 dB

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.00862 mW/g; SAR(10 g) = 0.00386 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

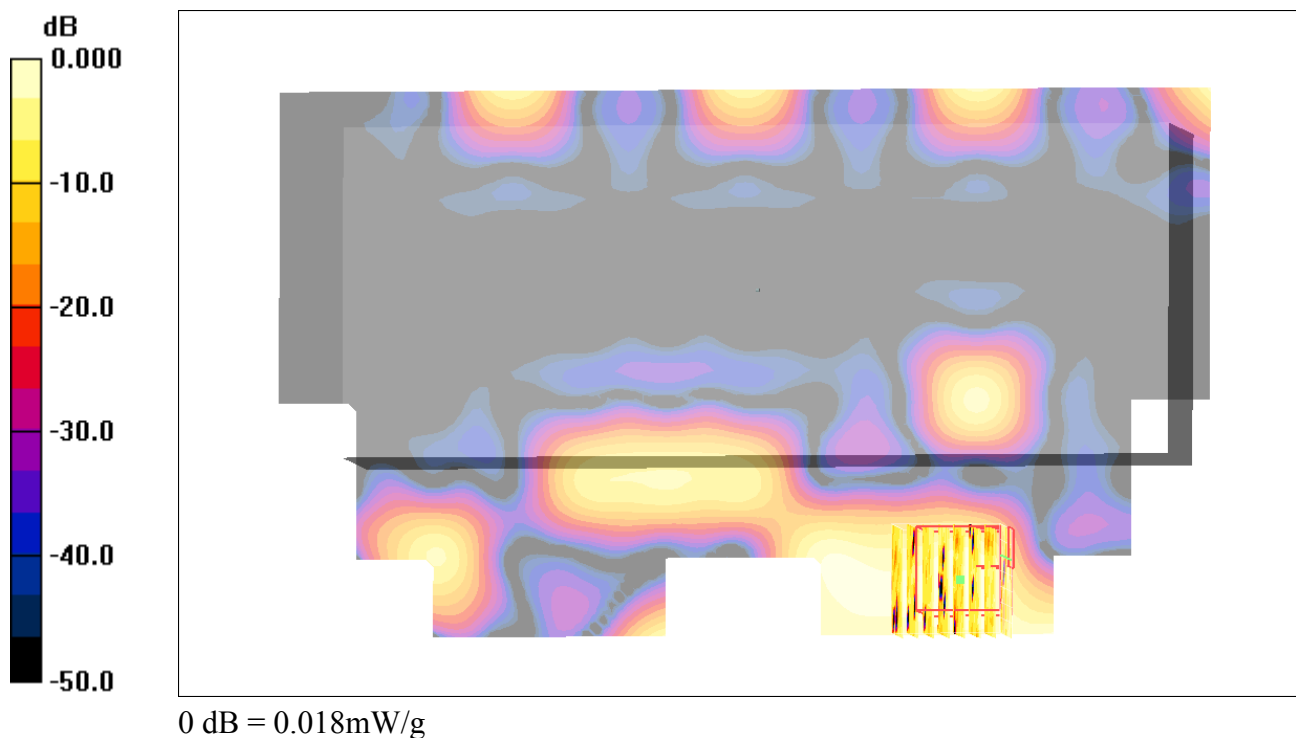

#26 802.11a_Left Side_1.5cm_Ch60_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.27$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 21.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.93, 3.93, 3.93); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch60/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.013 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.05 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.00468 mW/g; SAR(10 g) = 0.00219 mW/g

Maximum value of SAR (measured) = 0.011 mW/g

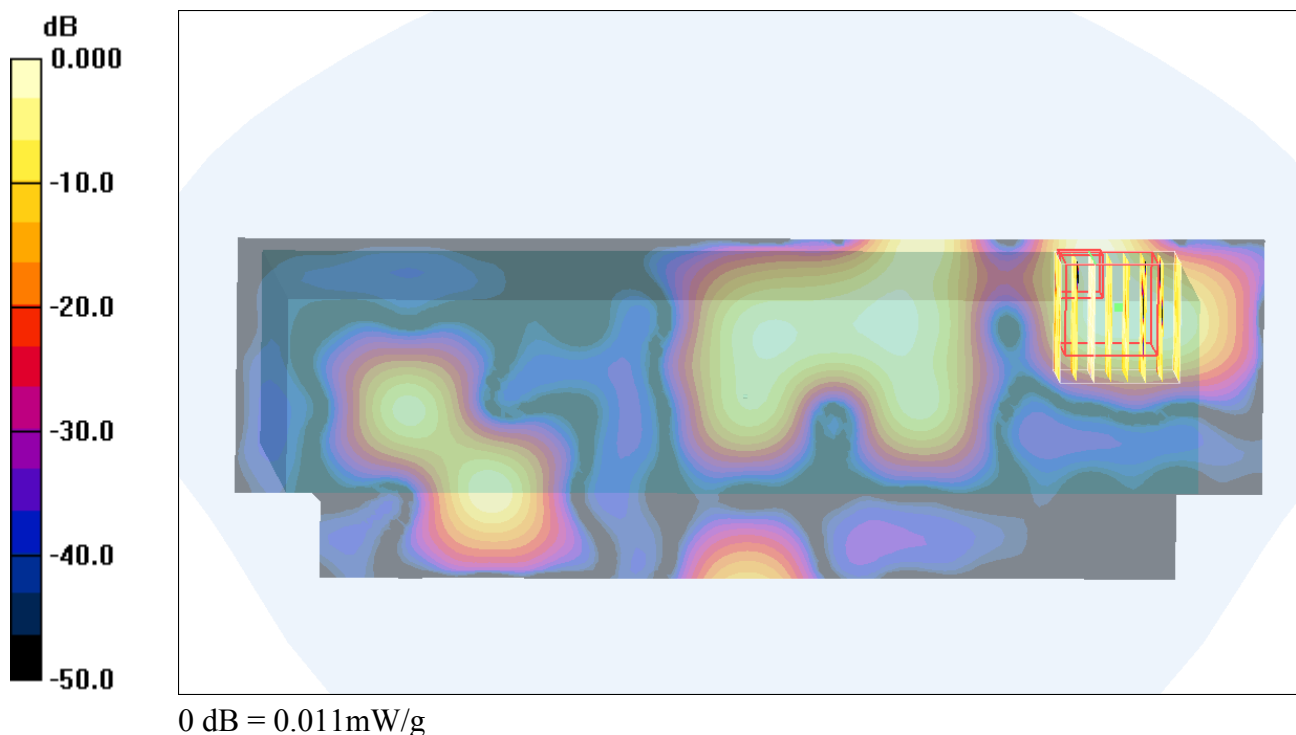

#27 802.11a_Right Side_1.5cm_Ch60_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.27$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.93, 3.93, 3.93); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch60/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.063 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 1.66 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.047 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.090 mW/g

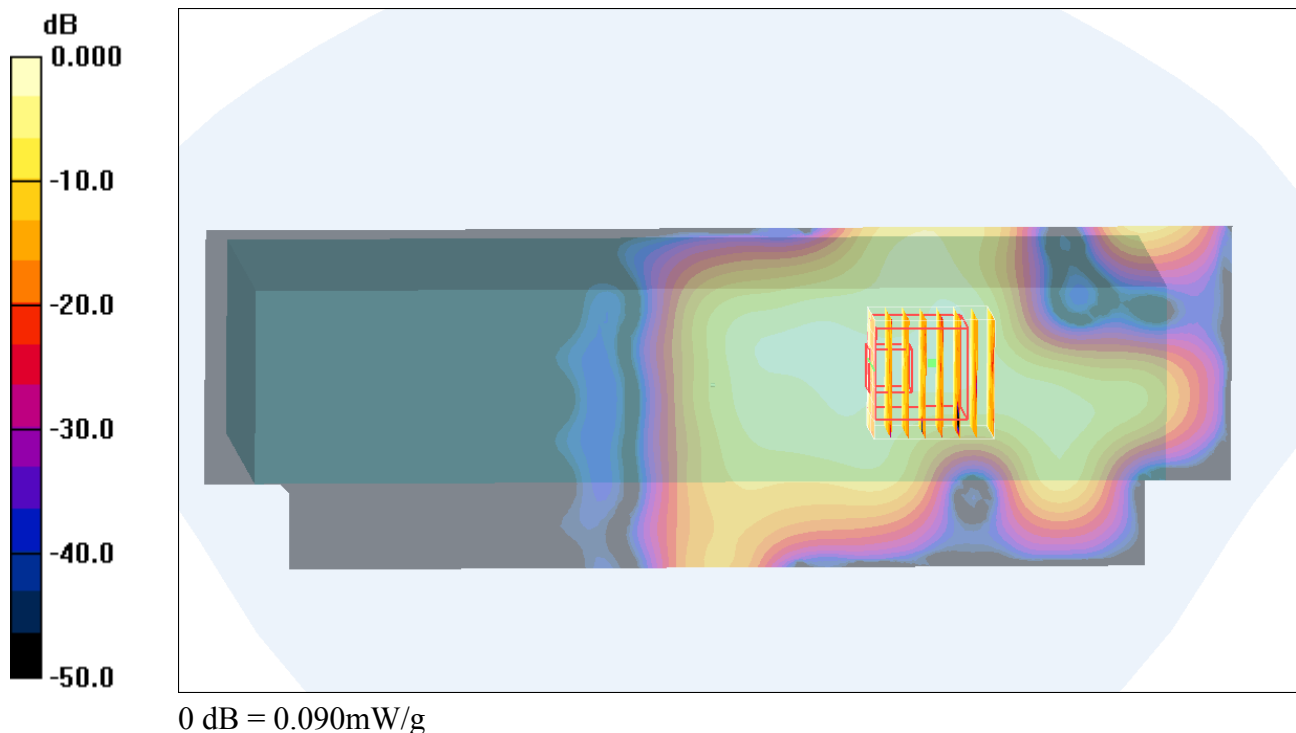

#31 802.11a_Front_0cm_Ch60_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.27$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.93, 3.93, 3.93); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch60/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.010 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.489 V/m; Power Drift = 0.164 dB

Peak SAR (extrapolated) = 0.010 W/kg

SAR(1 g) = 0.00232 mW/g; SAR(10 g) = 0.0013 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

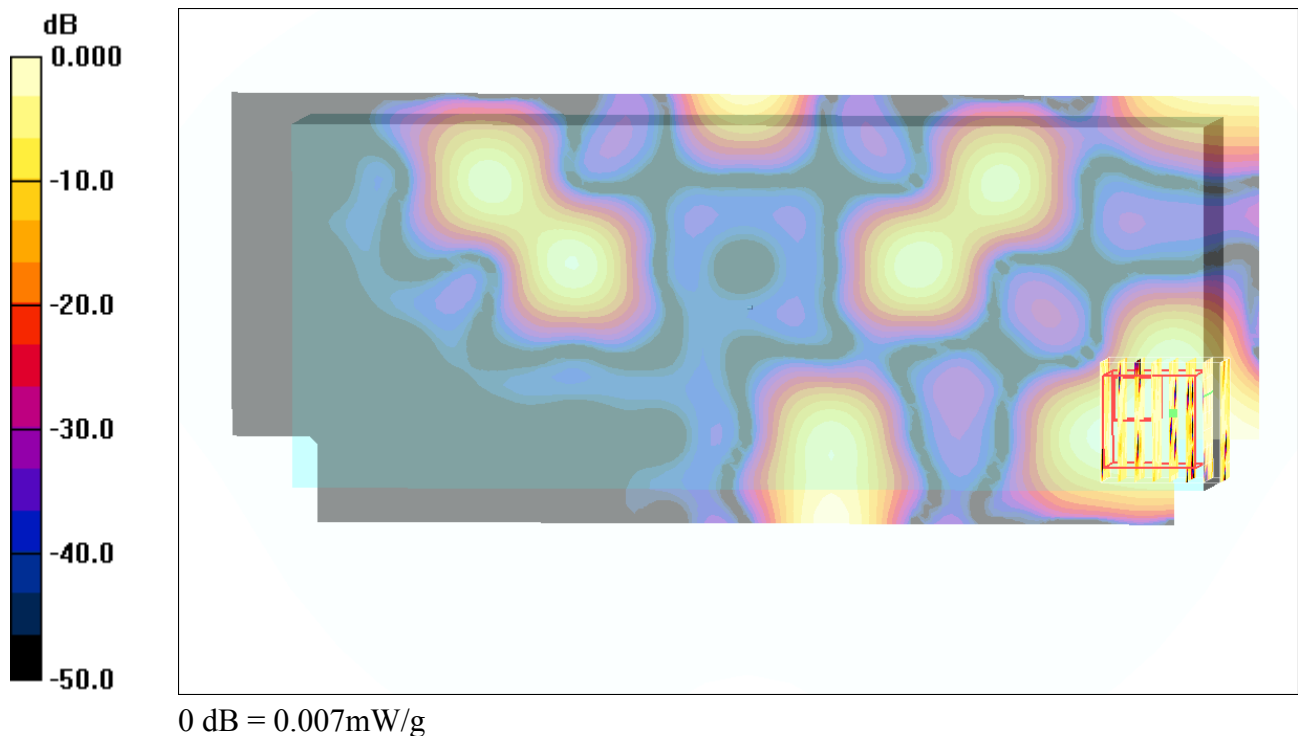

#32 802.11a_Left Side_0cm_Ch60_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5300$ MHz; $\sigma = 5.27$ mho/m; $\epsilon_r = 47.3$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.93, 3.93, 3.93); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch60/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.008 mW/g


Ch60/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.473 V/m; Power Drift = 0.138 dB

Peak SAR (extrapolated) = 0.039 W/kg

SAR(1 g) = 0.00923 mW/g; SAR(10 g) = 0.00399 mW/g

Maximum value of SAR (measured) = 0.018 mW/g

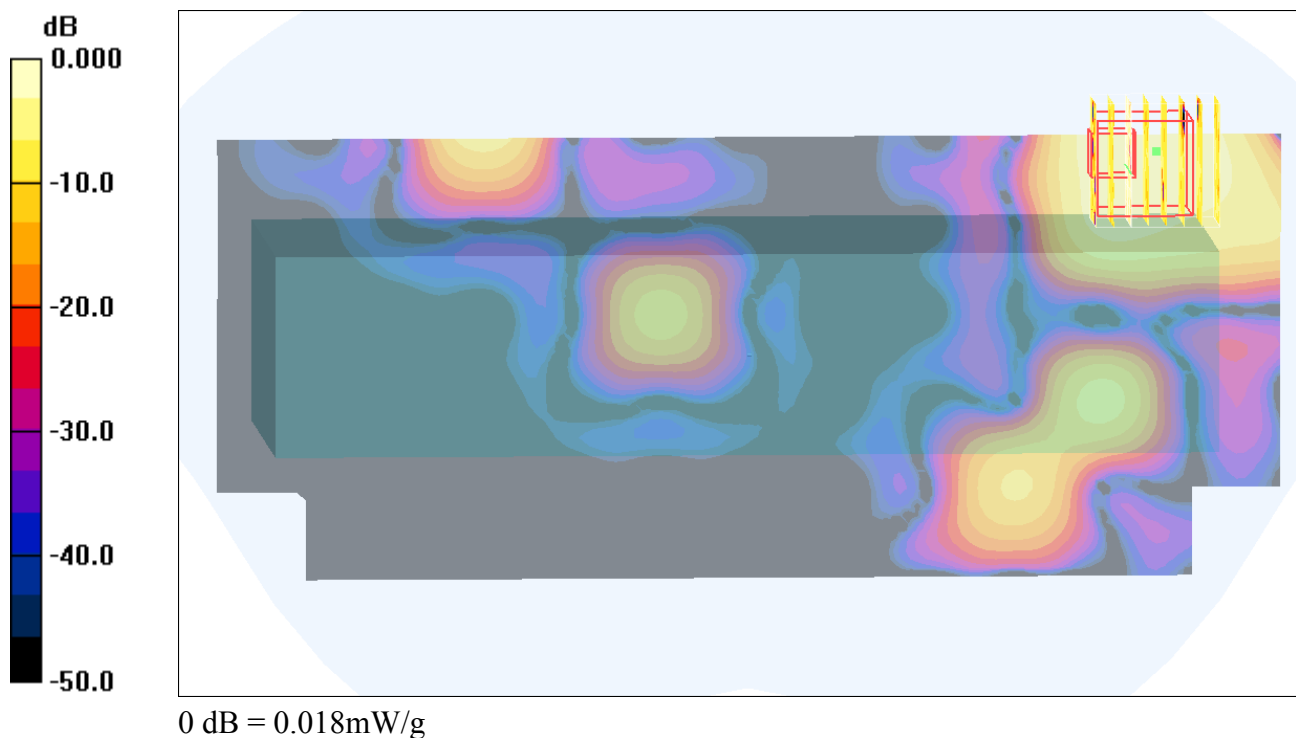

#33 802.11a_Right Side_0cm_Ch60_Battery2_Keypad1_Holster

DUT: 0D0904-14

Communication System: 802.11a; Frequency: 5180 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5180$ MHz; $\sigma = 5.1$ mho/m; $\epsilon_r = 47.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(4.22, 4.22, 4.22); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch36/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.093 mW/g

Ch36/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.977 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.384 W/kg

SAR(1 g) = 0.095 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.201 mW/g


Ch36/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.977 V/m; Power Drift = -0.132 dB

Peak SAR (extrapolated) = 0.171 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.089 mW/g

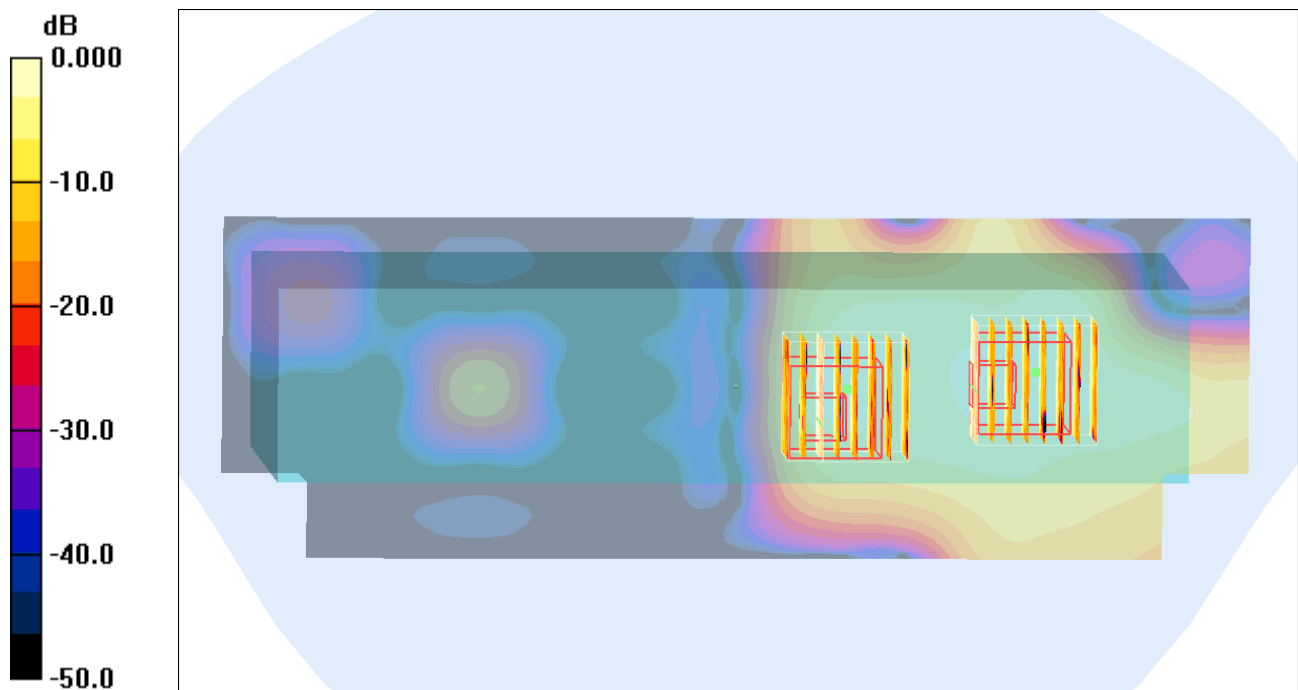

0 dB = 0.089mW/g

#37 802.11a_Front_1.5cm_Ch116_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used : $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (141x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.008 mW/g

Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.523 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.049 W/kg

SAR(1 g) = 0.00976 mW/g; SAR(10 g) = 0.00365 mW/g

Maximum value of SAR (measured) = 0.023 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.523 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.046 W/kg

SAR(1 g) = 0.00655 mW/g; SAR(10 g) = 0.00262 mW/g

Maximum value of SAR (measured) = 0.020 mW/g

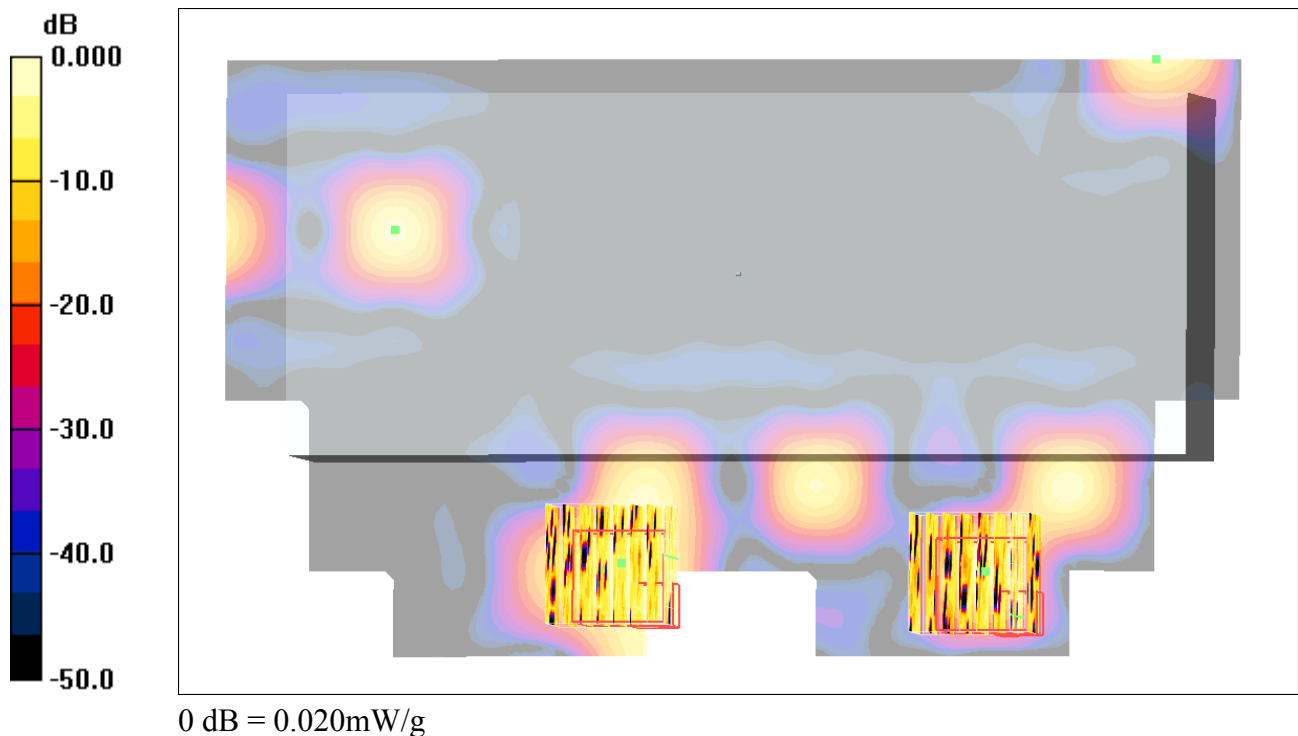

#38 802.11a_Left Side_1.5cm_Ch116_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.013 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.521 V/m; Power Drift = 0.123 dB

Peak SAR (extrapolated) = 0.047 W/kg

SAR(1 g) = 0.0029 mW/g; SAR(10 g) = 0.000795 mW/g

Maximum value of SAR (measured) = 0.016 mW/g

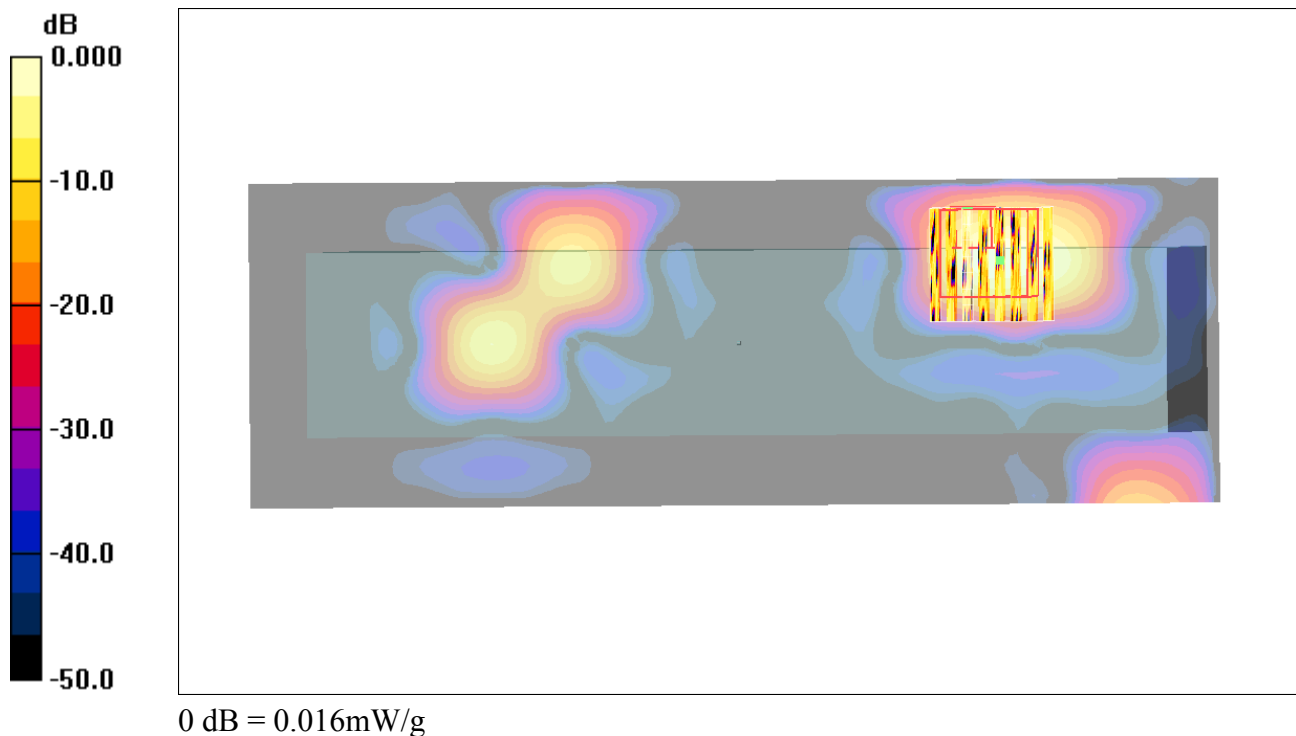

#39 802.11a_Right Side_1.5cm_Ch116_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (61x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.079 mW/g

Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.38 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.136 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 2.38 V/m; Power Drift = 0.132 dB

Peak SAR (extrapolated) = 0.181 W/kg

SAR(1 g) = 0.054 mW/g; SAR(10 g) = 0.023 mW/g

Maximum value of SAR (measured) = 0.103 mW/g

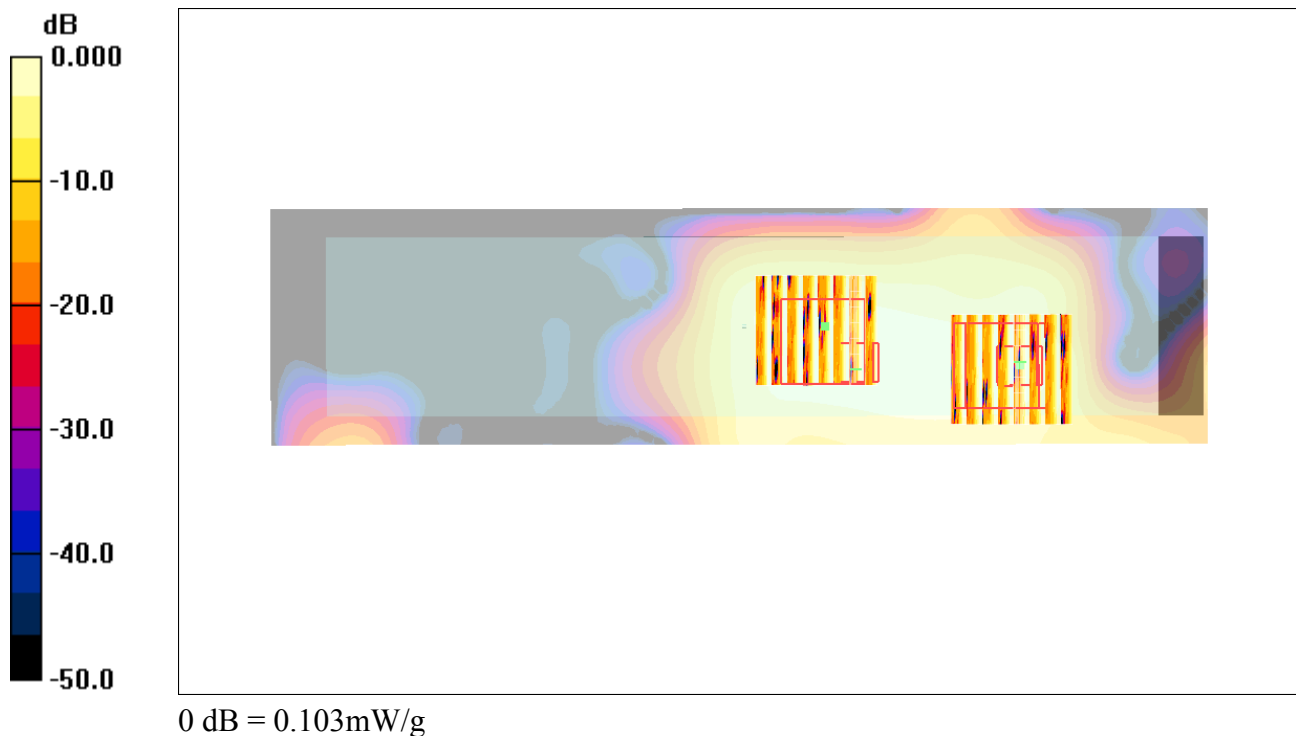

#43 802.11a_Front_0cm_Ch116_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.006 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.670 V/m; Power Drift = 0.113 dB

Peak SAR (extrapolated) = 0.052 W/kg

SAR(1 g) = 0.00467 mW/g; SAR(10 g) = 0.00113 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

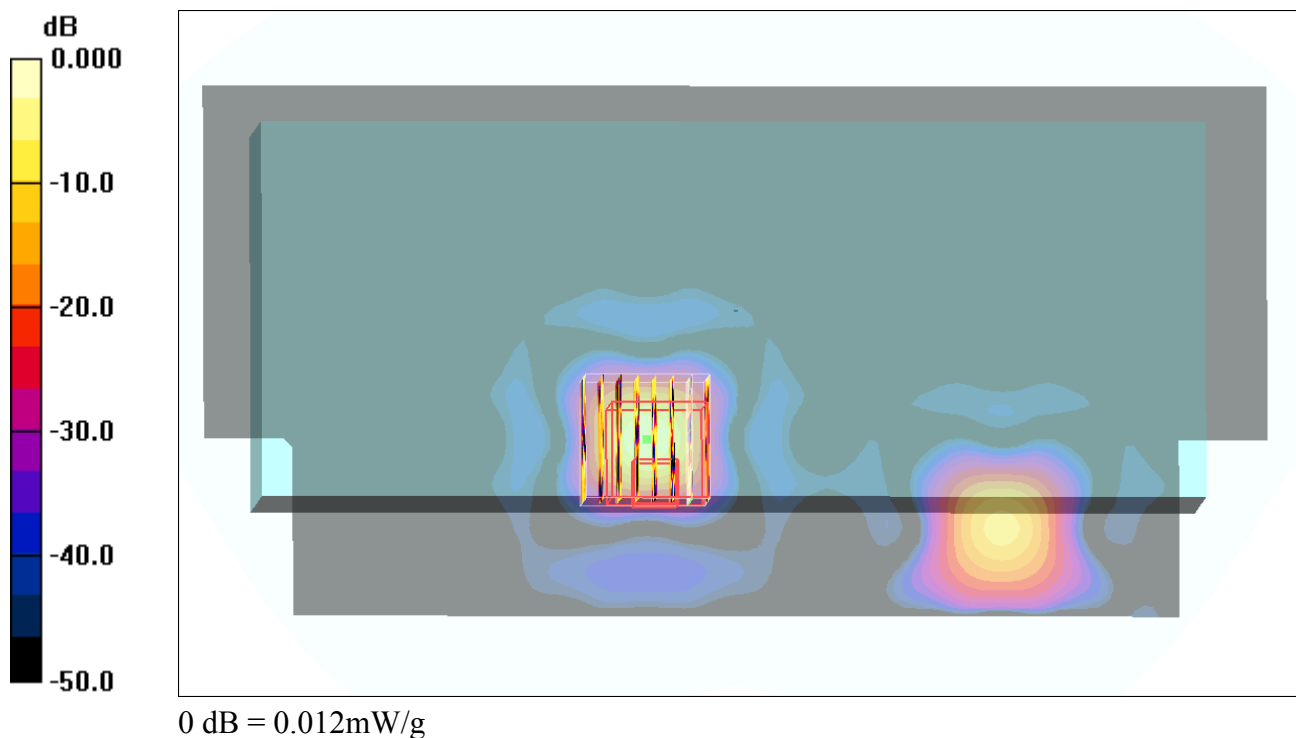

#44 802.11a_Left Side_0cm_Ch116_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.001 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.004 W/kg

SAR(1 g) = 3.38e-005 mW/g; SAR(10 g) = 2.23e-006 mW/g

Maximum value of SAR (measured) = 0.007 mW/g

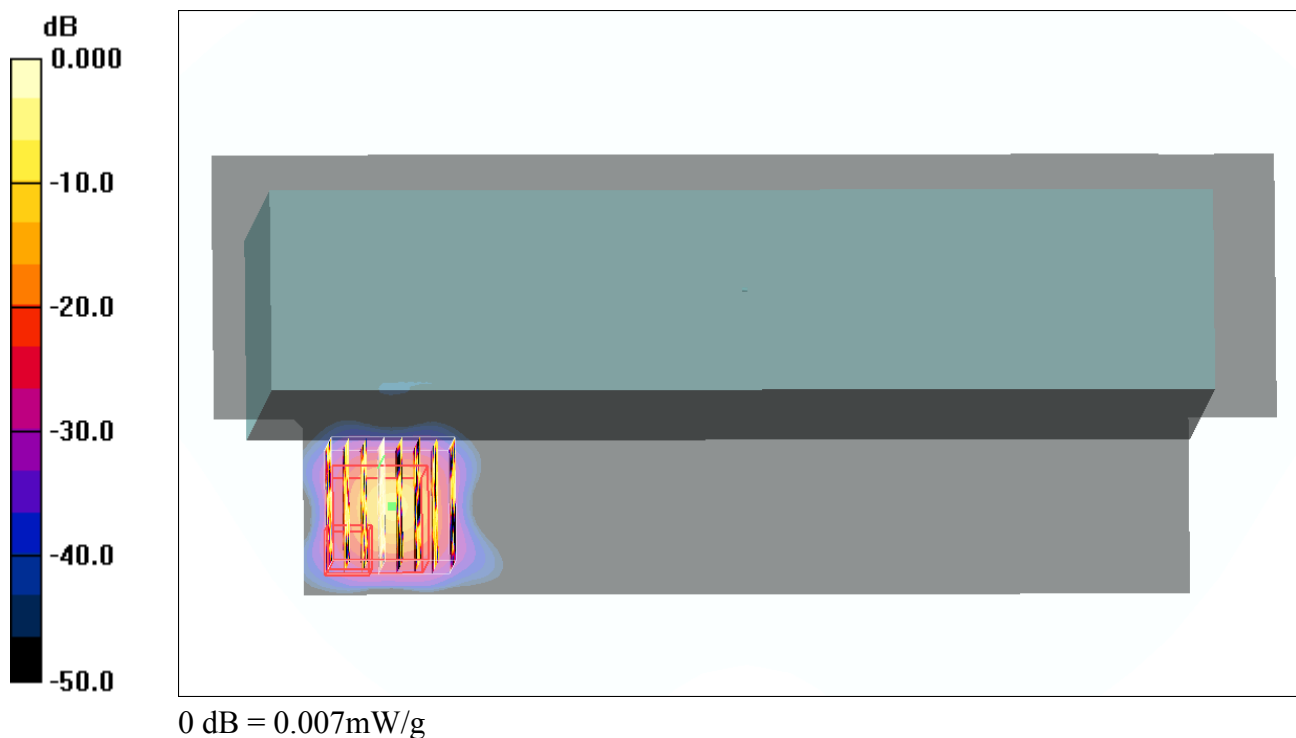

#45 802.11a_Right Side_0cm_Ch116_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.131 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.493 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

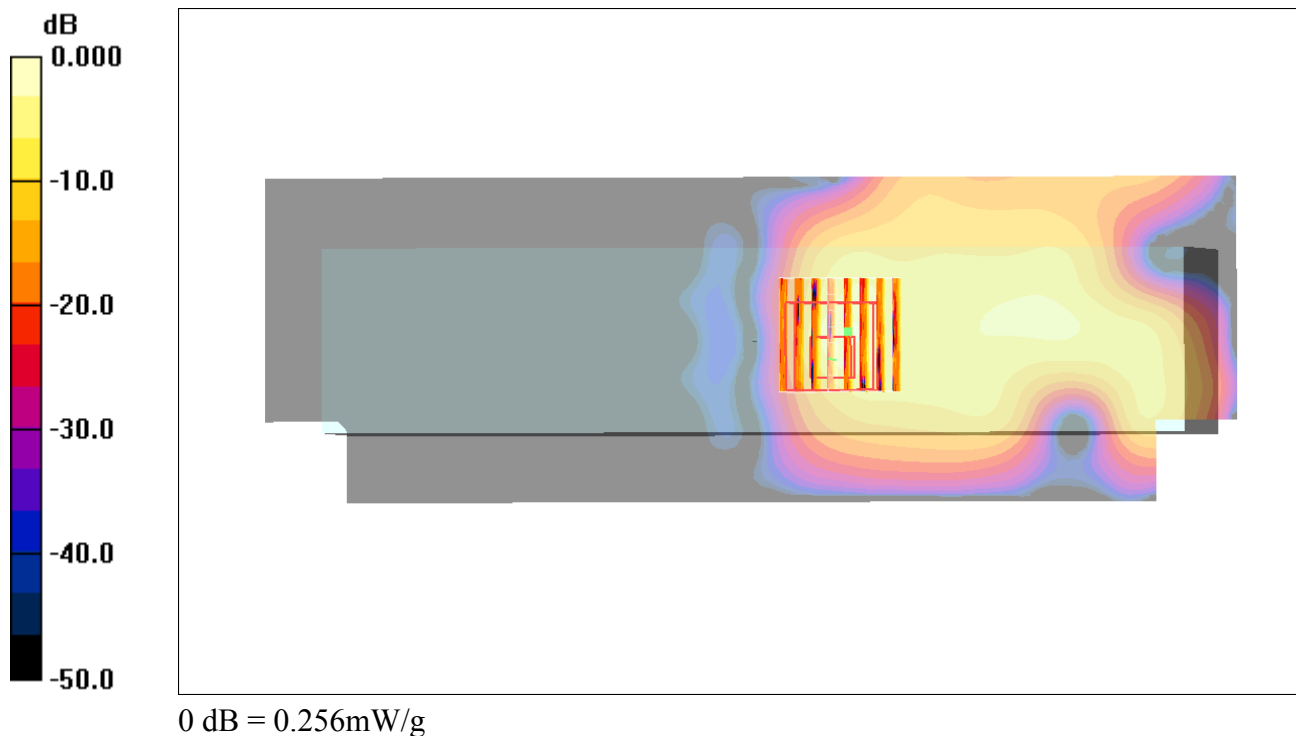

#45 802.11a_Right Side_0cm_Ch116_Battery2_Keypad1_Holster_2D**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5580 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5580$ MHz; $\sigma = 5.63$ mho/m; $\epsilon_r = 46.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.53, 3.53, 3.53); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch116/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.131 mW/g


Ch116/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.493 V/m; Power Drift = 0.159 dB

Peak SAR (extrapolated) = 0.418 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.028 mW/g

Maximum value of SAR (measured) = 0.256 mW/g

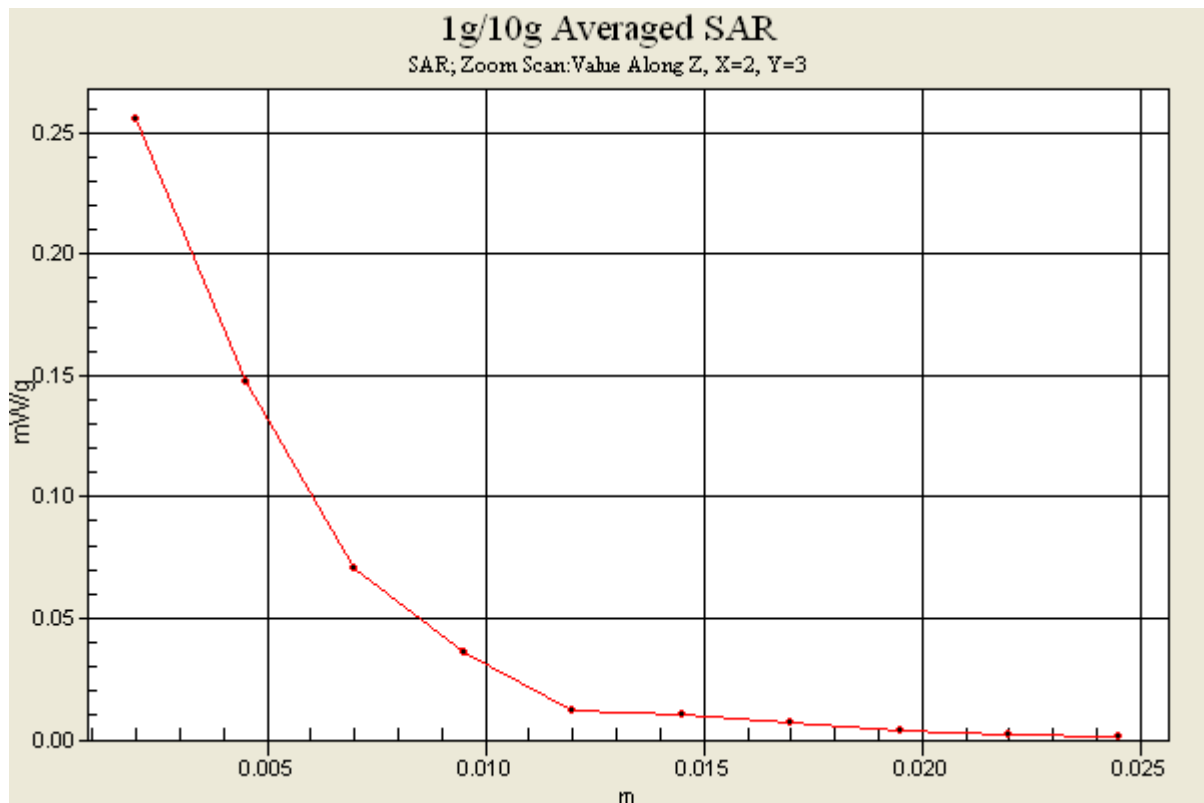

#49 802.11a_Front_1.5cm_Ch165_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.013 mW/g

Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.663 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.130 W/kg

SAR(1 g) = 0.015 mW/g; SAR(10 g) = 0.00604 mW/g

Maximum value of SAR (measured) = 0.035 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.663 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.080 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00408 mW/g

Maximum value of SAR (measured) = 0.031 mW/g

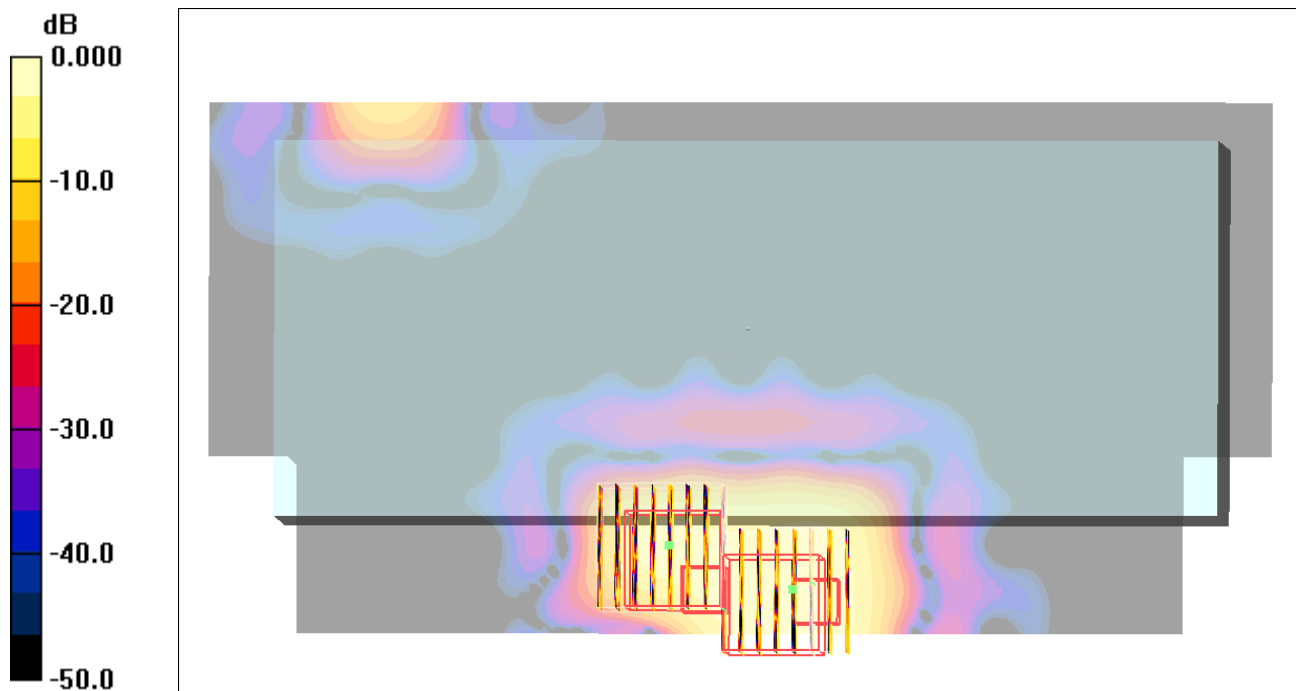

0 dB = 0.031mW/g

#50 802.11a_Left Side_1.5cm_Ch165_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.004 mW/g

Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.037 W/kg

SAR(1 g) = 0.00239 mW/g; SAR(10 g) = 0.000695 mW/g

Maximum value of SAR (measured) = 0.013 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.000 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.020 W/kg

SAR(1 g) = 0.00134 mW/g; SAR(10 g) = 0.000311 mW/g

Maximum value of SAR (measured) = 0.012 mW/g

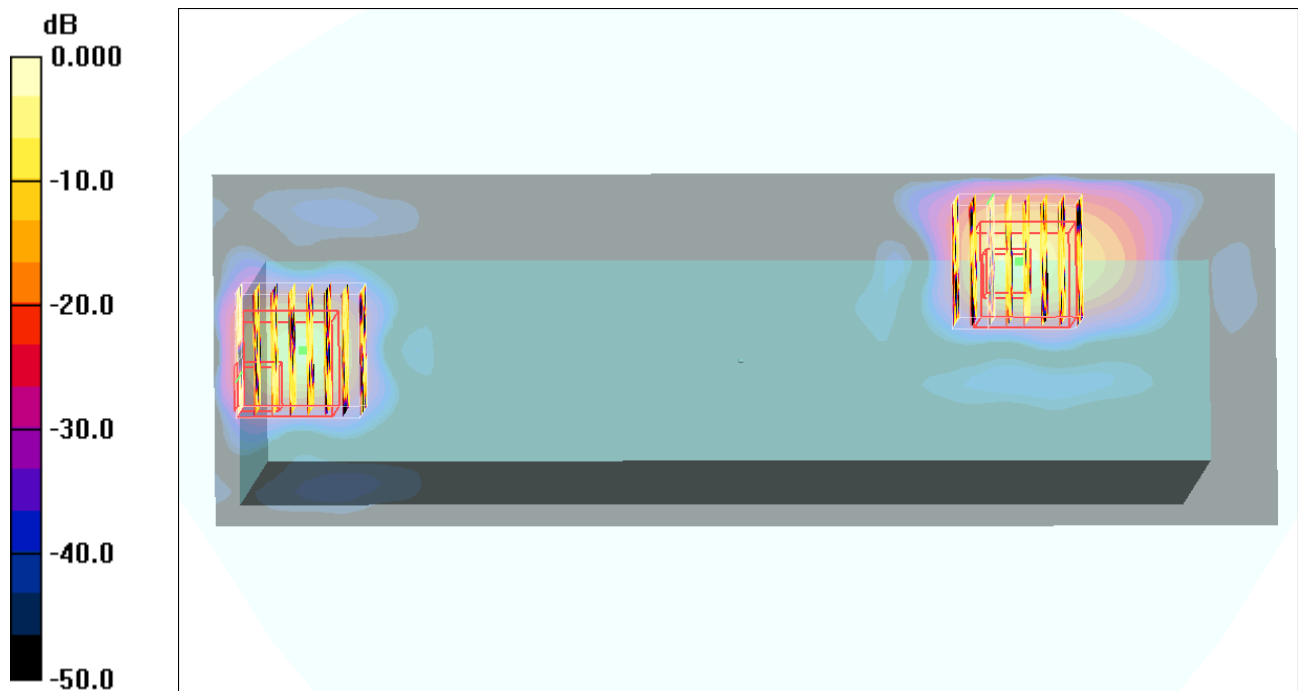

0 dB = 0.012mW/g

#51 802.11a_Right Side_1.5cm_Ch165_Battery2_Keypad1**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.065 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.867 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 0.207 W/kg

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

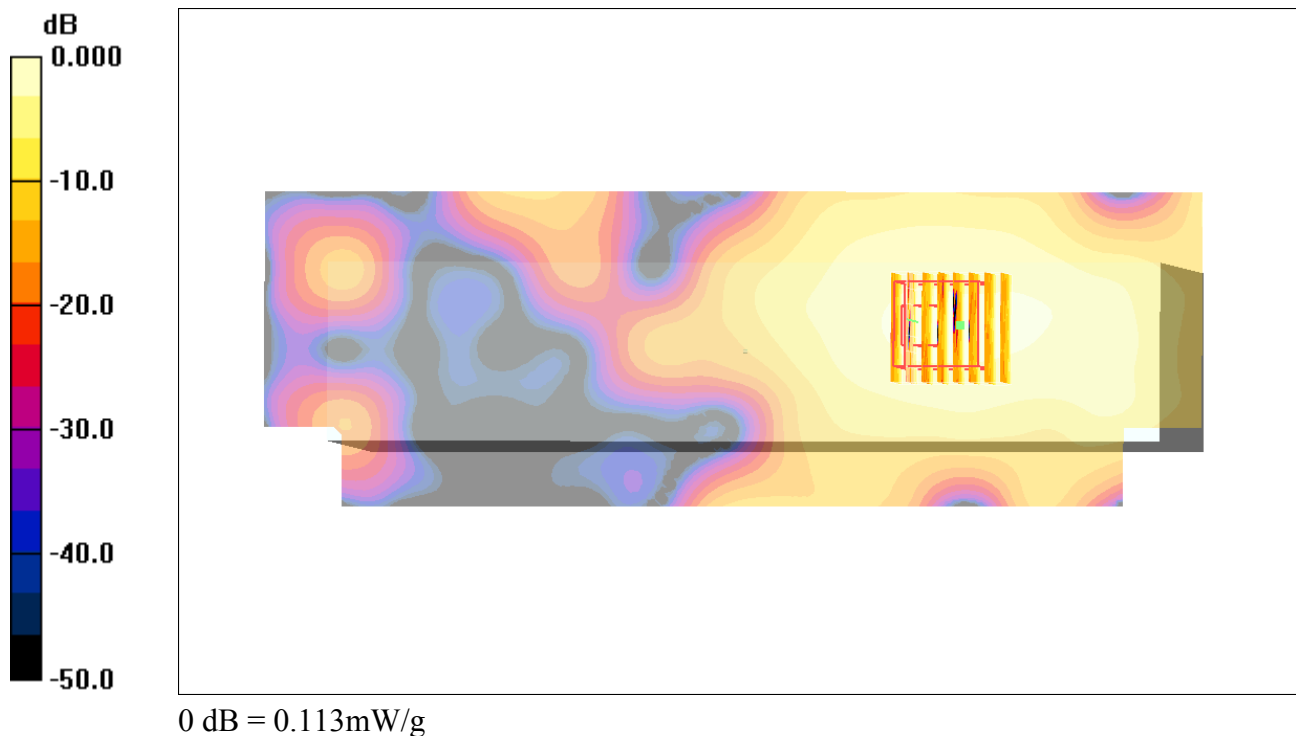

#55 802.11a_Front_0cm_Ch165_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (121x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.027 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.545 V/m; Power Drift = 0.105 dB

Peak SAR (extrapolated) = 0.082 W/kg

SAR(1 g) = 0.011 mW/g; SAR(10 g) = 0.00419 mW/g

Maximum value of SAR (measured) = 0.025 mW/g

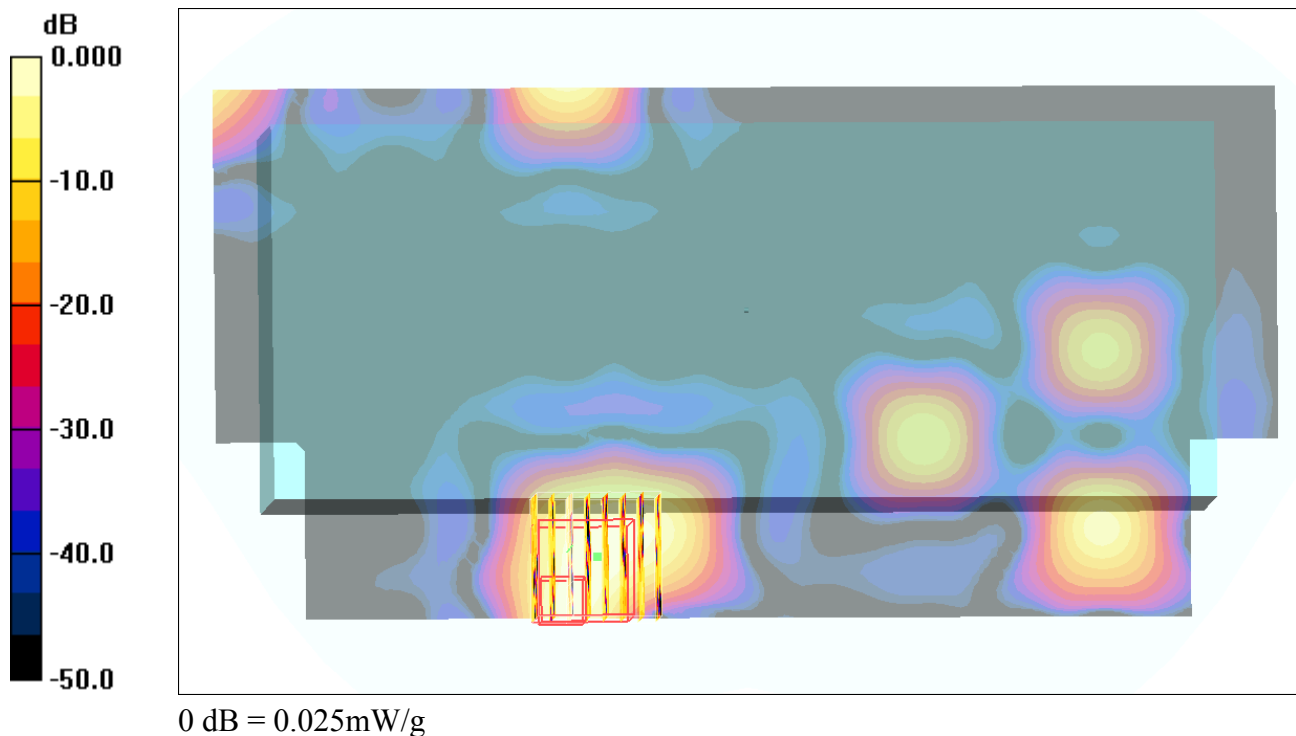

#56 802.11a_Left Side_0cm_Ch165_Battery2_Keypad1_Holster

DUT: 0D0904-14

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (101x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.003 mW/g


Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.909 V/m; Power Drift = 0.144 dB

Peak SAR (extrapolated) = 0.008 W/kg

SAR(1 g) = 0.000164 mW/g; SAR(10 g) = 2.5e-005 mW/g

Maximum value of SAR (measured) = 0.008 mW/g

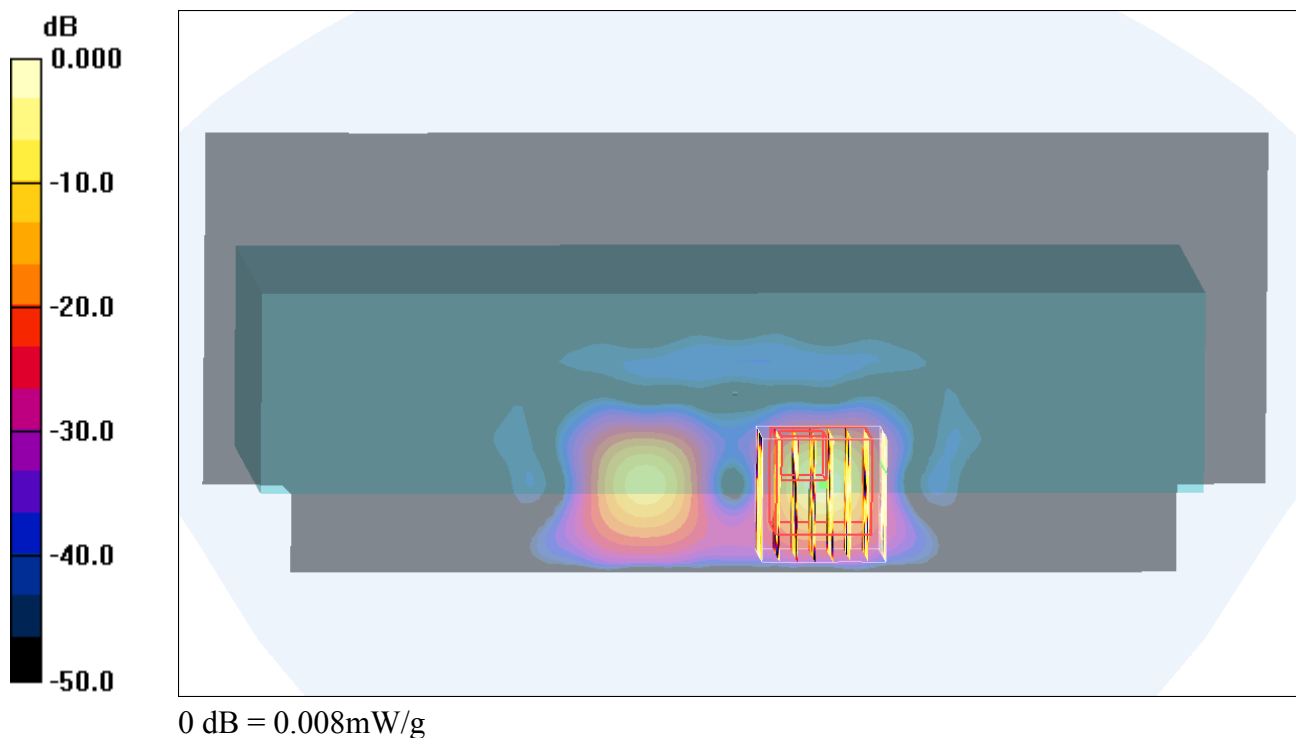

#57 802.11a_Right Side_0cm_Ch165_Battery2_Keypad1_Holster**DUT: 0D0904-14**

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: MSL_5G_110714 Medium parameters used: $f = 5825$ MHz; $\sigma = 6.05$ mho/m; $\epsilon_r = 46.5$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.5 °C ; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV4 - SN3792; ConvF(3.78, 3.78, 3.78); Calibrated: 2011/6/20
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2010/10/22
- Phantom: SAM_Right; Type: SAM; Serial: TP-1303
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch165/Area Scan (81x241x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.095 mW/g

Ch165/Zoom Scan (8x8x10)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.527 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.378 W/kg

SAR(1 g) = 0.113 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

Ch165/Zoom Scan (8x8x10)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2.5mm

Reference Value = 0.527 V/m; Power Drift = 0.156 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.025 mW/g

Maximum value of SAR (measured) = 0.100 mW/g

