



Conducted Output Power(Average)

Appendix B

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Port 3 (dBm)	Port 4 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
6185MHz	Pass	4.79	15.94	15.87	15.68	15.75	21.83	Inf	26.62	30.00
6345MHz	Pass	4.79	15.62	15.77	15.62	15.31	21.60	Inf	26.39	30.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.32	15.32	15.62	15.61	15.22	21.47	Inf	26.79	30.00
6665MHz	Pass	5.32	15.35	15.22	15.49	15.3	21.36	Inf	26.68	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.32	15.42	15.47	15.37	15.16	21.38	Inf	26.70	30.00
6985MHz	Pass	5.27	15.31	14.97	15.58	15.53	21.37	Inf	26.64	30.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.79	12.71	12.67	13.47	13.32	19.08	Inf	23.87	30.00
6265MHz	Pass	4.79	13.17	12.84	13.56	13.18	19.22	Inf	24.01	30.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.32	16.92	16.38	16.41	15.92	22.44	Inf	27.76	30.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.32	15.52	15.84	16.17	15.65	21.82	Inf	27.14	30.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.32	15.86	16.27	15.77	15.81	21.95	Inf	27.27	30.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.32	13.41	13.42	13.35	13.42	19.42	Inf	24.74	30.00

DG = Directional Gain; Port X = Port X output power

Directional Gain refers to antenna report.



Non-beamforming mode

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.03	4.76
802.11be EHT20_Nss1,(MCS0)_4TX	-0.01	4.78
802.11be EHT40_Nss1,(MCS0)_4TX	0.10	4.89
802.11be EHT80_Nss1,(MCS0)_4TX	0.11	4.90
802.11be EHT160_Nss1,(MCS0)_4TX	-0.00	4.79
802.11be EHT320_Nss1,(MCS0)_4TX	-5.15	-0.36
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	0.44	4.80
802.11be EHT20_Nss1,(MCS0)_4TX	0.39	4.75
802.11be EHT40_Nss1,(MCS0)_4TX	0.45	4.81
802.11be EHT80_Nss1,(MCS0)_4TX	0.24	4.60
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.55	4.77
802.11be EHT20_Nss1,(MCS0)_4TX	-0.45	4.87
802.11be EHT40_Nss1,(MCS0)_4TX	-0.43	4.89
802.11be EHT80_Nss1,(MCS0)_4TX	-0.46	4.86
802.11be EHT160_Nss1,(MCS0)_4TX	-0.48	4.84
802.11be EHT320_Nss1,(MCS0)_4TX	-1.53	3.79
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_4TX	-0.46	4.81
802.11be EHT20_Nss1,(MCS0)_4TX	-0.53	4.74
802.11be EHT40_Nss1,(MCS0)_4TX	-0.39	4.88
802.11be EHT80_Nss1,(MCS0)_4TX	-0.48	4.79
802.11be EHT160_Nss1,(MCS0)_4TX	-0.55	4.72

RBW = 1MHz



Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.790	-6.05	-5.57	-5.90	-5.36	-0.03	Inf	4.76	5.00
6175MHz	Pass	4.790	-6.30	-6.26	-5.19	-5.76	-0.03	Inf	4.76	5.00
6415MHz	Pass	4.790	-5.67	-5.89	-5.87	-6.82	-0.26	Inf	4.53	5.00
6435MHz	Pass	4.360	-5.36	-5.11	-5.58	-5.73	0.42	Inf	4.78	5.00
6475MHz	Pass	4.360	-6.46	-4.92	-5.36	-5.94	0.16	Inf	4.52	5.00
6515MHz	Pass	4.360	-5.52	-4.85	-5.24	-5.81	0.44	Inf	4.80	5.00
6535MHz	Pass	5.320	-5.70	-6.44	-6.33	-6.95	-0.57	Inf	4.75	5.00
6715MHz	Pass	5.320	-6.65	-5.93	-6.18	-6.45	-0.58	Inf	4.74	5.00
6855MHz	Pass	5.320	-8.06	-6.41	-5.92	-5.52	-0.60	Inf	4.72	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.320	-7.73	-6.73	-5.89	-5.31	-0.55	Inf	4.77	5.00
6895MHz	Pass	5.270	-7.42	-6.80	-6.07	-5.85	-0.67	Inf	4.60	5.00
7015MHz	Pass	5.270	-6.63	-5.72	-6.38	-6.25	-0.46	Inf	4.81	5.00
7095MHz	Pass	5.270	-6.36	-6.34	-6.60	-6.48	-0.67	Inf	4.60	5.00
7115MHz	Pass	5.270	-6.24	-6.19	-6.60	-6.68	-0.65	Inf	4.62	5.00
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.790	-6.27	-5.74	-5.55	-5.53	-0.09	Inf	4.70	5.00
6175MHz	Pass	4.790	-5.96	-5.94	-5.50	-5.75	-0.01	Inf	4.78	5.00
6415MHz	Pass	4.790	-5.59	-6.02	-6.03	-6.77	-0.29	Inf	4.50	5.00
6435MHz	Pass	4.360	-5.13	-5.43	-5.05	-5.93	0.39	Inf	4.75	5.00
6475MHz	Pass	4.360	-5.94	-5.07	-5.12	-5.62	0.38	Inf	4.74	5.00
6515MHz	Pass	4.360	-6.37	-5.60	-5.05	-5.90	0.15	Inf	4.51	5.00
6535MHz	Pass	5.320	-7.07	-6.17	-5.91	-6.53	-0.56	Inf	4.76	5.00
6715MHz	Pass	5.320	-6.49	-5.97	-6.33	-6.28	-0.45	Inf	4.87	5.00
6855MHz	Pass	5.320	-6.14	-6.07	-6.19	-7.38	-0.77	Inf	4.55	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.320	-5.94	-5.70	-6.46	-6.72	-0.47	Inf	4.85	5.00
6895MHz	Pass	5.270	-6.11	-5.88	-6.54	-6.77	-0.53	Inf	4.74	5.00
7015MHz	Pass	5.270	-6.37	-6.43	-5.82	-6.89	-0.57	Inf	4.70	5.00
7095MHz	Pass	5.270	-6.47	-6.29	-6.30	-6.45	-0.60	Inf	4.67	5.00
7115MHz	Pass	5.270	-6.15	-6.07	-6.60	-6.35	-0.54	Inf	4.73	5.00
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	4.790	-5.63	-5.37	-5.86	-5.86	0.10	Inf	4.89	5.00
6165MHz	Pass	4.790	-6.02	-5.59	-5.16	-5.81	0.09	Inf	4.88	5.00
6405MHz	Pass	4.790	-5.78	-5.80	-5.71	-6.58	-0.19	Inf	4.60	5.00
6445MHz	Pass	4.360	-5.96	-5.42	-4.88	-5.99	0.23	Inf	4.59	5.00
6485MHz	Pass	4.360	-5.40	-5.21	-4.63	-5.76	0.45	Inf	4.81	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.83	-6.15	-5.80	-6.33	-0.49	Inf	4.83	5.00
6565MHz	Pass	5.320	-7.00	-6.37	-6.03	-6.55	-0.68	Inf	4.64	5.00
6725MHz	Pass	5.320	-6.70	-6.34	-5.68	-6.42	-0.43	Inf	4.89	5.00
6845MHz	Pass	5.320	-5.95	-5.99	-6.09	-6.70	-0.45	Inf	4.87	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.30	-6.34	-6.58	-6.94	-0.78	Inf	4.54	5.00
6925MHz	Pass	5.270	-6.59	-6.23	-6.82	-6.21	-0.74	Inf	4.53	5.00
7005MHz	Pass	5.270	-6.54	-6.05	-5.45	-6.69	-0.40	Inf	4.87	5.00
7085MHz	Pass	5.270	-6.49	-6.05	-6.14	-6.01	-0.39	Inf	4.88	5.00





Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	4.790	-5.89	-5.20	-6.16	-6.12	0.02	Inf	4.81	5.00
6145MHz	Pass	4.790	-5.81	-5.95	-5.10	-5.73	0.11	Inf	4.90	5.00
6385MHz	Pass	4.790	-6.03	-5.60	-5.32	-6.02	-0.06	Inf	4.73	5.00
6465MHz	Pass	4.360	-5.58	-5.55	-4.93	-6.04	0.24	Inf	4.60	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.42	-6.18	-6.19	-6.51	-0.46	Inf	4.86	5.00
6625MHz	Pass	5.320	-6.20	-6.04	-6.01	-6.60	-0.49	Inf	4.83	5.00
6705MHz	Pass	5.320	-6.32	-6.23	-6.38	-6.68	-0.71	Inf	4.61	5.00
6785MHz	Pass	5.320	-6.42	-6.18	-6.52	-6.56	-0.71	Inf	4.61	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.320	-5.60	-5.86	-6.43	-7.25	-0.65	Inf	4.67	5.00
6945MHz	Pass	5.270	-6.13	-6.45	-6.90	-6.51	-0.67	Inf	4.60	5.00
7025MHz	Pass	5.270	-6.47	-6.01	-5.82	-6.48	-0.48	Inf	4.79	5.00
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6025MHz	Pass	4.790	-6.25	-5.79	-4.95	-6.19	-0.00	Inf	4.79	5.00
6185MHz	Pass	4.790	-5.66	-5.91	-5.93	-5.55	-0.14	Inf	4.65	5.00
6345MHz	Pass	4.790	-6.21	-5.71	-5.63	-6.23	-0.29	Inf	4.50	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.11	-6.21	-6.05	-6.34	-0.48	Inf	4.84	5.00
6665MHz	Pass	5.320	-6.28	-6.54	-6.18	-7.06	-0.62	Inf	4.70	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.31	-6.17	-6.51	-6.81	-0.56	Inf	4.76	5.00
6985MHz	Pass	5.270	-6.59	-6.14	-6.40	-6.33	-0.55	Inf	4.72	5.00
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.790	-10.86	-11.30	-11.56	-11.61	-5.69	Inf	-0.90	5.00
6265MHz	Pass	4.790	-10.71	-11.24	-10.84	-10.42	-5.15	Inf	-0.36	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.320	-7.84	-7.87	-7.72	-8.22	-2.13	Inf	3.19	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.320	-8.03	-7.98	-7.36	-7.56	-1.90	Inf	3.42	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.320	-6.76	-7.37	-7.91	-6.94	-1.53	Inf	3.79	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.320	-9.00	-9.92	-9.97	-9.94	-4.03	Inf	1.29	5.00


DG = Directional Gain; RBW = 1MHz


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

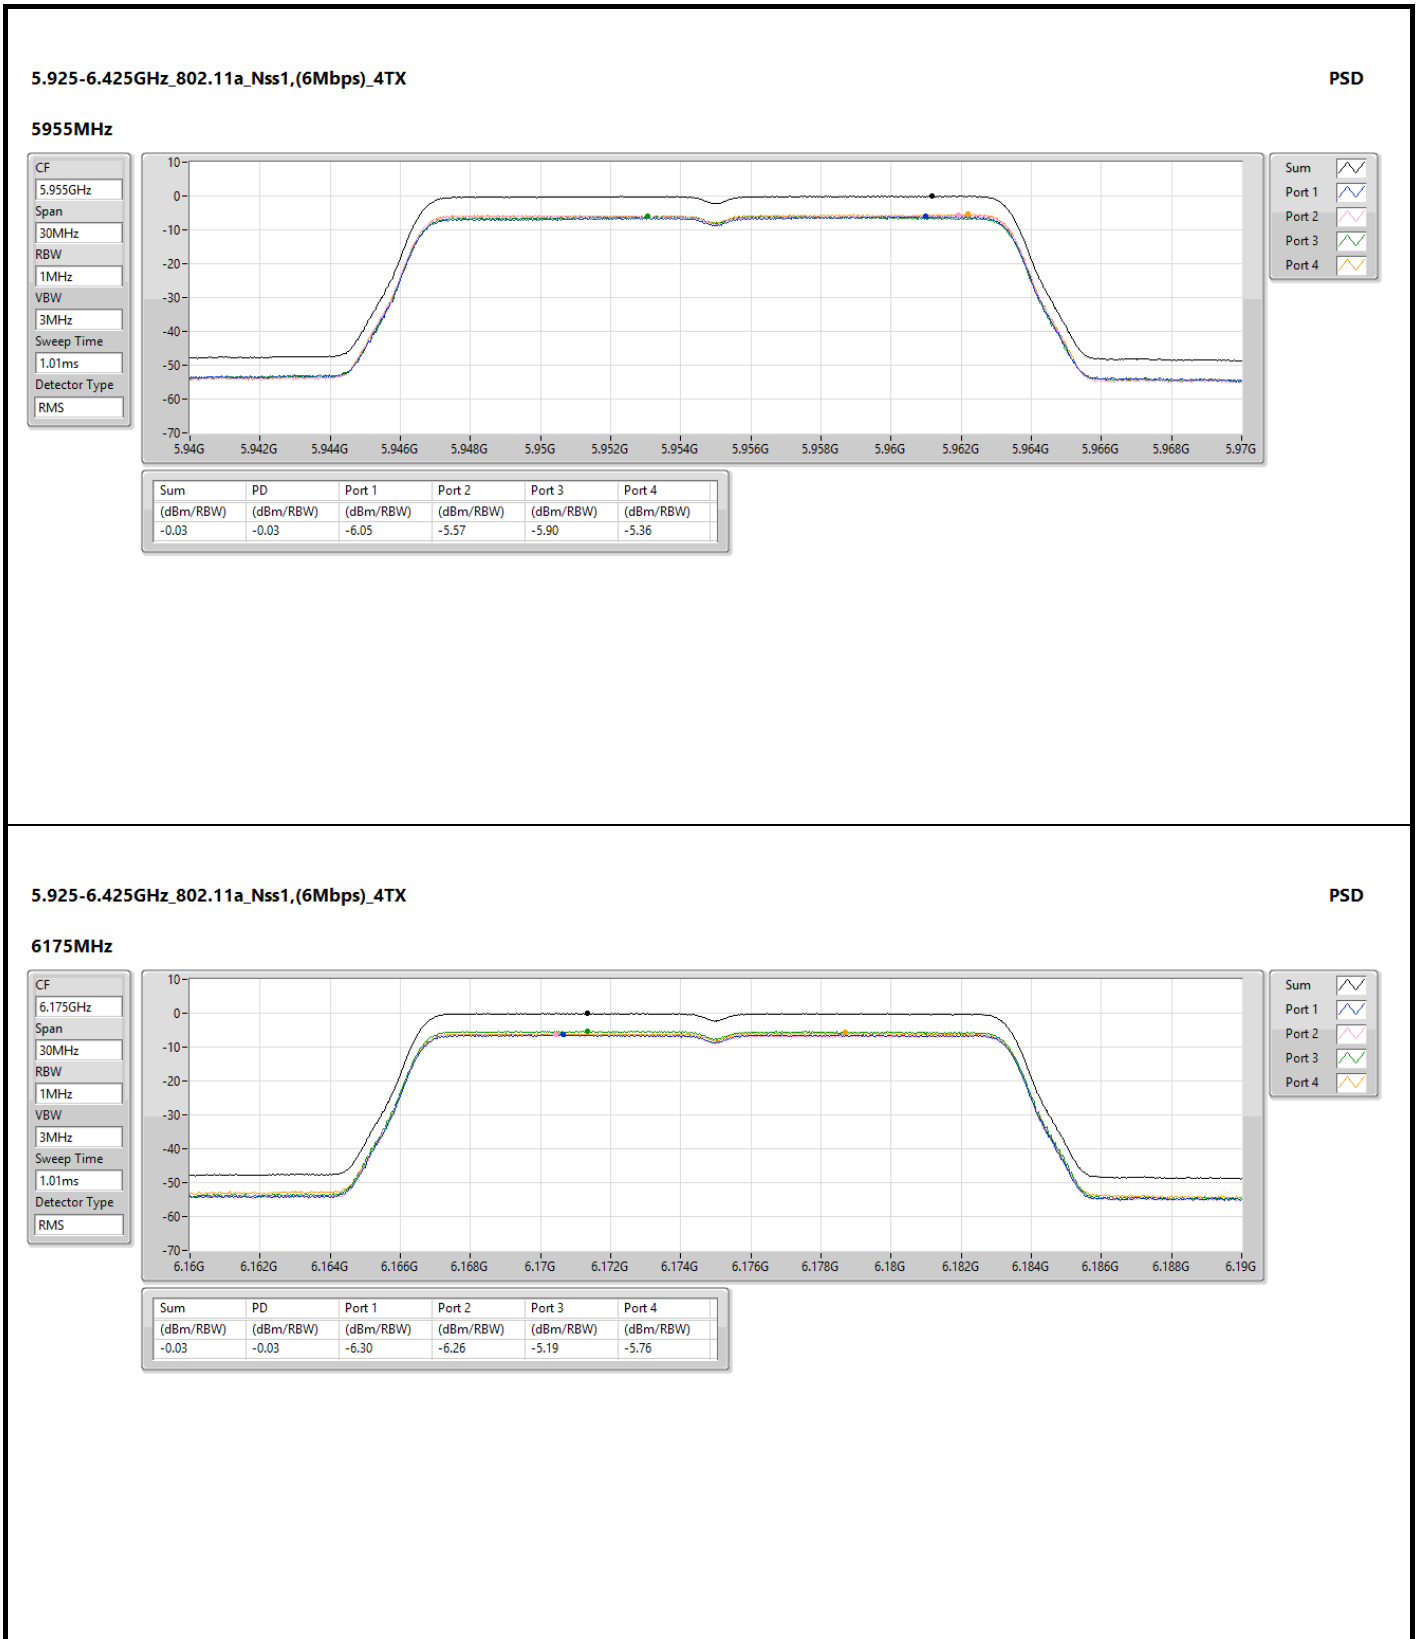


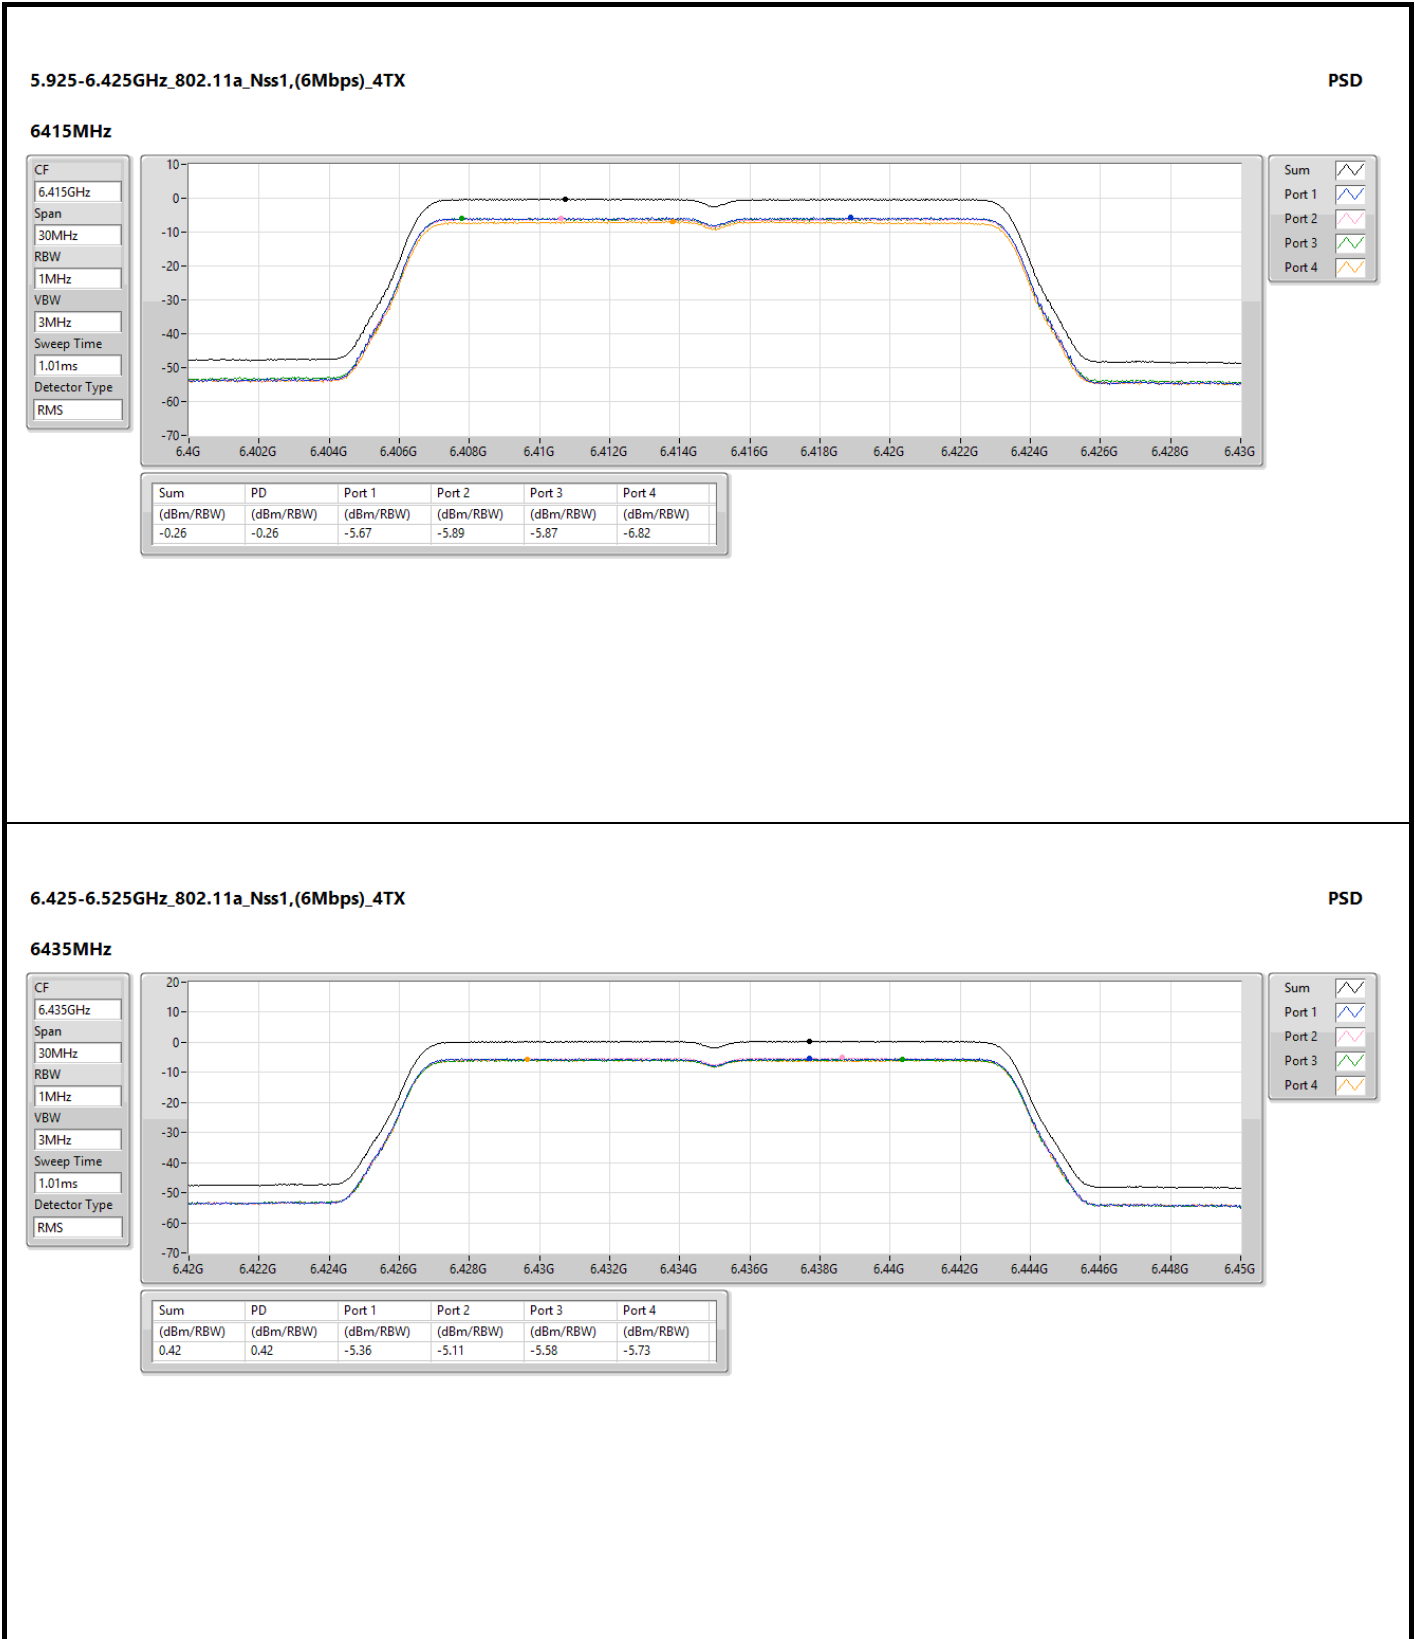


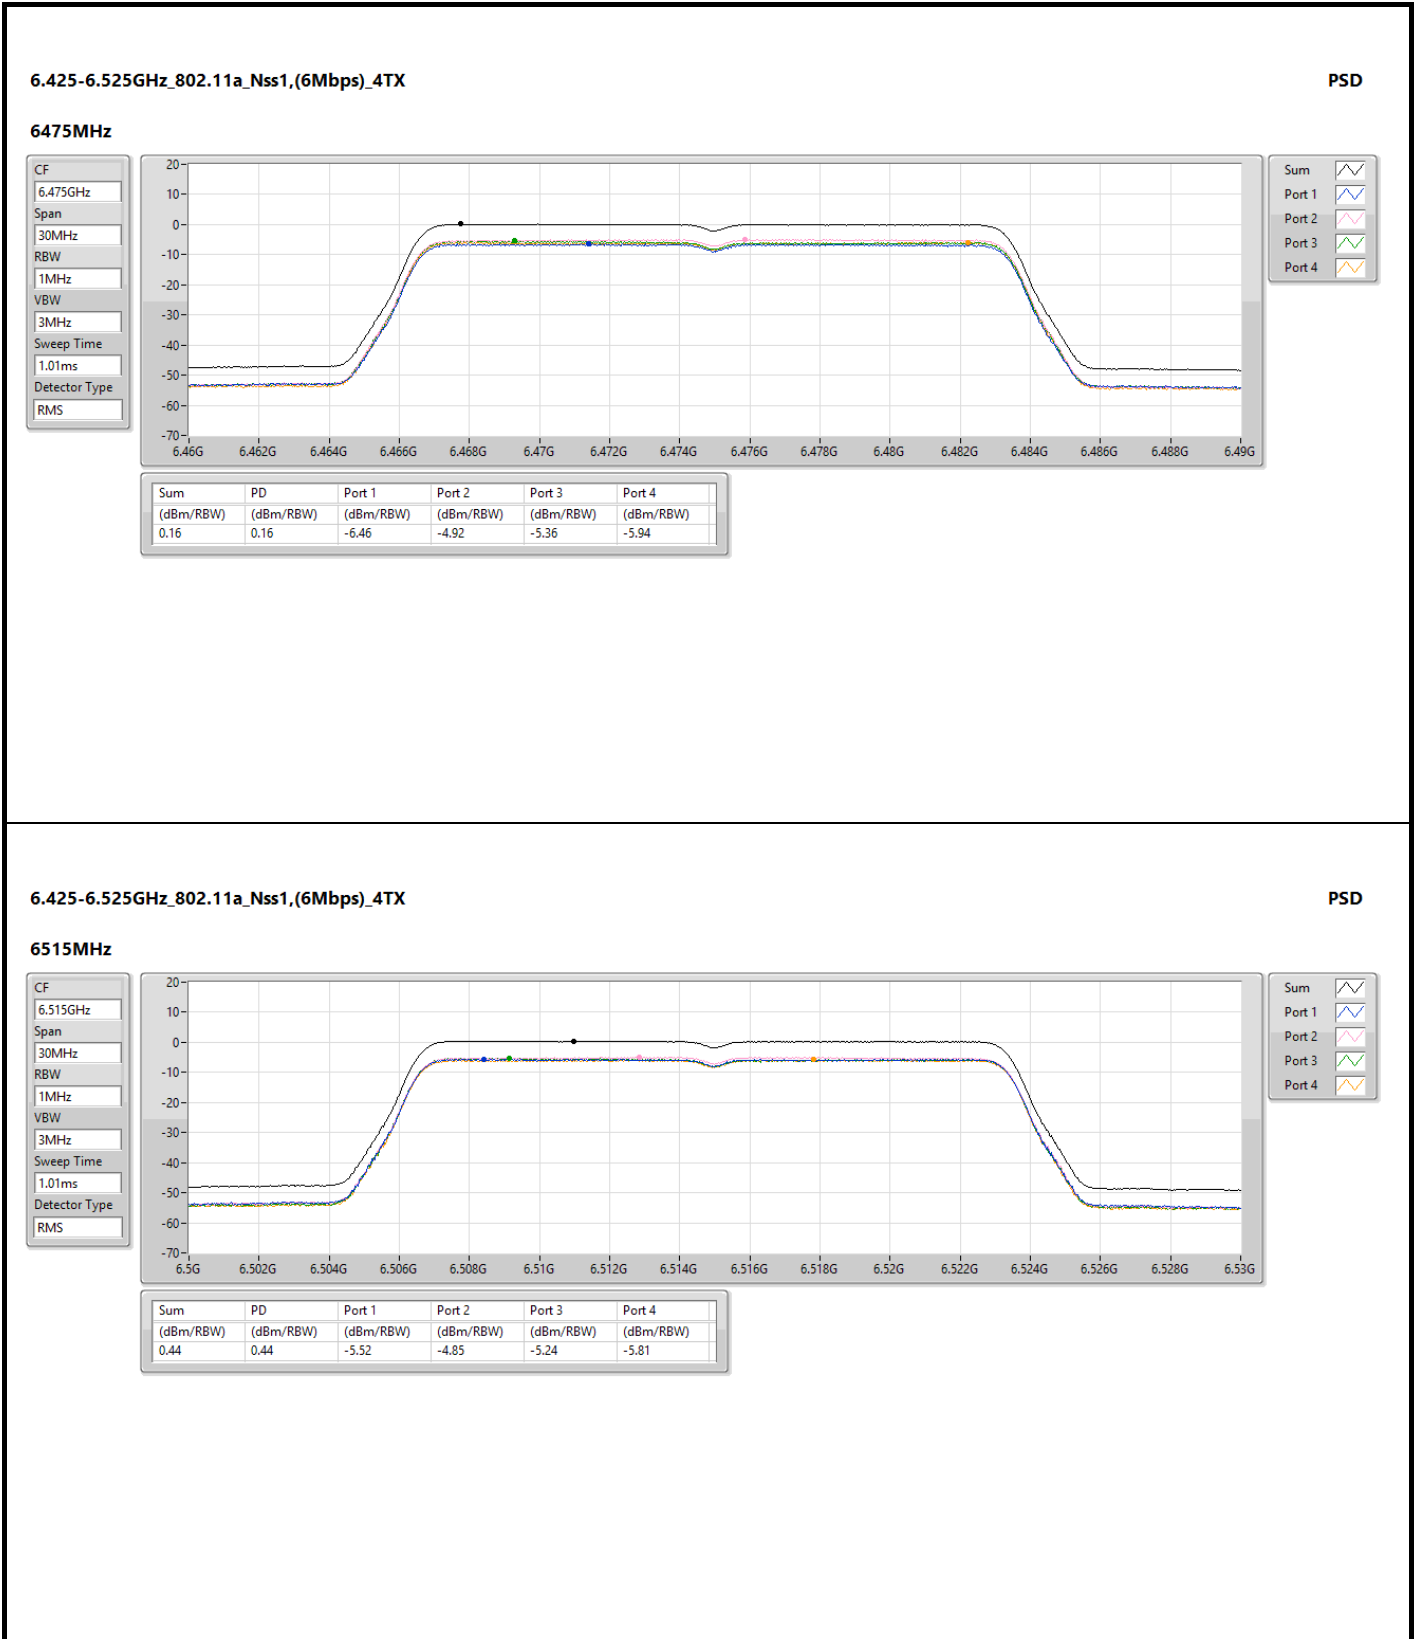

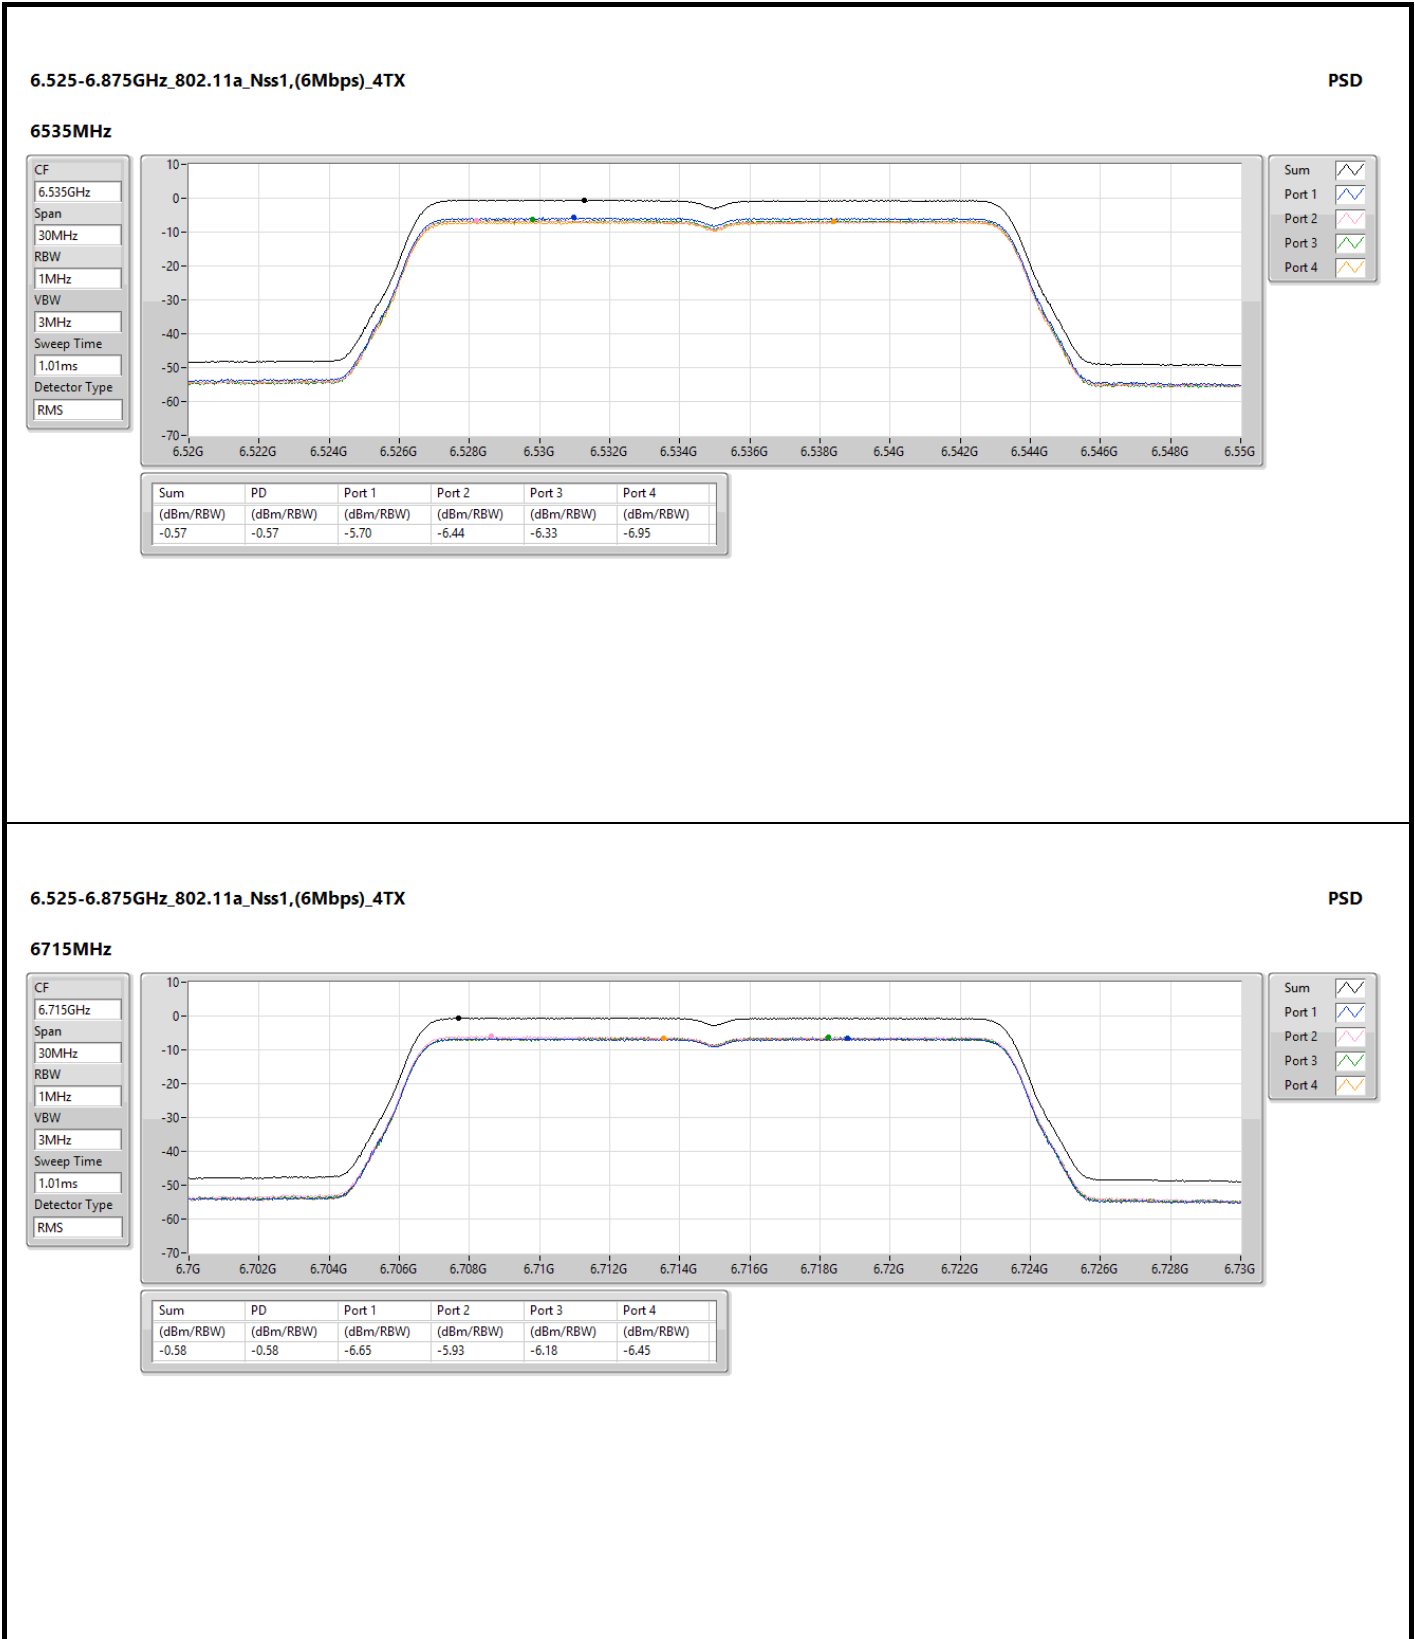


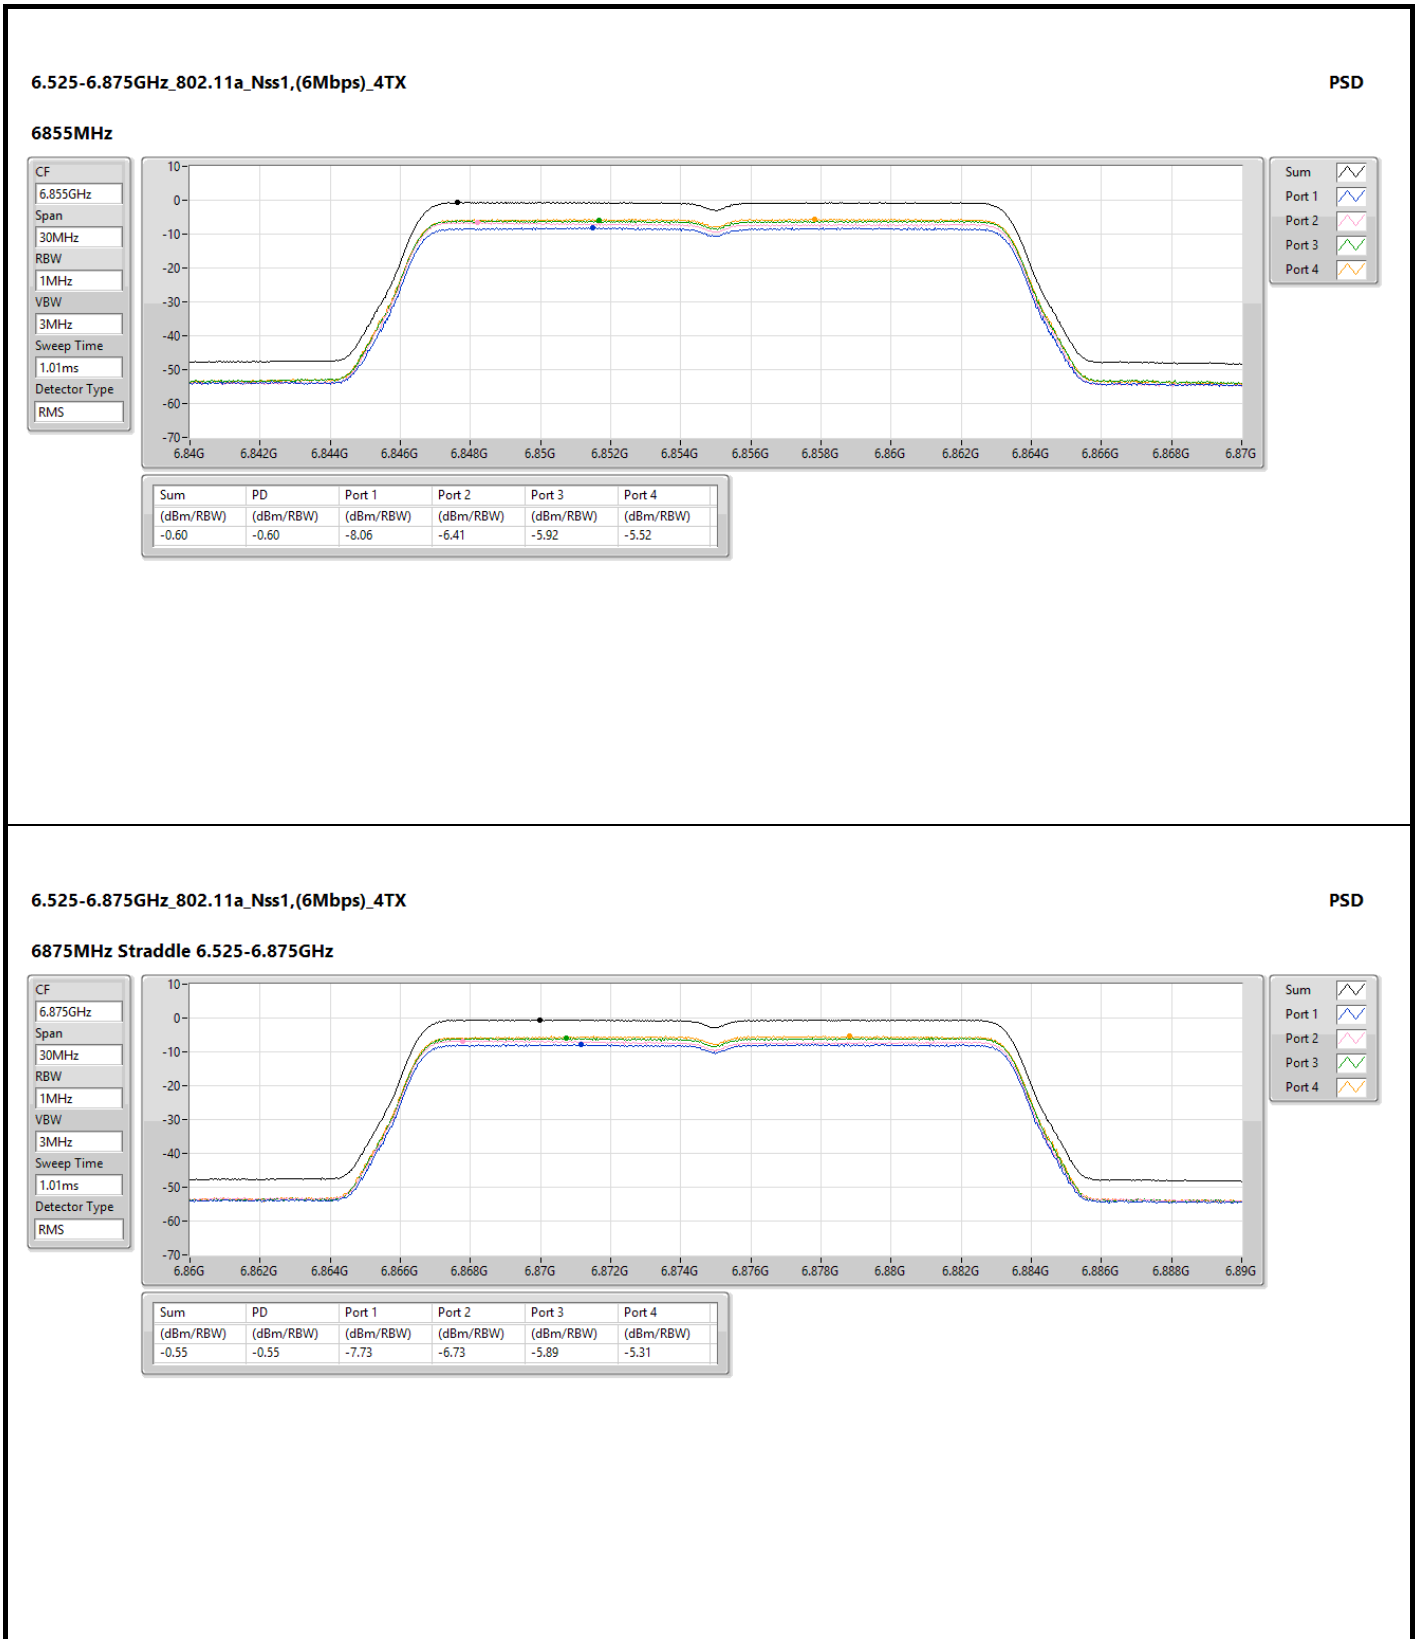

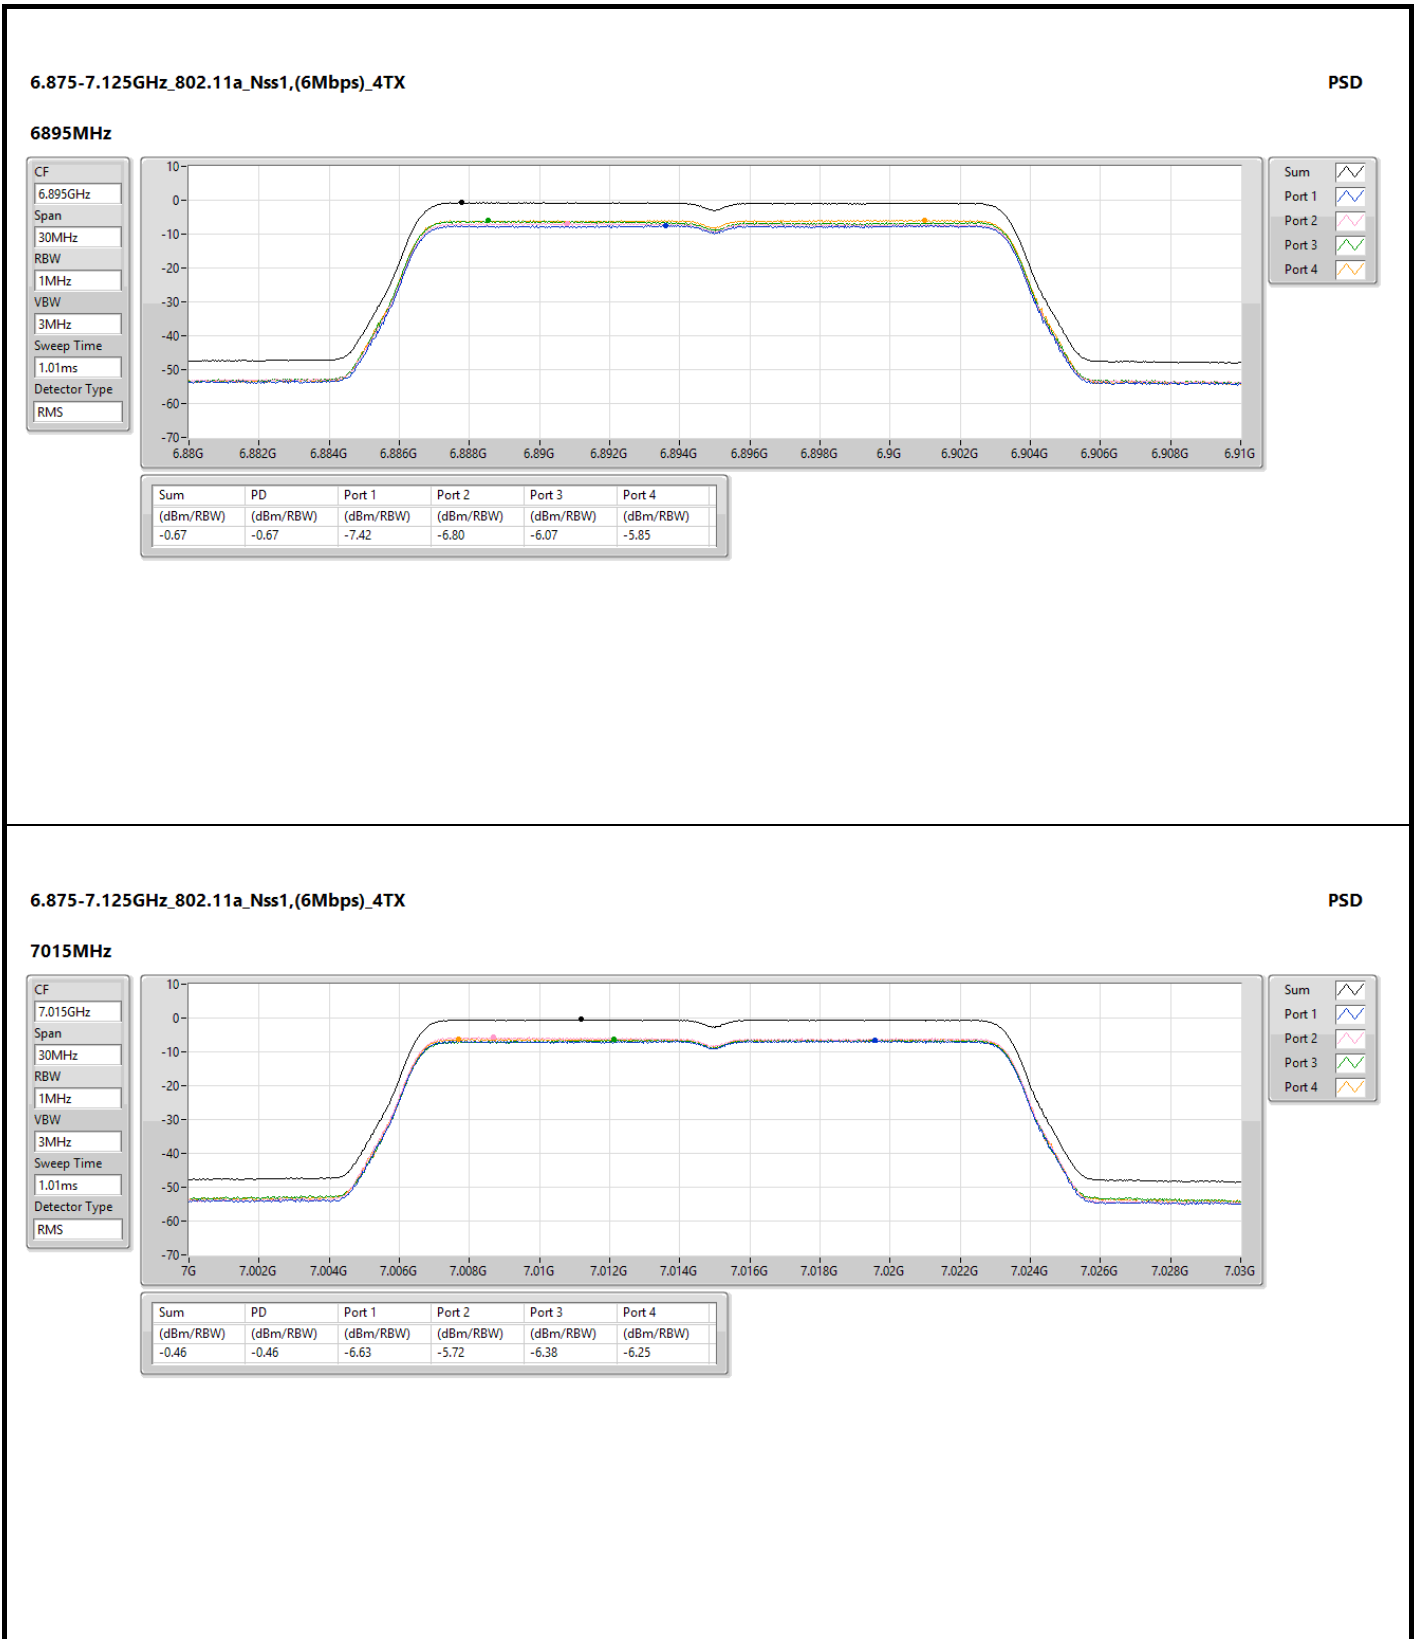

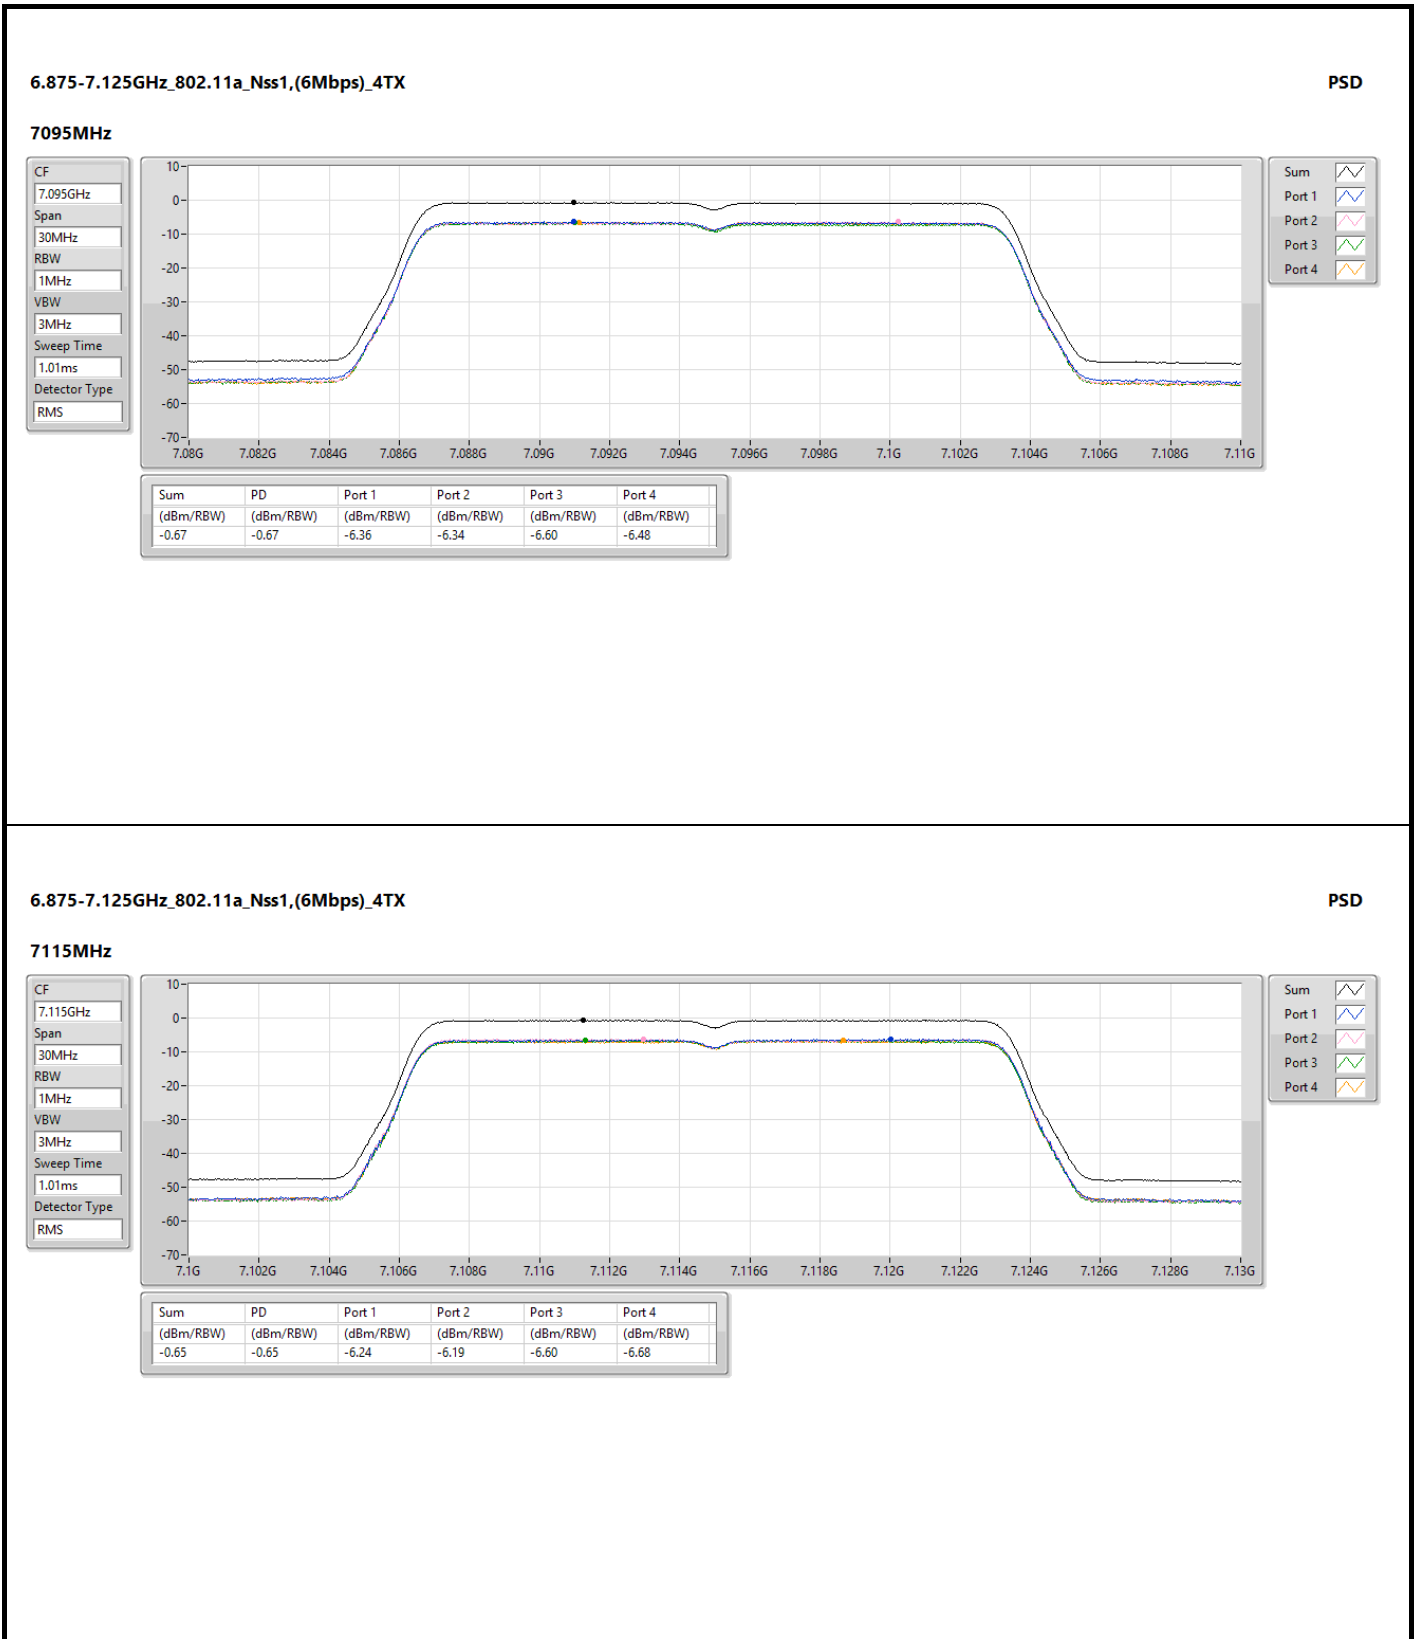



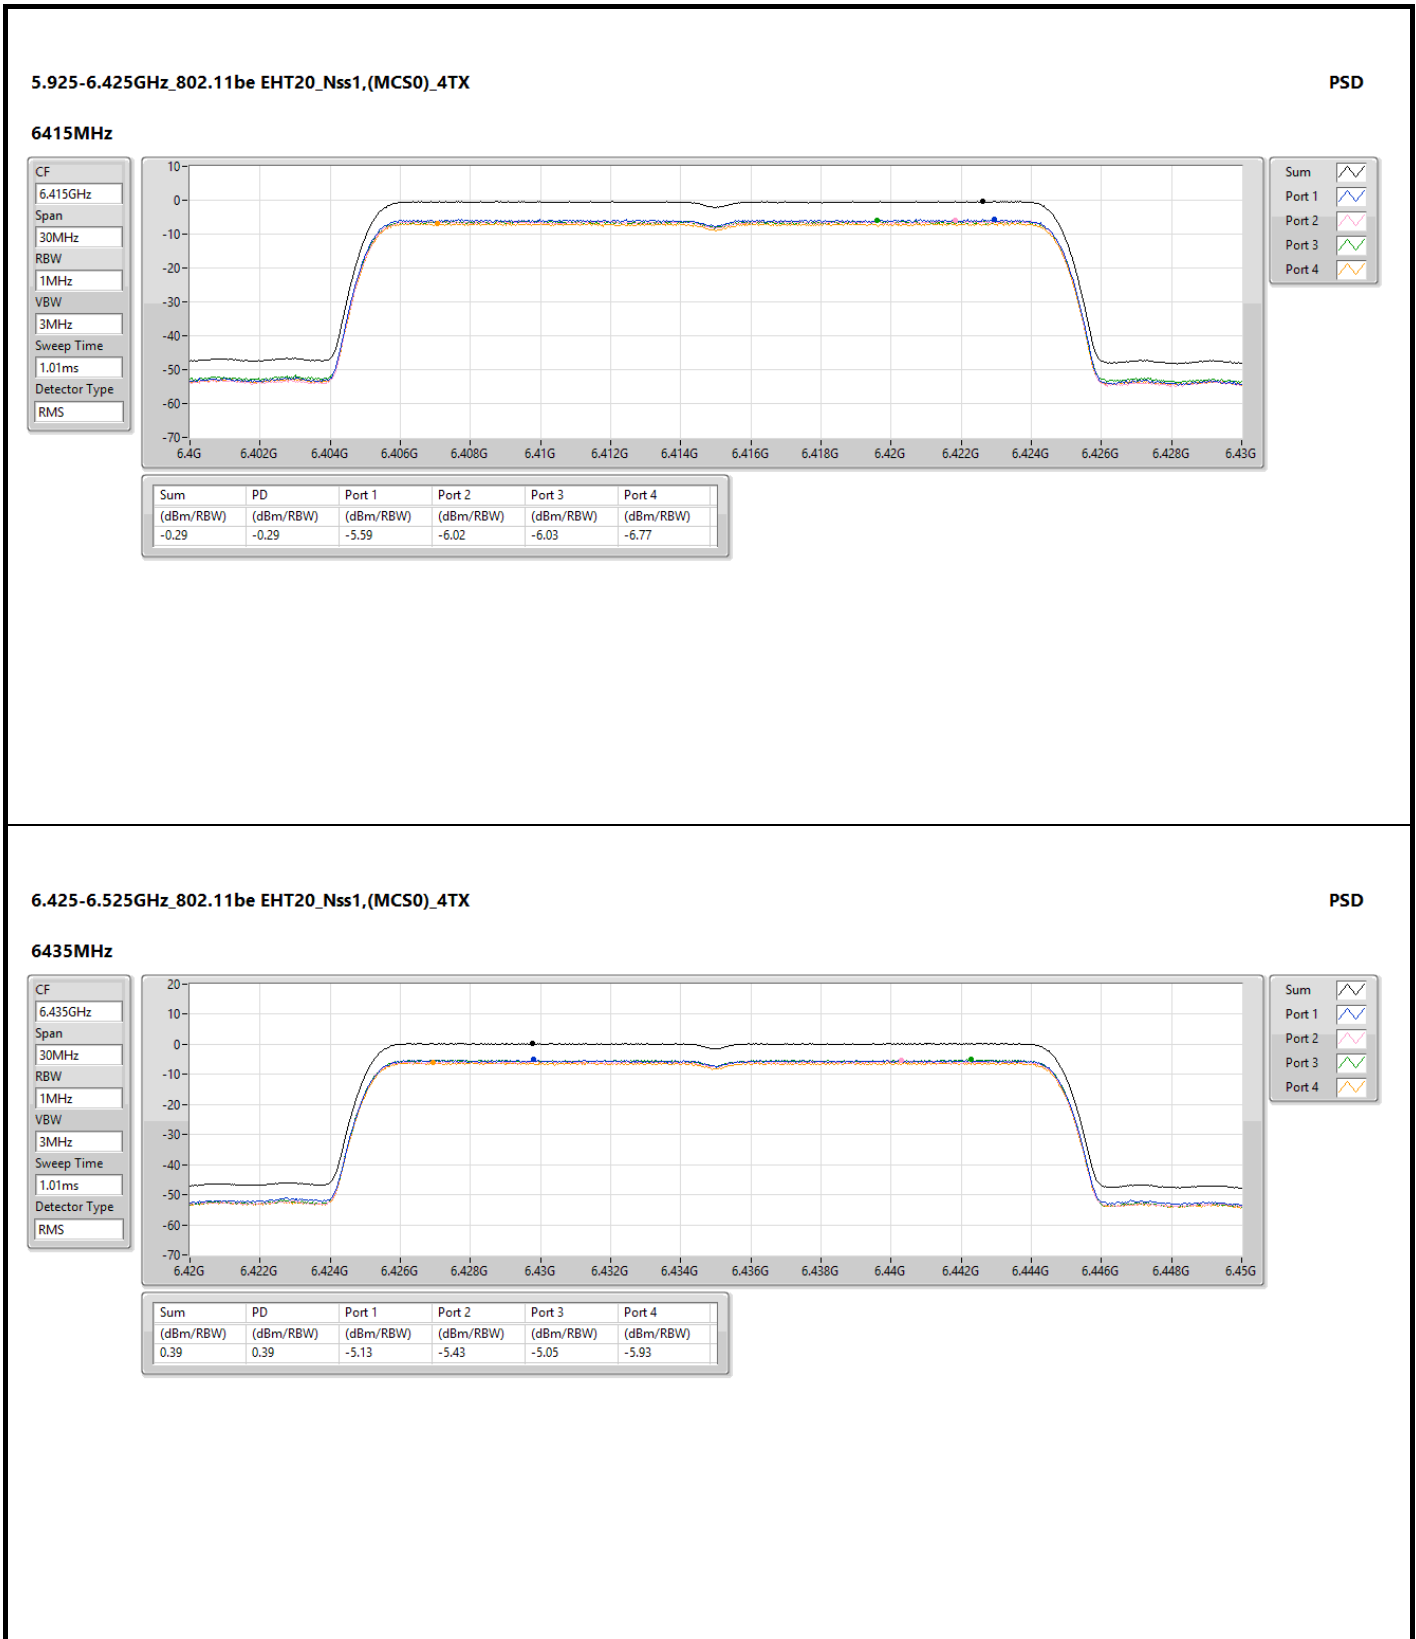
















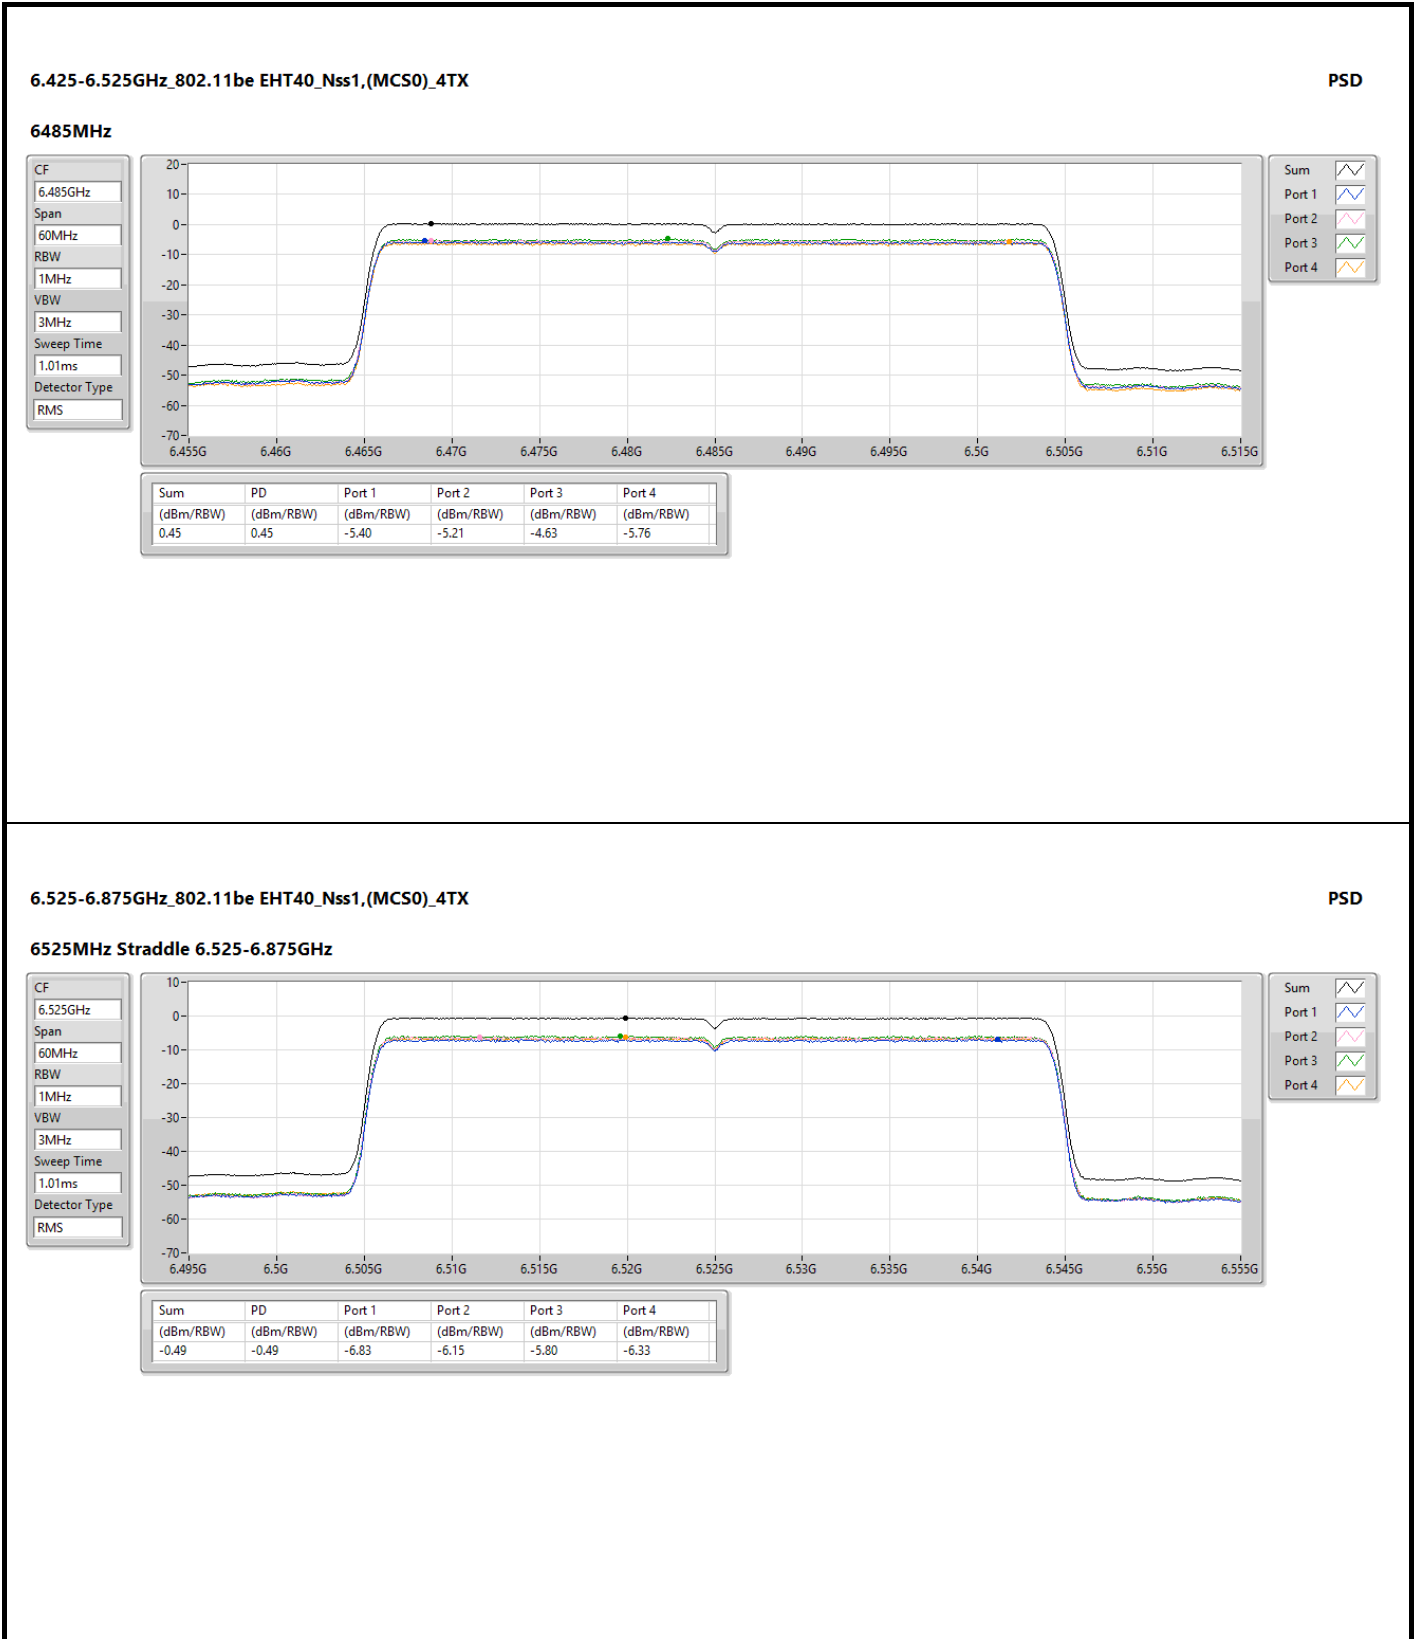
















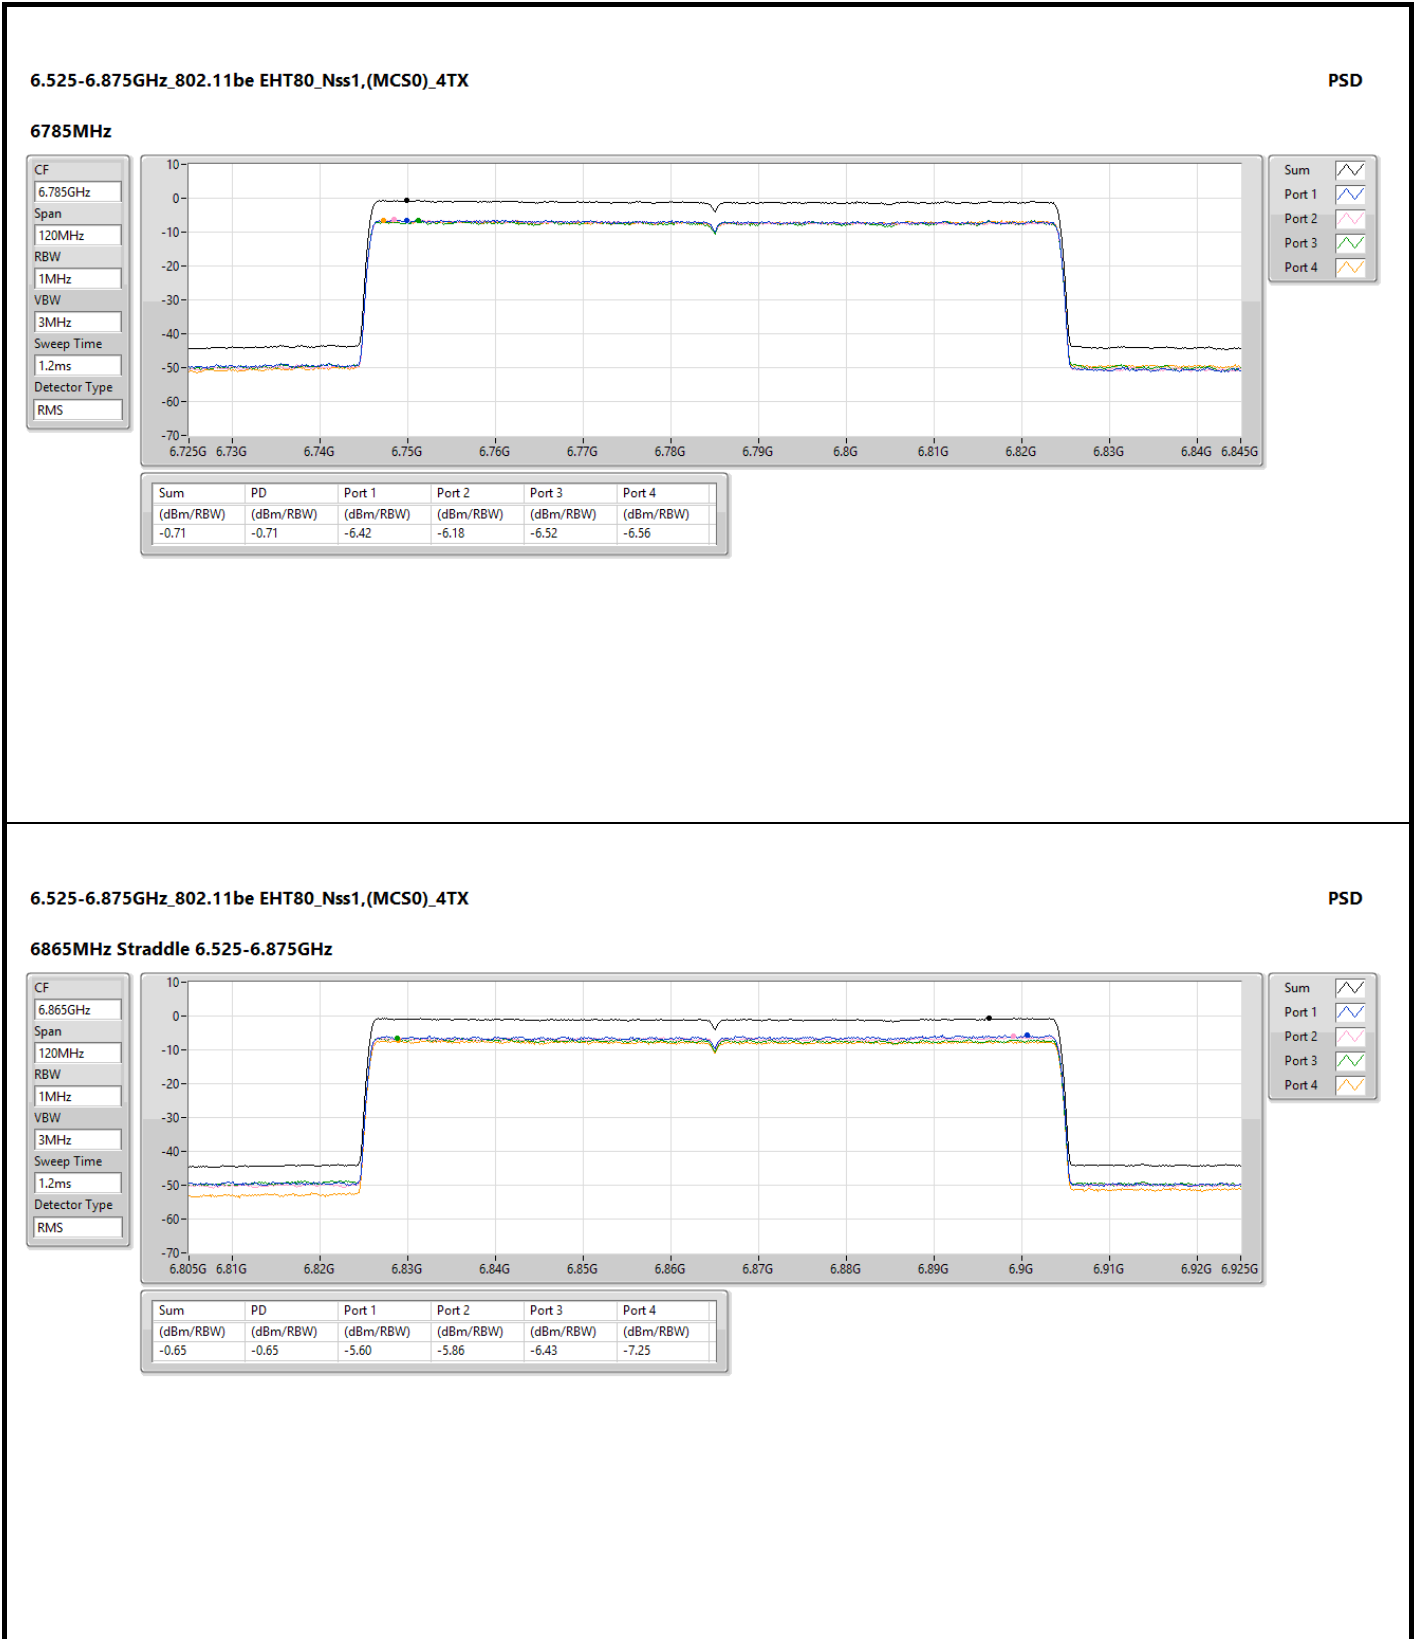

CF
6.865GHz

Span
120MHz

RBW
1MHz

VBW
3MHz

Sweep Time
1.2ms

Detector Type
RMS

Sum

Port 1

Port 2


Port 3


Port 4








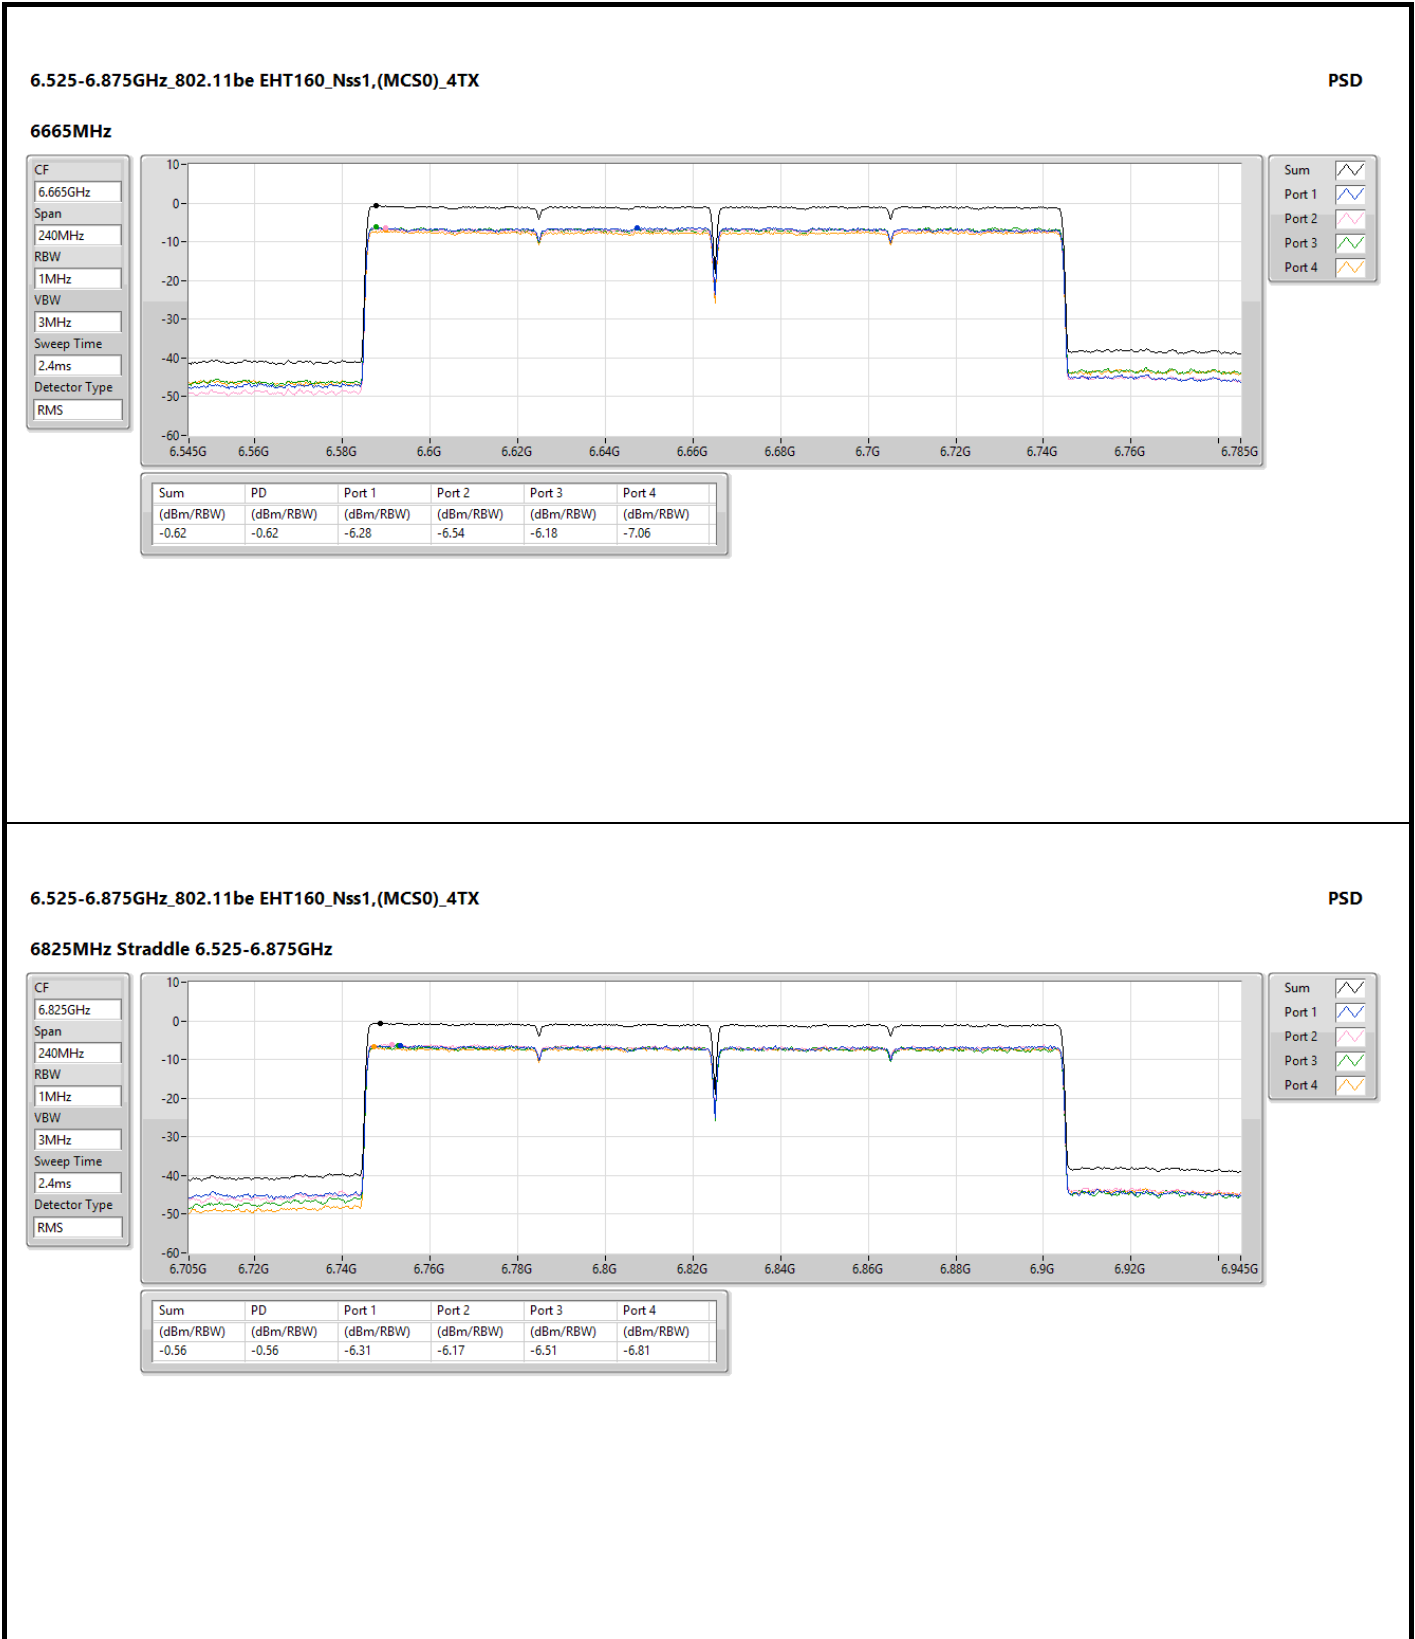

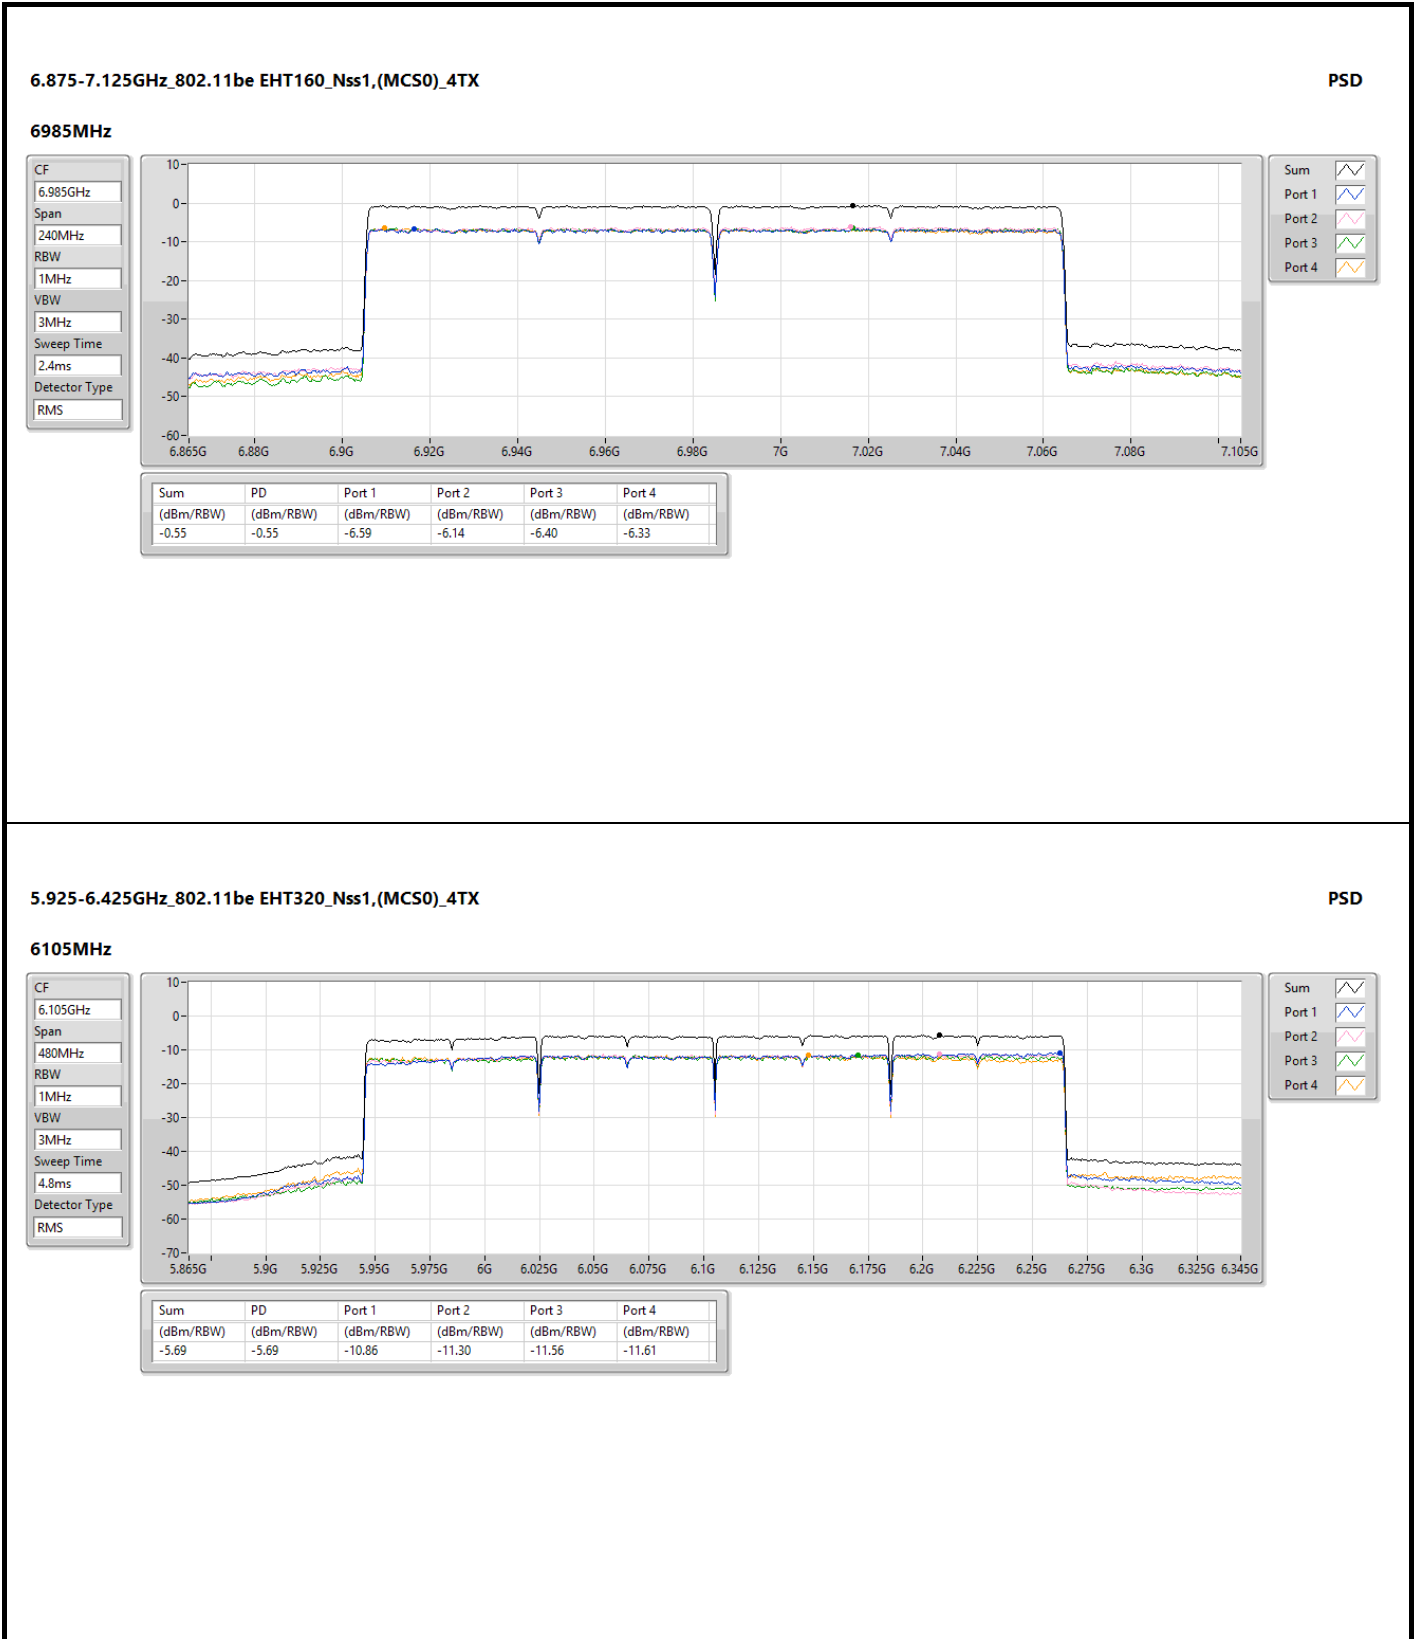





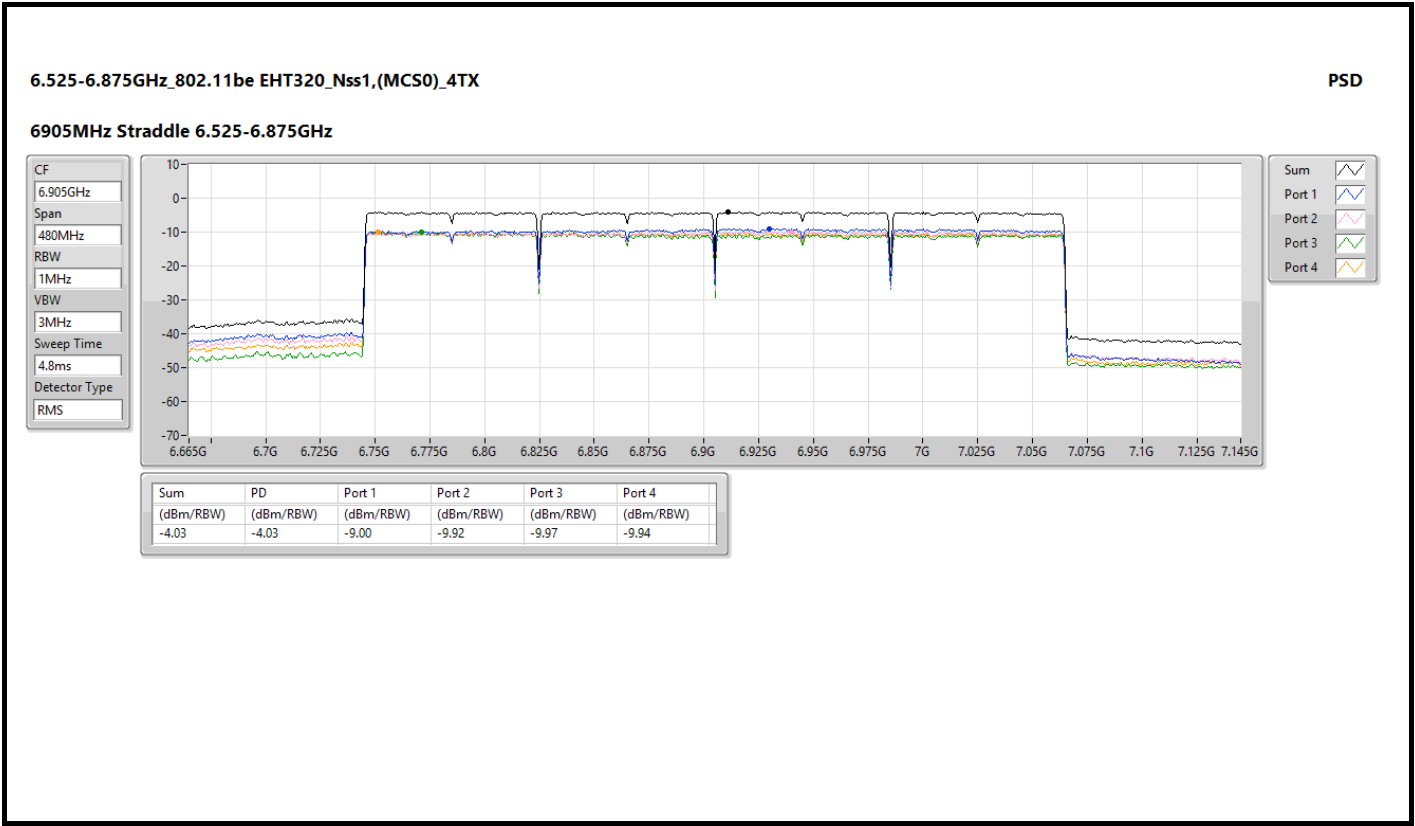



Beamforming mode

Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.05	4.74
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.02	4.77
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.06	4.73
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.13	4.66
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-5.46	-0.67
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	0.20	4.56
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.01	4.35
802.11be EHT80-BF_Nss1,(MCS0)_4TX	0.28	4.64
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.70	4.62
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.60	4.72
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.67	4.65
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.72	4.60
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-2.41	2.91
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-0.73	4.54
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-0.50	4.77
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-0.86	4.41
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-0.98	4.29

RBW = 1MHz



Result


Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5955MHz	Pass	4.79	-6.11	-6.09	-5.95	-5.78	-0.34	Inf	4.45	5.00
6175MHz	Pass	4.79	-5.66	-6.54	-5.66	-5.27	-0.05	Inf	4.74	5.00
6415MHz	Pass	4.79	-5.94	-5.83	-6.48	-7.04	-0.51	Inf	4.28	5.00
6435MHz	Pass	4.36	-5.48	-5.58	-5.58	-5.85	0.20	Inf	4.56	5.00
6475MHz	Pass	4.36	-5.80	-5.62	-5.59	-6.42	0.02	Inf	4.38	5.00
6515MHz	Pass	4.36	-6.42	-5.92	-5.59	-6.36	-0.16	Inf	4.20	5.00
6535MHz	Pass	5.32	-6.72	-6.54	-5.95	-6.70	-0.70	Inf	4.62	5.00
6715MHz	Pass	5.32	-6.72	-6.39	-6.36	-6.68	-0.76	Inf	4.56	5.00
6855MHz	Pass	5.32	-6.45	-6.42	-6.71	-6.88	-0.89	Inf	4.43	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.12	-6.34	-6.40	-6.62	-0.71	Inf	4.61	5.00
6895MHz	Pass	5.27	-6.55	-6.33	-6.93	-7.05	-0.90	Inf	4.37	5.00
7015MHz	Pass	5.27	-6.13	-7.10	-6.97	-6.95	-0.93	Inf	4.34	5.00
7095MHz	Pass	5.27	-6.56	-6.36	-6.42	-6.99	-0.75	Inf	4.52	5.00
7115MHz	Pass	5.27	-6.36	-6.47	-6.38	-7.06	-0.73	Inf	4.54	5.00
802.11be EHT40-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5965MHz	Pass	4.79	-5.55	-6.02	-5.81	-5.89	-0.02	Inf	4.77	5.00
6165MHz	Pass	4.79	-5.94	-6.44	-5.93	-5.50	-0.17	Inf	4.62	5.00
6405MHz	Pass	4.79	-6.16	-5.80	-6.24	-6.95	-0.44	Inf	4.35	5.00
6445MHz	Pass	4.36	-5.48	-5.52	-5.83	-6.46	-0.01	Inf	4.35	5.00
6485MHz	Pass	4.36	-5.93	-5.53	-5.64	-6.41	-0.08	Inf	4.28	5.00
6525MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.89	-6.64	-6.06	-6.84	-0.81	Inf	4.51	5.00
6565MHz	Pass	5.32	-6.60	-6.32	-5.86	-6.64	-0.60	Inf	4.72	5.00
6725MHz	Pass	5.32	-6.74	-6.75	-6.37	-6.54	-0.90	Inf	4.42	5.00
6845MHz	Pass	5.32	-6.29	-6.34	-6.39	-6.31	-0.61	Inf	4.71	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.38	-6.69	-6.67	-6.52	-0.91	Inf	4.41	5.00
6925MHz	Pass	5.27	-6.33	-6.44	-6.75	-6.70	-0.92	Inf	4.35	5.00
7005MHz	Pass	5.27	-5.50	-6.34	-7.08	-6.45	-0.50	Inf	4.77	5.00
7085MHz	Pass	5.27	-6.12	-5.95	-6.30	-6.69	-0.51	Inf	4.76	5.00
802.11be EHT80-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
5985MHz	Pass	4.79	-5.71	-5.84	-6.31	-6.03	-0.06	Inf	4.73	5.00
6145MHz	Pass	4.79	-5.24	-6.07	-5.37	-5.63	-0.14	Inf	4.65	5.00
6385MHz	Pass	4.79	-6.27	-5.64	-6.06	-6.84	-0.41	Inf	4.38	5.00
6465MHz	Pass	4.36	-5.34	-5.52	-5.31	-5.92	0.28	Inf	4.64	5.00
6545MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.81	-6.59	-5.99	-6.69	-0.68	Inf	4.64	5.00
6625MHz	Pass	5.32	-6.30	-6.59	-6.01	-6.42	-0.67	Inf	4.65	5.00
6705MHz	Pass	5.32	-6.71	-6.53	-6.62	-6.97	-0.88	Inf	4.44	5.00
6785MHz	Pass	5.32	-6.59	-6.71	-6.91	-6.59	-1.03	Inf	4.29	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.47	-6.42	-6.93	-6.67	-0.97	Inf	4.35	5.00
6945MHz	Pass	5.27	-6.39	-6.33	-6.87	-6.59	-0.86	Inf	4.41	5.00
7025MHz	Pass	5.27	-6.08	-6.79	-7.17	-6.67	-0.88	Inf	4.39	5.00
802.11be EHT160-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-



Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	Port 4 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6025MHz	Pass	4.79	-5.93	-5.99	-5.41	-6.44	-0.13	Inf	4.66	5.00
6185MHz	Pass	4.79	-5.94	-6.78	-5.66	-5.73	-0.24	Inf	4.55	5.00
6345MHz	Pass	4.79	-6.09	-6.25	-5.92	-6.80	-0.54	Inf	4.25	5.00
6505MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.86	-6.75	-6.38	-6.87	-0.90	Inf	4.42	5.00
6665MHz	Pass	5.32	-6.67	-6.53	-6.29	-6.57	-0.72	Inf	4.60	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	5.32	-6.58	-6.42	-6.54	-6.96	-0.88	Inf	4.44	5.00
6985MHz	Pass	5.27	-6.56	-6.81	-6.88	-6.79	-0.98	Inf	4.29	5.00
802.11be EHT320-BF_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-	-	-
6105MHz	Pass	4.79	-10.92	-11.15	-11.12	-11.73	-5.57	Inf	-0.78	5.00
6265MHz	Pass	4.79	-11.61	-11.99	-11.01	-10.51	-5.46	Inf	-0.67	5.00
6425MHz Straddle 6.525-6.875GHz	Pass	5.32	-8.16	-8.27	-8.09	-8.73	-2.41	Inf	2.91	5.00
6585MHz Straddle 6.525-6.875GHz	Pass	5.32	-9.61	-9.09	-8.61	-8.79	-3.21	Inf	2.11	5.00
6745MHz Straddle 6.525-6.875GHz	Pass	5.32	-8.63	-8.38	-8.83	-8.20	-2.96	Inf	2.36	5.00
6905MHz Straddle 6.525-6.875GHz	Pass	5.32	-11.63	-11.22	-11.09	-11.99	-5.74	Inf	-0.42	5.00

DG = Directional Gain; RBW = 1MHz

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density; Directional Gain refers to antenna report.

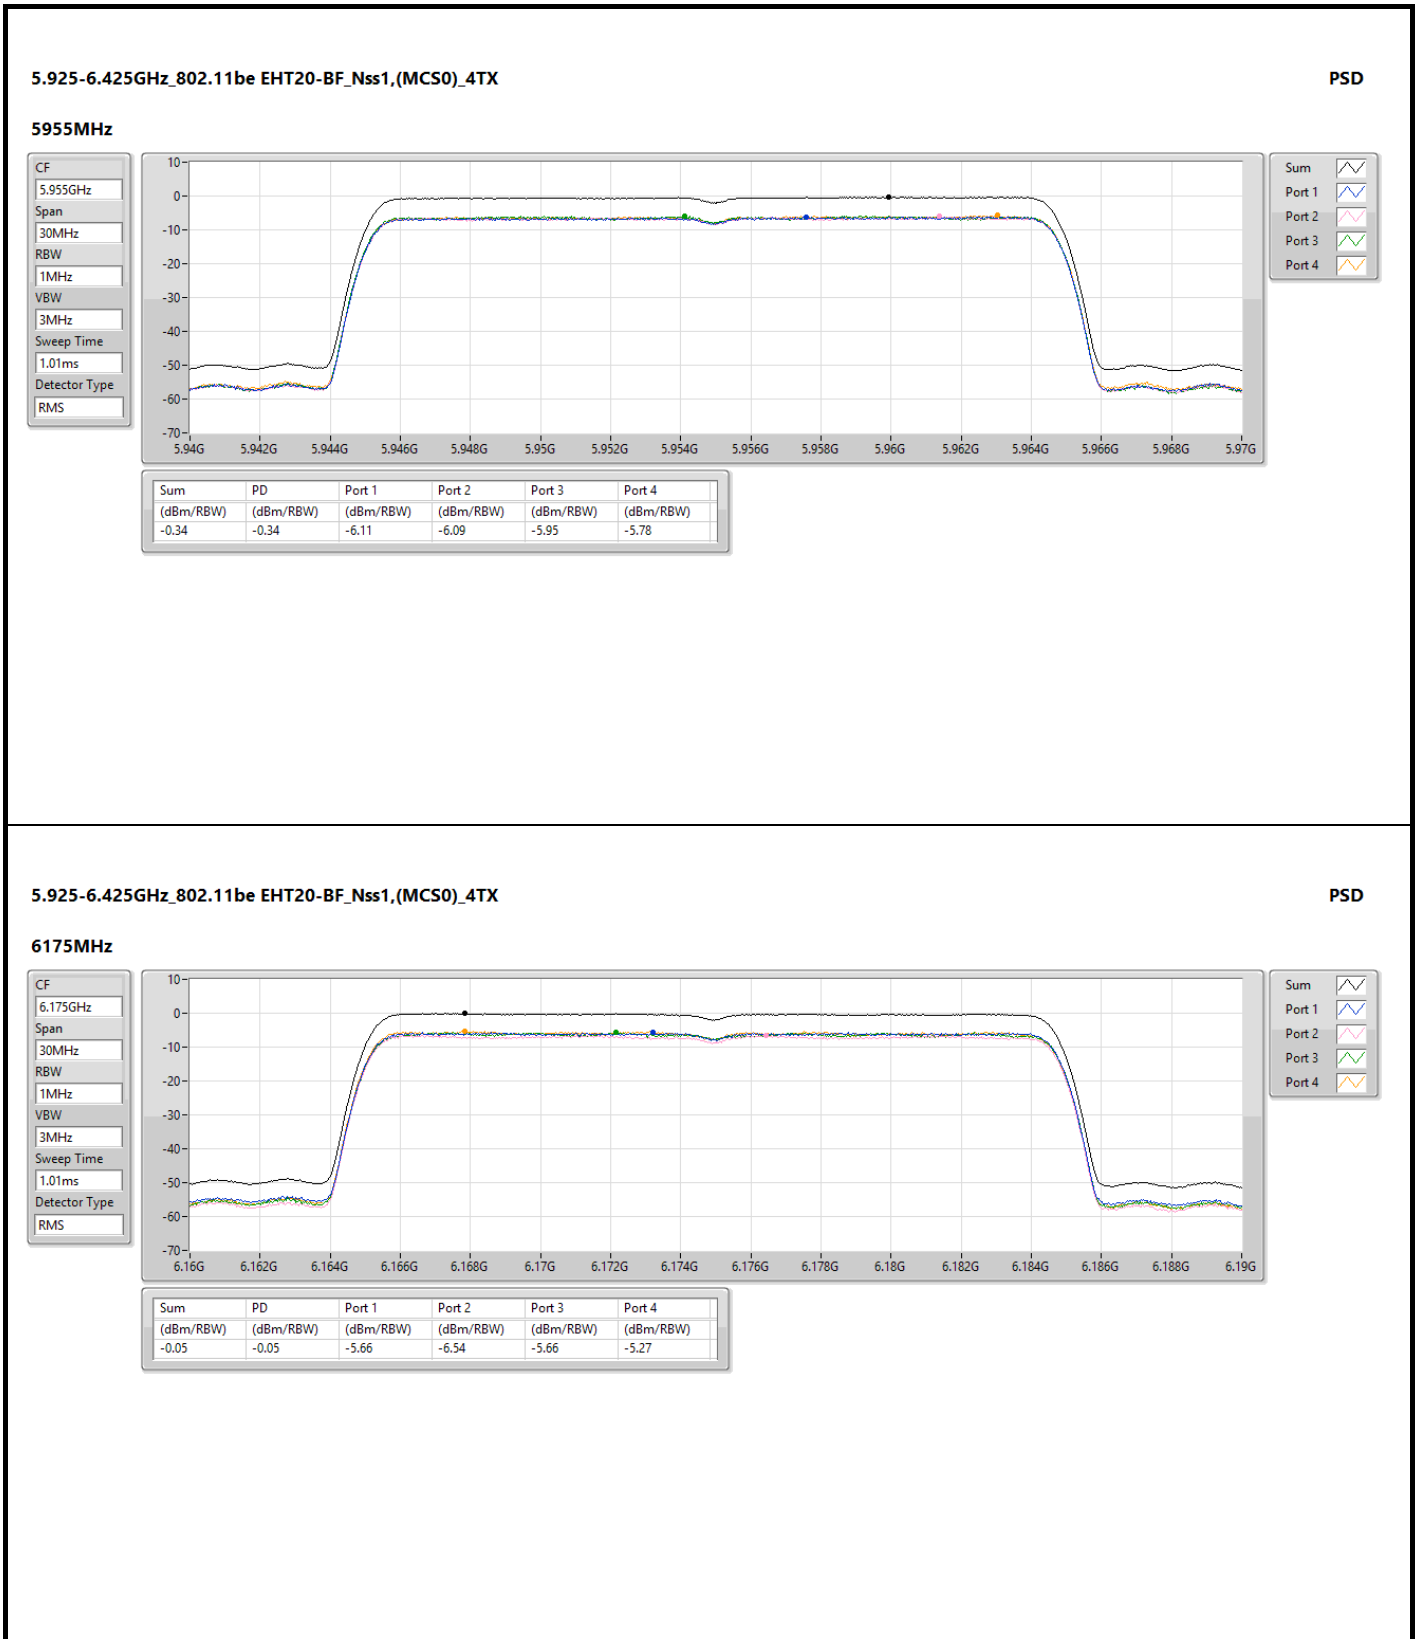












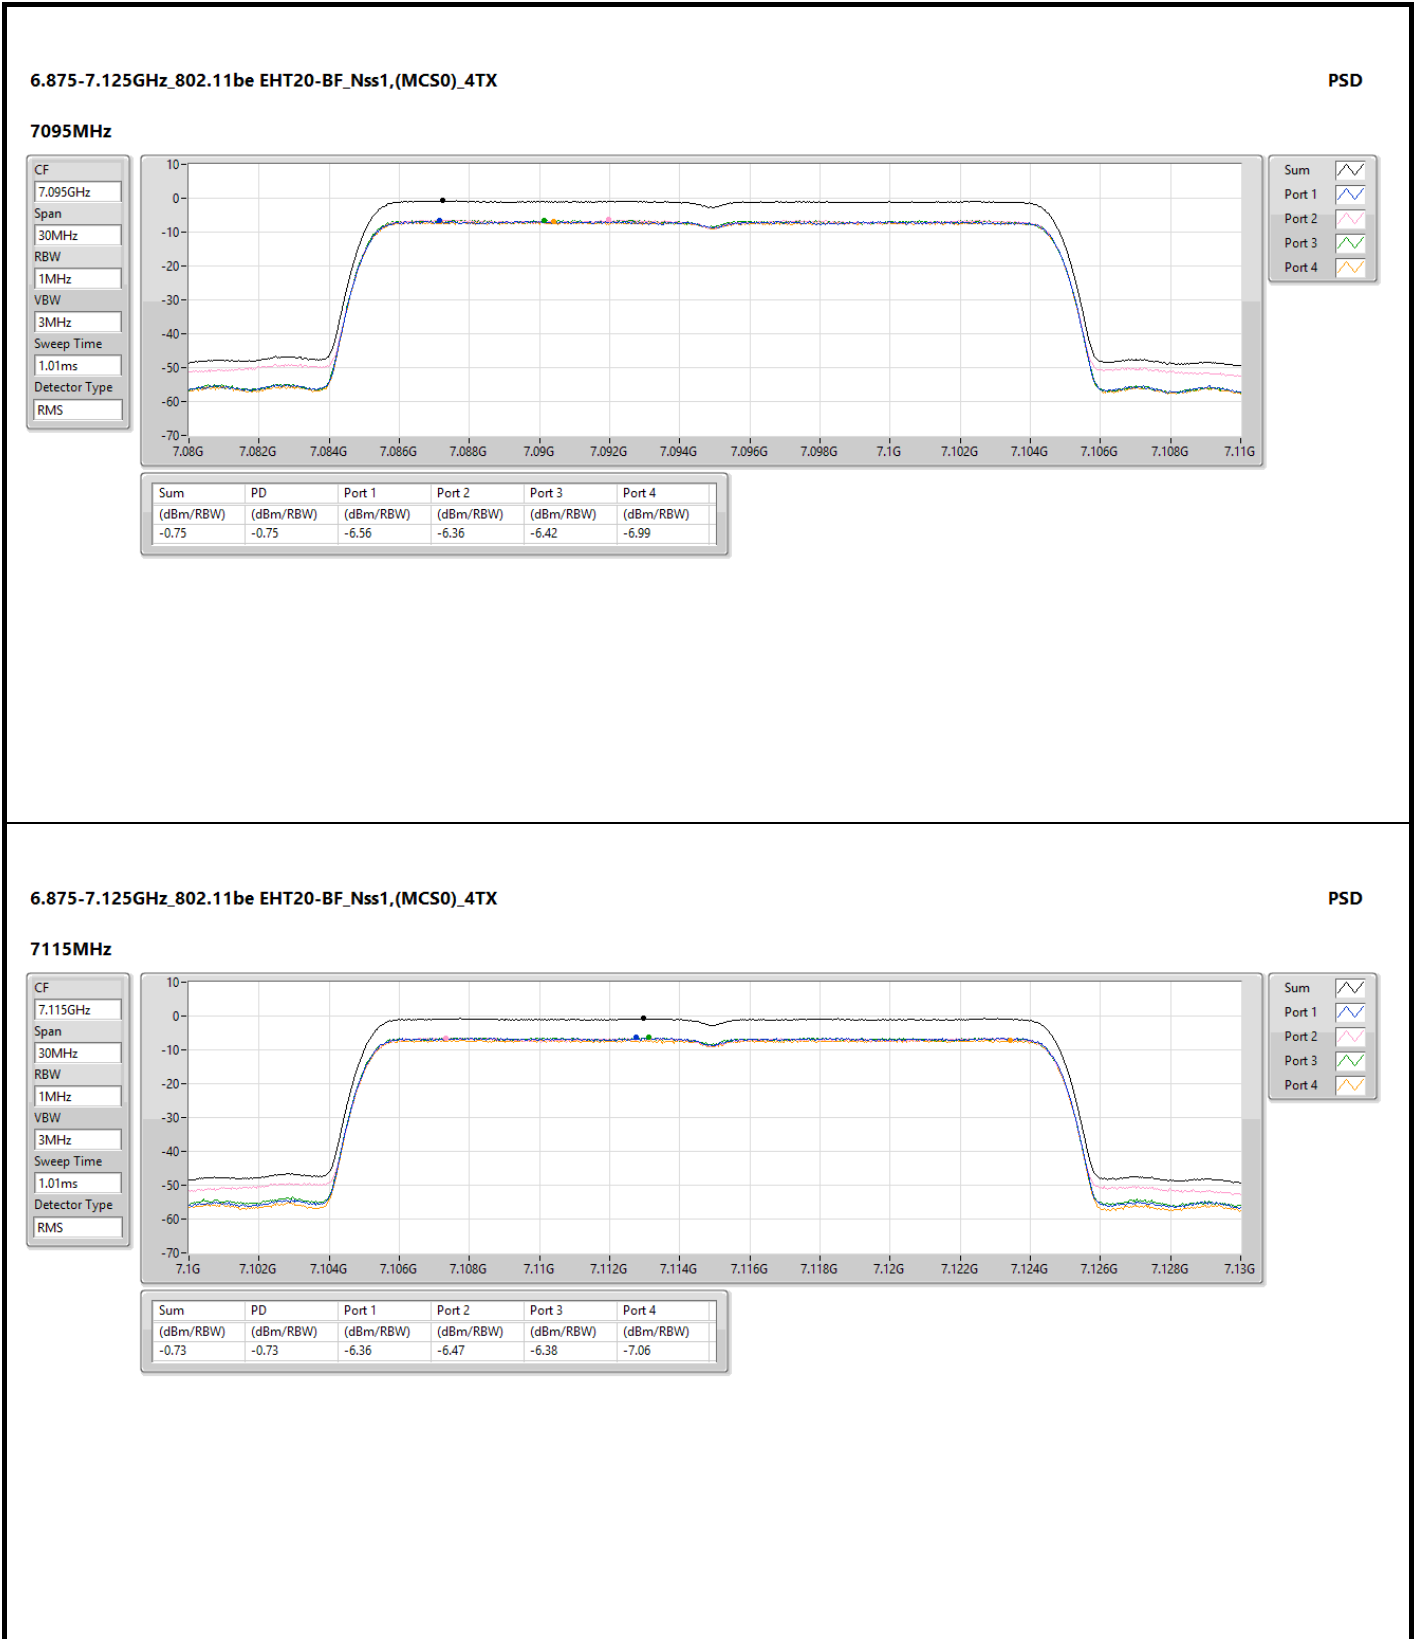

































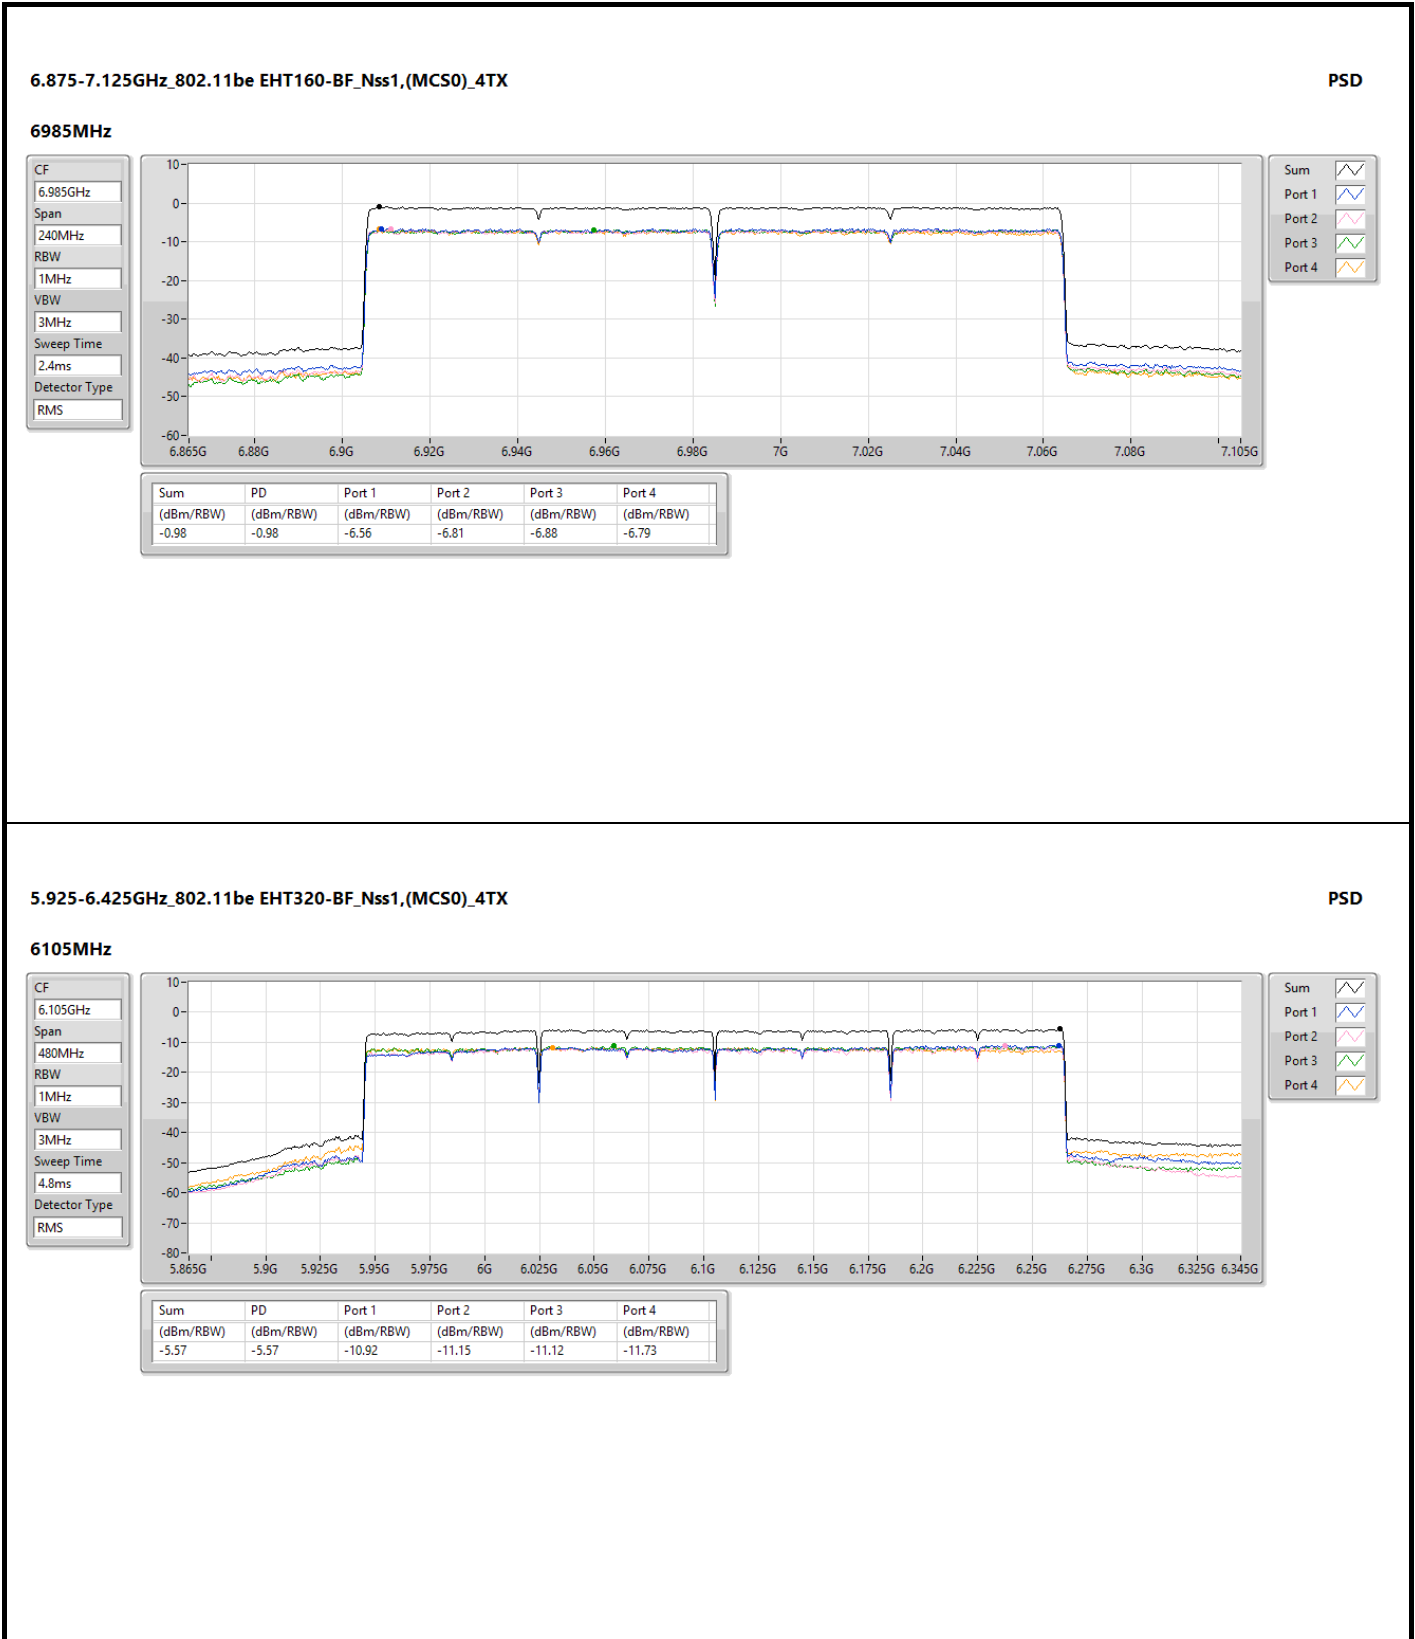





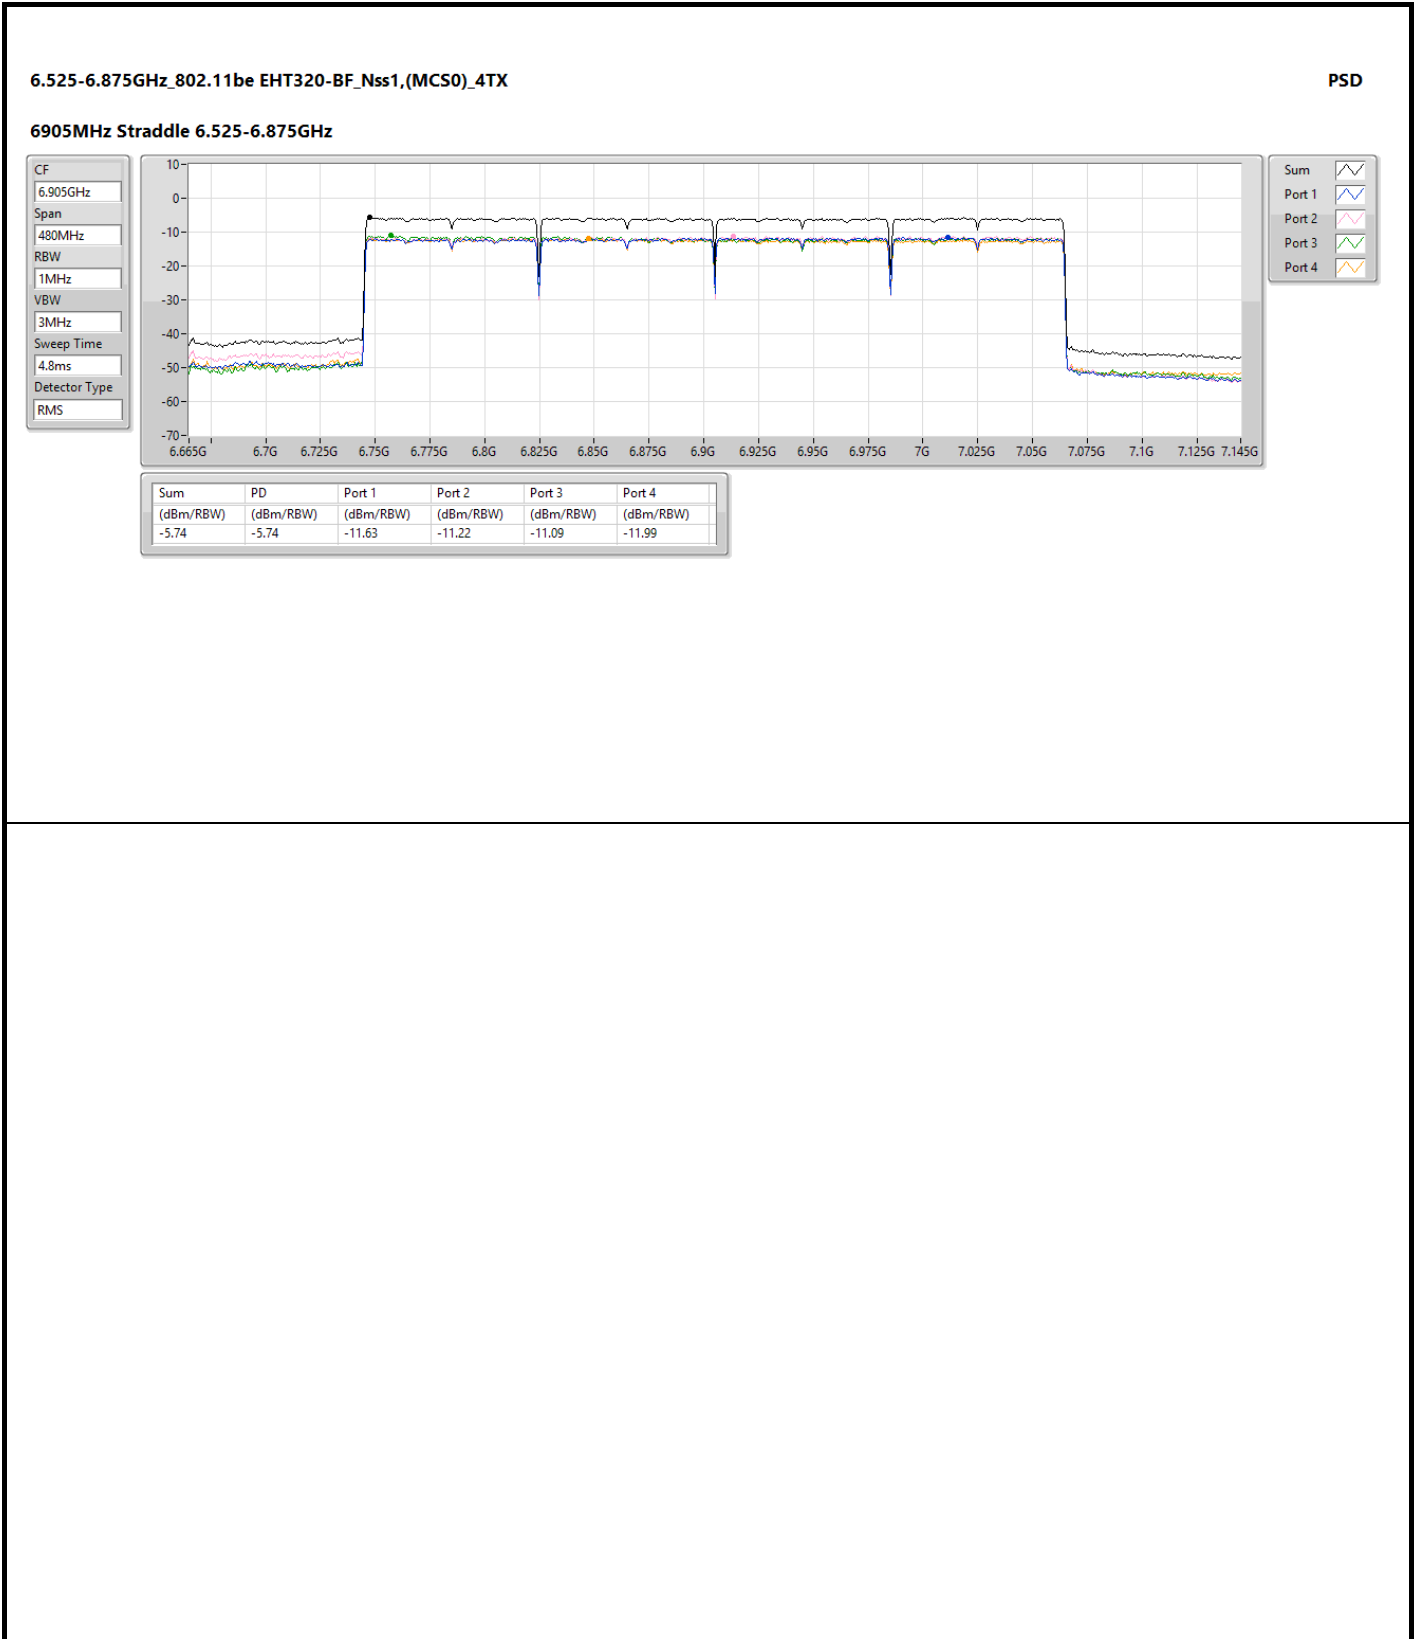




Non-beamforming mode

Configuration 1: Model: SDG-8733

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

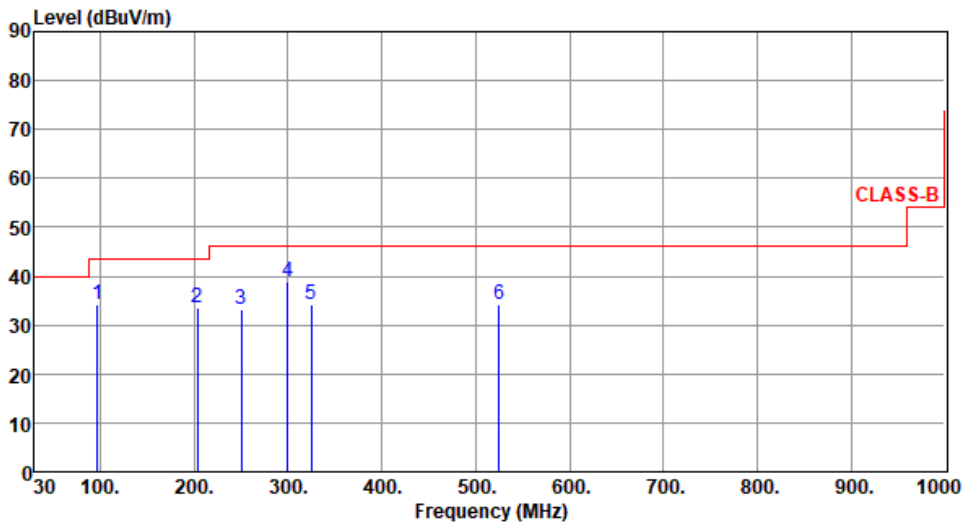

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	96.93	34.32	43.50	-9.18	47.86	-13.54	Peak	---	---
2	203.63	33.52	43.50	-9.98	45.39	-11.87	Peak	---	---
3	250.19	33.25	46.00	-12.75	43.20	-9.95	Peak	---	---
4	299.66	38.92	46.00	-7.08	46.99	-8.07	Peak	---	---
5	324.88	34.11	46.00	-11.89	41.41	-7.30	Peak	---	---
6	524.70	34.15	46.00	-11.85	36.76	-2.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 25 Humidity(%): 61

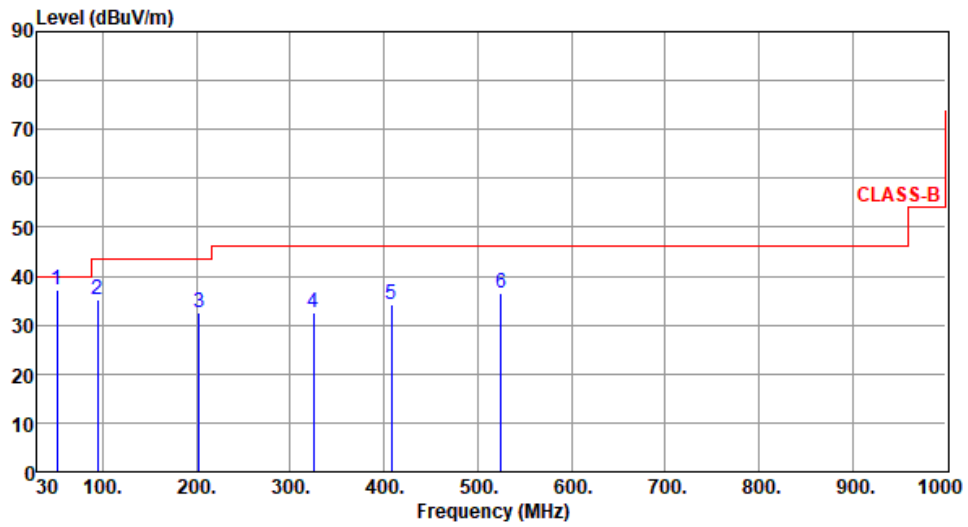

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	51.34	37.08	40.00	-2.92	44.95	-7.87	QP	100	60
2	94.02	35.24	43.50	-8.26	49.27	-14.03	Peak	---	---
3	202.66	32.62	43.50	-10.88	44.47	-11.85	Peak	---	---
4	325.16	32.44	46.00	-13.56	39.73	-7.29	Peak	---	---
5	408.30	34.27	46.00	-11.73	39.39	-5.12	Peak	---	---
6	524.70	36.57	46.00	-9.43	39.18	-2.61	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Configuration 2: Model: SDG-8734
Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

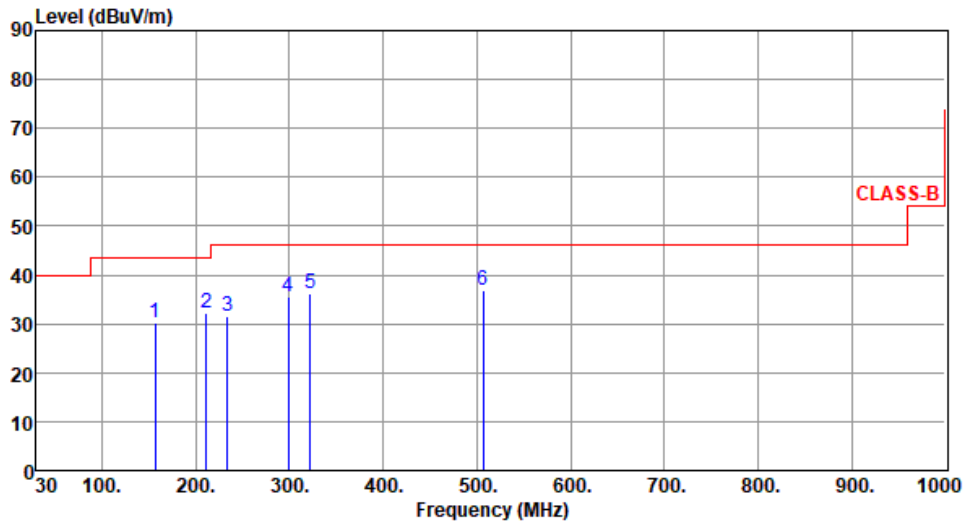

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	156.77	30.27	43.50	-13.23	38.99	-8.72	Peak	---	---
2	211.56	32.09	43.50	-11.41	44.07	-11.98	Peak	---	---
3	233.48	31.65	46.00	-14.35	42.66	-11.01	Peak	---	---
4	298.64	35.64	46.00	-10.36	43.75	-8.11	Peak	---	---
5	322.13	36.13	46.00	-9.87	43.49	-7.36	Peak	---	---
6	506.89	36.88	46.00	-9.12	39.69	-2.81	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):24 Humidity(%):62

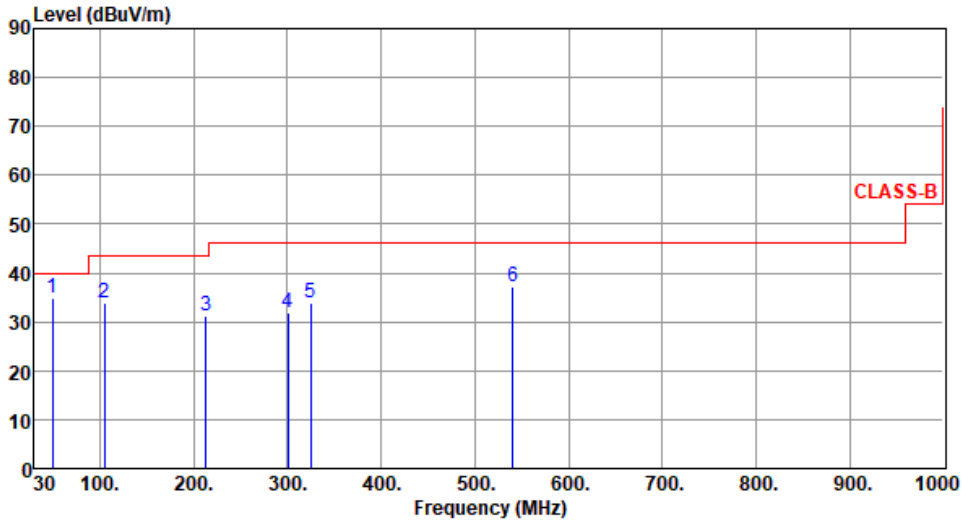

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	48.96	35.03	40.00	-4.97	42.87	-7.84	QP	100	90
2	104.88	33.85	43.50	-9.65	46.18	-12.33	Peak	---	---
3	212.95	31.06	43.50	-12.44	43.03	-11.97	Peak	---	---
4	300.72	31.75	46.00	-14.25	39.80	-8.05	Peak	---	---
5	324.50	33.84	46.00	-12.16	41.15	-7.31	Peak	---	---
6	540.54	37.12	46.00	-8.88	39.57	-2.45	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5955
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

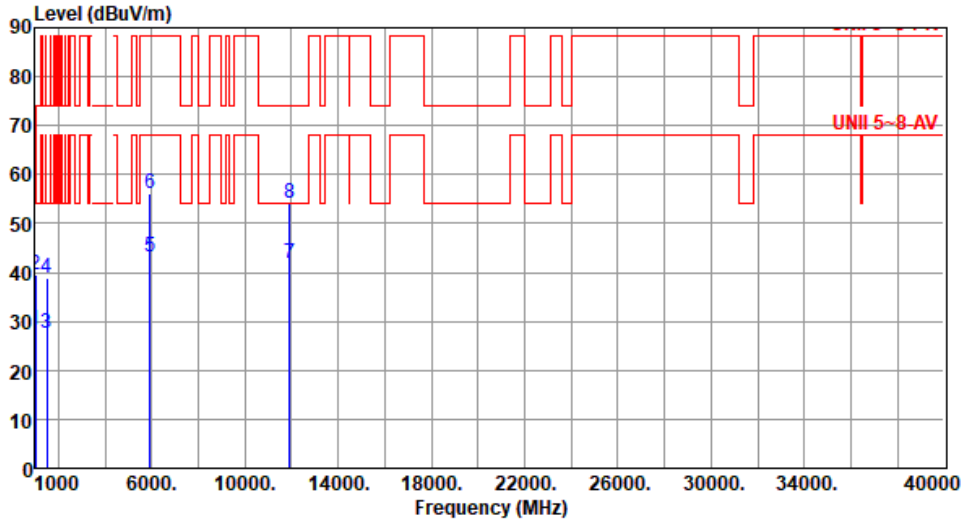

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	251
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	251
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	131	125
4	1500.00	38.72	74.00	-35.28	46.00	-7.28	Peak	131	125
5	5925.00	43.06	68.20	-25.14	41.93	1.13	Average	247	51
6	5925.00	55.99	88.20	-32.21	54.86	1.13	Peak	247	51
7	11910.00	41.76	54.00	-12.24	35.67	6.09	Average	100	185
8	11910.00	54.28	74.00	-19.72	48.19	6.09	Peak	100	185

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

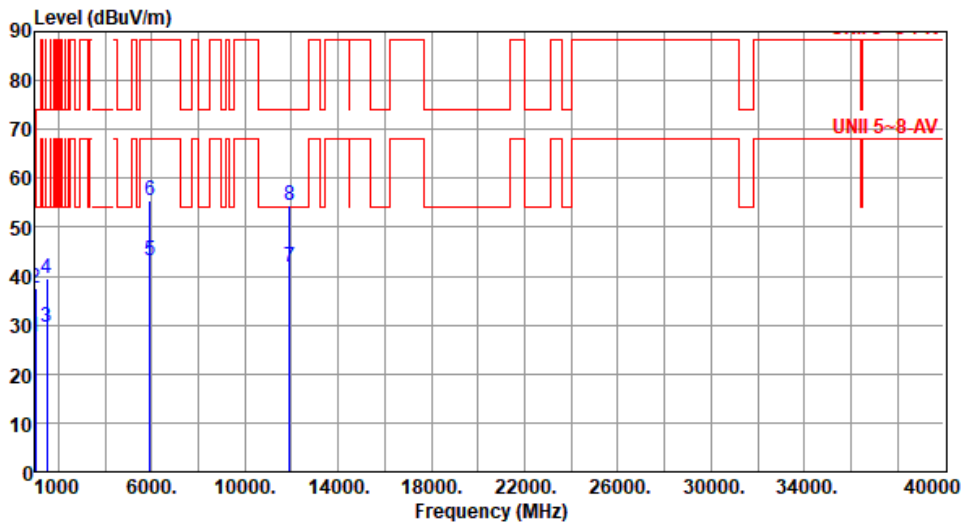

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	285
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	285
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	202	111
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	111
5	5925.00	43.09	68.20	-25.11	41.96	1.13	Average	264	331
6	5925.00	55.41	88.20	-32.79	54.28	1.13	Peak	264	331
7	11910.00	41.77	54.00	-12.23	35.68	6.09	Average	100	176
8	11910.00	54.41	74.00	-19.59	48.32	6.09	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

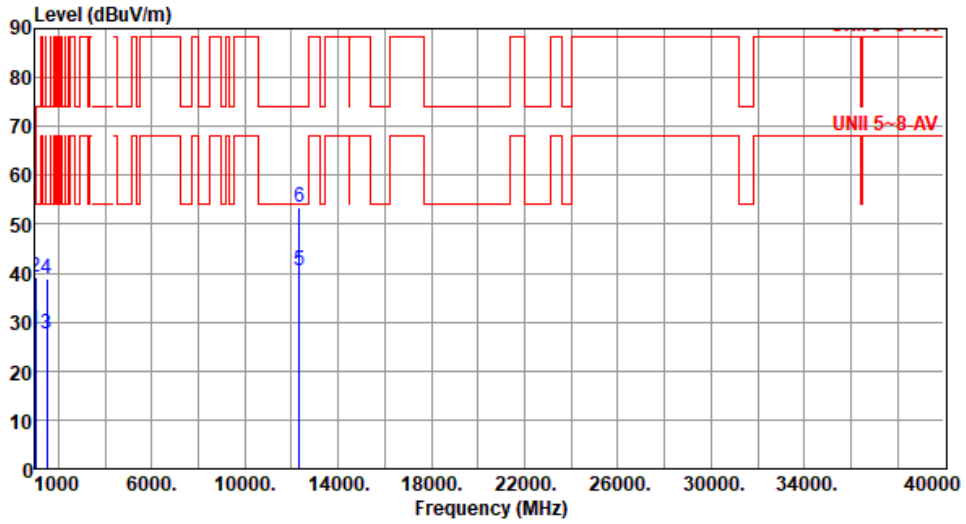

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	251
3	1500.00	27.63	54.00	-26.37	34.91	-7.28	Average	129	123
4	1500.00	38.82	74.00	-35.18	46.10	-7.28	Peak	129	123
5	12350.00	40.42	54.00	-13.58	34.59	5.83	Average	100	248
6	12350.00	53.58	74.00	-20.42	47.75	5.83	Peak	100	248

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

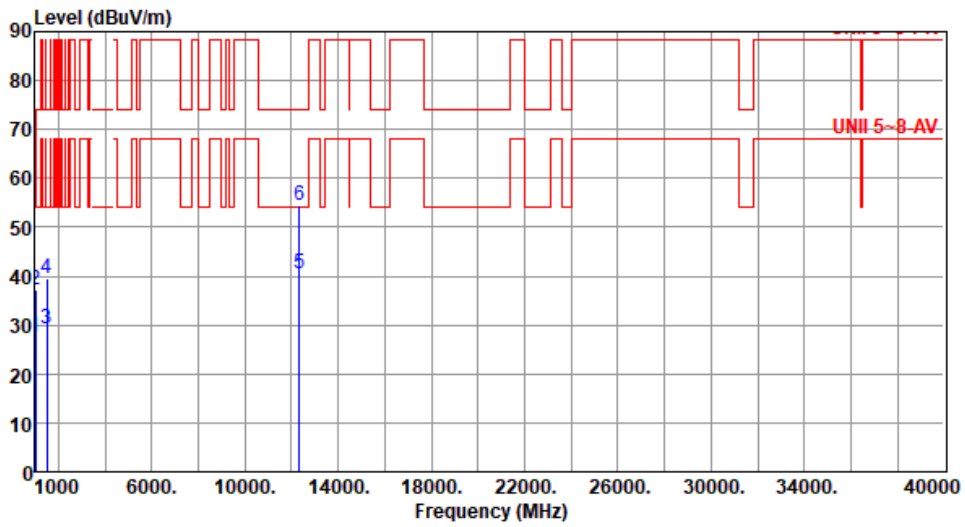

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	286
2	1000.00	37.32	54.00	-16.68	45.59	-8.27	Peak	100	286
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	202	113
4	1500.00	39.36	74.00	-34.64	46.64	-7.28	Peak	202	113
5	12350.00	40.51	54.00	-13.49	34.68	5.83	Average	100	208
6	12350.00	54.57	74.00	-19.43	48.74	5.83	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

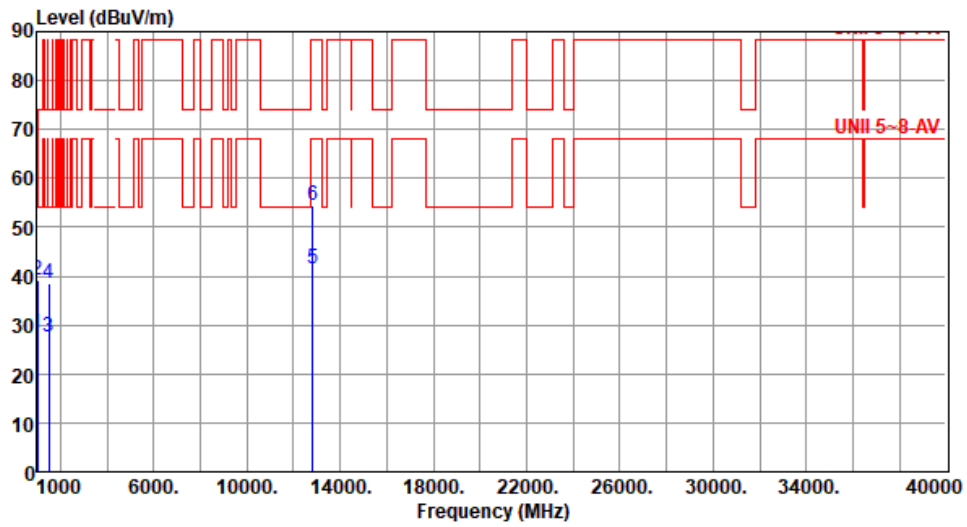

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	250
2	1000.00	39.35	54.00	-14.65	47.62	-8.27	Peak	100	250
3	1500.00	27.59	54.00	-26.41	34.87	-7.28	Average	131	122
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	122
5	12830.00	41.36	68.20	-26.84	35.21	6.15	Average	100	223
6	12830.00	54.41	88.20	-33.79	48.26	6.15	Peak	100	223

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

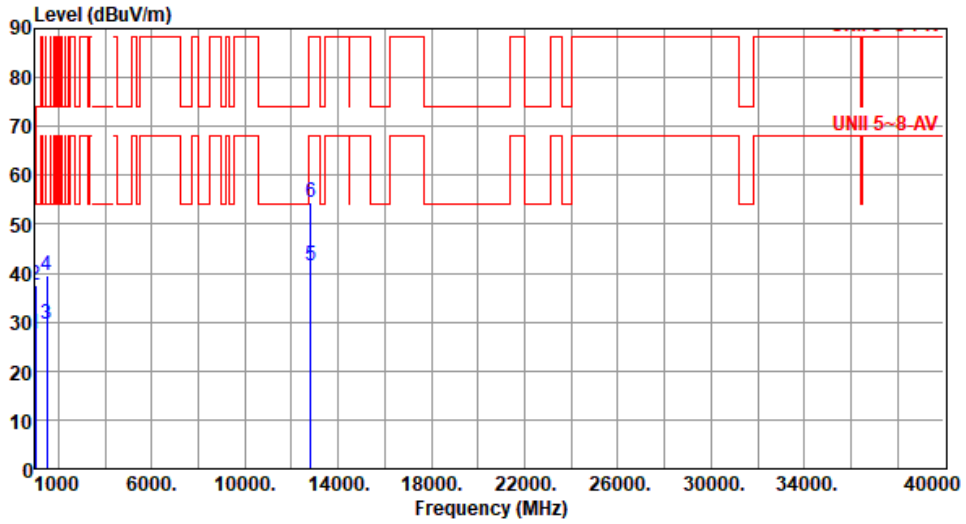

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	281
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	281
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	203	113
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	113
5	12830.00	41.38	68.20	-26.82	35.23	6.15	Average	100	279
6	12830.00	54.49	88.20	-33.71	48.34	6.15	Peak	100	279

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

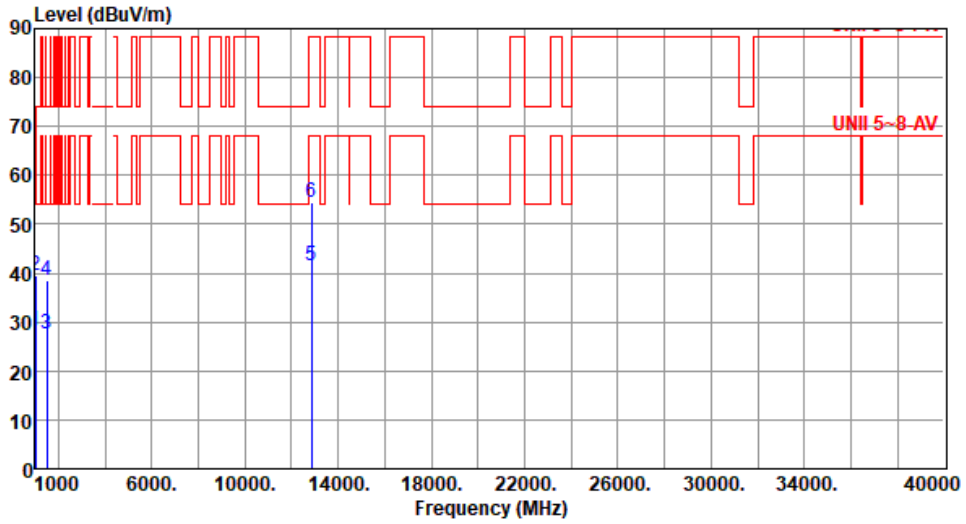

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	251
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	251
3	1500.00	27.61	54.00	-26.39	34.89	-7.28	Average	132	125
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	132	125
5	12870.00	41.62	68.20	-26.58	35.55	6.07	Average	100	273
6	12870.00	54.38	88.20	-33.82	48.31	6.07	Peak	100	273

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

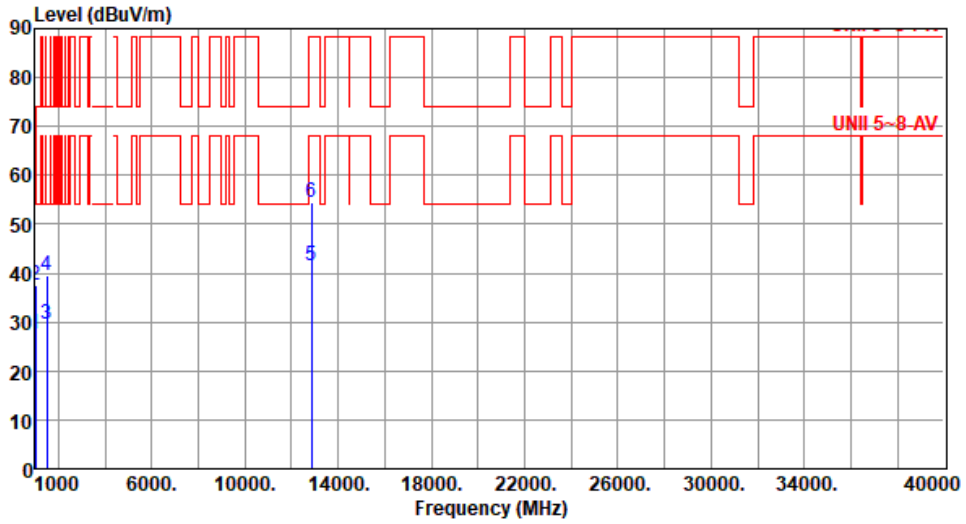

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288
2	1000.00	37.62	54.00	-16.38	45.89	-8.27	Peak	100	288
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	105
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	105
5	12870.00	41.62	68.20	-26.58	35.55	6.07	Average	100	294
6	12870.00	54.51	88.20	-33.69	48.44	6.07	Peak	100	294

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

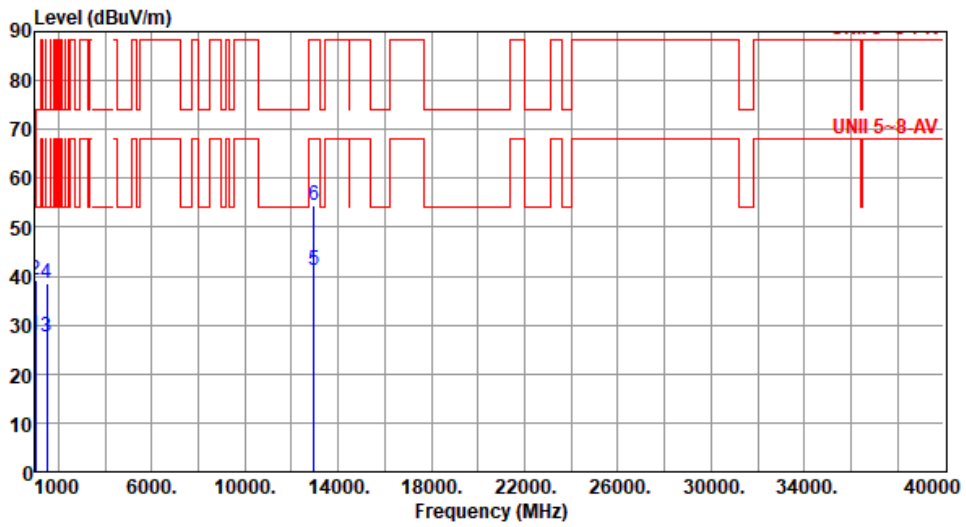

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.05	54.00	-25.95	36.32	-8.27	Average	100	253
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	253
3	1500.00	27.46	54.00	-26.54	34.74	-7.28	Average	131	122
4	1500.00	38.51	74.00	-35.49	45.79	-7.28	Peak	131	122
5	12950.00	41.13	68.20	-27.07	35.03	6.10	Average	100	203
6	12950.00	54.37	88.20	-33.83	48.27	6.10	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

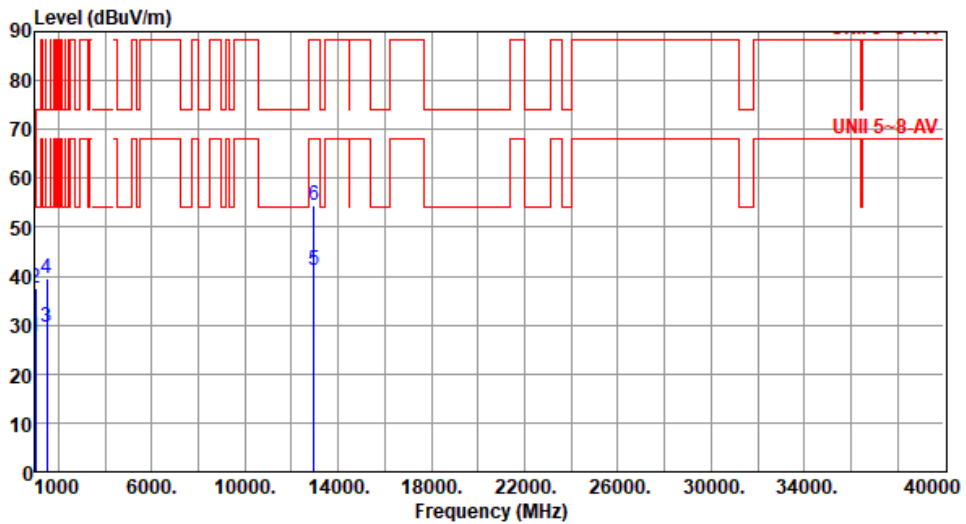

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.62	54.00	-26.38	35.89	-8.27	Average	100	286
2	1000.00	37.61	54.00	-16.39	45.88	-8.27	Peak	100	286
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	111
5	12950.00	41.23	68.20	-26.97	35.13	6.10	Average	100	248
6	12950.00	54.36	88.20	-33.84	48.26	6.10	Peak	100	248

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

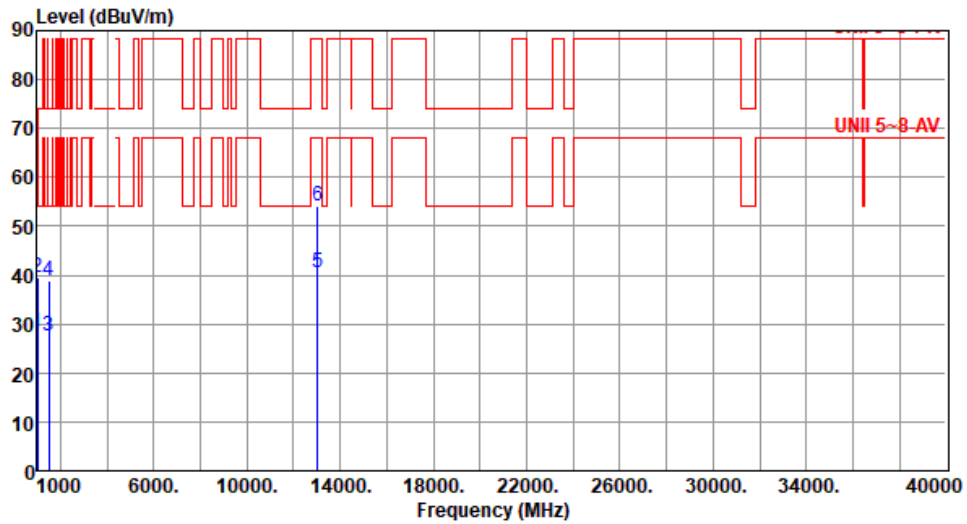

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.22	54.00	-25.78	36.49	-8.27	Average	100	251
2	1000.00	39.47	54.00	-14.53	47.74	-8.27	Peak	100	251
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	125
4	1500.00	38.85	74.00	-35.15	46.13	-7.28	Peak	131	125
5	13030.00	40.51	68.20	-27.69	34.50	6.01	Average	100	264
6	13030.00	54.11	88.20	-34.09	48.10	6.01	Peak	100	264

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

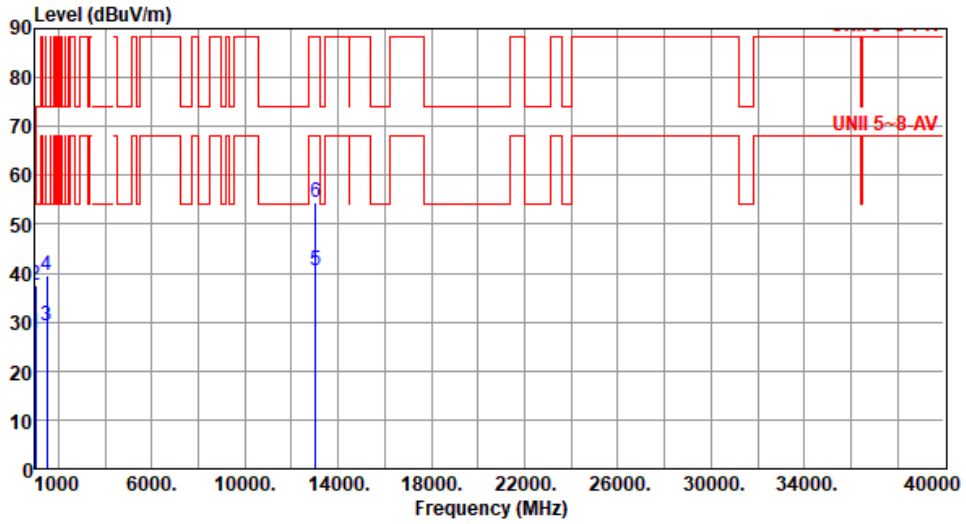

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	286
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	286
3	1500.00	29.28	54.00	-24.72	36.56	-7.28	Average	203	115
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	115
5	13030.00	40.61	68.20	-27.59	34.60	6.01	Average	100	184
6	13030.00	54.33	88.20	-33.87	48.32	6.01	Peak	100	184

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

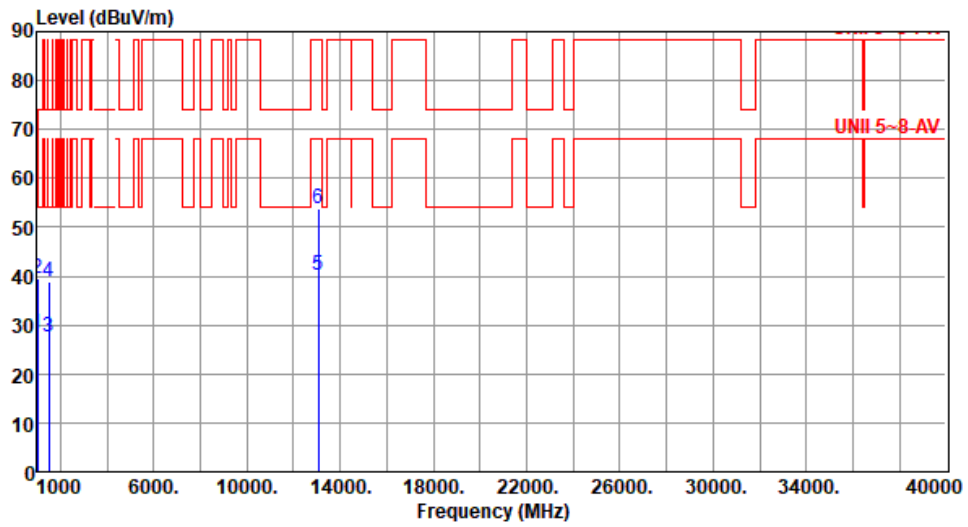

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	249
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	249
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	118
4	1500.00	38.76	74.00	-35.24	46.04	-7.28	Peak	125	118
5	13070.00	40.31	68.20	-27.89	34.51	5.80	Average	100	160
6	13070.00	53.79	88.20	-34.41	47.99	5.80	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

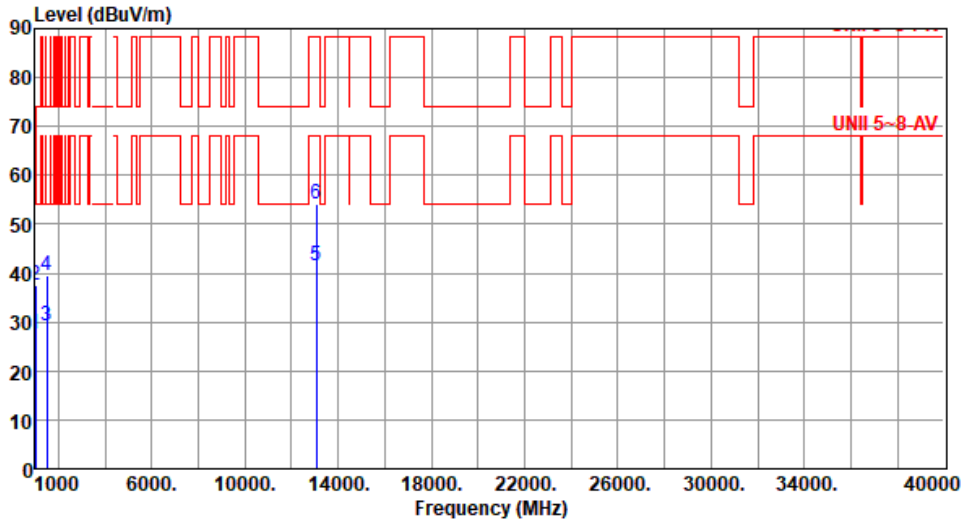

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	286
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	115
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	203	115
5	13070.00	41.42	68.20	-26.78	35.62	5.80	Average	100	123
6	13070.00	53.98	88.20	-34.22	48.18	5.80	Peak	100	123

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

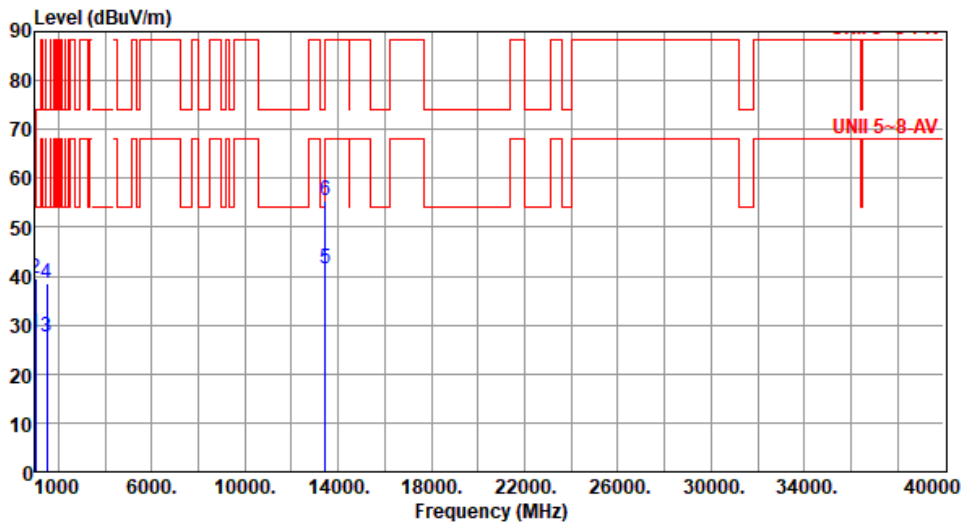

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.27	54.00	-25.73	36.54	-8.27	Average	100	253
2	1000.00	39.45	54.00	-14.55	47.72	-8.27	Peak	100	253
3	1500.00	27.59	54.00	-26.41	34.87	-7.28	Average	131	122
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	131	122
5	13430.00	41.58	68.20	-26.62	35.63	5.95	Average	100	244
6	13430.00	55.39	88.20	-32.81	49.44	5.95	Peak	100	244

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

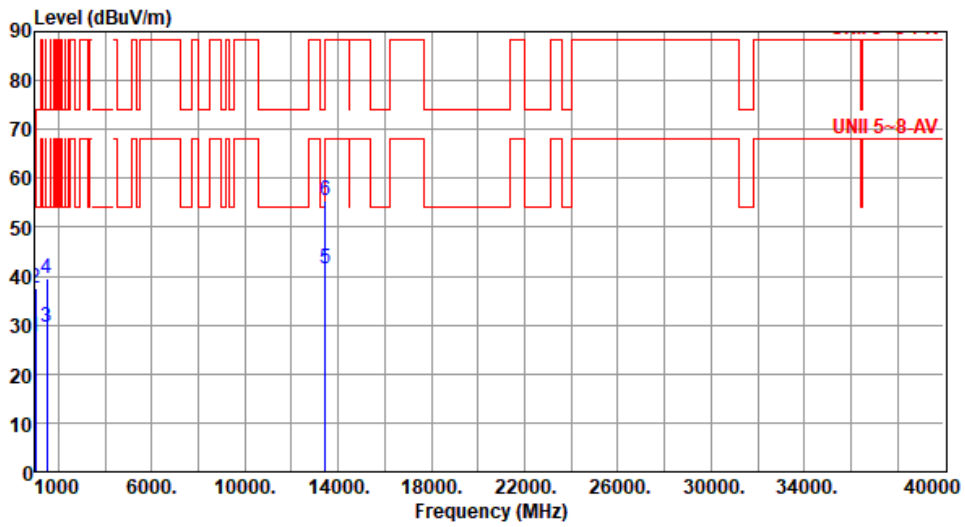

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288
2	1000.00	37.56	54.00	-16.44	45.83	-8.27	Peak	100	288
3	1500.00	29.57	54.00	-24.43	36.85	-7.28	Average	203	114
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	114
5	13430.00	41.55	68.20	-26.65	35.60	5.95	Average	100	261
6	13430.00	55.58	88.20	-32.62	49.63	5.95	Peak	100	261

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

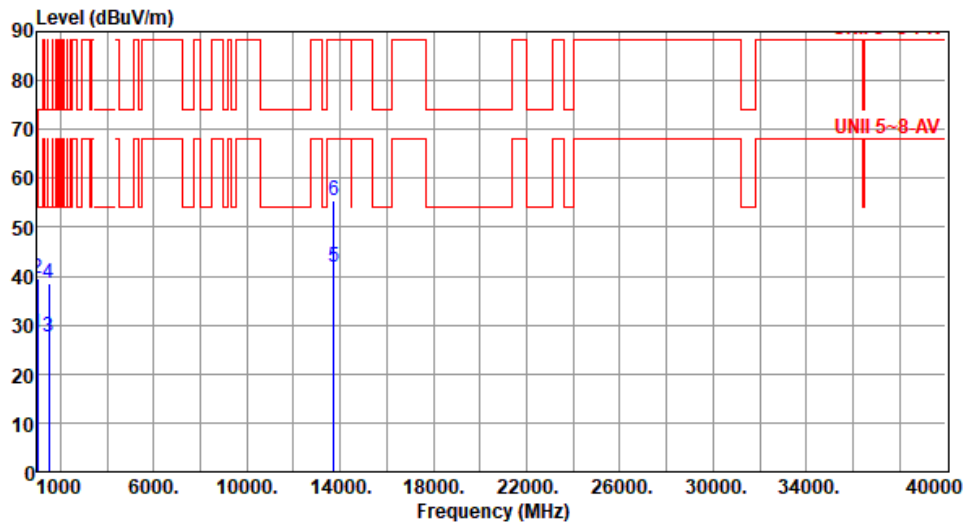

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	250
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	250
3	1500.00	27.67	54.00	-26.33	34.95	-7.28	Average	131	125
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	131	125
5	13710.00	41.76	68.20	-26.44	35.73	6.03	Average	100	277
6	13710.00	55.59	88.20	-32.61	49.56	6.03	Peak	100	277

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

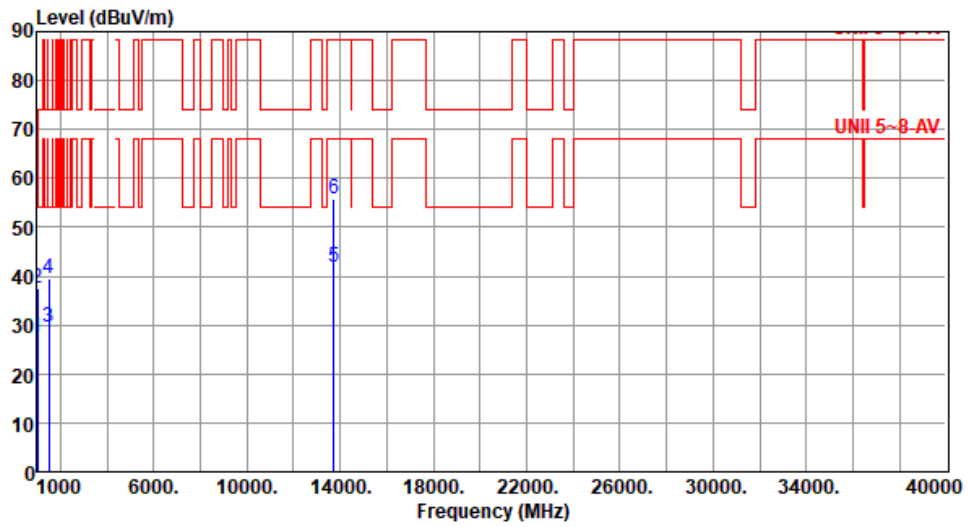

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	286
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	286
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	114
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	114
5	13710.00	41.82	68.20	-26.38	35.79	6.03	Average	100	157
6	13710.00	55.73	88.20	-32.47	49.70	6.03	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

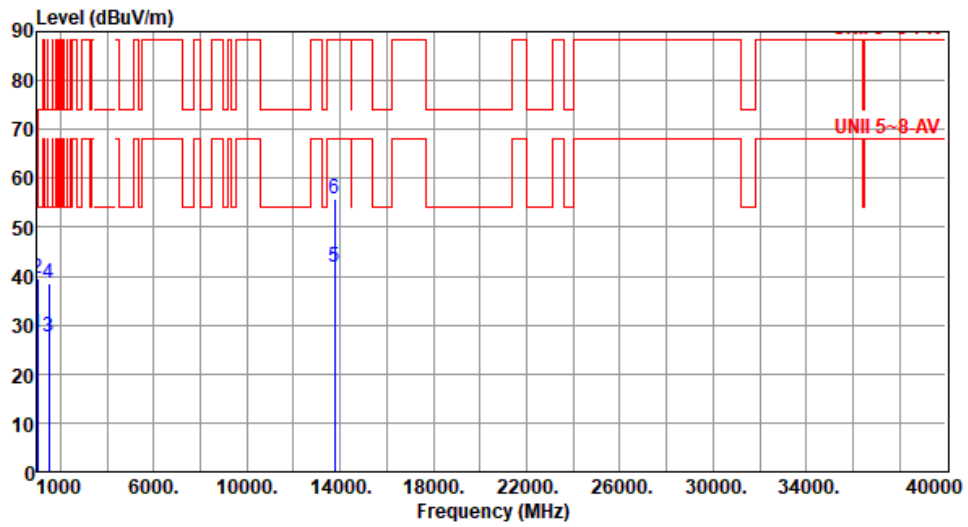

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	251
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251
3	1500.00	27.60	54.00	-26.40	34.88	-7.28	Average	128	125
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	128	125
5	13750.00	41.76	68.20	-26.44	35.76	6.00	Average	100	274
6	13750.00	55.67	88.20	-32.53	49.67	6.00	Peak	100	274

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

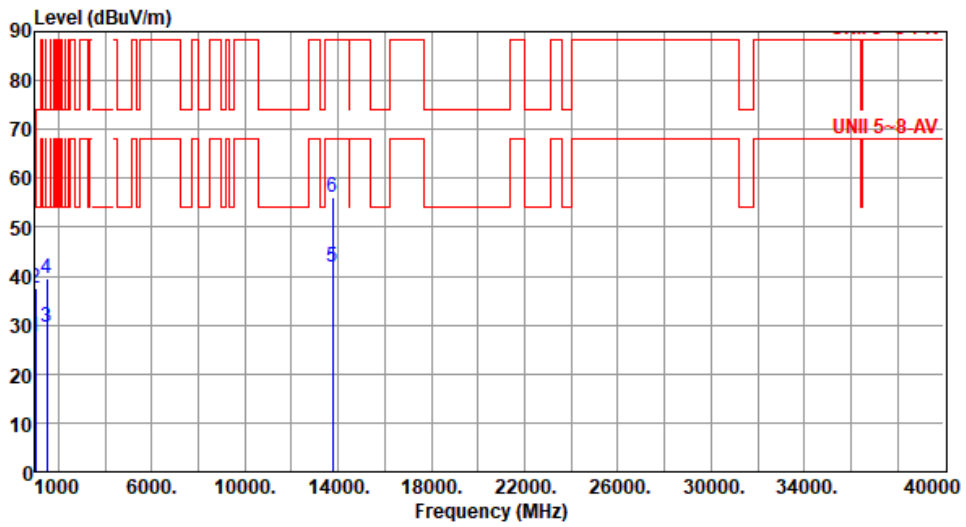

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	289
2	1000.00	37.54	54.00	-16.46	45.81	-8.27	Peak	100	289
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	203	111
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111
5	13750.00	41.74	68.20	-26.46	35.74	6.00	Average	100	269
6	13750.00	56.12	88.20	-32.08	50.12	6.00	Peak	100	269

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

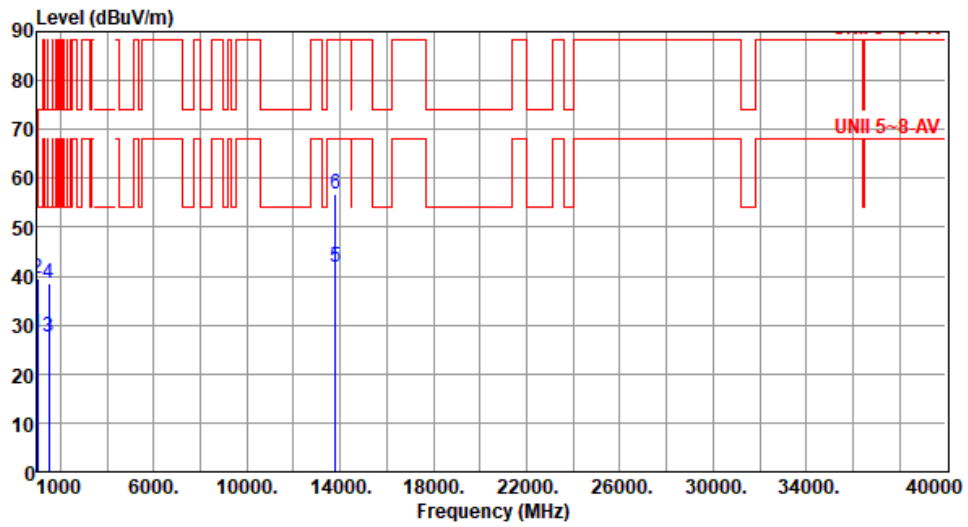

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	124
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	126	124
5	13790.00	41.76	68.20	-26.44	35.54	6.22	Average	100	245
6	13790.00	56.72	88.20	-31.48	50.50	6.22	Peak	100	245

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

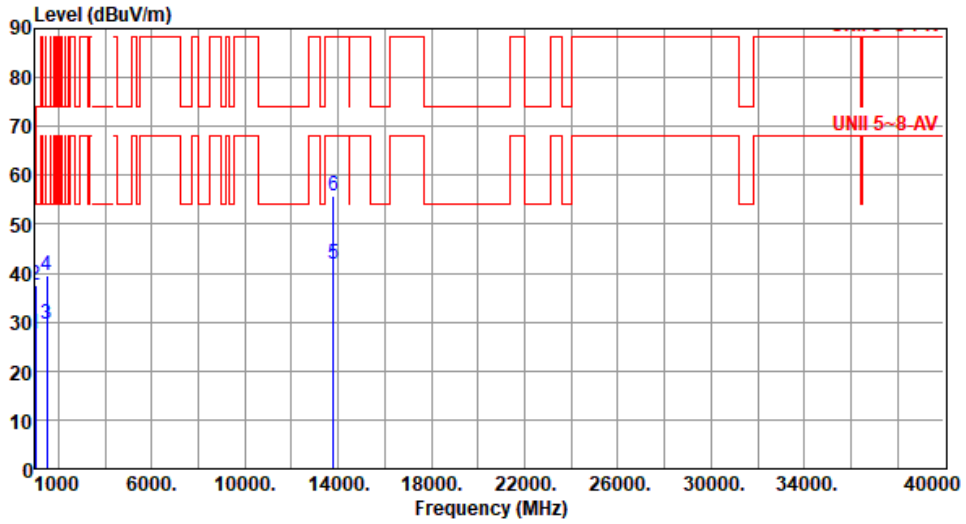

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.46	54.00	-26.54	35.73	-8.27	Average	100	285
2	1000.00	37.67	54.00	-16.33	45.94	-8.27	Peak	100	285
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	111
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	111
5	13790.00	41.72	68.20	-26.48	35.50	6.22	Average	100	169
6	13790.00	55.89	88.20	-32.31	49.67	6.22	Peak	100	169

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

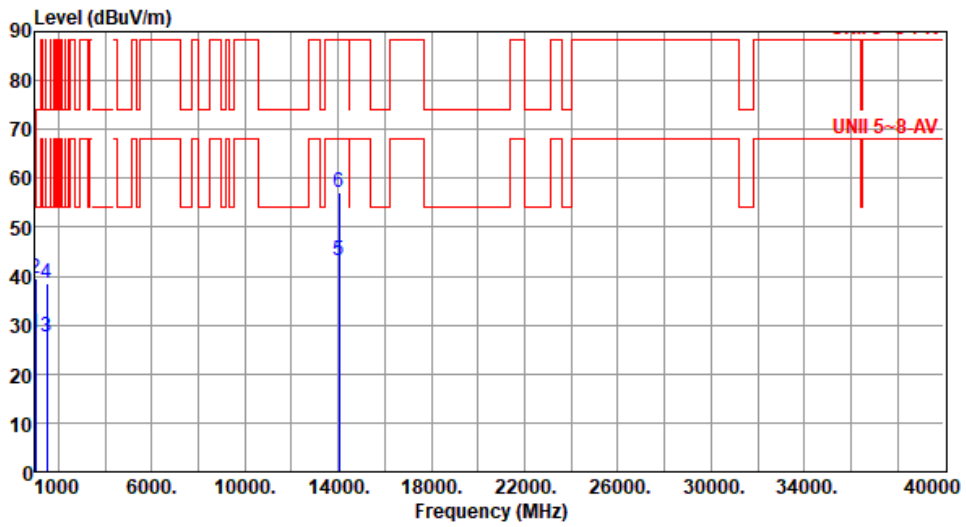

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	251
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	123
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	126	123
5	14030.00	43.24	68.20	-24.96	36.50	6.74	Average	100	160
6	14030.00	57.08	88.20	-31.12	50.34	6.74	Peak	100	160

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

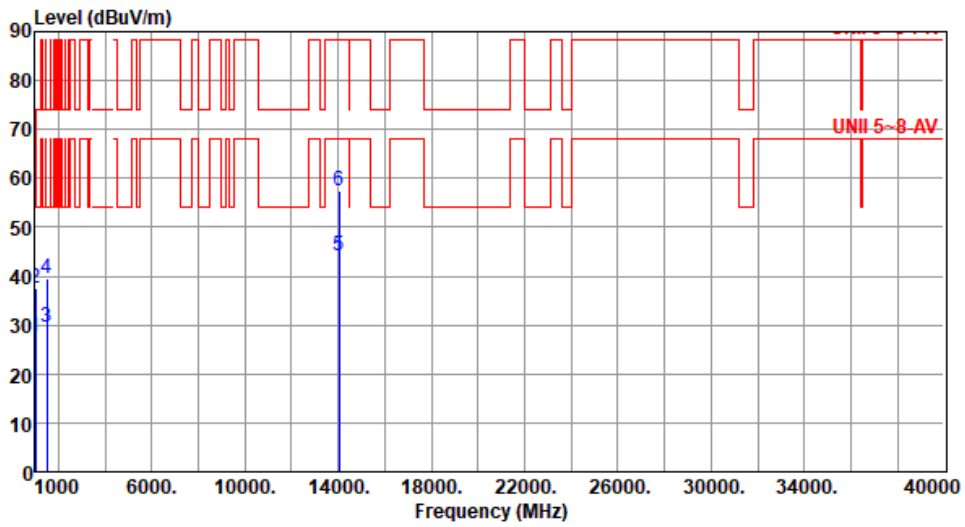

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.58	54.00	-26.42	35.85	-8.27	Average	100	286
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	203	111
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	111
5	14030.00	44.13	68.20	-24.07	37.39	6.74	Average	100	181
6	14030.00	57.34	88.20	-30.86	50.60	6.74	Peak	100	181

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

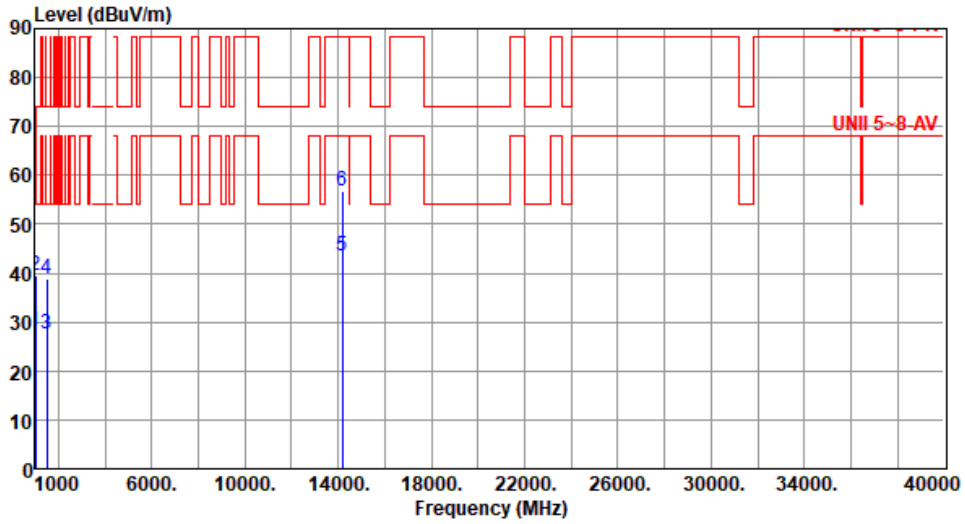

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	245
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	131	124
4	1500.00	38.87	74.00	-35.13	46.15	-7.28	Peak	131	124
5	14190.00	43.46	68.20	-24.74	36.56	6.90	Average	100	288
6	14190.00	56.94	88.20	-31.26	50.04	6.90	Peak	100	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

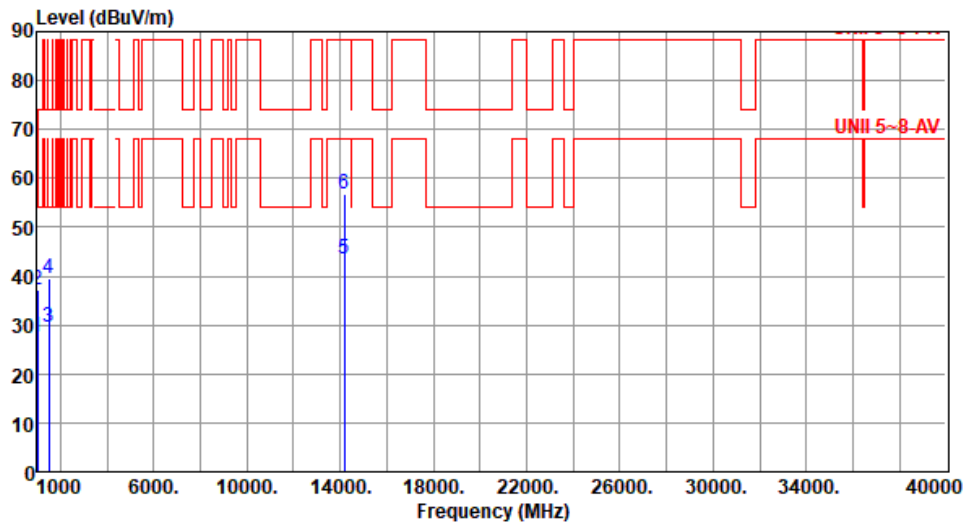

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	288
2	1000.00	37.29	54.00	-16.71	45.56	-8.27	Peak	100	288
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	203	108
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	108
5	14190.00	43.42	68.20	-24.78	36.52	6.90	Average	100	219
6	14190.00	56.84	88.20	-31.36	49.94	6.90	Peak	100	219

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

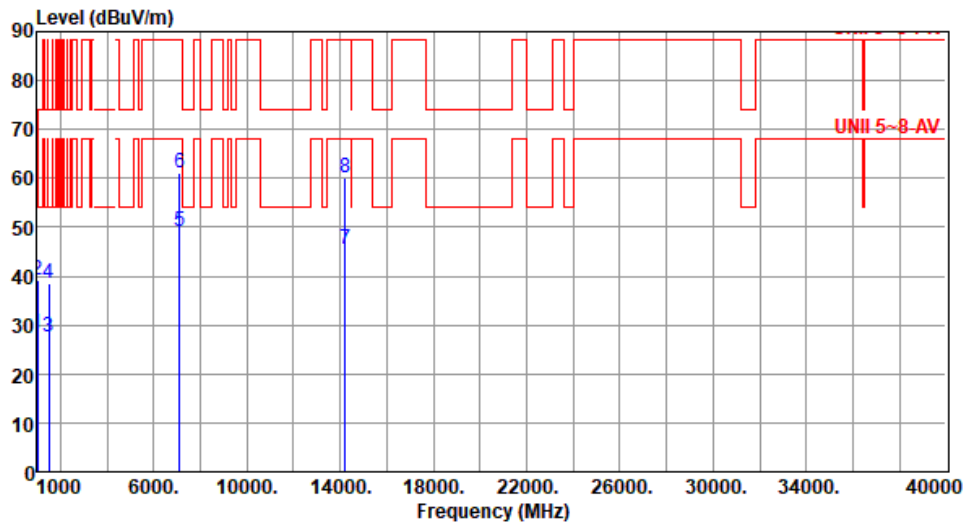

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.19	54.00	-25.81	36.46	-8.27	Average	100	252
2	1000.00	39.34	54.00	-14.66	47.61	-8.27	Peak	100	252
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	125	119
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	119
5	7125.00	49.27	68.20	-18.93	44.41	4.86	Average	100	351
6	7125.00	61.16	88.20	-27.04	56.30	4.86	Peak	100	351
7	14230.00	45.60	68.20	-22.60	38.48	7.12	Average	100	177
8	14230.00	60.06	88.20	-28.14	52.94	7.12	Peak	100	177

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	11a	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

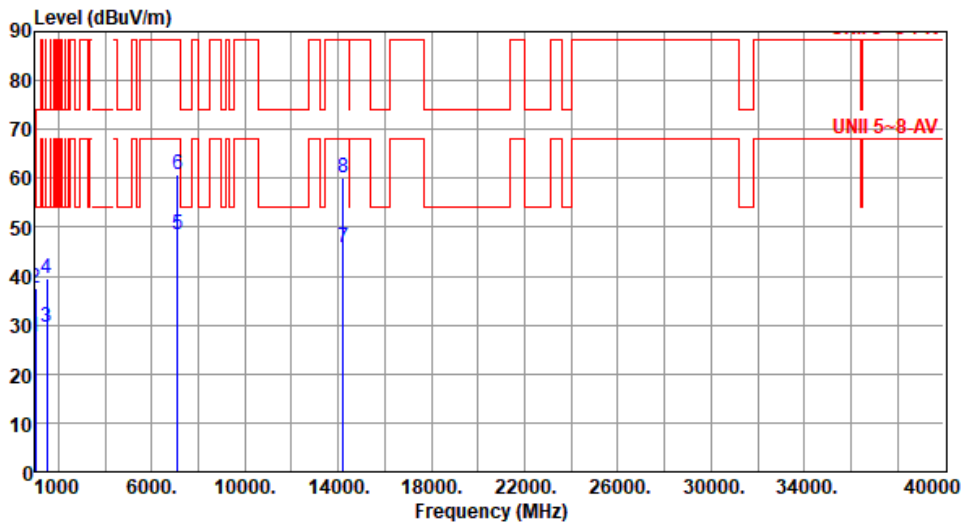

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.51	54.00	-26.49	35.78	-8.27	Average	100	278
2	1000.00	37.51	54.00	-16.49	45.78	-8.27	Peak	100	278
3	1500.00	29.68	54.00	-24.32	36.96	-7.28	Average	203	111
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111
5	7125.00	48.50	68.20	-19.70	43.64	4.86	Average	206	177
6	7125.00	60.80	88.20	-27.40	55.94	4.86	Peak	206	177
7	14230.00	45.91	68.20	-22.29	38.79	7.12	Average	100	227
8	14230.00	60.24	88.20	-27.96	53.12	7.12	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5955						
Polarization	Horizontal								
<p>Test By :Allen Lee Temperature(°C):23 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.30	54.00	-25.70	36.57	-8.27	Average	100	251
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	124
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	124
5	5925.00	43.07	68.20	-25.13	41.94	1.13	Average	141	341
6	5925.00	55.43	88.20	-32.77	54.30	1.13	Peak	141	341
7	11910.00	42.01	54.00	-11.99	35.92	6.09	Average	100	182
8	11910.00	55.30	74.00	-18.70	49.21	6.09	Peak	100	182

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

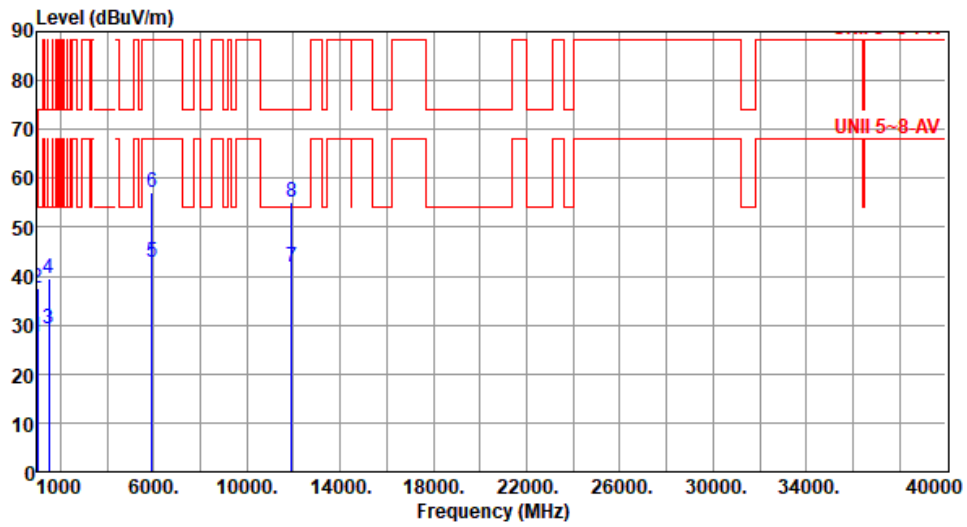

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.49	54.00	-26.51	35.76	-8.27	Average	100	286
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	286
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	203	107
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	203	107
5	5925.00	43.00	68.20	-25.20	41.87	1.13	Average	226	262
6	5925.00	57.01	88.20	-31.19	55.88	1.13	Peak	226	262
7	11910.00	41.91	54.00	-12.09	35.82	6.09	Average	100	176
8	11910.00	55.04	74.00	-18.96	48.95	6.09	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

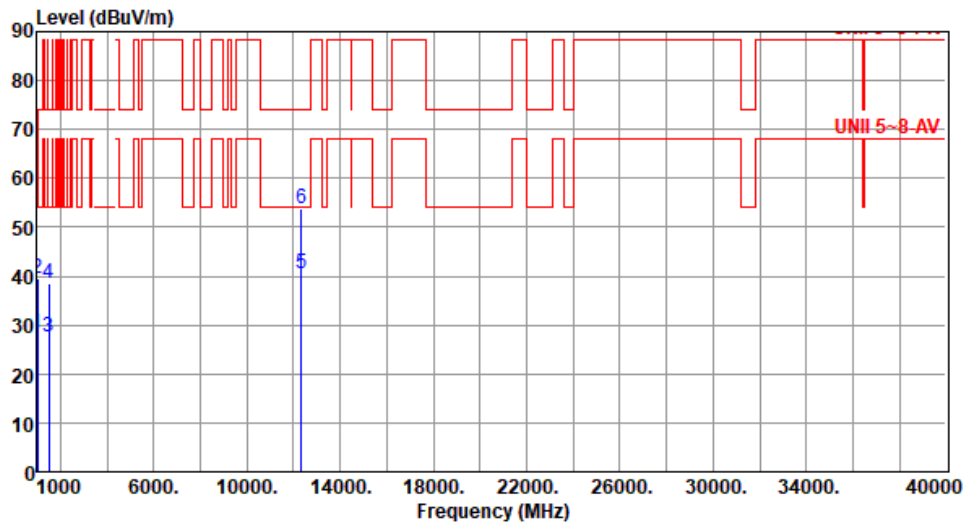

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	243
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	243
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	125	123
4	1500.00	38.52	74.00	-35.48	45.80	-7.28	Peak	125	123
5	12350.00	40.35	54.00	-13.65	34.52	5.83	Average	100	251
6	12350.00	53.65	74.00	-20.35	47.82	5.83	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

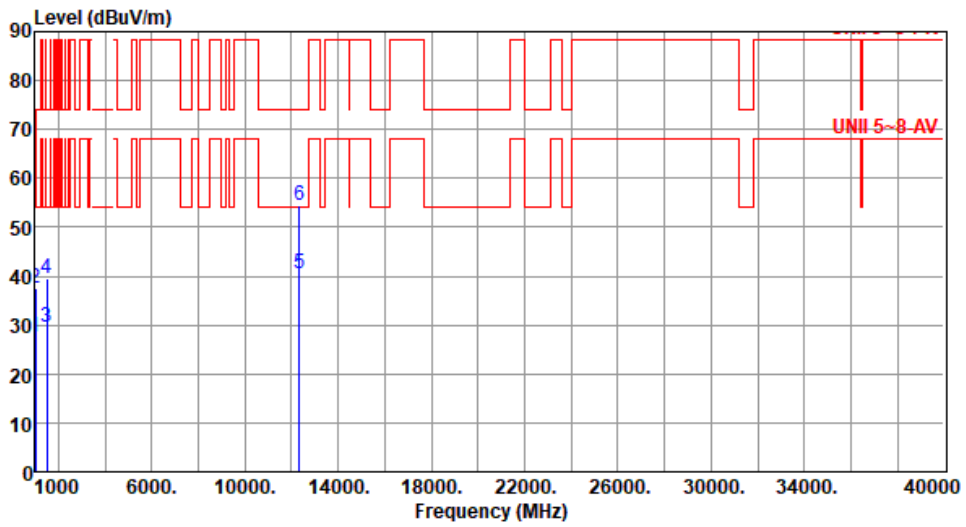

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.55	54.00	-26.45	35.82	-8.27	Average	100	287
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	287
3	1500.00	29.53	54.00	-24.47	36.81	-7.28	Average	203	112
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	112
5	12350.00	40.40	54.00	-13.60	34.57	5.83	Average	100	176
6	12350.00	54.45	74.00	-19.55	48.62	5.83	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

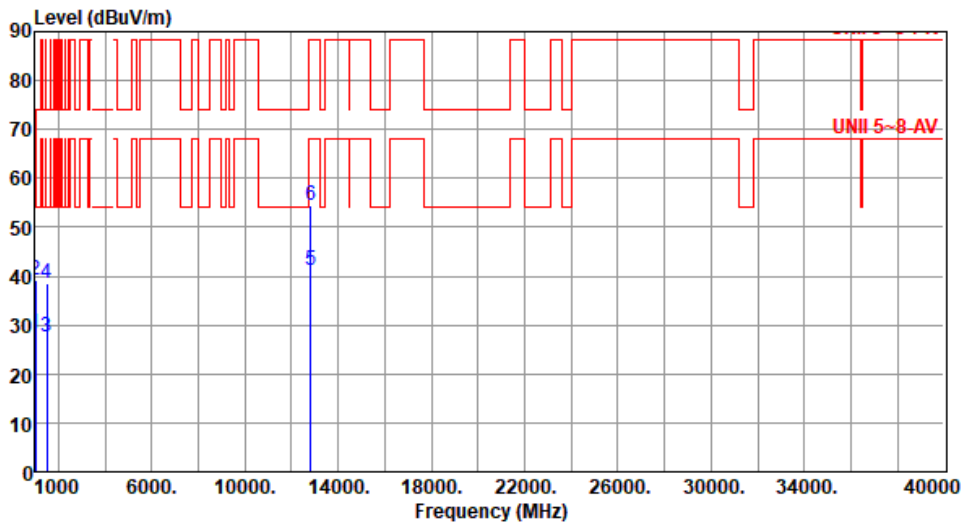

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	242
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	242
3	1500.00	27.52	54.00	-26.48	34.80	-7.28	Average	126	122
4	1500.00	38.49	74.00	-35.51	45.77	-7.28	Peak	126	122
5	12830.00	41.27	68.20	-26.93	35.12	6.15	Average	100	173
6	12830.00	54.36	88.20	-33.84	48.21	6.15	Peak	100	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

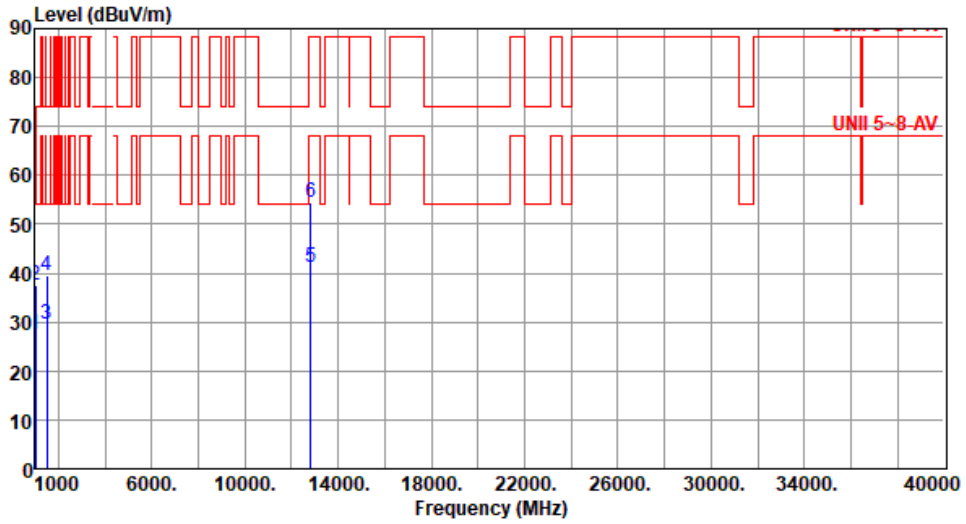

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	286
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	286
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	199	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	199	113
5	12830.00	41.23	68.20	-26.97	35.08	6.15	Average	100	281
6	12830.00	54.42	88.20	-33.78	48.27	6.15	Peak	100	281

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

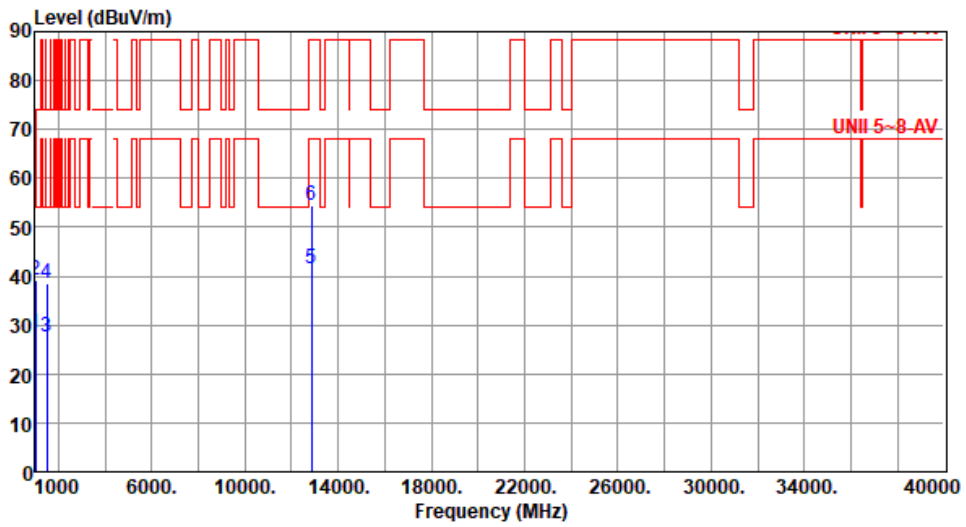

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	252
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	252
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	129	122
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	129	122
5	12870.00	41.59	68.20	-26.61	35.52	6.07	Average	100	254
6	12870.00	54.51	88.20	-33.69	48.44	6.07	Peak	100	254

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

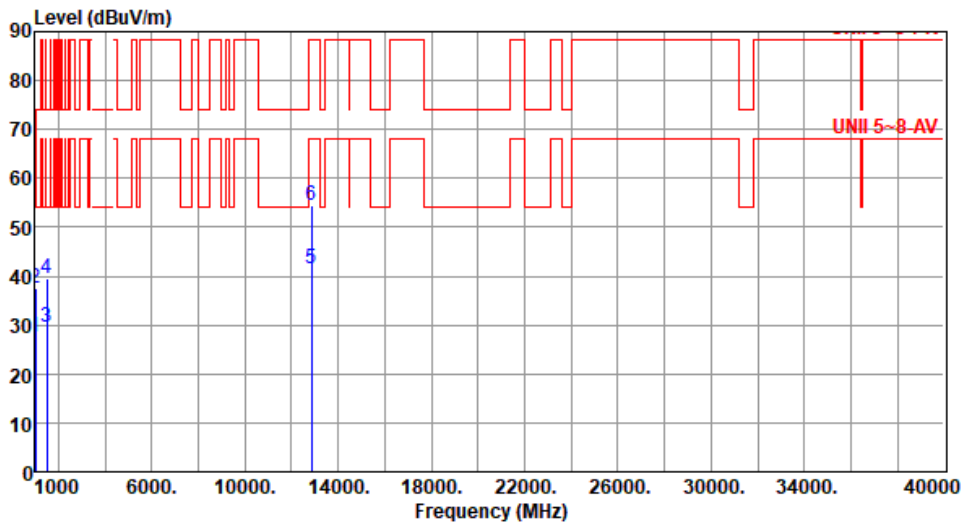

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	285
2	1000.00	37.53	54.00	-16.47	45.80	-8.27	Peak	100	285
3	1500.00	29.44	54.00	-24.56	36.72	-7.28	Average	202	113
4	1500.00	39.49	74.00	-34.51	46.77	-7.28	Peak	202	113
5	12870.00	41.59	68.20	-26.61	35.52	6.07	Average	100	281
6	12870.00	54.37	88.20	-33.83	48.30	6.07	Peak	100	281

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

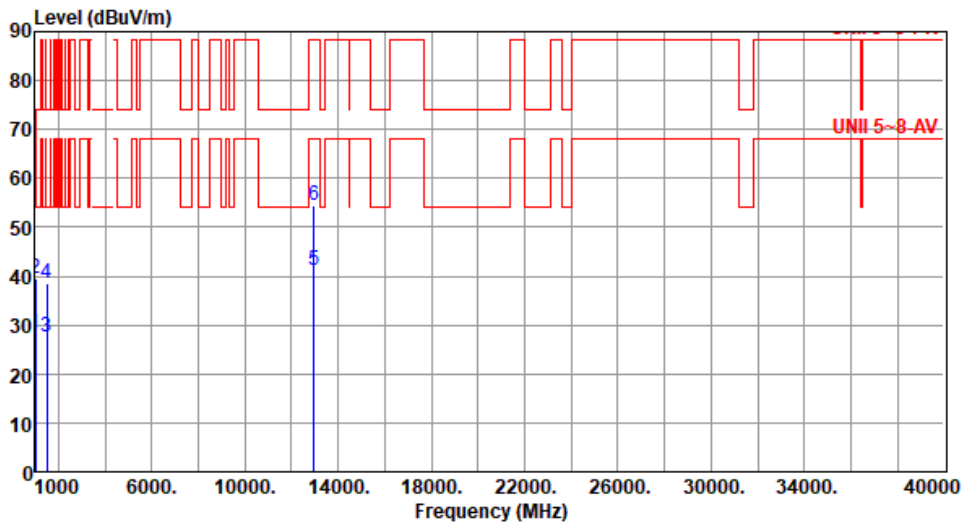

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.18	54.00	-25.82	36.45	-8.27	Average	100	246
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	246
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	122
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	125	122
5	12950.00	41.21	68.20	-26.99	35.11	6.10	Average	100	178
6	12950.00	54.33	88.20	-33.87	48.23	6.10	Peak	100	178

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

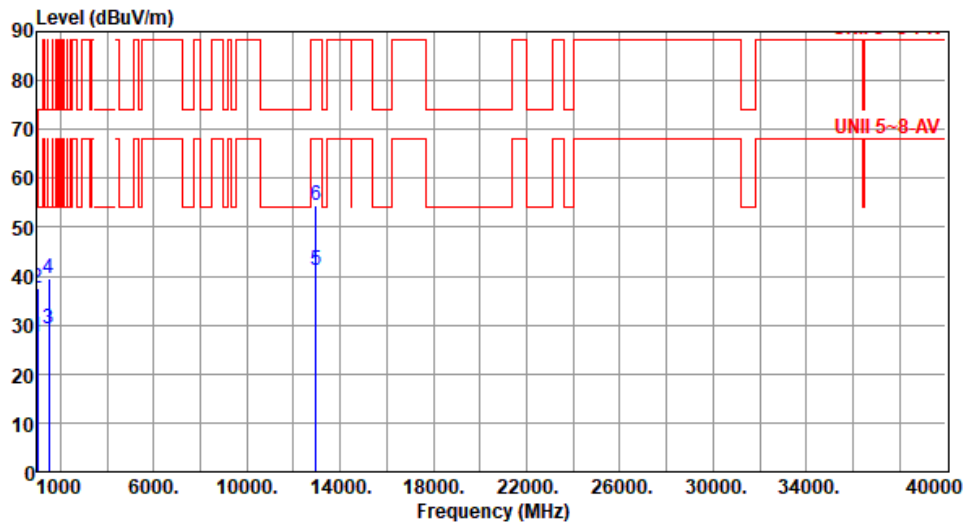

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	285
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	203	111
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111
5	12950.00	41.18	68.20	-27.02	35.08	6.10	Average	100	251
6	12950.00	54.43	88.20	-33.77	48.33	6.10	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

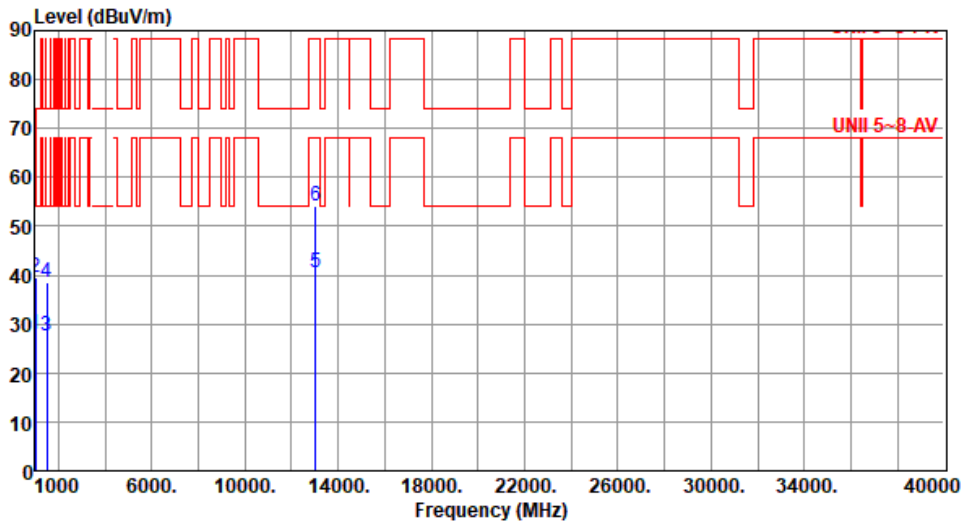

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.06	54.00	-25.94	36.33	-8.27	Average	100	245
2	1000.00	39.48	54.00	-14.52	47.75	-8.27	Peak	100	245
3	1500.00	27.51	54.00	-26.49	34.79	-7.28	Average	125	123
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	125	123
5	13030.00	40.38	68.20	-27.82	34.37	6.01	Average	100	257
6	13030.00	54.03	88.20	-34.17	48.02	6.01	Peak	100	257

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

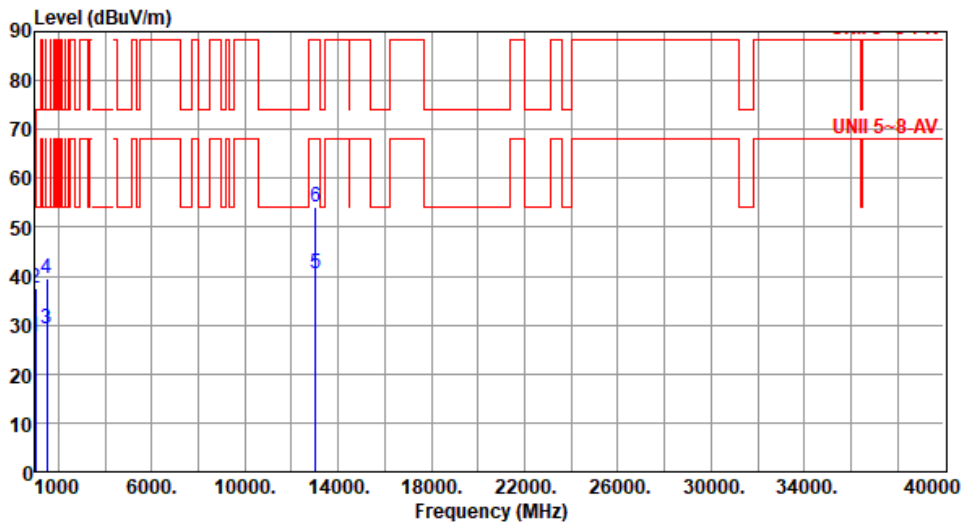

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.37	54.00	-24.63	36.65	-7.28	Average	205	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113
5	13030.00	40.56	68.20	-27.64	34.55	6.01	Average	100	155
6	13030.00	54.27	88.20	-33.93	48.26	6.01	Peak	100	155

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

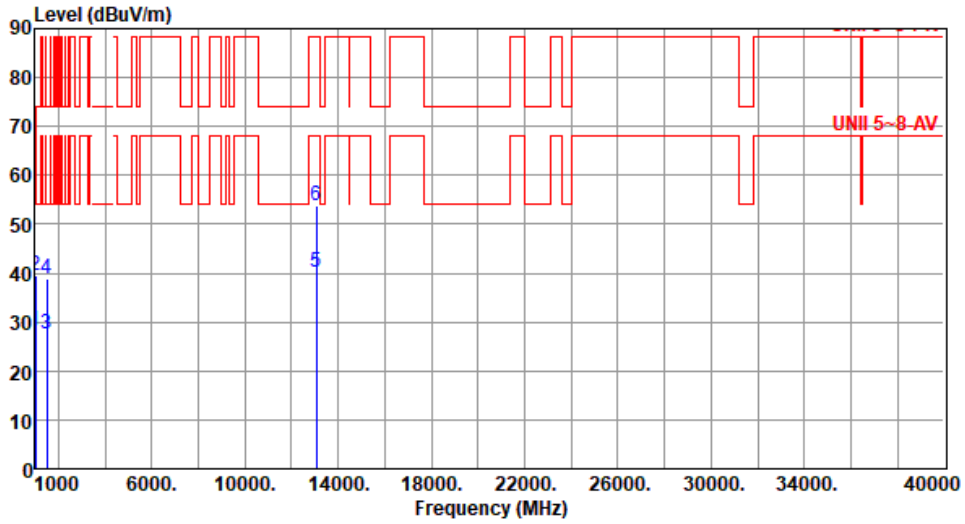

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	245
2	1000.00	39.39	54.00	-14.61	47.66	-8.27	Peak	100	245
3	1500.00	27.69	54.00	-26.31	34.97	-7.28	Average	125	122
4	1500.00	38.78	74.00	-35.22	46.06	-7.28	Peak	125	122
5	13070.00	40.29	68.20	-27.91	34.49	5.80	Average	100	158
6	13070.00	53.87	88.20	-34.33	48.07	5.80	Peak	100	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

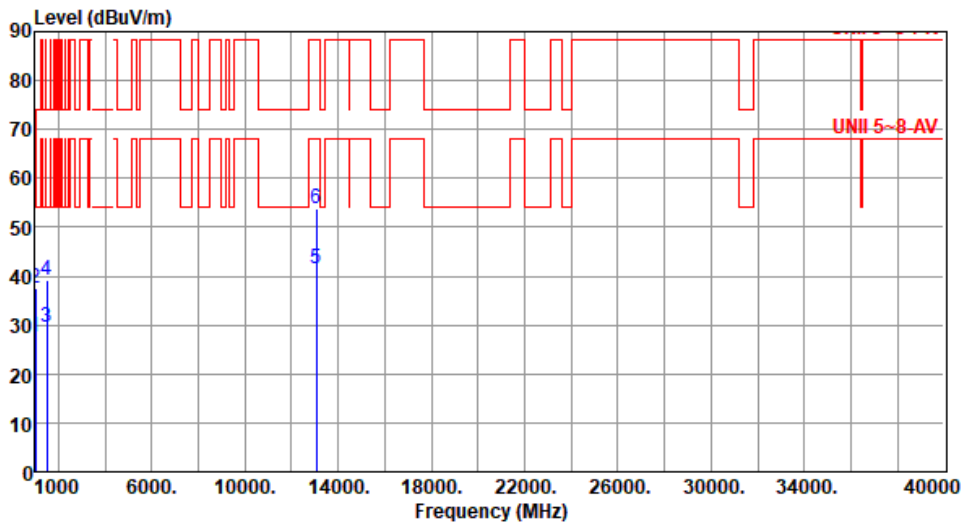

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	286
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	286
3	1500.00	29.54	54.00	-24.46	36.82	-7.28	Average	198	108
4	1500.00	39.28	74.00	-34.72	46.56	-7.28	Peak	198	108
5	13070.00	41.36	68.20	-26.84	35.56	5.80	Average	100	118
6	13070.00	53.95	88.20	-34.25	48.15	5.80	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

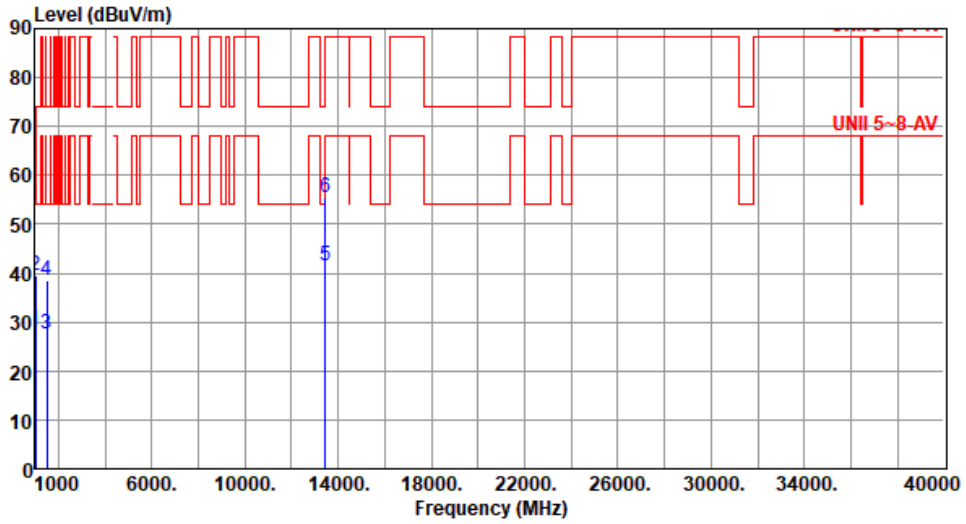

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	253
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	253
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	126	120
4	1500.00	38.57	74.00	-35.43	45.85	-7.28	Peak	126	120
5	13430.00	41.63	68.20	-26.57	35.68	5.95	Average	100	251
6	13430.00	55.34	88.20	-32.86	49.39	5.95	Peak	100	251

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

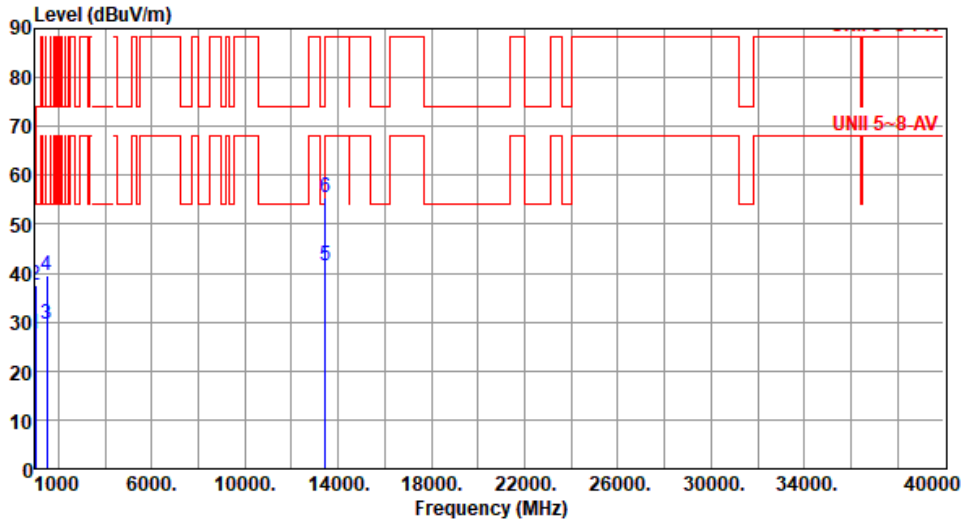

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	288
2	1000.00	37.49	54.00	-16.51	45.76	-8.27	Peak	100	288
3	1500.00	29.62	54.00	-24.38	36.90	-7.28	Average	205	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113
5	13430.00	41.60	68.20	-26.60	35.65	5.95	Average	100	257
6	13430.00	55.47	88.20	-32.73	49.52	5.95	Peak	100	257

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

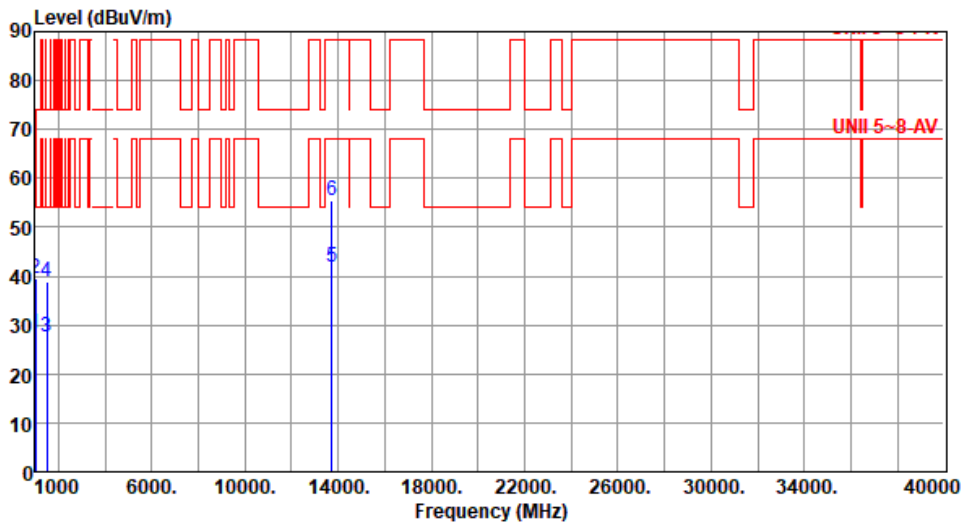

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	246
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	246
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122
4	1500.00	38.88	74.00	-35.12	46.16	-7.28	Peak	131	122
5	13710.00	41.89	68.20	-26.31	35.86	6.03	Average	100	284
6	13710.00	55.61	88.20	-32.59	49.58	6.03	Peak	100	284

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

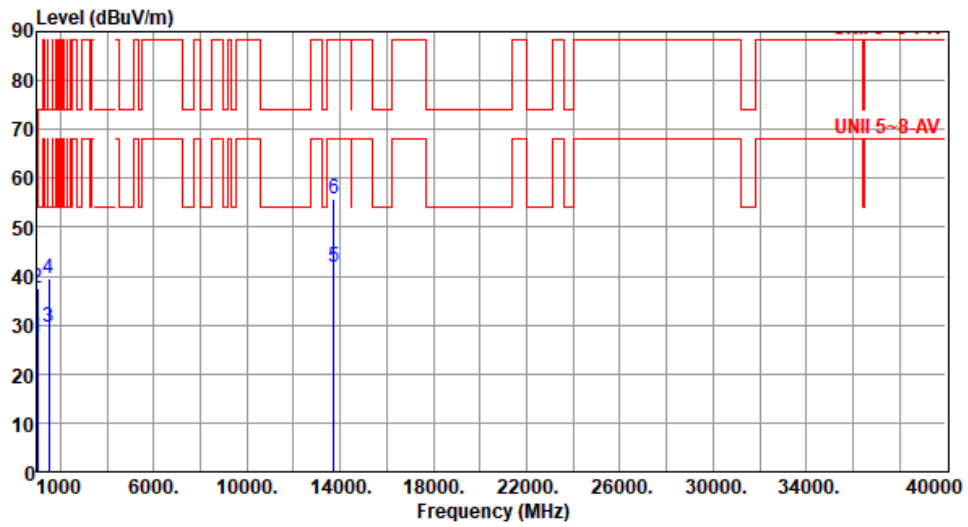

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	282
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	282
3	1500.00	29.51	54.00	-24.49	36.79	-7.28	Average	203	111
4	1500.00	39.58	74.00	-34.42	46.86	-7.28	Peak	203	111
5	13710.00	41.85	68.20	-26.35	35.82	6.03	Average	100	164
6	13710.00	55.69	88.20	-32.51	49.66	6.03	Peak	100	164

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

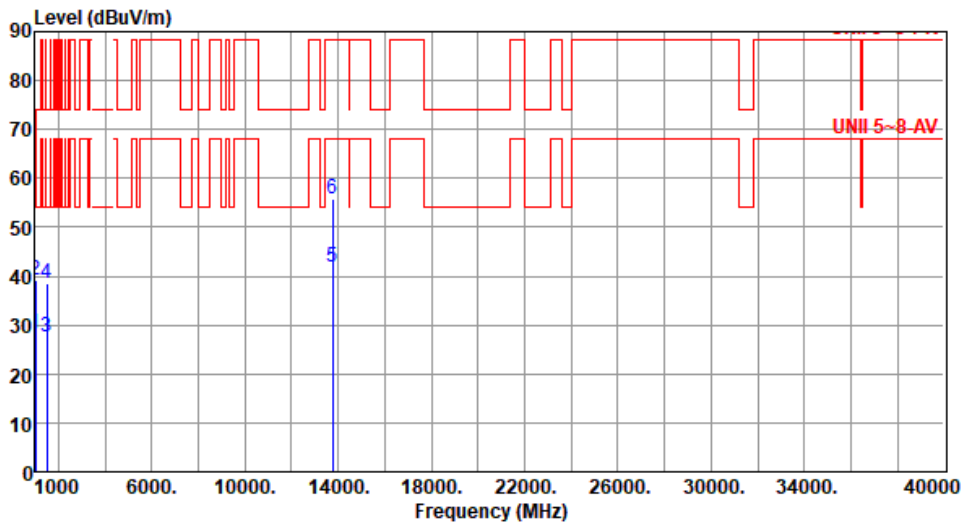

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.25	54.00	-25.75	36.52	-8.27	Average	100	245
2	1000.00	39.33	54.00	-14.67	47.60	-8.27	Peak	100	245
3	1500.00	27.48	54.00	-26.52	34.76	-7.28	Average	126	118
4	1500.00	38.55	74.00	-35.45	45.83	-7.28	Peak	126	118
5	13750.00	41.71	68.20	-26.49	35.71	6.00	Average	100	288
6	13750.00	55.88	88.20	-32.32	49.88	6.00	Peak	100	288

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

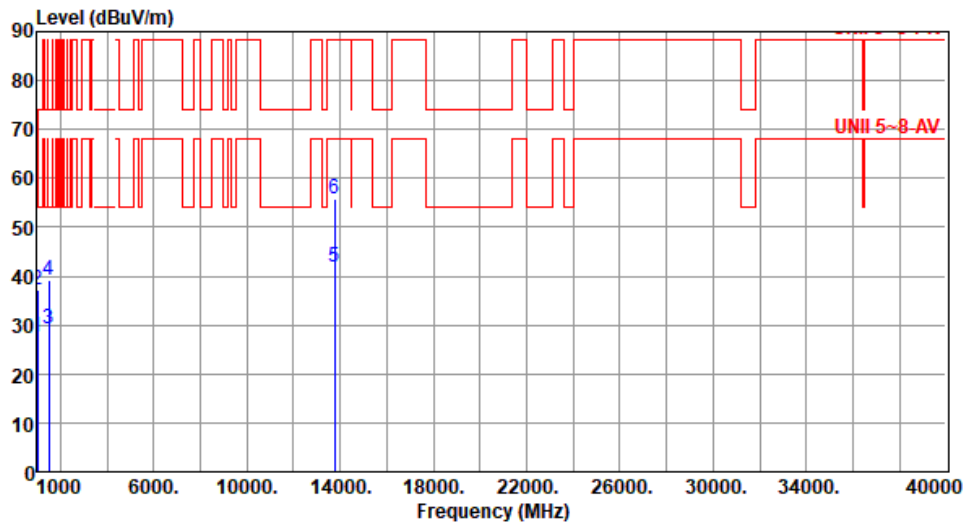

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	281
2	1000.00	37.21	54.00	-16.79	45.48	-8.27	Peak	100	281
3	1500.00	29.30	54.00	-24.70	36.58	-7.28	Average	205	107
4	1500.00	39.33	74.00	-34.67	46.61	-7.28	Peak	205	107
5	13750.00	41.89	68.20	-26.31	35.89	6.00	Average	100	280
6	13750.00	55.92	88.20	-32.28	49.92	6.00	Peak	100	280

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

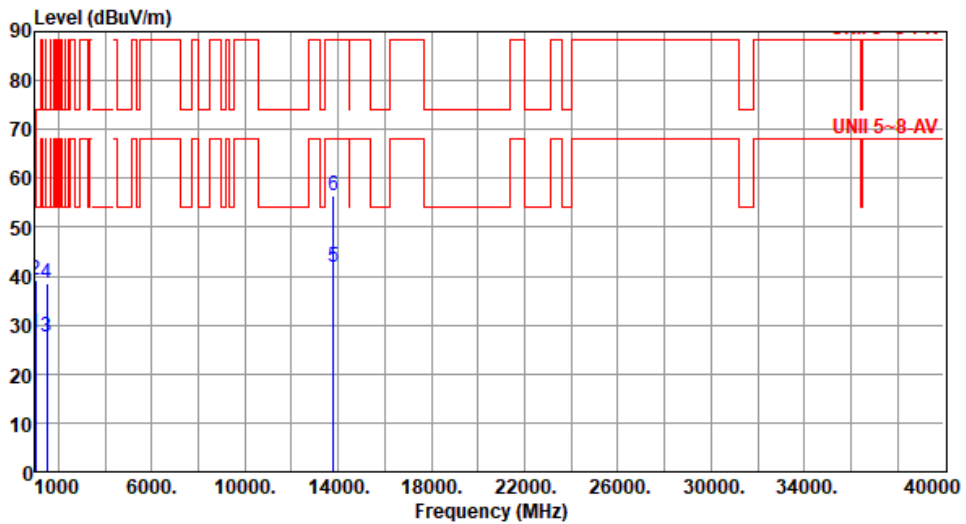

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	252
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	252
3	1500.00	27.71	54.00	-26.29	34.99	-7.28	Average	126	118
4	1500.00	38.69	74.00	-35.31	45.97	-7.28	Peak	126	118
5	13790.00	41.80	68.20	-26.40	35.58	6.22	Average	100	255
6	13790.00	56.55	88.20	-31.65	50.33	6.22	Peak	100	255

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

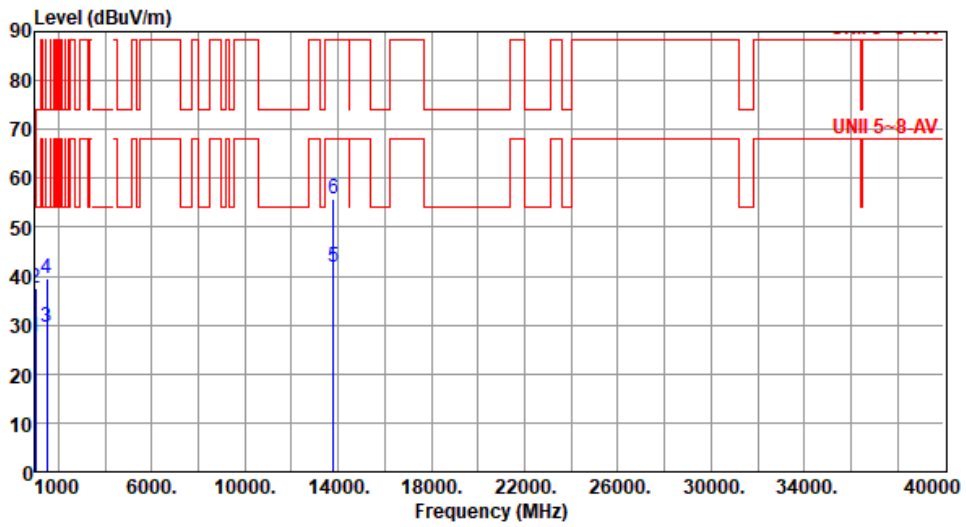

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.64	54.00	-26.36	35.91	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.61	54.00	-24.39	36.89	-7.28	Average	203	107
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	107
5	13790.00	41.83	68.20	-26.37	35.61	6.22	Average	100	173
6	13790.00	55.86	88.20	-32.34	49.64	6.22	Peak	100	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

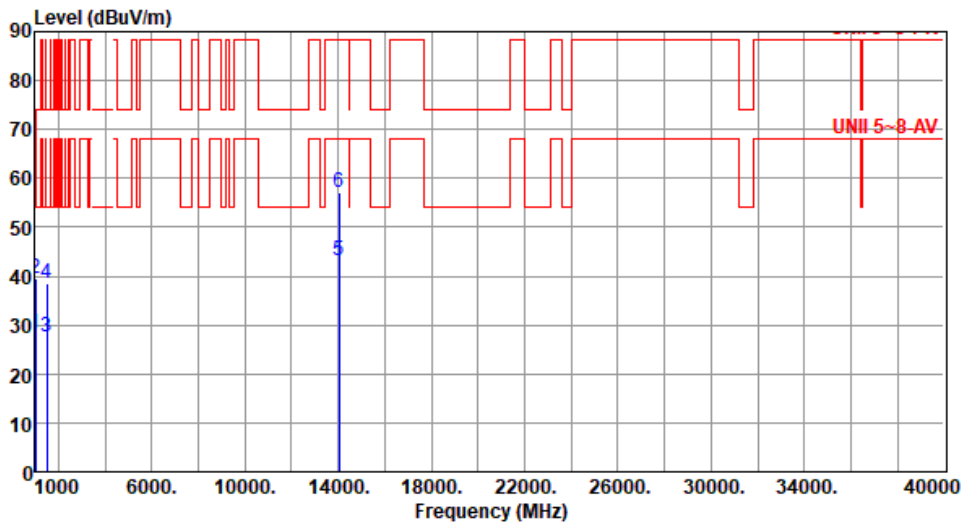

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.36	54.00	-25.64	36.63	-8.27	Average	100	253
2	1000.00	39.55	54.00	-14.45	47.82	-8.27	Peak	100	253
3	1500.00	27.72	54.00	-26.28	35.00	-7.28	Average	131	125
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	125
5	14030.00	43.12	68.20	-25.08	36.38	6.74	Average	100	157
6	14030.00	57.01	88.20	-31.19	50.27	6.74	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

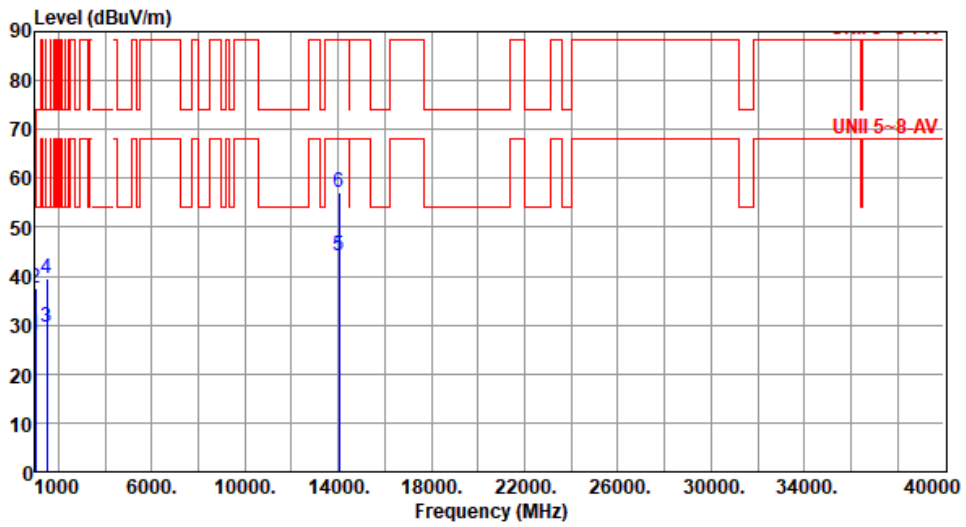

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.78	54.00	-26.22	36.05	-8.27	Average	100	282
2	1000.00	37.69	54.00	-16.31	45.96	-8.27	Peak	100	282
3	1500.00	29.50	54.00	-24.50	36.78	-7.28	Average	203	115
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	203	115
5	14030.00	44.02	68.20	-24.18	37.28	6.74	Average	100	176
6	14030.00	57.22	88.20	-30.98	50.48	6.74	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

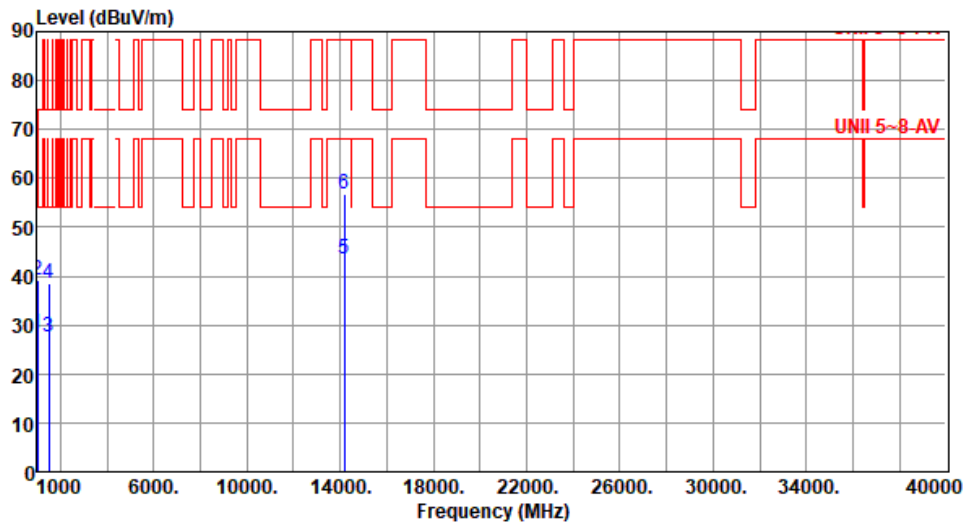

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	246
2	1000.00	39.09	54.00	-14.91	47.36	-8.27	Peak	100	246
3	1500.00	27.44	54.00	-26.56	34.72	-7.28	Average	131	126
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	126
5	14190.00	43.40	68.20	-24.80	36.50	6.90	Average	100	274
6	14190.00	56.78	88.20	-31.42	49.88	6.90	Peak	100	274

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

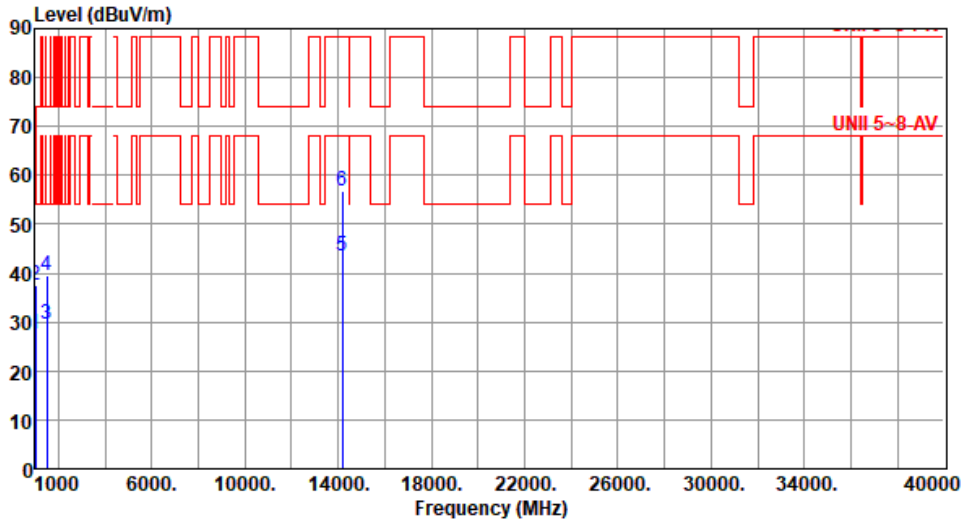

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.42	54.00	-26.58	35.69	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.58	54.00	-24.42	36.86	-7.28	Average	202	107
4	1500.00	39.56	74.00	-34.44	46.84	-7.28	Peak	202	107
5	14190.00	43.37	68.20	-24.83	36.47	6.90	Average	100	227
6	14190.00	56.72	88.20	-31.48	49.82	6.90	Peak	100	227

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

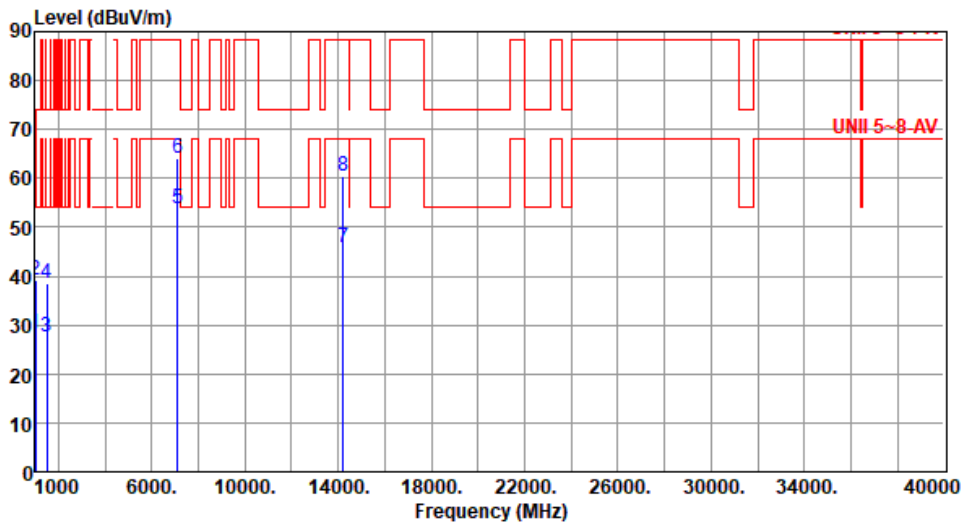

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.26	54.00	-25.74	36.53	-8.27	Average	100	245
2	1000.00	39.11	54.00	-14.89	47.38	-8.27	Peak	100	245
3	1500.00	27.66	54.00	-26.34	34.94	-7.28	Average	131	124
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	124
5	7125.00	53.70	68.20	-14.50	48.84	4.86	Average	122	358
6	7125.00	64.06	88.20	-24.14	59.20	4.86	Peak	122	358
7	14230.00	45.84	68.20	-22.36	38.72	7.12	Average	100	185
8	14230.00	60.36	88.20	-27.84	53.24	7.12	Peak	100	185

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

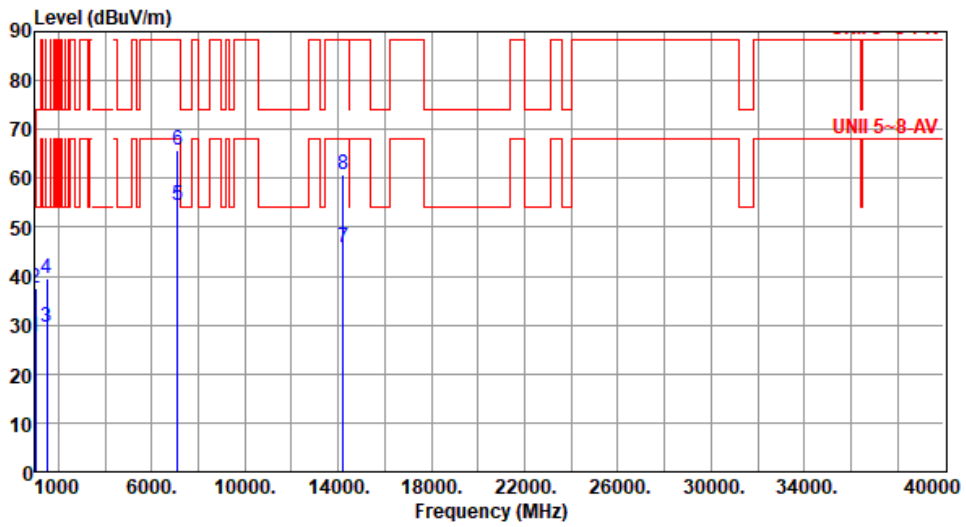

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	279
2	1000.00	37.55	54.00	-16.45	45.82	-8.27	Peak	100	279
3	1500.00	29.56	54.00	-24.44	36.84	-7.28	Average	202	108
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	202	108
5	7125.00	54.50	68.20	-13.70	49.64	4.86	Average	198	182
6	7125.00	65.82	88.20	-22.38	60.96	4.86	Peak	198	182
7	14230.00	45.69	68.20	-22.51	38.57	7.12	Average	100	285
8	14230.00	60.74	88.20	-27.46	53.62	7.12	Peak	100	285

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965						
Polarization	Horizontal								
<p>Test By :Allen Lee Temperature(°C):23 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.21	54.00	-25.79	36.48	-8.27	Average	100	251
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	251
3	1500.00	27.68	54.00	-26.32	34.96	-7.28	Average	126	122
4	1500.00	38.54	74.00	-35.46	45.82	-7.28	Peak	126	122
5	5925.00	43.67	68.20	-24.53	42.54	1.13	Average	135	343
6	5925.00	57.79	88.20	-30.41	56.66	1.13	Peak	135	343
7	11930.00	42.21	54.00	-11.79	36.12	6.09	Average	100	121
8	11930.00	54.46	74.00	-19.54	48.37	6.09	Peak	100	121

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Vertical		

Test By :Allen Lee Temperature(°C):23 Humidity(%):65

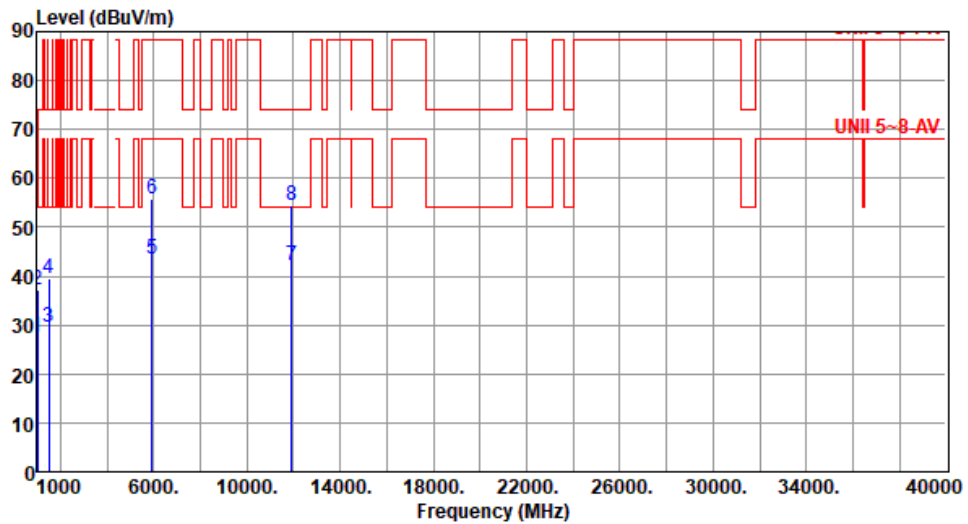

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.48	54.00	-26.52	35.75	-8.27	Average	100	285
2	1000.00	37.33	54.00	-16.67	45.60	-8.27	Peak	100	285
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	200	110
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	200	110
5	5925.00	43.54	68.20	-24.66	42.41	1.13	Average	163	272
6	5925.00	55.81	88.20	-32.39	54.68	1.13	Peak	163	272
7	11930.00	42.19	54.00	-11.81	36.10	6.09	Average	100	284
8	11930.00	54.38	74.00	-19.62	48.29	6.09	Peak	100	284

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

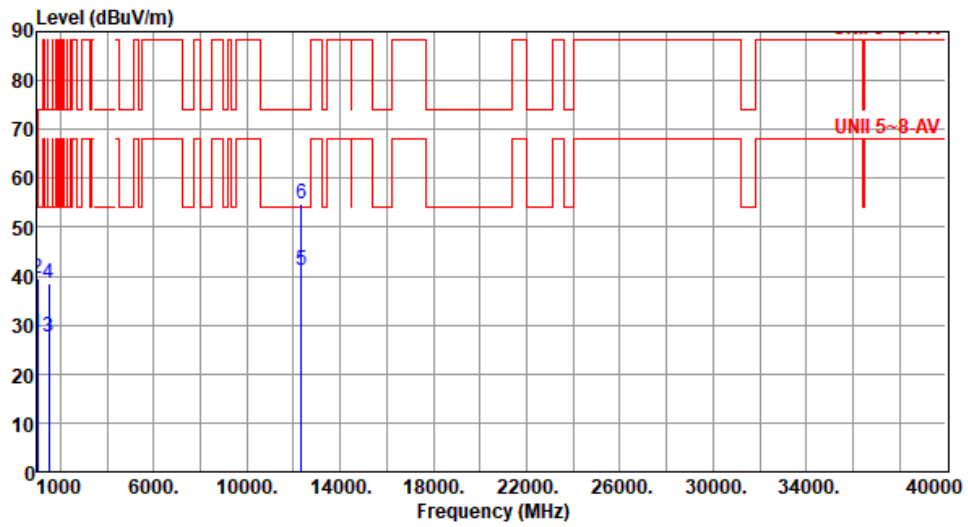

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.34	54.00	-25.66	36.61	-8.27	Average	100	245
2	1000.00	39.58	54.00	-14.42	47.85	-8.27	Peak	100	245
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	131	122
4	1500.00	38.48	74.00	-35.52	45.76	-7.28	Peak	131	122
5	12330.00	41.25	54.00	-12.75	35.28	5.97	Average	100	221
6	12330.00	54.64	74.00	-19.36	48.67	5.97	Peak	100	221

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

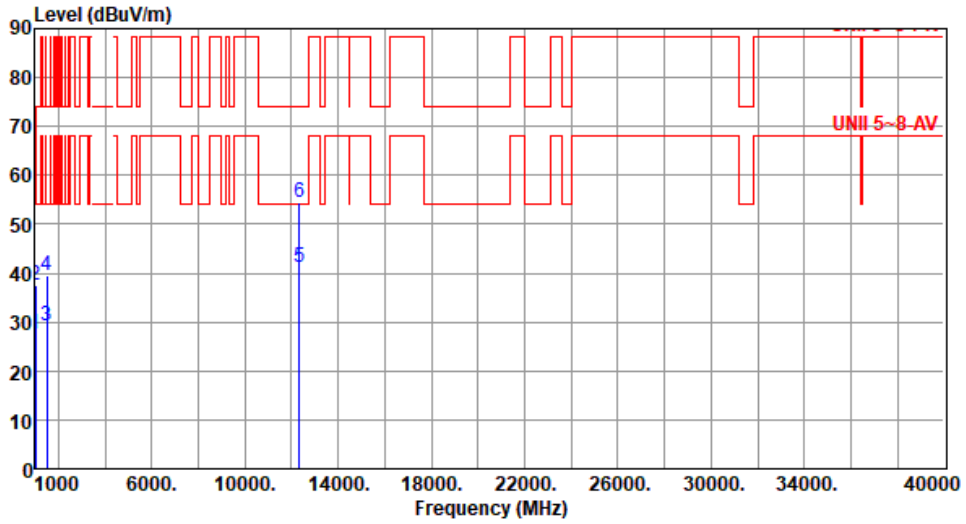

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.44	54.00	-26.56	35.71	-8.27	Average	100	262
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	262
3	1500.00	29.38	54.00	-24.62	36.66	-7.28	Average	202	113
4	1500.00	39.55	74.00	-34.45	46.83	-7.28	Peak	202	113
5	12330.00	41.13	54.00	-12.87	35.16	5.97	Average	100	176
6	12330.00	54.35	74.00	-19.65	48.38	5.97	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6405
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

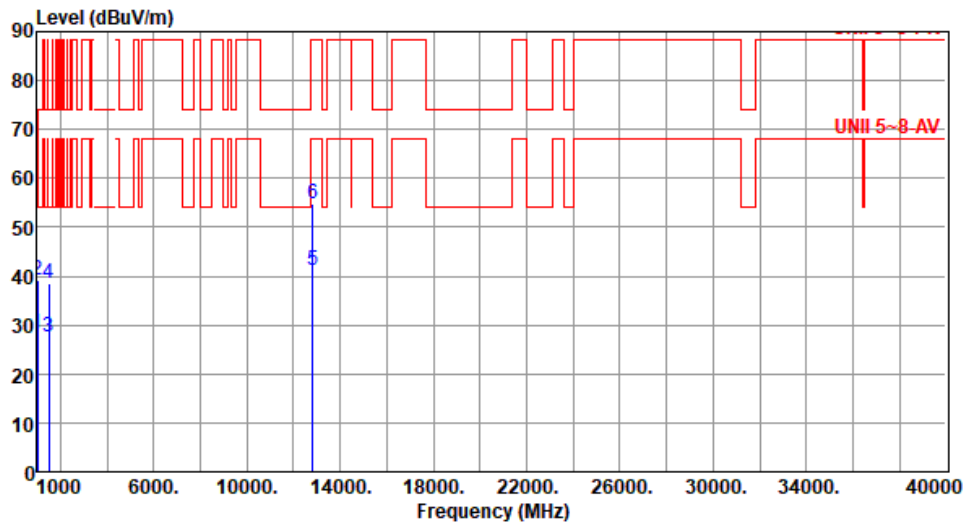

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	243
2	1000.00	39.15	54.00	-14.85	47.42	-8.27	Peak	100	243
3	1500.00	27.51	54.00	-26.49	34.79	-7.28	Average	125	122
4	1500.00	38.58	74.00	-35.42	45.86	-7.28	Peak	125	122
5	12810.00	41.24	68.20	-26.96	35.12	6.12	Average	100	224
6	12810.00	54.71	88.20	-33.49	48.59	6.12	Peak	100	224

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6405
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

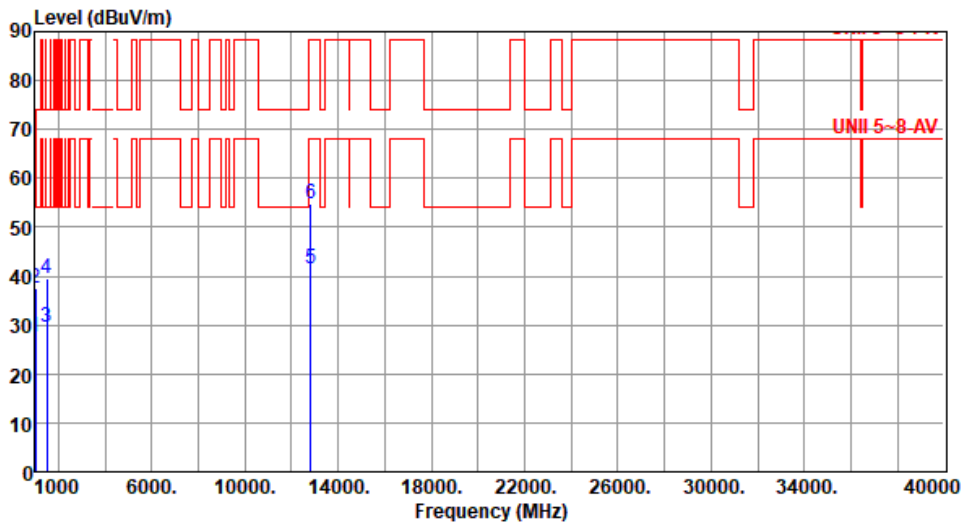

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.59	54.00	-26.41	35.86	-8.27	Average	100	279
2	1000.00	37.58	54.00	-16.42	45.85	-8.27	Peak	100	279
3	1500.00	29.41	54.00	-24.59	36.69	-7.28	Average	203	115
4	1500.00	39.59	74.00	-34.41	46.87	-7.28	Peak	203	115
5	12810.00	41.39	68.20	-26.81	35.27	6.12	Average	100	181
6	12810.00	54.78	88.20	-33.42	48.66	6.12	Peak	100	181

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

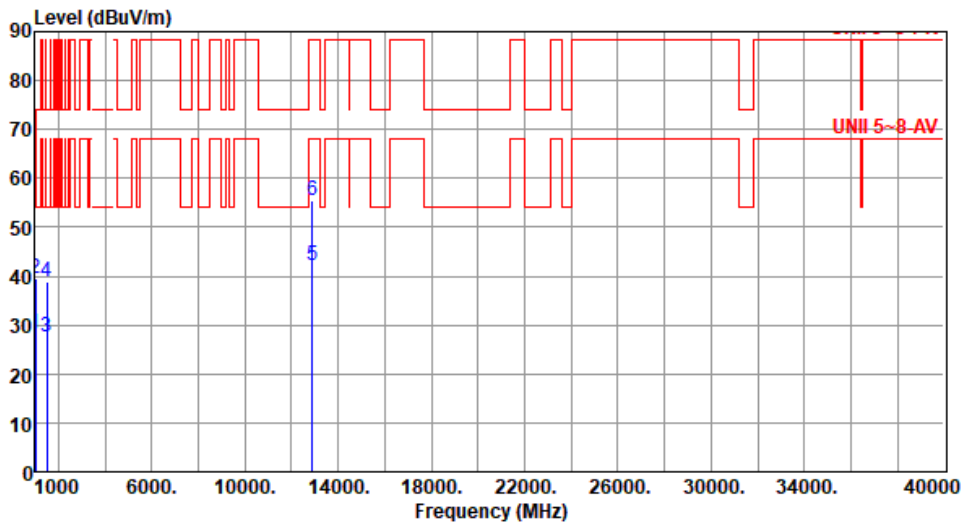

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.29	54.00	-25.71	36.56	-8.27	Average	100	251
2	1000.00	39.42	54.00	-14.58	47.69	-8.27	Peak	100	251
3	1500.00	27.62	54.00	-26.38	34.90	-7.28	Average	126	123
4	1500.00	38.78	74.00	-35.22	46.06	-7.28	Peak	126	123
5	12890.00	42.16	68.20	-26.04	36.18	5.98	Average	100	253
6	12890.00	55.50	88.20	-32.70	49.52	5.98	Peak	100	253

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

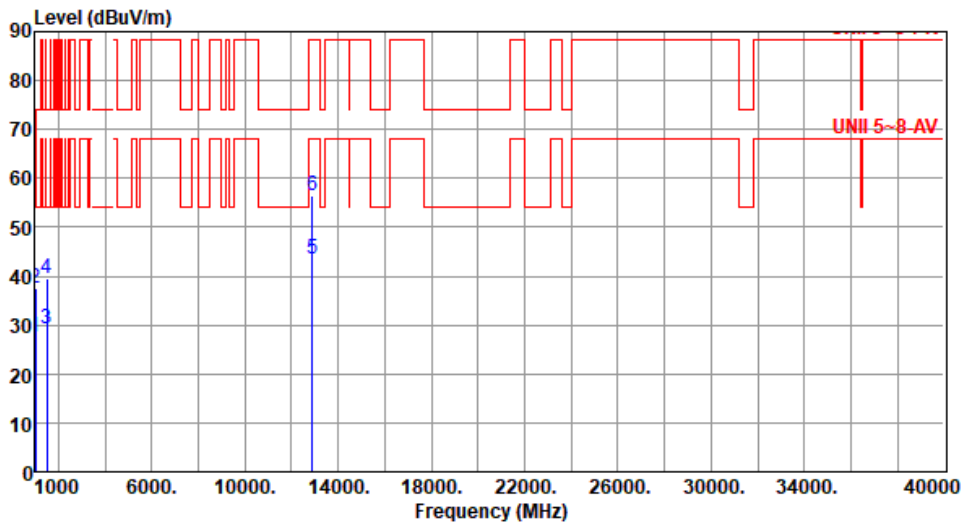

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.68	54.00	-26.32	35.95	-8.27	Average	100	278
2	1000.00	37.59	54.00	-16.41	45.86	-8.27	Peak	100	278
3	1500.00	29.32	54.00	-24.68	36.60	-7.28	Average	203	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	203	113
5	12890.00	43.44	68.20	-24.76	37.46	5.98	Average	145	242
6	12890.00	56.56	88.20	-31.64	50.58	5.98	Peak	145	242

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

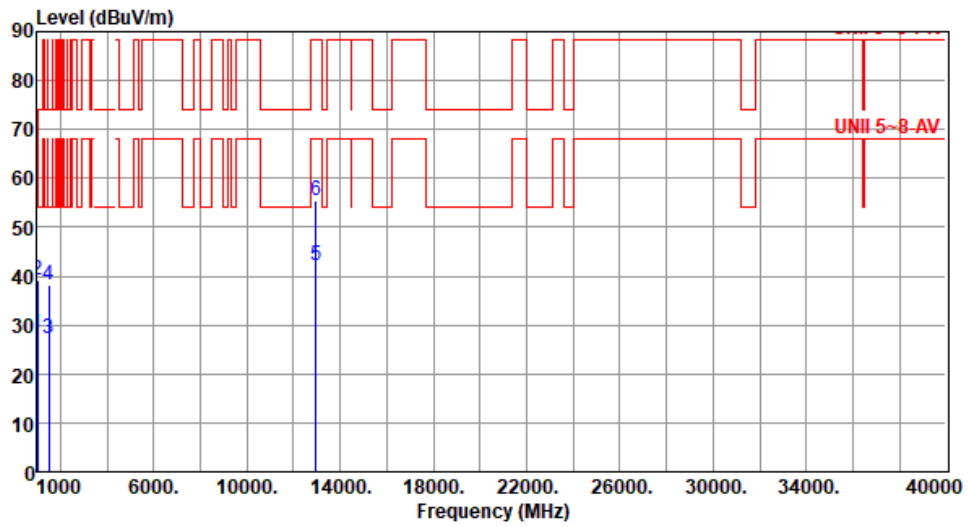

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.24	54.00	-25.76	36.51	-8.27	Average	100	252
2	1000.00	39.18	54.00	-14.82	47.45	-8.27	Peak	100	252
3	1500.00	27.36	54.00	-26.64	34.64	-7.28	Average	124	115
4	1500.00	38.28	74.00	-35.72	45.56	-7.28	Peak	124	115
5	12970.00	42.32	68.20	-25.88	36.20	6.12	Average	100	255
6	12970.00	55.56	88.20	-32.64	49.44	6.12	Peak	100	255

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

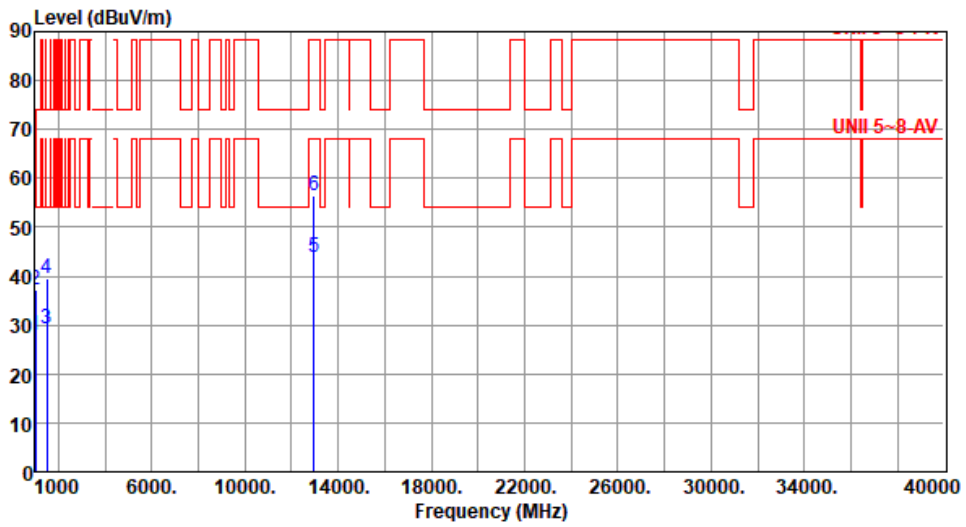

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.89	54.00	-26.11	36.16	-8.27	Average	100	278
2	1000.00	37.29	54.00	-16.71	45.56	-8.27	Peak	100	278
3	1500.00	29.33	54.00	-24.67	36.61	-7.28	Average	205	113
4	1500.00	39.54	74.00	-34.46	46.82	-7.28	Peak	205	113
5	12970.00	43.71	68.20	-24.49	37.59	6.12	Average	142	240
6	12970.00	56.61	88.20	-31.59	50.49	6.12	Peak	142	240

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

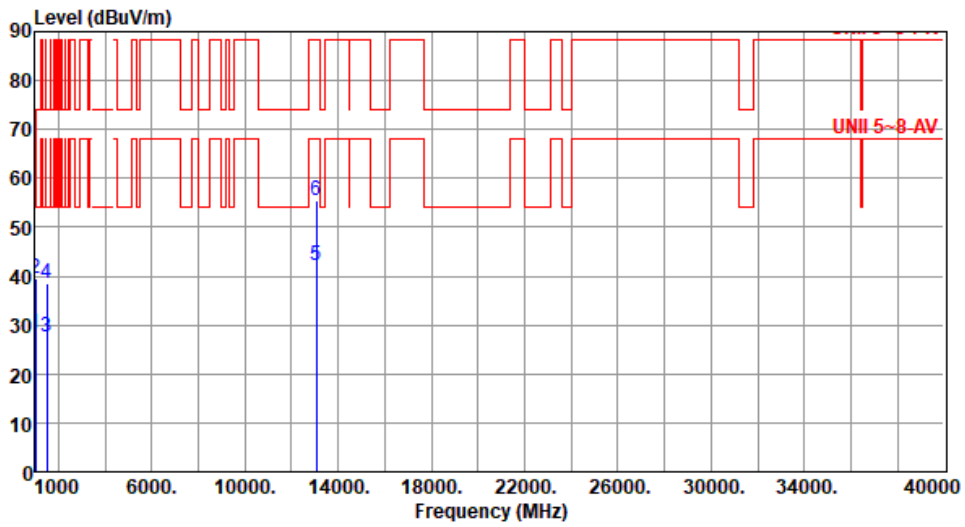

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	28.31	54.00	-25.69	36.58	-8.27	Average	100	246
2	1000.00	39.38	54.00	-14.62	47.65	-8.27	Peak	100	246
3	1500.00	27.64	54.00	-26.36	34.92	-7.28	Average	125	121
4	1500.00	38.64	74.00	-35.36	45.92	-7.28	Peak	125	121
5	13050.00	42.31	68.20	-25.89	36.41	5.90	Average	100	261
6	13050.00	55.58	88.20	-32.62	49.68	5.90	Peak	100	261

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 23 Humidity(%): 62

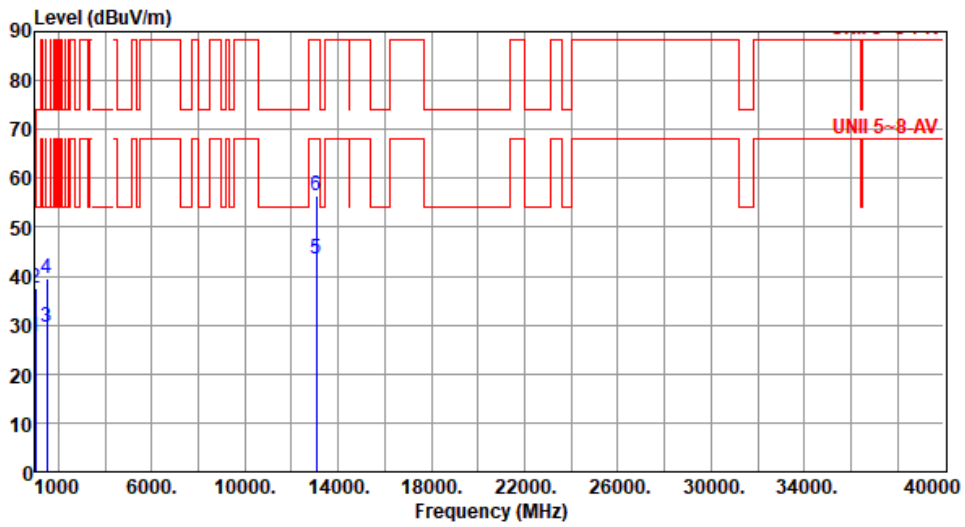

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	1000.00	27.43	54.00	-26.57	35.70	-8.27	Average	100	279
2	1000.00	37.52	54.00	-16.48	45.79	-8.27	Peak	100	279
3	1500.00	29.55	54.00	-24.45	36.83	-7.28	Average	100	288
4	1500.00	39.64	74.00	-34.36	46.92	-7.28	Peak	100	288
5	13050.00	43.51	68.20	-24.69	37.61	5.90	Average	139	244
6	13050.00	56.47	88.20	-31.73	50.57	5.90	Peak	139	244

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).