



5795MHz

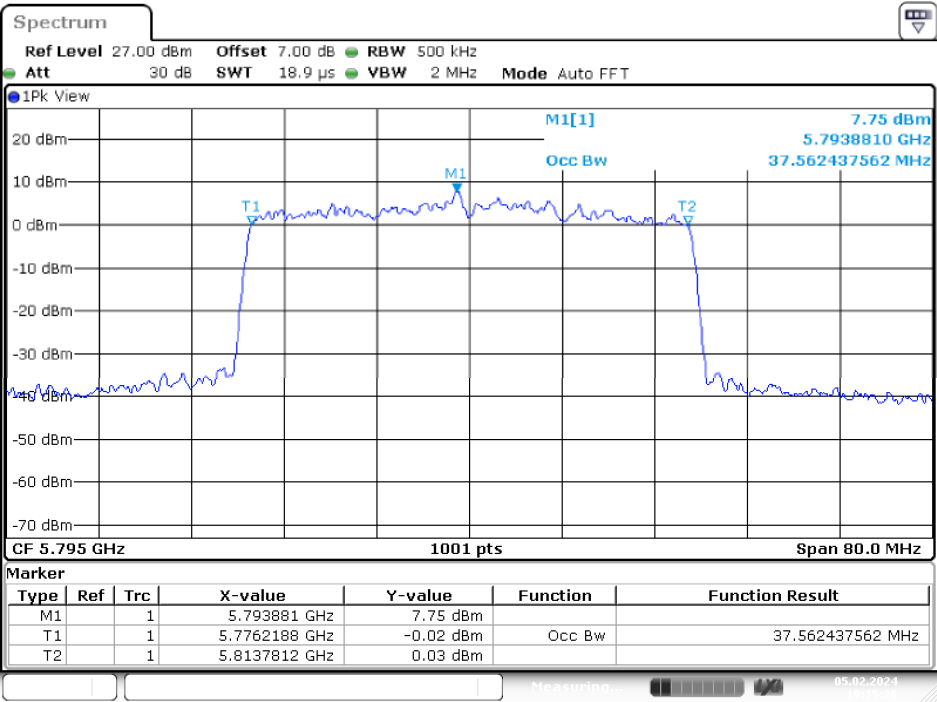

Date: 5.FEB.2024 19:15:26

IEEE 802.11ax HE80 Mode / 5725 ~ 5850MHz

5775MHz

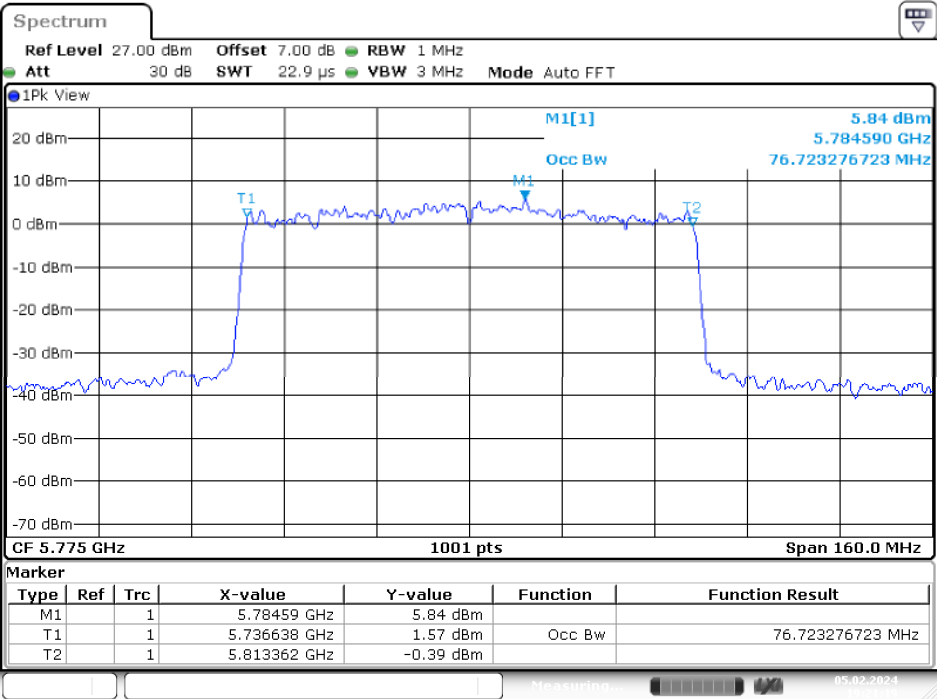


Date: 5.FEB.2024 19:21:19


Chain 2

IEEE 802.11a Mode / 5725 ~ 5850MHz


5745MHz

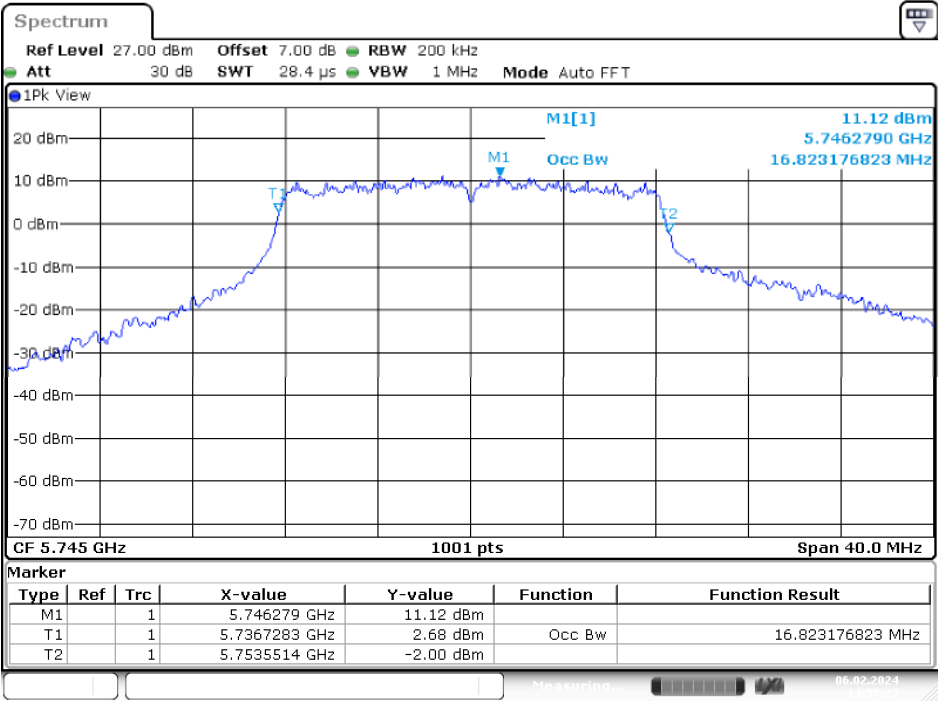

5785MHz

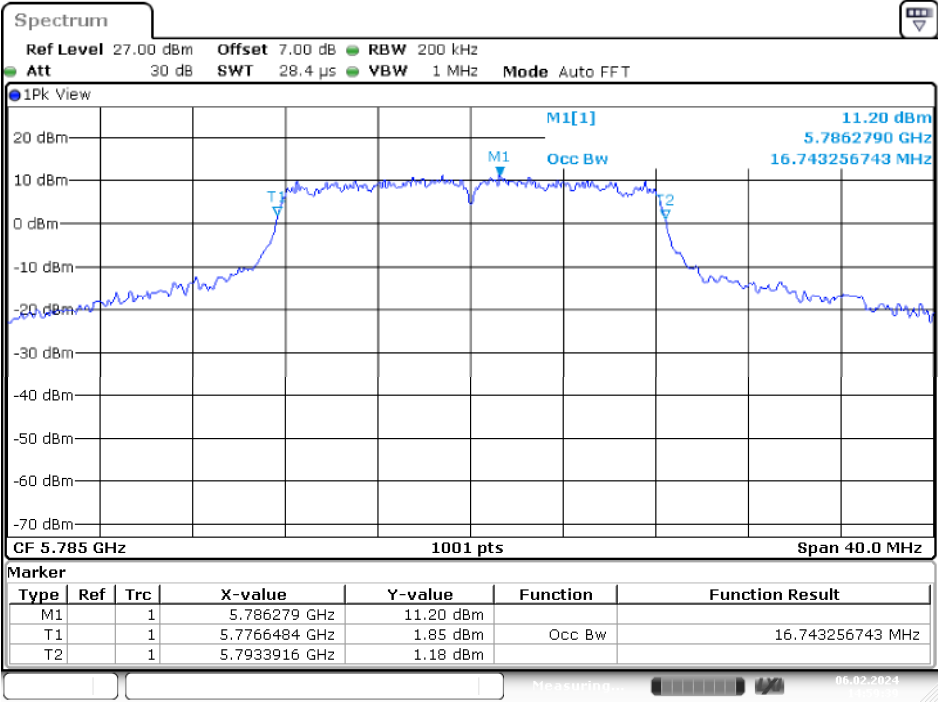


5825MHz

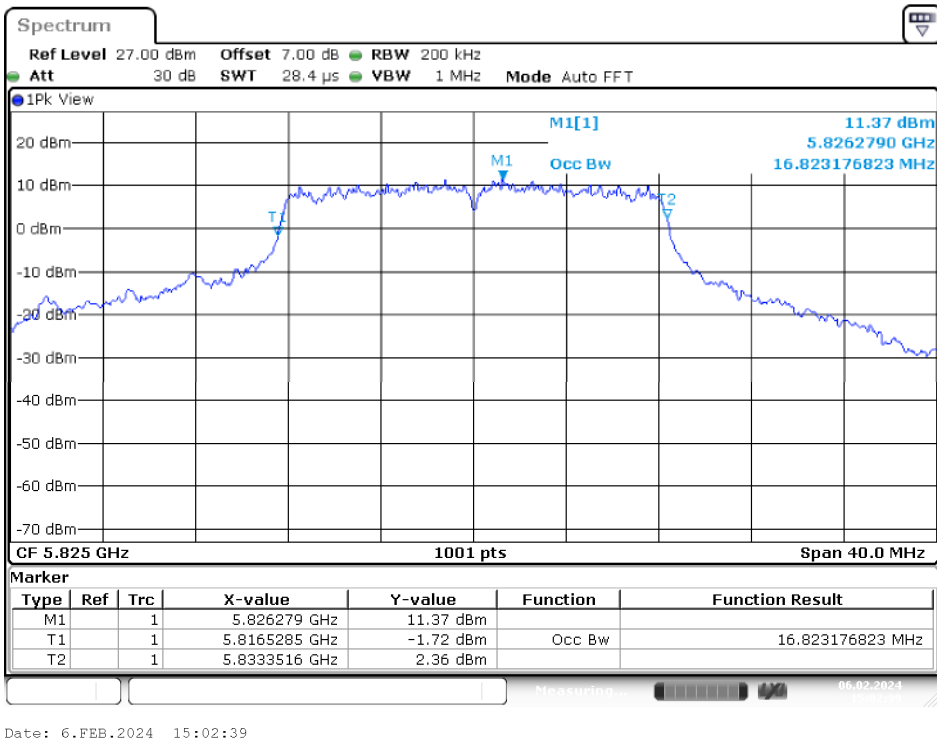


IEEE 802.11ac VHT20 Mode / 5725 ~ 5850MHz

5745MHz

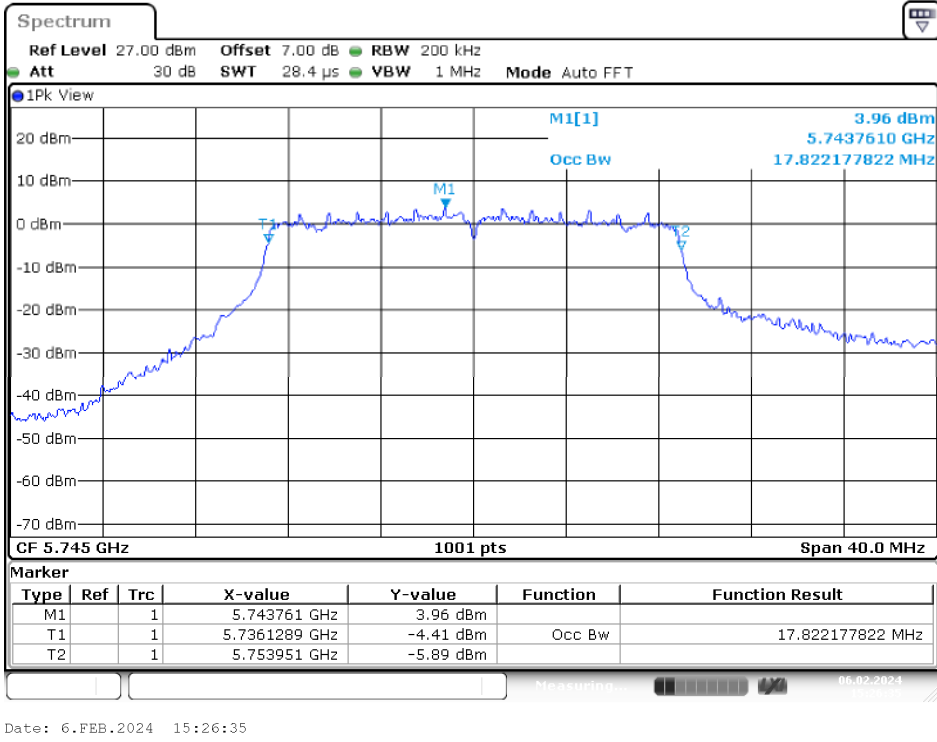


5785MHz

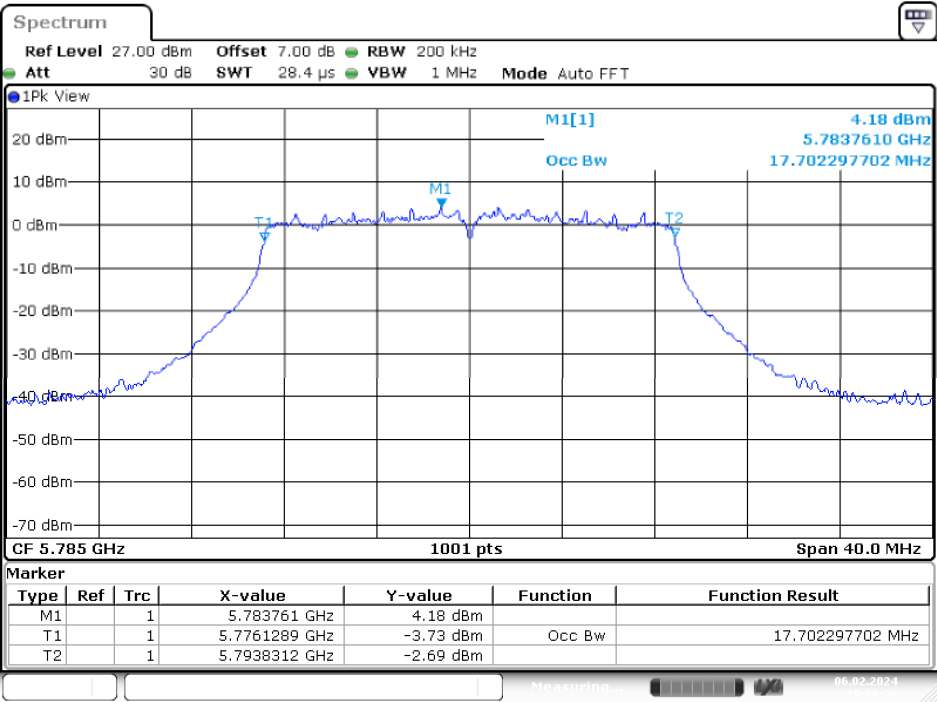

Date: 6.FEB.2024 15:28:30


5825MHz

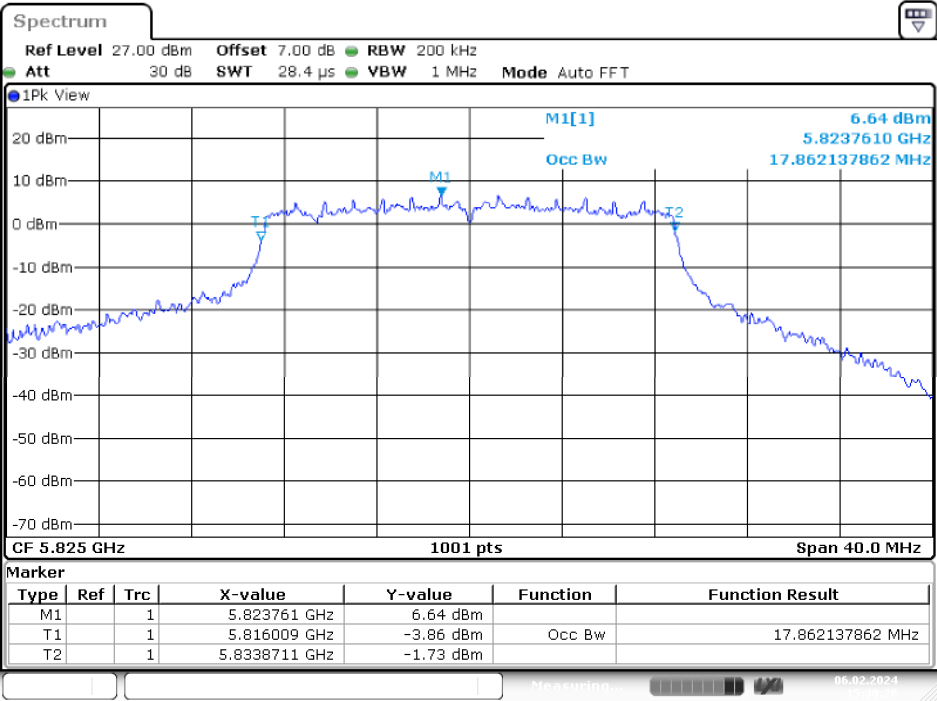

Date: 6.FEB.2024 15:30:28


IEEE 802.11ac VHT40 Mode / 5725 ~ 5850MHz

5755MHz

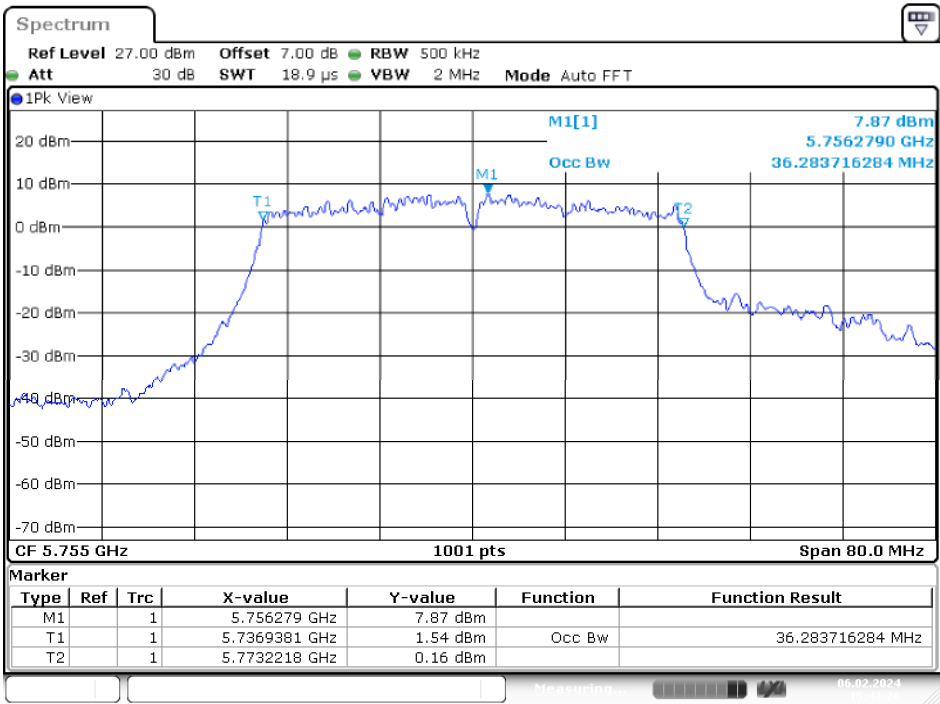


Date: 6.FEB.2024 15:42:26

5795MHz

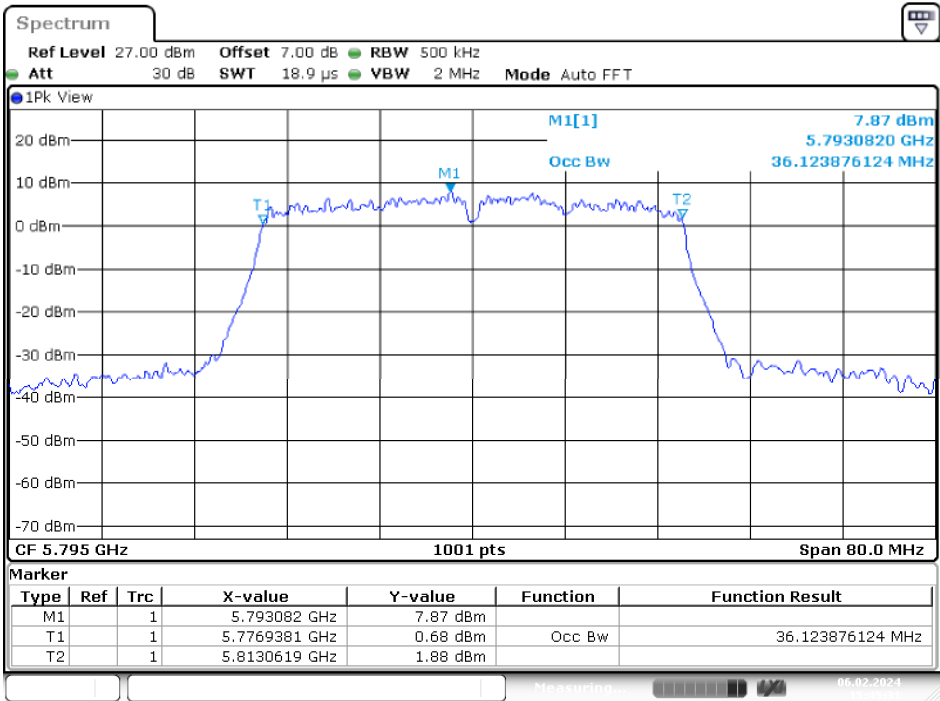


Date: 6.FEB.2024 15:45:32


IEEE 802.11ac VHT80 Mode / 5725 ~ 5850MHz

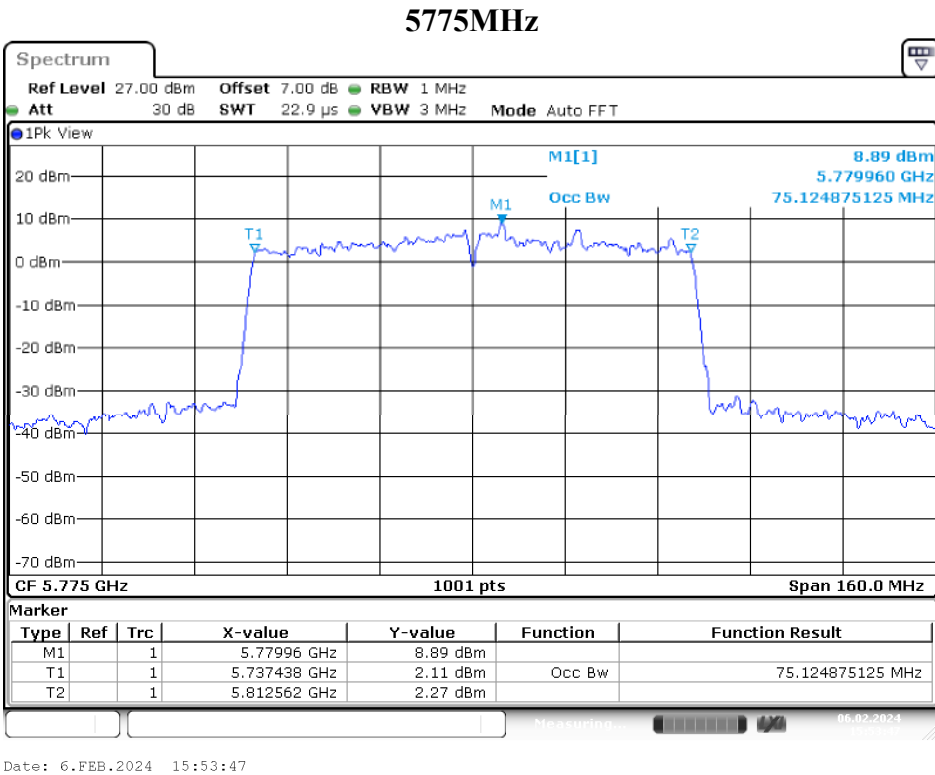

IEEE 802.11ax HE20 Mode / 5725 ~ 5850MHz

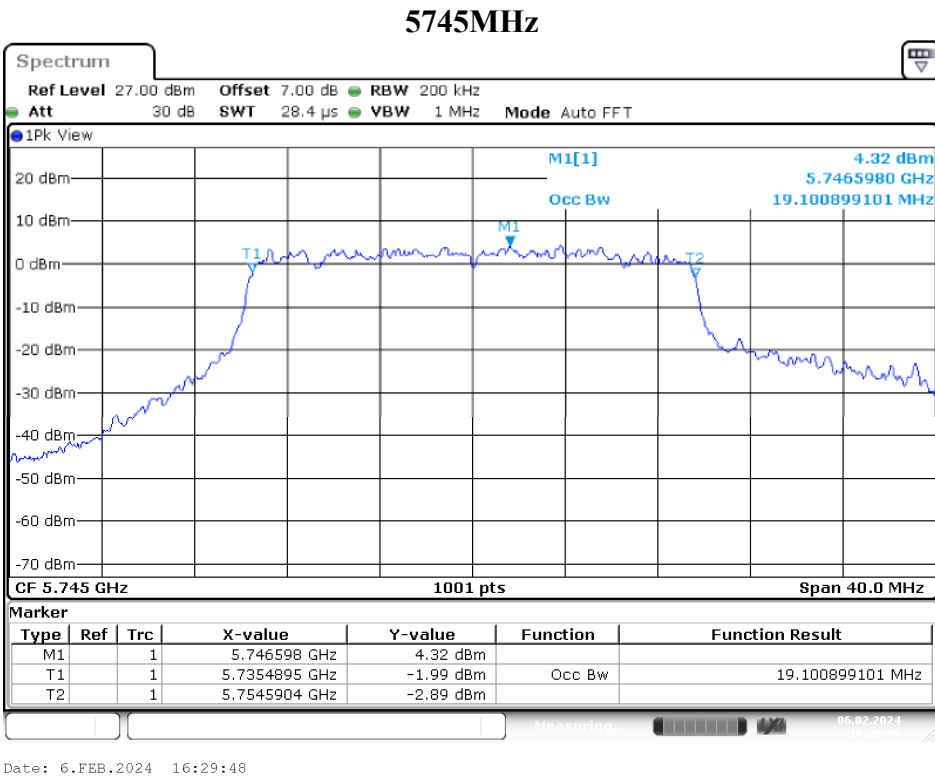


5785MHz

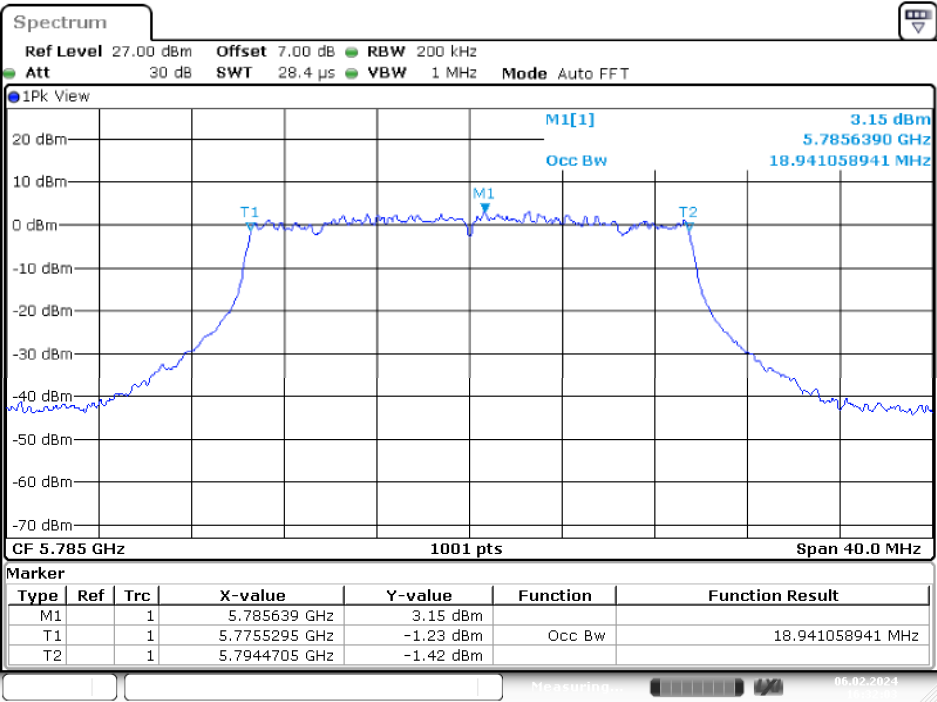

Date: 6.FEB.2024 16:32:03


5825MHz

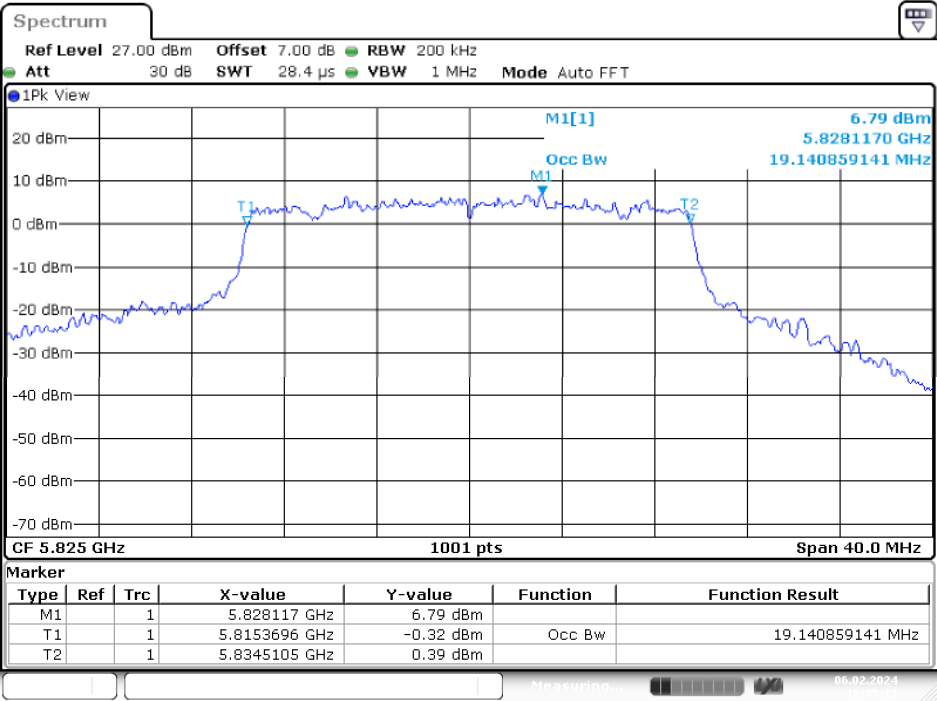

Date: 6.FEB.2024 16:35:13


IEEE 802.11ax HE40 Mode / 5725 ~ 5850MHz

5755MHz

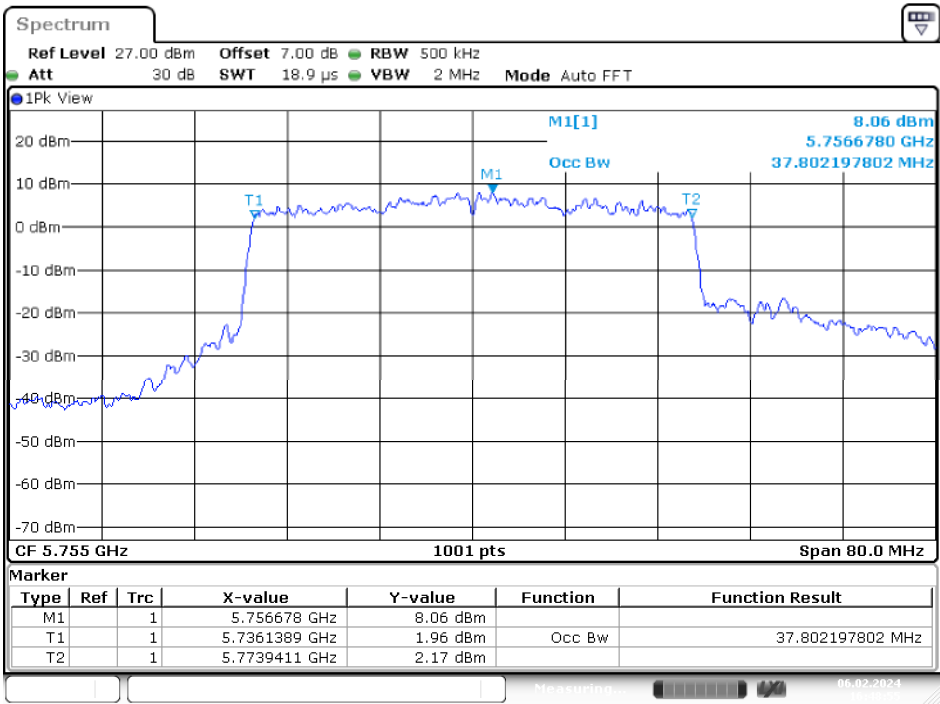


Date: 6.FEB.2024 16:48:55

5795MHz

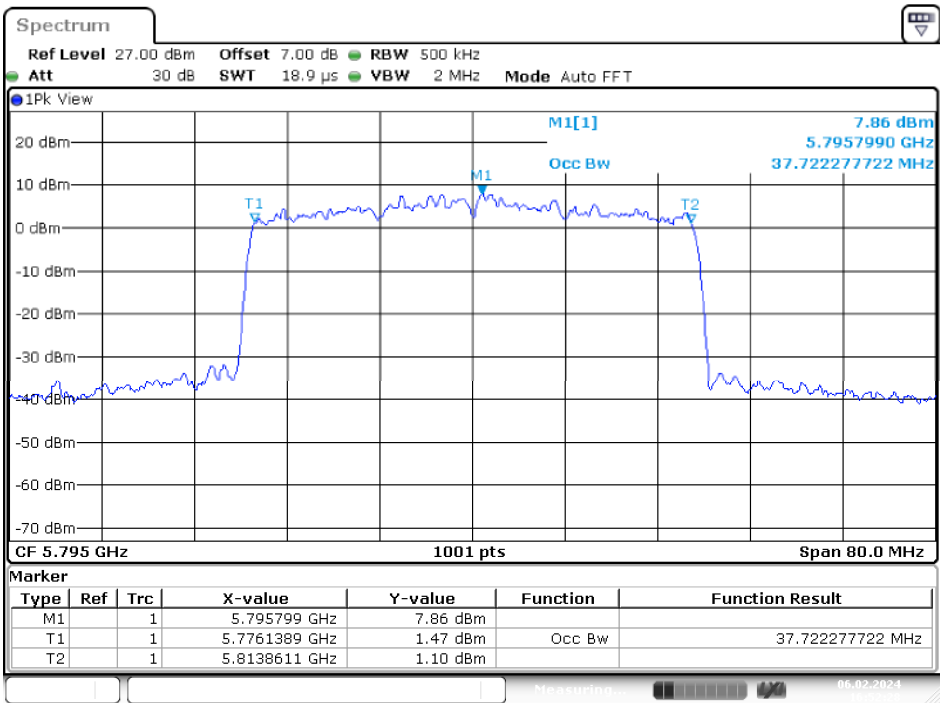

Date: 6.FEB.2024 16:52:29

IEEE 802.11ax HE80 Mode / 5725 ~ 5850MHz

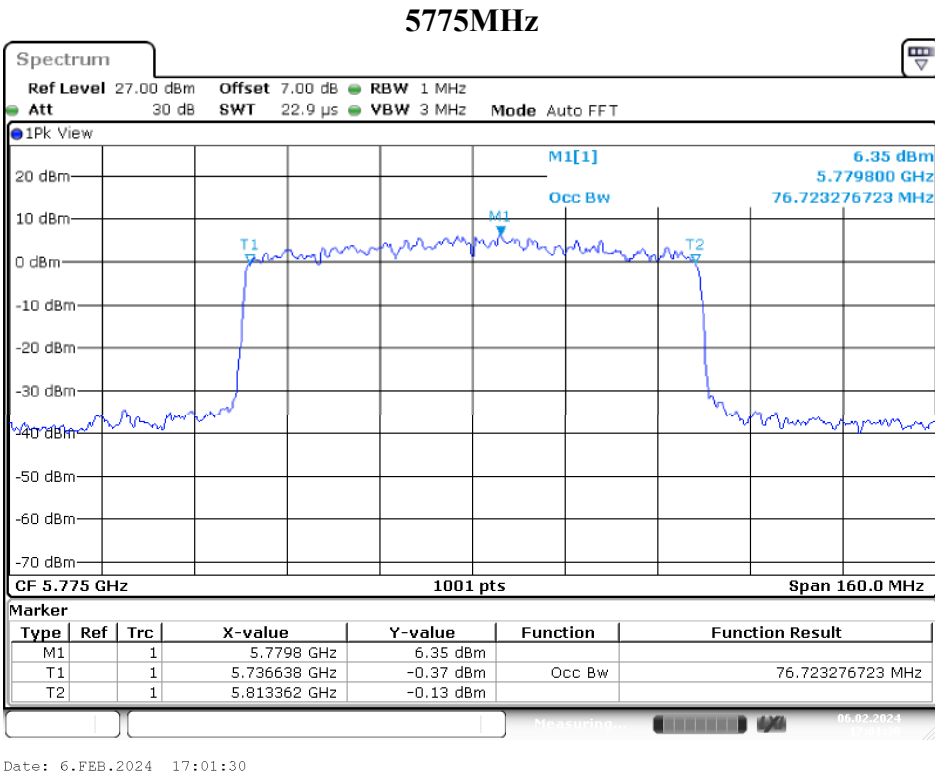


Beamforming Mode

Chain 0


IEEE 802.11ac VHT20 Mode / 5725 ~ 5850MHz

5745MHz

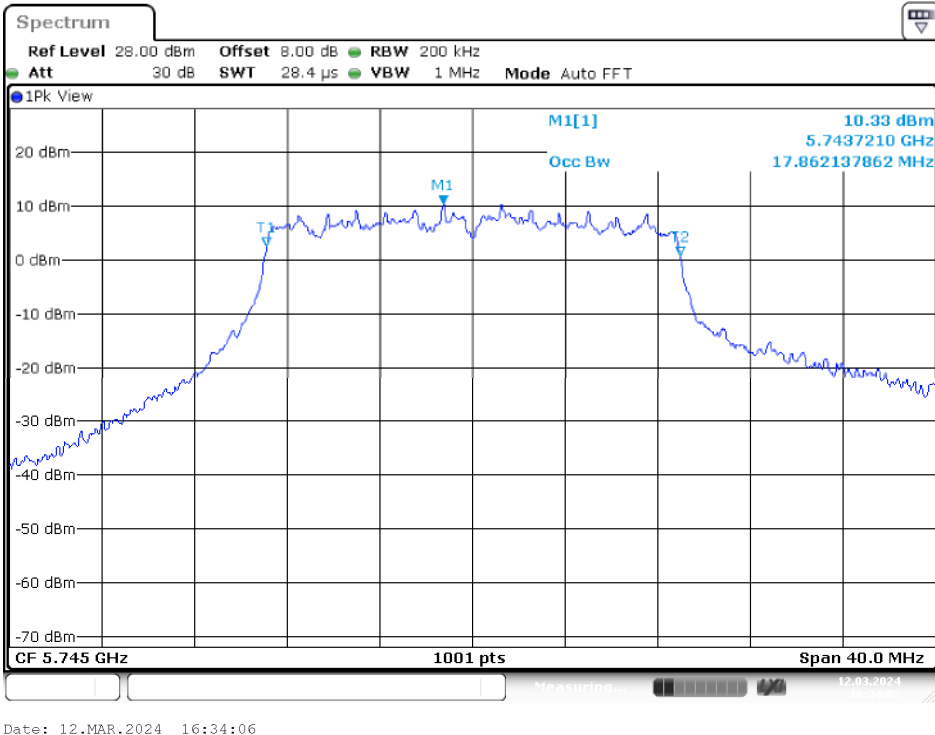


Date: 12.MAR.2024 16:34:06

5785MHz

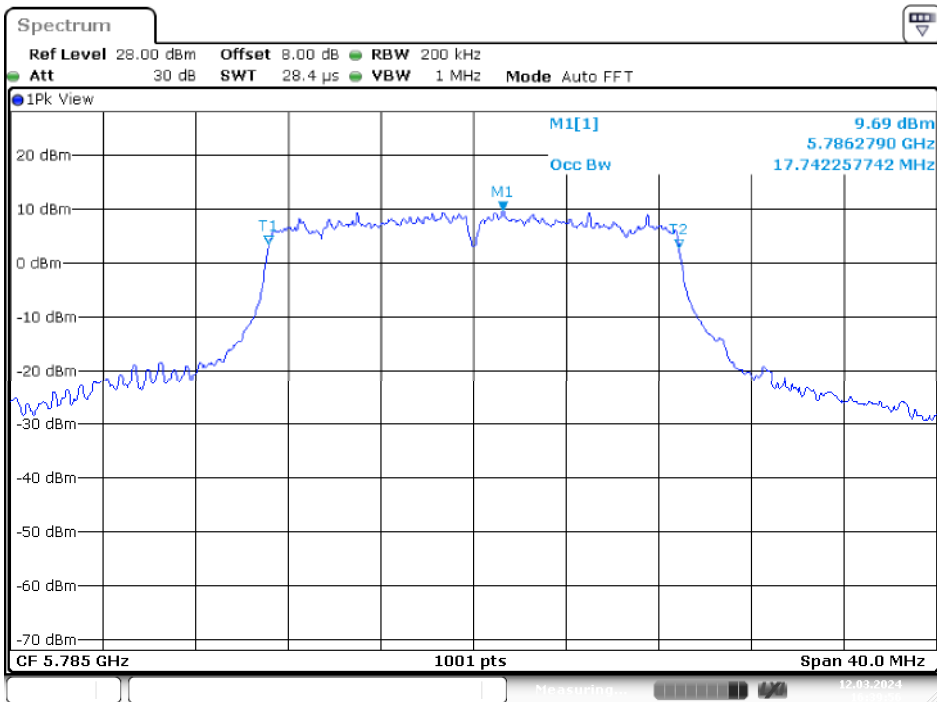

Date: 12.MAR.2024 16:39:56


5825MHz

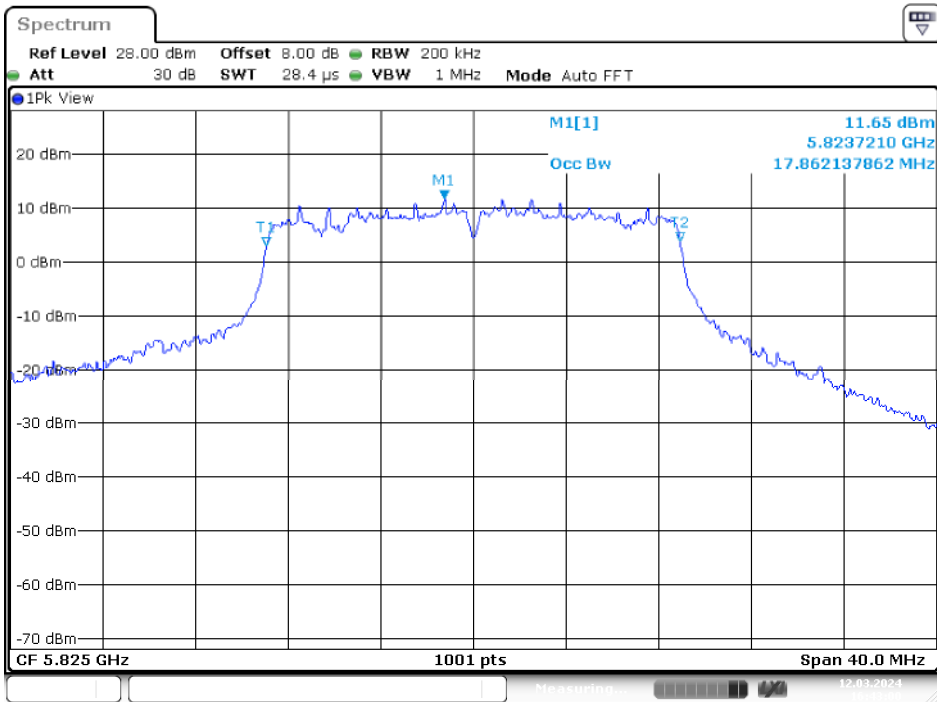

Date: 12.MAR.2024 16:43:01


IEEE 802.11ac VHT40 Mode / 5725 ~ 5850MHz

5755MHz

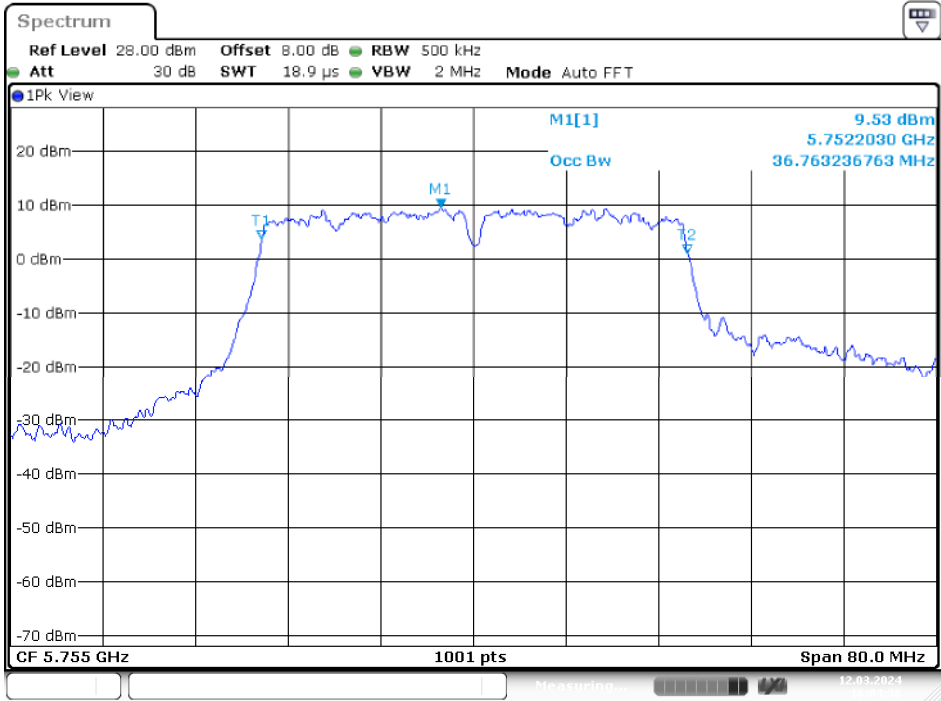

Date: 12.MAR.2024 16:04:37


5795MHz

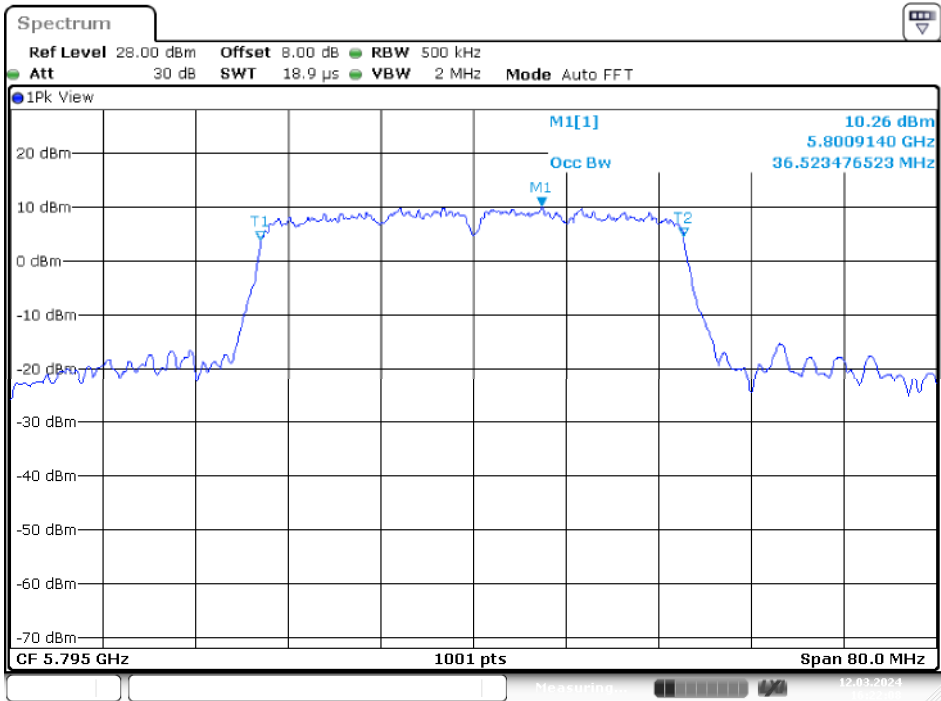

Date: 12.MAR.2024 16:22:09

IEEE 802.11ac VHT80 Mode / 5725 ~ 5850MHz


5775MHz

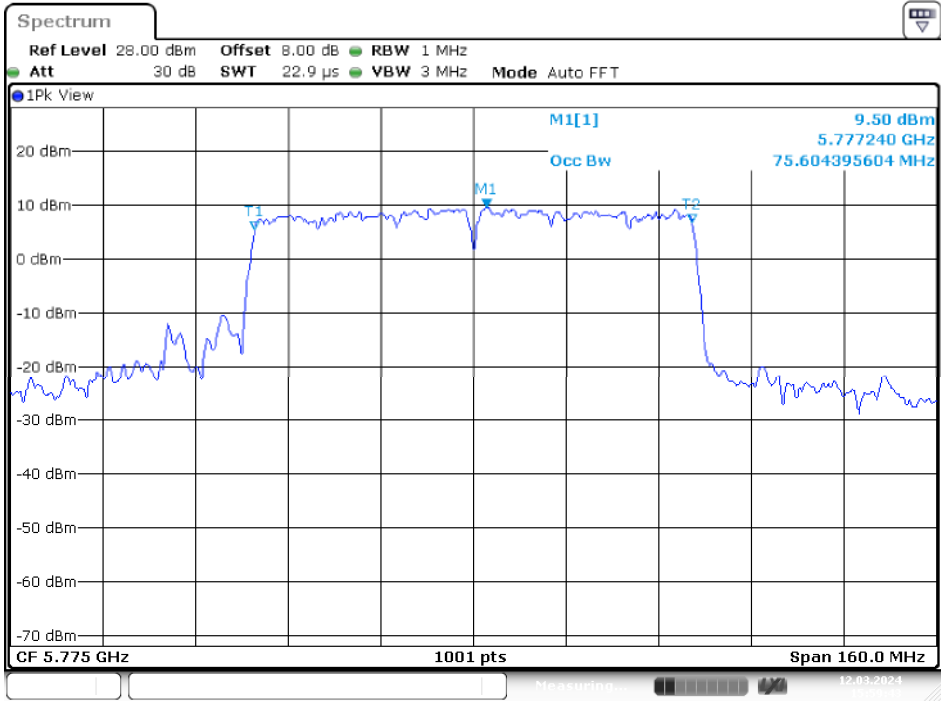

Date: 12.MAR.2024 15:59:43


IEEE 802.11ax HE20 Mode / 5725 ~ 5850MHz

5745MHz

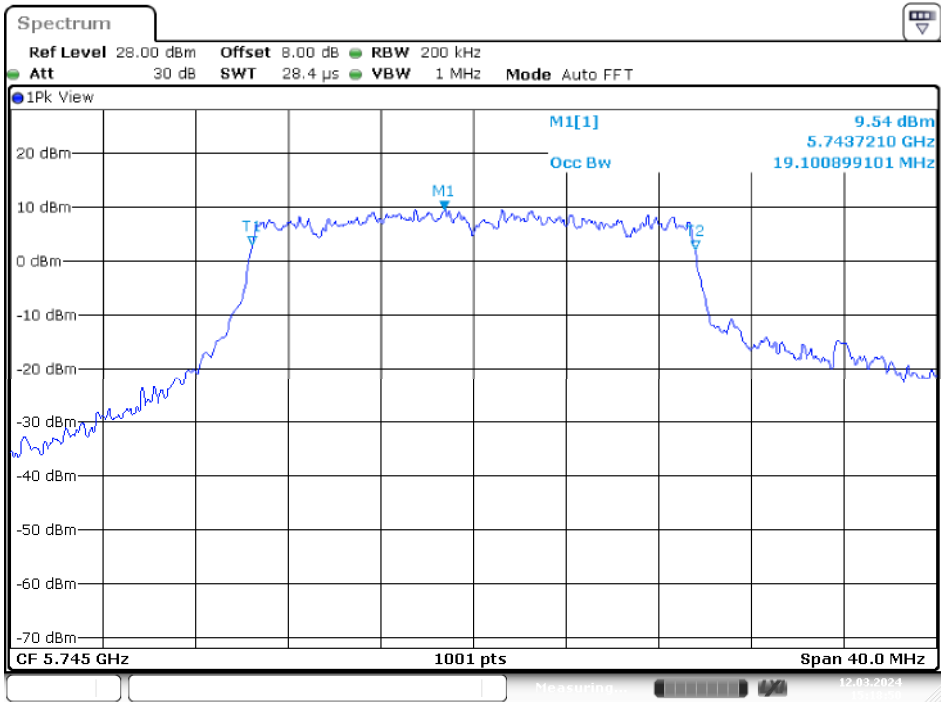


Date: 12.MAR.2024 15:18:50

5785MHz

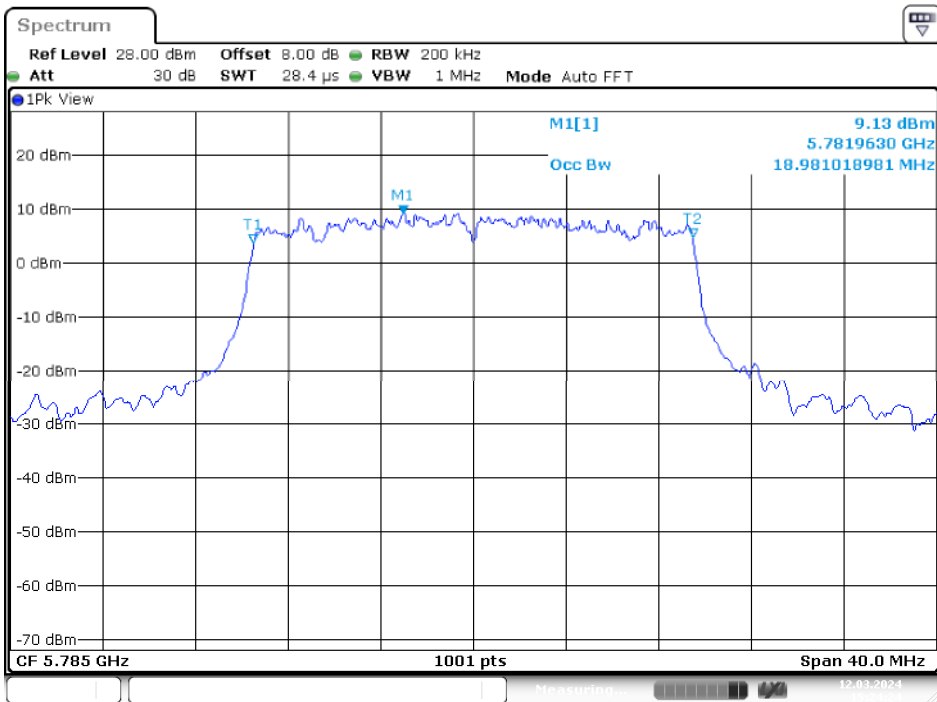

Date: 12.MAR.2024 15:24:24


5825MHz

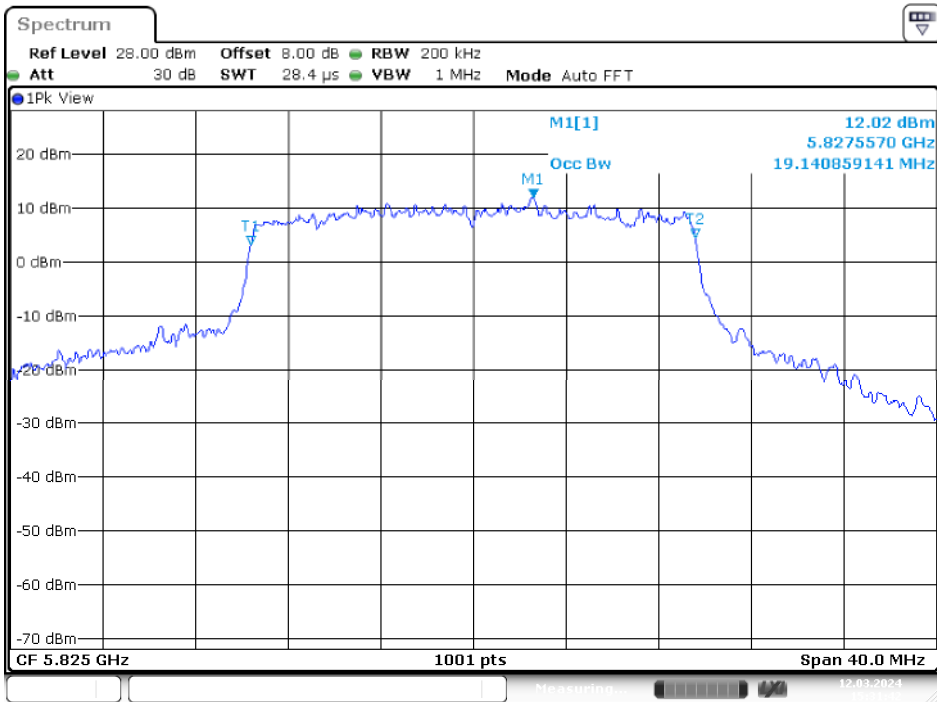

Date: 12.MAR.2024 15:31:43


IEEE 802.11ax HE40 Mode / 5725 ~ 5850MHz

5755MHz

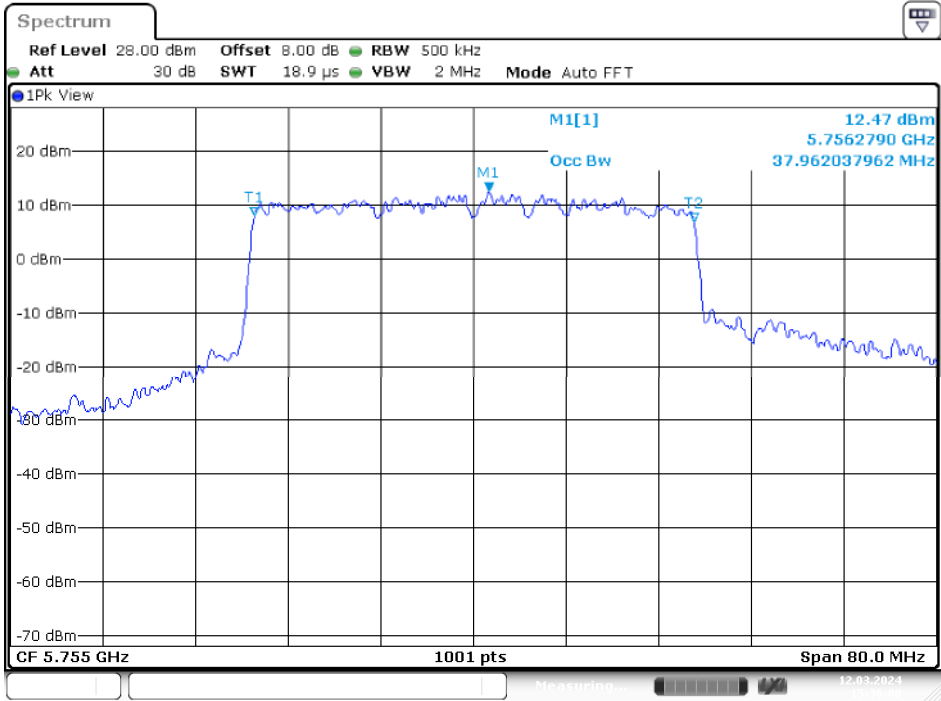


Date: 12.MAR.2024 15:36:00

5795MHz

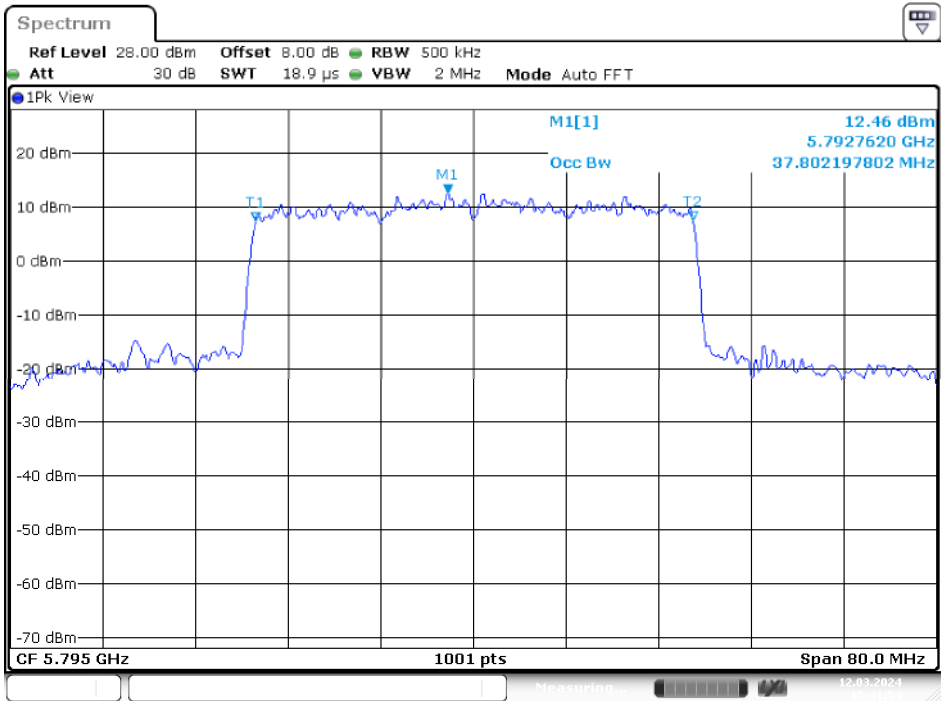


Date: 12.MAR.2024 15:41:54

IEEE 802.11ax HE80 Mode / 5725 ~ 5850MHz

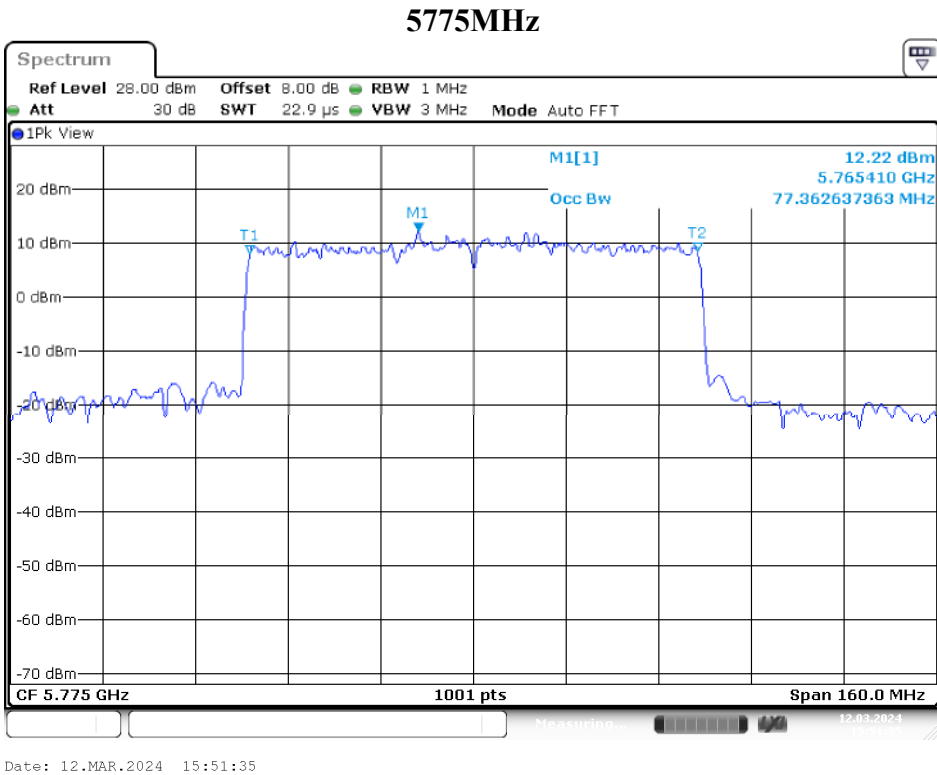


Chain 1

IEEE 802.11ac VHT20 Mode / 5725 ~ 5850MHz

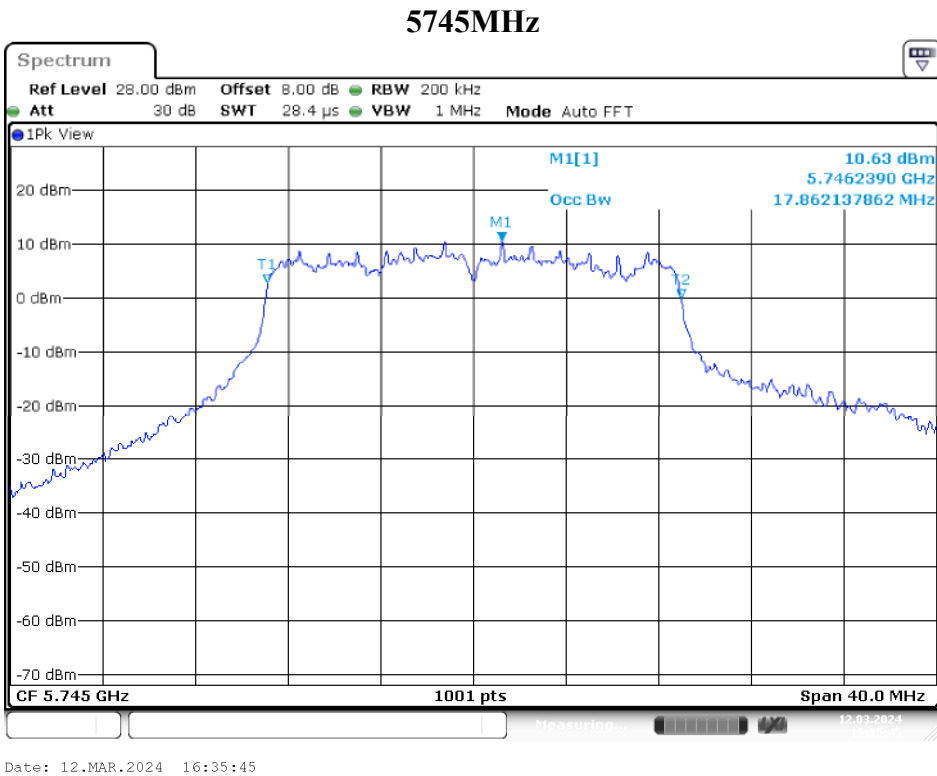


5785MHz

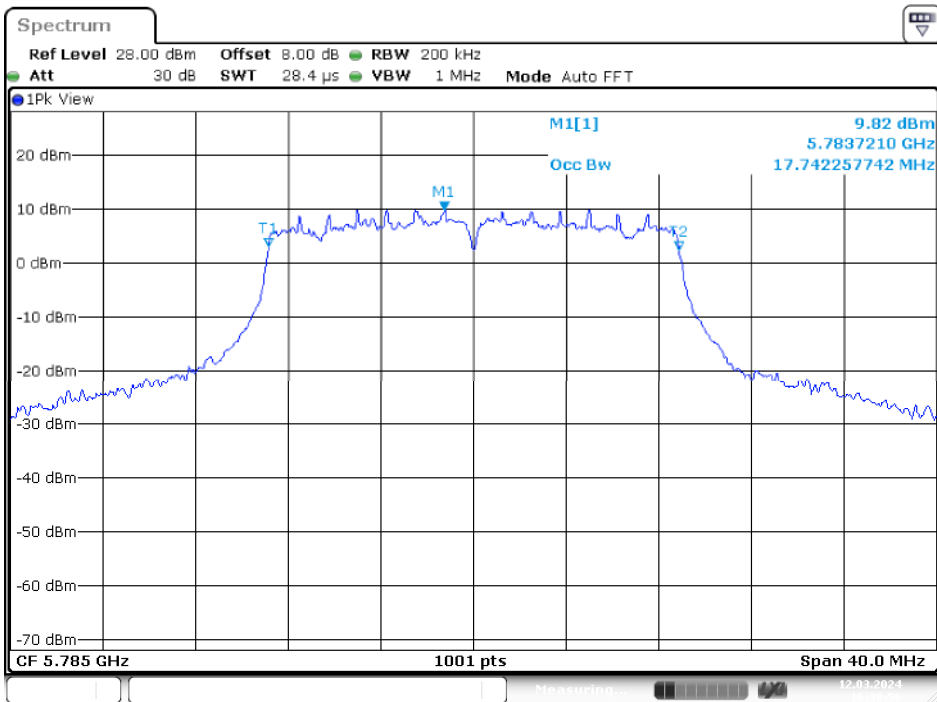

Date: 12.MAR.2024 16:38:57


5825MHz

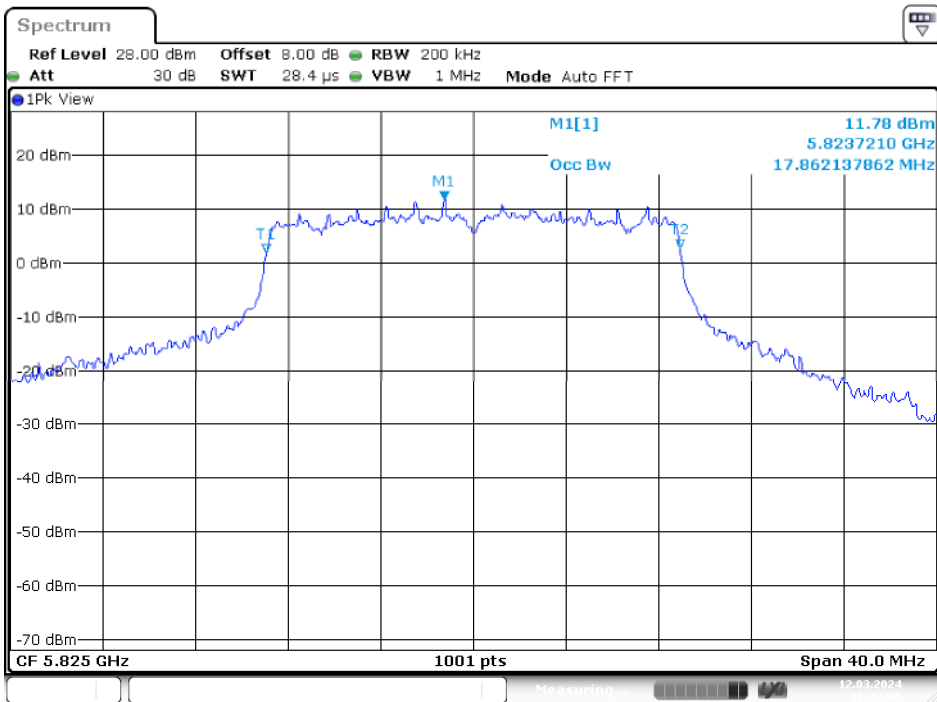

Date: 12.MAR.2024 16:44:05


IEEE 802.11ac VHT40 Mode / 5725 ~ 5850MHz

5755MHz

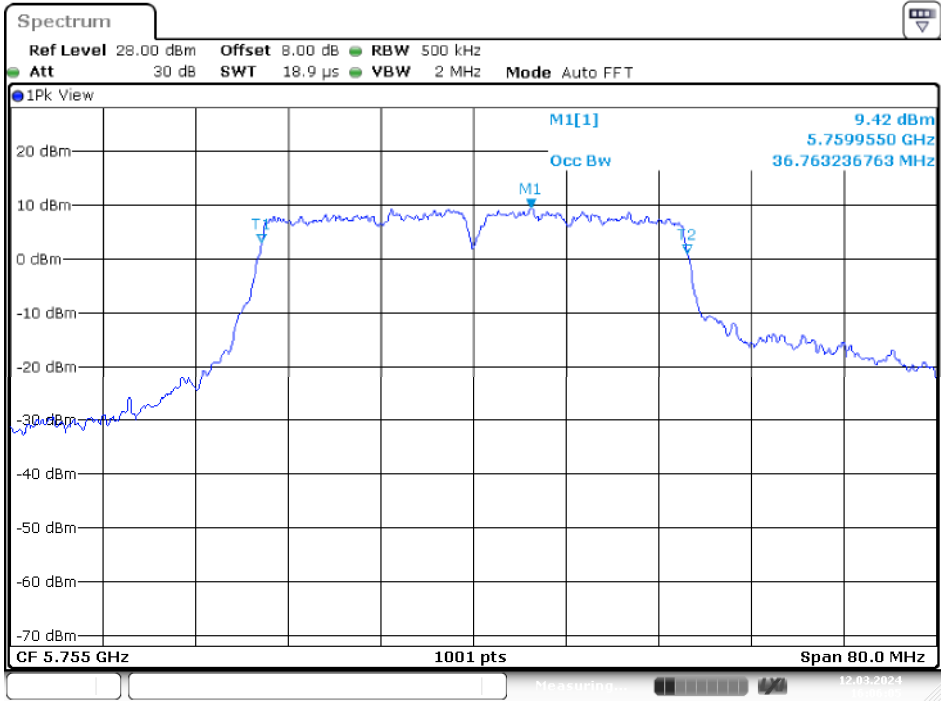

Date: 12.MAR.2024 16:06:05


5795MHz

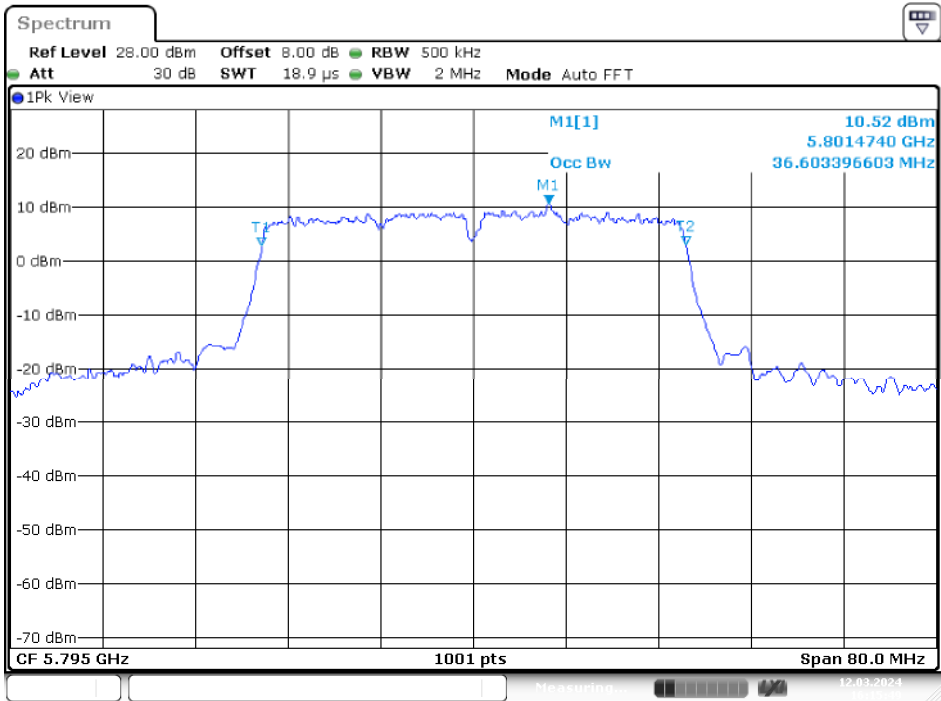

Date: 12.MAR.2024 16:15:49

IEEE 802.11ac VHT80 Mode / 5725 ~ 5850MHz


5775MHz

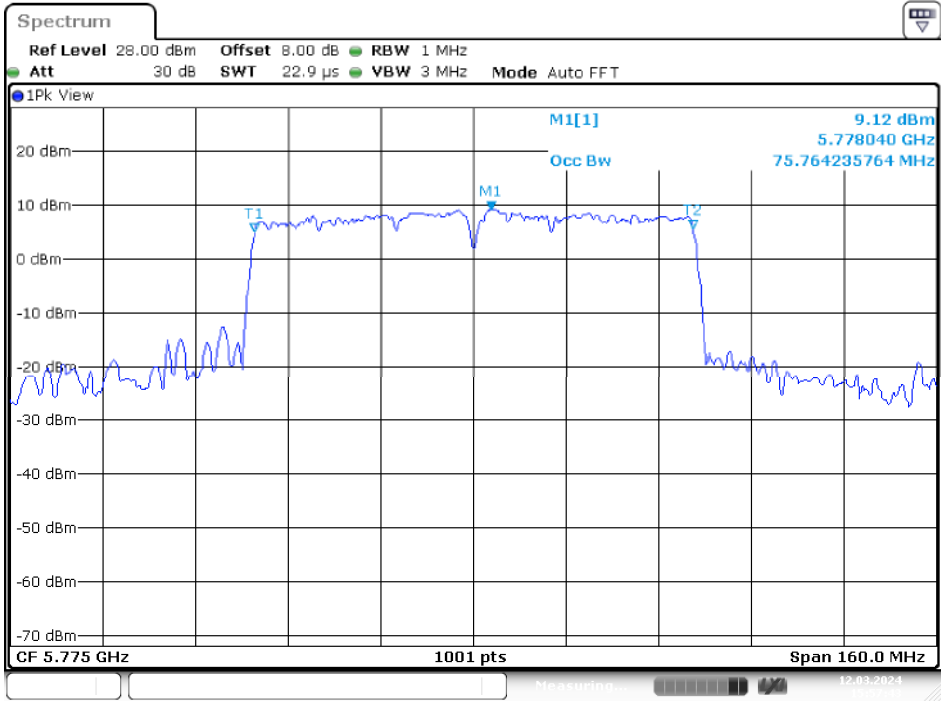

Date: 12.MAR.2024 15:57:43


IEEE 802.11ax HE20 Mode / 5725 ~ 5850MHz

5745MHz

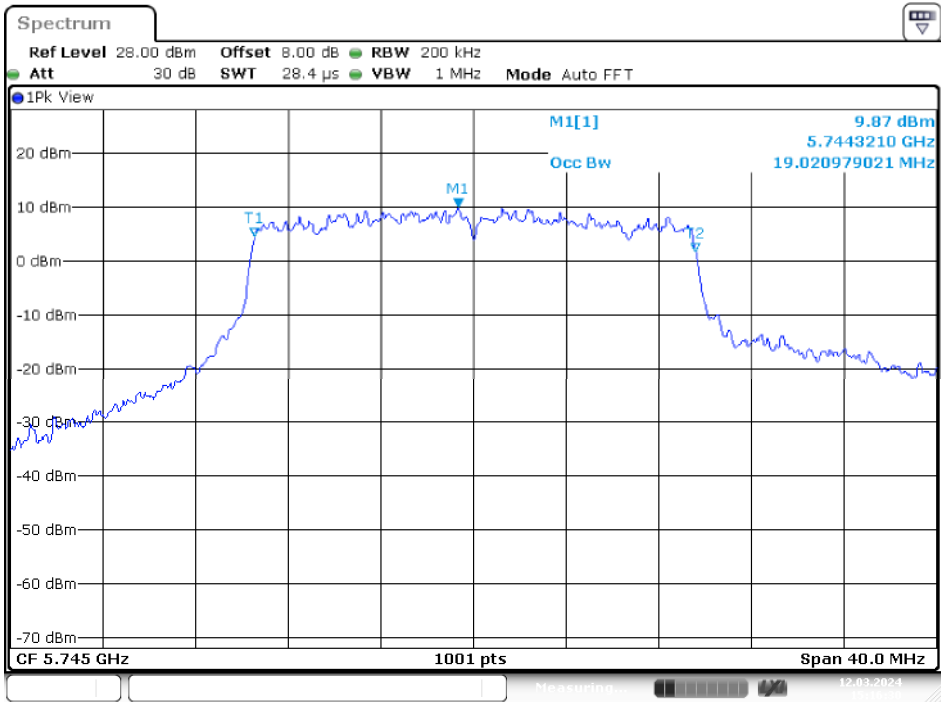


Date: 12.MAR.2024 15:16:30

5785MHz

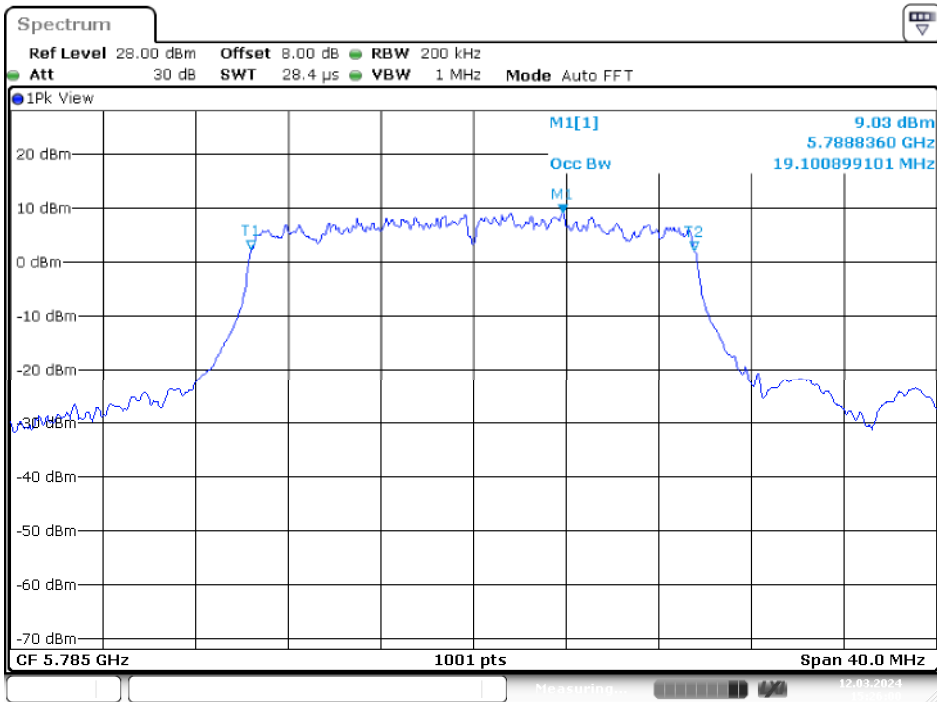

Date: 12.MAR.2024 15:26:01


5825MHz

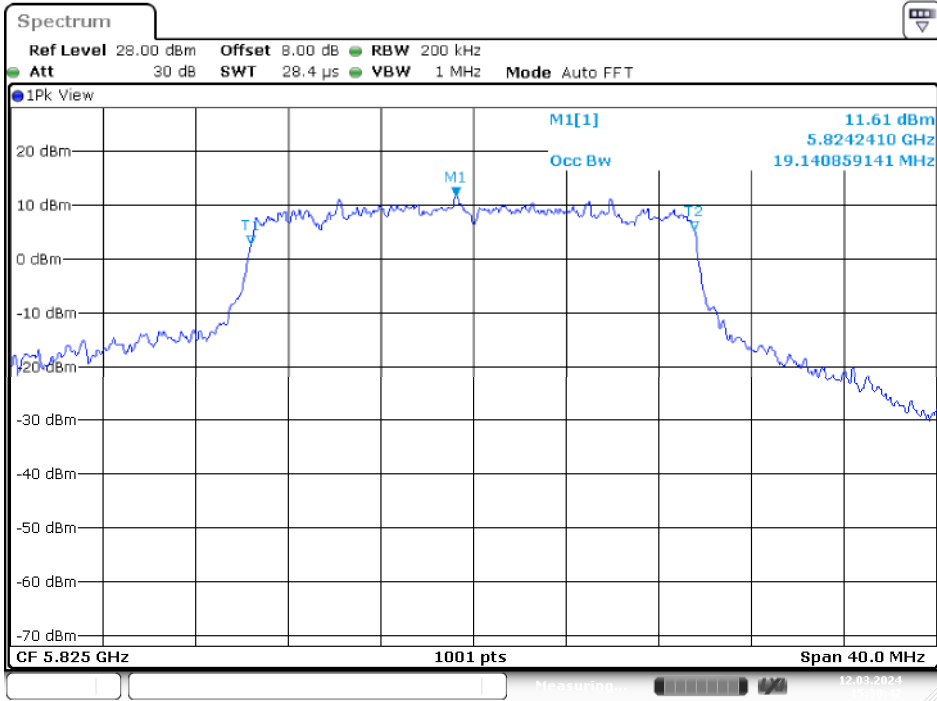

Date: 12.MAR.2024 15:30:42


IEEE 802.11ax HE40 Mode / 5725 ~ 5850MHz

5755MHz

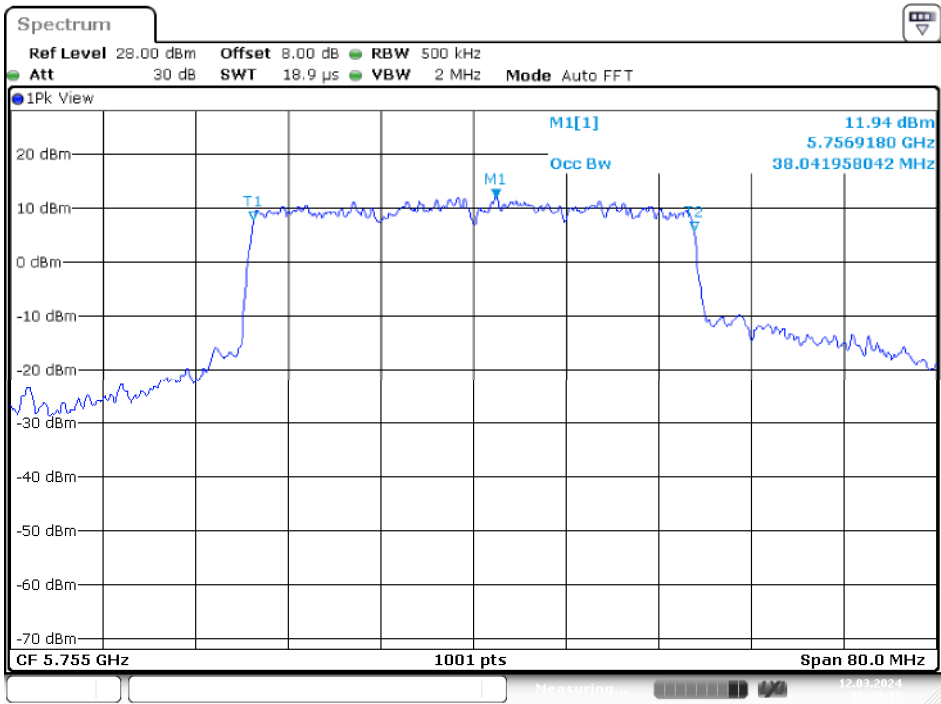


Date: 12.MAR.2024 15:37:42

5795MHz

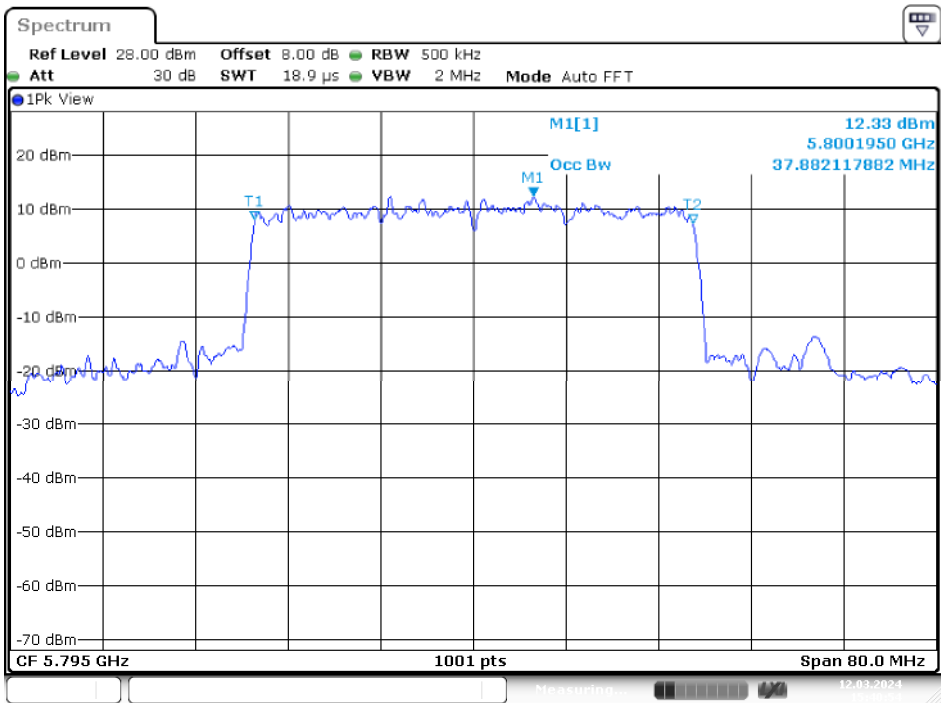


Date: 12.MAR.2024 15:40:54

IEEE 802.11ax HE80 Mode / 5725 ~ 5850MHz

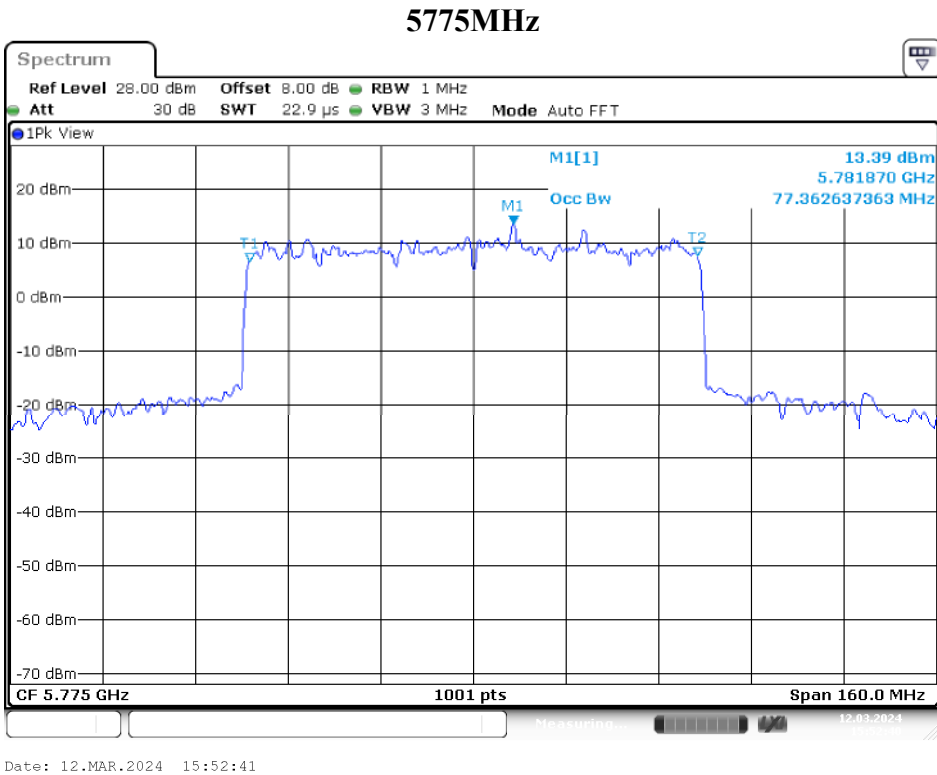


Chain 2

IEEE 802.11ac VHT20 Mode / 5725 ~ 5850MHz

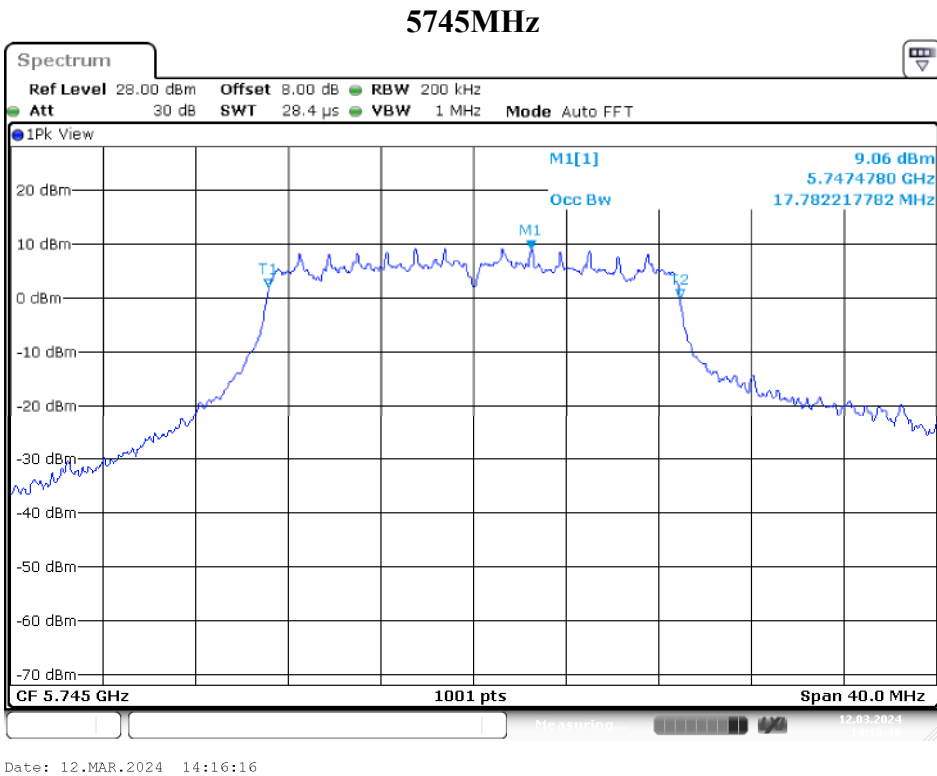


5785MHz

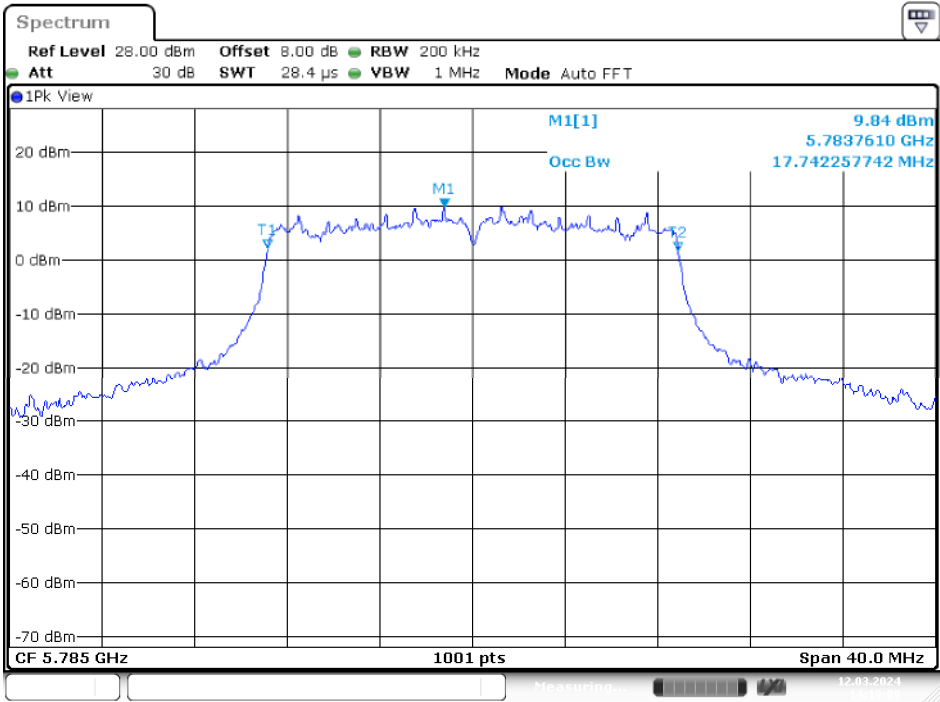

Date: 12.MAR.2024 14:19:10


5825MHz

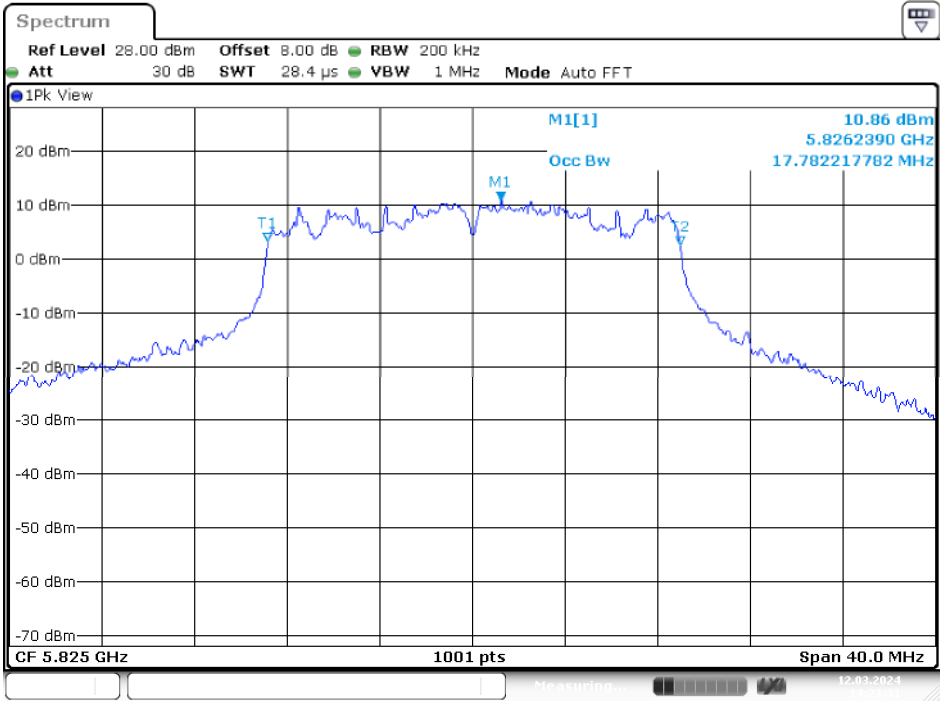

Date: 12.MAR.2024 14:23:31


IEEE 802.11ac VHT40 Mode / 5725 ~ 5850MHz

5755MHz

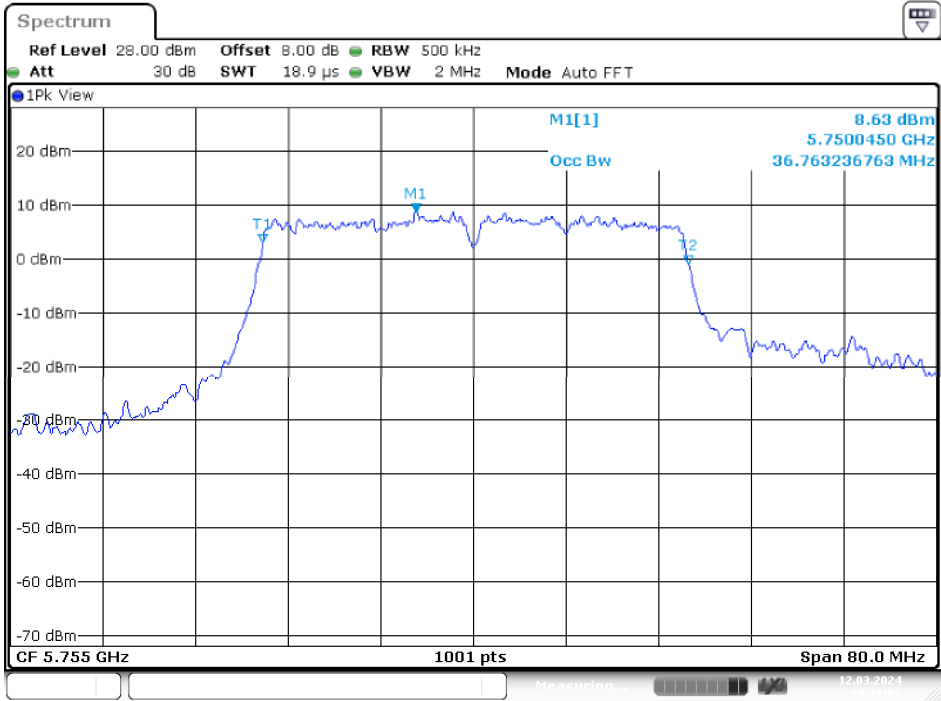

Date: 12.MAR.2024 14:31:07


5795MHz

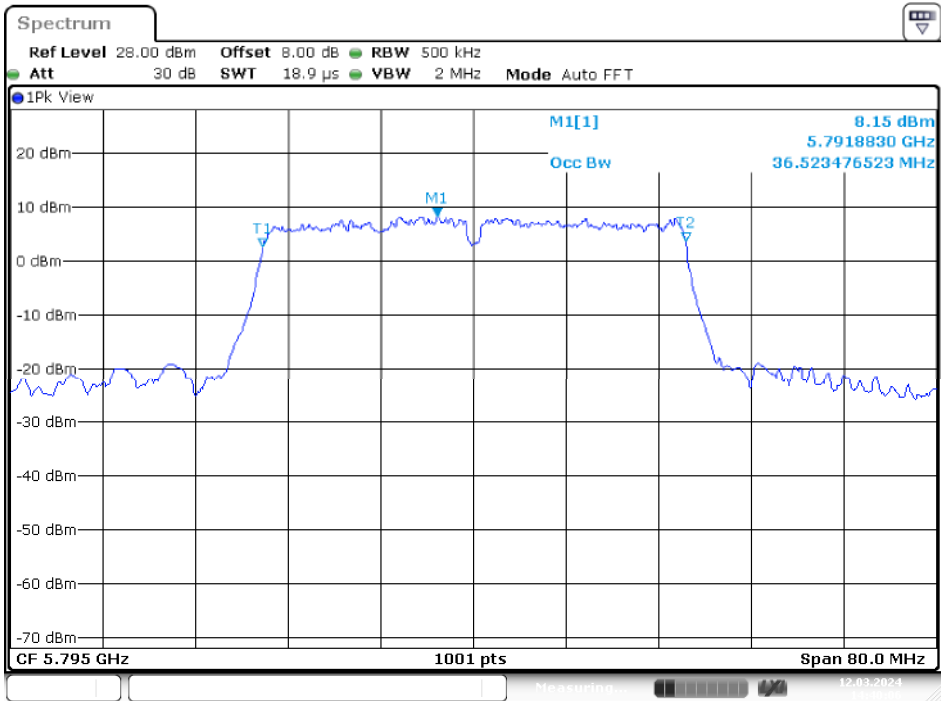

Date: 12.MAR.2024 14:40:06

IEEE 802.11ac VHT80 Mode / 5725 ~ 5850MHz


5775MHz

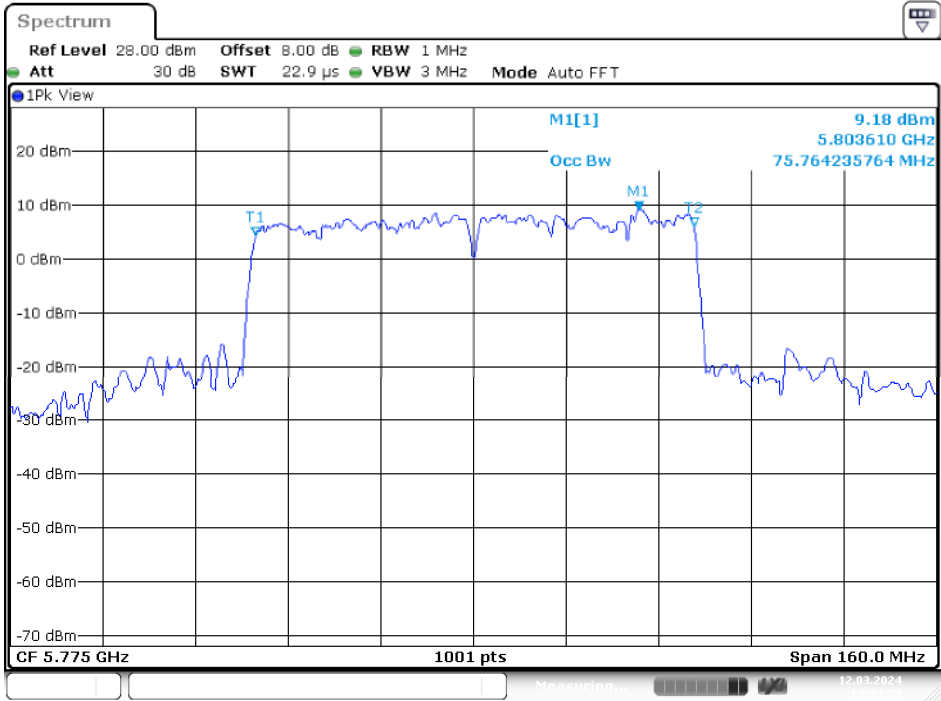

Date: 12.MAR.2024 14:34:53


IEEE 802.11ax HE20 Mode / 5725 ~ 5850MHz

5745MHz

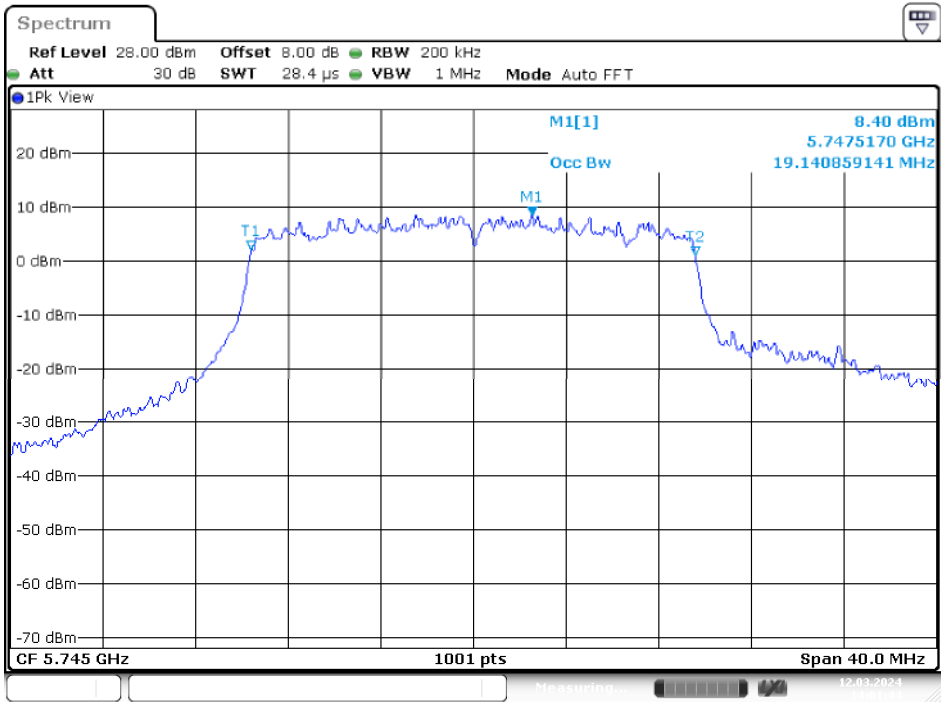


Date: 12.MAR.2024 14:01:44

5785MHz

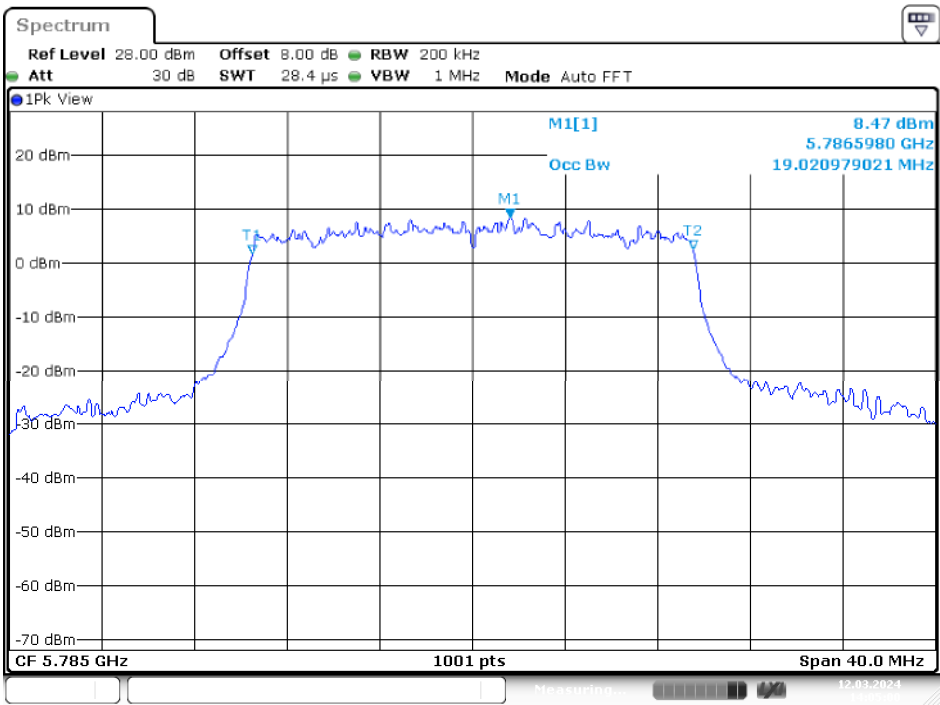

Date: 12.MAR.2024 14:05:00


5825MHz

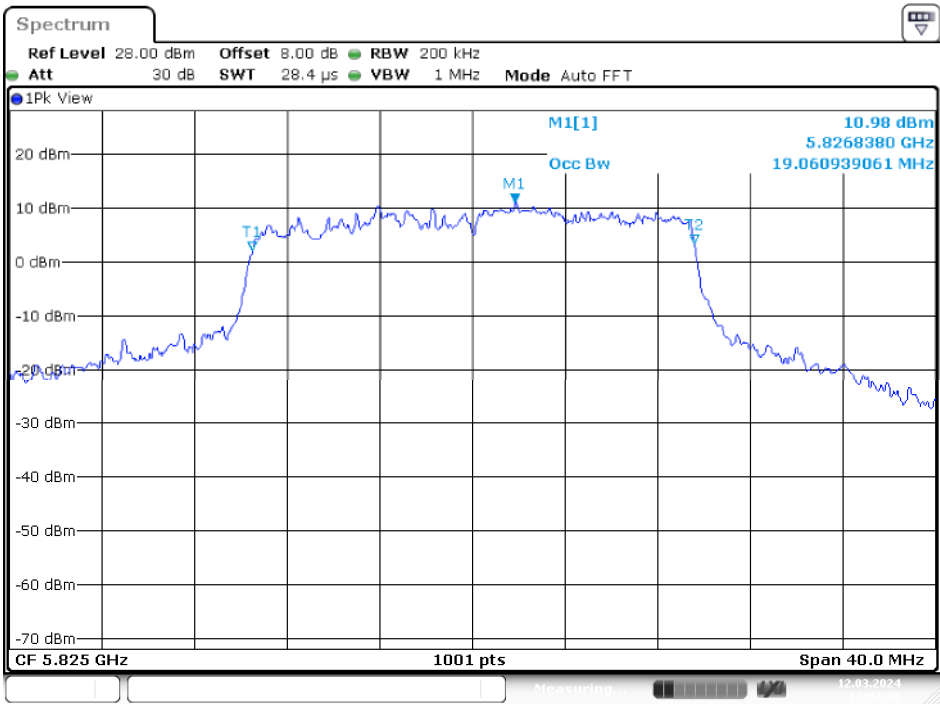

Date: 12.MAR.2024 14:07:30


IEEE 802.11ax HE40 Mode / 5725 ~ 5850MHz

5755MHz

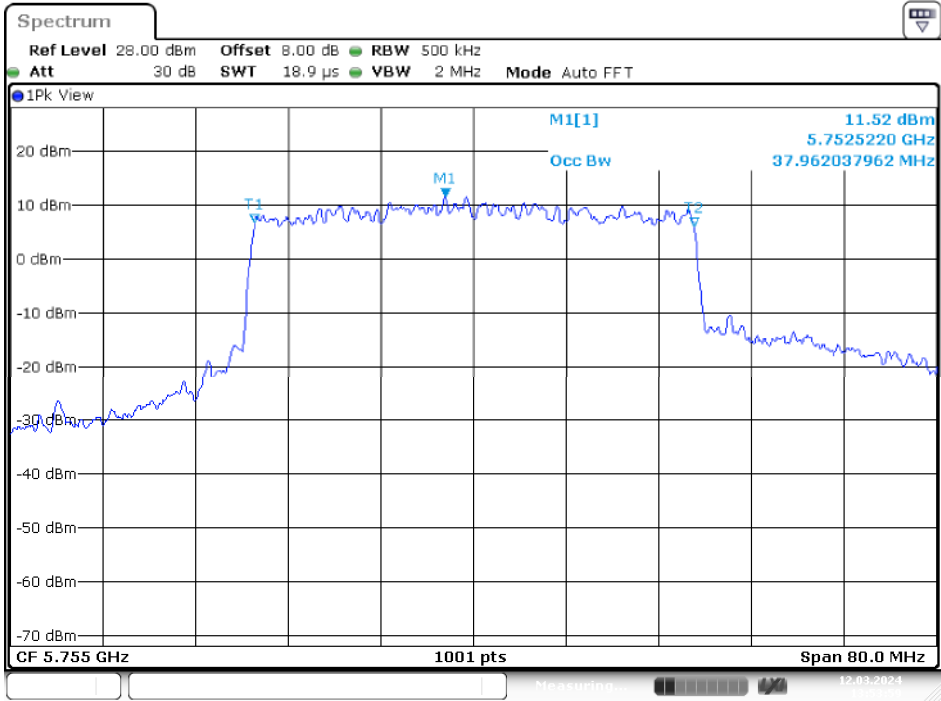


Date: 12.MAR.2024 13:53:59

5795MHz

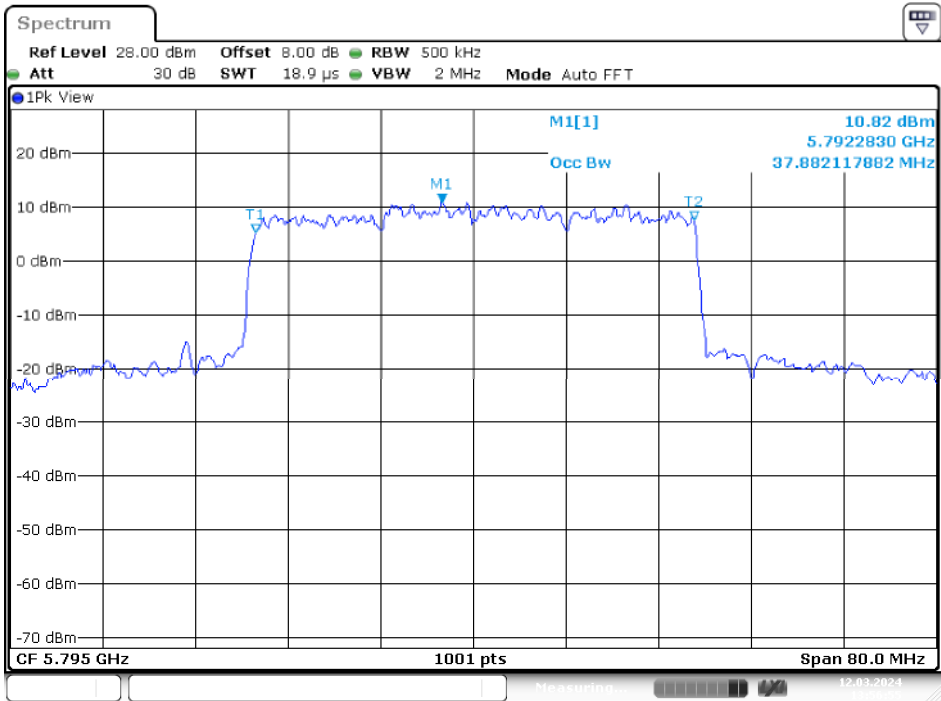

Date: 12.MAR.2024 13:56:55

5775MHz



10 FCC §15.407(a) – Maximum Output Power

10.1 Applicable Standard

According to FCC §15.407(a):

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

10.2 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

The use Power Meter

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Power sensor.

10.3 Test Results

Test Mode: Transmitting

5150-5250MHz

Non Beamforming Mode :

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)				Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Total			
802.11a	36	5180	20.51	20.31	20.43	25.19	0.18	25.37	30
	40	5200	20.65	20.38	20.52	25.29	0.18	25.47	30
	48	5240	20.95	20.81	20.98	25.69	0.18	25.87	30
802.11ac VHT20	36	5180	18.56	18.25	18.45	23.19	0.41	23.60	30
	40	5200	18.61	18.27	18.56	23.25	0.41	23.66	30
	48	5240	17.89	17.55	17.95	22.57	0.41	22.98	30
802.11ac VHT40	38	5190	15.75	12.05	15.65	19.56	2.52	22.08	30
	46	5230	16.01	12.11	16.05	19.84	2.52	22.36	30
802.11ac VHT80	42	5210	12.15	11.95	12.15	16.86	2.92	19.78	30
802.11ax HE20	36	5180	18.67	18.05	18.55	23.20	0.66	23.86	30
	40	5200	18.71	18.12	18.68	23.28	0.66	23.94	30
	48	5240	18.63	17.59	19.15	23.28	0.66	23.94	30
802.11ax HE40	38	5190	15.51	14.56	15.51	19.99	1.02	21.01	30
	46	5230	15.75	14.67	15.85	20.23	1.02	21.25	30
802.11ax HE80	42	5210	12.15	10.68	12.15	16.48	1.19	17.67	30

Note: The device is a indoor access point device.

Beamforming Mode:

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)				Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	FCC Limit (dBm)
			Chain 0	Chain 1	Chain 2	Total			
802.11ac VHT20	36	5180	19.72	18.98	19.68	24.24	0.41	24.65	26.95
	40	5200	19.88	19.15	19.85	24.41	0.41	24.82	26.95
	48	5240	20.05	19.22	19.88	24.50	0.41	24.91	26.95
802.11ac VHT40	38	5190	18.65	17.95	18.71	23.22	2.52	25.74	26.95
	46	5230	19.05	18.75	19.72	23.96	2.52	26.48	26.95
802.11ac VHT80	42	5210	15.45	14.85	15.45	20.03	2.92	22.95	26.95
802.11ax HE20	36	5180	19.68	19.05	20.03	24.38	0.66	25.04	26.95
	40	5200	19.78	19.47	20.15	24.58	0.66	25.24	26.95
	48	5240	19.91	19.97	20.72	24.99	0.66	25.65	26.95
802.11ax HE40	38	5190	18.25	17.65	18.75	23.01	1.02	24.03	26.95
	46	5230	18.65	18.55	18.25	23.26	1.02	24.28	26.95
802.11ax HE80	42	5210	15.45	14.75	15.88	20.16	1.19	21.35	26.95

Note: The device is a indoor access point device.

5725-5850MHz**Non Beamforming Mode:**

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)				Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Total			
802.11a	149	5745	24.43	24.01	25.12	29.32	0.18	29.50	30
	157	5785	24.28	23.89	24.98	29.18	0.18	29.36	30
	165	5825	24.41	24.02	25.03	29.28	0.18	29.46	30
802.11ac VHT20	149	5745	17.63	17.65	18.35	22.66	0.41	23.07	30
	157	5785	17.91	18.05	18.75	23.02	0.41	23.43	30
	165	5825	20.25	20.15	20.95	25.24	0.41	25.65	30
802.11ac VHT40	151	5755	19.42	15.87	20.01	23.55	2.52	26.07	30
	159	5795	18.59	14.85	19.21	22.70	2.52	25.22	30
802.11ac VHT80	155	5775	18.32	14.85	18.95	22.48	2.92	25.40	30
802.11ax HE20	149	5745	17.89	17.25	18.55	22.70	0.66	23.36	30
	157	5785	16.68	15.65	17.47	21.43	0.66	22.09	30
	165	5825	19.85	19.15	20.67	24.71	0.66	25.37	30
802.11ax HE40	151	5755	19.15	18.21	19.85	23.89	1.02	24.91	30
	159	5795	18.31	17.32	19.05	23.05	1.02	24.07	30
802.11ax HE80	155	5775	18.35	16.68	18.97	22.87	1.19	24.06	30

Beamforming Mode:

Test Modes	Channel	Frequency (MHz)	Maximum Conducted Average Output Power (dBm)				Duty Factor (dB)	Total Maximum Conducted Average Output Power With Duty Factor (dBm)	Limit (dBm)
			Chain 0	Chain 1	Chain 2	Total			
802.11ac VHT20	149	5745	19.05	18.95	19.35	23.89	0.41	24.30	26.51
	157	5785	20.25	19.95	20.15	24.89	0.41	25.30	26.51
	165	5825	20.95	19.95	21.05	25.45	0.41	25.86	26.51
802.11ac VHT40	151	5755	18.65	18.71	18.68	23.45	2.52	25.97	26.51
	159	5795	18.84	18.72	18.46	23.45	2.52	25.97	26.51
802.11ac VHT80	155	5775	18.11	18.02	18.73	23.07	2.92	25.99	26.51
802.11ax HE20	149	5745	19.68	18.88	18.85	23.93	0.66	24.59	26.51
	157	5785	19.25	18.75	18.75	23.69	0.66	24.35	26.51
	165	5825	20.57	20.58	20.48	25.31	0.66	25.97	26.51
802.11ax HE40	151	5755	20.57	19.65	19.65	24.75	1.02	25.77	26.51
	159	5795	20.38	19.97	19.78	24.82	1.02	25.84	26.51
802.11ax HE80	155	5775	19.65	18.95	18.85	23.94	1.19	25.13	26.51

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01

Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For Beamforming mode:

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.

Directional gain = Band 1: 9.05 dBi , Band 4: 9.49 dBi

The Output Power Limits was reduce Band 1: 3.05 dB , Band 4: 3.49 dB

11 FCC §15.407(a) – Power Spectral Density

11.1 Applicable Standard

According to FCC §15.407(a):

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

11.2 Test Procedure

The measurements are base on FCC KDB 789033 D02 General UNII Test Proceдыres New Rules v02r01: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices section F: Maximum power spectral density.

Duty cycle <98%, duty cycle variations are less than $\pm 2\%$

Method SA-2 was used.

11.3 Test Results

Test Mode: Transmitting

5150-5250MHz**Non Beamforming Mode:**

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Duty Factor (dB)	Power Spectral Density with duty factor (dBm/MHz)	Limit (dBm/MHz)
			Chain 0	Chain 1	Chain 2	Total			
802.11a	36	5180	8.82	8.67	8.63	13.48	0.18	13.66	13.95
	40	5200	9.05	8.69	9.00	13.69	0.18	13.87	13.95
	48	5240	9.10	8.89	8.93	13.75	0.18	13.93	13.95
802.11ac 20	36	5180	6.71	6.57	6.71	11.44	0.41	11.85	13.95
	40	5200	6.46	6.23	6.68	11.23	0.41	11.64	13.95
	48	5240	6.29	5.45	5.81	10.63	0.41	11.04	13.95
802.11ac 40	38	5190	1.44	1.29	2.08	6.39	2.52	8.91	13.95
	46	5230	1.77	1.76	2.03	6.63	2.52	9.15	13.95
802.11ac 80	42	5210	-4.64	-5.08	-4.26	0.12	2.92	3.04	13.95
802.11ax 20	36	5180	6.62	6.55	6.21	11.23	0.66	11.89	13.95
	40	5200	6.75	6.75	6.35	11.39	0.66	12.05	13.95
	48	5240	6.69	6.76	6.52	11.43	0.66	12.09	13.95
802.11ax 40	38	5190	1.64	1.56	0.89	6.15	1.02	7.17	13.95
	46	5230	1.90	1.83	1.63	6.56	1.02	7.58	13.95
802.11ax 80	42	5210	-4.44	-4.86	-4.84	0.06	1.19	1.25	13.95

Note: The device is a indoor access point device.

Beamforming Mode:

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Duty Factor (dB)	Power Spectral Density with duty factor (dBm/MHz)	Limit (dBm/MHz)
			Chain 0	Chain 1	Chain 2	Total			
802.11ac 20	36	5180	8.99	7.82	8.62	13.27	0.41	13.68	13.95
	40	5200	9.41	7.81	8.53	13.40	0.41	13.81	13.95
	48	5240	8.89	7.94	8.43	13.21	0.41	13.62	13.95
802.11ac 40	38	5190	5.35	4.24	5.35	9.78	2.52	12.30	13.95
	46	5230	5.56	5.24	6.28	10.49	2.52	13.01	13.95
802.11ac 80	42	5210	-0.93	-1.19	-0.88	3.77	2.92	6.69	13.95
802.11ax 20	36	5180	8.08	7.18	8.74	12.82	0.66	13.48	13.95
	40	5200	8.61	7.78	8.88	13.22	0.66	13.88	13.95
	48	5240	9.01	7.94	8.42	13.25	0.66	13.91	13.95
802.11ax 40	38	5190	4.28	3.60	4.10	8.77	1.02	9.79	13.95
	46	5230	5.78	4.56	5.62	10.12	1.02	11.14	13.95
802.11ax 80	42	5210	-1.38	-1.53	-1.41	3.33	1.19	4.52	13.95

Note: The device is a indoor access point device.

5725-5850MHz**Non Beamforming Mode:**

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Duty Factor (dB)	Power Spectral Density with duty factor (dBm/500kHz)	Limit (dBm/500kHz)
			Chain 0	Chain 1	Chain 2	Total			
802.11a	149	5745	11.66	11.23	12.10	16.45	0.18	16.63	26.51
	157	5785	11.72	10.90	12.32	16.46	0.18	16.64	26.51
	165	5825	11.58	10.46	12.37	16.31	0.18	16.49	26.51
802.11ac 20	149	5745	9.69	8.08	7.82	13.38	0.41	13.79	26.51
	157	5785	9.59	8.65	8.14	13.61	0.41	14.02	26.51
	165	5825	9.60	8.87	8.43	13.76	0.41	14.17	26.51
802.11ac 40	151	5755	5.98	4.88	4.26	9.87	2.52	12.39	26.51
	159	5795	6.02	5.03	4.68	10.05	2.52	12.57	26.51
802.11ac 80	155	5775	3.49	3.17	2.36	7.80	2.92	10.72	26.51
802.11ax 20	149	5745	8.91	7.42	7.07	12.65	0.66	13.31	26.51
	157	5785	9.44	7.73	7.27	13.02	0.66	13.68	26.51
	165	5825	8.97	7.83	7.37	12.88	0.66	13.54	26.51
802.11ax 40	151	5755	6.64	5.39	5.10	10.53	1.02	11.55	26.51
	159	5795	6.52	5.75	5.44	10.70	1.02	11.72	26.51
802.11ax 80	155	5775	3.10	2.78	1.94	7.40	1.19	8.59	26.51

Beamforming Mode:

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)				Duty Factor (dB)	Power Spectral Density with duty factor (dBm/500kHz)	Limit (dBm/500kHz)
			Chain 0	Chain 1	Chain 2	Total			
802.11ac 20	149	5745	5.95	9.78	7.19	12.71	0.41	13.12	26.51
	157	5785	6.19	7.17	7.17	11.64	0.41	12.05	26.51
	165	5825	7.73	8.91	8.25	13.09	0.41	13.50	26.51
802.11ac 40	151	5755	3.39	4.27	4.88	8.99	2.52	11.51	26.51
	159	5795	3.20	3.14	3.45	8.04	2.52	10.56	26.51
802.11ac 80	155	5775	-0.13	-0.52	0.28	4.66	2.92	7.58	26.51
802.11ax 20	149	5745	5.51	4.42	5.29	9.87	0.66	10.53	26.51
	157	5785	5.23	4.29	4.27	9.39	0.66	10.05	26.51
	165	5825	7.36	6.88	7.27	11.95	0.66	12.61	26.51
802.11ax 40	151	5755	3.33	4.07	3.69	8.48	1.02	9.50	26.51
	159	5795	3.07	2.69	4.10	8.10	1.02	9.12	26.51
802.11ax 80	155	5775	-0.56	-0.63	-0.26	4.29	1.19	5.48	26.51

Note:

The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01

Multiple Transmitter Output v02r01, for Power spectral density (PSD) measurements on the devices:

Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N_{ANT}]$ dBi.

Directional gain = Band 1: 9.05 dBi , Band 4: 9.49 dBi

The Power density Limits was reduce Band 1: 3.05 dB , Band 4: 3.49 dB


UNII-1 Band I / PSD

Non Beamforming Mode

Chain 0


IEEE 802.11a Mode / 5150 ~ 5250MHz

5180MHz

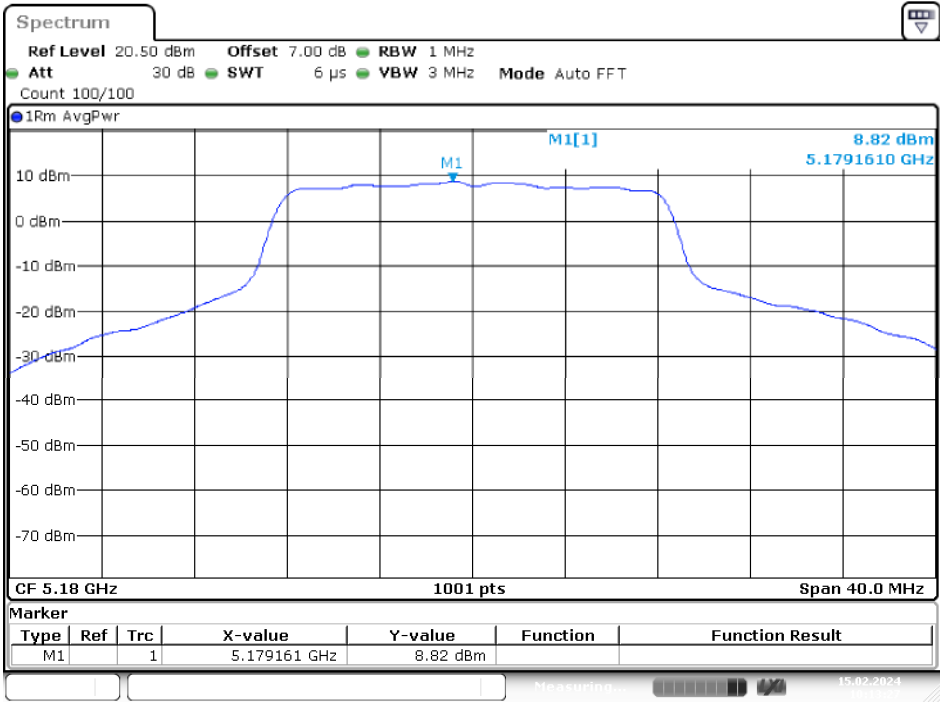


Date: 15.FEB.2024 10:13:28

5200MHz

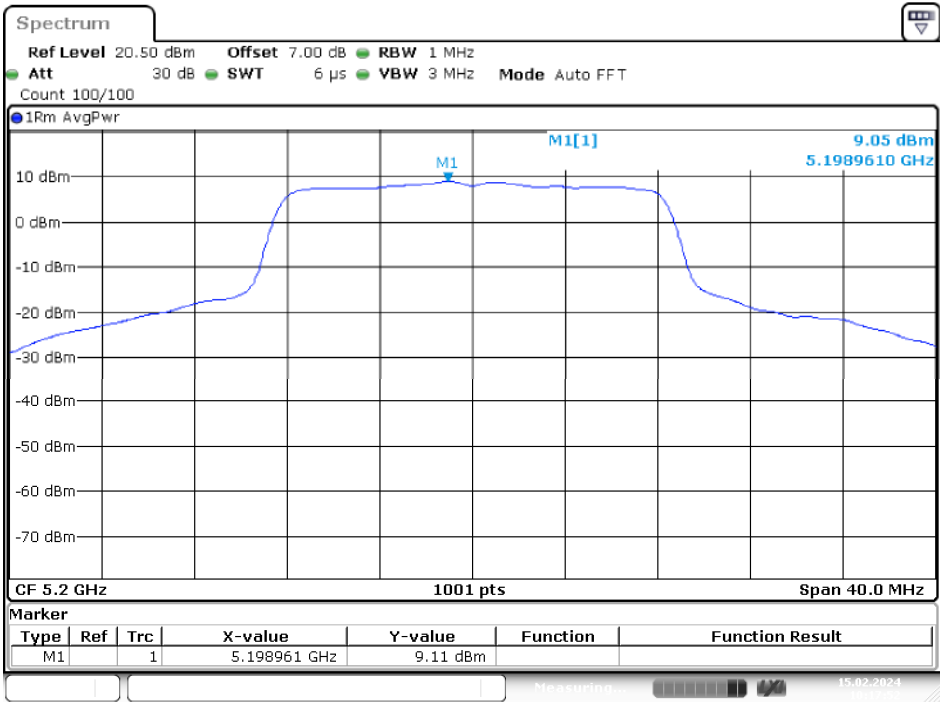

Date: 15.FEB.2024 10:17:53


5240MHz

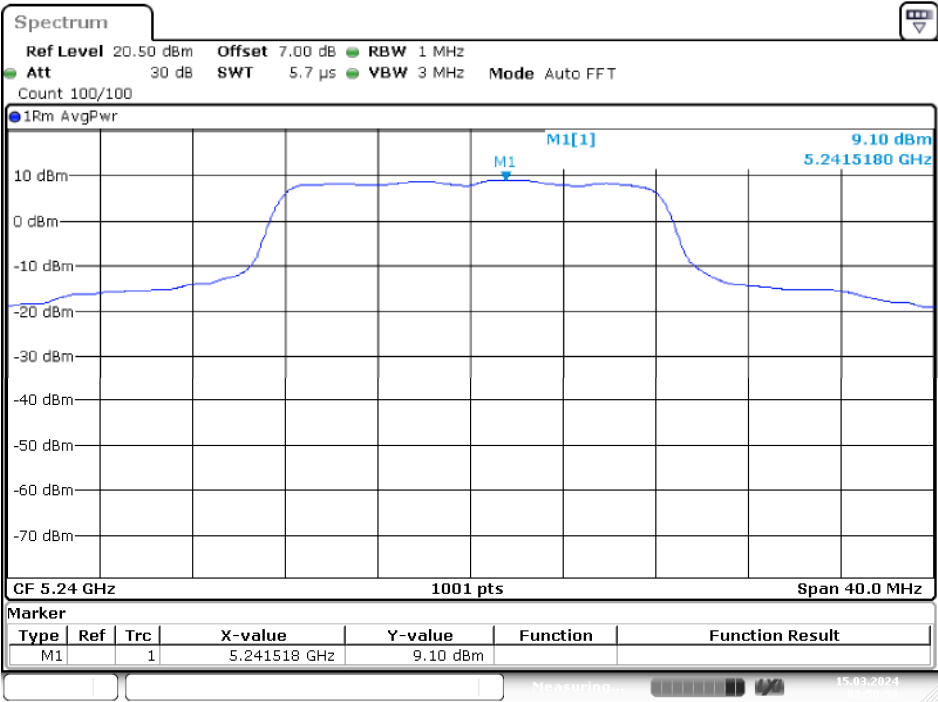

Date: 15.MAR.2024 08:50:58


IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

5180MHz

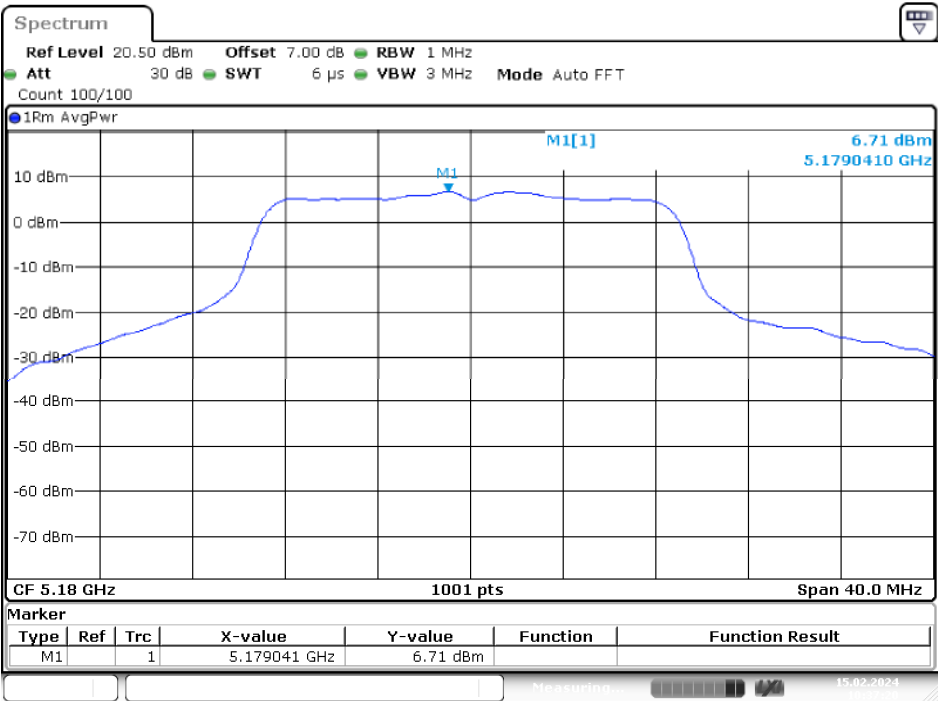


Date: 15.FEB.2024 10:37:20

5200MHz

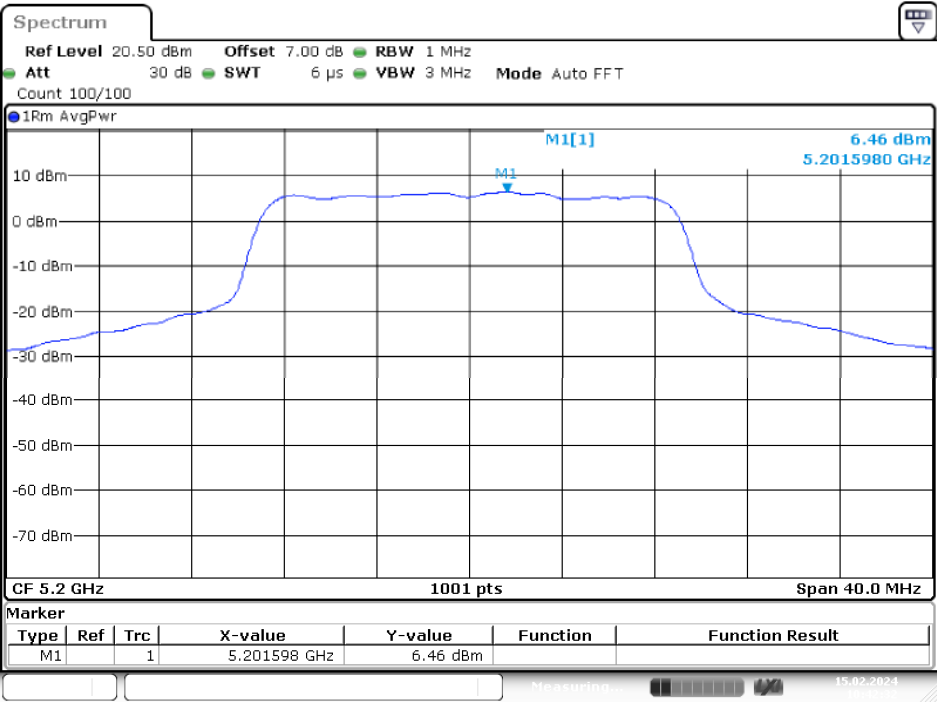

Date: 15.FEB.2024 10:42:33


5240MHz

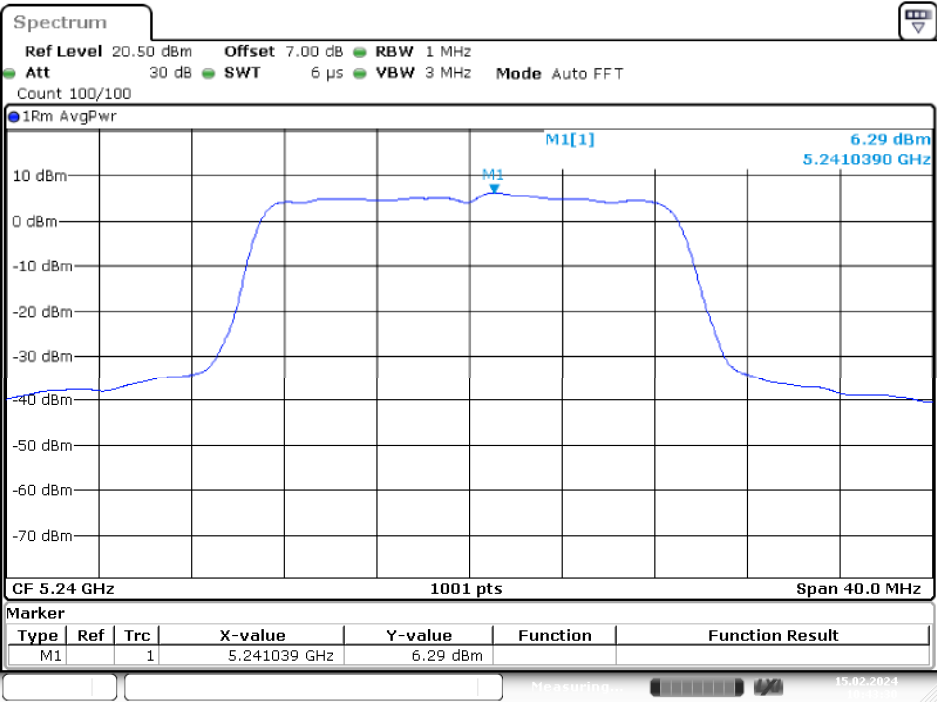


Date: 15.FEB.2024 10:43:31

IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

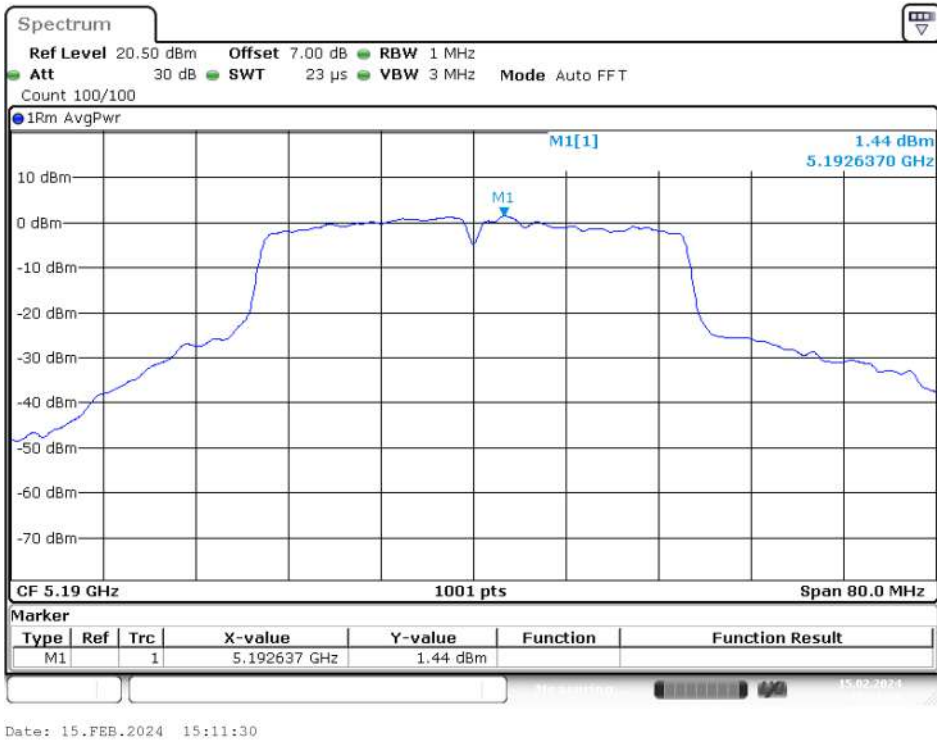


5230MHz

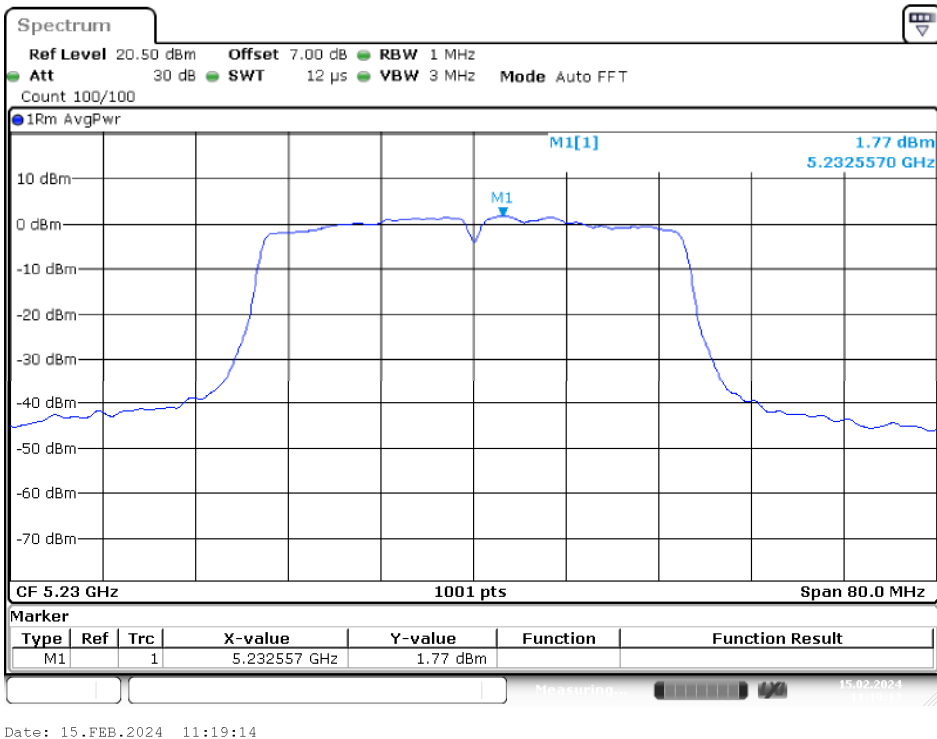

IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz


5210MHz

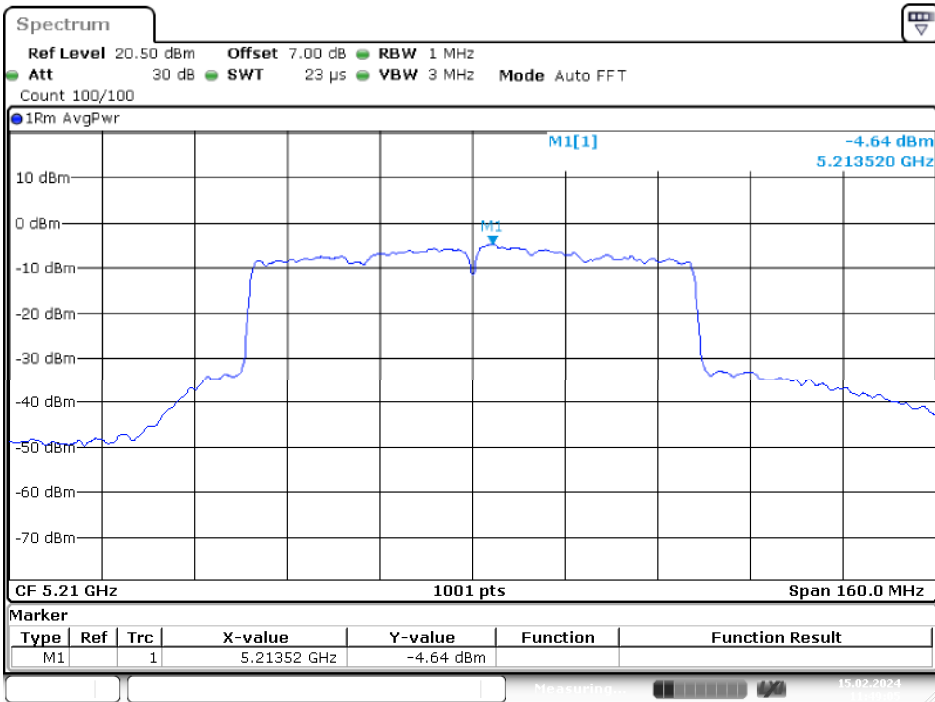

Date: 15.FEB.2024 11:49:06


IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

5180MHz

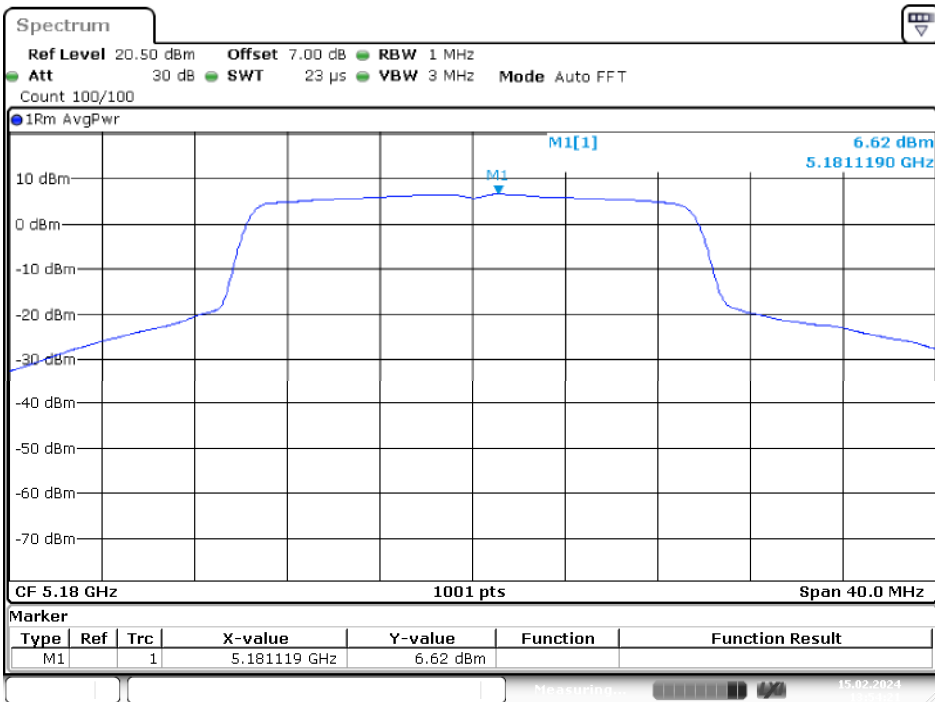


Date: 15.FEB.2024 13:54:20

5200MHz

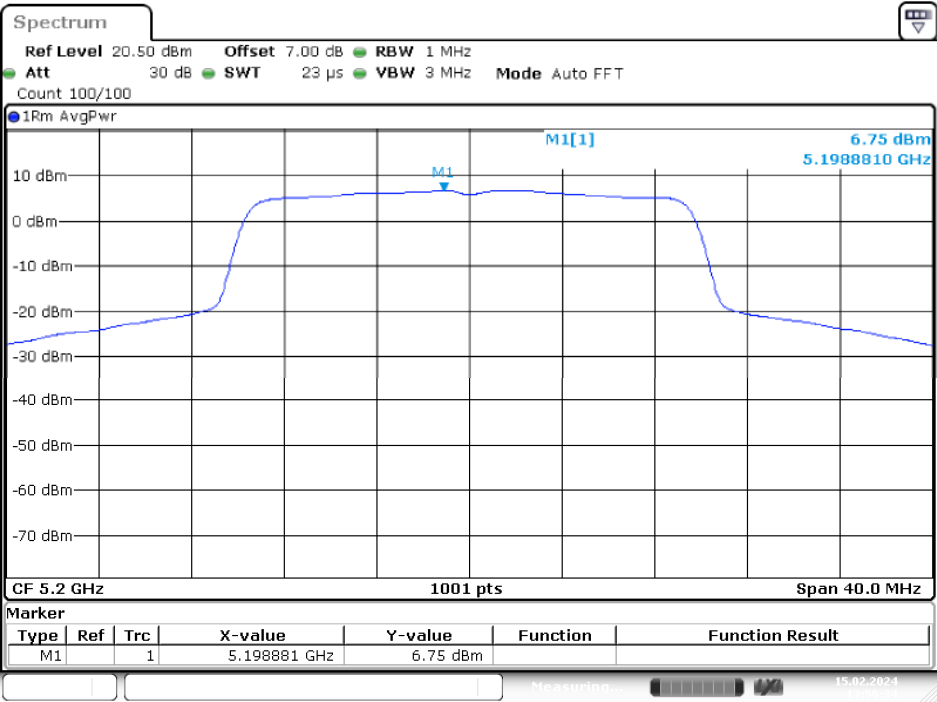

Date: 15.FEB.2024 13:56:34


5240MHz

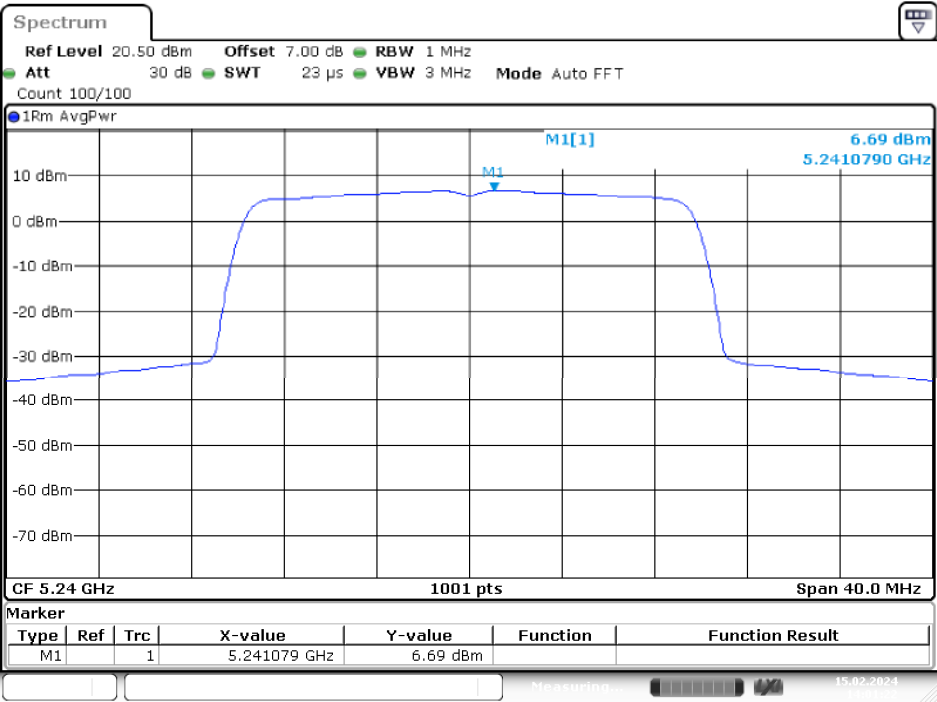

Date: 15.FEB.2024 14:01:22


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

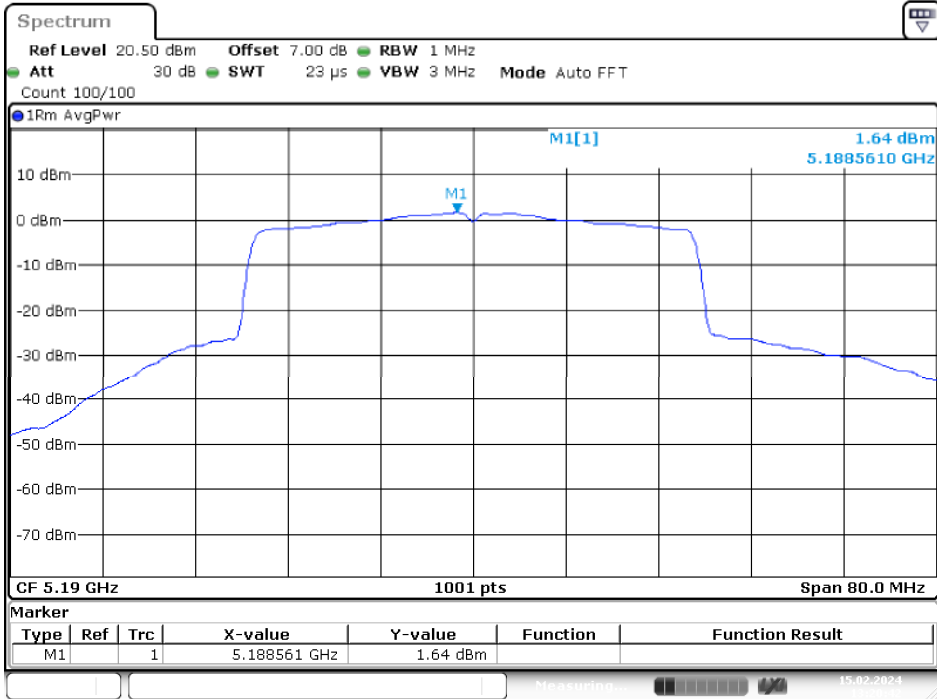


Date: 15.FEB.2024 13:20:42

5230MHz

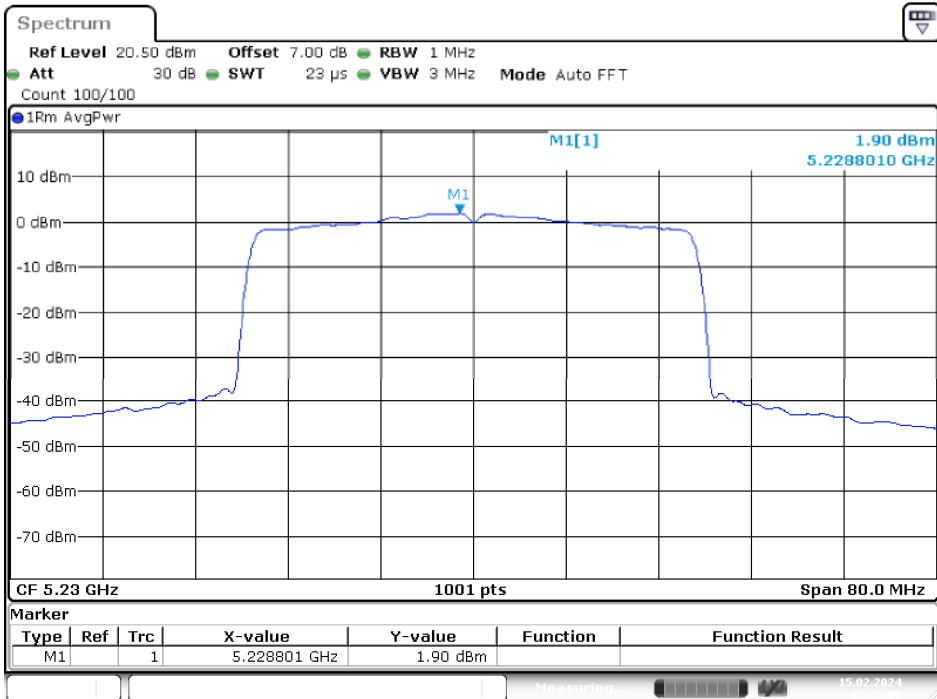


Date: 15.FEB.2024 13:22:08

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

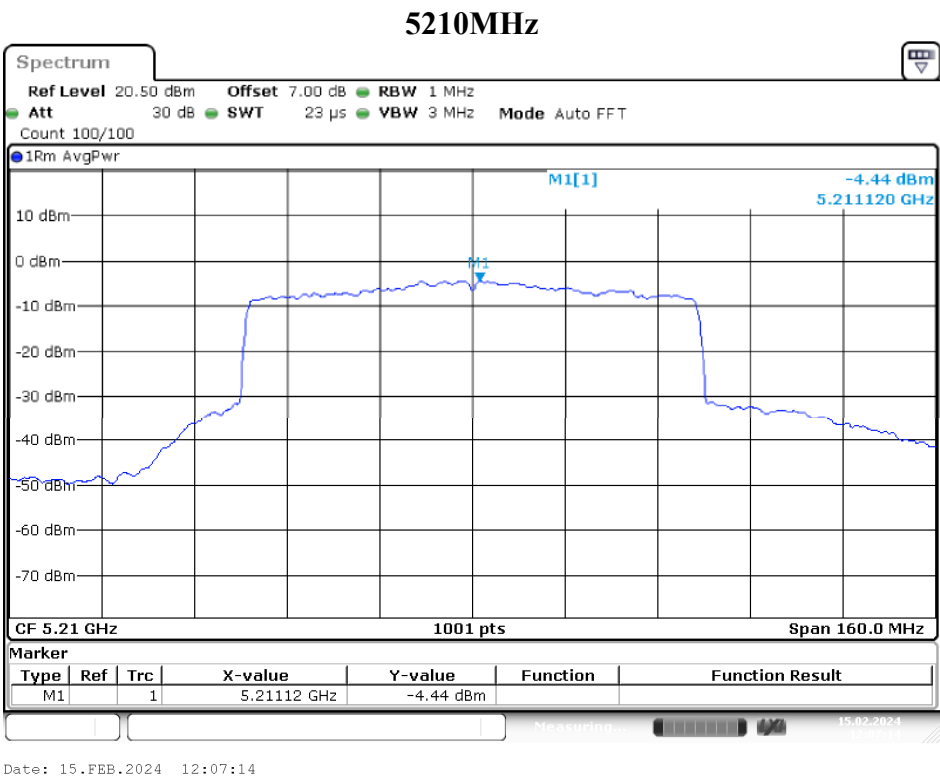


Chain 1

IEEE 802.11a Mode / 5150 ~ 5250MHz

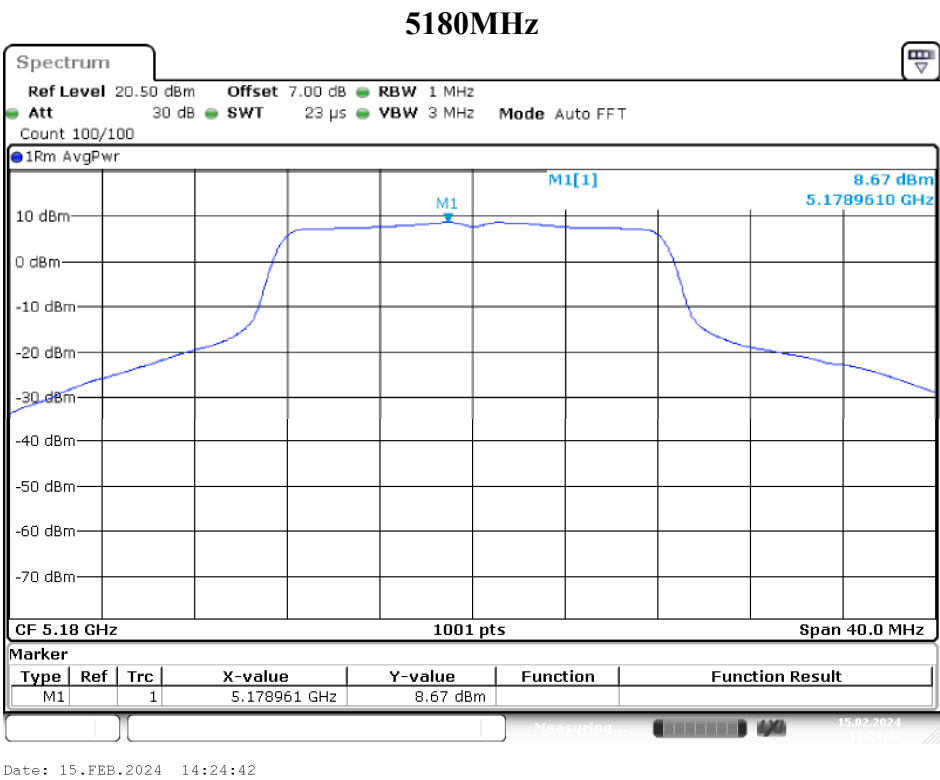


5200MHz

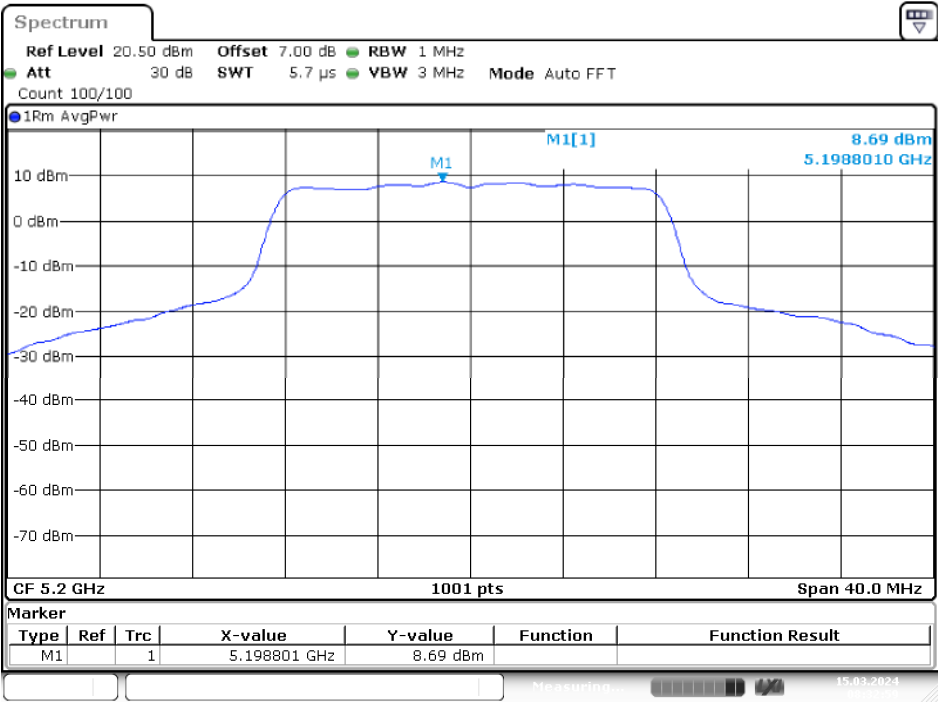

Date: 15.MAR.2024 08:32:59


5240MHz

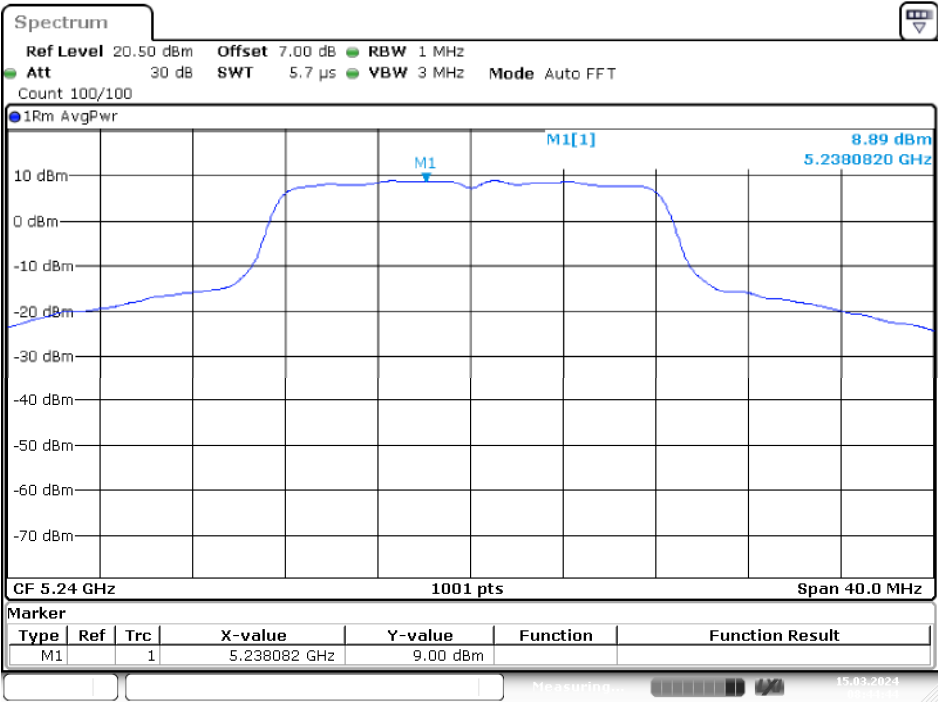

Date: 15.MAR.2024 08:44:43


IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

5180MHz

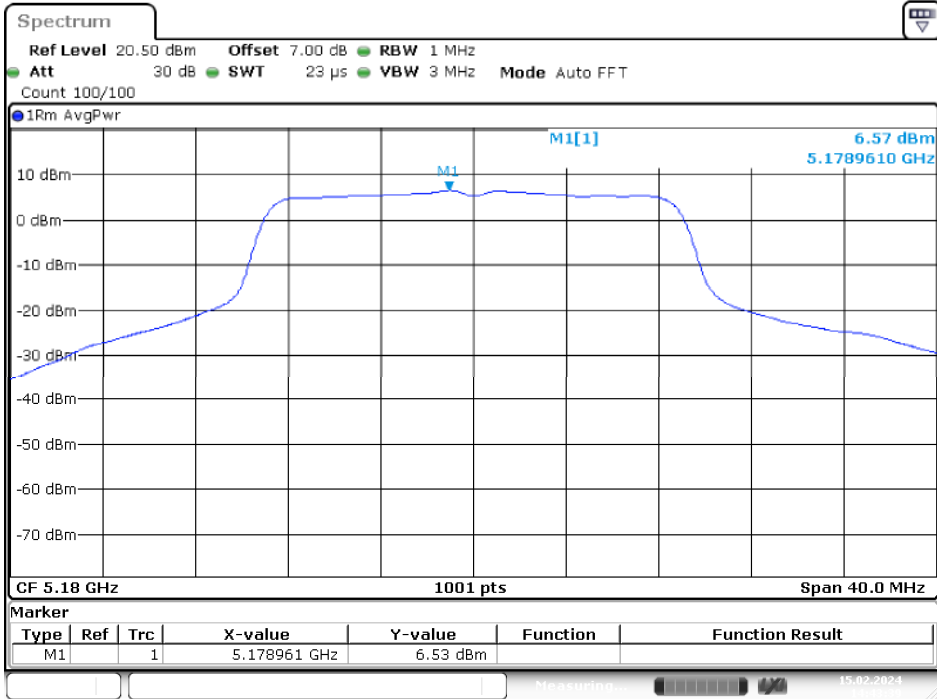


Date: 15.FEB.2024 14:43:39

5200MHz

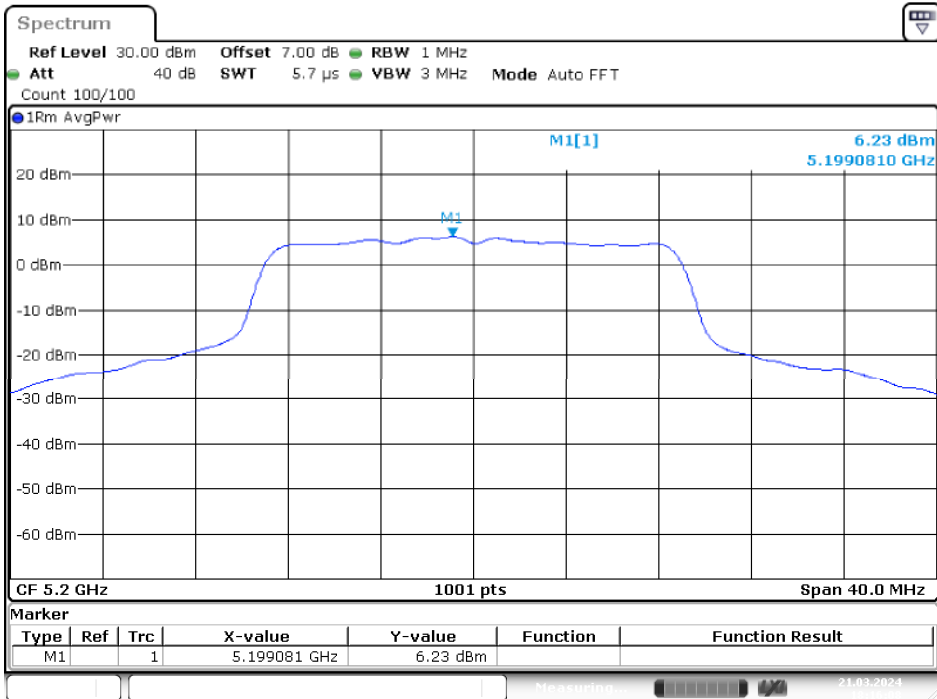

Date: 21.MAR.2024 18:16:08


5240MHz

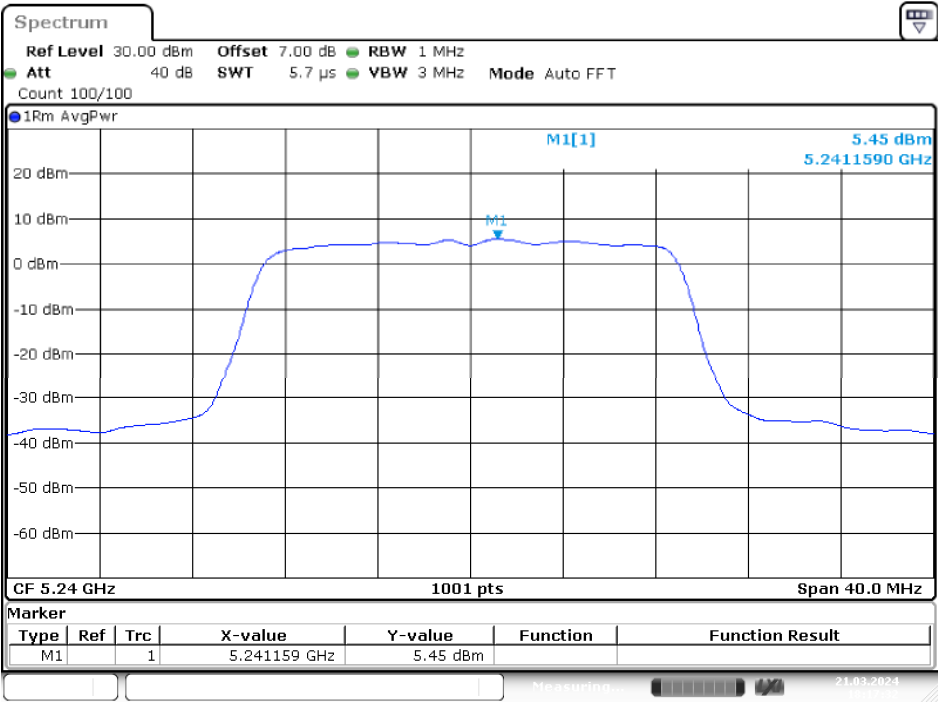

Date: 21.MAR.2024 18:17:33


IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

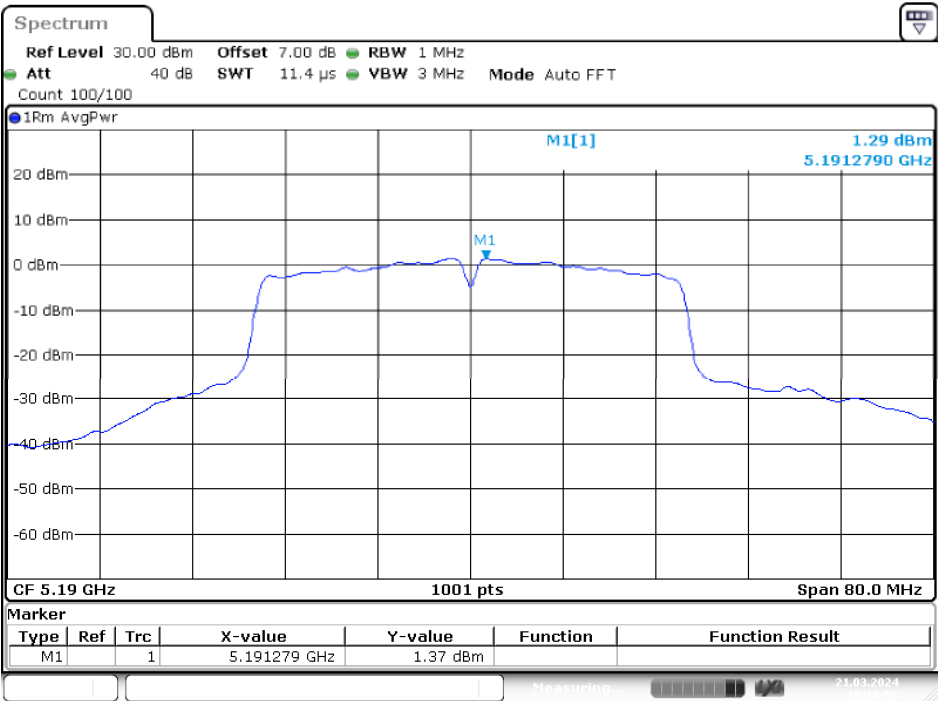

Date: 21.MAR.2024 18:19:55


5230MHz

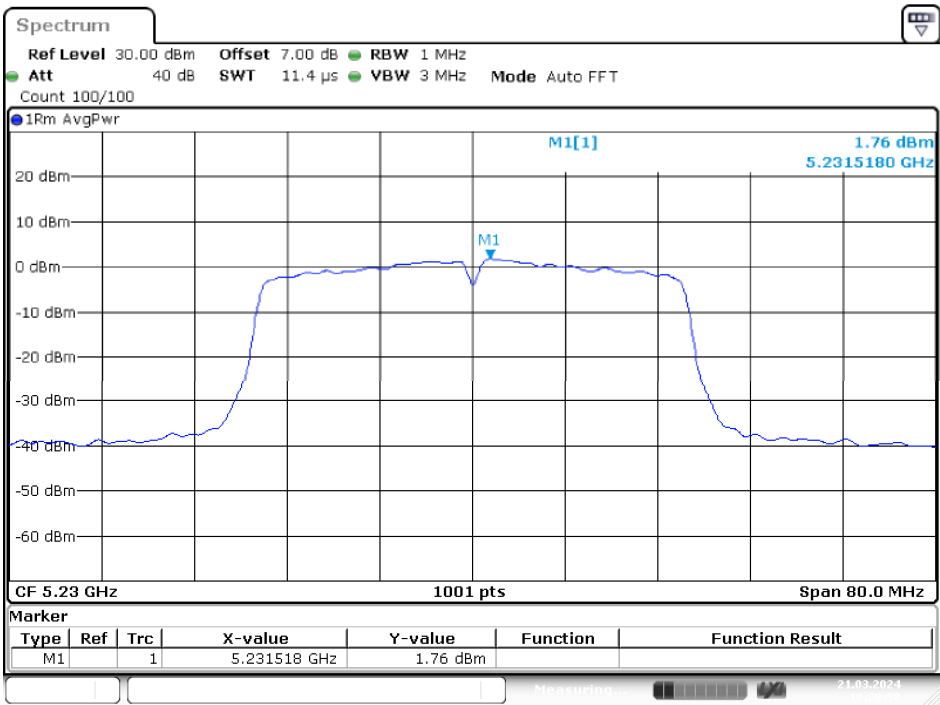

Date: 21.MAR.2024 18:20:58

IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz


5210MHz

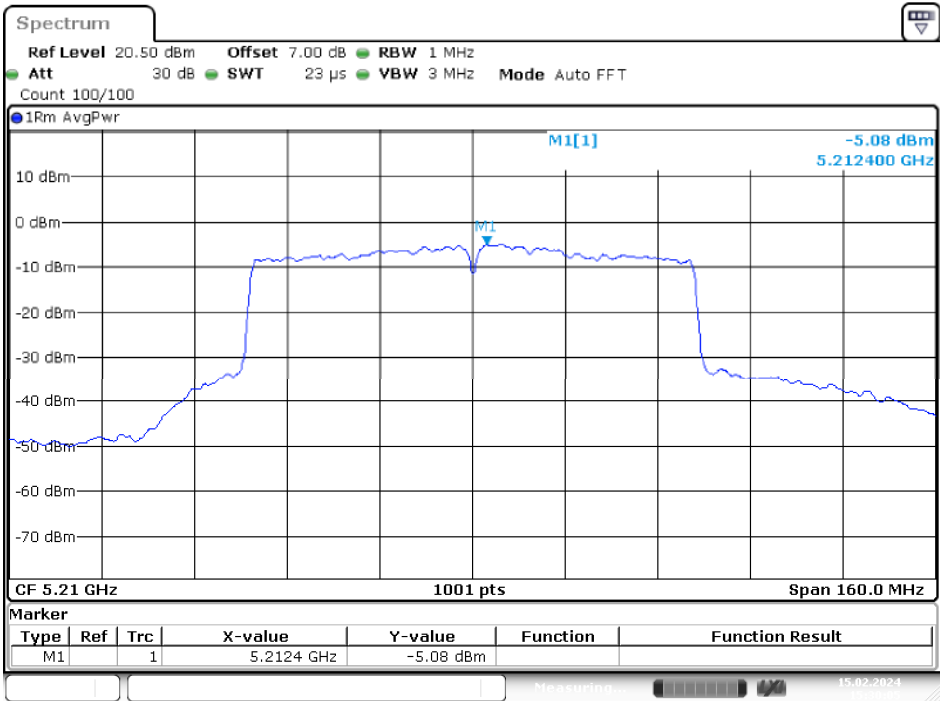

Date: 15.FEB.2024 15:30:04


IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

5180MHz

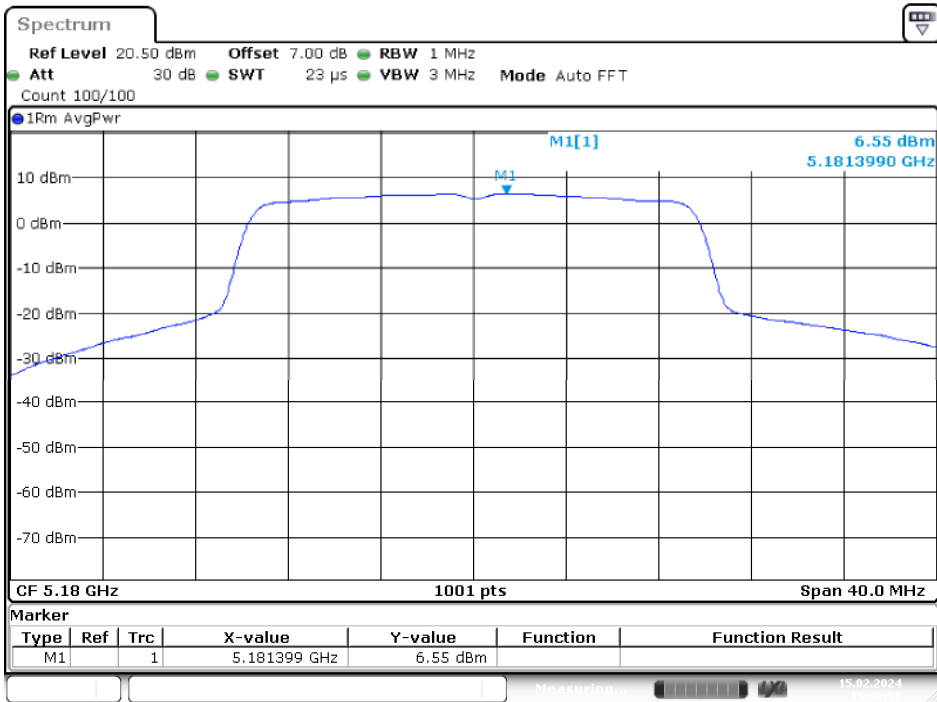


Date: 15.FEB.2024 15:48:59

5200MHz

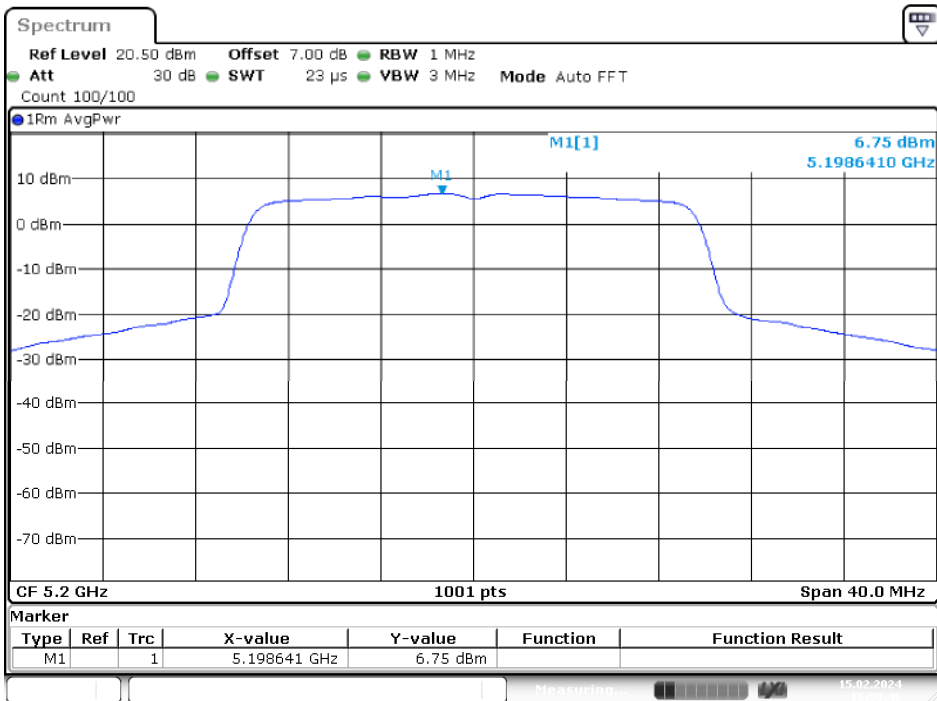

Date: 15.FEB.2024 15:50:46


5240MHz

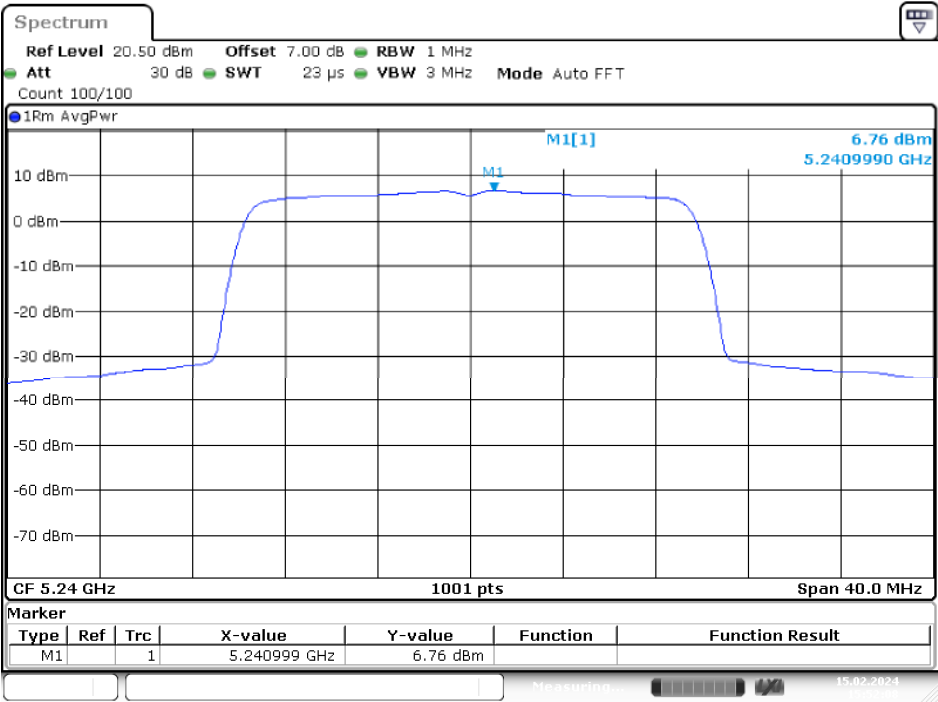

Date: 15.FEB.2024 15:52:08


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

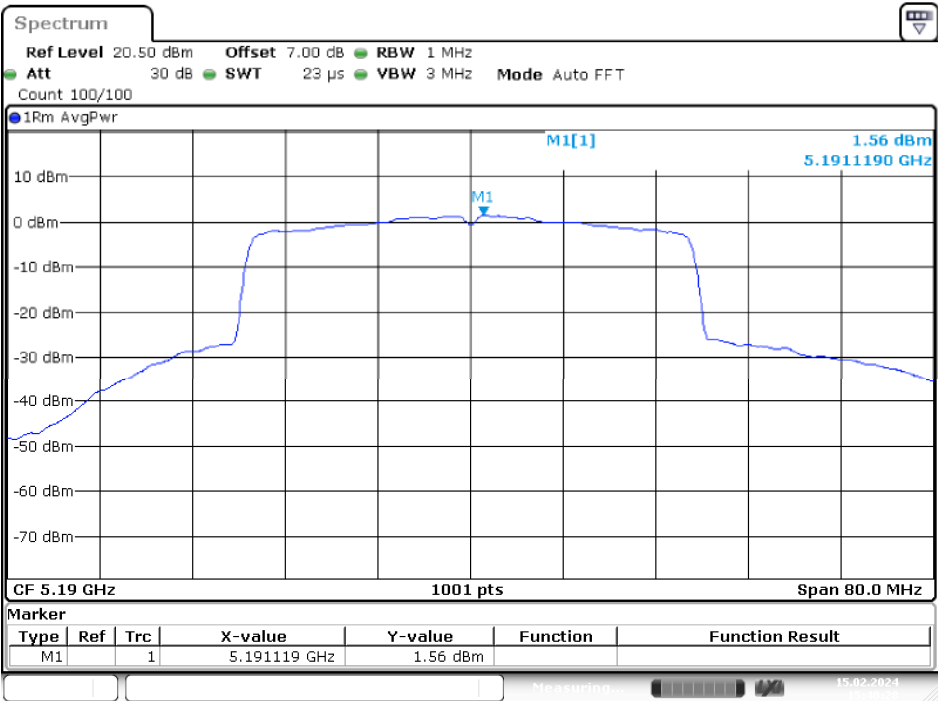

Date: 15.FEB.2024 15:40:28


5230MHz

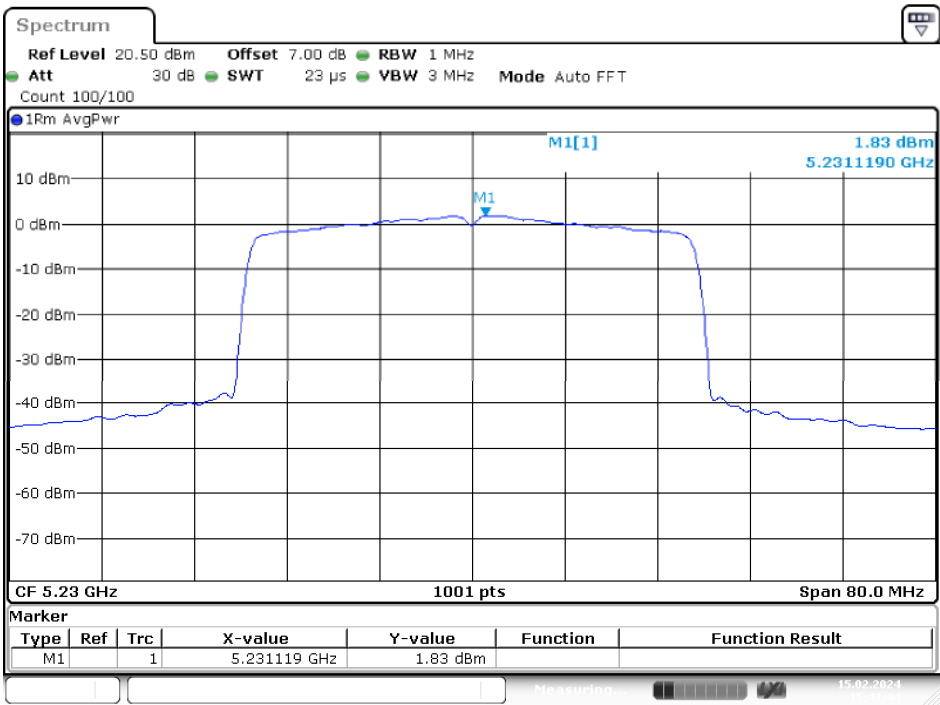

Date: 15.FEB.2024 15:41:44

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

5210MHz

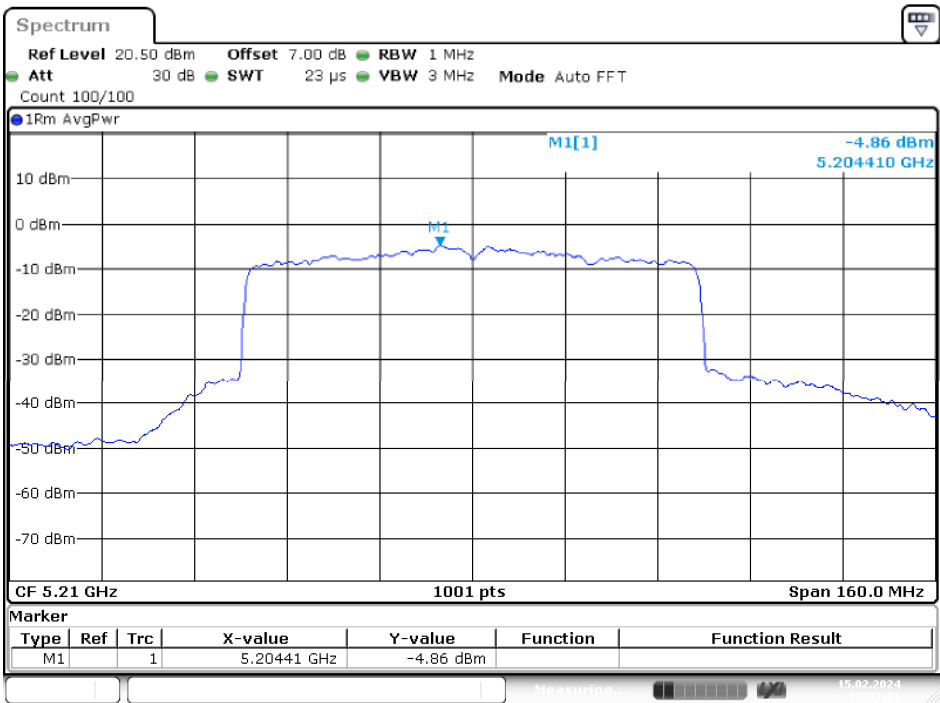


Date: 15.FEB.2024 15:37:21

Chain 2


IEEE 802.11a Mode / 5150 ~ 5250MHz

5180MHz

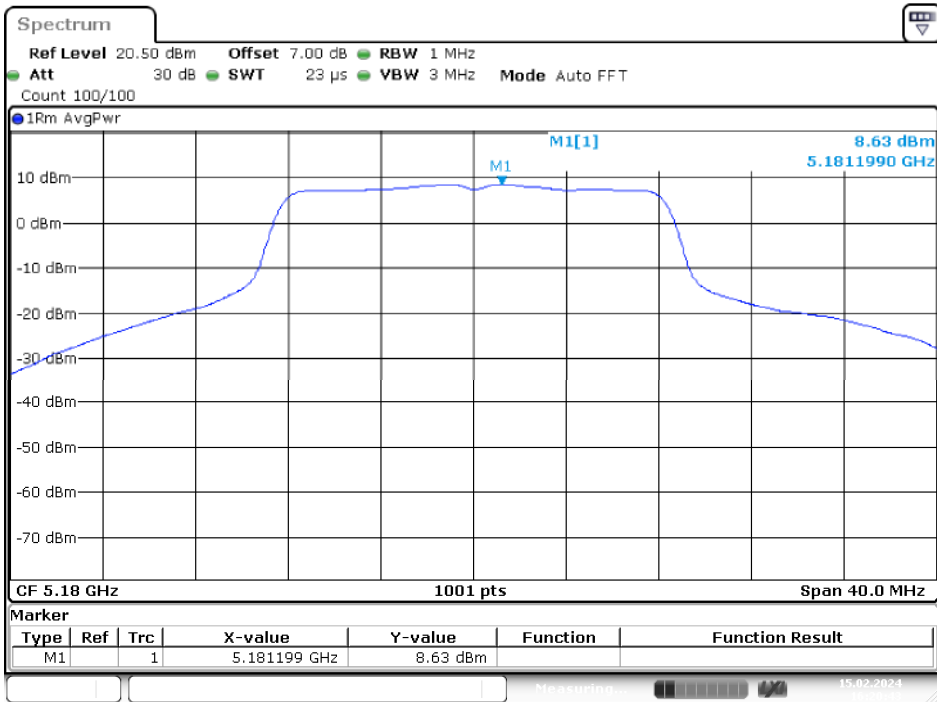


Date: 15.FEB.2024 16:20:43

5200MHz

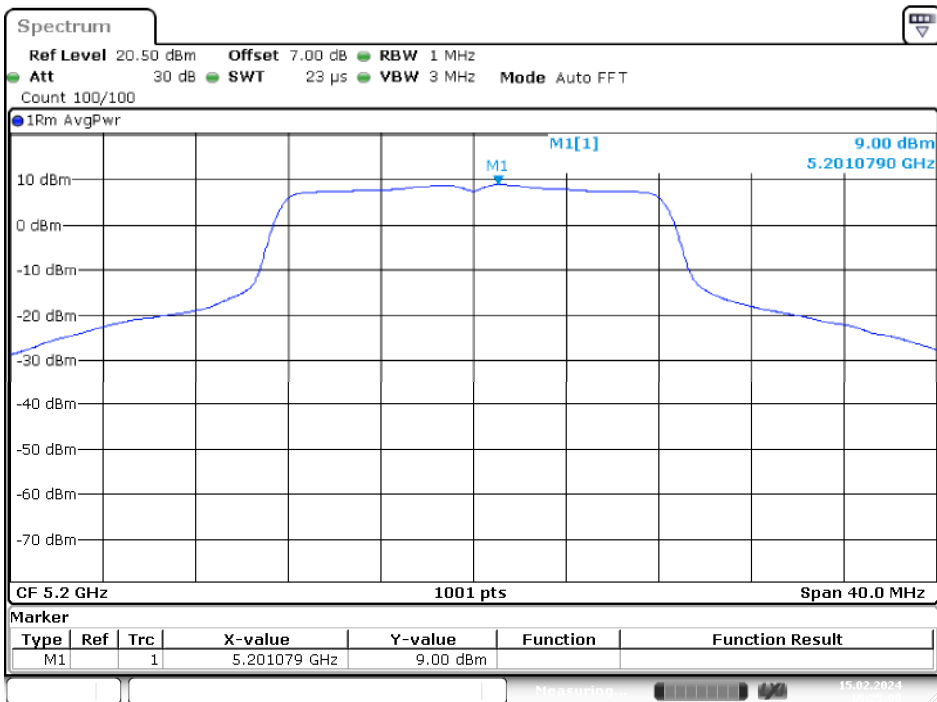

Date: 15.FEB.2024 16:25:00


5240MHz

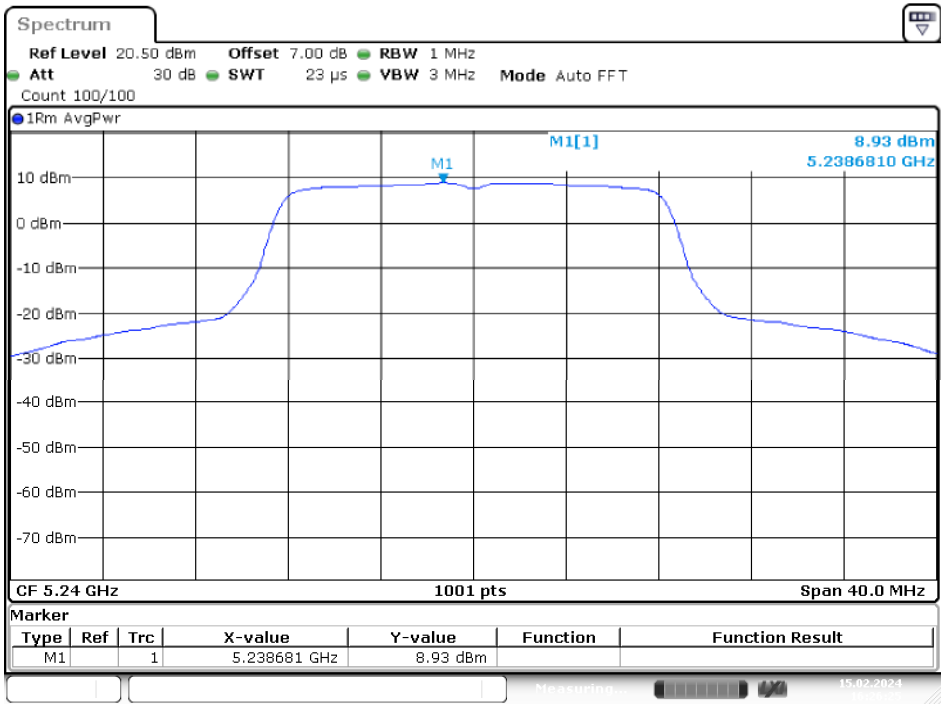

Date: 15.FEB.2024 16:26:25


IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

5180MHz

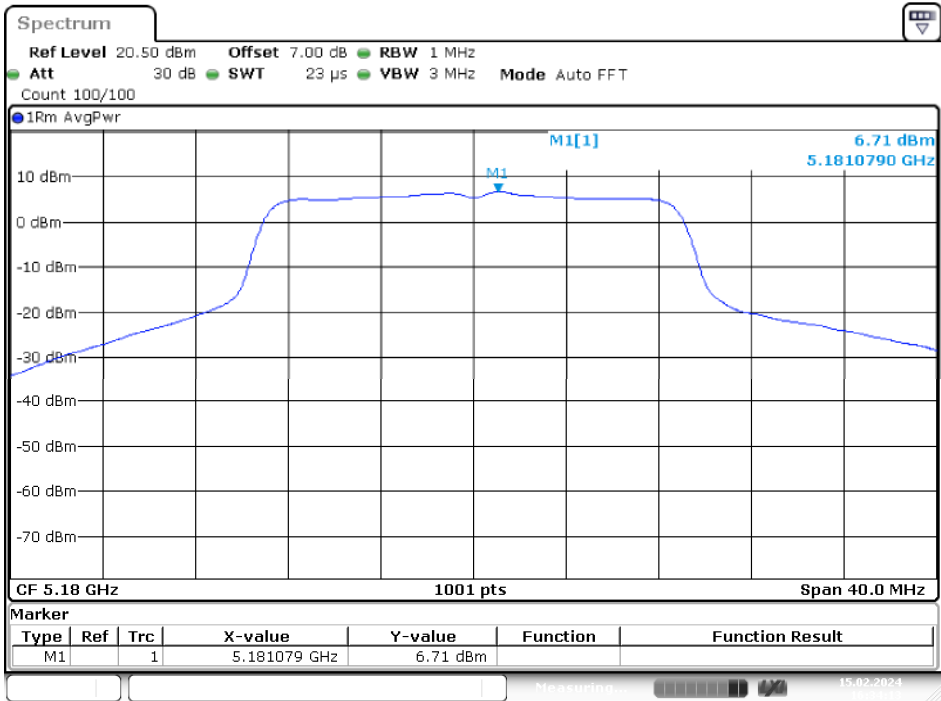


Date: 15.FEB.2024 16:34:13

5200MHz

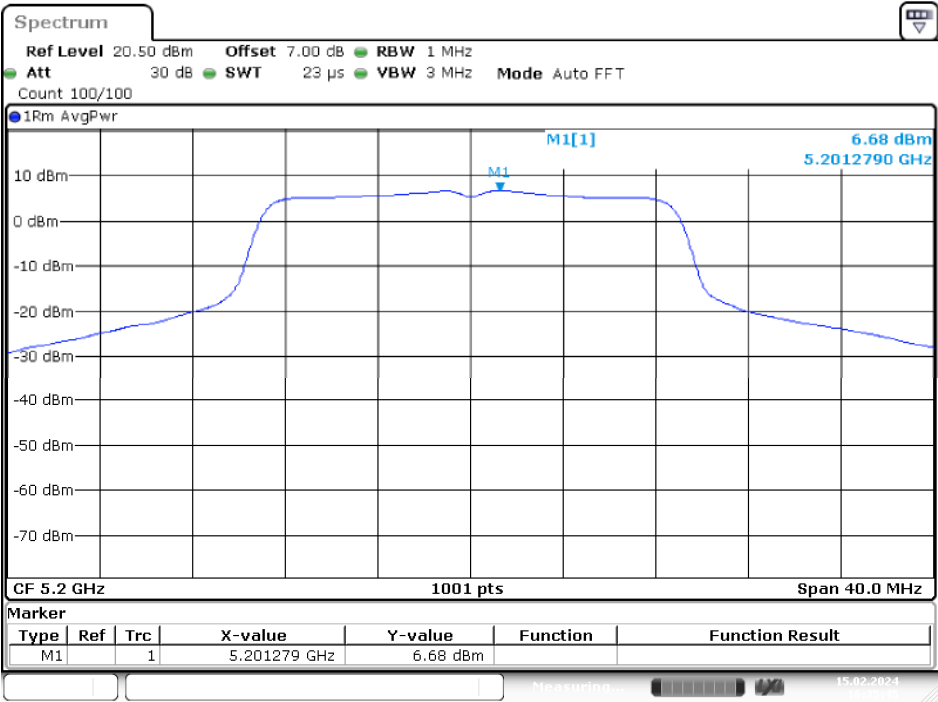

Date: 15.FEB.2024 16:35:45


5240MHz

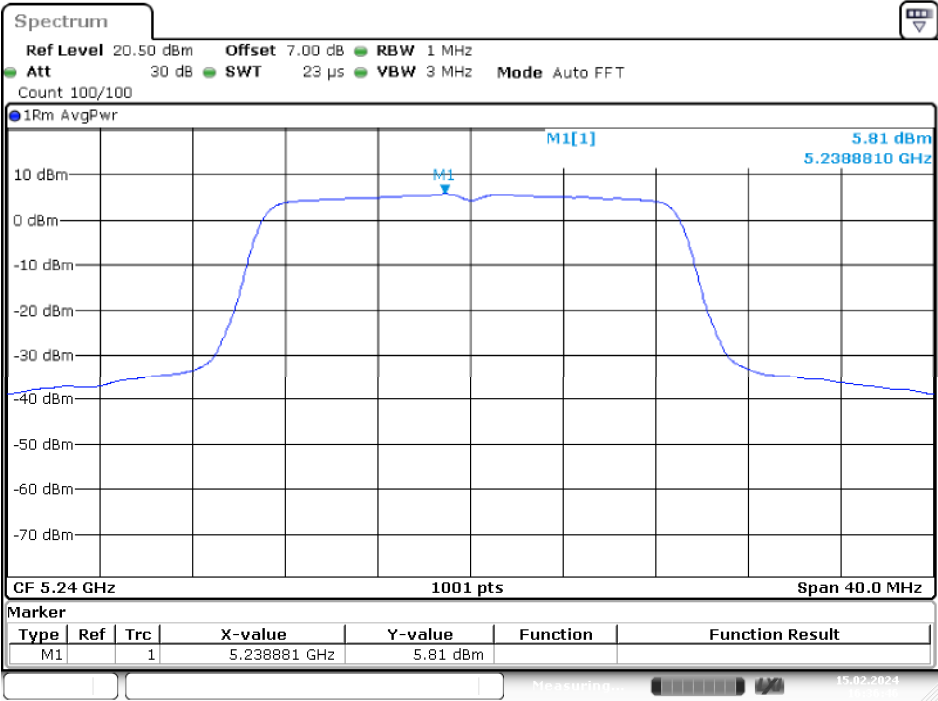

Date: 15.FEB.2024 16:36:47


IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

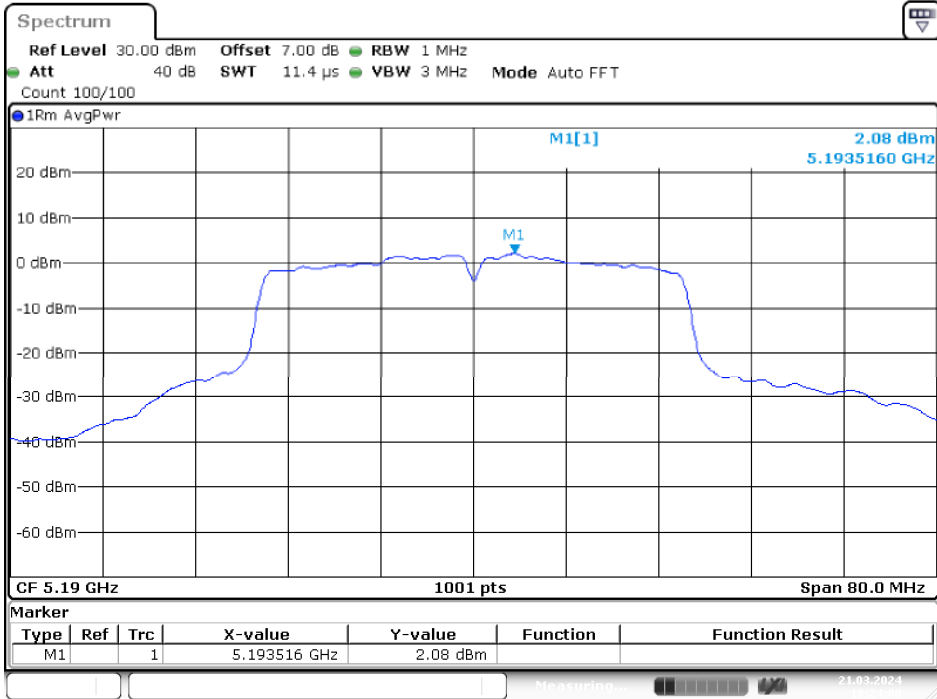


Date: 21.MAR.2024 18:24:00

5230MHz

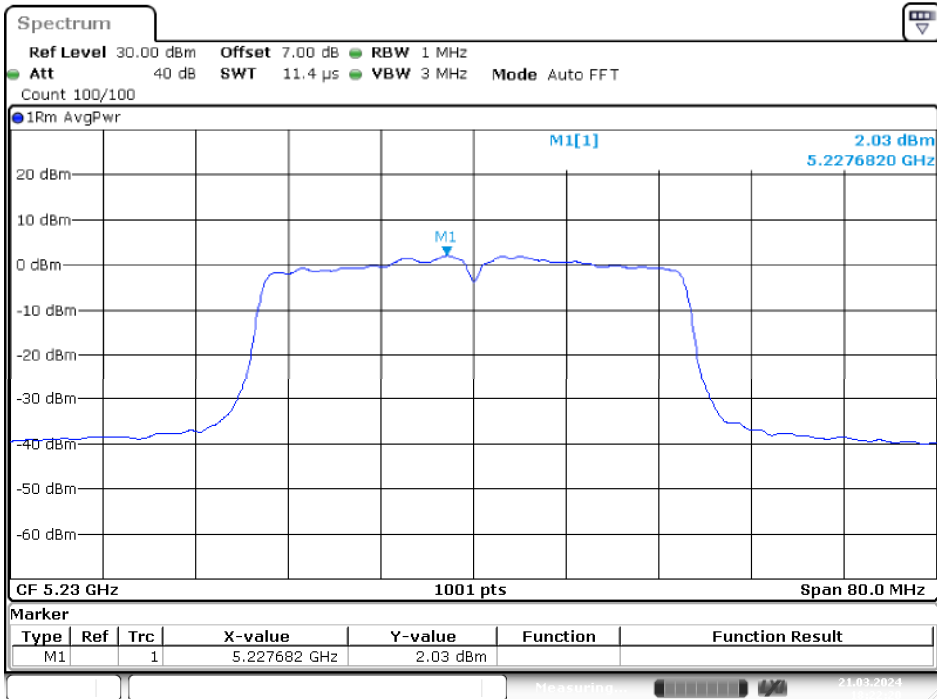


Date: 21.MAR.2024 18:22:20


IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz

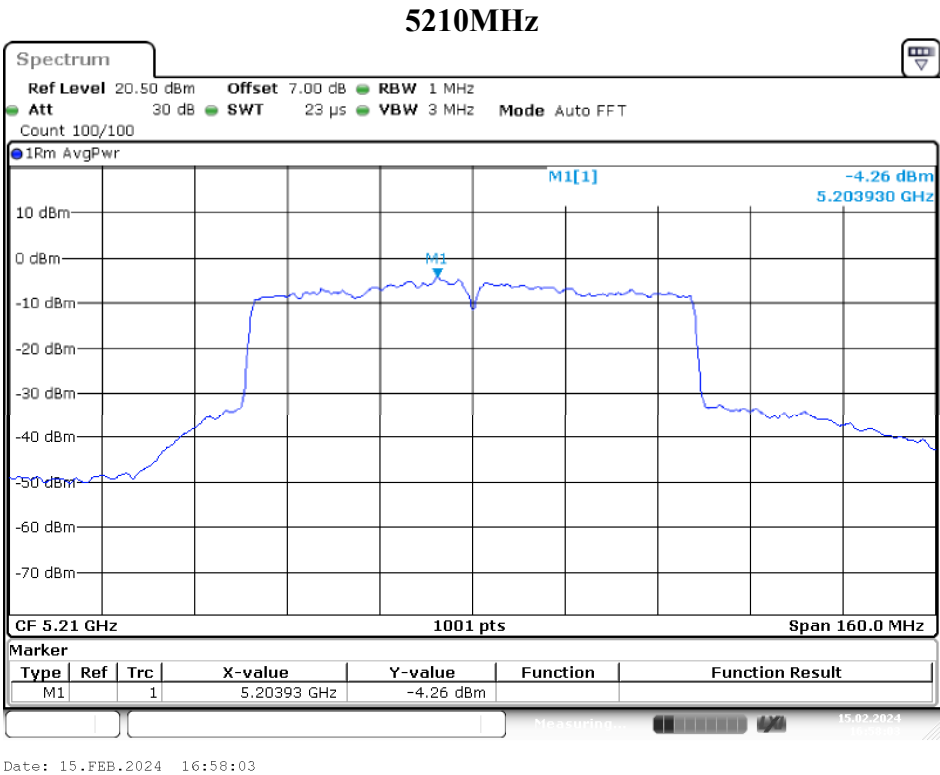

IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

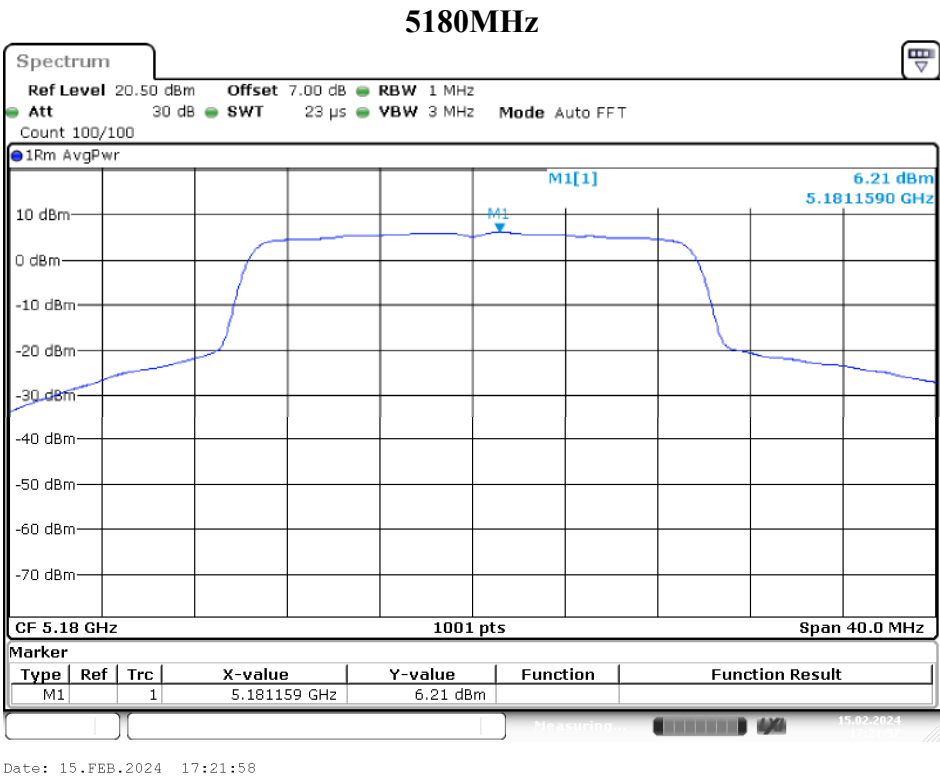


5200MHz

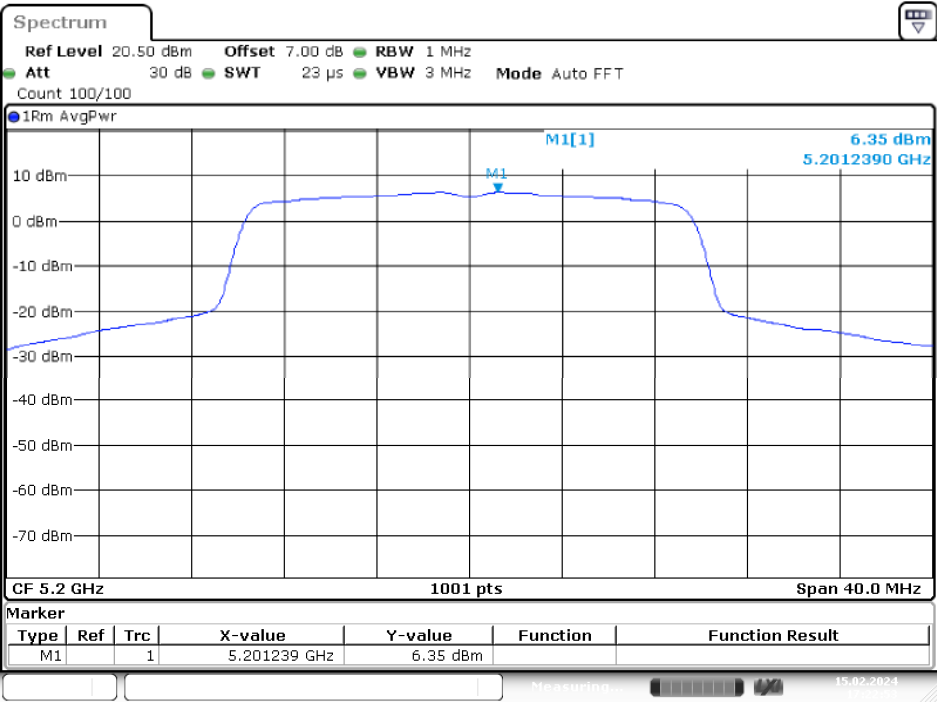

Date: 15.FEB.2024 17:22:54


5240MHz

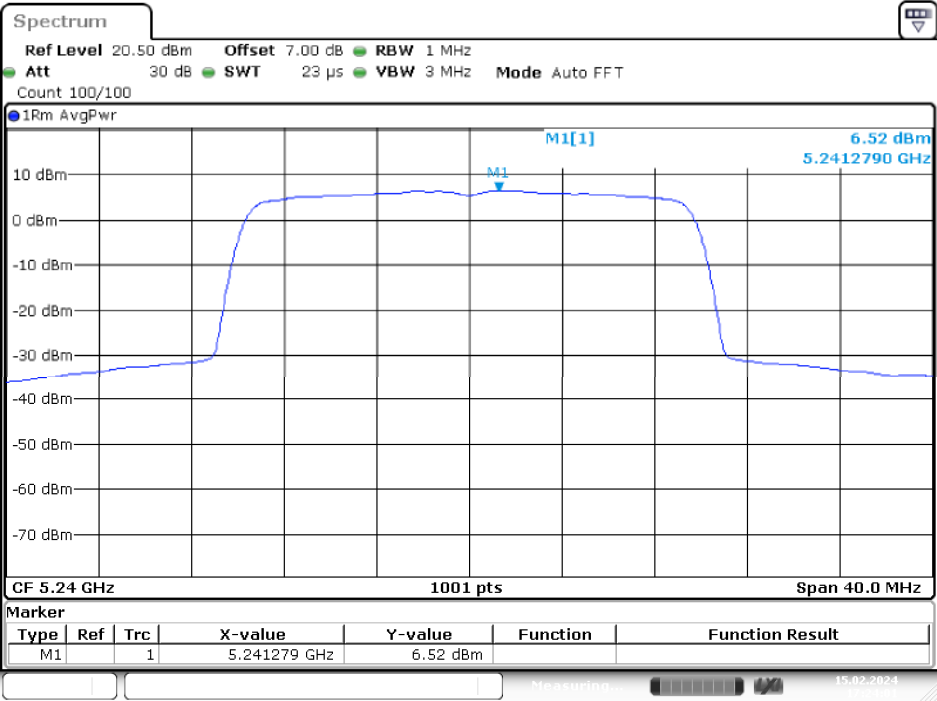

Date: 15.FEB.2024 17:24:01


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

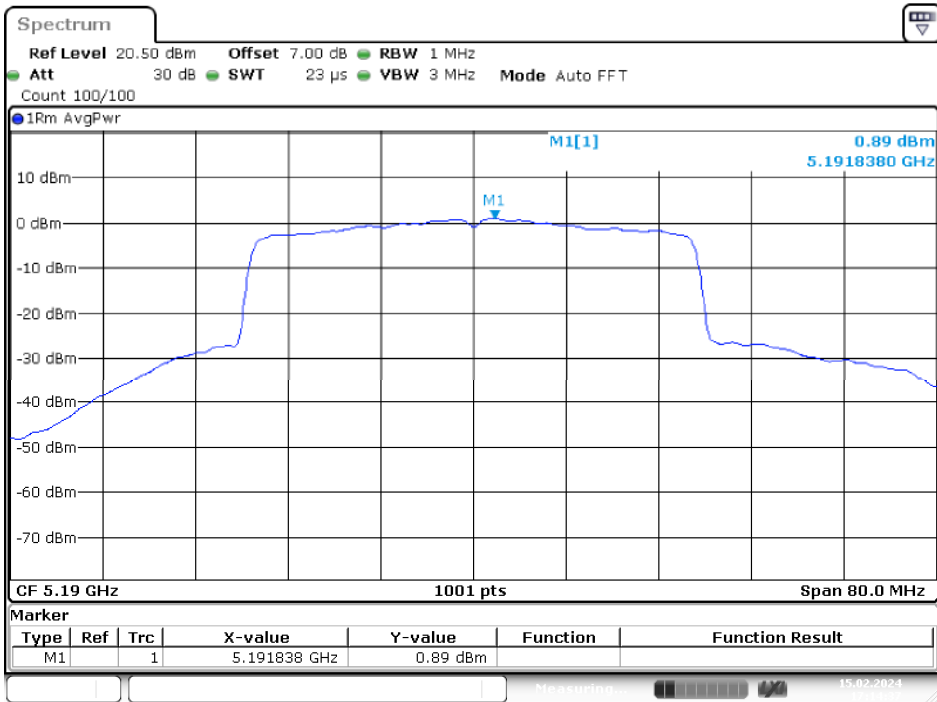

Date: 15.FEB.2024 17:14:37


5230MHz

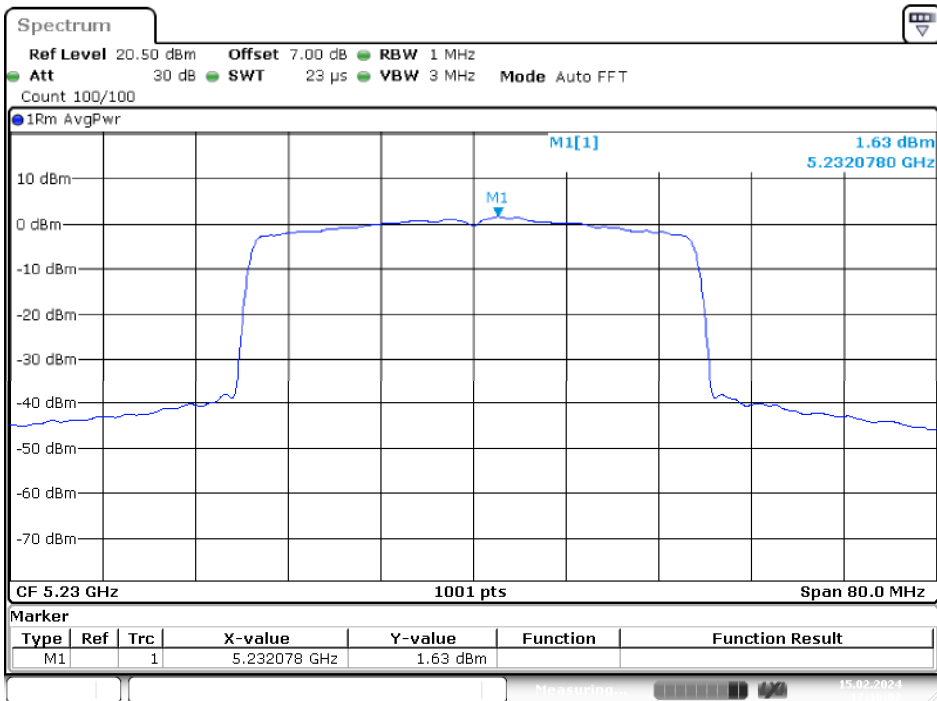

Date: 15.FEB.2024 17:16:03

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

5210MHz

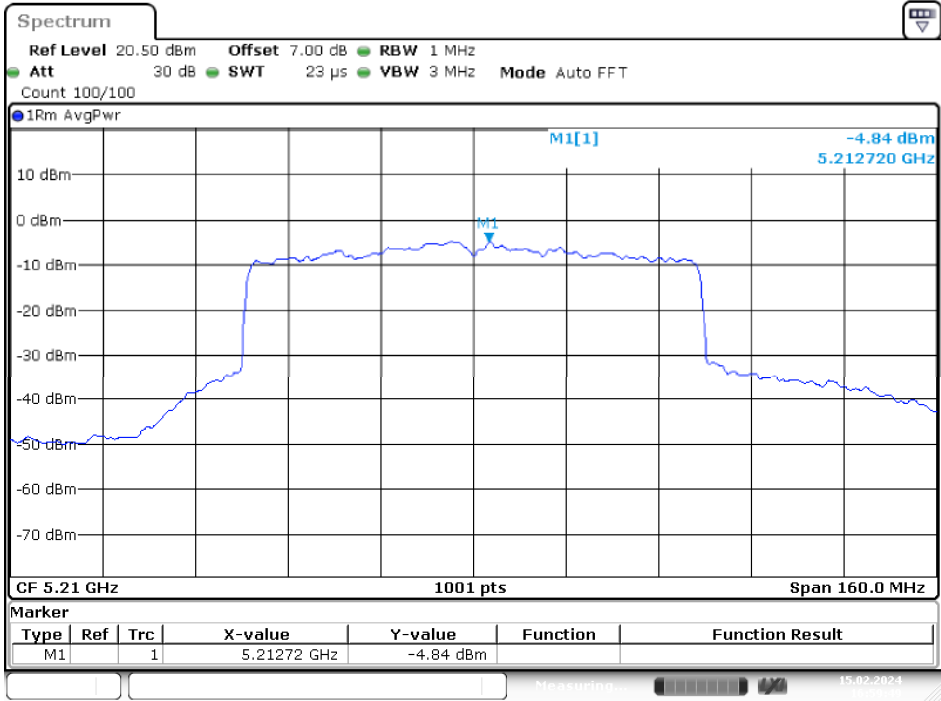


Date: 15.FEB.2024 16:59:49

Beamforming Mode:

Chain 0


IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

5180MHz

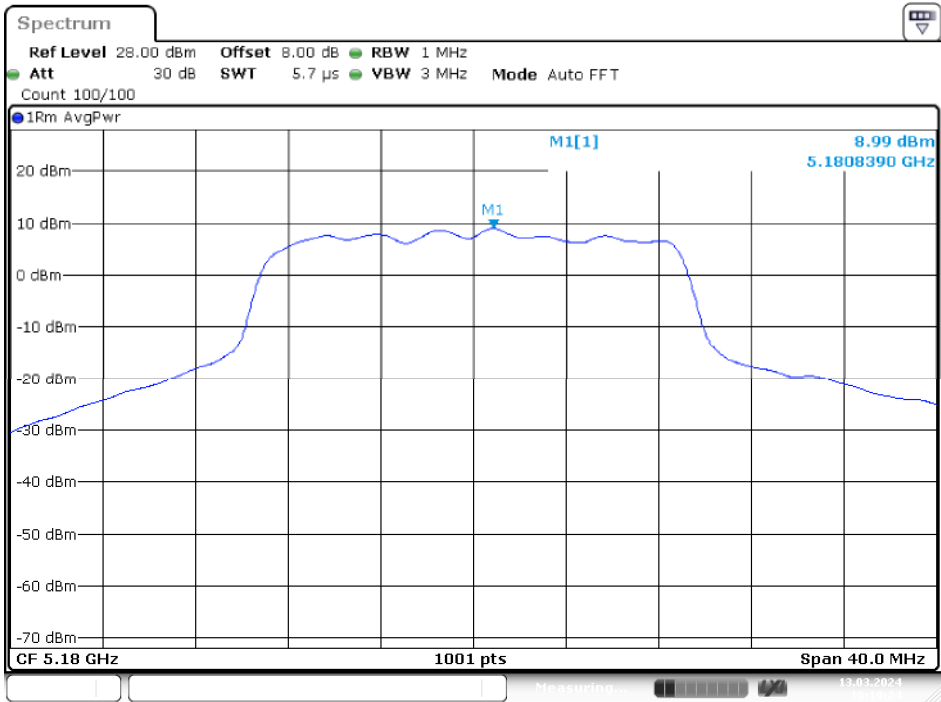


Date: 13.MAR.2024 19:19:24

5200MHz

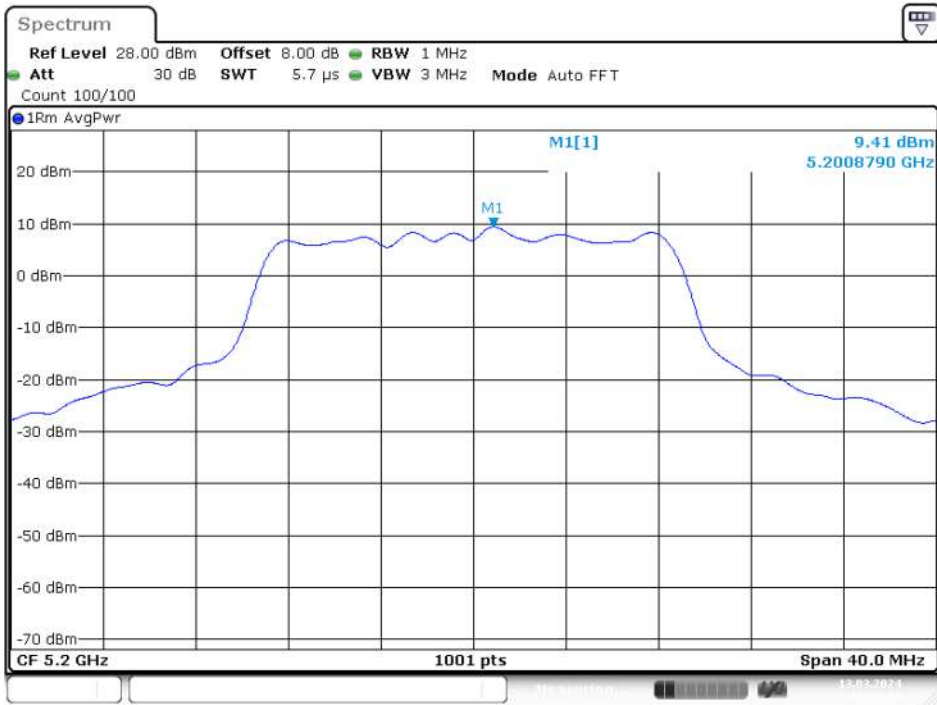

Date: 13.MAR.2024 19:27:08


5240MHz

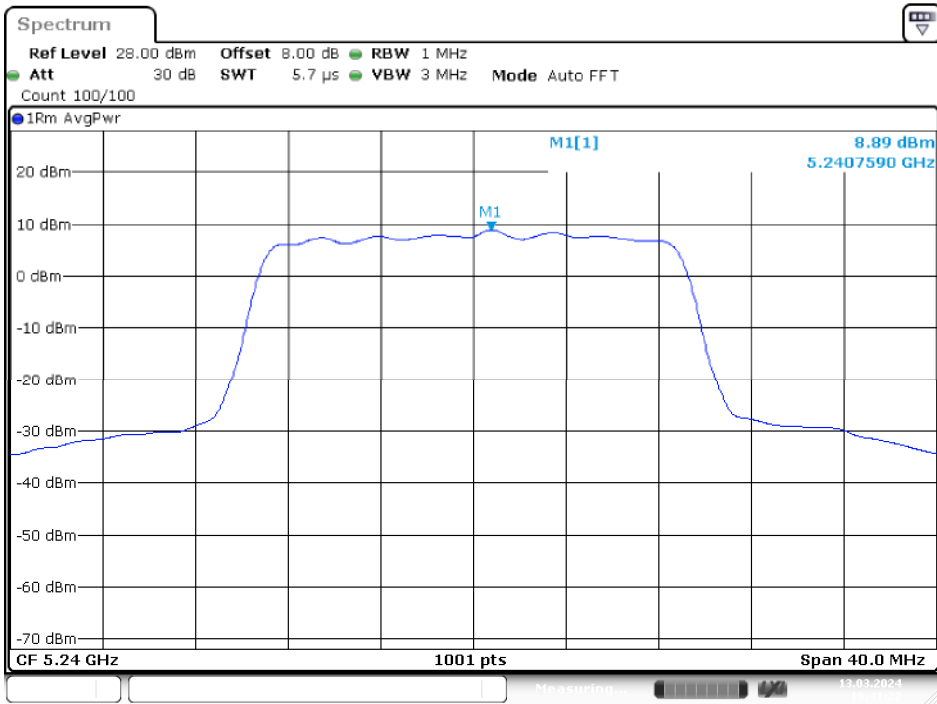

Date: 13.MAR.2024 19:41:22


IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

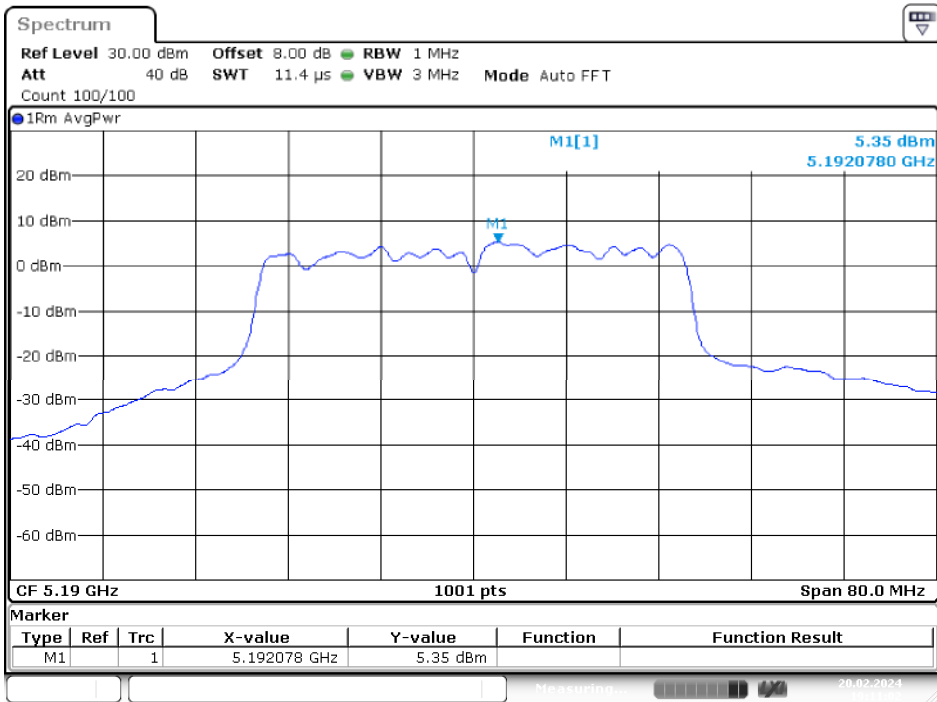


Date: 20.FEB.2024 19:11:02

5230MHz

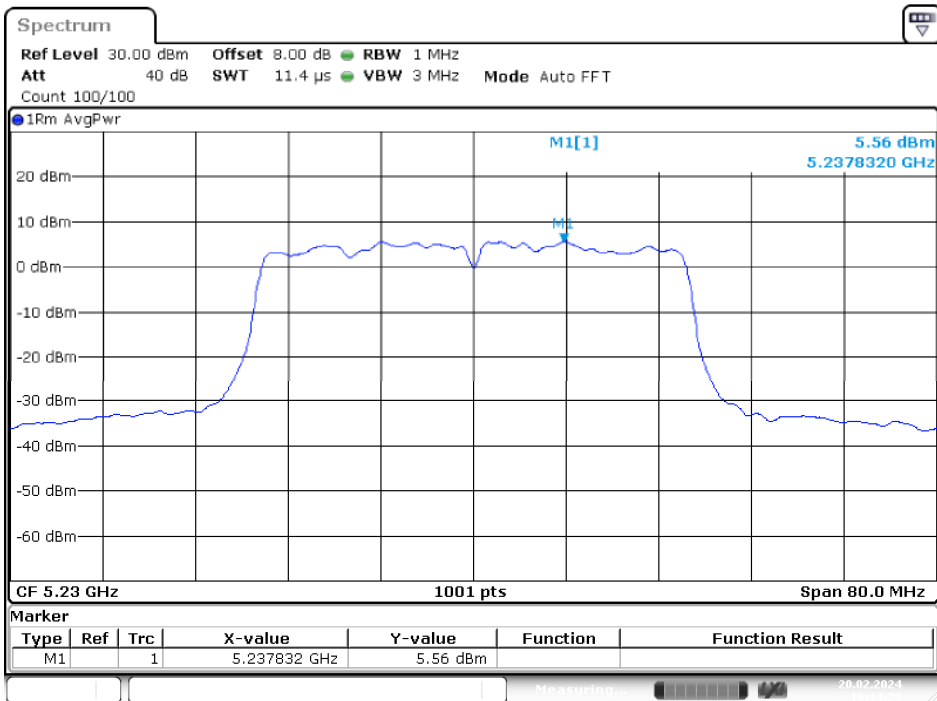


Date: 20.FEB.2024 19:14:29


IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz

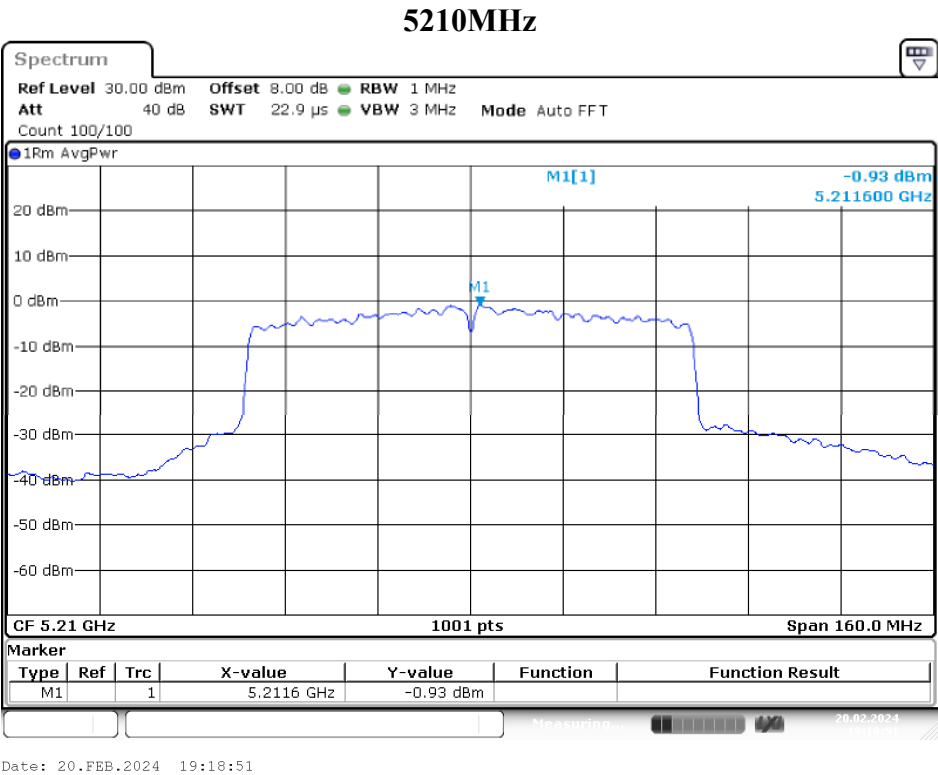

IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

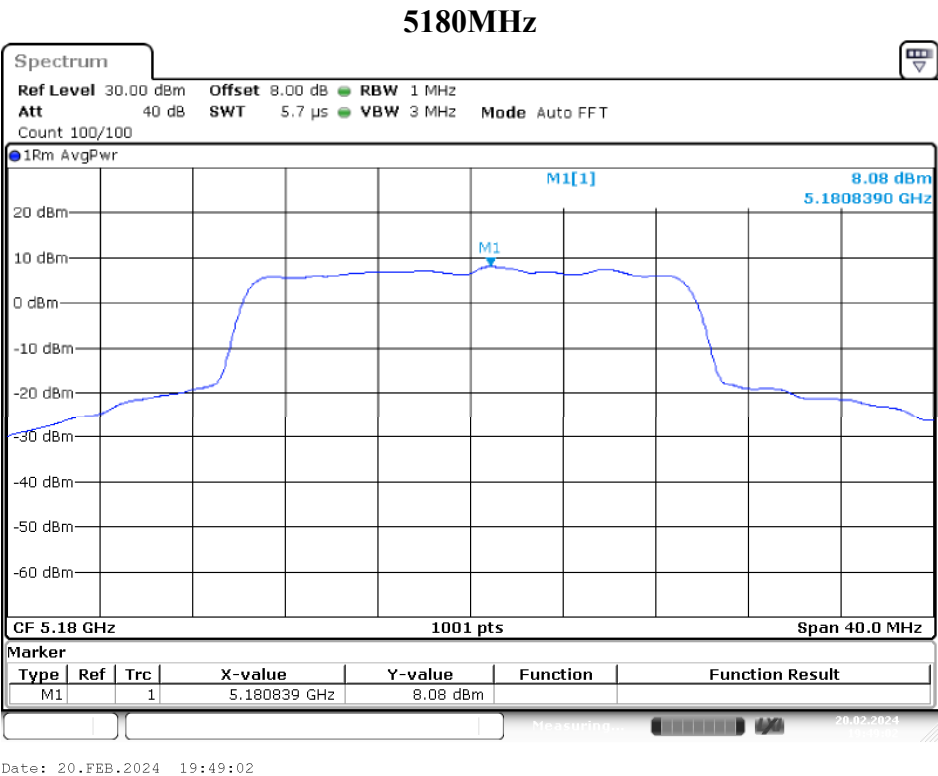


5200MHz

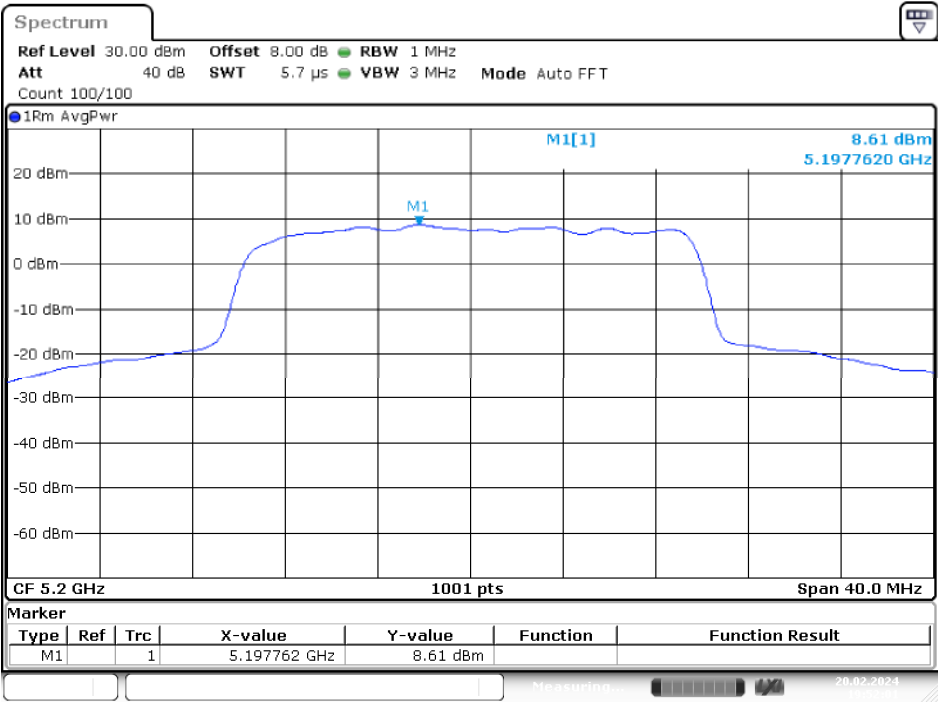

Date: 20.FEB.2024 19:52:01


5240MHz

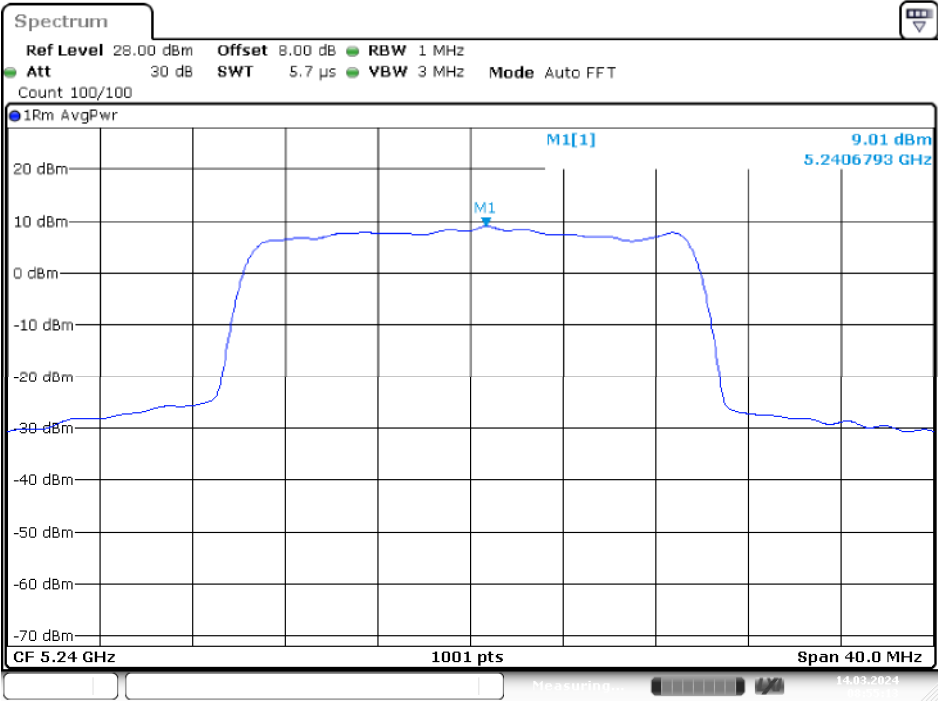

Date: 14.MAR.2024 08:55:13


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

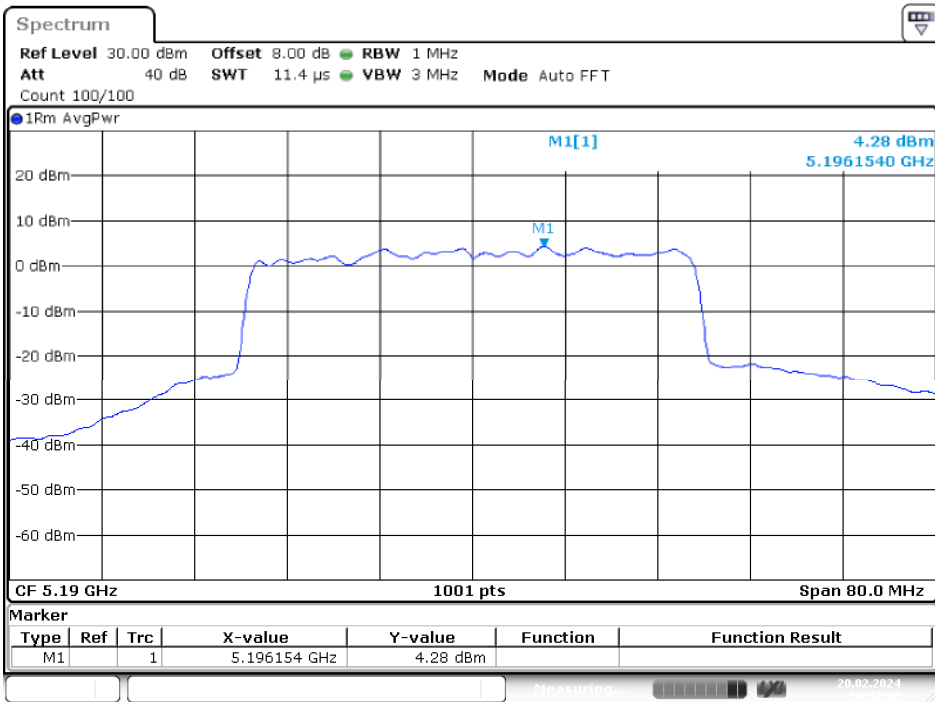


Date: 20.FEB.2024 19:32:08

5230MHz

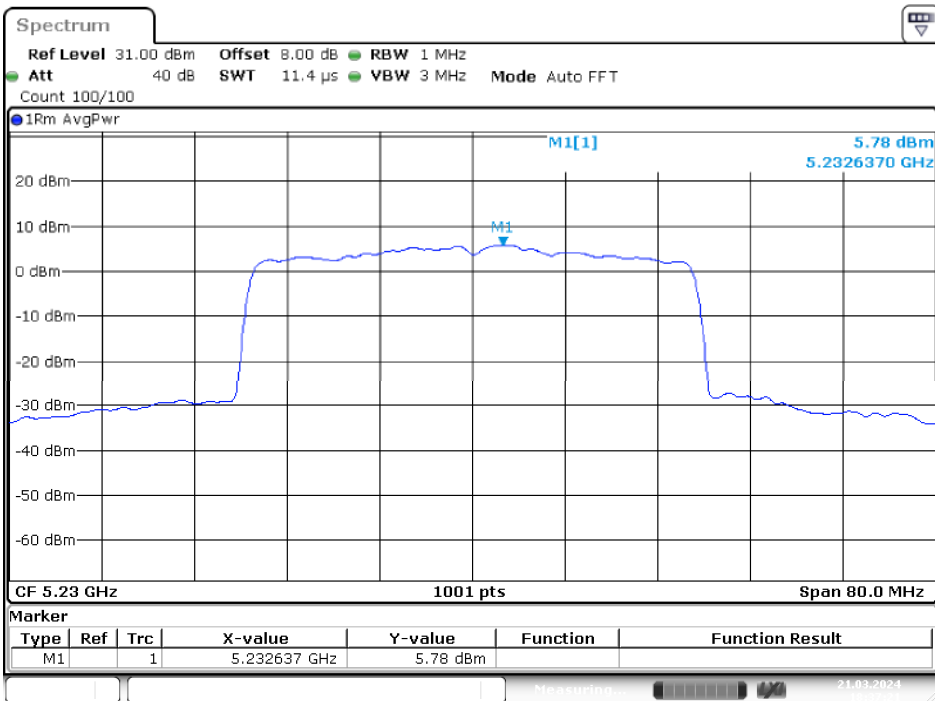


Date: 21.MAR.2024 18:37:22

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

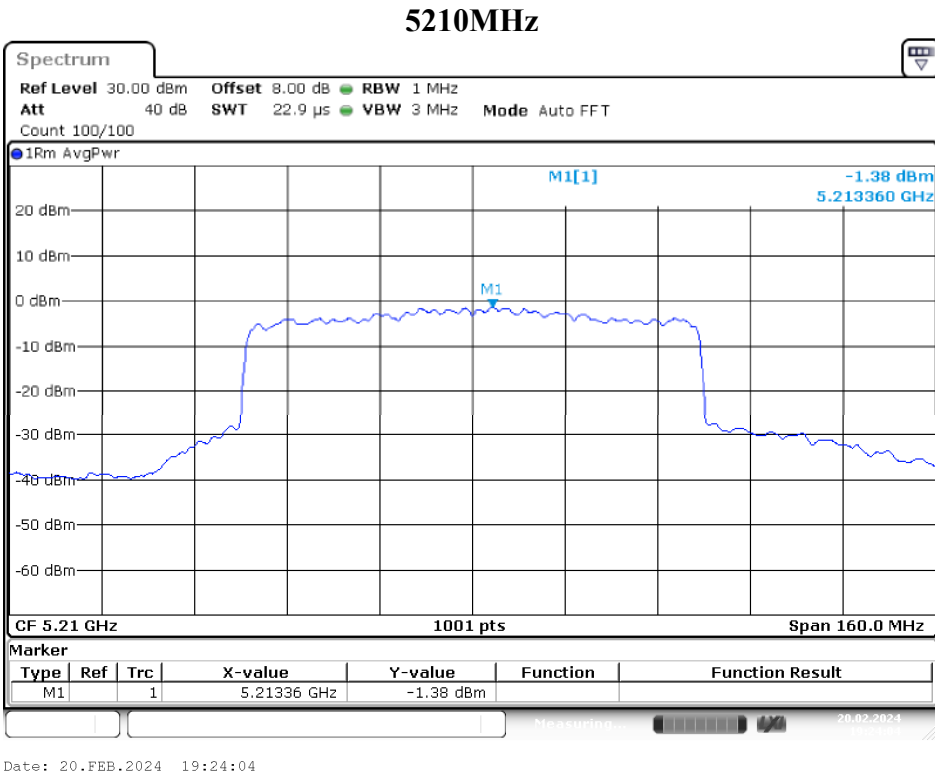


Chain 1

IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

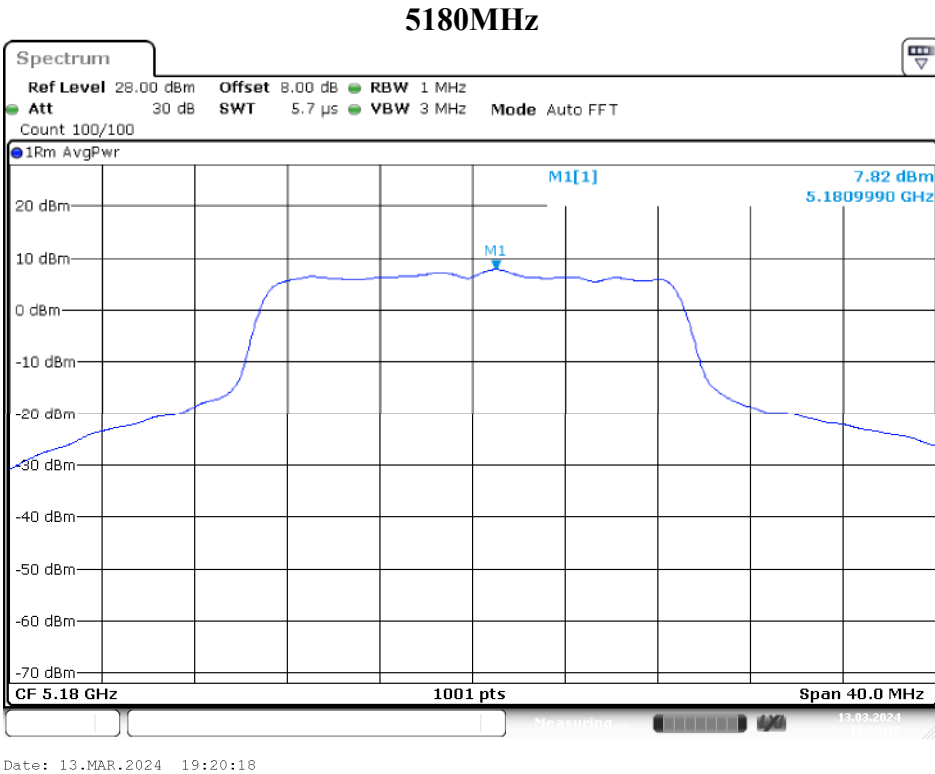


5200MHz

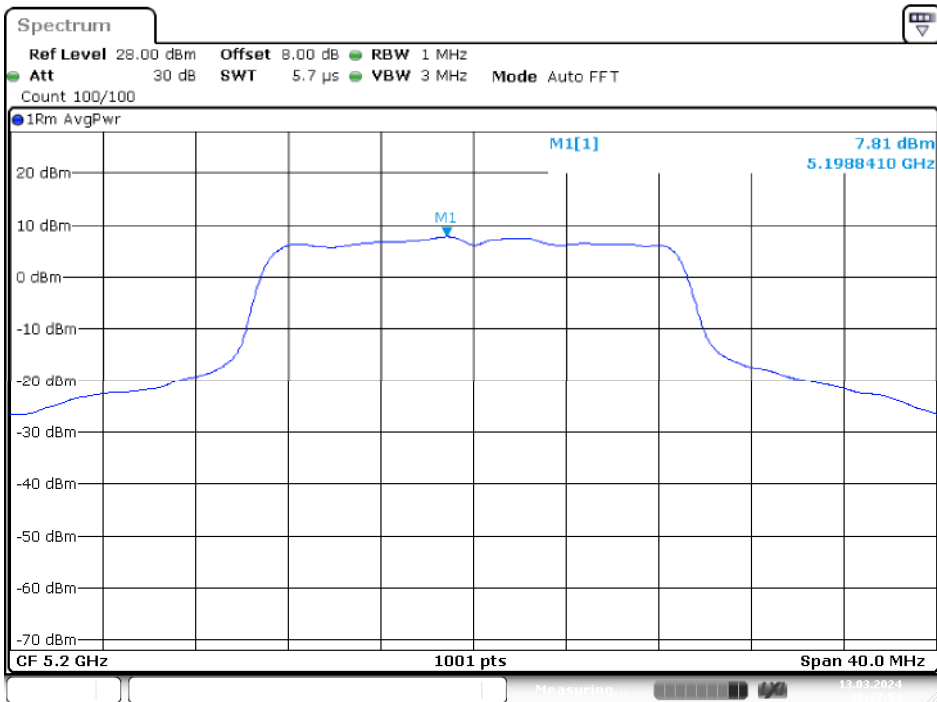

Date: 13.MAR.2024 19:27:54


5240MHz

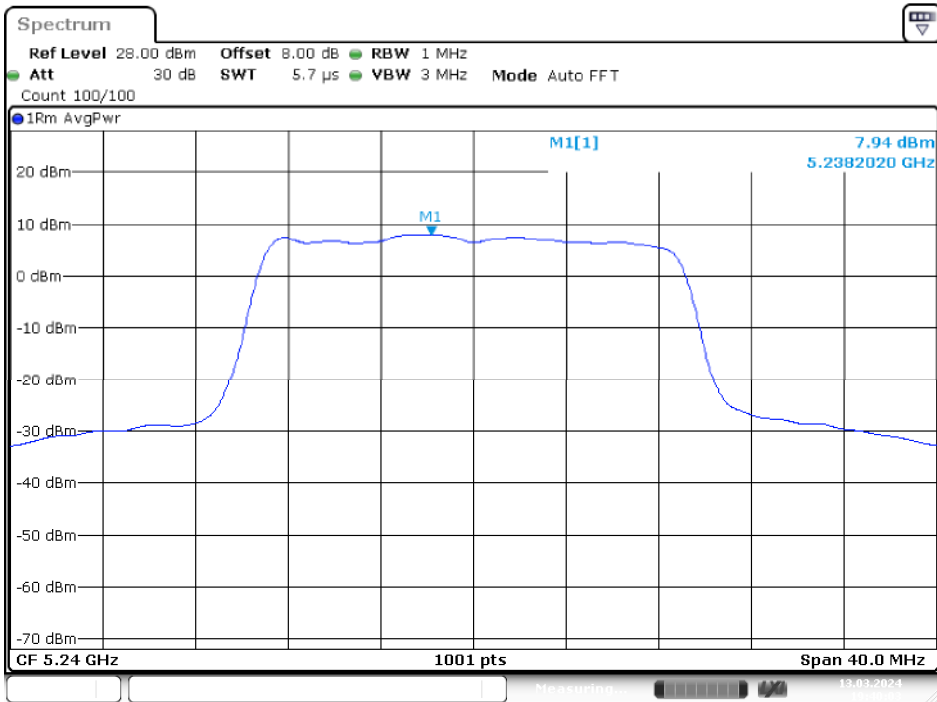

Date: 13.MAR.2024 19:40:03


IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

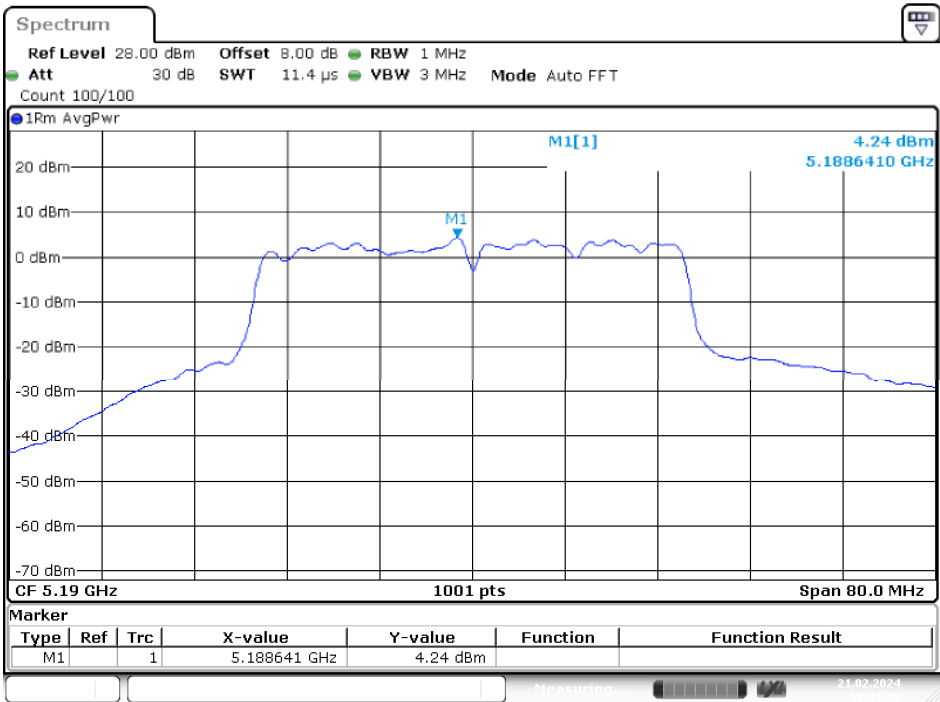

Date: 21.FEB.2024 18:31:37


5230MHz

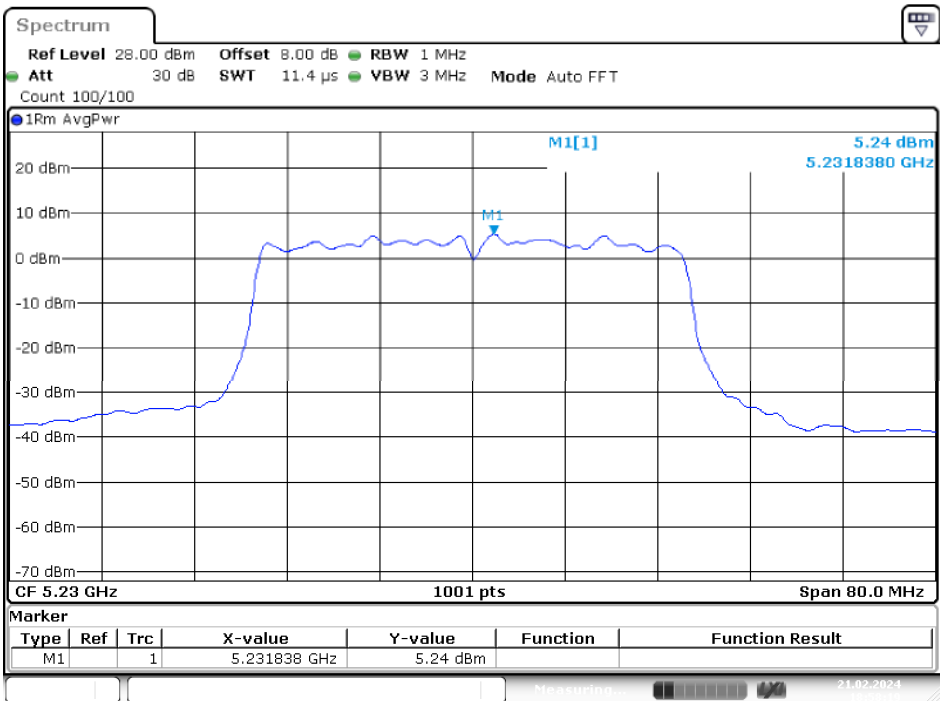

Date: 21.FEB.2024 18:58:20

IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz


5210MHz

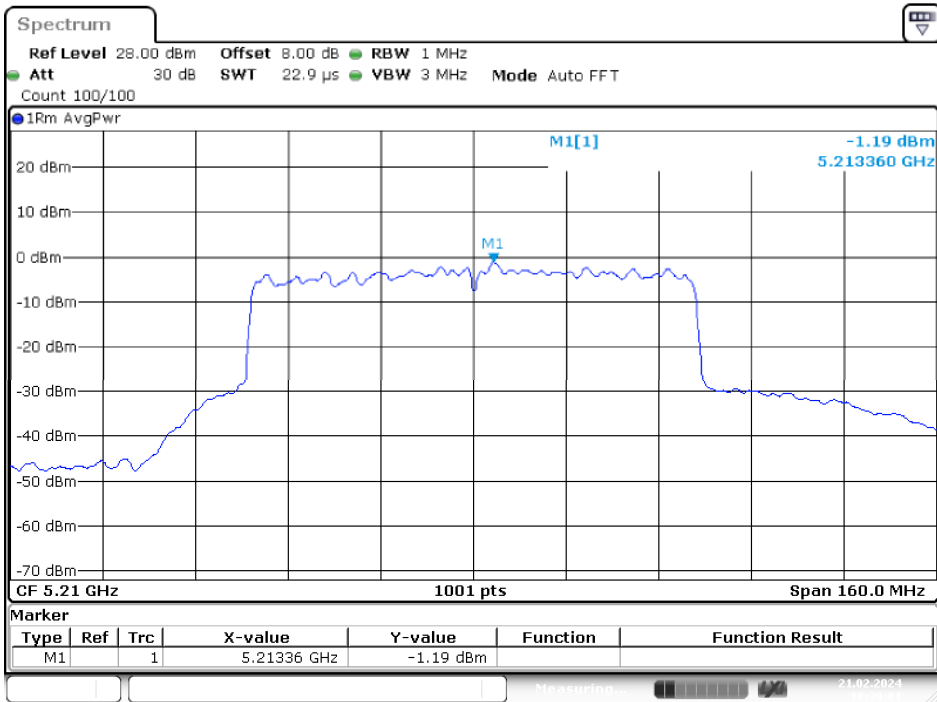

Date: 21.FEB.2024 18:39:02


IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

5180MHz

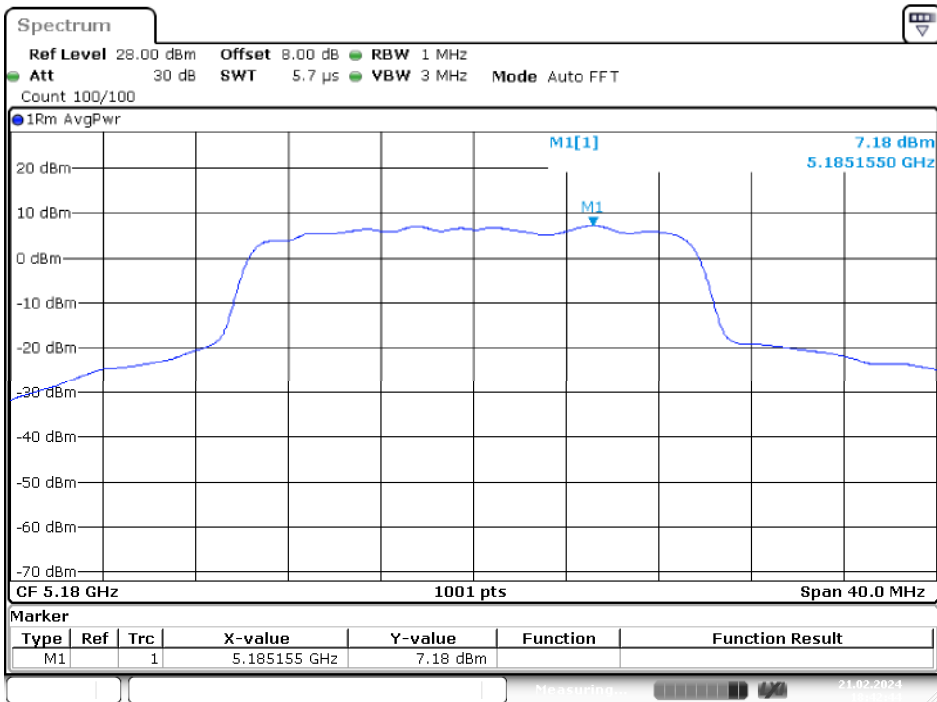


Date: 21.FEB.2024 18:42:44

5200MHz

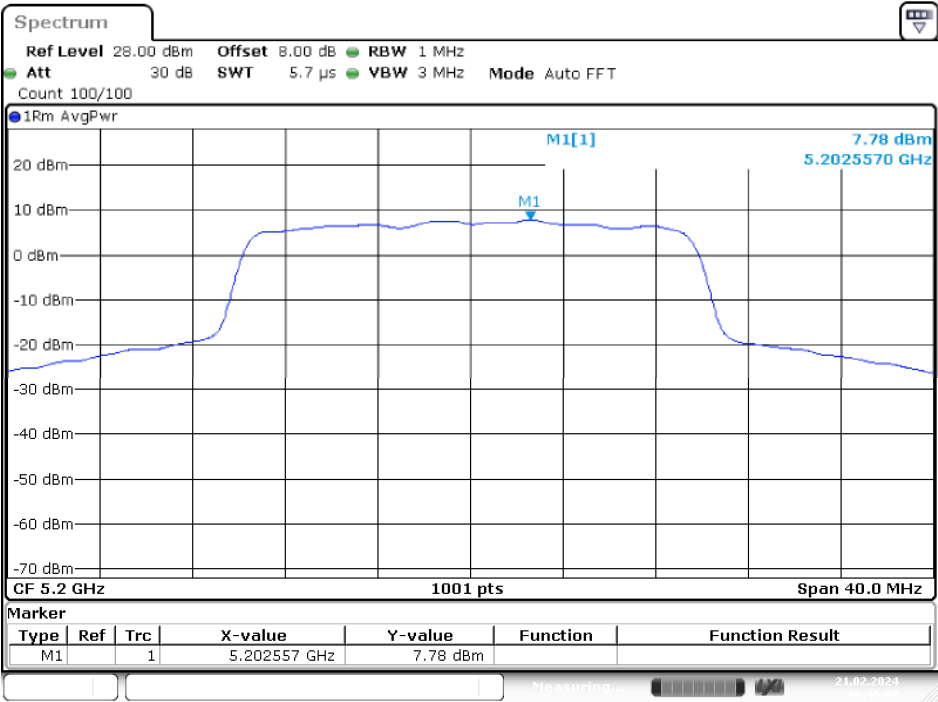

Date: 21.FEB.2024 18:46:07


5240MHz

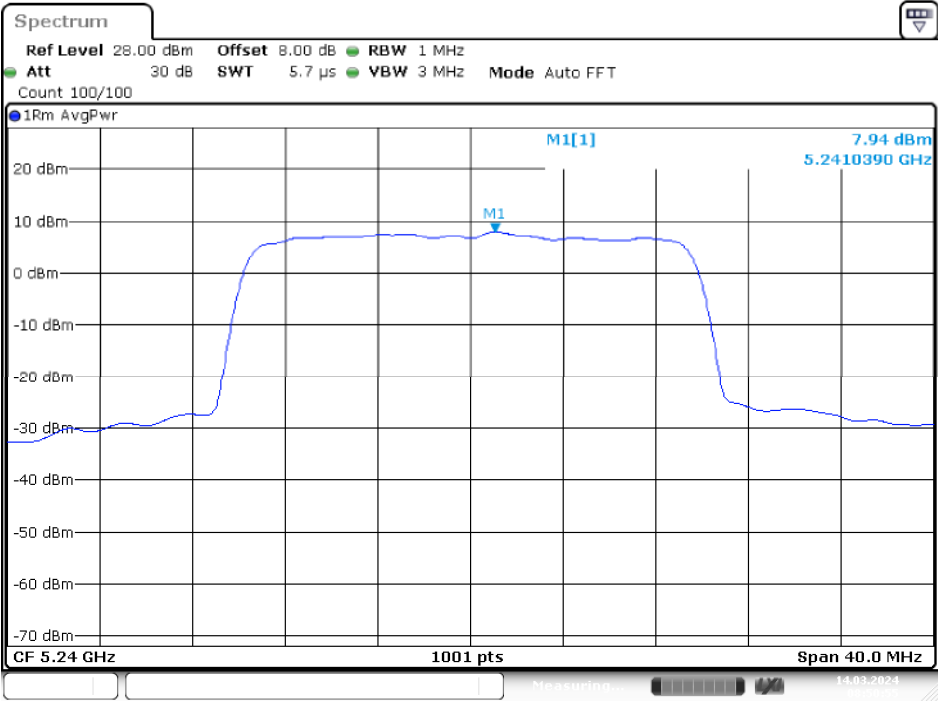

Date: 14.MAR.2024 08:50:56


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

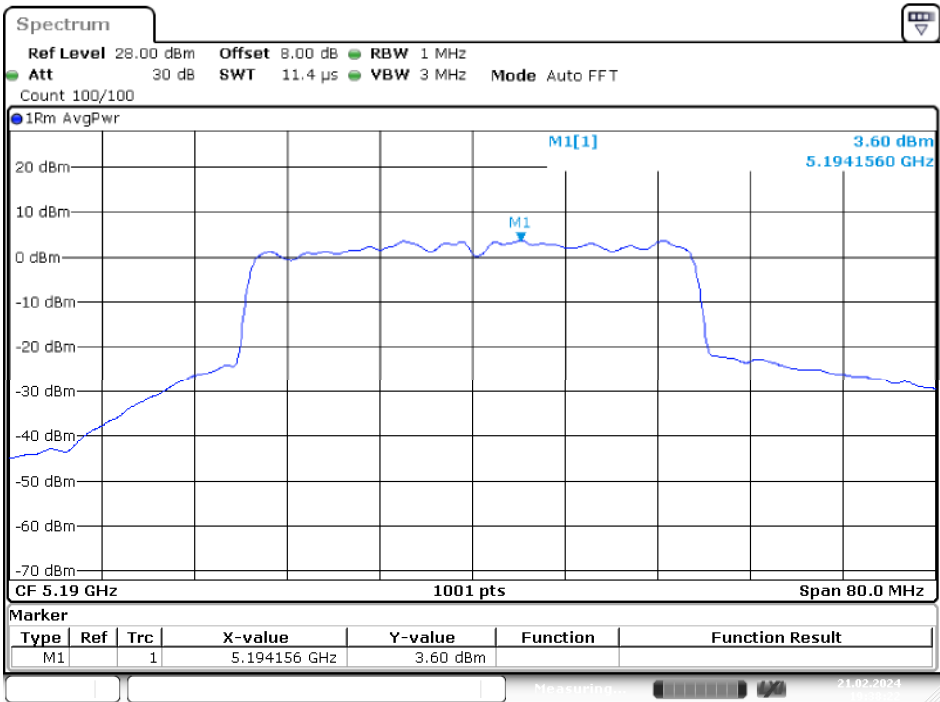


Date: 21.FEB.2024 19:38:22

5230MHz

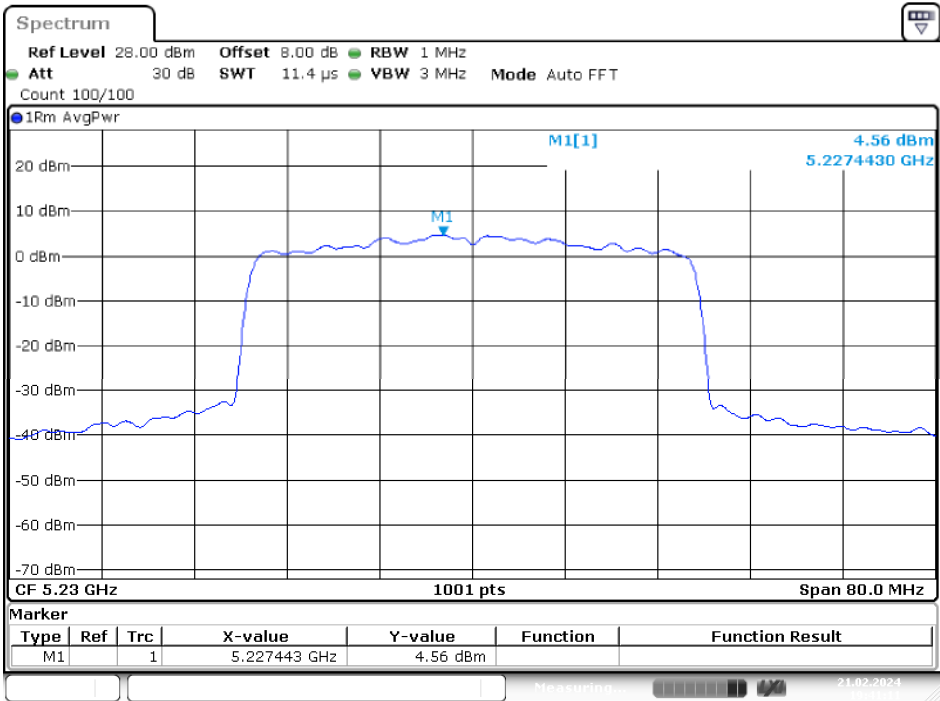


Date: 21.FEB.2024 19:41:12

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

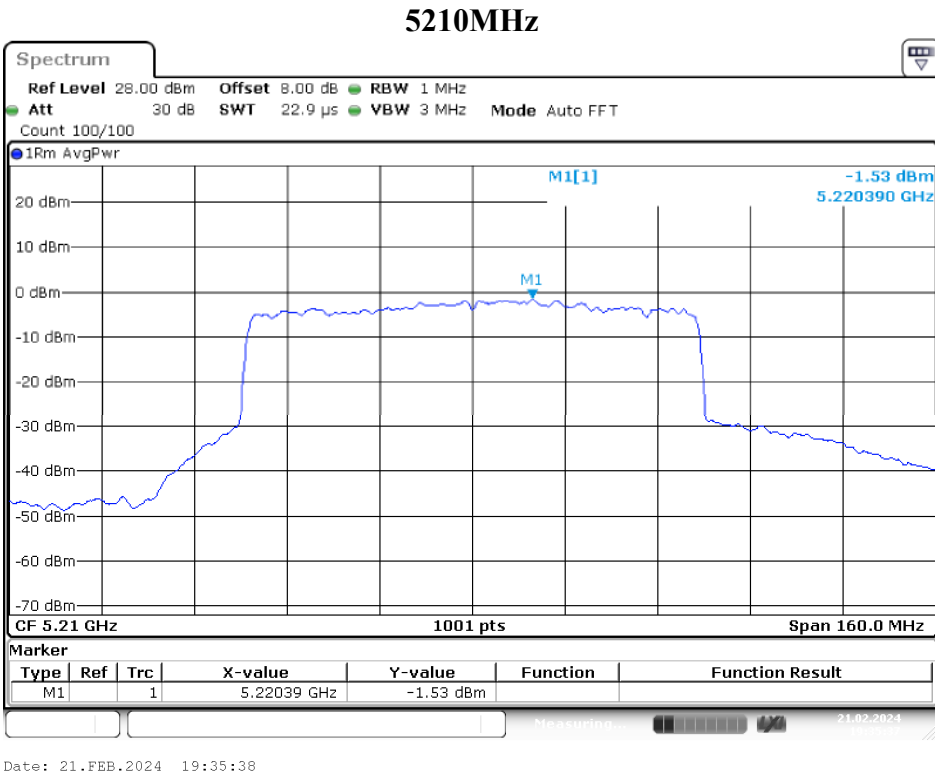


Chain 2

IEEE 802.11ac VHT20 Mode / 5150 ~ 5250MHz

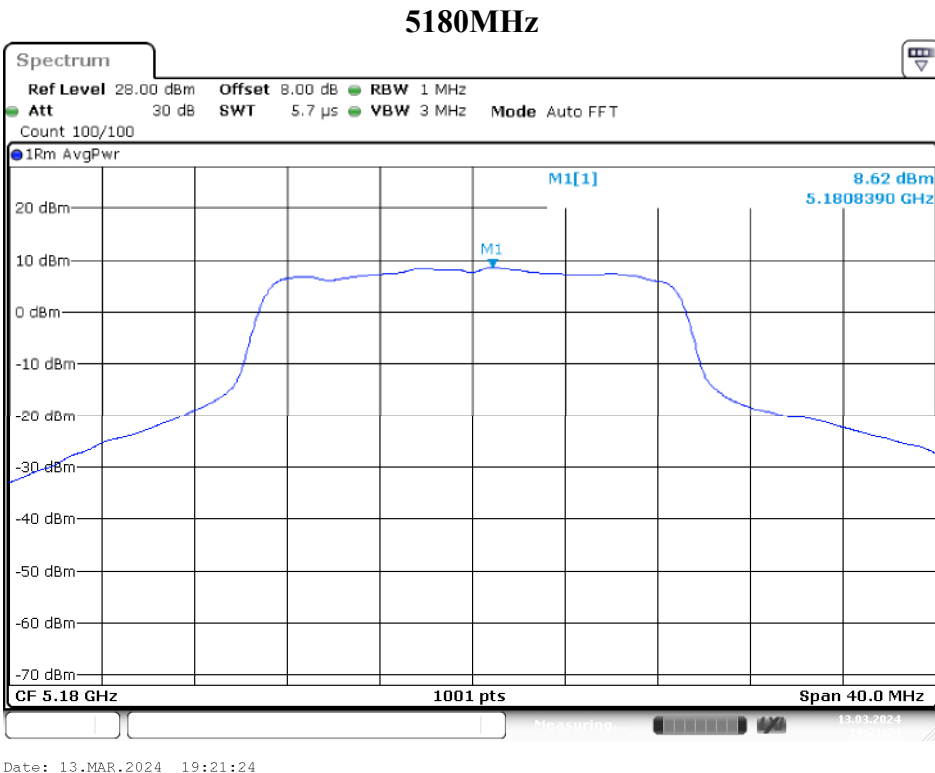


5200MHz

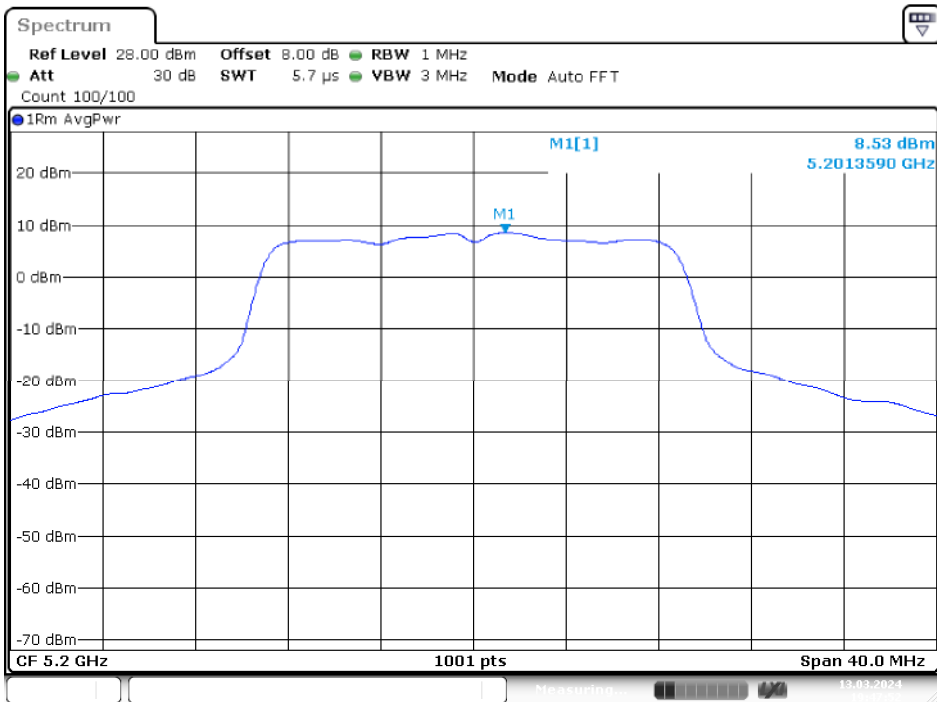

Date: 13.MAR.2024 19:47:52


5240MHz

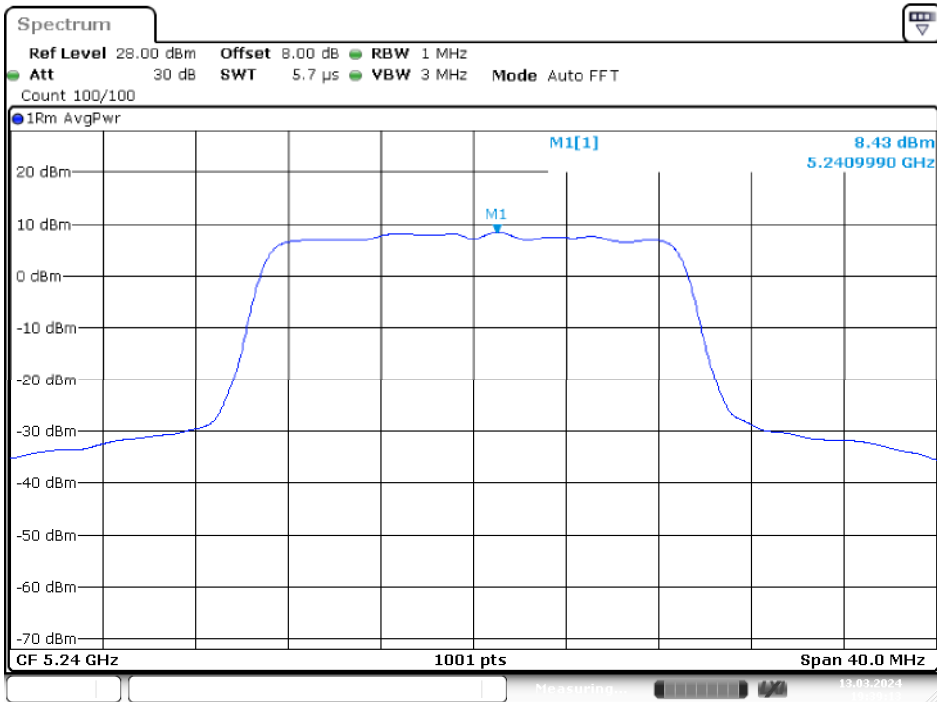

Date: 13.MAR.2024 19:39:14


IEEE 802.11ac VHT40 Mode / 5150 ~ 5250MHz

5190MHz

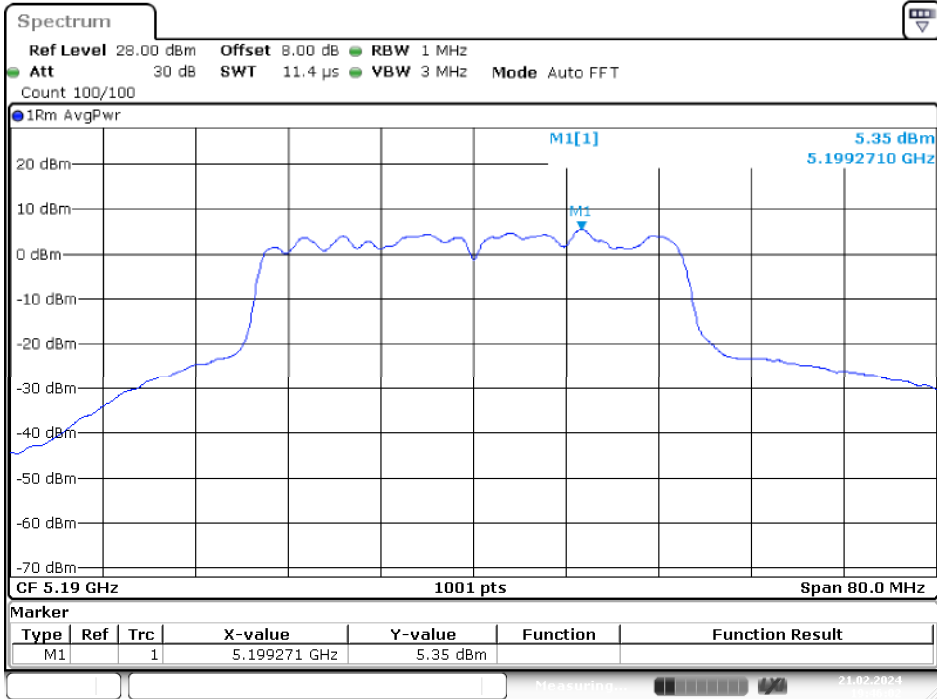

Date: 21.FEB.2024 19:46:02


5230MHz

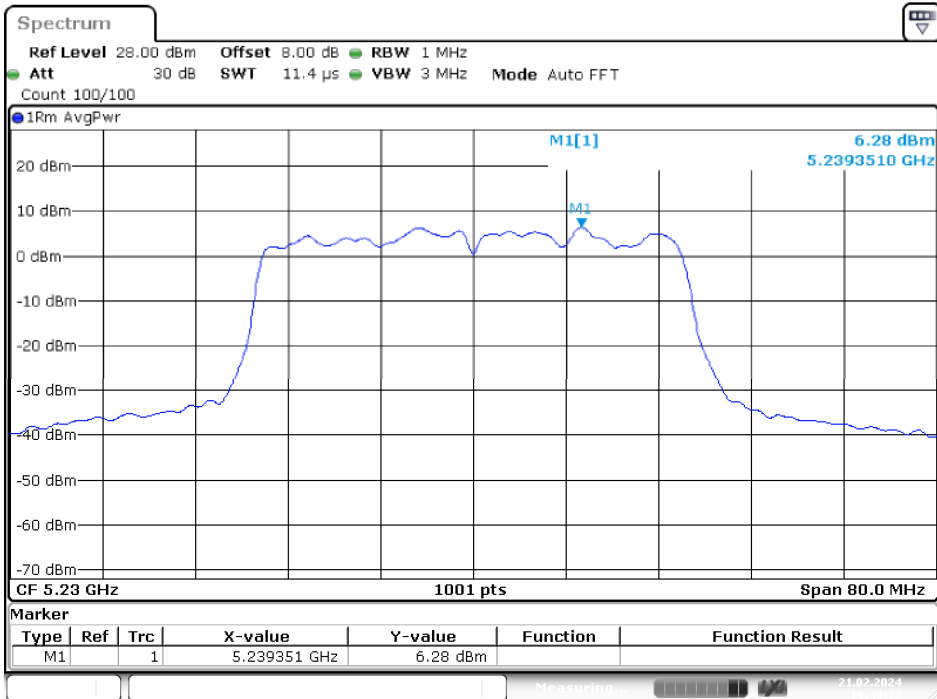

Date: 21.FEB.2024 19:48:33

IEEE 802.11ac VHT80 Mode / 5150 ~ 5250MHz


5210MHz

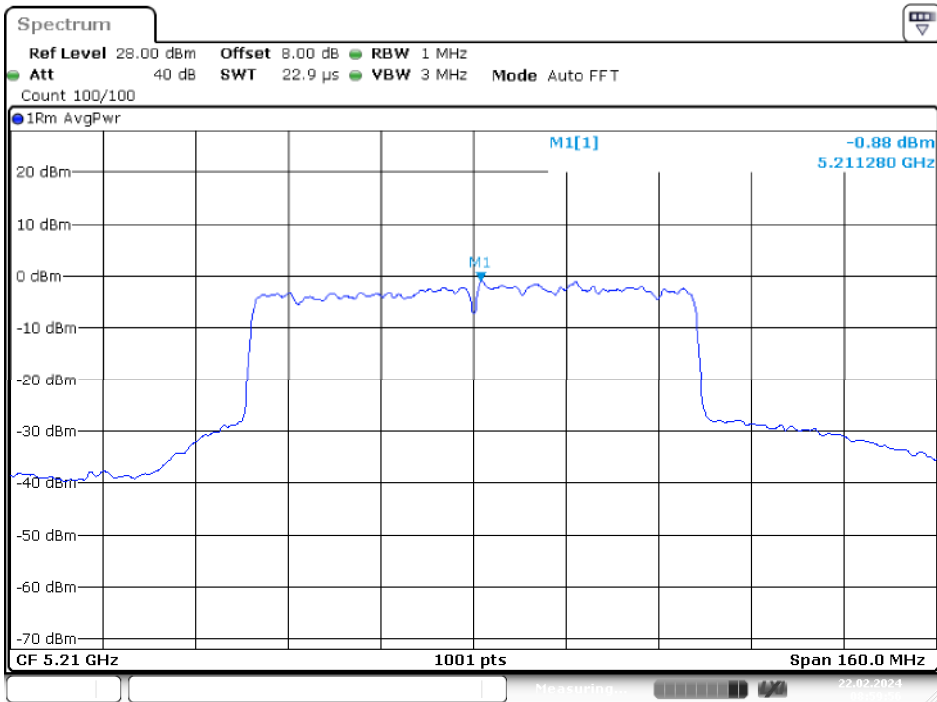

Date: 22.FEB.2024 08:59:56


IEEE 802.11ax HE20 Mode / 5150 ~ 5250MHz

5180MHz

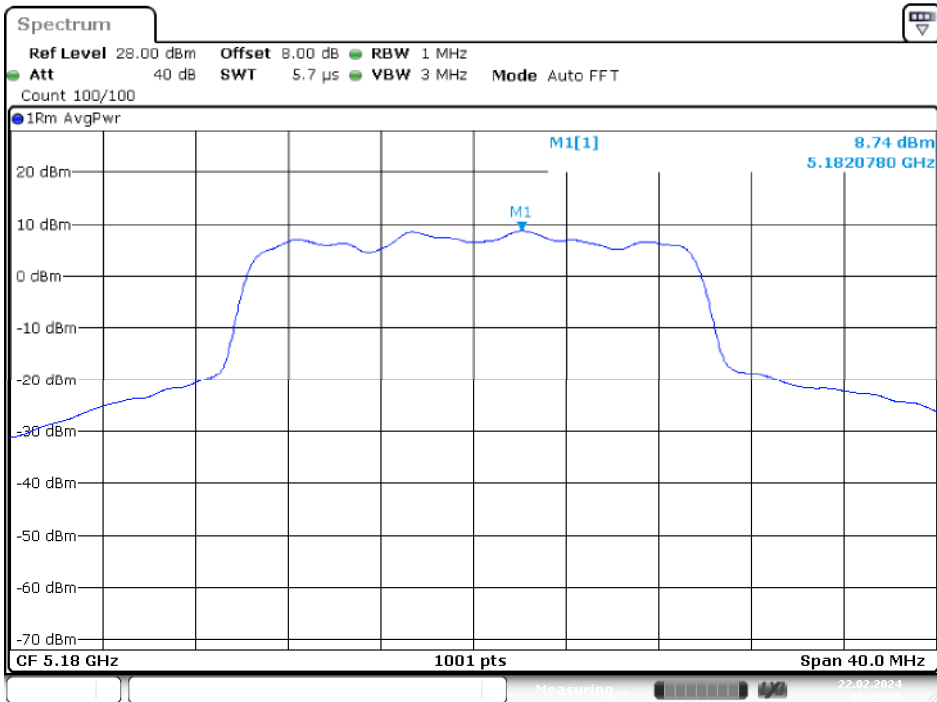


Date: 22.FEB.2024 10:24:05

5200MHz

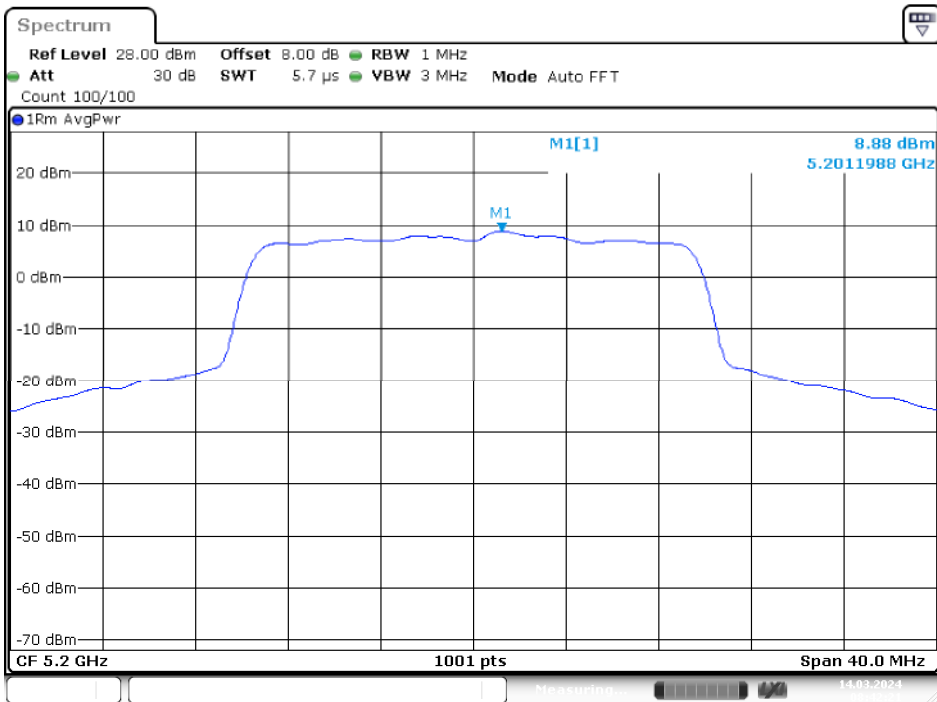

Date: 14.MAR.2024 08:42:22


5240MHz

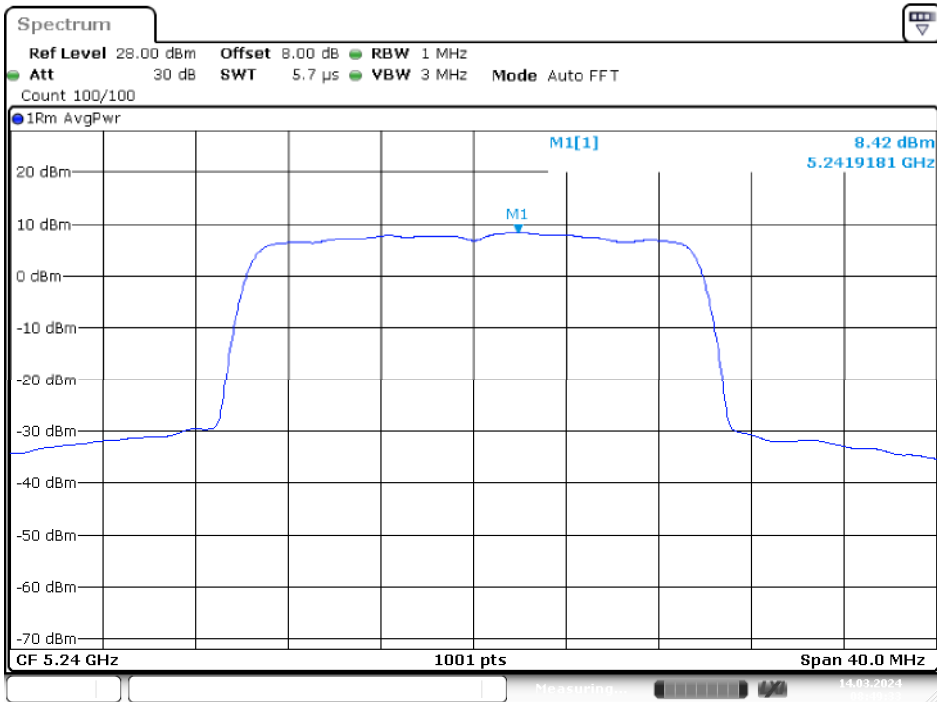

Date: 14.MAR.2024 08:49:33


IEEE 802.11ax HE40 Mode / 5150 ~ 5250MHz

5190MHz

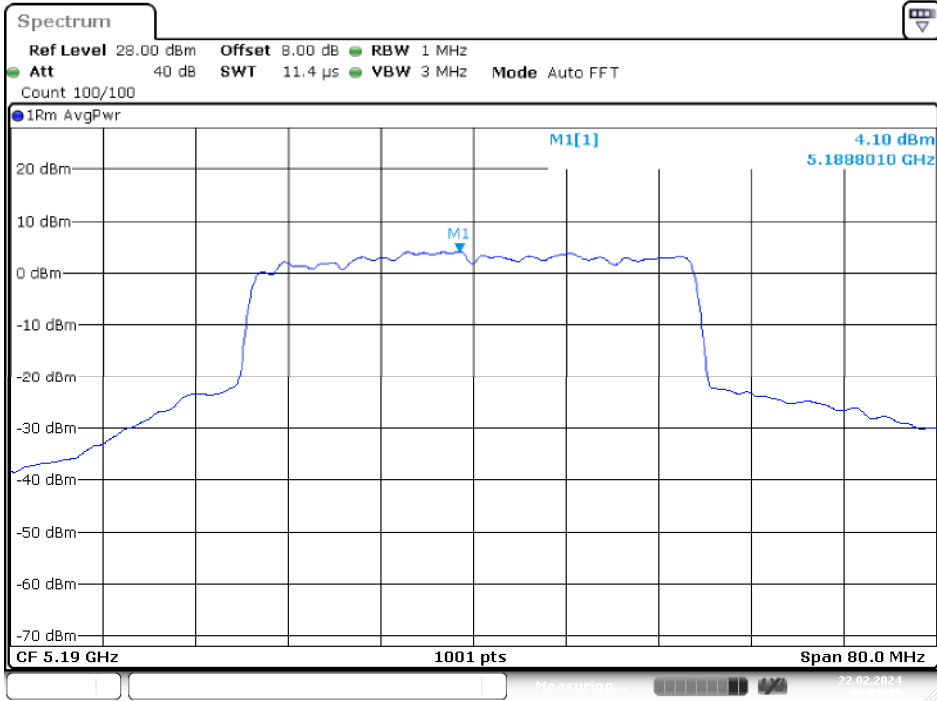

Date: 22.FEB.2024 09:07:35


5230MHz

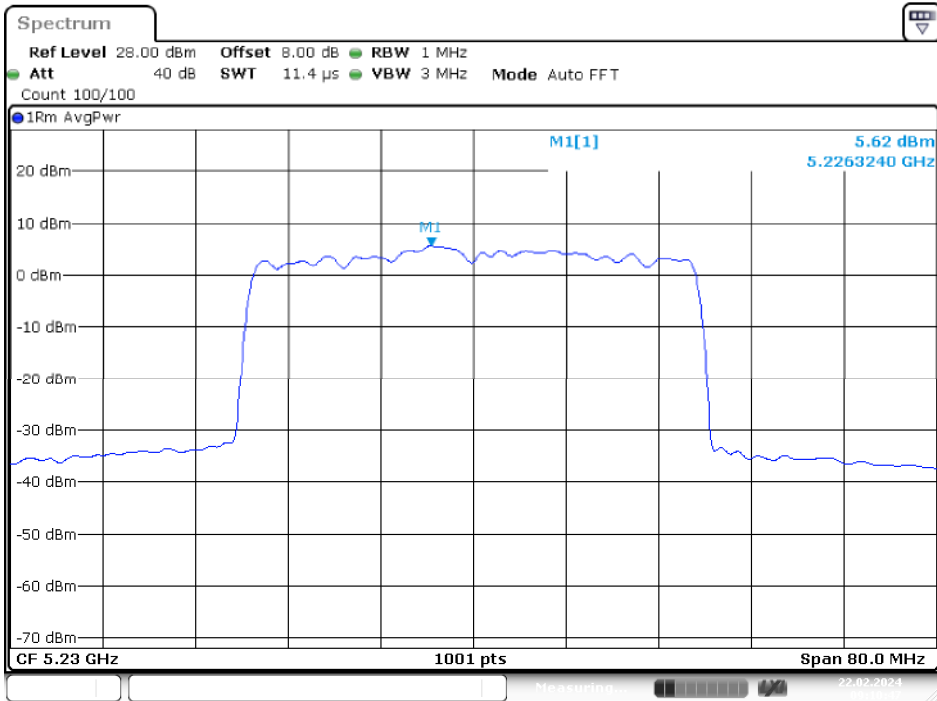

Date: 22.FEB.2024 09:10:47

IEEE 802.11ax HE80 Mode / 5150 ~ 5250MHz

5210MHz

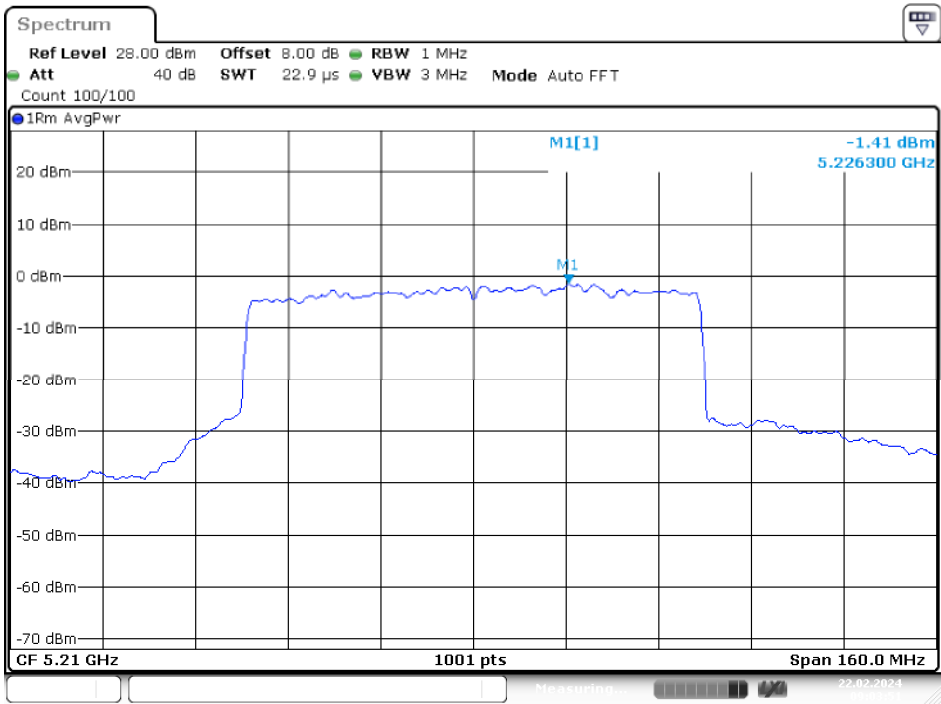

Date: 22.FEB.2024 09:03:51


UNII-3 Band IV / PSD

Non Beamforming Mode:

Chain 0


IEEE 802.11a Mode / 5725 ~ 5850MHz

5745MHz

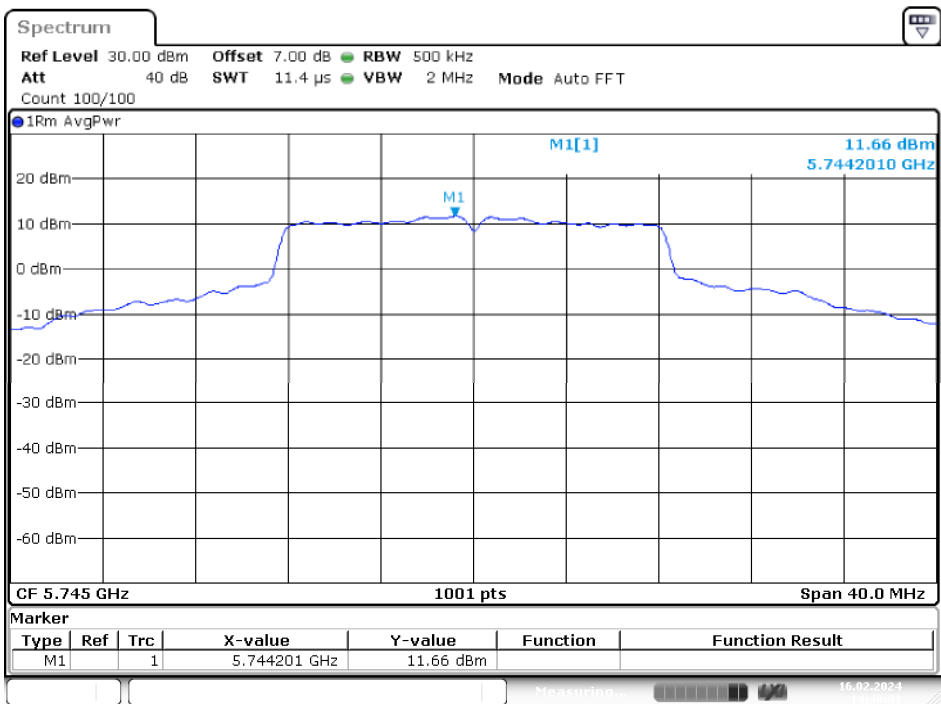


Date: 16.FEB.2024 14:48:02

5785MHz

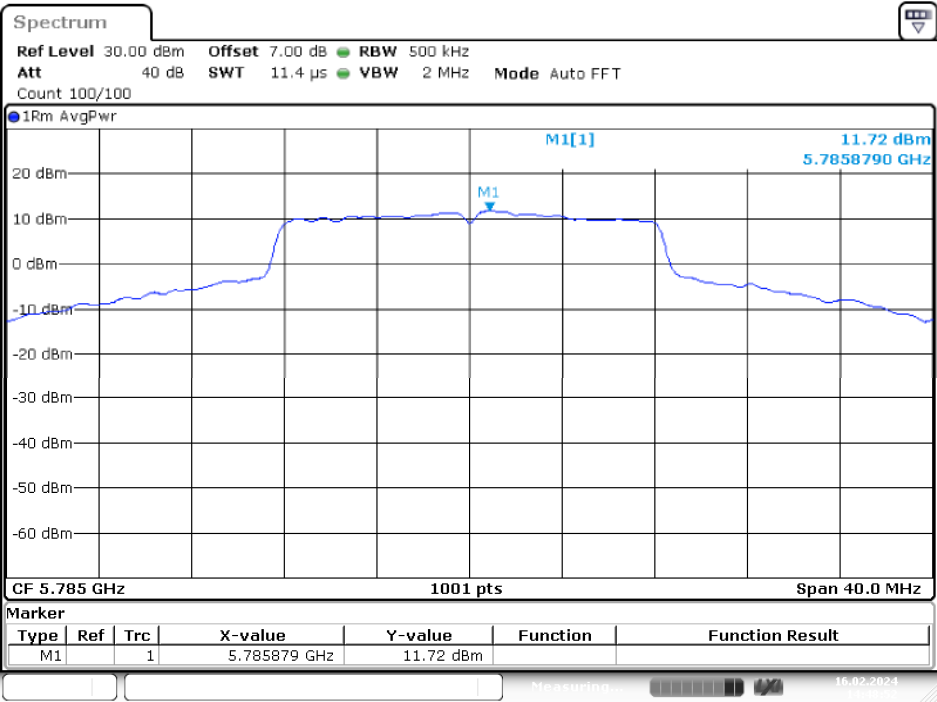

Date: 16.FEB.2024 14:48:53


5825MHz

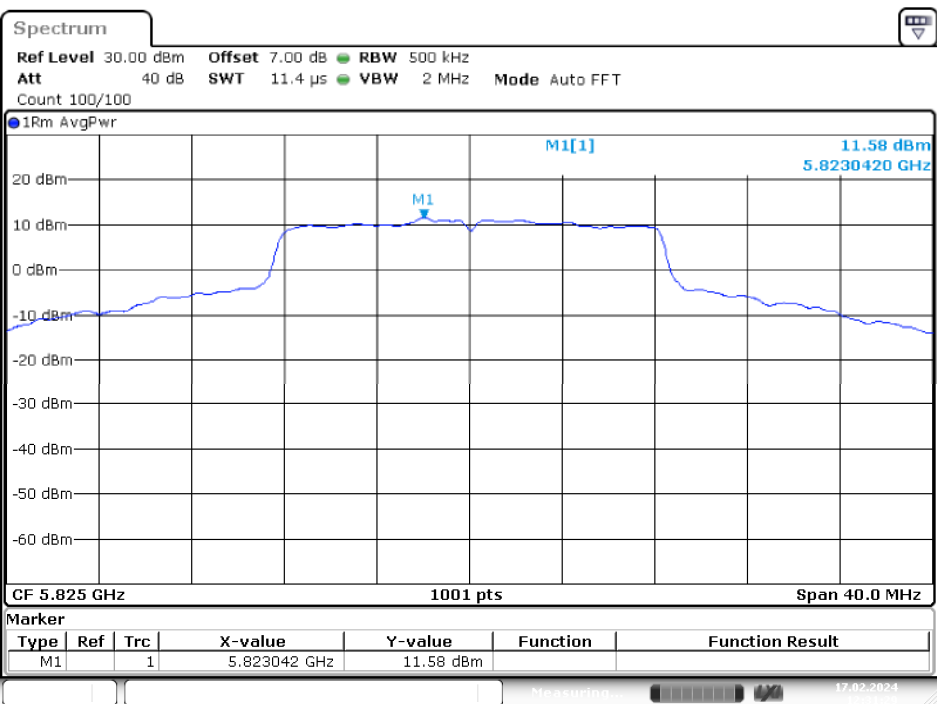

Date: 17.FEB.2024 12:31:29


IEEE 802.11ac VHT20 Mode / 5725 ~ 5850MHz

5745MHz

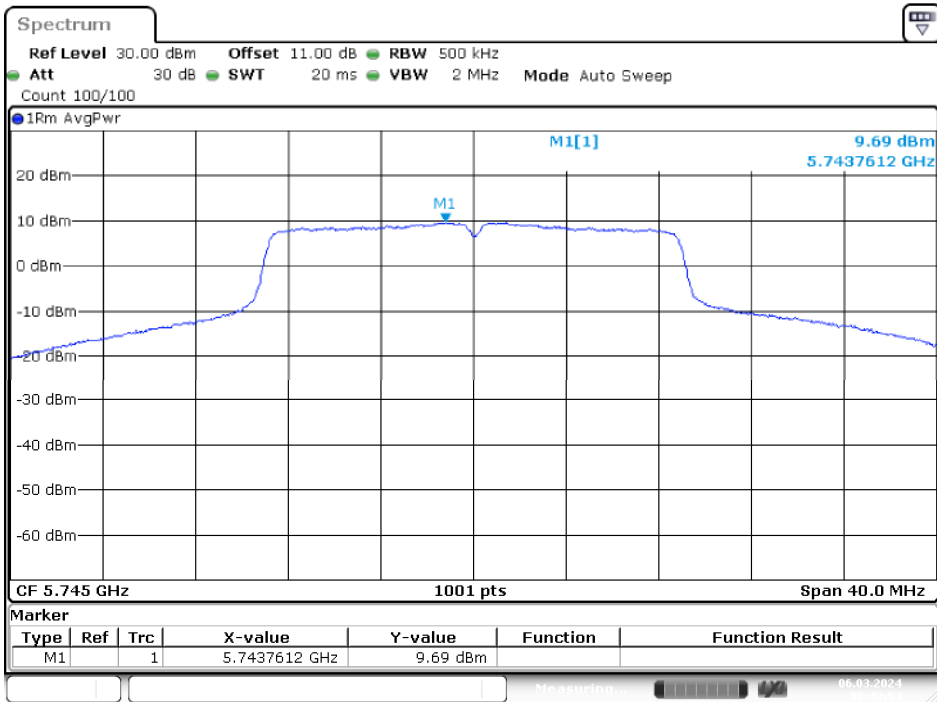

Date: 6.MAR.2024 08:43:53

5785MHz

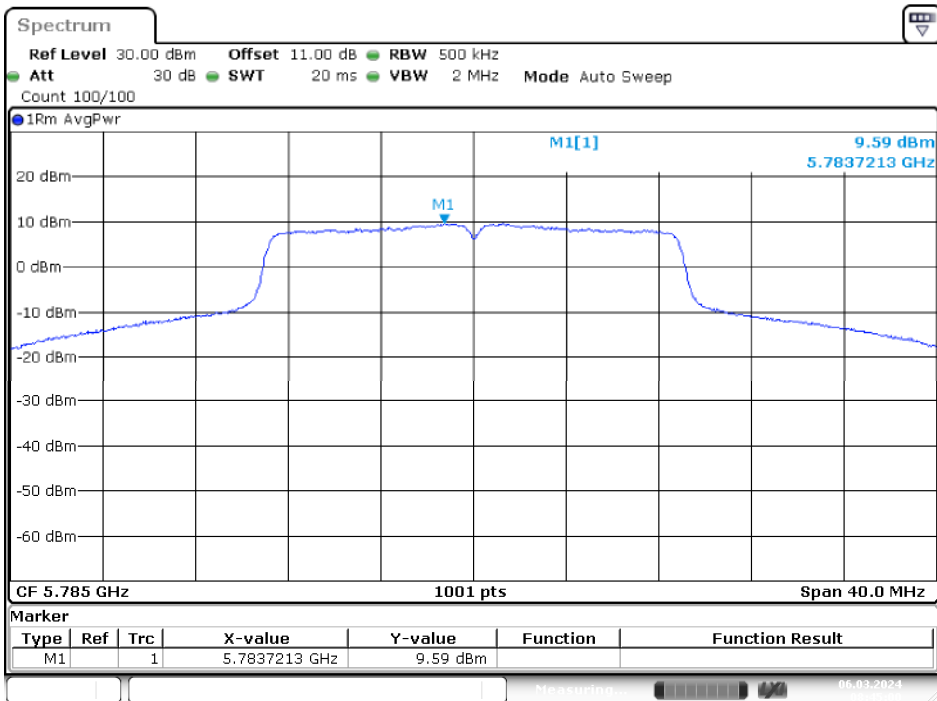

Date: 6.MAR.2024 08:45:00