



# FCC Co-Location Test Report

**FCC ID** : HDC-17600079  
**Equipment** : WiFi 7 10G Mesh AP  
**Model No.** : SDG-8733A  
**Brand Name** : Adtran  
**Applicant** : Adtran  
**Address** : 901 Explorer Boulevard, Huntsville, Alabama,  
United States, 35806-2807  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Jul. 12, 2024  
**Tested Date** : Sep. 20 ~ Oct. 24, 2024

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Along Chen

Along Chen / Assistant Manager

Approved by:

Gary Chang

Gary Chang / Manager

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	6
1.3	Test Standards .....	7
1.4	Reference Guidance .....	7
1.5	Deviation from Test Standard and Measurement Procedure.....	7
1.6	Measurement Uncertainty .....	7
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>8</b>
2.1	Testing Facility .....	8
2.2	The Worst Test Modes and Channel Details .....	8
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>9</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	9
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>13</b>

### Appendix A. Unwanted Emissions Into Restricted Frequency Bands

## Release Record

Report No.	Version	Description	Issued Date
FR471203CO	Rev. 01	Initial issue	Feb. 18, 2025

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 52.79 (Margin -1.21dB) - AV	Pass
15.209			

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 1 General Description

### 1.1 Information

#### 1.1.1 Specification of the Equipment under Test (EUT)

WLAN	
<b>Operating Frequency</b>	802.11b/g/n/ax/be: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax/be 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 MHz ~ 5825 MHz 5955 MHz ~ 7115 MHz
<b>Modulation Type</b>	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax/be: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM / 4096QAM)

The device contains one certified BT module as below information.

BT	
<b>FCC ID</b>	Y82-DA14531MOD
<b>Operating Frequency</b>	2402 MHz ~ 2480 MHz
<b>Modulation Type</b>	GFSK

#### 1.1.2 Antenna Details

Wi-Fi 2.4GHz / 5GHz

Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)				
			2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
DB1	Dipole	UFL	3.032	4.184	4.184	4.317	4.428
DB2	Dipole	UFL	3.005	3.183	3.182	3.722	3.722
5G3	Dipole	UFL	---	4.413	4.413	4.418	4.418

Wi-Fi 6GHz

Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
			5925~6425	6425~6525	6525~6875	6875~7125
6G1	PIFA	UFL	5.27	4.187	3.429	4.02
6G2	PIFA	UFL	3.968	3.746	3.892	3.426
6G3	Dipole	UFL	4.275	3.977	3.328	3.058

BT

Type	Connector	Gain (dBi)
PIFA	--	-0.5

#### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	15Vdc from adapter
-------------------	--------------------

## 1.2 The Equipment List

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Sep. 20 ~ Sep. 23, 2024				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 05, 2024	Mar. 04, 2025
Spectrum Analyzer	R&S	FSV40	101498	Nov. 23, 2023	Nov. 22, 2024
Loop Antenna	R&S	HFH2-Z2	100330	Oct. 31, 2023	Oct. 30, 2024
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 09, 2024	Aug. 08, 2025
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 27, 2023	Nov. 26, 2024
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 30, 2023	Oct. 29, 2024
Preamplifier	EMC	EMC02325	980225	Jun. 17, 2024	Jun. 16, 2025
Preamplifier	EMC	EMC118A45SE	980898	Jul. 05, 2024	Jul. 04, 2025
Preamplifier	EMC	EMC184045SE	980903	Jul. 30, 2024	Jul. 29, 2025
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 03, 2023	Oct. 02, 2024
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 03, 2023	Oct. 02, 2024
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 03, 2023	Oct. 02, 2024
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 03, 2023	Oct. 02, 2024
RF Cable	EMC	EMC104-35M-35M-8000	210920	Oct. 03, 2023	Oct. 02, 2024
RF Cable	EMC	EMC104-35M-35M-3000	210922	Oct. 03, 2023	Oct. 02, 2024
Attenuator	Pasternack	PE7005-10	10-1	Oct. 05, 2023	Oct. 04, 2024
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 05, 2023	Oct. 04, 2024
HIGHPASS FILTER 7.5-18G	STI	STI15-9722	STI-HP7.5G-A	Oct. 05, 2023	Oct. 04, 2024
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Oct. 24, 2024				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2024	Apr. 17, 2025
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2023	Nov. 20, 2024
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2023	Nov. 20, 2024
Attenuator	Pasternack	PE7005-10	10-3	Sep. 20, 2024	Sep. 19, 2025

Note: Calibration Interval of instruments listed above is one year.

## 1.3 Test Standards

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

## 1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 987594 D02 U-NII 6GHz EMC Measurement v02r01

## 1.5 Deviation from Test Standard and Measurement Procedure

None

## 1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission ≤ 1GHz	±3.41 dB
Unwanted Emission > 1GHz	±4.59 dB

## 2 Test Configuration

### 2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions≤ 1GHz	
Unwanted Emissions >1GHz	2.4G 11b CH06 + BLE 1M CH39+ 5G 11a CH149 + 6G 11be EHT160 CH143
Conducted Emissions	

**NOTE:**

1. Two adapters (LUCENT TRANS & PHIHONG) had been covered during the pretest and found that PHIHONG adapter was the worst case for radiated emission test and LUCENT TRANS adapter was the worst case for conducted emission test.

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**

Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.15 - 5.25 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.725 - 5.850 GHz	All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Un-restricted band emissions above 1GHz Limit		
Operating Band	PK Limit	AV Limit
5.925 – 7.125 GHz	e.i.r.p. -7 dBm [88.2 dBuV/m@3m]	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).		

### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup


#### Radiated Emissions below 1 GHz

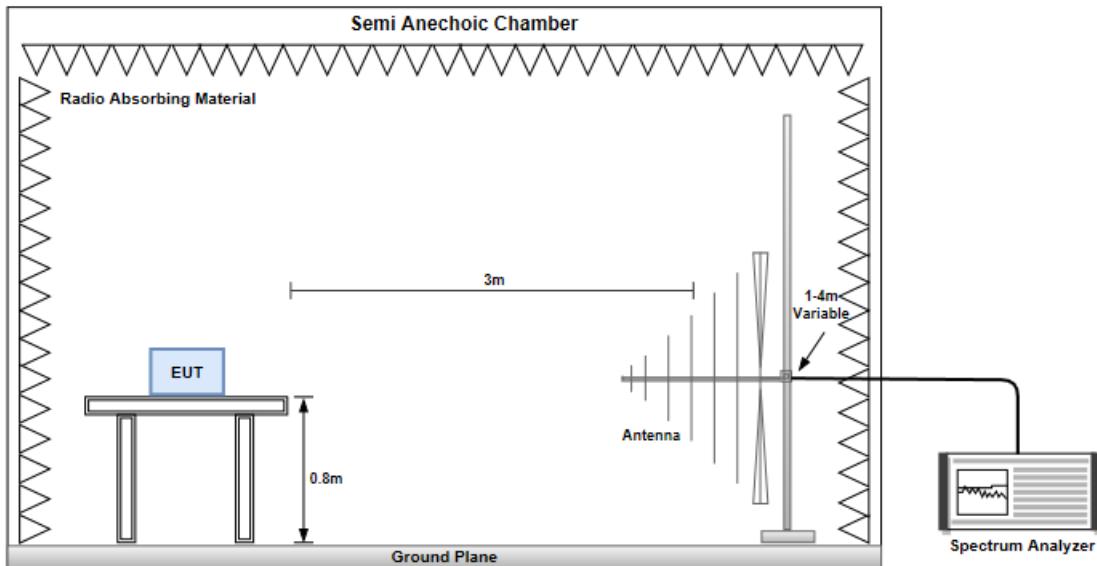

#### Radiated Emissions above 1 GHz

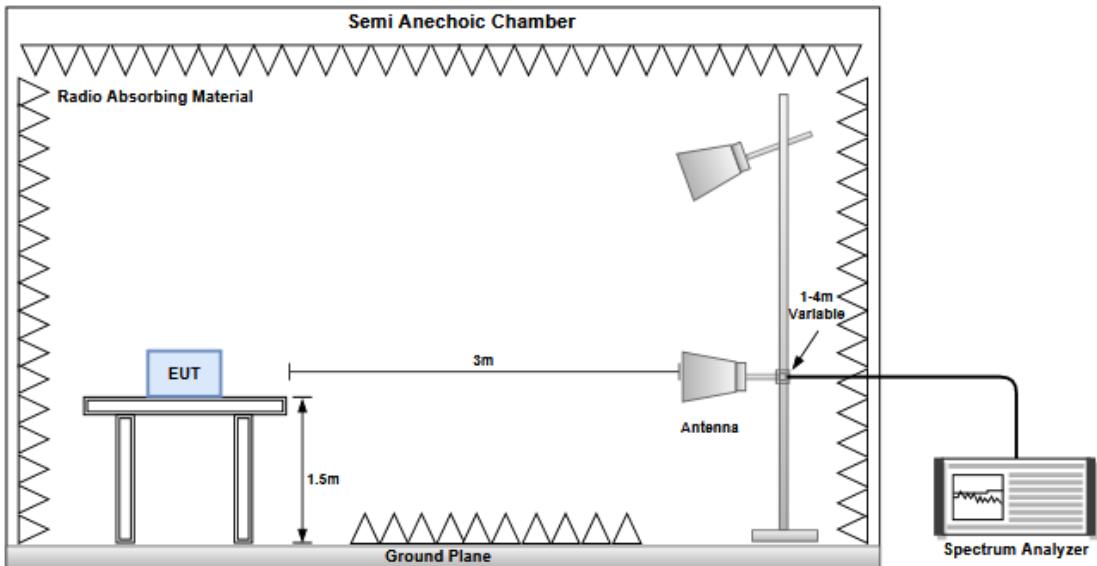

#### Transmitter Conducted Unwanted Emissions (30MHz~40GHz)

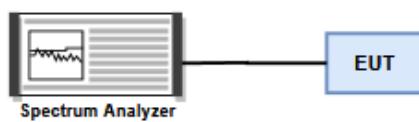

### 3.1.4 Test Results

Refer to Appendix A.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### Linkou

Tel: 886-2-2601-1640  
No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### Kwei Shan

Tel: 886-3-271-8666  
No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)


### Kwei Shan Site II

Tel: 886-3-271-8640  
No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666  
Fax: 886-3-318-0345  
Email: ICC\_Service@icertifi.com.tw

—END—

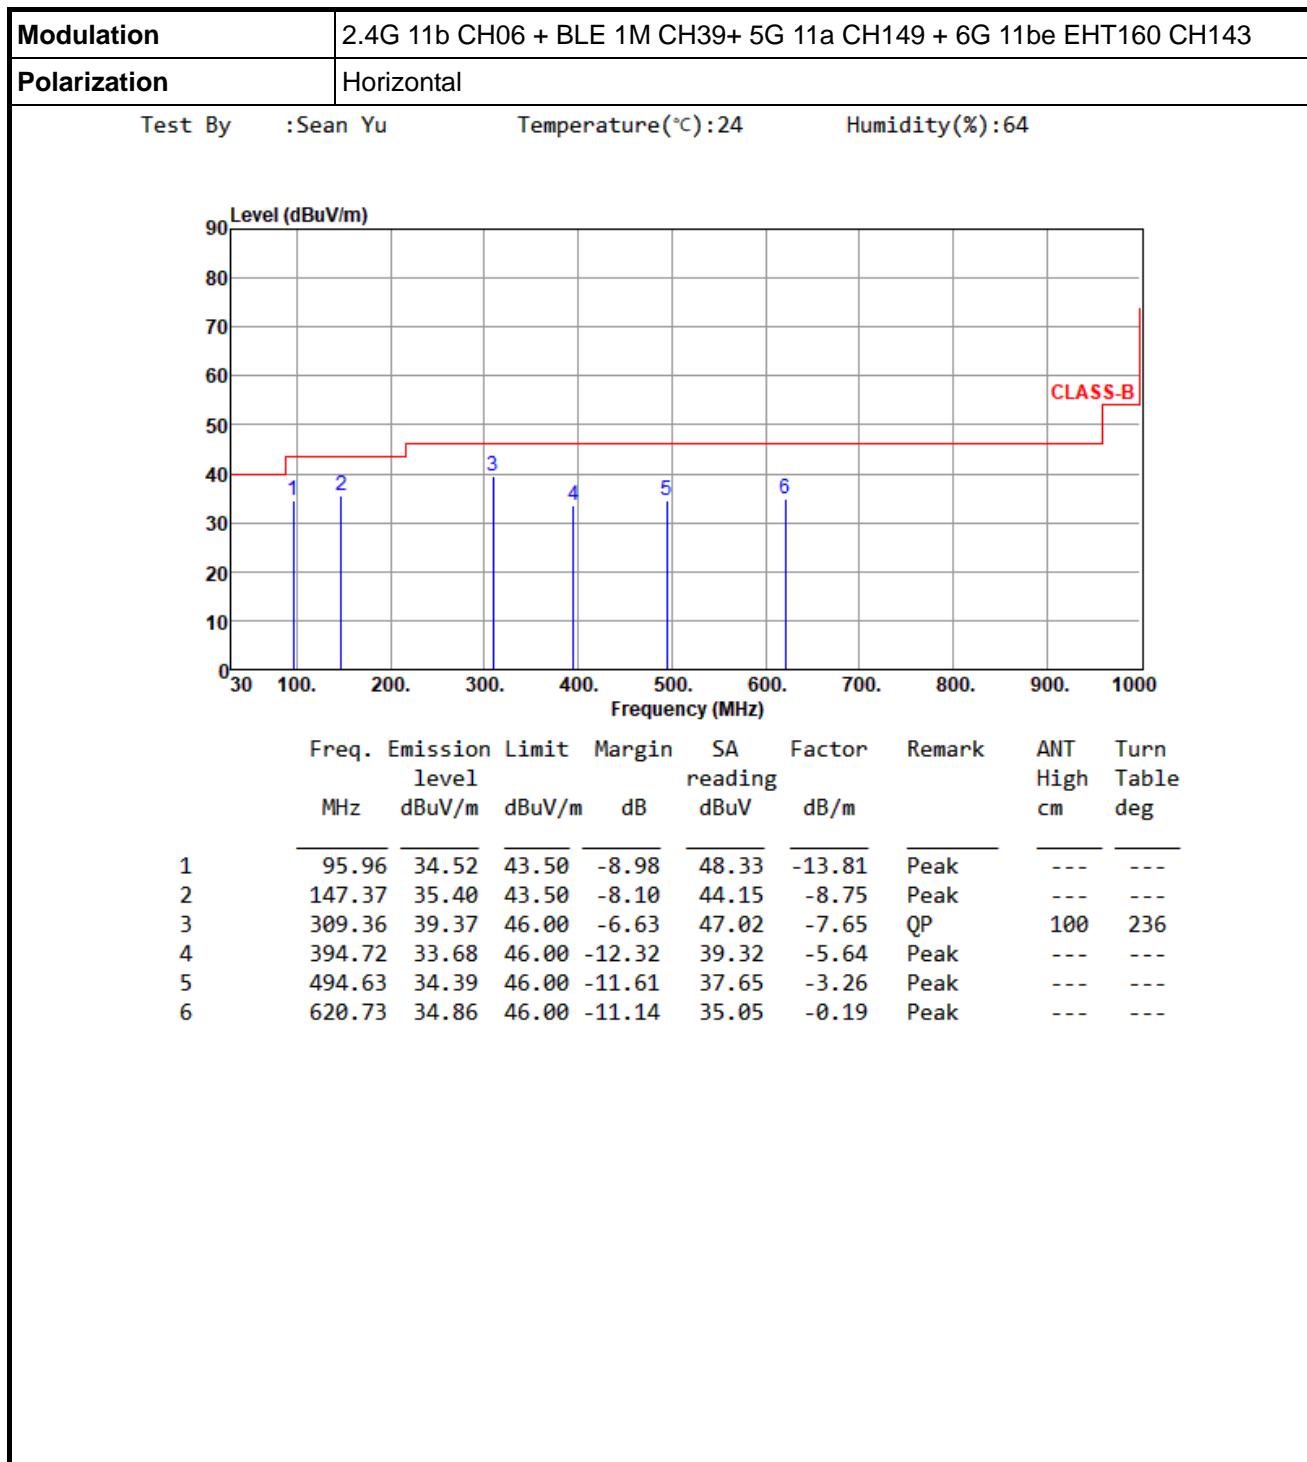
**Unwanted Emissions (Below 1GHz)**


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

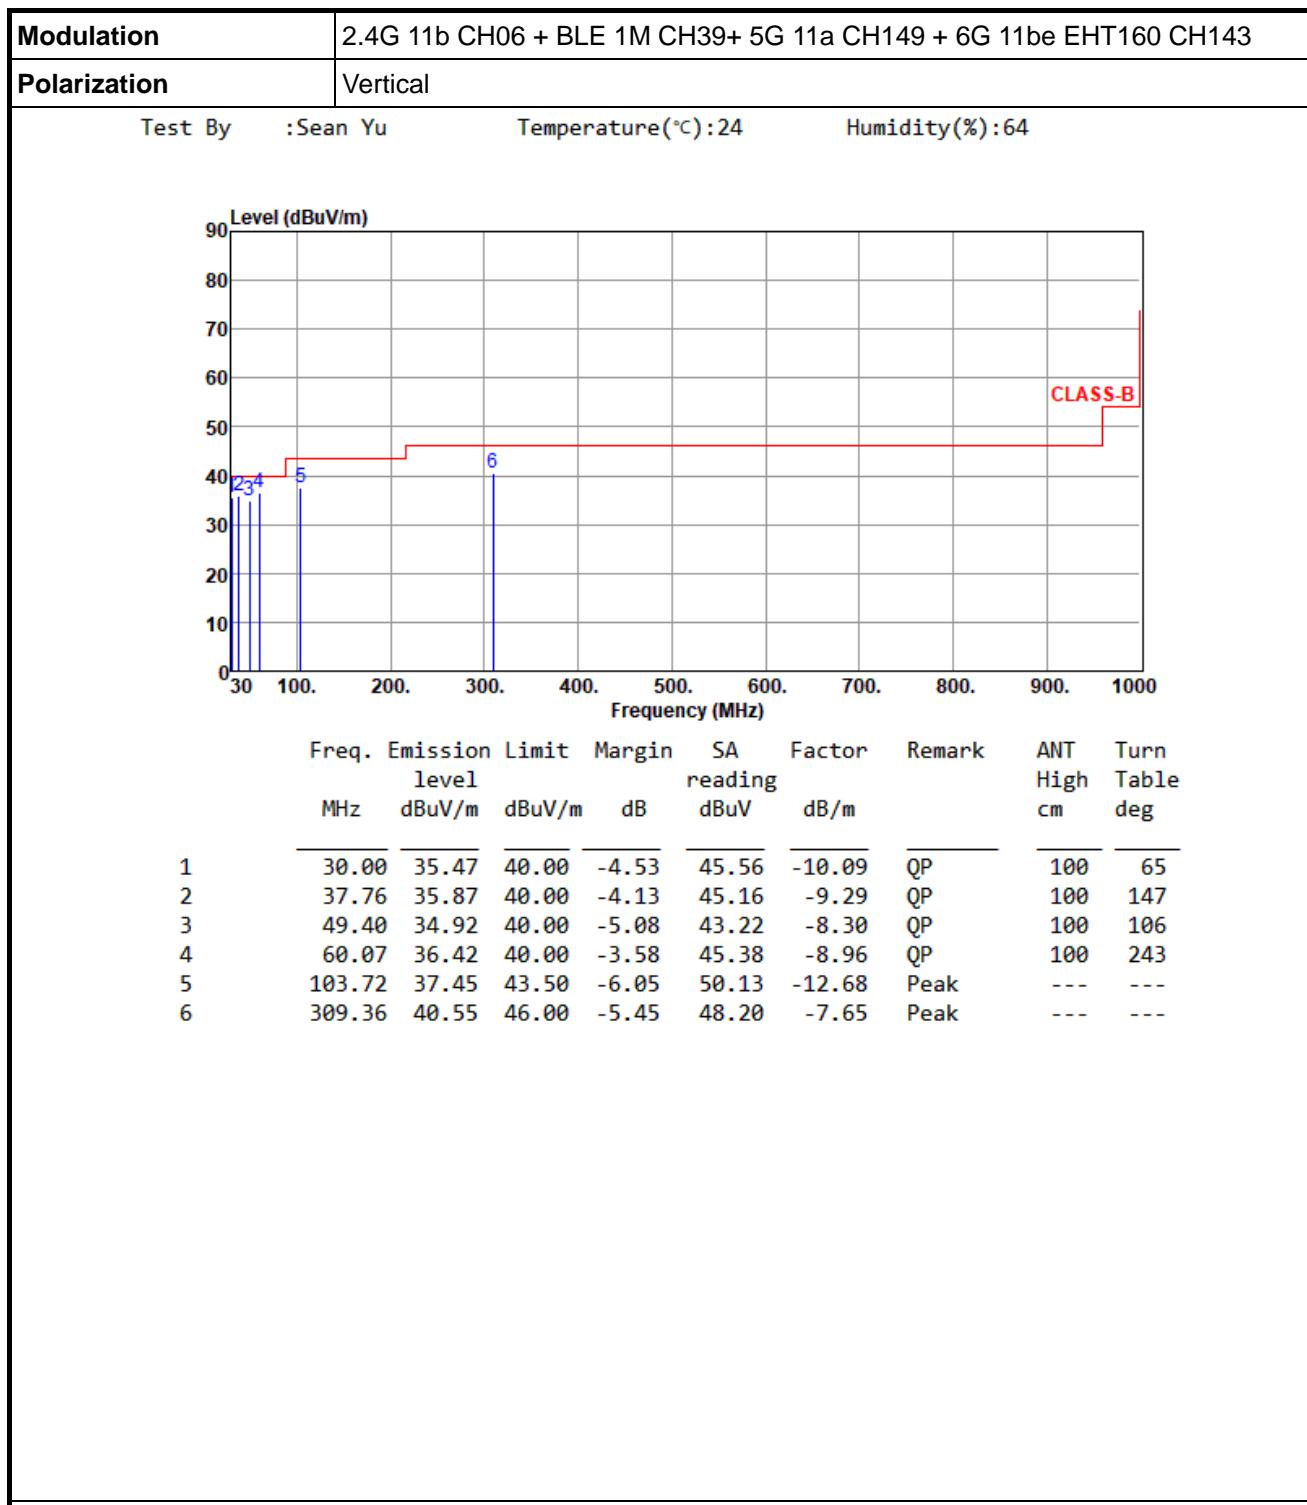


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

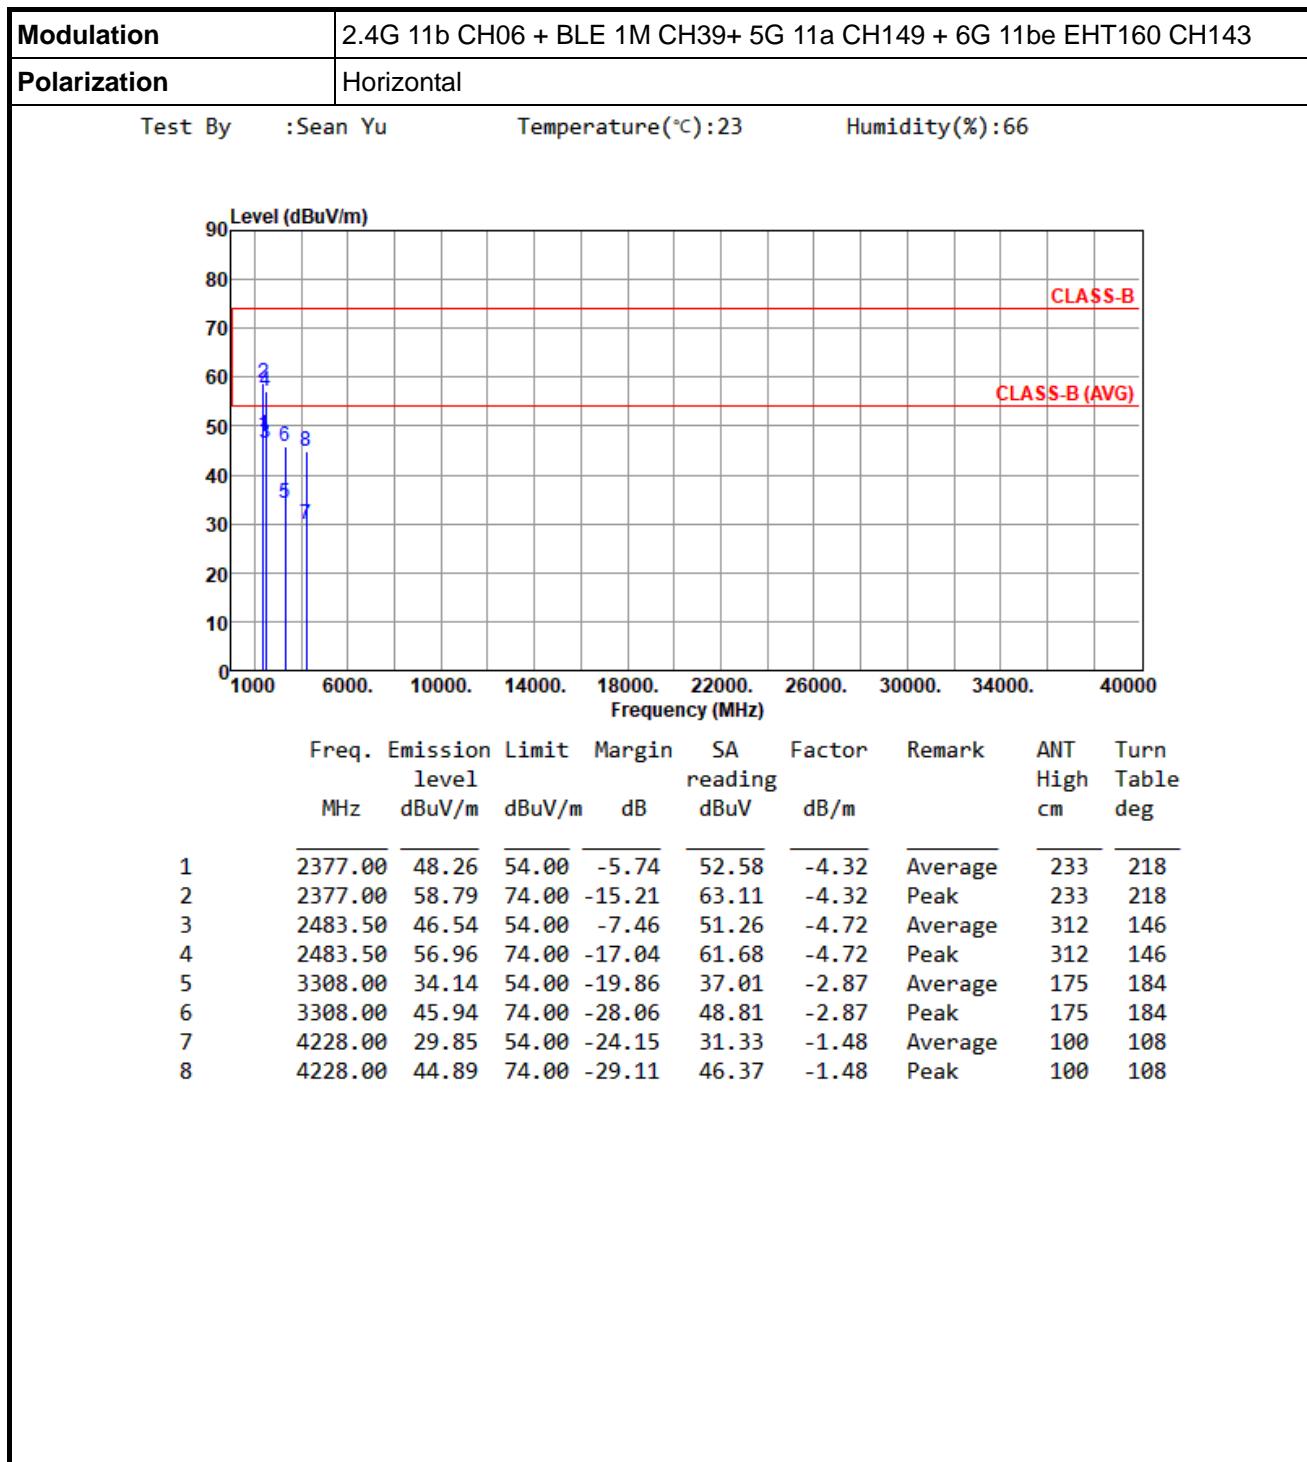**Unwanted Emissions (Above 1GHz)**


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
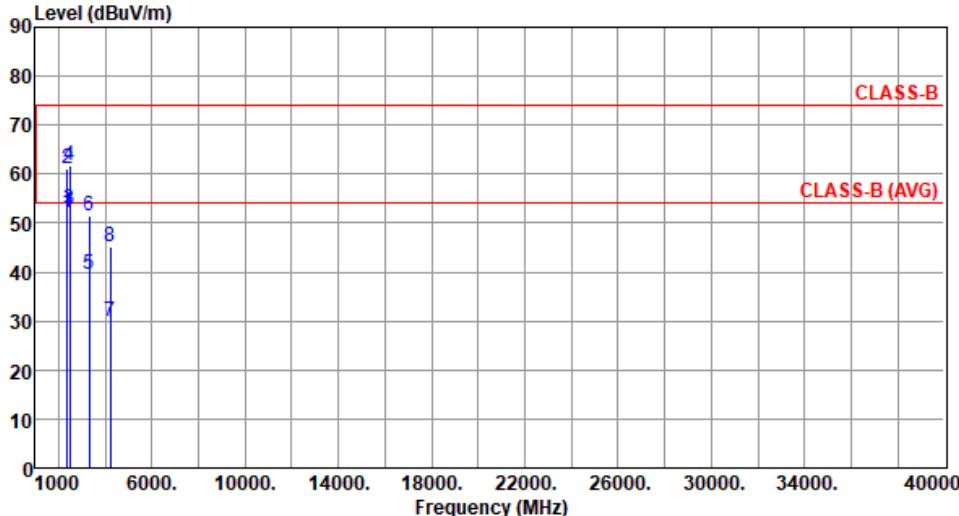
<b>Modulation</b>	2.4G 11b CH06 + BLE 1M CH39+ 5G 11a CH149 + 6G 11be EHT160 CH143																																																																																																											
<b>Polarization</b>	Vertical																																																																																																											
Test By	:Sean Yu			Temperature (°C):23			Humidity (%):66																																																																																																					
																																																																																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; width: 10%;">Freq.</th> <th style="text-align: left; width: 10%;">Emission</th> <th style="text-align: left; width: 10%;">Limit</th> <th style="text-align: left; width: 10%;">Margin</th> <th style="text-align: left; width: 10%;">SA</th> <th style="text-align: left; width: 10%;">Factor</th> <th style="text-align: left; width: 10%;">Remark</th> <th style="text-align: left; width: 10%;">ANT</th> <th style="text-align: left; width: 10%;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB/m</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">2377.00</td> <td style="text-align: center;">52.06</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-1.94</td> <td style="text-align: center;">56.38</td> <td style="text-align: center;">-4.32</td> <td style="text-align: center;">Average</td> <td style="text-align: center;">183</td> <td style="text-align: center;">344</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">2377.00</td> <td style="text-align: center;">61.06</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-12.94</td> <td style="text-align: center;">65.38</td> <td style="text-align: center;">-4.32</td> <td style="text-align: center;">Peak</td> <td style="text-align: center;">183</td> <td style="text-align: center;">344</td> </tr> <tr> <td style="text-align: center;"><b>3</b></td> <td style="text-align: center;"><b>2483.50</b></td> <td style="text-align: center;"><b>52.79</b></td> <td style="text-align: center;"><b>54.00</b></td> <td style="text-align: center;"><b>-1.21</b></td> <td style="text-align: center;"><b>57.51</b></td> <td style="text-align: center;"><b>-4.72</b></td> <td style="text-align: center;"><b>Average</b></td> <td style="text-align: center;"><b>136</b></td> <td style="text-align: center;"><b>347</b></td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">2483.50</td> <td style="text-align: center;">61.69</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-12.31</td> <td style="text-align: center;">66.41</td> <td style="text-align: center;">-4.72</td> <td style="text-align: center;">Peak</td> <td style="text-align: center;">136</td> <td style="text-align: center;">347</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">3308.00</td> <td style="text-align: center;">39.50</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-14.50</td> <td style="text-align: center;">42.37</td> <td style="text-align: center;">-2.87</td> <td style="text-align: center;">Average</td> <td style="text-align: center;">211</td> <td style="text-align: center;">221</td> </tr> <tr> <td style="text-align: center;">6</td> <td style="text-align: center;">3308.00</td> <td style="text-align: center;">51.63</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-22.37</td> <td style="text-align: center;">54.50</td> <td style="text-align: center;">-2.87</td> <td style="text-align: center;">Peak</td> <td style="text-align: center;">211</td> <td style="text-align: center;">221</td> </tr> <tr> <td style="text-align: center;">7</td> <td style="text-align: center;">4228.00</td> <td style="text-align: center;">29.78</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-24.22</td> <td style="text-align: center;">31.26</td> <td style="text-align: center;">-1.48</td> <td style="text-align: center;">Average</td> <td style="text-align: center;">100</td> <td style="text-align: center;">178</td> </tr> <tr> <td style="text-align: center;">8</td> <td style="text-align: center;">4228.00</td> <td style="text-align: center;">45.18</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">-28.82</td> <td style="text-align: center;">46.66</td> <td style="text-align: center;">-1.48</td> <td style="text-align: center;">Peak</td> <td style="text-align: center;">100</td> <td style="text-align: center;">178</td> </tr> </tbody> </table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dBuV	dB/m	High	Table	1	2377.00	52.06	54.00	-1.94	56.38	-4.32	Average	183	344	2	2377.00	61.06	74.00	-12.94	65.38	-4.32	Peak	183	344	<b>3</b>	<b>2483.50</b>	<b>52.79</b>	<b>54.00</b>	<b>-1.21</b>	<b>57.51</b>	<b>-4.72</b>	<b>Average</b>	<b>136</b>	<b>347</b>	4	2483.50	61.69	74.00	-12.31	66.41	-4.72	Peak	136	347	5	3308.00	39.50	54.00	-14.50	42.37	-2.87	Average	211	221	6	3308.00	51.63	74.00	-22.37	54.50	-2.87	Peak	211	221	7	4228.00	29.78	54.00	-24.22	31.26	-1.48	Average	100	178	8	4228.00	45.18	74.00	-28.82	46.66	-1.48	Peak	100	178
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																				
MHz	level	dBuV/m	dB	reading	dBuV	dB/m	High	Table																																																																																																				
1	2377.00	52.06	54.00	-1.94	56.38	-4.32	Average	183	344																																																																																																			
2	2377.00	61.06	74.00	-12.94	65.38	-4.32	Peak	183	344																																																																																																			
<b>3</b>	<b>2483.50</b>	<b>52.79</b>	<b>54.00</b>	<b>-1.21</b>	<b>57.51</b>	<b>-4.72</b>	<b>Average</b>	<b>136</b>	<b>347</b>																																																																																																			
4	2483.50	61.69	74.00	-12.31	66.41	-4.72	Peak	136	347																																																																																																			
5	3308.00	39.50	54.00	-14.50	42.37	-2.87	Average	211	221																																																																																																			
6	3308.00	51.63	74.00	-22.37	54.50	-2.87	Peak	211	221																																																																																																			
7	4228.00	29.78	54.00	-24.22	31.26	-1.48	Average	100	178																																																																																																			
8	4228.00	45.18	74.00	-28.82	46.66	-1.48	Peak	100	178																																																																																																			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Ambient Condition</b>	23°C / 65%	<b>Tested By</b>	Akun Chung
--------------------------	------------	------------------	------------

