




5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD


5700MHz

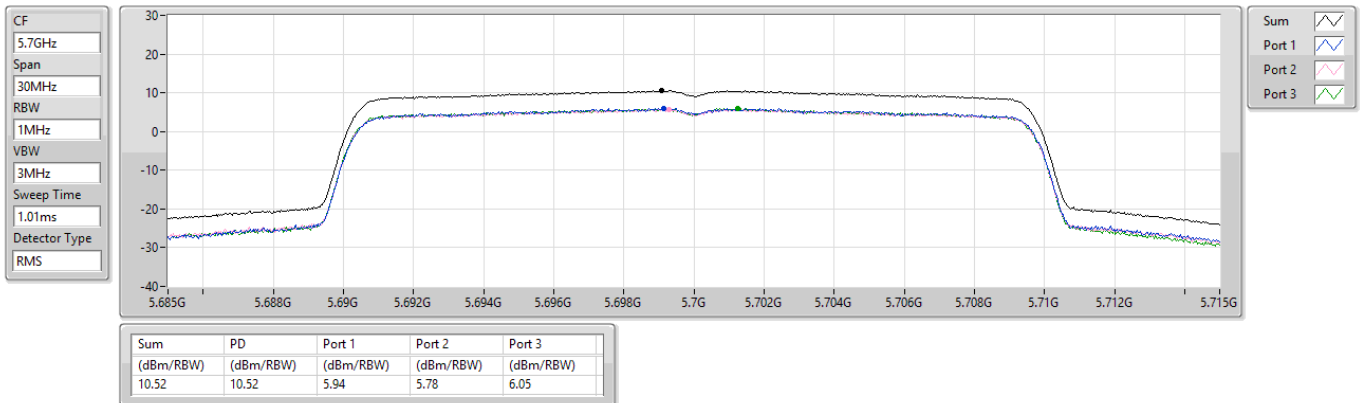

5.47-5.725GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD


5720MHz Straddle 5.47-5.725GHz

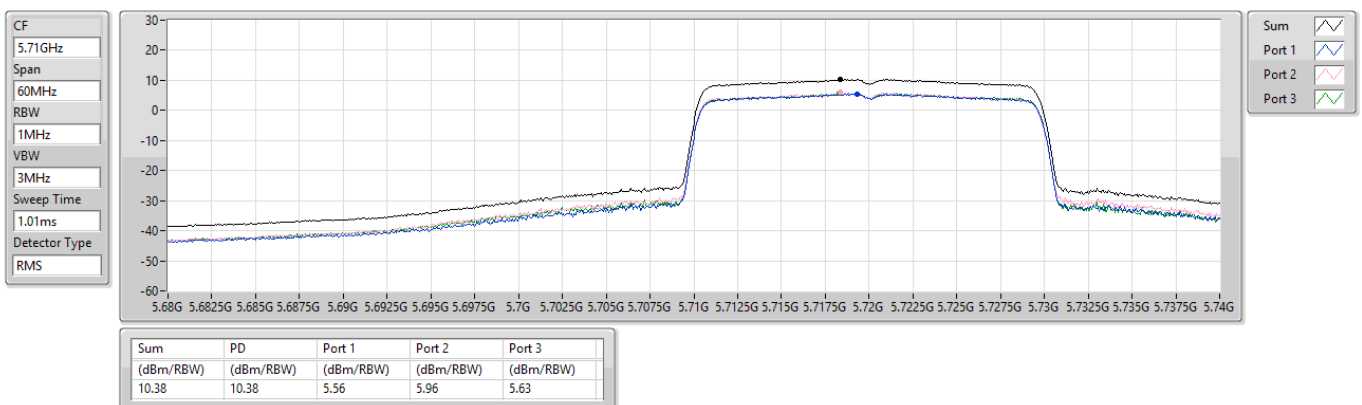

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD


5720MHz Straddle 5.725-5.85GHz

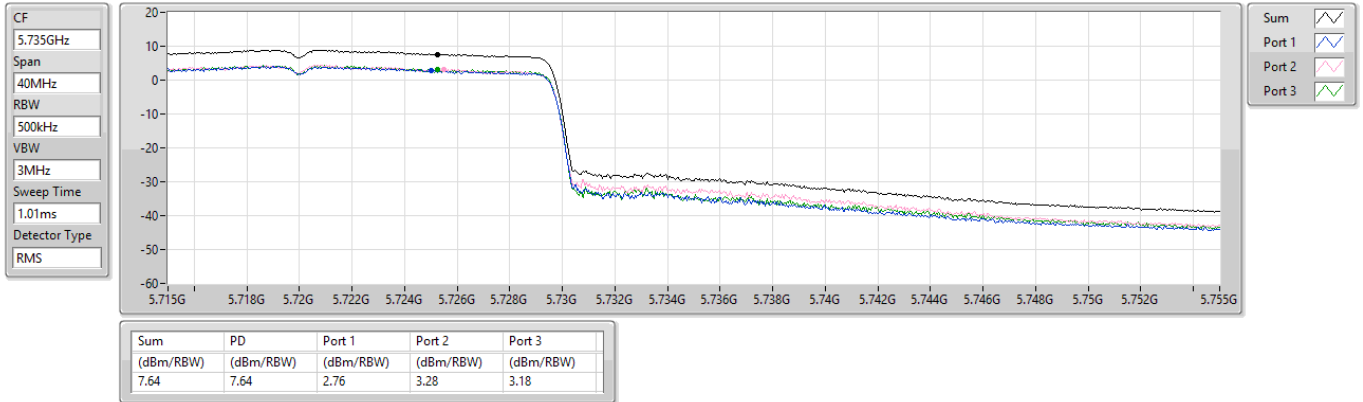

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD

5745MHz

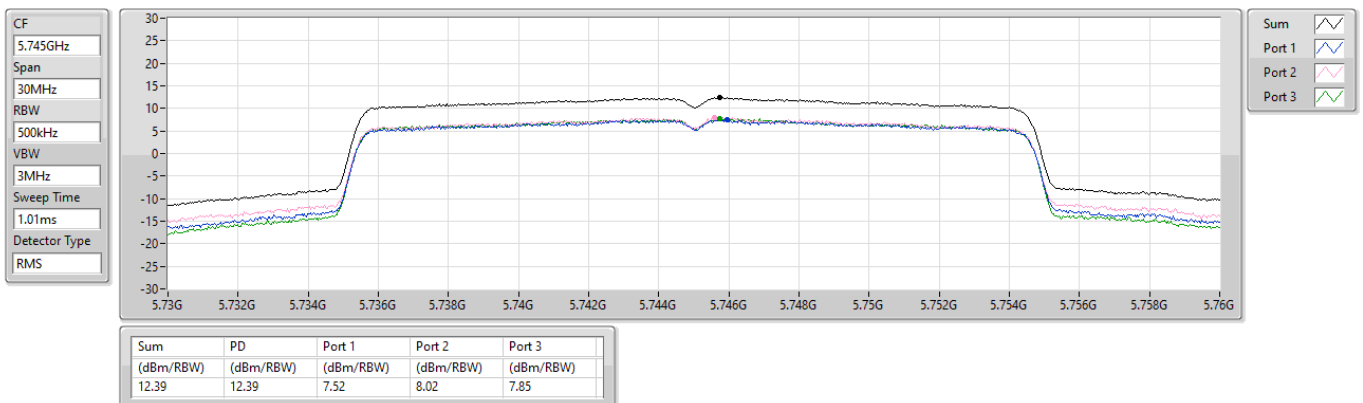




5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD


5785MHz

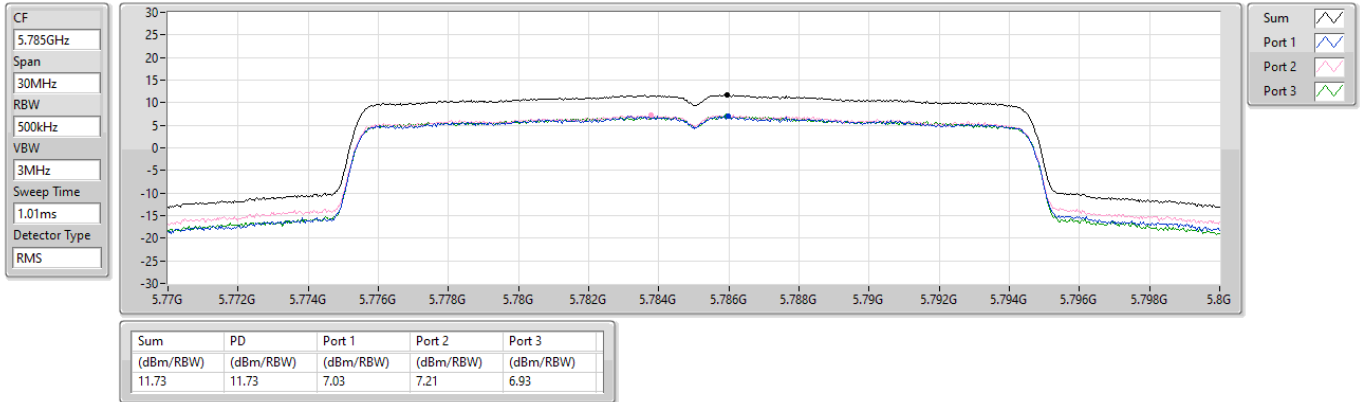

5.725-5.85GHz_802.11be EHT20_Nss1,(MCS0)_3TX

PSD

5825MHz

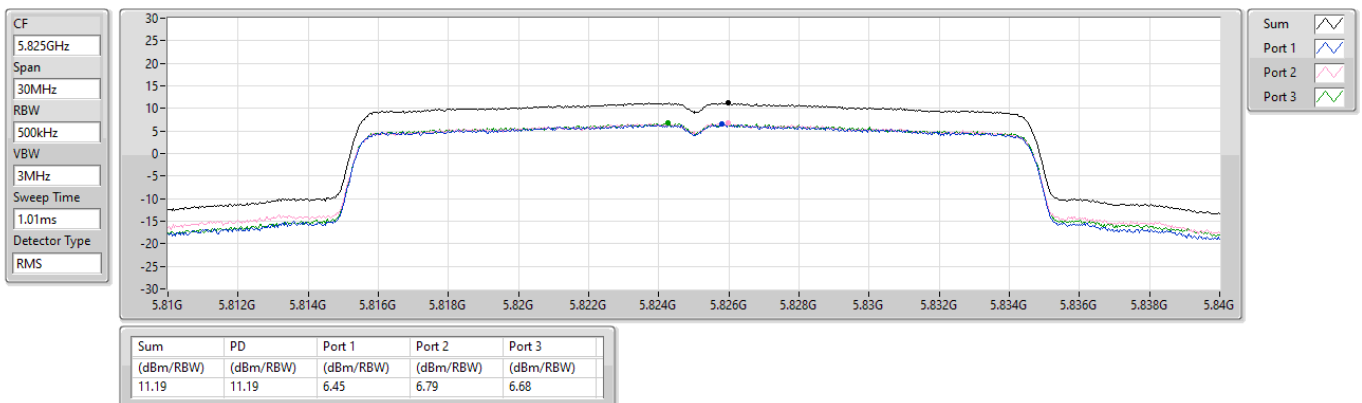


5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5190MHz

CF
5.19GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

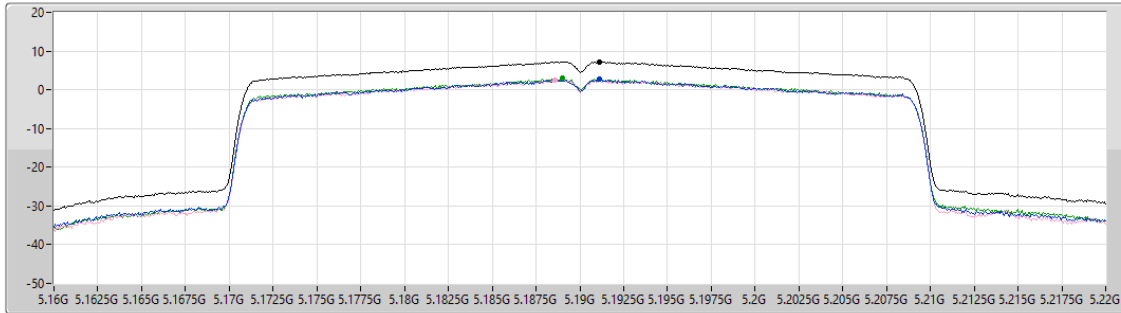

Sum
Port 1
Port 2
Port 3


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
7.25	7.25	2.65	2.58	2.95

5.15-5.25GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5230MHz

CF
5.23GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

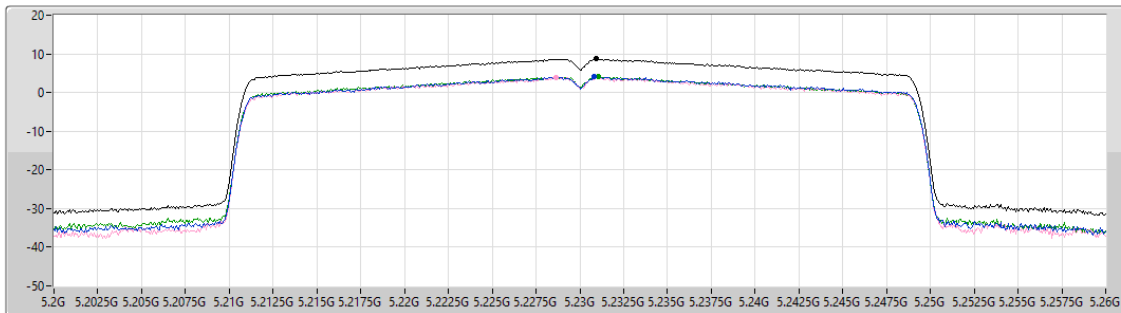


Sum
Port 1
Port 2
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.68	8.68	4.09	3.89	4.06

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD


5270MHz

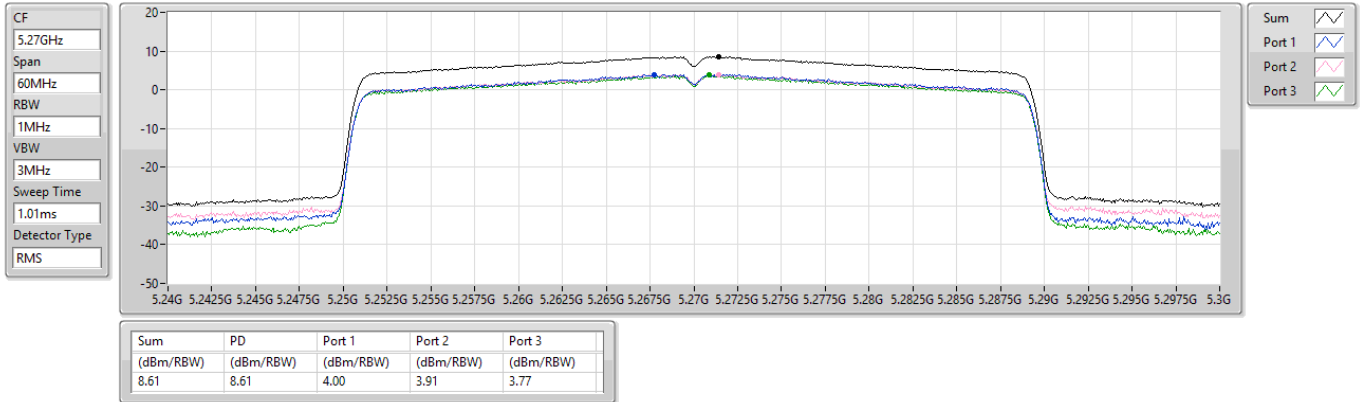

5.25-5.35GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5310MHz

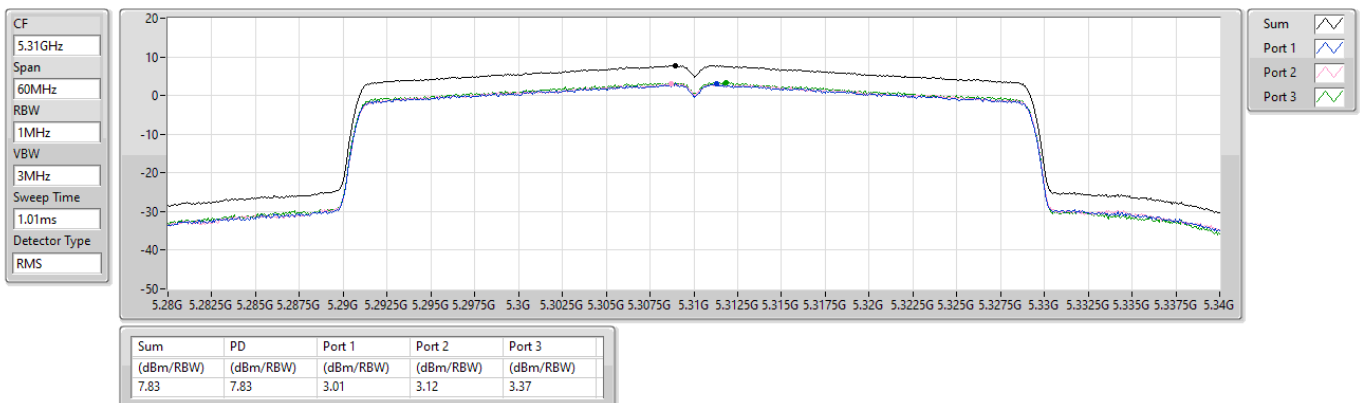




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD


5510MHz

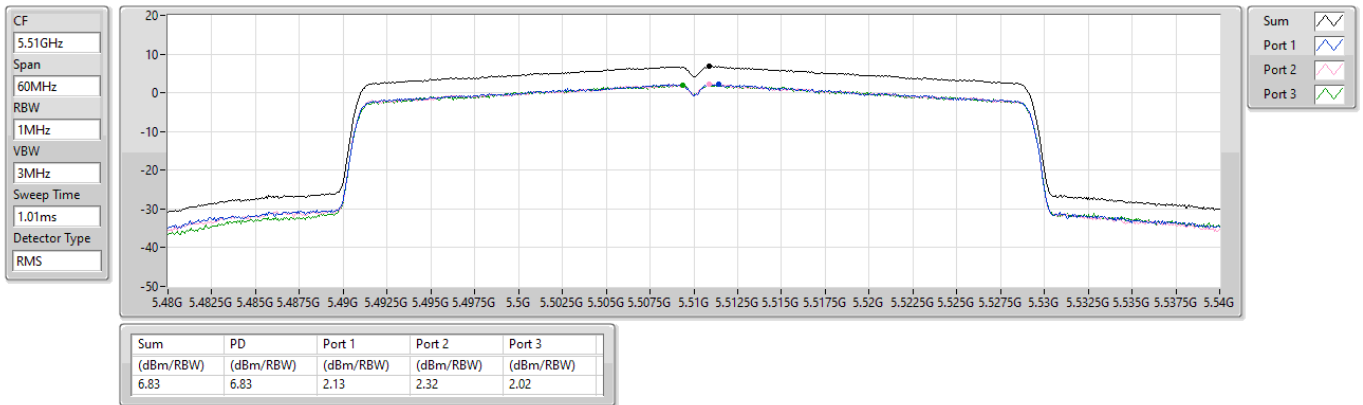

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5590MHz

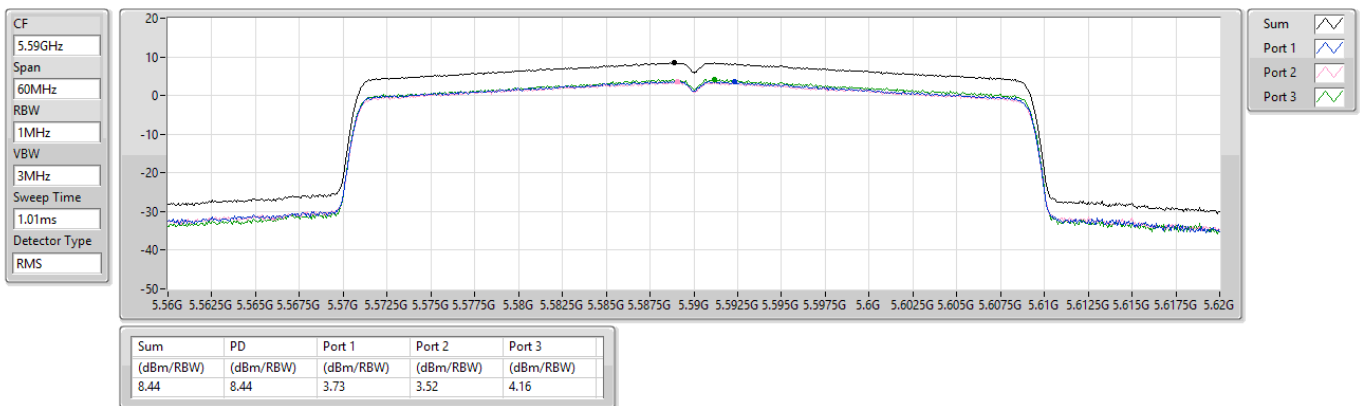




5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5670MHz

CF
5.67GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

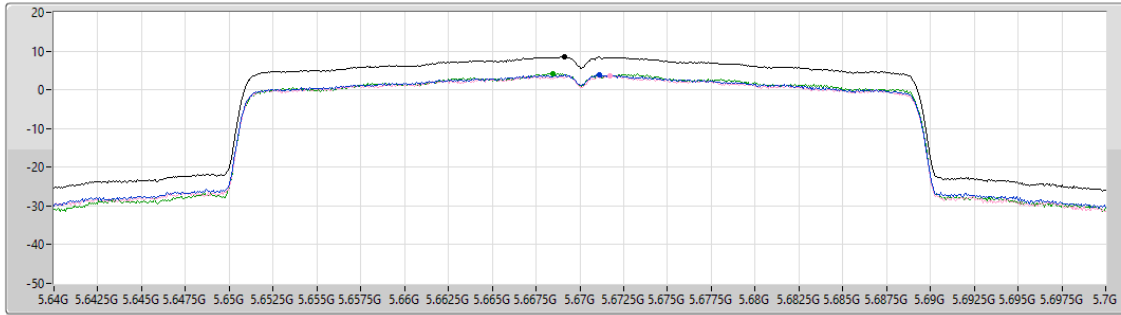

Sum
Port 1
Port 2
Port 3


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.48	8.48	3.90	3.57	4.13

5.47-5.725GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD

5710MHz Straddle 5.47-5.725GHz

CF
5.69GHz
Span
140MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

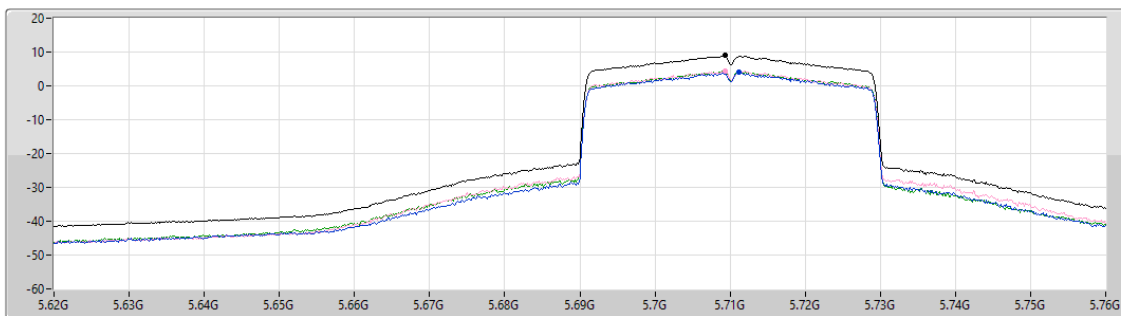

Sum
Port 1
Port 2
Port 3


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.91	8.91	3.93	4.51	4.40



5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD


5710MHz Straddle 5.725-5.85GHz

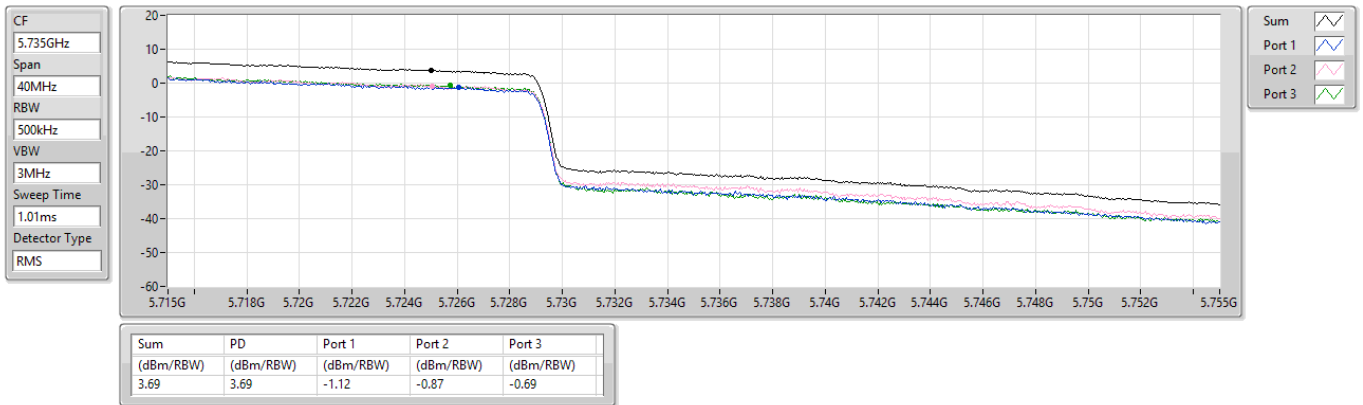

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD


5755MHz

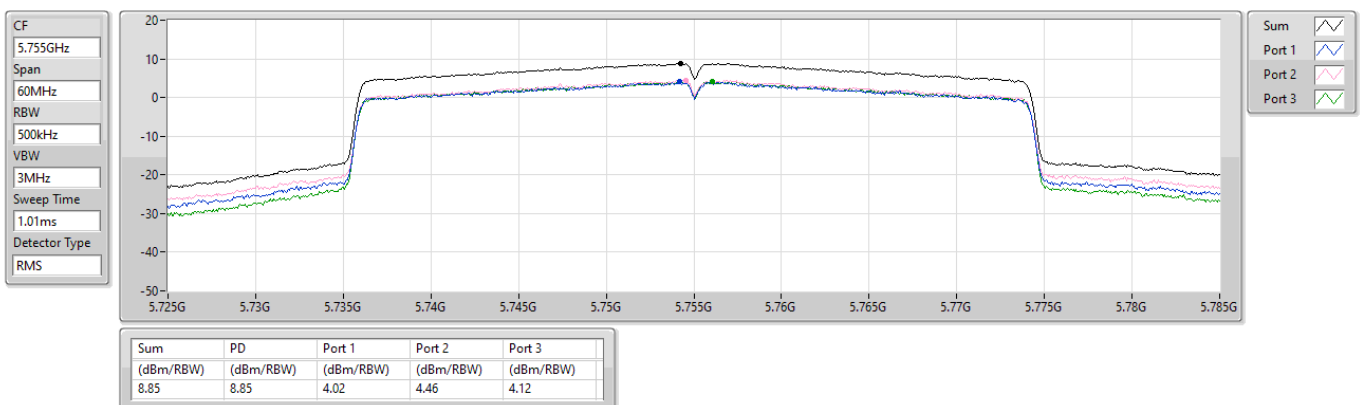

5.725-5.85GHz_802.11be EHT40_Nss1,(MCS0)_3TX

PSD


5795MHz

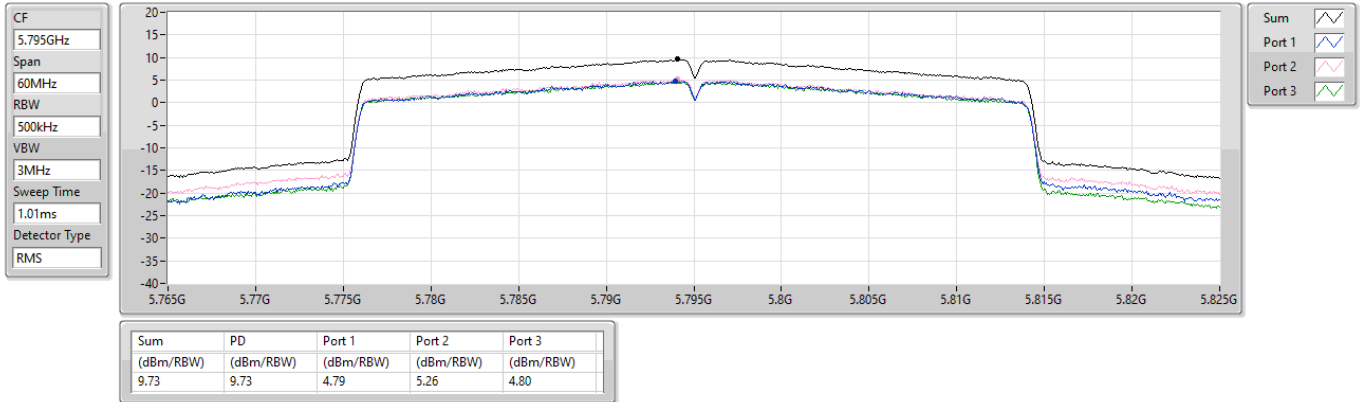

5.15-5.25GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD

5210MHz

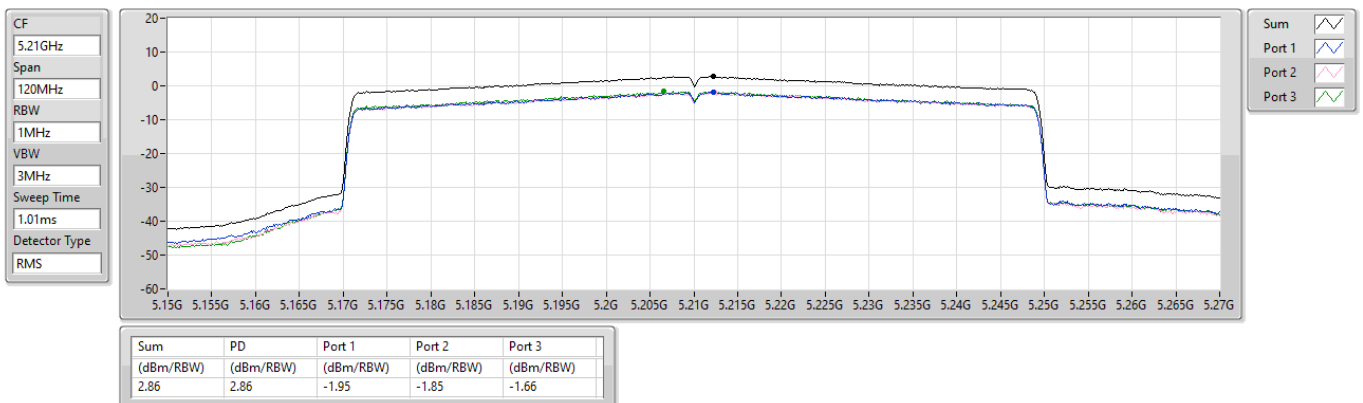


5.25-5.35GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD

5290MHz

CF
5.29GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

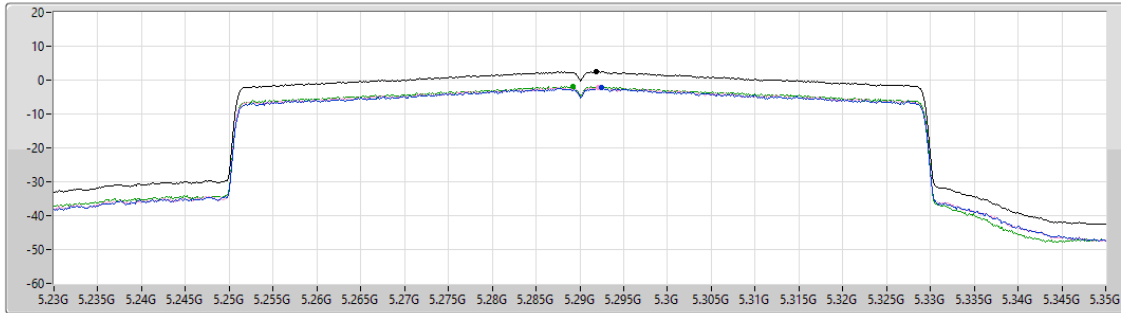

Sum
Port 1
Port 2
Port 3


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.50	2.50	-2.32	-2.11	-1.90

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD

5530MHz

CF
5.53GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

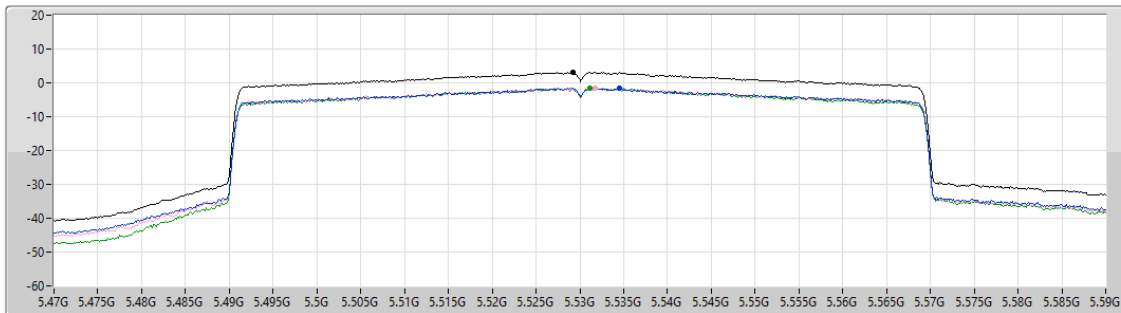


Sum
Port 1
Port 2
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
3.15	3.15	-1.48	-1.42	-1.48

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD


5610MHz

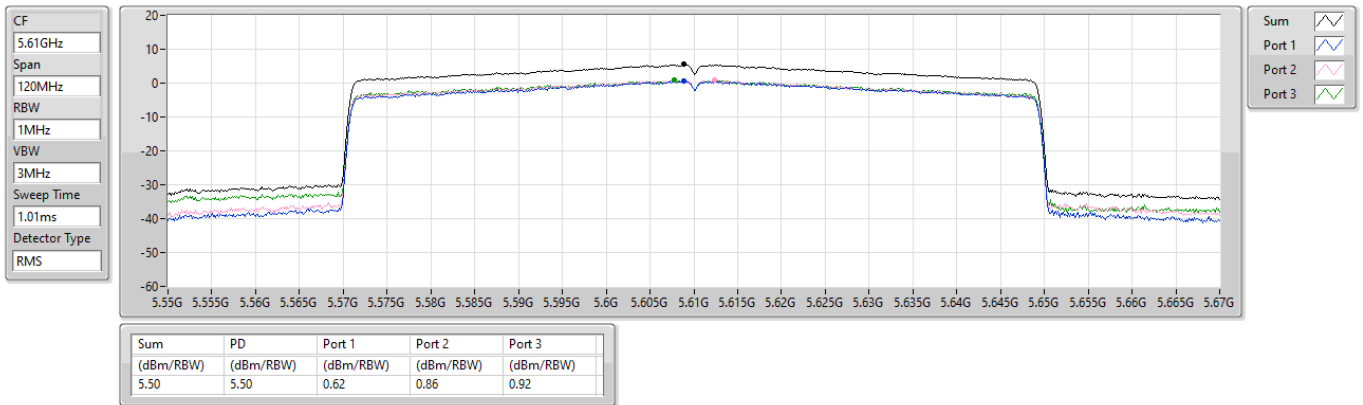

5.47-5.725GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD


5690MHz Straddle 5.47-5.725GHz

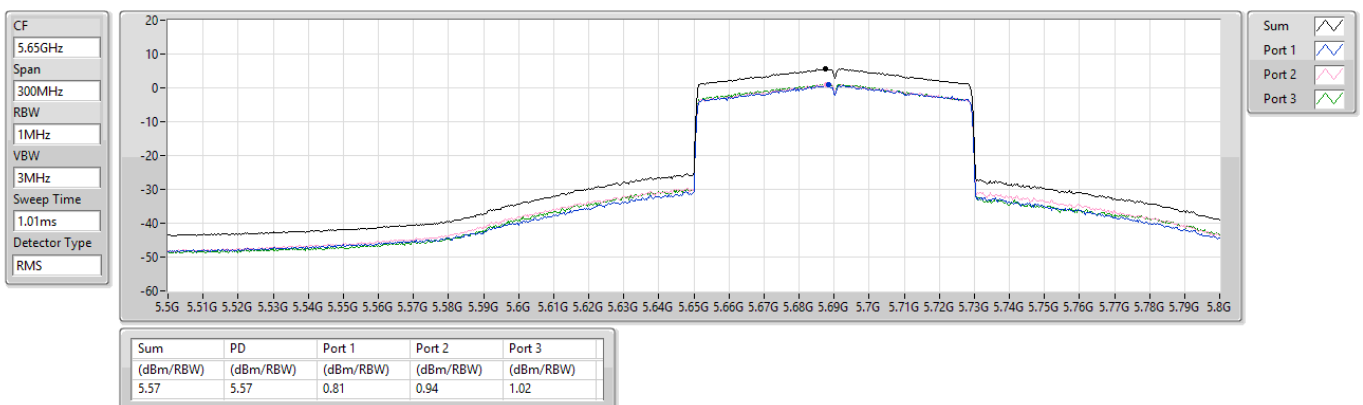

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD


5690MHz Straddle 5.725-5.85GHz

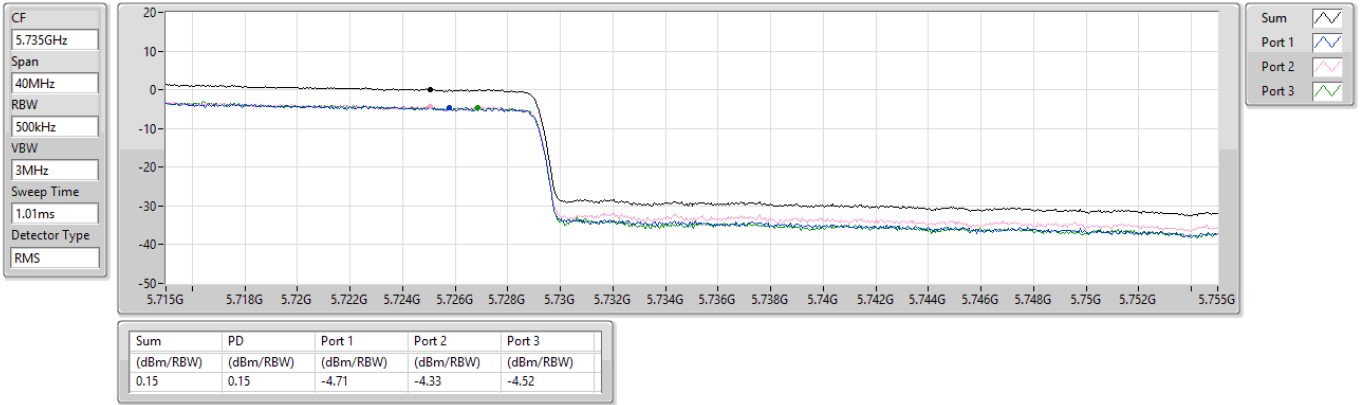

5.725-5.85GHz_802.11be EHT80_Nss1,(MCS0)_3TX

PSD


5775MHz

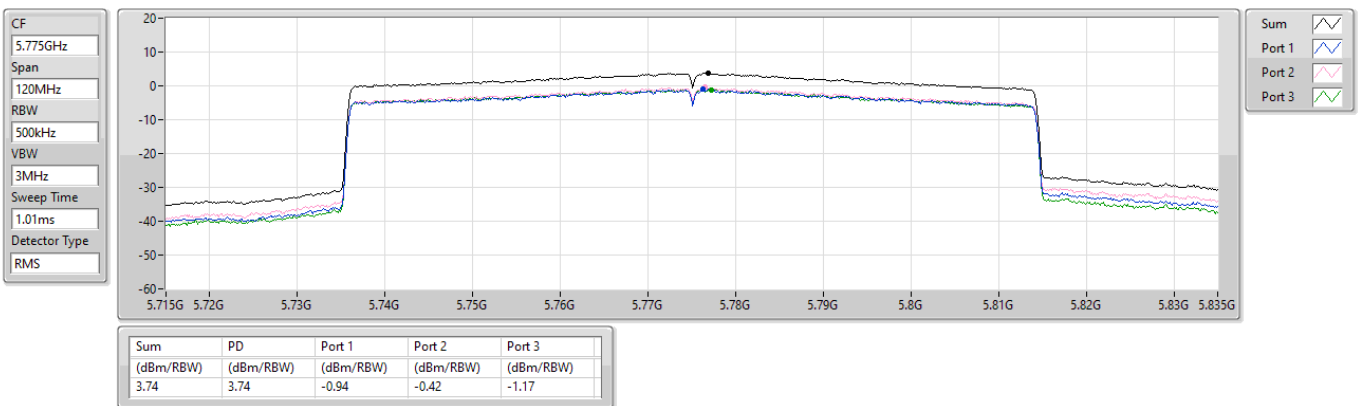

5.15-5.25GHz_802.11be EHT160_Nss1,(MCS0)_3TX

PSD


5250MHz Straddle 5.15-5.25GHz

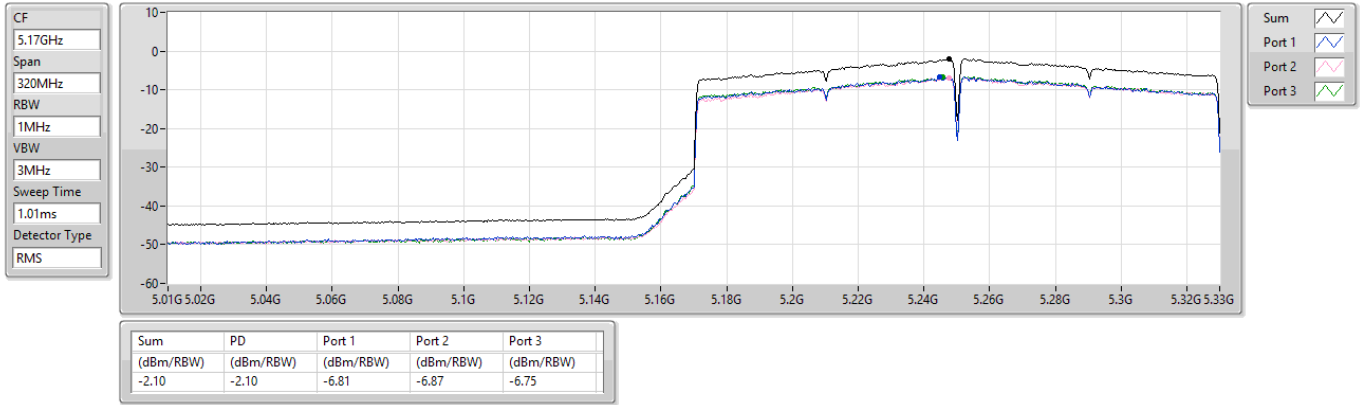

5.25-5.35GHz_802.11be EHT160_Nss1,(MCS0)_3TX

PSD

5250MHz Straddle 5.25-5.35GHz

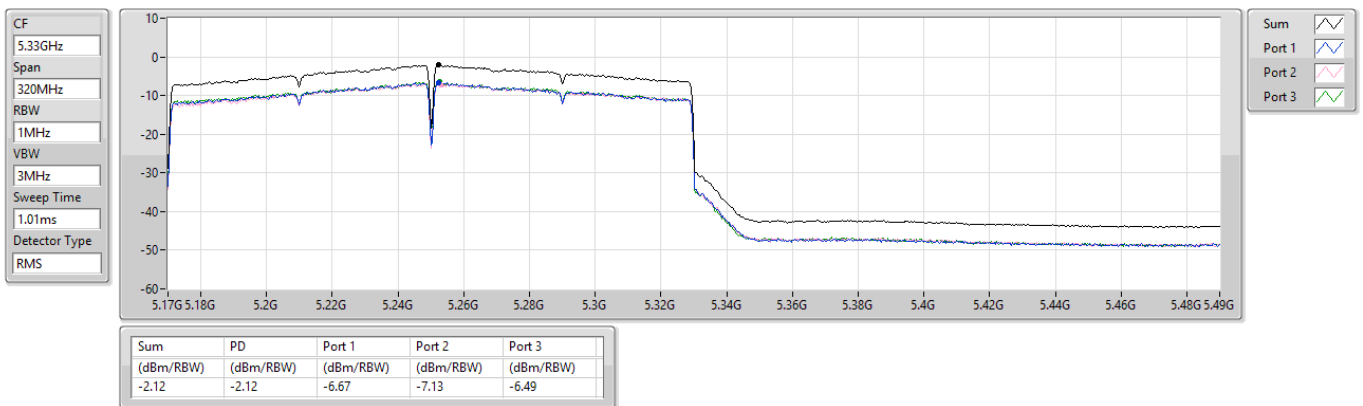




5.47-5.725GHz_802.11be EHT160_Nss1,(MCS0)_3TX

PSD

5570MHz

CF
5.57GHz
Span
240MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

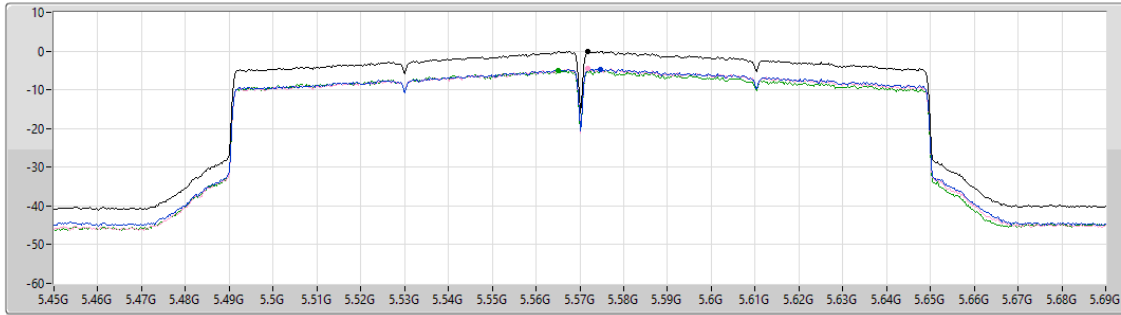

Sum
Port 1
Port 2
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.09	-0.09	-4.63	-4.55	-5.06

Beamforming mode
Summary

Mode	PD (dBm/RBW)	EIRP PD (dBm/RBW)
5.15-5.25GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_3TX	13.05	17.03
802.11be EHT40-BF_Nss1,(MCS0)_3TX	8.82	12.80
802.11be EHT80-BF_Nss1,(MCS0)_3TX	2.86	6.84
802.11be EHT160-BF_Nss1,(MCS0)_3TX	-1.87	2.11
5.25-5.35GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_3TX	10.66	14.42
802.11be EHT40-BF_Nss1,(MCS0)_3TX	8.90	12.66
802.11be EHT80-BF_Nss1,(MCS0)_3TX	2.69	6.45
802.11be EHT160-BF_Nss1,(MCS0)_3TX	-2.04	1.72
5.47-5.725GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_3TX	10.63	14.75
802.11be EHT40-BF_Nss1,(MCS0)_3TX	9.15	13.27
802.11be EHT80-BF_Nss1,(MCS0)_3TX	5.6	9.72
802.11be EHT160-BF_Nss1,(MCS0)_3TX	-0.82	3.30
5.725-5.85GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_3TX	12.50	16.62
802.11be EHT40-BF_Nss1,(MCS0)_3TX	9.53	13.65
802.11be EHT80-BF_Nss1,(MCS0)_3TX	3.79	7.91

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_3TX	-	-	-	-	-	-	-	-	-
5180MHz	Pass	3.980	5.94	5.93	5.92	10.53	17.00	14.51	23.00
5200MHz	Pass	3.980	7.46	7.35	7.52	12.09	17.00	16.07	23.00
5240MHz	Pass	3.980	8.52	8.25	8.55	13.05	17.00	17.03	23.00
5260MHz	Pass	3.760	5.64	5.97	6.16	10.52	11.00	14.28	17.00
5300MHz	Pass	3.760	5.75	6.18	6.18	10.60	11.00	14.36	17.00
5320MHz	Pass	3.760	5.72	6.02	6.10	10.66	11.00	14.42	17.00
5500MHz	Pass	4.120	5.87	6.00	5.69	10.53	11.00	14.65	17.00
5580MHz	Pass	4.120	5.68	5.88	6.44	10.63	11.00	14.75	17.00
5700MHz	Pass	4.120	6.00	5.73	5.94	10.52	11.00	14.64	17.00
5720MHz Straddle 5.47-5.725GHz	Pass	4.120	5.51	5.65	5.67	10.32	11.00	14.44	17.00
5720MHz Straddle 5.725-5.85GHz	Pass	4.120	3.02	2.95	3.09	7.69	30.00	11.81	36.00
5745MHz	Pass	4.120	7.68	8.15	7.66	12.50	30.00	16.62	36.00
5785MHz	Pass	4.120	7.28	7.59	6.89	11.88	30.00	16.00	36.00
5825MHz	Pass	4.120	6.59	6.92	6.66	11.36	30.00	15.48	36.00
802.11be EHT40-BF_Nss1,(MCS0)_3TX	-	-	-	-	-	-	-	-	-
5190MHz	Pass	3.980	2.73	2.57	2.78	7.31	17.00	11.29	23.00
5230MHz	Pass	3.980	4.13	4.05	4.23	8.82	17.00	12.80	23.00
5270MHz	Pass	3.760	4.16	4.36	4.49	8.90	11.00	12.66	17.00
5310MHz	Pass	3.760	3.14	3.24	3.58	7.98	11.00	11.74	17.00
5510MHz	Pass	4.120	1.44	1.36	1.28	5.97	11.00	10.09	17.00
5590MHz	Pass	4.120	3.85	4.23	4.37	8.90	11.00	13.02	17.00
5670MHz	Pass	4.120	4.10	3.85	4.15	8.65	11.00	12.77	17.00
5710MHz Straddle 5.47-5.725GHz	Pass	4.120	4.38	4.52	4.47	9.15	11.00	13.27	17.00
5710MHz Straddle 5.725-5.85GHz	Pass	4.120	-0.89	-0.89	-0.73	3.87	30.00	7.99	36.00
5755MHz	Pass	4.120	4.16	4.64	4.12	8.87	30.00	12.99	36.00
5795MHz	Pass	4.120	4.93	5.19	4.82	9.53	30.00	13.65	36.00
802.11be EHT80-BF_Nss1,(MCS0)_3TX	-	-	-	-	-	-	-	-	-
5210MHz	Pass	3.980	-1.71	-1.96	-1.60	2.86	17.00	6.84	23.00
5290MHz	Pass	3.760	-2.28	-2.01	-1.53	2.69	11.00	6.45	17.00
5530MHz	Pass	4.120	-1.44	-1.34	-1.46	3.31	11.00	7.43	17.00
5610MHz	Pass	4.120	0.75	0.89	0.53	5.33	11.00	9.45	17.00
5690MHz Straddle 5.47-5.725GHz	Pass	4.120	0.67	0.64	1.28	5.60	11.00	9.72	17.00
5690MHz Straddle 5.725-5.85GHz	Pass	4.120	-5	-4.82	-4.29	0.04	30.00	4.16	36.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	Port 3 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
5775MHz	Pass	4.120	-0.91	-0.43	-1.56	3.79	30.00	7.91	36.00
802.11be EHT160- BF_Nss1,(MCS0)_3TX	-	-	-	-	-	-	-	-	-
5250MHz Straddle 5.15-5.25GHz	Pass	3.980	-6.53	-6.55	-6.53	-1.87	17.00	2.11	23.00
5250MHz Straddle 5.25-5.35GHz	Pass	3.760	-6.78	-6.86	-6.68	-2.04	11.00	1.72	17.00
5570MHz	Pass	4.120	-5.36	-5.03	-6.31	-0.82	11.00	3.30	17.00


DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5180MHz

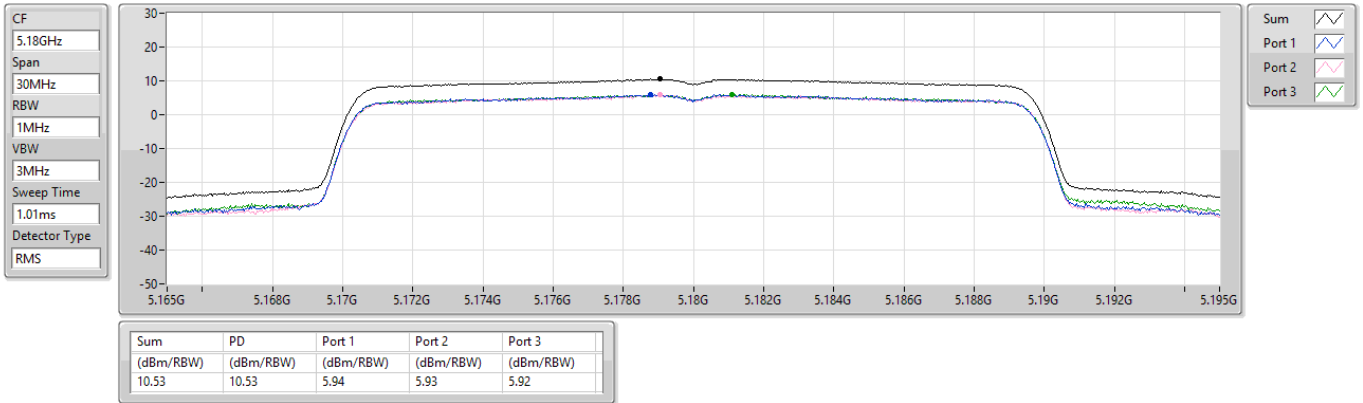

5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD

5200MHz

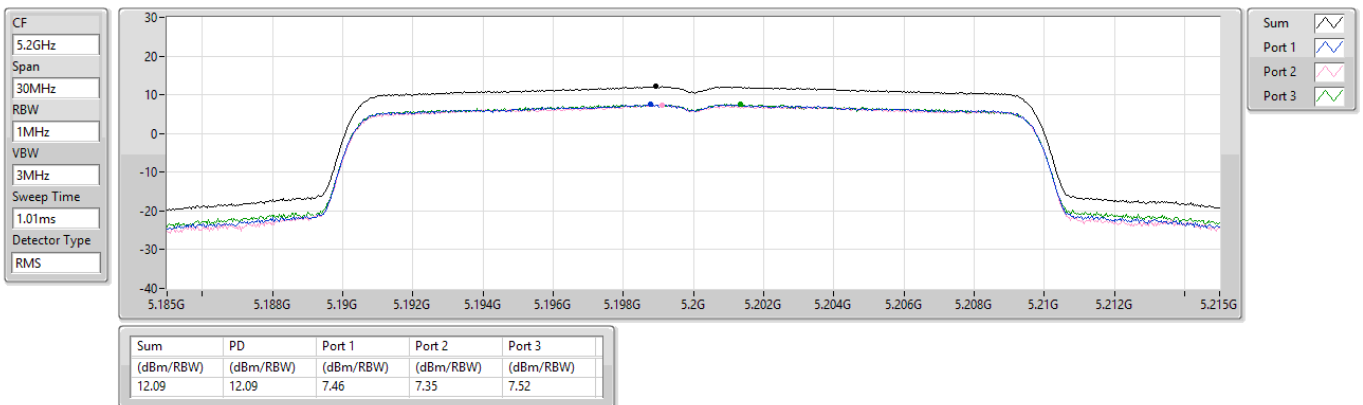




5.15-5.25GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5240MHz

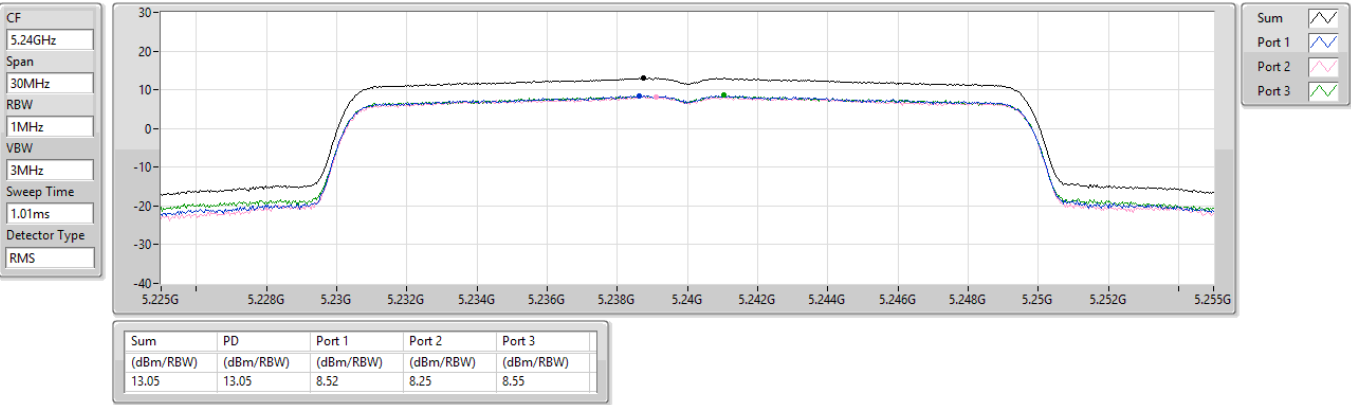

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD

5260MHz

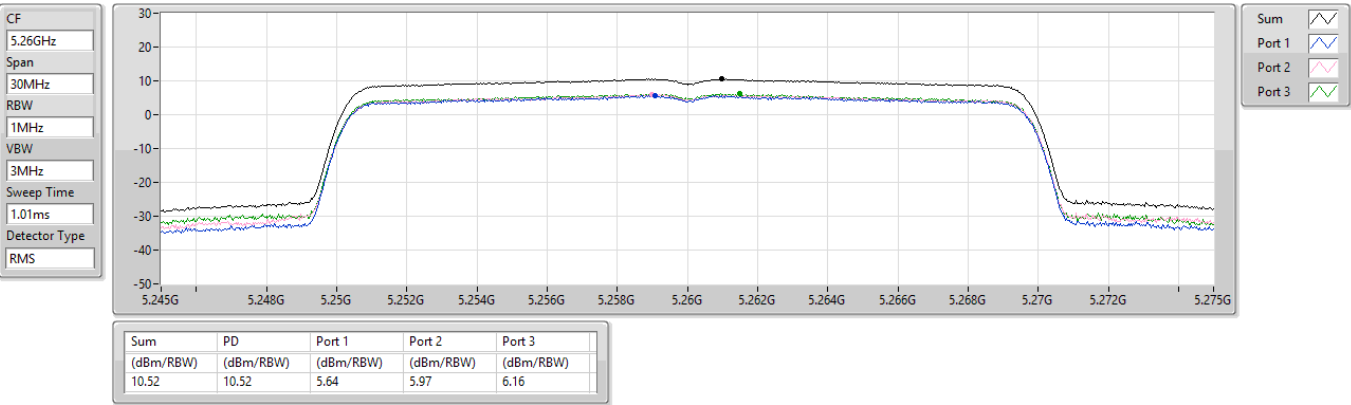




5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5300MHz

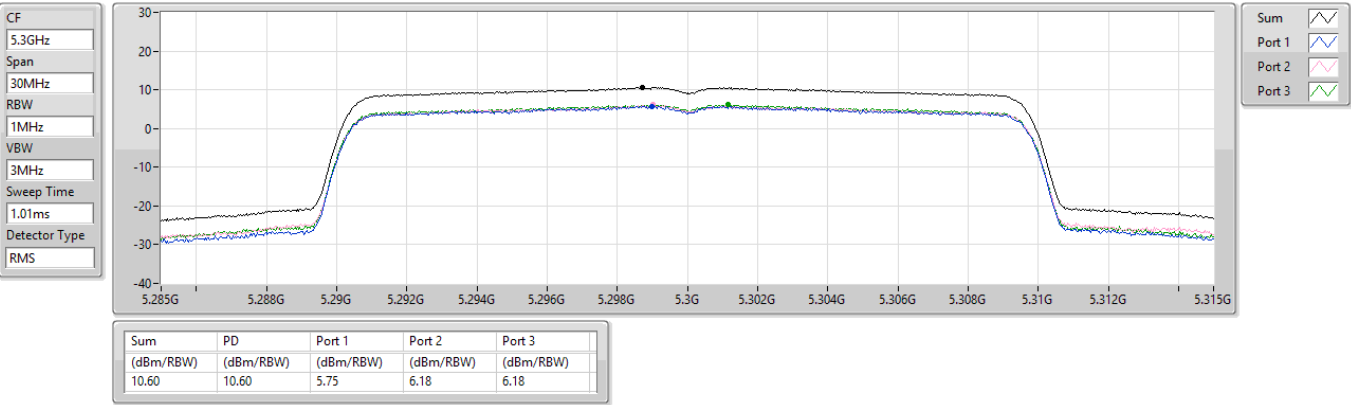

5.25-5.35GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD

5320MHz

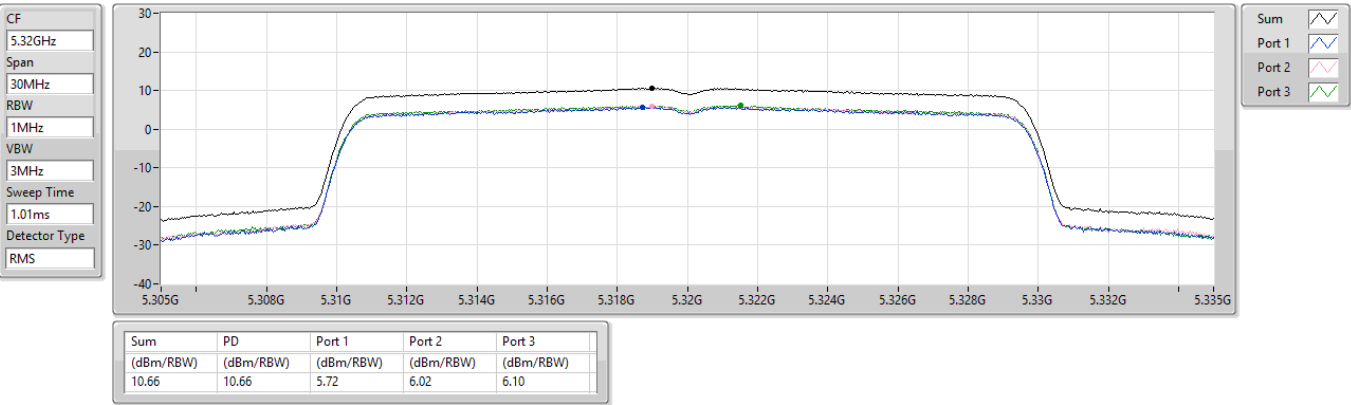




5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5500MHz

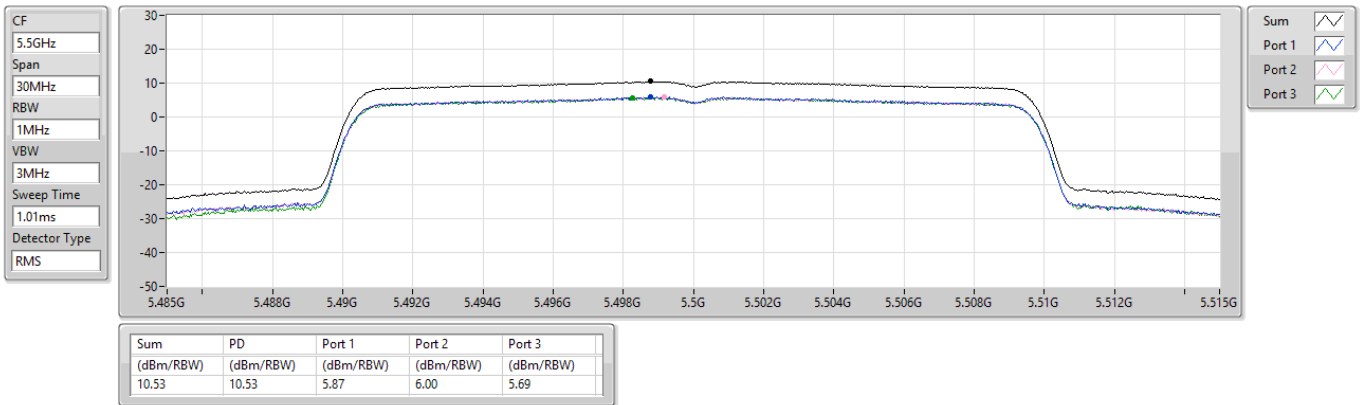

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD

5580MHz

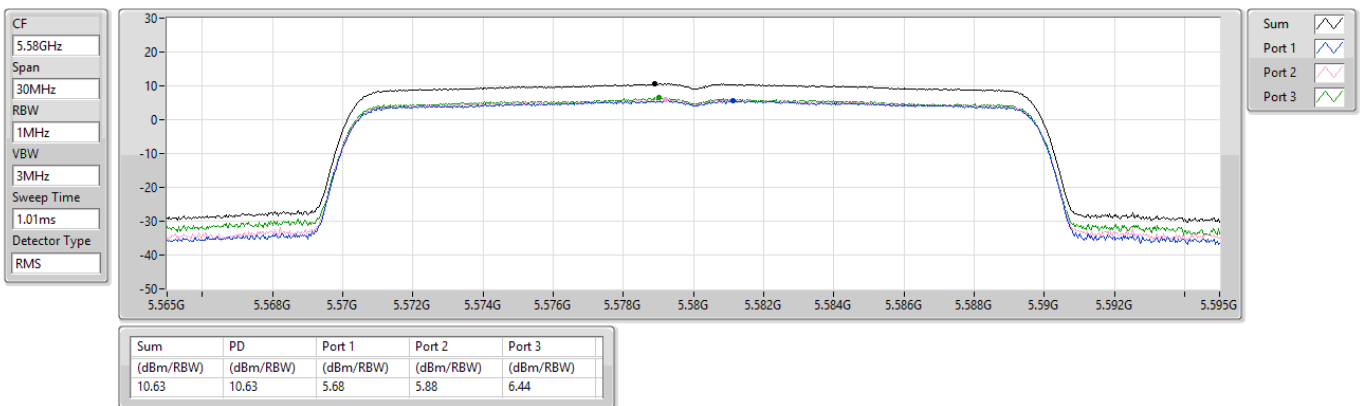




5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5700MHz

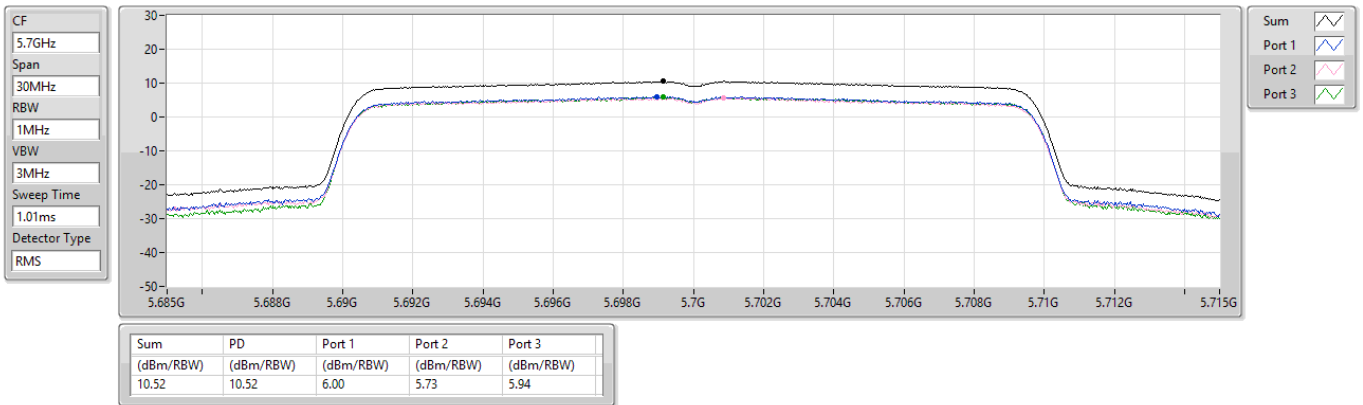

5.47-5.725GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5720MHz Straddle 5.47-5.725GHz

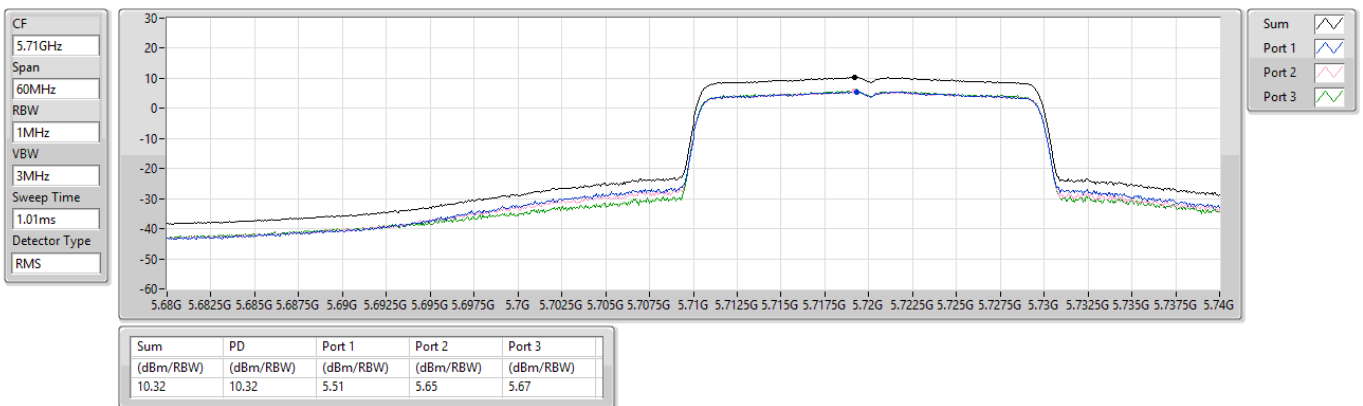

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5720MHz Straddle 5.725-5.85GHz

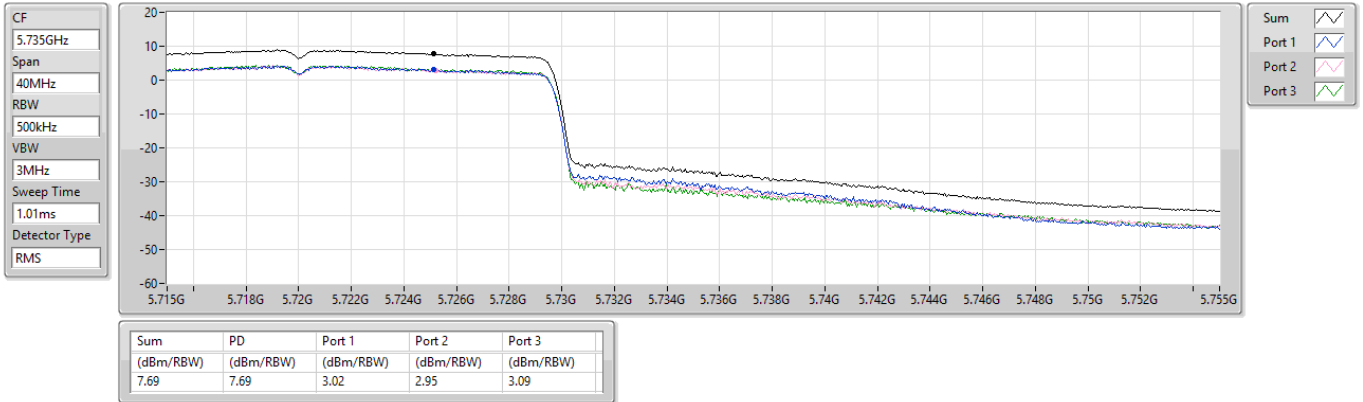

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5745MHz

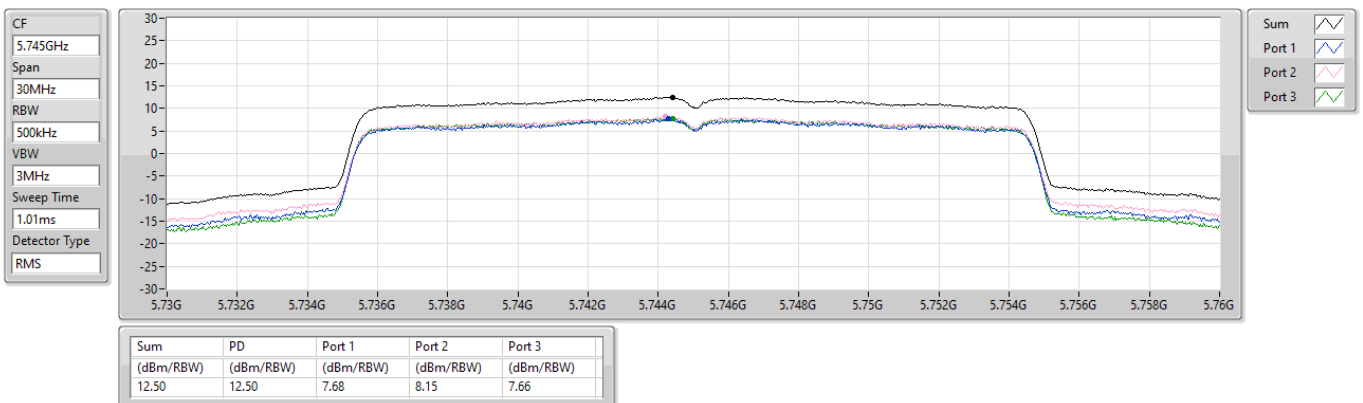

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5785MHz

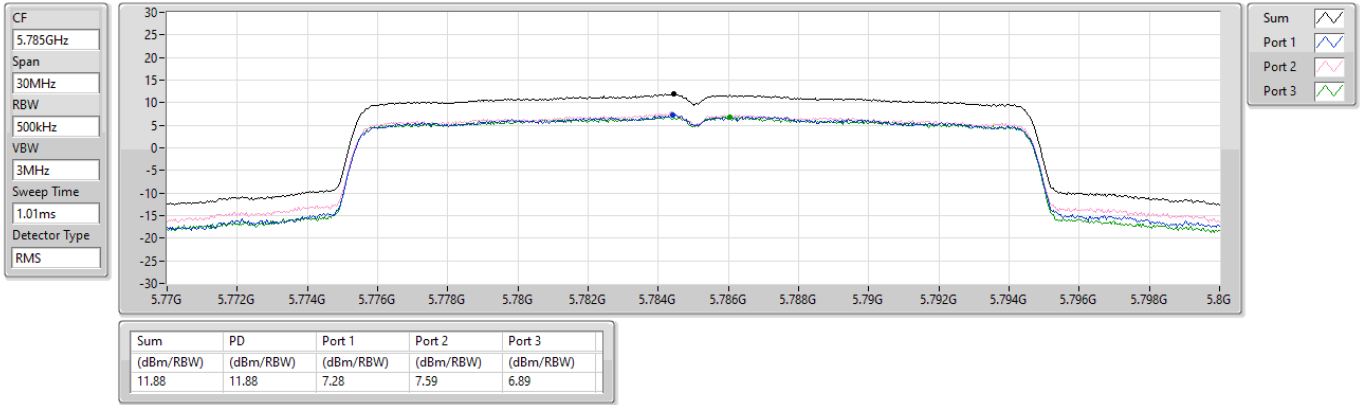

5.725-5.85GHz_802.11be EHT20-BF_Nss1,(MCS0)_3TX

PSD


5825MHz

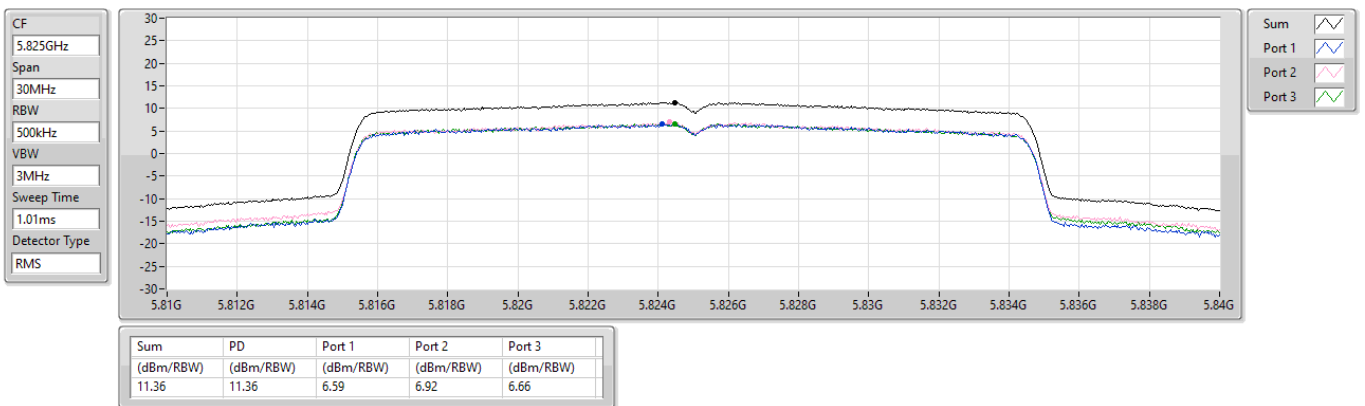

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD


5190MHz

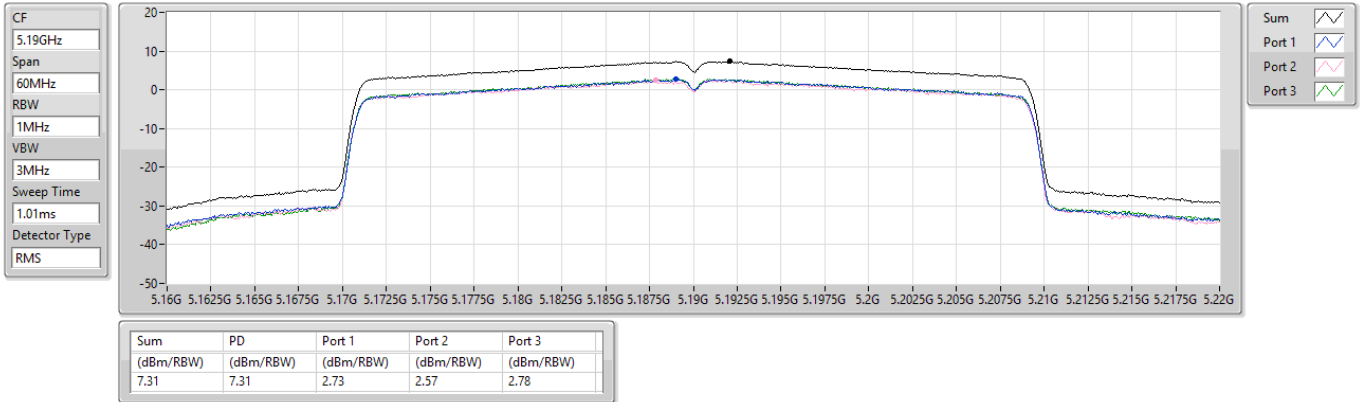

5.15-5.25GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD


5230MHz

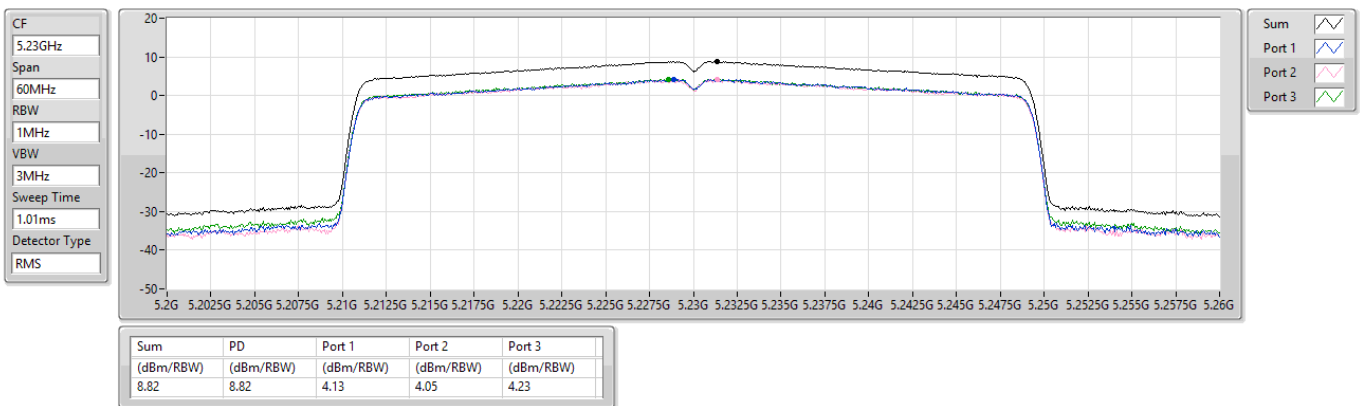

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD


5270MHz

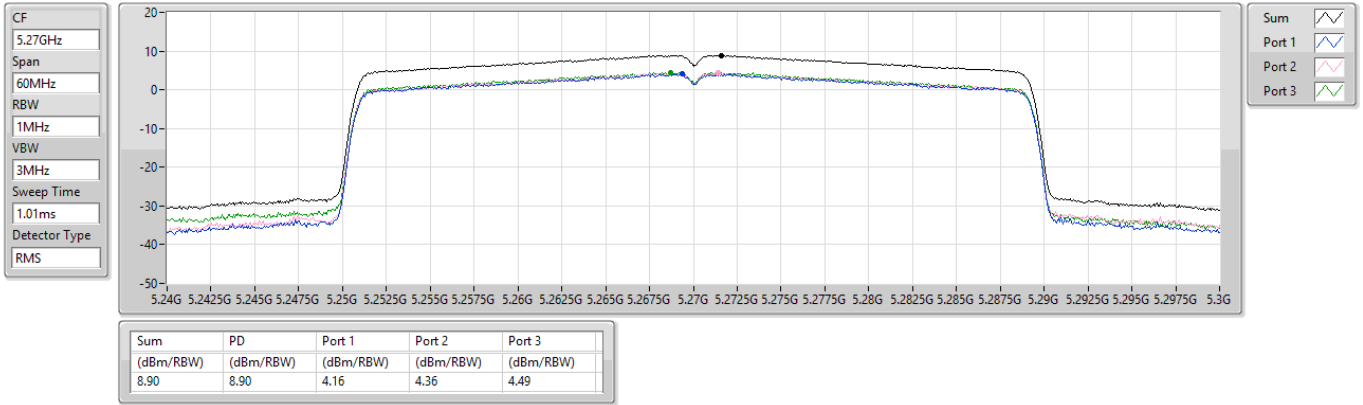

5.25-5.35GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5310MHz

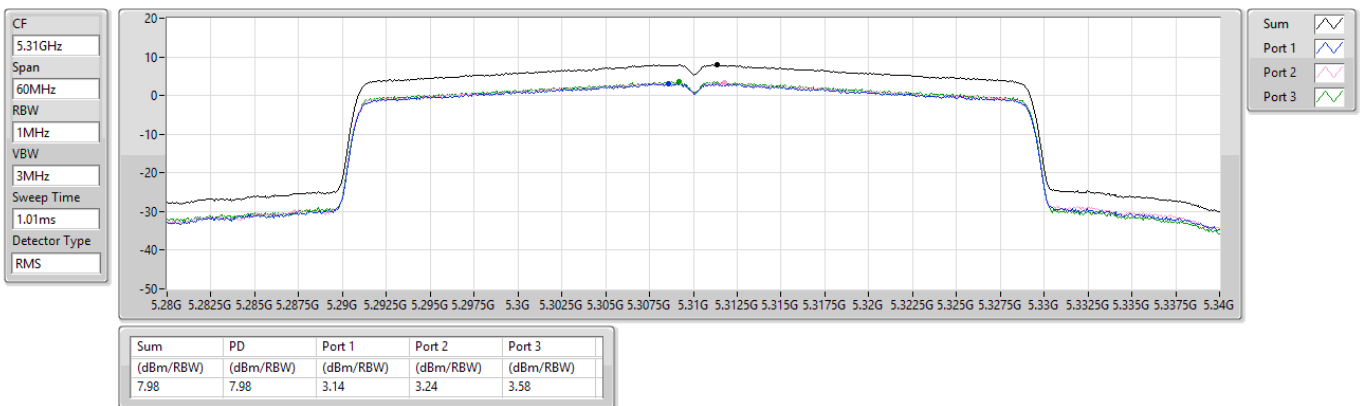




5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD


5510MHz

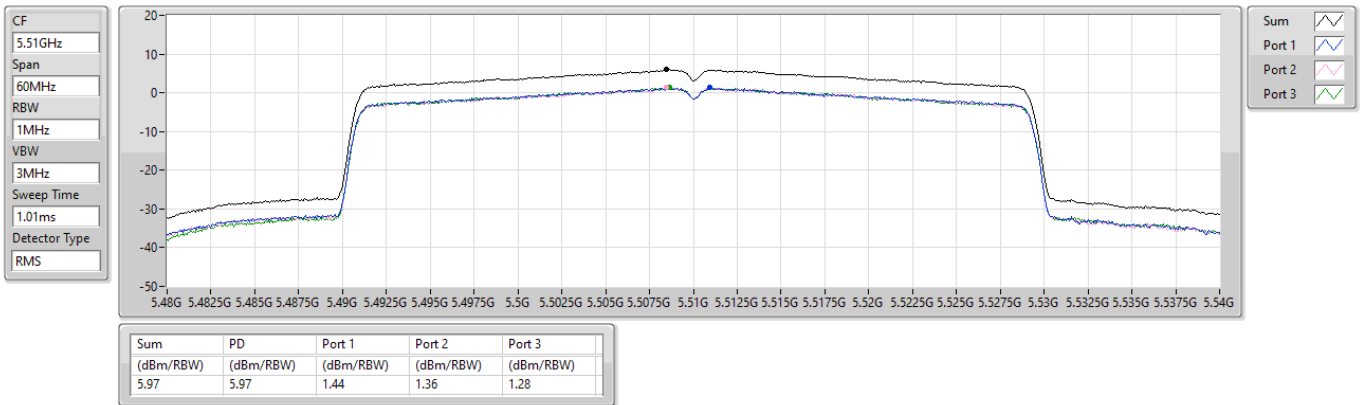

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5590MHz

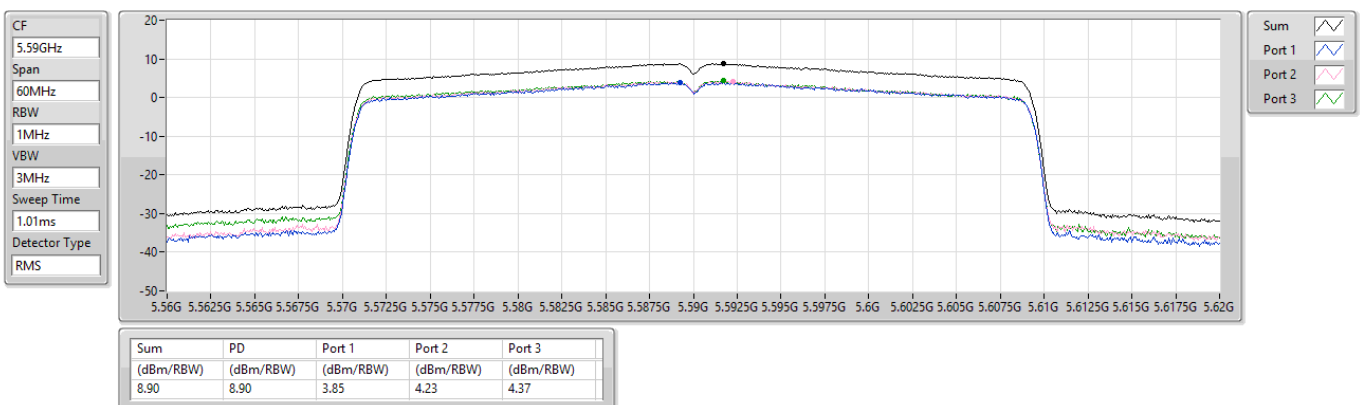


5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5670MHz

CF
5.67GHz
Span
60MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

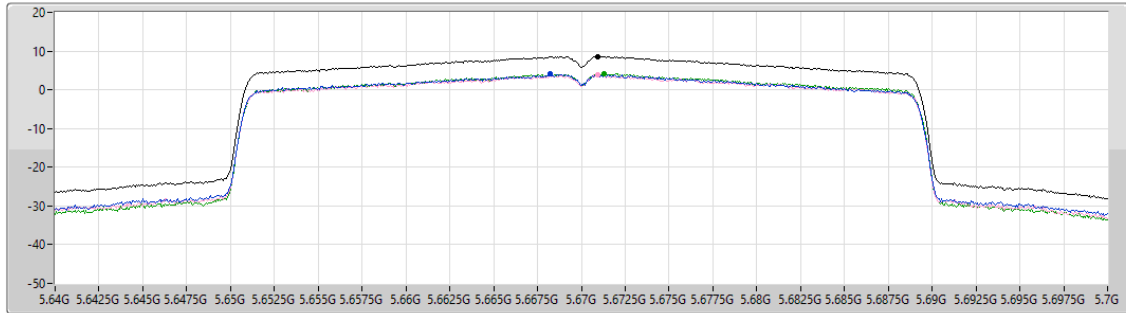

Sum
Port 1
Port 2
Port 3


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
8.65	8.65	4.10	3.85	4.15

5.47-5.725GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5710MHz Straddle 5.47-5.725GHz

CF
5.69GHz
Span
140MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

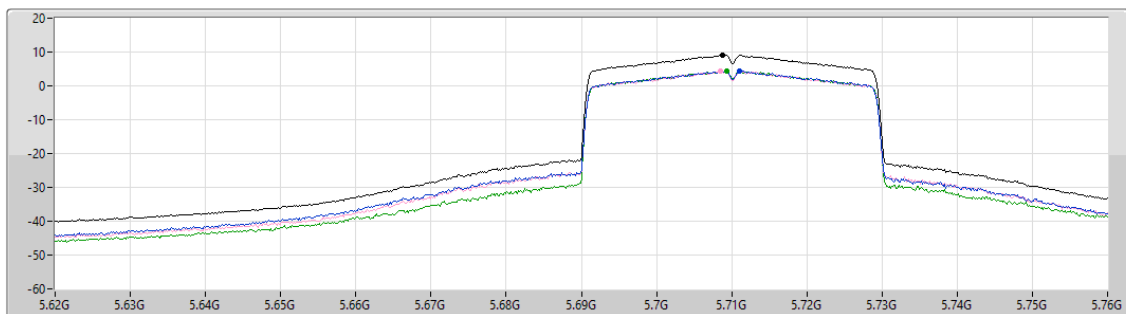


Sum
Port 1
Port 2
Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.15	9.15	4.38	4.52	4.47

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD


5710MHz Straddle 5.725-5.85GHz

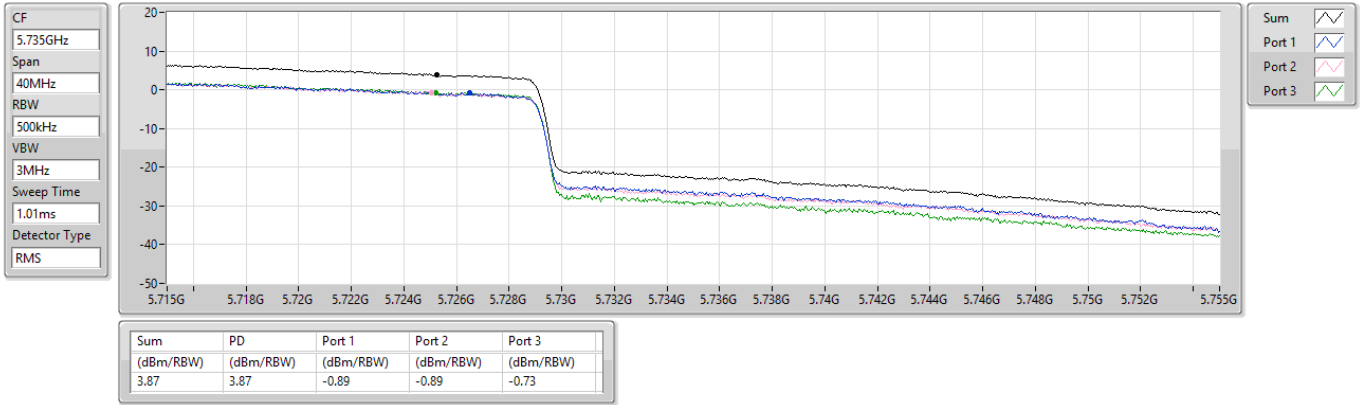

5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5755MHz

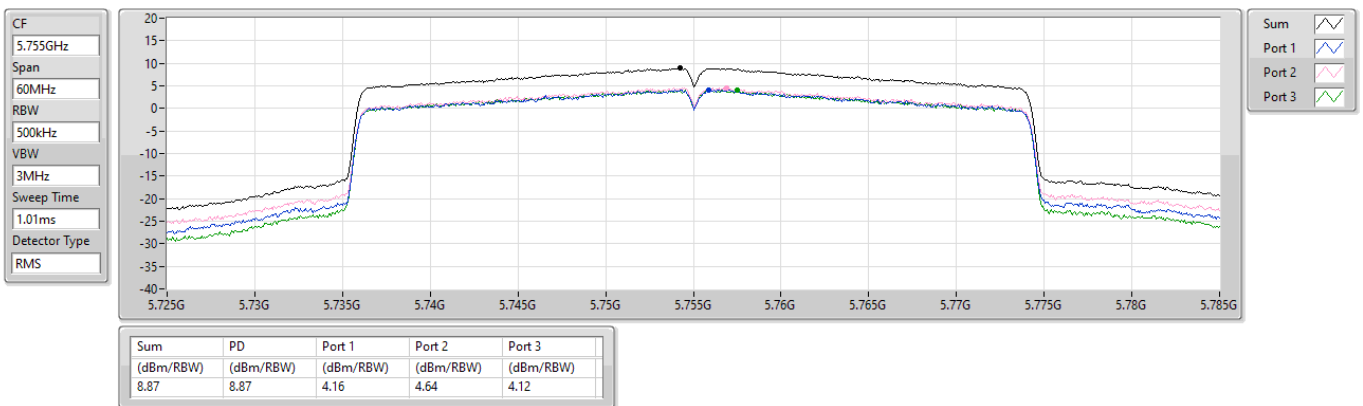


5.725-5.85GHz_802.11be EHT40-BF_Nss1,(MCS0)_3TX

PSD

5795MHz

CF
5.795GHz
Span
60MHz
RBW
500kHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

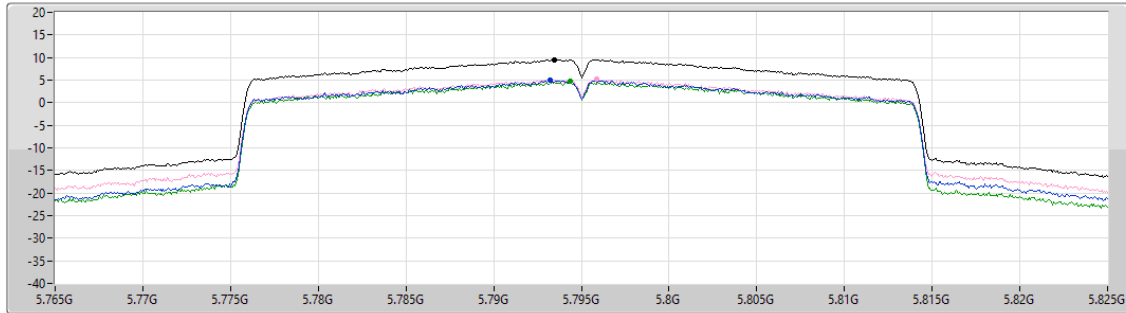


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
9.53	9.53	4.93	5.19	4.82

5.15-5.25GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD

5210MHz

CF
5.21GHz
Span
120MHz
RBW
1MHz
VBW
3MHz
Sweep Time
1.01ms
Detector Type
RMS

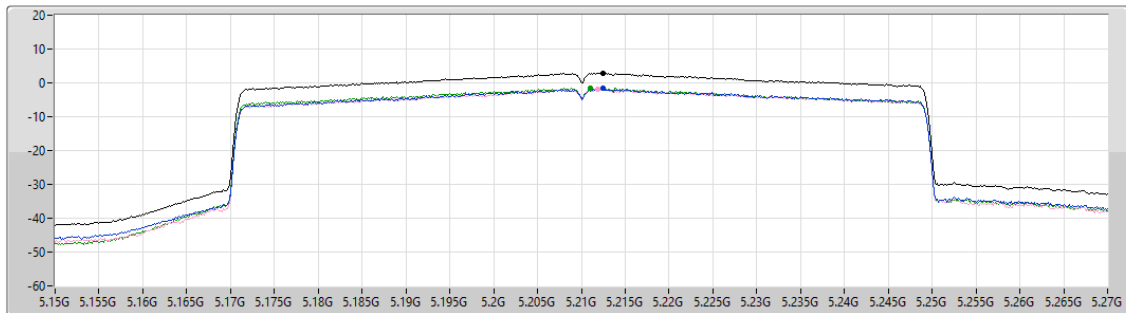


Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
2.86	2.86	-1.71	-1.96	-1.60

5.25-5.35GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5290MHz

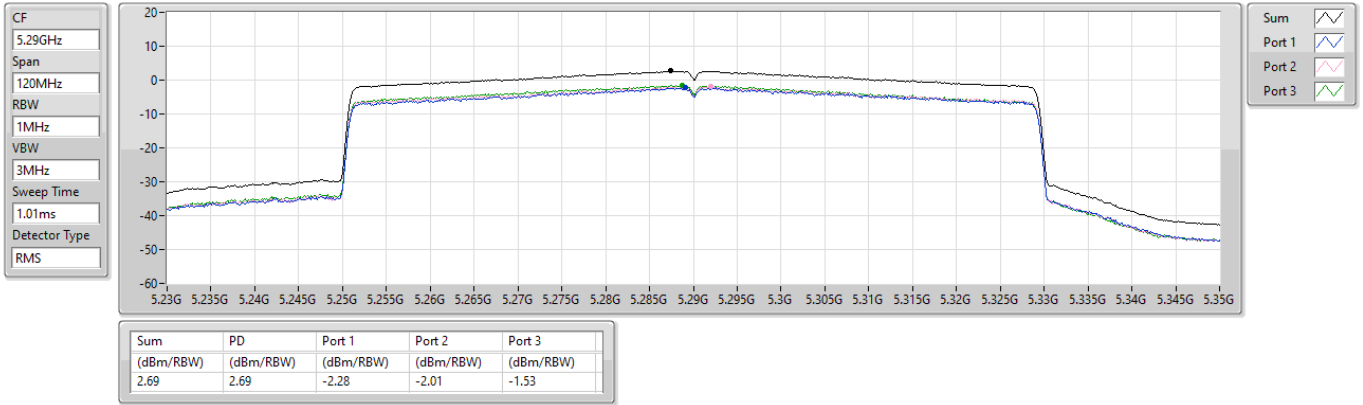

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5530MHz

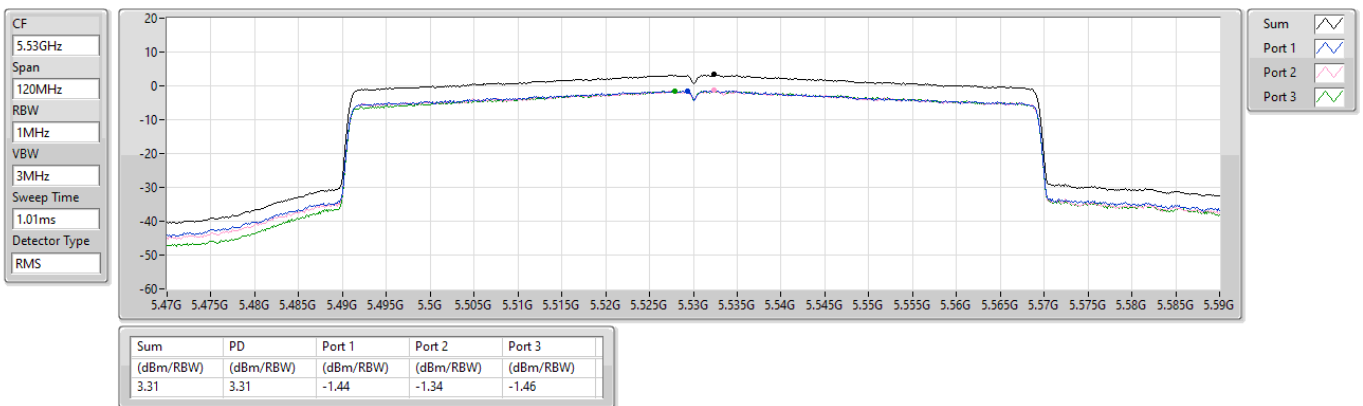

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5610MHz

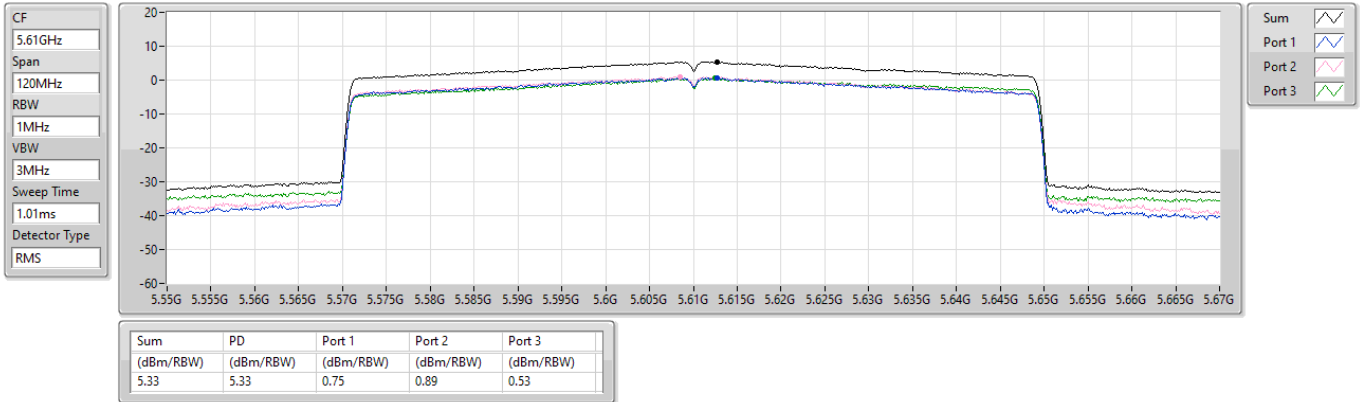

5.47-5.725GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5690MHz Straddle 5.47-5.725GHz

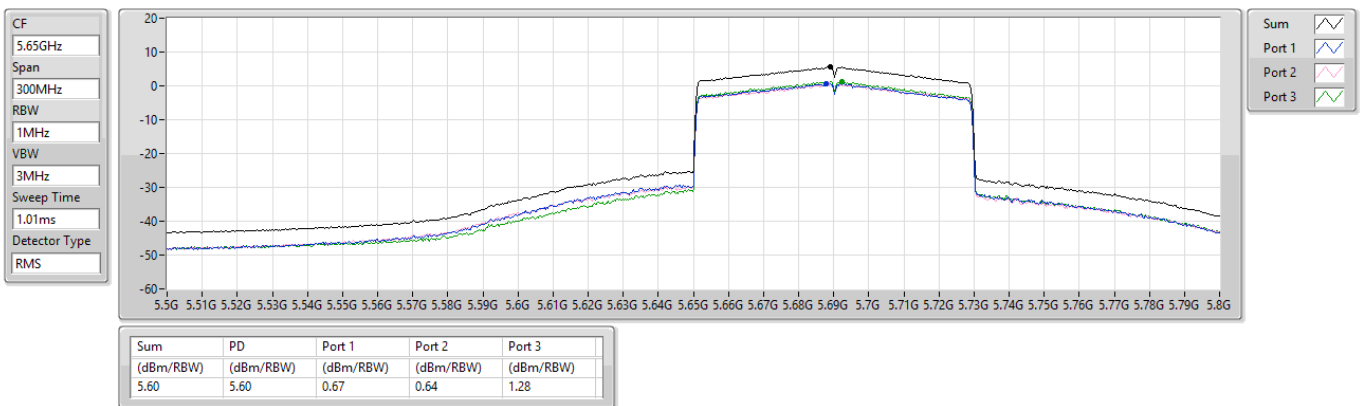

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5690MHz Straddle 5.725-5.85GHz

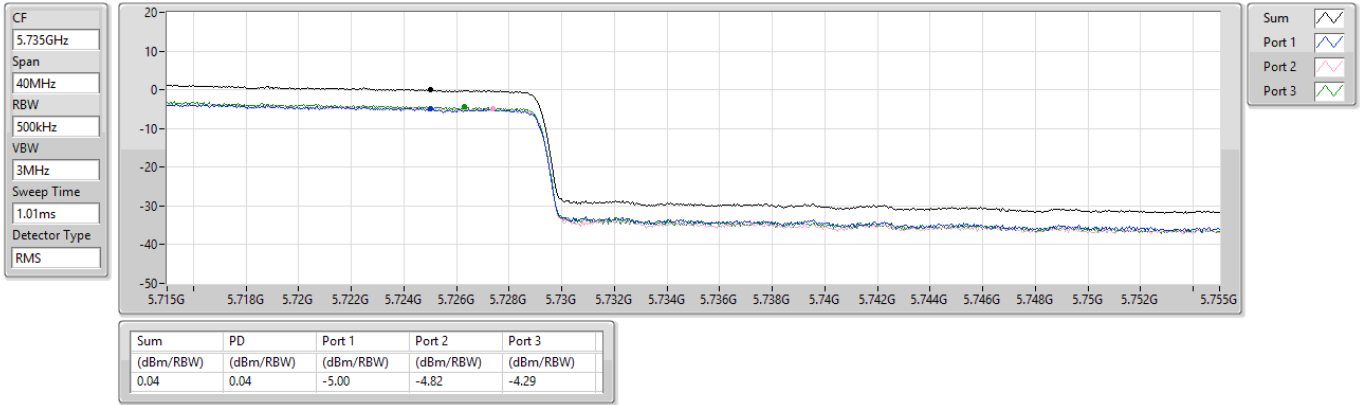

5.725-5.85GHz_802.11be EHT80-BF_Nss1,(MCS0)_3TX

PSD


5775MHz

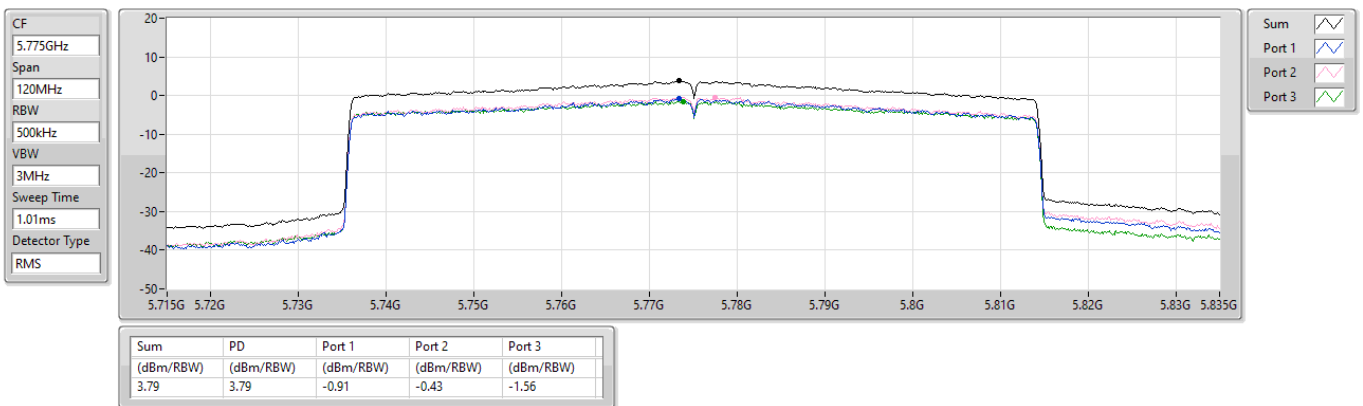

5.15-5.25GHz_802.11be EHT160-BF_Nss1,(MCS0)_3TX

PSD


5250MHz Straddle 5.15-5.25GHz

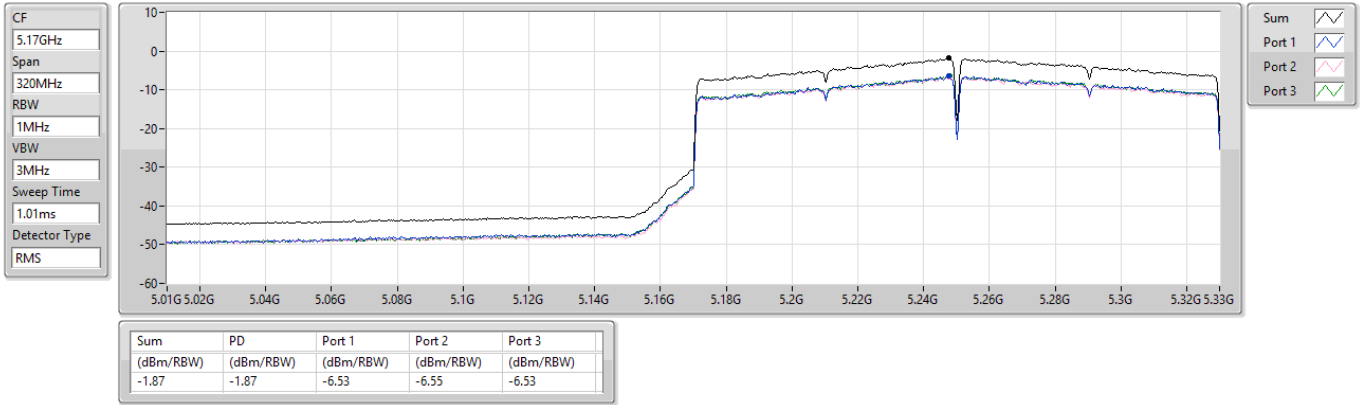

5.25-5.35GHz_802.11be EHT160-BF_Nss1,(MCS0)_3TX

PSD

5250MHz Straddle 5.25-5.35GHz

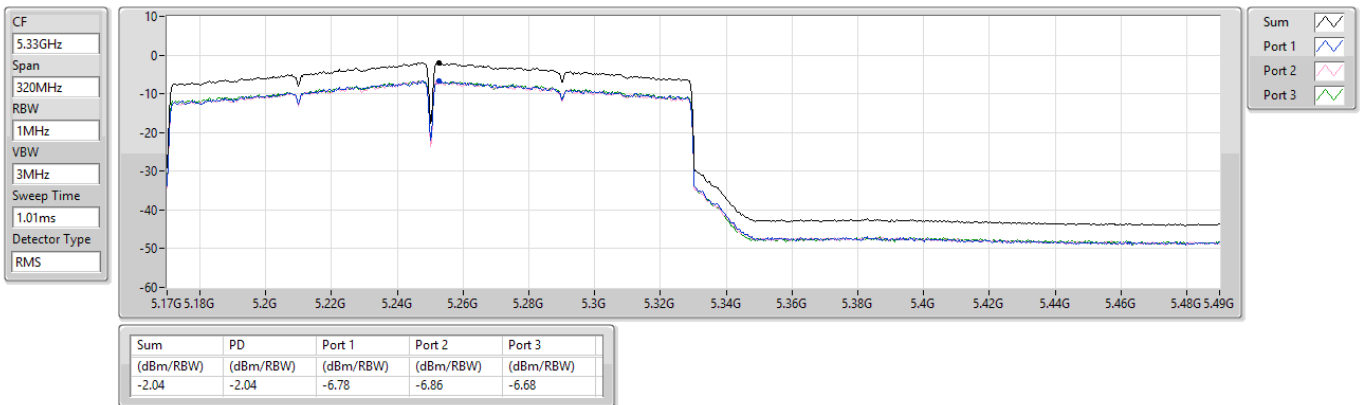



5.47-5.725GHz_802.11be EHT160-BF_Nss1,(MCS0)_3TX

PSD

5570MHz

CF

5.57GHz

Span

240MHz

RBW

1MHz

VBW


3MHz

Sweep Time

1.01ms

Detector Type

RMS

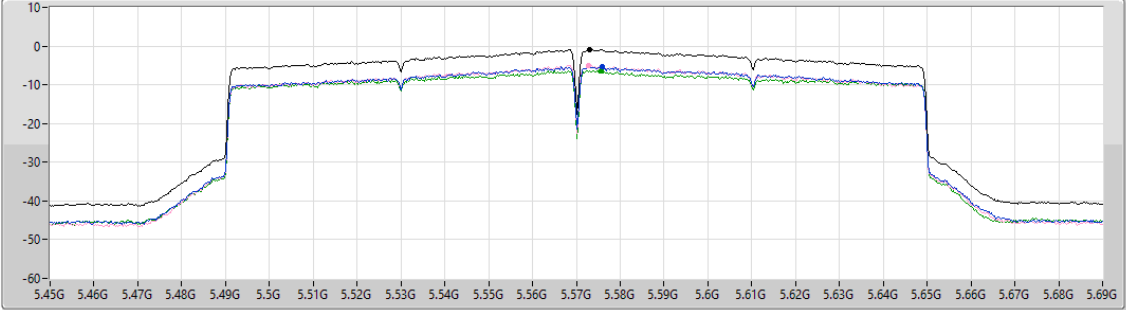

Sum

Port 1

Port 2

Port 3

Sum	PD	Port 1	Port 2	Port 3
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-0.82	-0.82	-5.36	-5.03	-6.31

**Non-beamforming mode****Unwanted Emissions (Below 1GHz)**

Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			




Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			




Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

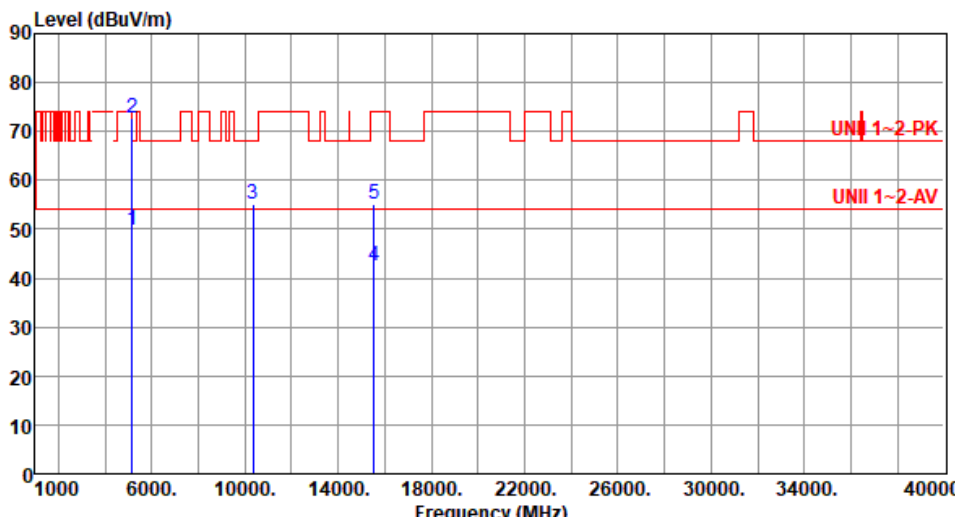


Modulation	11a	Test Freq. (MHz)	5180																																																													
Polarization	Vertical																																																															
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																
																																																																
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>49.89</td><td>54.00</td><td>-4.11</td><td>49.55</td><td>0.34</td><td>Average</td><td>234</td><td>340</td></tr><tr><td>2</td><td>5150.00</td><td>72.87</td><td>74.00</td><td>-1.13</td><td>72.53</td><td>0.34</td><td>Peak</td><td>234</td><td>340</td></tr><tr><td>3</td><td>10360.00</td><td>55.23</td><td>68.20</td><td>-12.97</td><td>47.83</td><td>7.40</td><td>Peak</td><td>100</td><td>55</td></tr><tr><td>4</td><td>15540.00</td><td>42.56</td><td>54.00</td><td>-11.44</td><td>38.59</td><td>3.97</td><td>Average</td><td>100</td><td>238</td></tr><tr><td>5</td><td>15540.00</td><td>55.26</td><td>74.00</td><td>-18.74</td><td>51.29</td><td>3.97</td><td>Peak</td><td>100</td><td>238</td></tr></table>		Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	49.89	54.00	-4.11	49.55	0.34	Average	234	340	2	5150.00	72.87	74.00	-1.13	72.53	0.34	Peak	234	340	3	10360.00	55.23	68.20	-12.97	47.83	7.40	Peak	100	55	4	15540.00	42.56	54.00	-11.44	38.59	3.97	Average	100	238	5	15540.00	55.26	74.00	-18.74	51.29	3.97	Peak	100	238			
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																							
1	5150.00	49.89	54.00	-4.11	49.55	0.34	Average	234	340																																																							
2	5150.00	72.87	74.00	-1.13	72.53	0.34	Peak	234	340																																																							
3	10360.00	55.23	68.20	-12.97	47.83	7.40	Peak	100	55																																																							
4	15540.00	42.56	54.00	-11.44	38.59	3.97	Average	100	238																																																							
5	15540.00	55.26	74.00	-18.74	51.29	3.97	Peak	100	238																																																							
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																

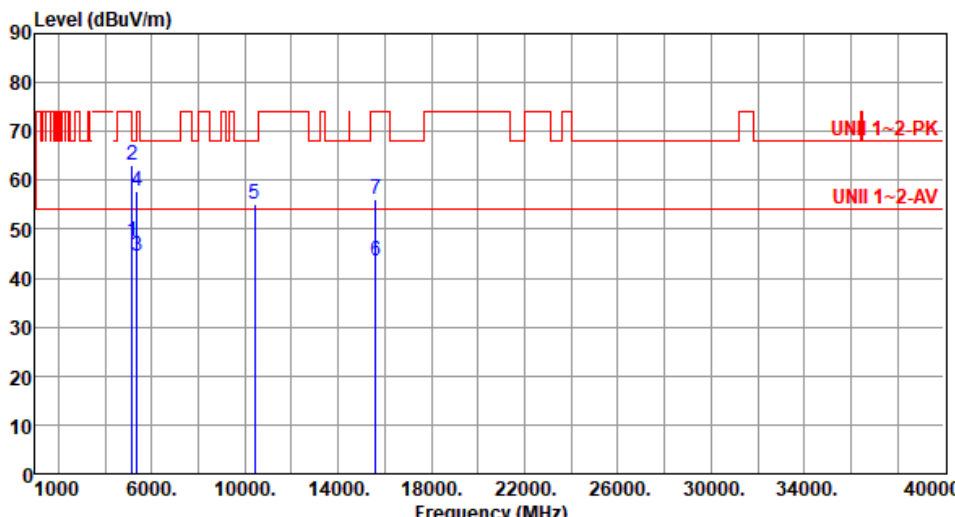

Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.59	54.00	-6.41	47.25	0.34	Average	176	76
2	5150.00	63.08	74.00	-10.92	62.74	0.34	Peak	176	76
3	5350.00	44.51	54.00	-9.49	44.76	-0.25	Average	176	76
4	5350.00	57.95	74.00	-16.05	58.20	-0.25	Peak	176	76
5	10400.00	55.13	68.20	-13.07	47.75	7.38	Peak	100	97
6	15600.00	43.62	54.00	-10.38	39.61	4.01	Average	100	305
7	15600.00	56.25	74.00	-17.75	52.24	4.01	Peak	100	305

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

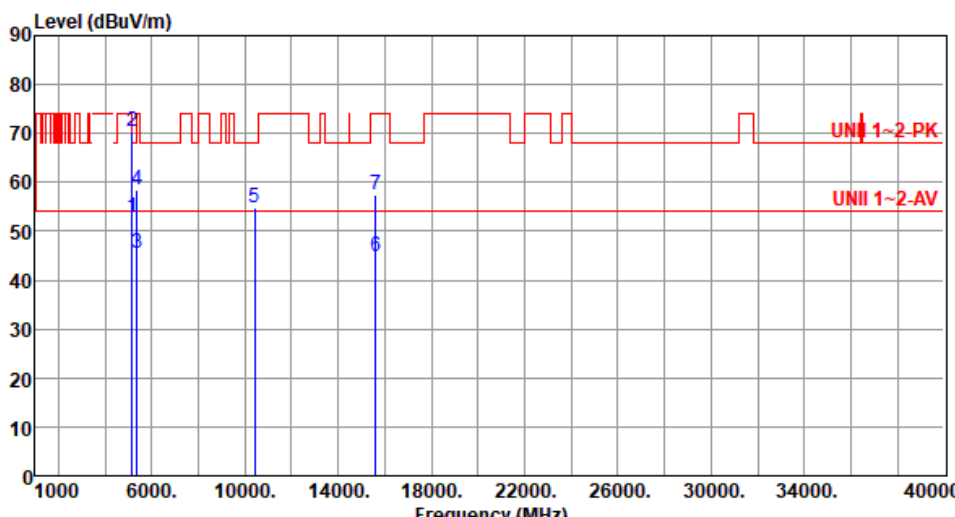

Modulation	11a	Test Freq. (MHz)	5200						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.79	54.00	-1.21	52.45	0.34	Average	286	205
2	5150.00	70.44	74.00	-3.56	70.10	0.34	Peak	286	205
3	5350.00	45.41	54.00	-8.59	45.66	-0.25	Average	286	205
4	5350.00	58.51	74.00	-15.49	58.76	-0.25	Peak	286	205
5	10400.00	54.90	68.20	-13.30	47.52	7.38	Peak	100	63
6	15600.00	44.70	54.00	-9.30	40.69	4.01	Average	100	220
7	15600.00	57.35	74.00	-16.65	53.34	4.01	Peak	100	220
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			



Modulation	11a	Test Freq. (MHz)	5240						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.89	54.00	-6.11	47.55	0.34	Average	248	211
2	5150.00	60.56	74.00	-13.44	60.22	0.34	Peak	248	211
3	5350.00	46.30	54.00	-7.70	46.55	-0.25	Average	248	211
4	5350.00	57.33	74.00	-16.67	57.58	-0.25	Peak	248	211
5	10480.00	54.79	68.20	-13.41	47.51	7.28	Peak	100	223
6	15720.00	42.66	54.00	-11.34	38.42	4.24	Average	100	209
7	15720.00	55.82	74.00	-18.18	51.58	4.24	Peak	100	209
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5260																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>43.20</td><td>0.34</td><td>Average</td><td>210</td><td>230</td></tr><tr><td>2</td><td>5150.00</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>54.52</td><td>0.34</td><td>Peak</td><td>210</td><td>230</td></tr><tr><td>3</td><td>5350.00</td><td>43.21</td><td>54.00</td><td>-10.79</td><td>43.46</td><td>-0.25</td><td>Average</td><td>210</td><td>230</td></tr><tr><td>4</td><td>5350.00</td><td>54.41</td><td>74.00</td><td>-19.59</td><td>54.66</td><td>-0.25</td><td>Peak</td><td>210</td><td>230</td></tr><tr><td>5</td><td>10520.00</td><td>54.83</td><td>68.20</td><td>-13.37</td><td>47.65</td><td>7.18</td><td>Peak</td><td>100</td><td>226</td></tr><tr><td>6</td><td>15780.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>38.31</td><td>3.98</td><td>Average</td><td>100</td><td>218</td></tr><tr><td>7</td><td>15780.00</td><td>55.30</td><td>74.00</td><td>-18.70</td><td>51.32</td><td>3.98</td><td>Peak</td><td>100</td><td>218</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.54	54.00	-10.46	43.20	0.34	Average	210	230	2	5150.00	54.86	74.00	-19.14	54.52	0.34	Peak	210	230	3	5350.00	43.21	54.00	-10.79	43.46	-0.25	Average	210	230	4	5350.00	54.41	74.00	-19.59	54.66	-0.25	Peak	210	230	5	10520.00	54.83	68.20	-13.37	47.65	7.18	Peak	100	226	6	15780.00	42.29	54.00	-11.71	38.31	3.98	Average	100	218	7	15780.00	55.30	74.00	-18.70	51.32	3.98	Peak	100	218
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	43.54	54.00	-10.46	43.20	0.34	Average	210	230																																																																										
2	5150.00	54.86	74.00	-19.14	54.52	0.34	Peak	210	230																																																																										
3	5350.00	43.21	54.00	-10.79	43.46	-0.25	Average	210	230																																																																										
4	5350.00	54.41	74.00	-19.59	54.66	-0.25	Peak	210	230																																																																										
5	10520.00	54.83	68.20	-13.37	47.65	7.18	Peak	100	226																																																																										
6	15780.00	42.29	54.00	-11.71	38.31	3.98	Average	100	218																																																																										
7	15780.00	55.30	74.00	-18.70	51.32	3.98	Peak	100	218																																																																										
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																			



Modulation	11a	Test Freq. (MHz)	5300																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>43.21</td><td>0.34</td><td>Average</td><td>231</td><td>58</td></tr><tr><td>2</td><td>5150.00</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>56.32</td><td>0.34</td><td>Peak</td><td>231</td><td>58</td></tr><tr><td>3</td><td>5350.00</td><td>43.33</td><td>54.00</td><td>-10.67</td><td>43.58</td><td>-0.25</td><td>Average</td><td>231</td><td>58</td></tr><tr><td>4</td><td>5350.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>56.38</td><td>-0.25</td><td>Peak</td><td>231</td><td>58</td></tr><tr><td>5</td><td>5380.00</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>43.48</td><td>-0.11</td><td>Average</td><td>231</td><td>58</td></tr><tr><td>6</td><td>5380.00</td><td>56.84</td><td>74.00</td><td>-17.16</td><td>56.95</td><td>-0.11</td><td>Peak</td><td>231</td><td>58</td></tr><tr><td>7</td><td>10600.00</td><td>41.08</td><td>54.00</td><td>-12.92</td><td>33.50</td><td>7.58</td><td>Average</td><td>100</td><td>167</td></tr><tr><td>8</td><td>10600.00</td><td>54.97</td><td>74.00</td><td>-19.03</td><td>47.39</td><td>7.58</td><td>Peak</td><td>100</td><td>167</td></tr><tr><td>9</td><td>15900.00</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>37.49</td><td>4.35</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>10</td><td>15900.00</td><td>56.02</td><td>74.00</td><td>-17.98</td><td>51.67</td><td>4.35</td><td>Peak</td><td>100</td><td>138</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	43.55	54.00	-10.45	43.21	0.34	Average	231	58	2	5150.00	56.66	74.00	-17.34	56.32	0.34	Peak	231	58	3	5350.00	43.33	54.00	-10.67	43.58	-0.25	Average	231	58	4	5350.00	56.13	74.00	-17.87	56.38	-0.25	Peak	231	58	5	5380.00	43.37	54.00	-10.63	43.48	-0.11	Average	231	58	6	5380.00	56.84	74.00	-17.16	56.95	-0.11	Peak	231	58	7	10600.00	41.08	54.00	-12.92	33.50	7.58	Average	100	167	8	10600.00	54.97	74.00	-19.03	47.39	7.58	Peak	100	167	9	15900.00	41.84	54.00	-12.16	37.49	4.35	Average	100	138	10	15900.00	56.02	74.00	-17.98	51.67	4.35	Peak	100	138
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5150.00	43.55	54.00	-10.45	43.21	0.34	Average	231	58																																																																																																								
2	5150.00	56.66	74.00	-17.34	56.32	0.34	Peak	231	58																																																																																																								
3	5350.00	43.33	54.00	-10.67	43.58	-0.25	Average	231	58																																																																																																								
4	5350.00	56.13	74.00	-17.87	56.38	-0.25	Peak	231	58																																																																																																								
5	5380.00	43.37	54.00	-10.63	43.48	-0.11	Average	231	58																																																																																																								
6	5380.00	56.84	74.00	-17.16	56.95	-0.11	Peak	231	58																																																																																																								
7	10600.00	41.08	54.00	-12.92	33.50	7.58	Average	100	167																																																																																																								
8	10600.00	54.97	74.00	-19.03	47.39	7.58	Peak	100	167																																																																																																								
9	15900.00	41.84	54.00	-12.16	37.49	4.35	Average	100	138																																																																																																								
10	15900.00	56.02	74.00	-17.98	51.67	4.35	Peak	100	138																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5300																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>44.27</td><td>54.00</td><td>-9.73</td><td>43.93</td><td>0.34</td><td>Average</td><td>236</td><td>194</td></tr><tr><td>2</td><td>5150.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>55.63</td><td>0.34</td><td>Peak</td><td>236</td><td>194</td></tr><tr><td>3</td><td>5350.00</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>45.11</td><td>-0.25</td><td>Average</td><td>236</td><td>194</td></tr><tr><td>4</td><td>5350.00</td><td>57.31</td><td>74.00</td><td>-16.69</td><td>57.56</td><td>-0.25</td><td>Peak</td><td>236</td><td>194</td></tr><tr><td>5</td><td>5380.00</td><td>46.74</td><td>54.00</td><td>-7.26</td><td>46.85</td><td>-0.11</td><td>Average</td><td>236</td><td>194</td></tr><tr><td>6</td><td>5380.00</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>56.77</td><td>-0.11</td><td>Peak</td><td>236</td><td>194</td></tr><tr><td>7</td><td>10600.00</td><td>41.10</td><td>54.00</td><td>-12.90</td><td>33.52</td><td>7.58</td><td>Average</td><td>100</td><td>159</td></tr><tr><td>8</td><td>10600.00</td><td>54.42</td><td>74.00</td><td>-19.58</td><td>46.84</td><td>7.58</td><td>Peak</td><td>100</td><td>159</td></tr><tr><td>9</td><td>15900.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>37.63</td><td>4.35</td><td>Average</td><td>100</td><td>240</td></tr><tr><td>10</td><td>15900.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>51.68</td><td>4.35</td><td>Peak</td><td>100</td><td>240</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.27	54.00	-9.73	43.93	0.34	Average	236	194	2	5150.00	55.97	74.00	-18.03	55.63	0.34	Peak	236	194	3	5350.00	44.86	54.00	-9.14	45.11	-0.25	Average	236	194	4	5350.00	57.31	74.00	-16.69	57.56	-0.25	Peak	236	194	5	5380.00	46.74	54.00	-7.26	46.85	-0.11	Average	236	194	6	5380.00	56.66	74.00	-17.34	56.77	-0.11	Peak	236	194	7	10600.00	41.10	54.00	-12.90	33.52	7.58	Average	100	159	8	10600.00	54.42	74.00	-19.58	46.84	7.58	Peak	100	159	9	15900.00	41.98	54.00	-12.02	37.63	4.35	Average	100	240	10	15900.00	56.03	74.00	-17.97	51.68	4.35	Peak	100	240
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5150.00	44.27	54.00	-9.73	43.93	0.34	Average	236	194																																																																																																								
2	5150.00	55.97	74.00	-18.03	55.63	0.34	Peak	236	194																																																																																																								
3	5350.00	44.86	54.00	-9.14	45.11	-0.25	Average	236	194																																																																																																								
4	5350.00	57.31	74.00	-16.69	57.56	-0.25	Peak	236	194																																																																																																								
5	5380.00	46.74	54.00	-7.26	46.85	-0.11	Average	236	194																																																																																																								
6	5380.00	56.66	74.00	-17.34	56.77	-0.11	Peak	236	194																																																																																																								
7	10600.00	41.10	54.00	-12.90	33.52	7.58	Average	100	159																																																																																																								
8	10600.00	54.42	74.00	-19.58	46.84	7.58	Peak	100	159																																																																																																								
9	15900.00	41.98	54.00	-12.02	37.63	4.35	Average	100	240																																																																																																								
10	15900.00	56.03	74.00	-17.97	51.68	4.35	Peak	100	240																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																	



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	11a	Test Freq. (MHz)	5320																																																																						
Polarization	Vertical																																																																								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																									
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>46.03</td><td>54.00</td><td>-7.97</td><td>46.28</td><td>-0.25</td><td>Average</td><td>233</td><td>217</td></tr><tr><td>2</td><td>5350.00</td><td>60.78</td><td>74.00</td><td>-13.22</td><td>61.03</td><td>-0.25</td><td>Peak</td><td>233</td><td>217</td></tr><tr><td>3</td><td>10640.00</td><td>41.80</td><td>54.00</td><td>-12.20</td><td>34.16</td><td>7.64</td><td>Average</td><td>100</td><td>168</td></tr><tr><td>4</td><td>10640.00</td><td>55.15</td><td>74.00</td><td>-18.85</td><td>47.51</td><td>7.64</td><td>Peak</td><td>100</td><td>168</td></tr><tr><td>5</td><td>15960.00</td><td>42.59</td><td>54.00</td><td>-11.41</td><td>38.26</td><td>4.33</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>15960.00</td><td>56.06</td><td>74.00</td><td>-17.94</td><td>51.73</td><td>4.33</td><td>Peak</td><td>100</td><td>251</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	46.03	54.00	-7.97	46.28	-0.25	Average	233	217	2	5350.00	60.78	74.00	-13.22	61.03	-0.25	Peak	233	217	3	10640.00	41.80	54.00	-12.20	34.16	7.64	Average	100	168	4	10640.00	55.15	74.00	-18.85	47.51	7.64	Peak	100	168	5	15960.00	42.59	54.00	-11.41	38.26	4.33	Average	100	251	6	15960.00	56.06	74.00	-17.94	51.73	4.33	Peak	100	251
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	46.03	54.00	-7.97	46.28	-0.25	Average	233	217																																																																
2	5350.00	60.78	74.00	-13.22	61.03	-0.25	Peak	233	217																																																																
3	10640.00	41.80	54.00	-12.20	34.16	7.64	Average	100	168																																																																
4	10640.00	55.15	74.00	-18.85	47.51	7.64	Peak	100	168																																																																
5	15960.00	42.59	54.00	-11.41	38.26	4.33	Average	100	251																																																																
6	15960.00	56.06	74.00	-17.94	51.73	4.33	Peak	100	251																																																																



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5580																																																																																
Polarization	Horizontal																																																																																		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>44.31</td><td>0.39</td><td>Average</td><td>228</td><td>231</td></tr><tr><td>2</td><td>5460.00</td><td>56.90</td><td>74.00</td><td>-17.10</td><td>56.51</td><td>0.39</td><td>Peak</td><td>228</td><td>231</td></tr><tr><td>3</td><td>5470.00</td><td>57.52</td><td>68.20</td><td>-10.68</td><td>57.13</td><td>0.39</td><td>Peak</td><td>228</td><td>231</td></tr><tr><td>4</td><td>5725.00</td><td>56.23</td><td>68.20</td><td>-11.97</td><td>55.64</td><td>0.59</td><td>Peak</td><td>228</td><td>231</td></tr><tr><td>5</td><td>11160.00</td><td>49.80</td><td>54.00</td><td>-4.20</td><td>42.84</td><td>6.96</td><td>Average</td><td>100</td><td>84</td></tr><tr><td>6</td><td>11160.00</td><td>64.21</td><td>74.00</td><td>-9.79</td><td>57.25</td><td>6.96</td><td>Peak</td><td>100</td><td>84</td></tr><tr><td>7</td><td>16740.00</td><td>58.88</td><td>68.20</td><td>-9.32</td><td>51.46</td><td>7.42</td><td>Peak</td><td>100</td><td>191</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.70	54.00	-9.30	44.31	0.39	Average	228	231	2	5460.00	56.90	74.00	-17.10	56.51	0.39	Peak	228	231	3	5470.00	57.52	68.20	-10.68	57.13	0.39	Peak	228	231	4	5725.00	56.23	68.20	-11.97	55.64	0.59	Peak	228	231	5	11160.00	49.80	54.00	-4.20	42.84	6.96	Average	100	84	6	11160.00	64.21	74.00	-9.79	57.25	6.96	Peak	100	84	7	16740.00	58.88	68.20	-9.32	51.46	7.42	Peak	100	191
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	44.70	54.00	-9.30	44.31	0.39	Average	228	231																																																																										
2	5460.00	56.90	74.00	-17.10	56.51	0.39	Peak	228	231																																																																										
3	5470.00	57.52	68.20	-10.68	57.13	0.39	Peak	228	231																																																																										
4	5725.00	56.23	68.20	-11.97	55.64	0.59	Peak	228	231																																																																										
5	11160.00	49.80	54.00	-4.20	42.84	6.96	Average	100	84																																																																										
6	11160.00	64.21	74.00	-9.79	57.25	6.96	Peak	100	84																																																																										
7	16740.00	58.88	68.20	-9.32	51.46	7.42	Peak	100	191																																																																										



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Modulation	11a	Test Freq. (MHz)	5700																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>64.80</td><td>68.20</td><td>-3.40</td><td>64.21</td><td>0.59</td><td>Peak</td><td>146</td><td>21</td></tr><tr><td>2</td><td>11400.00</td><td>45.49</td><td>54.00</td><td>-8.51</td><td>38.26</td><td>7.23</td><td>Average</td><td>100</td><td>77</td></tr><tr><td>3</td><td>11400.00</td><td>58.69</td><td>74.00</td><td>-15.31</td><td>51.46</td><td>7.23</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>4</td><td>17100.00</td><td>60.49</td><td>68.20</td><td>-7.71</td><td>53.59</td><td>6.90</td><td>Peak</td><td>100</td><td>206</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	64.80	68.20	-3.40	64.21	0.59	Peak	146	21	2	11400.00	45.49	54.00	-8.51	38.26	7.23	Average	100	77	3	11400.00	58.69	74.00	-15.31	51.46	7.23	Peak	100	77	4	17100.00	60.49	68.20	-7.71	53.59	6.90	Peak	100	206
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	64.80	68.20	-3.40	64.21	0.59	Peak	146	21																																												
2	11400.00	45.49	54.00	-8.51	38.26	7.23	Average	100	77																																												
3	11400.00	58.69	74.00	-15.31	51.46	7.23	Peak	100	77																																												
4	17100.00	60.49	68.20	-7.71	53.59	6.90	Peak	100	206																																												



Modulation	11a	Test Freq. (MHz)	5700																																																		
Polarization	Vertical																																																				
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>66.36</td><td>68.20</td><td>-1.84</td><td>65.77</td><td>0.59</td><td>Peak</td><td>250</td><td>231</td></tr><tr><td>2</td><td>11400.00</td><td>47.09</td><td>54.00</td><td>-6.91</td><td>39.86</td><td>7.23</td><td>Average</td><td>208</td><td>248</td></tr><tr><td>3</td><td>11400.00</td><td>59.33</td><td>74.00</td><td>-14.67</td><td>52.10</td><td>7.23</td><td>Peak</td><td>208</td><td>248</td></tr><tr><td>4</td><td>17100.00</td><td>60.12</td><td>68.20</td><td>-8.08</td><td>53.22</td><td>6.90</td><td>Peak</td><td>100</td><td>108</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	66.36	68.20	-1.84	65.77	0.59	Peak	250	231	2	11400.00	47.09	54.00	-6.91	39.86	7.23	Average	208	248	3	11400.00	59.33	74.00	-14.67	52.10	7.23	Peak	208	248	4	17100.00	60.12	68.20	-8.08	53.22	6.90	Peak	100	108
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	66.36	68.20	-1.84	65.77	0.59	Peak	250	231																																												
2	11400.00	47.09	54.00	-6.91	39.86	7.23	Average	208	248																																												
3	11400.00	59.33	74.00	-14.67	52.10	7.23	Peak	208	248																																												
4	17100.00	60.12	68.20	-8.08	53.22	6.90	Peak	100	108																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	11a	Test Freq. (MHz)	5720						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.65	54.00	-11.35	42.26	0.39	Average	158	241
2	5460.00	54.65	74.00	-19.35	54.26	0.39	Peak	158	241
3	5470.00	54.77	68.20	-13.43	54.38	0.39	Peak	158	241
4	5850.00	56.20	68.20	-12.00	55.23	0.97	Peak	158	241
5	11440.00	44.63	54.00	-9.37	37.42	7.21	Average	100	77
6	11440.00	57.63	74.00	-16.37	50.42	7.21	Peak	100	77
7	17160.00	59.69	68.20	-8.51	53.14	6.55	Peak	100	209
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			

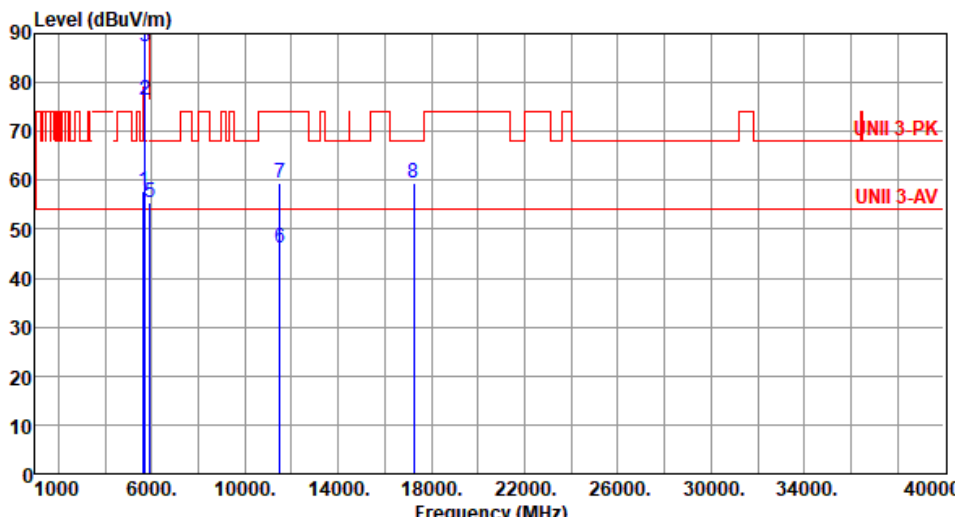

Modulation	11a	Test Freq. (MHz)	5745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.71</td><td>68.20</td><td>-10.49</td><td>57.49</td><td>0.22</td><td>Peak</td><td>256</td><td>58</td></tr><tr><td>2</td><td>5700.00</td><td>76.33</td><td>105.20</td><td>-28.87</td><td>75.79</td><td>0.54</td><td>Peak</td><td>256</td><td>58</td></tr><tr><td>3</td><td>5720.00</td><td>87.35</td><td>110.80</td><td>-23.45</td><td>86.77</td><td>0.58</td><td>Peak</td><td>256</td><td>58</td></tr><tr><td>4</td><td>5725.00</td><td>99.43</td><td>122.20</td><td>-22.77</td><td>98.84</td><td>0.59</td><td>Peak</td><td>256</td><td>58</td></tr><tr><td>5</td><td>5925.00</td><td>55.47</td><td>68.20</td><td>-12.73</td><td>54.33</td><td>1.14</td><td>Peak</td><td>256</td><td>58</td></tr><tr><td>6</td><td>11490.00</td><td>46.12</td><td>54.00</td><td>-7.88</td><td>38.77</td><td>7.35</td><td>Average</td><td>158</td><td>223</td></tr><tr><td>7</td><td>11490.00</td><td>59.48</td><td>74.00</td><td>-14.52</td><td>52.13</td><td>7.35</td><td>Peak</td><td>158</td><td>223</td></tr><tr><td>8</td><td>17235.00</td><td>59.54</td><td>68.20</td><td>-8.66</td><td>52.77</td><td>6.77</td><td>Peak</td><td>100</td><td>123</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.71	68.20	-10.49	57.49	0.22	Peak	256	58	2	5700.00	76.33	105.20	-28.87	75.79	0.54	Peak	256	58	3	5720.00	87.35	110.80	-23.45	86.77	0.58	Peak	256	58	4	5725.00	99.43	122.20	-22.77	98.84	0.59	Peak	256	58	5	5925.00	55.47	68.20	-12.73	54.33	1.14	Peak	256	58	6	11490.00	46.12	54.00	-7.88	38.77	7.35	Average	158	223	7	11490.00	59.48	74.00	-14.52	52.13	7.35	Peak	158	223	8	17235.00	59.54	68.20	-8.66	52.77	6.77	Peak	100	123
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	57.71	68.20	-10.49	57.49	0.22	Peak	256	58																																																																																				
2	5700.00	76.33	105.20	-28.87	75.79	0.54	Peak	256	58																																																																																				
3	5720.00	87.35	110.80	-23.45	86.77	0.58	Peak	256	58																																																																																				
4	5725.00	99.43	122.20	-22.77	98.84	0.59	Peak	256	58																																																																																				
5	5925.00	55.47	68.20	-12.73	54.33	1.14	Peak	256	58																																																																																				
6	11490.00	46.12	54.00	-7.88	38.77	7.35	Average	158	223																																																																																				
7	11490.00	59.48	74.00	-14.52	52.13	7.35	Peak	158	223																																																																																				
8	17235.00	59.54	68.20	-8.66	52.77	6.77	Peak	100	123																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11a	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.99</td><td>68.20</td><td>-9.21</td><td>58.77</td><td>0.22</td><td>Peak</td><td>233</td><td>22</td></tr><tr><td>2</td><td>5700.00</td><td>85.21</td><td>105.20</td><td>-19.99</td><td>84.67</td><td>0.54</td><td>Peak</td><td>233</td><td>22</td></tr><tr><td>3</td><td>5720.00</td><td>96.22</td><td>110.80</td><td>-14.58</td><td>95.64</td><td>0.58</td><td>Peak</td><td>233</td><td>22</td></tr><tr><td>4</td><td>5725.00</td><td>100.82</td><td>122.20</td><td>-21.38</td><td>100.23</td><td>0.59</td><td>Peak</td><td>233</td><td>22</td></tr><tr><td>5</td><td>5925.00</td><td>55.76</td><td>68.20</td><td>-12.44</td><td>54.62</td><td>1.14</td><td>Peak</td><td>233</td><td>22</td></tr><tr><td>6</td><td>11490.00</td><td>45.81</td><td>54.00</td><td>-8.19</td><td>38.46</td><td>7.35</td><td>Average</td><td>208</td><td>255</td></tr><tr><td>7</td><td>11490.00</td><td>59.12</td><td>74.00</td><td>-14.88</td><td>51.77</td><td>7.35</td><td>Peak</td><td>208</td><td>255</td></tr><tr><td>8</td><td>17235.00</td><td>59.79</td><td>68.20</td><td>-8.41</td><td>53.02</td><td>6.77</td><td>Peak</td><td>100</td><td>150</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.99	68.20	-9.21	58.77	0.22	Peak	233	22	2	5700.00	85.21	105.20	-19.99	84.67	0.54	Peak	233	22	3	5720.00	96.22	110.80	-14.58	95.64	0.58	Peak	233	22	4	5725.00	100.82	122.20	-21.38	100.23	0.59	Peak	233	22	5	5925.00	55.76	68.20	-12.44	54.62	1.14	Peak	233	22	6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	208	255	7	11490.00	59.12	74.00	-14.88	51.77	7.35	Peak	208	255	8	17235.00	59.79	68.20	-8.41	53.02	6.77	Peak	100	150
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	58.99	68.20	-9.21	58.77	0.22	Peak	233	22																																																																																				
2	5700.00	85.21	105.20	-19.99	84.67	0.54	Peak	233	22																																																																																				
3	5720.00	96.22	110.80	-14.58	95.64	0.58	Peak	233	22																																																																																				
4	5725.00	100.82	122.20	-21.38	100.23	0.59	Peak	233	22																																																																																				
5	5925.00	55.76	68.20	-12.44	54.62	1.14	Peak	233	22																																																																																				
6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	208	255																																																																																				
7	11490.00	59.12	74.00	-14.88	51.77	7.35	Peak	208	255																																																																																				
8	17235.00	59.79	68.20	-8.41	53.02	6.77	Peak	100	150																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																													



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			




Modulation	11a	Test Freq. (MHz)	5785																																																												
Polarization	Vertical																																																														
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.11</td><td>68.20</td><td>-10.09</td><td>57.89</td><td>0.22</td><td>Peak</td><td>233</td><td>163</td></tr><tr><td>2</td><td>5925.00</td><td>57.87</td><td>68.20</td><td>-10.33</td><td>56.73</td><td>1.14</td><td>Peak</td><td>233</td><td>163</td></tr><tr><td>3</td><td>11570.00</td><td>45.40</td><td>54.00</td><td>-8.60</td><td>38.14</td><td>7.26</td><td>Average</td><td>100</td><td>256</td></tr><tr><td>4</td><td>11570.00</td><td>59.01</td><td>74.00</td><td>-14.99</td><td>51.75</td><td>7.26</td><td>Peak</td><td>100</td><td>256</td></tr><tr><td>5</td><td>17355.00</td><td>59.97</td><td>68.20</td><td>-8.23</td><td>53.01</td><td>6.96</td><td>Peak</td><td>100</td><td>130</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.11	68.20	-10.09	57.89	0.22	Peak	233	163	2	5925.00	57.87	68.20	-10.33	56.73	1.14	Peak	233	163	3	11570.00	45.40	54.00	-8.60	38.14	7.26	Average	100	256	4	11570.00	59.01	74.00	-14.99	51.75	7.26	Peak	100	256	5	17355.00	59.97	68.20	-8.23	53.01	6.96	Peak	100	130
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5650.00	58.11	68.20	-10.09	57.89	0.22	Peak	233	163																																																						
2	5925.00	57.87	68.20	-10.33	56.73	1.14	Peak	233	163																																																						
3	11570.00	45.40	54.00	-8.60	38.14	7.26	Average	100	256																																																						
4	11570.00	59.01	74.00	-14.99	51.75	7.26	Peak	100	256																																																						
5	17355.00	59.97	68.20	-8.23	53.01	6.96	Peak	100	130																																																						



Modulation	11a	Test Freq. (MHz)	5825																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																	
Level (dBUV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>56.14</td><td>0.22</td><td>Peak</td><td>253</td><td>70</td></tr><tr><td>2</td><td>5850.00</td><td>96.39</td><td>122.20</td><td>-25.81</td><td>95.42</td><td>0.97</td><td>Peak</td><td>253</td><td>70</td></tr><tr><td>3</td><td>5855.00</td><td>94.14</td><td>110.80</td><td>-16.66</td><td>93.15</td><td>0.99</td><td>Peak</td><td>253</td><td>70</td></tr><tr><td>4</td><td>5875.00</td><td>81.25</td><td>105.20</td><td>-23.95</td><td>80.23</td><td>1.02</td><td>Peak</td><td>253</td><td>70</td></tr><tr><td>5</td><td>5925.00</td><td>56.27</td><td>68.20</td><td>-11.93</td><td>55.13</td><td>1.14</td><td>Peak</td><td>253</td><td>70</td></tr><tr><td>6</td><td>11650.00</td><td>45.18</td><td>54.00</td><td>-8.82</td><td>38.52</td><td>6.66</td><td>Average</td><td>149</td><td>208</td></tr><tr><td>7</td><td>11650.00</td><td>58.20</td><td>74.00</td><td>-15.80</td><td>51.54</td><td>6.66</td><td>Peak</td><td>149</td><td>208</td></tr><tr><td>8</td><td>17475.00</td><td>60.21</td><td>68.20</td><td>-7.99</td><td>52.76</td><td>7.45</td><td>Peak</td><td>100</td><td>128</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5650.00	56.36	68.20	-11.84	56.14	0.22	Peak	253	70	2	5850.00	96.39	122.20	-25.81	95.42	0.97	Peak	253	70	3	5855.00	94.14	110.80	-16.66	93.15	0.99	Peak	253	70	4	5875.00	81.25	105.20	-23.95	80.23	1.02	Peak	253	70	5	5925.00	56.27	68.20	-11.93	55.13	1.14	Peak	253	70	6	11650.00	45.18	54.00	-8.82	38.52	6.66	Average	149	208	7	11650.00	58.20	74.00	-15.80	51.54	6.66	Peak	149	208	8	17475.00	60.21	68.20	-7.99	52.76	7.45	Peak	100	128
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																								
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																								
		dBuV/m			dBuV			cm	deg																																																																																																								
1	5650.00	56.36	68.20	-11.84	56.14	0.22	Peak	253	70																																																																																																								
2	5850.00	96.39	122.20	-25.81	95.42	0.97	Peak	253	70																																																																																																								
3	5855.00	94.14	110.80	-16.66	93.15	0.99	Peak	253	70																																																																																																								
4	5875.00	81.25	105.20	-23.95	80.23	1.02	Peak	253	70																																																																																																								
5	5925.00	56.27	68.20	-11.93	55.13	1.14	Peak	253	70																																																																																																								
6	11650.00	45.18	54.00	-8.82	38.52	6.66	Average	149	208																																																																																																								
7	11650.00	58.20	74.00	-15.80	51.54	6.66	Peak	149	208																																																																																																								
8	17475.00	60.21	68.20	-7.99	52.76	7.45	Peak	100	128																																																																																																								

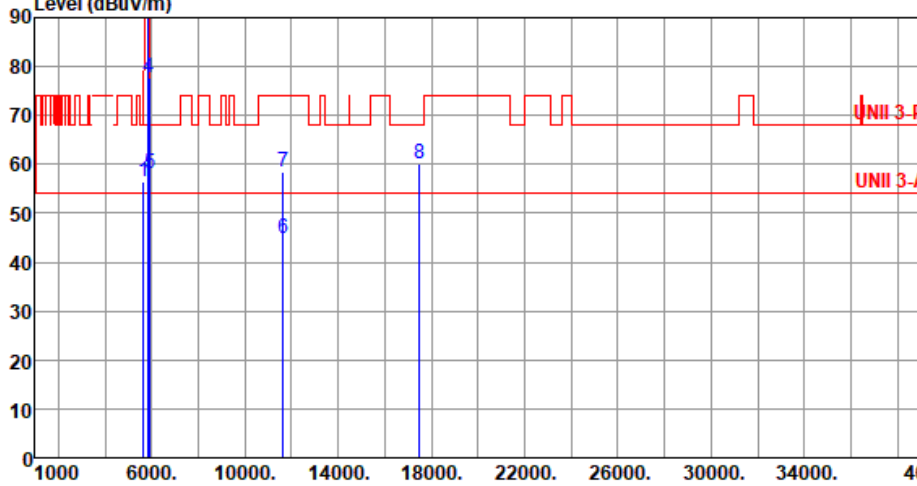

Modulation	11a	Test Freq. (MHz)	5825																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>56.34</td><td>68.20</td><td>-11.86</td><td>56.12</td><td>0.22</td><td>Peak</td><td>201</td><td>22</td></tr><tr><td>2</td><td>5850.00</td><td>94.54</td><td>122.20</td><td>-27.66</td><td>93.57</td><td>0.97</td><td>Peak</td><td>201</td><td>22</td></tr><tr><td>3</td><td>5855.00</td><td>92.44</td><td>110.80</td><td>-18.36</td><td>91.45</td><td>0.99</td><td>Peak</td><td>201</td><td>22</td></tr><tr><td>4</td><td>5875.00</td><td>77.87</td><td>105.20</td><td>-27.33</td><td>76.85</td><td>1.02</td><td>Peak</td><td>201</td><td>22</td></tr><tr><td>5</td><td>5925.00</td><td>58.02</td><td>68.20</td><td>-10.18</td><td>56.88</td><td>1.14</td><td>Peak</td><td>201</td><td>22</td></tr><tr><td>6</td><td>11650.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>38.27</td><td>6.66</td><td>Average</td><td>218</td><td>258</td></tr><tr><td>7</td><td>11650.00</td><td>58.43</td><td>74.00</td><td>-15.57</td><td>51.77</td><td>6.66</td><td>Peak</td><td>218</td><td>258</td></tr><tr><td>8</td><td>17475.00</td><td>60.21</td><td>68.20</td><td>-7.99</td><td>52.76</td><td>7.45</td><td>Peak</td><td>100</td><td>209</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	56.34	68.20	-11.86	56.12	0.22	Peak	201	22	2	5850.00	94.54	122.20	-27.66	93.57	0.97	Peak	201	22	3	5855.00	92.44	110.80	-18.36	91.45	0.99	Peak	201	22	4	5875.00	77.87	105.20	-27.33	76.85	1.02	Peak	201	22	5	5925.00	58.02	68.20	-10.18	56.88	1.14	Peak	201	22	6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	218	258	7	11650.00	58.43	74.00	-15.57	51.77	6.66	Peak	218	258	8	17475.00	60.21	68.20	-7.99	52.76	7.45	Peak	100	209
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	56.34	68.20	-11.86	56.12	0.22	Peak	201	22																																																																																				
2	5850.00	94.54	122.20	-27.66	93.57	0.97	Peak	201	22																																																																																				
3	5855.00	92.44	110.80	-18.36	91.45	0.99	Peak	201	22																																																																																				
4	5875.00	77.87	105.20	-27.33	76.85	1.02	Peak	201	22																																																																																				
5	5925.00	58.02	68.20	-10.18	56.88	1.14	Peak	201	22																																																																																				
6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	218	258																																																																																				
7	11650.00	58.43	74.00	-15.57	51.77	6.66	Peak	218	258																																																																																				
8	17475.00	60.21	68.20	-7.99	52.76	7.45	Peak	100	209																																																																																				

Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	be EHT20		Test Freq. (MHz)		5200																																																																																																								
Polarization	Horizontal																																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																													
Level (dBUV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><td></td><td>Freq.</td><td>Emission</td><td>Limit</td><td>Margin</td><td>SA</td><td>Factor</td><td>Remark</td><td>ANT</td><td>Turn</td></tr><tr><td></td><td>MHz</td><td>level</td><td></td><td></td><td>reading</td><td></td><td></td><td>High</td><td>Table</td></tr><tr><td></td><td></td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td></td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>5150.00</td><td>46.48</td><td>54.00</td><td>-7.52</td><td>46.14</td><td>0.34</td><td>Average</td><td>223</td><td>72</td></tr><tr><td>2</td><td>5150.00</td><td>63.11</td><td>74.00</td><td>-10.89</td><td>62.77</td><td>0.34</td><td>Peak</td><td>223</td><td>72</td></tr><tr><td>3</td><td>5350.00</td><td>42.97</td><td>54.00</td><td>-11.03</td><td>43.22</td><td>-0.25</td><td>Average</td><td>223</td><td>72</td></tr><tr><td>4</td><td>5350.00</td><td>54.43</td><td>74.00</td><td>-19.57</td><td>54.68</td><td>-0.25</td><td>Peak</td><td>223</td><td>72</td></tr><tr><td>5</td><td>10400.00</td><td>55.24</td><td>68.20</td><td>-12.96</td><td>47.86</td><td>7.38</td><td>Peak</td><td>100</td><td>264</td></tr><tr><td>6</td><td>15600.00</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>38.48</td><td>4.01</td><td>Average</td><td>100</td><td>324</td></tr><tr><td>7</td><td>15600.00</td><td>56.15</td><td>74.00</td><td>-17.85</td><td>52.14</td><td>4.01</td><td>Peak</td><td>100</td><td>324</td></tr></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5150.00	46.48	54.00	-7.52	46.14	0.34	Average	223	72	2	5150.00	63.11	74.00	-10.89	62.77	0.34	Peak	223	72	3	5350.00	42.97	54.00	-11.03	43.22	-0.25	Average	223	72	4	5350.00	54.43	74.00	-19.57	54.68	-0.25	Peak	223	72	5	10400.00	55.24	68.20	-12.96	47.86	7.38	Peak	100	264	6	15600.00	42.49	54.00	-11.51	38.48	4.01	Average	100	324	7	15600.00	56.15	74.00	-17.85	52.14	4.01	Peak	100	324
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																				
	MHz	level			reading			High	Table																																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																				
1	5150.00	46.48	54.00	-7.52	46.14	0.34	Average	223	72																																																																																																				
2	5150.00	63.11	74.00	-10.89	62.77	0.34	Peak	223	72																																																																																																				
3	5350.00	42.97	54.00	-11.03	43.22	-0.25	Average	223	72																																																																																																				
4	5350.00	54.43	74.00	-19.57	54.68	-0.25	Peak	223	72																																																																																																				
5	10400.00	55.24	68.20	-12.96	47.86	7.38	Peak	100	264																																																																																																				
6	15600.00	42.49	54.00	-11.51	38.48	4.01	Average	100	324																																																																																																				
7	15600.00	56.15	74.00	-17.85	52.14	4.01	Peak	100	324																																																																																																				



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5240																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.91</td><td>54.00</td><td>-9.09</td><td>44.57</td><td>0.34</td><td>Average</td><td>180</td><td>80</td></tr><tr><td>2</td><td>5150.00</td><td>56.76</td><td>74.00</td><td>-17.24</td><td>56.42</td><td>0.34</td><td>Peak</td><td>180</td><td>80</td></tr><tr><td>3</td><td>5350.00</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>43.79</td><td>-0.25</td><td>Average</td><td>180</td><td>80</td></tr><tr><td>4</td><td>5350.00</td><td>55.47</td><td>74.00</td><td>-18.53</td><td>55.72</td><td>-0.25</td><td>Peak</td><td>180</td><td>80</td></tr><tr><td>5</td><td>10480.00</td><td>54.84</td><td>68.20</td><td>-13.36</td><td>47.56</td><td>7.28</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>6</td><td>15720.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>38.52</td><td>4.24</td><td>Average</td><td>100</td><td>327</td></tr><tr><td>7</td><td>15720.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>52.04</td><td>4.24</td><td>Peak</td><td>100</td><td>327</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.91	54.00	-9.09	44.57	0.34	Average	180	80	2	5150.00	56.76	74.00	-17.24	56.42	0.34	Peak	180	80	3	5350.00	43.54	54.00	-10.46	43.79	-0.25	Average	180	80	4	5350.00	55.47	74.00	-18.53	55.72	-0.25	Peak	180	80	5	10480.00	54.84	68.20	-13.36	47.56	7.28	Peak	100	208	6	15720.00	42.76	54.00	-11.24	38.52	4.24	Average	100	327	7	15720.00	56.28	74.00	-17.72	52.04	4.24	Peak	100	327
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	44.91	54.00	-9.09	44.57	0.34	Average	180	80																																																																										
2	5150.00	56.76	74.00	-17.24	56.42	0.34	Peak	180	80																																																																										
3	5350.00	43.54	54.00	-10.46	43.79	-0.25	Average	180	80																																																																										
4	5350.00	55.47	74.00	-18.53	55.72	-0.25	Peak	180	80																																																																										
5	10480.00	54.84	68.20	-13.36	47.56	7.28	Peak	100	208																																																																										
6	15720.00	42.76	54.00	-11.24	38.52	4.24	Average	100	327																																																																										
7	15720.00	56.28	74.00	-17.72	52.04	4.24	Peak	100	327																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) <			



Modulation	be EHT20		Test Freq. (MHz)		5300																																																																																																																																						
Polarization	Vertical																																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																																																											
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.46</td><td>54.00</td><td>-9.54</td><td>44.12</td><td>0.34</td><td>Average</td><td>194</td><td>210</td></tr><tr><td>2</td><td>5150.00</td><td>57.56</td><td>74.00</td><td>-16.44</td><td>57.22</td><td>0.34</td><td>Peak</td><td>194</td><td>210</td></tr><tr><td>3</td><td>5350.00</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>45.57</td><td>-0.25</td><td>Average</td><td>194</td><td>210</td></tr><tr><td>4</td><td>5350.00</td><td>57.01</td><td>74.00</td><td>-16.99</td><td>57.26</td><td>-0.25</td><td>Peak</td><td>194</td><td>210</td></tr><tr><td>5</td><td>5380.00</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>47.57</td><td>-0.11</td><td>Average</td><td>194</td><td>210</td></tr><tr><td>6</td><td>5380.00</td><td>58.74</td><td>74.00</td><td>-15.26</td><td>58.85</td><td>-0.11</td><td>Peak</td><td>194</td><td>210</td></tr><tr><td>7</td><td>10600.00</td><td>42.09</td><td>54.00</td><td>-11.91</td><td>34.51</td><td>7.58</td><td>Average</td><td>100</td><td>206</td></tr><tr><td>8</td><td>10600.00</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>47.51</td><td>7.58</td><td>Peak</td><td>100</td><td>206</td></tr><tr><td>9</td><td>15900.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>38.31</td><td>4.35</td><td>Average</td><td>100</td><td>155</td></tr><tr><td>10</td><td>15900.00</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>51.53</td><td>4.35</td><td>Peak</td><td>100</td><td>155</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	44.46	54.00	-9.54	44.12	0.34	Average	194	210	2	5150.00	57.56	74.00	-16.44	57.22	0.34	Peak	194	210	3	5350.00	45.32	54.00	-8.68	45.57	-0.25	Average	194	210	4	5350.00	57.01	74.00	-16.99	57.26	-0.25	Peak	194	210	5	5380.00	47.46	54.00	-6.54	47.57	-0.11	Average	194	210	6	5380.00	58.74	74.00	-15.26	58.85	-0.11	Peak	194	210	7	10600.00	42.09	54.00	-11.91	34.51	7.58	Average	100	206	8	10600.00	55.09	74.00	-18.91	47.51	7.58	Peak	100	206	9	15900.00	42.66	54.00	-11.34	38.31	4.35	Average	100	155	10	15900.00	55.88	74.00	-18.12	51.53	4.35	Peak	100	155
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																		
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																																		
		dBuV/m			dBuV			cm	deg																																																																																																																																		
1	5150.00	44.46	54.00	-9.54	44.12	0.34	Average	194	210																																																																																																																																		
2	5150.00	57.56	74.00	-16.44	57.22	0.34	Peak	194	210																																																																																																																																		
3	5350.00	45.32	54.00	-8.68	45.57	-0.25	Average	194	210																																																																																																																																		
4	5350.00	57.01	74.00	-16.99	57.26	-0.25	Peak	194	210																																																																																																																																		
5	5380.00	47.46	54.00	-6.54	47.57	-0.11	Average	194	210																																																																																																																																		
6	5380.00	58.74	74.00	-15.26	58.85	-0.11	Peak	194	210																																																																																																																																		
7	10600.00	42.09	54.00	-11.91	34.51	7.58	Average	100	206																																																																																																																																		
8	10600.00	55.09	74.00	-18.91	47.51	7.58	Peak	100	206																																																																																																																																		
9	15900.00	42.66	54.00	-11.34	38.31	4.35	Average	100	155																																																																																																																																		
10	15900.00	55.88	74.00	-18.12	51.53	4.35	Peak	100	155																																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																																											



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT20		Test Freq. (MHz)		5320																																																																										
Polarization	Vertical																																																																														
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5350.00</td><td>47.61</td><td>54.00</td><td>-6.39</td><td>47.86</td><td>-0.25</td><td>Average</td><td>221</td><td>206</td></tr><tr><td>2</td><td>5350.00</td><td>62.26</td><td>74.00</td><td>-11.74</td><td>62.51</td><td>-0.25</td><td>Peak</td><td>221</td><td>206</td></tr><tr><td>3</td><td>10640.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>34.55</td><td>7.64</td><td>Average</td><td>100</td><td>128</td></tr><tr><td>4</td><td>10640.00</td><td>55.75</td><td>74.00</td><td>-18.25</td><td>48.11</td><td>7.64</td><td>Peak</td><td>100</td><td>128</td></tr><tr><td>5</td><td>15960.00</td><td>42.75</td><td>54.00</td><td>-11.25</td><td>38.42</td><td>4.33</td><td>Average</td><td>100</td><td>251</td></tr><tr><td>6</td><td>15960.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>51.33</td><td>4.33</td><td>Peak</td><td>100</td><td>251</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	47.61	54.00	-6.39	47.86	-0.25	Average	221	206	2	5350.00	62.26	74.00	-11.74	62.51	-0.25	Peak	221	206	3	10640.00	42.19	54.00	-11.81	34.55	7.64	Average	100	128	4	10640.00	55.75	74.00	-18.25	48.11	7.64	Peak	100	128	5	15960.00	42.75	54.00	-11.25	38.42	4.33	Average	100	251	6	15960.00	55.66	74.00	-18.34	51.33	4.33	Peak	100	251
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																						
1	5350.00	47.61	54.00	-6.39	47.86	-0.25	Average	221	206																																																																						
2	5350.00	62.26	74.00	-11.74	62.51	-0.25	Peak	221	206																																																																						
3	10640.00	42.19	54.00	-11.81	34.55	7.64	Average	100	128																																																																						
4	10640.00	55.75	74.00	-18.25	48.11	7.64	Peak	100	128																																																																						
5	15960.00	42.75	54.00	-11.25	38.42	4.33	Average	100	251																																																																						
6	15960.00	55.66	74.00	-18.34	51.33	4.33	Peak	100	251																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

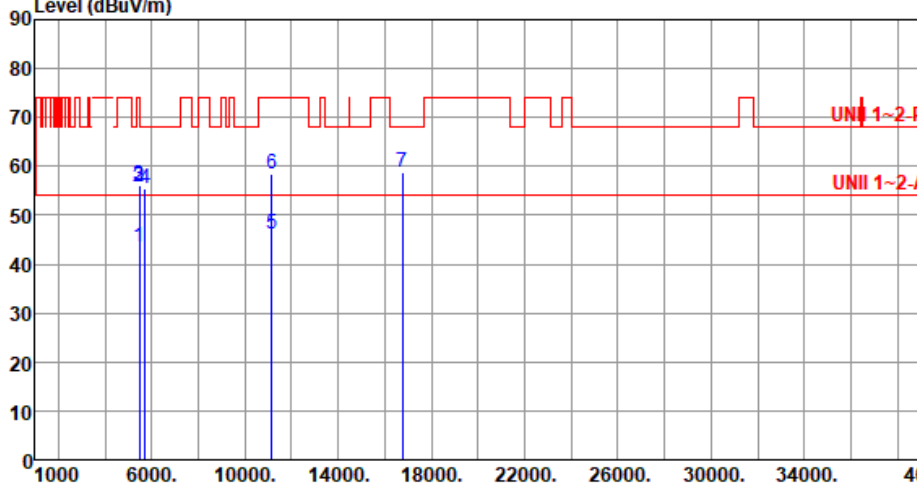

Modulation	be EHT20		Test Freq. (MHz)		5580																																																																																																								
Polarization	Vertical																																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>43.26</td><td>0.39</td><td>Average</td><td>200</td><td>161</td></tr><tr><td>2</td><td>5460.00</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>55.26</td><td>0.39</td><td>Peak</td><td>200</td><td>161</td></tr><tr><td>3</td><td>5470.00</td><td>56.25</td><td>68.20</td><td>-11.95</td><td>55.86</td><td>0.39</td><td>Peak</td><td>200</td><td>161</td></tr><tr><td>4</td><td>5725.00</td><td>55.35</td><td>68.20</td><td>-12.85</td><td>54.76</td><td>0.59</td><td>Peak</td><td>200</td><td>161</td></tr><tr><td>5</td><td>11160.00</td><td>46.22</td><td>54.00</td><td>-7.78</td><td>39.26</td><td>6.96</td><td>Average</td><td>100</td><td>268</td></tr><tr><td>6</td><td>11160.00</td><td>58.29</td><td>74.00</td><td>-15.71</td><td>51.33</td><td>6.96</td><td>Peak</td><td>100</td><td>268</td></tr><tr><td>7</td><td>16740.00</td><td>58.75</td><td>68.20</td><td>-9.45</td><td>51.33</td><td>7.42</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5460.00	43.65	54.00	-10.35	43.26	0.39	Average	200	161	2	5460.00	55.65	74.00	-18.35	55.26	0.39	Peak	200	161	3	5470.00	56.25	68.20	-11.95	55.86	0.39	Peak	200	161	4	5725.00	55.35	68.20	-12.85	54.76	0.59	Peak	200	161	5	11160.00	46.22	54.00	-7.78	39.26	6.96	Average	100	268	6	11160.00	58.29	74.00	-15.71	51.33	6.96	Peak	100	268	7	16740.00	58.75	68.20	-9.45	51.33	7.42	Peak	100	108
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																																				
1	5460.00	43.65	54.00	-10.35	43.26	0.39	Average	200	161																																																																																																				
2	5460.00	55.65	74.00	-18.35	55.26	0.39	Peak	200	161																																																																																																				
3	5470.00	56.25	68.20	-11.95	55.86	0.39	Peak	200	161																																																																																																				
4	5725.00	55.35	68.20	-12.85	54.76	0.59	Peak	200	161																																																																																																				
5	11160.00	46.22	54.00	-7.78	39.26	6.96	Average	100	268																																																																																																				
6	11160.00	58.29	74.00	-15.71	51.33	6.96	Peak	100	268																																																																																																				
7	16740.00	58.75	68.20	-9.45	51.33	7.42	Peak	100	108																																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5700																																																		
Polarization	Vertical																																																				
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>67.12</td><td>68.20</td><td>-1.08</td><td>66.53</td><td>0.59</td><td>Peak</td><td>239</td><td>217</td></tr><tr><td>2</td><td>11400.00</td><td>44.11</td><td>54.00</td><td>-9.89</td><td>36.88</td><td>7.23</td><td>Average</td><td>100</td><td>283</td></tr><tr><td>3</td><td>11400.00</td><td>57.05</td><td>74.00</td><td>-16.95</td><td>49.82</td><td>7.23</td><td>Peak</td><td>100</td><td>283</td></tr><tr><td>4</td><td>17100.00</td><td>59.93</td><td>68.20</td><td>-8.27</td><td>53.03</td><td>6.90</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	67.12	68.20	-1.08	66.53	0.59	Peak	239	217	2	11400.00	44.11	54.00	-9.89	36.88	7.23	Average	100	283	3	11400.00	57.05	74.00	-16.95	49.82	7.23	Peak	100	283	4	17100.00	59.93	68.20	-8.27	53.03	6.90	Peak	100	182
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	67.12	68.20	-1.08	66.53	0.59	Peak	239	217																																												
2	11400.00	44.11	54.00	-9.89	36.88	7.23	Average	100	283																																												
3	11400.00	57.05	74.00	-16.95	49.82	7.23	Peak	100	283																																												
4	17100.00	59.93	68.20	-8.27	53.03	6.90	Peak	100	182																																												




Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

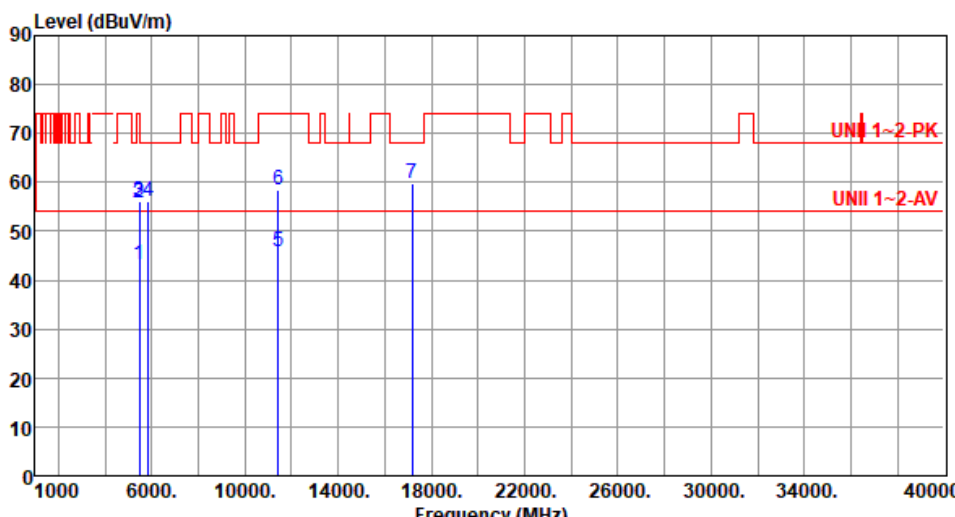

Modulation	be EHT20	Test Freq. (MHz)	5720						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.25	54.00	-10.75	42.86	0.39	Average	230	29
2	5460.00	55.70	74.00	-18.30	55.31	0.39	Peak	230	29
3	5470.00	56.15	68.20	-12.05	55.76	0.39	Peak	230	29
4	5850.00	56.10	68.20	-12.10	55.13	0.97	Peak	230	29
5	11440.00	45.80	54.00	-8.20	38.59	7.21	Average	189	251
6	11440.00	58.41	74.00	-15.59	51.20	7.21	Peak	189	251
7	17160.00	59.72	68.20	-8.48	53.17	6.55	Peak	100	208

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

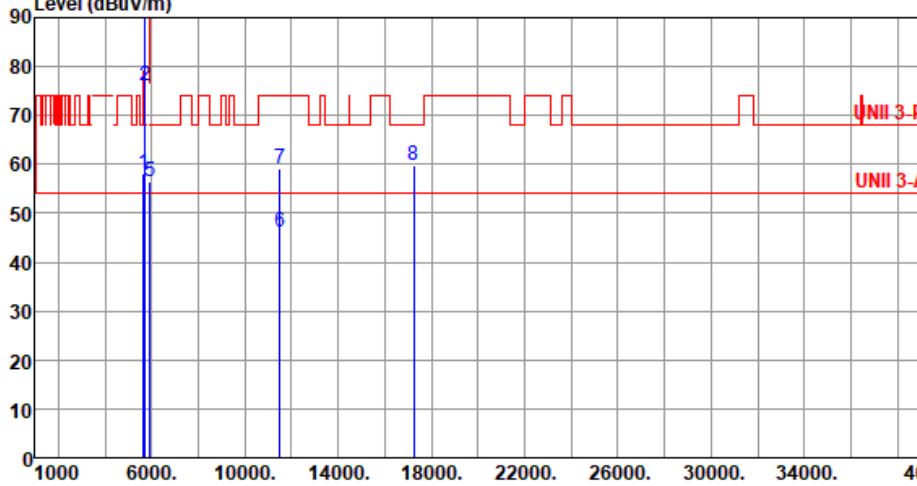

Modulation	be EHT20	Test Freq. (MHz)	5745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.01</td><td>68.20</td><td>-10.19</td><td>57.79</td><td>0.22</td><td>Peak</td><td>158</td><td>47</td></tr><tr><td>2</td><td>5700.00</td><td>76.15</td><td>105.20</td><td>-29.05</td><td>75.61</td><td>0.54</td><td>Peak</td><td>158</td><td>47</td></tr><tr><td>3</td><td>5720.00</td><td>88.79</td><td>110.80</td><td>-22.01</td><td>88.21</td><td>0.58</td><td>Peak</td><td>158</td><td>47</td></tr><tr><td>4</td><td>5725.00</td><td>94.01</td><td>122.20</td><td>-28.19</td><td>93.42</td><td>0.59</td><td>Peak</td><td>158</td><td>47</td></tr><tr><td>5</td><td>5925.00</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>55.22</td><td>1.14</td><td>Peak</td><td>158</td><td>47</td></tr><tr><td>6</td><td>11490.00</td><td>46.00</td><td>54.00</td><td>-8.00</td><td>38.65</td><td>7.35</td><td>Average</td><td>162</td><td>245</td></tr><tr><td>7</td><td>11490.00</td><td>59.21</td><td>74.00</td><td>-14.79</td><td>51.86</td><td>7.35</td><td>Peak</td><td>162</td><td>245</td></tr><tr><td>8</td><td>17235.00</td><td>59.88</td><td>68.20</td><td>-8.32</td><td>53.11</td><td>6.77</td><td>Peak</td><td>100</td><td>182</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.01	68.20	-10.19	57.79	0.22	Peak	158	47	2	5700.00	76.15	105.20	-29.05	75.61	0.54	Peak	158	47	3	5720.00	88.79	110.80	-22.01	88.21	0.58	Peak	158	47	4	5725.00	94.01	122.20	-28.19	93.42	0.59	Peak	158	47	5	5925.00	56.36	68.20	-11.84	55.22	1.14	Peak	158	47	6	11490.00	46.00	54.00	-8.00	38.65	7.35	Average	162	245	7	11490.00	59.21	74.00	-14.79	51.86	7.35	Peak	162	245	8	17235.00	59.88	68.20	-8.32	53.11	6.77	Peak	100	182
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	58.01	68.20	-10.19	57.79	0.22	Peak	158	47																																																																																				
2	5700.00	76.15	105.20	-29.05	75.61	0.54	Peak	158	47																																																																																				
3	5720.00	88.79	110.80	-22.01	88.21	0.58	Peak	158	47																																																																																				
4	5725.00	94.01	122.20	-28.19	93.42	0.59	Peak	158	47																																																																																				
5	5925.00	56.36	68.20	-11.84	55.22	1.14	Peak	158	47																																																																																				
6	11490.00	46.00	54.00	-8.00	38.65	7.35	Average	162	245																																																																																				
7	11490.00	59.21	74.00	-14.79	51.86	7.35	Peak	162	245																																																																																				
8	17235.00	59.88	68.20	-8.32	53.11	6.77	Peak	100	182																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5785																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																															
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>58.94</td><td>68.20</td><td>-9.26</td><td>58.72</td><td>0.22</td><td>Peak</td><td>243</td><td>23</td></tr><tr><td>2</td><td>5925.00</td><td>60.08</td><td>68.20</td><td>-8.12</td><td>58.94</td><td>1.14</td><td>Peak</td><td>243</td><td>23</td></tr><tr><td>3</td><td>11570.00</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>38.51</td><td>7.26</td><td>Average</td><td>152</td><td>233</td></tr><tr><td>4</td><td>11570.00</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>51.22</td><td>7.26</td><td>Peak</td><td>152</td><td>233</td></tr><tr><td>5</td><td>17355.00</td><td>59.09</td><td>68.20</td><td>-9.11</td><td>52.13</td><td>6.96</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	58.94	68.20	-9.26	58.72	0.22	Peak	243	23	2	5925.00	60.08	68.20	-8.12	58.94	1.14	Peak	243	23	3	11570.00	45.77	54.00	-8.23	38.51	7.26	Average	152	233	4	11570.00	58.48	74.00	-15.52	51.22	7.26	Peak	152	233	5	17355.00	59.09	68.20	-9.11	52.13	6.96	Peak	100	176
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5650.00	58.94	68.20	-9.26	58.72	0.22	Peak	243	23																																																						
2	5925.00	60.08	68.20	-8.12	58.94	1.14	Peak	243	23																																																						
3	11570.00	45.77	54.00	-8.23	38.51	7.26	Average	152	233																																																						
4	11570.00	58.48	74.00	-15.52	51.22	7.26	Peak	152	233																																																						
5	17355.00	59.09	68.20	-9.11	52.13	6.96	Peak	100	176																																																						



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m)			

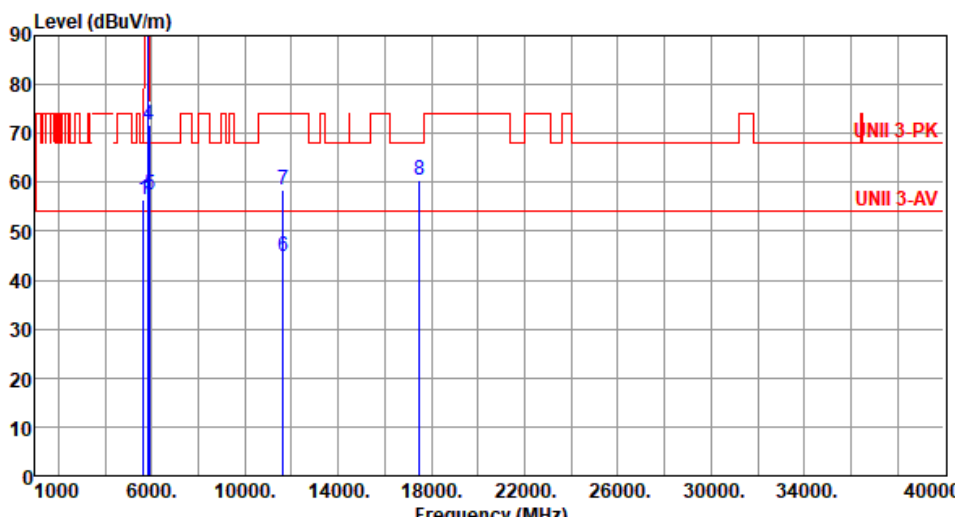

Modulation	be EHT20	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.60	68.20	-11.60	56.38	0.22	Peak	202	20
2	5850.00	93.34	122.20	-28.86	92.37	0.97	Peak	202	20
3	5855.00	89.62	110.80	-21.18	88.63	0.99	Peak	202	20
4	5875.00	71.89	105.20	-33.31	70.87	1.02	Peak	202	20
5	5925.00	57.51	68.20	-10.69	56.37	1.14	Peak	202	20
6	11650.00	44.94	54.00	-9.06	38.28	6.66	Average	221	254
7	11650.00	58.61	74.00	-15.39	51.95	6.66	Peak	221	254
8	17475.00	60.29	68.20	-7.91	52.84	7.45	Peak	100	179


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

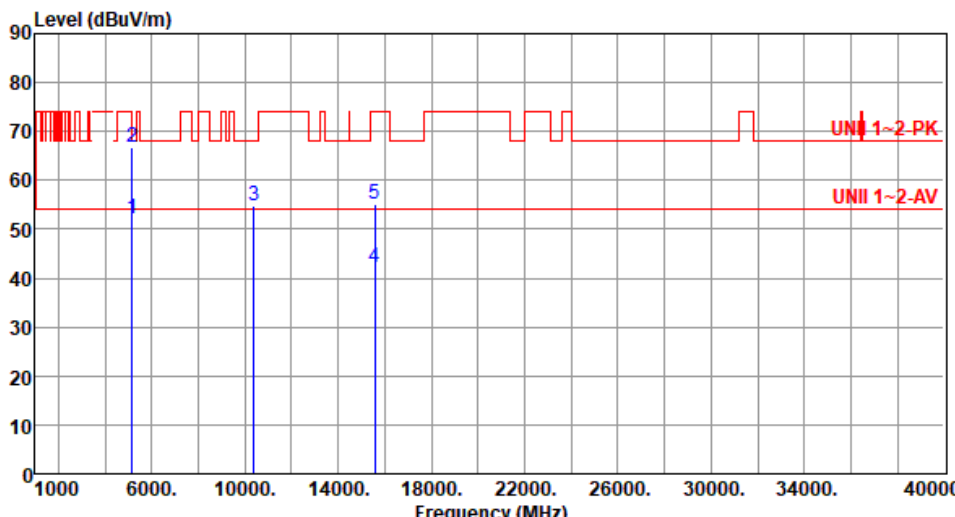


Modulation	be EHT40	Test Freq. (MHz)	5190						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.13	54.00	-1.87	51.79	0.34	Average	262	197
2	5150.00	66.75	74.00	-7.25	66.41	0.34	Peak	262	197
3	10380.00	54.90	68.20	-13.30	47.51	7.39	Peak	100	168
4	15570.00	42.30	54.00	-11.70	38.33	3.97	Average	100	223
5	15570.00	55.23	74.00	-18.77	51.26	3.97	Peak	100	223
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			

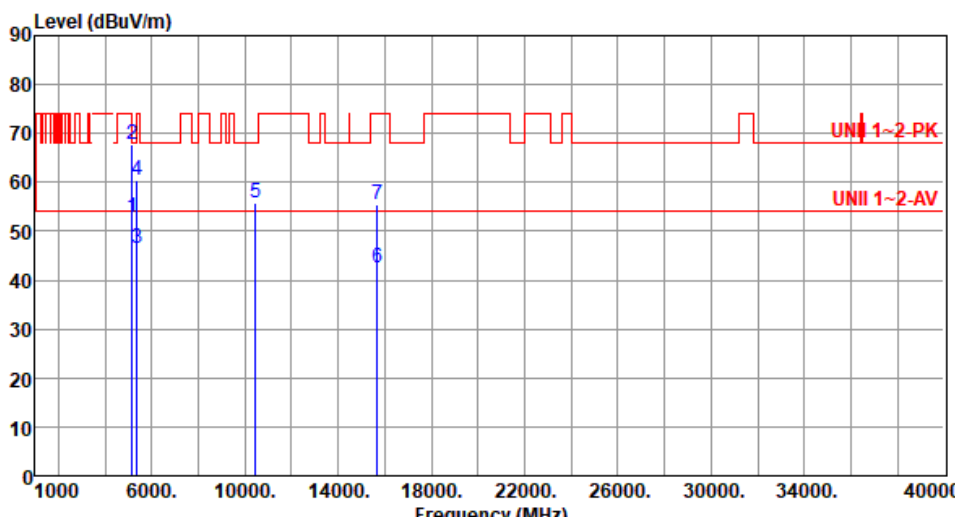

Modulation	be EHT40	Test Freq. (MHz)	5230																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64																																																																																			
																																																																																			
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>52.79</td><td>54.00</td><td>-1.21</td><td>52.45</td><td>0.34</td><td>Average</td><td>244</td><td>201</td></tr><tr><td>2</td><td>5150.00</td><td>67.78</td><td>74.00</td><td>-6.22</td><td>67.44</td><td>0.34</td><td>Peak</td><td>244</td><td>201</td></tr><tr><td>3</td><td>5350.00</td><td>46.63</td><td>54.00</td><td>-7.37</td><td>46.88</td><td>-0.25</td><td>Average</td><td>244</td><td>201</td></tr><tr><td>4</td><td>5350.00</td><td>60.59</td><td>74.00</td><td>-13.41</td><td>60.84</td><td>-0.25</td><td>Peak</td><td>244</td><td>201</td></tr><tr><td>5</td><td>10460.00</td><td>55.84</td><td>68.20</td><td>-12.36</td><td>48.51</td><td>7.33</td><td>Peak</td><td>100</td><td>208</td></tr><tr><td>6</td><td>15690.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>38.46</td><td>4.18</td><td>Average</td><td>100</td><td>250</td></tr><tr><td>7</td><td>15690.00</td><td>55.41</td><td>74.00</td><td>-18.59</td><td>51.23</td><td>4.18</td><td>Peak</td><td>100</td><td>250</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.79	54.00	-1.21	52.45	0.34	Average	244	201	2	5150.00	67.78	74.00	-6.22	67.44	0.34	Peak	244	201	3	5350.00	46.63	54.00	-7.37	46.88	-0.25	Average	244	201	4	5350.00	60.59	74.00	-13.41	60.84	-0.25	Peak	244	201	5	10460.00	55.84	68.20	-12.36	48.51	7.33	Peak	100	208	6	15690.00	42.64	54.00	-11.36	38.46	4.18	Average	100	250	7	15690.00	55.41	74.00	-18.59	51.23	4.18	Peak	100	250		
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	52.79	54.00	-1.21	52.45	0.34	Average	244	201																																																																										
2	5150.00	67.78	74.00	-6.22	67.44	0.34	Peak	244	201																																																																										
3	5350.00	46.63	54.00	-7.37	46.88	-0.25	Average	244	201																																																																										
4	5350.00	60.59	74.00	-13.41	60.84	-0.25	Peak	244	201																																																																										
5	10460.00	55.84	68.20	-12.36	48.51	7.33	Peak	100	208																																																																										
6	15690.00	42.64	54.00	-11.36	38.46	4.18	Average	100	250																																																																										
7	15690.00	55.41	74.00	-18.59	51.23	4.18	Peak	100	250																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																
Polarization	Horizontal																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>44.46</td><td>54.00</td><td>-9.54</td><td>44.12</td><td>0.34</td><td>Average</td><td>234</td><td>81</td></tr><tr><td>2</td><td>5150.00</td><td>57.17</td><td>74.00</td><td>-16.83</td><td>56.83</td><td>0.34</td><td>Peak</td><td>234</td><td>81</td></tr><tr><td>3</td><td>5350.00</td><td>48.30</td><td>54.00</td><td>-5.70</td><td>48.55</td><td>-0.25</td><td>Average</td><td>234</td><td>81</td></tr><tr><td>4</td><td>5350.00</td><td>68.11</td><td>74.00</td><td>-5.89</td><td>68.36</td><td>-0.25</td><td>Peak</td><td>234</td><td>81</td></tr><tr><td>5</td><td>10540.00</td><td>54.39</td><td>68.20</td><td>-13.81</td><td>47.26</td><td>7.13</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>6</td><td>15810.00</td><td>42.28</td><td>54.00</td><td>-11.72</td><td>38.46</td><td>3.82</td><td>Average</td><td>100</td><td>186</td></tr><tr><td>7</td><td>15810.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>51.77</td><td>3.82</td><td>Peak</td><td>100</td><td>186</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	44.46	54.00	-9.54	44.12	0.34	Average	234	81	2	5150.00	57.17	74.00	-16.83	56.83	0.34	Peak	234	81	3	5350.00	48.30	54.00	-5.70	48.55	-0.25	Average	234	81	4	5350.00	68.11	74.00	-5.89	68.36	-0.25	Peak	234	81	5	10540.00	54.39	68.20	-13.81	47.26	7.13	Peak	100	33	6	15810.00	42.28	54.00	-11.72	38.46	3.82	Average	100	186	7	15810.00	55.59	74.00	-18.41	51.77	3.82	Peak	100	186
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	44.46	54.00	-9.54	44.12	0.34	Average	234	81																																																																										
2	5150.00	57.17	74.00	-16.83	56.83	0.34	Peak	234	81																																																																										
3	5350.00	48.30	54.00	-5.70	48.55	-0.25	Average	234	81																																																																										
4	5350.00	68.11	74.00	-5.89	68.36	-0.25	Peak	234	81																																																																										
5	10540.00	54.39	68.20	-13.81	47.26	7.13	Peak	100	33																																																																										
6	15810.00	42.28	54.00	-11.72	38.46	3.82	Average	100	186																																																																										
7	15810.00	55.59	74.00	-18.41	51.77	3.82	Peak	100	186																																																																										



Modulation	be EHT40	Test Freq. (MHz)	5270																																																																																
Polarization	Vertical																																																																																		
Test By :Roger Lu Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m) UNI 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>46.46</td><td>54.00</td><td>-7.54</td><td>46.12</td><td>0.34</td><td>Average</td><td>225</td><td>200</td></tr><tr><td>2</td><td>5150.00</td><td>62.17</td><td>74.00</td><td>-11.83</td><td>61.83</td><td>0.34</td><td>Peak</td><td>225</td><td>200</td></tr><tr><td>3</td><td>5350.00</td><td>52.30</td><td>54.00</td><td>-1.70</td><td>52.55</td><td>-0.25</td><td>Average</td><td>225</td><td>200</td></tr><tr><td>4</td><td>5350.00</td><td>68.11</td><td>74.00</td><td>-5.89</td><td>68.36</td><td>-0.25</td><td>Peak</td><td>225</td><td>200</td></tr><tr><td>5</td><td>10540.00</td><td>54.26</td><td>68.20</td><td>-13.94</td><td>47.13</td><td>7.13</td><td>Peak</td><td>100</td><td>28</td></tr><tr><td>6</td><td>15810.00</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>38.51</td><td>3.82</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>7</td><td>15810.00</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>51.84</td><td>3.82</td><td>Peak</td><td>100</td><td>223</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	46.46	54.00	-7.54	46.12	0.34	Average	225	200	2	5150.00	62.17	74.00	-11.83	61.83	0.34	Peak	225	200	3	5350.00	52.30	54.00	-1.70	52.55	-0.25	Average	225	200	4	5350.00	68.11	74.00	-5.89	68.36	-0.25	Peak	225	200	5	10540.00	54.26	68.20	-13.94	47.13	7.13	Peak	100	28	6	15810.00	42.33	54.00	-11.67	38.51	3.82	Average	100	223	7	15810.00	55.66	74.00	-18.34	51.84	3.82	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	46.46	54.00	-7.54	46.12	0.34	Average	225	200																																																																										
2	5150.00	62.17	74.00	-11.83	61.83	0.34	Peak	225	200																																																																										
3	5350.00	52.30	54.00	-1.70	52.55	-0.25	Average	225	200																																																																										
4	5350.00	68.11	74.00	-5.89	68.36	-0.25	Peak	225	200																																																																										
5	10540.00	54.26	68.20	-13.94	47.13	7.13	Peak	100	28																																																																										
6	15810.00	42.33	54.00	-11.67	38.51	3.82	Average	100	223																																																																										
7	15810.00	55.66	74.00	-18.34	51.84	3.82	Peak	100	223																																																																										



Modulation	be EHT40	Test Freq. (MHz)	5310																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																									
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>46.61</td><td>54.00</td><td>-7.39</td><td>46.86</td><td>-0.25</td><td>Average</td><td>135</td><td>25</td></tr><tr><td>2</td><td>5350.00</td><td>59.66</td><td>74.00</td><td>-14.34</td><td>59.91</td><td>-0.25</td><td>Peak</td><td>135</td><td>25</td></tr><tr><td>3</td><td>10620.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>34.16</td><td>7.61</td><td>Average</td><td>100</td><td>126</td></tr><tr><td>4</td><td>10620.00</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>47.38</td><td>7.61</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>5</td><td>15930.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>38.57</td><td>4.33</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>6</td><td>15930.00</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>51.56</td><td>4.33</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	46.61	54.00	-7.39	46.86	-0.25	Average	135	25	2	5350.00	59.66	74.00	-14.34	59.91	-0.25	Peak	135	25	3	10620.00	41.77	54.00	-12.23	34.16	7.61	Average	100	126	4	10620.00	54.99	74.00	-19.01	47.38	7.61	Peak	100	126	5	15930.00	42.90	54.00	-11.10	38.57	4.33	Average	100	203	6	15930.00	55.89	74.00	-18.11	51.56	4.33	Peak	100	203
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	46.61	54.00	-7.39	46.86	-0.25	Average	135	25																																																																
2	5350.00	59.66	74.00	-14.34	59.91	-0.25	Peak	135	25																																																																
3	10620.00	41.77	54.00	-12.23	34.16	7.61	Average	100	126																																																																
4	10620.00	54.99	74.00	-19.01	47.38	7.61	Peak	100	126																																																																
5	15930.00	42.90	54.00	-11.10	38.57	4.33	Average	100	203																																																																
6	15930.00	55.89	74.00	-18.11	51.56	4.33	Peak	100	203																																																																



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) </			



Modulation	be EHT40		Test Freq. (MHz)		5510																																																																																														
Polarization	Vertical																																																																																																		
Test By :Sean Yu			Temperature(°C):24			Humidity(%):64																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>48.69</td><td>54.00</td><td>-5.31</td><td>48.30</td><td>0.39</td><td>Average</td><td>249</td><td>14</td></tr><tr><td>2</td><td>5460.00</td><td>61.05</td><td>74.00</td><td>-12.95</td><td>60.66</td><td>0.39</td><td>Peak</td><td>249</td><td>14</td></tr><tr><td>3</td><td>5470.00</td><td>66.63</td><td>68.20</td><td>-1.57</td><td>66.24</td><td>0.39</td><td>Peak</td><td>249</td><td>14</td></tr><tr><td>4</td><td>11020.00</td><td>42.70</td><td>54.00</td><td>-11.30</td><td>35.13</td><td>7.57</td><td>Average</td><td>100</td><td>158</td></tr><tr><td>5</td><td>11020.00</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>47.77</td><td>7.57</td><td>Peak</td><td>100</td><td>158</td></tr><tr><td>6</td><td>16530.00</td><td>58.95</td><td>68.20</td><td>-9.25</td><td>52.67</td><td>6.28</td><td>Peak</td><td>100</td><td>220</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m	dBuV/m	dB	dBuV			cm	deg	1	5460.00	48.69	54.00	-5.31	48.30	0.39	Average	249	14	2	5460.00	61.05	74.00	-12.95	60.66	0.39	Peak	249	14	3	5470.00	66.63	68.20	-1.57	66.24	0.39	Peak	249	14	4	11020.00	42.70	54.00	-11.30	35.13	7.57	Average	100	158	5	11020.00	55.34	74.00	-18.66	47.77	7.57	Peak	100	158	6	16530.00	58.95	68.20	-9.25	52.67	6.28	Peak	100	220
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																										
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																										
		dBuV/m	dBuV/m	dB	dBuV			cm	deg																																																																																										
1	5460.00	48.69	54.00	-5.31	48.30	0.39	Average	249	14																																																																																										
2	5460.00	61.05	74.00	-12.95	60.66	0.39	Peak	249	14																																																																																										
3	5470.00	66.63	68.20	-1.57	66.24	0.39	Peak	249	14																																																																																										
4	11020.00	42.70	54.00	-11.30	35.13	7.57	Average	100	158																																																																																										
5	11020.00	55.34	74.00	-18.66	47.77	7.57	Peak	100	158																																																																																										
6	16530.00	58.95	68.20	-9.25	52.67	6.28	Peak	100	220																																																																																										

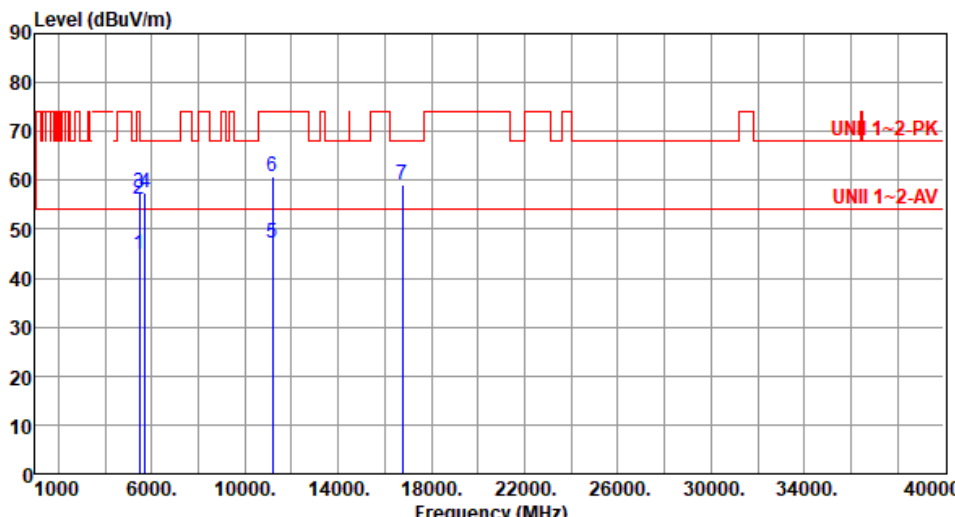

Modulation	be EHT40	Test Freq. (MHz)	5590																																																																																
Polarization	Horizontal																																																																																		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																			
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>44.56</td><td>0.39</td><td>Average</td><td>201</td><td>243</td></tr><tr><td>2</td><td>5460.00</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>55.84</td><td>0.39</td><td>Peak</td><td>201</td><td>243</td></tr><tr><td>3</td><td>5470.00</td><td>57.52</td><td>68.20</td><td>-10.68</td><td>57.13</td><td>0.39</td><td>Peak</td><td>201</td><td>243</td></tr><tr><td>4</td><td>5725.00</td><td>57.35</td><td>68.20</td><td>-10.85</td><td>56.76</td><td>0.59</td><td>Peak</td><td>201</td><td>243</td></tr><tr><td>5</td><td>11180.00</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>40.43</td><td>6.83</td><td>Average</td><td>100</td><td>79</td></tr><tr><td>6</td><td>11180.00</td><td>60.62</td><td>74.00</td><td>-13.38</td><td>53.79</td><td>6.83</td><td>Peak</td><td>100</td><td>79</td></tr><tr><td>7</td><td>16770.00</td><td>59.03</td><td>68.20</td><td>-9.17</td><td>51.66</td><td>7.37</td><td>Peak</td><td>100</td><td>203</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.95	54.00	-9.05	44.56	0.39	Average	201	243	2	5460.00	56.23	74.00	-17.77	55.84	0.39	Peak	201	243	3	5470.00	57.52	68.20	-10.68	57.13	0.39	Peak	201	243	4	5725.00	57.35	68.20	-10.85	56.76	0.59	Peak	201	243	5	11180.00	47.26	54.00	-6.74	40.43	6.83	Average	100	79	6	11180.00	60.62	74.00	-13.38	53.79	6.83	Peak	100	79	7	16770.00	59.03	68.20	-9.17	51.66	7.37	Peak	100	203
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	44.95	54.00	-9.05	44.56	0.39	Average	201	243																																																																										
2	5460.00	56.23	74.00	-17.77	55.84	0.39	Peak	201	243																																																																										
3	5470.00	57.52	68.20	-10.68	57.13	0.39	Peak	201	243																																																																										
4	5725.00	57.35	68.20	-10.85	56.76	0.59	Peak	201	243																																																																										
5	11180.00	47.26	54.00	-6.74	40.43	6.83	Average	100	79																																																																										
6	11180.00	60.62	74.00	-13.38	53.79	6.83	Peak	100	79																																																																										
7	16770.00	59.03	68.20	-9.17	51.66	7.37	Peak	100	203																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5670																																																		
Polarization	Vertical																																																				
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																					
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>61.99</td><td>68.20</td><td>-6.21</td><td>61.40</td><td>0.59</td><td>Peak</td><td>250</td><td>201</td></tr><tr><td>2</td><td>11340.00</td><td>42.77</td><td>54.00</td><td>-11.23</td><td>35.68</td><td>7.09</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>3</td><td>11340.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>48.94</td><td>7.09</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>4</td><td>17010.00</td><td>60.23</td><td>68.20</td><td>-7.97</td><td>52.99</td><td>7.24</td><td>Peak</td><td>100</td><td>264</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	61.99	68.20	-6.21	61.40	0.59	Peak	250	201	2	11340.00	42.77	54.00	-11.23	35.68	7.09	Average	100	108	3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	108	4	17010.00	60.23	68.20	-7.97	52.99	7.24	Peak	100	264
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	61.99	68.20	-6.21	61.40	0.59	Peak	250	201																																												
2	11340.00	42.77	54.00	-11.23	35.68	7.09	Average	100	108																																												
3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	108																																												
4	17010.00	60.23	68.20	-7.97	52.99	7.24	Peak	100	264																																												




Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			

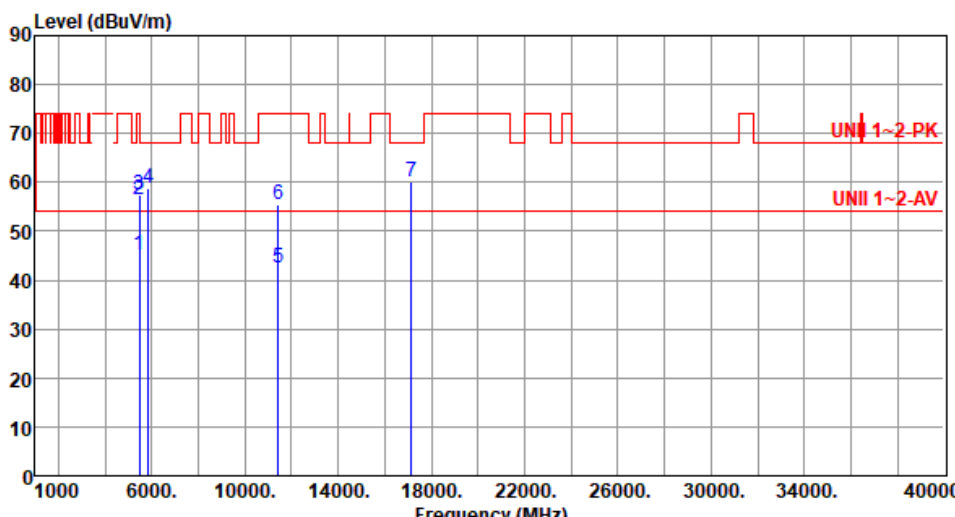


Modulation	be EHT40	Test Freq. (MHz)	5710						
Polarization	Vertical								
Test By :Allen Lee Temperature(°C):24 Humidity(%):64									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.23	54.00	-8.77	44.84	0.39	Average	205	204
2	5460.00	56.45	74.00	-17.55	56.06	0.39	Peak	205	204
3	5470.00	57.30	68.20	-10.90	56.91	0.39	Peak	205	204
4	5850.00	58.89	68.20	-9.31	57.92	0.97	Peak	205	204
5	11420.00	42.50	54.00	-11.50	35.28	7.22	Average	100	224
6	11420.00	55.62	74.00	-18.38	48.40	7.22	Peak	100	224
7	17130.00	59.95	68.20	-8.25	53.26	6.69	Peak	100	306

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

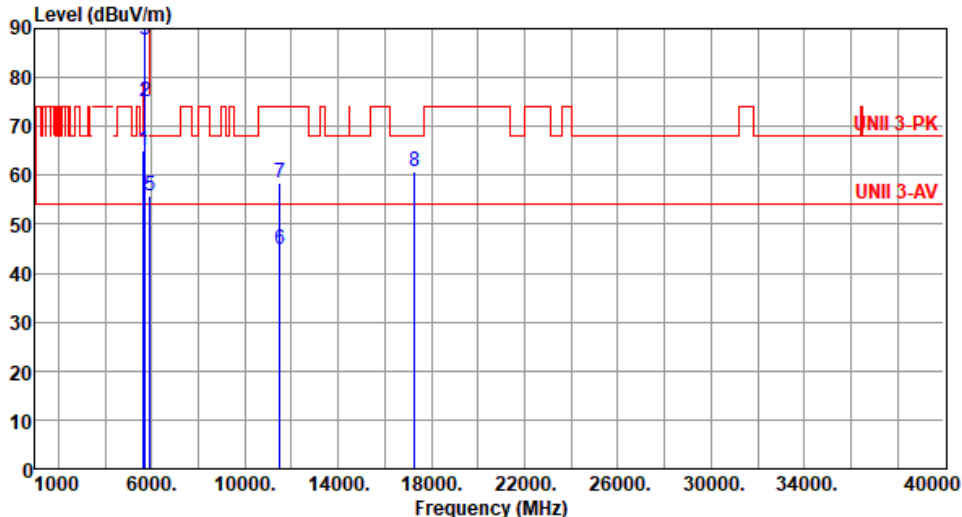


Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																										
Polarization	Horizontal																																																																																												
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>64.95</td><td>68.20</td><td>-3.25</td><td>64.73</td><td>0.22</td><td>Peak</td><td>152</td><td>45</td></tr><tr><td>2</td><td>5700.00</td><td>75.07</td><td>105.20</td><td>-30.13</td><td>74.53</td><td>0.54</td><td>Peak</td><td>152</td><td>45</td></tr><tr><td>3</td><td>5720.00</td><td>87.53</td><td>110.80</td><td>-23.27</td><td>86.95</td><td>0.58</td><td>Peak</td><td>152</td><td>45</td></tr><tr><td>4</td><td>5725.00</td><td>90.65</td><td>122.20</td><td>-31.55</td><td>90.06</td><td>0.59</td><td>Peak</td><td>152</td><td>45</td></tr><tr><td>5</td><td>5925.00</td><td>55.95</td><td>68.20</td><td>-12.25</td><td>54.81</td><td>1.14</td><td>Peak</td><td>152</td><td>45</td></tr><tr><td>6</td><td>11510.00</td><td>44.85</td><td>54.00</td><td>-9.15</td><td>37.46</td><td>7.39</td><td>Average</td><td>156</td><td>218</td></tr><tr><td>7</td><td>11510.00</td><td>58.52</td><td>74.00</td><td>-15.48</td><td>51.13</td><td>7.39</td><td>Peak</td><td>156</td><td>218</td></tr><tr><td>8</td><td>17265.00</td><td>60.70</td><td>68.20</td><td>-7.50</td><td>53.88</td><td>6.82</td><td>Peak</td><td>100</td><td>231</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	64.95	68.20	-3.25	64.73	0.22	Peak	152	45	2	5700.00	75.07	105.20	-30.13	74.53	0.54	Peak	152	45	3	5720.00	87.53	110.80	-23.27	86.95	0.58	Peak	152	45	4	5725.00	90.65	122.20	-31.55	90.06	0.59	Peak	152	45	5	5925.00	55.95	68.20	-12.25	54.81	1.14	Peak	152	45	6	11510.00	44.85	54.00	-9.15	37.46	7.39	Average	156	218	7	11510.00	58.52	74.00	-15.48	51.13	7.39	Peak	156	218	8	17265.00	60.70	68.20	-7.50	53.88	6.82	Peak	100	231
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	64.95	68.20	-3.25	64.73	0.22	Peak	152	45																																																																																				
2	5700.00	75.07	105.20	-30.13	74.53	0.54	Peak	152	45																																																																																				
3	5720.00	87.53	110.80	-23.27	86.95	0.58	Peak	152	45																																																																																				
4	5725.00	90.65	122.20	-31.55	90.06	0.59	Peak	152	45																																																																																				
5	5925.00	55.95	68.20	-12.25	54.81	1.14	Peak	152	45																																																																																				
6	11510.00	44.85	54.00	-9.15	37.46	7.39	Average	156	218																																																																																				
7	11510.00	58.52	74.00	-15.48	51.13	7.39	Peak	156	218																																																																																				
8	17265.00	60.70	68.20	-7.50	53.88	6.82	Peak	100	231																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

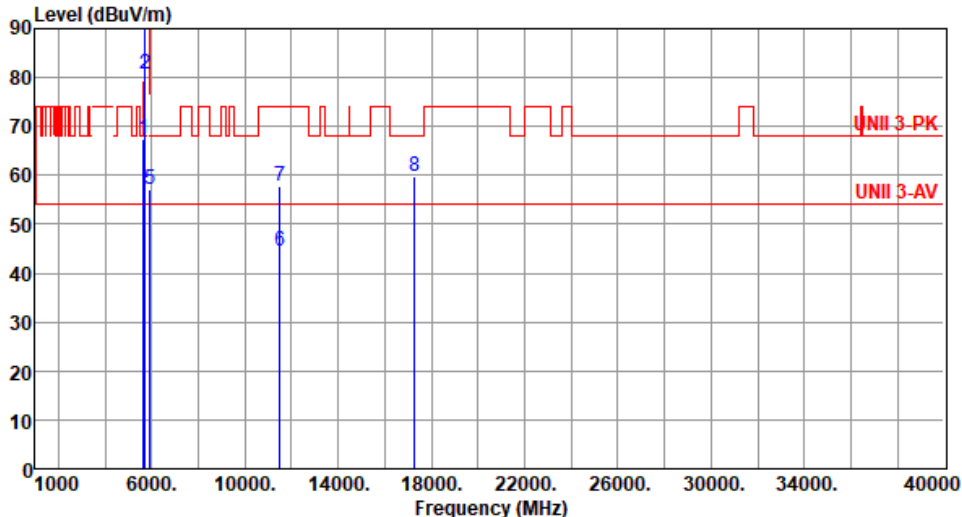


Modulation	be EHT40		Test Freq. (MHz)		5755																																																																																																																		
Polarization	Vertical																																																																																																																						
Test By :Allen Lee Temperature(°C):24 Humidity(%):64																																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>67.26</td><td>68.20</td><td>-0.94</td><td>67.04</td><td>0.22</td><td>Peak</td><td>240</td><td>230</td></tr><tr><td>2</td><td>5700.00</td><td>80.67</td><td>105.20</td><td>-24.53</td><td>80.13</td><td>0.54</td><td>Peak</td><td>240</td><td>230</td></tr><tr><td>3</td><td>5720.00</td><td>91.74</td><td>110.80</td><td>-19.06</td><td>91.16</td><td>0.58</td><td>Peak</td><td>240</td><td>230</td></tr><tr><td>4</td><td>5725.00</td><td>95.30</td><td>122.20</td><td>-26.90</td><td>94.71</td><td>0.59</td><td>Peak</td><td>240</td><td>230</td></tr><tr><td>5</td><td>5925.00</td><td>57.00</td><td>68.20</td><td>-11.20</td><td>55.86</td><td>1.14</td><td>Peak</td><td>240</td><td>230</td></tr><tr><td>6</td><td>11510.00</td><td>44.65</td><td>54.00</td><td>-9.35</td><td>37.26</td><td>7.39</td><td>Average</td><td>208</td><td>273</td></tr><tr><td>7</td><td>11510.00</td><td>57.76</td><td>74.00</td><td>-16.24</td><td>50.37</td><td>7.39</td><td>Peak</td><td>208</td><td>273</td></tr><tr><td>8</td><td>17265.00</td><td>59.70</td><td>68.20</td><td>-8.50</td><td>52.88</td><td>6.82</td><td>Peak</td><td>100</td><td>186</td></tr></tbody></table>											Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5650.00	67.26	68.20	-0.94	67.04	0.22	Peak	240	230	2	5700.00	80.67	105.20	-24.53	80.13	0.54	Peak	240	230	3	5720.00	91.74	110.80	-19.06	91.16	0.58	Peak	240	230	4	5725.00	95.30	122.20	-26.90	94.71	0.59	Peak	240	230	5	5925.00	57.00	68.20	-11.20	55.86	1.14	Peak	240	230	6	11510.00	44.65	54.00	-9.35	37.26	7.39	Average	208	273	7	11510.00	57.76	74.00	-16.24	50.37	7.39	Peak	208	273	8	17265.00	59.70	68.20	-8.50	52.88	6.82	Peak	100	186
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																														
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																																														
1	5650.00	67.26	68.20	-0.94	67.04	0.22	Peak	240	230																																																																																																														
2	5700.00	80.67	105.20	-24.53	80.13	0.54	Peak	240	230																																																																																																														
3	5720.00	91.74	110.80	-19.06	91.16	0.58	Peak	240	230																																																																																																														
4	5725.00	95.30	122.20	-26.90	94.71	0.59	Peak	240	230																																																																																																														
5	5925.00	57.00	68.20	-11.20	55.86	1.14	Peak	240	230																																																																																																														
6	11510.00	44.65	54.00	-9.35	37.26	7.39	Average	208	273																																																																																																														
7	11510.00	57.76	74.00	-16.24	50.37	7.39	Peak	208	273																																																																																																														
8	17265.00	59.70	68.20	-8.50	52.88	6.82	Peak	100	186																																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																																																							

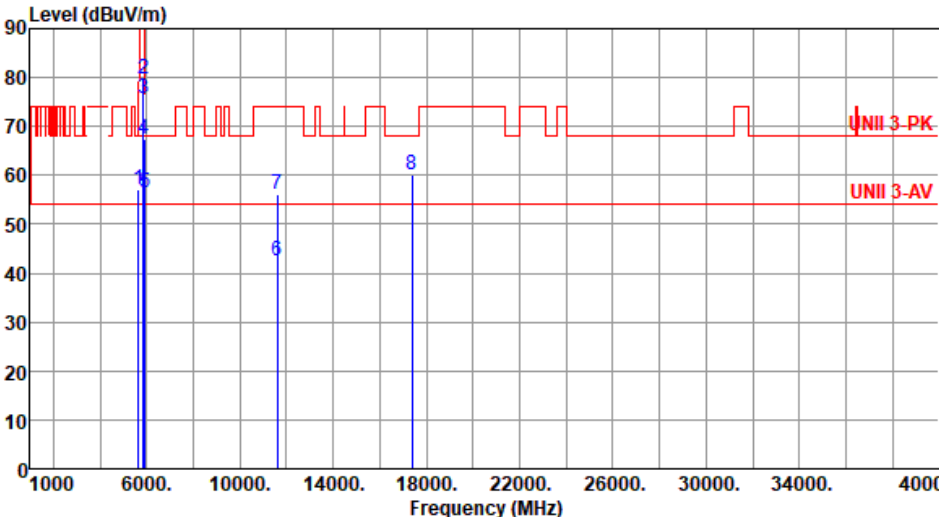

Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.26</td><td>68.20</td><td>-10.94</td><td>57.04</td><td>0.22</td><td>Peak</td><td>183</td><td>284</td></tr><tr><td>2</td><td>5850.00</td><td>79.83</td><td>122.20</td><td>-42.37</td><td>78.86</td><td>0.97</td><td>Peak</td><td>183</td><td>284</td></tr><tr><td>3</td><td>5855.00</td><td>75.65</td><td>110.80</td><td>-35.15</td><td>74.66</td><td>0.99</td><td>Peak</td><td>183</td><td>284</td></tr><tr><td>4</td><td>5875.00</td><td>67.48</td><td>105.20</td><td>-37.72</td><td>66.46</td><td>1.02</td><td>Peak</td><td>183</td><td>284</td></tr><tr><td>5</td><td>5925.00</td><td>56.32</td><td>68.20</td><td>-11.88</td><td>55.18</td><td>1.14</td><td>Peak</td><td>183</td><td>284</td></tr><tr><td>6</td><td>11590.00</td><td>42.60</td><td>54.00</td><td>-11.40</td><td>35.46</td><td>7.14</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>7</td><td>11590.00</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>48.95</td><td>7.14</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>8</td><td>17385.00</td><td>59.96</td><td>68.20</td><td>-8.24</td><td>52.86</td><td>7.10</td><td>Peak</td><td>100</td><td>111</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.26	68.20	-10.94	57.04	0.22	Peak	183	284	2	5850.00	79.83	122.20	-42.37	78.86	0.97	Peak	183	284	3	5855.00	75.65	110.80	-35.15	74.66	0.99	Peak	183	284	4	5875.00	67.48	105.20	-37.72	66.46	1.02	Peak	183	284	5	5925.00	56.32	68.20	-11.88	55.18	1.14	Peak	183	284	6	11590.00	42.60	54.00	-11.40	35.46	7.14	Average	100	108	7	11590.00	56.09	74.00	-17.91	48.95	7.14	Peak	100	108	8	17385.00	59.96	68.20	-8.24	52.86	7.10	Peak	100	111
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	57.26	68.20	-10.94	57.04	0.22	Peak	183	284																																																																																				
2	5850.00	79.83	122.20	-42.37	78.86	0.97	Peak	183	284																																																																																				
3	5855.00	75.65	110.80	-35.15	74.66	0.99	Peak	183	284																																																																																				
4	5875.00	67.48	105.20	-37.72	66.46	1.02	Peak	183	284																																																																																				
5	5925.00	56.32	68.20	-11.88	55.18	1.14	Peak	183	284																																																																																				
6	11590.00	42.60	54.00	-11.40	35.46	7.14	Average	100	108																																																																																				
7	11590.00	56.09	74.00	-17.91	48.95	7.14	Peak	100	108																																																																																				
8	17385.00	59.96	68.20	-8.24	52.86	7.10	Peak	100	111																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

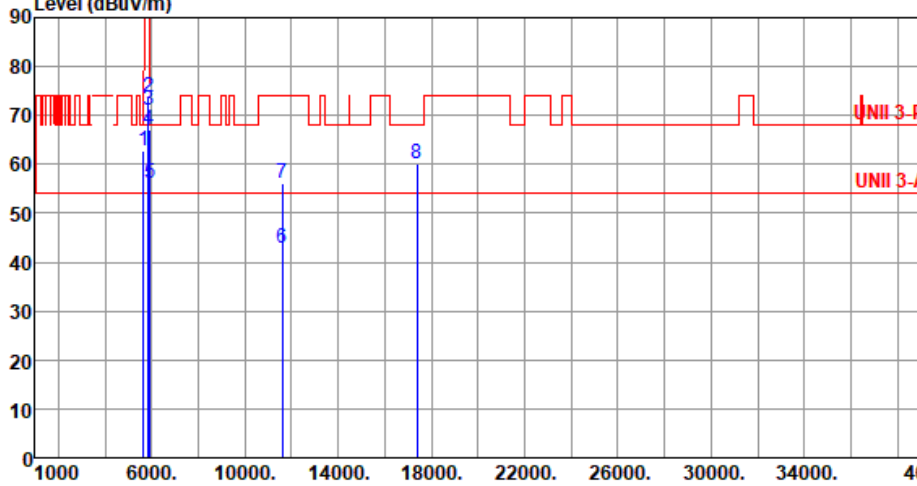

Modulation	be EHT40	Test Freq. (MHz)	5795																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>62.93</td><td>68.20</td><td>-5.27</td><td>62.71</td><td>0.22</td><td>Peak</td><td>203</td><td>217</td></tr><tr><td>2</td><td>5850.00</td><td>73.80</td><td>122.20</td><td>-48.40</td><td>72.83</td><td>0.97</td><td>Peak</td><td>203</td><td>217</td></tr><tr><td>3</td><td>5855.00</td><td>71.01</td><td>110.80</td><td>-39.79</td><td>70.02</td><td>0.99</td><td>Peak</td><td>203</td><td>217</td></tr><tr><td>4</td><td>5875.00</td><td>66.98</td><td>105.20</td><td>-38.22</td><td>65.96</td><td>1.02</td><td>Peak</td><td>203</td><td>217</td></tr><tr><td>5</td><td>5925.00</td><td>56.09</td><td>68.20</td><td>-12.11</td><td>54.95</td><td>1.14</td><td>Peak</td><td>203</td><td>217</td></tr><tr><td>6</td><td>11590.00</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>35.64</td><td>7.14</td><td>Average</td><td>100</td><td>123</td></tr><tr><td>7</td><td>11590.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>48.94</td><td>7.14</td><td>Peak</td><td>100</td><td>123</td></tr><tr><td>8</td><td>17385.00</td><td>60.23</td><td>68.20</td><td>-7.97</td><td>53.13</td><td>7.10</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	62.93	68.20	-5.27	62.71	0.22	Peak	203	217	2	5850.00	73.80	122.20	-48.40	72.83	0.97	Peak	203	217	3	5855.00	71.01	110.80	-39.79	70.02	0.99	Peak	203	217	4	5875.00	66.98	105.20	-38.22	65.96	1.02	Peak	203	217	5	5925.00	56.09	68.20	-12.11	54.95	1.14	Peak	203	217	6	11590.00	42.78	54.00	-11.22	35.64	7.14	Average	100	123	7	11590.00	56.08	74.00	-17.92	48.94	7.14	Peak	100	123	8	17385.00	60.23	68.20	-7.97	53.13	7.10	Peak	100	226
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	62.93	68.20	-5.27	62.71	0.22	Peak	203	217																																																																																				
2	5850.00	73.80	122.20	-48.40	72.83	0.97	Peak	203	217																																																																																				
3	5855.00	71.01	110.80	-39.79	70.02	0.99	Peak	203	217																																																																																				
4	5875.00	66.98	105.20	-38.22	65.96	1.02	Peak	203	217																																																																																				
5	5925.00	56.09	68.20	-12.11	54.95	1.14	Peak	203	217																																																																																				
6	11590.00	42.78	54.00	-11.22	35.64	7.14	Average	100	123																																																																																				
7	11590.00	56.08	74.00	-17.92	48.94	7.14	Peak	100	123																																																																																				
8	17385.00	60.23	68.20	-7.97	53.13	7.10	Peak	100	226																																																																																				

Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT80		Test Freq. (MHz)		5210																																																																
Polarization	Vertical																																																																				
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																					
<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>52.71</td><td>54.00</td><td>-1.29</td><td>52.37</td><td>0.34</td><td>Average</td><td>258</td><td>199</td></tr><tr><td>2</td><td>5150.00</td><td>65.46</td><td>74.00</td><td>-8.54</td><td>65.12</td><td>0.34</td><td>Peak</td><td>258</td><td>199</td></tr><tr><td>3</td><td>10420.00</td><td>54.21</td><td>68.20</td><td>-13.99</td><td>46.84</td><td>7.37</td><td>Peak</td><td>100</td><td>77</td></tr><tr><td>4</td><td>15630.00</td><td>42.20</td><td>54.00</td><td>-11.80</td><td>38.26</td><td>3.94</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>5</td><td>15630.00</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>51.33</td><td>3.94</td><td>Peak</td><td>100</td><td>182</td></tr></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.71	54.00	-1.29	52.37	0.34	Average	258	199	2	5150.00	65.46	74.00	-8.54	65.12	0.34	Peak	258	199	3	10420.00	54.21	68.20	-13.99	46.84	7.37	Peak	100	77	4	15630.00	42.20	54.00	-11.80	38.26	3.94	Average	100	182	5	15630.00	55.27	74.00	-18.73	51.33	3.94	Peak	100	182
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																												
1	5150.00	52.71	54.00	-1.29	52.37	0.34	Average	258	199																																																												
2	5150.00	65.46	74.00	-8.54	65.12	0.34	Peak	258	199																																																												
3	10420.00	54.21	68.20	-13.99	46.84	7.37	Peak	100	77																																																												
4	15630.00	42.20	54.00	-11.80	38.26	3.94	Average	100	182																																																												
5	15630.00	55.27	74.00	-18.73	51.33	3.94	Peak	100	182																																																												
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																					



Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																				
Polarization	Horizontal																																																																																																						
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																																							
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>43.84</td><td>54.00</td><td>-10.16</td><td>43.50</td><td>0.34</td><td>Average</td><td>261</td><td>77</td></tr><tr><td>2</td><td>5150.00</td><td>56.56</td><td>74.00</td><td>-17.44</td><td>56.22</td><td>0.34</td><td>Peak</td><td>261</td><td>77</td></tr><tr><td>3</td><td>5350.00</td><td>51.37</td><td>54.00</td><td>-2.63</td><td>51.62</td><td>-0.25</td><td>Average</td><td>261</td><td>77</td></tr><tr><td>4</td><td>5350.00</td><td>63.30</td><td>74.00</td><td>-10.70</td><td>63.55</td><td>-0.25</td><td>Peak</td><td>261</td><td>77</td></tr><tr><td>5</td><td>10580.00</td><td>54.62</td><td>68.20</td><td>-13.58</td><td>47.23</td><td>7.39</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>6</td><td>15870.00</td><td>42.55</td><td>54.00</td><td>-11.45</td><td>38.49</td><td>4.06</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>7</td><td>15870.00</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>51.11</td><td>4.06</td><td>Peak</td><td>100</td><td>182</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1	5150.00	43.84	54.00	-10.16	43.50	0.34	Average	261	77	2	5150.00	56.56	74.00	-17.44	56.22	0.34	Peak	261	77	3	5350.00	51.37	54.00	-2.63	51.62	-0.25	Average	261	77	4	5350.00	63.30	74.00	-10.70	63.55	-0.25	Peak	261	77	5	10580.00	54.62	68.20	-13.58	47.23	7.39	Peak	100	22	6	15870.00	42.55	54.00	-11.45	38.49	4.06	Average	100	182	7	15870.00	55.17	74.00	-18.83	51.11	4.06	Peak	100	182
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																														
		dBuV/m			dBuV			cm	deg																																																																																														
1	5150.00	43.84	54.00	-10.16	43.50	0.34	Average	261	77																																																																																														
2	5150.00	56.56	74.00	-17.44	56.22	0.34	Peak	261	77																																																																																														
3	5350.00	51.37	54.00	-2.63	51.62	-0.25	Average	261	77																																																																																														
4	5350.00	63.30	74.00	-10.70	63.55	-0.25	Peak	261	77																																																																																														
5	10580.00	54.62	68.20	-13.58	47.23	7.39	Peak	100	22																																																																																														
6	15870.00	42.55	54.00	-11.45	38.49	4.06	Average	100	182																																																																																														
7	15870.00	55.17	74.00	-18.83	51.11	4.06	Peak	100	182																																																																																														
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																							



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m) </			




Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m) </			

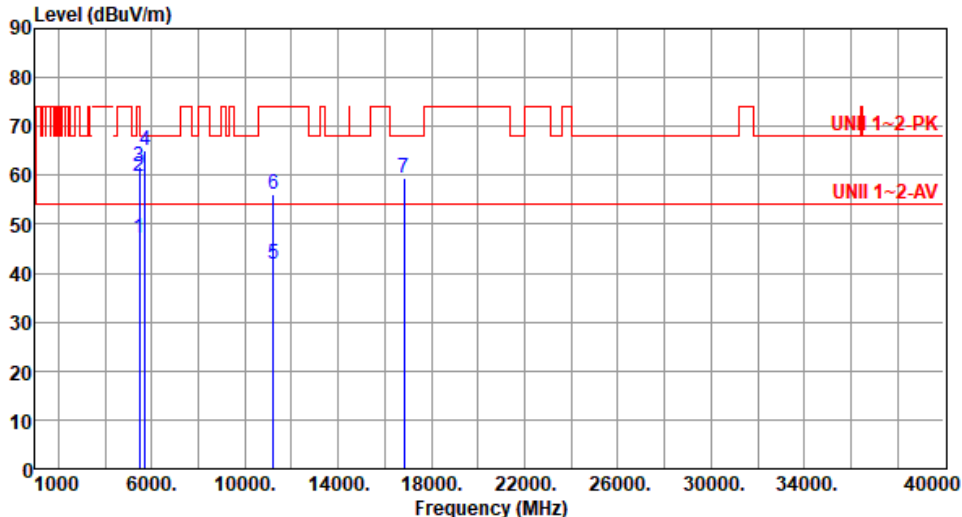

Modulation	be EHT80	Test Freq. (MHz)	5610																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>47.22</td><td>54.00</td><td>-6.78</td><td>46.83</td><td>0.39</td><td>Average</td><td>135</td><td>272</td></tr><tr><td>2</td><td>5460.00</td><td>59.65</td><td>74.00</td><td>-14.35</td><td>59.26</td><td>0.39</td><td>Peak</td><td>135</td><td>272</td></tr><tr><td>3</td><td>5470.00</td><td>61.61</td><td>68.20</td><td>-6.59</td><td>61.22</td><td>0.39</td><td>Peak</td><td>135</td><td>272</td></tr><tr><td>4</td><td>5725.00</td><td>65.01</td><td>68.20</td><td>-3.19</td><td>64.42</td><td>0.59</td><td>Peak</td><td>135</td><td>272</td></tr><tr><td>5</td><td>11220.00</td><td>41.99</td><td>54.00</td><td>-12.01</td><td>35.30</td><td>6.69</td><td>Average</td><td>100</td><td>172</td></tr><tr><td>6</td><td>11220.00</td><td>55.97</td><td>74.00</td><td>-18.03</td><td>49.28</td><td>6.69</td><td>Peak</td><td>100</td><td>172</td></tr><tr><td>7</td><td>16830.00</td><td>59.44</td><td>68.20</td><td>-8.76</td><td>52.16</td><td>7.28</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	47.22	54.00	-6.78	46.83	0.39	Average	135	272	2	5460.00	59.65	74.00	-14.35	59.26	0.39	Peak	135	272	3	5470.00	61.61	68.20	-6.59	61.22	0.39	Peak	135	272	4	5725.00	65.01	68.20	-3.19	64.42	0.59	Peak	135	272	5	11220.00	41.99	54.00	-12.01	35.30	6.69	Average	100	172	6	11220.00	55.97	74.00	-18.03	49.28	6.69	Peak	100	172	7	16830.00	59.44	68.20	-8.76	52.16	7.28	Peak	100	208
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	47.22	54.00	-6.78	46.83	0.39	Average	135	272																																																																										
2	5460.00	59.65	74.00	-14.35	59.26	0.39	Peak	135	272																																																																										
3	5470.00	61.61	68.20	-6.59	61.22	0.39	Peak	135	272																																																																										
4	5725.00	65.01	68.20	-3.19	64.42	0.59	Peak	135	272																																																																										
5	11220.00	41.99	54.00	-12.01	35.30	6.69	Average	100	172																																																																										
6	11220.00	55.97	74.00	-18.03	49.28	6.69	Peak	100	172																																																																										
7	16830.00	59.44	68.20	-8.76	52.16	7.28	Peak	100	208																																																																										



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):63			
Level (dBuV/m) </			



Modulation	be EHT80	Test Freq. (MHz)	5690						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):24 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.99	54.00	-10.01	43.60	0.39	Average	235	71
2	5460.00	54.95	74.00	-19.05	54.56	0.39	Peak	235	71
3	5470.00	55.65	68.20	-12.55	55.26	0.39	Peak	235	71
4	5850.00	61.44	68.20	-6.76	60.47	0.97	Peak	235	71
5	11380.00	43.47	54.00	-10.53	36.27	7.20	Average	100	241
6	11380.00	57.33	74.00	-16.67	50.13	7.20	Peak	100	241
7	17070.00	59.74	68.20	-8.46	52.56	7.18	Peak	100	213
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									




Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																
Polarization	Vertical																																																																																		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>44.31</td><td>0.39</td><td>Average</td><td>248</td><td>227</td></tr><tr><td>2</td><td>5460.00</td><td>56.52</td><td>74.00</td><td>-17.48</td><td>56.13</td><td>0.39</td><td>Peak</td><td>248</td><td>227</td></tr><tr><td>3</td><td>5470.00</td><td>58.05</td><td>68.20</td><td>-10.15</td><td>57.66</td><td>0.39</td><td>Peak</td><td>248</td><td>227</td></tr><tr><td>4</td><td>5850.00</td><td>60.10</td><td>68.20</td><td>-8.10</td><td>59.13</td><td>0.97</td><td>Peak</td><td>248</td><td>227</td></tr><tr><td>5</td><td>11380.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>35.48</td><td>7.20</td><td>Average</td><td>100</td><td>182</td></tr><tr><td>6</td><td>11380.00</td><td>56.33</td><td>74.00</td><td>-17.67</td><td>49.13</td><td>7.20</td><td>Peak</td><td>100</td><td>182</td></tr><tr><td>7</td><td>17070.00</td><td>60.37</td><td>68.20</td><td>-7.83</td><td>53.19</td><td>7.18</td><td>Peak</td><td>100</td><td>288</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.70	54.00	-9.30	44.31	0.39	Average	248	227	2	5460.00	56.52	74.00	-17.48	56.13	0.39	Peak	248	227	3	5470.00	58.05	68.20	-10.15	57.66	0.39	Peak	248	227	4	5850.00	60.10	68.20	-8.10	59.13	0.97	Peak	248	227	5	11380.00	42.68	54.00	-11.32	35.48	7.20	Average	100	182	6	11380.00	56.33	74.00	-17.67	49.13	7.20	Peak	100	182	7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	288
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	44.70	54.00	-9.30	44.31	0.39	Average	248	227																																																																										
2	5460.00	56.52	74.00	-17.48	56.13	0.39	Peak	248	227																																																																										
3	5470.00	58.05	68.20	-10.15	57.66	0.39	Peak	248	227																																																																										
4	5850.00	60.10	68.20	-8.10	59.13	0.97	Peak	248	227																																																																										
5	11380.00	42.68	54.00	-11.32	35.48	7.20	Average	100	182																																																																										
6	11380.00	56.33	74.00	-17.67	49.13	7.20	Peak	100	182																																																																										
7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	288																																																																										



Modulation	be EHT80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																																																											
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>63.61</td><td>68.20</td><td>-4.59</td><td>63.39</td><td>0.22</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>2</td><td>5700.00</td><td>77.62</td><td>105.20</td><td>-27.58</td><td>77.08</td><td>0.54</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>3</td><td>5720.00</td><td>79.81</td><td>110.80</td><td>-30.99</td><td>79.23</td><td>0.58</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>4</td><td>5725.00</td><td>81.64</td><td>122.20</td><td>-40.56</td><td>81.05</td><td>0.59</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>5</td><td>5850.00</td><td>78.74</td><td>122.20</td><td>-43.46</td><td>77.77</td><td>0.97</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>6</td><td>5855.00</td><td>74.96</td><td>110.80</td><td>-35.84</td><td>73.97</td><td>0.99</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>7</td><td>5875.00</td><td>68.59</td><td>105.20</td><td>-36.61</td><td>67.57</td><td>1.02</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>8</td><td>5925.00</td><td>56.50</td><td>68.20</td><td>-11.70</td><td>55.36</td><td>1.14</td><td>Peak</td><td>194</td><td>284</td></tr><tr><td>9</td><td>11550.00</td><td>42.86</td><td>54.00</td><td>-11.14</td><td>35.48</td><td>7.38</td><td>Average</td><td>100</td><td>241</td></tr><tr><td>10</td><td>11550.00</td><td>55.90</td><td>74.00</td><td>-18.10</td><td>48.52</td><td>7.38</td><td>Peak</td><td>100</td><td>241</td></tr><tr><td>11</td><td>17325.00</td><td>60.08</td><td>68.20</td><td>-8.12</td><td>53.22</td><td>6.86</td><td>Peak</td><td>100</td><td>108</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	63.61	68.20	-4.59	63.39	0.22	Peak	194	284	2	5700.00	77.62	105.20	-27.58	77.08	0.54	Peak	194	284	3	5720.00	79.81	110.80	-30.99	79.23	0.58	Peak	194	284	4	5725.00	81.64	122.20	-40.56	81.05	0.59	Peak	194	284	5	5850.00	78.74	122.20	-43.46	77.77	0.97	Peak	194	284	6	5855.00	74.96	110.80	-35.84	73.97	0.99	Peak	194	284	7	5875.00	68.59	105.20	-36.61	67.57	1.02	Peak	194	284	8	5925.00	56.50	68.20	-11.70	55.36	1.14	Peak	194	284	9	11550.00	42.86	54.00	-11.14	35.48	7.38	Average	100	241	10	11550.00	55.90	74.00	-18.10	48.52	7.38	Peak	100	241	11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	108
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	63.61	68.20	-4.59	63.39	0.22	Peak	194	284																																																																																																																		
2	5700.00	77.62	105.20	-27.58	77.08	0.54	Peak	194	284																																																																																																																		
3	5720.00	79.81	110.80	-30.99	79.23	0.58	Peak	194	284																																																																																																																		
4	5725.00	81.64	122.20	-40.56	81.05	0.59	Peak	194	284																																																																																																																		
5	5850.00	78.74	122.20	-43.46	77.77	0.97	Peak	194	284																																																																																																																		
6	5855.00	74.96	110.80	-35.84	73.97	0.99	Peak	194	284																																																																																																																		
7	5875.00	68.59	105.20	-36.61	67.57	1.02	Peak	194	284																																																																																																																		
8	5925.00	56.50	68.20	-11.70	55.36	1.14	Peak	194	284																																																																																																																		
9	11550.00	42.86	54.00	-11.14	35.48	7.38	Average	100	241																																																																																																																		
10	11550.00	55.90	74.00	-18.10	48.52	7.38	Peak	100	241																																																																																																																		
11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	108																																																																																																																		

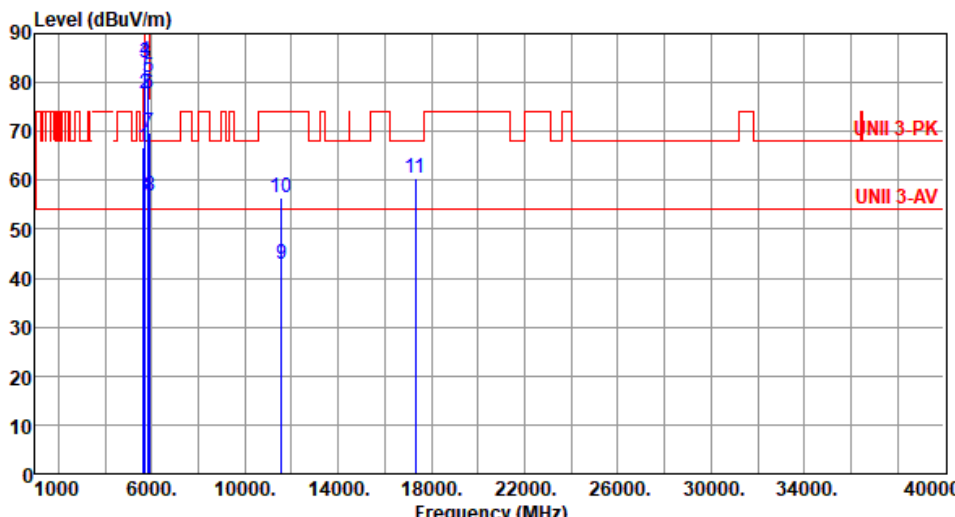

Modulation	be EHT80	Test Freq. (MHz)	5775																																																																																																													
Polarization	Vertical																																																																																																															
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																																																
																																																																																																																
	<table><tr><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>66.68</td><td>68.20</td><td>-1.52</td><td>66.46</td><td>0.22</td><td>Peak</td><td>230</td></tr><tr><td>2</td><td>5700.00</td><td>77.88</td><td>105.20</td><td>-27.32</td><td>77.34</td><td>0.54</td><td>Peak</td><td>230</td></tr><tr><td>3</td><td>5720.00</td><td>83.88</td><td>110.80</td><td>-26.92</td><td>83.30</td><td>0.58</td><td>Peak</td><td>230</td></tr><tr><td>4</td><td>5725.00</td><td>84.48</td><td>122.20</td><td>-37.72</td><td>83.89</td><td>0.59</td><td>Peak</td><td>230</td></tr><tr><td>5</td><td>5850.00</td><td>80.93</td><td>122.20</td><td>-41.27</td><td>79.96</td><td>0.97</td><td>Peak</td><td>230</td></tr><tr><td>6</td><td>5855.00</td><td>77.59</td><td>110.80</td><td>-33.21</td><td>76.60</td><td>0.99</td><td>Peak</td><td>230</td></tr><tr><td>7</td><td>5875.00</td><td>69.60</td><td>105.20</td><td>-35.60</td><td>68.58</td><td>1.02</td><td>Peak</td><td>230</td></tr><tr><td>8</td><td>5925.00</td><td>56.80</td><td>68.20</td><td>-11.40</td><td>55.66</td><td>1.14</td><td>Peak</td><td>230</td></tr><tr><td>9</td><td>11550.00</td><td>42.92</td><td>54.00</td><td>-11.08</td><td>35.54</td><td>7.38</td><td>Average</td><td>100</td></tr><tr><td>10</td><td>11550.00</td><td>56.60</td><td>74.00</td><td>-17.40</td><td>49.22</td><td>7.38</td><td>Peak</td><td>100</td></tr><tr><td>11</td><td>17325.00</td><td>60.34</td><td>68.20</td><td>-7.86</td><td>53.48</td><td>6.86</td><td>Peak</td><td>100</td></tr></table>	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	66.68	68.20	-1.52	66.46	0.22	Peak	230	2	5700.00	77.88	105.20	-27.32	77.34	0.54	Peak	230	3	5720.00	83.88	110.80	-26.92	83.30	0.58	Peak	230	4	5725.00	84.48	122.20	-37.72	83.89	0.59	Peak	230	5	5850.00	80.93	122.20	-41.27	79.96	0.97	Peak	230	6	5855.00	77.59	110.80	-33.21	76.60	0.99	Peak	230	7	5875.00	69.60	105.20	-35.60	68.58	1.02	Peak	230	8	5925.00	56.80	68.20	-11.40	55.66	1.14	Peak	230	9	11550.00	42.92	54.00	-11.08	35.54	7.38	Average	100	10	11550.00	56.60	74.00	-17.40	49.22	7.38	Peak	100	11	17325.00	60.34	68.20	-7.86	53.48	6.86	Peak	100			
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	5650.00	66.68	68.20	-1.52	66.46	0.22	Peak	230																																																																																																								
2	5700.00	77.88	105.20	-27.32	77.34	0.54	Peak	230																																																																																																								
3	5720.00	83.88	110.80	-26.92	83.30	0.58	Peak	230																																																																																																								
4	5725.00	84.48	122.20	-37.72	83.89	0.59	Peak	230																																																																																																								
5	5850.00	80.93	122.20	-41.27	79.96	0.97	Peak	230																																																																																																								
6	5855.00	77.59	110.80	-33.21	76.60	0.99	Peak	230																																																																																																								
7	5875.00	69.60	105.20	-35.60	68.58	1.02	Peak	230																																																																																																								
8	5925.00	56.80	68.20	-11.40	55.66	1.14	Peak	230																																																																																																								
9	11550.00	42.92	54.00	-11.08	35.54	7.38	Average	100																																																																																																								
10	11550.00	56.60	74.00	-17.40	49.22	7.38	Peak	100																																																																																																								
11	17325.00	60.34	68.20	-7.86	53.48	6.86	Peak	100																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																																


Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBuV/m)			



Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																
Polarization	Vertical																																																																																		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63																																																																																			
Level (dBUV/m) UNII 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.28</td><td>54.00</td><td>-1.72</td><td>51.94</td><td>0.34</td><td>Average</td><td>246</td><td>208</td></tr><tr><td>2</td><td>5150.00</td><td>64.83</td><td>74.00</td><td>-9.17</td><td>64.49</td><td>0.34</td><td>Peak</td><td>246</td><td>208</td></tr><tr><td>3</td><td>5350.00</td><td>52.63</td><td>54.00</td><td>-1.37</td><td>52.88</td><td>-0.25</td><td>Average</td><td>246</td><td>208</td></tr><tr><td>4</td><td>5350.00</td><td>65.21</td><td>74.00</td><td>-8.79</td><td>65.46</td><td>-0.25</td><td>Peak</td><td>246</td><td>208</td></tr><tr><td>5</td><td>10500.00</td><td>54.66</td><td>68.20</td><td>-13.54</td><td>47.43</td><td>7.23</td><td>Peak</td><td>100</td><td>200</td></tr><tr><td>6</td><td>15750.00</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>38.48</td><td>4.23</td><td>Average</td><td>100</td><td>176</td></tr><tr><td>7</td><td>15750.00</td><td>55.45</td><td>74.00</td><td>-18.55</td><td>51.22</td><td>4.23</td><td>Peak</td><td>100</td><td>176</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.28	54.00	-1.72	51.94	0.34	Average	246	208	2	5150.00	64.83	74.00	-9.17	64.49	0.34	Peak	246	208	3	5350.00	52.63	54.00	-1.37	52.88	-0.25	Average	246	208	4	5350.00	65.21	74.00	-8.79	65.46	-0.25	Peak	246	208	5	10500.00	54.66	68.20	-13.54	47.43	7.23	Peak	100	200	6	15750.00	42.71	54.00	-11.29	38.48	4.23	Average	100	176	7	15750.00	55.45	74.00	-18.55	51.22	4.23	Peak	100	176
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	52.28	54.00	-1.72	51.94	0.34	Average	246	208																																																																										
2	5150.00	64.83	74.00	-9.17	64.49	0.34	Peak	246	208																																																																										
3	5350.00	52.63	54.00	-1.37	52.88	-0.25	Average	246	208																																																																										
4	5350.00	65.21	74.00	-8.79	65.46	-0.25	Peak	246	208																																																																										
5	10500.00	54.66	68.20	-13.54	47.43	7.23	Peak	100	200																																																																										
6	15750.00	42.71	54.00	-11.29	38.48	4.23	Average	100	176																																																																										
7	15750.00	55.45	74.00	-18.55	51.22	4.23	Peak	100	176																																																																										

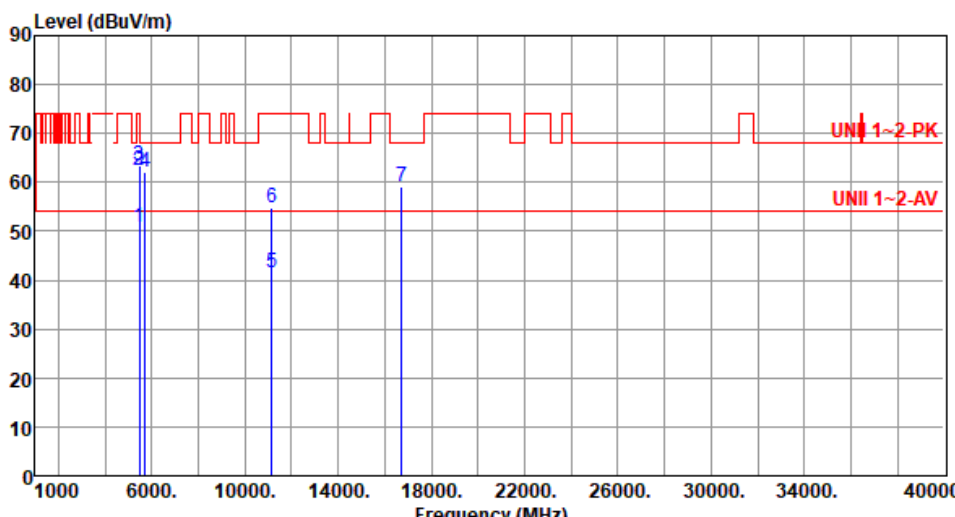

Modulation	be EHT160	Test Freq. (MHz)	5570						
Polarization	Horizontal								
Test By :Allen Lee Temperature(°C):24 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	50.96	54.00	-3.04	50.57	0.39	Average	244	71
2	5460.00	62.50	74.00	-11.50	62.11	0.39	Peak	244	71
3	5470.00	63.27	68.20	-4.93	62.88	0.39	Peak	244	71
4	5725.00	62.14	68.20	-6.06	61.55	0.59	Peak	244	71
5	11140.00	41.67	54.00	-12.33	34.59	7.08	Average	100	203
6	11140.00	54.86	74.00	-19.14	47.78	7.08	Peak	100	203
7	16710.00	59.26	68.20	-8.94	51.79	7.47	Peak	100	168
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Allen Lee Temperature(°C):24 Humidity(%):63			
Level (dBUV/m)			

Beamforming mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBuV/m)			



Modulation	be EHT20		Test Freq. (MHz)		5240				
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):64									
Level (dBUV/m) <									



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):64			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):24 Humidity(%):64																																																																																													
Level (dBuV/m) 30 100. 200. 300. 400. 500. 600. 700. 800. 900. 1000 2 3 4 5 6 CLASS-B <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.00</td><td>35.16</td><td>40.00</td><td>-4.84</td><td>45.25</td><td>-10.09</td><td>QP</td><td>100</td><td>68</td></tr><tr><td>2</td><td>37.86</td><td>35.59</td><td>40.00</td><td>-4.41</td><td>44.86</td><td>-9.27</td><td>QP</td><td>100</td><td>148</td></tr><tr><td>3</td><td>49.40</td><td>34.59</td><td>40.00</td><td>-5.41</td><td>42.89</td><td>-8.30</td><td>QP</td><td>100</td><td>98</td></tr><tr><td>4</td><td>60.07</td><td>36.13</td><td>40.00</td><td>-3.87</td><td>45.09</td><td>-8.96</td><td>QP</td><td>100</td><td>244</td></tr><tr><td>5</td><td>99.84</td><td>37.20</td><td>43.50</td><td>-6.30</td><td>50.60</td><td>-13.40</td><td>Peak</td><td>---</td><td>---</td></tr><tr><td>6</td><td>308.94</td><td>40.16</td><td>46.00</td><td>-5.84</td><td>47.82</td><td>-7.66</td><td>Peak</td><td>---</td><td>---</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table						dBuV			cm	deg	1	30.00	35.16	40.00	-4.84	45.25	-10.09	QP	100	68	2	37.86	35.59	40.00	-4.41	44.86	-9.27	QP	100	148	3	49.40	34.59	40.00	-5.41	42.89	-8.30	QP	100	98	4	60.07	36.13	40.00	-3.87	45.09	-8.96	QP	100	244	5	99.84	37.20	43.50	-6.30	50.60	-13.40	Peak	---	---	6	308.94	40.16	46.00	-5.84	47.82	-7.66	Peak	---	---
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
					dBuV			cm	deg																																																																																				
1	30.00	35.16	40.00	-4.84	45.25	-10.09	QP	100	68																																																																																				
2	37.86	35.59	40.00	-4.41	44.86	-9.27	QP	100	148																																																																																				
3	49.40	34.59	40.00	-5.41	42.89	-8.30	QP	100	98																																																																																				
4	60.07	36.13	40.00	-3.87	45.09	-8.96	QP	100	244																																																																																				
5	99.84	37.20	43.50	-6.30	50.60	-13.40	Peak	---	---																																																																																				
6	308.94	40.16	46.00	-5.84	47.82	-7.66	Peak	---	---																																																																																				

Unwanted Emissions (Above 1GHz) for ax HE20

Modulation	ax HE20	Test Freq. (MHz)	5180
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			




Modulation	ax HE20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	ax HE20	Test Freq. (MHz)	5200
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			

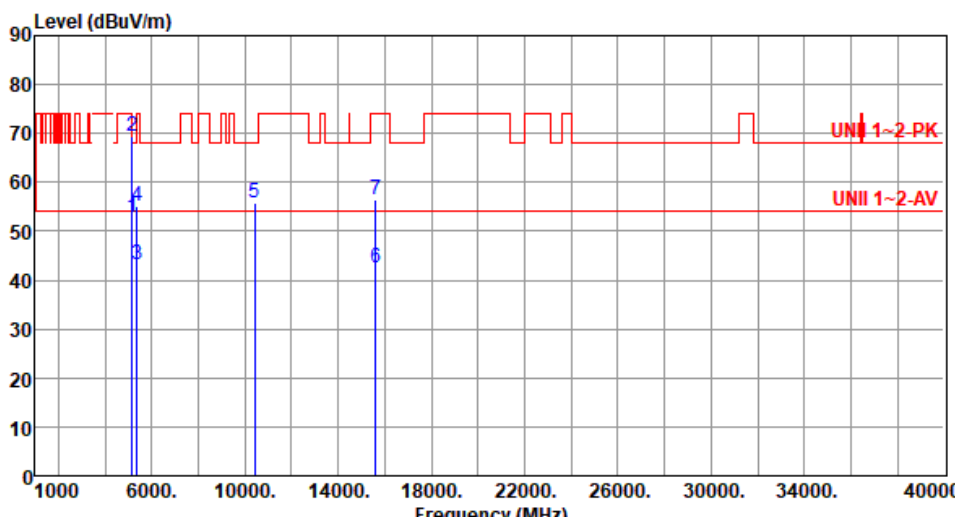

Modulation	ax HE20	Test Freq. (MHz)	5200																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>52.95</td><td>54.00</td><td>-1.05</td><td>52.61</td><td>0.34</td><td>Average</td><td>189</td><td>238</td></tr><tr><td>2</td><td>5150.00</td><td>69.46</td><td>74.00</td><td>-4.54</td><td>69.12</td><td>0.34</td><td>Peak</td><td>189</td><td>238</td></tr><tr><td>3</td><td>5350.00</td><td>43.26</td><td>54.00</td><td>-10.74</td><td>43.51</td><td>-0.25</td><td>Average</td><td>189</td><td>238</td></tr><tr><td>4</td><td>5350.00</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>55.47</td><td>-0.25</td><td>Peak</td><td>189</td><td>238</td></tr><tr><td>5</td><td>10400.00</td><td>55.76</td><td>68.20</td><td>-12.44</td><td>48.38</td><td>7.38</td><td>Peak</td><td>100</td><td>102</td></tr><tr><td>6</td><td>15600.00</td><td>42.63</td><td>54.00</td><td>-11.37</td><td>38.62</td><td>4.01</td><td>Average</td><td>100</td><td>254</td></tr><tr><td>7</td><td>15600.00</td><td>56.34</td><td>74.00</td><td>-17.66</td><td>52.33</td><td>4.01</td><td>Peak</td><td>100</td><td>254</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.95	54.00	-1.05	52.61	0.34	Average	189	238	2	5150.00	69.46	74.00	-4.54	69.12	0.34	Peak	189	238	3	5350.00	43.26	54.00	-10.74	43.51	-0.25	Average	189	238	4	5350.00	55.22	74.00	-18.78	55.47	-0.25	Peak	189	238	5	10400.00	55.76	68.20	-12.44	48.38	7.38	Peak	100	102	6	15600.00	42.63	54.00	-11.37	38.62	4.01	Average	100	254	7	15600.00	56.34	74.00	-17.66	52.33	4.01	Peak	100	254
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	52.95	54.00	-1.05	52.61	0.34	Average	189	238																																																																										
2	5150.00	69.46	74.00	-4.54	69.12	0.34	Peak	189	238																																																																										
3	5350.00	43.26	54.00	-10.74	43.51	-0.25	Average	189	238																																																																										
4	5350.00	55.22	74.00	-18.78	55.47	-0.25	Peak	189	238																																																																										
5	10400.00	55.76	68.20	-12.44	48.38	7.38	Peak	100	102																																																																										
6	15600.00	42.63	54.00	-11.37	38.62	4.01	Average	100	254																																																																										
7	15600.00	56.34	74.00	-17.66	52.33	4.01	Peak	100	254																																																																										



Modulation	ax HE20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5240						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.46	54.00	-7.54	46.12	0.34	Average	211	208
2	5150.00	58.46	74.00	-15.54	58.12	0.34	Peak	211	208
3	5350.00	44.86	54.00	-9.14	45.11	-0.25	Average	211	208
4	5350.00	57.95	74.00	-16.05	58.20	-0.25	Peak	211	208
5	10480.00	54.83	68.20	-13.37	47.55	7.28	Peak	100	177
6	15720.00	42.82	54.00	-11.18	38.58	4.24	Average	100	223
7	15720.00	56.63	74.00	-17.37	52.39	4.24	Peak	100	223
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5260
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			