



Modulation	ax HE20	Test Freq. (MHz)	5300
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5300
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5320																																																																						
Polarization	Vertical																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5350.00</td><td>46.00</td><td>54.00</td><td>-8.00</td><td>46.25</td><td>-0.25</td><td>Average</td><td>235</td><td>201</td></tr><tr><td>2</td><td>5350.00</td><td>63.46</td><td>74.00</td><td>-10.54</td><td>63.71</td><td>-0.25</td><td>Peak</td><td>235</td><td>201</td></tr><tr><td>3</td><td>10640.00</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>34.65</td><td>7.64</td><td>Average</td><td>100</td><td>287</td></tr><tr><td>4</td><td>10640.00</td><td>55.90</td><td>74.00</td><td>-18.10</td><td>48.26</td><td>7.64</td><td>Peak</td><td>100</td><td>287</td></tr><tr><td>5</td><td>15960.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>38.51</td><td>4.33</td><td>Average</td><td>100</td><td>226</td></tr><tr><td>6</td><td>15960.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>51.39</td><td>4.33</td><td>Peak</td><td>100</td><td>226</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5350.00	46.00	54.00	-8.00	46.25	-0.25	Average	235	201	2	5350.00	63.46	74.00	-10.54	63.71	-0.25	Peak	235	201	3	10640.00	42.29	54.00	-11.71	34.65	7.64	Average	100	287	4	10640.00	55.90	74.00	-18.10	48.26	7.64	Peak	100	287	5	15960.00	42.84	54.00	-11.16	38.51	4.33	Average	100	226	6	15960.00	55.72	74.00	-18.28	51.39	4.33	Peak	100	226
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5350.00	46.00	54.00	-8.00	46.25	-0.25	Average	235	201																																																																
2	5350.00	63.46	74.00	-10.54	63.71	-0.25	Peak	235	201																																																																
3	10640.00	42.29	54.00	-11.71	34.65	7.64	Average	100	287																																																																
4	10640.00	55.90	74.00	-18.10	48.26	7.64	Peak	100	287																																																																
5	15960.00	42.84	54.00	-11.16	38.51	4.33	Average	100	226																																																																
6	15960.00	55.72	74.00	-18.28	51.39	4.33	Peak	100	226																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE20	Test Freq. (MHz)	5500																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV Frequency (MHz) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th></th><th></th><th>reading</th><th></th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>43.33</td><td>0.39</td><td>Average</td><td>100</td><td>16</td></tr><tr><td>2</td><td>5460.00</td><td>56.11</td><td>74.00</td><td>-17.89</td><td>55.72</td><td>0.39</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>3</td><td>5470.00</td><td>57.53</td><td>68.20</td><td>-10.67</td><td>57.14</td><td>0.39</td><td>Peak</td><td>100</td><td>16</td></tr><tr><td>4</td><td>11000.00</td><td>45.87</td><td>54.00</td><td>-8.13</td><td>38.29</td><td>7.58</td><td>Average</td><td>100</td><td>247</td></tr><tr><td>5</td><td>11000.00</td><td>59.20</td><td>74.00</td><td>-14.80</td><td>51.62</td><td>7.58</td><td>Peak</td><td>100</td><td>247</td></tr><tr><td>6</td><td>16500.00</td><td>58.83</td><td>68.20</td><td>-9.37</td><td>52.33</td><td>6.50</td><td>Peak</td><td>100</td><td>157</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level			reading			High	Table			dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	1	5460.00	43.72	54.00	-10.28	43.33	0.39	Average	100	16	2	5460.00	56.11	74.00	-17.89	55.72	0.39	Peak	100	16	3	5470.00	57.53	68.20	-10.67	57.14	0.39	Peak	100	16	4	11000.00	45.87	54.00	-8.13	38.29	7.58	Average	100	247	5	11000.00	59.20	74.00	-14.80	51.62	7.58	Peak	100	247	6	16500.00	58.83	68.20	-9.37	52.33	6.50	Peak	100	157
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level			reading			High	Table																																																																																				
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg																																																																																				
1	5460.00	43.72	54.00	-10.28	43.33	0.39	Average	100	16																																																																																				
2	5460.00	56.11	74.00	-17.89	55.72	0.39	Peak	100	16																																																																																				
3	5470.00	57.53	68.20	-10.67	57.14	0.39	Peak	100	16																																																																																				
4	11000.00	45.87	54.00	-8.13	38.29	7.58	Average	100	247																																																																																				
5	11000.00	59.20	74.00	-14.80	51.62	7.58	Peak	100	247																																																																																				
6	16500.00	58.83	68.20	-9.37	52.33	6.50	Peak	100	157																																																																																				



Modulation	ax HE20	Test Freq. (MHz)	5500
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) <			



Modulation	ax HE20	Test Freq. (MHz)	5580
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE20	Test Freq. (MHz)	5580																																																																																
Polarization	Vertical																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>43.37</td><td>0.39</td><td>Average</td><td>203</td><td>185</td></tr><tr><td>2</td><td>5460.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>55.47</td><td>0.39</td><td>Peak</td><td>203</td><td>185</td></tr><tr><td>3</td><td>5470.00</td><td>56.54</td><td>68.20</td><td>-11.66</td><td>56.15</td><td>0.39</td><td>Peak</td><td>203</td><td>185</td></tr><tr><td>4</td><td>5725.00</td><td>55.24</td><td>68.20</td><td>-12.96</td><td>54.65</td><td>0.59</td><td>Peak</td><td>203</td><td>185</td></tr><tr><td>5</td><td>11160.00</td><td>46.29</td><td>54.00</td><td>-7.71</td><td>39.33</td><td>6.96</td><td>Average</td><td>100</td><td>271</td></tr><tr><td>6</td><td>11160.00</td><td>58.23</td><td>74.00</td><td>-15.77</td><td>51.27</td><td>6.96</td><td>Peak</td><td>100</td><td>271</td></tr><tr><td>7</td><td>16740.00</td><td>58.71</td><td>68.20</td><td>-9.49</td><td>51.29</td><td>7.42</td><td>Peak</td><td>100</td><td>136</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.76	54.00	-10.24	43.37	0.39	Average	203	185	2	5460.00	55.86	74.00	-18.14	55.47	0.39	Peak	203	185	3	5470.00	56.54	68.20	-11.66	56.15	0.39	Peak	203	185	4	5725.00	55.24	68.20	-12.96	54.65	0.59	Peak	203	185	5	11160.00	46.29	54.00	-7.71	39.33	6.96	Average	100	271	6	11160.00	58.23	74.00	-15.77	51.27	6.96	Peak	100	271	7	16740.00	58.71	68.20	-9.49	51.29	7.42	Peak	100	136
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	43.76	54.00	-10.24	43.37	0.39	Average	203	185																																																																										
2	5460.00	55.86	74.00	-18.14	55.47	0.39	Peak	203	185																																																																										
3	5470.00	56.54	68.20	-11.66	56.15	0.39	Peak	203	185																																																																										
4	5725.00	55.24	68.20	-12.96	54.65	0.59	Peak	203	185																																																																										
5	11160.00	46.29	54.00	-7.71	39.33	6.96	Average	100	271																																																																										
6	11160.00	58.23	74.00	-15.77	51.27	6.96	Peak	100	271																																																																										
7	16740.00	58.71	68.20	-9.49	51.29	7.42	Peak	100	136																																																																										



Modulation	ax HE20	Test Freq. (MHz)	5700																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>65.94</td><td>68.20</td><td>-2.26</td><td>65.35</td><td>0.59</td><td>Peak</td><td>197</td><td>281</td></tr><tr><td>2</td><td>11400.00</td><td>46.54</td><td>54.00</td><td>-7.46</td><td>39.31</td><td>7.23</td><td>Average</td><td>148</td><td>239</td></tr><tr><td>3</td><td>11400.00</td><td>58.75</td><td>74.00</td><td>-15.25</td><td>51.52</td><td>7.23</td><td>Peak</td><td>148</td><td>239</td></tr><tr><td>4</td><td>17100.00</td><td>59.37</td><td>68.20</td><td>-8.83</td><td>52.47</td><td>6.90</td><td>Peak</td><td>100</td><td>158</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	65.94	68.20	-2.26	65.35	0.59	Peak	197	281	2	11400.00	46.54	54.00	-7.46	39.31	7.23	Average	148	239	3	11400.00	58.75	74.00	-15.25	51.52	7.23	Peak	148	239	4	17100.00	59.37	68.20	-8.83	52.47	6.90	Peak	100	158
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	65.94	68.20	-2.26	65.35	0.59	Peak	197	281																																												
2	11400.00	46.54	54.00	-7.46	39.31	7.23	Average	148	239																																												
3	11400.00	58.75	74.00	-15.25	51.52	7.23	Peak	148	239																																												
4	17100.00	59.37	68.20	-8.83	52.47	6.90	Peak	100	158																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	ax HE20	Test Freq. (MHz)	5700																																																		
Polarization	Vertical																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5725.00</td><td>67.80</td><td>68.20</td><td>-0.40</td><td>67.21</td><td>0.59</td><td>Peak</td><td>242</td><td>1</td></tr><tr><td>2</td><td>11400.00</td><td>43.80</td><td>54.00</td><td>-10.20</td><td>36.57</td><td>7.23</td><td>Average</td><td>100</td><td>286</td></tr><tr><td>3</td><td>11400.00</td><td>56.80</td><td>74.00</td><td>-17.20</td><td>49.57</td><td>7.23</td><td>Peak</td><td>100</td><td>286</td></tr><tr><td>4</td><td>17100.00</td><td>60.01</td><td>68.20</td><td>-8.19</td><td>53.11</td><td>6.90</td><td>Peak</td><td>100</td><td>188</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	67.80	68.20	-0.40	67.21	0.59	Peak	242	1	2	11400.00	43.80	54.00	-10.20	36.57	7.23	Average	100	286	3	11400.00	56.80	74.00	-17.20	49.57	7.23	Peak	100	286	4	17100.00	60.01	68.20	-8.19	53.11	6.90	Peak	100	188
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	67.80	68.20	-0.40	67.21	0.59	Peak	242	1																																												
2	11400.00	43.80	54.00	-10.20	36.57	7.23	Average	100	286																																												
3	11400.00	56.80	74.00	-17.20	49.57	7.23	Peak	100	286																																												
4	17100.00	60.01	68.20	-8.19	53.11	6.90	Peak	100	188																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	ax HE20	Test Freq. (MHz)	5720																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>42.51</td><td>0.39</td><td>Average</td><td>168</td><td>254</td></tr><tr><td>2</td><td>5460.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.26</td><td>0.39</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>3</td><td>5470.00</td><td>55.25</td><td>68.20</td><td>-12.95</td><td>54.86</td><td>0.39</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>4</td><td>5850.00</td><td>55.85</td><td>68.20</td><td>-12.35</td><td>54.88</td><td>0.97</td><td>Peak</td><td>168</td><td>254</td></tr><tr><td>5</td><td>11440.00</td><td>44.47</td><td>54.00</td><td>-9.53</td><td>37.26</td><td>7.21</td><td>Average</td><td>100</td><td>108</td></tr><tr><td>6</td><td>11440.00</td><td>57.67</td><td>74.00</td><td>-16.33</td><td>50.46</td><td>7.21</td><td>Peak</td><td>100</td><td>108</td></tr><tr><td>7</td><td>17160.00</td><td>59.40</td><td>68.20</td><td>-8.80</td><td>52.85</td><td>6.55</td><td>Peak</td><td>100</td><td>116</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	42.90	54.00	-11.10	42.51	0.39	Average	168	254	2	5460.00	54.65	74.00	-19.35	54.26	0.39	Peak	168	254	3	5470.00	55.25	68.20	-12.95	54.86	0.39	Peak	168	254	4	5850.00	55.85	68.20	-12.35	54.88	0.97	Peak	168	254	5	11440.00	44.47	54.00	-9.53	37.26	7.21	Average	100	108	6	11440.00	57.67	74.00	-16.33	50.46	7.21	Peak	100	108	7	17160.00	59.40	68.20	-8.80	52.85	6.55	Peak	100	116
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	42.90	54.00	-11.10	42.51	0.39	Average	168	254																																																																										
2	5460.00	54.65	74.00	-19.35	54.26	0.39	Peak	168	254																																																																										
3	5470.00	55.25	68.20	-12.95	54.86	0.39	Peak	168	254																																																																										
4	5850.00	55.85	68.20	-12.35	54.88	0.97	Peak	168	254																																																																										
5	11440.00	44.47	54.00	-9.53	37.26	7.21	Average	100	108																																																																										
6	11440.00	57.67	74.00	-16.33	50.46	7.21	Peak	100	108																																																																										
7	17160.00	59.40	68.20	-8.80	52.85	6.55	Peak	100	116																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			

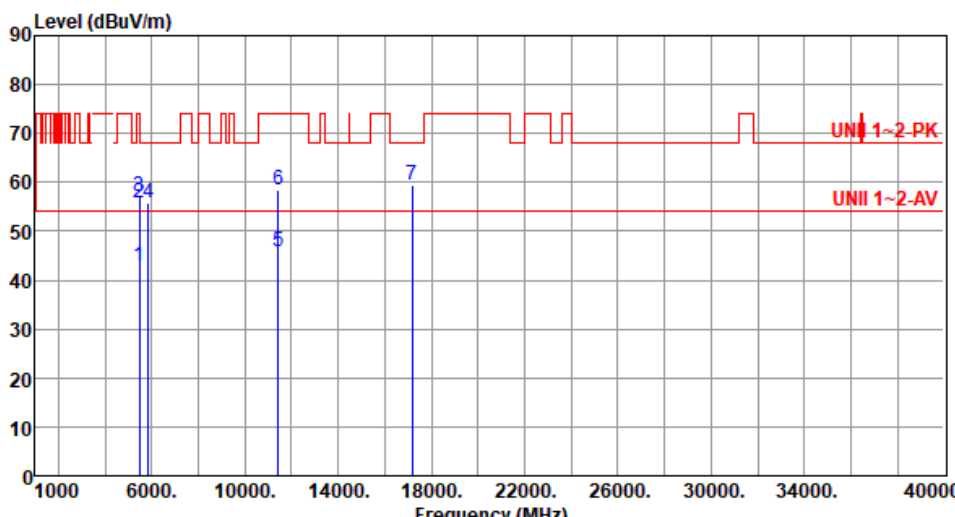


Modulation	ax HE20	Test Freq. (MHz)	5720						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.96	54.00	-11.04	42.57	0.39	Average	233	31
2	5460.00	55.87	74.00	-18.13	55.48	0.39	Peak	233	31
3	5470.00	57.23	68.20	-10.97	56.84	0.39	Peak	233	31
4	5850.00	55.91	68.20	-12.29	54.94	0.97	Peak	233	31
5	11440.00	45.76	54.00	-8.24	38.55	7.21	Average	100	258
6	11440.00	58.58	74.00	-15.42	51.37	7.21	Peak	100	258
7	17160.00	59.58	68.20	-8.62	53.03	6.55	Peak	100	186
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

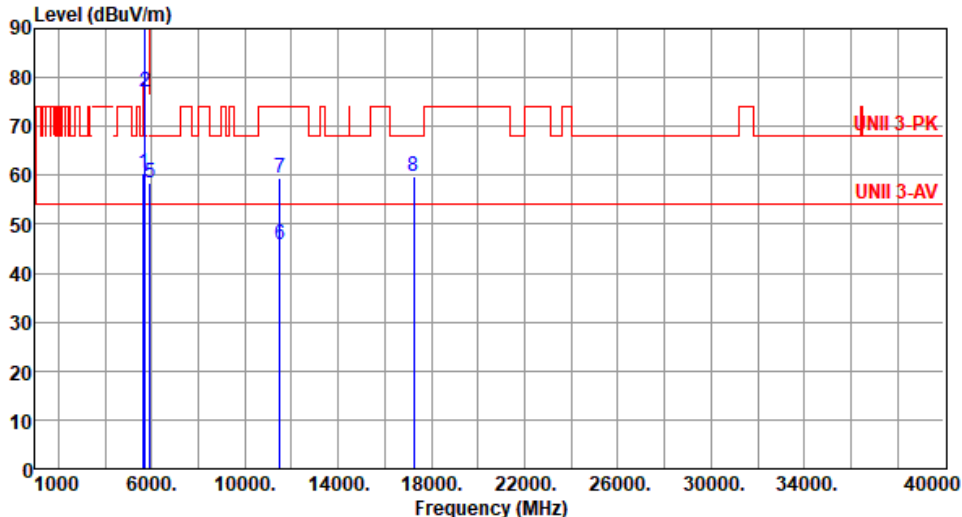

Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>60.29</td><td>68.20</td><td>-7.91</td><td>60.07</td><td>0.22</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>2</td><td>5700.00</td><td>76.97</td><td>105.20</td><td>-28.23</td><td>76.43</td><td>0.54</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>3</td><td>5720.00</td><td>96.20</td><td>110.80</td><td>-14.60</td><td>95.62</td><td>0.58</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>4</td><td>5725.00</td><td>99.79</td><td>122.20</td><td>-22.41</td><td>99.20</td><td>0.59</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>5</td><td>5925.00</td><td>58.37</td><td>68.20</td><td>-9.83</td><td>57.23</td><td>1.14</td><td>Peak</td><td>241</td><td>57</td></tr><tr><td>6</td><td>11490.00</td><td>45.90</td><td>54.00</td><td>-8.10</td><td>38.55</td><td>7.35</td><td>Average</td><td>158</td><td>249</td></tr><tr><td>7</td><td>11490.00</td><td>59.29</td><td>74.00</td><td>-14.71</td><td>51.94</td><td>7.35</td><td>Peak</td><td>158</td><td>249</td></tr><tr><td>8</td><td>17235.00</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>52.85</td><td>6.77</td><td>Peak</td><td>100</td><td>222</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.29	68.20	-7.91	60.07	0.22	Peak	241	57	2	5700.00	76.97	105.20	-28.23	76.43	0.54	Peak	241	57	3	5720.00	96.20	110.80	-14.60	95.62	0.58	Peak	241	57	4	5725.00	99.79	122.20	-22.41	99.20	0.59	Peak	241	57	5	5925.00	58.37	68.20	-9.83	57.23	1.14	Peak	241	57	6	11490.00	45.90	54.00	-8.10	38.55	7.35	Average	158	249	7	11490.00	59.29	74.00	-14.71	51.94	7.35	Peak	158	249	8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	222
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	60.29	68.20	-7.91	60.07	0.22	Peak	241	57																																																																																				
2	5700.00	76.97	105.20	-28.23	76.43	0.54	Peak	241	57																																																																																				
3	5720.00	96.20	110.80	-14.60	95.62	0.58	Peak	241	57																																																																																				
4	5725.00	99.79	122.20	-22.41	99.20	0.59	Peak	241	57																																																																																				
5	5925.00	58.37	68.20	-9.83	57.23	1.14	Peak	241	57																																																																																				
6	11490.00	45.90	54.00	-8.10	38.55	7.35	Average	158	249																																																																																				
7	11490.00	59.29	74.00	-14.71	51.94	7.35	Peak	158	249																																																																																				
8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	222																																																																																				

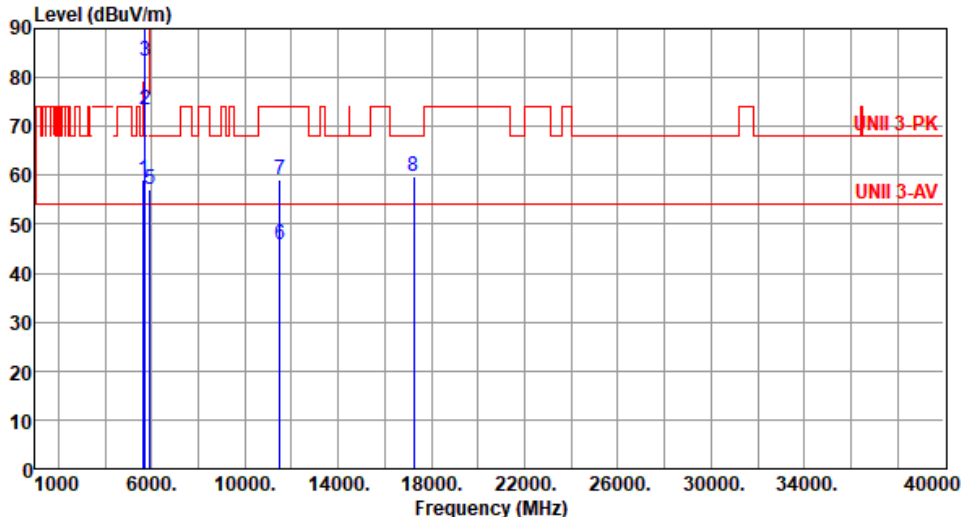

Modulation	ax HE20	Test Freq. (MHz)	5745																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>59.26</td><td>68.20</td><td>-8.94</td><td>59.04</td><td>0.22</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>2</td><td>5700.00</td><td>73.55</td><td>105.20</td><td>-31.65</td><td>73.01</td><td>0.54</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>3</td><td>5720.00</td><td>83.21</td><td>110.80</td><td>-27.59</td><td>82.63</td><td>0.58</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>4</td><td>5725.00</td><td>89.96</td><td>122.20</td><td>-32.24</td><td>89.37</td><td>0.59</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>5</td><td>5925.00</td><td>57.27</td><td>68.20</td><td>-10.93</td><td>56.13</td><td>1.14</td><td>Peak</td><td>206</td><td>12</td></tr><tr><td>6</td><td>11490.00</td><td>45.81</td><td>54.00</td><td>-8.19</td><td>38.46</td><td>7.35</td><td>Average</td><td>233</td><td>258</td></tr><tr><td>7</td><td>11490.00</td><td>59.11</td><td>74.00</td><td>-14.89</td><td>51.76</td><td>7.35</td><td>Peak</td><td>233</td><td>258</td></tr><tr><td>8</td><td>17235.00</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>52.85</td><td>6.77</td><td>Peak</td><td>100</td><td>179</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.26	68.20	-8.94	59.04	0.22	Peak	206	12	2	5700.00	73.55	105.20	-31.65	73.01	0.54	Peak	206	12	3	5720.00	83.21	110.80	-27.59	82.63	0.58	Peak	206	12	4	5725.00	89.96	122.20	-32.24	89.37	0.59	Peak	206	12	5	5925.00	57.27	68.20	-10.93	56.13	1.14	Peak	206	12	6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	233	258	7	11490.00	59.11	74.00	-14.89	51.76	7.35	Peak	233	258	8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	179
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	59.26	68.20	-8.94	59.04	0.22	Peak	206	12																																																																																				
2	5700.00	73.55	105.20	-31.65	73.01	0.54	Peak	206	12																																																																																				
3	5720.00	83.21	110.80	-27.59	82.63	0.58	Peak	206	12																																																																																				
4	5725.00	89.96	122.20	-32.24	89.37	0.59	Peak	206	12																																																																																				
5	5925.00	57.27	68.20	-10.93	56.13	1.14	Peak	206	12																																																																																				
6	11490.00	45.81	54.00	-8.19	38.46	7.35	Average	233	258																																																																																				
7	11490.00	59.11	74.00	-14.89	51.76	7.35	Peak	233	258																																																																																				
8	17235.00	59.62	68.20	-8.58	52.85	6.77	Peak	100	179																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													




Modulation	ax HE20	Test Freq. (MHz)	5785																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>59.86</td><td>68.20</td><td>-8.34</td><td>59.64</td><td>0.22</td><td>Peak</td><td>234</td><td>82</td></tr><tr><td>2</td><td>5925.00</td><td>60.25</td><td>68.20</td><td>-7.95</td><td>59.11</td><td>1.14</td><td>Peak</td><td>234</td><td>82</td></tr><tr><td>3</td><td>11570.00</td><td>45.83</td><td>54.00</td><td>-8.17</td><td>38.57</td><td>7.26</td><td>Average</td><td>100</td><td>220</td></tr><tr><td>4</td><td>11570.00</td><td>58.94</td><td>74.00</td><td>-15.06</td><td>51.68</td><td>7.26</td><td>Peak</td><td>100</td><td>220</td></tr><tr><td>5</td><td>17355.00</td><td>59.81</td><td>68.20</td><td>-8.39</td><td>52.85</td><td>6.96</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.86	68.20	-8.34	59.64	0.22	Peak	234	82	2	5925.00	60.25	68.20	-7.95	59.11	1.14	Peak	234	82	3	11570.00	45.83	54.00	-8.17	38.57	7.26	Average	100	220	4	11570.00	58.94	74.00	-15.06	51.68	7.26	Peak	100	220	5	17355.00	59.81	68.20	-8.39	52.85	6.96	Peak	100	205
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5650.00	59.86	68.20	-8.34	59.64	0.22	Peak	234	82																																																						
2	5925.00	60.25	68.20	-7.95	59.11	1.14	Peak	234	82																																																						
3	11570.00	45.83	54.00	-8.17	38.57	7.26	Average	100	220																																																						
4	11570.00	58.94	74.00	-15.06	51.68	7.26	Peak	100	220																																																						
5	17355.00	59.81	68.20	-8.39	52.85	6.96	Peak	100	205																																																						
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																															




Modulation	ax HE20	Test Freq. (MHz)	5785
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			

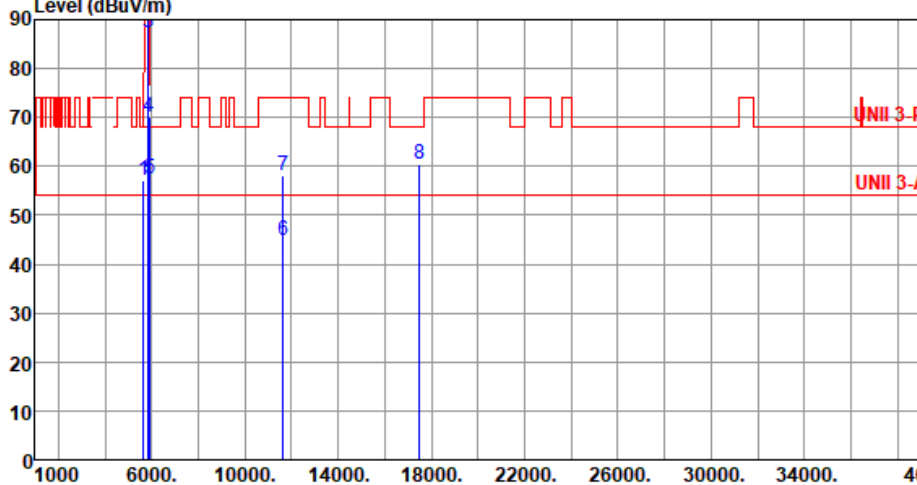

Modulation	ax HE20	Test Freq. (MHz)	5825																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>57.07</td><td>68.20</td><td>-11.13</td><td>56.85</td><td>0.22</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>2</td><td>5850.00</td><td>91.23</td><td>122.20</td><td>-30.97</td><td>90.26</td><td>0.97</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>3</td><td>5855.00</td><td>87.44</td><td>110.80</td><td>-23.36</td><td>86.45</td><td>0.99</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>4</td><td>5875.00</td><td>69.97</td><td>105.20</td><td>-35.23</td><td>68.95</td><td>1.02</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>5</td><td>5925.00</td><td>57.57</td><td>68.20</td><td>-10.63</td><td>56.43</td><td>1.14</td><td>Peak</td><td>233</td><td>77</td></tr><tr><td>6</td><td>11650.00</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>38.27</td><td>6.66</td><td>Average</td><td>150</td><td>211</td></tr><tr><td>7</td><td>11650.00</td><td>58.24</td><td>74.00</td><td>-15.76</td><td>51.58</td><td>6.66</td><td>Peak</td><td>150</td><td>211</td></tr><tr><td>8</td><td>17475.00</td><td>60.31</td><td>68.20</td><td>-7.89</td><td>52.86</td><td>7.45</td><td>Peak</td><td>100</td><td>106</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	57.07	68.20	-11.13	56.85	0.22	Peak	233	77	2	5850.00	91.23	122.20	-30.97	90.26	0.97	Peak	233	77	3	5855.00	87.44	110.80	-23.36	86.45	0.99	Peak	233	77	4	5875.00	69.97	105.20	-35.23	68.95	1.02	Peak	233	77	5	5925.00	57.57	68.20	-10.63	56.43	1.14	Peak	233	77	6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	150	211	7	11650.00	58.24	74.00	-15.76	51.58	6.66	Peak	150	211	8	17475.00	60.31	68.20	-7.89	52.86	7.45	Peak	100	106
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	57.07	68.20	-11.13	56.85	0.22	Peak	233	77																																																																																				
2	5850.00	91.23	122.20	-30.97	90.26	0.97	Peak	233	77																																																																																				
3	5855.00	87.44	110.80	-23.36	86.45	0.99	Peak	233	77																																																																																				
4	5875.00	69.97	105.20	-35.23	68.95	1.02	Peak	233	77																																																																																				
5	5925.00	57.57	68.20	-10.63	56.43	1.14	Peak	233	77																																																																																				
6	11650.00	44.93	54.00	-9.07	38.27	6.66	Average	150	211																																																																																				
7	11650.00	58.24	74.00	-15.76	51.58	6.66	Peak	150	211																																																																																				
8	17475.00	60.31	68.20	-7.89	52.86	7.45	Peak	100	106																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													

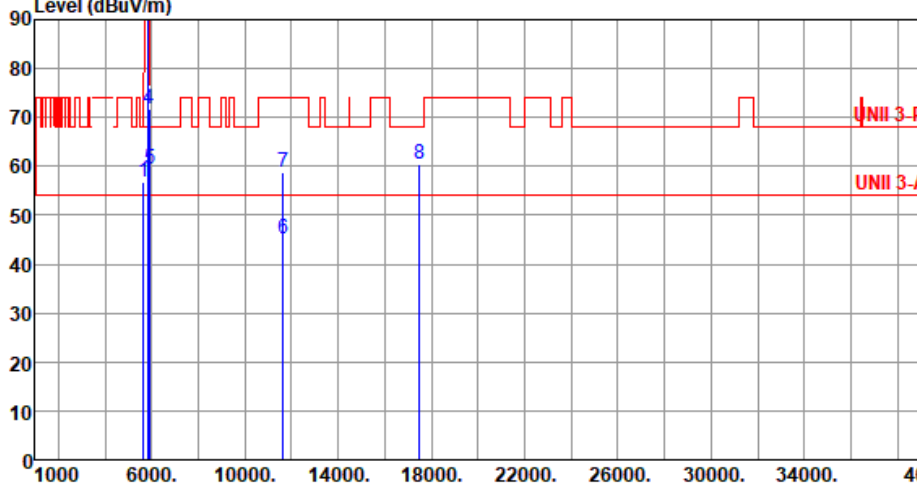

Modulation	ax HE20	Test Freq. (MHz)	5825						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.71	68.20	-11.49	56.49	0.22	Peak	213	26
2	5850.00	94.10	122.20	-28.10	93.13	0.97	Peak	213	26
3	5855.00	91.11	110.80	-19.69	90.12	0.99	Peak	213	26
4	5875.00	71.89	105.20	-33.31	70.87	1.02	Peak	213	26
5	5925.00	59.60	68.20	-8.60	58.46	1.14	Peak	213	26
6	11650.00	45.09	54.00	-8.91	38.43	6.66	Average	220	251
7	11650.00	58.80	74.00	-15.20	52.14	6.66	Peak	220	251
8	17475.00	60.33	68.20	-7.87	52.88	7.45	Peak	100	188
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									

Unwanted Emissions (Above 1GHz) for ax HE40

Modulation	ax HE40	Test Freq. (MHz)	5190																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>47.56</td><td>0.34</td><td>Average</td><td>238</td><td>76</td></tr><tr><td>2</td><td>5150.00</td><td>62.65</td><td>74.00</td><td>-11.35</td><td>62.31</td><td>0.34</td><td>Peak</td><td>238</td><td>76</td></tr><tr><td>3</td><td>10380.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>47.56</td><td>7.39</td><td>Peak</td><td>100</td><td>126</td></tr><tr><td>4</td><td>15570.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>38.51</td><td>3.97</td><td>Average</td><td>100</td><td>214</td></tr><tr><td>5</td><td>15570.00</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>51.56</td><td>3.97</td><td>Peak</td><td>100</td><td>214</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	238	76	2	5150.00	62.65	74.00	-11.35	62.31	0.34	Peak	238	76	3	10380.00	54.95	68.20	-13.25	47.56	7.39	Peak	100	126	4	15570.00	42.48	54.00	-11.52	38.51	3.97	Average	100	214	5	15570.00	55.53	74.00	-18.47	51.56	3.97	Peak	100	214
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	238	76																																																						
2	5150.00	62.65	74.00	-11.35	62.31	0.34	Peak	238	76																																																						
3	10380.00	54.95	68.20	-13.25	47.56	7.39	Peak	100	126																																																						
4	15570.00	42.48	54.00	-11.52	38.51	3.97	Average	100	214																																																						
5	15570.00	55.53	74.00	-18.47	51.56	3.97	Peak	100	214																																																						



Modulation	ax HE40	Test Freq. (MHz)	5190																																																												
Polarization	Vertical																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5150.00</td><td>52.52</td><td>54.00</td><td>-1.48</td><td>52.18</td><td>0.34</td><td>Average</td><td>191</td><td>359</td></tr><tr><td>2</td><td>5150.00</td><td>69.75</td><td>74.00</td><td>-4.25</td><td>69.41</td><td>0.34</td><td>Peak</td><td>191</td><td>359</td></tr><tr><td>3</td><td>10380.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>47.46</td><td>7.39</td><td>Peak</td><td>100</td><td>155</td></tr><tr><td>4</td><td>15570.00</td><td>42.43</td><td>54.00</td><td>-11.57</td><td>38.46</td><td>3.97</td><td>Average</td><td>100</td><td>223</td></tr><tr><td>5</td><td>15570.00</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>51.38</td><td>3.97</td><td>Peak</td><td>100</td><td>223</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	52.52	54.00	-1.48	52.18	0.34	Average	191	359	2	5150.00	69.75	74.00	-4.25	69.41	0.34	Peak	191	359	3	10380.00	54.85	68.20	-13.35	47.46	7.39	Peak	100	155	4	15570.00	42.43	54.00	-11.57	38.46	3.97	Average	100	223	5	15570.00	55.35	74.00	-18.65	51.38	3.97	Peak	100	223
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	52.52	54.00	-1.48	52.18	0.34	Average	191	359																																																						
2	5150.00	69.75	74.00	-4.25	69.41	0.34	Peak	191	359																																																						
3	10380.00	54.85	68.20	-13.35	47.46	7.39	Peak	100	155																																																						
4	15570.00	42.43	54.00	-11.57	38.46	3.97	Average	100	223																																																						
5	15570.00	55.35	74.00	-18.65	51.38	3.97	Peak	100	223																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															



Modulation	ax HE40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5230
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5270						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	46.70	54.00	-7.30	46.36	0.34	Average	154	195
2	5150.00	61.53	74.00	-12.47	61.19	0.34	Peak	154	195
3	5350.00	52.85	54.00	-1.15	53.10	-0.25	Average	153	231
4	5350.00	68.55	74.00	-5.45	68.80	-0.25	Peak	153	231
5	10540.00	54.39	68.20	-13.81	47.26	7.13	Peak	100	23
6	15810.00	42.28	54.00	-11.72	38.46	3.82	Average	100	247
7	15810.00	55.61	74.00	-18.39	51.79	3.82	Peak	100	247

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m)			



Modulation	ax HE40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5510																																																																						
Polarization	Horizontal																																																																								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																									
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.70</td><td>54.00</td><td>-10.30</td><td>43.31</td><td>0.39</td><td>Average</td><td>177</td><td>33</td></tr><tr><td>2</td><td>5460.00</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>55.47</td><td>0.39</td><td>Peak</td><td>177</td><td>33</td></tr><tr><td>3</td><td>5470.00</td><td>57.62</td><td>68.20</td><td>-10.58</td><td>57.23</td><td>0.39</td><td>Peak</td><td>177</td><td>33</td></tr><tr><td>4</td><td>11020.00</td><td>44.83</td><td>54.00</td><td>-9.17</td><td>37.26</td><td>7.57</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>5</td><td>11020.00</td><td>58.13</td><td>74.00</td><td>-15.87</td><td>50.56</td><td>7.57</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>6</td><td>16530.00</td><td>58.60</td><td>68.20</td><td>-9.60</td><td>52.32</td><td>6.28</td><td>Peak</td><td>100</td><td>227</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.70	54.00	-10.30	43.31	0.39	Average	177	33	2	5460.00	55.86	74.00	-18.14	55.47	0.39	Peak	177	33	3	5470.00	57.62	68.20	-10.58	57.23	0.39	Peak	177	33	4	11020.00	44.83	54.00	-9.17	37.26	7.57	Average	100	148	5	11020.00	58.13	74.00	-15.87	50.56	7.57	Peak	100	148	6	16530.00	58.60	68.20	-9.60	52.32	6.28	Peak	100	227
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																
1	5460.00	43.70	54.00	-10.30	43.31	0.39	Average	177	33																																																																
2	5460.00	55.86	74.00	-18.14	55.47	0.39	Peak	177	33																																																																
3	5470.00	57.62	68.20	-10.58	57.23	0.39	Peak	177	33																																																																
4	11020.00	44.83	54.00	-9.17	37.26	7.57	Average	100	148																																																																
5	11020.00	58.13	74.00	-15.87	50.56	7.57	Peak	100	148																																																																
6	16530.00	58.60	68.20	-9.60	52.32	6.28	Peak	100	227																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																									



Modulation	ax HE40	Test Freq. (MHz)	5510						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.23	54.00	-6.77	46.84	0.39	Average	242	17
2	5460.00	62.05	74.00	-11.95	61.66	0.39	Peak	242	17
3	5470.00	67.72	68.20	-0.48	67.33	0.39	Peak	242	17
4	11020.00	42.83	54.00	-11.17	35.26	7.57	Average	100	165
5	11020.00	55.41	74.00	-18.59	47.84	7.57	Peak	100	165
6	16530.00	59.15	68.20	-9.05	52.87	6.28	Peak	100	203
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE40	Test Freq. (MHz)	5590																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																			
Level (dBuV/m) UNI 1~2-PK UNI 1~2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>45.52</td><td>54.00</td><td>-8.48</td><td>45.13</td><td>0.39</td><td>Average</td><td>203</td><td>251</td></tr><tr><td>2</td><td>5460.00</td><td>56.50</td><td>74.00</td><td>-17.50</td><td>56.11</td><td>0.39</td><td>Peak</td><td>203</td><td>251</td></tr><tr><td>3</td><td>5470.00</td><td>58.01</td><td>68.20</td><td>-10.19</td><td>57.62</td><td>0.39</td><td>Peak</td><td>203</td><td>251</td></tr><tr><td>4</td><td>5725.00</td><td>57.43</td><td>68.20</td><td>-10.77</td><td>56.84</td><td>0.59</td><td>Peak</td><td>203</td><td>251</td></tr><tr><td>5</td><td>11180.00</td><td>47.38</td><td>54.00</td><td>-6.62</td><td>40.55</td><td>6.83</td><td>Average</td><td>100</td><td>82</td></tr><tr><td>6</td><td>11180.00</td><td>60.10</td><td>74.00</td><td>-13.90</td><td>53.27</td><td>6.83</td><td>Peak</td><td>100</td><td>82</td></tr><tr><td>7</td><td>16770.00</td><td>58.94</td><td>68.20</td><td>-9.26</td><td>51.57</td><td>7.37</td><td>Peak</td><td>100</td><td>211</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.52	54.00	-8.48	45.13	0.39	Average	203	251	2	5460.00	56.50	74.00	-17.50	56.11	0.39	Peak	203	251	3	5470.00	58.01	68.20	-10.19	57.62	0.39	Peak	203	251	4	5725.00	57.43	68.20	-10.77	56.84	0.59	Peak	203	251	5	11180.00	47.38	54.00	-6.62	40.55	6.83	Average	100	82	6	11180.00	60.10	74.00	-13.90	53.27	6.83	Peak	100	82	7	16770.00	58.94	68.20	-9.26	51.57	7.37	Peak	100	211
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	45.52	54.00	-8.48	45.13	0.39	Average	203	251																																																																										
2	5460.00	56.50	74.00	-17.50	56.11	0.39	Peak	203	251																																																																										
3	5470.00	58.01	68.20	-10.19	57.62	0.39	Peak	203	251																																																																										
4	5725.00	57.43	68.20	-10.77	56.84	0.59	Peak	203	251																																																																										
5	11180.00	47.38	54.00	-6.62	40.55	6.83	Average	100	82																																																																										
6	11180.00	60.10	74.00	-13.90	53.27	6.83	Peak	100	82																																																																										
7	16770.00	58.94	68.20	-9.26	51.57	7.37	Peak	100	211																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE40	Test Freq. (MHz)	5590
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			



Modulation	ax HE40	Test Freq. (MHz)	5670																																																		
Polarization	Horizontal																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>66.17</td><td>68.20</td><td>-2.03</td><td>65.58</td><td>0.59</td><td>Peak</td><td>161</td><td>43</td></tr><tr><td>2</td><td>11340.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>35.86</td><td>7.09</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>3</td><td>11340.00</td><td>56.03</td><td>74.00</td><td>-17.97</td><td>48.94</td><td>7.09</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>4</td><td>17010.00</td><td>60.00</td><td>68.20</td><td>-8.20</td><td>52.76</td><td>7.24</td><td>Peak</td><td>100</td><td>205</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	66.17	68.20	-2.03	65.58	0.59	Peak	161	43	2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	188	3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	188	4	17010.00	60.00	68.20	-8.20	52.76	7.24	Peak	100	205
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	66.17	68.20	-2.03	65.58	0.59	Peak	161	43																																												
2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	188																																												
3	11340.00	56.03	74.00	-17.97	48.94	7.09	Peak	100	188																																												
4	17010.00	60.00	68.20	-8.20	52.76	7.24	Peak	100	205																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																					




Modulation	ax HE40	Test Freq. (MHz)	5670																																																		
Polarization	Vertical																																																				
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																					
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5725.00</td><td>65.57</td><td>68.20</td><td>-2.63</td><td>64.98</td><td>0.59</td><td>Peak</td><td>222</td><td>14</td></tr><tr><td>2</td><td>11340.00</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>35.86</td><td>7.09</td><td>Average</td><td>100</td><td>177</td></tr><tr><td>3</td><td>11340.00</td><td>55.88</td><td>74.00</td><td>-18.12</td><td>48.79</td><td>7.09</td><td>Peak</td><td>100</td><td>177</td></tr><tr><td>4</td><td>17010.00</td><td>60.37</td><td>68.20</td><td>-7.83</td><td>53.13</td><td>7.24</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5725.00	65.57	68.20	-2.63	64.98	0.59	Peak	222	14	2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	177	3	11340.00	55.88	74.00	-18.12	48.79	7.09	Peak	100	177	4	17010.00	60.37	68.20	-7.83	53.13	7.24	Peak	100	208
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																												
1	5725.00	65.57	68.20	-2.63	64.98	0.59	Peak	222	14																																												
2	11340.00	42.95	54.00	-11.05	35.86	7.09	Average	100	177																																												
3	11340.00	55.88	74.00	-18.12	48.79	7.09	Peak	100	177																																												
4	17010.00	60.37	68.20	-7.83	53.13	7.24	Peak	100	208																																												




Modulation	ax HE40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBuV/m) </			

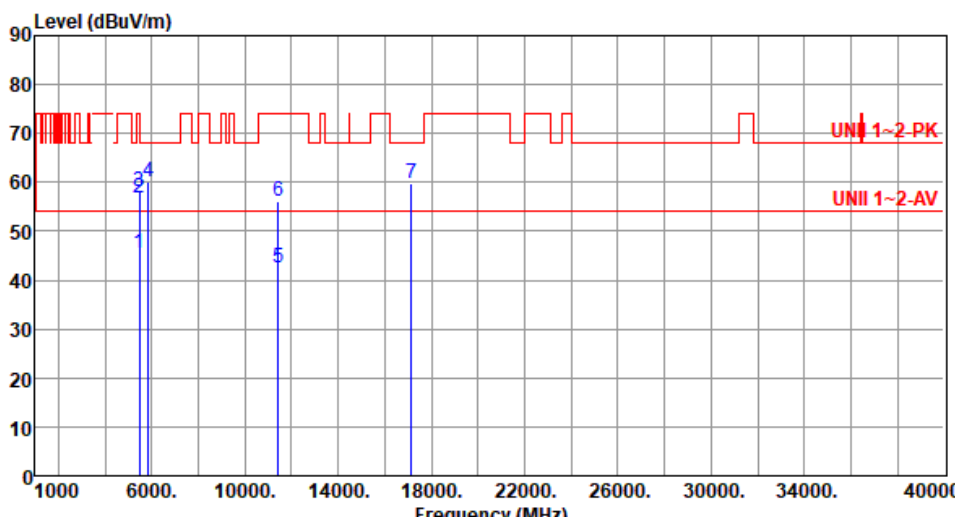


Modulation	ax HE40	Test Freq. (MHz)	5710						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):61									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.65	54.00	-8.35	45.26	0.39	Average	203	211
2	5460.00	56.93	74.00	-17.07	56.54	0.39	Peak	203	211
3	5470.00	58.01	68.20	-10.19	57.62	0.39	Peak	203	211
4	5850.00	59.96	68.20	-8.24	58.99	0.97	Peak	203	211
5	11420.00	42.60	54.00	-11.40	35.38	7.22	Average	100	256
6	11420.00	56.08	74.00	-17.92	48.86	7.22	Peak	100	256
7	17130.00	59.80	68.20	-8.40	53.11	6.69	Peak	100	226
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

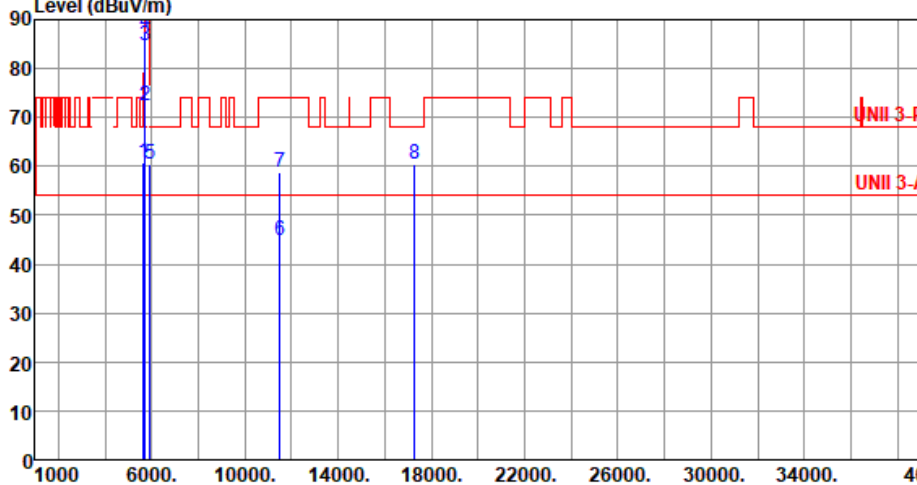


Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>60.82</td><td>68.20</td><td>-7.38</td><td>60.60</td><td>0.22</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>2</td><td>5700.00</td><td>72.37</td><td>105.20</td><td>-32.83</td><td>71.83</td><td>0.54</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>3</td><td>5720.00</td><td>84.70</td><td>110.80</td><td>-26.10</td><td>84.12</td><td>0.58</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>4</td><td>5725.00</td><td>87.46</td><td>122.20</td><td>-34.74</td><td>86.87</td><td>0.59</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>5</td><td>5925.00</td><td>60.57</td><td>68.20</td><td>-7.63</td><td>59.43</td><td>1.14</td><td>Peak</td><td>180</td><td>67</td></tr><tr><td>6</td><td>11510.00</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>37.51</td><td>7.39</td><td>Average</td><td>153</td><td>208</td></tr><tr><td>7</td><td>11510.00</td><td>58.65</td><td>74.00</td><td>-15.35</td><td>51.26</td><td>7.39</td><td>Peak</td><td>153</td><td>208</td></tr><tr><td>8</td><td>17265.00</td><td>60.28</td><td>68.20</td><td>-7.92</td><td>53.46</td><td>6.82</td><td>Peak</td><td>100</td><td>105</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	60.82	68.20	-7.38	60.60	0.22	Peak	180	67	2	5700.00	72.37	105.20	-32.83	71.83	0.54	Peak	180	67	3	5720.00	84.70	110.80	-26.10	84.12	0.58	Peak	180	67	4	5725.00	87.46	122.20	-34.74	86.87	0.59	Peak	180	67	5	5925.00	60.57	68.20	-7.63	59.43	1.14	Peak	180	67	6	11510.00	44.90	54.00	-9.10	37.51	7.39	Average	153	208	7	11510.00	58.65	74.00	-15.35	51.26	7.39	Peak	153	208	8	17265.00	60.28	68.20	-7.92	53.46	6.82	Peak	100	105
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	60.82	68.20	-7.38	60.60	0.22	Peak	180	67																																																																																				
2	5700.00	72.37	105.20	-32.83	71.83	0.54	Peak	180	67																																																																																				
3	5720.00	84.70	110.80	-26.10	84.12	0.58	Peak	180	67																																																																																				
4	5725.00	87.46	122.20	-34.74	86.87	0.59	Peak	180	67																																																																																				
5	5925.00	60.57	68.20	-7.63	59.43	1.14	Peak	180	67																																																																																				
6	11510.00	44.90	54.00	-9.10	37.51	7.39	Average	153	208																																																																																				
7	11510.00	58.65	74.00	-15.35	51.26	7.39	Peak	153	208																																																																																				
8	17265.00	60.28	68.20	-7.92	53.46	6.82	Peak	100	105																																																																																				

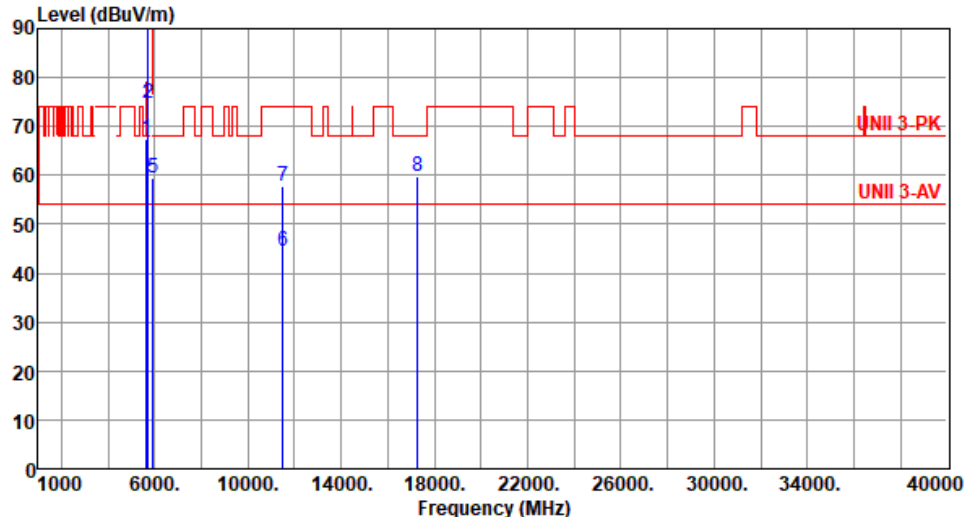

Modulation	ax HE40	Test Freq. (MHz)	5755																																																																																										
Polarization	Vertical																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>67.46</td><td>68.20</td><td>-0.74</td><td>67.24</td><td>0.22</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>2</td><td>5700.00</td><td>74.84</td><td>105.20</td><td>-30.36</td><td>74.30</td><td>0.54</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>3</td><td>5720.00</td><td>88.92</td><td>110.80</td><td>-21.88</td><td>88.34</td><td>0.58</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>4</td><td>5725.00</td><td>91.94</td><td>122.20</td><td>-30.26</td><td>91.35</td><td>0.59</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>5</td><td>5925.00</td><td>59.45</td><td>68.20</td><td>-8.75</td><td>58.31</td><td>1.14</td><td>Peak</td><td>230</td><td>234</td></tr><tr><td>6</td><td>11510.00</td><td>44.55</td><td>54.00</td><td>-9.45</td><td>37.16</td><td>7.39</td><td>Average</td><td>203</td><td>288</td></tr><tr><td>7</td><td>11510.00</td><td>57.85</td><td>74.00</td><td>-16.15</td><td>50.46</td><td>7.39</td><td>Peak</td><td>203</td><td>288</td></tr><tr><td>8</td><td>17265.00</td><td>59.66</td><td>68.20</td><td>-8.54</td><td>52.84</td><td>6.82</td><td>Peak</td><td>100</td><td>103</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.46	68.20	-0.74	67.24	0.22	Peak	230	234	2	5700.00	74.84	105.20	-30.36	74.30	0.54	Peak	230	234	3	5720.00	88.92	110.80	-21.88	88.34	0.58	Peak	230	234	4	5725.00	91.94	122.20	-30.26	91.35	0.59	Peak	230	234	5	5925.00	59.45	68.20	-8.75	58.31	1.14	Peak	230	234	6	11510.00	44.55	54.00	-9.45	37.16	7.39	Average	203	288	7	11510.00	57.85	74.00	-16.15	50.46	7.39	Peak	203	288	8	17265.00	59.66	68.20	-8.54	52.84	6.82	Peak	100	103
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	67.46	68.20	-0.74	67.24	0.22	Peak	230	234																																																																																				
2	5700.00	74.84	105.20	-30.36	74.30	0.54	Peak	230	234																																																																																				
3	5720.00	88.92	110.80	-21.88	88.34	0.58	Peak	230	234																																																																																				
4	5725.00	91.94	122.20	-30.26	91.35	0.59	Peak	230	234																																																																																				
5	5925.00	59.45	68.20	-8.75	58.31	1.14	Peak	230	234																																																																																				
6	11510.00	44.55	54.00	-9.45	37.16	7.39	Average	203	288																																																																																				
7	11510.00	57.85	74.00	-16.15	50.46	7.39	Peak	203	288																																																																																				
8	17265.00	59.66	68.20	-8.54	52.84	6.82	Peak	100	103																																																																																				

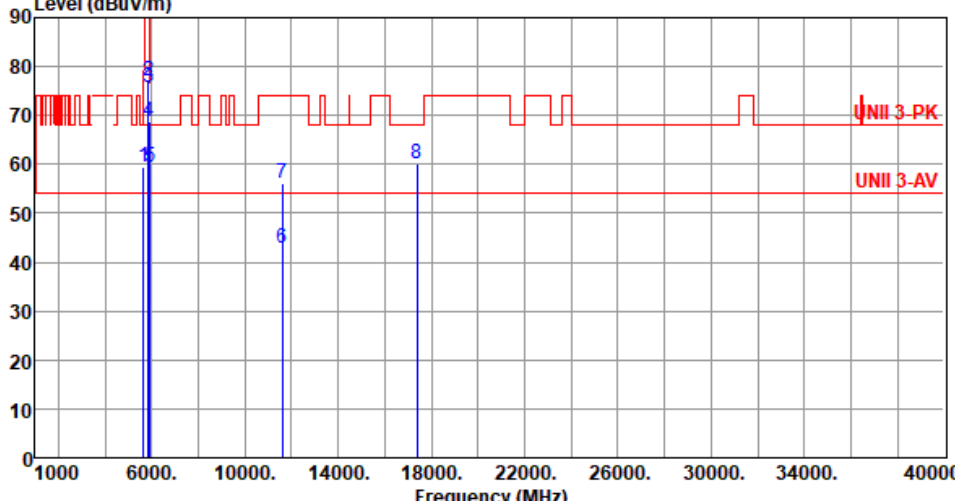


Modulation	ax HE40	Test Freq. (MHz)	5795																																																																																										
Polarization	Horizontal																																																																																												
Test By :Sean Yu Temperature(°C):26 Humidity(%):61																																																																																													
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5650.00</td><td>59.42</td><td>68.20</td><td>-8.78</td><td>59.20</td><td>0.22</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>2</td><td>5850.00</td><td>77.10</td><td>122.20</td><td>-45.10</td><td>76.13</td><td>0.97</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>3</td><td>5855.00</td><td>75.63</td><td>110.80</td><td>-35.17</td><td>74.64</td><td>0.99</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>4</td><td>5875.00</td><td>68.62</td><td>105.20</td><td>-36.58</td><td>67.60</td><td>1.02</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>5</td><td>5925.00</td><td>59.40</td><td>68.20</td><td>-8.80</td><td>58.26</td><td>1.14</td><td>Peak</td><td>135</td><td>241</td></tr><tr><td>6</td><td>11590.00</td><td>42.76</td><td>54.00</td><td>-11.24</td><td>35.62</td><td>7.14</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>7</td><td>11590.00</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>48.99</td><td>7.14</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>8</td><td>17385.00</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>53.12</td><td>7.10</td><td>Peak</td><td>100</td><td>102</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	59.42	68.20	-8.78	59.20	0.22	Peak	135	241	2	5850.00	77.10	122.20	-45.10	76.13	0.97	Peak	135	241	3	5855.00	75.63	110.80	-35.17	74.64	0.99	Peak	135	241	4	5875.00	68.62	105.20	-36.58	67.60	1.02	Peak	135	241	5	5925.00	59.40	68.20	-8.80	58.26	1.14	Peak	135	241	6	11590.00	42.76	54.00	-11.24	35.62	7.14	Average	100	148	7	11590.00	56.13	74.00	-17.87	48.99	7.14	Peak	100	148	8	17385.00	60.22	68.20	-7.98	53.12	7.10	Peak	100	102
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5650.00	59.42	68.20	-8.78	59.20	0.22	Peak	135	241																																																																																				
2	5850.00	77.10	122.20	-45.10	76.13	0.97	Peak	135	241																																																																																				
3	5855.00	75.63	110.80	-35.17	74.64	0.99	Peak	135	241																																																																																				
4	5875.00	68.62	105.20	-36.58	67.60	1.02	Peak	135	241																																																																																				
5	5925.00	59.40	68.20	-8.80	58.26	1.14	Peak	135	241																																																																																				
6	11590.00	42.76	54.00	-11.24	35.62	7.14	Average	100	148																																																																																				
7	11590.00	56.13	74.00	-17.87	48.99	7.14	Peak	100	148																																																																																				
8	17385.00	60.22	68.20	-7.98	53.12	7.10	Peak	100	102																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).																																																																																													



Modulation	ax HE40	Test Freq. (MHz)	5795
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):61			
Level (dBUV/m) </			


Unwanted Emissions (Above 1GHz) for ax HE80

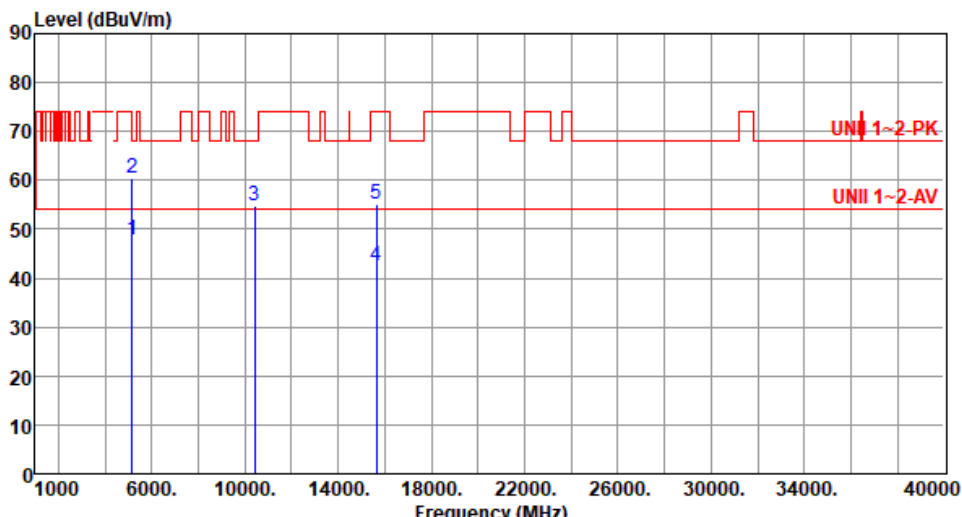Modulation	ax HE80	Test Freq. (MHz)	5210																																																												
Polarization	Horizontal																																																														
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																															
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>47.56</td><td>0.34</td><td>Average</td><td>239</td><td>73</td></tr><tr><td>2</td><td>5150.00</td><td>60.56</td><td>74.00</td><td>-13.44</td><td>60.22</td><td>0.34</td><td>Peak</td><td>239</td><td>73</td></tr><tr><td>3</td><td>10420.00</td><td>54.85</td><td>68.20</td><td>-13.35</td><td>47.48</td><td>7.37</td><td>Peak</td><td>100</td><td>147</td></tr><tr><td>4</td><td>15630.00</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>38.46</td><td>3.94</td><td>Average</td><td>100</td><td>208</td></tr><tr><td>5</td><td>15630.00</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>51.33</td><td>3.94</td><td>Peak</td><td>100</td><td>208</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	239	73	2	5150.00	60.56	74.00	-13.44	60.22	0.34	Peak	239	73	3	10420.00	54.85	68.20	-13.35	47.48	7.37	Peak	100	147	4	15630.00	42.40	54.00	-11.60	38.46	3.94	Average	100	208	5	15630.00	55.27	74.00	-18.73	51.33	3.94	Peak	100	208
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																						
1	5150.00	47.90	54.00	-6.10	47.56	0.34	Average	239	73																																																						
2	5150.00	60.56	74.00	-13.44	60.22	0.34	Peak	239	73																																																						
3	10420.00	54.85	68.20	-13.35	47.48	7.37	Peak	100	147																																																						
4	15630.00	42.40	54.00	-11.60	38.46	3.94	Average	100	208																																																						
5	15630.00	55.27	74.00	-18.73	51.33	3.94	Peak	100	208																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																															




Modulation	ax HE80	Test Freq. (MHz)	5210
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) </			

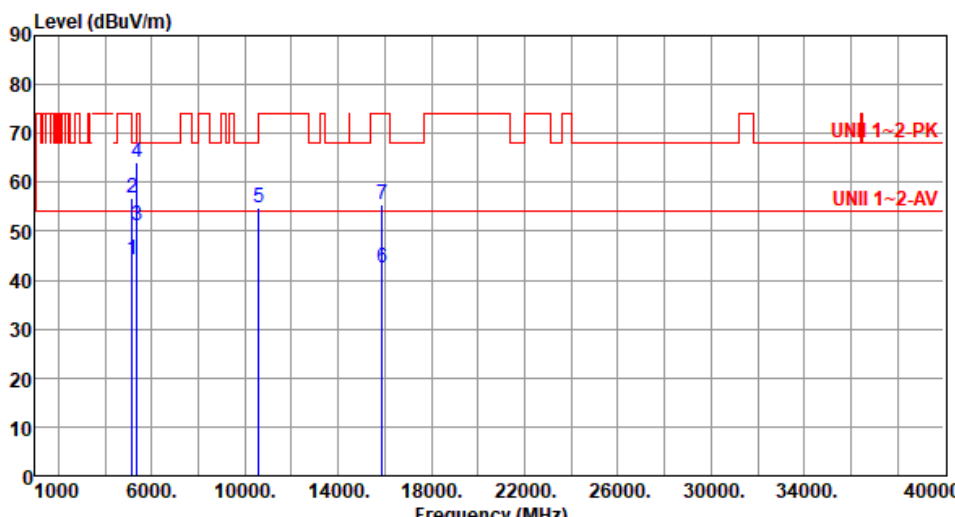

Modulation	ax HE80	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.11	54.00	-9.89	43.77	0.34	Average	173	32
2	5150.00	56.74	74.00	-17.26	56.40	0.34	Peak	173	32
3	5350.00	51.11	54.00	-2.89	51.36	-0.25	Average	173	32
4	5350.00	63.93	74.00	-10.07	64.18	-0.25	Peak	173	32
5	10580.00	54.93	68.20	-13.27	47.54	7.39	Peak	100	217
6	15870.00	42.61	54.00	-11.39	38.55	4.06	Average	100	156
7	15870.00	55.52	74.00	-18.48	51.46	4.06	Peak	100	156
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									

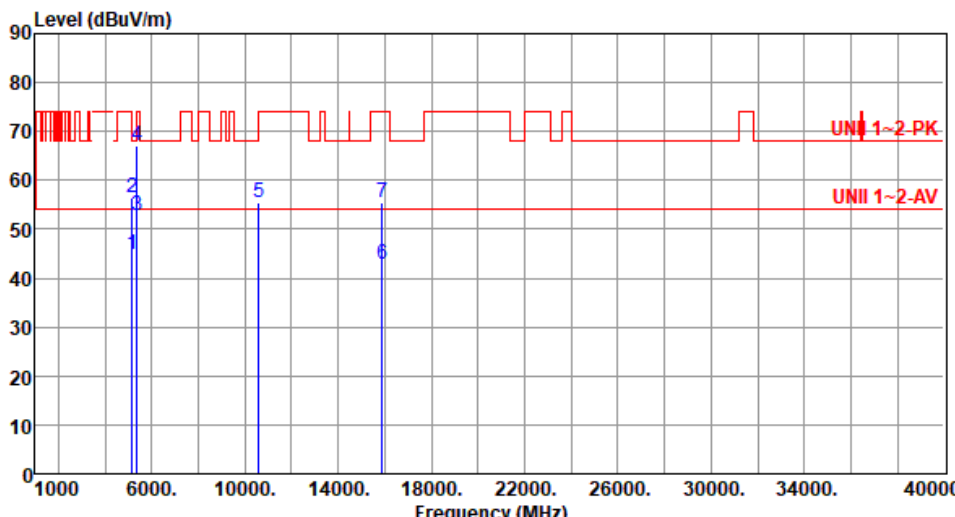

Modulation	ax HE80	Test Freq. (MHz)	5290						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.76	54.00	-9.24	44.42	0.34	Average	209	223
2	5150.00	56.46	74.00	-17.54	56.12	0.34	Peak	209	223
3	5350.00	52.69	54.00	-1.31	52.94	-0.25	Average	209	223
4	5350.00	66.93	74.00	-7.07	67.18	-0.25	Peak	209	223
5	10580.00	55.62	68.20	-12.58	48.23	7.39	Peak	100	147
6	15870.00	42.79	54.00	-11.21	38.73	4.06	Average	100	241
7	15870.00	55.54	74.00	-18.46	51.48	4.06	Peak	100	241
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).									



Modulation	ax HE80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBUV/m)			




Modulation	ax HE80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m) </			




Modulation	ax HE80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBUV/m)			

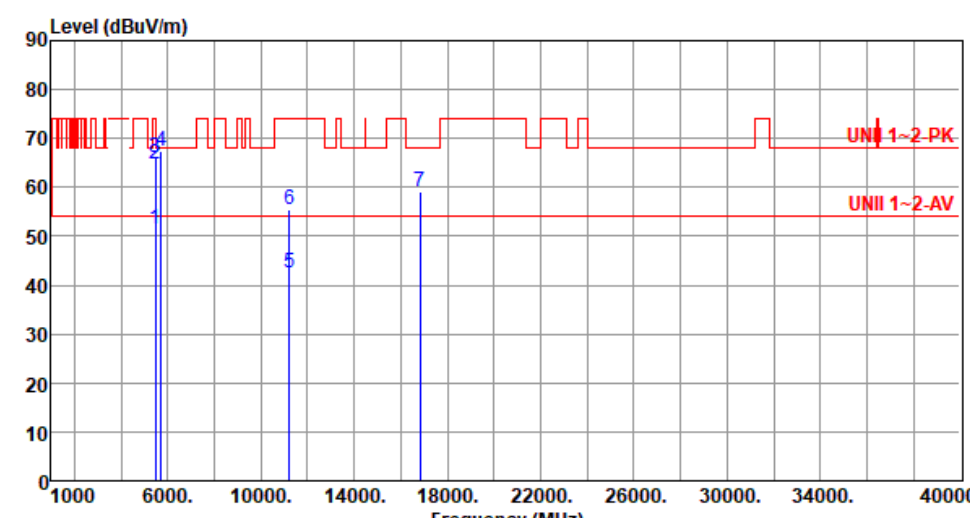

Modulation	ax HE80	Test Freq. (MHz)	5610						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.62	54.00	-2.38	51.23	0.39	Average	240	216
2	5460.00	64.90	74.00	-9.10	64.51	0.39	Peak	240	216
3	5470.00	66.25	68.20	-1.95	65.86	0.39	Peak	240	216
4	5725.00	67.32	68.20	-0.88	66.73	0.59	Peak	240	216
5	11220.00	42.38	54.00	-11.62	35.69	6.69	Average	100	177
6	11220.00	55.34	74.00	-18.66	48.65	6.69	Peak	100	177
7	16830.00	59.07	68.20	-9.13	51.79	7.28	Peak	100	204


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

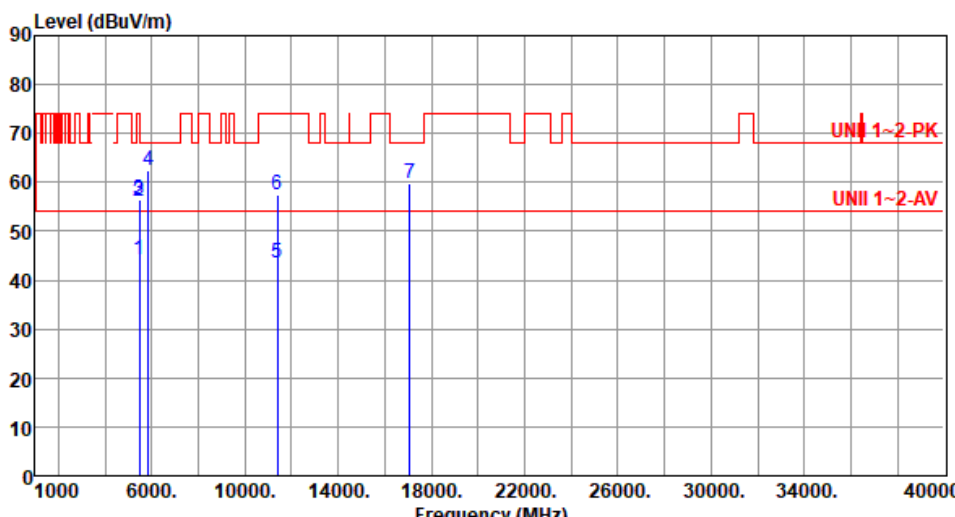


Modulation	ax HE80	Test Freq. (MHz)	5690						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.27	54.00	-9.73	43.88	0.39	Average	141	40
2	5460.00	56.03	74.00	-17.97	55.64	0.39	Peak	141	40
3	5470.00	56.46	68.20	-11.74	56.07	0.39	Peak	141	40
4	5850.00	62.51	68.20	-5.69	61.54	0.97	Peak	141	40
5	11380.00	43.42	54.00	-10.58	36.22	7.20	Average	100	123
6	11380.00	57.36	74.00	-16.64	50.16	7.20	Peak	100	123
7	17070.00	59.93	68.20	-8.27	52.75	7.18	Peak	100	284

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

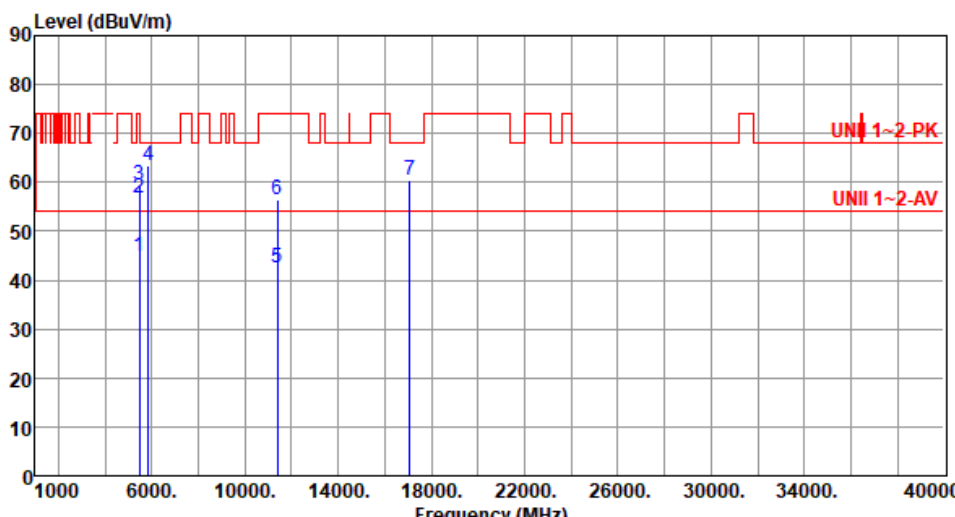

Modulation	ax HE80	Test Freq. (MHz)	5690																																																																																	
Polarization	Vertical																																																																																			
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																				
																																																																																				
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.79</td><td>54.00</td><td>-9.21</td><td>44.40</td><td>0.39</td><td>Average</td><td>237</td><td>157</td></tr><tr><td>2</td><td>5460.00</td><td>56.63</td><td>74.00</td><td>-17.37</td><td>56.24</td><td>0.39</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>3</td><td>5470.00</td><td>59.49</td><td>68.20</td><td>-8.71</td><td>59.10</td><td>0.39</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>4</td><td>5850.00</td><td>63.53</td><td>68.20</td><td>-4.67</td><td>62.56</td><td>0.97</td><td>Peak</td><td>237</td><td>157</td></tr><tr><td>5</td><td>11380.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>35.46</td><td>7.20</td><td>Average</td><td>100</td><td>188</td></tr><tr><td>6</td><td>11380.00</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>49.23</td><td>7.20</td><td>Peak</td><td>100</td><td>188</td></tr><tr><td>7</td><td>17070.00</td><td>60.37</td><td>68.20</td><td>-7.83</td><td>53.19</td><td>7.18</td><td>Peak</td><td>100</td><td>203</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	44.79	54.00	-9.21	44.40	0.39	Average	237	157	2	5460.00	56.63	74.00	-17.37	56.24	0.39	Peak	237	157	3	5470.00	59.49	68.20	-8.71	59.10	0.39	Peak	237	157	4	5850.00	63.53	68.20	-4.67	62.56	0.97	Peak	237	157	5	11380.00	42.66	54.00	-11.34	35.46	7.20	Average	100	188	6	11380.00	56.43	74.00	-17.57	49.23	7.20	Peak	100	188	7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	203			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																											
1	5460.00	44.79	54.00	-9.21	44.40	0.39	Average	237	157																																																																											
2	5460.00	56.63	74.00	-17.37	56.24	0.39	Peak	237	157																																																																											
3	5470.00	59.49	68.20	-8.71	59.10	0.39	Peak	237	157																																																																											
4	5850.00	63.53	68.20	-4.67	62.56	0.97	Peak	237	157																																																																											
5	11380.00	42.66	54.00	-11.34	35.46	7.20	Average	100	188																																																																											
6	11380.00	56.43	74.00	-17.57	49.23	7.20	Peak	100	188																																																																											
7	17070.00	60.37	68.20	-7.83	53.19	7.18	Peak	100	203																																																																											
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																				

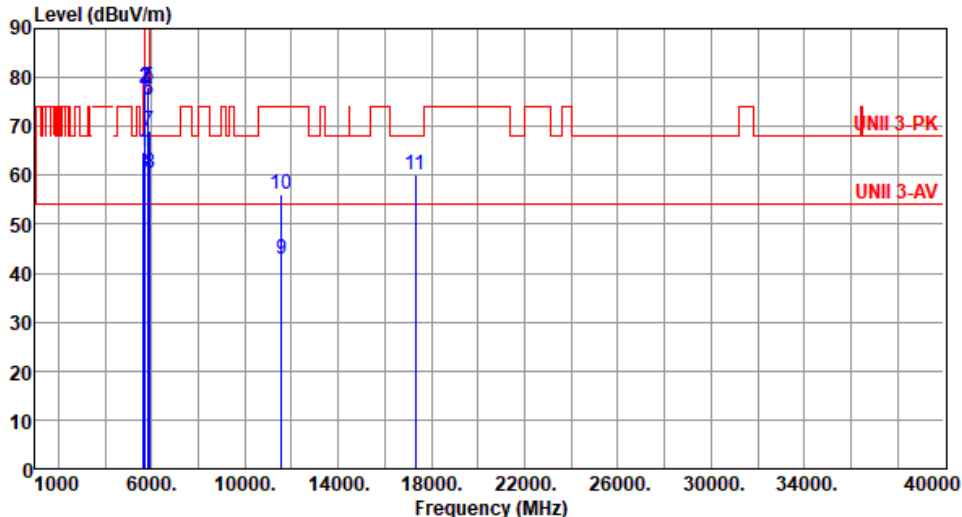

Modulation	ax HE80	Test Freq. (MHz)	5775						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	64.75	68.20	-3.45	64.53	0.22	Peak	181	284
2	5700.00	77.91	105.20	-27.29	77.37	0.54	Peak	181	284
3	5720.00	77.77	110.80	-33.03	77.19	0.58	Peak	181	284
4	5725.00	76.88	122.20	-45.32	76.29	0.59	Peak	181	284
5	5850.00	77.96	122.20	-44.24	76.99	0.97	Peak	181	284
6	5855.00	75.22	110.80	-35.58	74.23	0.99	Peak	181	284
7	5875.00	69.20	105.20	-36.00	68.18	1.02	Peak	181	284
8	5925.00	60.40	68.20	-7.80	59.26	1.14	Peak	181	284
9	11550.00	42.95	54.00	-11.05	35.57	7.38	Average	100	251
10	11550.00	56.14	74.00	-17.86	48.76	7.38	Peak	100	251
11	17325.00	60.12	68.20	-8.08	53.26	6.86	Peak	100	240

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	ax HE80	Test Freq. (MHz)	5775																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																																																											
Level (dBuV/m) UNII 3-PK UNII 3-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5650.00</td><td>67.08</td><td>68.20</td><td>-1.12</td><td>66.86</td><td>0.22</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>2</td><td>5700.00</td><td>81.54</td><td>105.20</td><td>-23.66</td><td>81.00</td><td>0.54</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>3</td><td>5720.00</td><td>83.05</td><td>110.80</td><td>-27.75</td><td>82.47</td><td>0.58</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>4</td><td>5725.00</td><td>85.21</td><td>122.20</td><td>-36.99</td><td>84.62</td><td>0.59</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>5</td><td>5850.00</td><td>79.45</td><td>122.20</td><td>-42.75</td><td>78.48</td><td>0.97</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>6</td><td>5855.00</td><td>77.94</td><td>110.80</td><td>-32.86</td><td>76.95</td><td>0.99</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>7</td><td>5875.00</td><td>72.76</td><td>105.20</td><td>-32.44</td><td>71.74</td><td>1.02</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>8</td><td>5925.00</td><td>59.85</td><td>68.20</td><td>-8.35</td><td>58.71</td><td>1.14</td><td>Peak</td><td>237</td><td>145</td></tr><tr><td>9</td><td>11550.00</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>35.64</td><td>7.38</td><td>Average</td><td>100</td><td>148</td></tr><tr><td>10</td><td>11550.00</td><td>56.71</td><td>74.00</td><td>-17.29</td><td>49.33</td><td>7.38</td><td>Peak</td><td>100</td><td>148</td></tr><tr><td>11</td><td>17325.00</td><td>60.08</td><td>68.20</td><td>-8.12</td><td>53.22</td><td>6.86</td><td>Peak</td><td>100</td><td>110</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5650.00	67.08	68.20	-1.12	66.86	0.22	Peak	237	145	2	5700.00	81.54	105.20	-23.66	81.00	0.54	Peak	237	145	3	5720.00	83.05	110.80	-27.75	82.47	0.58	Peak	237	145	4	5725.00	85.21	122.20	-36.99	84.62	0.59	Peak	237	145	5	5850.00	79.45	122.20	-42.75	78.48	0.97	Peak	237	145	6	5855.00	77.94	110.80	-32.86	76.95	0.99	Peak	237	145	7	5875.00	72.76	105.20	-32.44	71.74	1.02	Peak	237	145	8	5925.00	59.85	68.20	-8.35	58.71	1.14	Peak	237	145	9	11550.00	43.02	54.00	-10.98	35.64	7.38	Average	100	148	10	11550.00	56.71	74.00	-17.29	49.33	7.38	Peak	100	148	11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	110
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	5650.00	67.08	68.20	-1.12	66.86	0.22	Peak	237	145																																																																																																																		
2	5700.00	81.54	105.20	-23.66	81.00	0.54	Peak	237	145																																																																																																																		
3	5720.00	83.05	110.80	-27.75	82.47	0.58	Peak	237	145																																																																																																																		
4	5725.00	85.21	122.20	-36.99	84.62	0.59	Peak	237	145																																																																																																																		
5	5850.00	79.45	122.20	-42.75	78.48	0.97	Peak	237	145																																																																																																																		
6	5855.00	77.94	110.80	-32.86	76.95	0.99	Peak	237	145																																																																																																																		
7	5875.00	72.76	105.20	-32.44	71.74	1.02	Peak	237	145																																																																																																																		
8	5925.00	59.85	68.20	-8.35	58.71	1.14	Peak	237	145																																																																																																																		
9	11550.00	43.02	54.00	-10.98	35.64	7.38	Average	100	148																																																																																																																		
10	11550.00	56.71	74.00	-17.29	49.33	7.38	Peak	100	148																																																																																																																		
11	17325.00	60.08	68.20	-8.12	53.22	6.86	Peak	100	110																																																																																																																		

Unwanted Emissions (Above 1GHz) for ax HE160

Modulation	ax HE160	Test Freq. (MHz)	5250
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Modulation	ax HE160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):26 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.27	54.00	-1.73	51.93	0.34	Average	233	1
2	5150.00	64.93	74.00	-9.07	64.59	0.34	Peak	233	1
3	5350.00	52.39	54.00	-1.61	52.64	-0.25	Average	233	1
4	5350.00	65.17	74.00	-8.83	65.42	-0.25	Peak	233	1
5	10500.00	54.75	68.20	-13.45	47.52	7.23	Peak	100	123
6	15750.00	42.72	54.00	-11.28	38.49	4.23	Average	100	258
7	15750.00	55.55	74.00	-18.45	51.32	4.23	Peak	100	258
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).									



Modulation	ax HE160	Test Freq. (MHz)	5570																																																																																
Polarization	Horizontal																																																																																		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63																																																																																			
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>50.57</td><td>54.00</td><td>-3.43</td><td>50.18</td><td>0.39</td><td>Average</td><td>174</td><td>36</td></tr><tr><td>2</td><td>5460.00</td><td>62.57</td><td>74.00</td><td>-11.43</td><td>62.18</td><td>0.39</td><td>Peak</td><td>174</td><td>36</td></tr><tr><td>3</td><td>5470.00</td><td>63.67</td><td>68.20</td><td>-4.53</td><td>63.28</td><td>0.39</td><td>Peak</td><td>174</td><td>36</td></tr><tr><td>4</td><td>5725.00</td><td>63.99</td><td>68.20</td><td>-4.21</td><td>63.40</td><td>0.59</td><td>Peak</td><td>174</td><td>36</td></tr><tr><td>5</td><td>11140.00</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>34.69</td><td>7.08</td><td>Average</td><td>100</td><td>203</td></tr><tr><td>6</td><td>11140.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>47.87</td><td>7.08</td><td>Peak</td><td>100</td><td>203</td></tr><tr><td>7</td><td>16710.00</td><td>59.60</td><td>68.20</td><td>-8.60</td><td>52.13</td><td>7.47</td><td>Peak</td><td>100</td><td>215</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	50.57	54.00	-3.43	50.18	0.39	Average	174	36	2	5460.00	62.57	74.00	-11.43	62.18	0.39	Peak	174	36	3	5470.00	63.67	68.20	-4.53	63.28	0.39	Peak	174	36	4	5725.00	63.99	68.20	-4.21	63.40	0.59	Peak	174	36	5	11140.00	41.77	54.00	-12.23	34.69	7.08	Average	100	203	6	11140.00	54.95	74.00	-19.05	47.87	7.08	Peak	100	203	7	16710.00	59.60	68.20	-8.60	52.13	7.47	Peak	100	215
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5460.00	50.57	54.00	-3.43	50.18	0.39	Average	174	36																																																																										
2	5460.00	62.57	74.00	-11.43	62.18	0.39	Peak	174	36																																																																										
3	5470.00	63.67	68.20	-4.53	63.28	0.39	Peak	174	36																																																																										
4	5725.00	63.99	68.20	-4.21	63.40	0.59	Peak	174	36																																																																										
5	11140.00	41.77	54.00	-12.23	34.69	7.08	Average	100	203																																																																										
6	11140.00	54.95	74.00	-19.05	47.87	7.08	Peak	100	203																																																																										
7	16710.00	59.60	68.20	-8.60	52.13	7.47	Peak	100	215																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																			



Modulation	ax HE160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):26 Humidity(%):63			
Level (dBuV/m)			



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	4.45	1.89	-0.40	-1.01
T20°C Vmin	8.42	5.68	2.63	1.87
T40°C Vnom	-9.15	-9.83	-10.50	-10.72
T30°C Vnom	-1.36	-2.85	-4.11	-4.48
T20°C Vnom	4.38	1.89	-0.43	-1.04
T10°C Vnom	8.42	5.73	2.66	1.94
T0°C Vnom	13.49	10.31	6.44	5.58
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°C Vmax	5.86	3.08	0.13	-0.77
T20°C Vmin	8.74	5.43	2.77	1.94
T40°C Vnom	-9.33	-9.89	-10.50	-10.72
T30°C Vnom	-0.73	-2.73	-4.34	-4.84
T20°C Vnom	5.79	3.05	0.06	-0.80
T10°C Vnom	8.83	5.50	2.78	2.02
T0°C Vnom	12.38	9.15	6.40	5.48
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 0	


Non-beamforming mode

Modulation Mode	11a	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C


Humidity: 64%

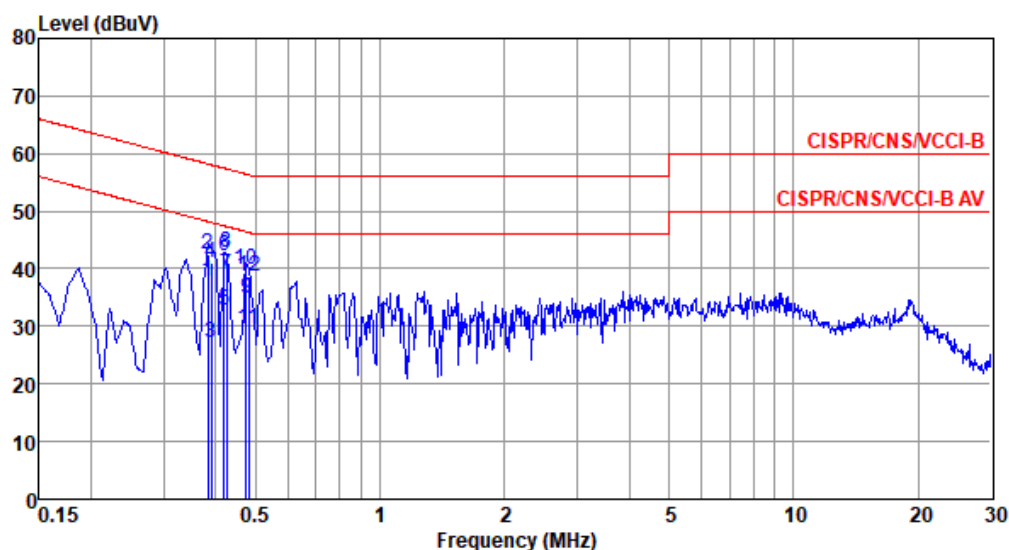

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.383	37.80	48.21	-10.41	27.75	9.64	0.09	0.32	Average
2	0.383	42.52	58.21	-15.69	32.47	9.64	0.09	0.32	QP
3	0.391	27.20	48.03	-20.83	17.15	9.64	0.09	0.32	Average
4	0.391	40.95	58.03	-17.08	30.90	9.64	0.09	0.32	QP
5	0.419	32.79	47.46	-14.67	22.74	9.64	0.09	0.32	Average
6	0.419	42.21	57.46	-15.25	32.16	9.64	0.09	0.32	QP
7*	0.426	39.04	47.33	-8.29	28.98	9.64	0.09	0.33	Average
8	0.426	42.73	57.33	-14.60	32.67	9.64	0.09	0.33	QP
9	0.474	34.72	46.45	-11.73	24.66	9.64	0.09	0.33	Average
10	0.474	39.75	56.45	-16.70	29.69	9.64	0.09	0.33	QP
11	0.481	29.60	46.32	-16.72	19.53	9.64	0.09	0.34	Average
12	0.481	38.75	56.32	-17.57	28.68	9.64	0.09	0.34	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

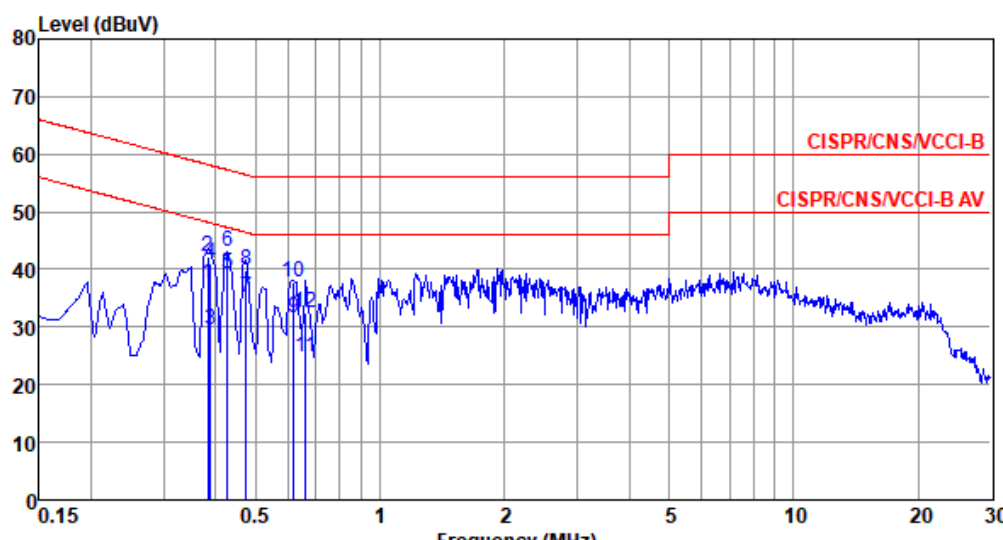Modulation Mode	11a	Test Freq. (MHz)	5240																																																																																																																																												
Power Phase	Neutral																																																																																																																																														
Test by : Akun Chung Temperature: 24°C Humidity: 64%																																																																																																																																															
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>dBuV</th><th>dB</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th>Remark</th></tr><tr><td>1</td><td>0.383</td><td>37.45</td><td>48.21</td><td>-10.76</td><td>27.46</td><td>9.64</td><td>0.09</td><td>0.26</td><td>Average</td></tr><tr><td>2</td><td>0.383</td><td>42.23</td><td>58.21</td><td>-15.98</td><td>32.24</td><td>9.64</td><td>0.09</td><td>0.26</td><td>QP</td></tr><tr><td>3</td><td>0.389</td><td>29.49</td><td>48.08</td><td>-18.59</td><td>19.50</td><td>9.64</td><td>0.09</td><td>0.26</td><td>Average</td></tr><tr><td>4</td><td>0.389</td><td>41.15</td><td>58.08</td><td>-16.93</td><td>31.16</td><td>9.64</td><td>0.09</td><td>0.26</td><td>QP</td></tr><tr><td>5*</td><td>0.428</td><td>39.34</td><td>47.29</td><td>-7.95</td><td>29.34</td><td>9.64</td><td>0.09</td><td>0.27</td><td>Average</td></tr><tr><td>6</td><td>0.428</td><td>43.16</td><td>57.29</td><td>-14.13</td><td>33.16</td><td>9.64</td><td>0.09</td><td>0.27</td><td>QP</td></tr><tr><td>7</td><td>0.474</td><td>35.12</td><td>46.45</td><td>-11.33</td><td>25.11</td><td>9.64</td><td>0.09</td><td>0.28</td><td>Average</td></tr><tr><td>8</td><td>0.474</td><td>39.74</td><td>56.45</td><td>-16.71</td><td>29.73</td><td>9.64</td><td>0.09</td><td>0.28</td><td>QP</td></tr><tr><td>9</td><td>0.617</td><td>31.69</td><td>46.00</td><td>-14.31</td><td>21.66</td><td>9.64</td><td>0.09</td><td>0.30</td><td>Average</td></tr><tr><td>10</td><td>0.617</td><td>37.88</td><td>56.00</td><td>-18.12</td><td>27.85</td><td>9.64</td><td>0.09</td><td>0.30</td><td>QP</td></tr><tr><td>11</td><td>0.661</td><td>24.74</td><td>46.00</td><td>-21.26</td><td>14.68</td><td>9.65</td><td>0.10</td><td>0.31</td><td>Average</td></tr><tr><td>12</td><td>0.661</td><td>32.46</td><td>56.00</td><td>-23.54</td><td>22.40</td><td>9.65</td><td>0.10</td><td>0.31</td><td>QP</td></tr></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux			MHz	dBuV	dBuV	dB	Level	dB	loss	dB	Remark	1	0.383	37.45	48.21	-10.76	27.46	9.64	0.09	0.26	Average	2	0.383	42.23	58.21	-15.98	32.24	9.64	0.09	0.26	QP	3	0.389	29.49	48.08	-18.59	19.50	9.64	0.09	0.26	Average	4	0.389	41.15	58.08	-16.93	31.16	9.64	0.09	0.26	QP	5*	0.428	39.34	47.29	-7.95	29.34	9.64	0.09	0.27	Average	6	0.428	43.16	57.29	-14.13	33.16	9.64	0.09	0.27	QP	7	0.474	35.12	46.45	-11.33	25.11	9.64	0.09	0.28	Average	8	0.474	39.74	56.45	-16.71	29.73	9.64	0.09	0.28	QP	9	0.617	31.69	46.00	-14.31	21.66	9.64	0.09	0.30	Average	10	0.617	37.88	56.00	-18.12	27.85	9.64	0.09	0.30	QP	11	0.661	24.74	46.00	-21.26	14.68	9.65	0.10	0.31	Average	12	0.661	32.46	56.00	-23.54	22.40	9.65	0.10	0.31	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux																																																																																																																																							
	MHz	dBuV	dBuV	dB	Level	dB	loss	dB	Remark																																																																																																																																						
1	0.383	37.45	48.21	-10.76	27.46	9.64	0.09	0.26	Average																																																																																																																																						
2	0.383	42.23	58.21	-15.98	32.24	9.64	0.09	0.26	QP																																																																																																																																						
3	0.389	29.49	48.08	-18.59	19.50	9.64	0.09	0.26	Average																																																																																																																																						
4	0.389	41.15	58.08	-16.93	31.16	9.64	0.09	0.26	QP																																																																																																																																						
5*	0.428	39.34	47.29	-7.95	29.34	9.64	0.09	0.27	Average																																																																																																																																						
6	0.428	43.16	57.29	-14.13	33.16	9.64	0.09	0.27	QP																																																																																																																																						
7	0.474	35.12	46.45	-11.33	25.11	9.64	0.09	0.28	Average																																																																																																																																						
8	0.474	39.74	56.45	-16.71	29.73	9.64	0.09	0.28	QP																																																																																																																																						
9	0.617	31.69	46.00	-14.31	21.66	9.64	0.09	0.30	Average																																																																																																																																						
10	0.617	37.88	56.00	-18.12	27.85	9.64	0.09	0.30	QP																																																																																																																																						
11	0.661	24.74	46.00	-21.26	14.68	9.65	0.10	0.31	Average																																																																																																																																						
12	0.661	32.46	56.00	-23.54	22.40	9.65	0.10	0.31	QP																																																																																																																																						
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																															


Modulation Mode	11a	Test Freq. (MHz)	5745																																																																																																																																												
Power Phase	Line																																																																																																																																														
Test by : Akun Chung Temperature: 24°C Humidity: 64%																																																																																																																																															
Level (dBUV) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Factor</th><th>Cable</th><th>Aux</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV</th><th>Line</th><th>Limit</th><th>Level</th><th>dB</th><th>loss</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>0.339</td><td>31.33</td><td>49.22</td><td>-17.89</td><td>21.29</td><td>9.64</td><td>0.09</td><td>0.31</td><td>Average</td></tr><tr><td>2</td><td>0.339</td><td>39.25</td><td>59.22</td><td>-19.97</td><td>29.21</td><td>9.64</td><td>0.09</td><td>0.31</td><td>QP</td></tr><tr><td>3</td><td>0.383</td><td>37.76</td><td>48.21</td><td>-10.45</td><td>27.71</td><td>9.64</td><td>0.09</td><td>0.32</td><td>Average</td></tr><tr><td>4</td><td>0.383</td><td>42.54</td><td>58.21</td><td>-15.67</td><td>32.49</td><td>9.64</td><td>0.09</td><td>0.32</td><td>QP</td></tr><tr><td>5*</td><td>0.428</td><td>38.62</td><td>47.29</td><td>-8.67</td><td>28.56</td><td>9.64</td><td>0.09</td><td>0.33</td><td>Average</td></tr><tr><td>6</td><td>0.428</td><td>42.58</td><td>57.29</td><td>-14.71</td><td>32.52</td><td>9.64</td><td>0.09</td><td>0.33</td><td>QP</td></tr><tr><td>7</td><td>0.474</td><td>34.76</td><td>46.45</td><td>-11.69</td><td>24.70</td><td>9.64</td><td>0.09</td><td>0.33</td><td>Average</td></tr><tr><td>8</td><td>0.474</td><td>39.48</td><td>56.45</td><td>-16.97</td><td>29.42</td><td>9.64</td><td>0.09</td><td>0.33</td><td>QP</td></tr><tr><td>9</td><td>0.518</td><td>29.23</td><td>46.00</td><td>-16.77</td><td>19.16</td><td>9.64</td><td>0.09</td><td>0.34</td><td>Average</td></tr><tr><td>10</td><td>0.518</td><td>35.01</td><td>56.00</td><td>-20.99</td><td>24.94</td><td>9.64</td><td>0.09</td><td>0.34</td><td>QP</td></tr><tr><td>11</td><td>0.617</td><td>30.34</td><td>46.00</td><td>-15.66</td><td>20.25</td><td>9.64</td><td>0.09</td><td>0.36</td><td>Average</td></tr><tr><td>12</td><td>0.617</td><td>36.65</td><td>56.00</td><td>-19.35</td><td>26.56</td><td>9.64</td><td>0.09</td><td>0.36</td><td>QP</td></tr></tbody></table>					Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark		MHz	dBuV	Line	Limit	Level	dB	loss	dB		1	0.339	31.33	49.22	-17.89	21.29	9.64	0.09	0.31	Average	2	0.339	39.25	59.22	-19.97	29.21	9.64	0.09	0.31	QP	3	0.383	37.76	48.21	-10.45	27.71	9.64	0.09	0.32	Average	4	0.383	42.54	58.21	-15.67	32.49	9.64	0.09	0.32	QP	5*	0.428	38.62	47.29	-8.67	28.56	9.64	0.09	0.33	Average	6	0.428	42.58	57.29	-14.71	32.52	9.64	0.09	0.33	QP	7	0.474	34.76	46.45	-11.69	24.70	9.64	0.09	0.33	Average	8	0.474	39.48	56.45	-16.97	29.42	9.64	0.09	0.33	QP	9	0.518	29.23	46.00	-16.77	19.16	9.64	0.09	0.34	Average	10	0.518	35.01	56.00	-20.99	24.94	9.64	0.09	0.34	QP	11	0.617	30.34	46.00	-15.66	20.25	9.64	0.09	0.36	Average	12	0.617	36.65	56.00	-19.35	26.56	9.64	0.09	0.36	QP
	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark																																																																																																																																						
	MHz	dBuV	Line	Limit	Level	dB	loss	dB																																																																																																																																							
1	0.339	31.33	49.22	-17.89	21.29	9.64	0.09	0.31	Average																																																																																																																																						
2	0.339	39.25	59.22	-19.97	29.21	9.64	0.09	0.31	QP																																																																																																																																						
3	0.383	37.76	48.21	-10.45	27.71	9.64	0.09	0.32	Average																																																																																																																																						
4	0.383	42.54	58.21	-15.67	32.49	9.64	0.09	0.32	QP																																																																																																																																						
5*	0.428	38.62	47.29	-8.67	28.56	9.64	0.09	0.33	Average																																																																																																																																						
6	0.428	42.58	57.29	-14.71	32.52	9.64	0.09	0.33	QP																																																																																																																																						
7	0.474	34.76	46.45	-11.69	24.70	9.64	0.09	0.33	Average																																																																																																																																						
8	0.474	39.48	56.45	-16.97	29.42	9.64	0.09	0.33	QP																																																																																																																																						
9	0.518	29.23	46.00	-16.77	19.16	9.64	0.09	0.34	Average																																																																																																																																						
10	0.518	35.01	56.00	-20.99	24.94	9.64	0.09	0.34	QP																																																																																																																																						
11	0.617	30.34	46.00	-15.66	20.25	9.64	0.09	0.36	Average																																																																																																																																						
12	0.617	36.65	56.00	-19.35	26.56	9.64	0.09	0.36	QP																																																																																																																																						
Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB). 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).																																																																																																																																															

Modulation Mode	11a	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

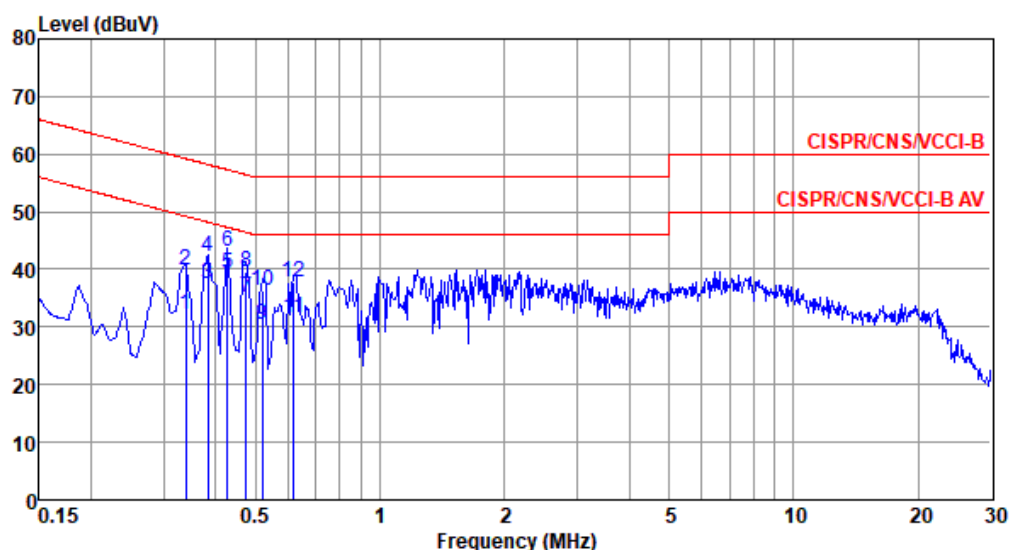

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.339	32.05	49.22	-17.17	22.07	9.64	0.09	0.25	Average
2	0.339	39.76	59.22	-19.46	29.78	9.64	0.09	0.25	QP
3	0.383	37.48	48.21	-10.73	27.49	9.64	0.09	0.26	Average
4	0.383	42.26	58.21	-15.95	32.27	9.64	0.09	0.26	QP
5*	0.428	39.32	47.29	-7.97	29.32	9.64	0.09	0.27	Average
6	0.428	43.22	57.29	-14.07	33.22	9.64	0.09	0.27	QP
7	0.474	35.15	46.45	-11.30	25.14	9.64	0.09	0.28	Average
8	0.474	39.65	56.45	-16.80	29.64	9.64	0.09	0.28	QP
9	0.518	30.48	46.00	-15.52	20.46	9.64	0.09	0.29	Average
10	0.518	36.39	56.00	-19.61	26.37	9.64	0.09	0.29	QP
11	0.617	31.61	46.00	-14.39	21.58	9.64	0.09	0.30	Average
12	0.617	37.87	56.00	-18.13	27.84	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

Note 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Beamforming mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

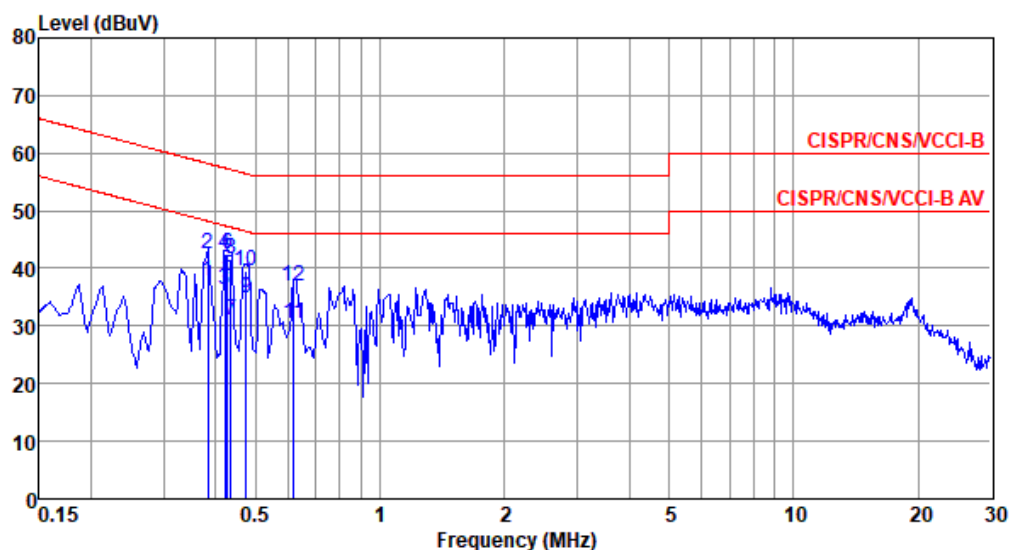

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.383	37.72	48.21	-10.49	27.67	9.64	0.09	0.32	Average
2	0.383	42.47	58.21	-15.74	32.42	9.64	0.09	0.32	QP
3	0.421	36.43	47.42	-10.99	26.38	9.64	0.09	0.32	Average
4	0.421	42.64	57.42	-14.78	32.59	9.64	0.09	0.32	QP
5*	0.428	38.64	47.29	-8.65	28.58	9.64	0.09	0.33	Average
6	0.428	42.51	57.29	-14.78	32.45	9.64	0.09	0.33	QP
7	0.435	30.93	47.15	-16.22	20.87	9.64	0.09	0.33	Average
8	0.435	41.52	57.15	-15.63	31.46	9.64	0.09	0.33	QP
9	0.474	34.83	46.45	-11.62	24.77	9.64	0.09	0.33	Average
10	0.474	39.62	56.45	-16.83	29.56	9.64	0.09	0.33	QP
11	0.617	30.39	46.00	-15.61	20.30	9.64	0.09	0.36	Average
12	0.617	36.76	56.00	-19.24	26.67	9.64	0.09	0.36	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5240
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

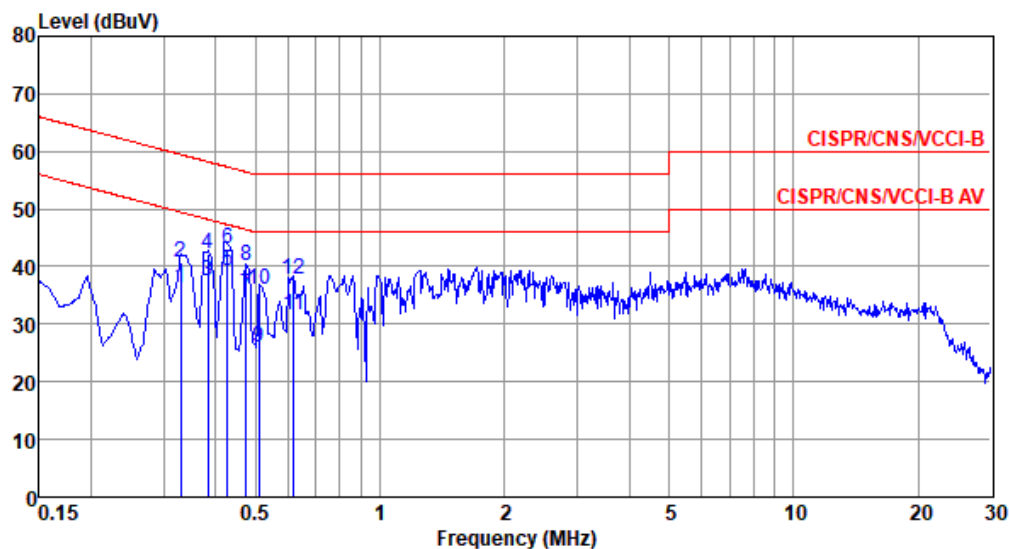

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.330	36.30	49.44	-13.14	26.33	9.64	0.09	0.24	Average
2	0.330	40.82	59.44	-18.62	30.85	9.64	0.09	0.24	QP
3	0.383	37.53	48.21	-10.68	27.54	9.64	0.09	0.26	Average
4	0.383	42.32	58.21	-15.89	32.33	9.64	0.09	0.26	QP
5*	0.428	39.29	47.29	-8.00	29.29	9.64	0.09	0.27	Average
6	0.428	43.24	57.29	-14.05	33.24	9.64	0.09	0.27	QP
7	0.474	35.12	46.45	-11.33	25.11	9.64	0.09	0.28	Average
8	0.474	40.07	56.45	-16.38	30.06	9.64	0.09	0.28	QP
9	0.510	26.00	46.00	-20.00	15.99	9.64	0.09	0.28	Average
10	0.510	35.93	56.00	-20.07	25.92	9.64	0.09	0.28	QP
11	0.617	31.67	46.00	-14.33	21.64	9.64	0.09	0.30	Average
12	0.617	37.76	56.00	-18.24	27.73	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

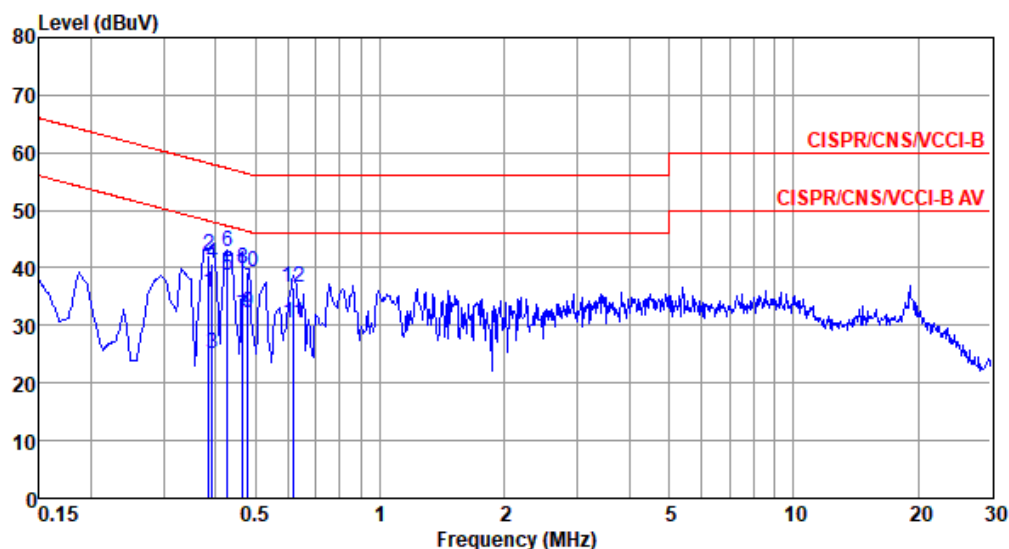

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.385	35.60	48.17	-12.57	25.55	9.64	0.09	0.32	Average
2	0.385	42.14	58.17	-16.03	32.09	9.64	0.09	0.32	QP
3	0.393	25.09	47.99	-22.90	15.04	9.64	0.09	0.32	Average
4	0.393	40.67	57.99	-17.32	30.62	9.64	0.09	0.32	QP
5*	0.428	38.63	47.29	-8.66	28.57	9.64	0.09	0.33	Average
6	0.428	42.69	57.29	-14.60	32.63	9.64	0.09	0.33	QP
7	0.466	31.54	46.58	-15.04	21.48	9.64	0.09	0.33	Average
8	0.466	39.80	56.58	-16.78	29.74	9.64	0.09	0.33	QP
9	0.479	32.29	46.36	-14.07	22.22	9.64	0.09	0.34	Average
10	0.479	39.27	56.36	-17.09	29.20	9.64	0.09	0.34	QP
11	0.617	30.45	46.00	-15.55	20.36	9.64	0.09	0.36	Average
12	0.617	36.68	56.00	-19.32	26.59	9.64	0.09	0.36	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

Modulation Mode	be EHT20	Test Freq. (MHz)	5745
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

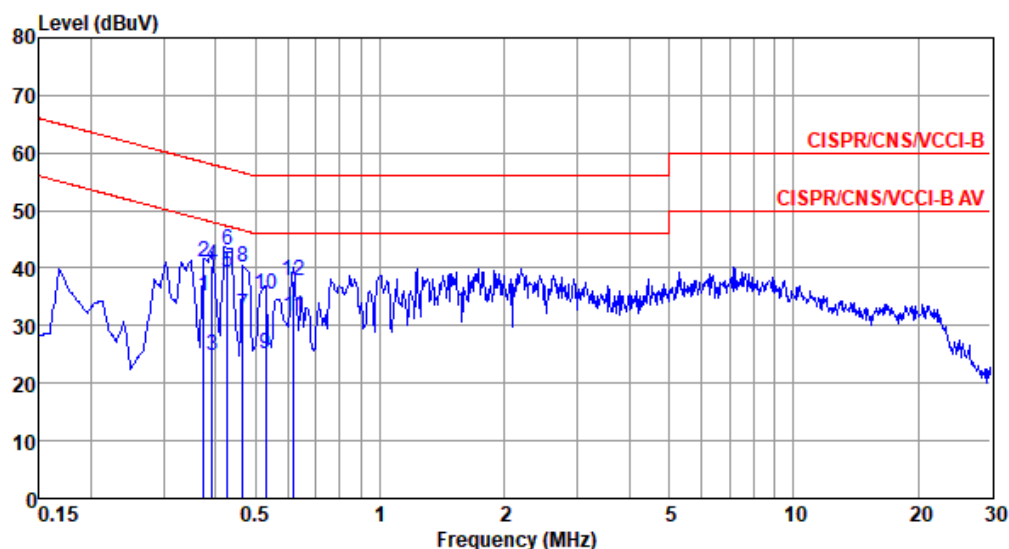

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.375	35.23	48.39	-13.16	25.25	9.64	0.09	0.25	Average
2	0.375	41.08	58.39	-17.31	31.10	9.64	0.09	0.25	QP
3	0.393	24.94	47.99	-23.05	14.95	9.64	0.09	0.26	Average
4	0.393	40.54	57.99	-17.45	30.55	9.64	0.09	0.26	QP
5*	0.428	39.30	47.29	-7.99	29.30	9.64	0.09	0.27	Average
6	0.428	43.22	57.29	-14.07	33.22	9.64	0.09	0.27	QP
7	0.466	31.83	46.58	-14.75	21.82	9.64	0.09	0.28	Average
8	0.466	40.16	56.58	-16.42	30.15	9.64	0.09	0.28	QP
9	0.529	25.05	46.00	-20.95	15.03	9.64	0.09	0.29	Average
10	0.529	35.33	56.00	-20.67	25.31	9.64	0.09	0.29	QP
11	0.617	31.69	46.00	-14.31	21.66	9.64	0.09	0.30	Average
12	0.617	37.83	56.00	-18.17	27.80	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).