





Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

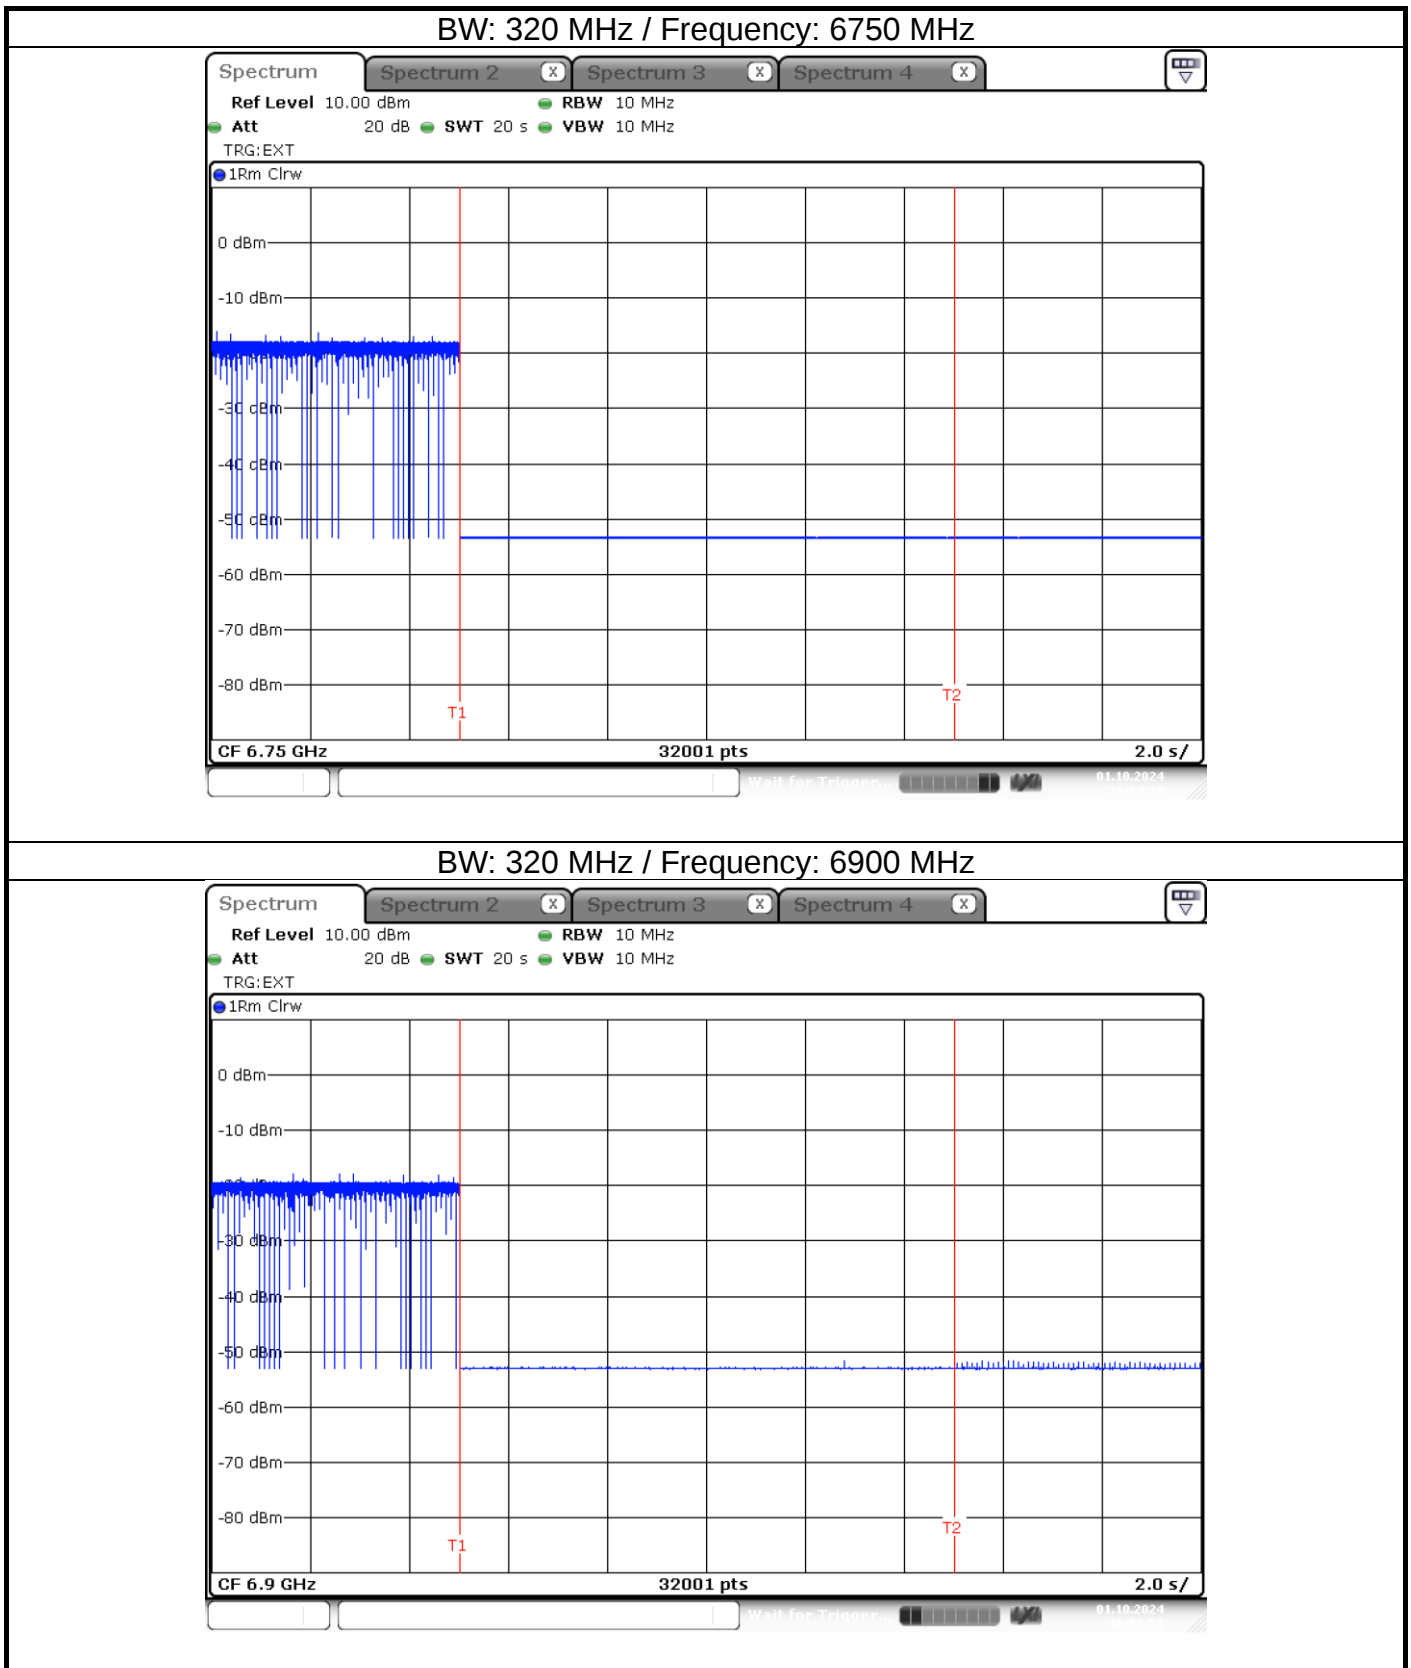

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

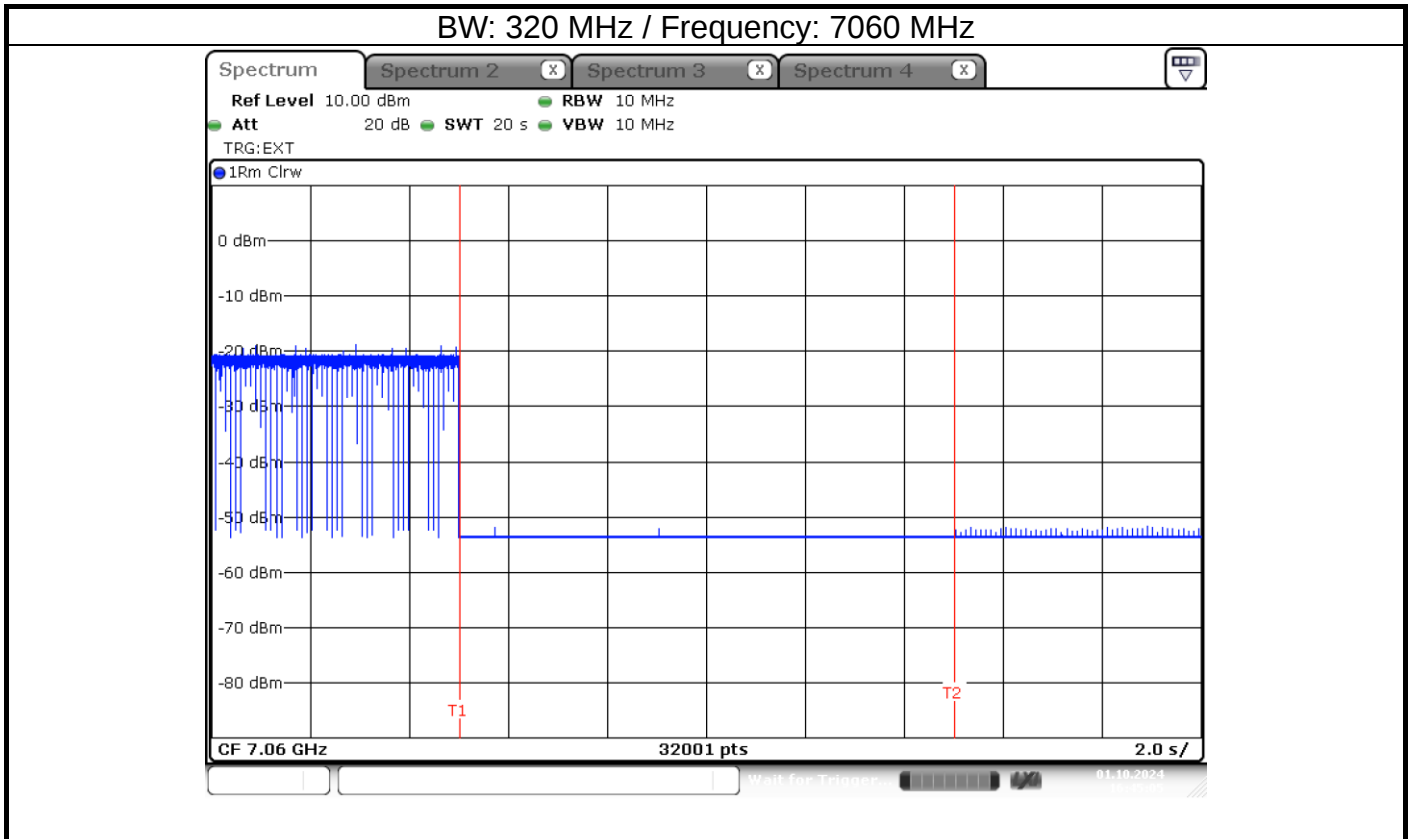


Non-beamforming mode

Modulation Mode	be EHT160	Test Freq. (MHz)	6665
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

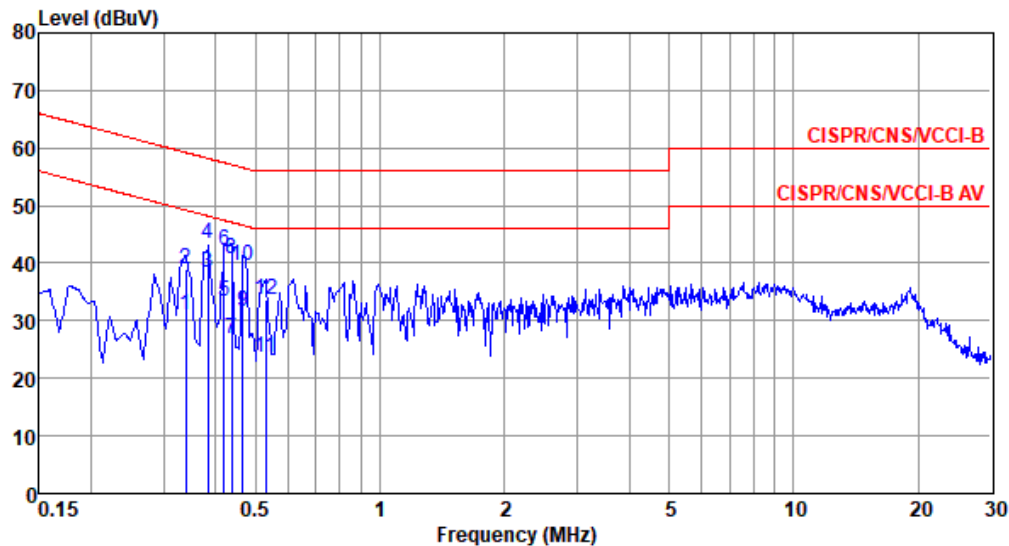

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
1	0.339	31.03	49.22	-18.19	20.99	9.64	0.09	0.31	Average
2	0.339	39.02	59.22	-20.20	28.98	9.64	0.09	0.31	QP
3*	0.383	38.46	48.21	-9.75	28.41	9.64	0.09	0.32	Average
4	0.383	43.46	58.21	-14.75	33.41	9.64	0.09	0.32	QP
5	0.419	33.36	47.46	-14.10	23.31	9.64	0.09	0.32	Average
6	0.419	42.15	57.46	-15.31	32.10	9.64	0.09	0.32	QP
7	0.437	26.85	47.11	-20.26	16.79	9.64	0.09	0.33	Average
8	0.437	40.78	57.11	-16.33	30.72	9.64	0.09	0.33	QP
9	0.466	31.57	46.58	-15.01	21.51	9.64	0.09	0.33	Average
10	0.466	39.67	56.58	-16.91	29.61	9.64	0.09	0.33	QP
11	0.529	23.57	46.00	-22.43	13.50	9.64	0.09	0.34	Average
12	0.529	33.79	56.00	-22.21	23.72	9.64	0.09	0.34	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).

Modulation Mode	be EHT160	Test Freq. (MHz)	6665
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

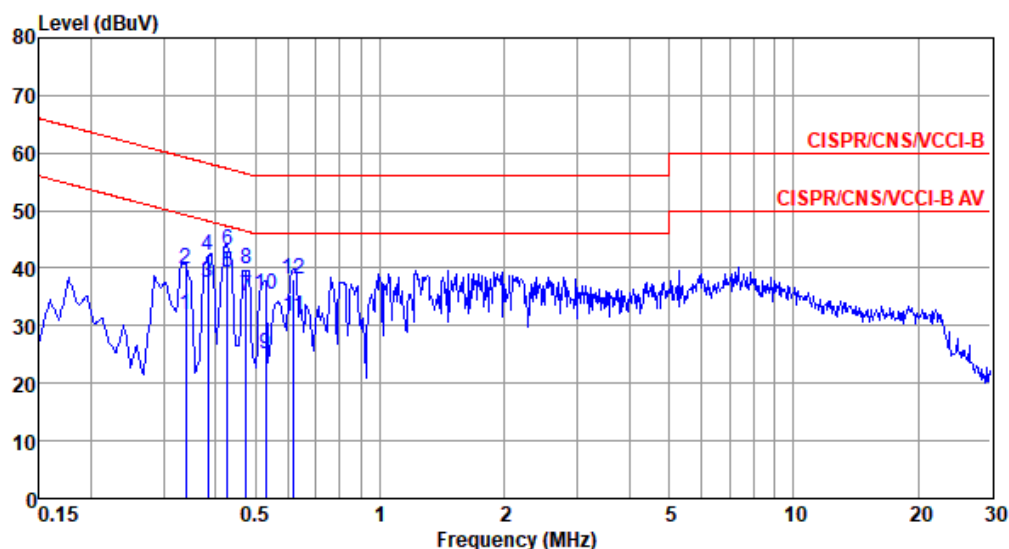

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.339	32.02	49.22	-17.20	22.04	9.64	0.09	0.25	Average
2	0.339	39.83	59.22	-19.39	29.85	9.64	0.09	0.25	QP
3	0.383	37.43	48.21	-10.78	27.44	9.64	0.09	0.26	Average
4	0.383	42.27	58.21	-15.94	32.28	9.64	0.09	0.26	QP
5*	0.428	39.32	47.29	-7.97	29.32	9.64	0.09	0.27	Average
6	0.428	43.12	57.29	-14.17	33.12	9.64	0.09	0.27	QP
7	0.474	35.15	46.45	-11.30	25.14	9.64	0.09	0.28	Average
8	0.474	39.99	56.45	-16.46	29.98	9.64	0.09	0.28	QP
9	0.529	24.95	46.00	-21.05	14.93	9.64	0.09	0.29	Average
10	0.529	35.40	56.00	-20.60	25.38	9.64	0.09	0.29	QP
11	0.617	31.56	46.00	-14.44	21.53	9.64	0.09	0.30	Average
12	0.617	38.00	56.00	-18.00	27.97	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


Beamforming mode

Modulation Mode	be EHT160	Test Freq. (MHz)	6665
Power Phase	Line		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

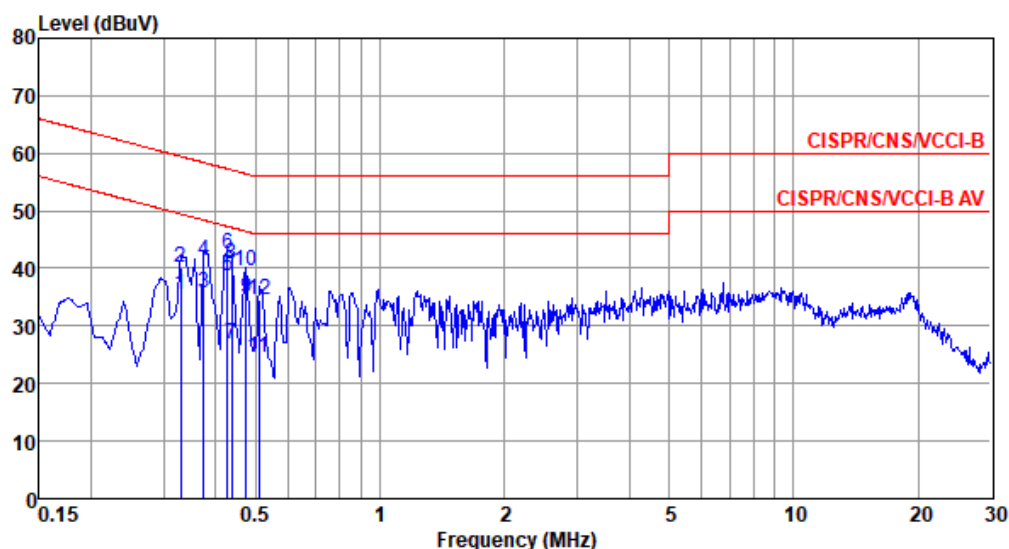

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level		loss		Remark
			dBuV	dB	dBuV	dB	dB	dB	
1	0.330	35.53	49.44	-13.91	25.50	9.64	0.09	0.30	Average
2	0.330	40.08	59.44	-19.36	30.05	9.64	0.09	0.30	QP
3	0.375	35.70	48.39	-12.69	25.66	9.64	0.09	0.31	Average
4	0.375	41.32	58.39	-17.07	31.28	9.64	0.09	0.31	QP
5*	0.428	38.62	47.29	-8.67	28.56	9.64	0.09	0.33	Average
6	0.428	42.52	57.29	-14.77	32.46	9.64	0.09	0.33	QP
7	0.437	26.75	47.11	-20.36	16.69	9.64	0.09	0.33	Average
8	0.437	40.72	57.11	-16.39	30.66	9.64	0.09	0.33	QP
9	0.474	34.78	46.45	-11.67	24.72	9.64	0.09	0.33	Average
10	0.474	39.47	56.45	-16.98	29.41	9.64	0.09	0.33	QP
11	0.510	24.61	46.00	-21.39	14.54	9.64	0.09	0.34	Average
12	0.510	34.63	56.00	-21.37	24.56	9.64	0.09	0.34	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).


Note 2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).

Modulation Mode	be EHT160	Test Freq. (MHz)	6665
Power Phase	Neutral		

Test by : Akun Chung

Temperature: 24°C

Humidity: 64%

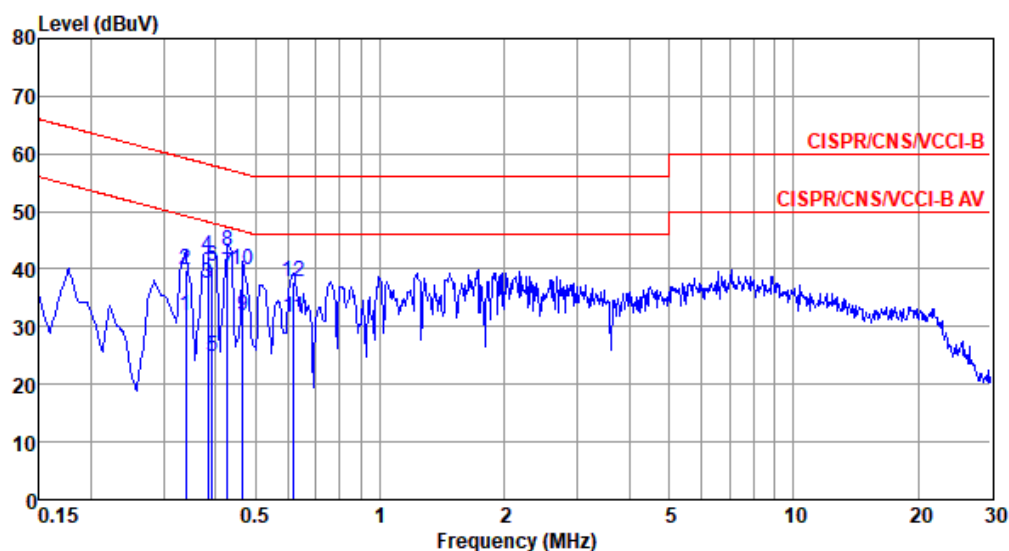

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.339	31.76	49.22	-17.46	21.78	9.64	0.09	0.25	Average
2	0.339	39.84	59.22	-19.38	29.86	9.64	0.09	0.25	QP
3	0.383	37.48	48.21	-10.73	27.49	9.64	0.09	0.26	Average
4	0.383	42.30	58.21	-15.91	32.31	9.64	0.09	0.26	QP
5	0.393	24.77	47.99	-23.22	14.78	9.64	0.09	0.26	Average
6	0.393	40.32	57.99	-17.67	30.33	9.64	0.09	0.26	QP
7*	0.428	39.36	47.29	-7.93	29.36	9.64	0.09	0.27	Average
8	0.428	43.16	57.29	-14.13	33.16	9.64	0.09	0.27	QP
9	0.466	32.01	46.58	-14.57	22.00	9.64	0.09	0.28	Average
10	0.466	39.96	56.58	-16.62	29.95	9.64	0.09	0.28	QP
11	0.617	31.73	46.00	-14.27	21.70	9.64	0.09	0.30	Average
12	0.617	37.84	56.00	-18.16	27.81	9.64	0.09	0.30	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).