



Transmitter Radiated Unwanted Emissions (Below 1GHz)

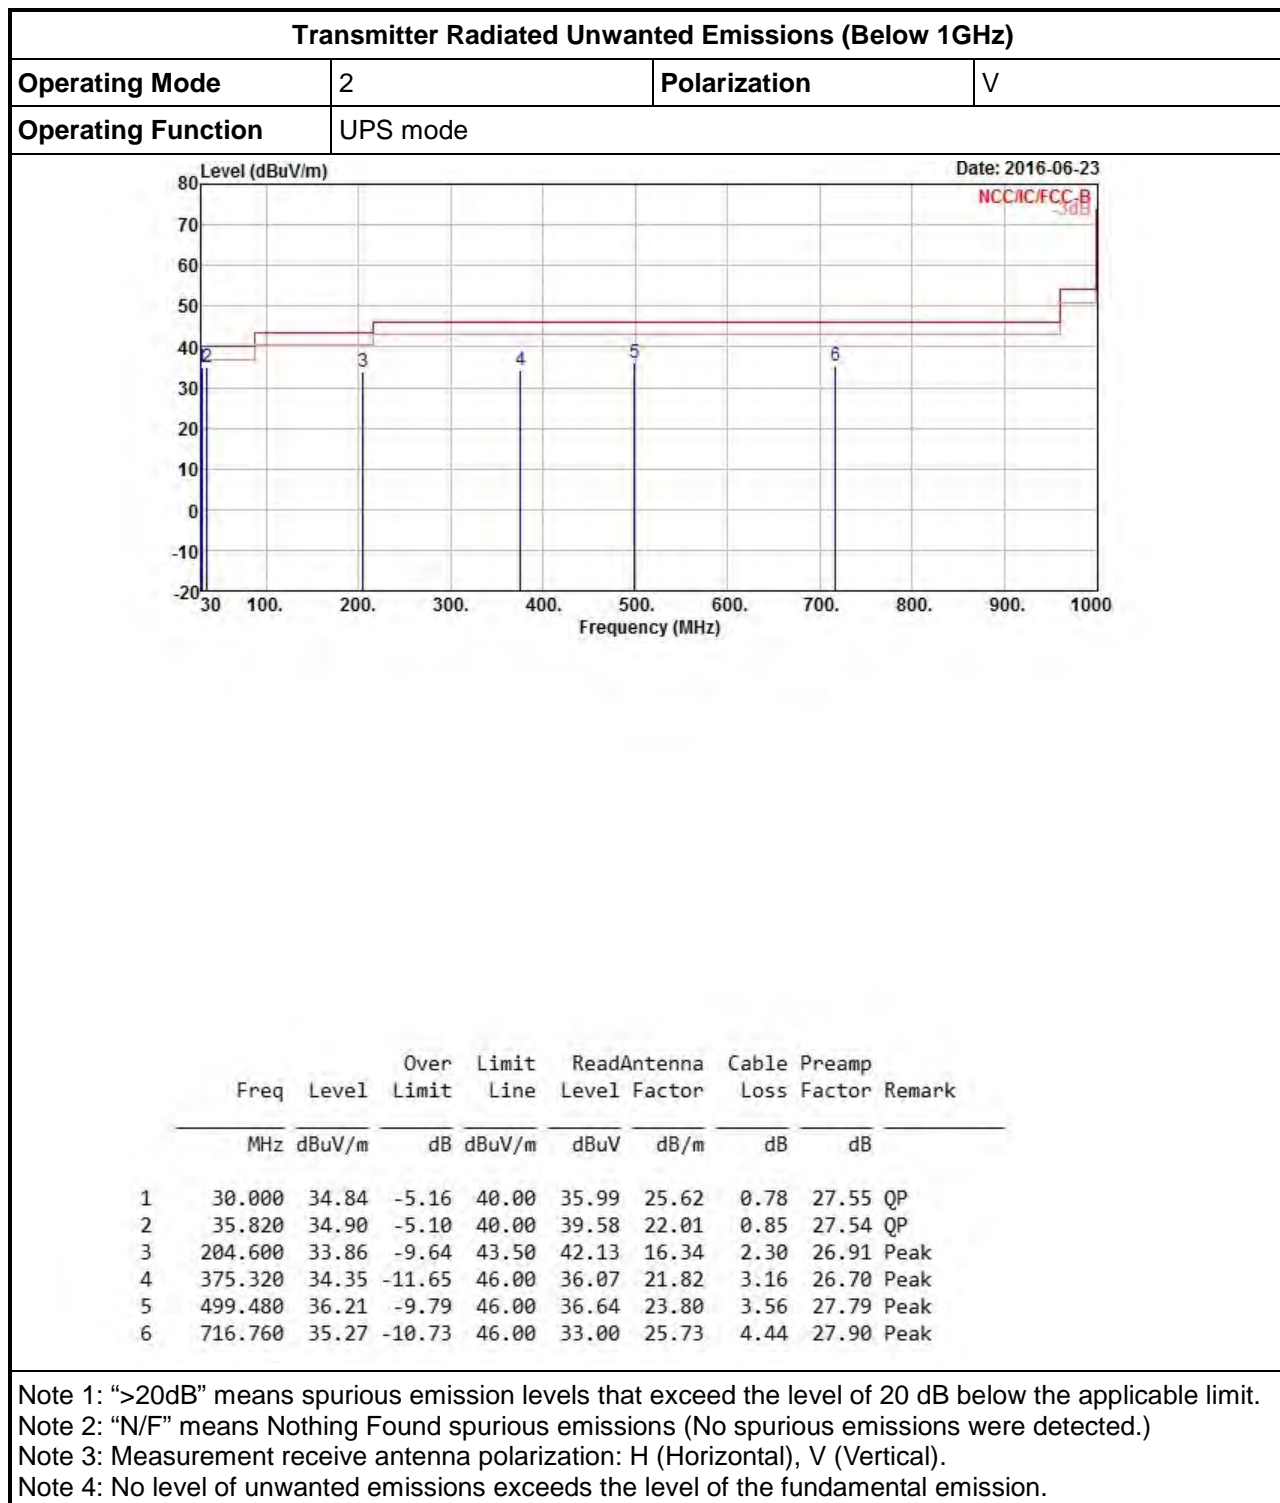

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H
Operating Function	UPS mode		

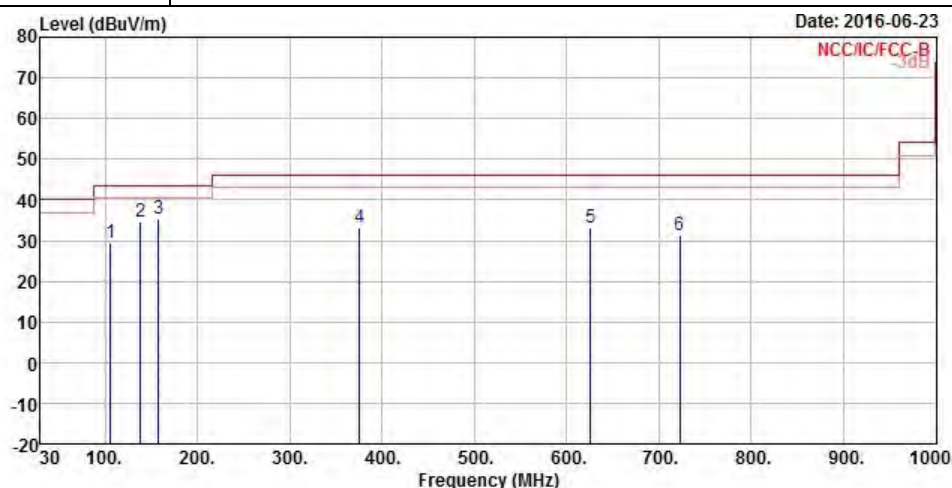

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	105.660	29.43	-14.07	43.50	37.25	17.95	1.59	27.36
2	138.640	34.76	-8.74	43.50	42.21	17.93	1.83	27.21
3	158.040	35.31	-8.19	43.50	43.93	16.53	1.97	27.12
4	375.320	33.19	-12.81	46.00	34.91	21.82	3.16	26.70
5	625.580	33.02	-12.98	46.00	31.76	25.10	4.16	28.00
6	722.580	31.39	-14.61	46.00	29.00	25.83	4.46	27.90


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5150-5250MHz

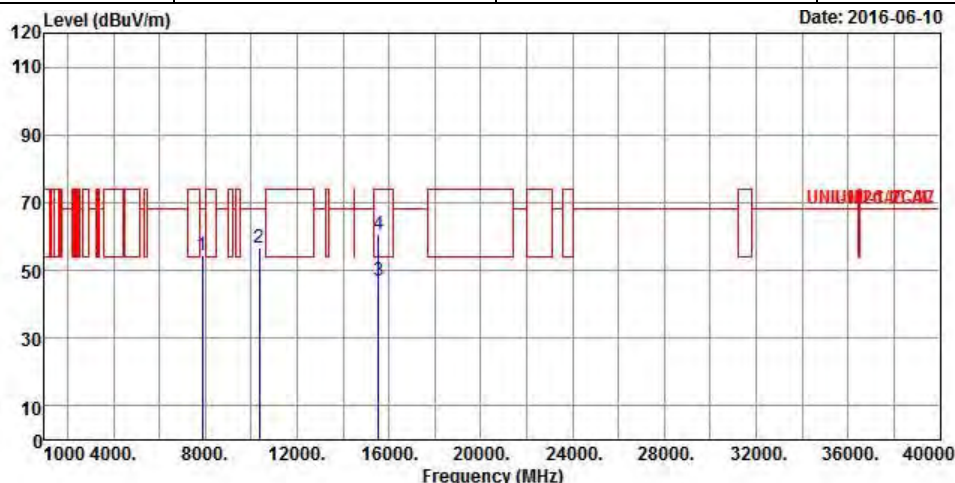Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																															
Modulation Mode		11a (Ant. A)				Test Freq. (MHz)		5180																																																																							
N _{TX}		1				Polarization		V																																																																							
<div><div><div>Level (dBuV/m)</div><div></div><div>Date: 2016-06-10</div></div><table><tr><th></th><th>Freq</th><th>Level</th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th colspan="2"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>Limit</th><th>Line</th><th>Level</th><th>Loss</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th></th><th></th><th></th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>7869.400</td><td>54.27</td><td>-13.93</td><td>68.20</td><td>43.10</td><td>36.89</td><td>7.20</td><td>32.92</td><td>Peak</td></tr><tr><td>2</td><td>10360.000</td><td>56.58</td><td>-11.62</td><td>68.20</td><td>41.77</td><td>39.23</td><td>8.47</td><td>32.89</td><td>Peak</td></tr><tr><td>3</td><td>15540.000</td><td>46.92</td><td>-7.08</td><td>54.00</td><td>30.55</td><td>38.30</td><td>10.41</td><td>32.34</td><td>Average</td></tr><tr><td>4</td><td>15540.000</td><td>60.87</td><td>-13.13</td><td>74.00</td><td>44.50</td><td>38.30</td><td>10.41</td><td>32.34</td><td>Peak</td></tr></table></div>											Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp				MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark					dB	dBuV/m	dBuV	dB/m	dB	dB		1	7869.400	54.27	-13.93	68.20	43.10	36.89	7.20	32.92	Peak	2	10360.000	56.58	-11.62	68.20	41.77	39.23	8.47	32.89	Peak	3	15540.000	46.92	-7.08	54.00	30.55	38.30	10.41	32.34	Average	4	15540.000	60.87	-13.13	74.00	44.50	38.30	10.41	32.34	Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp																																																																								
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark																																																																							
			dB	dBuV/m	dBuV	dB/m	dB	dB																																																																							
1	7869.400	54.27	-13.93	68.20	43.10	36.89	7.20	32.92	Peak																																																																						
2	10360.000	56.58	-11.62	68.20	41.77	39.23	8.47	32.89	Peak																																																																						
3	15540.000	46.92	-7.08	54.00	30.55	38.30	10.41	32.34	Average																																																																						
4	15540.000	60.87	-13.13	74.00	44.50	38.30	10.41	32.34	Peak																																																																						
<div><div>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div><div>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</div><div>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div><div>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div><div>Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.</div><div>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</div></div>																																																																															

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	H

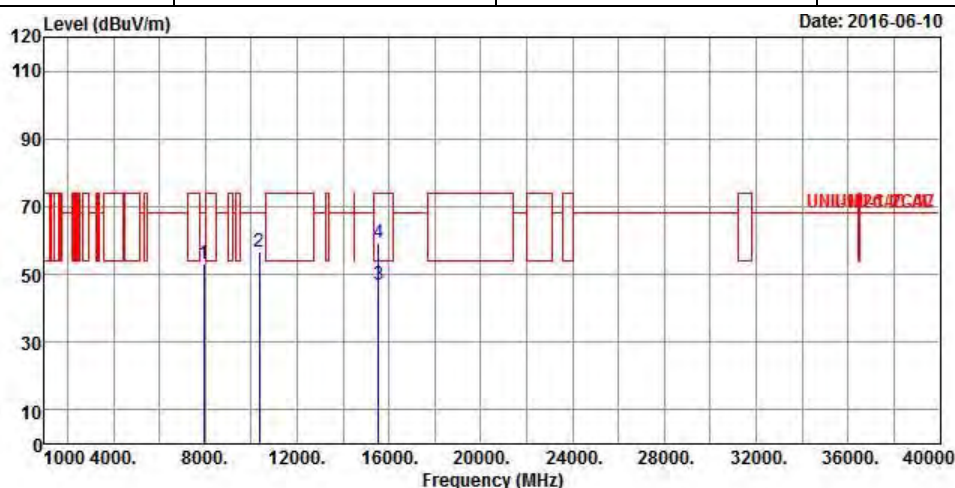

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7940.000	53.23	-14.97	68.20	41.88	37.00	7.28	32.93 Peak
2	10360.000	56.88	-11.32	68.20	42.07	39.23	8.47	32.89 Peak
3	15540.000	46.85	-7.15	54.00	30.48	38.30	10.41	32.34 Average
4	15540.000	59.55	-14.45	74.00	43.18	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	V

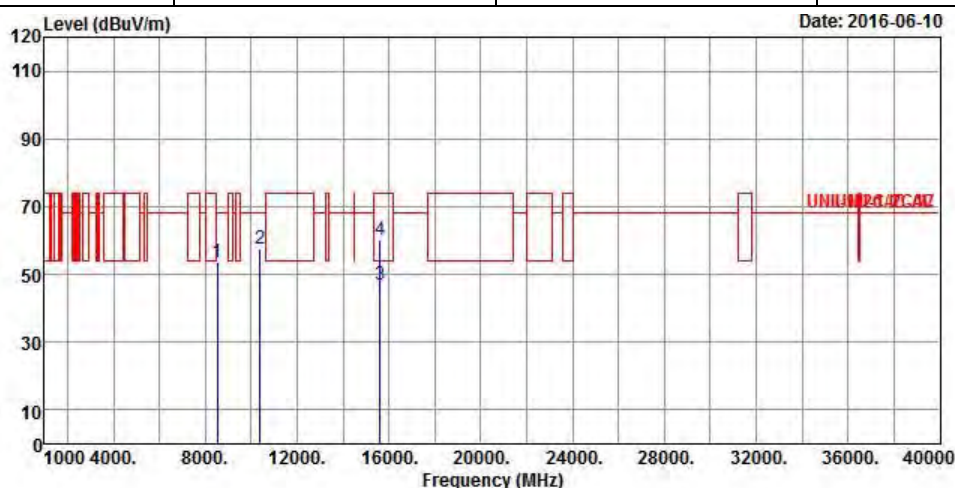

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8526.000	53.39	-14.81	68.20	41.86	36.73	7.75	32.95 Peak
2	10400.000	57.78	-10.42	68.20	42.86	39.28	8.49	32.85 Peak
3	15600.000	46.87	-7.13	54.00	30.55	38.16	10.52	32.36 Average
4	15600.000	60.20	-13.80	74.00	43.88	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	H

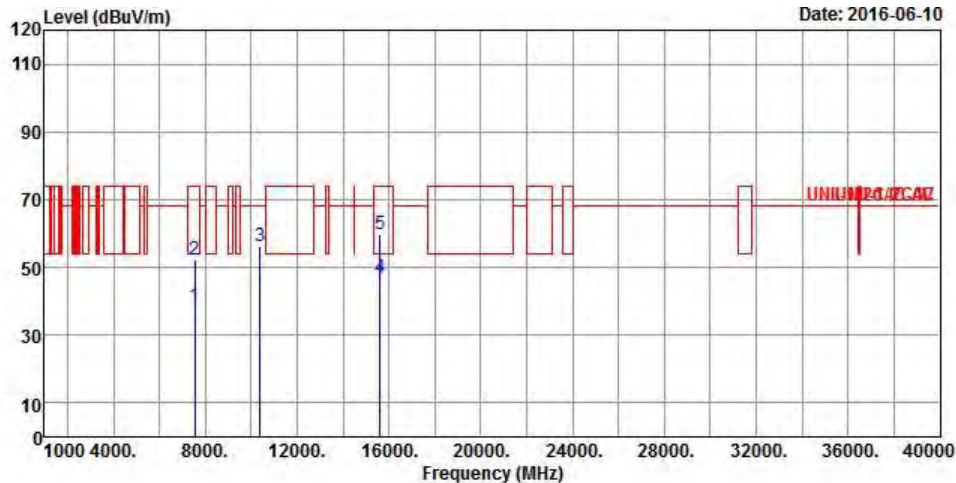

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7554.000	38.70	-15.30	54.00	28.06	36.39	7.12	32.87 Average
2	7554.000	52.17	-21.83	74.00	41.53	36.39	7.12	32.87 Peak
3	10400.000	56.44	-11.76	68.20	41.52	39.28	8.49	32.85 Peak
4	15600.000	46.77	-7.23	54.00	30.45	38.16	10.52	32.36 Average
5	15600.000	59.89	-14.11	74.00	43.57	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	V

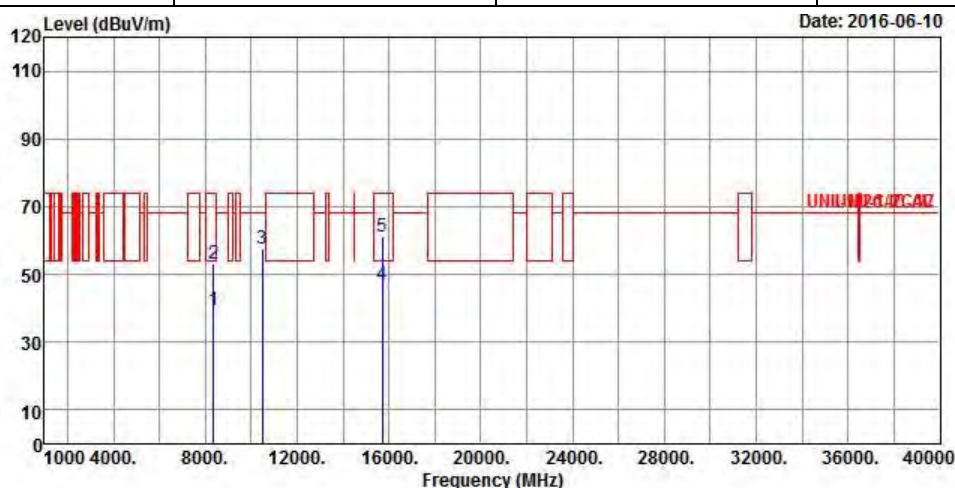

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8364.200	39.54	-14.46	54.00	27.95	36.81	7.72	32.94 Average
2	8364.200	53.29	-20.71	74.00	41.70	36.81	7.72	32.94 Peak
3	10480.000	57.41	-10.79	68.20	42.26	39.38	8.55	32.78 Peak
4	15720.000	46.91	-7.09	54.00	30.68	37.87	10.75	32.39 Average
5	15720.000	60.91	-13.09	74.00	44.68	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	H

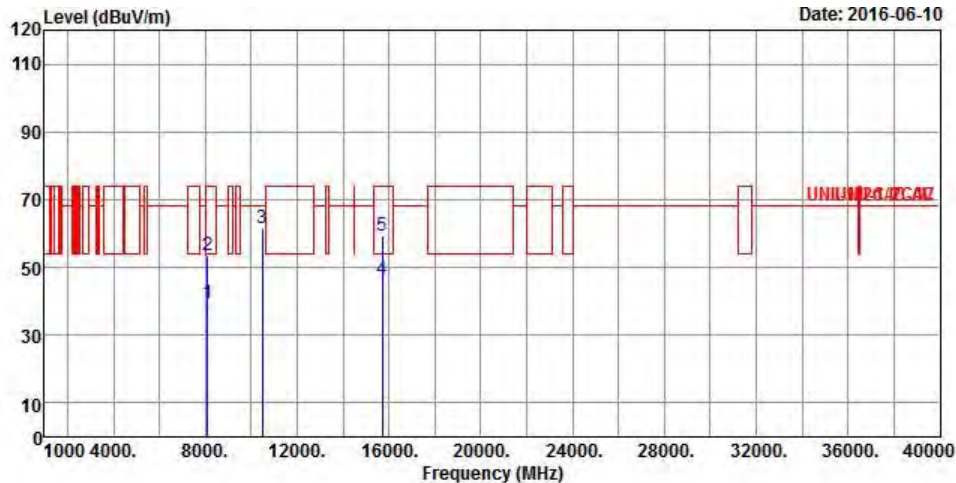

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8084.500	39.40	-14.60	54.00	27.86	37.03	7.45	32.94 Average
2	8084.500	53.71	-20.29	74.00	42.17	37.03	7.45	32.94 Peak
3	10480.000	61.55	-6.65	68.20	46.40	39.38	8.55	32.78 Peak
4	15720.000	46.62	-7.38	54.00	30.39	37.87	10.75	32.39 Average
5	15720.000	59.47	-14.53	74.00	43.24	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	V

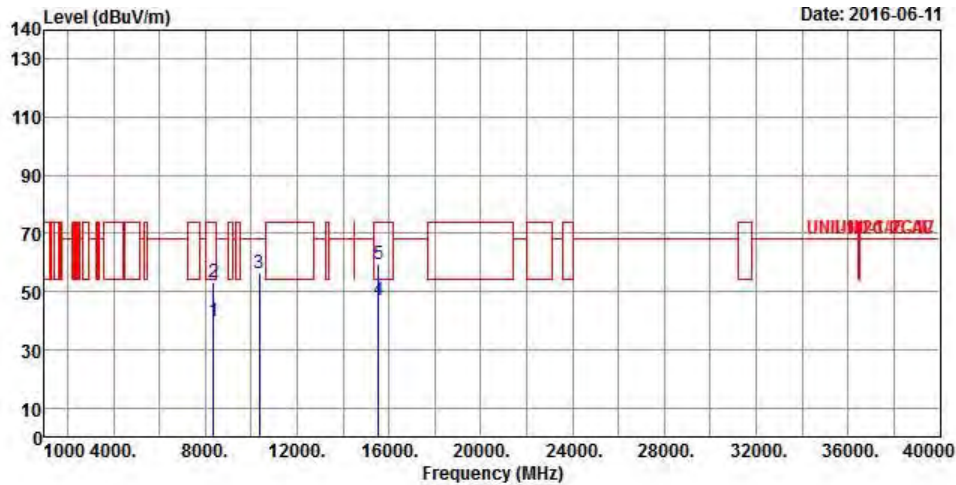

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8356.000	39.57	-14.43	54.00	27.98	36.82	7.71	32.94 Average
2	8356.000	53.22	-20.78	74.00	41.63	36.82	7.71	32.94 Peak
3	10360.000	56.31	-11.89	68.20	41.50	39.23	8.47	32.89 Peak
4	15540.000	47.13	-6.87	54.00	30.76	38.30	10.41	32.34 Average
5	15540.000	59.38	-14.62	74.00	43.01	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	H

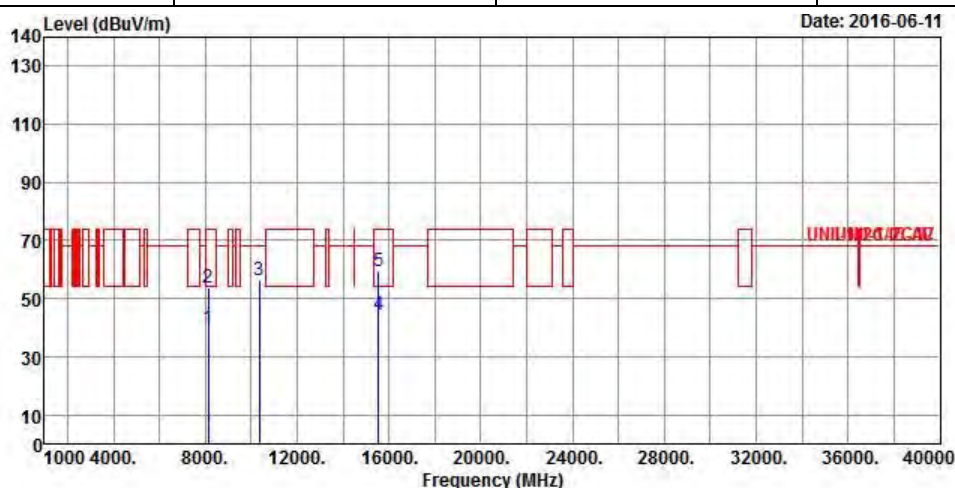

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8130.000	39.67	-14.33	54.00	28.11	37.00	7.50	32.94 Average
2	8130.000	53.60	-20.40	74.00	42.04	37.00	7.50	32.94 Peak
3	10360.000	56.18	-12.02	68.20	41.37	39.23	8.47	32.89 Peak
4	15540.000	44.37	-9.63	54.00	28.00	38.30	10.41	32.34 Average
5	15540.000	59.42	-14.58	74.00	43.05	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	V

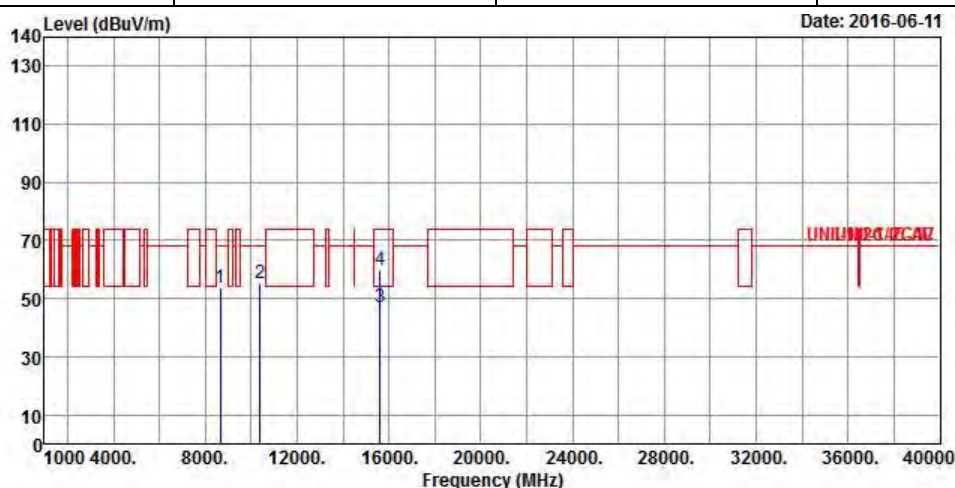

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8656.000	53.58	-14.62	68.20	41.89	36.89	7.79	32.99 Peak
2	10400.000	55.46	-12.74	68.20	40.54	39.28	8.49	32.85 Peak
3	15600.000	46.87	-7.13	54.00	30.55	38.16	10.52	32.36 Average
4	15600.000	59.86	-14.14	74.00	43.54	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	H

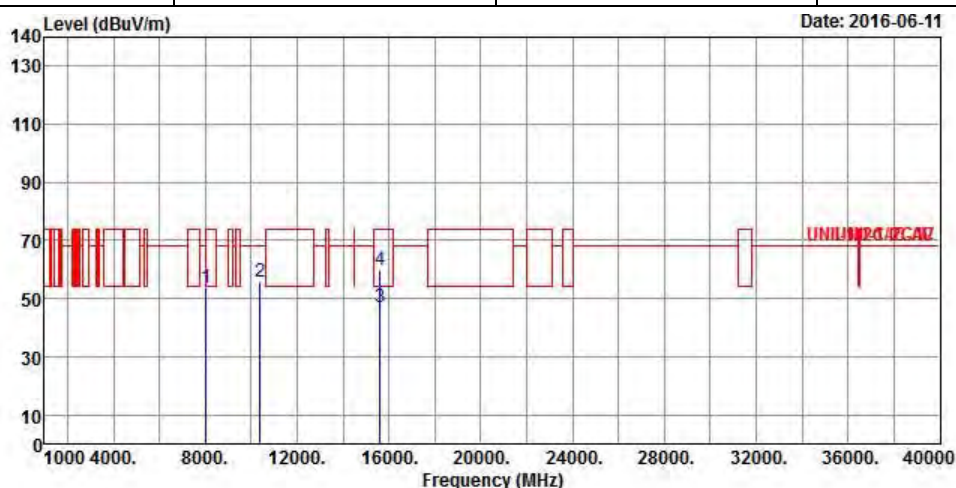

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8022.000	53.65	-14.55	68.20	42.14	37.08	7.37	32.94 Peak
2	10400.000	55.76	-12.44	68.20	40.84	39.28	8.49	32.85 Peak
3	15600.000	46.99	-7.01	54.00	30.67	38.16	10.52	32.36 Average
4	15600.000	59.81	-14.19	74.00	43.49	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	V

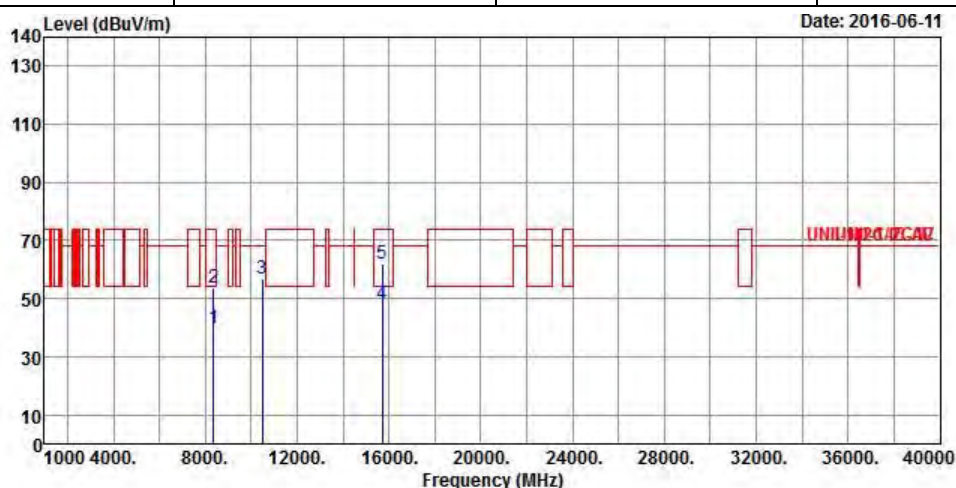

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8346.000	39.62	-14.38	54.00	28.03	36.82	7.71	32.94 Average
2	8346.000	53.66	-20.34	74.00	42.07	36.82	7.71	32.94 Peak
3	10480.000	56.69	-11.51	68.20	41.54	39.38	8.55	32.78 Peak
4	15720.000	47.96	-6.04	54.00	31.73	37.87	10.75	32.39 Average
5	15720.000	61.77	-12.23	74.00	45.54	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	H

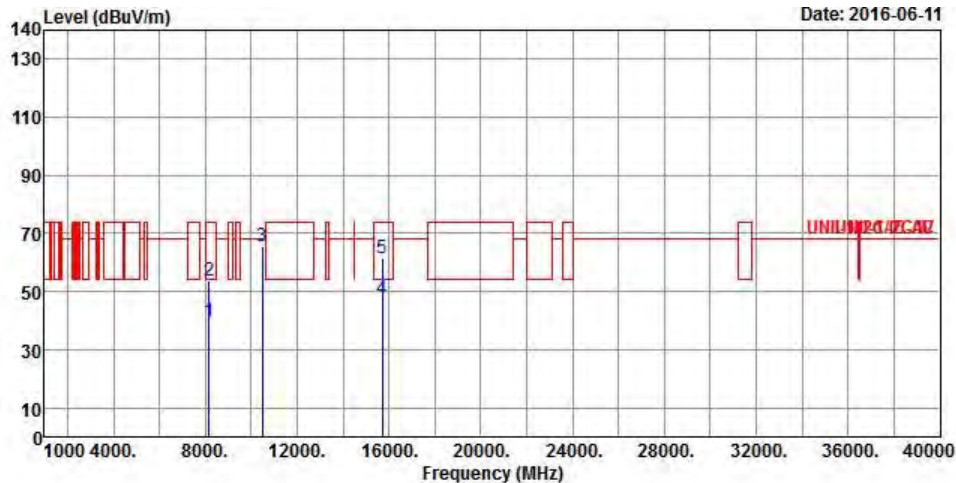

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8152.000	39.66	-14.34	54.00	28.09	36.98	7.53	32.94 Average
2	8152.000	53.55	-20.45	74.00	41.98	36.98	7.53	32.94 Peak
3	10480.000	65.78	-2.42	68.20	50.63	39.38	8.55	32.78 Peak
4	15720.000	47.52	-6.48	54.00	31.29	37.87	10.75	32.39 Average
5	15720.000	61.30	-12.70	74.00	45.07	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	V

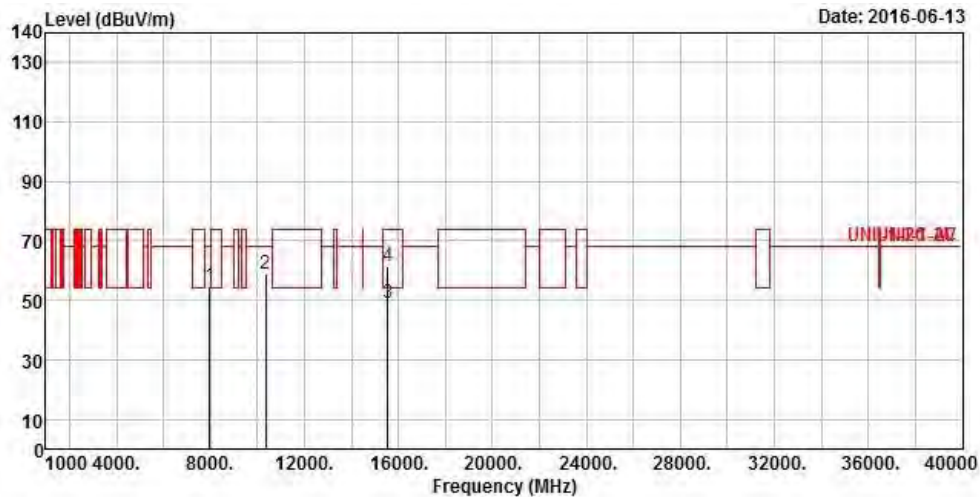

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7962.000	54.94	-13.26	68.20	43.53	37.04	7.30	32.93 Peak
2	10360.000	58.98	-9.22	68.20	44.17	39.23	8.47	32.89 Peak
3	15540.000	49.02	-4.98	54.00	32.65	38.30	10.41	32.34 Average
4	15540.000	61.53	-12.47	74.00	45.16	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5180
N _{TX}	1	Polarization	H

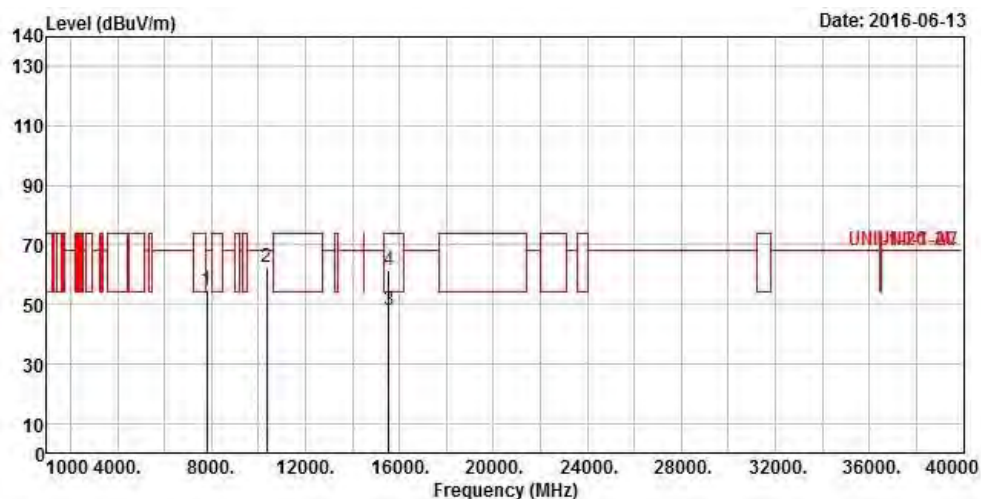

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7794.000	54.57	-13.63	68.20	43.57	36.77	7.13	32.90 Peak
2	10360.000	62.54	-5.66	68.20	47.73	39.23	8.47	32.89 Peak
3	15540.000	47.99	-6.01	54.00	31.62	38.30	10.41	32.34 Average
4	15540.000	61.45	-12.55	74.00	45.08	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	V

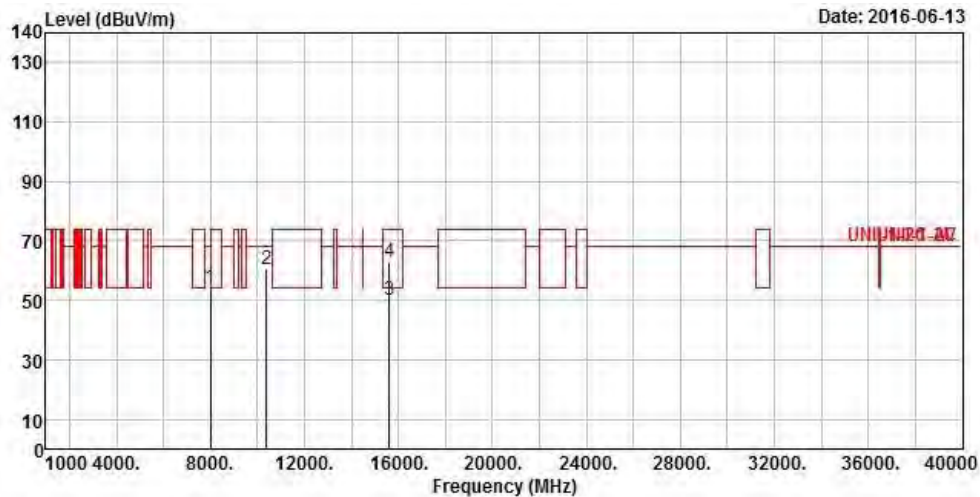

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7998.000	54.42	-13.78	68.20	42.92	37.10	7.34	32.94 Peak
2	10400.000	60.40	-7.80	68.20	45.48	39.28	8.49	32.85 Peak
3	15600.000	50.08	-3.92	54.00	33.76	38.16	10.52	32.36 Average
4	15600.000	63.03	-10.97	74.00	46.71	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5200
N _{TX}	1	Polarization	H

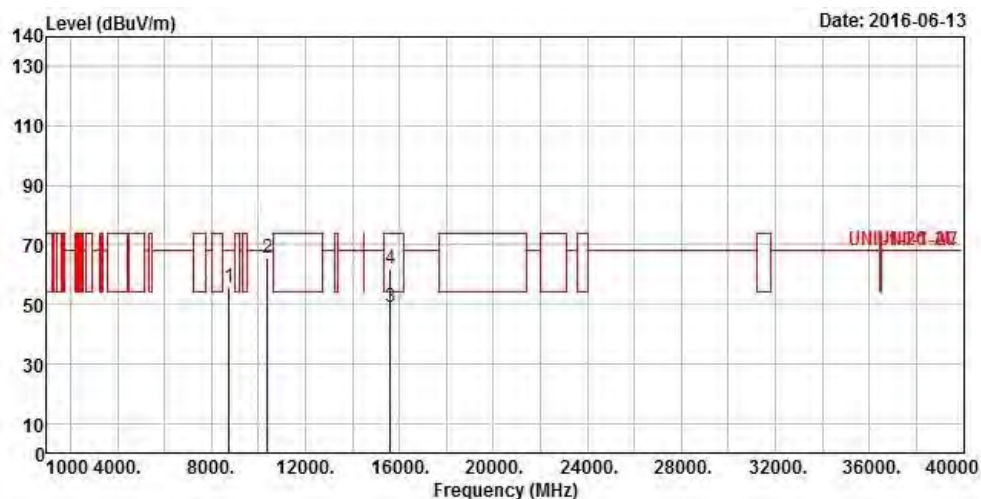

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8739.000	55.62	-12.58	68.20	43.80	36.99	7.85	33.02 Peak
2	10400.000	65.62	-2.58	68.20	50.70	39.28	8.49	32.85 Peak
3	15600.000	49.15	-4.85	54.00	32.83	38.16	10.52	32.36 Average
4	15600.000	62.19	-11.81	74.00	45.87	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	V

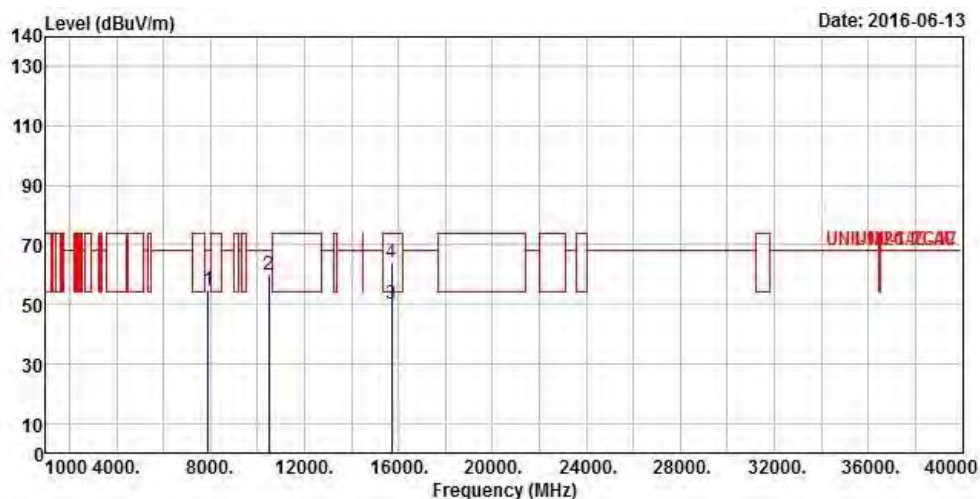

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7916.000	54.84	-13.36	68.20	43.54	36.97	7.25	32.92 Peak
2	10480.000	59.71	-8.49	68.20	44.56	39.38	8.55	32.78 Peak
3	15720.000	49.87	-4.13	54.00	33.64	37.87	10.75	32.39 Average
4	15720.000	64.12	-9.88	74.00	47.89	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5240
N _{TX}	1	Polarization	H

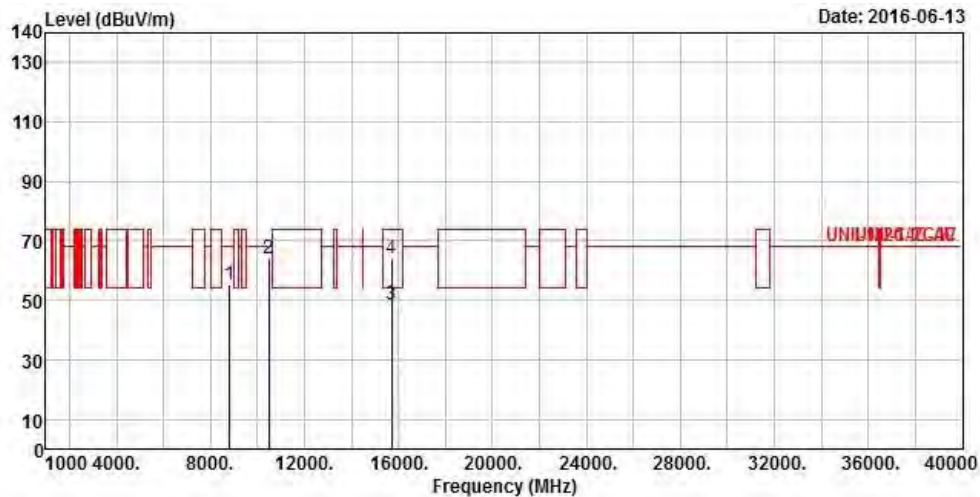

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8804.000	55.53	-12.67	68.20	43.61	37.06	7.90	33.04 Peak
2	10480.000	64.24	-3.96	68.20	49.09	39.38	8.55	32.78 Peak
3	15720.000	48.52	-5.48	54.00	32.29	37.87	10.75	32.39 Average
4	15720.000	64.02	-9.98	74.00	47.79	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	3	Polarization	V

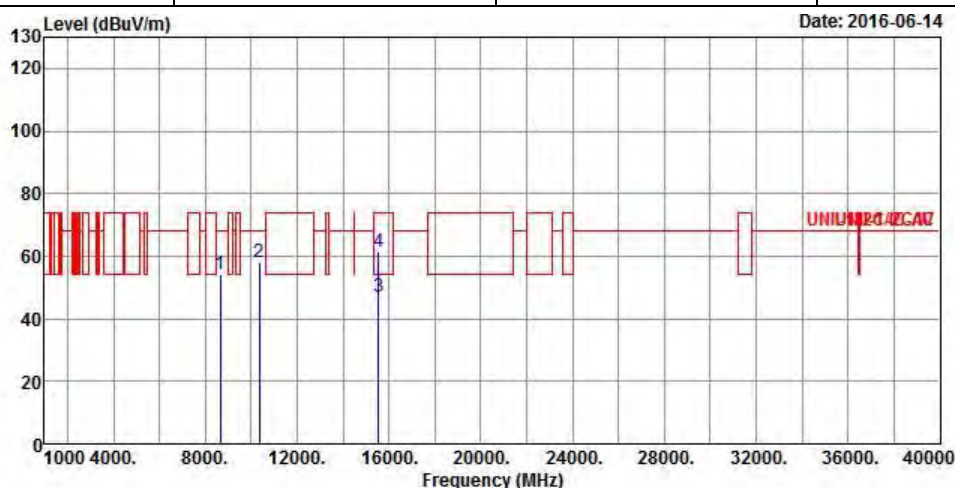

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8664.000	54.44	-13.76	68.20	42.74	36.90	7.80	33.00 Peak
2	10360.000	58.14	-10.06	68.20	43.33	39.23	8.47	32.89 Peak
3	15540.000	47.20	-6.80	54.00	30.83	38.30	10.41	32.34 Average
4	15540.000	61.51	-12.49	74.00	45.14	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	3	Polarization	H

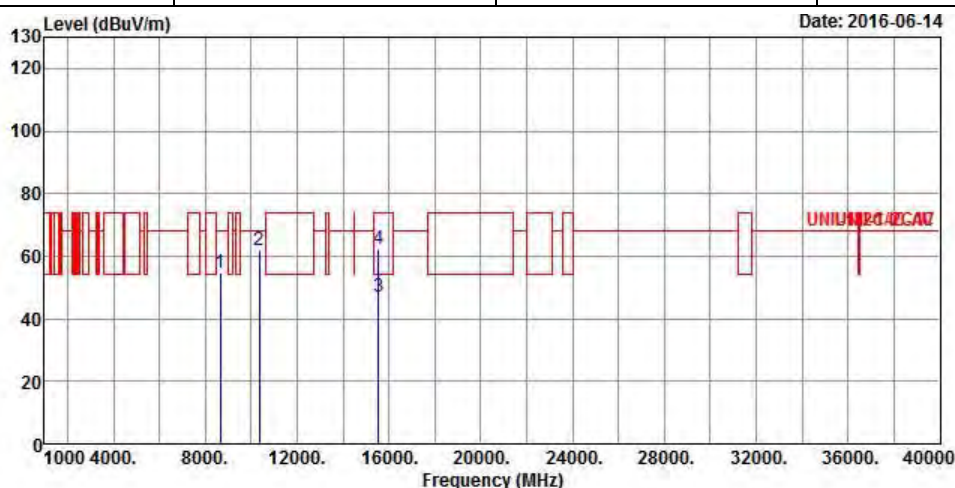

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8644.000	54.69	-13.51	68.20	43.03	36.87	7.78	32.99 Peak
2	10360.000	61.74	-6.46	68.20	46.93	39.23	8.47	32.89 Peak
3	15540.000	47.08	-6.92	54.00	30.71	38.30	10.41	32.34 Average
4	15540.000	62.13	-11.87	74.00	45.76	38.30	10.41	32.34 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N _{TX}	3	Polarization	V

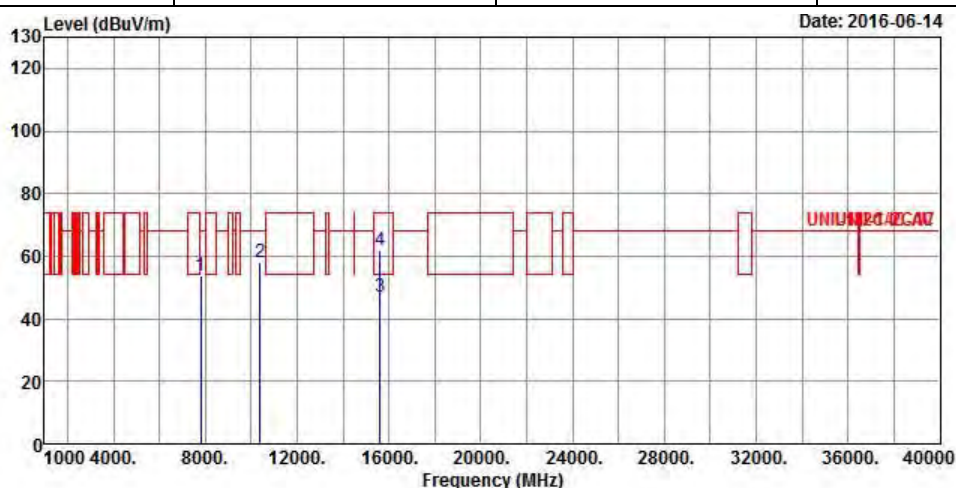

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7808.000	53.55	-14.65	68.20	42.53	36.79	7.14	32.91 Peak
2	10400.000	58.21	-9.99	68.20	43.29	39.28	8.49	32.85 Peak
3	15600.000	46.99	-7.01	54.00	30.67	38.16	10.52	32.36 Average
4	15600.000	61.71	-12.29	74.00	45.39	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N _{TX}	3	Polarization	H

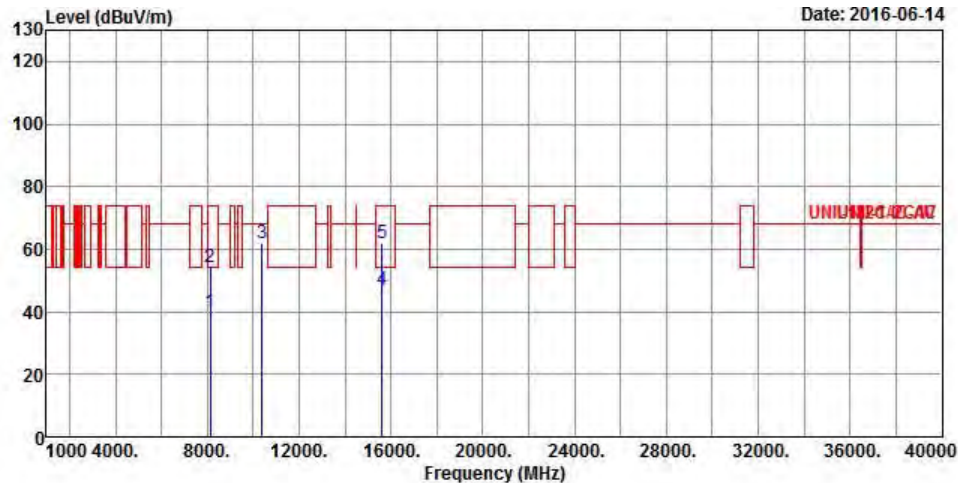

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8120.000	39.94	-14.06	54.00	28.39	37.00	7.49	32.94 Average
2	8120.000	54.30	-19.70	74.00	42.75	37.00	7.49	32.94 Peak
3	10400.000	61.73	-6.47	68.20	46.81	39.28	8.49	32.85 Peak
4	15600.000	47.02	-6.98	54.00	30.70	38.16	10.52	32.36 Average
5	15600.000	61.78	-12.22	74.00	45.46	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	3	Polarization	V

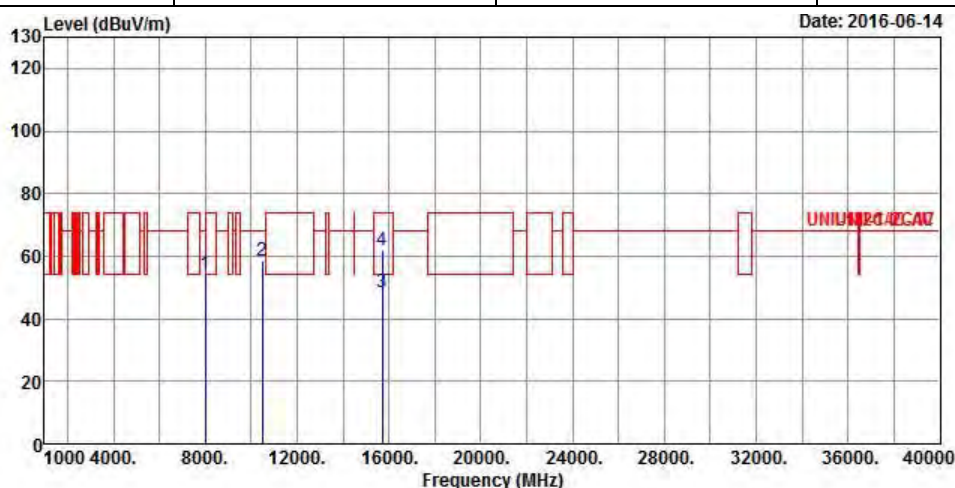

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8008.000	54.16	-14.04	68.20	42.66	37.09	7.35	32.94 Peak
2	10480.000	58.29	-9.91	68.20	43.14	39.38	8.55	32.78 Peak
3	15720.000	48.23	-5.77	54.00	32.00	37.87	10.75	32.39 Average
4	15720.000	61.74	-12.26	74.00	45.51	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	3	Polarization	H

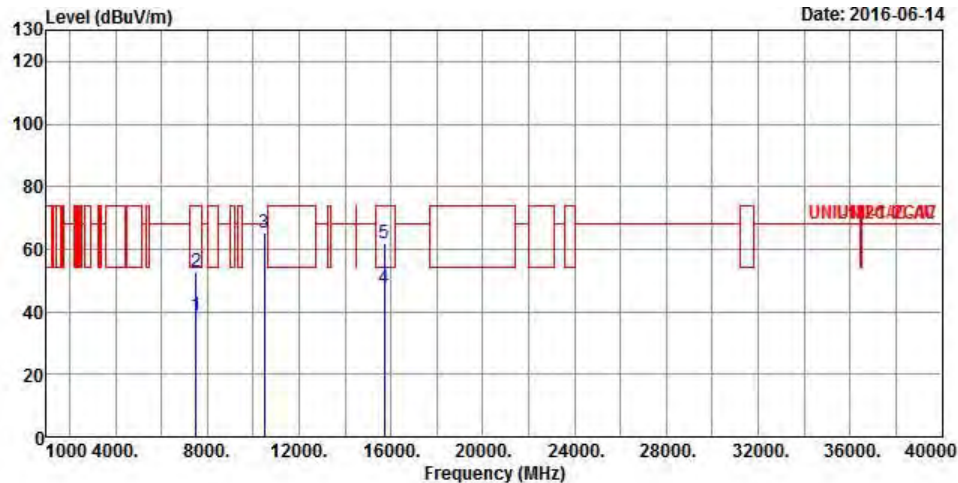

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7524.000	38.87	-15.13	54.00	28.29	36.34	7.10	32.86 Average
2	7524.000	52.95	-21.05	74.00	42.37	36.34	7.10	32.86 Peak
3	10480.000	65.30	-2.90	68.20	50.15	39.38	8.55	32.78 Peak
4	15720.000	47.46	-6.54	54.00	31.23	37.87	10.75	32.39 Average
5	15720.000	61.84	-12.16	74.00	45.61	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N _{TX}	3	Polarization	V

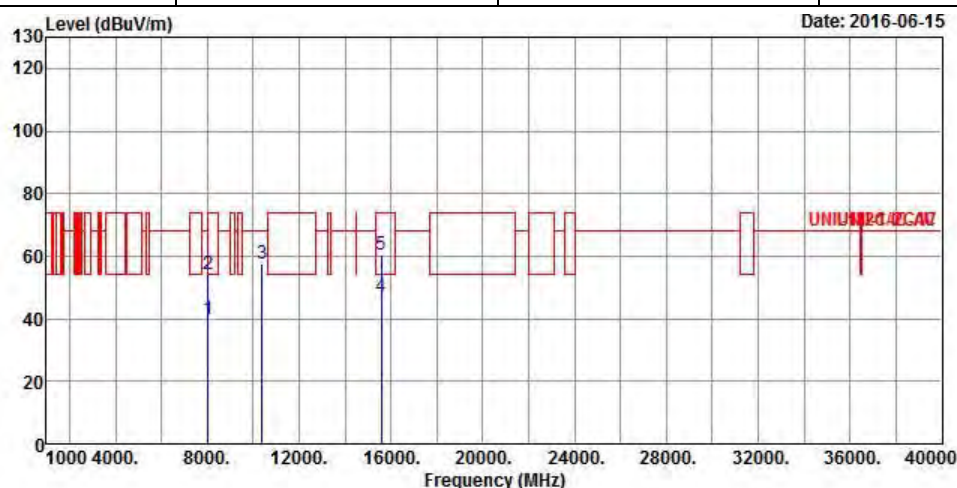

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8044.000	39.60	-14.40	54.00	28.09	37.06	7.39	32.94 Average
2	8044.000	53.99	-20.01	74.00	42.48	37.06	7.39	32.94 Peak
3	10380.000	57.39	-10.81	68.20	42.52	39.26	8.48	32.87 Peak
4	15570.000	47.00	-7.00	54.00	30.66	38.23	10.46	32.35 Average
5	15570.000	60.66	-13.34	74.00	44.32	38.23	10.46	32.35 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N _{TX}	3	Polarization	H

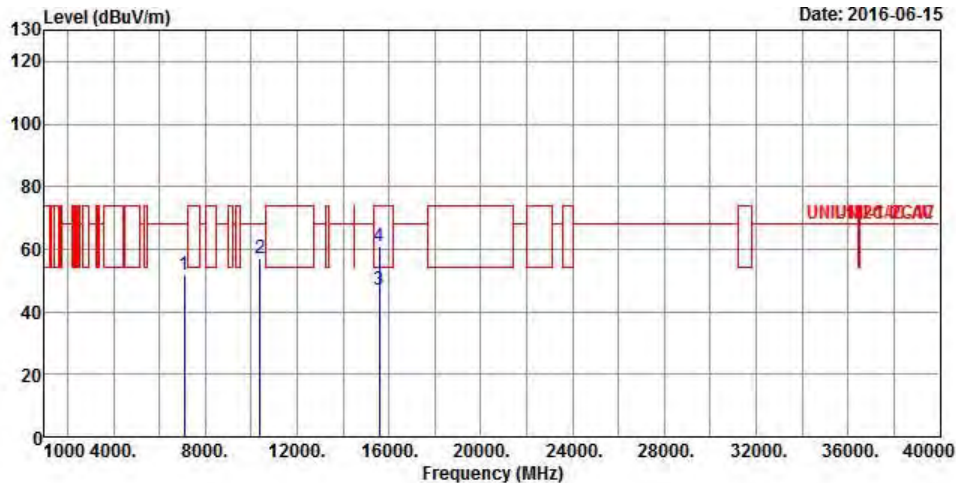

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7080.000	51.79	-16.41	68.20	42.12	35.29	7.11	32.73 Peak
2	10380.000	57.32	-10.88	68.20	42.45	39.26	8.48	32.87 Peak
3	15570.000	46.95	-7.05	54.00	30.61	38.23	10.46	32.35 Average
4	15570.000	60.95	-13.05	74.00	44.61	38.23	10.46	32.35 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N _{TX}	3	Polarization	V

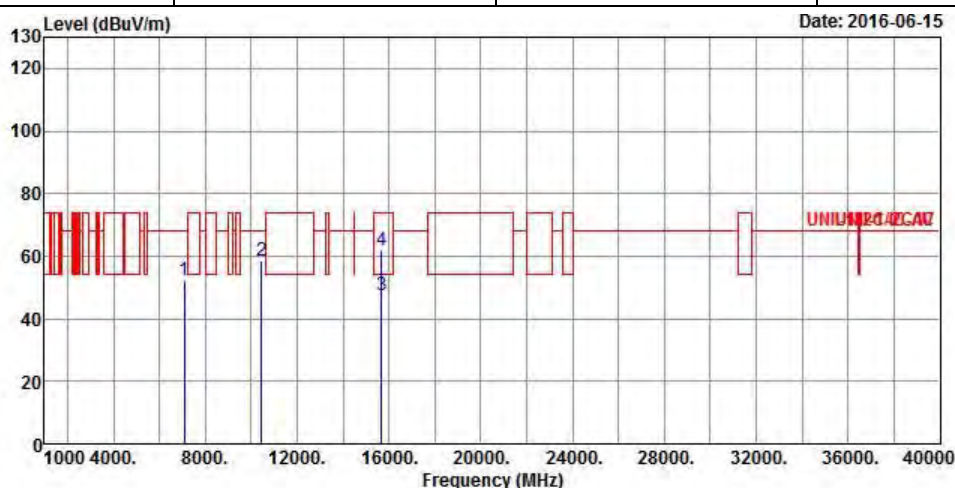

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7080.000	52.23	-15.97	68.20	42.56	35.29	7.11	32.73 Peak
2	10460.000	58.48	-9.72	68.20	43.40	39.35	8.53	32.80 Peak
3	15690.000	47.28	-6.72	54.00	31.04	37.94	10.69	32.39 Average
4	15690.000	61.74	-12.26	74.00	45.50	37.94	10.69	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N _{TX}	3	Polarization	H

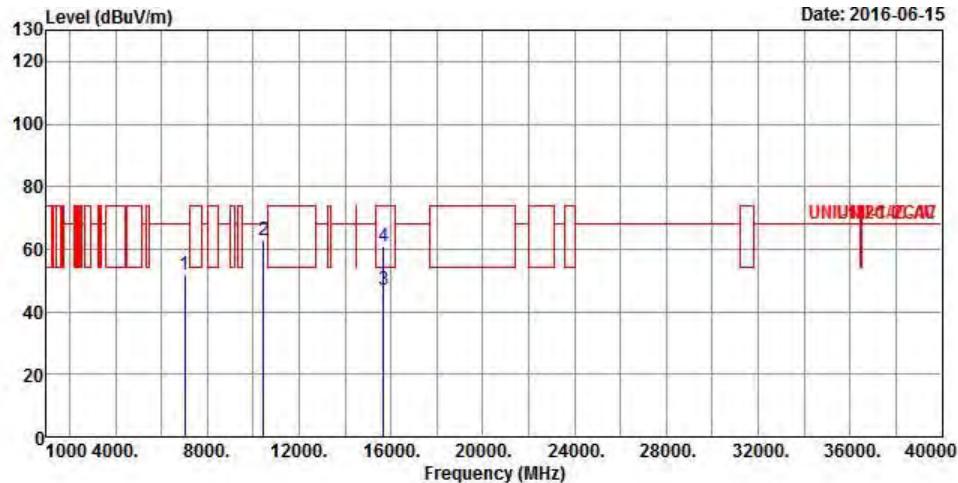


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7008.000	52.02	-16.18	68.20	42.47	35.12	7.15	32.72 Peak
2	10460.000	62.69	-5.51	68.20	47.61	39.35	8.53	32.80 Peak
3	15690.000	46.96	-7.04	54.00	30.72	37.94	10.69	32.39 Average
4	15690.000	61.05	-12.95	74.00	44.81	37.94	10.69	32.39 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	3	Polarization	V

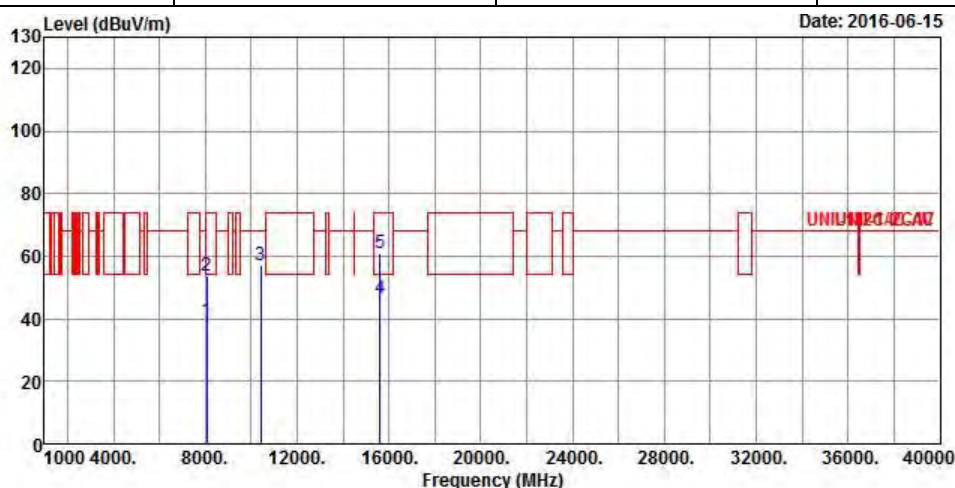

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8080.000	39.36	-14.64	54.00	27.82	37.04	7.44	32.94 Average
2	8080.000	53.58	-20.42	74.00	42.04	37.04	7.44	32.94 Peak
3	10420.000	57.23	-10.97	68.20	42.27	39.30	8.51	32.85 Peak
4	15630.000	46.73	-7.27	54.00	30.43	38.09	10.58	32.37 Average
5	15630.000	60.77	-13.23	74.00	44.47	38.09	10.58	32.37 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	3	Polarization	H

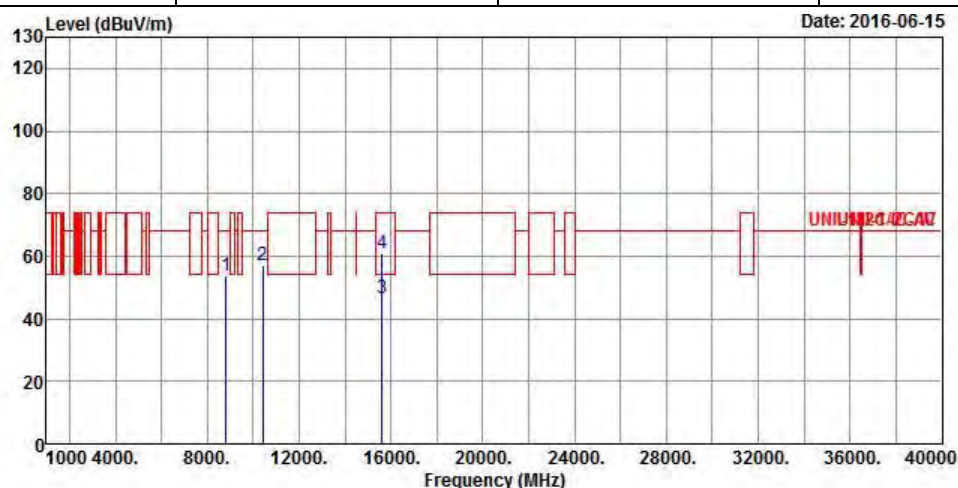

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8808.000	53.59	-14.61	68.20	41.66	37.07	7.90	33.04 Peak
2	10420.000	57.18	-11.02	68.20	42.22	39.30	8.51	32.85 Peak
3	15630.000	46.68	-7.32	54.00	30.38	38.09	10.58	32.37 Average
4	15630.000	61.14	-12.86	74.00	44.84	38.09	10.58	32.37 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for 5725-5850MHz

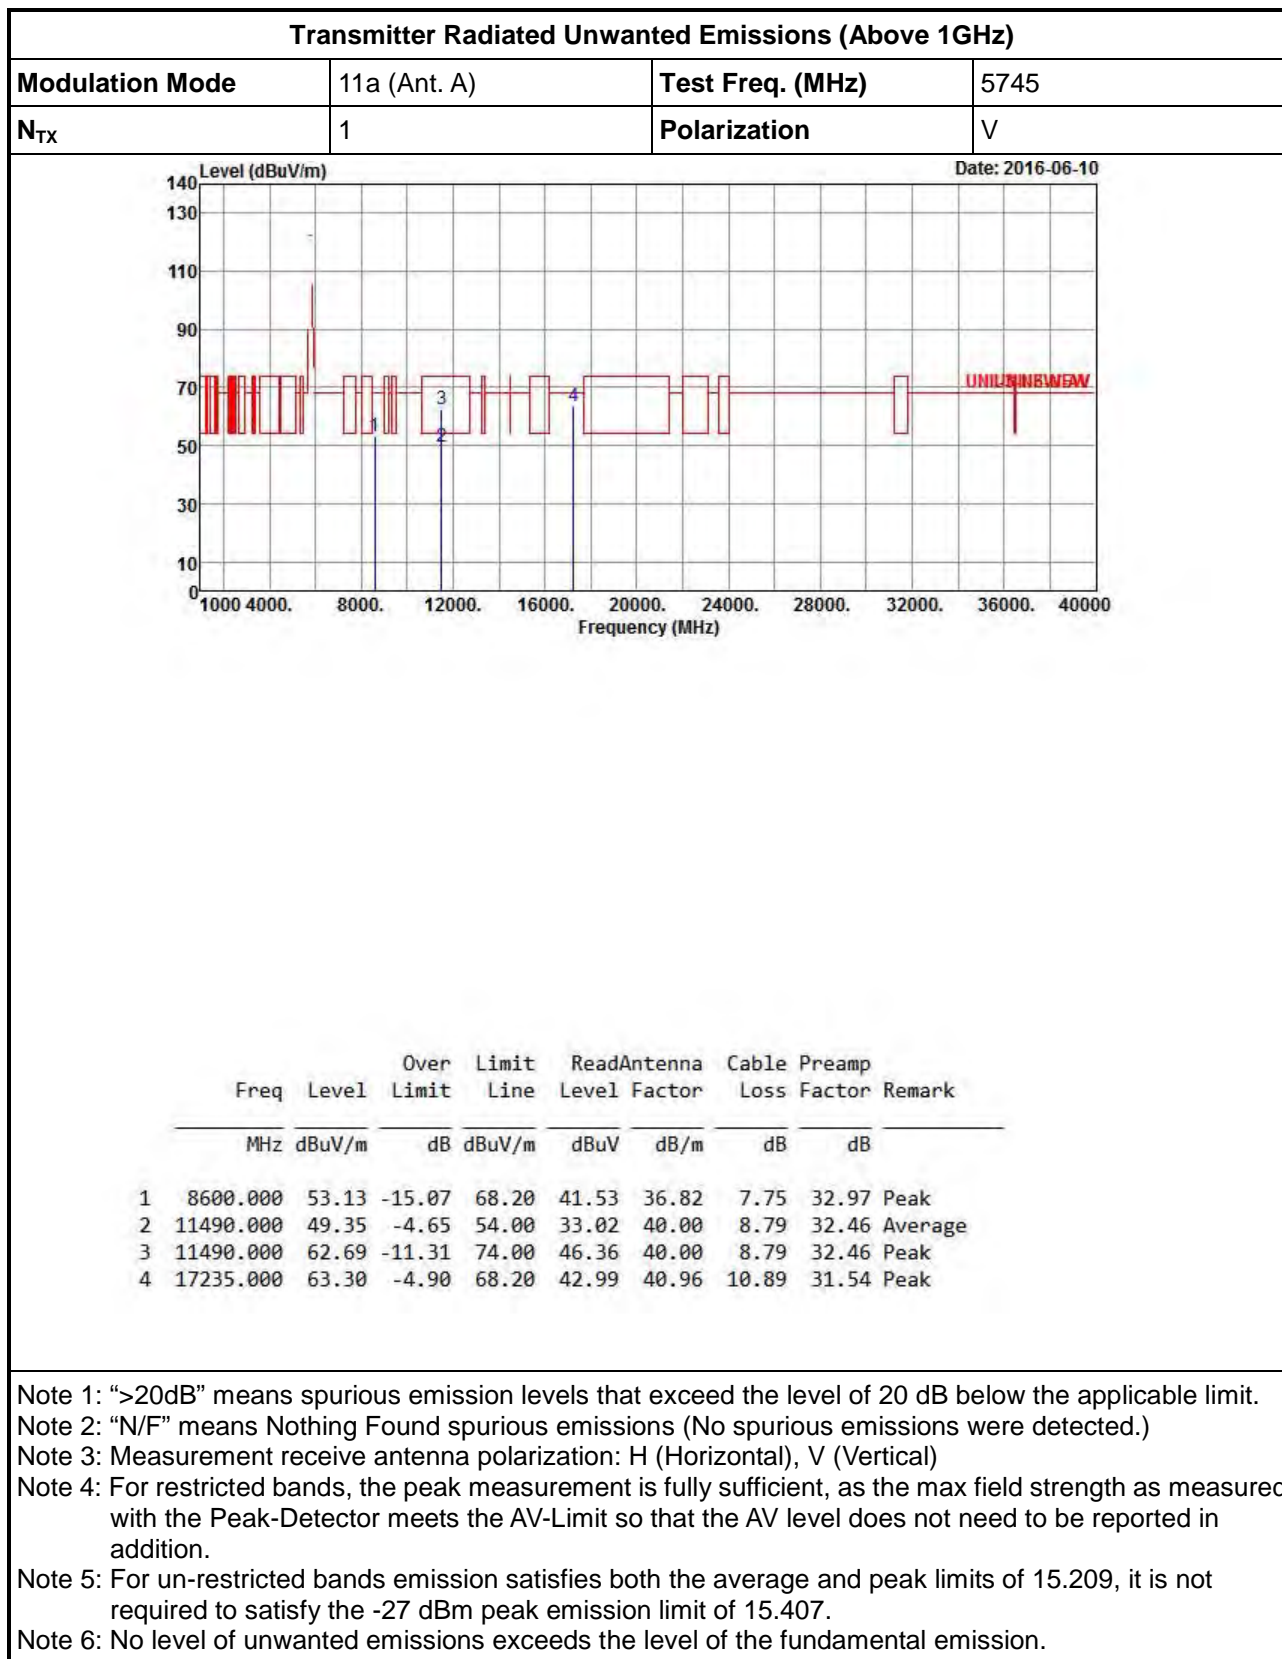

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

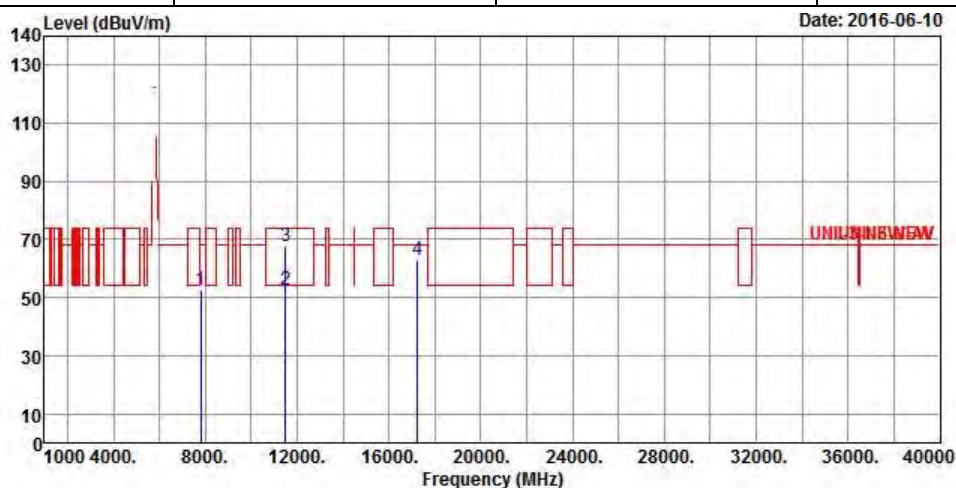

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7818.000	52.44	-15.76	68.20	41.39	36.81	7.15	32.91 Peak
2	11490.000	52.83	-1.17	54.00	36.50	40.00	8.79	32.46 Average
3	11490.000	67.56	-6.44	74.00	51.23	40.00	8.79	32.46 Peak
4	17235.000	62.81	-5.39	68.20	42.50	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	V

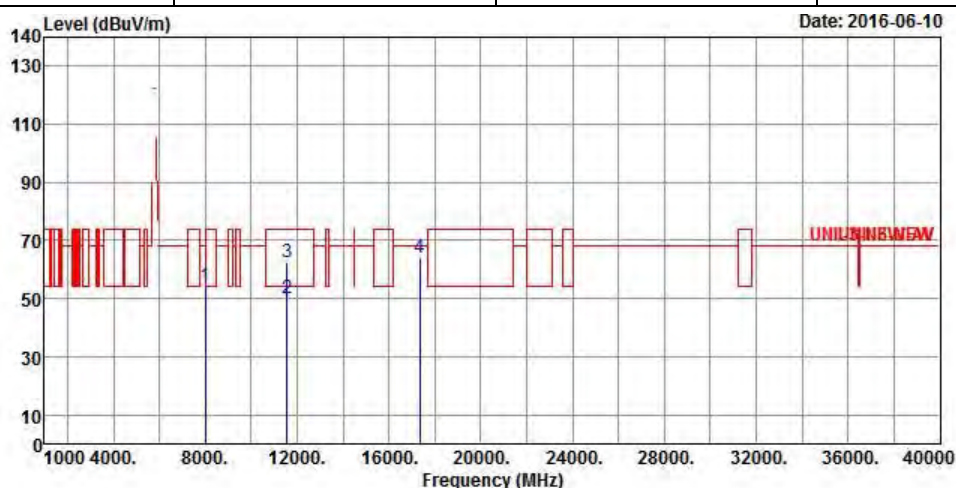

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8012.000	54.25	-13.95	68.20	42.74	37.09	7.36	32.94 Peak
2	11570.000	49.89	-4.11	54.00	33.61	39.86	8.89	32.47 Average
3	11570.000	62.28	-11.72	74.00	46.00	39.86	8.89	32.47 Peak
4	17355.000	63.96	-4.24	68.20	43.34	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	H

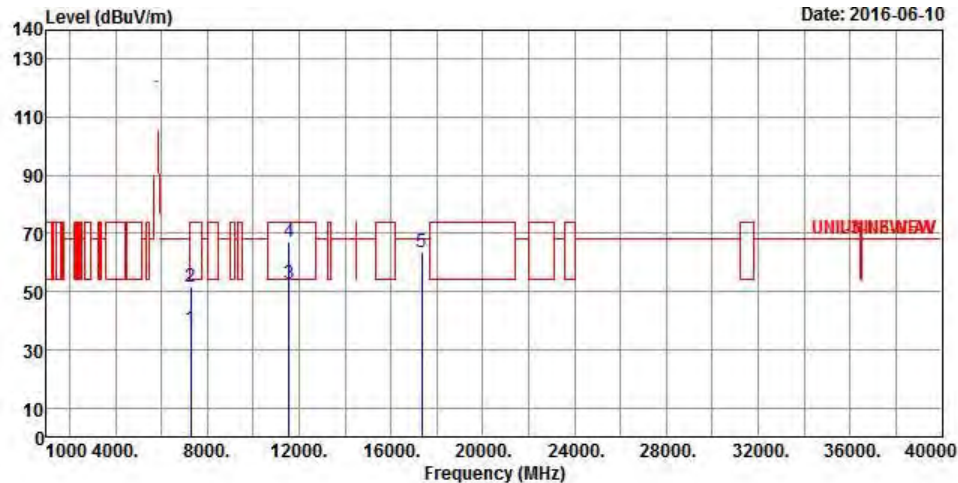

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7292.000	37.45	-16.55	54.00	27.42	35.80	7.03	32.80 Average
2	7292.000	51.73	-22.27	74.00	41.70	35.80	7.03	32.80 Peak
3	11570.000	52.74	-1.26	54.00	36.46	39.86	8.89	32.47 Average
4	11570.000	67.14	-6.86	74.00	50.86	39.86	8.89	32.47 Peak
5	17335.000	63.50	-4.70	68.20	42.94	41.20	10.93	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	V

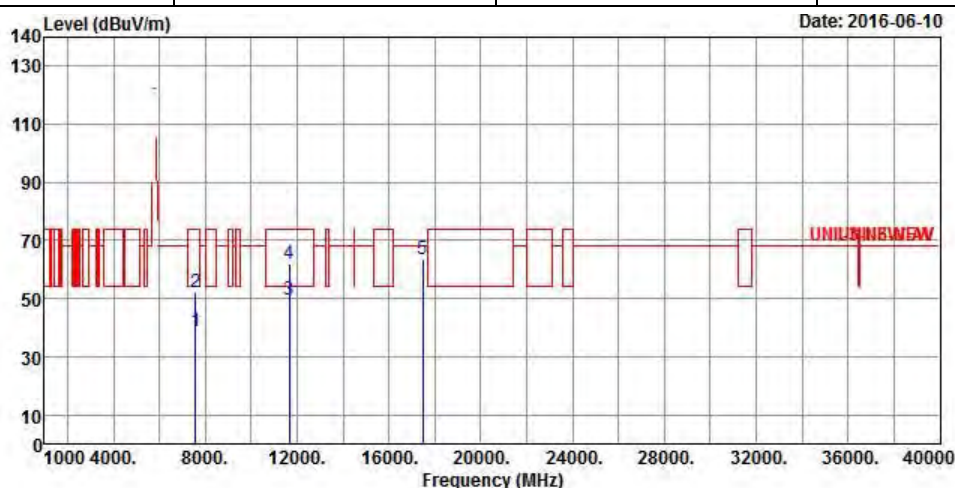

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7588.000	38.80	-15.20	54.00	28.09	36.44	7.14	32.87 Average
2	7588.000	52.33	-21.67	74.00	41.62	36.44	7.14	32.87 Peak
3	11650.000	49.58	-4.42	54.00	33.35	39.70	9.01	32.48 Average
4	11650.000	62.18	-11.82	74.00	45.95	39.70	9.01	32.48 Peak
5	17475.000	63.37	-4.83	68.20	42.45	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. A)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

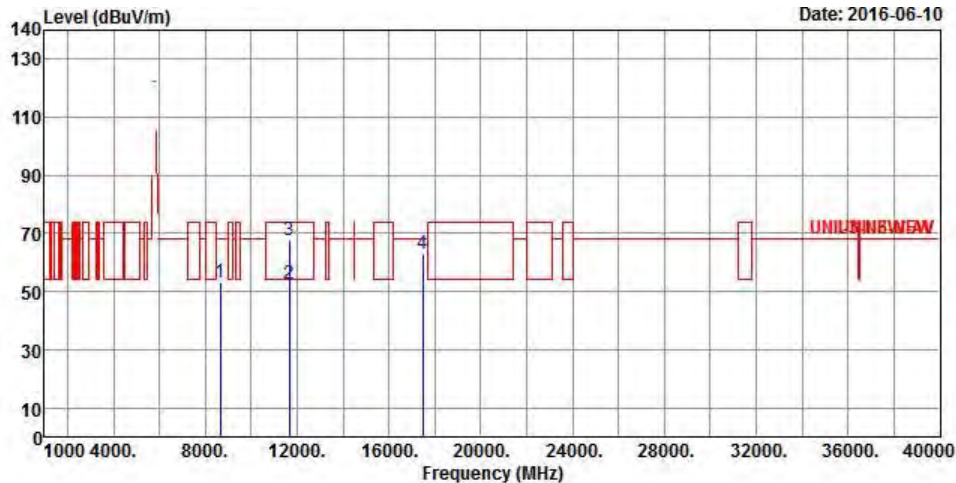


	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8644.000	53.11	-15.09	68.20	41.45	36.87	7.78	32.99 Peak
2	11650.000	52.69	-1.31	54.00	36.46	39.70	9.01	32.48 Average
3	11650.000	67.50	-6.50	74.00	51.27	39.70	9.01	32.48 Peak
4	17475.000	63.11	-5.09	68.20	42.19	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	V

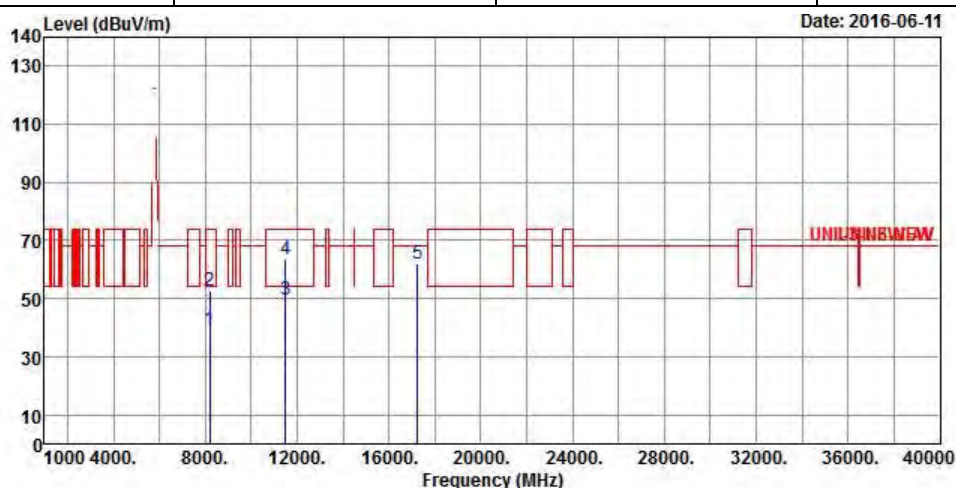

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8182.000	39.24	-14.76	54.00	27.66	36.95	7.57	32.94 Average
2	8182.000	52.95	-21.05	74.00	41.37	36.95	7.57	32.94 Peak
3	11490.000	49.78	-4.22	54.00	33.45	40.00	8.79	32.46 Average
4	11490.000	63.45	-10.55	74.00	47.12	40.00	8.79	32.46 Peak
5	17235.000	62.09	-6.11	68.20	41.78	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

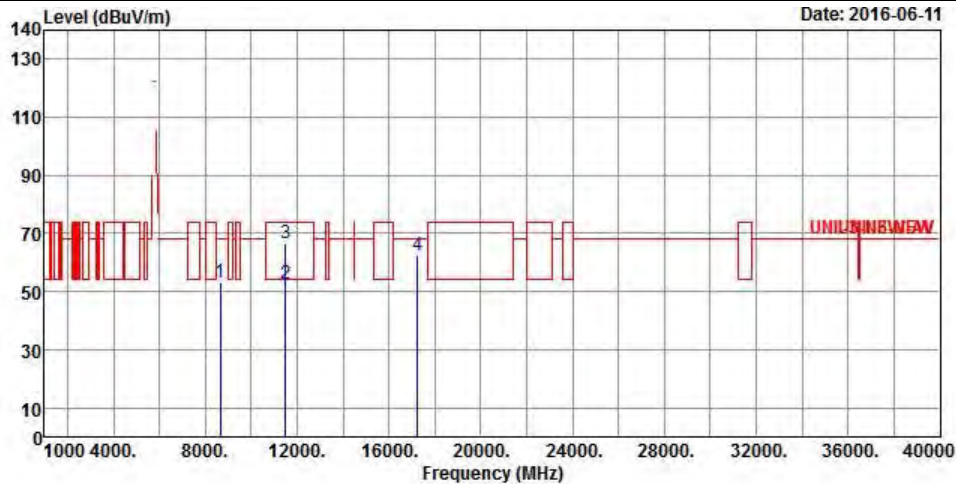

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8666.000	53.03	-15.17	68.20	41.33	36.90	7.80	33.00 Peak
2	11490.000	52.73	-1.27	54.00	36.40	40.00	8.79	32.46 Average
3	11490.000	66.50	-7.50	74.00	50.17	40.00	8.79	32.46 Peak
4	17235.000	62.36	-5.84	68.20	42.05	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	V

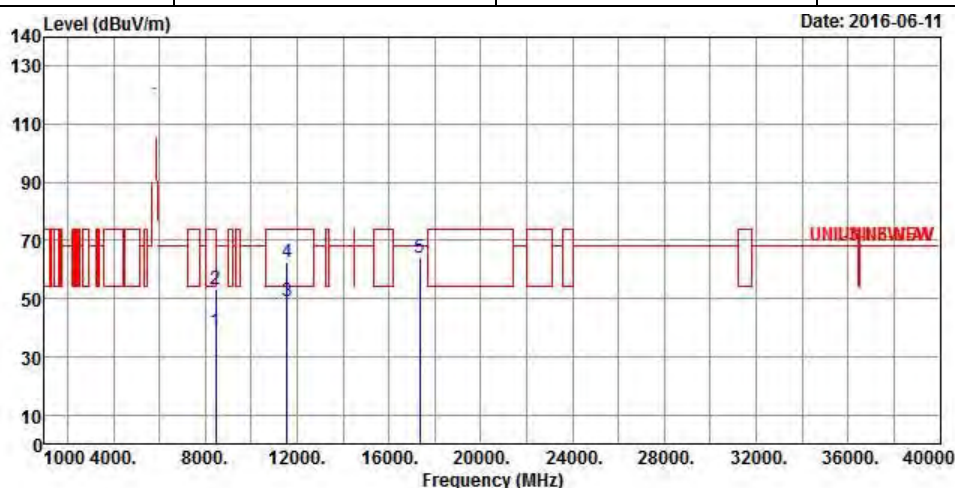

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8468.000	38.99	-15.01	54.00	27.45	36.73	7.75	32.94 Average
2	8468.000	53.17	-20.83	74.00	41.63	36.73	7.75	32.94 Peak
3	11570.000	48.84	-5.16	54.00	32.56	39.86	8.89	32.47 Average
4	11570.000	62.68	-11.32	74.00	46.40	39.86	8.89	32.47 Peak
5	17355.000	64.03	-4.17	68.20	43.41	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	H

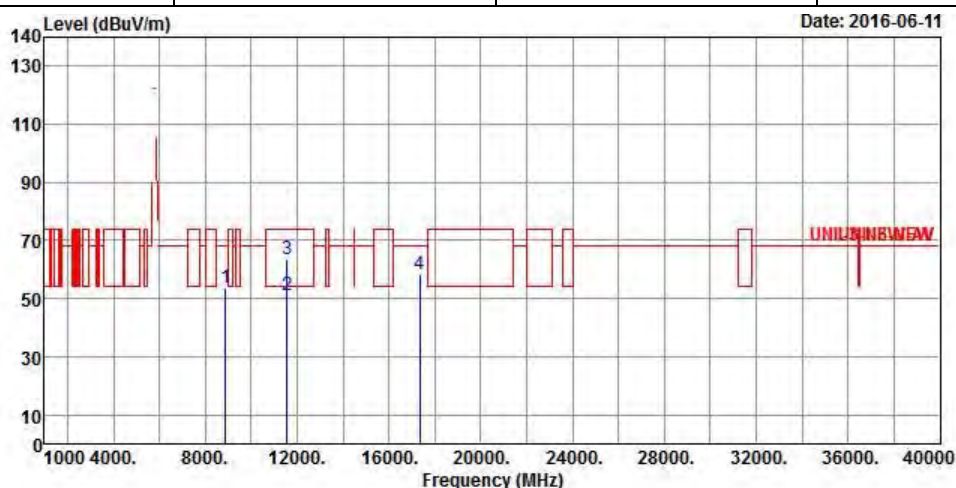

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8886.000	53.64	-14.56	68.20	41.59	37.16	7.96	33.07 Peak
2	11570.000	51.39	-2.61	54.00	35.11	39.86	8.89	32.47 Average
3	11570.000	63.59	-10.41	74.00	47.31	39.86	8.89	32.47 Peak
4	17355.000	58.30	-9.90	68.20	37.68	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	V

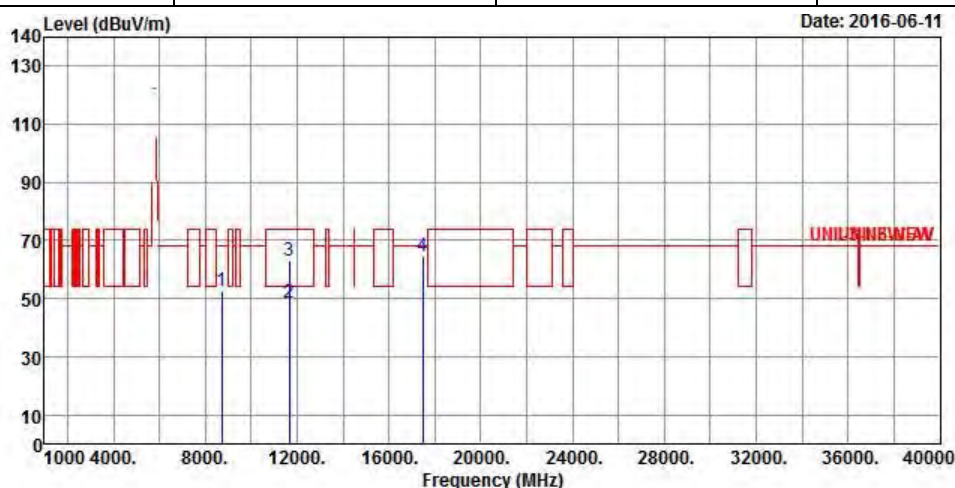

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8732.000	52.91	-15.29	68.20	41.10	36.98	7.85	33.02 Peak
2	11650.000	48.81	-5.19	54.00	32.58	39.70	9.01	32.48 Average
3	11650.000	63.06	-10.94	74.00	46.83	39.70	9.01	32.48 Peak
4	17475.000	64.63	-3.57	68.20	43.71	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. B)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

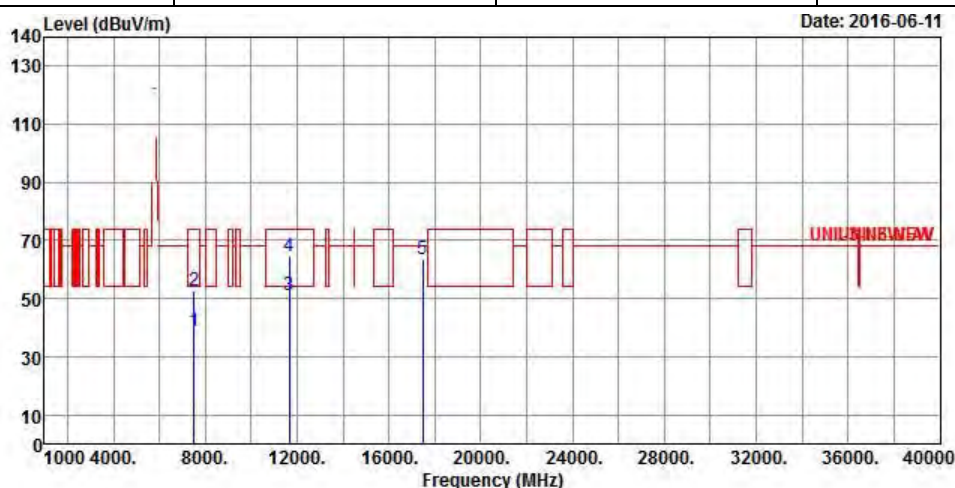

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7506.000	38.70	-15.30	54.00	28.17	36.31	7.08	32.86 Average
2	7506.000	52.66	-21.34	74.00	42.13	36.31	7.08	32.86 Peak
3	11650.000	50.98	-3.02	54.00	34.75	39.70	9.01	32.48 Average
4	11650.000	64.79	-9.21	74.00	48.56	39.70	9.01	32.48 Peak
5	17475.000	63.56	-4.64	68.20	42.64	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	V

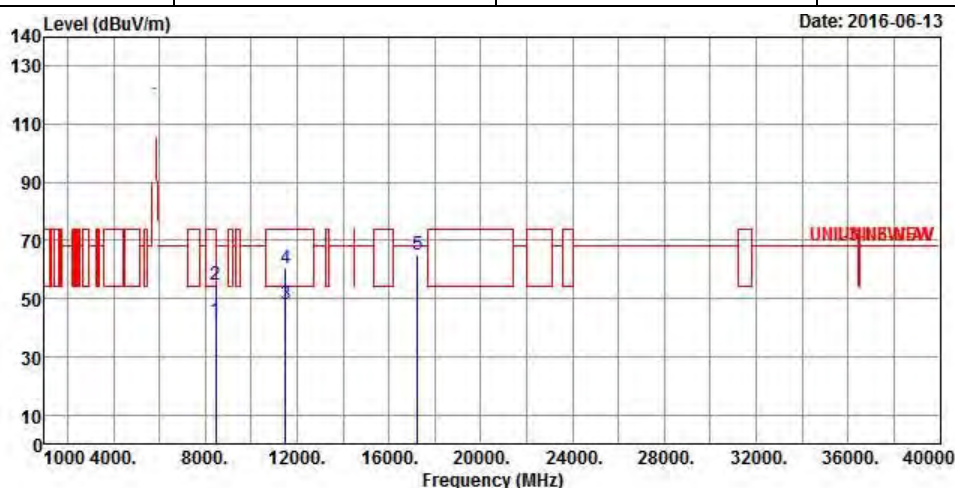

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	8465.000	42.43	-11.57	54.00	30.89	36.73	7.75	32.94 Average
2	8465.000	54.72	-19.28	74.00	43.18	36.73	7.75	32.94 Peak
3	11490.000	47.93	-6.07	54.00	31.60	40.00	8.79	32.46 Average
4	11490.000	60.65	-13.35	74.00	44.32	40.00	8.79	32.46 Peak
5	17235.000	65.06	-3.14	68.20	44.75	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5745
N _{TX}	1	Polarization	H

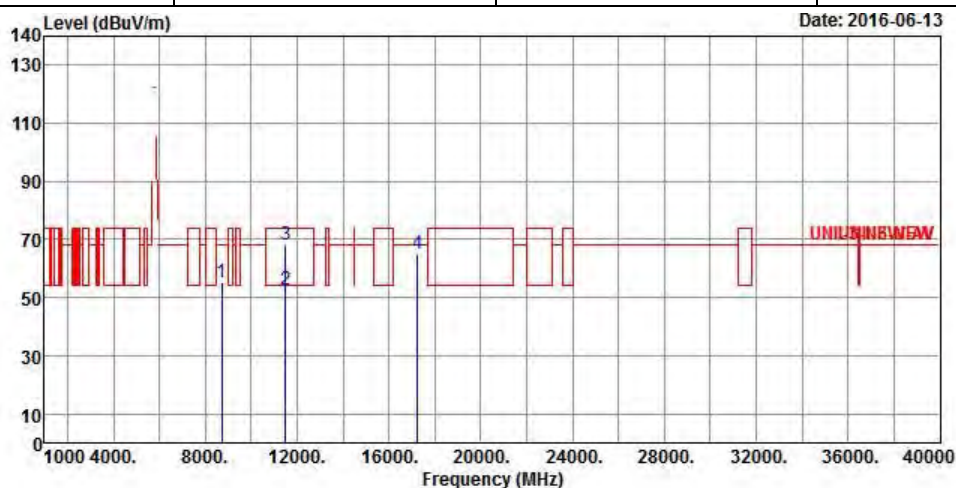

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8719.000	55.18	-13.02	68.20	43.40	36.96	7.84	33.02 Peak
2	11490.000	52.50	-1.50	54.00	36.17	40.00	8.79	32.46 Average
3	11490.000	68.30	-5.70	74.00	51.97	40.00	8.79	32.46 Peak
4	17235.000	65.04	-3.16	68.20	44.73	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	V

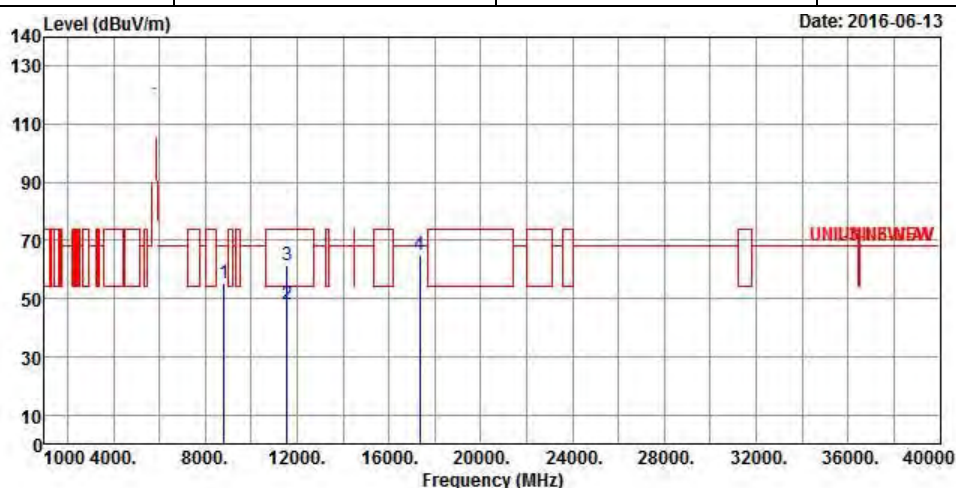

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8804.000	55.35	-12.85	68.20	43.43	37.06	7.90	33.04 Peak
2	11570.000	47.84	-6.16	54.00	31.56	39.86	8.89	32.47 Average
3	11570.000	61.49	-12.51	74.00	45.21	39.86	8.89	32.47 Peak
4	17355.000	65.28	-2.92	68.20	44.66	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5785
N _{TX}	1	Polarization	H

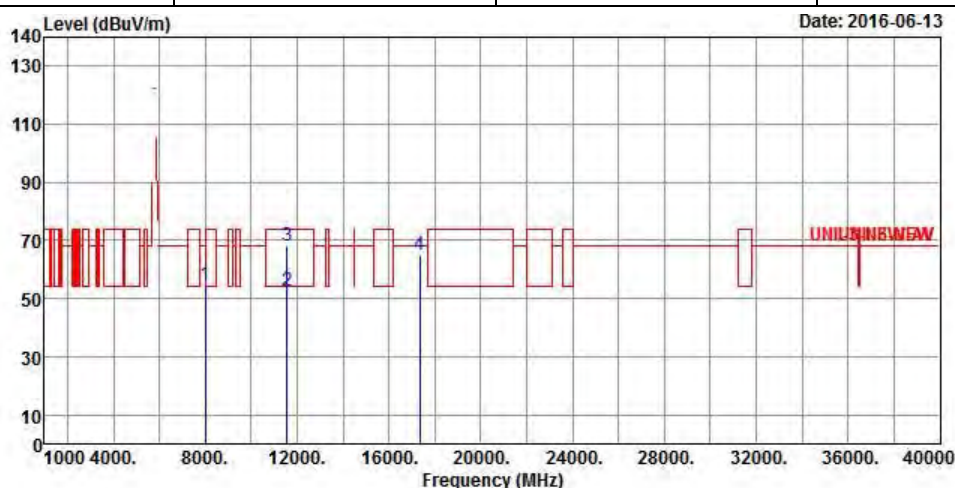

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8017.000	54.99	-13.21	68.20	43.48	37.09	7.36	32.94 Peak
2	11570.000	52.55	-1.45	54.00	36.27	39.86	8.89	32.47 Average
3	11570.000	68.25	-5.75	74.00	51.97	39.86	8.89	32.47 Peak
4	17355.000	65.27	-2.93	68.20	44.65	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	V

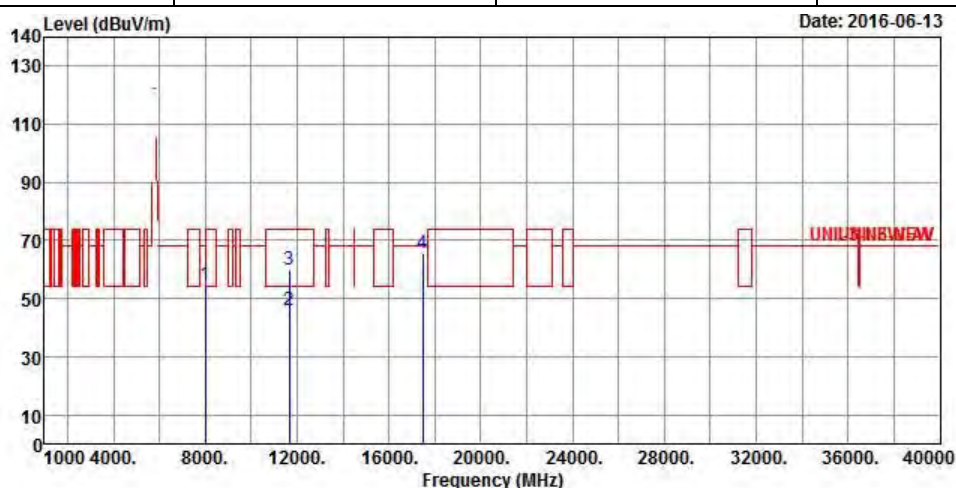

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7988.000	54.70	-13.50	68.20	43.23	37.08	7.33	32.94 Peak
2	11650.000	46.16	-7.84	54.00	29.93	39.70	9.01	32.48 Average
3	11650.000	59.81	-14.19	74.00	43.58	39.70	9.01	32.48 Peak
4	17475.000	65.55	-2.65	68.20	44.63	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11a (Ant. C)	Test Freq. (MHz)	5825
N _{TX}	1	Polarization	H

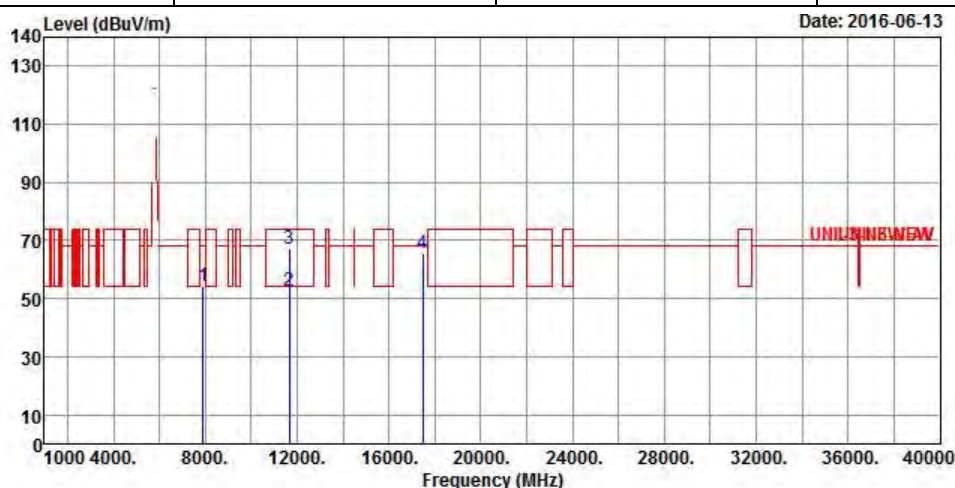

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7915.000	54.47	-13.73	68.20	43.18	36.96	7.25	32.92 Peak
2	11650.000	52.83	-1.17	54.00	36.60	39.70	9.01	32.48 Average
3	11650.000	67.08	-6.92	74.00	50.85	39.70	9.01	32.48 Peak
4	17475.000	65.44	-2.76	68.20	44.52	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	3	Polarization	V

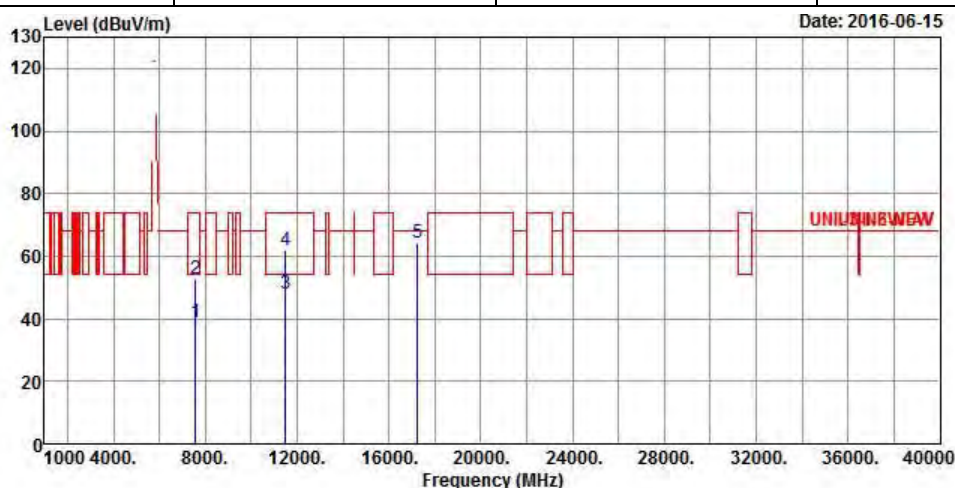

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	7576.000	38.80	-15.20	54.00	28.12	36.42	7.13	32.87
2	7576.000	52.89	-21.11	74.00	42.21	36.42	7.13	32.87
3	11490.000	48.19	-5.81	54.00	31.86	40.00	8.79	32.46
4	11490.000	61.90	-12.10	74.00	45.57	40.00	8.79	32.46
5	17235.000	64.50	-3.70	68.20	44.19	40.96	10.89	31.54

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	3	Polarization	H

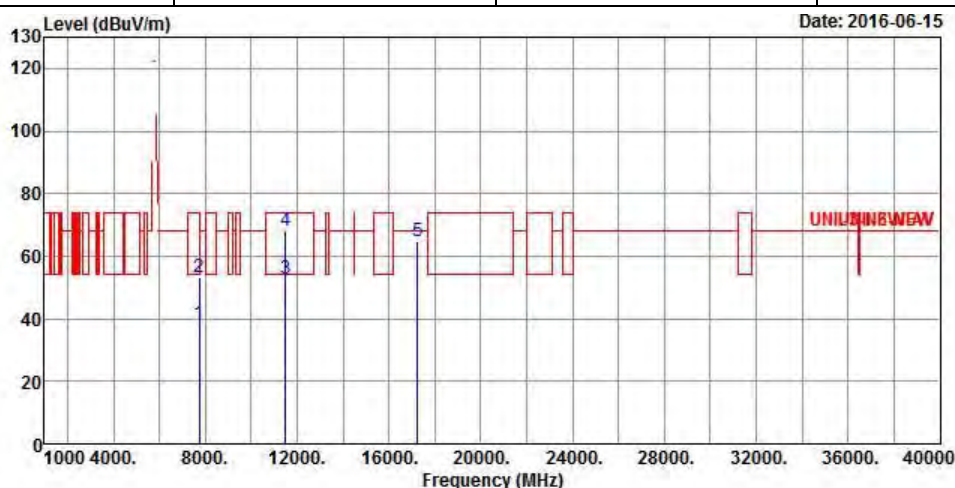

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7744.000	38.61	-15.39	54.00	27.68	36.69	7.14	32.90 Average
2	7744.000	53.37	-20.63	74.00	42.44	36.69	7.14	32.90 Peak
3	11490.000	52.53	-1.47	54.00	36.20	40.00	8.79	32.46 Average
4	11490.000	68.22	-5.78	74.00	51.89	40.00	8.79	32.46 Peak
5	17235.000	64.87	-3.33	68.20	44.56	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	3	Polarization	V

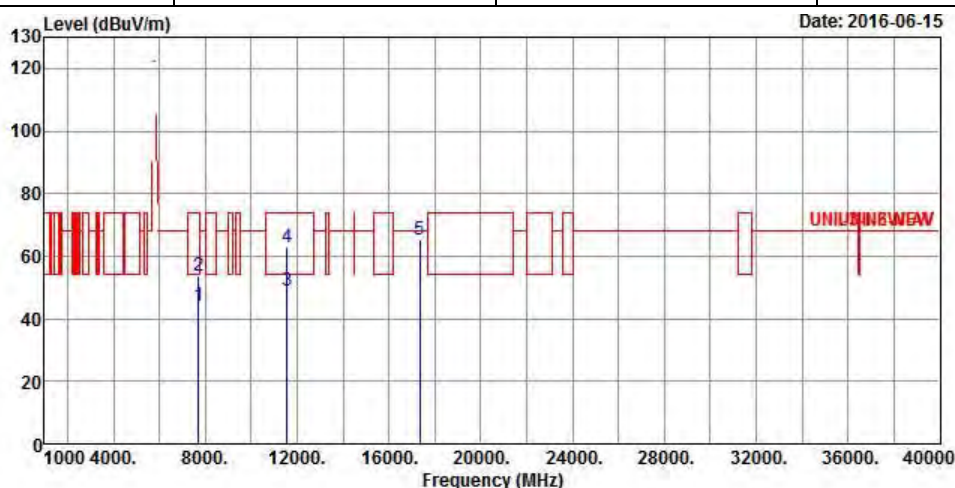

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	7712.000	44.25	-9.75	54.00	33.36	36.64	7.14	32.89 Average
2	7712.000	53.86	-20.14	74.00	42.97	36.64	7.14	32.89 Peak
3	11570.000	49.08	-4.92	54.00	32.80	39.86	8.89	32.47 Average
4	11570.000	62.79	-11.21	74.00	46.51	39.86	8.89	32.47 Peak
5	17355.000	65.34	-2.86	68.20	44.72	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	3	Polarization	H

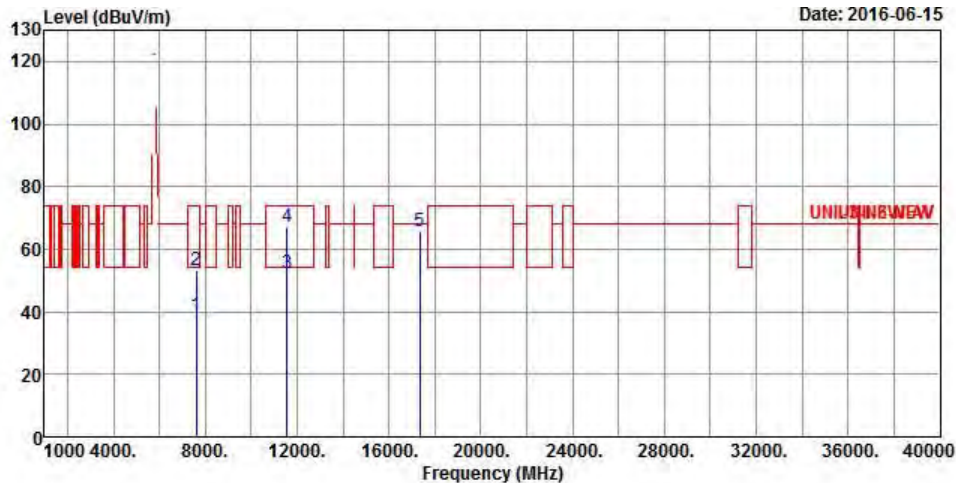

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Factor	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7616.000	39.04	-14.96	54.00	28.28	36.49	7.15	32.88 Average
2	7616.000	53.27	-20.73	74.00	42.51	36.49	7.15	32.88 Peak
3	11570.000	52.50	-1.50	54.00	36.22	39.86	8.89	32.47 Average
4	11570.000	67.31	-6.69	74.00	51.03	39.86	8.89	32.47 Peak
5	17355.000	65.52	-2.68	68.20	44.90	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	V

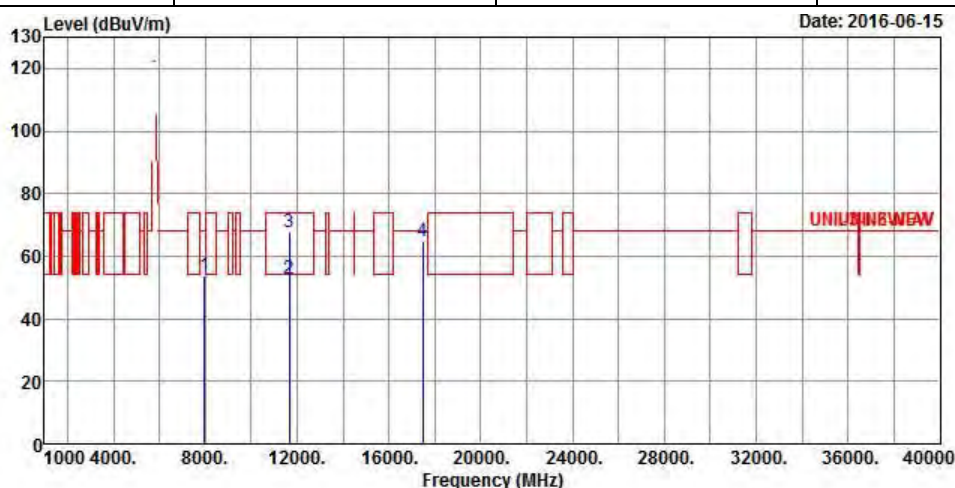

	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Loss	Remark
					dBuV	dB/m	dB	dB
1	7964.000	53.73	-14.47	68.20	42.32	37.04	7.30	32.93 Peak
2	11650.000	52.92	-1.08	54.00	36.69	39.70	9.01	32.48 Average
3	11650.000	67.75	-6.25	74.00	51.52	39.70	9.01	32.48 Peak
4	17475.000	64.97	-3.23	68.20	44.05	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	H

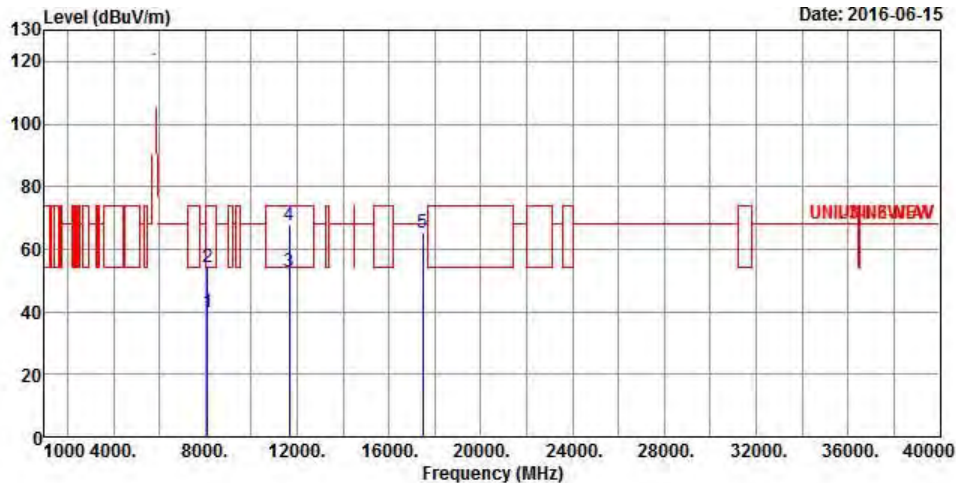

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8108.000	39.81	-14.19	54.00	28.26	37.01	7.48	32.94 Average
2	8108.000	54.01	-19.99	74.00	42.46	37.01	7.48	32.94 Peak
3	11650.000	52.66	-1.34	54.00	36.43	39.70	9.01	32.48 Average
4	11650.000	67.78	-6.22	74.00	51.55	39.70	9.01	32.48 Peak
5	17475.000	65.01	-3.19	68.20	44.09	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	V

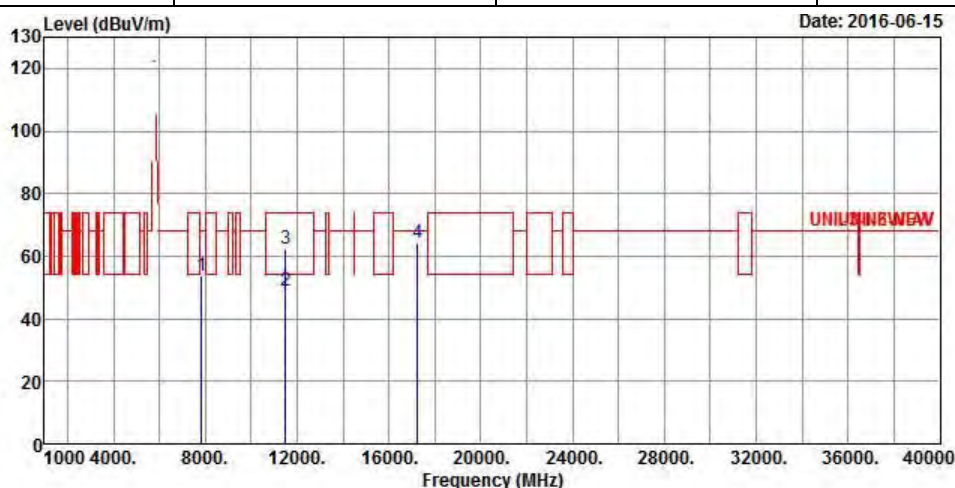

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7836.000	53.63	-14.57	68.20	42.53	36.84	7.17	32.91 Peak
2	11510.000	48.88	-5.12	54.00	32.56	39.98	8.80	32.46 Average
3	11510.000	62.45	-11.55	74.00	46.13	39.98	8.80	32.46 Peak
4	17265.000	64.18	-4.02	68.20	43.79	41.04	10.90	31.55 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	H

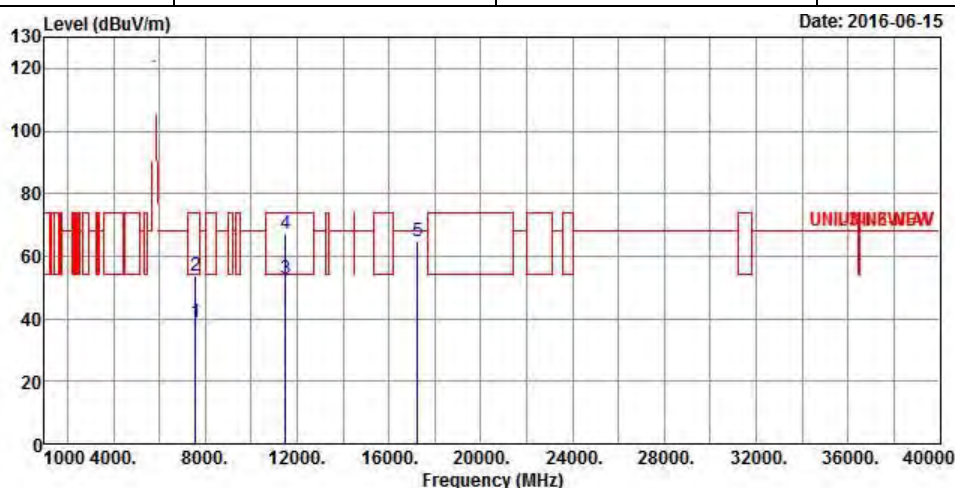

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor
			dB	dBuV/m	dBuV	dB/m	dB	dB
1	7584.000	38.90	-15.10	54.00	28.20	36.43	7.14	32.87
2	7584.000	53.54	-20.46	74.00	42.84	36.43	7.14	32.87
3	11510.000	52.92	-1.08	54.00	36.60	39.98	8.80	32.46
4	11510.000	67.23	-6.77	74.00	50.91	39.98	8.80	32.46
5	17265.000	64.91	-3.29	68.20	44.52	41.04	10.90	31.55

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	3	Polarization	V

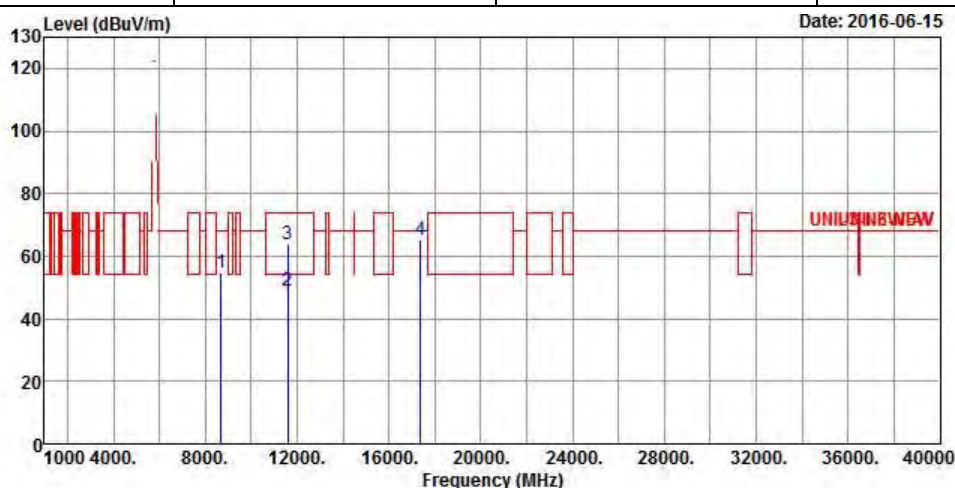

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8700.000	54.85	-13.35	68.20	43.10	36.94	7.82	33.01 Peak
2	11590.000	49.10	-4.90	54.00	32.83	39.82	8.92	32.47 Average
3	11590.000	63.78	-10.22	74.00	47.51	39.82	8.92	32.47 Peak
4	17385.000	65.19	-3.01	68.20	44.51	41.32	10.95	31.59 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	3	Polarization	H

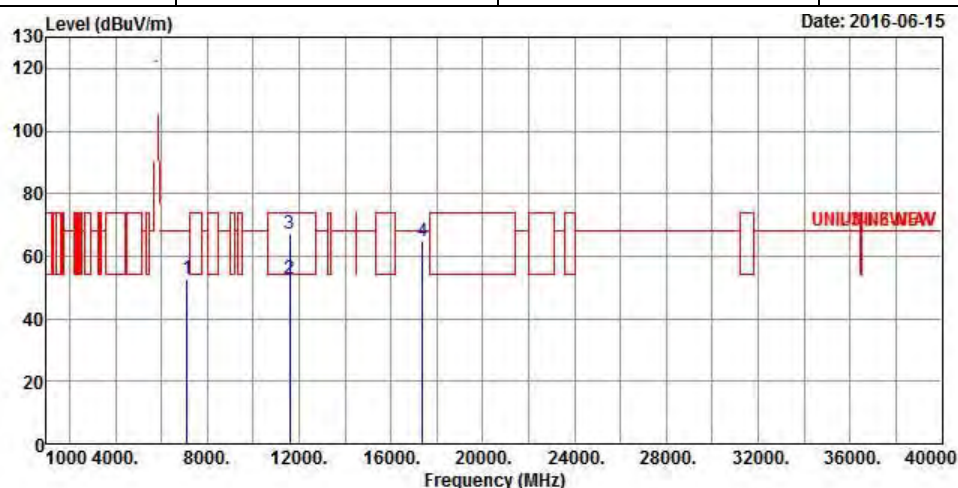

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7124.000	52.65	-15.55	68.20	42.92	35.40	7.08	32.75 Peak
2	11590.000	52.71	-1.29	54.00	36.44	39.82	8.92	32.47 Average
3	11590.000	67.12	-6.88	74.00	50.85	39.82	8.92	32.47 Peak
4	17385.000	64.83	-3.37	68.20	44.15	41.32	10.95	31.59 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	3	Polarization	V

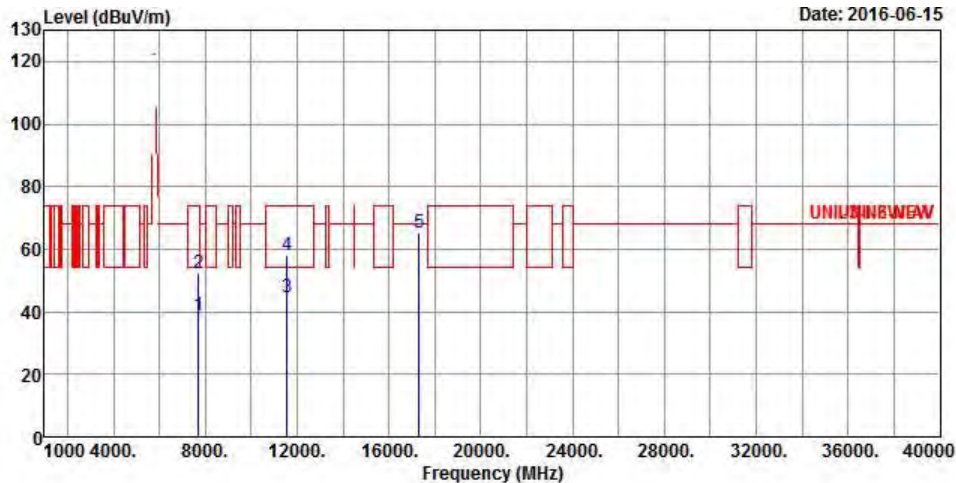

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp	Loss Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7692.000	38.76	-15.24	54.00	27.90	36.61	7.14	32.89 Average
2	7692.000	52.33	-21.67	74.00	41.47	36.61	7.14	32.89 Peak
3	11550.000	44.46	-9.54	54.00	28.17	39.90	8.86	32.47 Average
4	11550.000	58.15	-15.85	74.00	41.86	39.90	8.86	32.47 Peak
5	17325.000	65.22	-2.98	68.20	44.67	41.18	10.93	31.56 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	3	Polarization	H

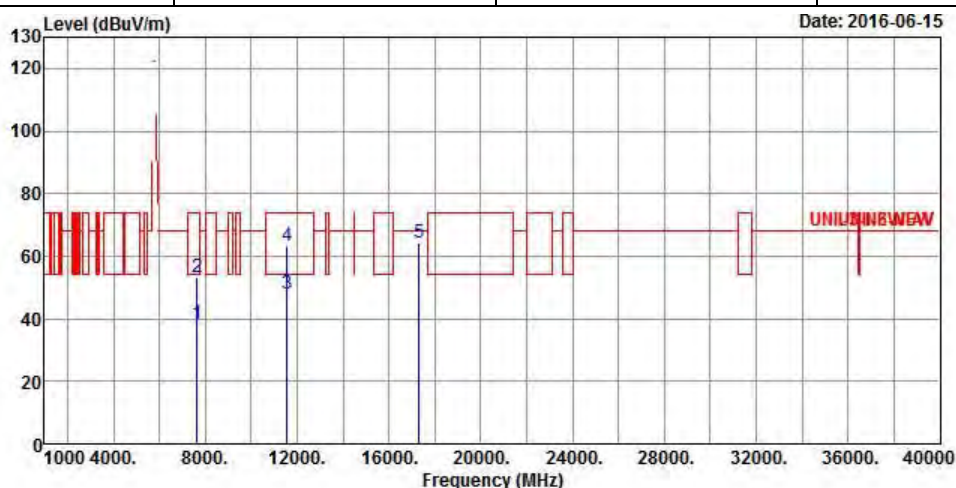

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7632.000	38.53	-15.47	54.00	27.75	36.51	7.15	32.88 Average
2	7632.000	53.03	-20.97	74.00	42.25	36.51	7.15	32.88 Peak
3	11550.000	48.06	-5.94	54.00	31.77	39.90	8.86	32.47 Average
4	11550.000	63.40	-10.60	74.00	47.11	39.90	8.86	32.47 Peak
5	17325.000	64.22	-3.98	68.20	43.67	41.18	10.93	31.56 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Below 1GHz) for TxBF

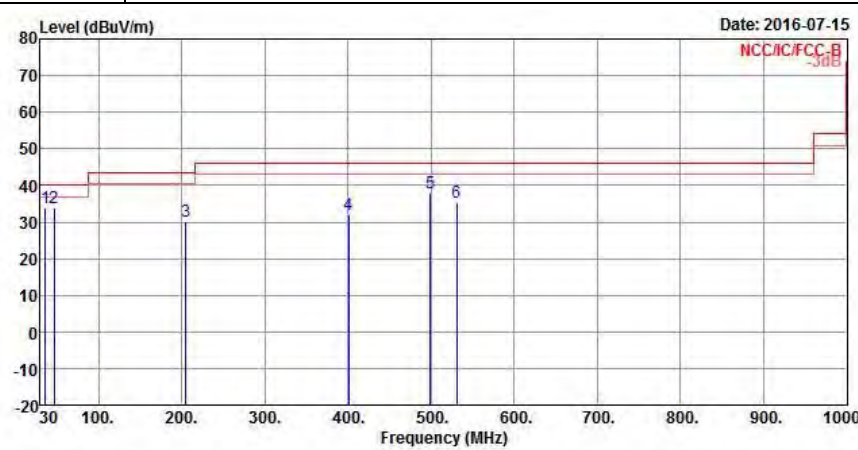Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																
Operating Mode	2				Polarization		V																																																																									
Operating Function	UPS mode																																																																															
<div><div><div>Level (dBuV/m)</div><div><div><div>Date: 2016-07-15</div><div>NCC/IC/FCC-B</div><div>-3dB</div></div></div><div><div>Frequency (MHz)</div><table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamp Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>35.820</td><td>33.89</td><td>-6.11</td><td>40.00</td><td>38.57</td><td>22.01</td><td>0.85</td><td>27.54 QP</td></tr><tr><td>2</td><td>46.490</td><td>34.05</td><td>-5.95</td><td>40.00</td><td>44.43</td><td>16.14</td><td>0.99</td><td>27.51 Peak</td></tr><tr><td>3</td><td>204.600</td><td>30.30</td><td>-13.20</td><td>43.50</td><td>38.57</td><td>16.34</td><td>2.30</td><td>26.91 Peak</td></tr><tr><td>4</td><td>400.540</td><td>32.18</td><td>-13.82</td><td>46.00</td><td>33.28</td><td>22.37</td><td>3.24</td><td>26.71 Peak</td></tr><tr><td>5</td><td>499.480</td><td>37.78</td><td>-8.22</td><td>46.00</td><td>38.21</td><td>23.80</td><td>3.56</td><td>27.79 Peak</td></tr><tr><td>6</td><td>530.520</td><td>35.29</td><td>-10.71</td><td>46.00</td><td>35.22</td><td>24.33</td><td>3.61</td><td>27.87 Peak</td></tr></tbody></table></div></div></div>										Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	35.820	33.89	-6.11	40.00	38.57	22.01	0.85	27.54 QP	2	46.490	34.05	-5.95	40.00	44.43	16.14	0.99	27.51 Peak	3	204.600	30.30	-13.20	43.50	38.57	16.34	2.30	26.91 Peak	4	400.540	32.18	-13.82	46.00	33.28	22.37	3.24	26.71 Peak	5	499.480	37.78	-8.22	46.00	38.21	23.80	3.56	27.79 Peak	6	530.520	35.29	-10.71	46.00	35.22	24.33	3.61	27.87 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																								
1	35.820	33.89	-6.11	40.00	38.57	22.01	0.85	27.54 QP																																																																								
2	46.490	34.05	-5.95	40.00	44.43	16.14	0.99	27.51 Peak																																																																								
3	204.600	30.30	-13.20	43.50	38.57	16.34	2.30	26.91 Peak																																																																								
4	400.540	32.18	-13.82	46.00	33.28	22.37	3.24	26.71 Peak																																																																								
5	499.480	37.78	-8.22	46.00	38.21	23.80	3.56	27.79 Peak																																																																								
6	530.520	35.29	-10.71	46.00	35.22	24.33	3.61	27.87 Peak																																																																								
<div>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical). Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.</div>																																																																																

Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	2	Polarization	H
Operating Function	UPS mode		

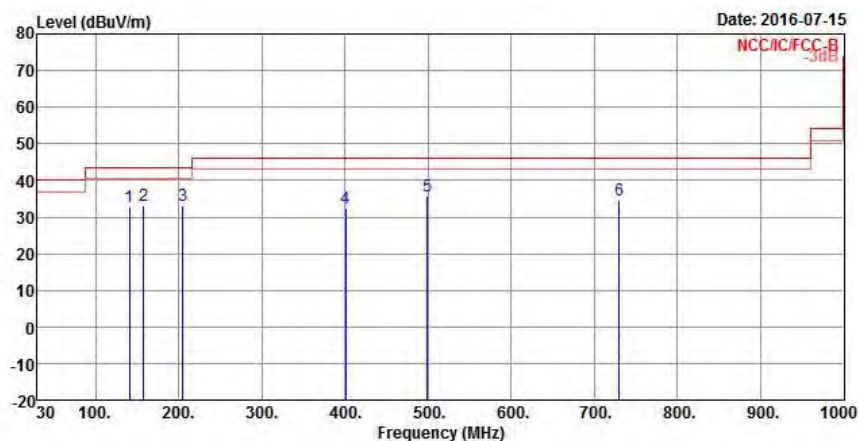

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	140.580	32.85	-10.65	43.50	40.44	17.77	1.84	27.20	Peak
2	158.040	33.03	-10.47	43.50	41.65	16.53	1.97	27.12	Peak
3	204.600	33.25	-10.25	43.50	41.52	16.34	2.30	26.91	Peak
4	400.540	32.38	-13.62	46.00	33.48	22.37	3.24	26.71	Peak
5	499.480	35.86	-10.14	46.00	36.29	23.80	3.56	27.79	Peak
6	730.340	34.60	-11.40	46.00	32.04	25.96	4.48	27.88	Peak


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for TxBF 5150-5250MHz

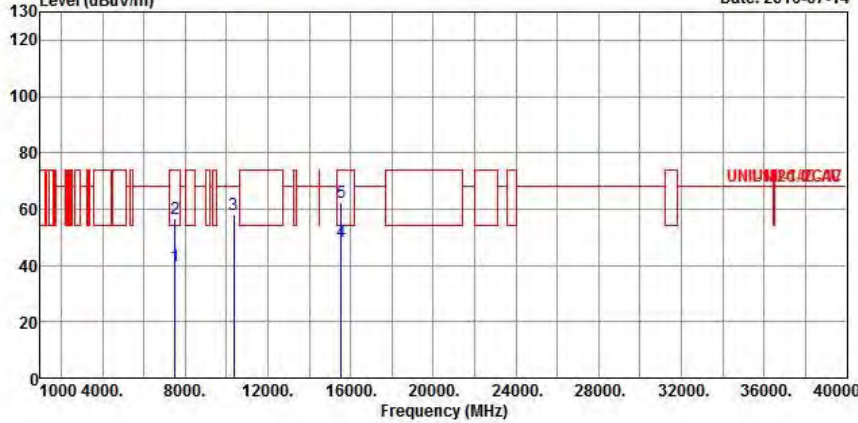Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																								
Modulation Mode		VHT20				Test Freq. (MHz)		5180																																																																
N _{TX}		3				Polarization		V																																																																
<div><div><div>Level (dBuV/m)</div><div><div><div>Date: 2016-07-14</div></div><div>Frequency (MHz)</div></div></div><table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Preamp Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>7500.000</td><td>39.86</td><td>-14.14</td><td>54.00</td><td>29.34</td><td>36.30</td><td>7.08</td><td>32.86 Average</td></tr><tr><td>2</td><td>7500.000</td><td>56.63</td><td>-17.37</td><td>74.00</td><td>46.11</td><td>36.30</td><td>7.08</td><td>32.86 Peak</td></tr><tr><td>3</td><td>10360.000</td><td>58.25</td><td>-9.95</td><td>68.20</td><td>43.44</td><td>39.23</td><td>8.47</td><td>32.89 Peak</td></tr><tr><td>4</td><td>15540.000</td><td>48.43</td><td>-5.57</td><td>54.00</td><td>32.06</td><td>38.30</td><td>10.41</td><td>32.34 Average</td></tr><tr><td>5</td><td>15540.000</td><td>62.17</td><td>-11.83</td><td>74.00</td><td>45.80</td><td>38.30</td><td>10.41</td><td>32.34 Peak</td></tr></table></div>											Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	1	7500.000	39.86	-14.14	54.00	29.34	36.30	7.08	32.86 Average	2	7500.000	56.63	-17.37	74.00	46.11	36.30	7.08	32.86 Peak	3	10360.000	58.25	-9.95	68.20	43.44	39.23	8.47	32.89 Peak	4	15540.000	48.43	-5.57	54.00	32.06	38.30	10.41	32.34 Average	5	15540.000	62.17	-11.83	74.00	45.80	38.30	10.41	32.34 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark																																																																
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB																																																																
1	7500.000	39.86	-14.14	54.00	29.34	36.30	7.08	32.86 Average																																																																
2	7500.000	56.63	-17.37	74.00	46.11	36.30	7.08	32.86 Peak																																																																
3	10360.000	58.25	-9.95	68.20	43.44	39.23	8.47	32.89 Peak																																																																
4	15540.000	48.43	-5.57	54.00	32.06	38.30	10.41	32.34 Average																																																																
5	15540.000	62.17	-11.83	74.00	45.80	38.30	10.41	32.34 Peak																																																																
<div><div>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div><div>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</div><div>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div><div>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div><div>Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.</div><div>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</div></div>																																																																								

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5180
N _{TX}	3	Polarization	H

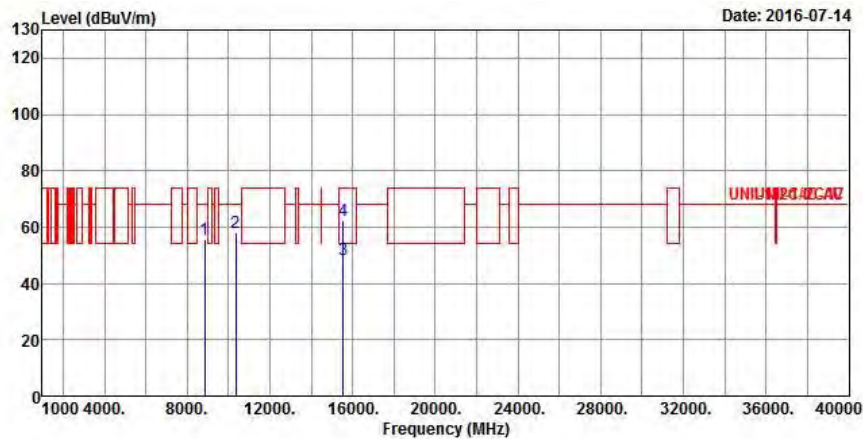


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8844.000	55.60	-12.60	68.20	43.62	37.11	7.93	33.06	Peak
2	10360.000	58.13	-10.07	68.20	43.32	39.23	8.47	32.89	Peak
3	15540.000	48.38	-5.62	54.00	32.01	38.30	10.41	32.34	Average
4	15540.000	62.29	-11.71	74.00	45.92	38.30	10.41	32.34	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N _{TX}	3	Polarization	V

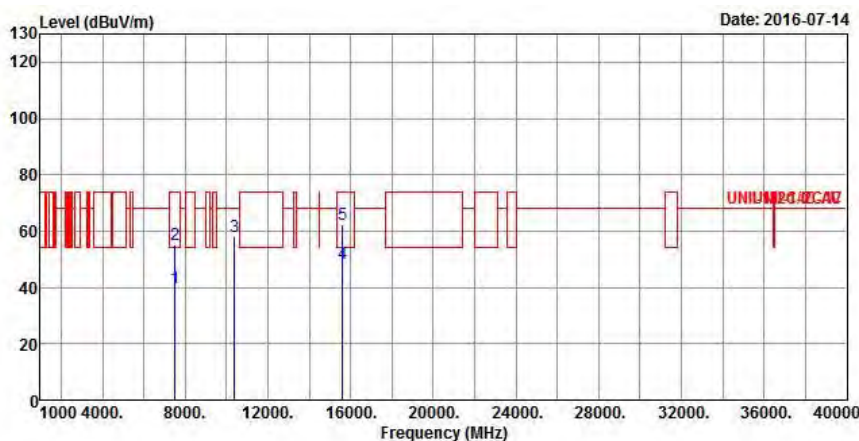

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7500.000	39.68	-14.32	54.00	29.16	36.30	7.08	32.86 Average
2	7500.000	55.23	-18.77	74.00	44.71	36.30	7.08	32.86 Peak
3	10400.000	58.24	-9.96	68.20	43.32	39.28	8.49	32.85 Peak
4	15600.000	48.51	-5.49	54.00	32.19	38.16	10.52	32.36 Average
5	15600.000	62.24	-11.76	74.00	45.92	38.16	10.52	32.36 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5200
N _{TX}	3	Polarization	H

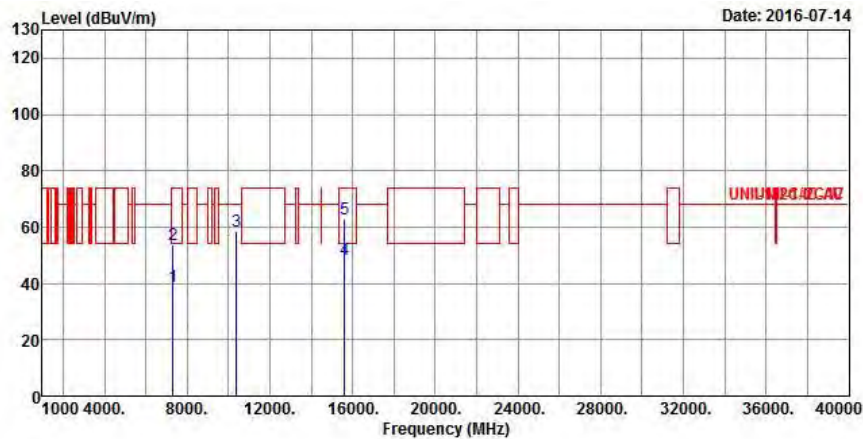


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7308.000	38.82	-15.18	54.00	28.76	35.84	7.02	32.80	Average
2	7308.000	53.91	-20.09	74.00	43.85	35.84	7.02	32.80	Peak
3	10400.000	58.39	-9.81	68.20	43.47	39.28	8.49	32.85	Peak
4	15600.000	48.56	-5.44	54.00	32.24	38.16	10.52	32.36	Average
5	15600.000	62.72	-11.28	74.00	46.40	38.16	10.52	32.36	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	3	Polarization	V

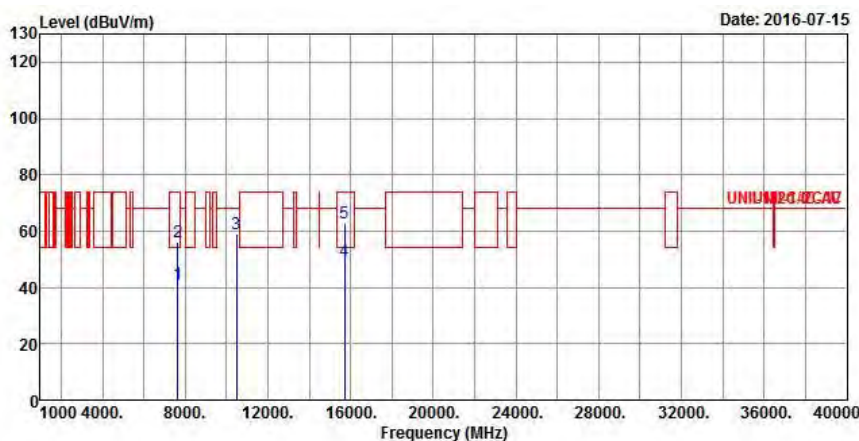

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7656.000	41.09	-12.91	54.00	30.28	36.55	7.14	32.88 Average
2	7656.000	55.98	-18.02	74.00	45.17	36.55	7.14	32.88 Peak
3	10480.000	58.89	-9.31	68.20	43.74	39.38	8.55	32.78 Peak
4	15720.000	49.40	-4.60	54.00	33.17	37.87	10.75	32.39 Average
5	15720.000	62.75	-11.25	74.00	46.52	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5240
N _{TX}	3	Polarization	H

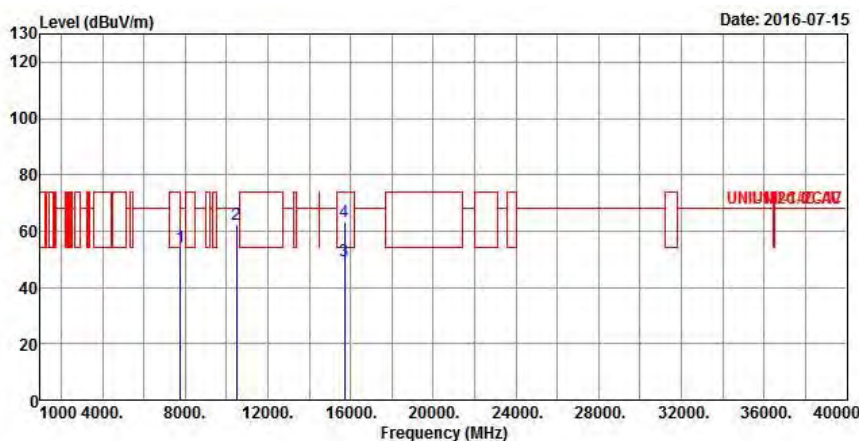

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7786.000	53.99	-14.21	68.20	43.00	36.76	7.13	32.90 Peak
2	10480.000	62.54	-5.66	68.20	47.39	39.38	8.55	32.78 Peak
3	15720.000	49.20	-4.80	54.00	32.97	37.87	10.75	32.39 Average
4	15720.000	63.38	-10.62	74.00	47.15	37.87	10.75	32.39 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N _{TX}	3	Polarization	V

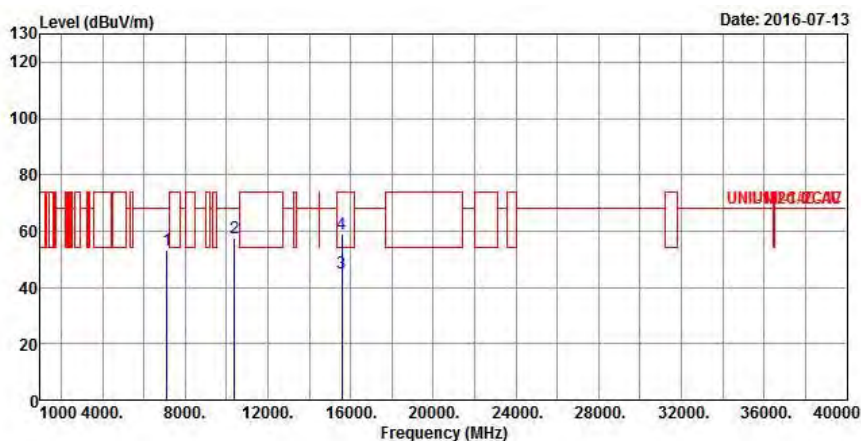

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7133.000	53.07	-15.13	68.20	43.33	35.42	7.08	32.76	Peak
2	10380.000	57.49	-10.71	68.20	42.62	39.26	8.48	32.87	Peak
3	15570.000	44.86	-9.14	54.00	28.52	38.23	10.46	32.35	Average
4	15570.000	59.06	-14.94	74.00	42.72	38.23	10.46	32.35	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5190
N _{TX}	3	Polarization	H

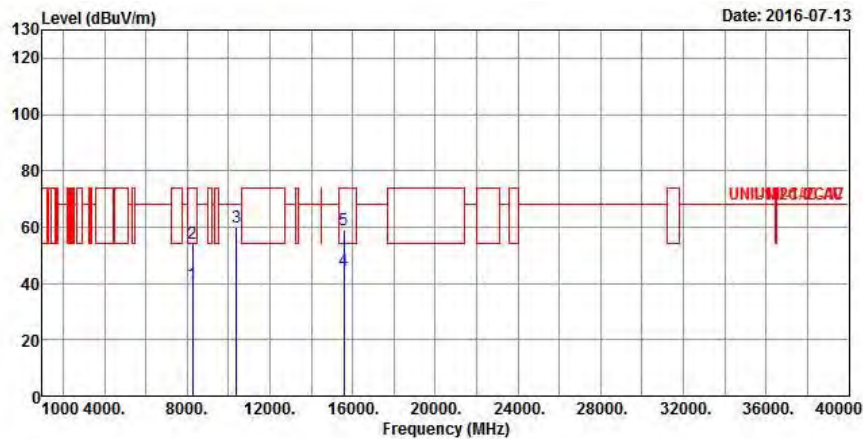

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8255.000	39.88	-14.12	54.00	28.29	36.90	7.63	32.94	Average
2	8255.000	54.40	-19.60	74.00	42.81	36.90	7.63	32.94	Peak
3	10380.000	59.73	-8.47	68.20	44.86	39.26	8.48	32.87	Peak
4	15570.000	44.82	-9.18	54.00	28.48	38.23	10.46	32.35	Average
5	15570.000	59.10	-14.90	74.00	42.76	38.23	10.46	32.35	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N _{TX}	3	Polarization	V

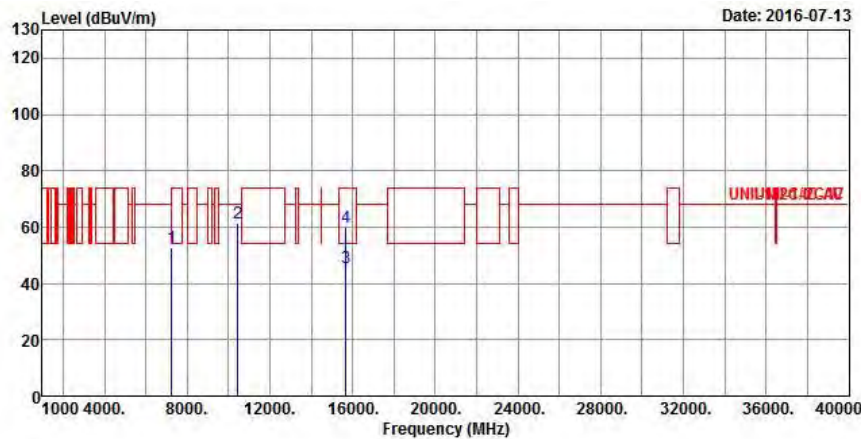


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Gain	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7245.000	52.78	-15.42	68.20	42.84	35.69	7.03	32.78	Peak
2	10460.000	61.61	-6.59	68.20	46.53	39.35	8.53	32.80	Peak
3	15690.000	45.64	-8.36	54.00	29.40	37.94	10.69	32.39	Average
4	15690.000	59.95	-14.05	74.00	43.71	37.94	10.69	32.39	Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5230
N _{TX}	3	Polarization	H

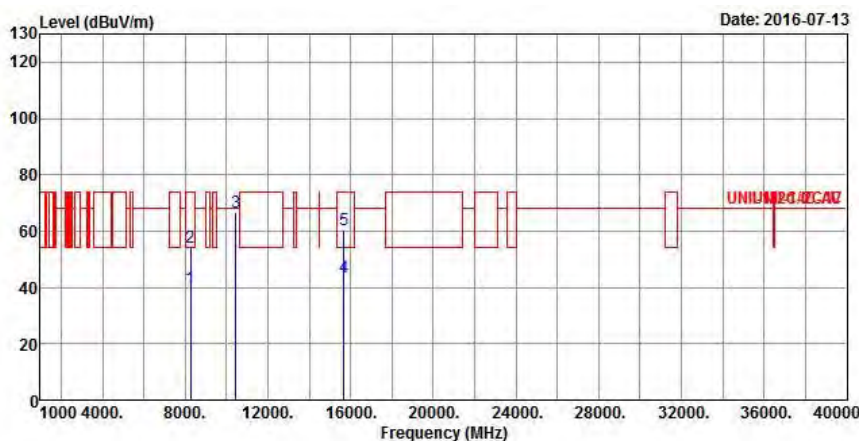

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8275.000	39.77	-14.23	54.00	28.18	36.88	7.65	32.94	Average
2	8275.000	54.22	-19.78	74.00	42.63	36.88	7.65	32.94	Peak
3	10460.000	66.90	-1.30	68.20	51.82	39.35	8.53	32.80	Peak
4	15690.000	43.72	-10.28	54.00	27.48	37.94	10.69	32.39	Average
5	15690.000	60.33	-13.67	74.00	44.09	37.94	10.69	32.39	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	3	Polarization	H

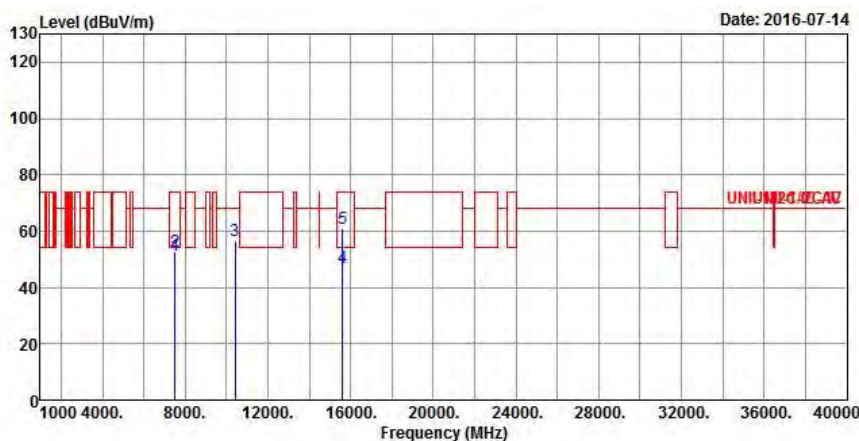

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7500.000	51.51	-2.49	54.00	40.99	36.30	7.08	32.86 Average
2	7500.000	52.64	-21.36	74.00	42.12	36.30	7.08	32.86 Peak
3	10420.000	56.62	-11.58	68.20	41.66	39.30	8.51	32.85 Peak
4	15630.000	47.04	-6.96	54.00	30.74	38.09	10.58	32.37 Average
5	15630.000	60.92	-13.08	74.00	44.62	38.09	10.58	32.37 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5210
N _{TX}	3	Polarization	H

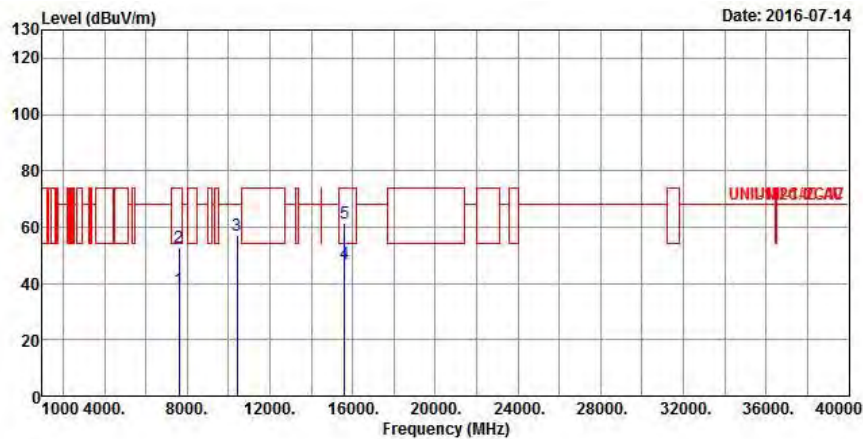

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7612.000	37.87	-16.13	54.00	27.12	36.48	7.15	32.88	Average
2	7612.000	52.62	-21.38	74.00	41.87	36.48	7.15	32.88	Peak
3	10420.000	56.85	-11.35	68.20	41.89	39.30	8.51	32.85	Peak
4	15630.000	47.05	-6.95	54.00	30.75	38.09	10.58	32.37	Average
5	15630.000	61.27	-12.73	74.00	44.97	38.09	10.58	32.37	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.


Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz) for TxBF 5725-5850MHz

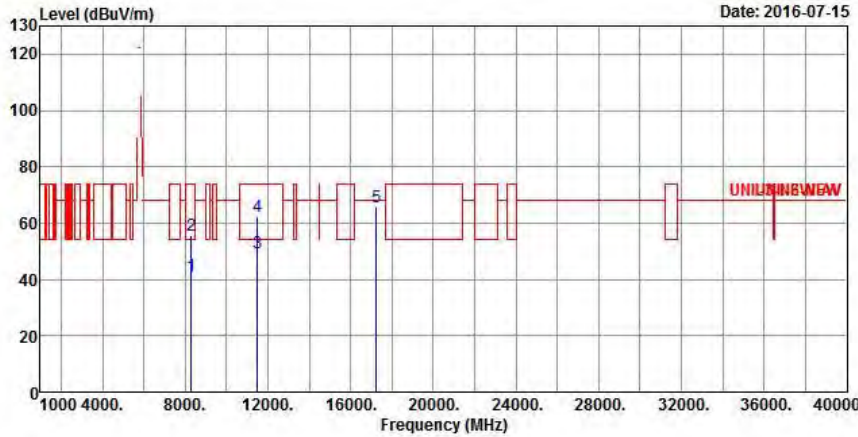Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																								
Modulation Mode		VHT20				Test Freq. (MHz)		5745																																																																
N _{TX}		3				Polarization		V																																																																
<div><div><div>Level (dBUV/m)</div><div></div><div>Frequency (MHz)</div></div><div><table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamp Loss</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBUV/m</th><th>dB</th><th>dBUV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>8304.000</td><td>41.27</td><td>-12.73</td><td>54.00</td><td>29.68</td><td>36.86</td><td>7.67</td><td>32.94 Average</td></tr><tr><td>2</td><td>8304.000</td><td>55.42</td><td>-18.58</td><td>74.00</td><td>43.83</td><td>36.86</td><td>7.67</td><td>32.94 Peak</td></tr><tr><td>3</td><td>11490.000</td><td>49.35</td><td>-4.65</td><td>54.00</td><td>33.02</td><td>40.00</td><td>8.79</td><td>32.46 Average</td></tr><tr><td>4</td><td>11490.000</td><td>62.32</td><td>-11.68</td><td>74.00</td><td>45.99</td><td>40.00</td><td>8.79</td><td>32.46 Peak</td></tr><tr><td>5</td><td>17235.000</td><td>65.73</td><td>-2.47</td><td>68.20</td><td>45.42</td><td>40.96</td><td>10.89</td><td>31.54 Peak</td></tr></table></div></div>											Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark		MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB	1	8304.000	41.27	-12.73	54.00	29.68	36.86	7.67	32.94 Average	2	8304.000	55.42	-18.58	74.00	43.83	36.86	7.67	32.94 Peak	3	11490.000	49.35	-4.65	54.00	33.02	40.00	8.79	32.46 Average	4	11490.000	62.32	-11.68	74.00	45.99	40.00	8.79	32.46 Peak	5	17235.000	65.73	-2.47	68.20	45.42	40.96	10.89	31.54 Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Remark																																																																
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB																																																																
1	8304.000	41.27	-12.73	54.00	29.68	36.86	7.67	32.94 Average																																																																
2	8304.000	55.42	-18.58	74.00	43.83	36.86	7.67	32.94 Peak																																																																
3	11490.000	49.35	-4.65	54.00	33.02	40.00	8.79	32.46 Average																																																																
4	11490.000	62.32	-11.68	74.00	45.99	40.00	8.79	32.46 Peak																																																																
5	17235.000	65.73	-2.47	68.20	45.42	40.96	10.89	31.54 Peak																																																																
<div><div>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.</div><div>Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)</div><div>Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</div><div>Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.</div><div>Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.</div><div>Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.</div></div>																																																																								

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5745
N _{TX}	3	Polarization	H

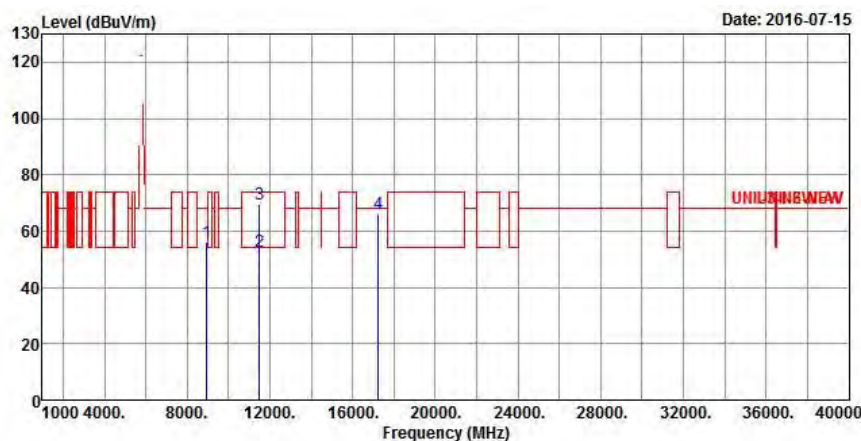

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8936.000	56.32	-11.88	68.20	44.19	37.22	7.99	33.08 Peak
2	11490.000	52.73	-1.27	54.00	36.40	40.00	8.79	32.46 Average
3	11490.000	69.52	-4.48	74.00	53.19	40.00	8.79	32.46 Peak
4	17235.000	66.22	-1.98	68.20	45.91	40.96	10.89	31.54 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	3	Polarization	V

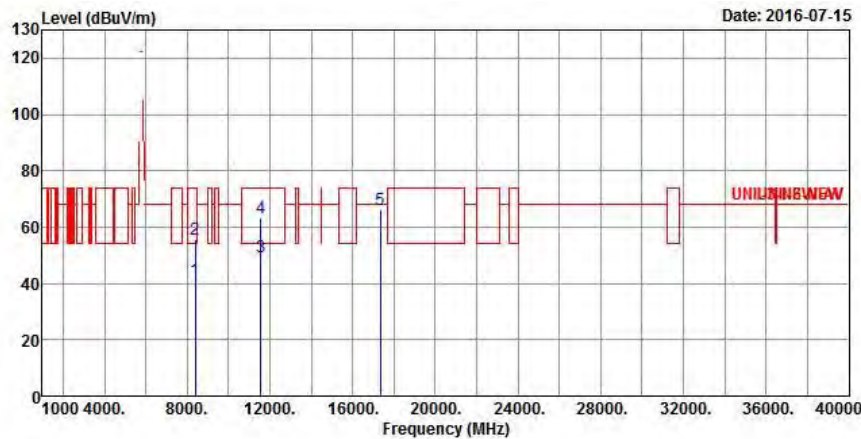


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8404.000	41.13	-12.87	54.00	29.54	36.78	7.75	32.94	Average
2	8404.000	55.54	-18.46	74.00	43.95	36.78	7.75	32.94	Peak
3	11570.000	49.45	-4.55	54.00	33.17	39.86	8.89	32.47	Average
4	11570.000	63.53	-10.47	74.00	47.25	39.86	8.89	32.47	Peak
5	17355.000	66.34	-1.86	68.20	45.72	41.25	10.94	31.57	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
 Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5785
N _{TX}	3	Polarization	H

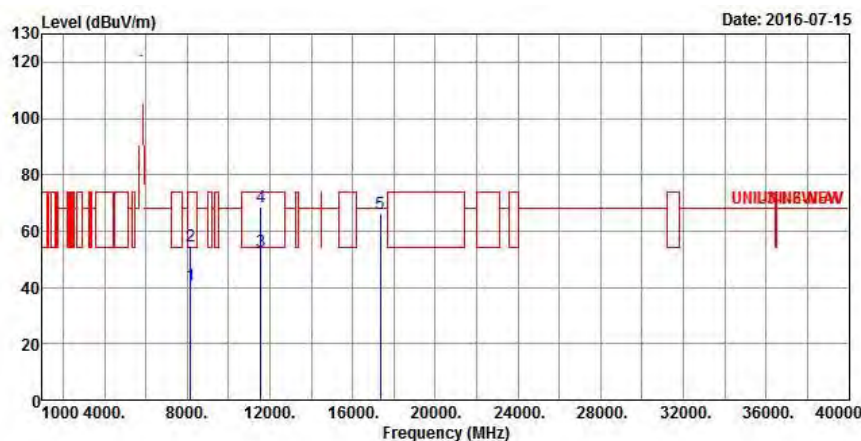

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8176.000	40.74	-13.26	54.00	29.16	36.96	7.56	32.94 Average
2	8176.000	54.83	-19.17	74.00	43.25	36.96	7.56	32.94 Peak
3	11570.000	52.96	-1.04	54.00	36.68	39.86	8.89	32.47 Average
4	11570.000	68.59	-5.41	74.00	52.31	39.86	8.89	32.47 Peak
5	17355.000	66.35	-1.85	68.20	45.73	41.25	10.94	31.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	V

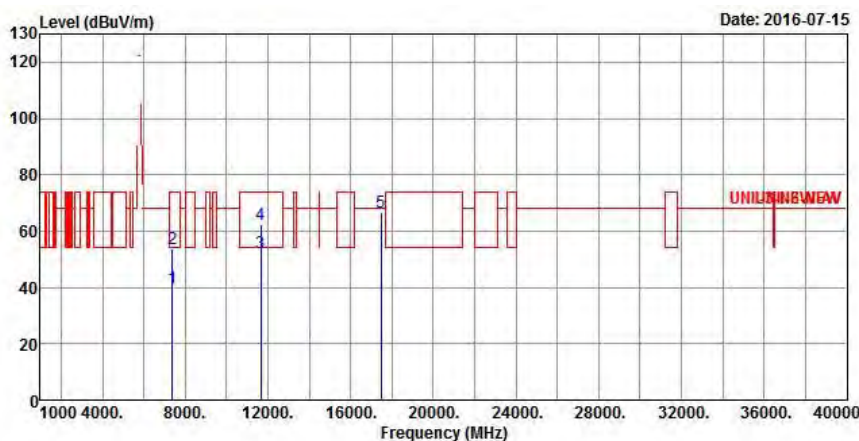

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7384.000	39.89	-14.11	54.00	29.68	36.02	7.01	32.82 Average
2	7384.000	53.69	-20.31	74.00	43.48	36.02	7.01	32.82 Peak
3	11650.000	52.50	-1.50	54.00	36.27	39.70	9.01	32.48 Average
4	11650.000	62.25	-11.75	74.00	46.02	39.70	9.01	32.48 Peak
5	17475.000	66.75	-1.45	68.20	45.83	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT20	Test Freq. (MHz)	5825
N _{TX}	3	Polarization	H

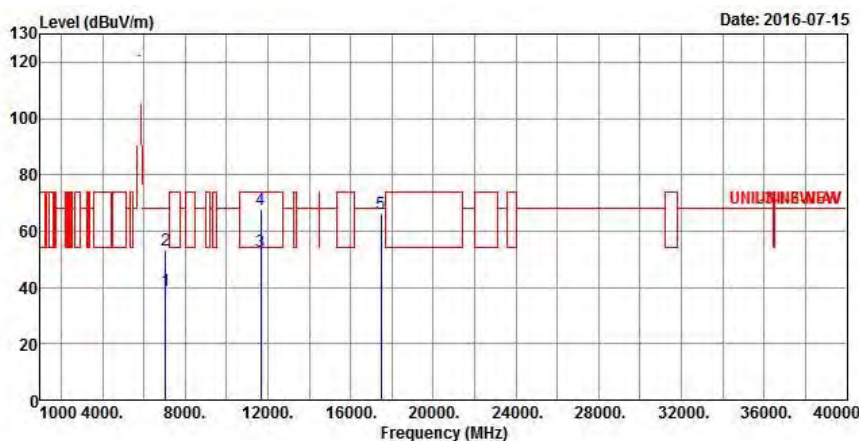

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7046.000	38.73	-29.47	68.20	29.12	35.21	7.12	32.72 Average
2	7046.000	53.13	-15.07	68.20	43.52	35.21	7.12	32.72 Peak
3	11650.000	52.75	-1.25	54.00	36.52	39.70	9.01	32.48 Average
4	11650.000	67.81	-6.19	74.00	51.58	39.70	9.01	32.48 Peak
5	17475.000	66.18	-2.02	68.20	45.26	41.54	10.99	31.61 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	V

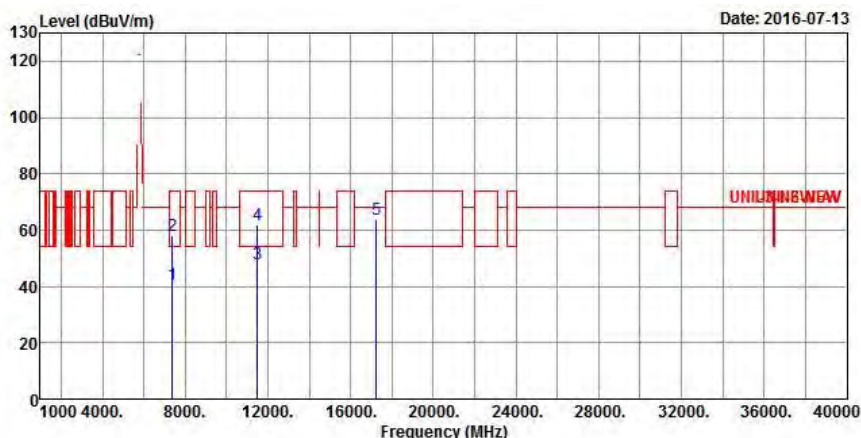

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	7384.000	40.55	-13.45	54.00	30.34	36.02	7.01	32.82	Average
2	7384.000	58.11	-15.89	74.00	47.90	36.02	7.01	32.82	Peak
3	11510.000	48.16	-5.84	54.00	31.84	39.98	8.80	32.46	Average
4	11510.000	61.99	-12.01	74.00	45.67	39.98	8.80	32.46	Peak
5	17265.000	63.97	-4.23	68.20	43.58	41.04	10.90	31.55	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5755
N _{TX}	3	Polarization	H

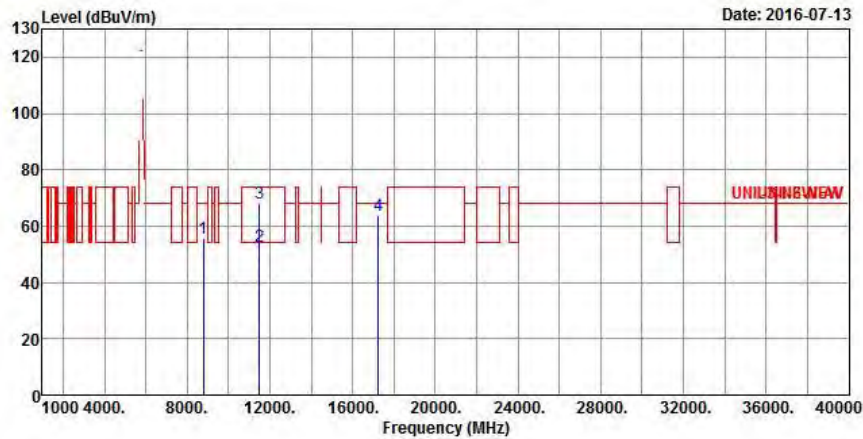


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8800.000	55.61	-12.59	68.20	43.70	37.06	7.89	33.04 Peak
2	11510.000	52.59	-1.41	54.00	36.27	39.98	8.80	32.46 Average
3	11510.000	68.21	-5.79	74.00	51.89	39.98	8.80	32.46 Peak
4	17265.000	63.91	-4.29	68.20	43.52	41.04	10.90	31.55 Peak

- Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
- Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
- Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
- Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
- Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.
- Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	3	Polarization	V

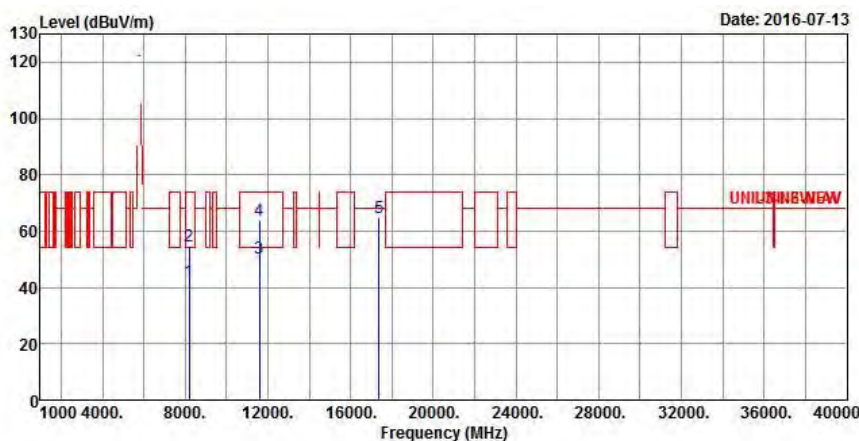

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8200.000	42.34	-11.66	54.00	30.75	36.94	7.59	32.94	Average
2	8200.000	54.64	-19.36	74.00	43.05	36.94	7.59	32.94	Peak
3	11590.000	50.30	-3.70	54.00	34.03	39.82	8.92	32.47	Average
4	11590.000	63.77	-10.23	74.00	47.50	39.82	8.92	32.47	Peak
5	17385.000	64.56	-3.64	68.20	43.88	41.32	10.95	31.59	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT40	Test Freq. (MHz)	5795
N _{TX}	3	Polarization	H

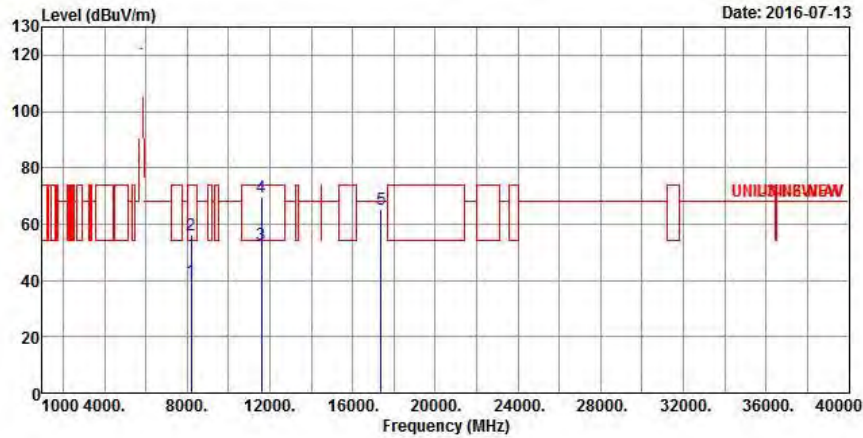

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	8212.000	40.01	-13.99	54.00	28.42	36.93	7.60	32.94 Average
2	8212.000	56.26	-17.74	74.00	44.67	36.93	7.60	32.94 Peak
3	11590.000	52.80	-1.20	54.00	36.53	39.82	8.92	32.47 Average
4	11590.000	69.69	-4.31	74.00	53.42	39.82	8.92	32.47 Peak
5	17385.000	65.48	-2.72	68.20	44.80	41.32	10.95	31.59 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	3	Polarization	V

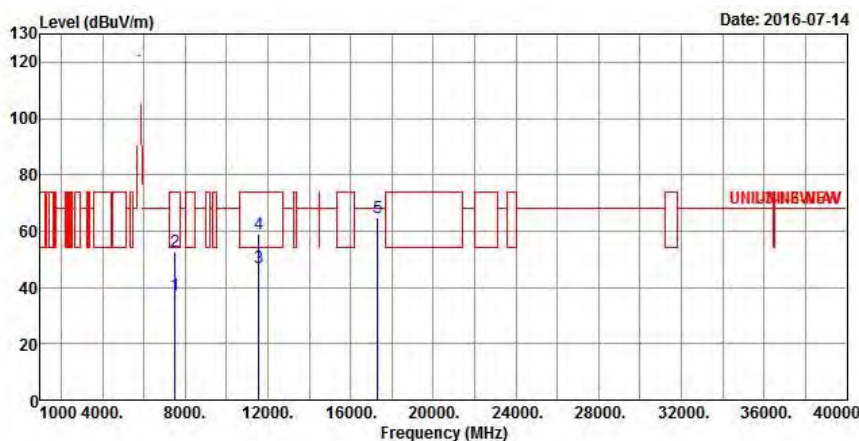

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Preamp Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB
1	7500.000	37.59	-16.41	54.00	27.07	36.30	7.08	32.86 Average
2	7500.000	52.56	-21.44	74.00	42.04	36.30	7.08	32.86 Peak
3	11550.000	46.95	-7.05	54.00	30.66	39.90	8.86	32.47 Average
4	11550.000	58.83	-15.17	74.00	42.54	39.90	8.86	32.47 Peak
5	17325.000	64.92	-3.28	68.20	44.37	41.18	10.93	31.56 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	VHT80	Test Freq. (MHz)	5775
N _{TX}	3	Polarization	H

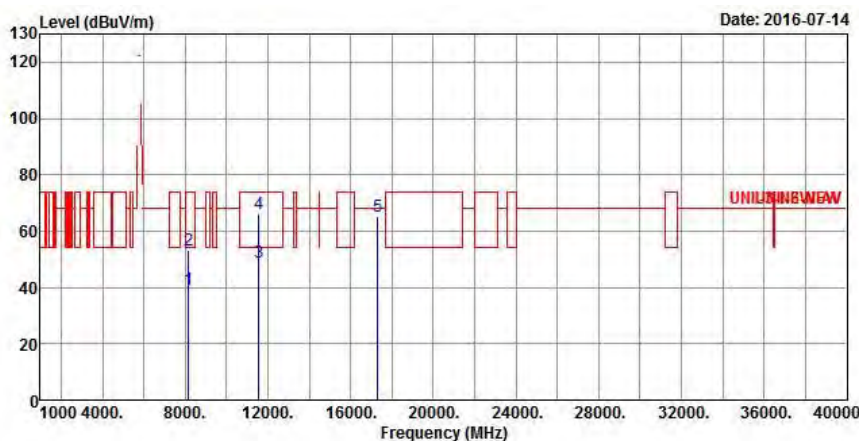

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	
1	8176.000	39.14	-14.86	54.00	27.56	36.96	7.56	32.94	Average
2	8176.000	53.01	-20.99	74.00	41.43	36.96	7.56	32.94	Peak
3	11550.000	48.77	-5.23	54.00	32.48	39.90	8.86	32.47	Average
4	11550.000	66.26	-7.74	74.00	49.97	39.90	8.86	32.47	Peak
5	17325.000	65.17	-3.03	68.20	44.62	41.18	10.93	31.56	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands emission satisfies both the average and peak limits of 15.209, it is not required to satisfy the -27 dBm peak emission limit of 15.407.

Note 6: No level of unwanted emissions exceeds the level of the fundamental emission.



Summary

Mode	Result	Ch (Hz)	Center (Hz)	F1 (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G:11a:20:1:1(1):5200:M:T50,VN	Pass	5.2G	5.20009561G	NaN	NaN	18.386	20	1	2 min



Result

Mode	Result	Ch (Hz)	Center (Hz)	FI (Hz)	Fh (Hz)	ppm	Limit (ppm)	Port	Remark
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996945G	NaN	NaN	5.875	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996944G	NaN	NaN	5.876	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996949G	NaN	NaN	5.868	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;TN,VL	Pass	5.2G	5.19996951G	NaN	NaN	5.863	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997459G	NaN	NaN	4.886	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997464G	NaN	NaN	4.878	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997465G	NaN	NaN	4.875	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;TN,VH	Pass	5.2G	5.19997472G	NaN	NaN	4.861	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009556G	NaN	NaN	18.377	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009561G	NaN	NaN	18.386	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.2000955G	NaN	NaN	18.365	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T50,VN	Pass	5.2G	5.20009546G	NaN	NaN	18.359	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003187G	NaN	NaN	6.129	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003191G	NaN	NaN	6.136	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.2000319G	NaN	NaN	6.135	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T40,VN	Pass	5.2G	5.20003198G	NaN	NaN	6.151	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998358G	NaN	NaN	3.158	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998364G	NaN	NaN	3.147	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998371G	NaN	NaN	3.133	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T30,VN	Pass	5.2G	5.19998379G	NaN	NaN	3.116	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997101G	NaN	NaN	5.575	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997101G	NaN	NaN	5.576	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.19997103G	NaN	NaN	5.57	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T20,VN	Pass	5.2G	5.199971G	NaN	NaN	5.578	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996467G	NaN	NaN	6.794	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.1999647G	NaN	NaN	6.789	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996468G	NaN	NaN	6.792	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T10,VN	Pass	5.2G	5.19996467G	NaN	NaN	6.795	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996639G	NaN	NaN	6.463	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996635G	NaN	NaN	6.472	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996643G	NaN	NaN	6.456	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T0,VN	Pass	5.2G	5.19996644G	NaN	NaN	6.454	20	1	10 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996756G	NaN	NaN	6.238	20	1	0 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996759G	NaN	NaN	6.233	20	1	2 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996758G	NaN	NaN	6.235	20	1	5 min
5.2G;11a;20;1;1(1);5200;M;T-10,VN	Pass	5.2G	5.19996759G	NaN	NaN	6.232	20	1	10 min