



**FCC & Industry Canada Certification  
Test Report**

**for**

**ADTRAN, Inc.**

**FCC ID: HDCTRC4206L1**

**IC: 2250A-4206L1**

**August 27, 2004**

Prepared for:

**ADTRAN, Inc.  
901 Explorer Blvd  
Huntsville, AL 35806**

Prepared By:

**Washington Laboratories, Ltd.  
7560 Lindbergh Drive  
Gaithersburg, Maryland 20879**



**FCC & Industry Canada Certification Test Report**  
**for the**  
**ADTRAN, Inc.**  
**TRACER**  
**Transceiver 4206L1**  
**FCC ID: HDCTRC4206L1**  
**IC: 2250A-4206L1**

WLL JOB# 8028

Prepared by: Brian J. Dettling  
Documentation Specialist

Reviewed by: Gregory M. Snyder  
Wireless/Telco Services Manager & Chief EMC Engineer

## **Abstract**

This report has been prepared on behalf of ADTRAN, Inc. to support the attached Application for Equipment Authorization. The test report and application are submitted for a Digitally Modulated Transmitter under Part 15.247 of the FCC Rules and Regulations and Spectrum Management and Telecommunications Policy RSS-210 of Industry Canada. This Certification Test Report documents the test configuration and test results for an ADTRAN, Inc. TRACER 4206L1 Transceiver.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

The ADTRAN, Inc. TRACER 4206L1 Transceiver complies with the requirements for a Digitally Modulated Transmitter device under FCC Part 15.247 and Industry Canada RSS-210.

## Table of Contents

Abstract.....	ii
1 Introduction.....	1
1.1 Compliance Statement .....	1
1.2 Test Scope.....	1
1.3 Contract Information.....	1
1.4 Test Dates .....	1
1.5 Test and Support Personnel .....	1
1.6 Abbreviations.....	2
2 Equipment Under Test .....	3
2.1 EUT Identification & Description .....	3
2.2 Test Configuration .....	5
2.3 Testing Algorithm.....	5
2.4 Test Location .....	5
2.5 Measurements .....	6
2.5.1 References.....	6
2.6 Measurement Uncertainty.....	6
3 Test Equipment .....	7
4 Test Results.....	8
4.1 RF Power Output .....	8
4.2 RF Peak Power Spectral Density .....	9
4.3 Occupied Bandwidth.....	16
4.4 Spurious Emissions at Antenna Terminals (FCC Part §15.247(b)).....	23
4.4.1 Test Procedure .....	23
4.4.2 Test Results.....	23
4.5 Radiated Spurious Emissions: (FCC Part §15.247(c)) .....	50
4.5.1 Test Procedure .....	51
4.6 AC Powerline Conducted Emissions: (FCC Part §15.207) .....	58

## List of Tables

Table 1. Device Summary.....	4
Table 2: Test Equipment List.....	7
Table 3. RF Power Output .....	8
Table 4. Peak Power Spectral Density .....	10
Table 5. Occupied Bandwidth Results.....	23
Table 7: Radiated Emission Test Data - Plan A Channel 1 .....	52
Table 8: Radiated Emission Test Data - Plan A Channel 2 .....	53
Table 9: Radiated Emission Test Data - Plan A Channel 3 .....	54
Table 10: Radiated Emission Test Data - Plan B Channel 1 .....	55
Table 11: Radiated Emission Test Data - Plan B Channel 2 .....	56
Table 12: Radiated Emission Test Data - Plan B Channel 3 .....	57
Table 13: Conducted Emissions Test Data; 15.207.....	59

## List of Figures

Figure 1: RF Power Measurement Test Setup Diagram .....	9
Figure 2. Power Spectral Density Plan A, Band 1 .....	11
Figure 3. Power Spectral Density Plan A, Band 2.....	12
Figure 4. Power Spectral Density Plan A, Band 3.....	13
Figure 5. Power Spectral Density Plan B, Band 1 .....	14
Figure 6. Power Spectral Density Plan B, Band 2.....	15
Figure 7. Power Spectral Density Plan B, Band 3 .....	16
Figure 8. Occupied Bandwidth, Plan A, Channel 1 .....	17
Figure 9. Occupied Bandwidth, Plan A, Channel 2.....	18
Figure 10. Occupied Bandwidth, Plan A, Channel 3.....	19
Figure 11. Occupied Bandwidth, Plan B, Channel 1 .....	20
Figure 12. Occupied Bandwidth, Plan B, Channel 2.....	21
Figure 13. Occupied Bandwidth, Plan B, Channel 3 .....	22
Figure 14. Conducted Spurious Emissions, Plan A - Channel 1, 30MHz-1GHz .....	24
Figure 15. Conducted Spurious Emissions, Plan A - Channel 1, 1GHz-5.7GHz.....	25
Figure 16. Conducted Spurious Emissions, Plan A - Channel 1, 5.7GHz-5.9GHz.....	26
Figure 17. Conducted Spurious Emissions, Plan A - Channel 1, 5.9GHz-10GHz.....	27
Figure 18. Conducted Spurious Emissions, Plan A - Channel 1, 10GHz-40GHz.....	28
Figure 19. Conducted Spurious Emissions, Plan A - Channel 2, 30MHz-5.72GHz .....	29
Figure 20. Conducted Spurious Emissions, Plan A - Channel 2, 5.72GHz-5.86GHz.....	30
Figure 21. Conducted Spurious Emissions, Plan A - Channel 2, 5.85GHz-40GHz.....	31
Figure 22. Conducted Spurious Emissions, Plan A - Channel 3, 30MHz-1GHz .....	32
Figure 23. Conducted Spurious Emissions, Plan A - Channel 3, 1GHz-5.7GHz.....	33
Figure 24. Conducted Spurious Emissions, Plan A - Channel 3, 5.7GHz-5.9GHz.....	34
Figure 25. Conducted Spurious Emissions, Plan A - Channel 3, 5.9GHz-10GHz.....	35
Figure 26. Conducted Spurious Emissions, Plan A - Channel 3, 10GHz-40GHz.....	36
Figure 27. Conducted Spurious Emissions, Plan B - Channel 1, 30MHz-1GHz .....	37
Figure 28. Conducted Spurious Emissions, Plan B - Channel 1, 1GHz-5.7GHz .....	38
Figure 29. Conducted Spurious Emissions, Plan B - Channel 1, 5.7GHz-5.9GHz .....	39
Figure 30. Conducted Spurious Emissions, Plan B - Channel 1, 5.9GHz-10GHz .....	40
Figure 31. Conducted Spurious Emissions, Plan B - Channel 1, 10GHz-40GHz .....	41
Figure 32. Conducted Spurious Emissions, Plan B - Channel 2, 30MHz-1GHz .....	42
Figure 33. Conducted Spurious Emissions, Plan B - Channel 2, 1GHz-5.7GHz .....	43
Figure 34. Conducted Spurious Emissions, Plan B - Channel 2, 5.72GHz-5.86GHz .....	44
Figure 35. Conducted Spurious Emissions, Plan B - Channel 2, 5.85GHz-40GHz .....	45
Figure 36. Conducted Spurious Emissions, Plan B - Channel 3, 30MHz-1GHz .....	46
Figure 37. Conducted Spurious Emissions, Plan B - Channel 3, 1GHz-5.72GHz .....	47
Figure 38. Conducted Spurious Emissions, Plan B - Channel 3, 5.7GHz-5.9GHz .....	48
Figure 39. Conducted Spurious Emissions, Plan B - Channel 3, 5.9GHz-10GHz .....	49
Figure 40. Conducted Spurious Emissions, Plan B - Channel 3, 10GHz-40GHz .....	50



## **1 Introduction**

### **1.1 Compliance Statement**

The ADTRAN, Inc. TRACER 4206L1 System complies with the requirements for a Digitally Modulated Transmitter device under FCC Part 15.247 and Industry Canada RSS-210.

### **1.2 Test Scope**

Tests for radiated and conducted emissions were performed. All measurements were performed according to the 2001 version of ANSI C63.4. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

### **1.3 Contract Information**

Customer: ADTRAN, Inc.  
901 Explorer Blvd  
Huntsville, AL 35806

Purchase Order Number: 416542

Quotation Number: 61468

### **1.4 Test Dates**

Testing was performed from April 29 through May 18.

### **1.5 Test and Support Personnel**

Washington Laboratories, LTD

Greg Snyder, James Ritter

## 1.6 Abbreviations

A	Ampere
Ac	alternating current
AM	Amplitude Modulation
Amps	Amperes
b/s	bits per second
BW	Bandwidth
CE	Conducted Emission
Cm	Centimeter
CW	Continuous Wave
DB	Decibel
Dc	direct current
EMI	Electromagnetic Interference
EUT	Equipment Under Test
FM	Frequency Modulation
G	giga – prefix for $10^9$ multiplier
Hz	Hertz
IF	Intermediate Frequency
K	kilo – prefix for $10^3$ multiplier
M	Mega – prefix for $10^6$ multiplier
M	Meter
$\mu$	micro – prefix for $10^{-6}$ multiplier
NB	Narrowband
LISN	Line Impedance Stabilization Network
RE	Radiated Emissions
RF	Radio Frequency
Rms	root-mean-square
SN	Serial Number
S/A	Spectrum Analyzer
V	Volt



## 2 Equipment Under Test

### 2.1 EUT Identification & Description

ADTRAN Part #	Product Name/Description
12804206L1A	Tracer 4206L1 Plan A
12804206L1B	Tracer 4206L1 Plan B

<b>Top Assembly #:</b> 12804206L1A and B
<b>Sub Assembly #(s):</b> 2280003-20, 2280018-6
<b>Circuit Board #(s):</b> 5280003-20, 2280018-6

The 12804206L1 (Tracer 4206L1 Radio) is a digital radio device that accepts four 1.544 Mb/sec T1 signal and transports it over a wireless carrier. A pair of these radios forms a wireless transport for T1 digital services in the 5.8 GHz Industrial, Scientific and Medical (ISM) radio band. The 12804206L1 provides the network, antenna, and control/status interface to the customer. The T1 interfaces are network timed. No internal timing is available.

The Tracer 4206L1 operates in the 5734-5833 MHz band using direct sequence spread spectrum transmission. Two channels are available: "A" and "B". The channels are determined by internal cable routing on the transmit module during manufacture.

I/O Ports and Cables available on the TRACER 4206L1 DS3 Radio:

#	Signal/ Port Name	Signal/ Port Type	Cable Type	NOTES
1	T1A	I/O	Unshielded	100 ohm impedance
2	T1B	I/O	Unshielded	100 ohm impedance
3	T1C	I/O	Unshielded	100 ohm impedance
4	T1D	I/O	Unshielded	100 ohm impedance
5	RS232	I/O	Shielded 25 wire	VT100
6	ALARM	Control	Unshielded TP	Alarm contacts, no active signals
7	ANTENNA	I/O	Shielded Coax	50 ohm impedance, 5.8 GHz signal only
8	TEST	Output	Unshielded TP	¼ inch stereo jack, X/Y Constellation plot
9	RSSI	Output	Unshielded wire	Mono jack, Receive Signal Strength
10	TX PWR	Output	Unshielded wire	Mono jack, Transmit Power
11	GND	Output	Unshielded wire	Mono jack, Circuit ground
EX :	HDSL Loop 1	Span Pwr-I/O	Twisted Pair	137V Span Voltage

**Table 1. Device Summary**

<b>ITEM</b>	<b>DESCRIPTION</b>
Manufacturer:	ADTRAN, Inc.
FCC ID Number	HDCTRC4206L1
Industry Canada Number	2250A-4206L1
EUT Name:	Spread Spectrum Transceiver
Model:	4206L1
FCC Rule Parts:	§15.247
Industry Canada	RSS-210
Frequency Range:	5734 MHz – 5833MHz
Maximum Output Power:	19.5 dBm (conducted)
Modulation:	Digital (QPSK)
Bandwidth:	7.7MHz
Keying:	Automatic
Type of Information:	Data
Number of Channels:	6
Power Output Level	Fixed
Antenna Type	Parabolic Dish
Frequency Tolerance:	N/A
Emission Type(s):	N/A
Power Source & Voltage:	48 Vdc

The TRACER DSSS 4206L1 contains the following sources:

<b>Frequency (MHz)</b>	<b>Description</b>
50.432	Master clock of digital transmit and receive. (XO 25ppm)
1.544	T1 rate clock for framer operation.
12.000	RF Reference XO
280.000	IF XO
5732.813	RF Center frequency for Channel A Bandplan 1
1398.203	RX LO Reference, Channel A Bandplan 1
1363.203	TX LO Reference, Channel A Bandplan 1
5748.438	RF Center frequency for Channel A Bandplan 2
1402.110	RX LO Reference, Channel A Bandplan 2
1367.110	TX LO Reference, Channel A Bandplan 2
5764.063	RF Center frequency for Channel A Bandplan 3
1406.016	RX LO Reference, Channel A Bandplan 3
1371.016	TX LO Reference, Channel A Bandplan 3
5779.688	RF Center frequency for Channel A Bandplan 4

<b>Frequency (MHz)</b>	<b>Description</b>
1409.922	RX LO Reference, Channel A Bandplan 4
1374.922	TX LO Reference, Channel A Bandplan 4
5795.313	RF Center frequency for Channel B Bandplan 1
1413.828	RX LO Reference, Channel B Bandplan 1
1378.828	TX LO Reference, Channel B Bandplan 1
5810.938	RF Center frequency for Channel B Bandplan 2
1417.735	RX LO Reference, Channel B Bandplan 2
1382.735	TX LO Reference, Channel B Bandplan 2
5826.563	RF Center frequency for Channel B Bandplan 3
1421.641	RX LO Reference, Channel B Bandplan 3
1386.641	TX LO Reference, Channel B Bandplan 3
5842.188	RF Center frequency for Channel B Bandplan 4
1425.547	RX LO Reference, Channel B Bandplan 4
1390.547	TX LO Reference, Channel B Bandplan 4

## 2.2 Test Configuration

The EUT was configured with an external power adapter, loopback connections on Channels A and B, unshielded wires connected to the alarm I/O, and a 50 Ohm coaxial cable connected to the antenna port.

The EUT firmware was set up to provide continuous random data for Direct Sequence modulation to the output connector.

Two “Plans” are available: “A” and “B”. Each “Plan” has three channels. Changing between the plans is accomplished by switching the internal cables. The channels are then programmed within the plan.

Testing was performed using the 2’ diameter, 28.5 dBi dish antenna. During testing all out-of-band radiated spurious emissions were detected from the enclosure of the equipment as opposed to the antenna structure.

## 2.3 Testing Algorithm

The TRACER 4206L1 was operated continuously by firmware test sequence that provided a modulated RF data stream to the output port.

## 2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia,

MD. The Industry Canada OATS numbers are 3035A-1 and 3035A-2 for Washington Laboratories, Ltd. Site 1 and Site 2, respectively. Washington Laboratories, Ltd. has been accepted by the FCC and approved by NIST NVLAP (NVLAP Lab Code: 200066-0) as an independent FCC test laboratory.

## 2.5 Measurements

### 2.5.1 References

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

ANSI C63.4 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

## 2.6 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The measurement uncertainty of the data contained herein is  $\pm 2.3$  dB.

For the purposes of the measurements performed by Washington Laboratories, the measurement uncertainty is  $\pm$  dB. This has been calculated for a *worst-case situation* (radiated emissions measurements performed on an open area test site).

The following measurement uncertainty calculation is provided:

$$\text{Total Uncertainty} = (A^2 + B^2 + C^2)^{1/2}/(n-1)$$

where:

A = Antenna calibration uncertainty, in dB = 2 dB

B = Spectrum Analyzer uncertainty, in dB = 1 dB

C = Site uncertainty, in dB = 4 dB

n = number of factors in uncertainty calculation = 3

Thus, total uncertainty =  $0.5 (2^2 + 1^2 + 4^2)^{1/2} = \pm 2.3$  dB.

### 3 Test Equipment

Table 2 shows a list of the test equipment used for measurements along with the calibration information.

**Table 2: Test Equipment List**

<b>Manufacturer</b>	<b>Model/Type</b>	<b>Function</b>	<b>Identification</b>	<b>Cal. Due</b>
HP	8568B	Spectrum Analyzer	2634A02888	7/07/04
HP	85650A	Quasi-Peak Adapter	3303A01786	7/08/04
HP	HP 8593A	Spectrum Analyzer	3009A00739	6/25/04
HP	8449B	Microwave Preamp	3008A00385	9/29/05
Solar	8012-50-R-24BNC	LISN	8379493	6/30/04
Narda	V638	Horn Antenna	210	7/22/04
ARA	LPB-2520	BiconiLog Antenna	1044	6/20/04
ARA	DRG118/A	Microwave Horn Antenna	1236	4/17/05
HP	85685A	RF Preselector	3221A01395	7/07/04
Tektronix	TDS 220	Oscilloscope	00333	8/18/04
HP	8672A	Generator	00080	3/25/05
Agilent	8474B	Diode Detector	00416	12/19/04
HP	438A	Power Meter	00394	3/10/05

## 4 Test Results

### 4.1 RF Power Output

For devices within the scope of FCC §15.247, the peak power conducted from the intentional radiator to the antenna shall not be greater than one watt (30 dBm).

The output from the transmitter was connected to a diode detector and oscilloscope. The peak deflection was measured on the oscilloscope and recorded. A signal generator was then substituted in place of EUT and set to the same frequency as the transmitter. The CW output of the signal generator was increased until the same deflection was noted on the oscilloscope. A power meter was then connected to the output of the signal generator to determine the output power of the signal generator. This level is then recorded as the output power of the EUT at the specified frequency.


This measurement method was chosen as the bandwidth of the EUT was much greater than the measurement bandwidth available on the spectrum analyzer.

The EUT carrier was modulated during this test.

**Table 3. RF Power Output**

<b>Frequency</b>	<b>Level</b>	<b>Limit</b>	<b>Pass/Fail</b>
Plan A			
Channel 1 5734.00 MHz	19.1	30 dBm	Pass
Channel 2 5743.80 MHz	19.3	30 dBm	Pass
Channel 3 5753.00 MHz	19.34	30 dBm	Pass
Plan B			
Channel 1 5814.70 MHz	19.5	30 dBm	Pass
Channel 2 5824.00 MHz	19.2	30 dBm	Pass
Channel 3 5833.10 MHz	19.3	30 dBm	Pass

**RF Output Power Measurement  
Diode Detector Method Test Setup Diagram**

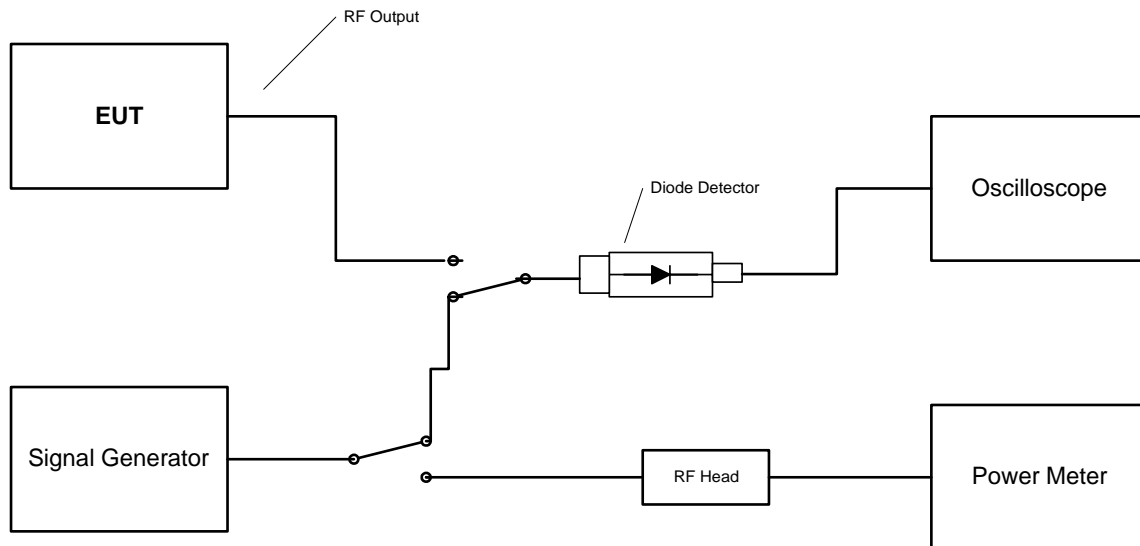

**Figure 1: RF Power Measurement Test Setup Diagram**

#### 4.2 RF Peak Power Spectral Density

For Digitally Modulated Devices and DSSS devices, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band.

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system. The entire bandwidth of the peak signal was scanned as the resolution bandwidth was reduced until a peak signal was identified. Once the peak was identified, the resolution bandwidth was reduced and the spectrum analyzer settings were adjusted to the following settings for making the measurement:

- 3 kHz RBW
- 10kHz VBW
- 300kHz span
- 100 second sweep time


The carrier was modulated internally via firmware that provided loop-back data to the rear-panel T1 connectors.

Plots of the PSD were taken as shown in Figure 2 through Figure 7 below. Table 4 provides a summary of the data.


**Table 4. Peak Power Spectral Density**

<b>Frequency</b>	<b>Level</b>	<b>Limit</b>	<b>Pass/Fail</b>
Plan A			
Channel 1 5734.00 MHz	-2.01 dBm	8 dBm	Pass
Channel 2 5743.80 MHz	-1.81 dBm	8 dBm	Pass
Channel 3 5753.00 MHz	-2.4 dBm	8 dBm	Pass
Plan B			
Channel 1 5814.70 MHz	-4.12 dBm	8 dBm	Pass
Channel 2 5824.00 MHz	-2.02 dBm	8 dBm	Pass
Channel 3 5833.10 MHz	-2.62 dBm	8 dBm	Pass




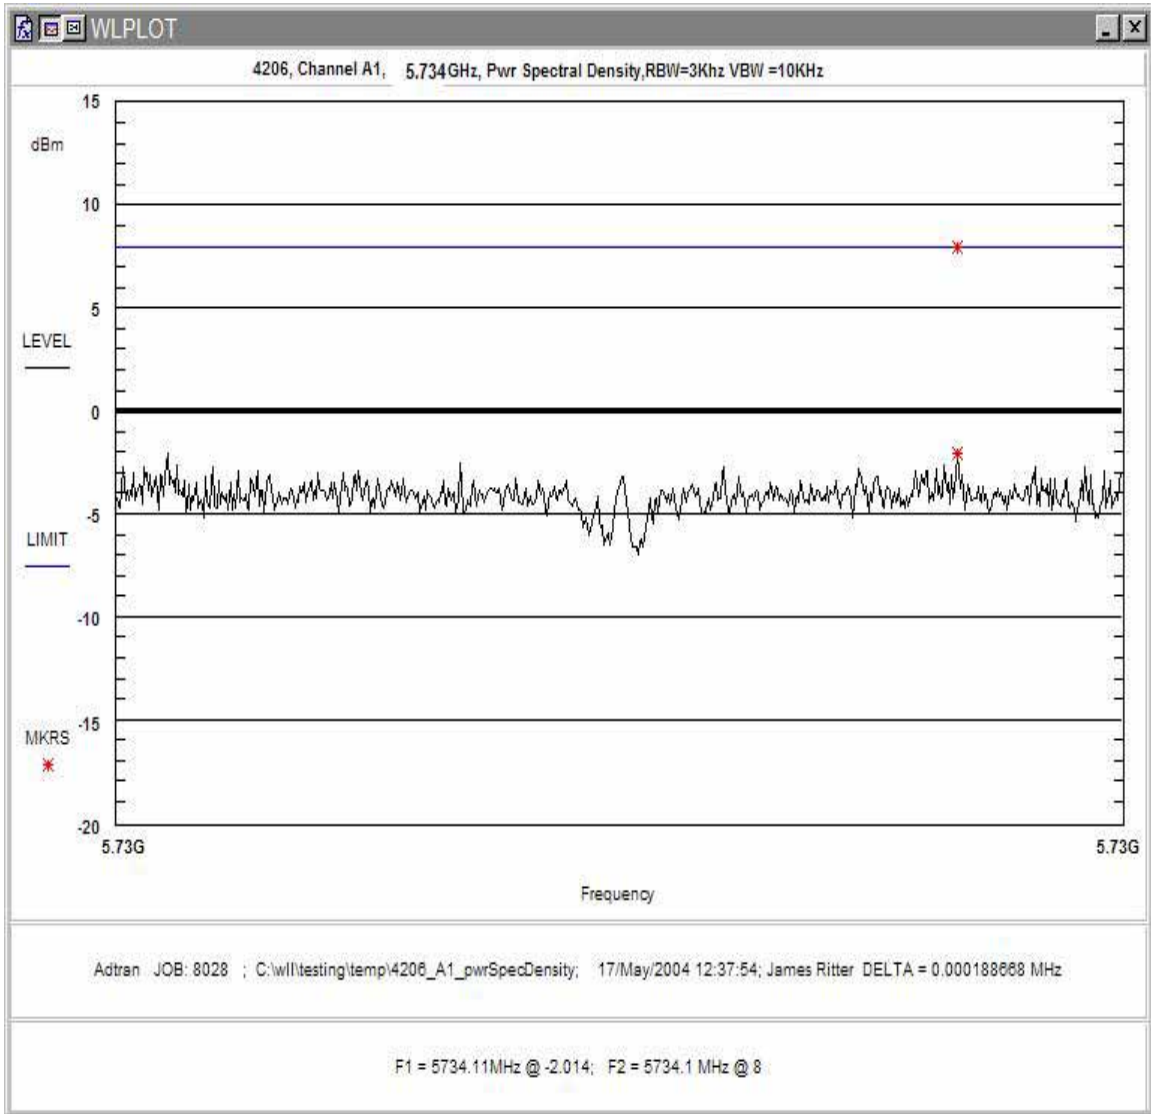


**Figure 2. Power Spectral Density Plan A, Band 1**

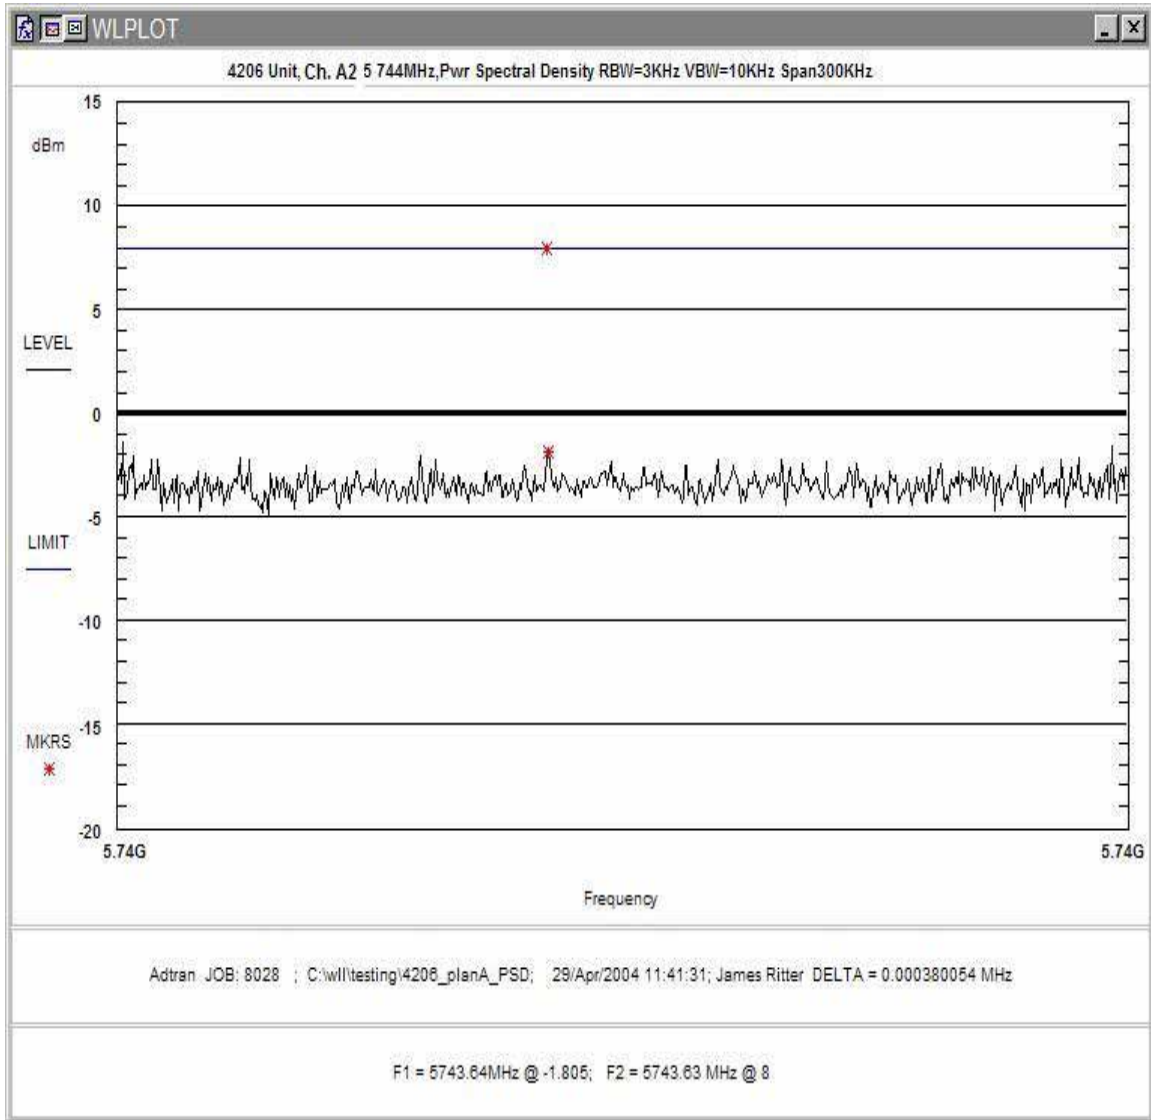


**Figure 3. Power Spectral Density Plan A, Band 2**

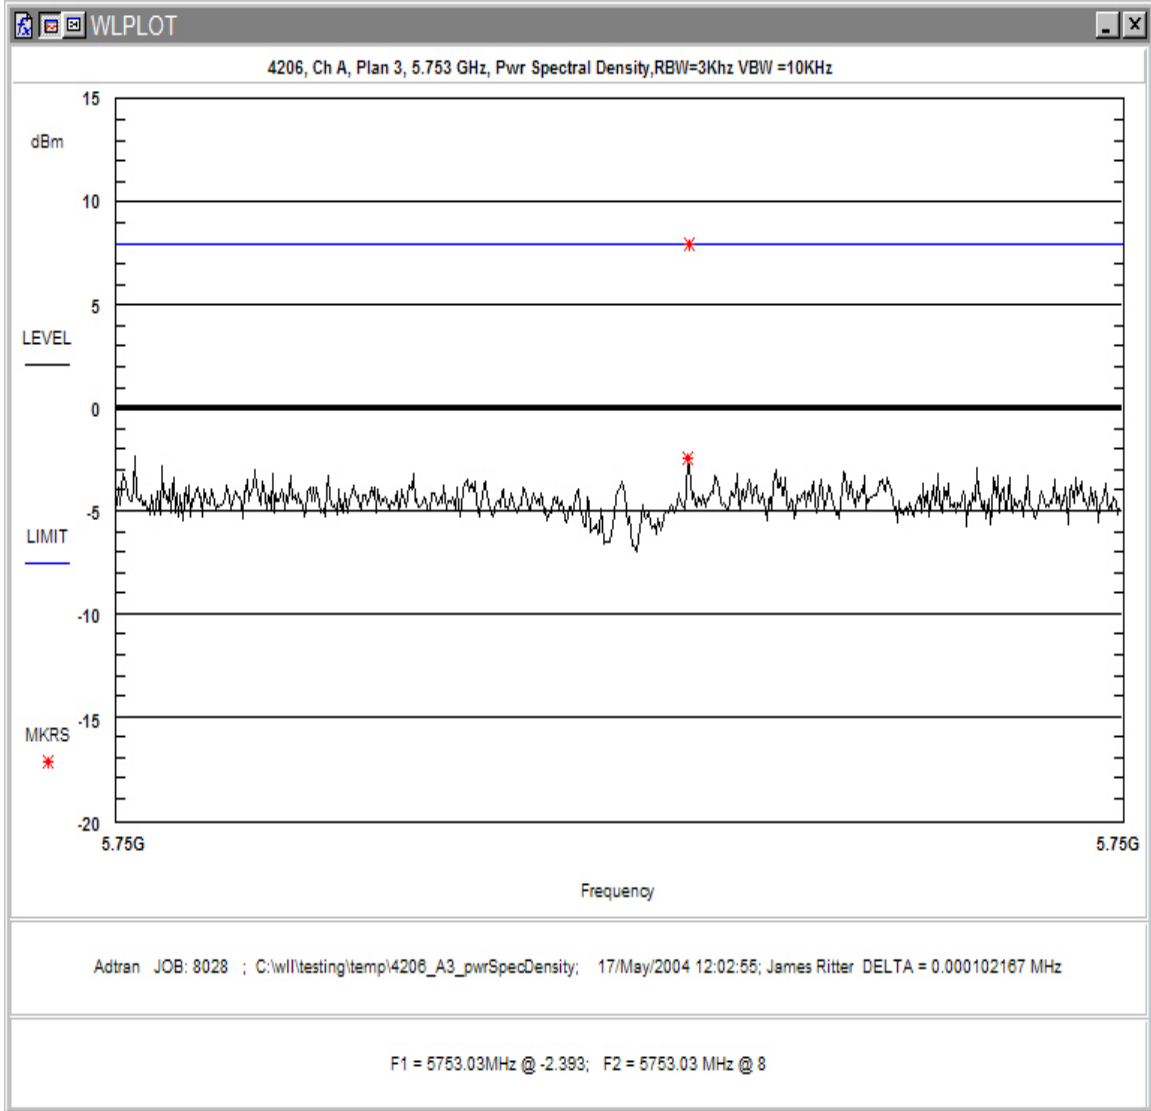


**Figure 4. Power Spectral Density Plan A, Band 3**

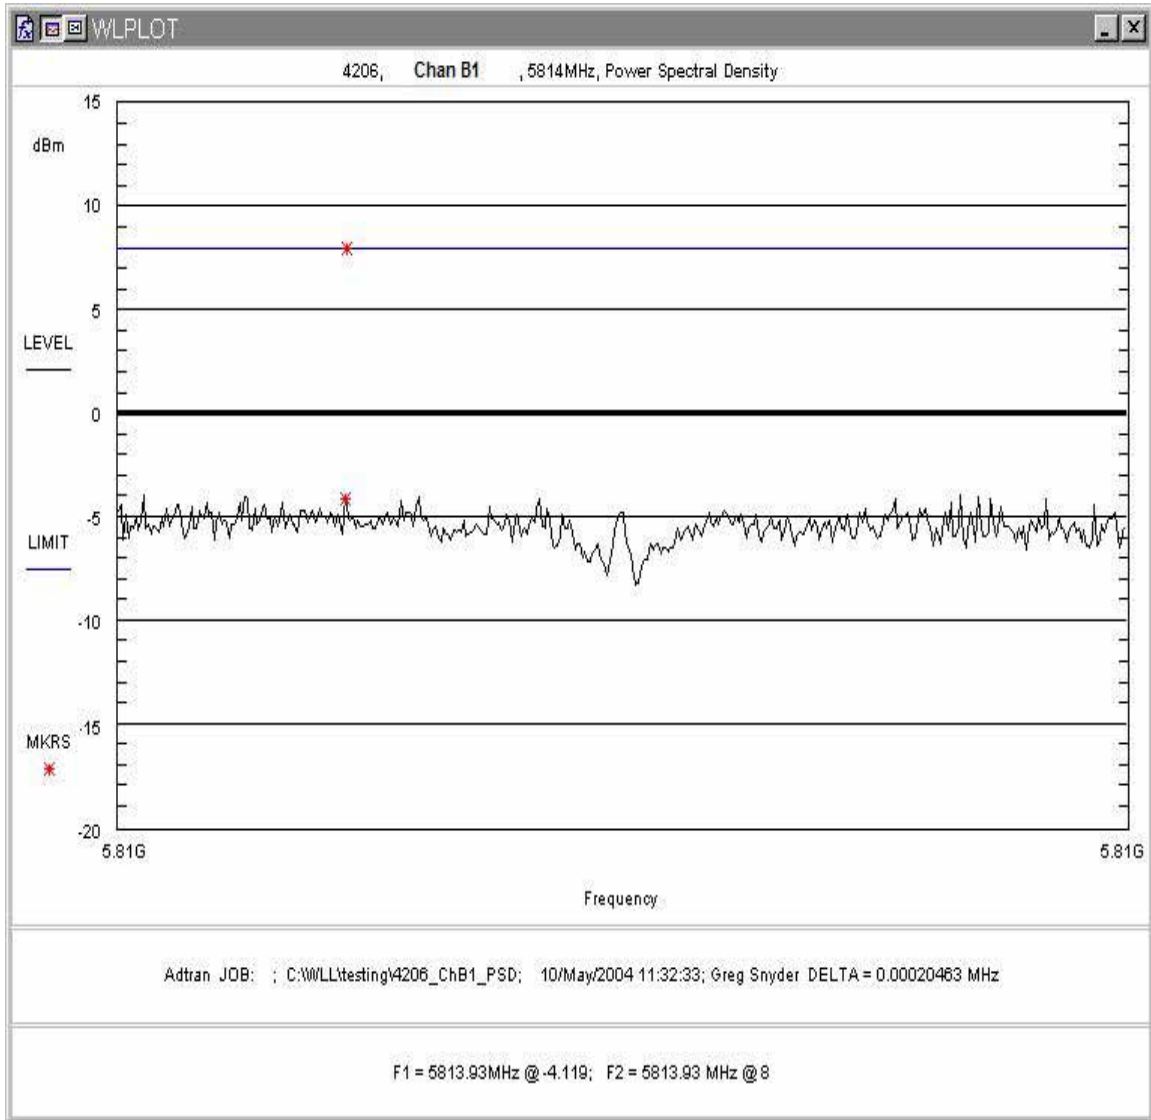

**Figure 5. Power Spectral Density Plan B, Band 1**

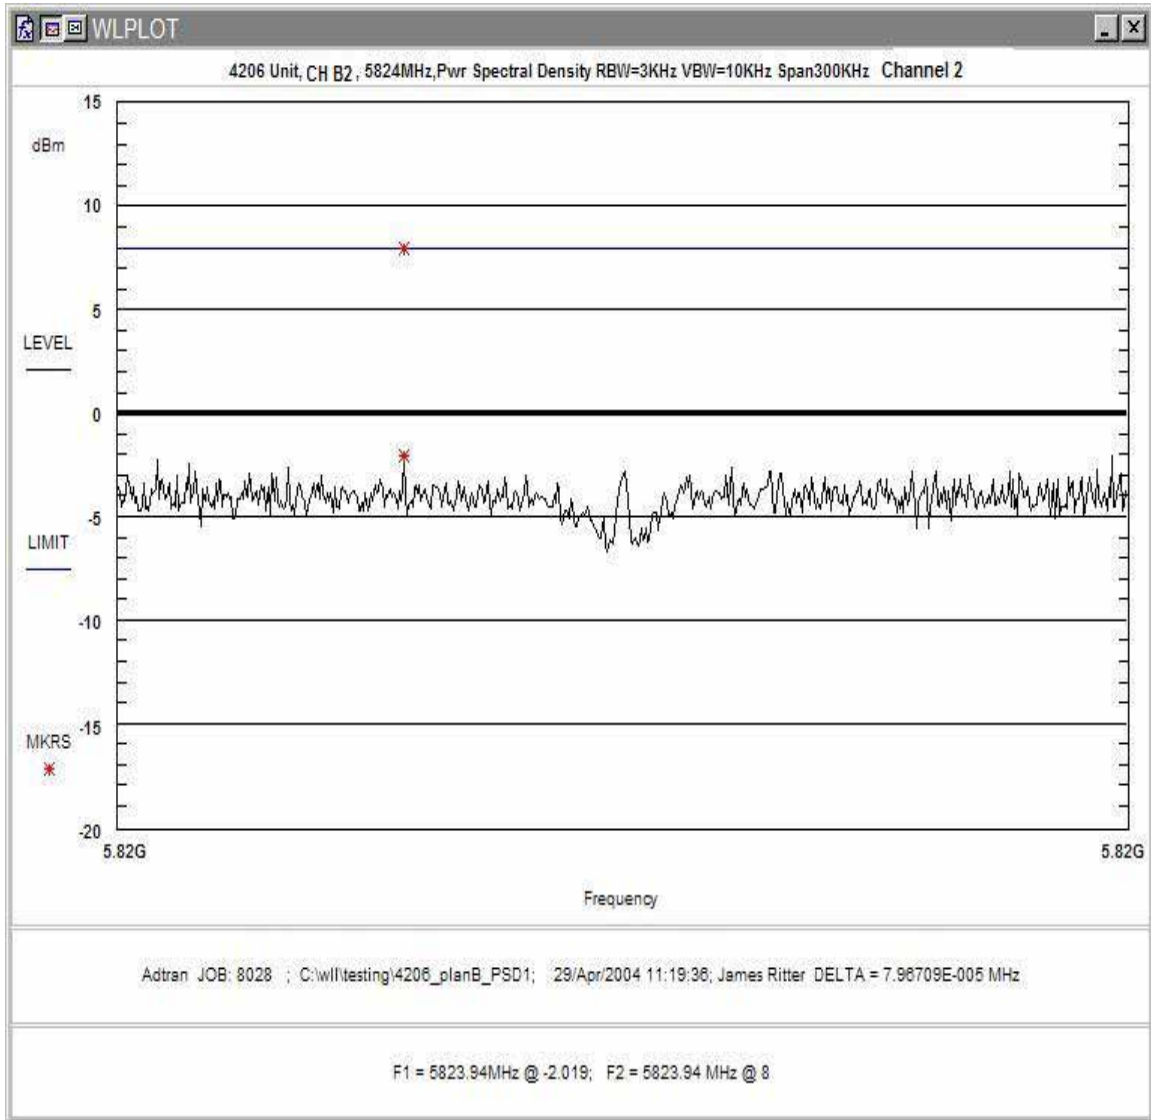

**Figure 6. Power Spectral Density Plan B, Band 2**

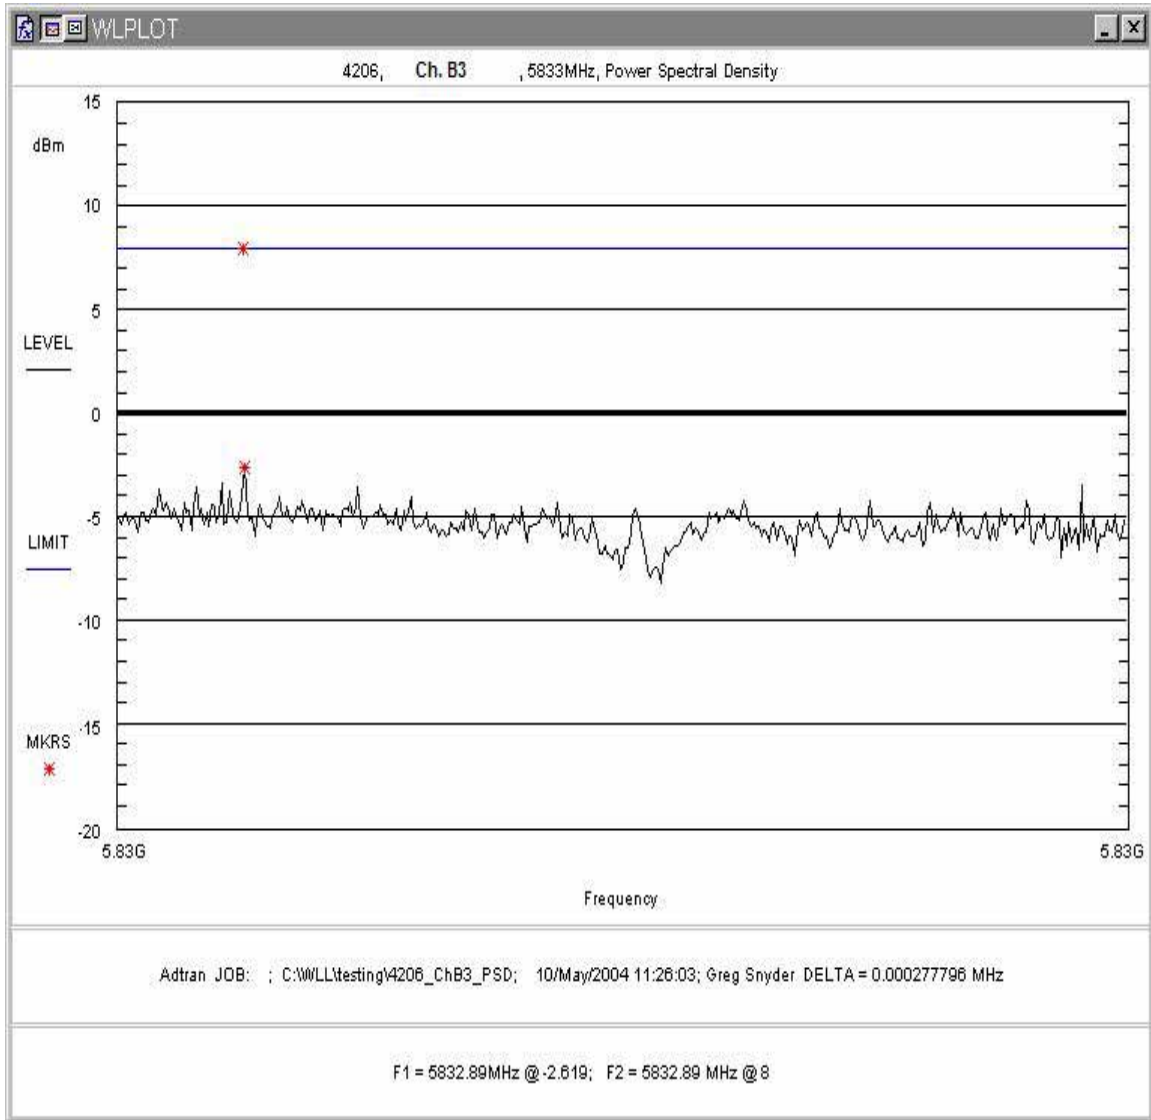


**Figure 7. Power Spectral Density Plan B, Band 3**

### 4.3 Occupied Bandwidth

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.

For Direct Sequence Spread Spectrum Systems, FCC Part 15.247 requires that the minimum 6 dB bandwidth be at least 500 kHz.

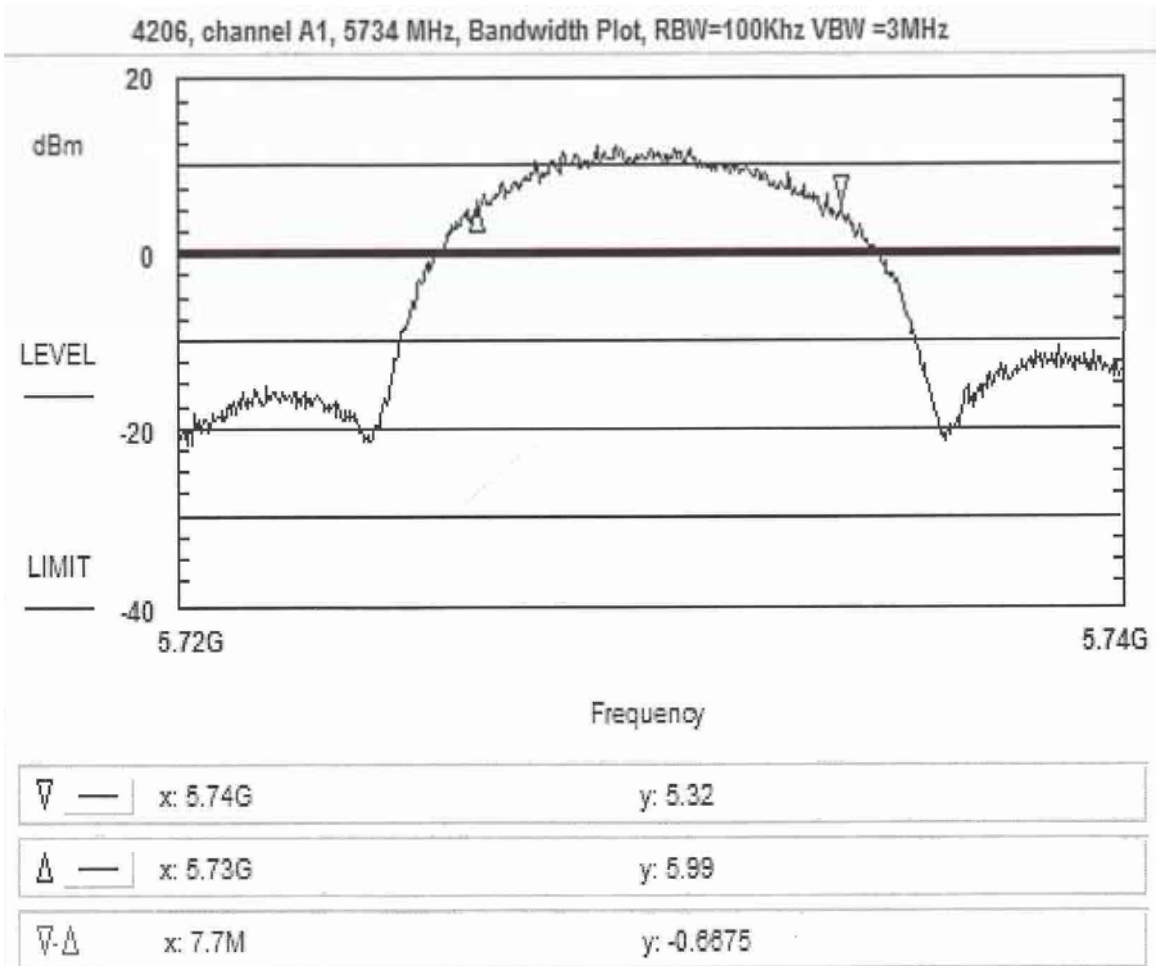

**Figure 8. Occupied Bandwidth, Plan A, Channel 1**

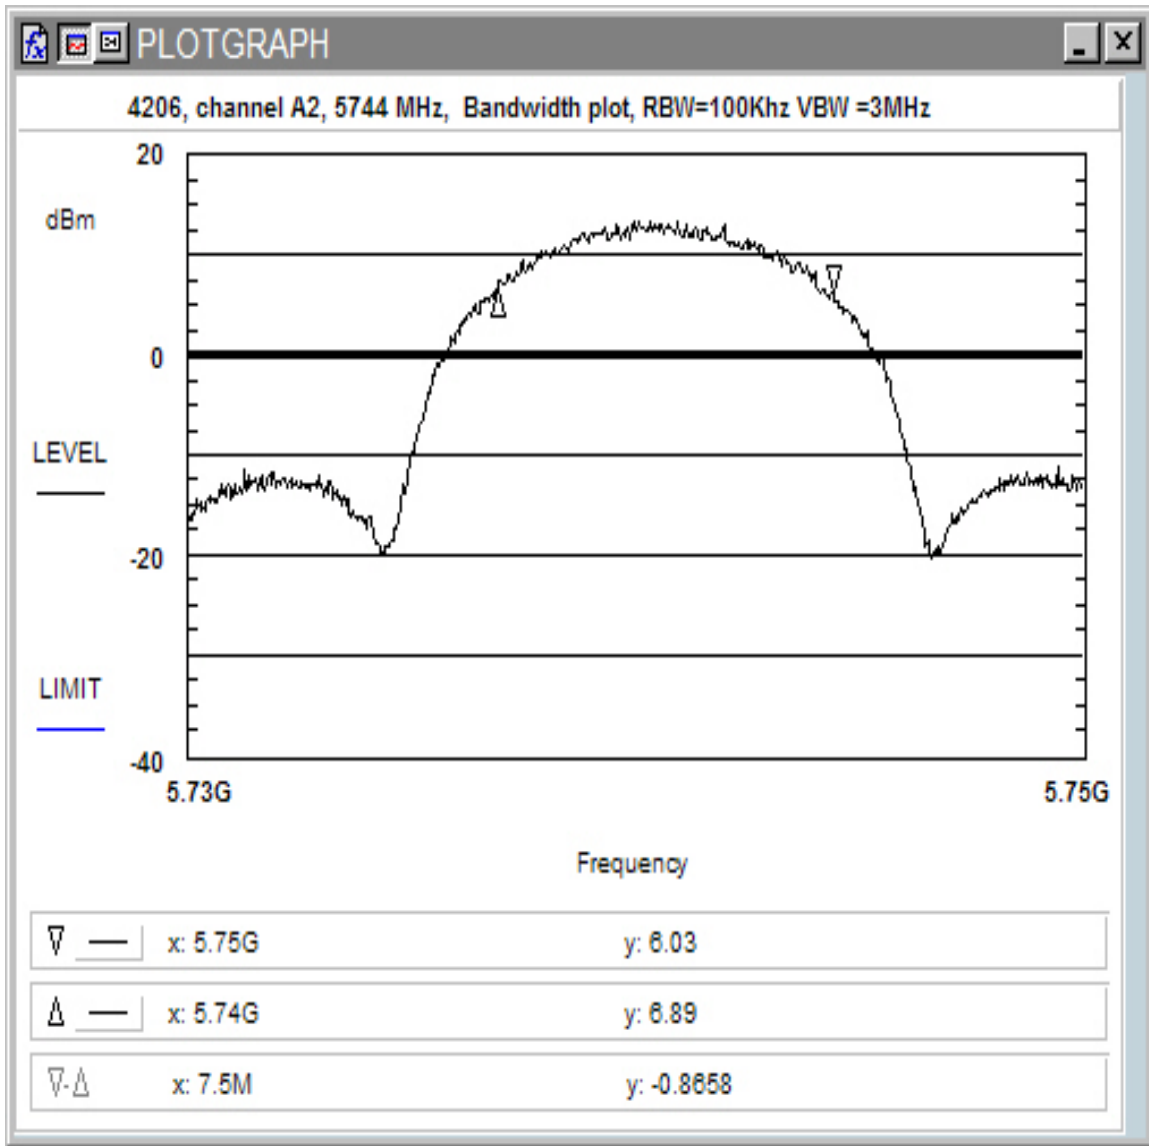


Figure 9. Occupied Bandwidth, Plan A, Channel 2



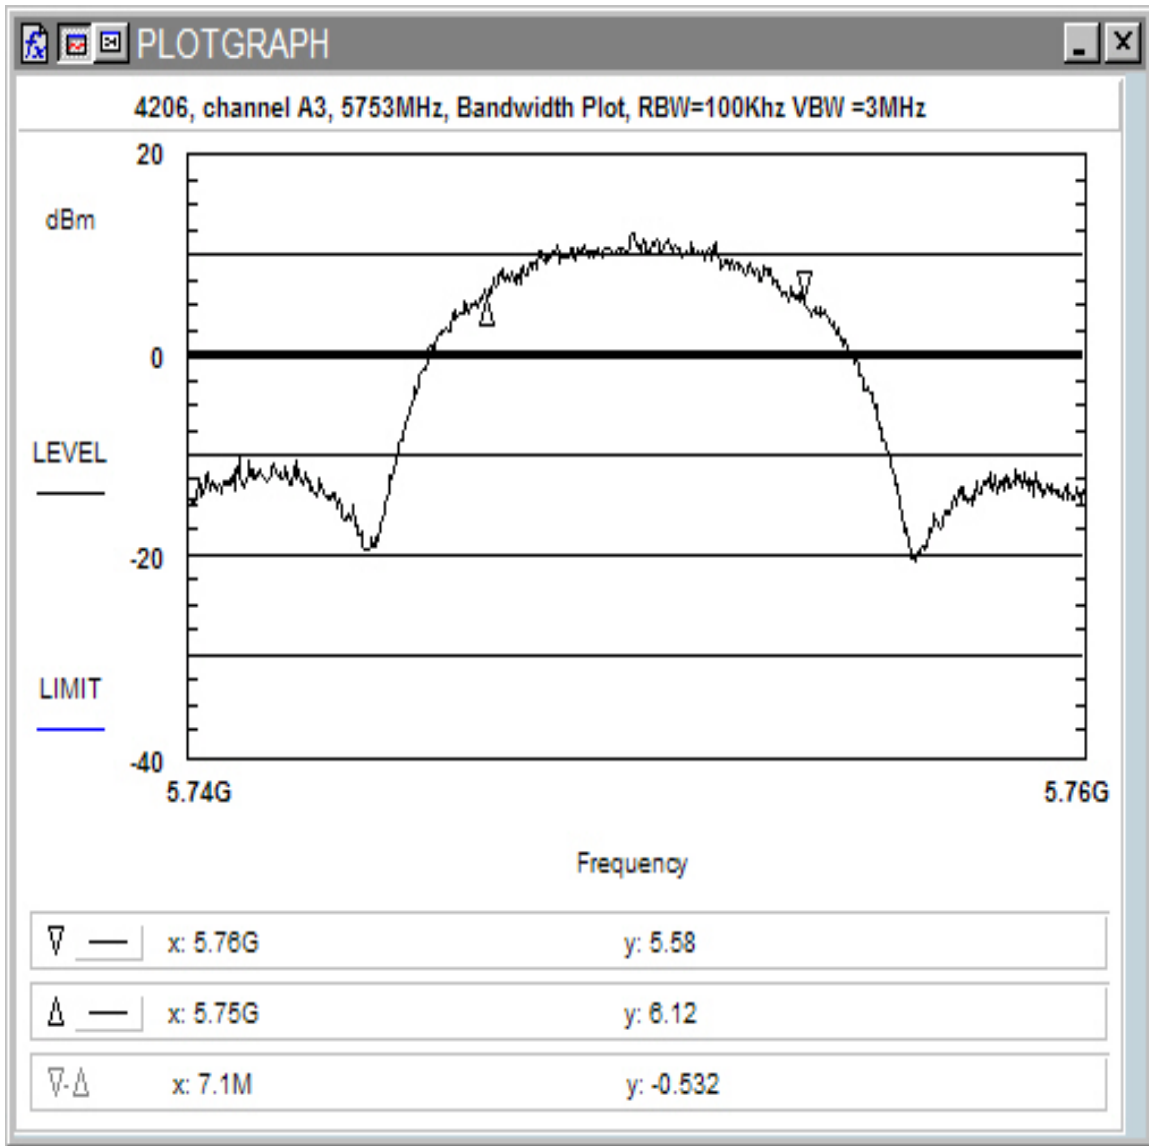


Figure 10. Occupied Bandwidth, Plan A, Channel 3

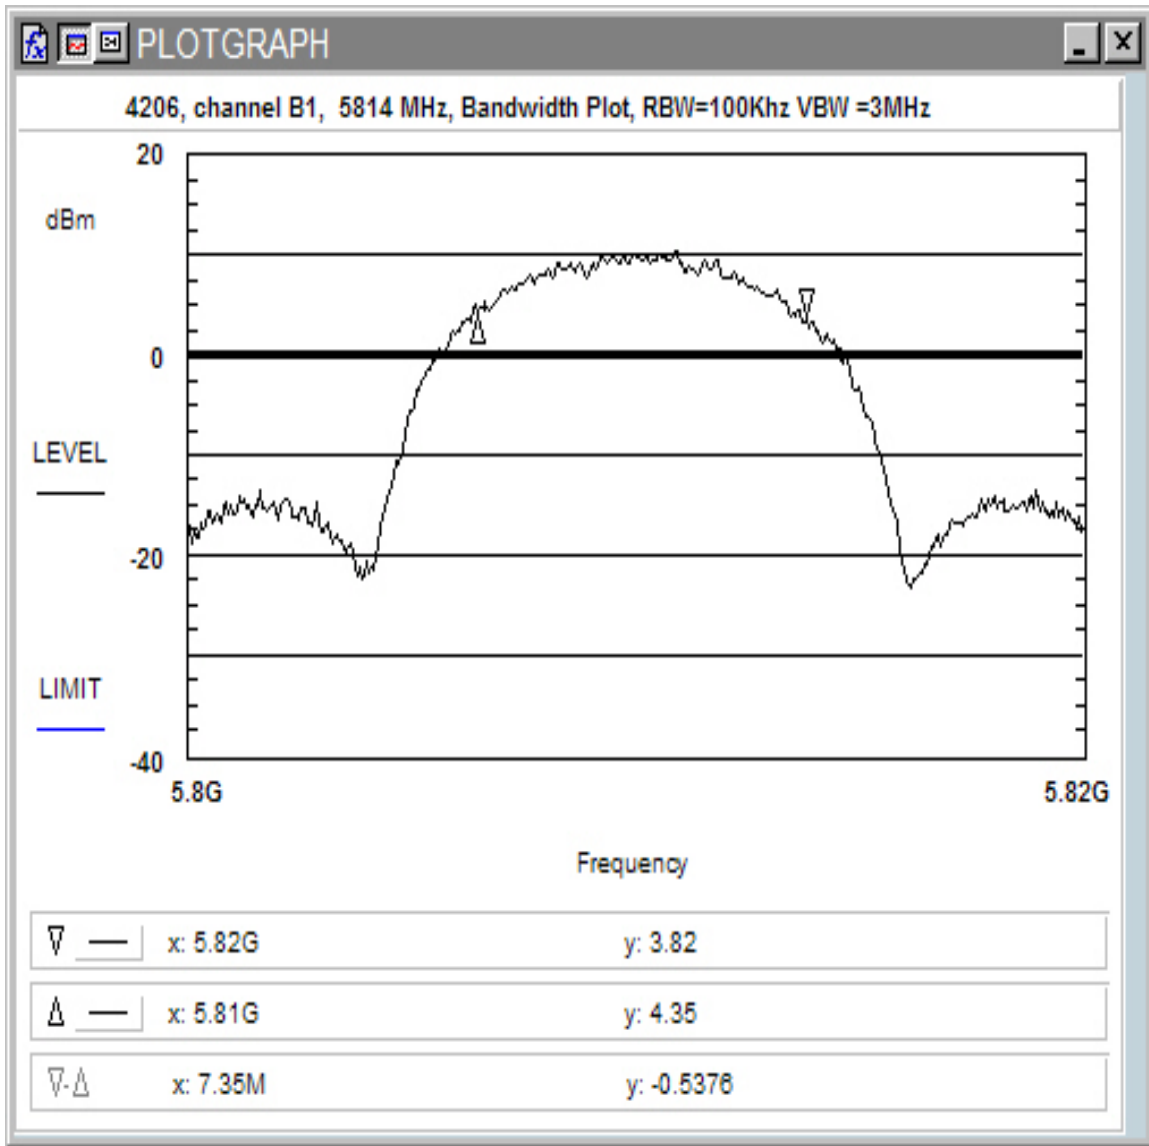


Figure 11. Occupied Bandwidth, Plan B, Channel 1

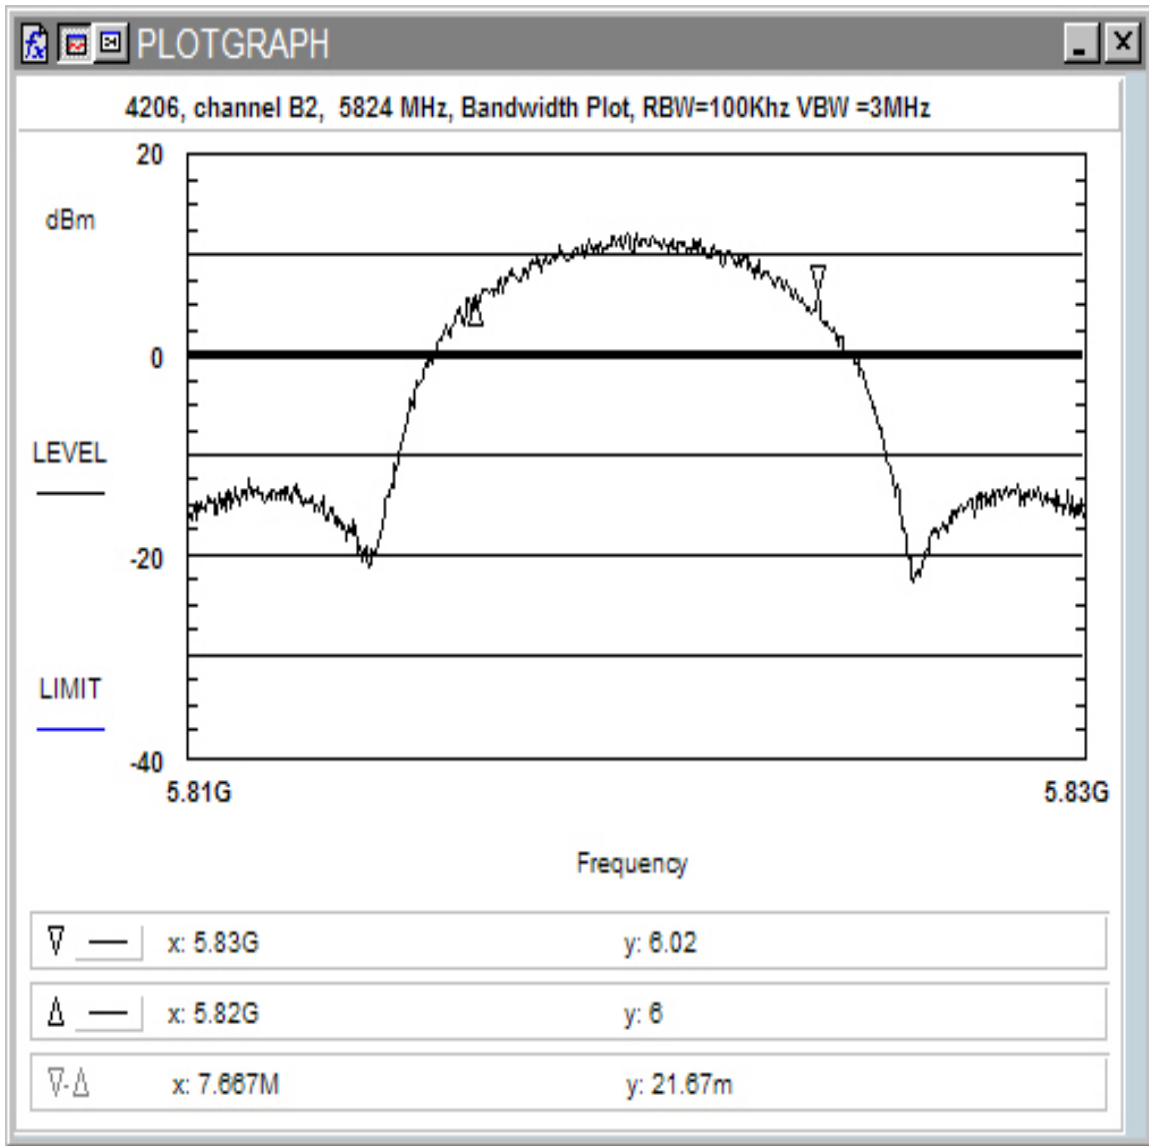


Figure 12. Occupied Bandwidth, Plan B, Channel 2

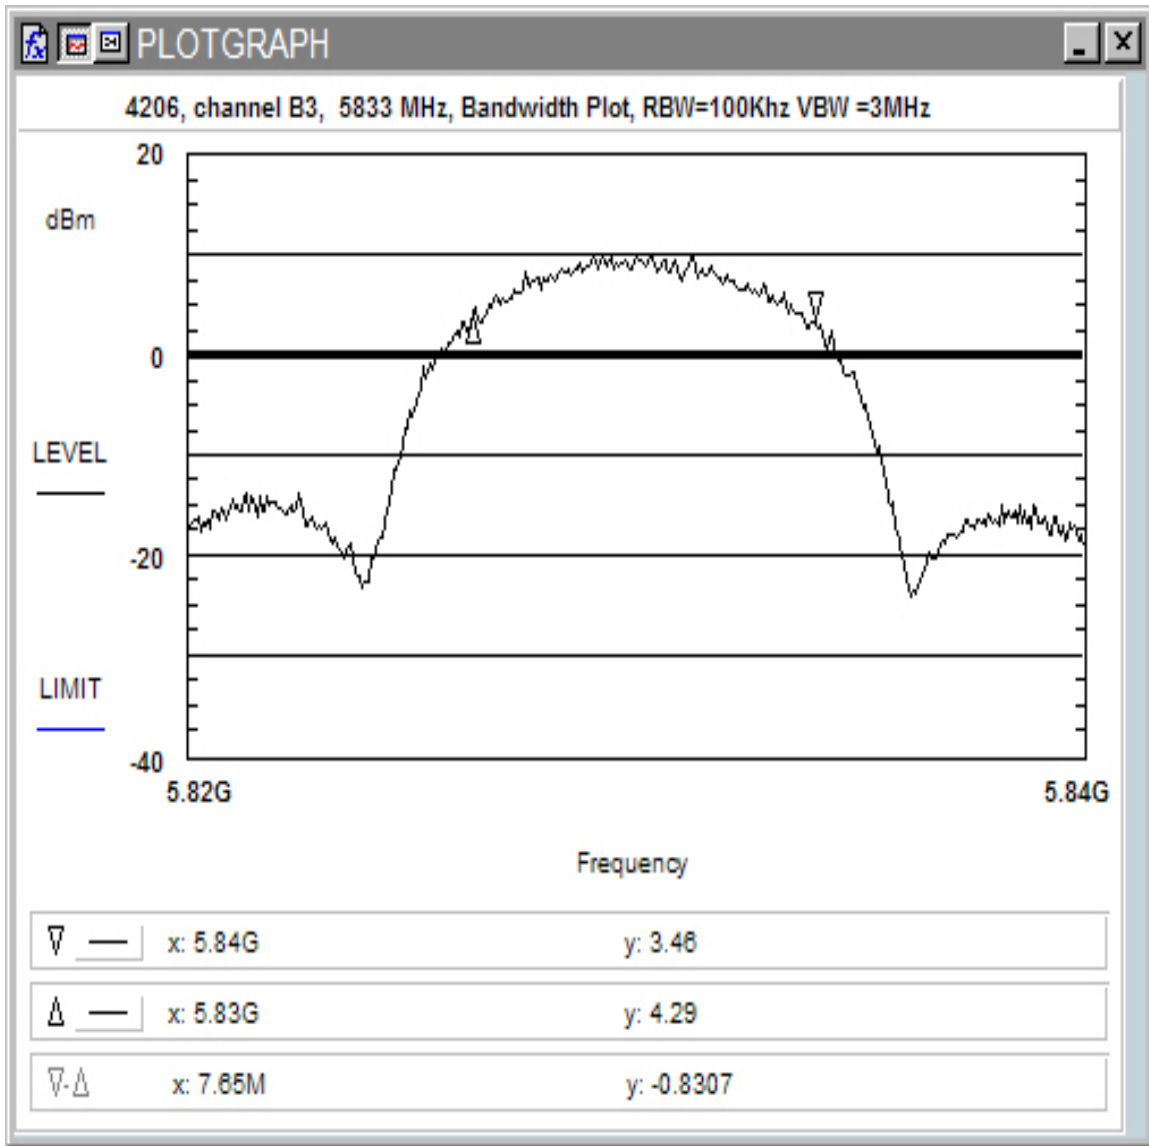


Figure 13. Occupied Bandwidth, Plan B, Channel 3

Table 5 provides a summary of the Occupied Bandwidth Results.

**Table 5. Occupied Bandwidth Results**

<b>Frequency</b>	<b>Bandwidth</b>	<b>Limit</b>	<b>Pass/Fail</b>
<b>Plan A</b>			
Channel 1 5734.00 MHz	7.7 MHz	> 500 kHz	Pass
Channel 2 5743.80 MHz	7.5 MHz	> 500 kHz	Pass
Channel 3 5753.00 MHz	7.1 MHz	> 500 kHz	Pass
<b>Plan B</b>			
Channel 1 5814.70 MHz	7.35 MHz	> 500 kHz	Pass
Channel 2 5824.00 MHz	7.67 MHz	> 500 kHz	Pass
Channel 3 5833.10 MHz	7.65 MHz	> 500 kHz	Pass

**4.4 Spurious Emissions at Antenna Terminals (FCC Part §15.247(b))**

In any 100 kHz band outside the frequency band in which the system is operating, the RF power shall be at least 20dB below that in the 100 kHz bandwidth that contain the highest level of the desired power.


**4.4.1 Test Procedure**

The RF output of the EUT was connected to the input of a spectrum analyzer. All calibration factors including attenuators and cable losses were included in the corrections for the measurements. The resolution bandwidth was set to 100kHz for the duration of the testing and the video bandwidth was set to 3MHz.


Initially the highest in-band signal was measured using the 100kHz measurement bandwidth. The limit for out-of-band spurious emissions was then set at 20dBc. Emissions were scanned to 40GHz.

**4.4.2 Test Results**


Conducted spurious emissions were scanned for all 6 channels. No above limit spurious emissions were detected. The following are plots of the conducted spurious emissions.

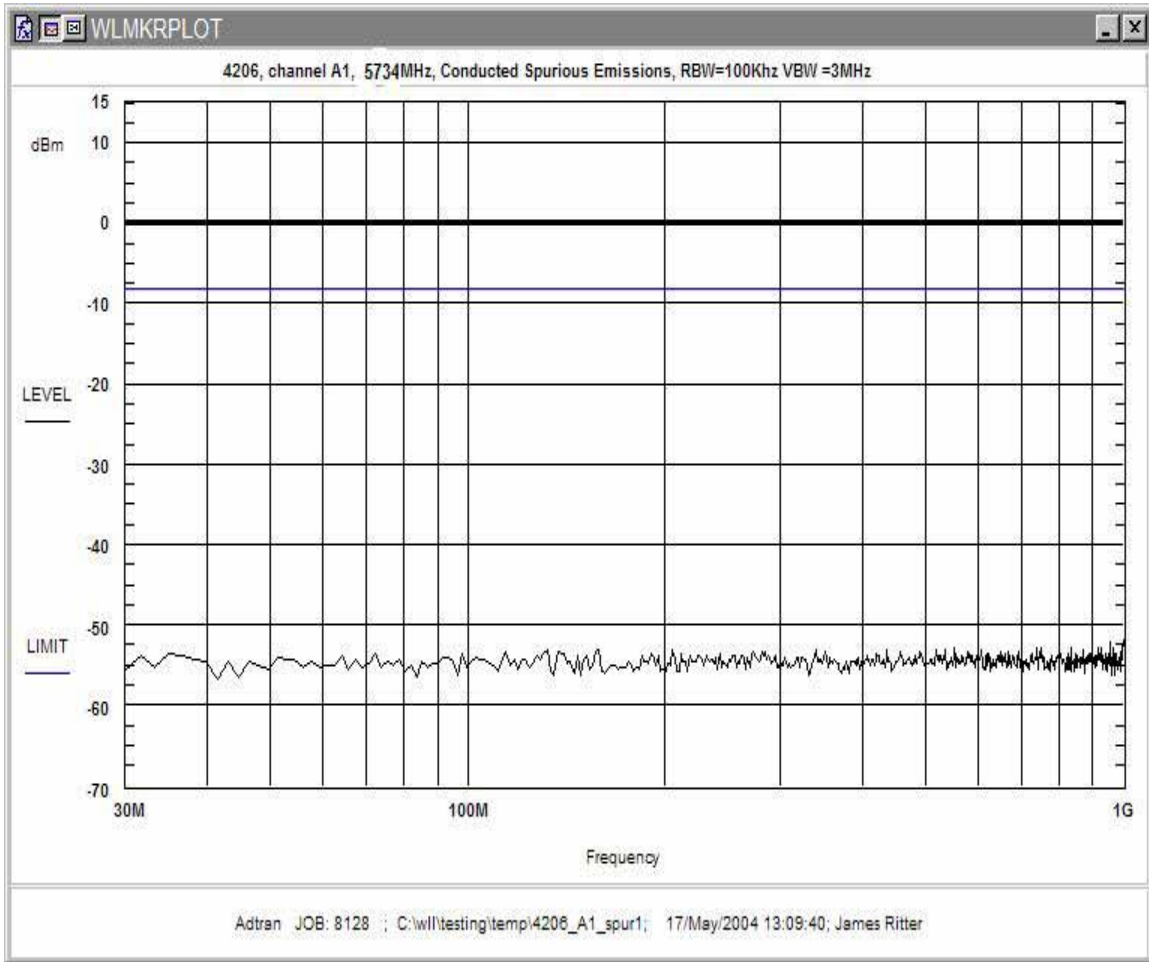

**Figure 14. Conducted Spurious Emissions, Plan A - Channel 1, 30MHz-1GHz**

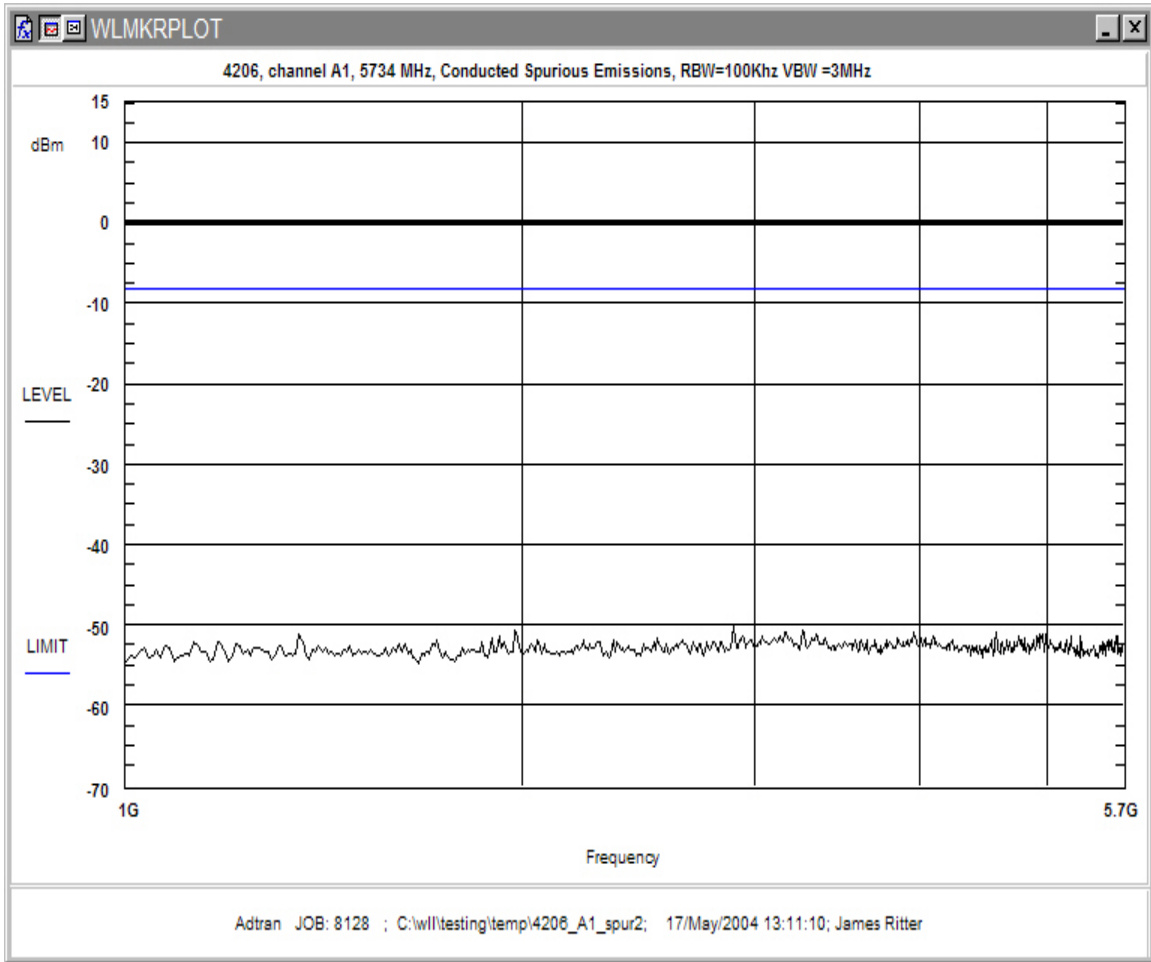


**Figure 15. Conducted Spurious Emissions, Plan A - Channel 1, 1GHz-5.7GHz**

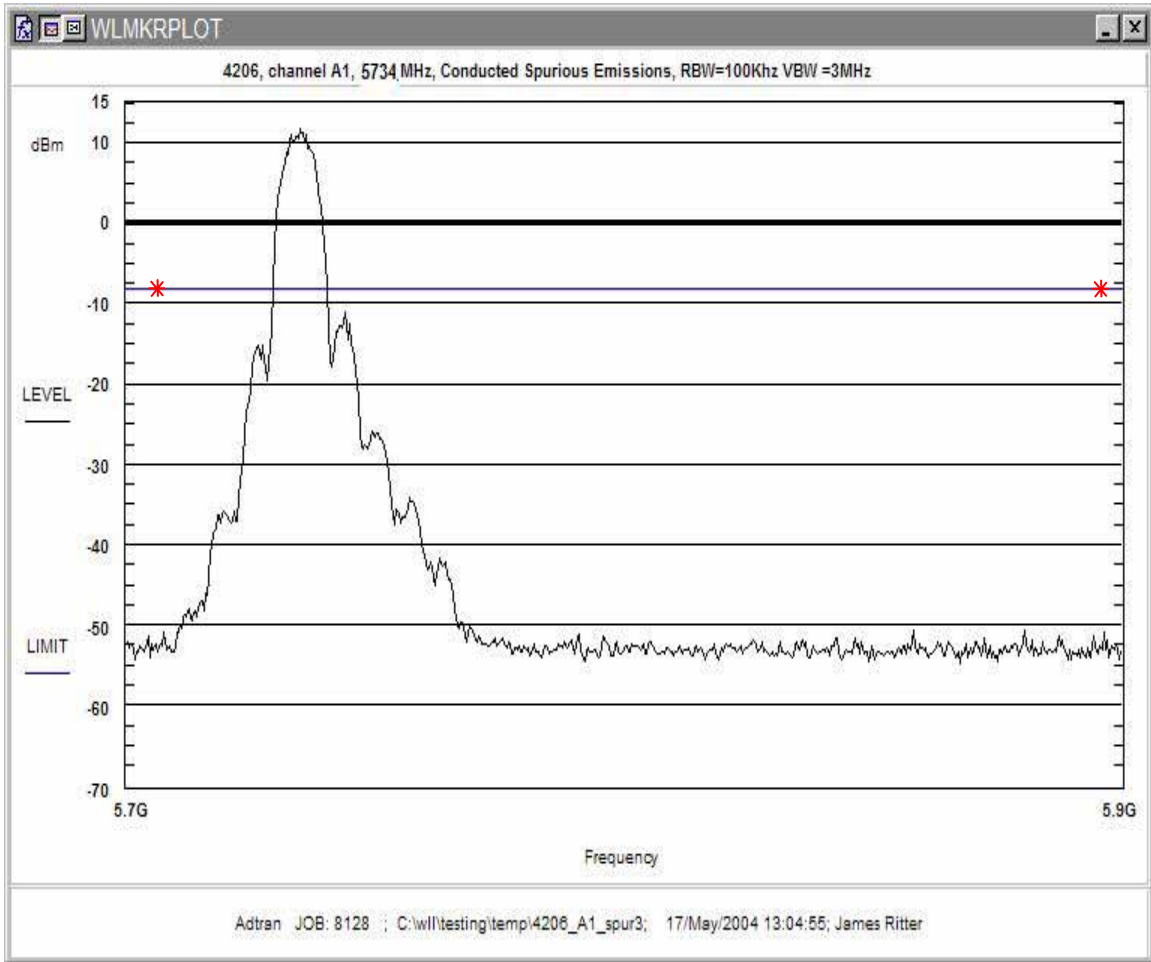


**Figure 16. Conducted Spurious Emissions, Plan A - Channel 1, 5.7GHz-5.9GHz**




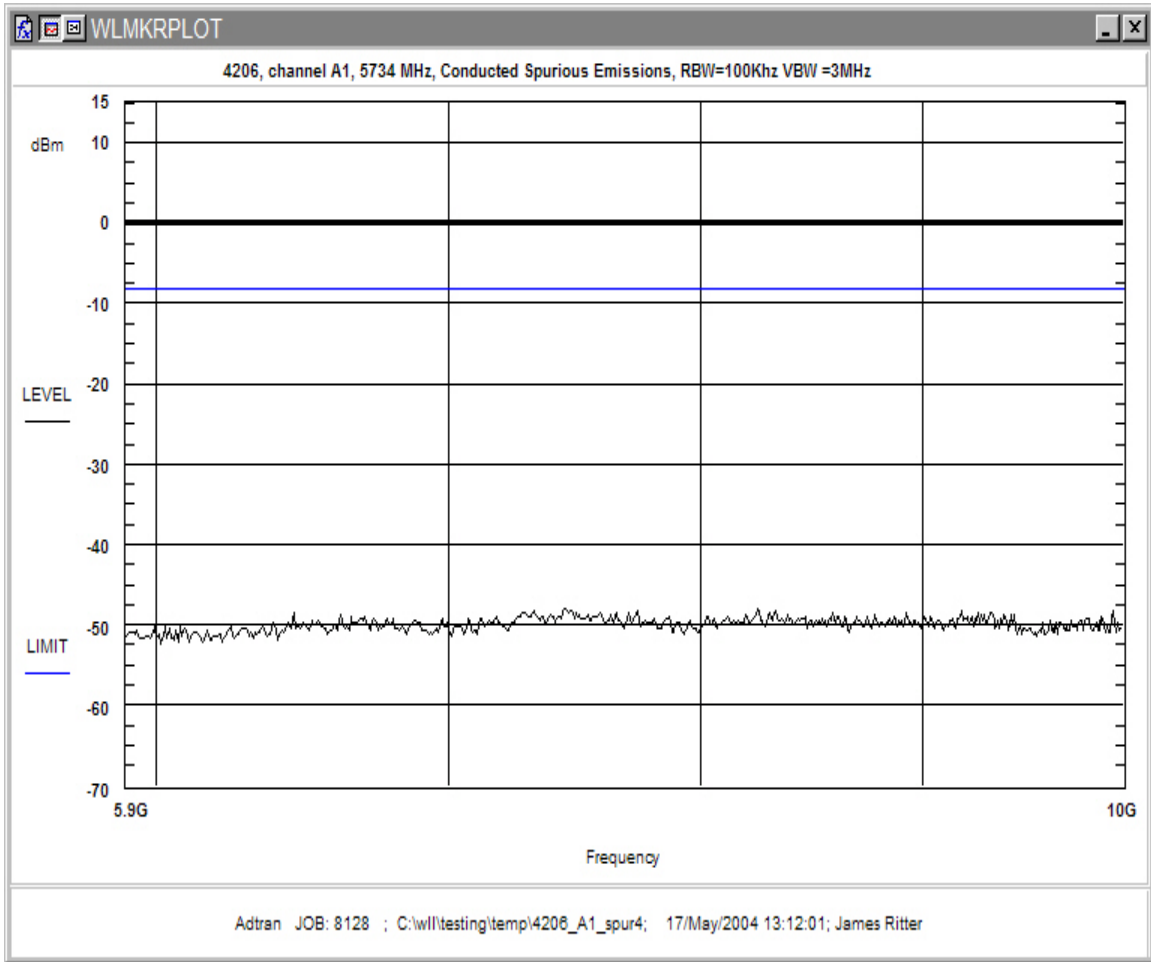


**Figure 17. Conducted Spurious Emissions, Plan A - Channel 1, 5.9GHz-10GHz**

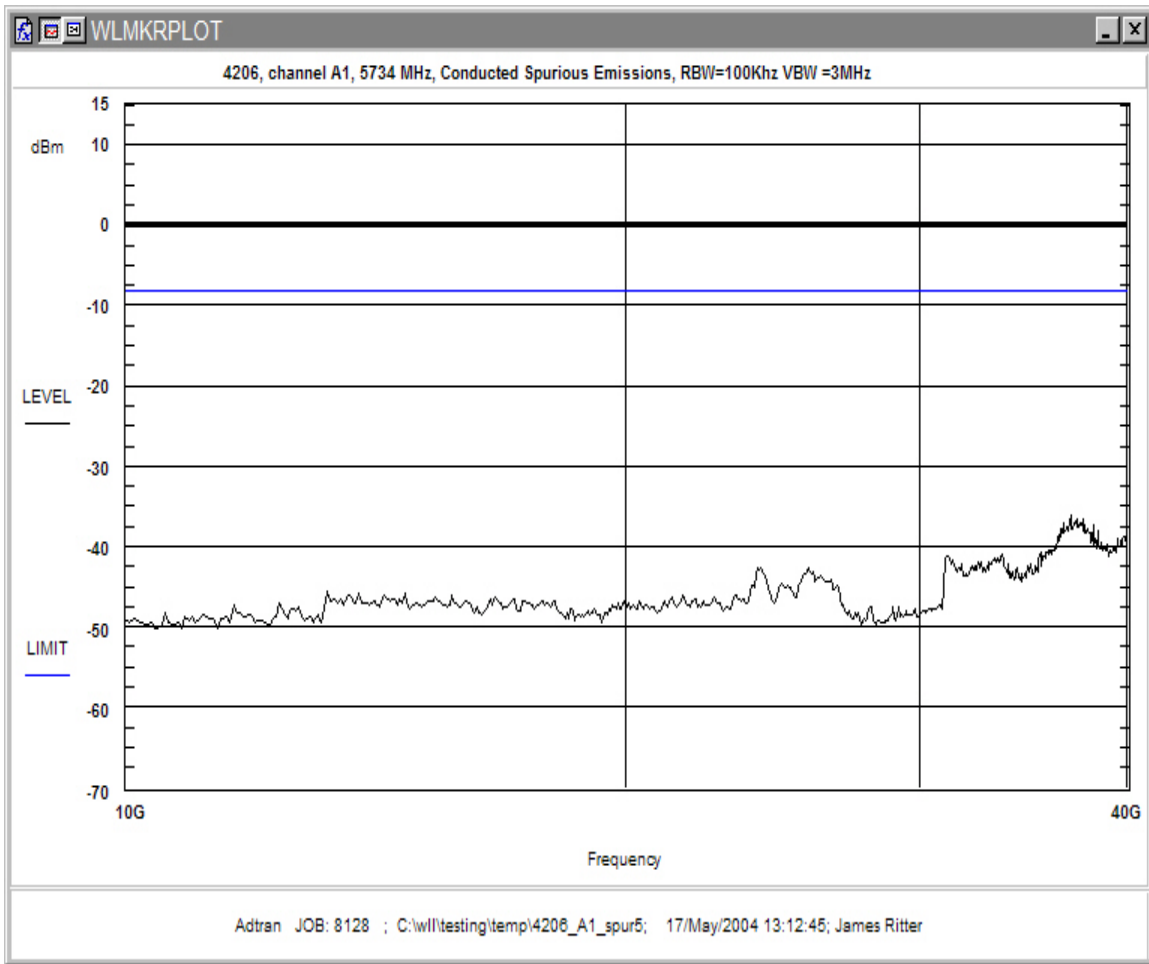


**Figure 18. Conducted Spurious Emissions, Plan A - Channel 1, 10GHz-40GHz**

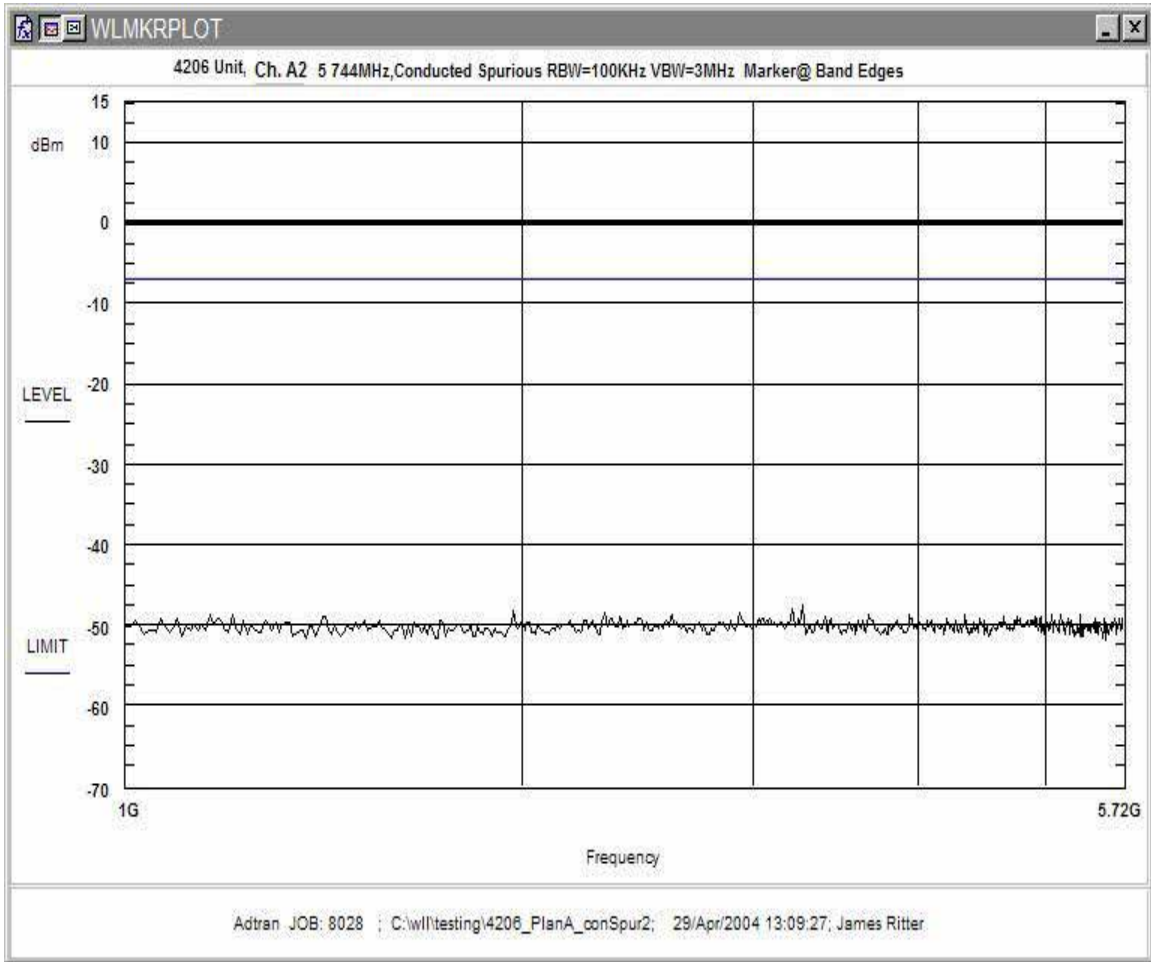


**Figure 19. Conducted Spurious Emissions, Plan A - Channel 2, 30MHz-5.72GHz**

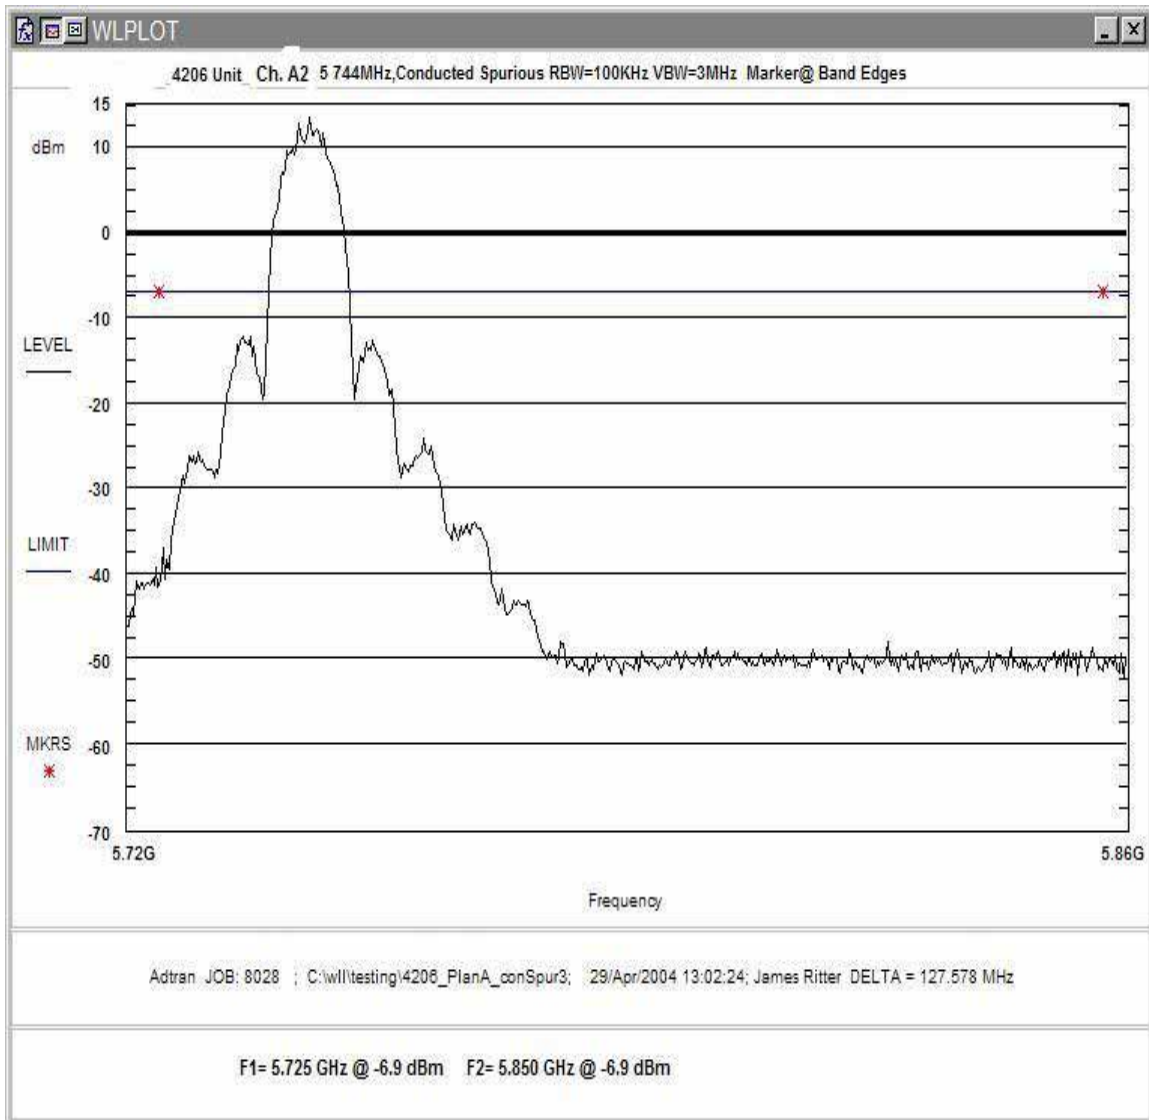


**Figure 20. Conducted Spurious Emissions, Plan A - Channel 2, 5.72GHz-5.86GHz**

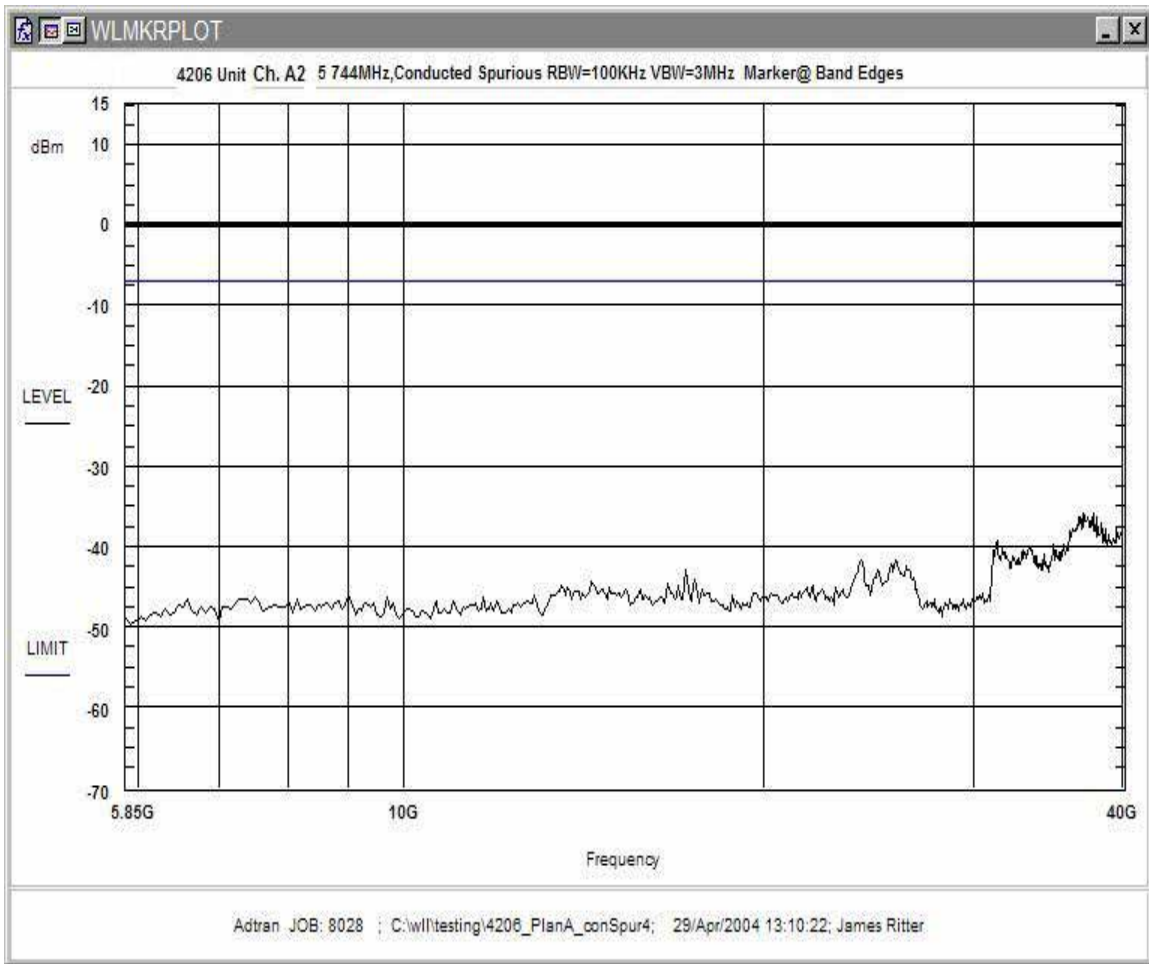


**Figure 21. Conducted Spurious Emissions, Plan A - Channel 2, 5.85GHz-40GHz**

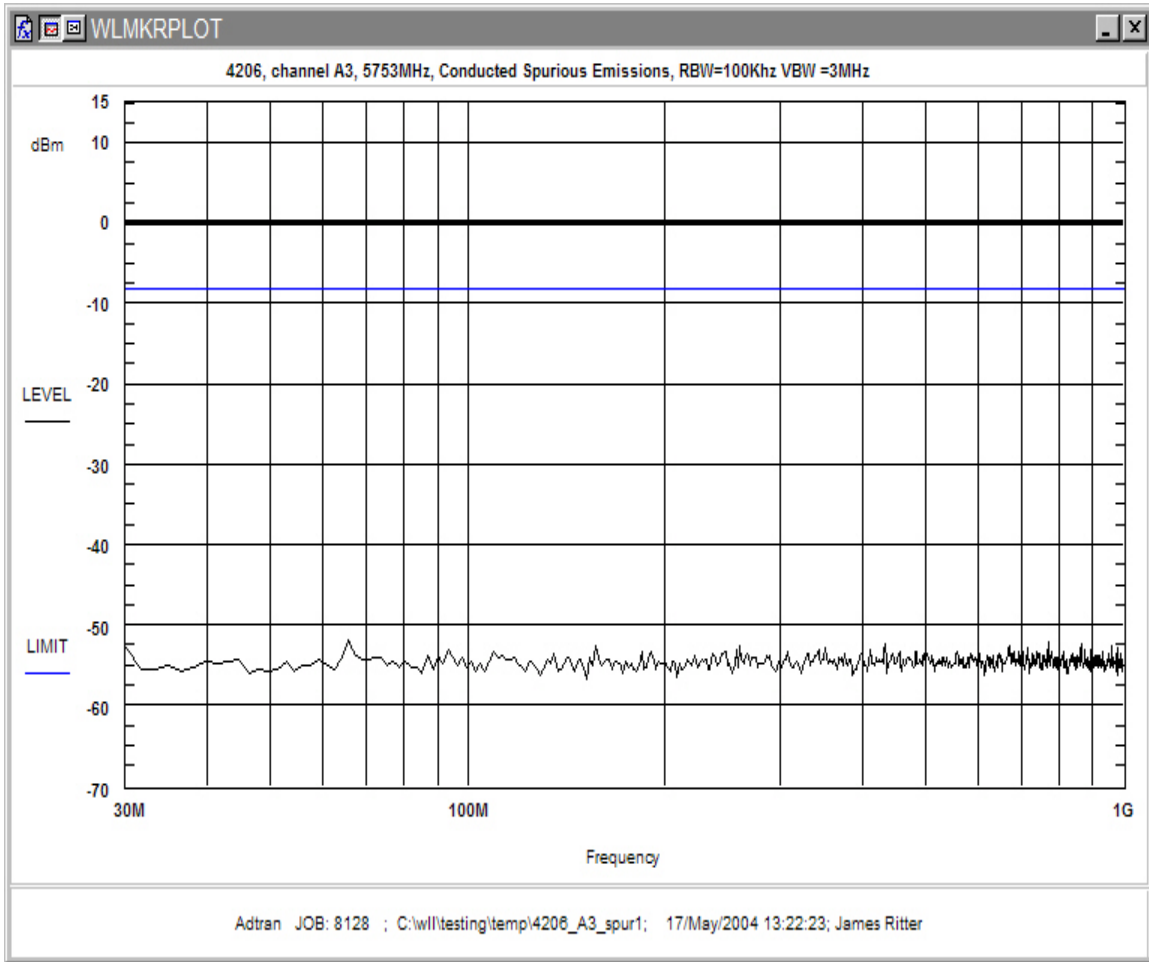

**Figure 22. Conducted Spurious Emissions, Plan A - Channel 3, 30MHz-1GHz**

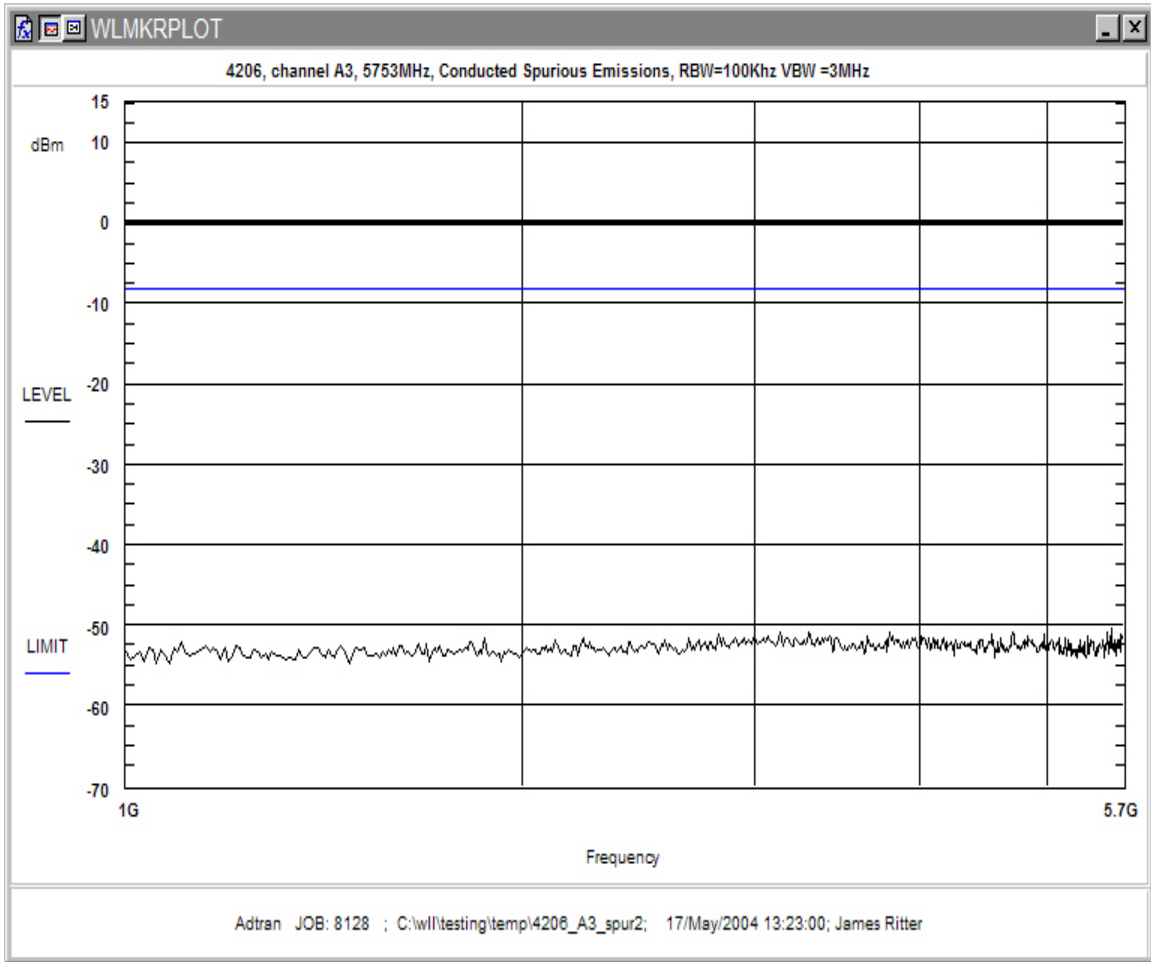


**Figure 23. Conducted Spurious Emissions, Plan A - Channel 3, 1GHz-5.7GHz**

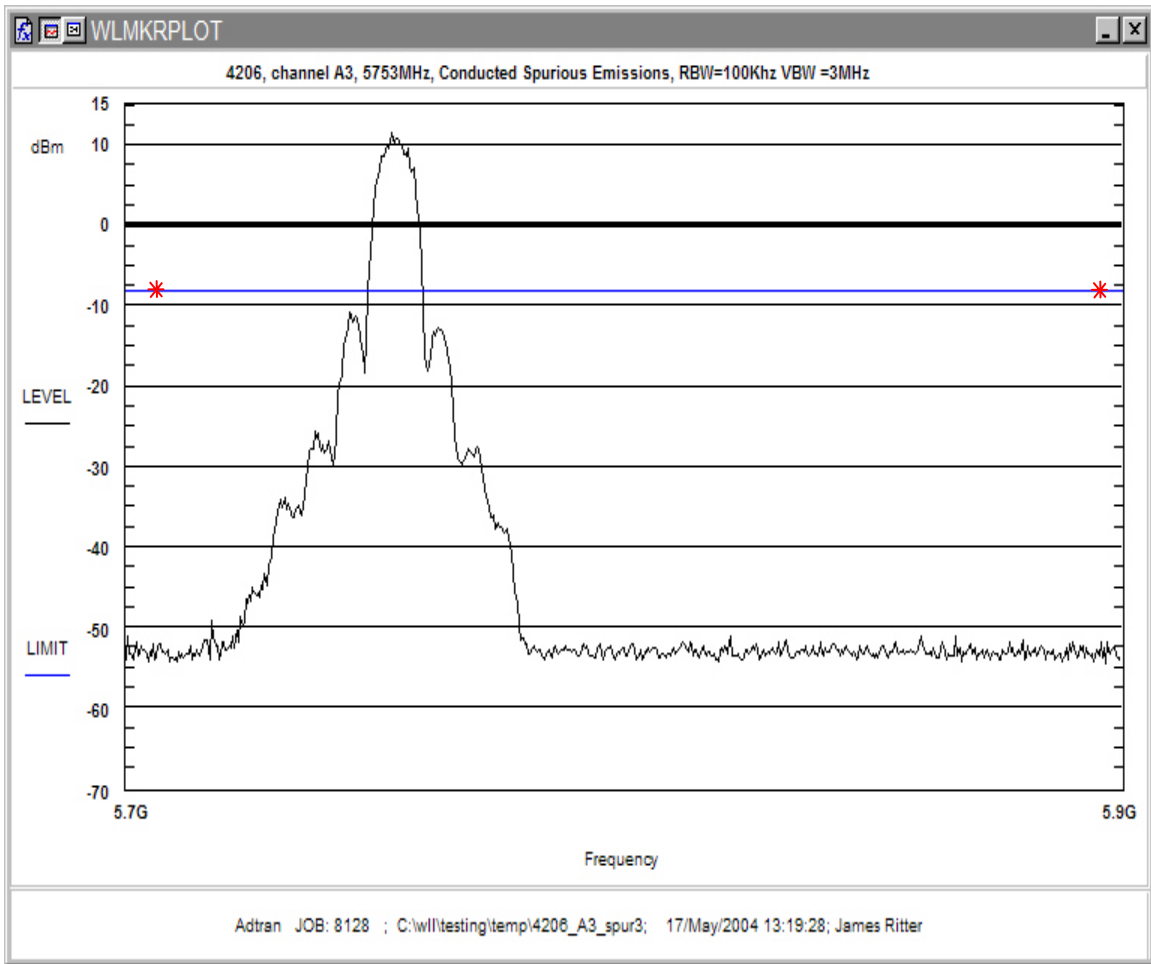


**Figure 24. Conducted Spurious Emissions, Plan A - Channel 3, 5.7GHz-5.9GHz**




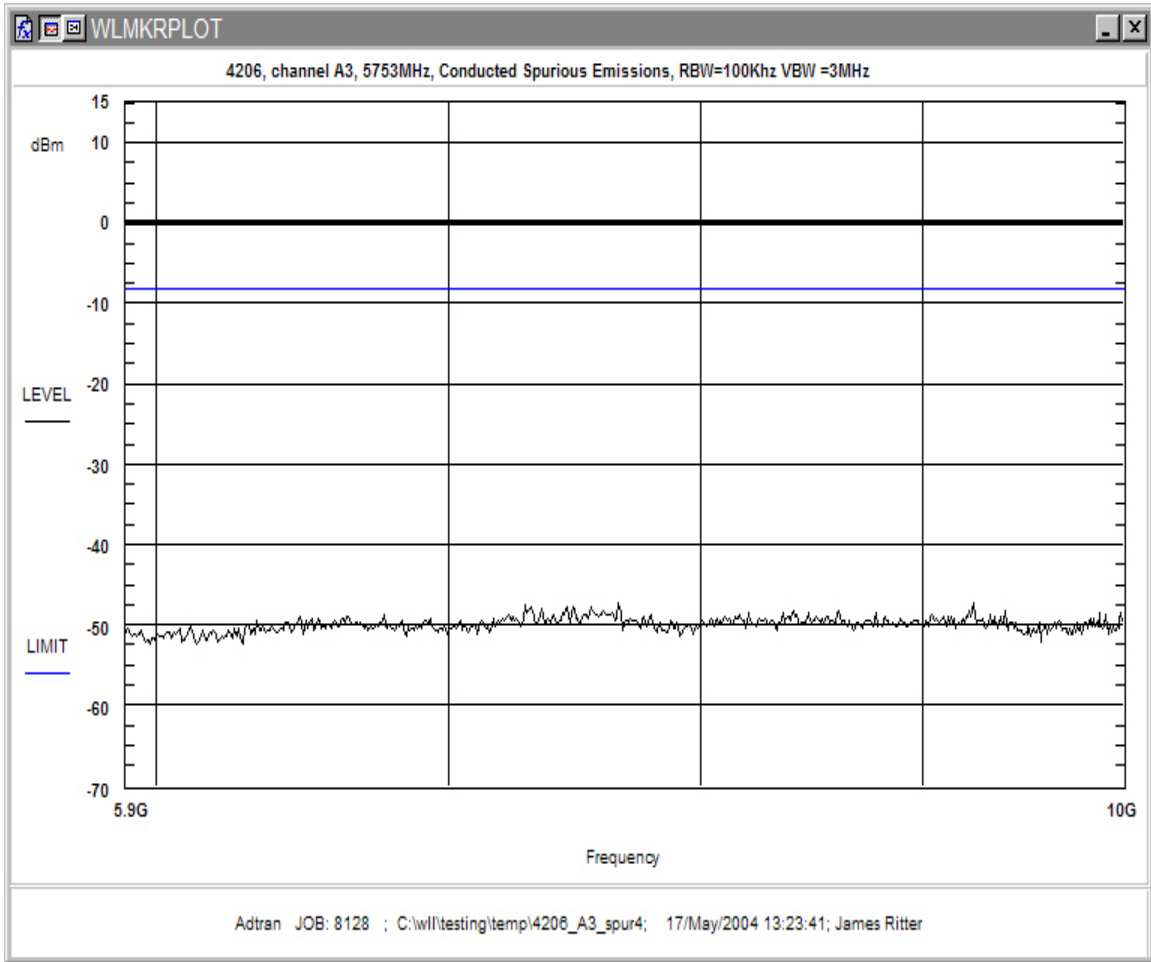


**Figure 25. Conducted Spurious Emissions, Plan A - Channel 3, 5.9GHz-10GHz**

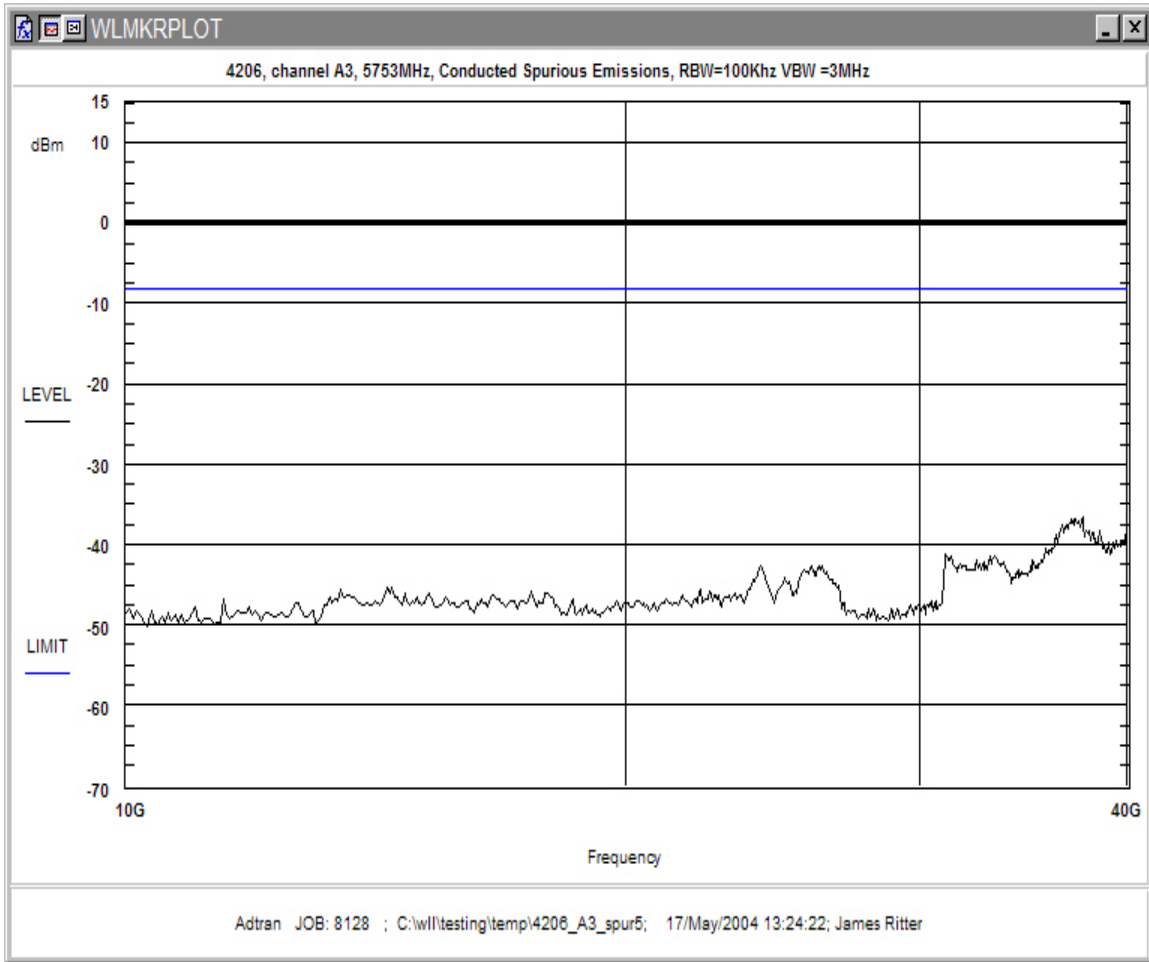


**Figure 26. Conducted Spurious Emissions, Plan A - Channel 3, 10GHz-40GHz**

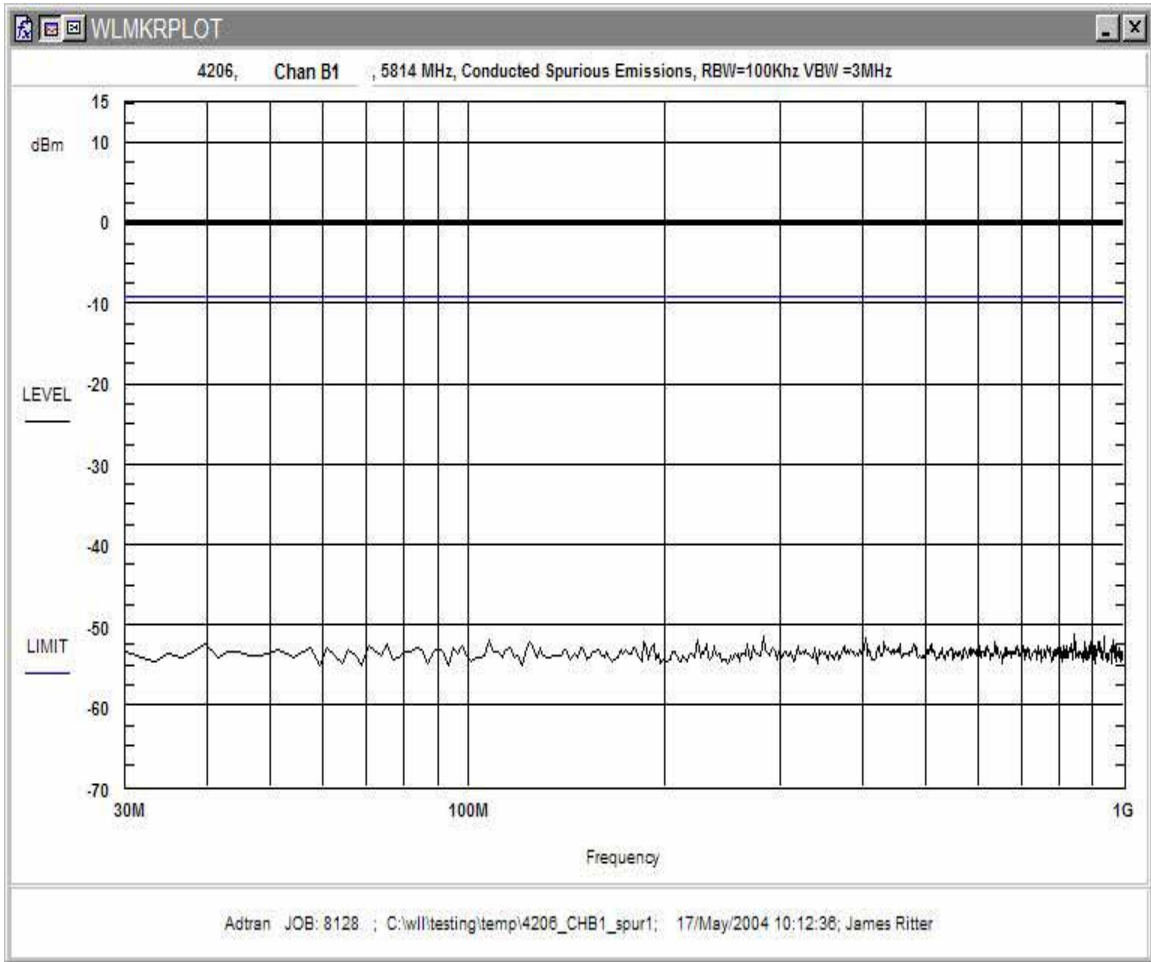


**Figure 27. Conducted Spurious Emissions, Plan B - Channel 1, 30MHz-1GHz**

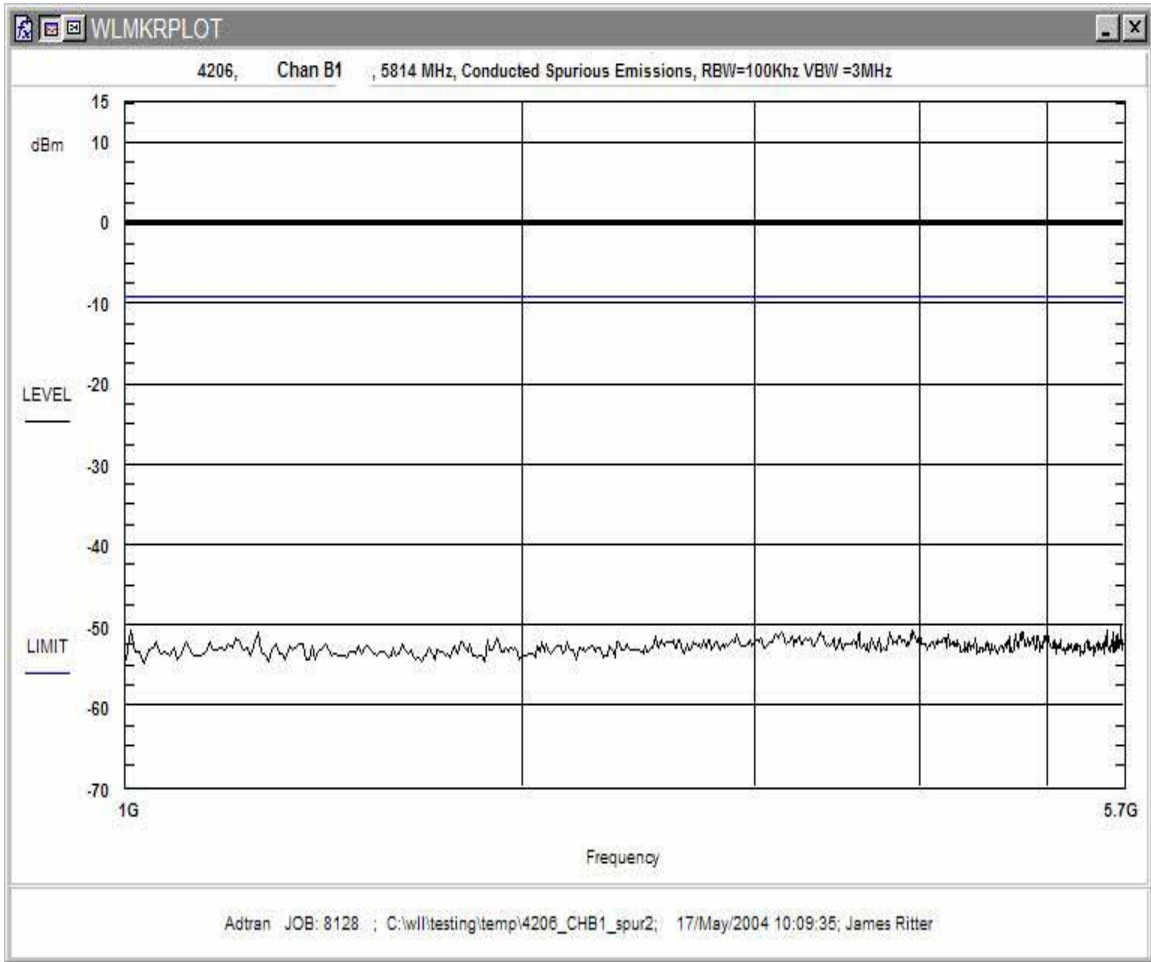


**Figure 28. Conducted Spurious Emissions, Plan B - Channel 1, 1GHz-5.7GHz**

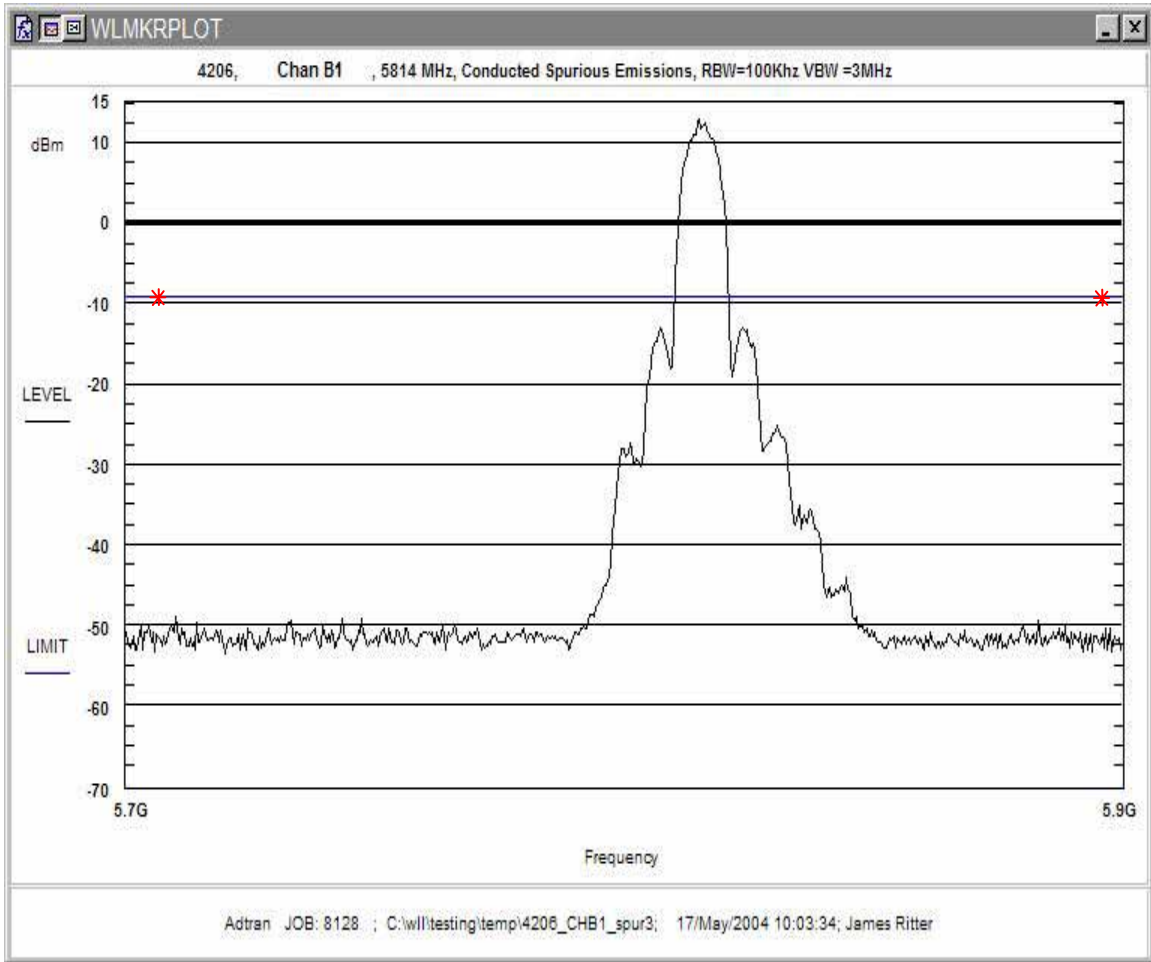


**Figure 29. Conducted Spurious Emissions, Plan B - Channel 1, 5.7GHz-5.9GHz**

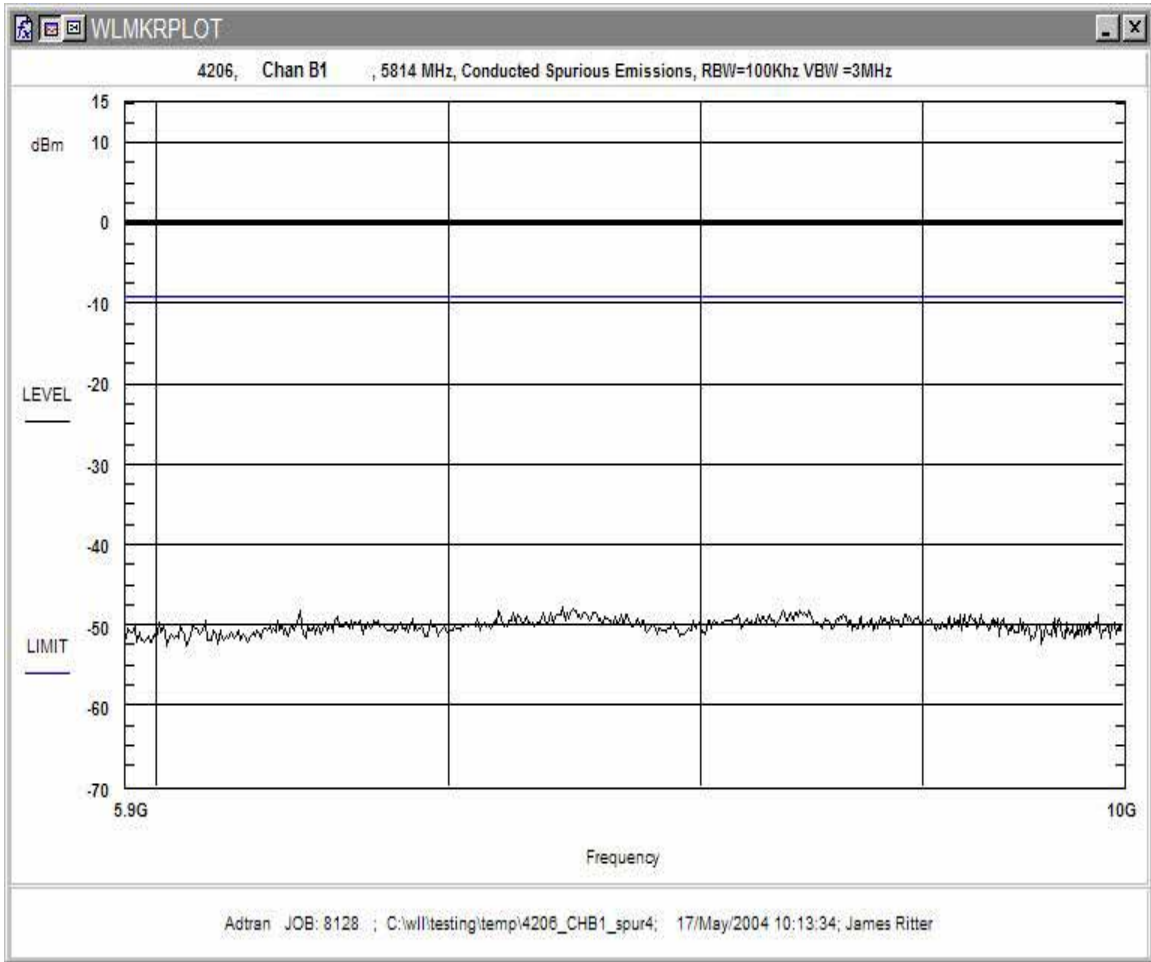

**Figure 30. Conducted Spurious Emissions, Plan B - Channel 1, 5.9GHz-10GHz**

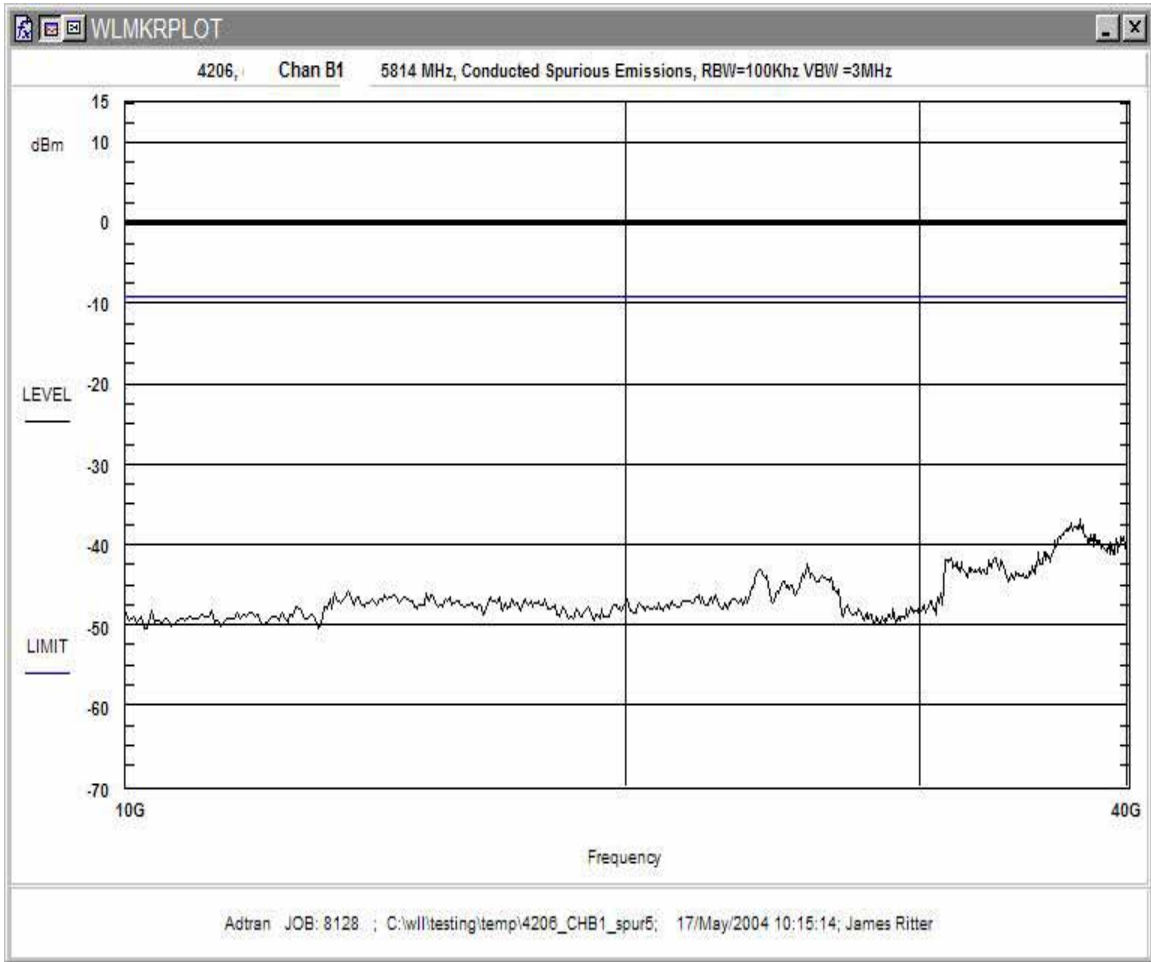


**Figure 31. Conducted Spurious Emissions, Plan B - Channel 1, 10GHz-40GHz**

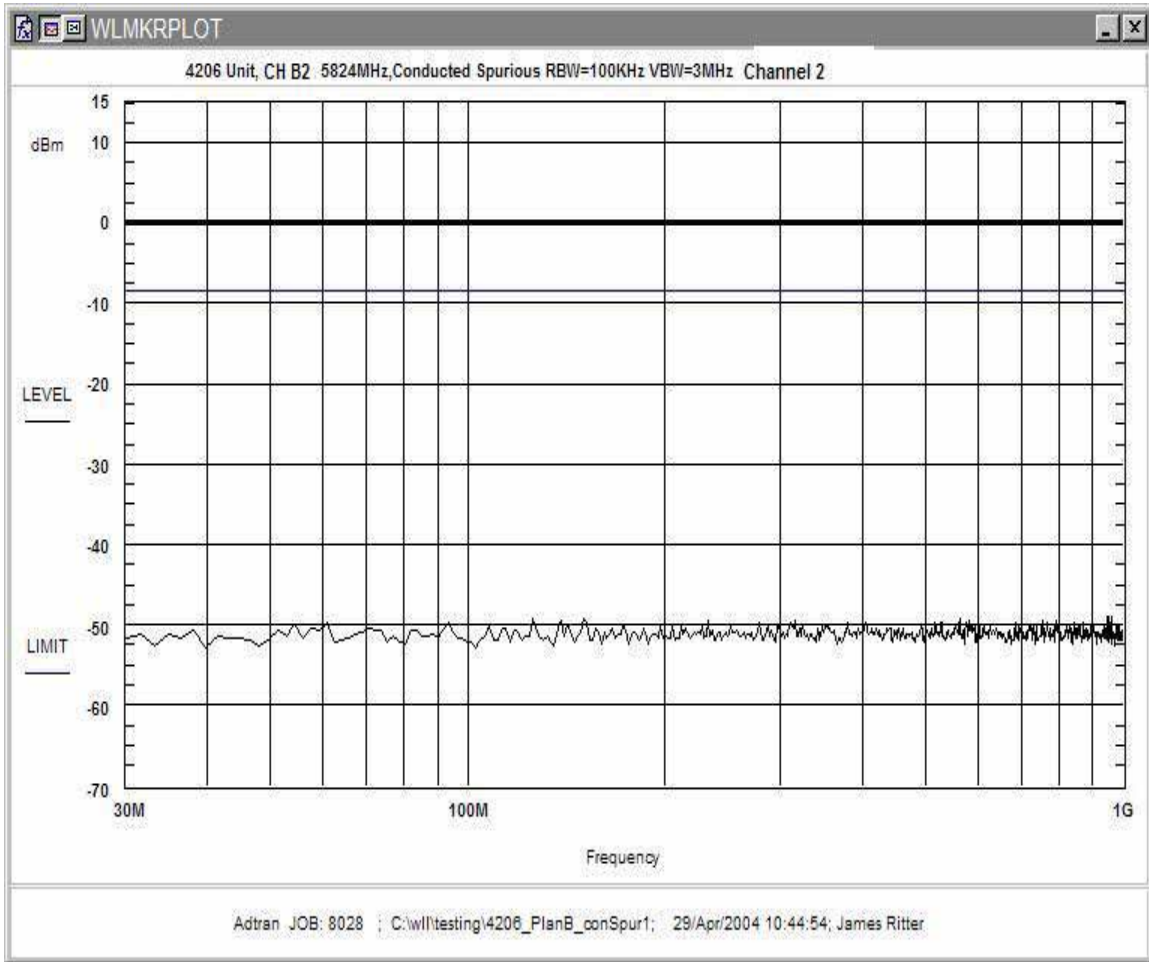


**Figure 32. Conducted Spurious Emissions, Plan B - Channel 2, 30MHz-1GHz**




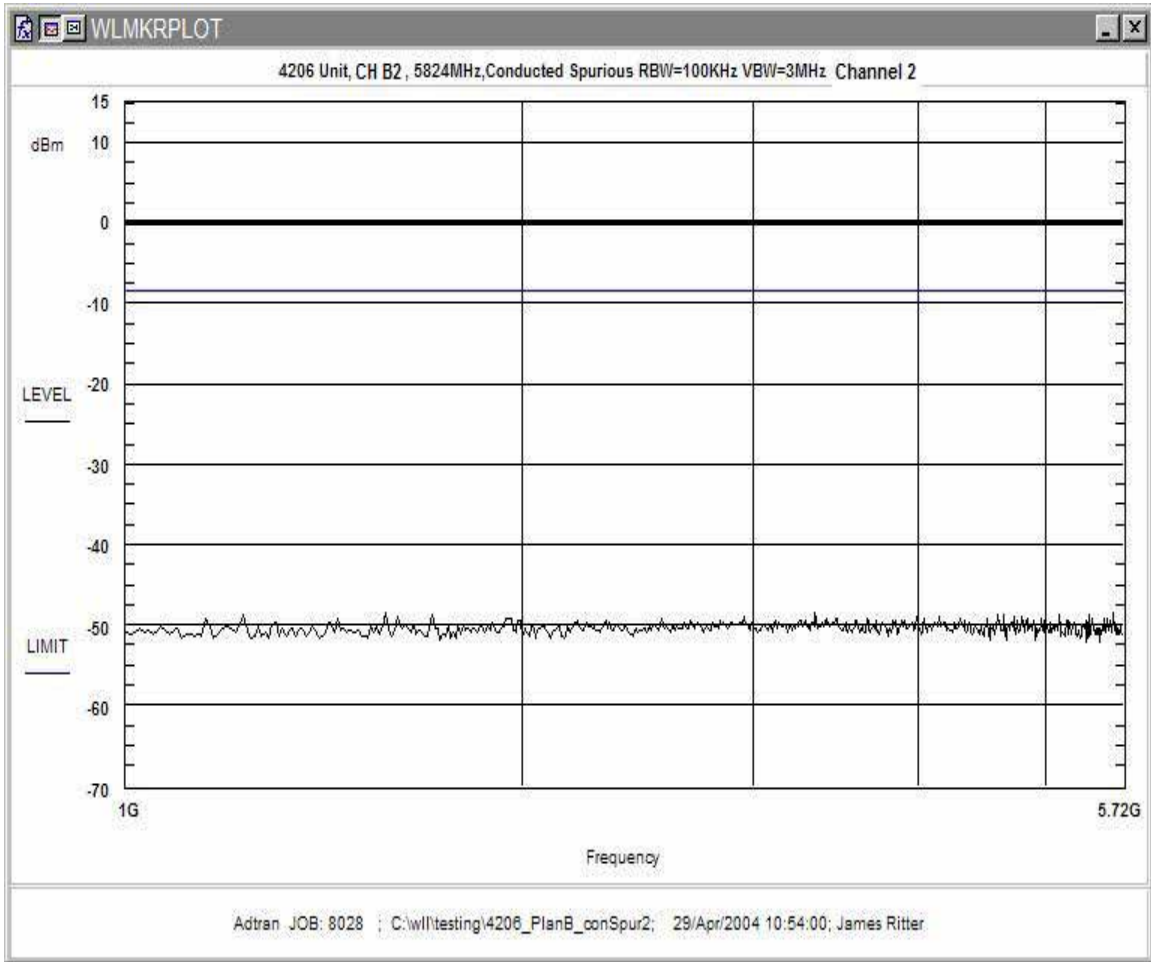


**Figure 33. Conducted Spurious Emissions, Plan B - Channel 2, 1GHz-5.7GHz**

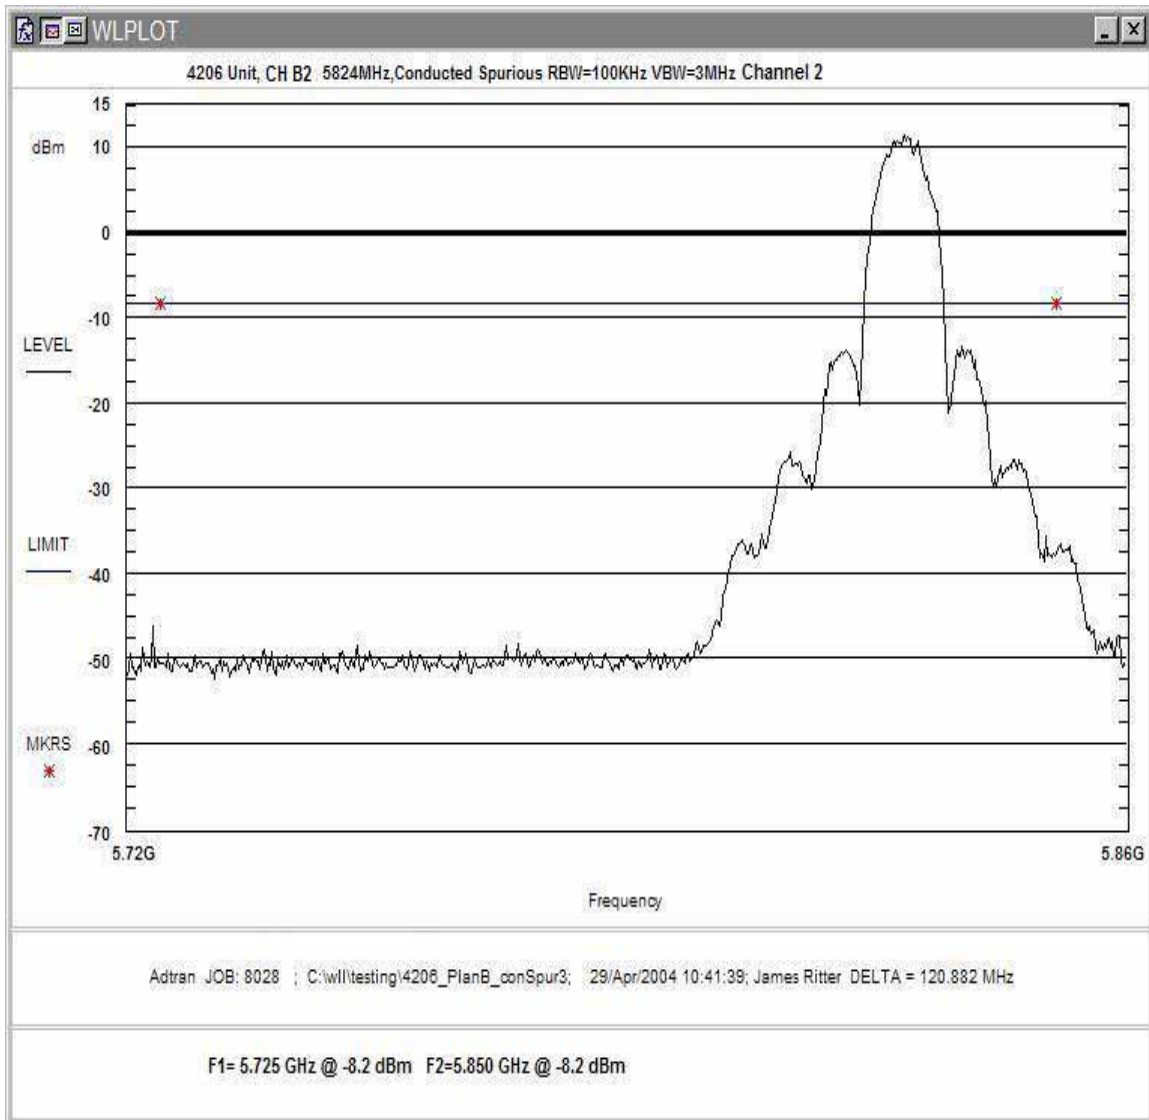


**Figure 34. Conducted Spurious Emissions, Plan B - Channel 2, 5.72GHz-5.86GHz**

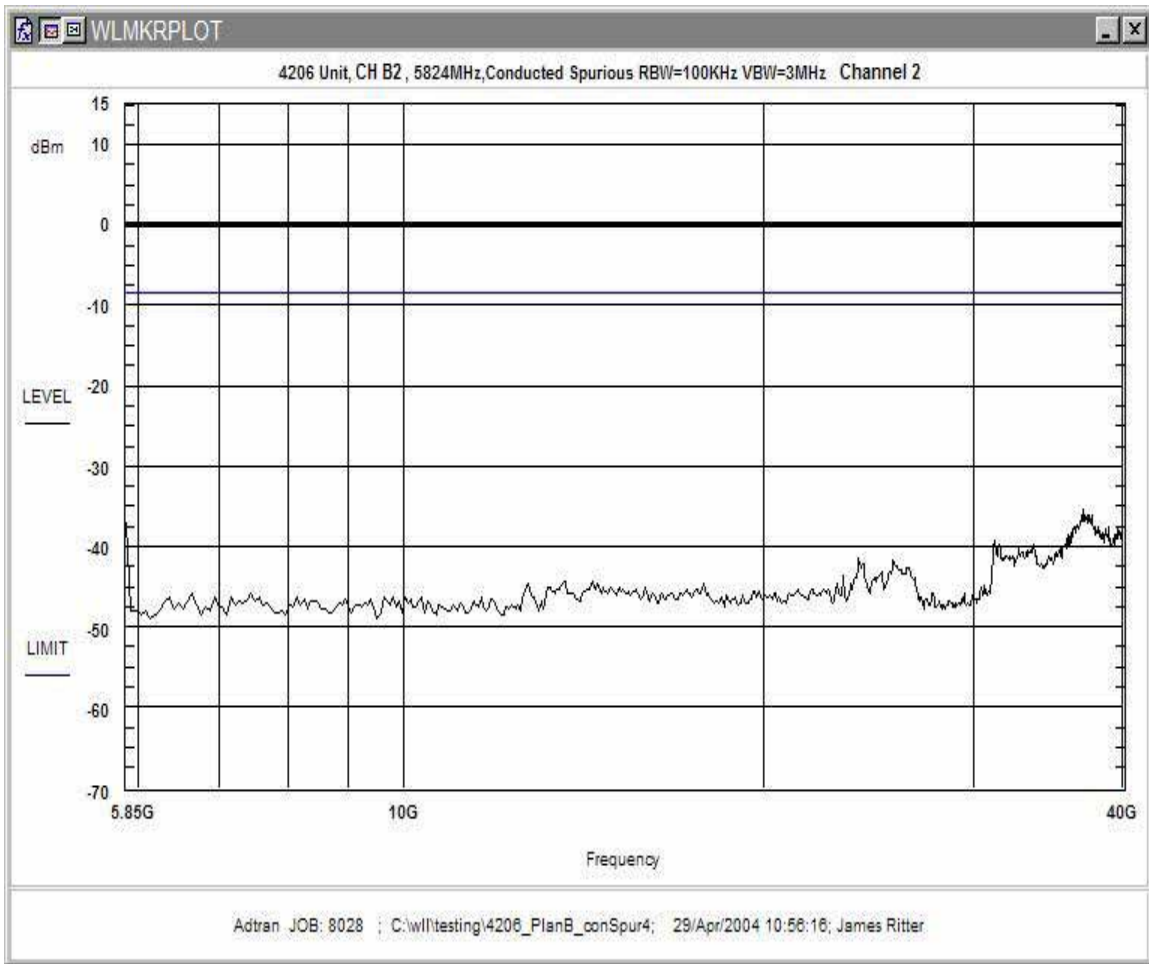


**Figure 35. Conducted Spurious Emissions, Plan B - Channel 2, 5.85GHz-40GHz**

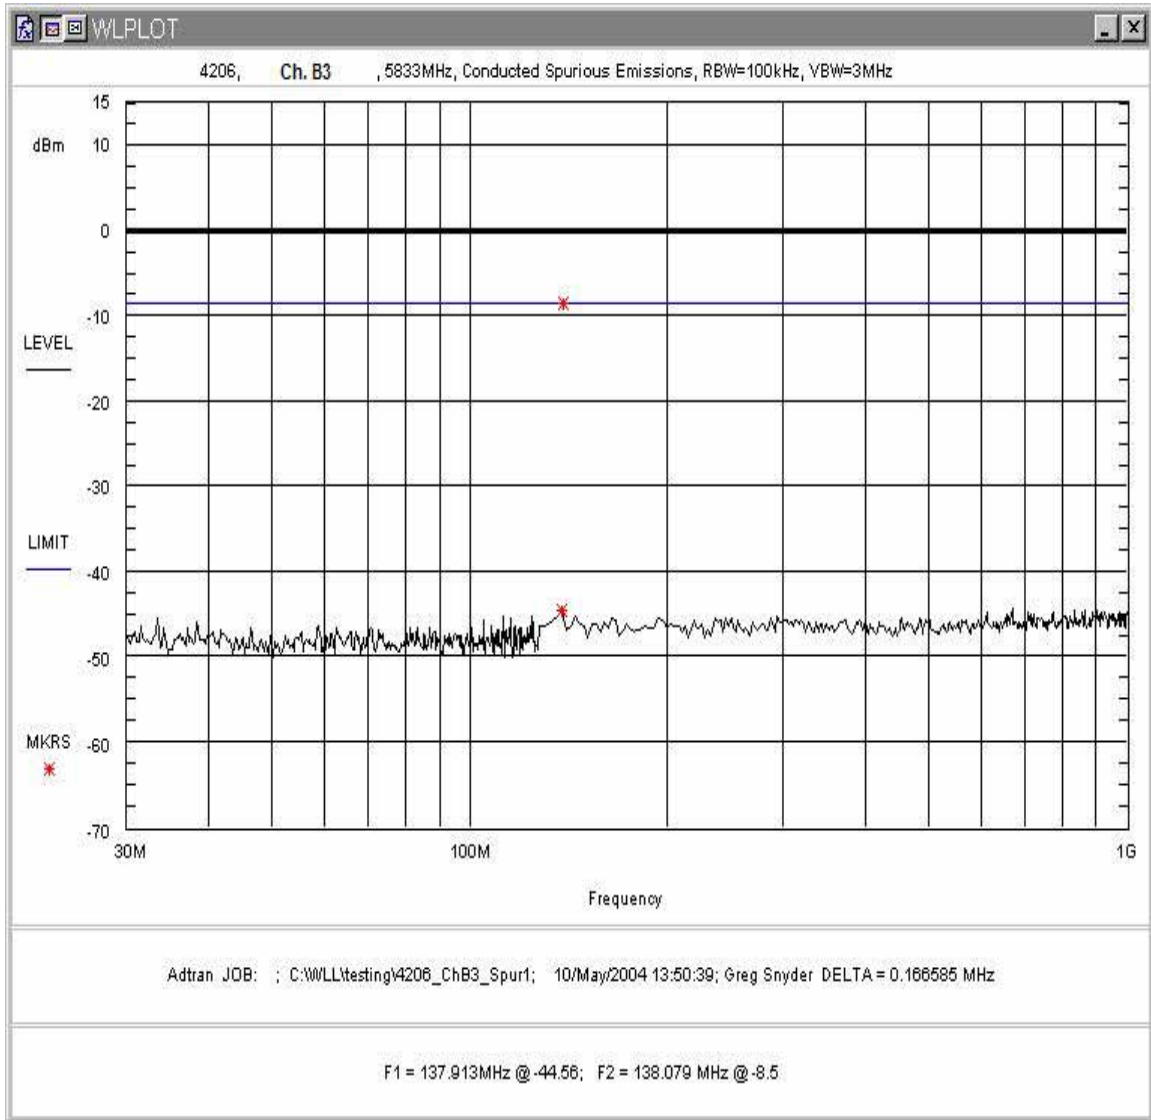


**Figure 36. Conducted Spurious Emissions, Plan B - Channel 3, 30MHz-1GHz**

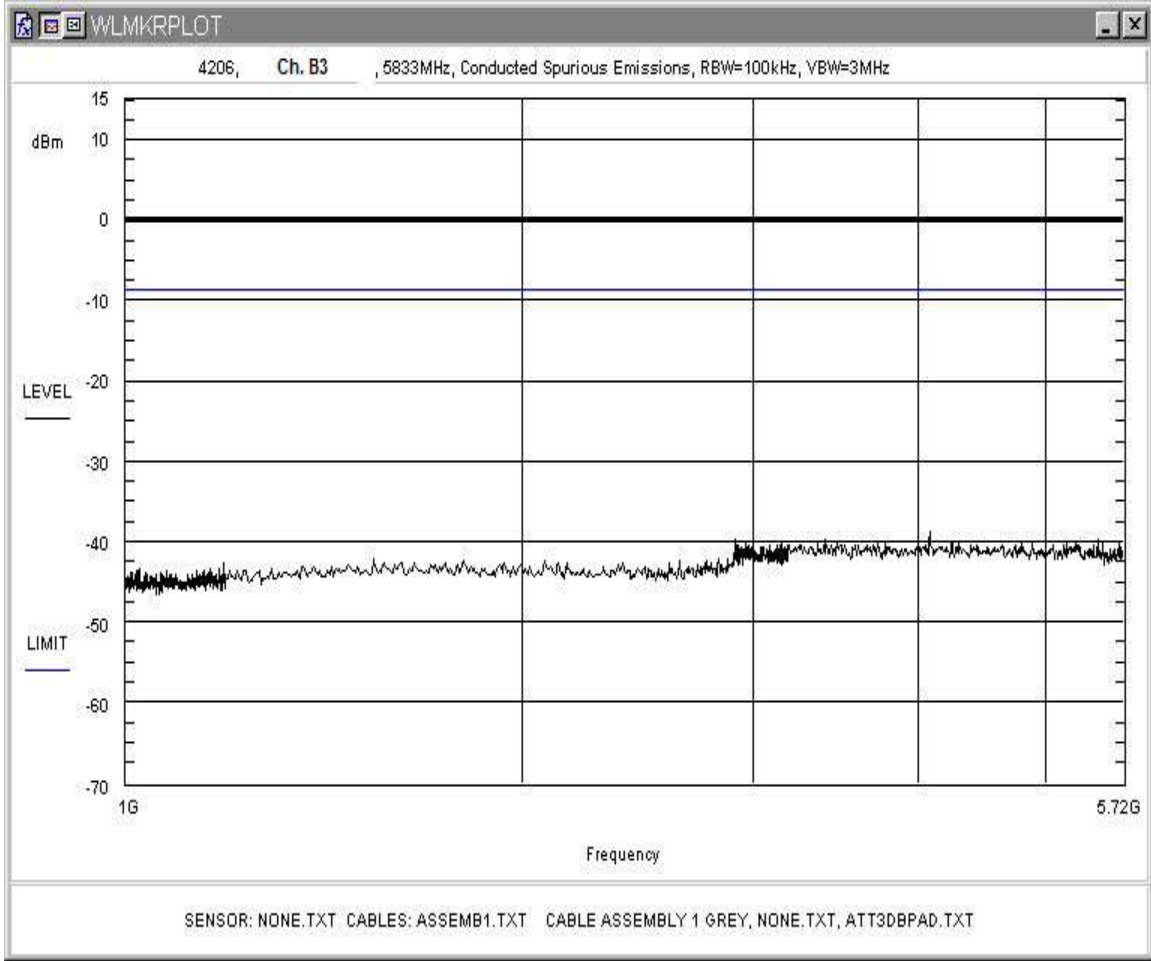


**Figure 37. Conducted Spurious Emissions, Plan B - Channel 3, 1GHz-5.72GHz**

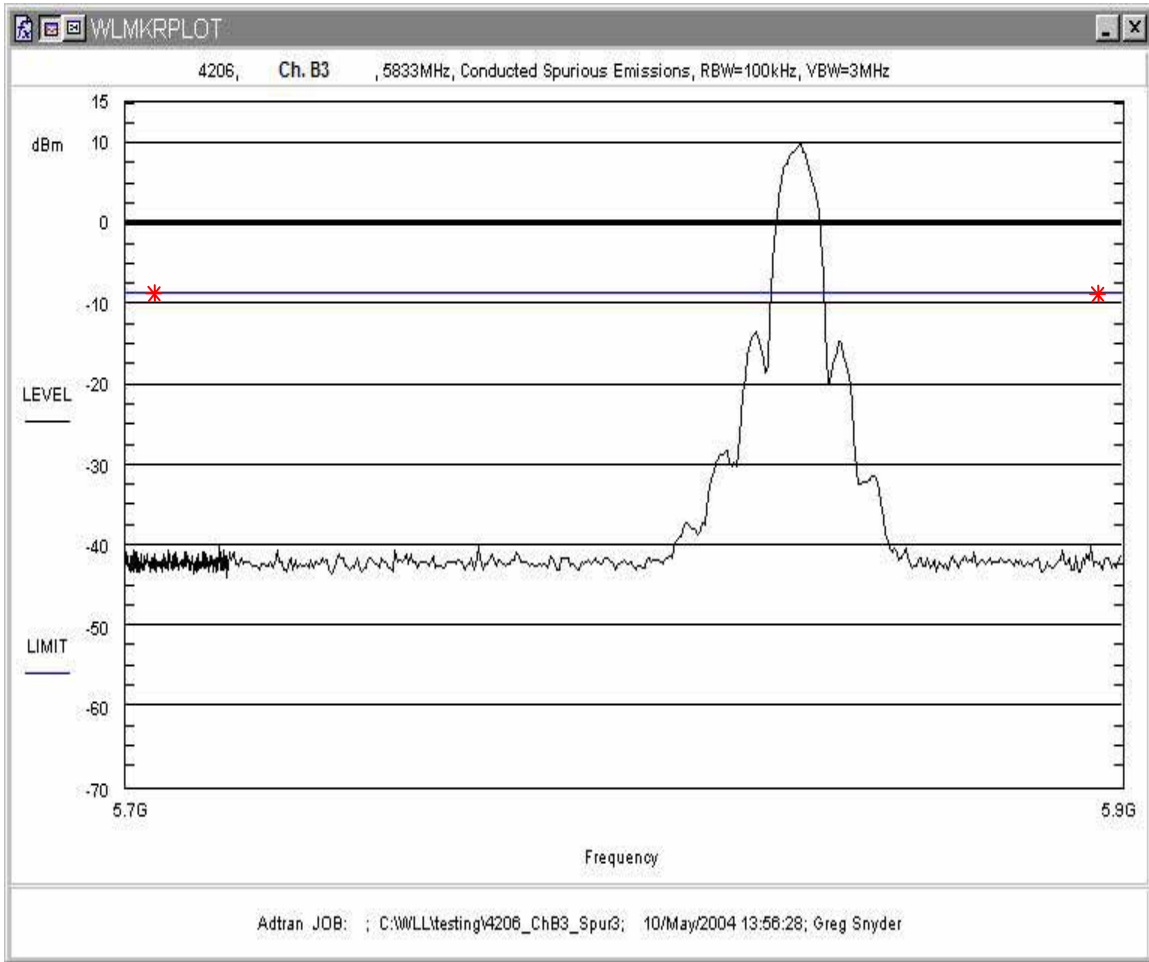

**Figure 38. Conducted Spurious Emissions, Plan B - Channel 3, 5.7GHz-5.9GHz**

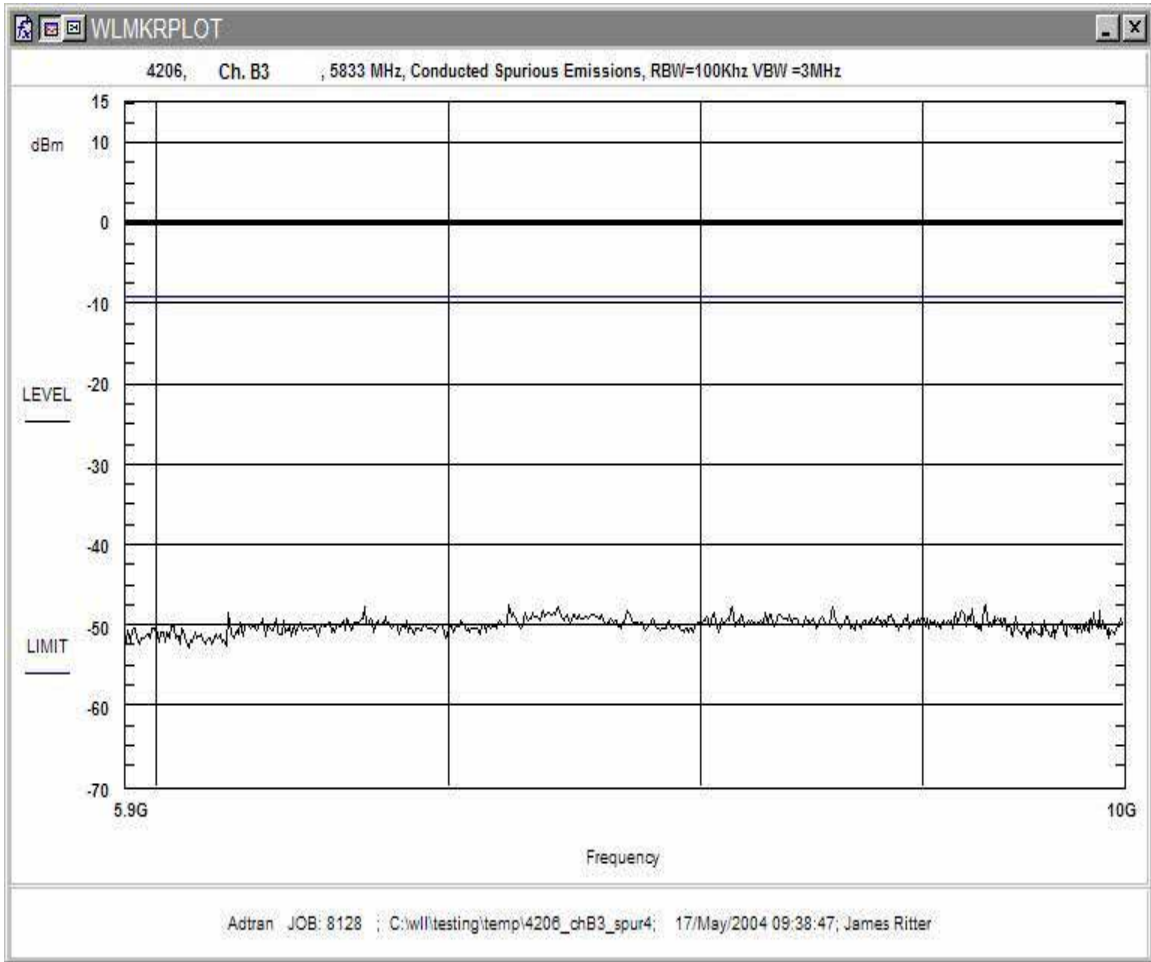

**Figure 39. Conducted Spurious Emissions, Plan B - Channel 3, 5.9GHz-10GHz**

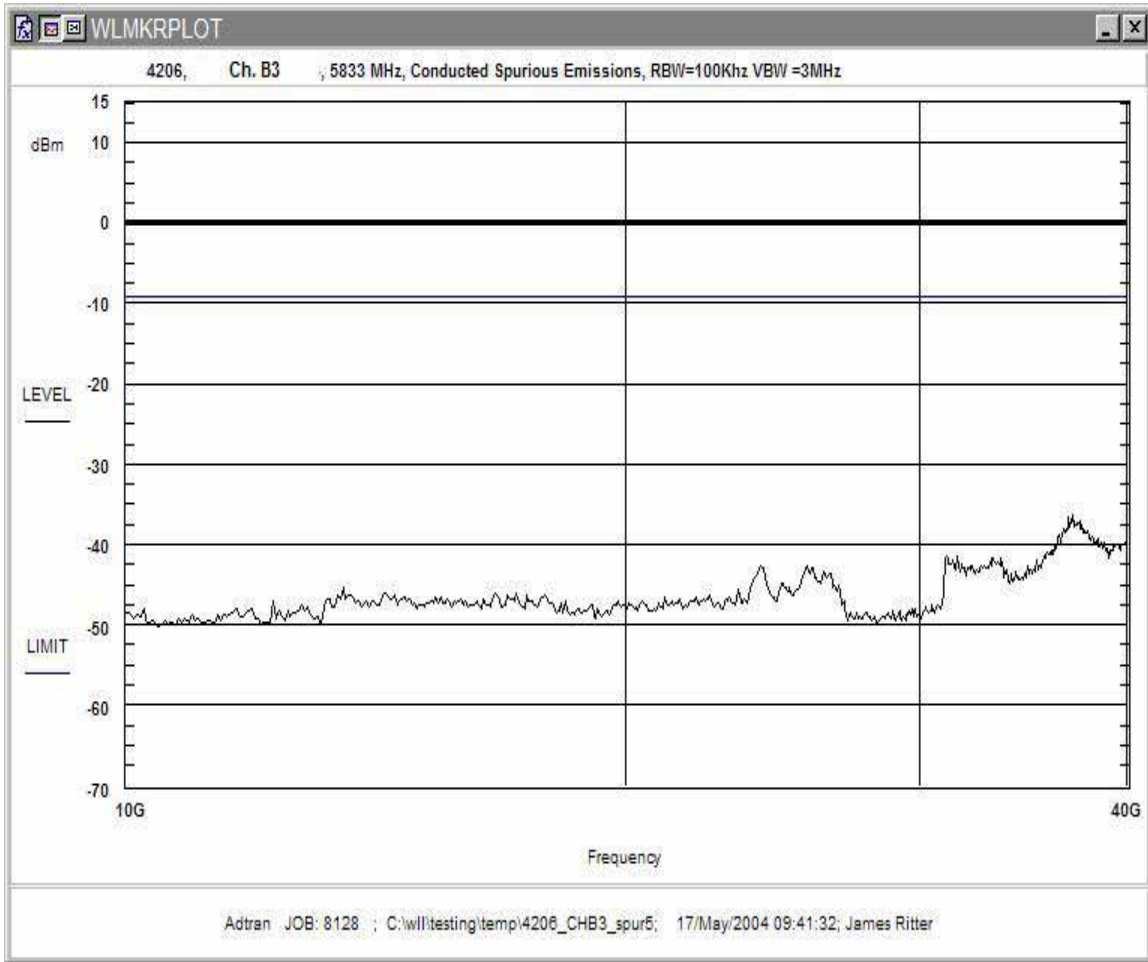

**Figure 40. Conducted Spurious Emissions, Plan B - Channel 3, 10GHz-40GHz**

**4.5 Radiated Spurious Emissions: (FCC Part §15.247(c))**

Radiated emissions that fall in the restricted bands must comply with the general emissions limits in 15.209(a).

The emissions were measured using the following resolution bandwidths:

Frequency Range	Resolution Bandwidth	Video Bandwidth
30MHz-1000 MHz	120kHz	>30 kHz
>1000 MHz	1 MHz	<30 Hz (Avg.) 1MHz (Peak)

Harmonic and Spurious emissions that were identified as coming from the EUT were checked in Peak and in Average Mode. It was verified that the peak-to-average ratio did not exceed 20dB.

Peak measurements and average measurements are made. All emissions were determined to have a peak-to-average ratio of less than 20 dB.



#### 4.5.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2001. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The EUT was tested in the following configurations and modes:

<b>Antenna</b>	<b>Channel</b>
2' Dish, 28.5dBi Gain	A&B

The following is a sample calculation used in the data tables for calculating the final field strength of spurious emissions and comparing these levels to the specified limits.

#### Sample Calculation:

Spectrum Analyzer Voltage (SA Level): V dB $\mu$ V  
Antenna Factor (Ant Corr): AFdB/m  
Cable Loss Correction (Cable Corr): CCdB  
Amplifier Gain: GdB  
Electric Field (Corr Level): EdB $\mu$ V/m = VdB $\mu$ V + AFdB/m + CCdB - GdB  
To convert to linear units: E $\mu$ V/m = antilog (EdB $\mu$ V/m/20)

Data are supplied in the following tables. Testing was performed to 40GHz. No emissions were detected below 1GHz or above 12GHz. All detected emissions are reported in the following tables. Both peak and average measurements are listed.

**Table 6: Radiated Emission Test Data - Plan A Channel 1**

CLIENT: Adtran DATE: 5/18/2004  
 TESTER: J. Ritter JOB #: 8028  
 EUT: Tracer 4206 STANDARD: FCC Part 15  
 CONFIGURATION: Plan A Band 1 DISTANCE: 3m  
 CLOCKS: Transmit at 5734Mhz

**Test Equipment/Limit:**

ANTENNA: A\_00425 LIMIT: LFCC\_3m\_Class\_B  
 CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dB $\mu$ V	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dB $\mu$ V/m	Corr. Level $\mu$ V/m	Limit $\mu$ V/m	Margin dB
<b>Peak</b>											
1700.67	H	180.0	1.0	45.4	28.2	2.4	35.7	40.3	103.8	5000.0	-33.7
2338.00	H	180.0	1.0	46.8	29.8	2.9	35.6	43.9	156.5	5000.0	-30.1
3785.13	H	10.0	1.0	47.5	31.1	3.8	35.4	46.9	222.3	5000.0	-27.0
8180.98	H	0.0	1.0	45.7	38.4	5.3	36.1	53.3	462.0	5000.0	-20.7 a
10907.99	H	0.0	1.0	45.3	40.2	6.1	35.6	56.1	635.1	5000.0	-17.9 a
11468.00	H	0.0	1.0	47.1	40.8	6.4	35.6	58.6	855.9	5000.0	-15.3 a
1700.67	V	180.0	1.0	48.6	28.2	2.4	35.7	43.5	149.4	5000.0	-30.5
2338.00	V	180.0	1.0	55.3	29.8	2.9	35.6	52.4	416.5	5000.0	-21.6
3785.13	V	40.0	1.0	57.3	31.1	3.8	35.4	56.7	685.3	5000.0	-17.3
8180.98	V	0.0	1.0	45.3	38.4	5.3	36.1	52.9	440.7	5000.0	-21.1 a
10907.99	V	0.0	1.0	45.1	40.2	6.1	35.6	55.9	620.6	5000.0	-18.1 a
11468.00	V	0.0	1.0	46.3	40.8	6.4	35.6	57.8	780.6	5000.0	-16.1 a
<b>AVG</b>											
1700.67	H	180.0	1.0	35.5	28.2	2.4	35.7	30.4	33.1	500.0	-23.6
2338.00	H	180.0	1.0	33.0	29.8	2.9	35.6	30.1	32.0	500.0	-23.9
3785.13	H	10.0	1.0	38.5	31.1	3.8	35.4	37.9	78.7	500.0	-16.1
8180.98	H	0.0	1.0	34.0	38.4	5.3	36.1	41.5	119.3	500.0	-12.4 a
10907.99	H	0.0	1.0	34.5	40.2	6.1	35.6	45.3	183.2	500.0	-8.7 a
11468.00	H	0.0	1.0	34.2	40.8	6.4	35.6	45.8	194.3	500.0	-8.2 a
1700.67	V	180.0	1.0	37.7	28.2	2.4	35.7	32.6	42.7	500.0	-21.4
2338.00	V	180.0	1.0	44.7	29.8	2.9	35.6	41.7	122.2	500.0	-12.2
3785.13	V	40.0	1.0	41.5	31.1	3.8	35.4	40.9	111.1	500.0	-13.1
8180.98	V	0.0	1.0	34.0	38.4	5.3	36.1	41.5	119.3	500.0	-12.4 a
10907.99	V	0.0	1.0	34.2	40.2	6.1	35.6	45.0	176.9	500.0	-9.0 a
11468.00	V	0.0	1.0	34.0	40.8	6.4	35.6	45.5	189.4	500.0	-8.4 a

a = ambient reading

**Table 7: Radiated Emission Test Data - Plan A Channel 2**

CLIENT: Adtran DATE: 5/18/2004  
 TESTER: J. Ritter JOB #: 8028  
 EUT: Tracer 4202/4206 STANDARD: FCC Part 15  
 CONFIGURATION: Plan A Band 2 DISTANCE: 3m  
 CLOCKS: Transmit at 5744MHz (peak of signal)  
**Test Equipment/Limit:**  
 ANTENNA: A\_00425 LIMIT: LFCC\_3m\_Class\_B  
 CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dBµV	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dBµV/m	Corr. Level µV/m	Limit µV/m	Margin dB
<b>PEAK</b>											
1237.20	V	170.0	1.0	50.3	26.4	2.3	36.2	42.8	137.5	5000.0	-31.2
1339.92	V	270.0	1.0	45.6	26.8	2.3	36.0	38.7	85.9	5000.0	-35.3
1367.24	V	180.0	1.0	47.5	27.0	2.3	36.0	40.7	108.8	5000.0	-33.2
1676.00	V	179.0	1.0	47.8	28.2	2.4	35.7	42.6	134.9	5000.0	-31.4
1700.77	V	190.0	1.0	49.2	28.2	2.4	35.7	44.1	160.0	5000.0	-29.9
2732.00	V	0.0	1.0	40.5	30.4	3.2	35.6	38.3	82.6	5000.0	-35.6 a
11488.00	V	0.0	1.0	46.1	40.8	6.4	35.6	57.7	765.2	5000.0	-16.3 a
1237.20	H	170.0	1.0	48.1	26.4	2.3	36.2	40.6	106.7	5000.0	-33.4
1339.92	H	270.0	1.0	45.0	26.8	2.3	36.0	38.1	80.2	5000.0	-35.9
1367.24	H	180.0	1.0	46.0	27.0	2.3	36.0	39.2	91.6	5000.0	-34.7
1676.00	H	179.0	1.0	46.1	28.2	2.4	35.7	40.9	110.9	5000.0	-33.1
1700.77	H	190.0	1.0	50.1	28.2	2.4	35.7	45.0	178.1	5000.0	-29.0
2732.00	H	0.0	1.0	41.2	30.4	3.2	35.6	39.1	89.9	5000.0	-34.9 a
11488.00	H	0.0	1.0	45.1	40.8	6.4	35.6	56.7	682.0	5000.0	-17.3 a
<b>AVG:</b>											
1237.20	V	170.0	1.0	39.2	26.4	2.3	36.2	31.7	38.3	500.0	-22.3
1339.92	V	270.0	1.0	35.7	26.8	2.3	36.0	28.8	27.5	500.0	-25.2
1367.24	V	180.0	1.0	35.4	27.0	2.3	36.0	28.6	27.0	500.0	-25.3
1676.00	V	170.0	1.0	37.2	28.2	2.4	35.7	32.0	39.6	500.0	-22.0
1700.77	V	190.0	1.0	37.3	28.2	2.4	35.7	32.2	40.6	500.0	-21.8
2732.00	V	0.0	1.0	29.9	30.4	3.2	35.6	27.8	24.5	500.0	-26.2 a
11488.00	V	0.0	1.0	37.5	40.8	6.4	35.6	49.1	284.3	500.0	-4.9 a
1237.20	H	170.0	1.0	39.1	26.4	2.3	36.2	31.6	37.9	500.0	-22.4
1339.92	H	270.0	1.0	36.1	26.8	2.3	36.0	29.2	28.8	500.0	-24.8
1367.24	H	180.0	1.0	35.3	27.0	2.3	36.0	28.7	27.2	500.0	-25.3
1676.00	H	170.0	1.0	37.0	28.2	2.4	35.7	31.8	38.9	500.0	-22.2
1700.77	H	190.0	1.0	38.0	28.2	2.4	35.7	32.9	44.2	500.0	-21.1
2732.00	H	0.0	1.0	32.0	30.4	3.2	35.6	29.9	31.2	500.0	-24.1 a
11488.00	H	0.0	1.0	37.1	40.8	6.4	35.6	48.7	271.5	500.0	-5.3 a

a = ambient reading

**Table 8: Radiated Emission Test Data - Plan A Channel 3**

CLIENT:	Adtran	DATE:	5/18/2004
TESTER:	J. Ritter	JOB #:	8028
EUT:	Tracer 4202/4206	STANDARD:	FCC Part 15
CONFIGURATION:	Plan A Band 3	DISTANCE:	3m
CLOCKS:	Transmit at 5753Mhz (peak of signal)		
<b>Test Equipment/Limit:</b>			
ANTENNA:	A_00425	LIMIT:	LFCC_3m_Class_B
CABLE:	CSITE1_HF	AMPLIFIER (dB)	A_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dBµV	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dBµV/m	Corr. Level µV/m	Limit µV/m	Margin dB
<b>PEAK</b>											
1187.30	H	180.0	1.0	48.9	26.1	2.3	36.2	41.1	112.9	5000.0	-32.9
1236.80	H	180.0	1.0	48.3	26.4	2.3	36.2	40.8	109.2	5000.0	-33.2
1339.80	H	190.0	1.0	48.3	26.8	2.3	36.0	41.4	117.1	5000.0	-32.6
1700.77	H	290.0	1.0	47.7	28.2	2.4	35.7	42.6	135.1	5000.0	-31.4
2338.20	H	170.0	1.0	53.2	29.8	2.9	35.6	50.3	327.1	5000.0	-23.7
2736.50	H	180.0	1.0	46.4	30.4	3.2	35.6	44.3	163.7	5000.0	-29.7 a
11506.00	H	0.0	1.0	46.0	40.9	6.4	35.7	57.6	756.0	5000.0	-16.4 a
1187.30	V	180.0	1.0	48.1	26.1	2.3	36.2	40.3	102.9	5000.0	-33.7
1236.80	V	180.0	1.0	47.2	26.4	2.3	36.2	39.7	96.2	5000.0	-34.3
1339.80	V	190.0	1.0	48.9	26.8	2.3	36.0	42.0	125.6	5000.0	-32.0
1700.77	V	290.0	1.0	46.6	28.2	2.4	35.7	41.5	119.1	5000.0	-32.5
2338.20	V	170.0	1.0	47.7	29.8	2.9	35.6	44.8	173.6	5000.0	-29.2
2736.50	V	180.0	1.0	46.4	30.4	3.2	35.6	44.3	163.7	5000.0	-29.7 a
11506.00	V	0.0	1.0	46.1	40.9	6.4	35.7	57.7	767.4	5000.0	-16.3 a
<b>AVG</b>											
1187.30	H	180.0	1.0	38.1	26.1	2.3	36.2	30.3	32.5	500.0	-23.7
1236.80	H	180.0	1.0	40.5	26.4	2.3	36.2	33.0	44.7	500.0	-21.0
1339.80	H	190.0	1.0	36.4	26.8	2.3	36.0	29.5	29.8	500.0	-24.5
1700.77	H	290.0	1.0	36.3	28.2	2.4	35.7	31.2	36.3	500.0	-22.8
2338.20	H	170.0	1.0	42.6	29.8	2.9	35.6	39.7	96.5	500.0	-14.3
2736.50	H	180.0	1.0	34.0	30.4	3.2	35.6	31.9	39.5	500.0	-22.1 a
11506.00	H	0.0	1.0	34.9	40.9	6.4	35.7	46.5	211.4	500.0	-7.5 a
1187.30	V	180.0	1.0	36.0	26.1	2.3	36.2	28.2	25.6	500.0	-25.8
1236.80	V	180.0	1.0	40.2	26.4	2.3	36.2	32.7	43.0	500.0	-21.3
1339.80	V	190.0	1.0	34.2	26.8	2.3	36.0	27.3	23.1	500.0	-26.7
1700.77	V	290.0	1.0	34.1	28.2	2.4	35.7	29.0	28.2	500.0	-25.0
2338.20	V	170.0	1.0	42.3	29.8	2.9	35.6	39.4	93.3	500.0	-14.6
2736.50	V	180.0	1.0	35.1	30.4	3.2	35.6	33.0	44.6	500.0	-21.0 a
11506.00	V	0.0	1.0	34.1	40.9	6.4	35.7	45.7	192.8	500.0	-8.3 a

a= ambient reading

**Table 9: Radiated Emission Test Data - Plan B Channel 1**

CLIENT: Adtran DATE: 5/6/2004  
 TESTER: J. Ritter JOB #: 8028  
 EUT: Tracer 4202/4206 STANDARD: FCC Part 15  
 CONFIGURATION: Plan B Band 1 DISTANCE: 3m  
 CLOCKS: Transmit at 5814 Mhz (peak of signal)  
**Test Equipment/Limit:**  
 ANTENNA: A\_00425 LIMIT: LFCC\_3m\_Class\_B  
 CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dB $\mu$ V	Ant. Corr. dB/m	Cable Corr. dB	Amp Gain dB	Corr. Level dB $\mu$ V/m	Corr. Level $\mu$ V/m	Limit $\mu$ V/m	Margin dB
<b>Peak</b>											
1398.50	V	180.0	1.0	46.1	27.1	2.3	36.0	39.5	94.5	5000.0	-34.5
1597.62	V	190.0	1.0	57.3	27.9	2.4	35.8	51.8	387.4	5000.0	-22.2
1700.69	V	90.0	1.0	52.7	28.2	2.4	35.7	47.6	239.5	5000.0	-26.4
2767.00	V	0.0	1.0	48.8	30.4	3.2	35.7	46.8	218.0	5000.0	-27.2 a
4150.50	V	0.0	1.0	49.7	31.6	3.9	35.5	49.7	304.2	5000.0	-24.3 a
8301.00	V	0.0	1.0	45.2	38.5	5.3	36.1	52.9	439.7	5000.0	-21.1 a
11629.40	V	0.0	1.0	46.2	41.0	6.4	35.7	57.9	787.7	5000.0	-16.1 a
1398.50	H	180.0	1.0	47.8	27.1	2.3	36.0	41.2	114.9	5000.0	-32.8
1597.62	H	190.0	1.0	47.5	27.9	2.4	35.8	41.9	124.9	5000.0	-32.0
1700.69	H	90.0	1.0	47.7	28.2	2.4	35.7	42.6	134.7	5000.0	-31.4 a
2767.00	H	0.0	1.0	47.0	30.4	3.2	35.7	44.9	176.6	5000.0	-29.0 a
4150.50	H	0.0	1.0	48.1	31.6	3.9	35.5	48.1	253.9	5000.0	-25.9 a
8301.00	H	0.0	1.0	47.8	38.5	5.3	36.1	55.5	597.3	5000.0	-18.5 a
11629.40	H	0.0	1.0	45.2	41.0	6.4	35.7	56.9	702.9	5000.0	-17.0 a
<b>AVG</b>											
1398.50	V	180.0	1.0	38.5	27.1	2.3	36.0	31.9	39.4	500.0	-22.1
1597.62	V	190.0	1.0	40.8	27.9	2.4	35.8	35.3	58.0	500.0	-18.7
1700.69	V	90.0	1.0	38.3	28.2	2.4	35.7	33.2	45.8	500.0	-20.8
2767.00	V	0.0	1.0	37.2	30.4	3.2	35.7	35.1	57.1	500.0	-18.8 a
4150.50	V	0.0	1.0	38.2	31.6	3.9	35.5	38.2	80.9	500.0	-15.8 a
8301.00	V	0.0	1.0	35.2	38.5	5.3	36.1	42.9	139.1	500.0	-11.1 a
11629.40	V	0.0	1.0	36.2	41.0	6.4	35.7	47.9	249.4	500.0	-6.0 a
1398.50	H	180.0	1.0	36.2	27.1	2.3	36.0	29.6	30.1	500.0	-24.4
1597.62	H	190.0	1.0	38.6	27.9	2.4	35.8	33.0	44.8	500.0	-20.9
1700.69	H	90.0	1.0	37.5	28.2	2.4	35.7	32.4	41.8	500.0	-21.6 a
2767.00	H	0.0	1.0	37.1	30.4	3.2	35.7	35.0	56.5	500.0	-18.9 a
4150.50	H	0.0	1.0	36.8	31.6	3.9	35.5	36.8	69.1	500.0	-17.2 a
8301.00	H	0.0	1.0	34.8	38.5	5.3	36.1	42.5	133.3	500.0	-11.5 a
11629.40	H	0.0	1.0	35.5	41.0	6.4	35.7	47.3	230.9	500.0	-6.7 a

a = ambient reading

**Table 10: Radiated Emission Test Data - Plan B Channel 2**

CLIENT: Adtran DATE: 5/6/2004  
 TESTER: J. Ritter JOB #: 8028  
 EUT: Tracer 4202/4206 STANDARD: FCC Part 15  
 CONFIGURATION: Plan A Band 1 DISTANCE: 3m  
 CLOCKS: Transmit at 5824 Mhz (peak of signal)  
**Test Equipment/Limit:**  
 ANTENNA: A\_00425 LIMIT: LFCC\_3m\_Class\_B  
 CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dB $\mu$ V	Ant. Corr. dB/m	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level dB $\mu$ V/m	Corr. Level $\mu$ V/m	Limit $\mu$ V/m	Margin dB
<b>Peak</b>											
1236.53	H	180.0	1.0	52.1	26.4	2.3	36.2	44.6	169.1	5000.0	-29.4
1401.00	H	0.0	1.0	49.3	27.1	2.3	36.0	42.8	137.3	5000.0	-31.2
2802.00	H	0.0	1.0	48.0	30.4	3.2	35.7	46.0	199.6	5000.0	-28.0 a
3861.00	H	10.0	1.0	51.1	31.1	3.8	35.4	50.6	338.8	5000.0	-23.4
4158.00	H	0.0	1.0	47.7	31.6	3.9	35.5	47.7	242.1	5000.0	-26.3 a
8316.00	H	0.0	1.0	47.8	38.5	5.3	36.1	55.5	596.2	5000.0	-18.5 a
11648.00	H	0.0	1.0	45.0	41.1	6.4	35.7	56.8	691.3	5000.0	-17.2 a
1236.53	V	180.0	1.0	53.3	26.4	2.3	36.2	45.8	194.8	5000.0	-28.2
1401.00	V	190.0	1.0	43.7	27.1	2.3	36.0	37.1	71.6	5000.0	-36.9
2802.00	V	0.0	1.0	47.1	30.4	3.2	35.7	45.1	179.9	5000.0	-28.9 a
3861.00	V	10.0	1.0	53.6	31.1	3.8	35.4	53.1	451.8	5000.0	-20.9
4158.00	V	0.0	1.0	48.2	31.6	3.9	35.5	48.2	256.5	5000.0	-25.8 a
8316.00	V	0.0	1.0	45.4	38.5	5.3	36.1	53.1	452.3	5000.0	-20.9 a
11648.00	V	0.0	1.0	46.8	41.1	6.4	35.7	58.6	850.4	5000.0	-15.4 a
<b>AVG</b>											
1236.53	H	180.0	1.0	47.2	26.4	2.3	36.2	39.7	96.2	500.0	-14.3
1401.00	H	0.0	1.0	38.7	27.1	2.3	36.0	32.1	40.4	500.0	-21.9
2802.00	H	0.0	1.0	40.1	30.4	3.2	35.7	38.1	80.4	500.0	-15.9 a
3861.00	H	10.0	1.0	38.0	31.1	3.8	35.4	37.5	75.0	500.0	-16.5
4158.00	H	0.0	1.0	38.6	31.6	3.9	35.5	38.6	85.2	500.0	-15.4 a
8316.00	H	0.0	1.0	38.1	38.5	5.3	36.1	45.8	195.2	500.0	-8.2 a
11648.00	H	0.0	1.0	39.2	41.1	6.4	35.7	51.0	354.5	500.0	-3.0 a
1236.53	V	180.0	1.0	41.3	26.4	2.3	36.2	33.8	48.9	500.0	-20.2
1401.00	V	190.0	1.0	43.7	27.1	2.3	36.0	37.1	71.6	500.0	-16.9
2802.00	V	0.0	1.0	37.1	30.4	3.2	35.7	35.1	56.9	500.0	-18.9
3861.00	V	10.0	1.0	39.5	31.1	3.8	35.4	39.0	89.1	500.0	-15.0
4158.00	V	0.0	1.0	36.7	31.6	3.9	35.5	36.7	68.2	500.0	-17.3 a
8316.00	V	0.0	1.0	37.2	38.5	5.3	36.1	44.9	175.9	500.0	-9.1 a
11648.00	V	0.0	1.0	38.1	41.1	6.4	35.7	49.9	312.3	500.0	-4.1 a

a = ambient reading

**Table 11: Radiated Emission Test Data - Plan B Channel 3**

CLIENT: Adtran DATE: 5/18/2004  
 TESTER: J. Ritter JOB #: 8028  
 EUT: Tracer 4202/4206 STANDARD : FCC Part 15  
 CONFIGURATION: Plan B Band 3 DISTANCE: 3m  
 CLOCKS: Transmit at 5833Mhz (peak of signal)  
**Test Equipment/Limit:**  
 ANTENNA: A\_00425 LIMIT: LFCC\_3m\_Class\_B  
 CABLE: CSITE1\_HF AMPLIFIER (dB) A\_00066

Frequency (MHz)	Polarity H/V	Az Deg	Ant. Hght (m)	SA Level dB $\mu$ V	Ant. Corr. dB/m	Cable Corr. (dB)	Amp Gain (dB)	Corr. Level dB $\mu$ V/m	Corr. Level $\mu$ V/m	Limit $\mu$ V/m	Margin dB
<b>Peak</b>											
1237.70	H	170.0	1.0	51.9	26.4	2.3	36.2	44.4	165.0	5000.0	-29.6
1403.26	H	180.0	1.0	44.3	27.1	2.3	36.0	37.7	77.1	5000.0	-36.2 a
1494.54	H	190.0	1.0	49.4	27.5	2.3	35.9	43.4	147.2	5000.0	-30.6
1700.67	H	180.0	1.0	48.7	28.2	2.4	35.7	43.6	151.4	5000.0	-30.4
2337.35	H	180.0	1.0	55.0	29.8	2.9	35.6	52.1	402.3	5000.0	-21.9
8419.50	H	180.0	1.0	46.3	38.6	5.3	36.1	54.1	507.1	5000.0	-19.9 a
11667.00	H	180.0	1.0	47.3	41.1	6.4	35.7	59.1	900.4	5000.0	-14.9 a
1237.70	V	170.0	1.0	51.9	26.4	2.3	36.2	44.4	165.0	5000.0	-29.6
1403.26	V	180.0	1.0	43.3	27.1	2.3	36.0	36.7	68.7	5000.0	-37.2 a
1494.54	V	170.0	1.0	46.9	27.5	2.3	35.9	40.8	109.9	5000.0	-33.2
1700.67	V	180.0	1.0	48.5	28.2	2.4	35.7	43.4	148.2	5000.0	-30.6
2337.35	V	180.0	1.0	57.8	29.8	2.9	35.6	54.9	553.4	5000.0	-19.1
8419.50	V	90.0	1.0	45.3	38.6	5.3	36.1	53.1	454.1	5000.0	-20.8 a
11667.00	V	180.0	1.0	47.7	41.1	6.4	35.7	59.5	946.1	5000.0	-14.5 a
<b>AVG</b>											
1237.70	H	170.0	1.0	40.2	26.4	2.3	36.2	32.7	43.1	500.0	-21.3
1403.26	H	180.0	1.0	34.8	27.1	2.3	36.0	28.3	25.9	500.0	-25.7
1494.54	H	190.0	1.0	37.8	27.5	2.3	35.9	31.7	38.6	500.0	-22.3
1700.67	H	180.0	1.0	36.0	28.2	2.4	35.7	30.9	35.2	500.0	-23.0
2337.35	H	180.0	1.0	43.4	29.8	2.9	35.6	40.5	105.8	500.0	-13.5
8419.50	H	180.0	1.0	35.5	38.6	5.3	36.1	43.3	145.6	500.0	-10.7 a
11667.00	H	180.0	1.0	35.3	41.1	6.4	35.7	47.1	226.9	500.0	-6.9 a
1237.70	V	170.0	1.0	40.2	26.4	2.3	36.2	32.7	43.1	500.0	-21.3
1403.26	V	180.0	1.0	33.6	27.1	2.3	36.0	27.0	22.5	500.0	-26.9 a
1494.54	V	190.0	1.0	37.7	27.5	2.3	35.9	31.6	38.0	500.0	-22.4
1700.67	V	180.0	1.0	38.1	28.2	2.4	35.7	33.0	44.7	500.0	-21.0
2337.35	V	180.0	1.0	45.5	29.8	2.9	35.6	42.6	134.8	500.0	-11.4
8419.50	V	90.0	1.0	35.3	38.6	5.3	36.1	43.1	142.9	500.0	-10.9 a
11667.00	V	180.0	1.0	35.4	41.1	6.4	35.7	47.2	228.3	500.0	-6.8 a

a = ambient reading

#### **4.6 AC Powerline Conducted Emissions: (FCC Part §15.207)**

The EUT was placed on an 80 cm high 1 x 1.5 m non-conductive table above a ground plane. Power to the EUT was provided through a Solar Corporation 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network bonded to a 3 x 2 meter ground plane. The LISN has its AC input supplied from a filtered AC power source. Power and data cables were moved about to obtain maximum emissions.

The 50 $\Omega$  output of the LISN was connected to the input of the spectrum analyzer and the emissions in the frequency range of 150 kHz to 30 MHz were measured. The detector function was set to quasi-peak, peak, or average as appropriate, and the resolution bandwidth during testing was at least 9 kHz, with all post-detector filtering no less than 10 times the resolution bandwidth for peak measurements.

Data is recorded in Table 12.



**Table 12: Conducted Emissions Test Data; 15.207**

CLIENT: Adtran EUT : Tracer 4202L1/4206L1  
 DATE: 5/7/04 TESTER: G. Snyder  
 JOB #: 8028 TEST STANDARD: FCC Part 15  
 CLASS: FCC\_B TEST VOLTAGE: 120 VAC

Frequency	Level	Cable	Limit	Margin	Level	Cable	Limit	Margin
	QP	Loss	QP	QP	AVG	Loss	AVG	AVG
MHz	dBuV	dB	dBuV	dB	dBuV	dB	dBuV	dB
0.26	19.3	10.7	61.4	-31.4	19.3	10.7	51.4	-21.4
0.30	37.6	10.7	60.1	-11.8	28.6	10.7	50.1	-10.8
0.48	21.4	10.7	56.3	-24.2	21.4	10.7	46.3	-14.2
1.04	34.6	11.0	56.0	-10.4	22.3	11.0	46.0	-12.7
3.49	34.2	11.4	56.0	-10.4	21.8	11.4	46.0	-12.8
9.95	29.6	11.9	60.0	-18.5	18.7	11.9	50.0	-19.4
13.10	35.1	12.2	60.0	-12.7	21.0	12.2	50.0	-16.8
16.13	30.4	12.3	60.0	-17.3	21.4	12.3	50.0	-16.3

LINE 2 - PHASE

Frequency	Level	Cable	Limit	Margin	Level	Cable	Limit	Margin
	QP	Loss	QP	QP	AVG	Loss	AVG	AVG
MHz	dBuV	dB	dBuV	dB	dBuV	dB	dBuV	dB
0.26	30.7	10.7	61.4	-20.0	30.7	10.7	51.4	-10.0
0.30	37.9	10.7	60.1	-11.5	27.4	10.7	50.1	-12.0
0.48	33.9	10.7	56.3	-11.7	20.3	10.7	46.3	-15.3
1.22	36.0	11.0	56.0	-9.0	24.1	11.0	46.0	-10.9
3.49	34.9	11.4	56.0	-9.7	22.8	11.4	46.0	-11.8
9.95	29.7	11.9	60.0	-18.4	20.0	11.9	50.0	-18.1
13.09	35.6	12.2	60.0	-12.2	25.1	12.2	50.0	-12.7
15.77	29.7	12.4	60.0	-17.9	19.7	12.4	50.0	-17.9