


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Gemlink Ltd.
Address : Flat 17, 8/F International Plaza, 20 Sheung Yuet Road, Kowloon Bay,
Kowloon, Hong Kong
Manufacturer/Factory : Guoguang Electric (Zhongshan) Ltd.
Address : #6 Building, #58 ChuangYe Road, ZhuYuan Estate, XiaoLan Town,
ZhongShan, GuangDong, China
E.U.T. : 37" HD Sound Bar with Bluetooth Wireless
Brand Name : iLIVE, CAWA
Model No. : ITB259B, B-335F (For model difference refer to section 1)
FCC ID : HDOAB35BT
Measurement Standard : FCC PART 15.247: 2017
Date of Receiver : January 24, 2019
Date of Test : January 24, 2019 to February 20, 2019
Date of Report : February 26, 2019

This Test Report is Issued Under the Authority of :

Prepared by


Knight Wen / Engineer

Approved & Authorized Signer


Tori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 Product Description for Equipment under Test	5
1.2 Related Submittal(s) / Grant (s)	7
1.3 Test Methodology	7
1.4 Equipment Modifications	7
1.5 Support Device	7
1.6 Test Facility and Location	8
1.7 Summary of Test Results	9
2. SYSTEM TEST CONFIGURATION.....	10
2.1 EUT Configuration.....	10
2.2 Special Accessories	10
2.3 Description of test modes	10
2.4 EUT Exercise	10
3. CONDUCTED EMISSIONS TEST	11
3.1 Test SET-UP (Block Diagram of Configuration)	11
3.2 Test Condition	11
3.3 Measurement Results.....	11
4. RADIATED EMISSION TEST.....	14
4.1 Test SET-UP (Block Diagram of Configuration)	14
4.2 Measurement Procedure	15
4.3 Limit	16
4.4 Measurement Results.....	16
5. CHANNEL SEPARATION TEST.....	20
5.1 Measurement Procedure	20
5.2 Test SET-UP (Block Diagram of Configuration)	20
5.3 Measurement Results.....	20
6. 20DB BANDWIDTH.....	26
6.1 Measurement Procedure	26
6.2 Test SET-UP (Block Diagram of Configuration)	26
6.3 Measurement Results.....	26
7. HOPPING CHANNEL NUMBER	33
7.1 Measurement Procedure	33
7.2 Test SET-UP (Block Diagram of Configuration)	33
7.3 Measurement Results.....	33

8. TIME OF OCCUPANCY (DWELL TIME).....	35
8.1 Measurement Procedure	35
8.2 Measurement Results.....	35
9. MAXIMUM PEAK OUTPUT POWER	41
9.1 Measurement Procedure	41
9.2 Measurement Results.....	41
10. BAND EDGE	47
10.1 Measurement Procedure	47
10.2 Limit	47
10.3 Measurement Results.....	47
11. ANTENNA APPLICATION	54
11.1 Antenna requirement.....	54
11.2 Measurement Results.....	54
12. CONDUCTED SPURIOUS EMISSIONS	55
12.1 Measurement Procedure	55
12.2 Measurement Results.....	55
13. TEST EQUIPMENT LIST.....	59

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1901329FV00	Initial Issue	2019-02-26

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Product Name	: 37" HD Sound Bar with Bluetooth Wireless
Main Model Name	: ITB259B
Additional Model Name	: B-335F
Model difference	: Both models have the same circuit schematic, construction, PCB Layout and critical components. Their difference in model number, brand name and color due to trading purpose.
Brand Name	: iLIVE, CAWA
Power Supply	: DC 15V From Adapter
Adapter	: Model: HP24E-1501000-AU Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 15V/1000mA
Test voltage	: AC 120V/60Hz, AC 240V/50Hz (Only the worst case was recorded in this report)
Cable	: DC Line: 1.51m, unshielded Optical Line: 1.06m, unshielded
Hardware version	: 01
Software version	: V003
Remark	: According to the model difference, all tests were performed on model ITB259B.

Technical parameters

Bluetooth Version	: V5.0
Frequency Range	: 2402-2480MHz
Modulation	: GFSK, $\pi/4$ -DQPSK, 8DPSK
Number of Channel	: 79
Channel space	: 1MHz
Date Rate	: 1Mbps for GFSK 2Mbps for $\pi/4$ -DQPSK 3Mbps for 8DPSK
Antenna Type	: PCB Antenna
Antenna Gain	: -0.68 dBi

Channel List

Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz	Channel	Frequency MHz
1	2402	21	2422	41	2442	61	2462
2	2403	22	2423	42	2443	62	2463
3	2404	23	2424	43	2444	63	2464
4	2405	24	2425	44	2445	64	2465
5	2406	25	2426	45	2446	65	2466
6	2407	26	2427	46	2447	66	2467
7	2408	27	2428	47	2448	67	2468
8	2409	28	2429	48	2449	68	2469
9	2410	29	2430	49	2450	69	2470
10	2411	30	2431	50	2451	70	2471
11	2412	31	2432	51	2452	71	2472
12	2413	32	2433	52	2453	72	2473
13	2414	33	2434	53	2454	73	2474
14	2415	34	2435	54	2455	74	2475
15	2416	35	2436	55	2456	75	2476
16	2417	36	2437	56	2457	76	2477
17	2418	37	2438	57	2458	77	2478
18	2419	38	2439	58	2459	78	2479
19	2420	39	2440	59	2460	79	2480
20	2421	40	2441	60	2461		

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, Middle, and the Highest frequency of channel were selected to perform the test. The selected frequency and test software see below:

Channel	Frequency MHz
1	2402
40	2441
79	2480

Test SW version	BT_Tool.exe
-----------------	-------------

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **HDOAB35BT** filing to comply with Section 15.247 of the FCC Part 15 (2017), Subpart C Rule.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

N/A

1.6 Test Facility and Location

Site Description

EMC Lab : Listed by CNAS, August 13, 2018
The certificate is valid until August 13, 2024
The Laboratory has been assessed and proved to
be in compliance with CNAS/CL01
The Certificate Registration Number is L5795.

Listed by A2LA, November 01, 2017
The certificate is valid until December 31, 2019
The Laboratory has been assessed and proved to
be in compliance with ISO17025
The Certificate Registration Number is 4429.01

Listed by FCC, November 06, 2017
The Designation Number is CN1214
Test Firm Registration Number: 907417

Listed by Industry Canada, June 08, 2017
The Certificate Registration Number. Is 46405-9743

Name of Firm : Dongguan Nore Testing Center Co., Ltd.
(Dongguan NTC Co., Ltd.)

Site Location : Building D, Gaosheng Science and Technology
Park, Hongtu Road, Nancheng District, Dongguan
City, Guangdong Province, China

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.247(a)(1)	Channel Separation test	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)	20dB Bandwidth	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)(iii)	Hopping Channel Number	$\pm 1.42 \times 10^{-4}\%$	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	$\pm 5\%$	Compliant
§15.247(b)	Max Peak output Power test	$\pm 1.06\text{dB}$	Compliant
§15.247(d)	Band edge test	$\pm 1.70\text{dB}$	Compliant
§15.207 (a)	AC Power Conducted Emission	$\pm 1.06\text{dB}$	Compliant
§15.247(d), §15.209, §15.205	Radiated Emission	$\pm 3.70\text{dB}$	Compliant
§15.203	Antenna Requirement	N/A	Compliant
§15.247(d)	Conducted Spurious Emission	$\pm 1.70\text{dB}$	Compliant

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and normal mode is programmed. The Lowest, middle and highest channel were chosen for testing, and all packets DH1, DH3, DH5, 2DH1, 2DH3, 2DH5, 3DH1, 3DH3, 3DH5 mode in all modulation type GFSK, $\pi/4$ -DQPSK, 8DPSK were tested.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

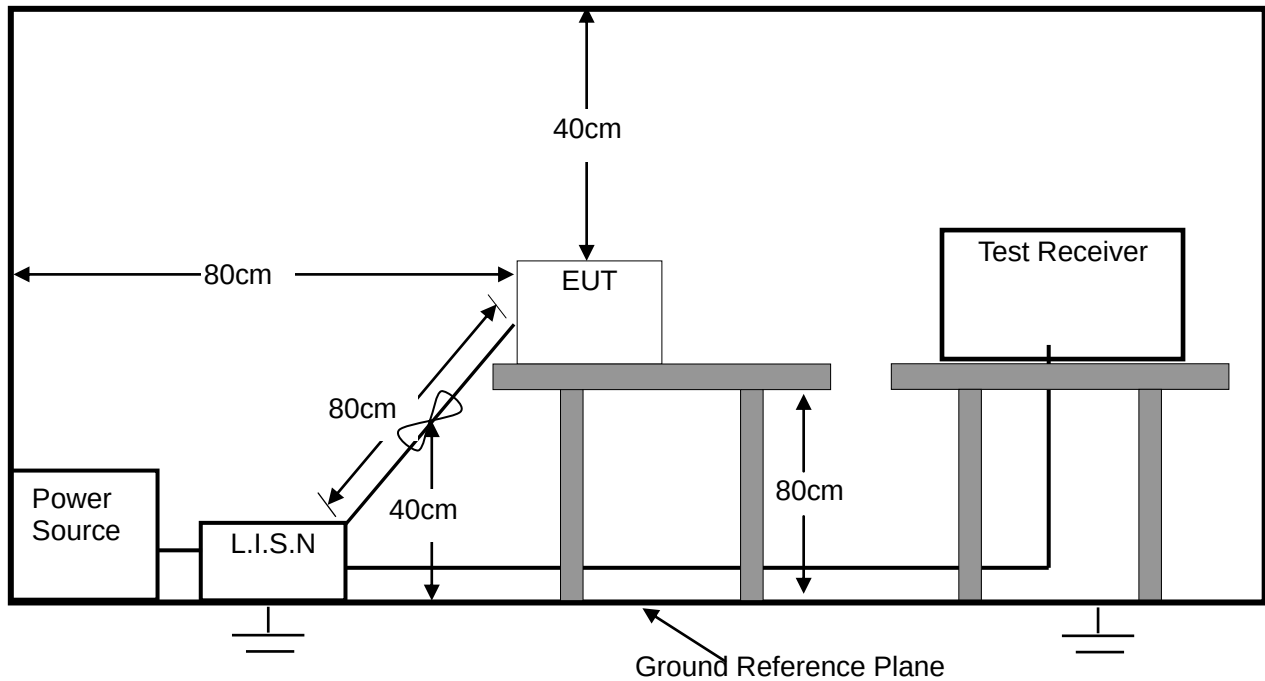

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: TX

3.3 Measurement Results

Please refer to following plots of the worst case: 8DPSK Low Channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Conducted Emission Measurement


File : ITB259B

Data : #1

Date: 2019-1-28

Time: 13:00:27

80.0 dBuV

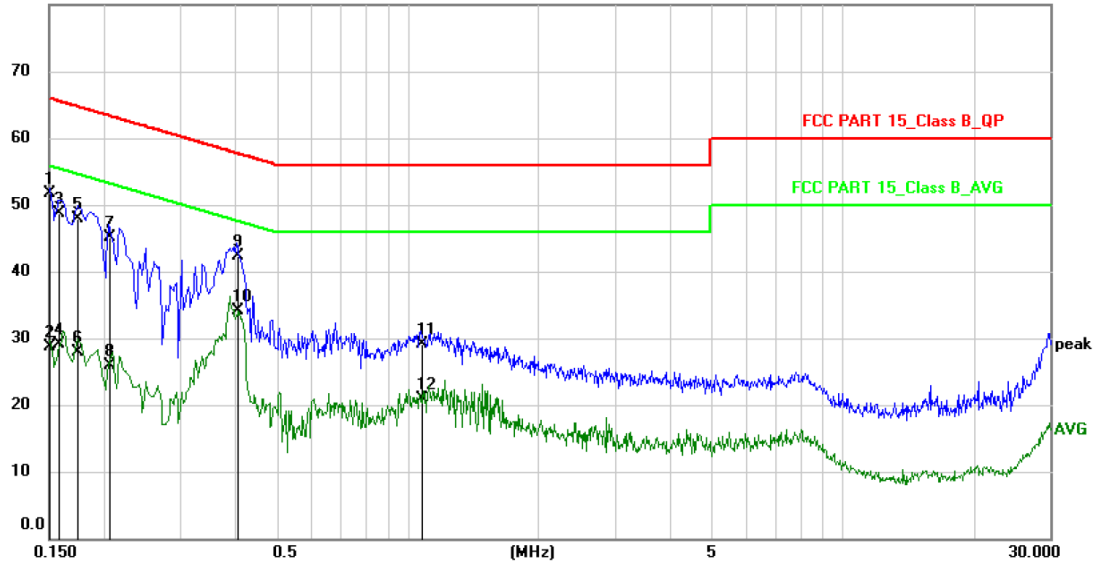

Site

Phase: **L1**

Temperature: 26

Limit: FCC PART 15_Class B_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT:

M/N: ITB259B

Mode: TX

Note: 37" HD Sound Bar with Bluetooth Wireless

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	41.09	10.61	51.70	66.00	-14.30	QP	
2		0.1500	18.09	10.61	28.70	56.00	-27.30	AVG	
3		0.1580	38.09	10.61	48.70	65.57	-16.87	QP	
4		0.1580	18.59	10.61	29.20	55.57	-26.37	AVG	
5		0.1740	37.29	10.61	47.90	64.77	-16.87	QP	
6		0.1740	17.29	10.61	27.90	54.77	-26.87	AVG	
7		0.2060	34.49	10.61	45.10	63.37	-18.27	QP	
8		0.2060	15.29	10.61	25.90	53.37	-27.47	AVG	
9		0.4060	31.78	10.62	42.40	57.73	-15.33	QP	
10	*	0.4060	23.58	10.62	34.20	47.73	-13.53	AVG	
11		1.0740	18.45	10.65	29.10	56.00	-26.90	QP	
12		1.0740	10.25	10.65	20.90	46.00	-25.10	AVG	



Dongguan NTC Co., Ltd.
Tel:+86-769-22022444 Fax:+86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Conducted Emission Measurement


File :ITB259B

Data :#2

Date: 2019-1-28

Time: 13:07:58

80.0 dBuV

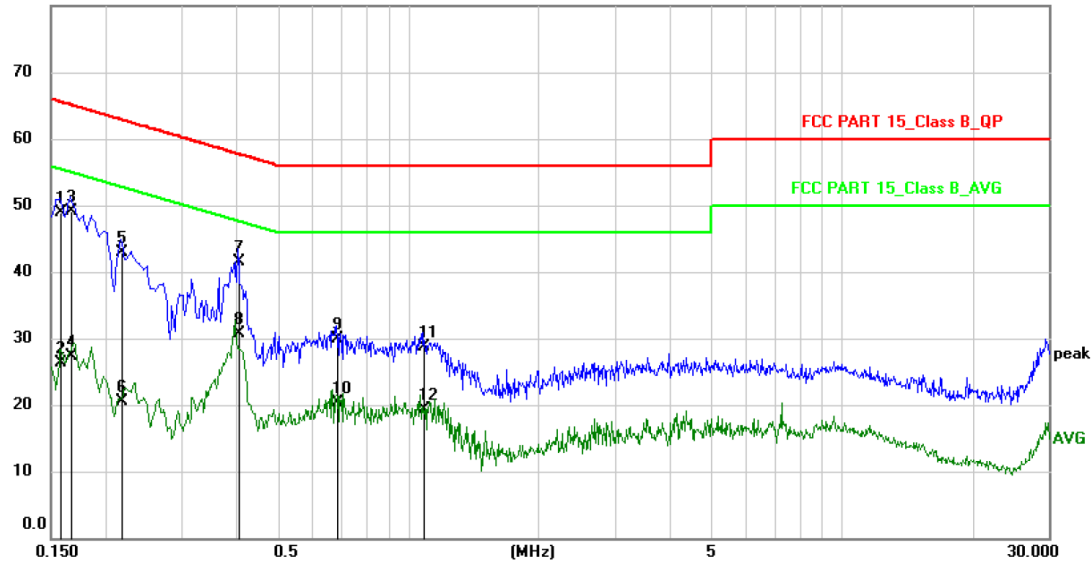

Site

Phase: **N**

Temperature: 26

Limit: FCC PART 15_Class B_QP

Power: AC120V/60Hz

Humidity: 50 %

EUT:

M/N: ITB259B

Mode: TX


Note: 37" HD Sound Bar with Bluetooth Wireless

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1580	38.39	10.61	49.00	65.57	-16.57	QP	
2		0.1580	15.79	10.61	26.40	55.57	-29.17	AVG	
3	*	0.1660	38.59	10.61	49.20	65.16	-15.96	QP	
4		0.1660	16.69	10.61	27.30	55.16	-27.86	AVG	
5		0.2180	32.39	10.61	43.00	62.89	-19.89	QP	
6		0.2180	9.99	10.61	20.60	52.89	-32.29	AVG	
7		0.4060	30.88	10.62	41.50	57.73	-16.23	QP	
8		0.4060	20.08	10.62	30.70	47.73	-17.03	AVG	
9		0.6860	19.37	10.63	30.00	56.00	-26.00	QP	
10		0.6860	9.77	10.63	20.40	46.00	-25.60	AVG	
11		1.0859	18.15	10.65	28.80	56.00	-27.20	QP	
12		1.0859	8.75	10.65	19.40	46.00	-26.60	AVG	


4. Radiated Emission Test

4.1 Test SET-UP (Block Diagram of Configuration)

4.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

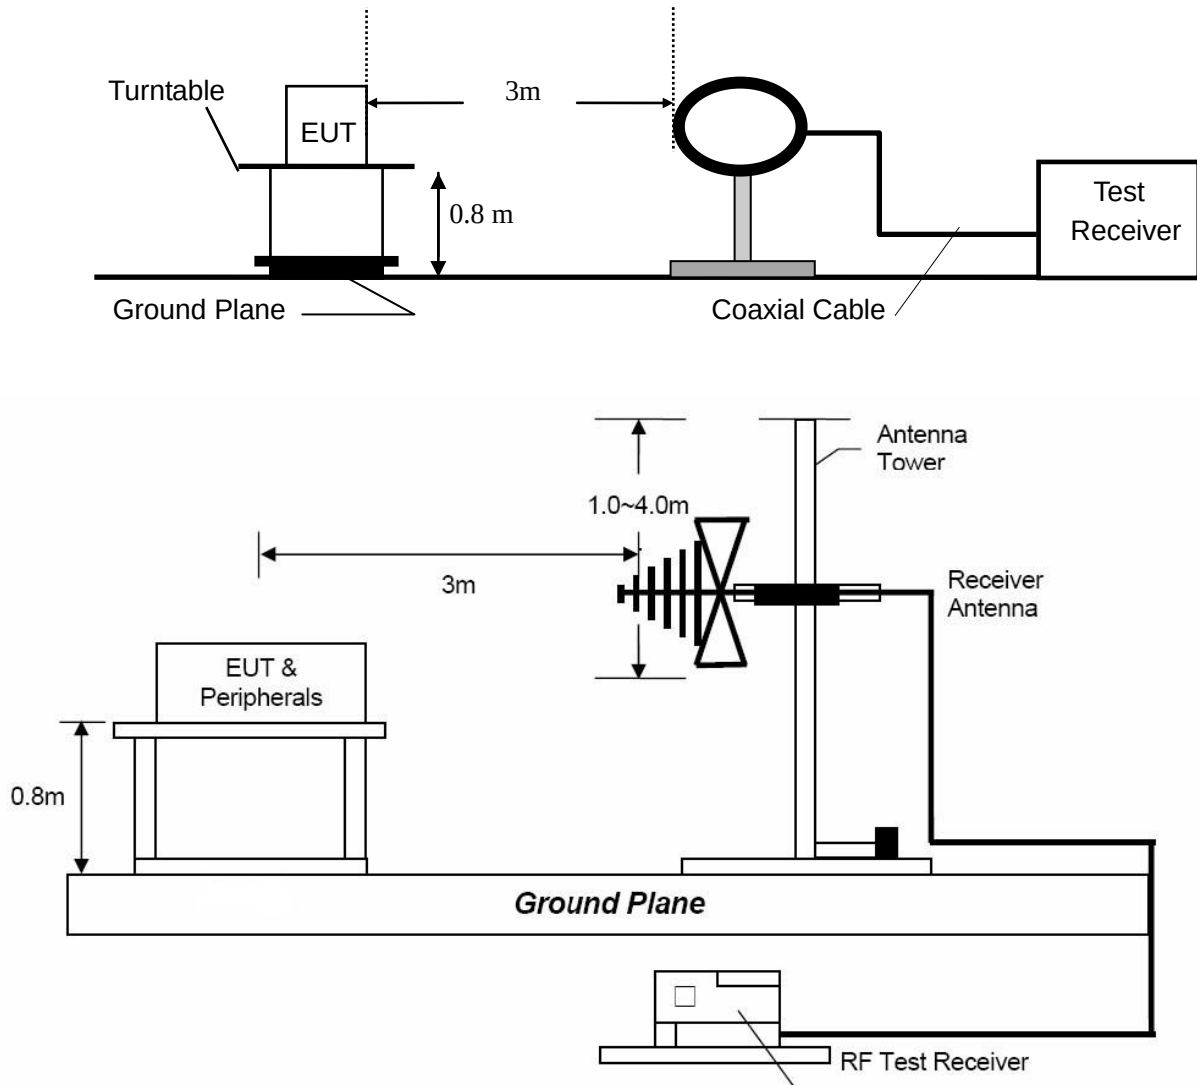

4.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

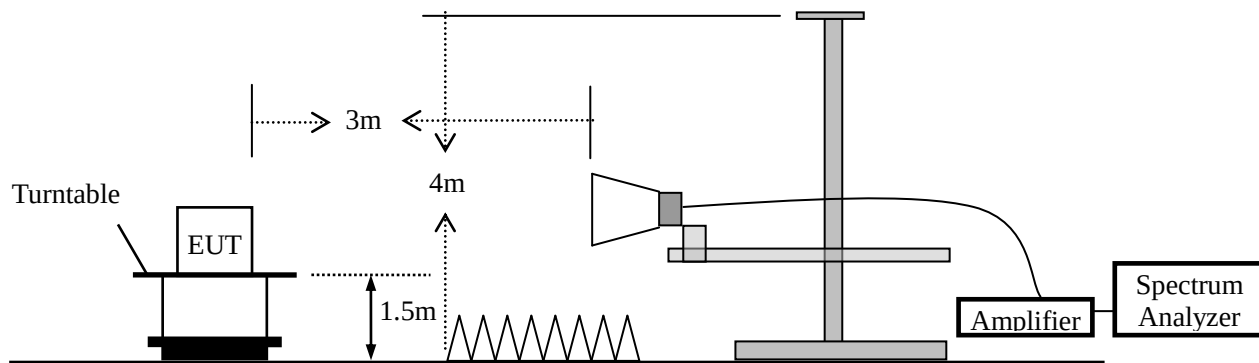

4.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

4.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level $(\text{dB})_{\mu\text{V}} = 20 \log \text{Emission level } \mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

4.4 Measurement Results

Please refer to following plots of the worst case: 8DPSK Low Channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement


File : ITB259B

Data : #1

Date: 2019-1-29

Time: 9:50:01

80.0 dBuV/m

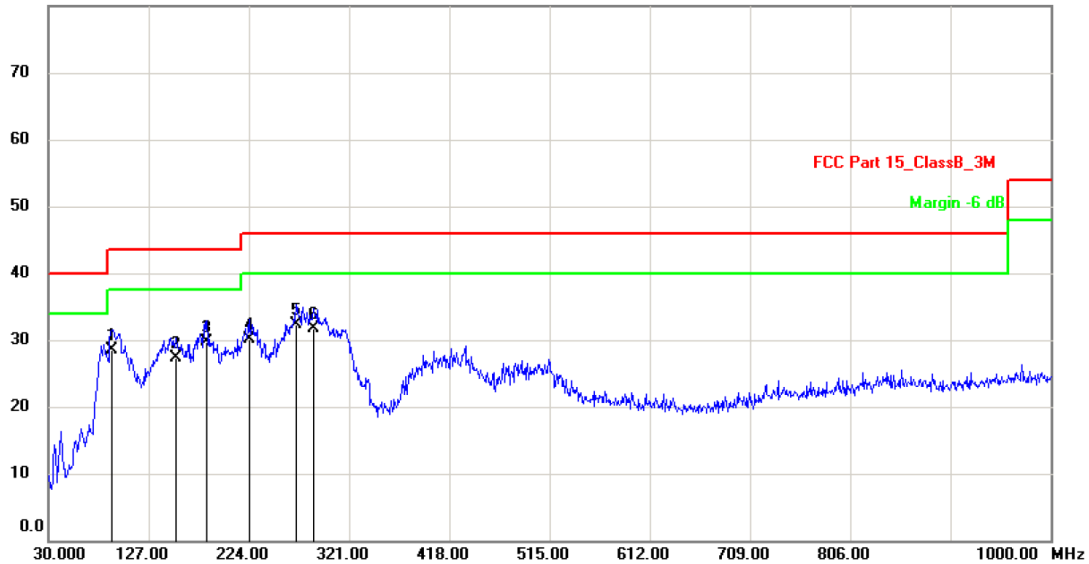

Site: 3m Chamber

Polarization: **Horizontal**

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT:

Distance: 3m

M/N: ITB259B

Mode: TX

Note: 37" HD Sound Bar with Bluetooth Wireless

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		91.1100	42.16	-13.66	28.50	43.50	-15.00	QP		
2		153.1900	42.70	-15.40	27.30	43.50	-16.20	QP		
3		183.2600	43.74	-13.94	29.80	43.50	-13.70	QP		
4		224.0000	42.86	-12.76	30.10	46.00	-15.90	QP		
5	*	269.5900	43.60	-11.20	32.40	46.00	-13.60	QP		
6		286.0799	42.55	-10.85	31.70	46.00	-14.30	QP		

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Radiated Emission Measurement


File : ITB259B

Data : #2

Date: 2019-1-29

Time: 9:58:59

80.0 dBuV/m

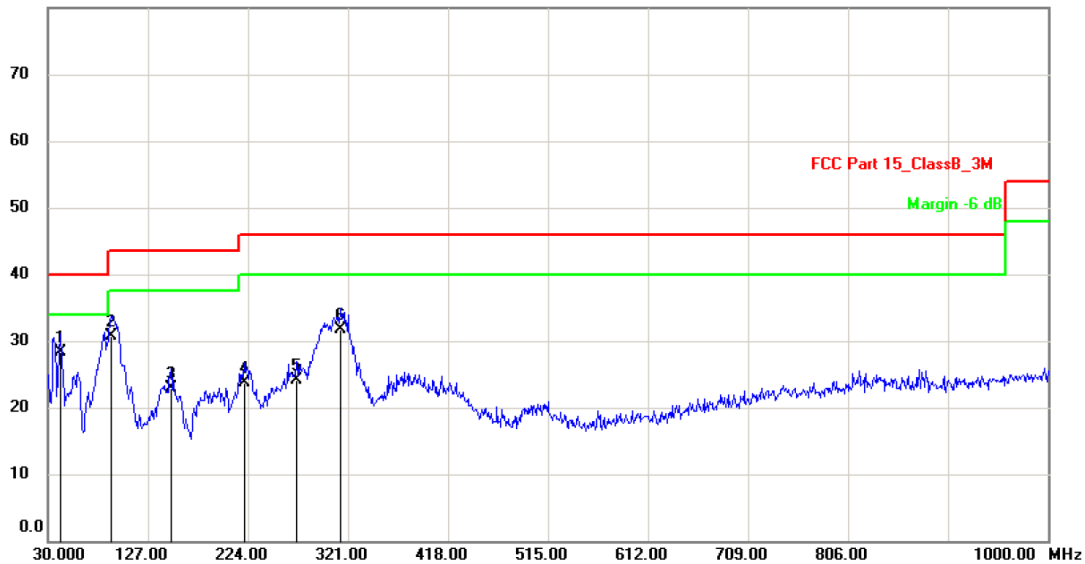

Site: 3m Chamber

Polarization: **Vertical**

Temperature: 26

Limit: FCC Part 15_ClassB_3M

Power: AC120V/60Hz

Humidity: 47 %

EUT:

Distance: 3m

M/N: ITB259B

Mode: TX

Note: 37" HD Sound Bar with Bluetooth Wireless

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.6100	42.58	-14.28	28.30	40.00	-11.70	QP		
2		91.1100	47.46	-16.66	30.80	43.50	-12.70	QP		
3		149.3100	41.42	-18.52	22.90	43.50	-20.60	QP		
4		220.1200	39.67	-15.97	23.70	46.00	-22.30	QP		
5		271.5300	37.25	-13.15	24.10	46.00	-21.90	QP		
6		314.2100	43.89	-12.09	31.80	46.00	-14.20	QP		

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

Modulation: **8DPSK** (The Worst Case)
Frequency Range: 1-25GHz Test Date : February 20, 2019
Test Result: PASS Temperature : 24 °C
Measured Distance: 3m Humidity : 47 %
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4804	V	47.93	32.29	6.30	54.23	38.59	74.00	54.00	-19.77	-15.41
7206	V	46.03	30.90	10.44	56.47	41.34	74.00	54.00	-17.53	-12.66

4804	H	49.47	35.04	6.30	55.77	41.34	74.00	54.00	-18.23	-12.66
7206	H	46.41	32.64	10.44	56.85	43.08	74.00	54.00	-17.15	-10.92

Operation Mode: TX Mode (Mid)										
4882	V	46.40	31.66	6.60	53.00	38.26	74.00	54.00	-21.00	-15.74
7323	V	45.85	30.57	10.55	56.40	41.12	74.00	54.00	-17.60	-12.88

4882	H	48.65	35.27	6.60	55.25	41.87	74.00	54.00	-18.75	-12.13
7323	H	47.04	31.22	10.55	57.59	41.77	74.00	54.00	-16.41	-12.23

Operation Mode: TX Mode (High)										
4960	V	46.61	31.29	6.89	53.50	38.18	74.00	54.00	-20.50	-15.82
7440	V	46.36	31.36	10.60	56.96	41.96	74.00	54.00	-17.04	-12.04

4960	H	47.72	36.72	6.89	54.61	43.61	74.00	54.00	-19.39	-10.39
7440	H	46.29	31.18	10.60	56.89	41.78	74.00	54.00	-17.11	-12.22

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.


5. Channel Separation test

5.1 Measurement Procedure

Minimum Hopping Channel Carrier Frequency Separation, FCC Rule 15.247(a)(1):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable, and using the MARKER and Max-Hold function to record the separation of two adjacent channels.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results


Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5, 2DH5, 3DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	February 19, 2019
Temperature :	22 °C	Humidity :	53 %
Test Result:	PASS		

Channel number	Channel frequency (MHz)	Separation Read Value (KHz)	Separation Limit 2/3 20dB Bandwidth (KHz)
GFSK			
Lowest	2402	1002	>630.4
Middle	2441	1002	>630.2
Highest	2480	1002	>629.9
$\pi/4$ -DQPSK			
Lowest	2402	1002	>876.0
Middle	2441	1002	>877.3
Highest	2480	1002	>878.7
8DPSK			
Lowest	2402	1002	>862.0
Middle	2441	1002	>863.3
Highest	2480	1002	>863.3


GFSK Lowest Channel

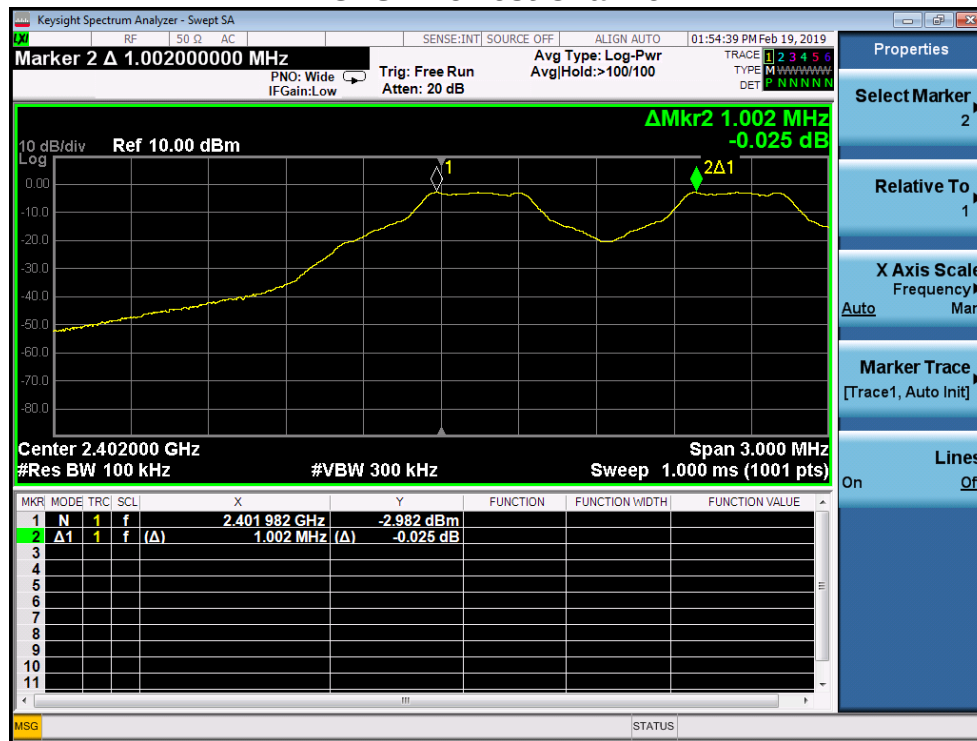


GFSK Middle Channel

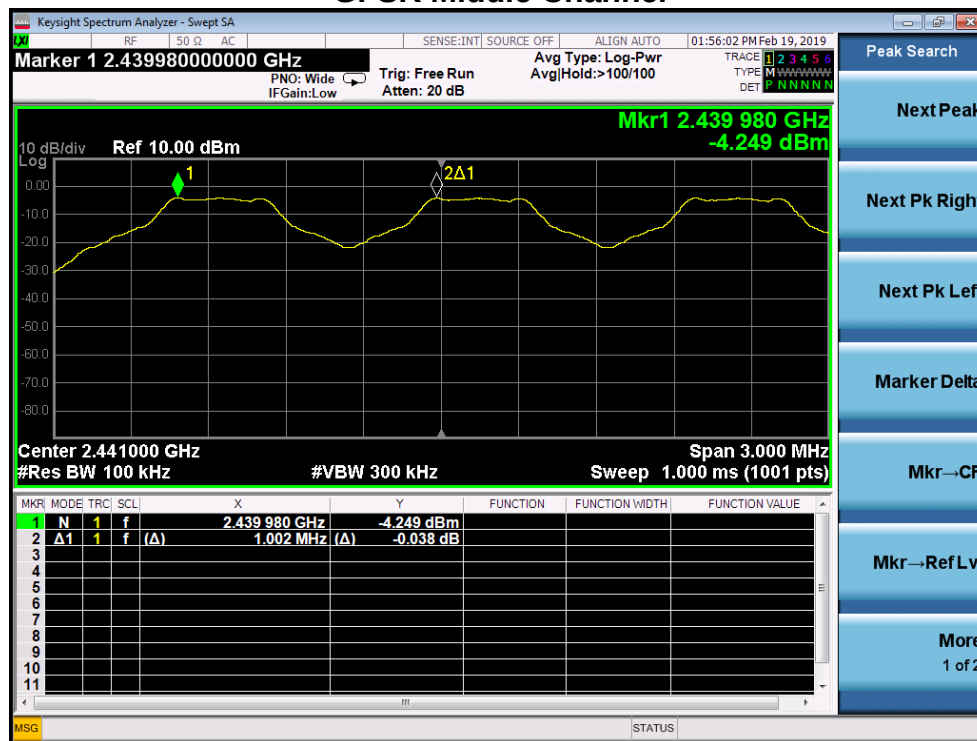


GFSK Highest Channel

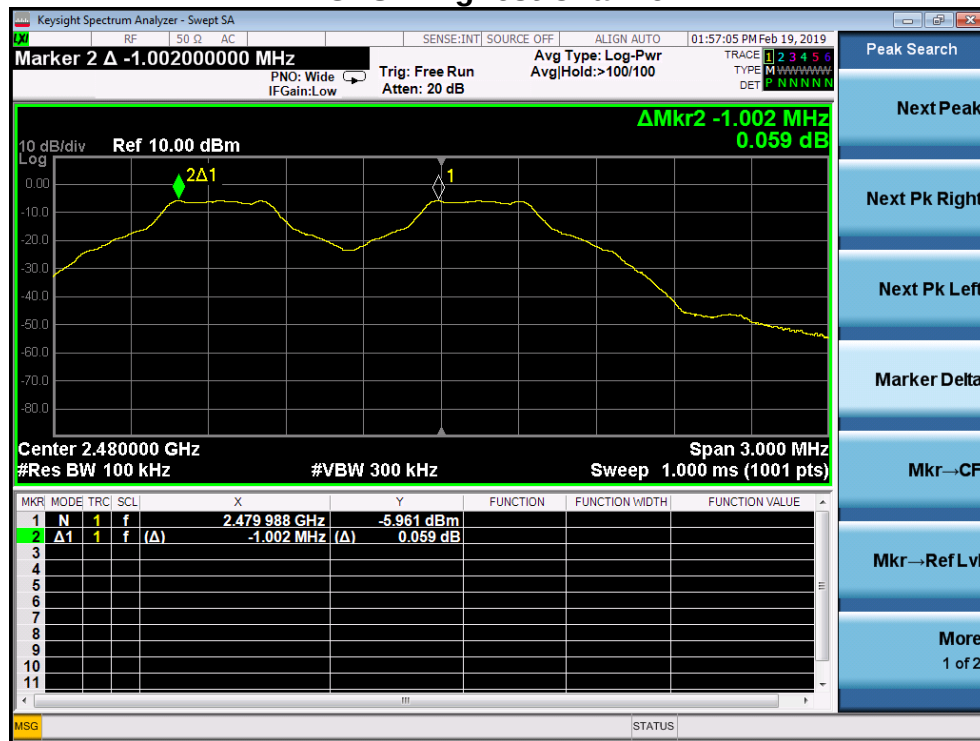


$\pi/4$ -DQPSK Lowest Channel

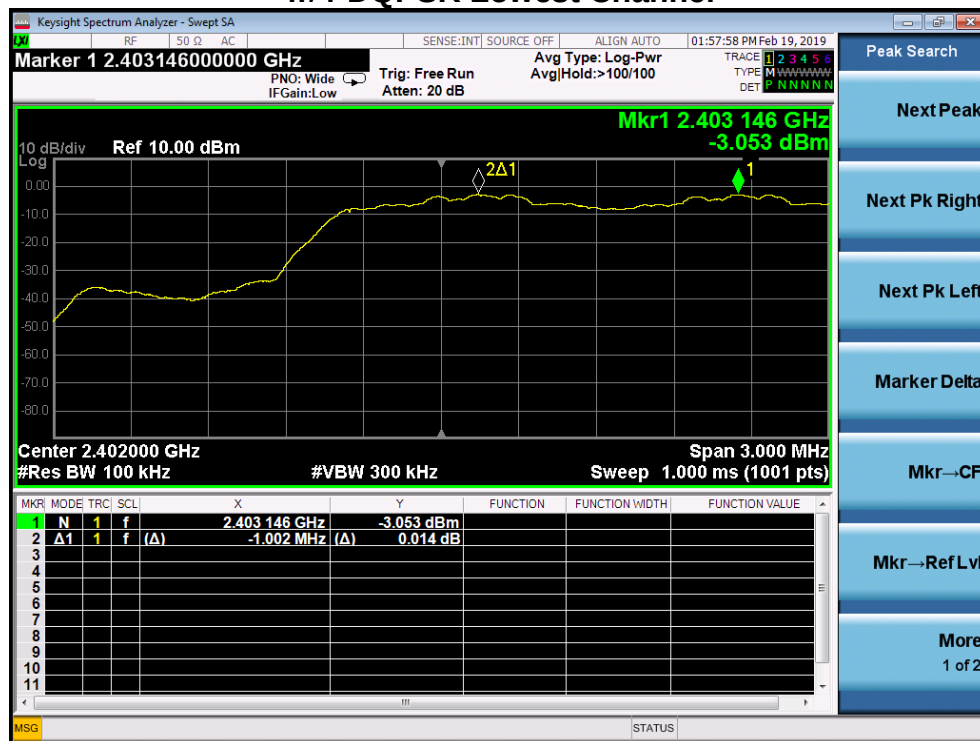


$\pi/4$ -DQPSK Middle Channel

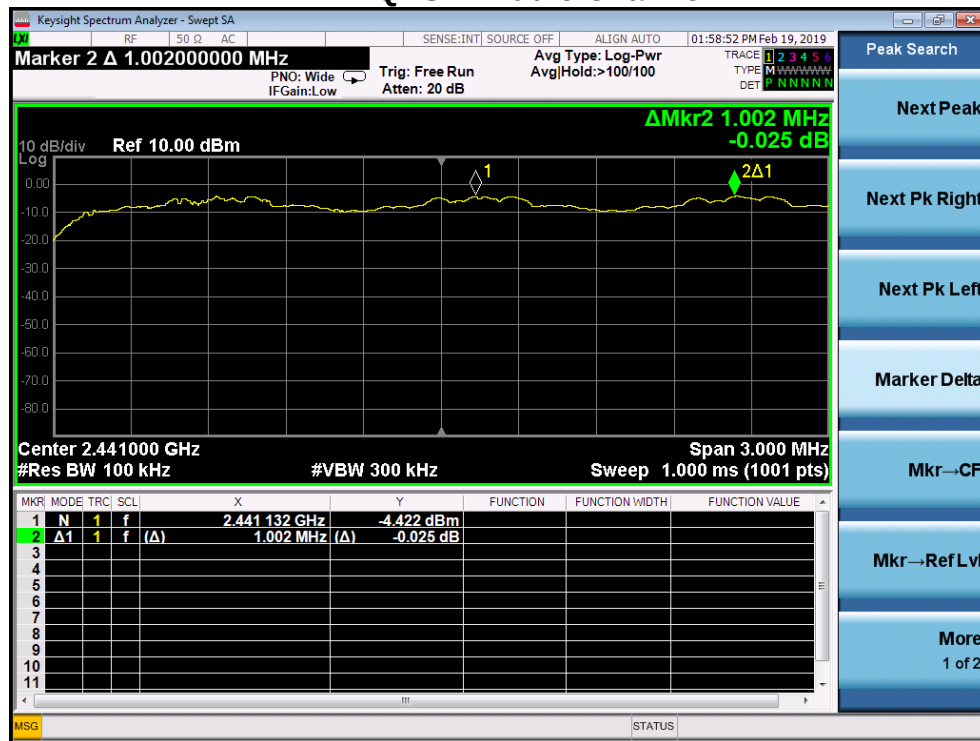


$\pi/4$ -DQPSK Highest Channel

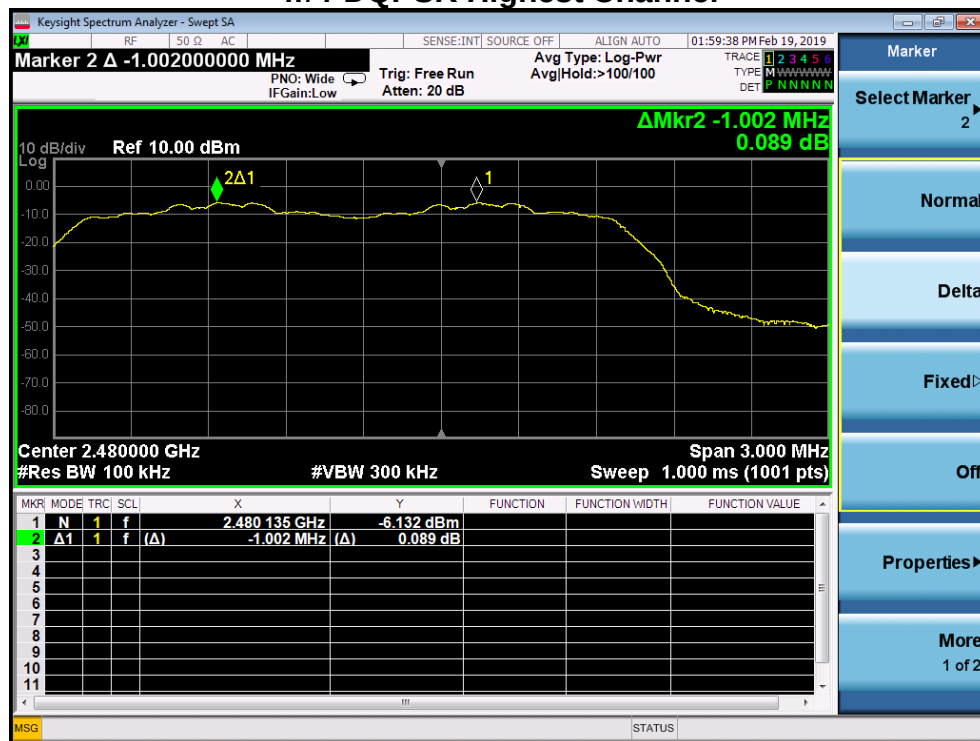


8DPSK Lowest Channel

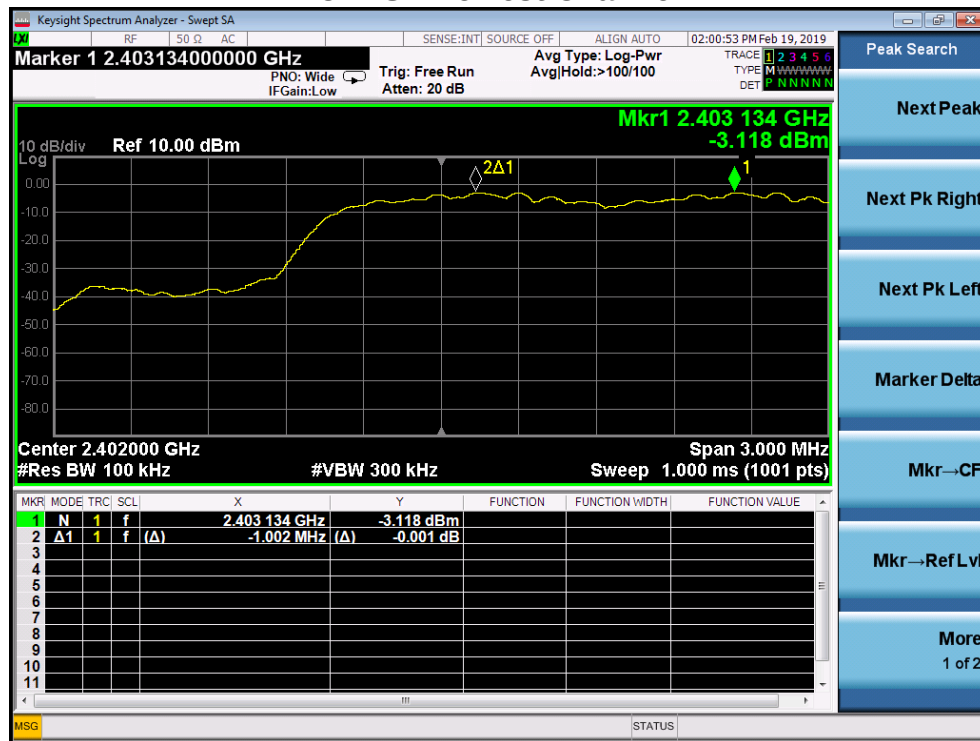

8DPSK Middle Channel

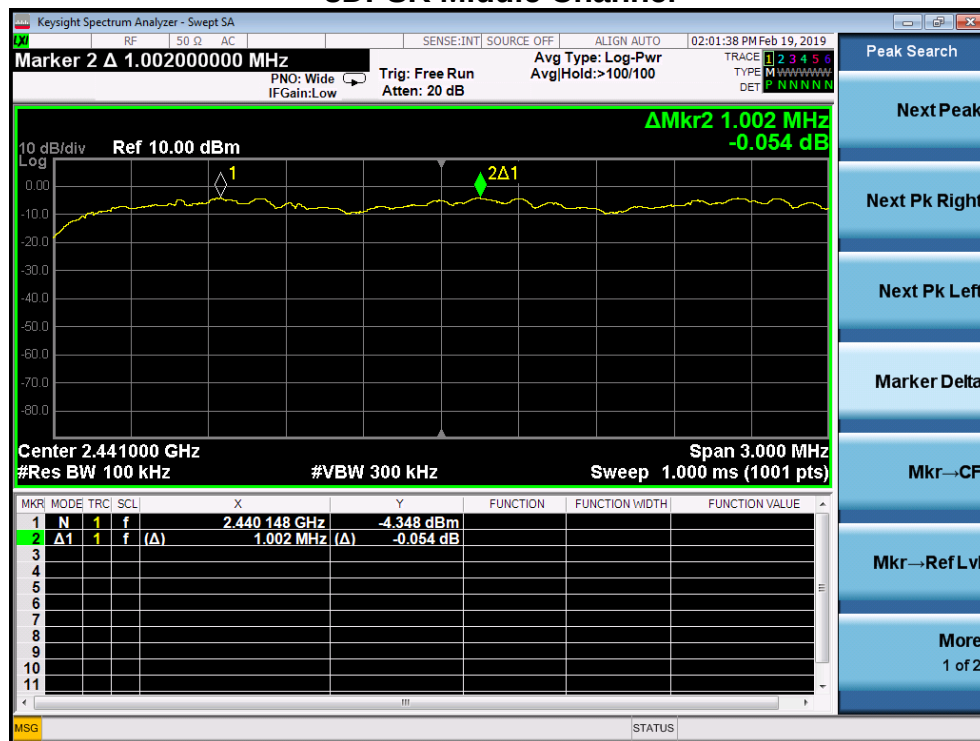

8DPSK Highest Channel

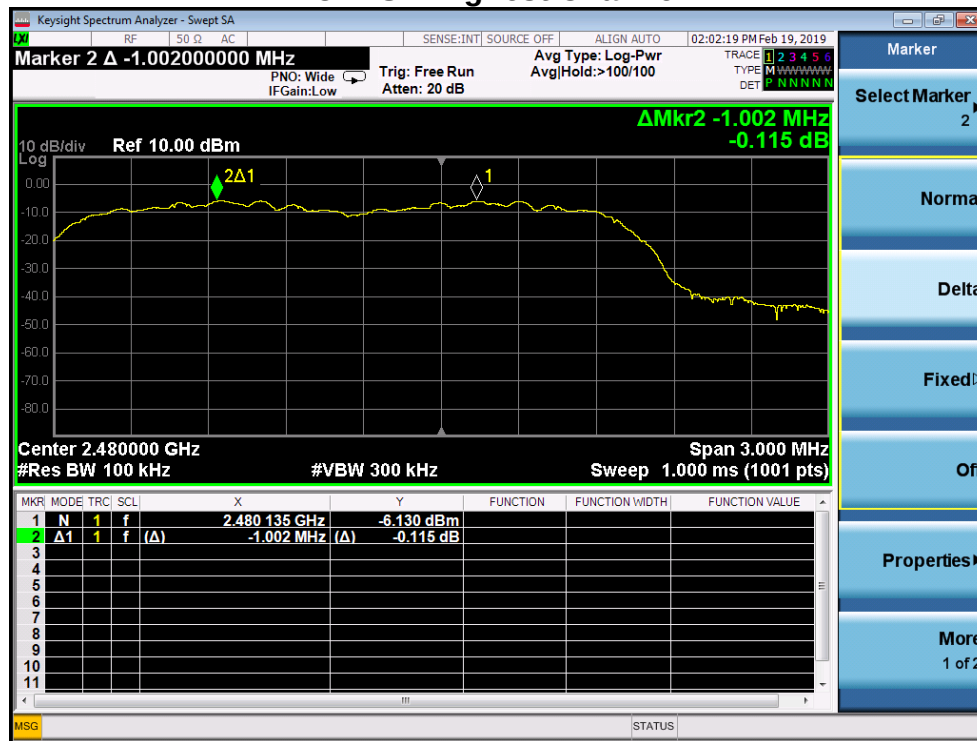


6. 20dB Bandwidth

6.1 Measurement Procedure

Maximum 20dB RF Bandwidth, FCC Rule 15.247(a)(1):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RBW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. Use the spectrum 20dB down delta function to measure the bandwidth.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Refer to attached data chart.


Modulation: GFSK, $\pi/4$ -DQPSK, 8DPSK
 RBW: 30KHz VBW: 100KHz
 Packet: DH5, 2DH5, 3DH5 Spectrum Detector: PK
 Test By: Sance Test Date : February 19, 2019
 Temperature : 22 °C Humidity : 53 %
 Test Result: PASS

Channel frequency (MHz)	20dB Down BW(kHz)
GFSK	
2402	945.6
2441	945.3
2480	944.8
$\pi/4$ -DQPSK	
2402	1314.0
2441	1316.0
2480	1318.0
8DPSK	
2402	1293.0
2441	1295.0
2480	1295.0

GFSK Lowest Channel

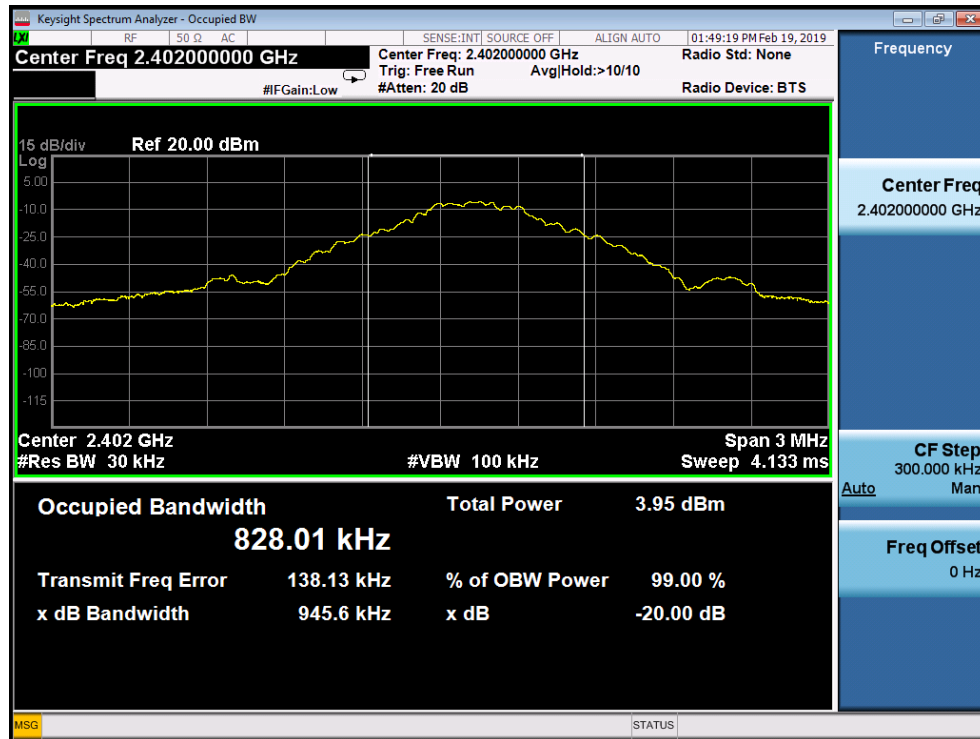


GFSK Middle Channel

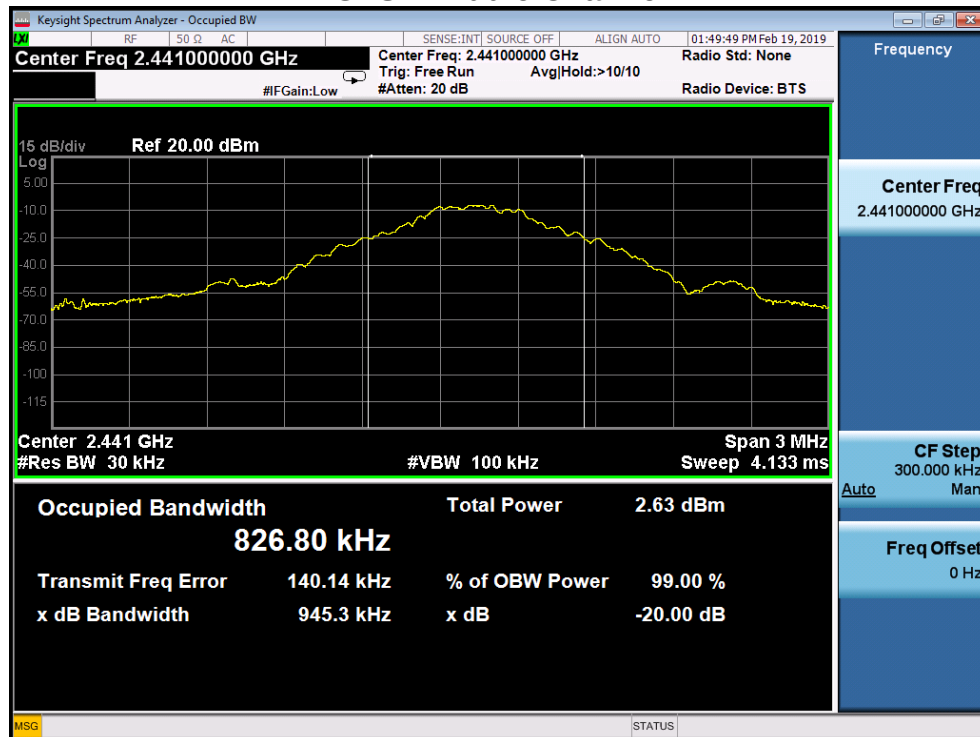


GFSK Highest Channel



$\pi/4$ -DQPSK Lowest Channel

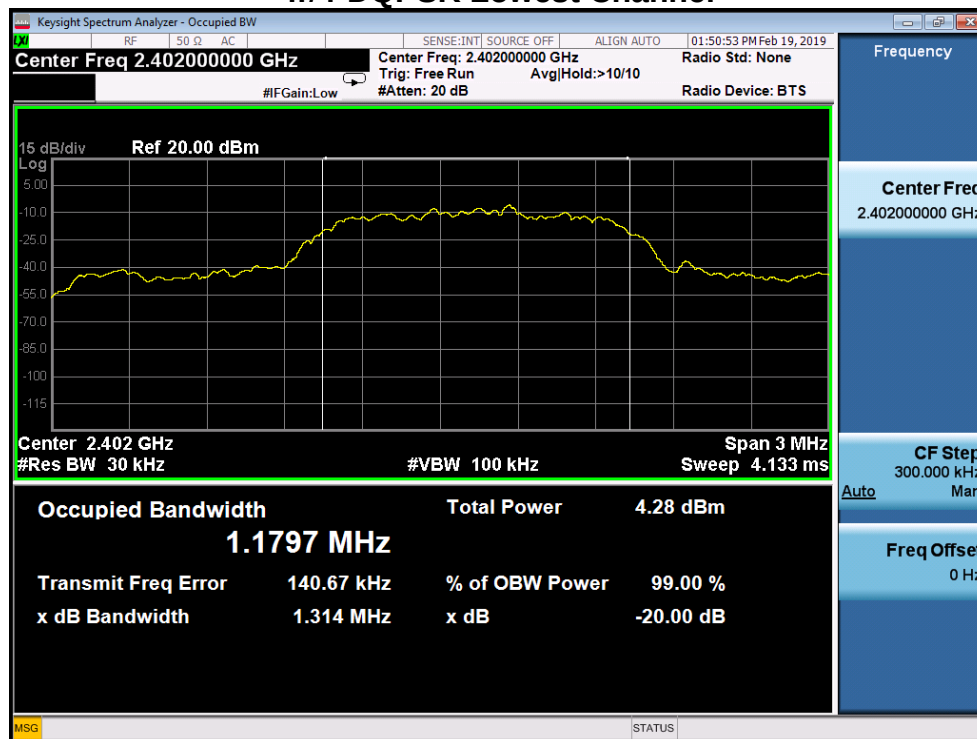


$\pi/4$ -DQPSK Middle Channel

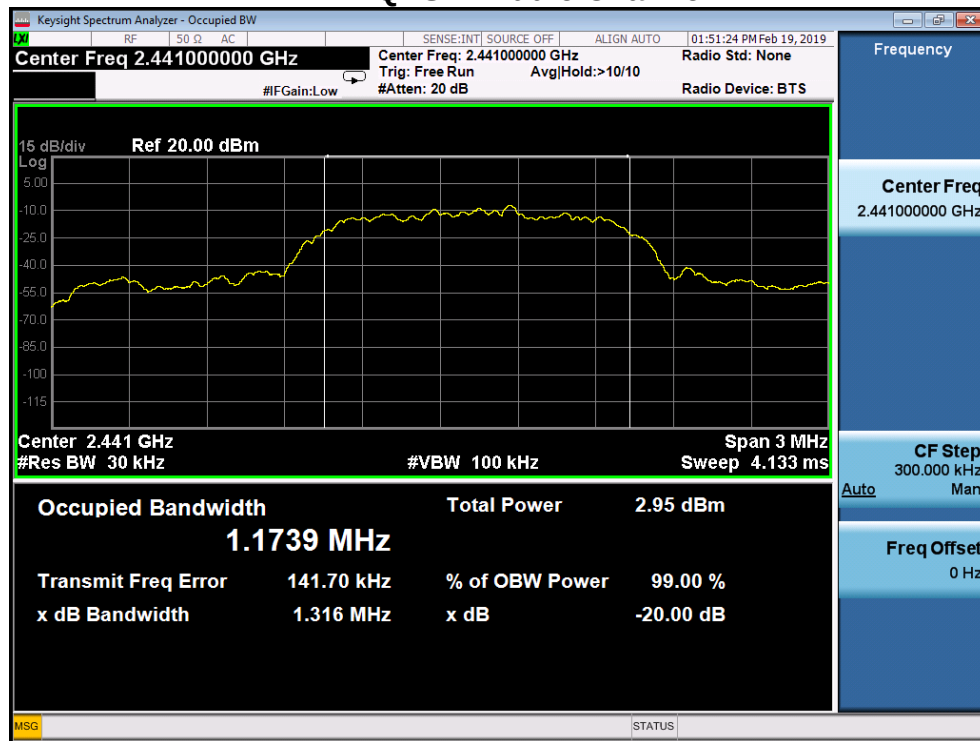

$\pi/4$ -DQPSK Highest Channel




8DPSK Lowest Channel

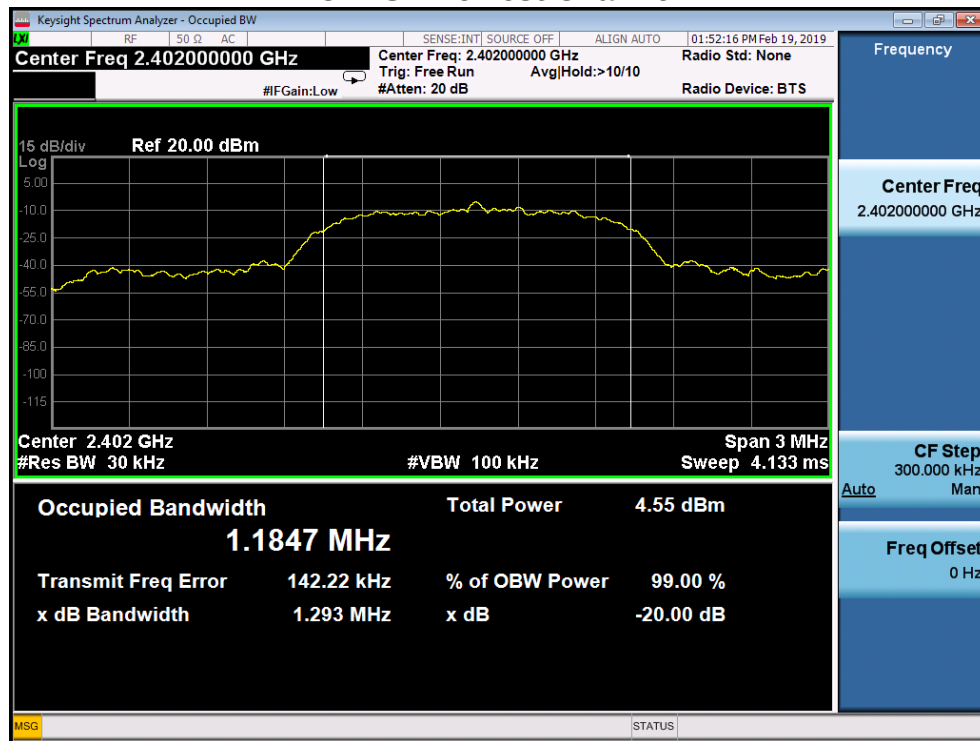

8DPSK Middle Channel



8DPSK Highest Channel

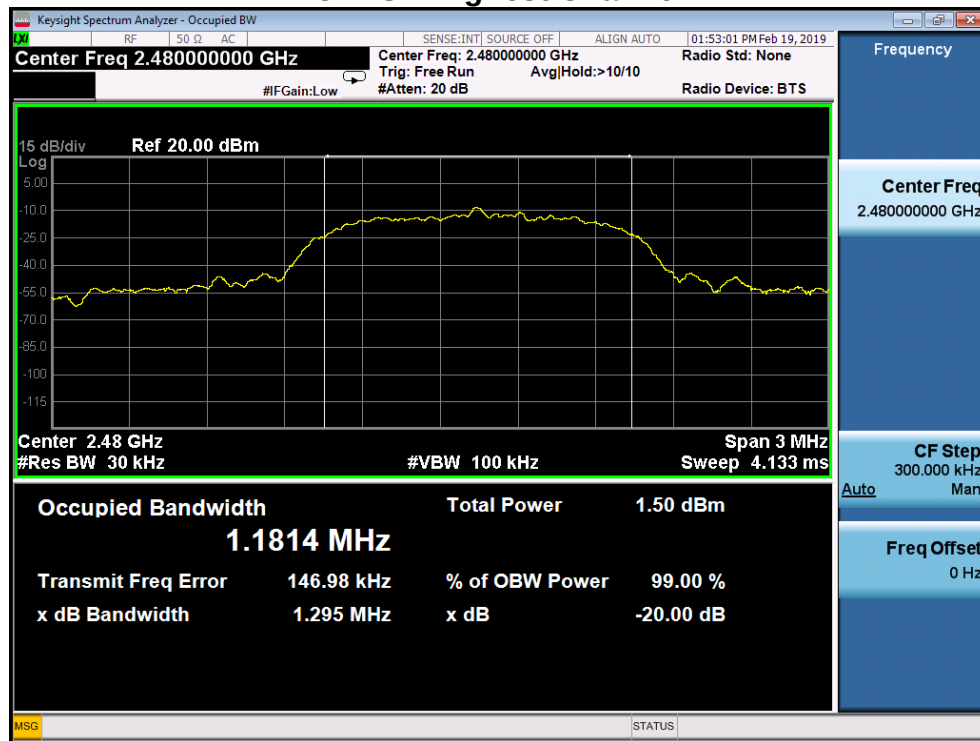


7. Hopping Channel Number

7.1 Measurement Procedure

Minimum Number of Hopping Frequencies, FCC Rule 15.247(a)(1)(iii):

Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, and the spectrum analyzer set to MAX HOLD readings were taken for 3-5 minutes. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

7.2 Test SET-UP (Block Diagram of Configuration)




7.3 Measurement Results

Modulation	GFSK, π /4-DQPSK, 8DPSK		
RBW:	100KHz	VBW:	300KHz
Packet:	DH5	Spectrum Detector:	PK
Test By:	Sance	Test Date :	February 19, 2019
Temperature :	22 °C	Humidity :	53 %
Test Result:	PASS		

Hopping Channel Frequency Range	Number of Hopping Channels	Limit
2402-2480	79	≥15

The worst case: 8DPSK

8DPSK

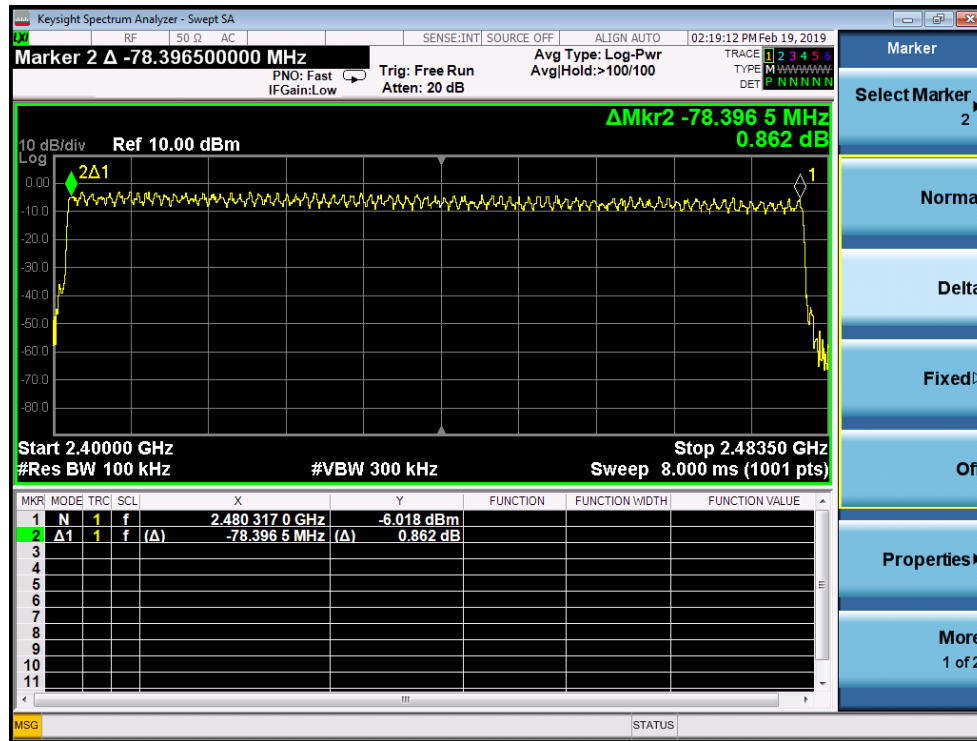

8. Time of Occupancy (Dwell Time)

8.1 Measurement Procedure

Average Channel Occupancy Time, FCC Ref:15.247(a)(1)(iii):

Connect EUT antenna terminal to the spectrum analyzer with a low loss cable.
The spectrum analyzer center frequency was set to one of the known hopping channels.
The Sweep was set to 10 ms, the SPAN was set to Zero SPAN. The time duration of the transmissions so captured was measured with the Marker Delta function

8.2 Measurement Results


The maximum number of hopping channels in 31.6s (0.4s/Channel x 79 Channel)

Refer to attached data chart.


Modulation :	GFSK, $\pi/4$ -DQPSK, 8DPSK		
RBW :	1MHz	VBW :	3MHz
Spectrum Detector:	PK	Test By:	Sance
Test Date :	February 19, 2019	Temperature :	22°C
Test Result:	PASS	Humidity :	53 %

Packet	Frequency (MHz)	Result (msec)			Limit (msec)
GFSK					
DH1	2441	0.383	$(ms) \cdot (1600 / (2 \cdot 79)) \cdot 31.6 =$	122.56	400
DH3	2441	1.652	$(ms) \cdot (1600 / (4 \cdot 79)) \cdot 31.6 =$	264.32	400
DH5	2441	2.894	$(ms) \cdot (1600 / (6 \cdot 79)) \cdot 31.6 =$	308.69	400
$\pi/4$ -DQPSK					
2-DH1	2441	0.398	$(ms) \cdot (1600 / (2 \cdot 79)) \cdot 31.6 =$	127.36	400
2-DH3	2441	1.643	$(ms) \cdot (1600 / (4 \cdot 79)) \cdot 31.6 =$	262.88	400
2-DH5	2441	2.905	$(ms) \cdot (1600 / (6 \cdot 79)) \cdot 31.6 =$	309.87	400
8DPSK					
3-DH1	2441	0.394	$(ms) \cdot (1600 / (2 \cdot 79)) \cdot 31.6 =$	126.08	400
3-DH3	2441	1.646	$(ms) \cdot (1600 / (4 \cdot 79)) \cdot 31.6 =$	263.36	400
3-DH5	2441	2.890	$(ms) \cdot (1600 / (6 \cdot 79)) \cdot 31.6 =$	308.27	400


GFSK DH1

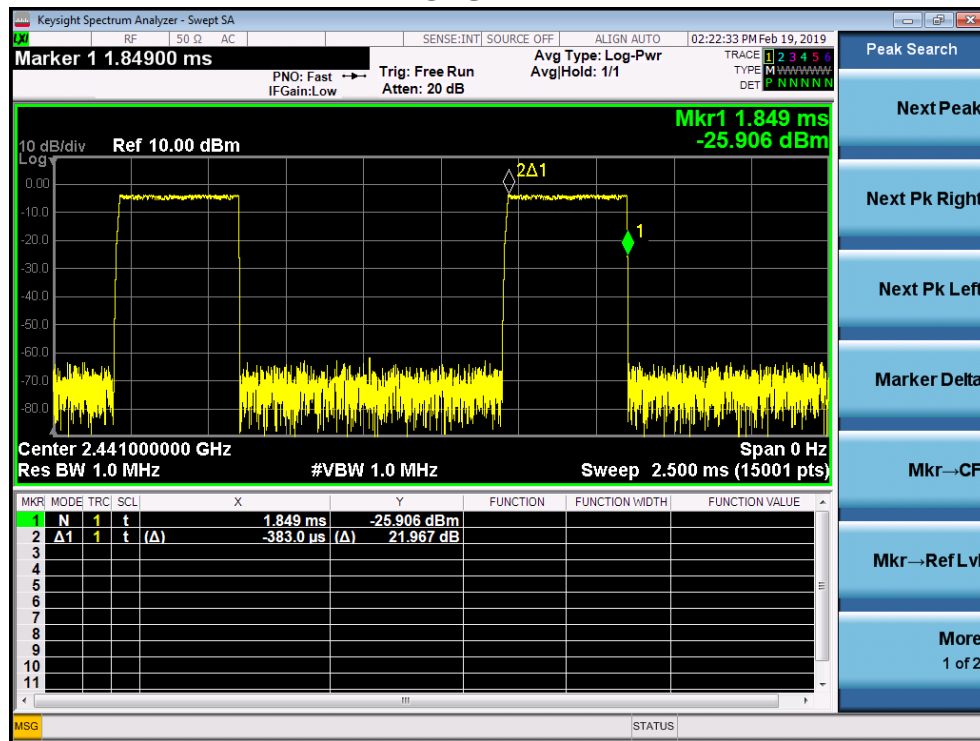


GFSK DH3

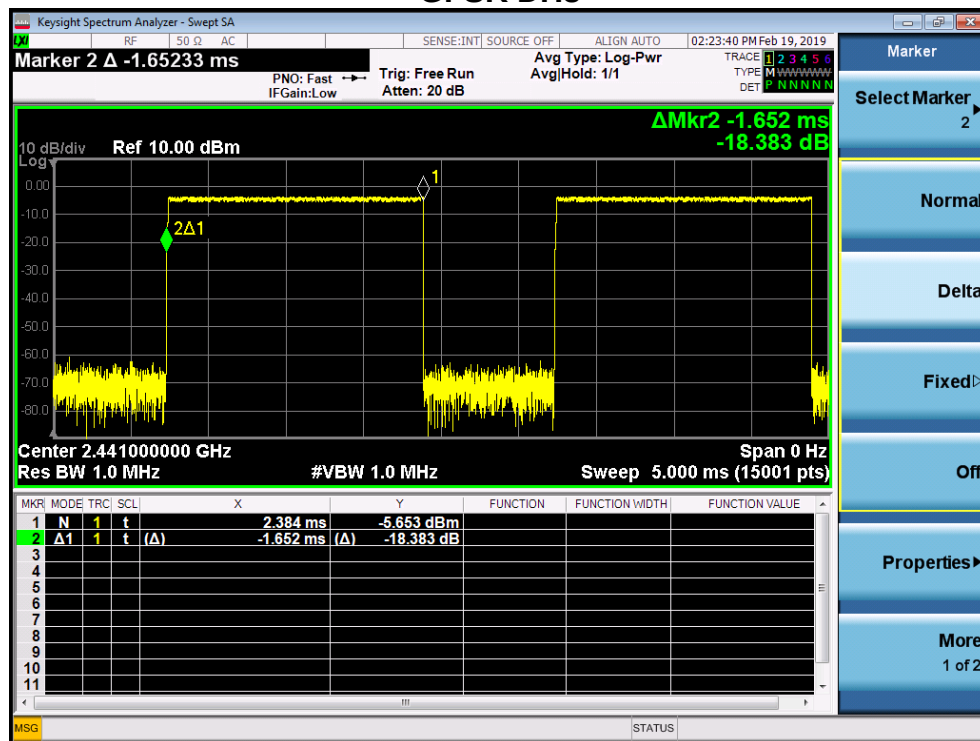


GFSK DH5

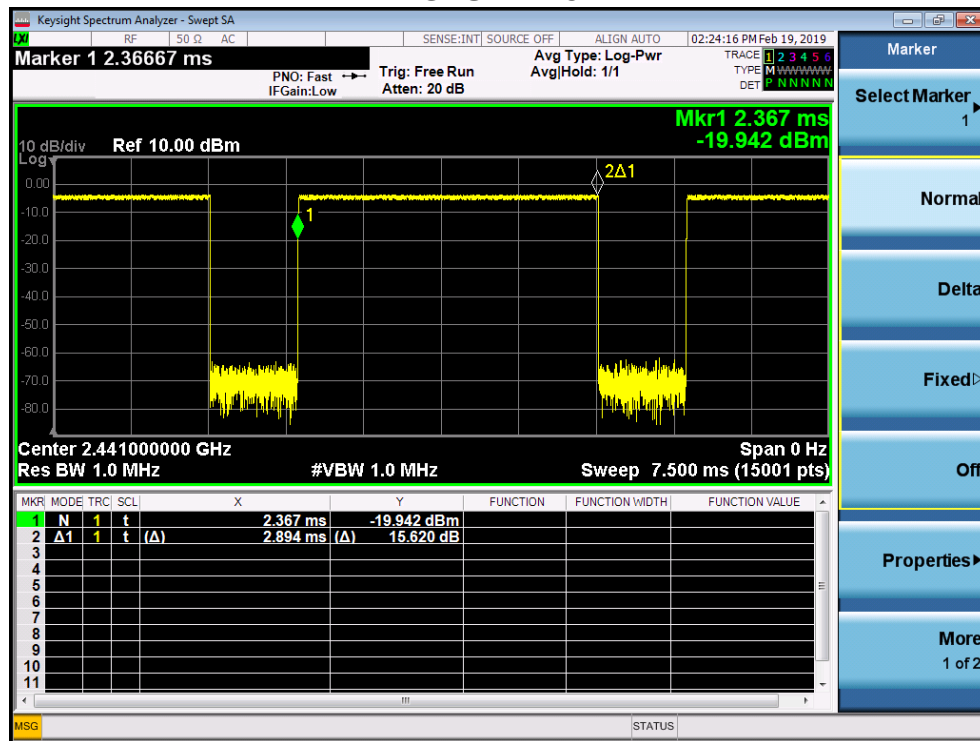


$\pi/4$ -DQPSK 2DH1

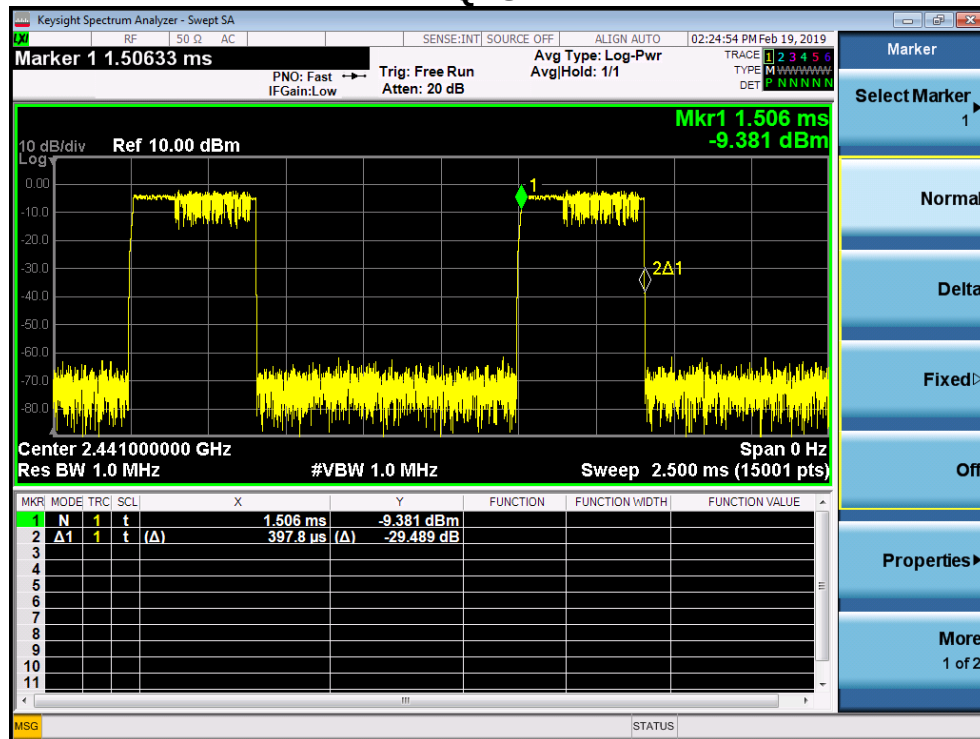


$\pi/4$ -DQPSK 2DH3

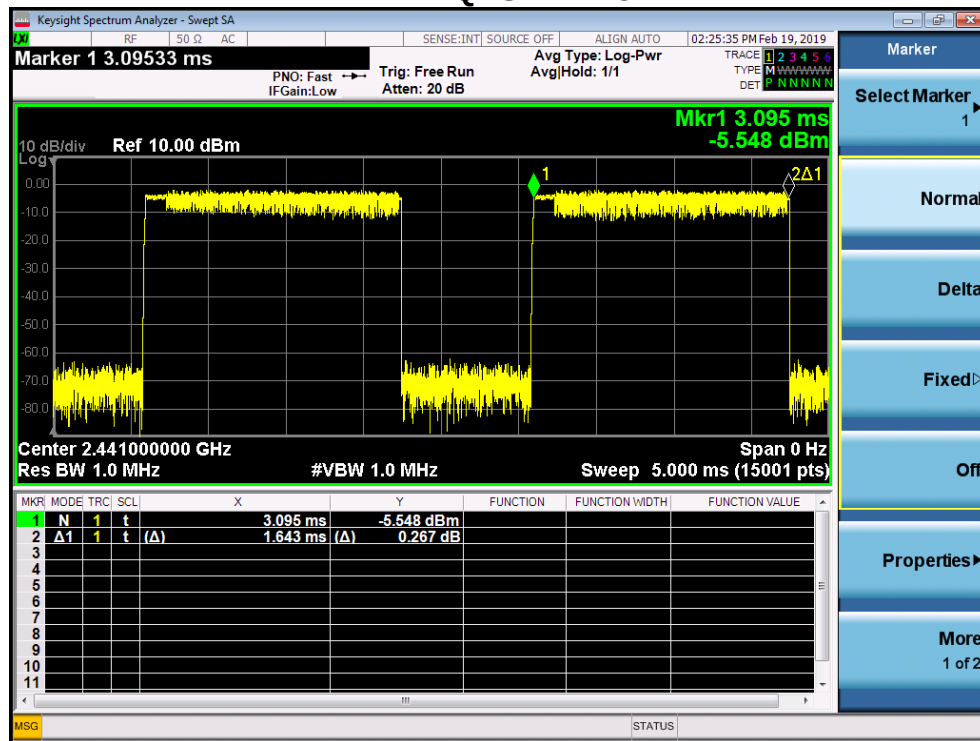


$\pi/4$ -DQPSK 2DH5

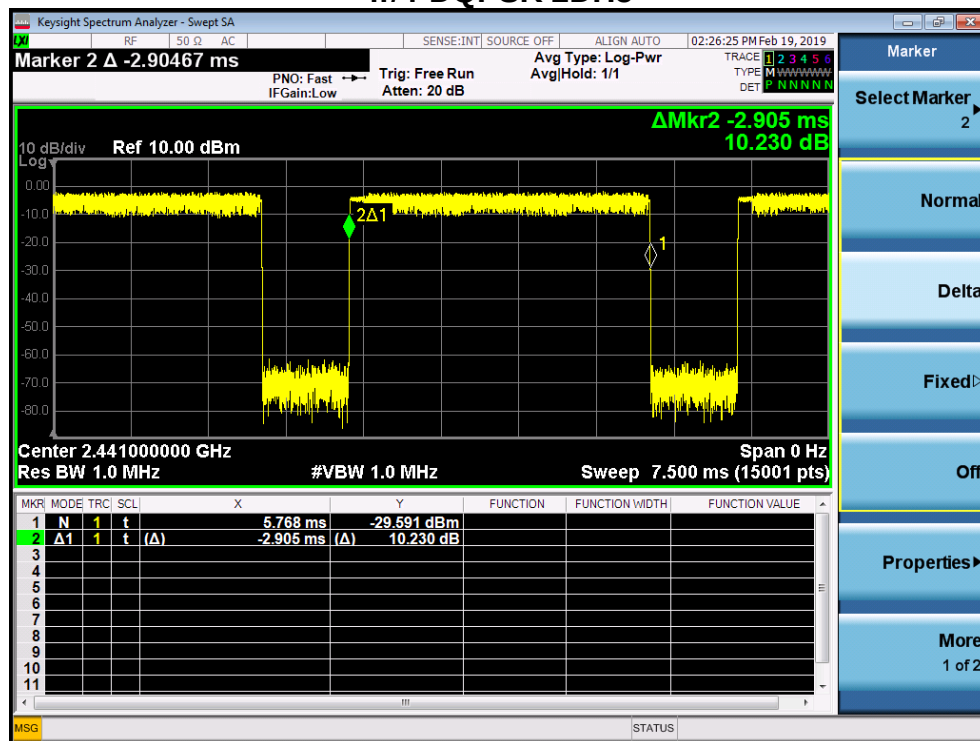


8DPSK 3DH1

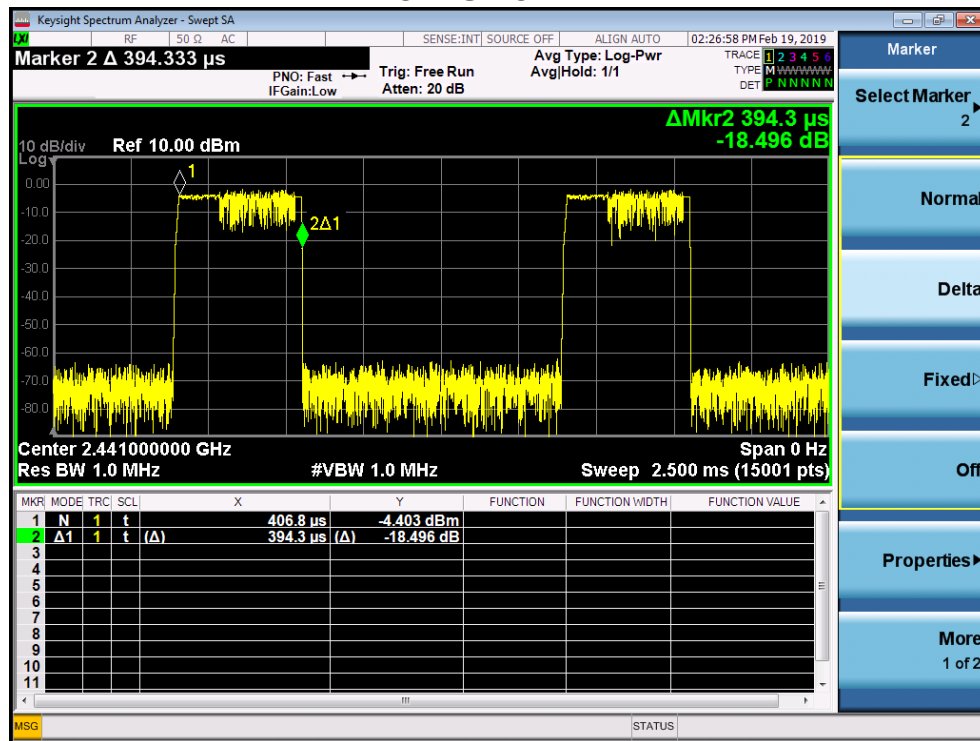

8DPSK 3DH3

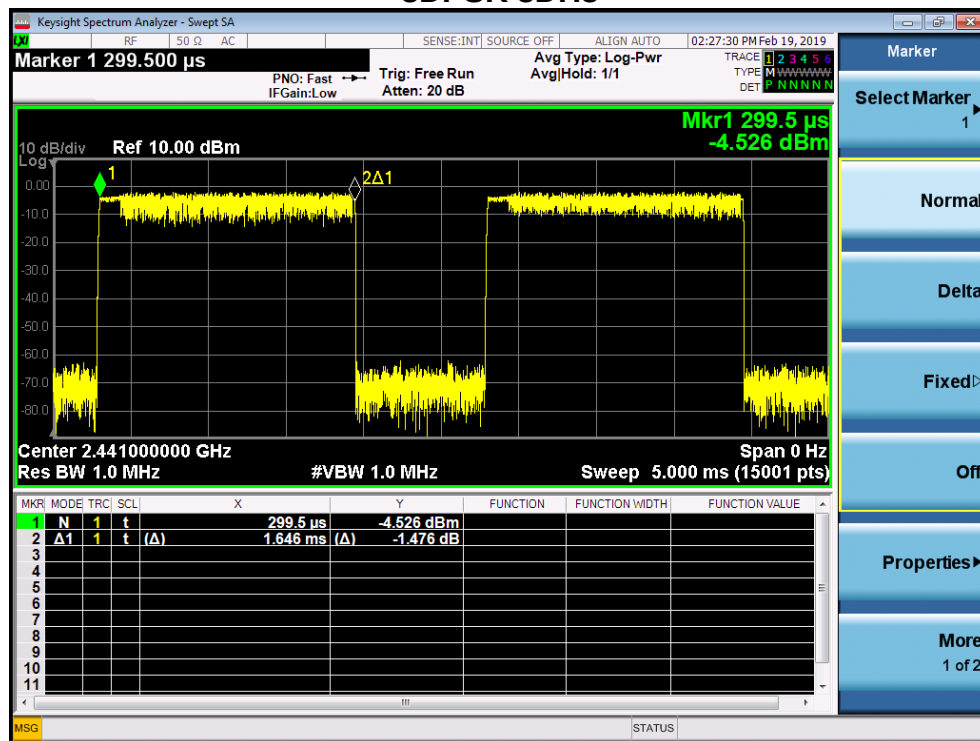

8DPSK 3DH5

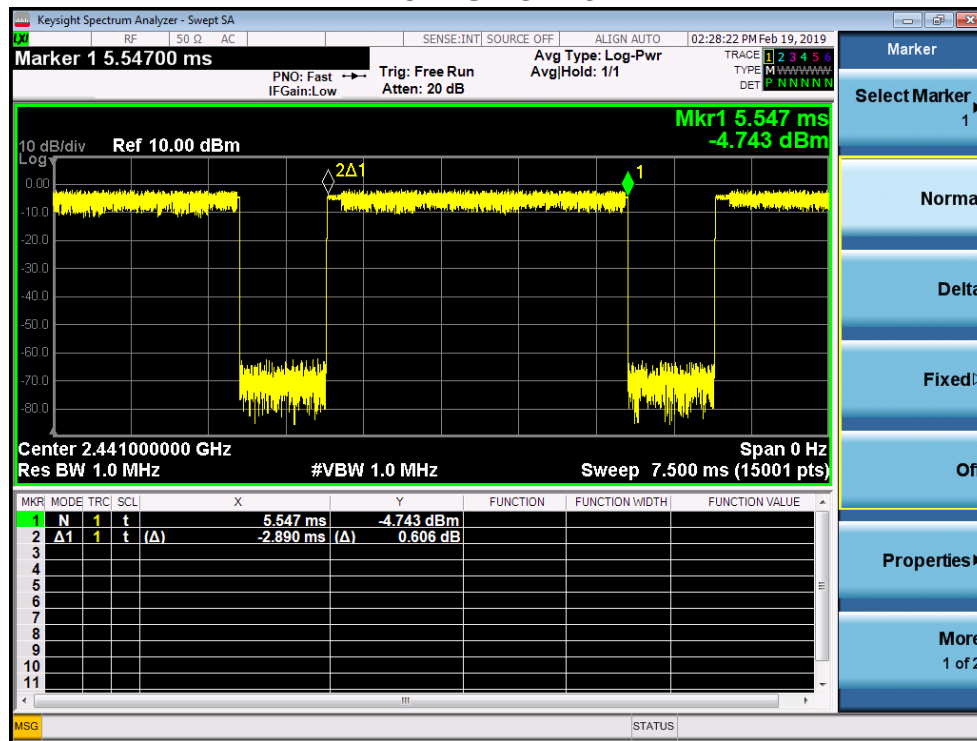

9. MAXIMUM PEAK OUTPUT POWER

9.1 Measurement Procedure

Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b)(1):



Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum. The analyzer was set for RBW > 20dB bandwidth and power was read directly in dBm. Cable loss was considered during this measurement.

9.2 Measurement Results


Refer to attached data chart.

Modulation : GFSK, $\pi/4$ -DQPSK, 8DPSK
RBW : 3MHz VBW : 3MHz
Spectrum Detector: PK Test Date : February 19, 2019
Test By: Sance Temperature : 22 °C
Test Result: PASS Humidity : 53 %


Channel Frequency (MHz)	Cable Loss (dB)	Peak Power output (dBm)	Peak Power output (mW)	Peak Power Limit (dBm)	Pass/Fail
GFSK					
2402.00	1.5	-2.612	0.548	21	PASS
2441.00	1.5	-3.818	0.415	21	PASS
2480.00	1.5	-5.641	0.273	21	PASS
$\pi/4$ -DQPSK					
2402.00	1.5	0.177	1.042	21	PASS
2441.00	1.5	-1.381	0.728	21	PASS
2480.00	1.5	-3.217	0.477	21	PASS
8DPSK					
2402.00	1.5	0.926	1.238	21	PASS
2441.00	1.5	-0.707	0.850	21	PASS
2480.00	1.5	-2.570	0.553	21	PASS

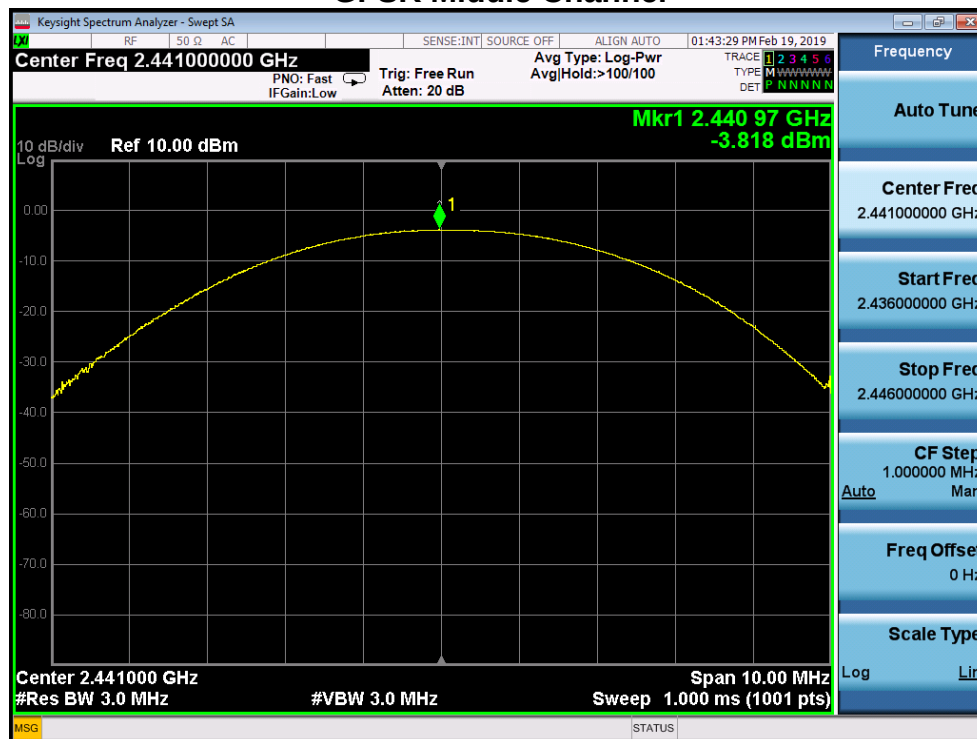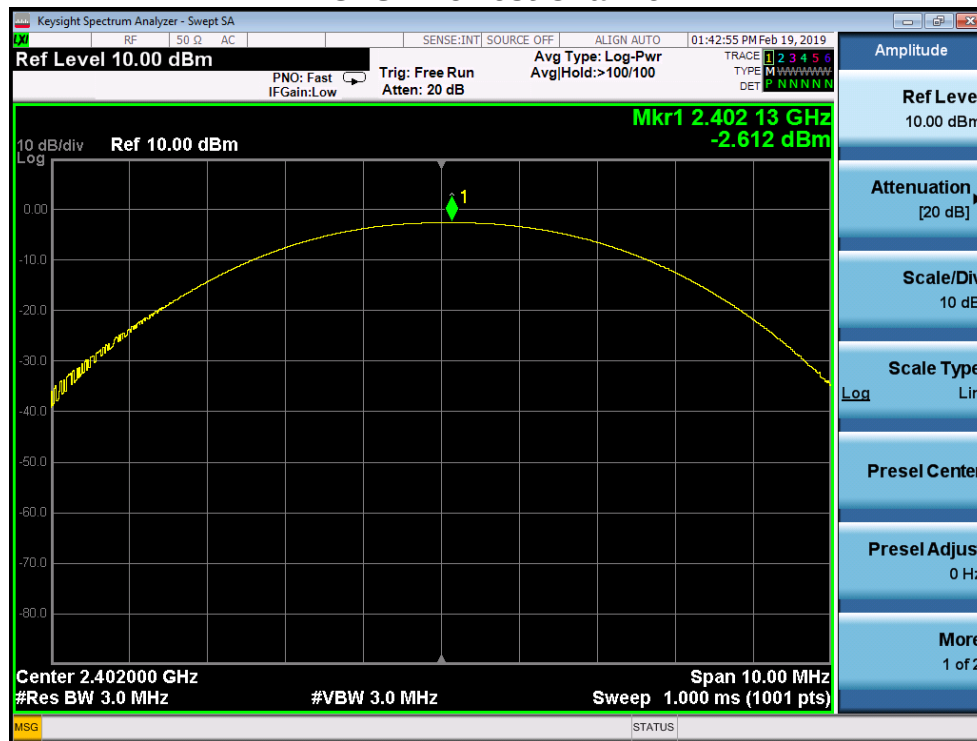


GFSK Highest Channel

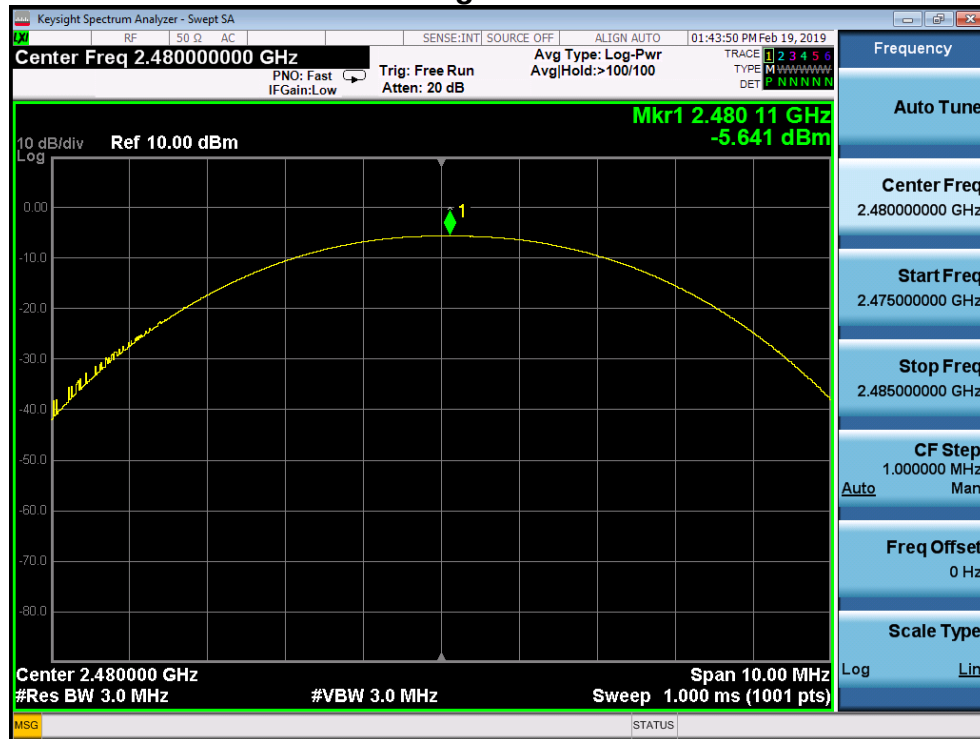


$\pi/4$ -DQPSK Lowest Channel

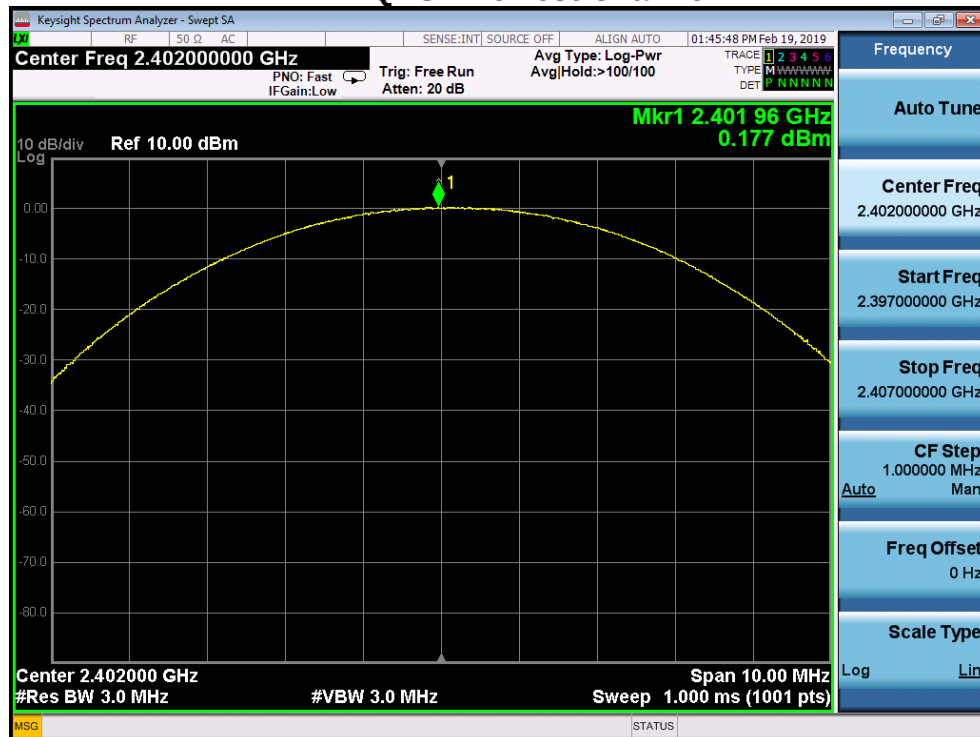

$\pi/4$ -DQPSK Middle Channel

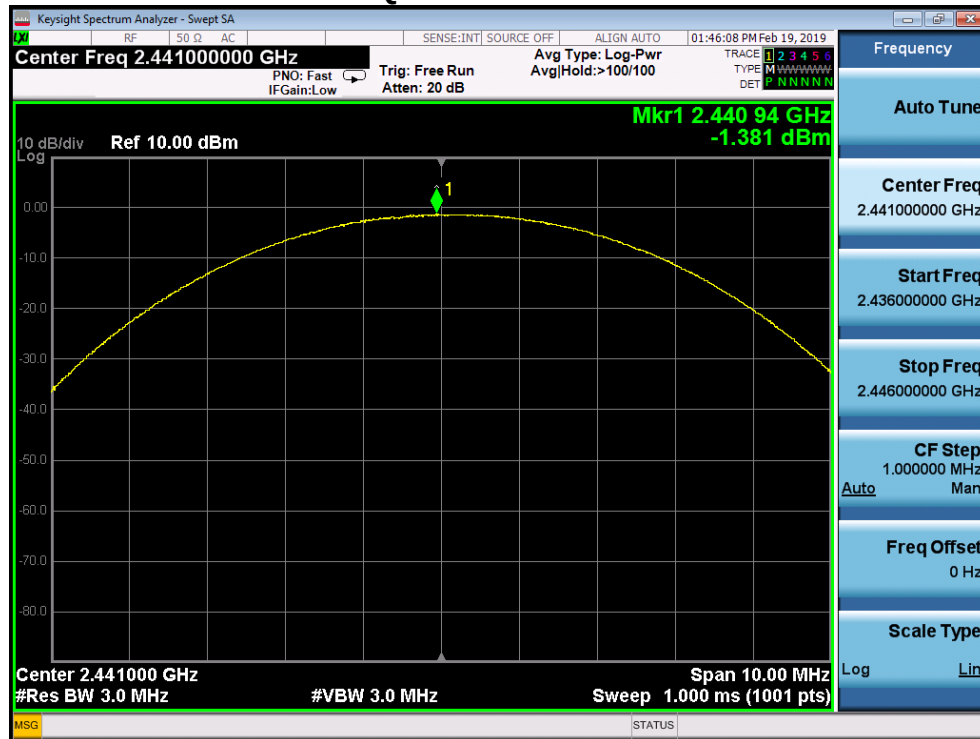


$\pi/4$ -DQPSK Highest Channel

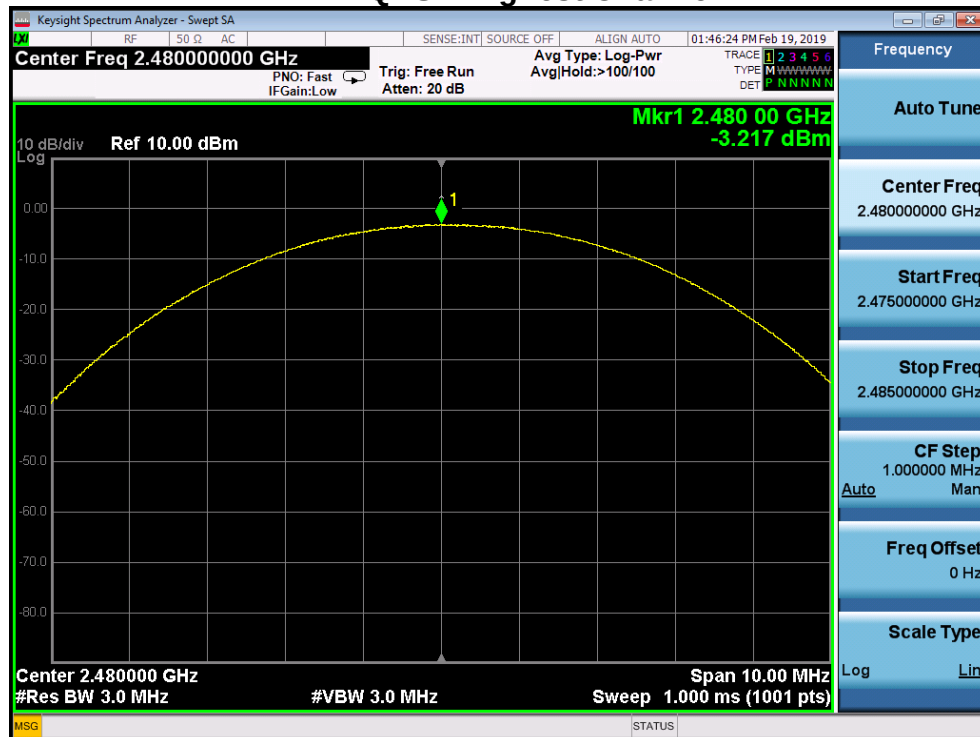


8DPSK Lowest Channel



8DPSK Middle Channel

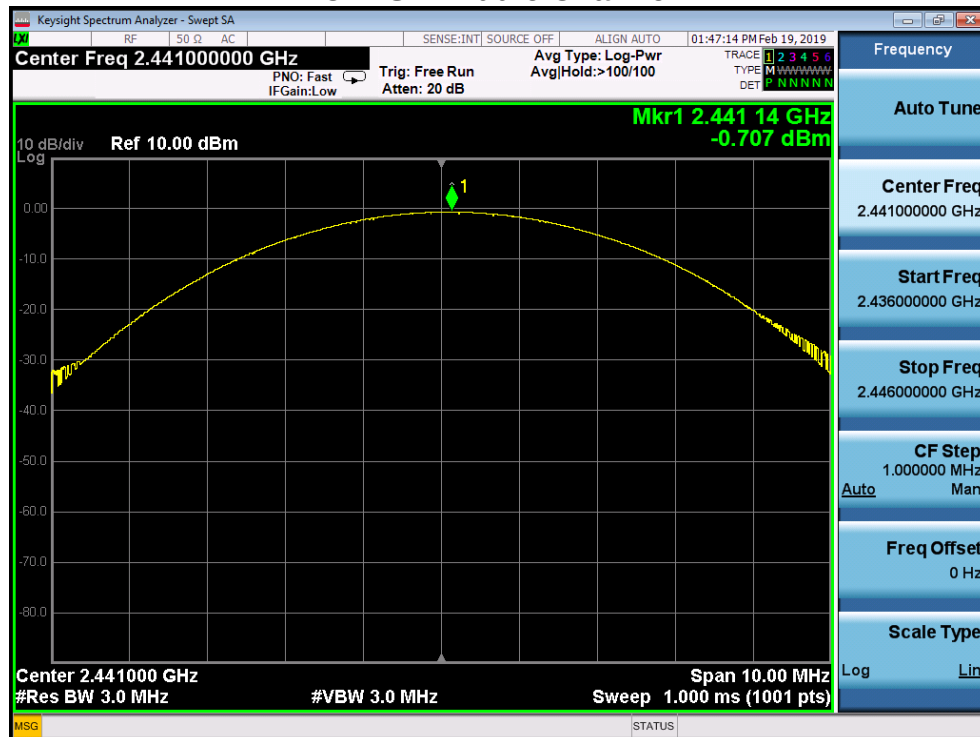

8DPSK Highest Channel

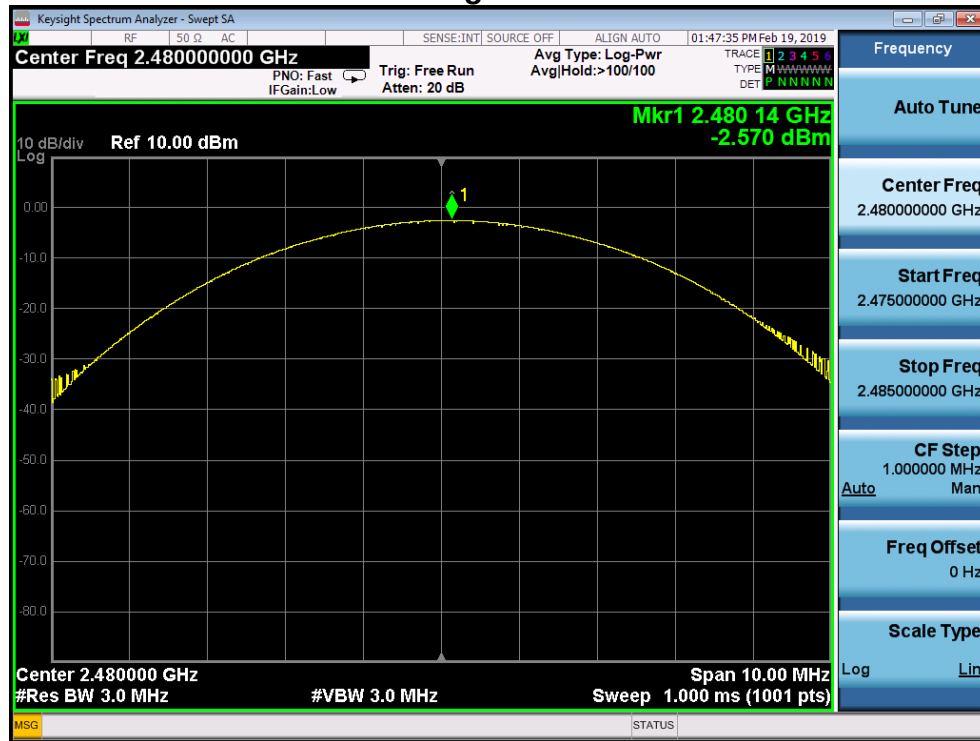

10. Band Edge

10.1 Measurement Procedure

Out of Band Conducted Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. The resolution bandwidth is set to 100KHz, and the video bandwidth set to 300KHz.

10.2 Limit

15.247(d) In any 100KHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.3 Measurement Results

Please see below test table and plots.

For Radiated Emission

The worst case : **8DPSK**

Hopping-on mode

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	54.87	33.47	0.09	54.96	33.56	74.00	54.00	-19.04	-20.44
2390.000	V	56.55	33.31	0.09	56.64	33.40	74.00	54.00	-17.36	-20.60
2483.560	H	49.90	34.32	0.35	50.25	34.67	74.00	54.00	-23.75	-19.33
2483.560	V	49.77	33.13	0.35	50.12	33.48	74.00	54.00	-23.88	-20.52

- Note:**
- (1) Emission Level= Reading Level + Factor
 - (2) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (3) Horn antenna used for the emission over 1000MHz.

For RF Conducted

GFSK Lowest Channel



GFSK Highest Channel



π /4DQPSK Lowest Channel





Keysight Spectrum Analyzer - Swept SA

Display Line -23.04 dBm

PNO: Wide IFGain: Low Trig: Free Run Atten: 20 dB

Avg Type: Log-Pwr AvgHold: >100/100

02:11:55 PM Feb 19, 2019

TRACE 1 2 3 4 5 6 TYPE M N N N N N N DET P N N N N N N

10 dB/div Ref 10.00 dBm

Log

Center 2.400000 GHz Span 10.00 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)

ΔMkr2 -2.46 MHz -44.866 dB

1

2Δ1

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.402 30 GHz	-3.041 dBm			
2	Δ1	1	f	(Δ)	-2.46 MHz (Δ)			-44.866 dB

MSG File <Screen_0041.png> saved

Keysight Spectrum Analyzer - Swept SA

Display Line -25.61 dBm

PNO: Wide IFGain:Low Trig: Free Run Avg Type: Log-Pwr Avg/Hold:>100/100

02:13:21 PM Feb 19, 2019

ΔMkr2 3.46 MHz -52.375 dB

10 dB/div Ref 10.00 dBm

Center 2.483500 GHz Span 10.00 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.480 15 GHz	-5.614 dBm			
2	Δ1	1	f (Δ)	3.46 MHz (Δ)	-52.375 dB			

MSG File <Screen_0043.png> saved

STATUS

Display Annotation Title Graticule On Display Line -25.61 dBm On System Display Settings

Keysight Spectrum Analyzer - Swept SA

Display Line -25.61 dBm

PNO: Wide IFGain:Low Trig: Free Run Avg Type: Log-Pwr Avg/Hold:>100/100

02:13:38 PM Feb 19, 2019

ΔMkr2 3.46 MHz -52.376 dB

10 dB/div Ref 10.00 dBm

Center 2.483500 GHz Span 10.00 MHz

#Res BW 100 kHz #VBW 300 kHz Sweep 1.000 ms (1001 pts)

MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	N	1	f	2.480 15 GHz	-5.614 dBm			
2	Δ1	1	f (Δ)	3.46 MHz (Δ)	-52.376 dB			

MSG File <Screen_0043.png> saved

STATUS

Display Annotation Title Graticule On Display Line -25.61 dBm On System Display Settings

11. Antenna Application

11.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

11.2 Measurement Results

The antenna is PCB Antenna and no consideration of replacement, and the best case gain of the antenna is -0.68 dBi. So, the antenna is consider meet the requirement.

12. Conducted Spurious Emissions

12.1 Measurement Procedure


Out of Band Conducted Spurious Emissions, FCC Rule 15.247(d):

The transmitter output is connected to spectrum analyzer. All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband.


12.2 Measurement Results

Please refer to following plots, the worst case (8DPSK) was shown.


Lowest Channel

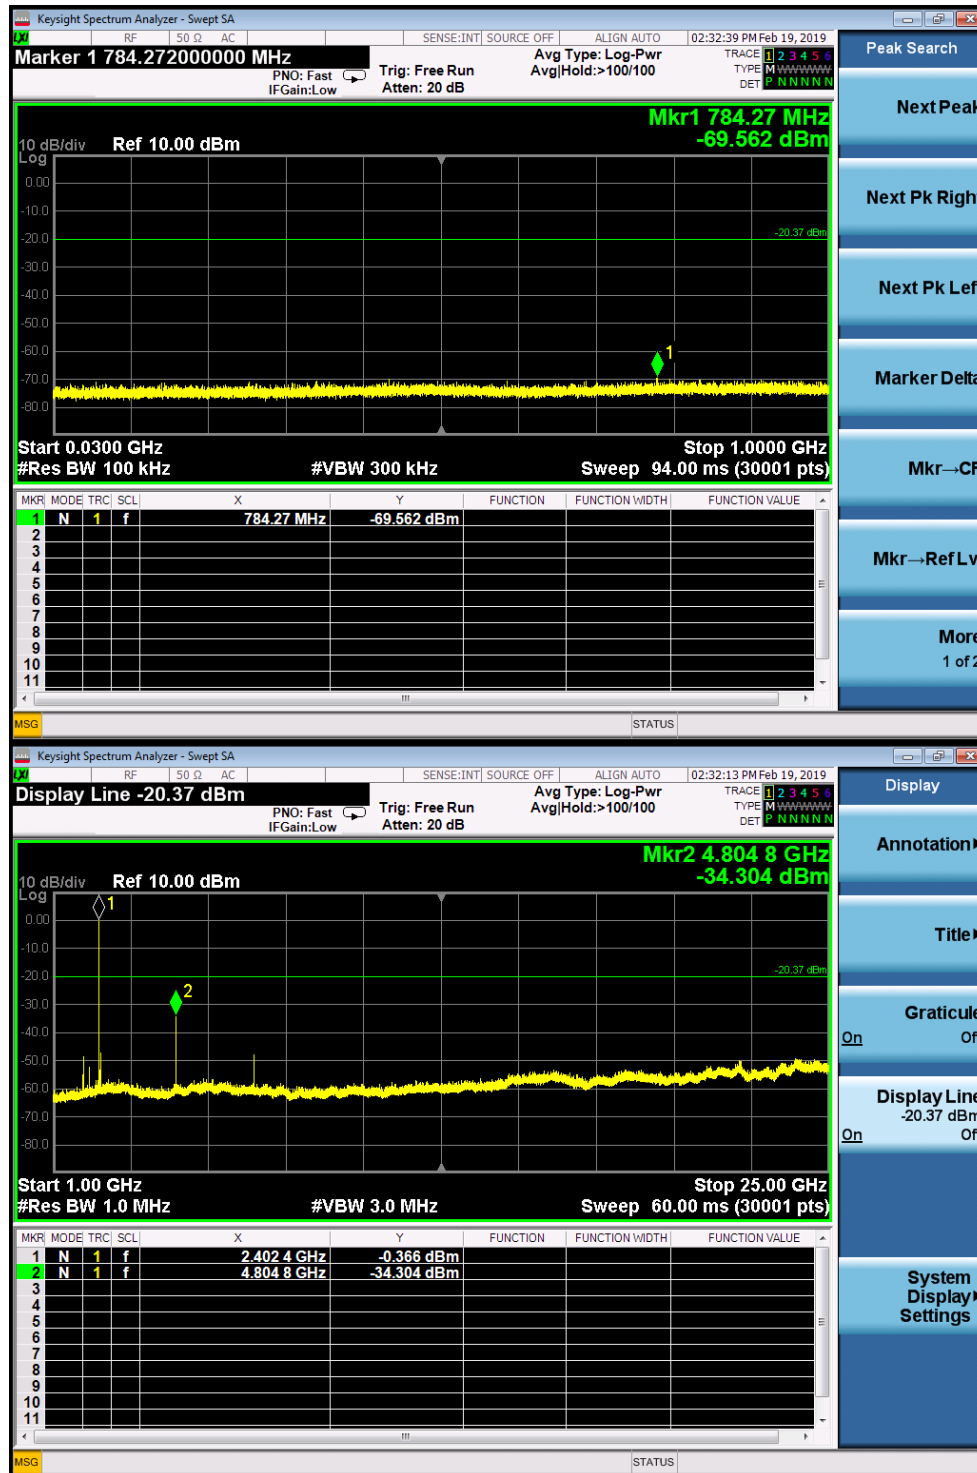

Middle Channel

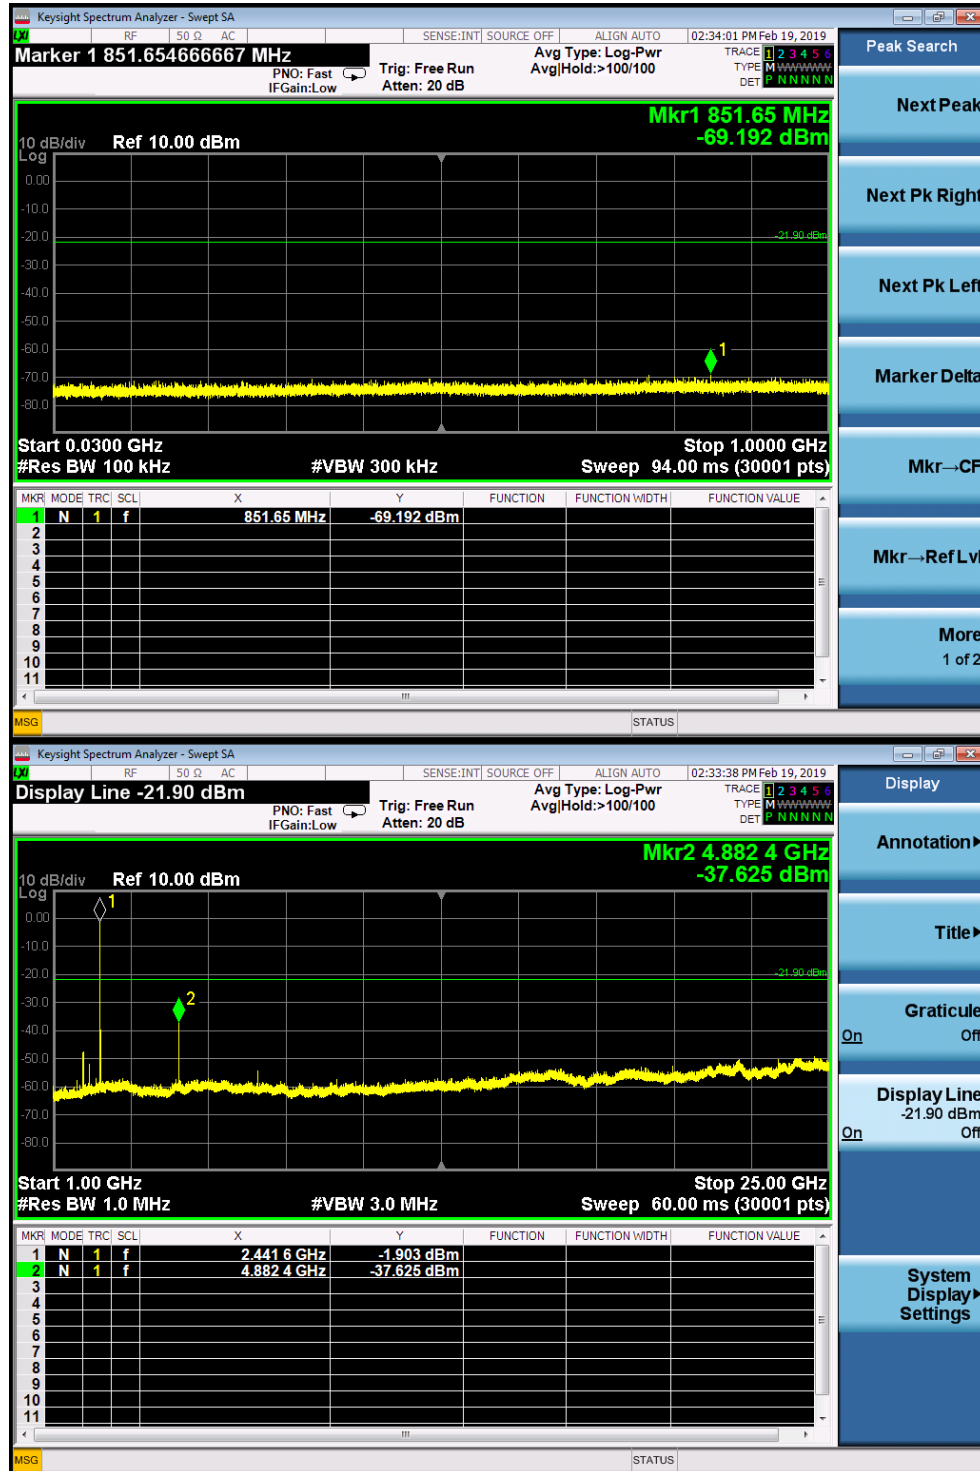

Highest Channel

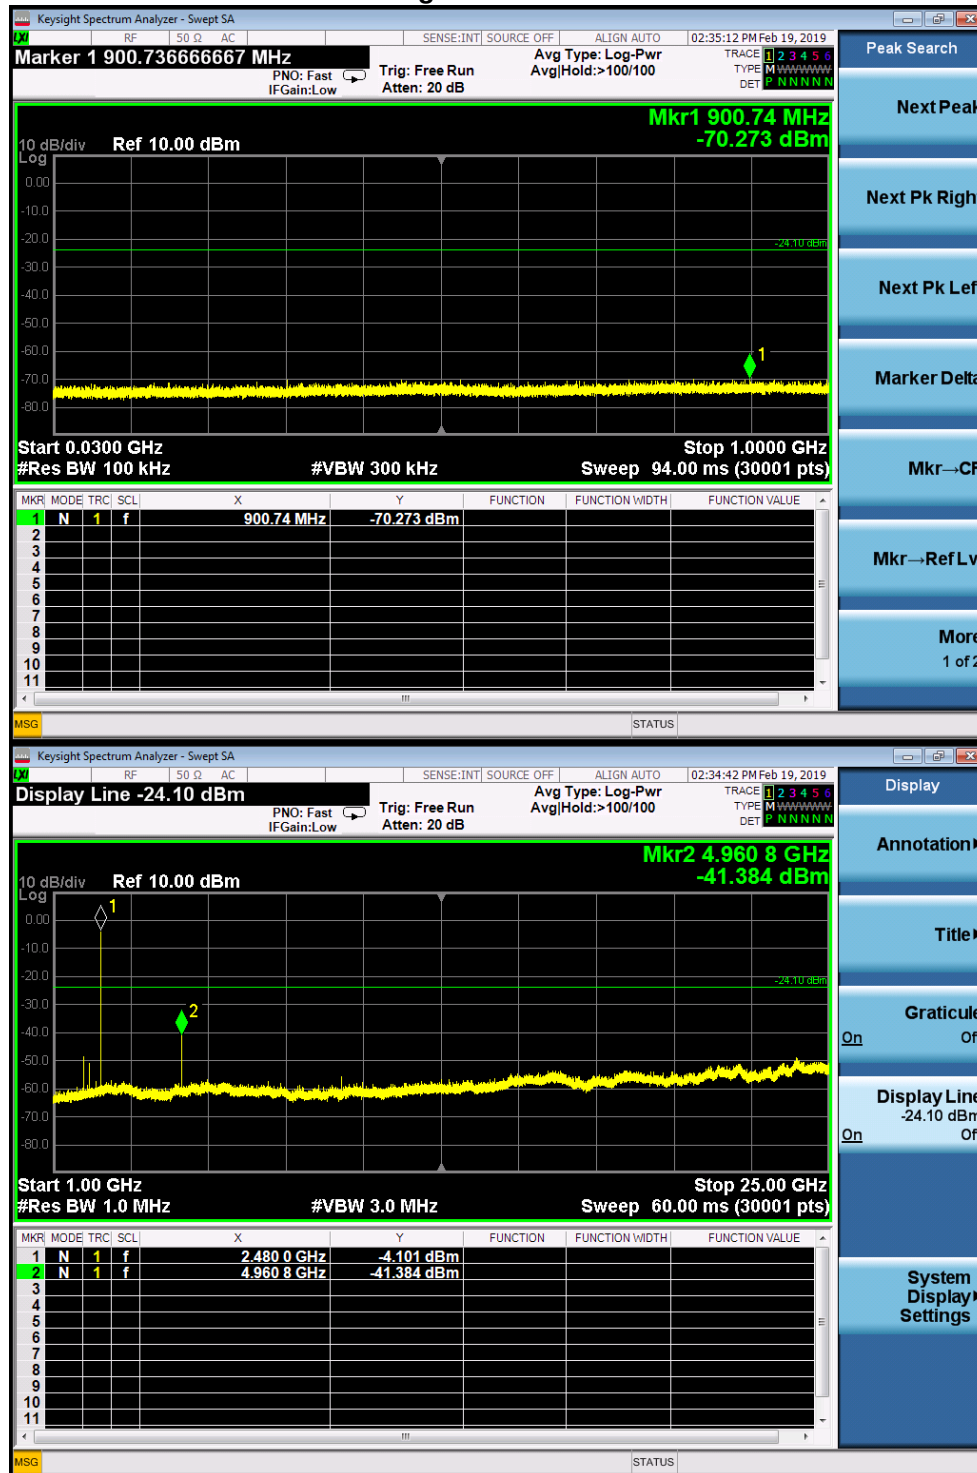

Note: Sweep points=30001pts

13. Test Equipment List

No.	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Mar. 14, 2018	Mar. 13, 2019
2.	Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Mar. 23, 2018	Mar. 22, 2019
3.	Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Mar. 14, 2018	Mar. 13, 2019
4.	Spectrum Analyzer	Keysight	N9020A	MY5420083 1	20Hz~26.5GHz	Apr. 24, 2018	Apr. 23, 2019
5.	Horn Antenna	Schwarzbeck	BBHA9170	9170-372	15GHz~40GHz	Mar. 23, 2018	Mar. 22, 2019
6.	Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Apr. 24, 2018	Apr. 23, 2019
7.	Power Sensor	DARE	RPR3006W	15I00041SN O64	100MHz~6GHz	Mar. 14, 2018	Mar. 13, 2019
8.	Horn Antenna	COM-Power	AH-118	071078	500MHz~18GHz	Mar. 23, 2018	Mar. 22, 2019
9.	Pre-Amplifier	HP	HP 8449B	3008A00964	1GHz~26.5GHz	Mar. 14, 2018	Mar. 13, 2019
10.	Pre-Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Mar. 14, 2018	Mar. 13, 2019
11.	Loop Antenna	Schwarzbeck	FMZB 1513	1513-272	9KHz~30MHz	Apr. 24, 2018	Apr. 23, 2019
12.	Temperature & Humidity Chamber	REMAFEE	SYHR225L	N/A	-40~150℃	Apr. 24, 2018	Apr. 23, 2019
13.	DC Source	MY	MY8811	N/A	0~30V	Mar. 23, 2018	Mar. 22, 2019
14.	Temporary antenna connector	TESCOM	SS402	N/A	9KHz~25GHz	N/A	N/A
15.	Test Receiver	Rohde & Schwarz	ESCI	101152	9KHz~3GHz	Mar. 14, 2018	Mar. 13, 2019
16.	L.I.S.N	Rohde & Schwarz	ENV 216	101317	N/A	Mar. 14, 2018	Mar. 13, 2019
17.	L.I.S.N	Schwarzbeck	NNLK8129	8129212	N/A	Mar. 07, 2018	Mar. 06, 2019
18.	RF Switching Unit	Compliance Direction Systems Inc.	RSU-M2	38311	N/A	Mar. 14, 2018	Mar. 13, 2019
19.	Test Software	EZ	EZ_EMG	N/A	N/A	N/A	N/A

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---