



**FCC PART 15 SUBPART C
CERTIFICATION REPORT**

FOR

307KHz/433.92 MHz Transceiver

**MODEL: TAG LINK
FCC ID NO: HE7TGL
REPORT NO: 03U2119-1**

ISSUE DATE: AUGUST 04, 2003

Prepared for

**EXI WIRELESS SYSTEMS INC.
SUITE 100, 13551 COMMERCE PARKWAY
RICHMOND, BC
CANADA**

Prepared by

COMPLIANCE ENGINEERING SERVICES, INC.

d.b.a.

**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD
MORGAN HILL, CA 95037 USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS	PAGE
1. VERIFICATION OF COMPLIANCE	Error! Bookmark not defined.
3. TEST FACILITY	4
4. MEASUREMENT STANDARD	4
5. TEST METHODOLOGY	4
6. MEASUREMENT EQUIPMENT USED	4
7. POWERLINE RFI LIMIT	5
8. RADIATED EMISSION LIMITS	5
9. SYSTEM TEST CONFIGURATION	6
10. TEST PROCEDURE	7
11. EQUIPMENT MODIFICATIONS	9
12. TEST RESULT	10

TEST DATA

- Maximum Modulation Percentage Plot
- Emission Bandwidth Plot
- Radiated Emission Worksheet for Peak Measurement
- Radiated Emission Worksheet for Average Measurement

ATTACHMENT

- EUT Photographs

- Proposed FCC ID Label
- Schematics & Block Diagram
- User Manual

1. VERIFICATION OF COMPLIANCE

COMPANY NAME : EXI WIRELESS SYSTEMS INC.
SUITE 100, 13551 COMMERCE PARKWAY
RICHMOND BC, V6V 2L1 CANADA
EUT DESCRIPTION : 307KHz / 433.92 MHz TRANSCEIVER
MODEL NO : TAG LINK
FCC ID : HE7TGL
DATE TESTED : 8-04-2003

TYPE OF EQUIPMENT	RF TAGS
EQUIPMENT TYPE	307KHz / 433.92MHz TRANSCEIVERS
MEASUREMENT PROCEDURE	ANSI C63.4 / 2001
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15

The above equipment was tested by Compliance Certification Services for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:



CHIN PANG
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

Approved & Released By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

2. PRODUCT DESCRIPTION

Fundamental Frequency	307KHz / 433.92 MHz
Power Source	9V Battery
Transmitting Time	Periodic $\geq$ 5 seconds
Associated Receiver	NA
Manufacturer	EXI Wireless Systems Inc.

3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

4. MEASUREMENT STANDARD

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/2001.

5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

6. MEASUREMENT EQUIPMENT USED

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Antenna, Loop 9 kHz ~ 30 MHz	EMCO	6502	9202-2722	4/23/2004
SA Display Section 2	HP	85662A	2816A16696	5/22/2004
SA RF Section, 1.5 GHz	HP	85680B	2732A03661	5/22/2004
Quasi-Peak Adaptor	HP	85650A	2811A01155	5/22/2004
Antenna, Bilog	Chase	CBL6112B	2586	3/6/2004
Spectrum Analyzer	Agilent	E4446A	NA	1/13/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06589	8/22/2003
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	2/4/2004
Preamplifier, 1-26GHz MHz	Miteq	NSP10023988	63250761R	4/18/2004

7. POWERLINE RFI LIMIT


CONNECTED TO AC POWER LINE	SECTION 15.207
CARRIER CURRENT SYSTEM IN THE FREQUENCY RANGE OF 150 KHz TO 30 MHz	SECTION 15.205 AND SECTION 15.209, 15.221, 15.223, 15.225 OR 15.227, AS APPROPRIATE.
BATTERY POWER	NOT REQUIRED

8. RADIATED EMISSION LIMITS

GENERAL REQUIREMENTS	SECTION 15.209
RESTRICTED BANDS OF OPERATION	SECTION 15.205
PERIODIC OPERATION IN THE BAND 40.66 - 40.70 MHz AND ABOVE 70 MHz.	SECTION 15.231(e)

9. SYSTEM TEST CONFIGURATION


Use a block of foam and combined it with EUT wrapping rubber band around it. This way it can test X.Y, and Z axis. To activate continuous transmission, place a small plastic block between rubber band and EUT push button.

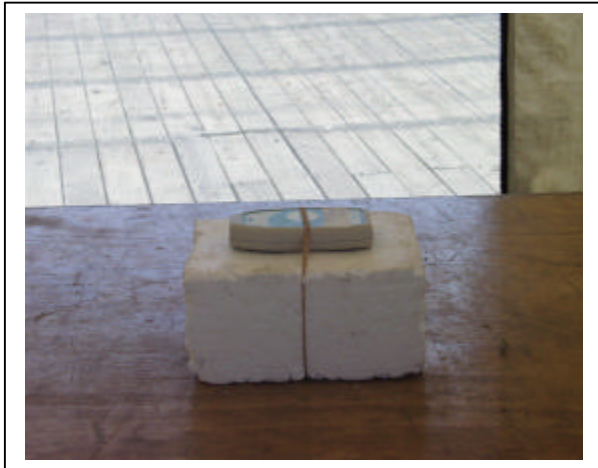

X-Axis



Y-Axis

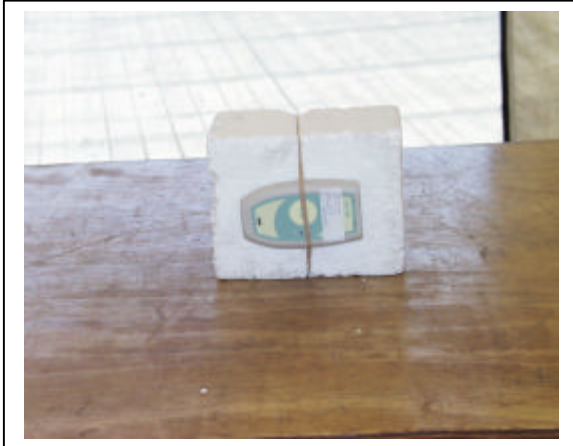


Z-Axis

Radiated Open Site Test Set-up

10. TEST PROCEDURE

Radiated Emissions, 15.209

Test Set-up for frequency range below 30 MHz

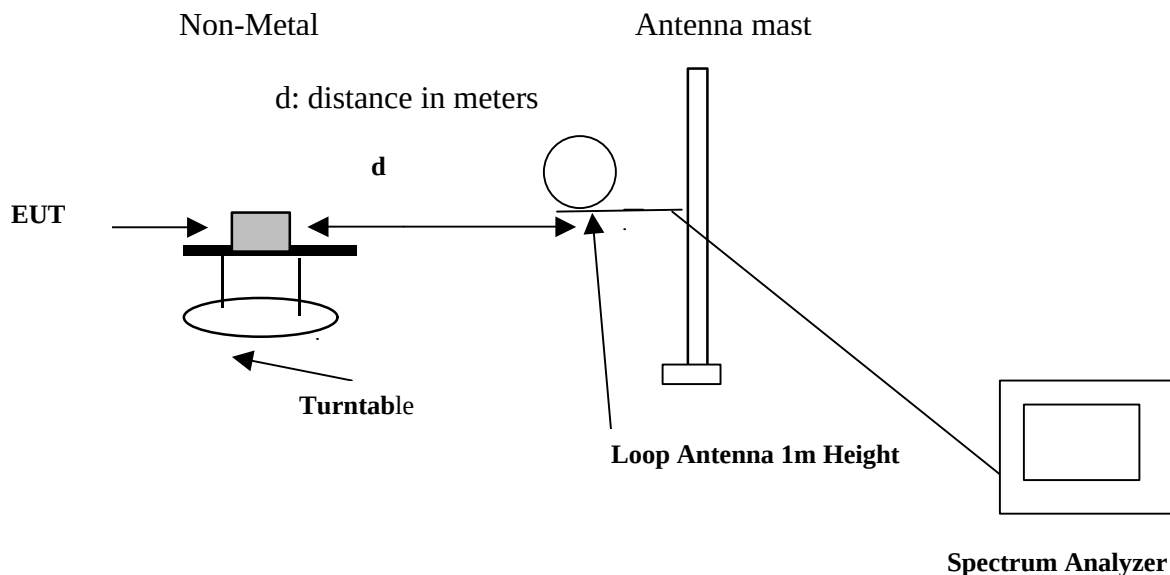


Test Procedure:

The measurement is made on open field test site, the H field produced by the EUT is measured using an active loop antenna, measurement is done at 3m distances from the EUT with an extrapolation of corrected distance factor. The loop antenna is rotated around its axis to maximize the emission, the antenna of the EUT was placed at three different orientations, X, Y and Z to find the worst orientation, the worst orientation was found to be when the antenna of the EUT is in vertical position and the plane of the loop antenna is in parallel with the antenna of the EUT.


The RBW of the spectrum analyzer is set to 10kHz, VBW is set to 10kHz, reading on the analyzer in dBuV was added to cable loss and antenna factor in dBS/m to get the H field in dBuA/m.

Radiated Emissions, 15.231(e)

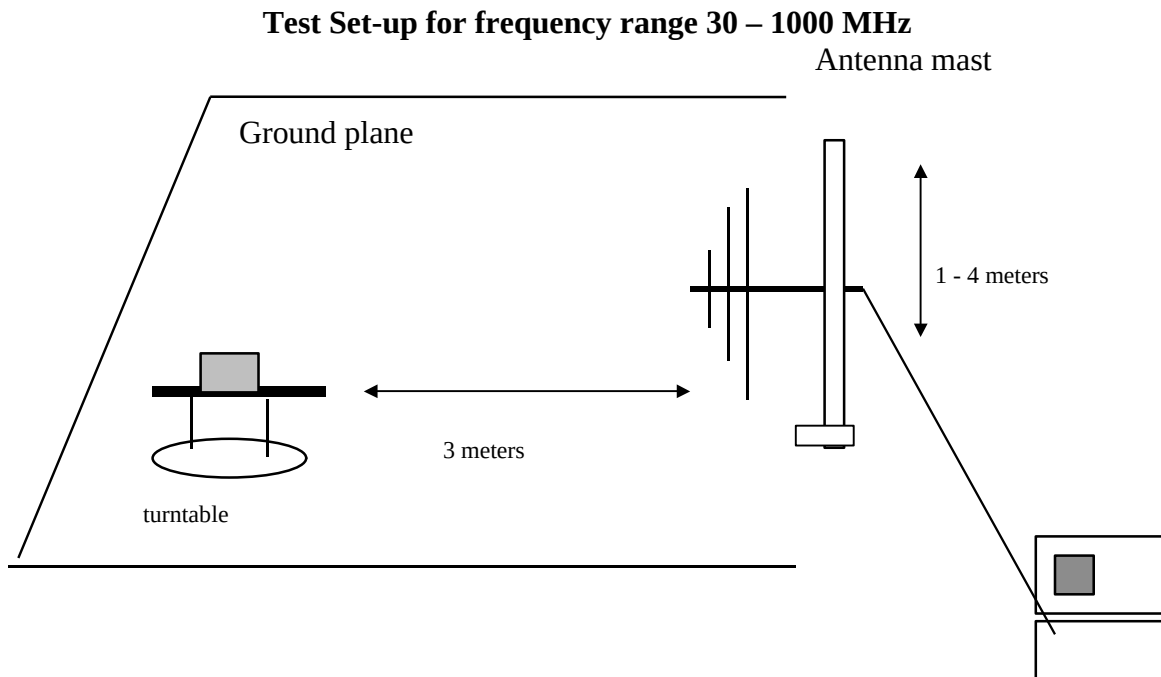

preamplifier/spectrum analyzer

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3-meters from the EUT.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

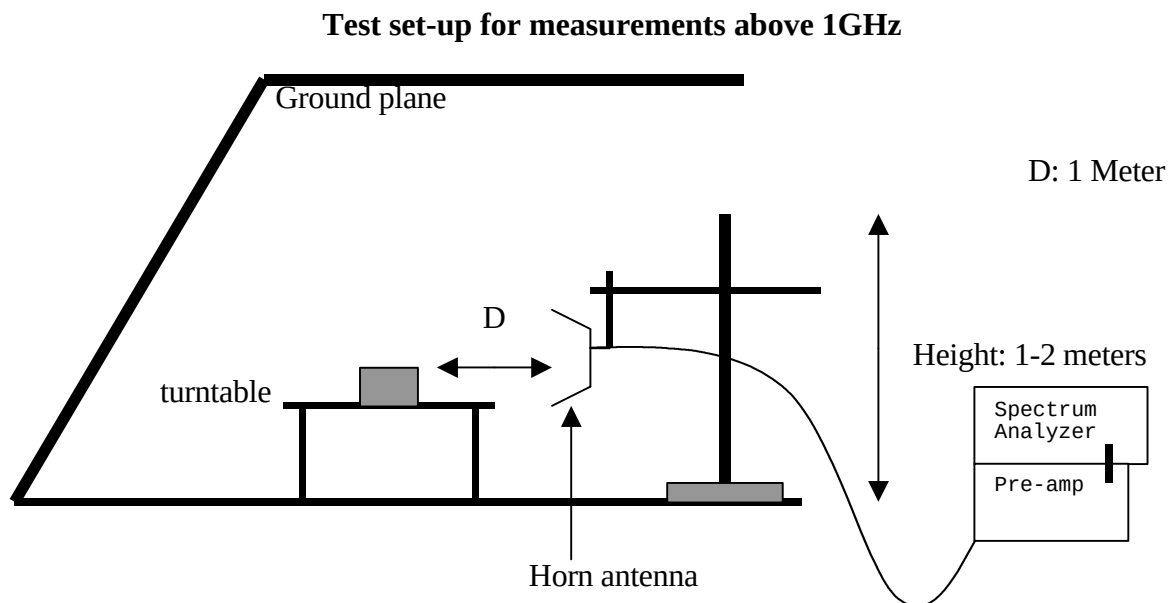

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 1-meters from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205. The EUT was moved throughout the XY, XZ, and YZ planes to maximize emissions received by the search antenna.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The maximum readings so obtained are recorded in the data listed below.

11. EQUIPMENT MODIFICATIONS

To achieve compliance to FCC Section 15.231 technical limits, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to Section 15.231 levels.

12. TEST RESULT

Powerline RFI Class B	Eut	Radiated Emission Limits	Eut
SECTION 15.207		SECTION 15.209	X
SECTION 15.205, 15.209, 15.221, 15.223, x 15.225 OR 15.227		SECTION 15.205	X
BATTERY POWER	X	SECTION 15.231 (e)	X

12.1 MAXIMUM MODULATION PERCENTAGE (M%)

CALCULATION:

Average Reading = Peak Reading (dBuV/m)+ 20log (Duty Cycle)

In order to determine possible Maximum Modulation percentage, alternations are made to the EUT. We measured:

WHERE 1 Period = 78.5ms
 Long pulse = 0.5 ms
 Short pulse =0.2333 ms
 No of Long pulse = 6
 No of Short pulse = 48

Duty Cycle = (N1L1+N2L2+...+Nn-1Ln-1+NnLn)/100 or T

Duty Cycle = ((6x0.500)+(48x0.2333))/78.50=0.219=.21.9%


For duty cycle refer to plot #1, 2, 3,4, 5.

12.2 EMISSION BANDWIDTH


The bandwidth of the emissions were investigated per 15.231(c)

Center Frequency	Measured	Limits
433.92 MHz	513 KHz (refer to plot)	433.92 x 0.25%= 1.0848MHz


DUTY CYCLE 1

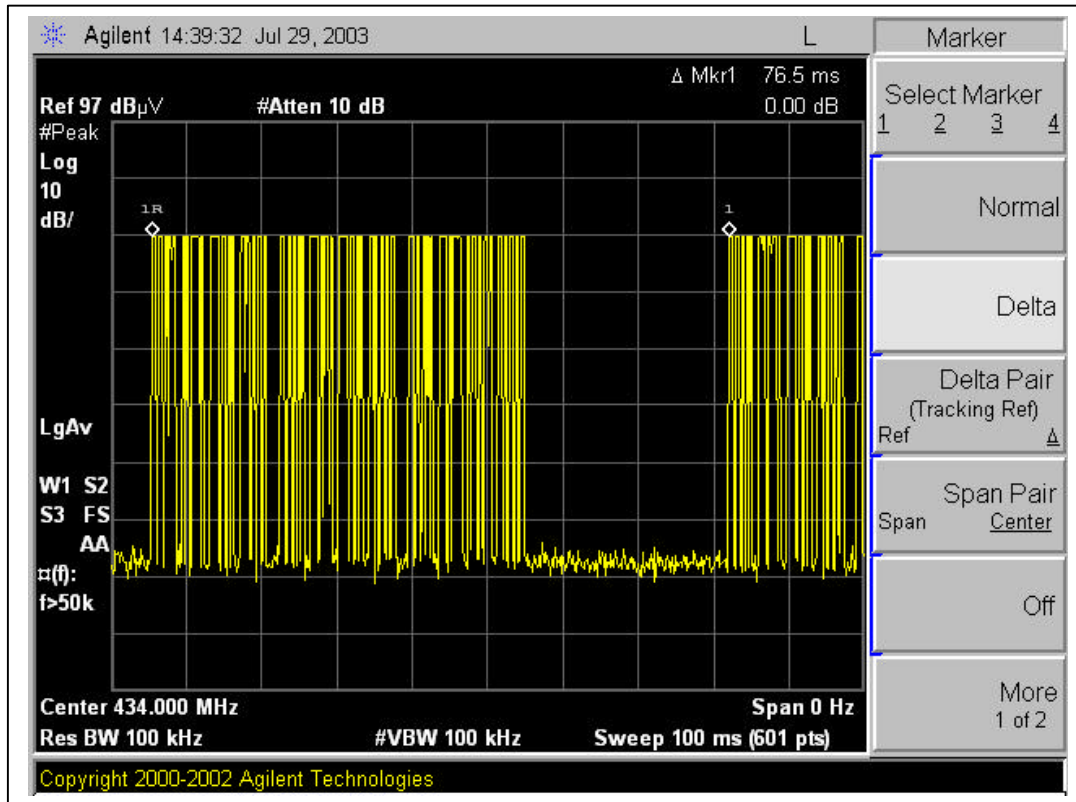


DUTY CYCLE 2

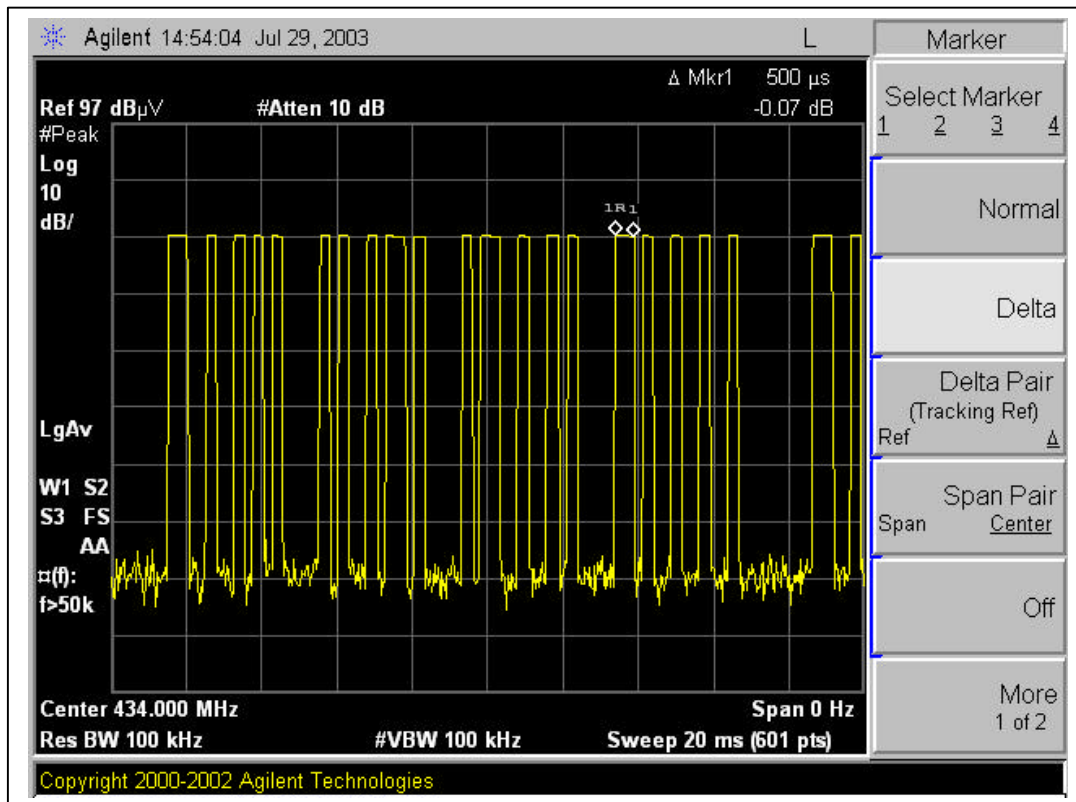


DUTY CYCLE 3

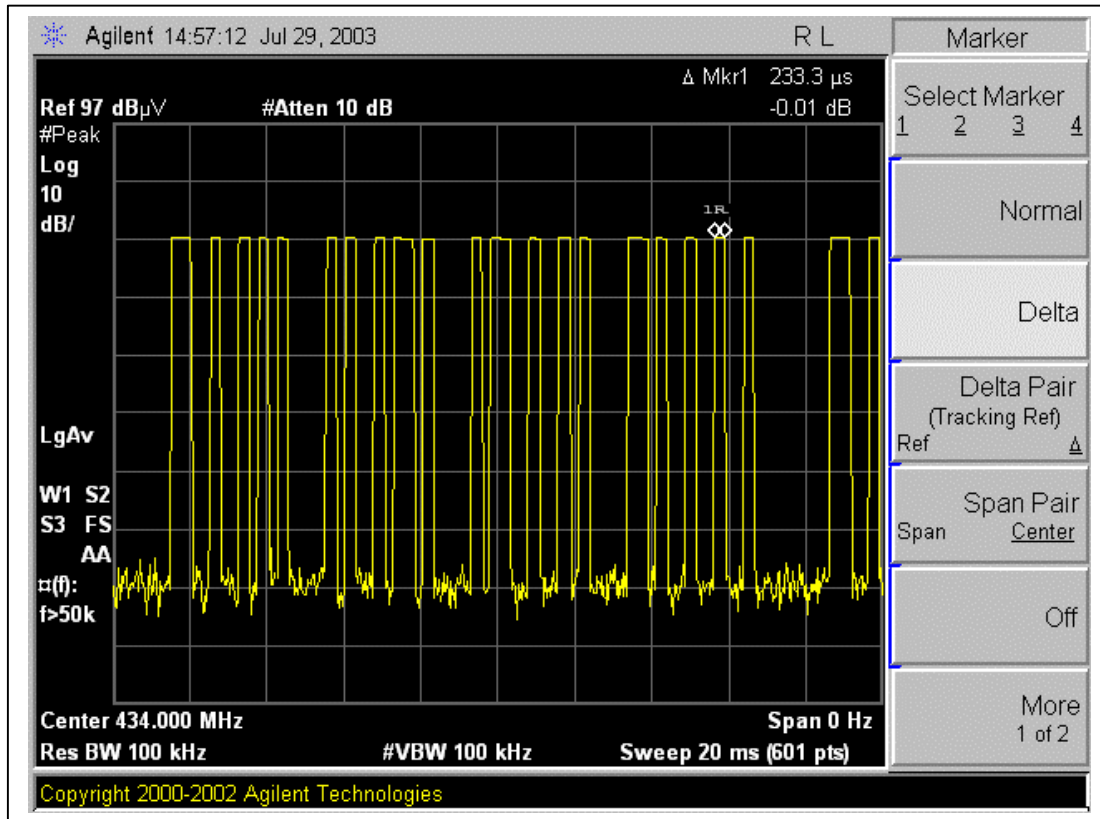


DUTY CYCLE 4

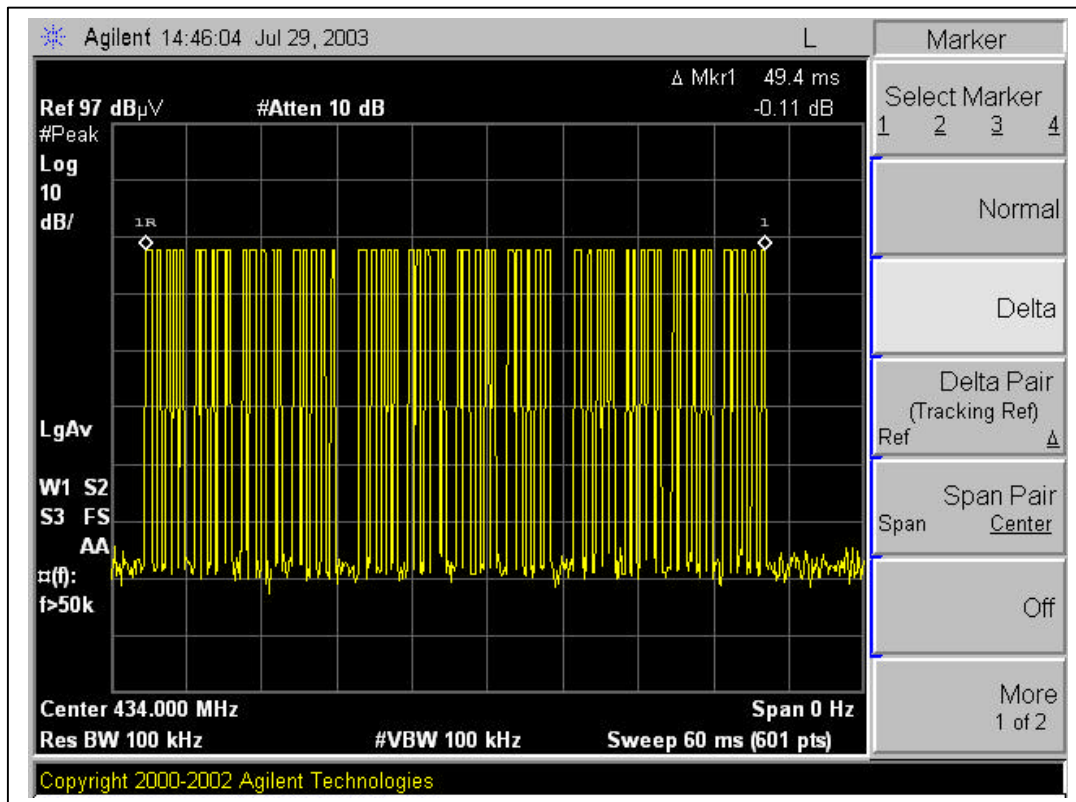

DUTY CYCLE 5

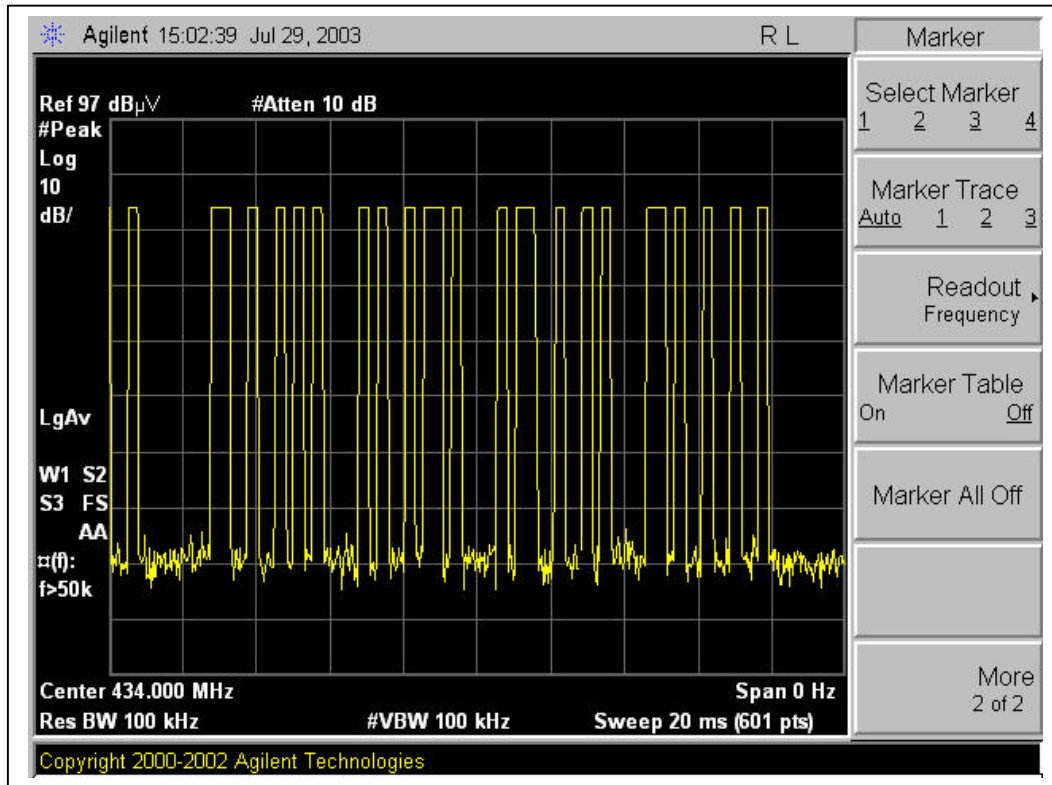

EMISSION BANDWIDTH

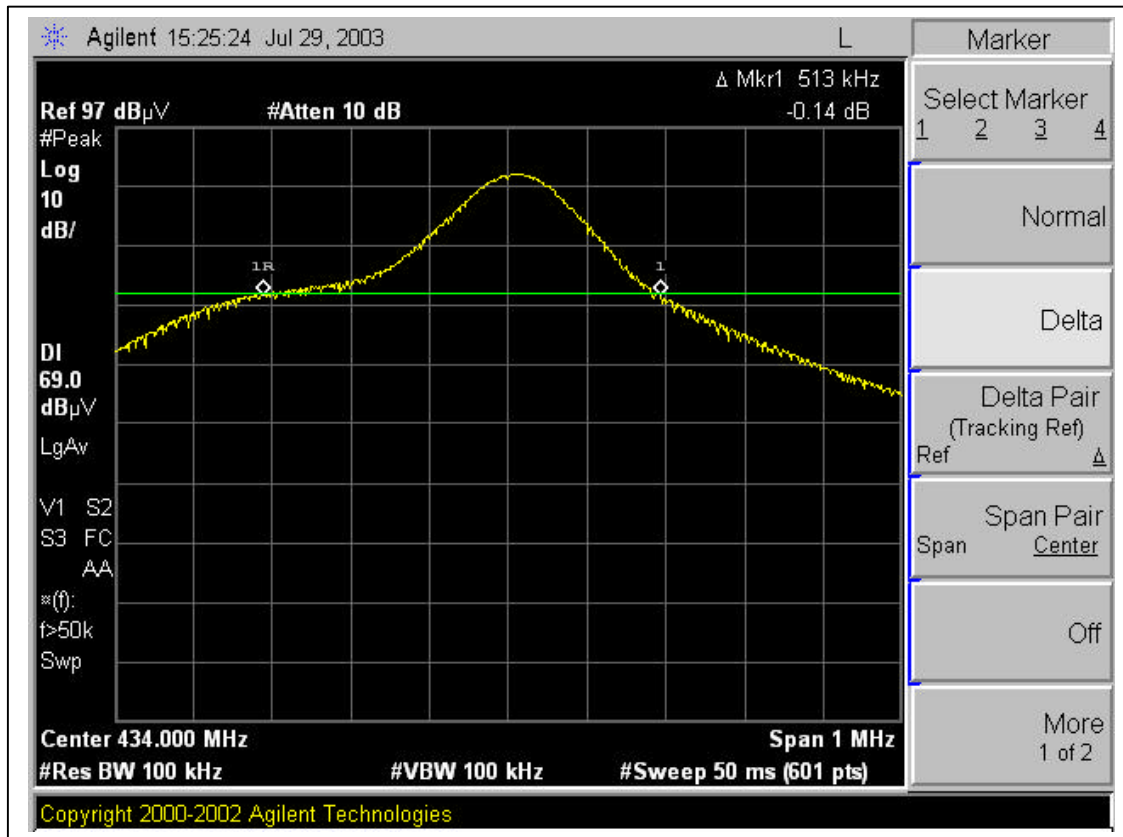

RADIATED DATA

						Project #: 03u2095-1 Report #: 030715C2 Date & Time: 07/15/03 3:46 PM Test Engr: Chin Pang					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: EXI Wireless Systems Inc. EUT Description: RF Tag Reader (307KHz Transmitting) Test Configuration : EUT Only Type of Test: FCC 15.209 / 15.231 Mode of Operation: TX											
☒ A-Site		☐ B-Site		☐ C-Site		☐ F-Site		6 Worst Data		Descending	

Freq. (KHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Dist (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
Test at worst position:											
307.00	58.70	10.80	0.30	80.00	-10.20	17.86	-28.06	3mV	0.00	1.00	P
614.00	56.40	10.60	0.30	40.00	27.30	31.84	-4.54	3mV	0.00	1.00	P
921.00	38.40	10.60	0.30	40.00	9.30	28.32	-19.02	3mV	0.00	1.00	P
1228.00	50.80	10.60	0.30	40.00	21.70	25.82	-4.12	3mV	0.00	1.00	P
1535.00	45.40	10.60	0.30	40.00	16.30	23.88	-7.58	3mV	0.00	1.00	P
307.00	48.20	10.80	0.30	80.00	-20.70	17.86	-38.56	3mH	0.00	1.00	P
614.00	50.10	10.60	0.30	40.00	21.00	31.84	-10.84	3mH	0.00	1.00	P
921.00	34.10	10.60	0.30	40.00	5.00	28.32	-23.32	3mH	0.00	1.00	P
1228.00	48.00	10.60	0.30	40.00	18.90	25.82	-6.92	3mH	0.00	1.00	P
1535.00	36.80	10.60	0.30	40.00	7.70	23.88	-16.18	3mH	0.00	1.00	P
No other emissions were found up to 30MHz.											

												Project #: 03U2096-1 Report #: 030722B1 Date & Time: 07/22/03 1:53PM Test Engr: Chin Pang	
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888													
Company: EXI Wireless Systems Inc EUT Description: 433.92MHz RFID Tag Reader (307KHz/433MHz Transceiver) Test Configuration : EUT only Type of Test: FCC 15.231 Mode of Operation: Tx													
$M\% = ((t1+t2+t3+...)/100\% = 16.5\%$ RBW=100KHZ, VBW=100KHZ												$Av\ Reading = Pk\ Reading + 20*\log(M\%)$ $20*\log(M\%) = -15.65$	
Freq. (MHz)	Pk Rdg (dBuV)	Av Rdg (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)	
433.92Mhz Fundamental frequency													
Y-Position (stand Up)													
433.92	76.20	60.55	16.22	5.19	28.63	53.33	72.86	-19.53	3mV	0.00	1.00	P	
433.92	72.70	57.05	16.22	5.19	28.63	49.83	72.86	-23.03	3mH	0.00	1.00	P	
X-Position (EUT Lay Down)													
433.92	75.10	59.45	16.22	5.19	28.63	52.23	72.86	-20.63	3mV	0.00	1.00	P	
433.92	70.50	54.85	16.22	5.19	28.63	47.63	72.86	-25.23	3mH	0.00	2.00	P	
Z-Position (EUT Place Side Way)													
433.92	75.50	59.85	16.22	5.19	28.63	52.63	72.86	-20.23	3mV	0.00	1.00	P	
433.92	75.40	59.75	16.22	5.19	28.63	52.53	72.86	-20.33	3mH	0.00	1.50	P	
The Data show Y-Position is the worst case													
868.60	45.00	29.35	20.19	7.66	28.63	28.57	52.86	-24.29	3mV	0.00	1.00	P	
868.60	41.70	26.05	20.19	7.66	28.63	25.27	52.86	-27.59	3mH	0.00	1.50	P	

RADIATED EMISSIONS (HARMONIC)


08/04/03 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:Chin Pang Project #:03U2119-1 Company:EXI Wireless Systems Inc. EUT Descrip.:307KHz / 433.92MHz Transceiver EUT M/N:Tag Link Test Target: FCC Class B Mode Oper:Tx																
Test Equipment:																
EMCO Horn 1-18GHz T60; S/N: 2238 @1m		Pre-amplifier 1-26GHz T87 Miteq 924342		Spectrum Analyzer Agilent 8564E Analyzer		Horn > 18GHz										
Hi Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)				Peak Measurements: 1 MHz Resolution Bandwidth 1MHz Video Bandwidth				Average Measurements: 1 MHz Resolution Bandwidth 10Hz Video Bandwidth								
Average=Peak-Duty Cycle																
f GHz	Dist feet	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes	
1.302	3.3	58.3	45.1	25.8	1.5	-43.4	-9.5	0.0	32.7	19.5	74.0	54.0	-41.3	-34.5	V	
1.736	3.3	55.0	41.8	27.9	1.9	-43.3	-9.5	1.0	33.0	19.8	74.0	54.0	-41.0	-34.2	V	
2.170	3.3	51.8	38.6	29.6	2.3	-43.2	-9.5	1.0	31.9	18.7	74.0	54.0	-42.1	-35.3	V	
2.604	3.3	50.9	37.7	30.5	2.7	-43.2	-9.5	1.0	32.4	19.2	74.0	54.0	-41.6	-34.8	V	
3.038	3.3	46.6	33.4	31.4	3.1	-43.2	-9.5	1.0	29.4	16.2	74.0	54.0	-44.6	-37.8	V	
1.302	3.3	59.0	45.8	25.8	1.5	-43.4	-9.5	0.0	33.4	20.2	74.0	54.0	-40.6	-33.8	H	
1.736	3.3	56.0	42.8	27.9	1.9	-43.3	-9.5	1.0	34.0	20.8	74.0	54.0	-40.0	-33.2	H	
2.170	3.3	52.4	39.2	29.6	2.3	-43.2	-9.5	1.0	32.5	19.3	74.0	54.0	-41.5	-34.7	H	
2.604	3.3	51.3	38.1	30.5	2.7	-43.2	-9.5	1.0	32.8	19.6	74.0	54.0	-41.2	-34.4	H	
3.038	3.3	47.3	34.1	31.4	3.1	-43.2	-9.5	1.0	30.1	16.9	74.0	54.0	-43.9	-37.1	H	
No other emissions were detected above the system noise floor																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


EUT PHOTOGRAPHS







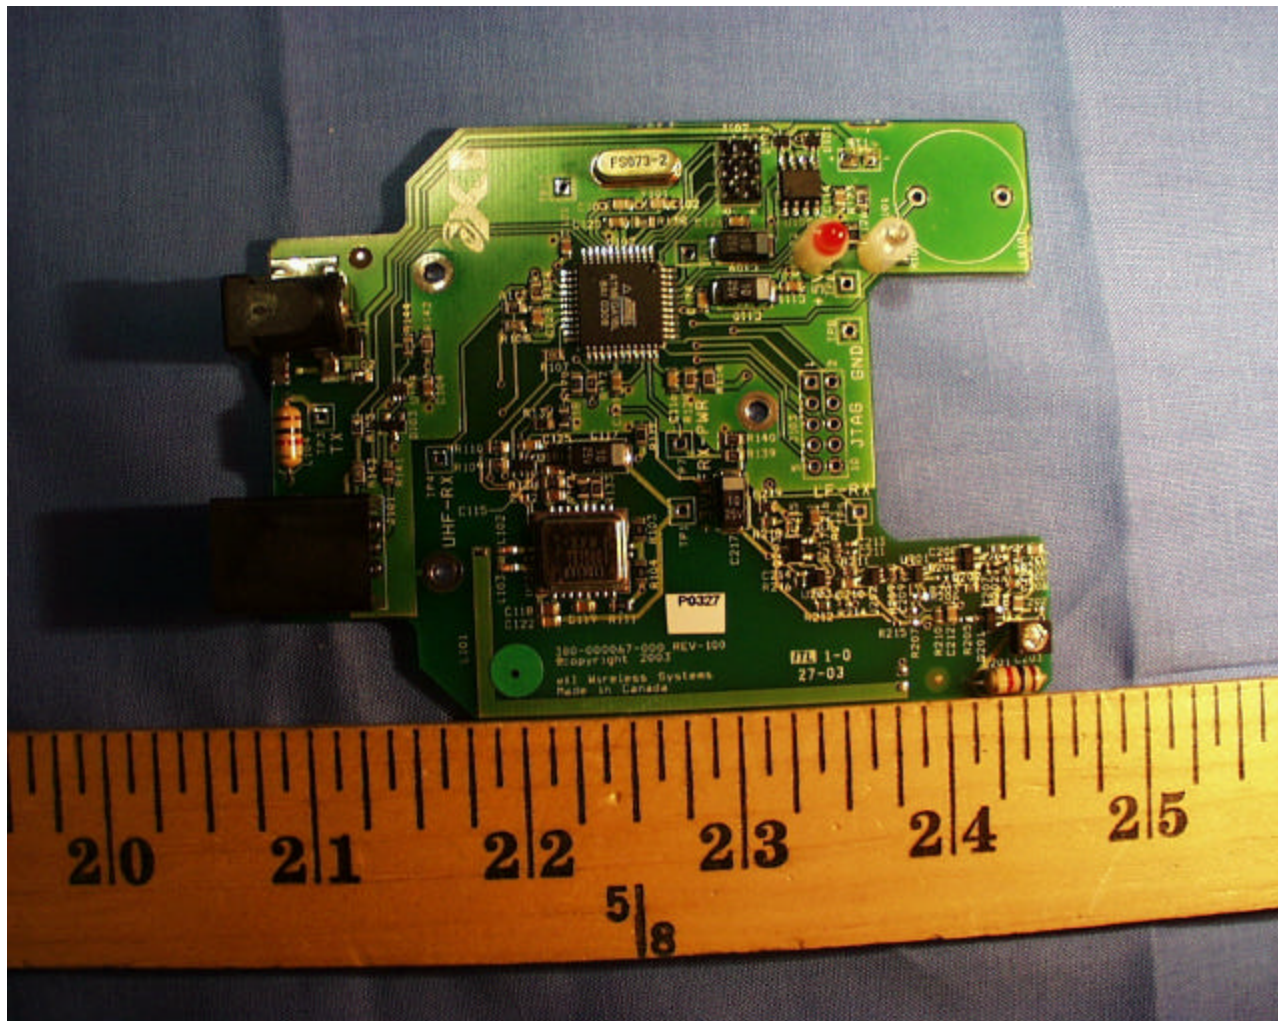

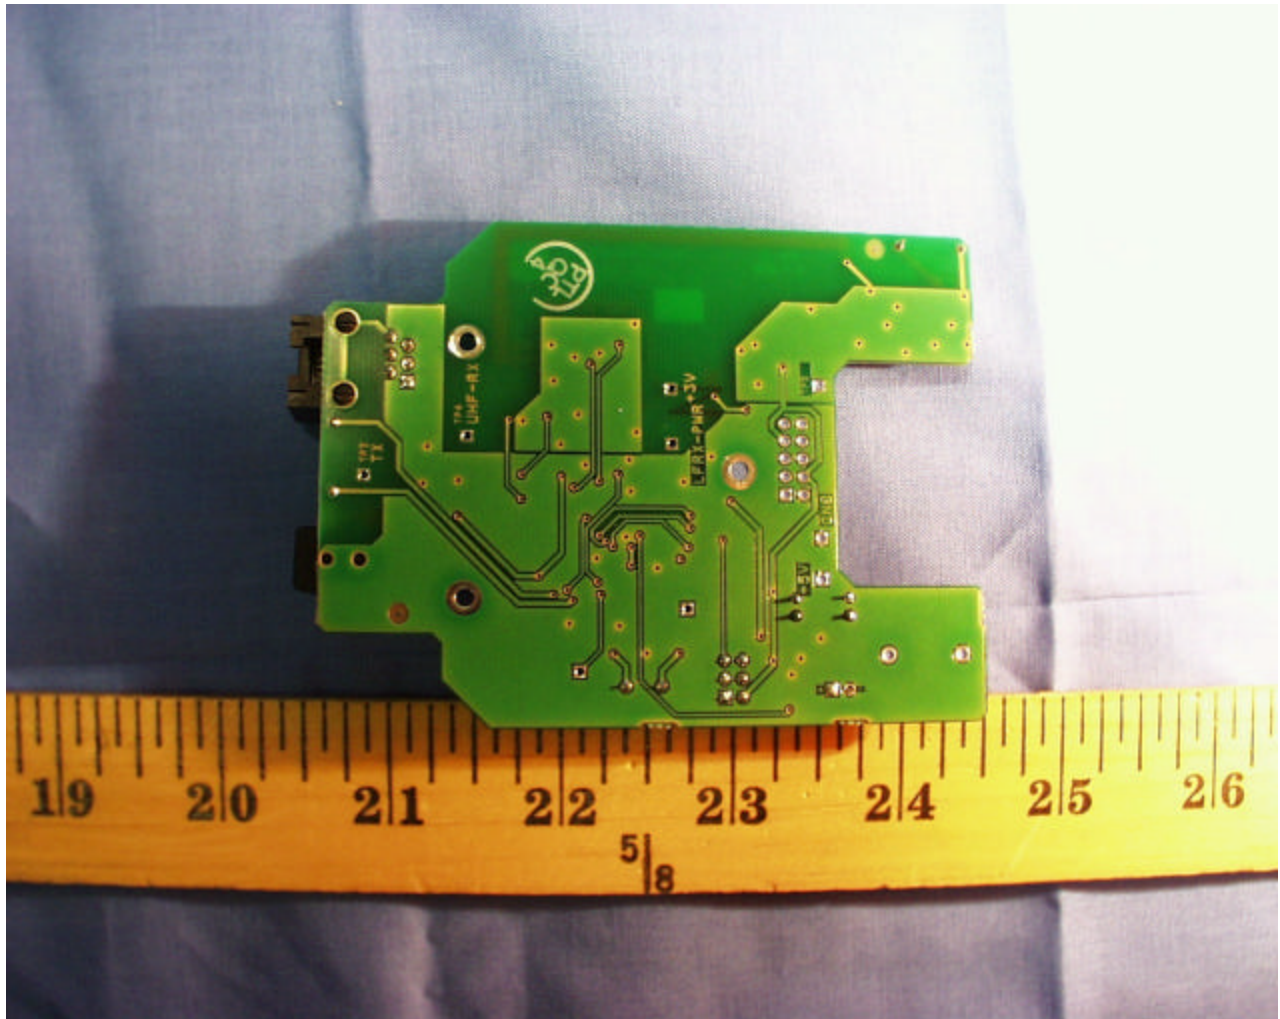

END OF REPORT