



## FCC RADIO TEST REPORT

Applicant's company	<b>Accton Technology Corporation</b>
Applicant Address	No. 1 Creation Rd., III, Science-based Industrial Park, Hsin chu 30077, Taiwan
FCC ID	<b>HED-HWG6507CAM</b>
Manufacturer's company	<b>Accton Technology Corporation</b>
Manufacturer Address	No. 1 Creation Rd., III, Science-based Industrial Park, Hsin chu 30077, Taiwan

Product Name	WaltzOne All-in-One IP Cam
Brand Name	Accton
Model No.	<b>HWG6507</b>
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400~2483.5 MHz
Received Date	Oct. 05, 2012
Final Test Date	Apr. 06, 2016
Submission Type	Original Equipment

### Statement

**Test result included is only for the IEEE 802.15.4 ZigBee of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C** and **KDB558074 D01 v03r05**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies .....	4
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	5
3.7. Table for Supporting Units .....	6
3.8. Table for Parameters of Test Software Setting .....	7
3.9. EUT Operation during Test .....	7
3.10. Duty Cycle.....	7
3.11. Test Configurations .....	8
<b>4. TEST RESULT .....</b>	<b>11</b>
4.1. AC Power Line Conducted Emissions Measurement.....	11
4.2. Maximum Conducted Output Power Measurement.....	15
4.3. Power Spectral Density Measurement .....	17
4.4. 6dB Spectrum Bandwidth Measurement .....	21
4.5. Radiated Emissions Measurement .....	25
4.6. Emissions Measurement.....	35
4.7. Antenna Requirements .....	41
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>42</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>44</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A4</b>
<b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....</b>	<b>B1 ~ B3</b>



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : WaltzOne All-in-One IP Cam  
Brand Name : Accton  
Model No. : HWG6507  
Applicant : Accton Technology Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 05, 2012 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that appears to read "Sam Chen".

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	16.97 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	8.42 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.70 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.15 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.52 dB
4.7	15.203	Antenna Requirements	Complies	-

Note: This device contains WiFi transmitter module FCC ID: HED7822GMN.

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From power adapter
Modulation	DSSS (O-QPSK)
Data Rate (Mbps)	DSSS (250kbps)
Frequency Range	2400~2483.5 MHz
Channel Number	15
Channel Band Width (99%)	2.42 MHz
Maximum Conducted Output Power	21.58 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

Power	Brand	Model	Rating
Adapter	APD	WB-10E05FU	Input: 100-240V, 50-60Hz, 0.4A Max. Output: 5V, 2A


#### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	MAGIC	102700000010A	Chip Antenna	N/A	3.2

Note:

For ZigBee mode (1TX/1RX):

Only Ant. 1 can be used as transmitting/receiving antenna.

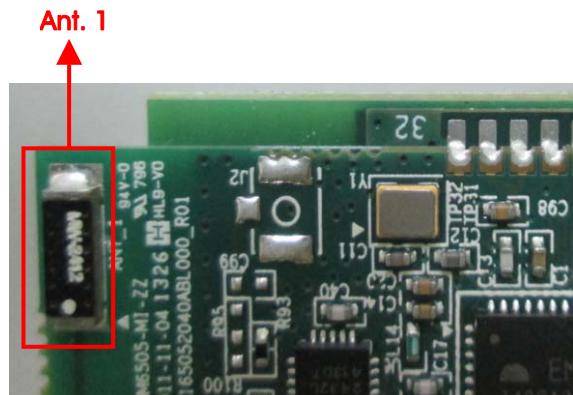

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5 MHz	11	2405 MHz	19	2445 MHz
	12	2410 MHz	20	2450 MHz
	13	2415 MHz	21	2455 MHz
	14	2420 MHz	22	2460 MHz
	15	2425 MHz	23	2465 MHz
	16	2430 MHz	24	2470 MHz
	17	2435 MHz	25	2475 MHz
	18	2440 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power	TX Mode	250 kbps	11/18/25	1
Power Spectral Density 6dB Spectrum Bandwidth	TX Mode	250 kbps	11/18/25	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	TX Mode	250 kbps	11/18/25	1
Band Edge Emissions	TX Mode	250 kbps	11/18/25	1

Note1: The EUT can only be used at Y axis position.

Note2: The SD port is no function.

The following test modes were performed for all tests:

#### For Conducted Emission test:

Mode 1. Normal Link - EUT with Adapter

#### For Radiated Emission test below 1GHz:

Mode 1. Normal Link - EUT with Adapter

#### For Radiated Emission test above 1GHz:

Mode 1. CTX - EUT

#### For Co-location MPE and Radiated Emission Co-location Test:

The EUT could be applied with 2.4GHz WLAN function and Zigbee function; therefore Co-location Maximum Permissible Exposure (Please refer to FA620101) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and Zigbee function.

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Designation No.	IC File No.
03CH01-CB	SAC	Hsin Chu	TW0006	IC 4086D
CO01-CB	Conduction	Hsin Chu	TW0006	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Supporting Units

For Test Site No: 03CH01-CB

For Radiated Emission test below 1GHz:

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E4300	DoC
AP	SMC	SMCWBR14S-N4 NA	DoC
AP	SMC	SMCWBR14S-N5 NA	DoC
Sensor	N/A	N/A	DoC
WiFi Module	Accton	EW-7822GMn	HED7822GMN
SD Card	Apacer	SD Card	N/A

For Radiated Emission test above 1GHz:

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB*2	DELL	E6430	DoC
AP	SMC	SMCWBR14S-N4 NA	DoC
AP	SMC	SMCWBR14S-N5 NA	DoC
Sensor	N/A	N/A	DoC
WiFi Module	Accton	EW-7822GMn	HED7822GMN
SD card	Silicon Power	SP016GBSDH006V10	DoC

For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.15.4 Zigbee

Test Software Version	Ember desktop 3.3.1652		
Frequency	2405 MHz	2440 MHz	2475 MHz
IEEE 802.15.4 ZigBee	Default (0x00)	Default (0xFD)	Default (0xFB)

### 3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.10. Duty Cycle

On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
1.000	1.000	100.00%	0.00	0.01

### 3.11. Test Configurations


#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

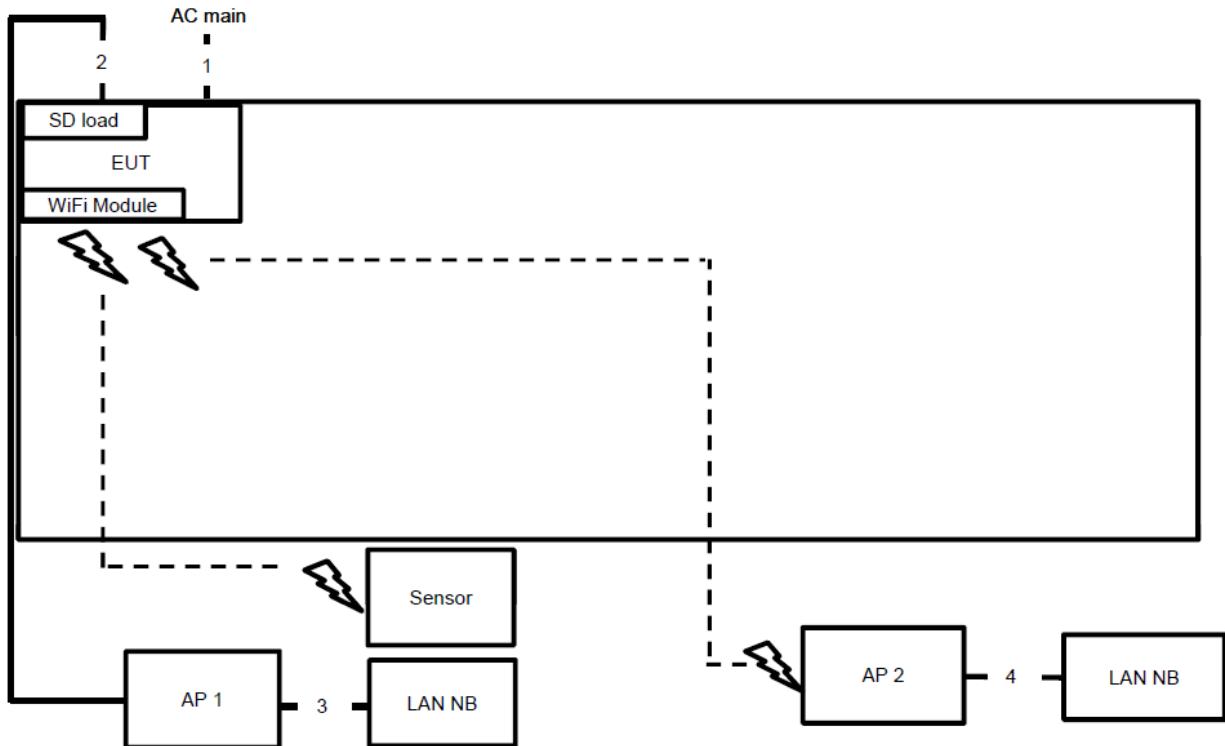

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	3m
4	RJ-45 cable	No	3m


### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

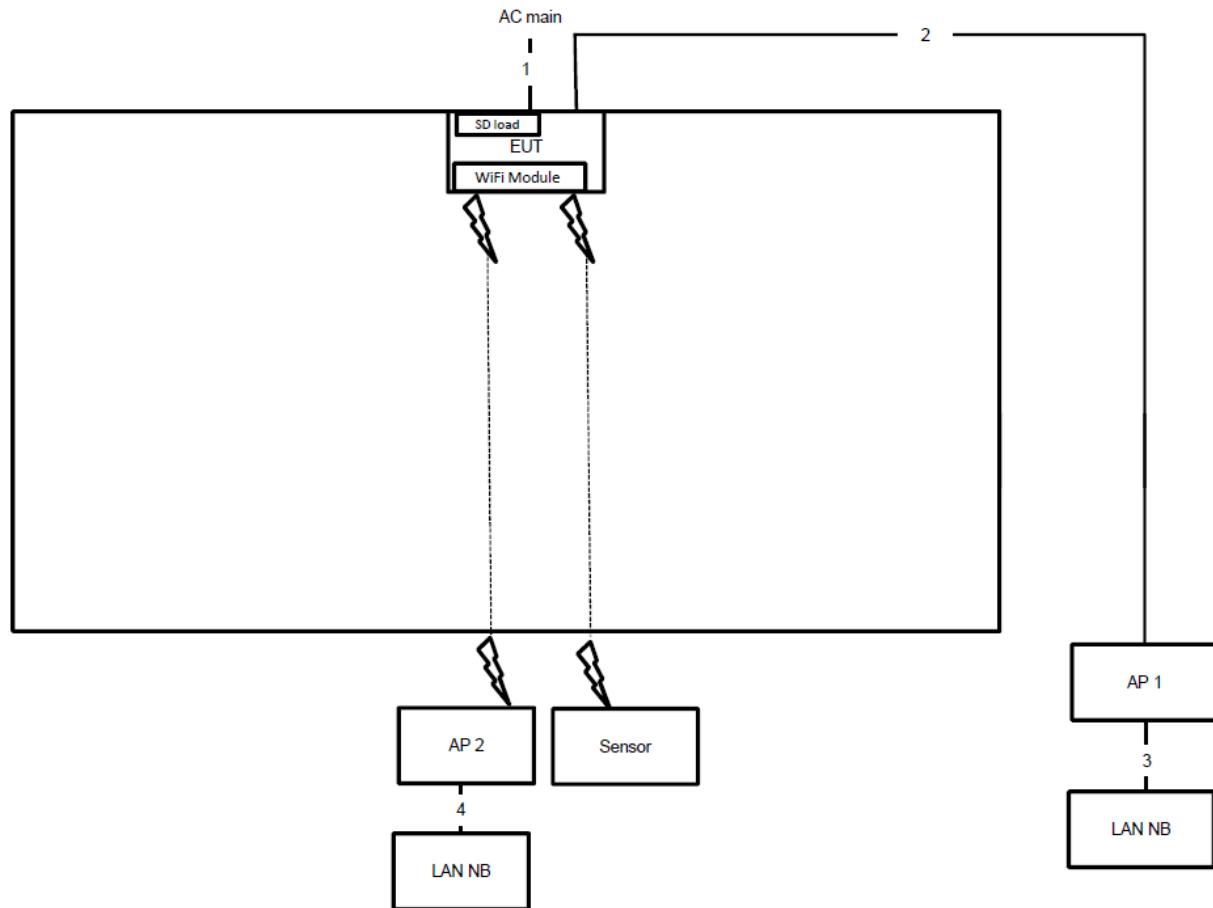

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	3m
4	RJ-45 cable	No	3m

Test Configuration: Above 1GHz

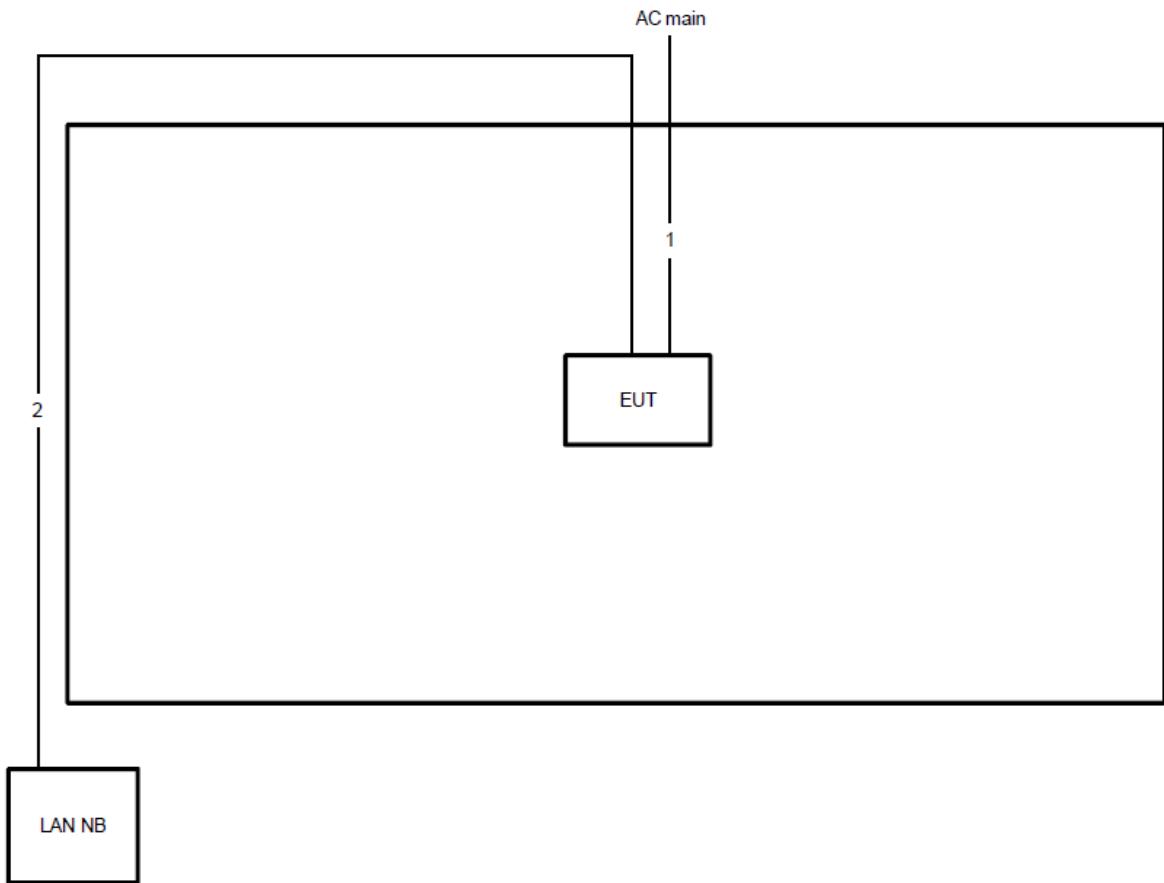

Item	Connection	Shielded	Length
1	Power cable	No	3m
2	RJ-45 cable	No	10m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

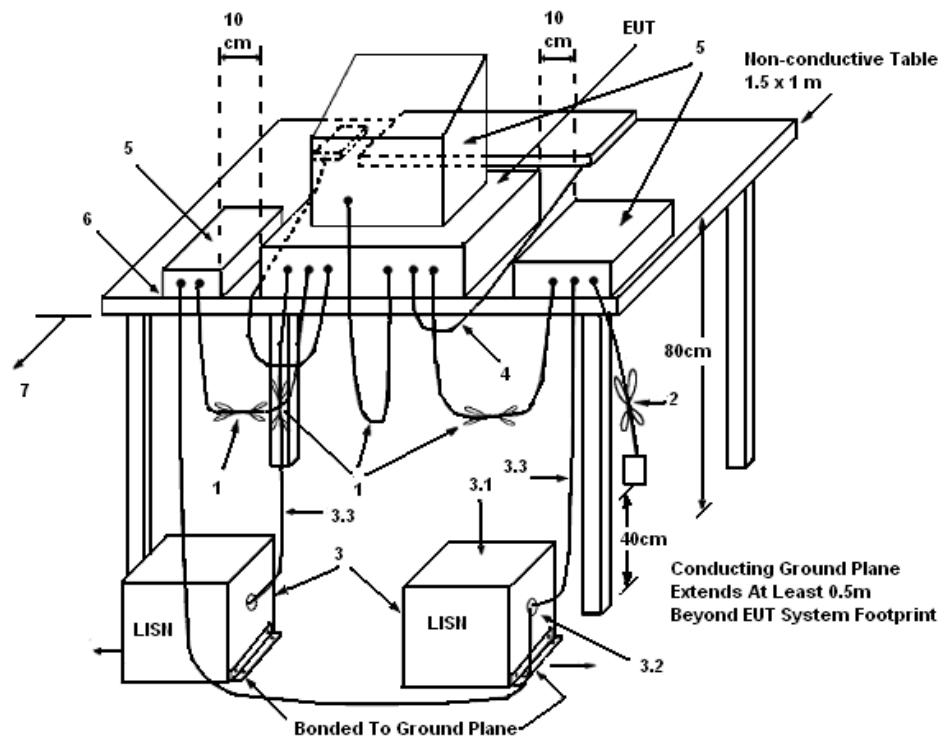

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50\ \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	60%
Test Engineer	Sollo Luo	Phase	Line
Configuration	Normal Link		

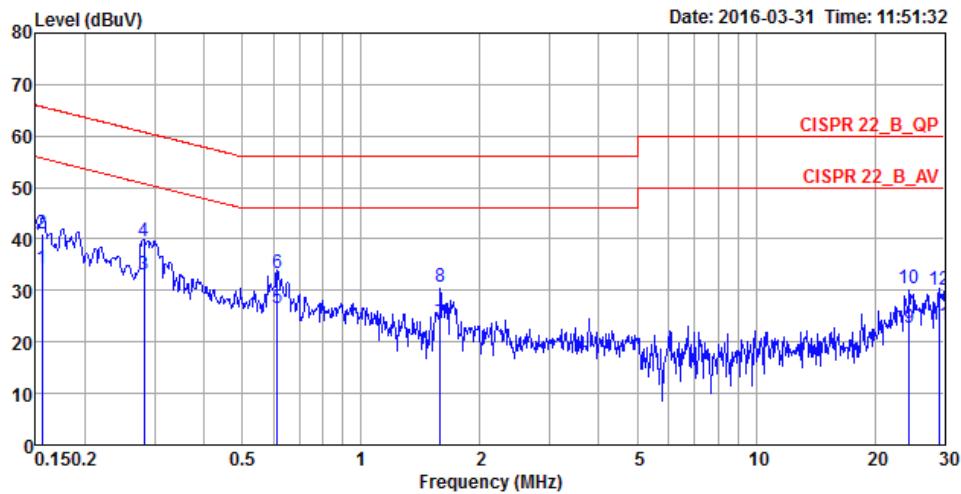

Freq	Level	Over	Limit	Read	LISN	Cable	Remark
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1557	34.17	-21.52	55.69	24.13	10.02	0.02 LINE Average
2	0.1557	41.09	-24.60	65.69	31.05	10.02	0.02 LINE QP
3	0.2818	32.96	-17.80	50.76	23.00	9.92	0.04 LINE Average
4	0.2818	39.68	-21.08	60.76	29.72	9.92	0.04 LINE QP
5	0.6140	26.59	-19.41	46.00	16.62	9.93	0.04 LINE Average
6	0.6140	33.39	-22.61	56.00	23.42	9.93	0.04 LINE QP
7	1.5851	23.74	-22.26	46.00	13.73	9.95	0.06 LINE Average
8	1.5851	30.62	-25.38	56.00	20.61	9.95	0.06 LINE QP
9	24.3995	22.82	-27.18	50.00	12.13	10.42	0.27 LINE Average
10	24.3995	30.41	-29.59	60.00	19.72	10.42	0.27 LINE QP
11	29.2157	23.24	-26.76	50.00	12.41	10.55	0.28 LINE Average
12	29.2157	30.09	-29.91	60.00	19.26	10.55	0.28 LINE QP

<b>Temperature</b>	23°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Sollo Luo	<b>Phase</b>	Neutral
<b>Configuration</b>	Normal Link		

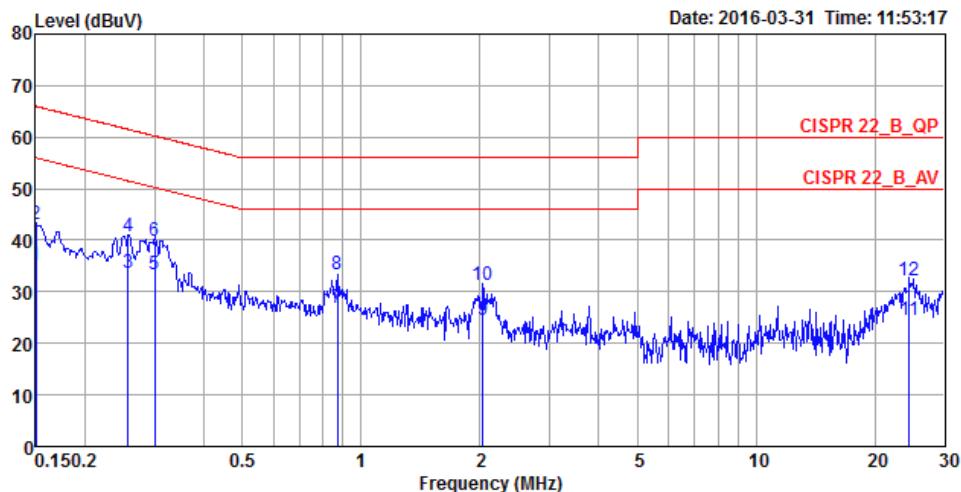

Freq	Level	Over Limit	Limit Line	Read		LISN	Cable	Remark	
				MHz	dBuV	dB	dBuV	dB	dB
1	0.1500	35.19	-20.81	56.00	25.15	10.02	0.02	NEUTRAL	Average
2	0.1500	42.98	-23.02	66.00	32.94	10.02	0.02	NEUTRAL	QP
3	0.2575	33.77	-17.74	51.51	23.82	9.92	0.03	NEUTRAL	Average
4	0.2575	40.61	-20.90	61.51	30.66	9.92	0.03	NEUTRAL	QP
5	0.3003	33.27	-16.97	50.24	23.31	9.92	0.04	NEUTRAL	Average
6	0.3003	40.00	-20.24	60.24	30.04	9.92	0.04	NEUTRAL	QP
7	0.8710	26.78	-19.22	46.00	16.79	9.94	0.05	NEUTRAL	Average
8	0.8710	33.49	-22.51	56.00	23.50	9.94	0.05	NEUTRAL	QP
9	2.0333	24.46	-21.54	46.00	14.44	9.96	0.06	NEUTRAL	Average
10	2.0333	31.15	-24.85	56.00	21.13	9.96	0.06	NEUTRAL	QP
11	24.3995	24.61	-25.39	50.00	13.92	10.42	0.27	NEUTRAL	Average
12	24.3995	32.18	-27.82	60.00	21.49	10.42	0.27	NEUTRAL	QP

**Note:**

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r05 section 9.2.3.2.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

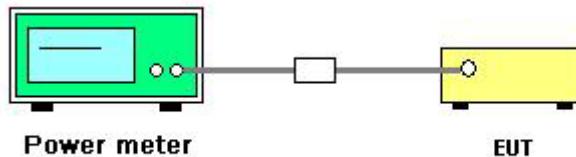

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	45%
Test Engineer	Serway Li	Configurations	802.15.4 Zigbee
Test Date	Feb. 24, 2016		

##### Configuration IEEE 802.15.4 Zigbee

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
11	2405 MHz	21.58	30.00	Complies
18	2440 MHz	20.75	30.00	Complies
25	2475 MHz	19.82	30.00	Complies

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	5-30 % greater than the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD).
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

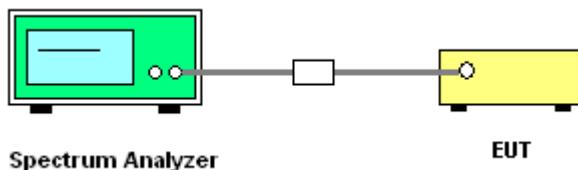

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	45%
Test Engineer	Serway Li	Configurations	802.15.4 Zigbee


##### Configuration IEEE 802.15.4 Zigbee

Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
2405 MHz	6.30	8.00	Complies
2440 MHz	6.09	8.00	Complies
2475 MHz	5.15	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

**Power Density Plot on Configuration 802.15.4 Zigbee / 2405 MHz**

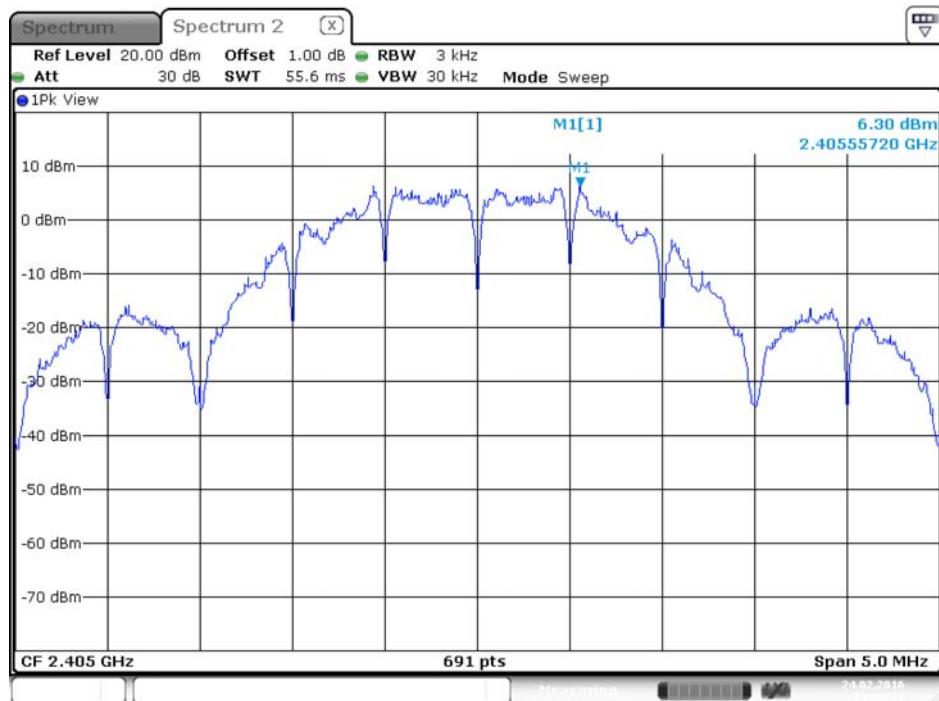

Date: 24.FEB.2016 14:50:37

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold

### 4.4.3. Test Procedures

#### For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

#### For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	25°C	Humidity	45%
Test Engineer	Serway Li	Configurations	802.15.4 Zigbee

##### Configuration 802.15.4 Zigbee

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
11	2405 MHz	1.58	2.39	500.00	Complies
18	2440 MHz	1.60	2.42	500.00	Complies
25	2475 MHz	1.58	2.42	500.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

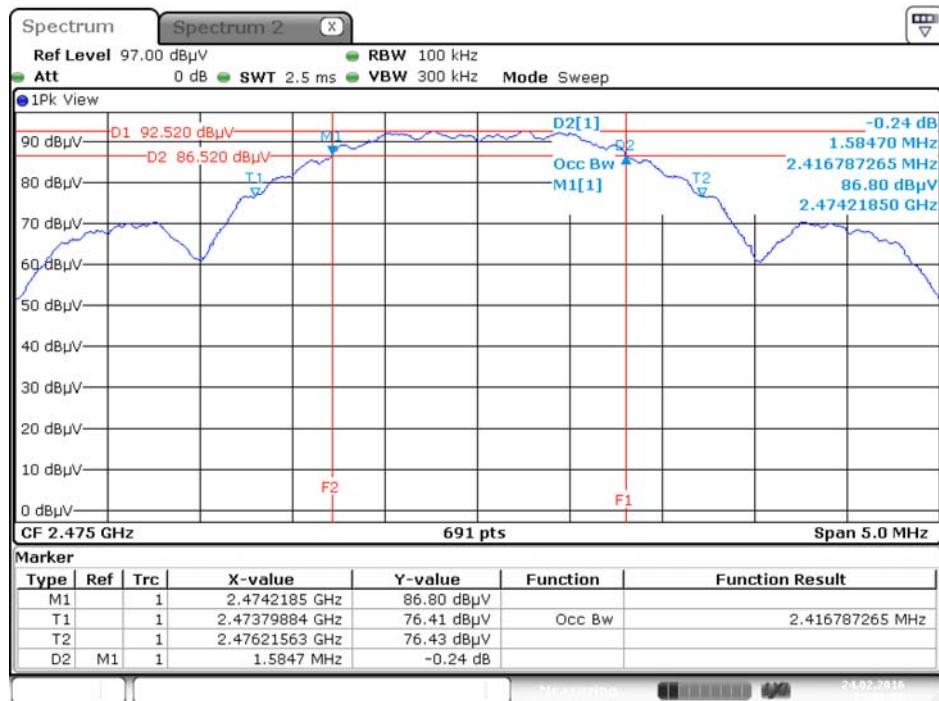**6 dB Bandwidth and 99% Occupied Bandwidth Plot on Configuration 802.15.4 Zigbee / 2475 MHz**


Date: 24.FEB.2016 15.08.07

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

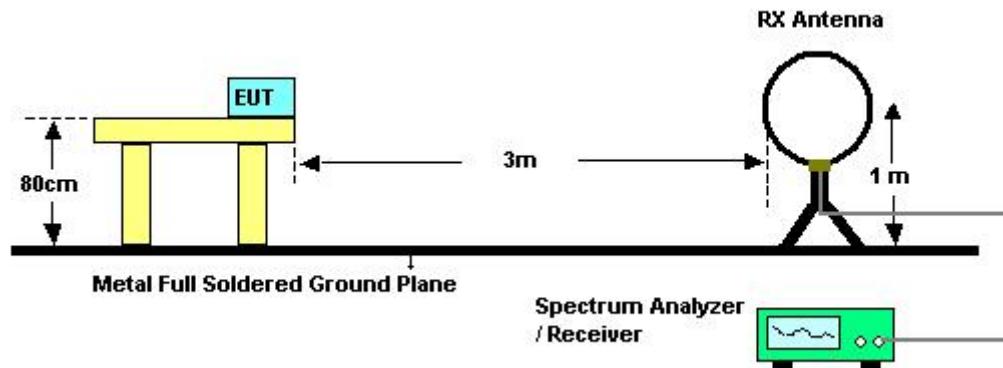

For Radiated Emissions: 30MHz~1GHz

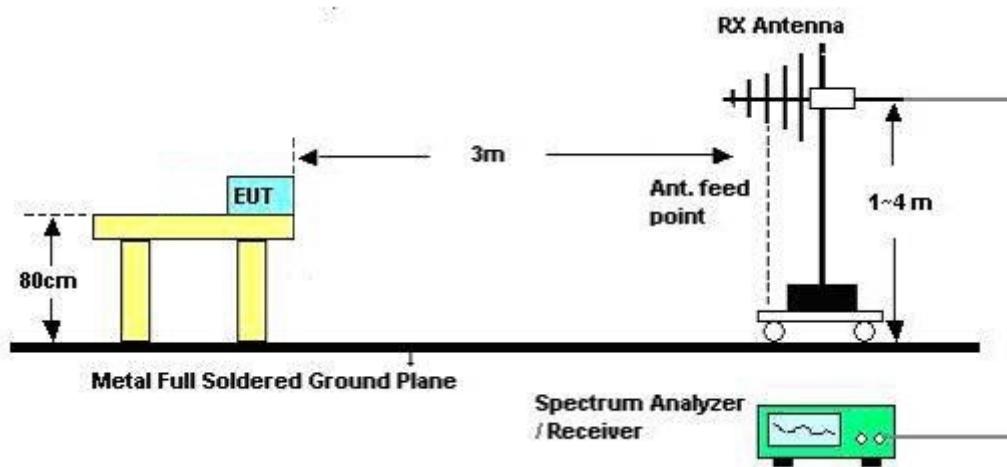

For Radiated Emissions: Above 1GHz

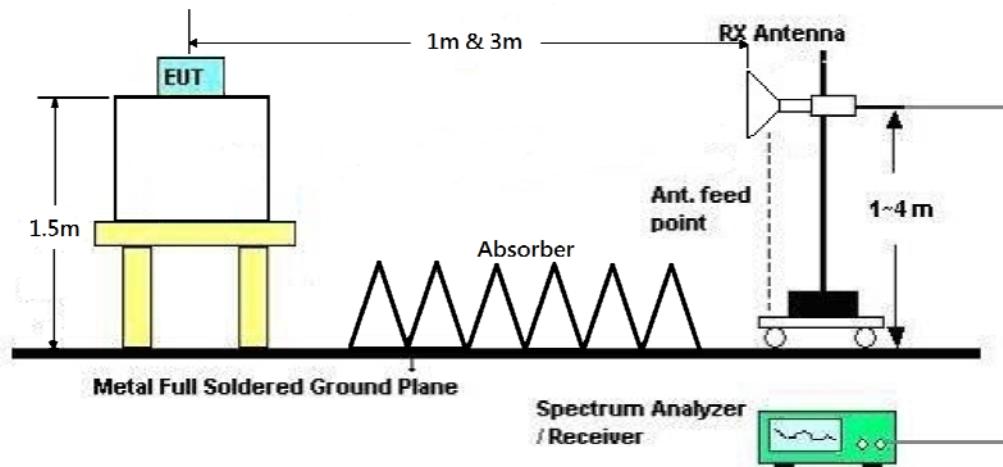

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	Normal Link
Test Date	Apr. 06, 2016		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


## 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	Normal Link

## Horizontal

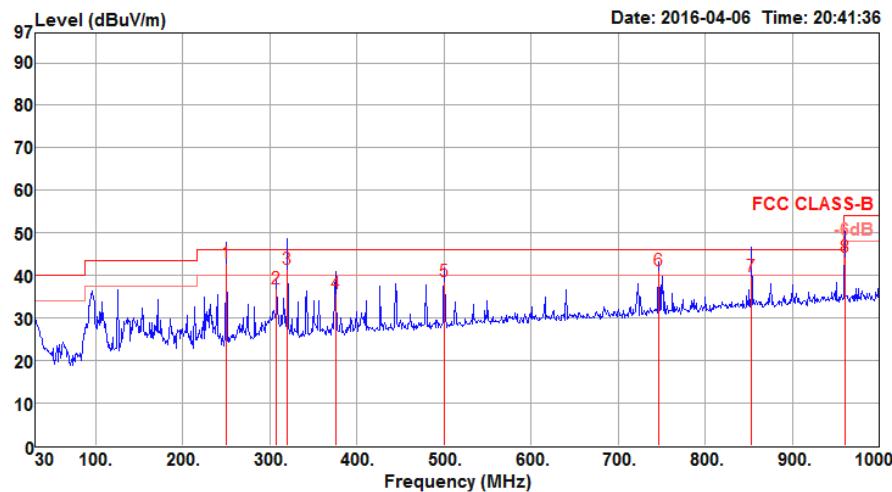

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	250.19	42.85	46.00	-3.15	49.67	1.97	18.80	27.59	136	217 QP	HORIZONTAL
2	307.42	36.82	46.00	-9.18	42.40	2.15	19.81	27.54	164	189 QP	HORIZONTAL
3	320.03	41.59	46.00	-4.41	46.92	2.18	20.13	27.64	177	241 QP	HORIZONTAL
4	375.32	35.89	46.00	-10.11	40.06	2.31	21.58	28.06	156	146 QP	HORIZONTAL
5	500.45	38.67	46.00	-7.33	41.13	2.58	23.64	28.68	169	134 QP	HORIZONTAL
6	746.83	41.16	46.00	-4.84	40.34	3.22	26.07	28.47	134	222 QP	HORIZONTAL
7	853.53	39.76	46.00	-6.24	37.11	3.38	27.32	28.05	126	178 QP	HORIZONTAL
8	960.23	44.40	54.00	-9.60	40.20	3.64	28.16	27.60	241	155 QP	HORIZONTAL

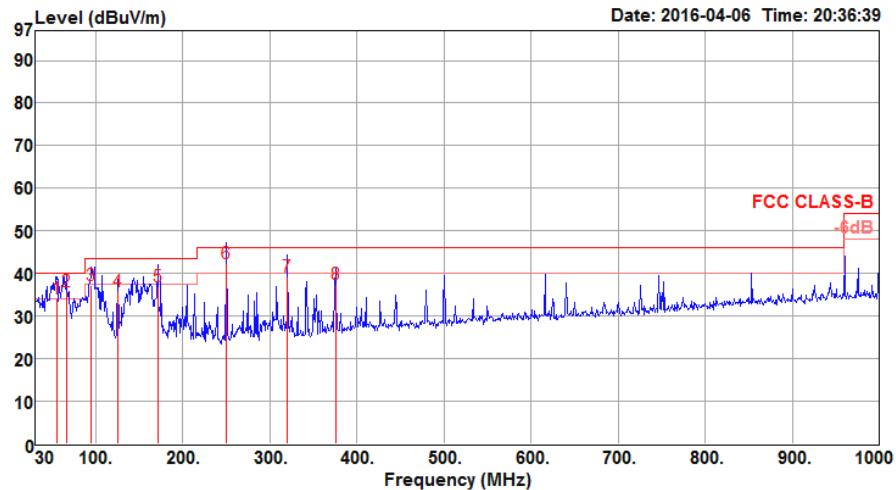**Vertical**


Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	55.22	34.19	40.00	-5.81	47.85	1.36	13.42	28.44	119	136	QP
2	65.89	35.70	40.00	-4.30	50.34	1.42	12.34	28.40	150	167	QP
3	94.99	37.07	43.50	-6.43	48.00	1.56	15.81	28.30	146	321	QP
4	125.06	35.66	43.50	-7.84	44.07	1.65	18.05	28.11	196	145	QP
5	170.65	37.05	43.50	-6.45	47.36	1.78	15.76	27.85	136	220	QP
6	250.19	42.23	46.00	-3.77	49.05	1.97	18.80	27.59	179	220	QP
7	320.03	39.32	46.00	-6.68	44.65	2.18	20.13	27.64	113	331	QP
8	375.32	37.49	46.00	-8.51	41.66	2.31	21.58	28.06	294	214	QP

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	802.15.4 Zigbee CH 11
Test Date	Feb. 23, 2016		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB					
1	4808.96	56.95	74.00	-17.05	15.72	8.15	33.08	0.00	103	44	Peak	HORIZONTAL	
2	4811.04	47.73	54.00	-6.27	6.50	8.15	33.08	0.00	103	44	Average	HORIZONTAL	

## Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dBuV/m			dBuV	dB	dB					
1	4808.92	55.17	74.00	-18.83	13.94	8.15	33.08	0.00	100	110	Peak	VERTICAL	
2	4811.04	47.31	54.00	-6.69	6.08	8.15	33.08	0.00	100	110	Average	VERTICAL	

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	802.15.4 Zigbee CH 18
Test Date	Feb. 23, 2016		

**Horizontal**

Freq	Level	Limit		Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over Limit								
MHz		dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4879.00	57.57	74.00	-16.43	49.33	7.94	33.23	32.93	100	2	Peak HORIZONTAL
2	4881.04	49.09	54.00	-4.91	40.85	7.94	33.23	32.93	100	2	Average HORIZONTAL
3	7321.32	57.22	74.00	-16.78	44.71	9.68	36.13	33.30	133	236	Peak HORIZONTAL
4	7321.64	46.43	54.00	-7.57	33.92	9.68	36.13	33.30	133	236	Average HORIZONTAL

**Vertical**

Freq	Level	Limit		Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Over Limit								
MHz		dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	4878.92	49.79	54.00	-4.21	41.55	7.94	33.23	32.93	100	163	Average VERTICAL
2	4879.04	58.04	74.00	-15.96	49.80	7.94	33.23	32.93	100	163	Peak VERTICAL
3	7318.40	59.73	74.00	-14.27	47.22	9.68	36.13	33.30	255	164	Peak VERTICAL
4	7318.60	49.04	54.00	-4.96	36.53	9.68	36.13	33.30	255	164	Average VERTICAL

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	802.15.4 Zigbee CH 25
Test Date	Feb. 23, 2016		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB									
1	4948.92	45.27	54.00	-8.73	37.07	7.74	33.38	32.92	100	126	Average	HORIZONTAL
2	4949.00	55.18	74.00	-18.82	46.98	7.74	33.38	32.92	100	126	Peak	HORIZONTAL
3	7426.32	54.44	74.00	-19.56	41.45	9.95	36.36	33.32	119	68	Peak	HORIZONTAL
4	7426.56	41.78	54.00	-12.22	28.79	9.95	36.36	33.32	119	68	Average	HORIZONTAL

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB									
1	4948.88	56.26	74.00	-17.74	48.06	7.74	33.38	32.92	100	189	Peak	VERTICAL
2	4949.12	45.97	54.00	-8.03	37.77	7.74	33.38	32.92	100	189	Average	VERTICAL
3	7423.60	56.35	74.00	-17.65	43.36	9.95	36.36	33.32	100	285	Peak	VERTICAL
4	7426.44	43.47	54.00	-10.53	30.48	9.95	36.36	33.32	100	285	Average	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

#### For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r05 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.

#### **4.6.4. Test Setup Layout**

##### For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

##### For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	802.15.4 Zigbee CH 11, 18, 25
Test Date	Feb. 23, 2016		

##### Channel 11

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	2388.80	58.87	74.00	-15.13	25.55	5.01	28.31	0.00	141	178	Peak	HORIZONTAL	
2	2390.00	47.78	54.00	-6.22	14.46	5.01	28.31	0.00	141	178	Average	HORIZONTAL	
3	2404.60	112.97			79.58	5.04	28.35	0.00	141	178	Peak	HORIZONTAL	
4	2405.00	108.32			74.93	5.04	28.35	0.00	141	178	Average	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2405 MHz.

##### Channel 18

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	2357.20	56.75	74.00	-17.25	23.51	4.97	28.27	0.00	136	183	Peak	HORIZONTAL	
2	2390.00	44.63	54.00	-9.37	11.31	5.01	28.31	0.00	136	183	Average	HORIZONTAL	
3	2440.00	107.48			73.99	5.08	28.41	0.00	136	183	Average	HORIZONTAL	
4	2440.40	111.87			78.38	5.08	28.41	0.00	136	183	Peak	HORIZONTAL	
5	2483.50	44.92	54.00	-9.08	11.32	5.12	28.48	0.00	136	183	Average	HORIZONTAL	
6	2488.80	57.19	74.00	-16.81	23.59	5.12	28.48	0.00	136	183	Peak	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2440 MHz.


##### Channel 25

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
1	2474.40	108.30			74.74	5.11	28.45	0.00	120	187	Peak	HORIZONTAL	
2	2475.00	105.99			72.42	5.11	28.46	0.00	120	187	Average	HORIZONTAL	
3	2483.50	63.81	74.00	-10.19	30.21	5.12	28.48	0.00	120	187	Peak	HORIZONTAL	
4	2483.50	53.48	54.00	-0.52	19.88	5.12	28.48	0.00	120	187	Average	HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2475 MHz.


For Emission not in Restricted Band

Plot on Configuration 802.15.4 Zigbee / Reference Level

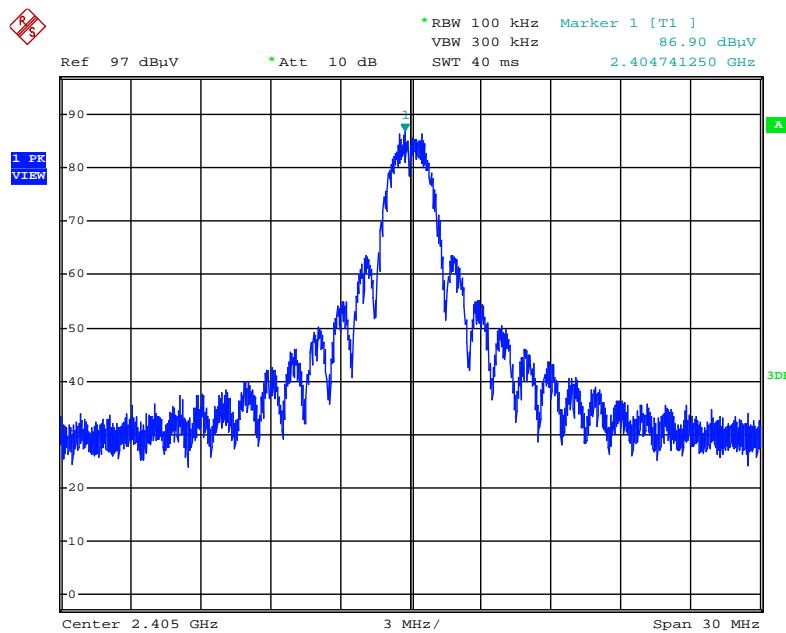


Date: 23.FEB.2016 15:41:34


Plot on Configuration 802.15.4 Zigbee / CH 11 / 30MHz~2400MHz (down 30dBc)

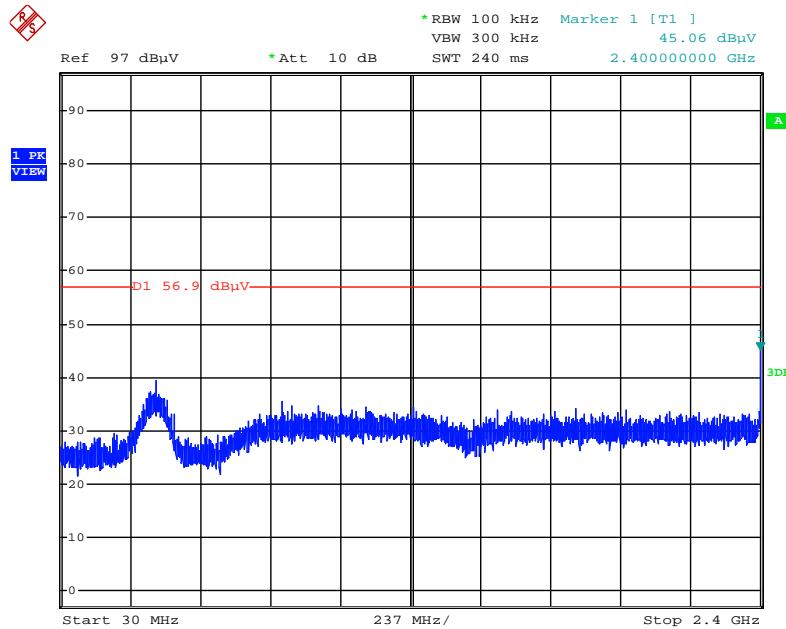

Date: 23.FEB.2016 15:46:56

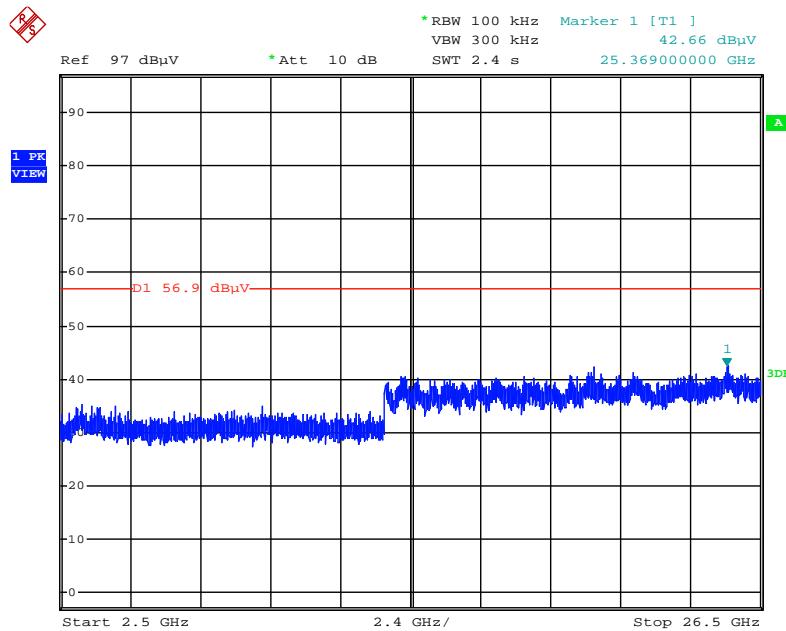
**Plot on Configuration 802.15.4 Zigbee / CH 11 / 2500MHz~26500MHz (down 30dBc)**


Date: 23.FEB.2016 15:46:23

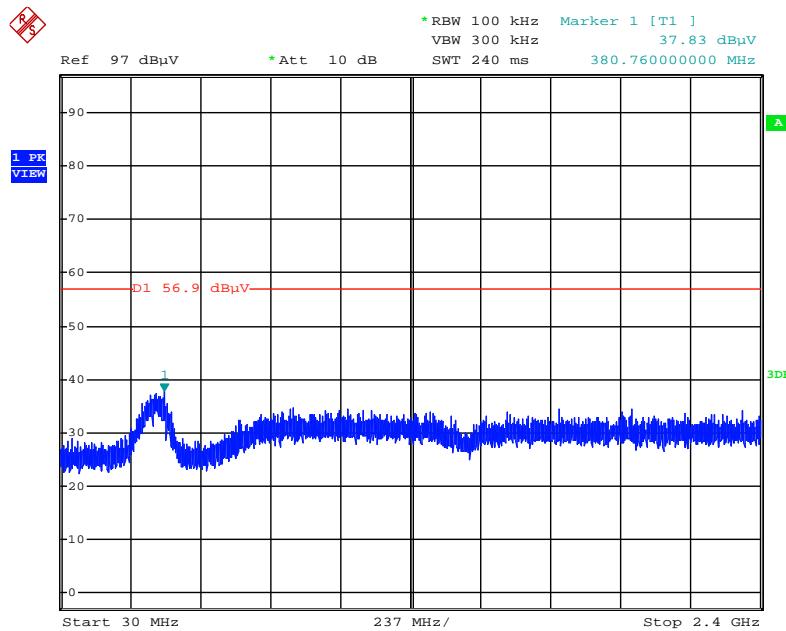**Plot on Configuration 802.15.4 Zigbee / CH 25 / 30MHz~2400MHz (down 30dBc)**


Date: 23.FEB.2016 15:52:46

**Plot on Configuration 802.15.4 Zigbee / CH 25 / 2500MHz~26500MHz (down 30dBc)**

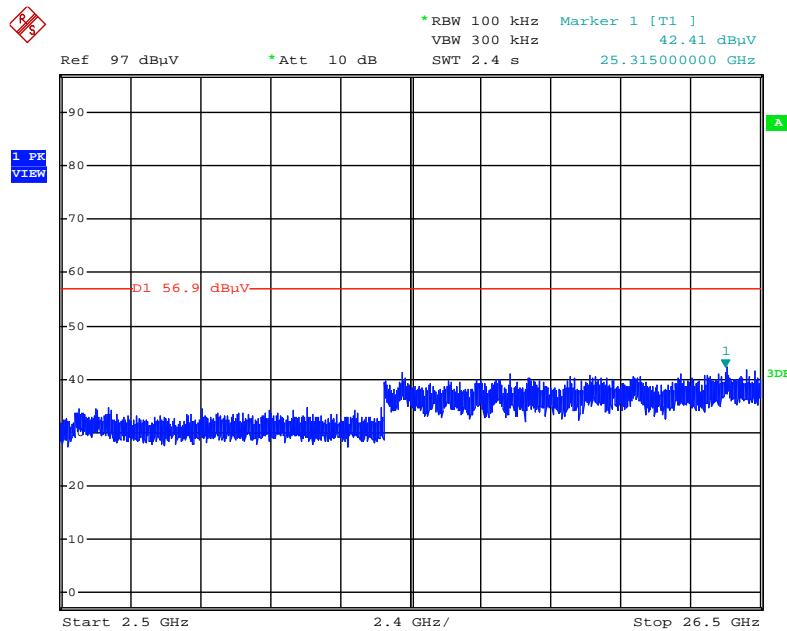

Date: 23.FEB.2016 15:56:50

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.45GHz	Jan. 27, 0216	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Mar. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 16, 2016*	Radiation (03CH01-CB)
Test Software	Audix	E3	6.2009-I0-7	N/A	N/A	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 09, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)



RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%