


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	Gary Chu	Configurations	2.4GHz + Zigbee

Horizontal

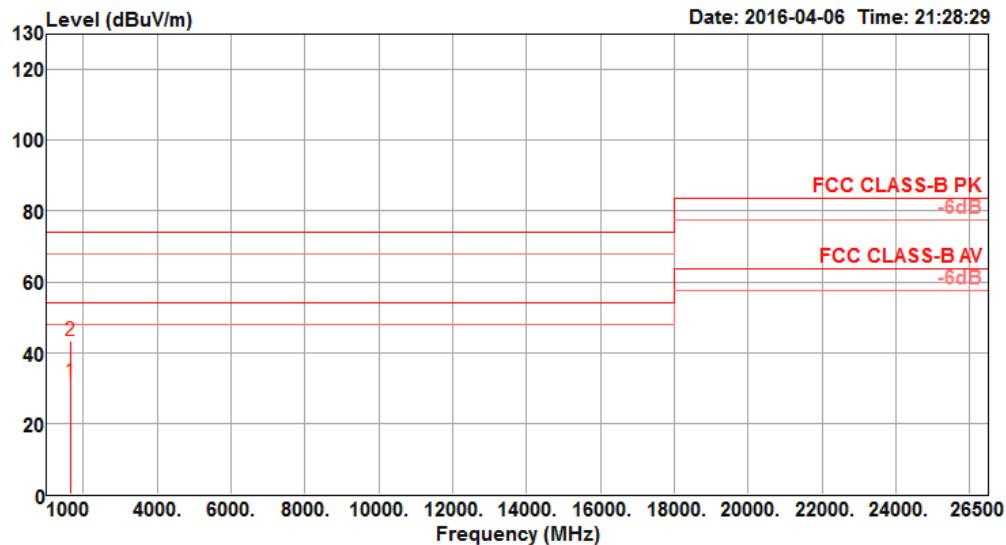

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	dB	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1675.84	31.99	54.00	-22.01	36.27	4.03	26.24	34.55	153	316 Average	HORIZONTAL
2	1676.64	43.18	74.00	-30.82	47.46	4.03	26.24	34.55	153	316 Peak	HORIZONTAL

Vertical

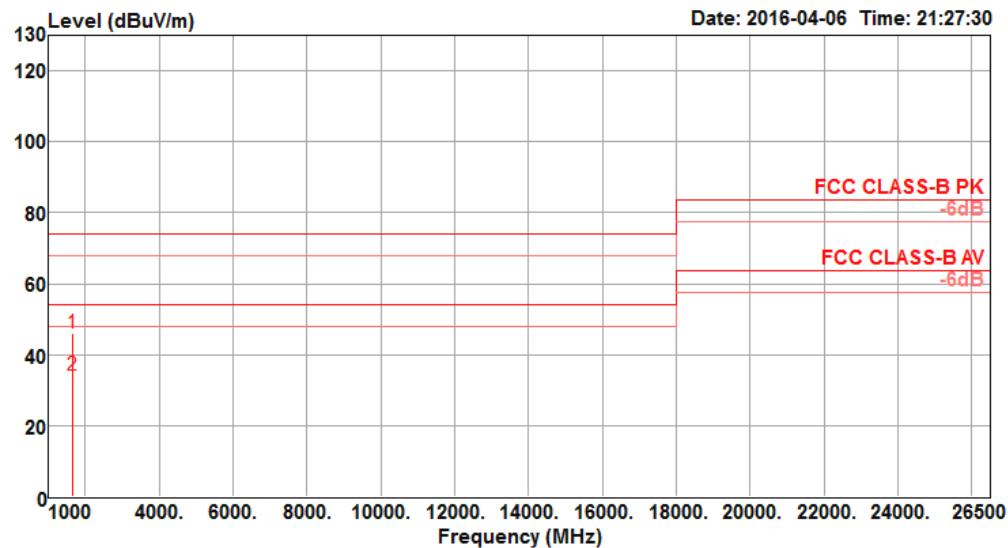

Freq	Level	Limit	Over	Read	Cable			Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	1673.96	46.06	74.00	-27.94	50.38	4.02	26.21	34.55	165	358	Peak	VERTICAL
2	1674.04	34.10	54.00	-19.90	38.42	4.02	26.21	34.55	165	358	Average	VERTICAL