



FCC Radio Test Report

Equipment : Metrolinq 60 GHz Module
Brand Name : IgniteNet
Model No. : RDO-60-FB-USBB-8
FCC ID : HED-ML60MDSB
Standard : 47 CFR FCC Part 15.255
Applicant : Accton Technology Corporation
No. 1, Creation Rd. III, Science-based Industrial
Park Hsin Chu 30077, Taiwan R.O.C.
Manufacturer : Joy Technology (Shen Zhen) Co. Ltd
HengKeng Ind., Shangpai, Shangwu, Aiqun
Rd., Shitian Town, Shenzhen 518108 China

The product sample received on Mar. 04, 2016 and completely tested on Mar. 23, 2016. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013, 47 CFR FCC Part 15.255 and Millimeter Wave Test Procedures and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.



Sam Chen
SPORTON INTERNATIONAL INC.





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	7
1.3	Support Equipment.....	7
1.4	EUT Operation during Test	7
1.5	Test Setup Diagram	8
1.6	Testing Applied Standards	11
1.7	Testing Location	11
2	TEST CONFIGURATION OF EQUIPMENT UNDER TEST	12
2.1	Test Channel Frequencies	12
2.2	Conformance Tests and Related Test Frequencies	12
2.3	Far Field Boundary Calculations	12
3	TRANSMITTER TEST RESULT	13
3.1	AC Power Conducted Emissions	13
3.2	Occupied Bandwidth	17
3.3	EIRP Power.....	22
3.4	Peak Conducted Power.....	25
3.5	Transmitter Spurious Emissions.....	27
3.6	Frequency Stability	39
3.7	Operation Restriction and Group Installation	42
4	TEST EQUIPMENT AND CALIBRATION DATA	43
5	MEASUREMENT UNCERTAINTY	45
APPENDIX A. TEST PHOTOS.....		A1 ~ A5



Summary of Test Result

Standard Requirements and Conformance Test Specifications				
Report Clause	Ref. Std. Clause	Description	Result	Remark
3.1	FCC 15.207	AC Power Conducted Emissions	Complied	-
3.2	FCC 15.255(e)	Occupied Bandwidth	Complied	-
3.3	FCC 15.255(b)(1)	EIRP Power	Complied	-
3.4	FCC 15.255(e)	Peak Conducted Power	Complied	-
3.5	FCC 15.255(c)	Transmitter Spurious Emissions	Complied	-
3.6	FCC 15.255(f)	Frequency Stability	Complied	-
3.7	FCC 15.255(a),(h)	Operation Restriction and Group Installation	Complied	-



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information	
Frequency Range	57-64 GHz
The Channel Plan(s)	Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz

1.1.2 Table of Modulation

MCS index	Modulation	N _{CBPS}	Repetition	Code rate	Data rate (Mbps)
1	$\pi/2$ -BPSK	1	2	1/2	385
2	$\pi/2$ -BPSK	1	1	1/2	770
3	$\pi/2$ -BPSK	1	1	5/8	962.5
4	$\pi/2$ -BPSK	1	1	3/4	1155
5	$\pi/2$ -BPSK	1	1	13/16	1251.25
6	$\pi/2$ -QPSK	2	1	1/2	1540
7	$\pi/2$ -QPSK	2	1	5/8	1925
8	$\pi/2$ -QPSK	2	1	3/4	2310
9	$\pi/2$ -QPSK	2	1	13/16	2502.5
10	$\pi/2$ -16QAM	4	1	1/2	3080
11	$\pi/2$ -16QAM	4	1	5/8	3850
12	$\pi/2$ -16QAM	4	1	3/4	4620

1.1.3 Antenna Information

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBd)
1	Accton	123400001084A	Dish Ant.	N/A	42
2	Accton	123400001227A	Dish Ant.	N/A	38

1.1.4 EUT Power Type

EUT Power Type	From host system
----------------	------------------



1.1.5 Equipment Use Condition

Equipment Use Condition	
<input type="checkbox"/>	Fixed field disturbance sensors at 61-61.5GHz
<input type="checkbox"/>	Except fixed field disturbance sensors at 61-61.5GHz
<input checked="" type="checkbox"/>	Except fixed field disturbance sensors

1.1.6 User Condition

Intended Operation	
<input type="checkbox"/>	Indoor only
<input checked="" type="checkbox"/>	Outdoor only

1.1.7 Duty Cycle

Duty Cycle		Duty Cycle Factor	
The transmitter is intended for	Low Channel	100%	0.00
	Middle Channel	100%	0.00
	High Channel	100%	0.00



1.2 Accessories

Accessories
Reflection board of antenna*1
USB cable*1, shielded, 0.7m

1.3 Support Equipment

For AC Power Conducted Emissions Test:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E6430	DoC
2	Earphone	e-Power	S90W	N/A
3	Mouse	Logitech	M-U0026	DoC
4	Test fixture	Accton	OAP920920	DoC

For Transmitter Spurious Emissions (below 1 GHz) Test:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Mouse	Logitech	M-U0026	DoC
3	Earphone	SHYARO CHI	MIC-04	N/A
4	Test fixture	Accton	OAP920920	DoC

For Other Test Items:


Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
1	NB	DELL	E4300	DoC
2	Test fixture	Accton	OAP920920	DoC

1.4 EUT Operation during Test

During the test, "Tera Term 、QuetzalConfig" under WIN 7 was executed the test program to control the EUT continuously transmit RF signal.


1.5 Test Setup Diagram

Test Setup Diagram - AC Power Conducted Emissions

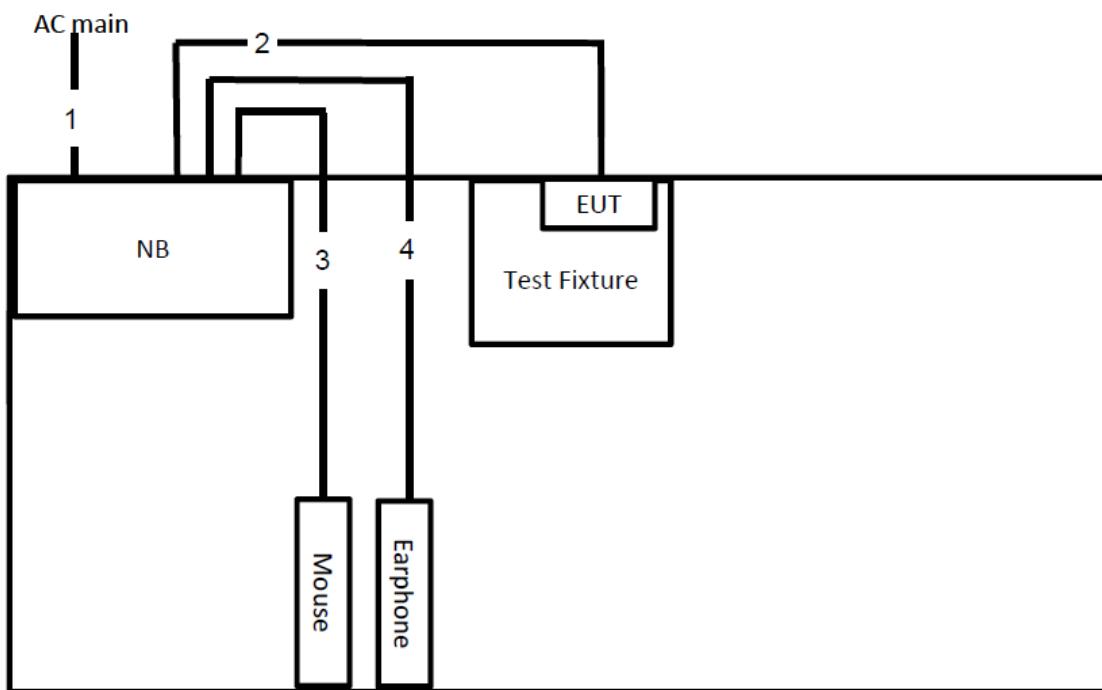


Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	USB cable	Yes	0.7m
3	USB cable	Yes	1.8m
4	Audio cable	No	1.4m

Test Setup Diagram - Transmitter Spurious Emissions below 1 GHz

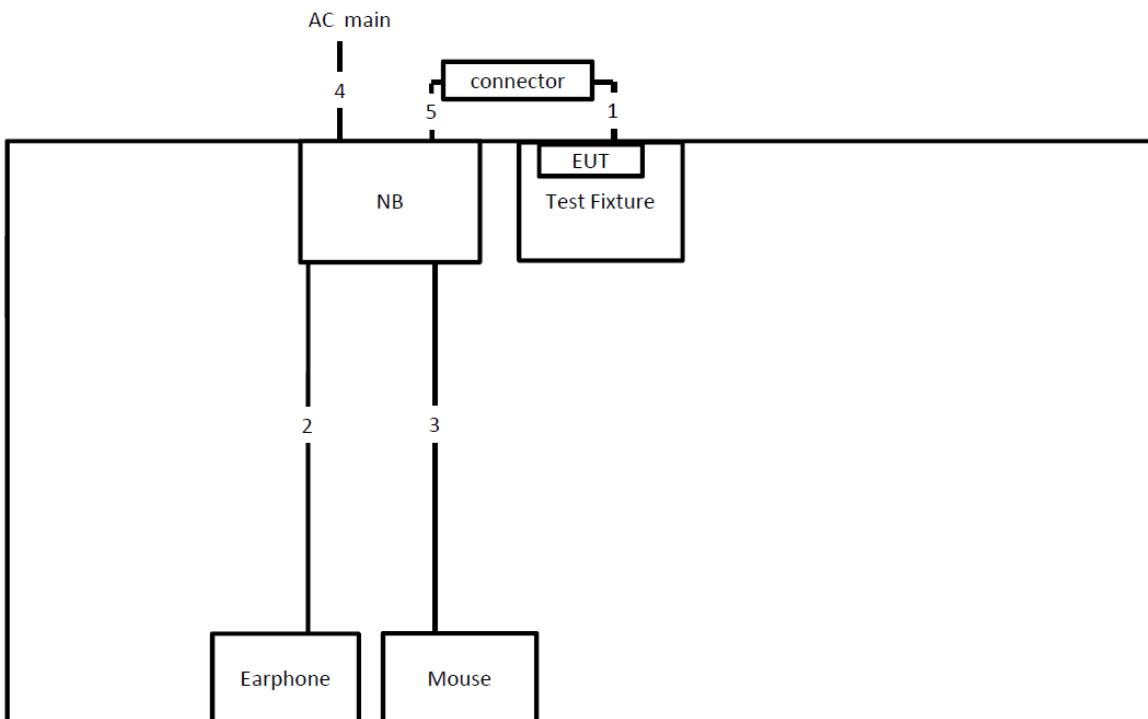

Item	Connection	Shielded	Length
1	USB cable	Yes	0.7m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m
4	Power cable	No	2.6m
5	USB cable	Yes	1.8m

Test Setup Diagram - Transmitter Spurious Emissions above 1 GHz

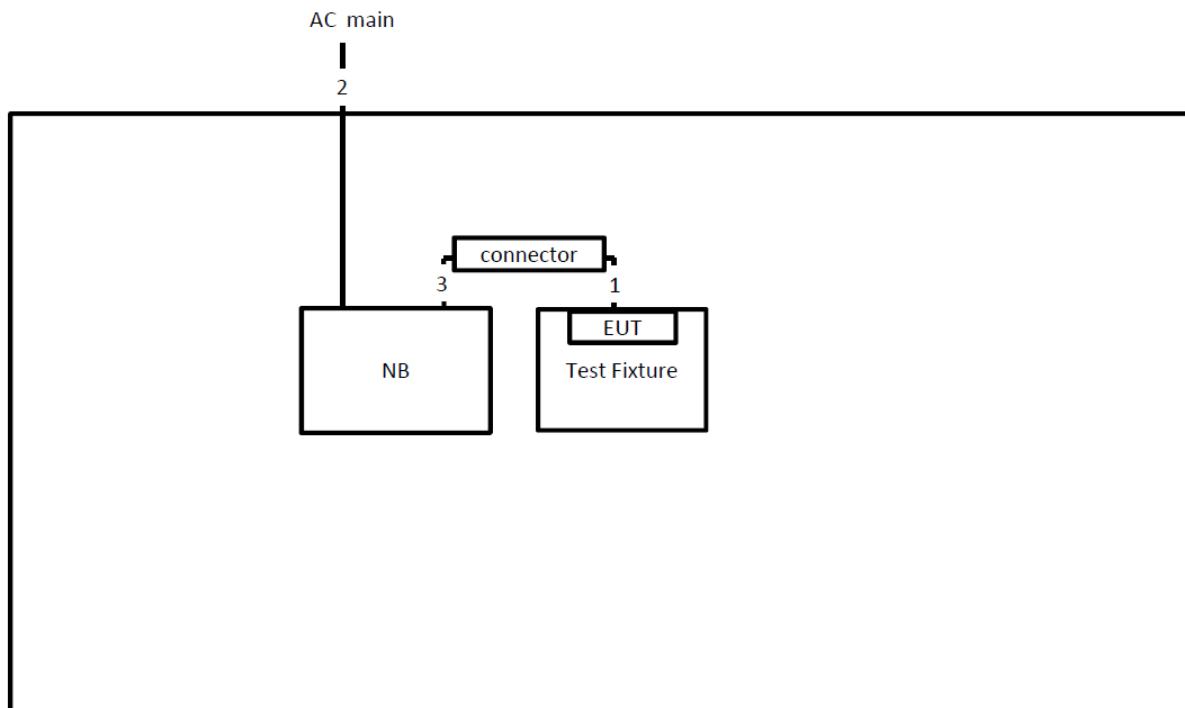

Item	Connection	Shielded	Length
1	USB cable	Yes	0.7m
2	Power cable	No	2.6m
3	USB cable	Yes	1.8m



1.6 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

1.7 Testing Location

Testing Location						
<input type="checkbox"/>	HWA YA	ADD	:	No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL	:	886-3-327-3456	FAX	:
<input checked="" type="checkbox"/>	JHUBEI	ADD	:	No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.		
		TEL	:	886-3-656-9065	FAX	:
Test Site No.						
CO01-CB		03CH01-CB			TH01-CB	



2 Test Configuration of Equipment under Test

2.1 Test Channel Frequencies

Test Channel Frequencies Configuration	
Low Channel (GHz)	58.32
Middle Channel (GHz)	60.48
High Channel (GHz)	62.64

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	Normal Link
Occupied Bandwidth	58.32, 60.48, 62.64
EIRP Power	58.32, 60.48, 62.64
Peak Conducted Power	58.32, 60.48, 62.64
Transmitter Spurious Emissions (below 1 GHz)	Normal Link
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32, 60.48, 62.64
Transmitter Spurious Emissions (above 40 GHz)	58.32, 60.48, 62.64
Frequency Stability	Un-Modulation

2.3 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$

where:

L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters

Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.35	0.0051440	47.628	4762.80
60.48	0.35	0.0049603	49.392	4939.20
62.64	0.35	0.0047893	51.156	5115.60

3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

3.1.4 Test Setup

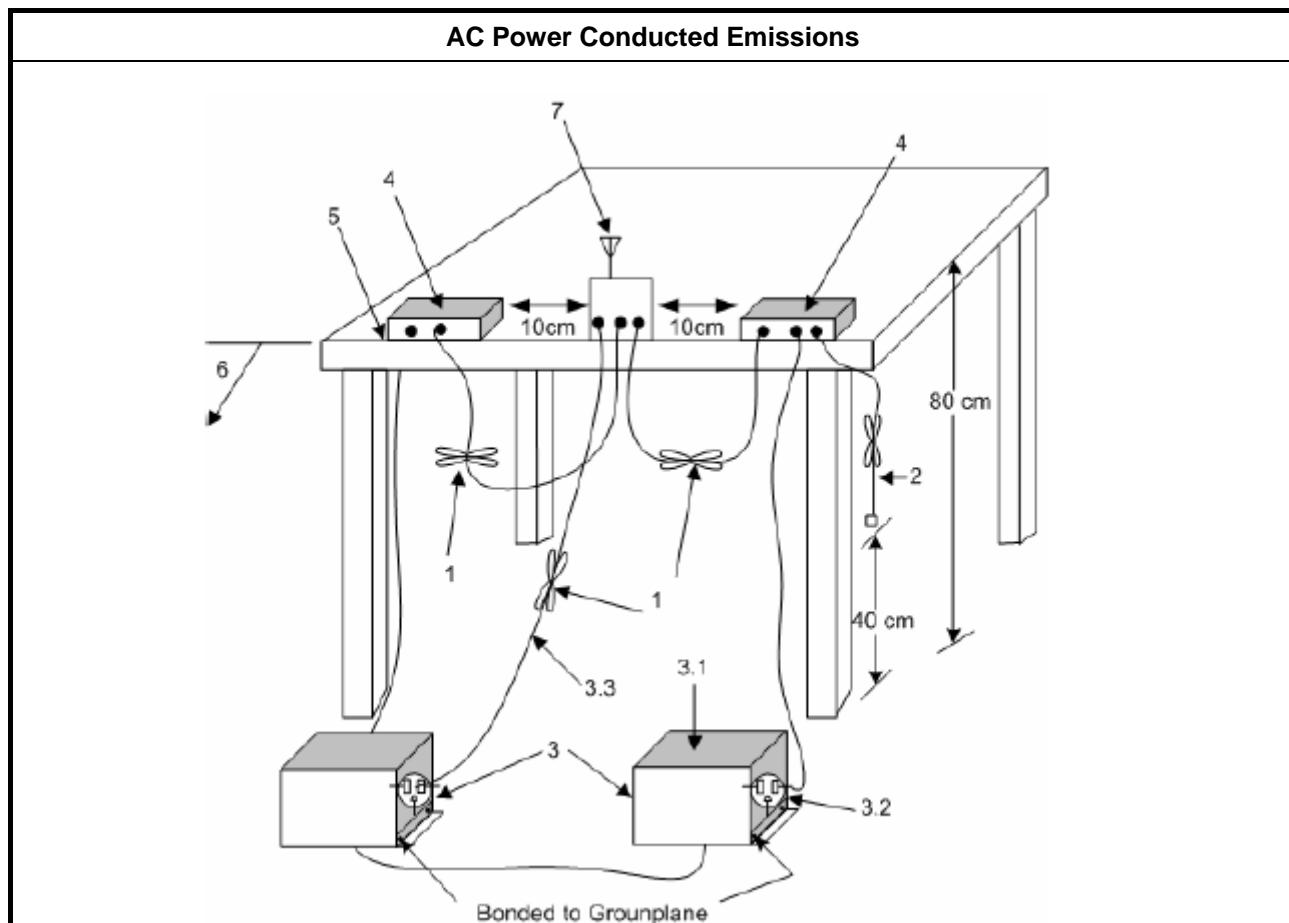

**AC Power Conducted Emissions**

1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see ANSI C63.10, clause 6.2.3.2).
2. I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see ANSI C63.10, clause 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 ohm loads. LISN can be placed on top of, or immediately beneath, reference ground plane (see ANSI C63.10, clauses 6.2.2 and 6.2.3).
 - 3.1. All other equipment powered from additional LISN(s).
 - 3.2. A multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3. LISN at least 80 cm from nearest part of EUT chassis.
4. Non-EUT components of EUT system being tested.
5. Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see ANSI C63.10, clause 6.2.3.2).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see ANSI C63.10, clause 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.


3.1.5 Test Result of AC Power Conducted Emissions**Test Conditions** see ANSI C63.10, clause 5.11**Test Setup** see ANSI C63.10, clause 6.2.3

NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.

NOTE 2: “>20dB” means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.




Temp	22°C	Humidity	59%
Test Engineer	Edison Lin	Phase	Line
Configuration	Normal Link		

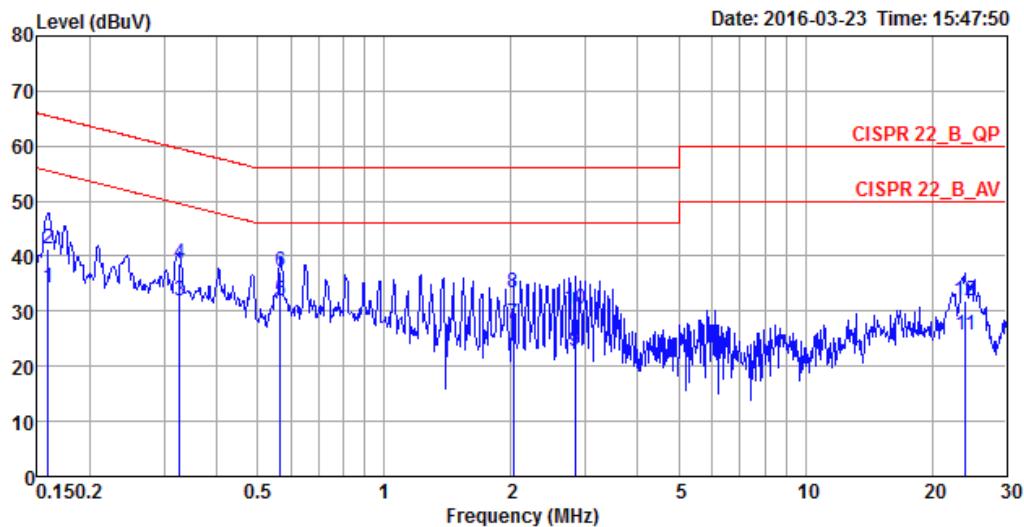

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Limit	Line	Level	Factor	Loss		
	MHz	dBuV	dB	dBuV	dBuV	dB		
1	0.1590	34.32	-21.20	55.52	24.28	10.02	0.02	LINE Average
2	0.1590	41.35	-24.17	65.52	31.31	10.02	0.02	LINE QP
3	0.3268	31.78	-17.75	49.53	21.82	9.92	0.04	LINE Average
4	0.3268	38.55	-20.98	59.53	28.59	9.92	0.04	LINE QP
5	0.5671	31.90	-14.10	46.00	21.93	9.93	0.04	LINE Average
6	0.5671	37.24	-18.76	56.00	27.27	9.93	0.04	LINE QP
7	2.0225	27.77	-18.23	46.00	17.75	9.96	0.06	LINE Average
8	2.0225	33.47	-22.53	56.00	23.45	9.96	0.06	LINE QP
9	2.8390	22.65	-23.35	46.00	12.63	9.97	0.05	LINE Average
10	2.8390	30.38	-25.62	56.00	20.36	9.97	0.05	LINE QP
11	24.0148	25.75	-24.25	50.00	15.07	10.41	0.27	LINE Average
12	24.0148	31.83	-28.17	60.00	21.15	10.41	0.27	LINE QP



Temp	22°C	Humidity	59%
Test Engineer	Edison Lin	Phase	Neutral
Configuration	Normal Link		

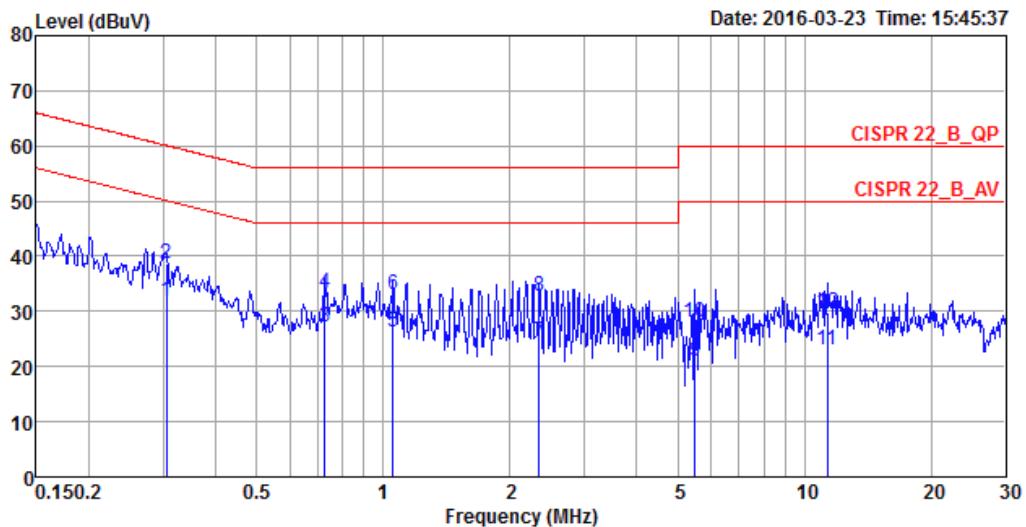

Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss		Pol/Phase	Remark
						MHz	dBuV	dB	dBuV
1	0.3051	31.87	-18.23	50.10	21.91	9.92	0.04	NEUTRAL	Average
2	0.3051	38.62	-21.48	60.10	28.66	9.92	0.04	NEUTRAL	QP
3	0.7274	27.23	-18.77	46.00	17.26	9.93	0.04	NEUTRAL	Average
4	0.7274	33.42	-22.58	56.00	23.45	9.93	0.04	NEUTRAL	QP
5	1.0541	26.40	-19.60	46.00	16.41	9.94	0.05	NEUTRAL	Average
6	1.0541	32.95	-23.05	56.00	22.96	9.94	0.05	NEUTRAL	QP
7	2.3460	24.43	-21.57	46.00	14.40	9.97	0.06	NEUTRAL	Average
8	2.3460	32.77	-23.23	56.00	22.74	9.97	0.06	NEUTRAL	QP
9	5.5054	21.03	-28.97	50.00	10.89	10.03	0.11	NEUTRAL	Average
10	5.5054	28.12	-31.88	60.00	17.98	10.03	0.11	NEUTRAL	QP
11	11.3170	23.03	-26.97	50.00	12.61	10.17	0.25	NEUTRAL	Average
12	11.3170	29.74	-30.26	60.00	19.32	10.17	0.25	NEUTRAL	QP

3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
26dBc Bandwidth	None
99% Occupied Bandwidth (see Note 2)	None

NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.

NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.2.4 Test Setup

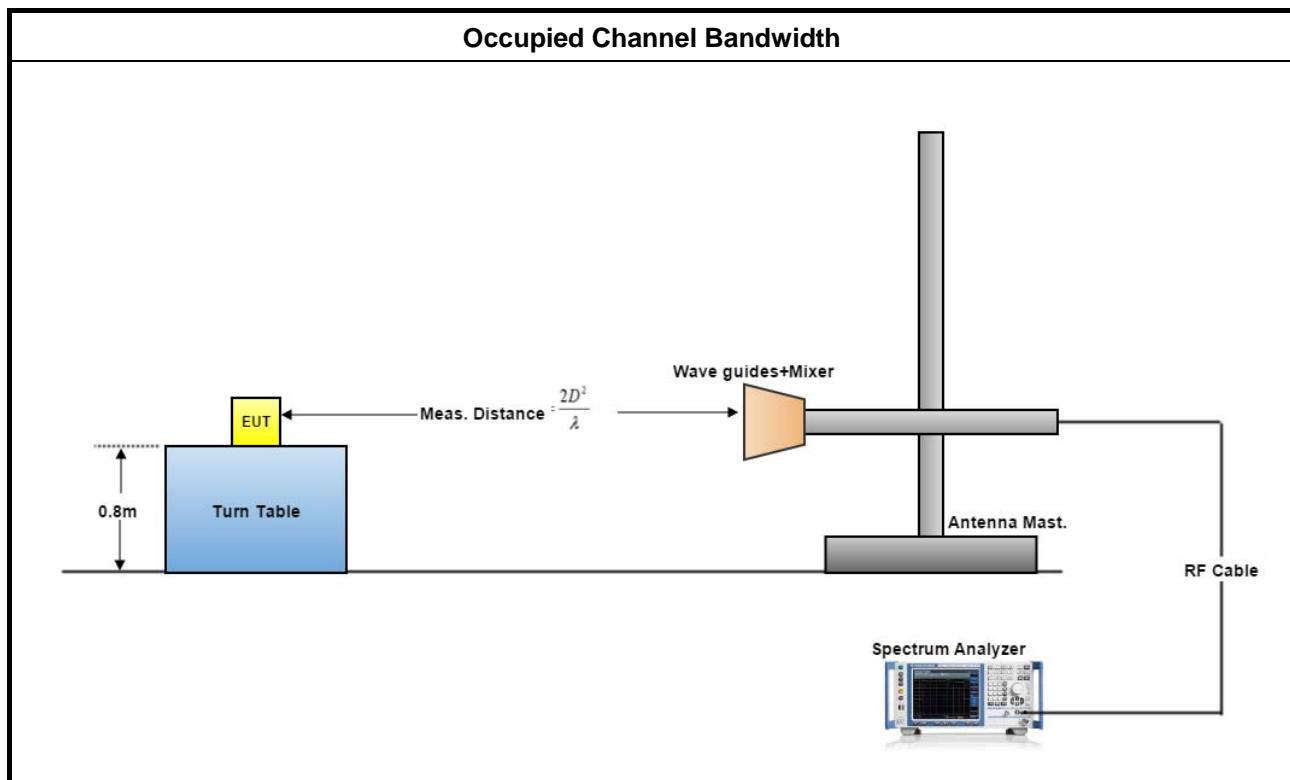




3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.	


Temp	23°C	Humidity	60%	
Test Engineer	Steven Liang			
Test Results				
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	Occupied Bandwidth (MHz)	26 dBc Bandwidth (MHz)	Limit (MHz)
58.32	1800.30	1950.80	2205.50	N/A
60.48	1632.40	1881.33	2130.20	N/A
62.64	1603.50	1962.37	2170.80	N/A

3.2.5.1 Bandwidth Plots

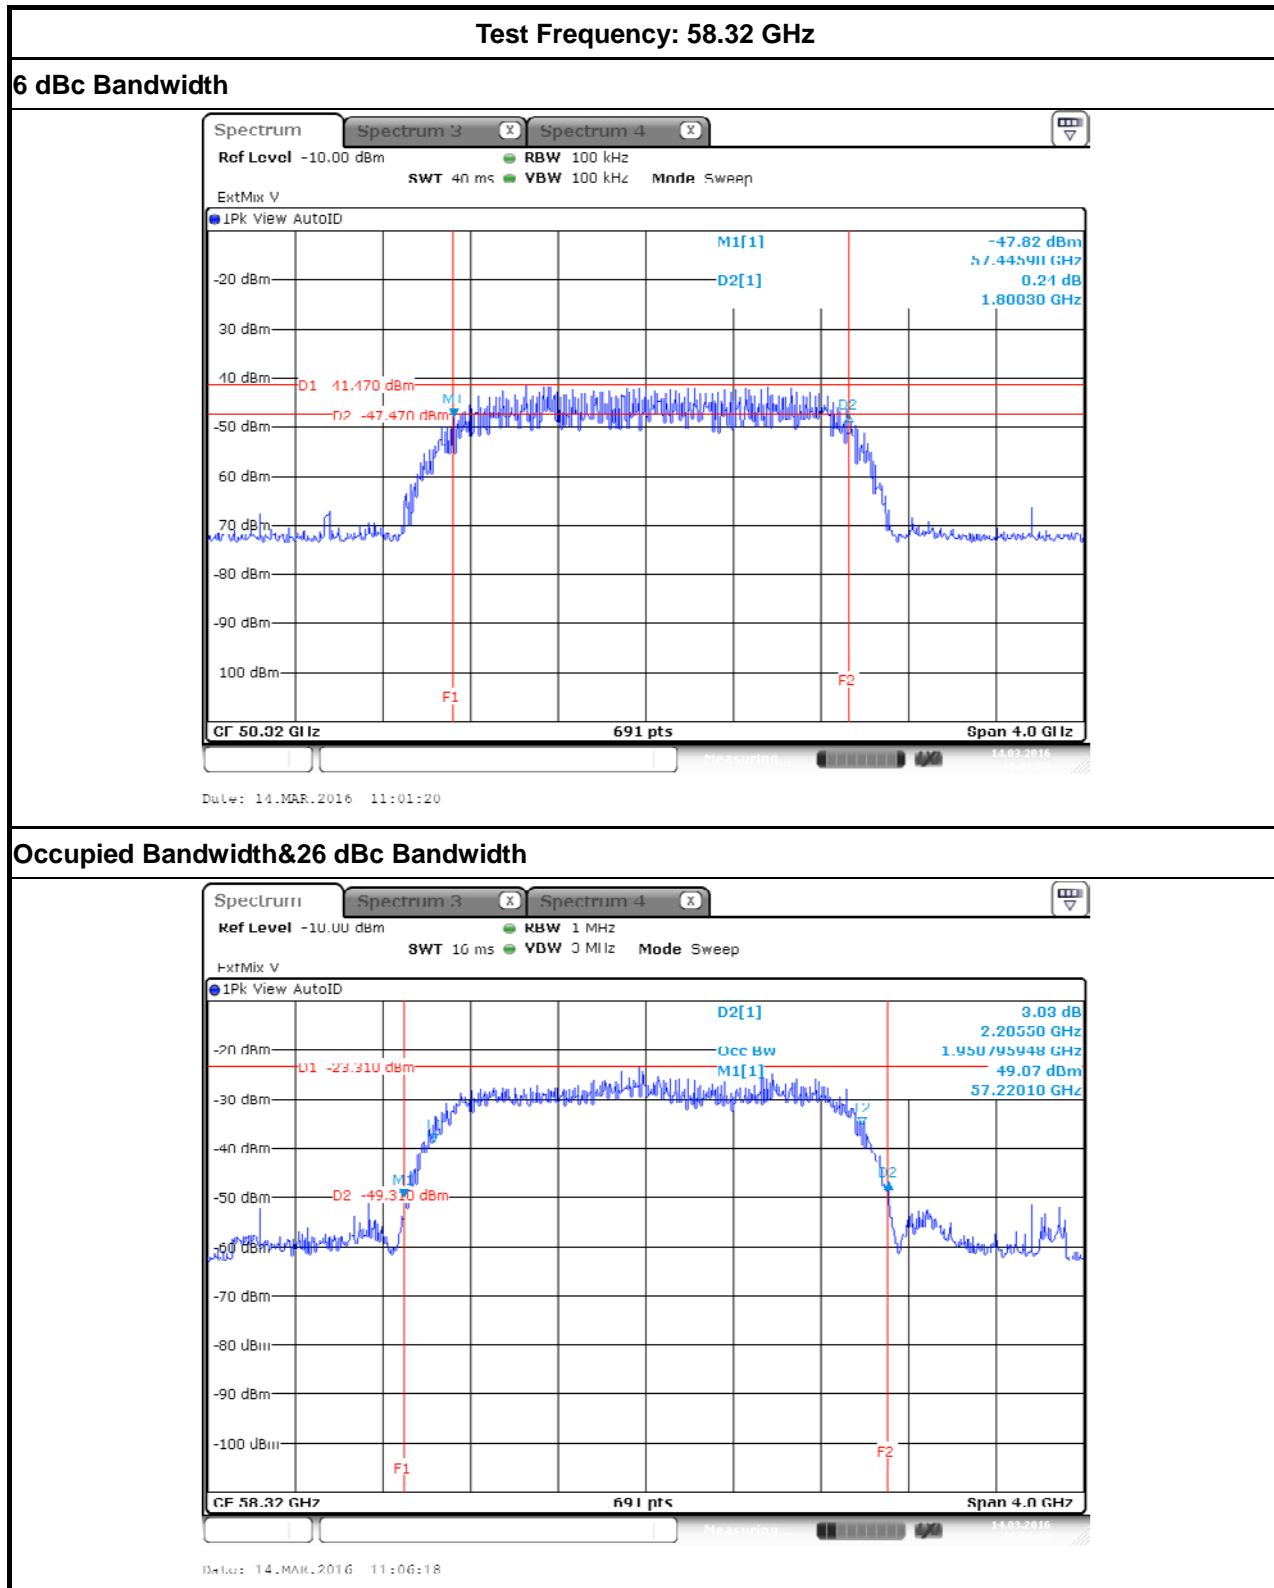


Test Frequency: 60.48 GHz

6 dBc Bandwidth

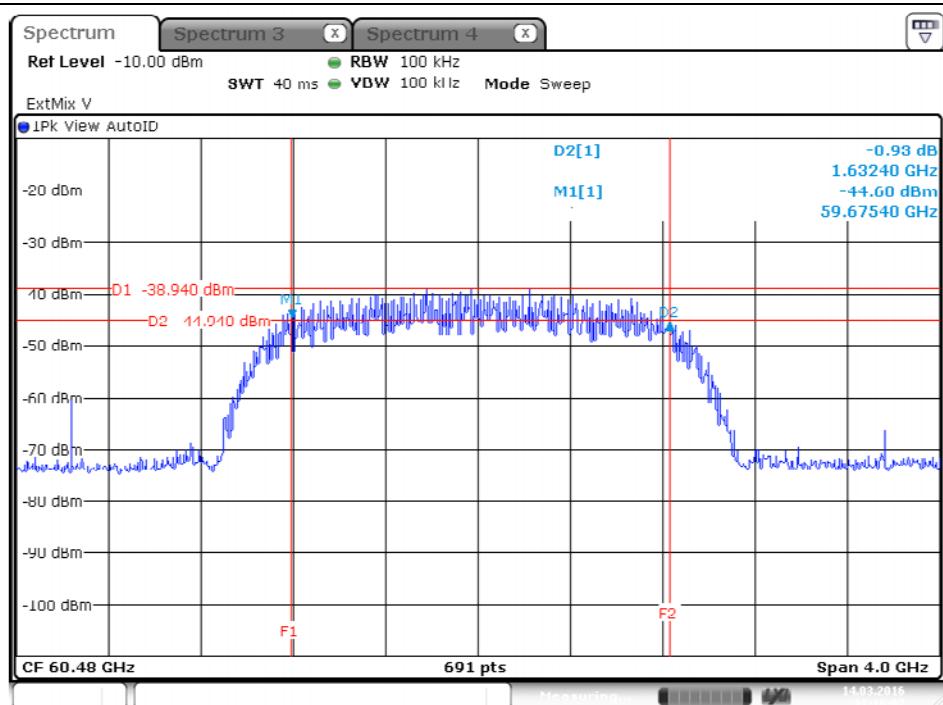

Date: 14.MAR.2016 11:16:07


Occupied Bandwidth&26 dBc Bandwidth

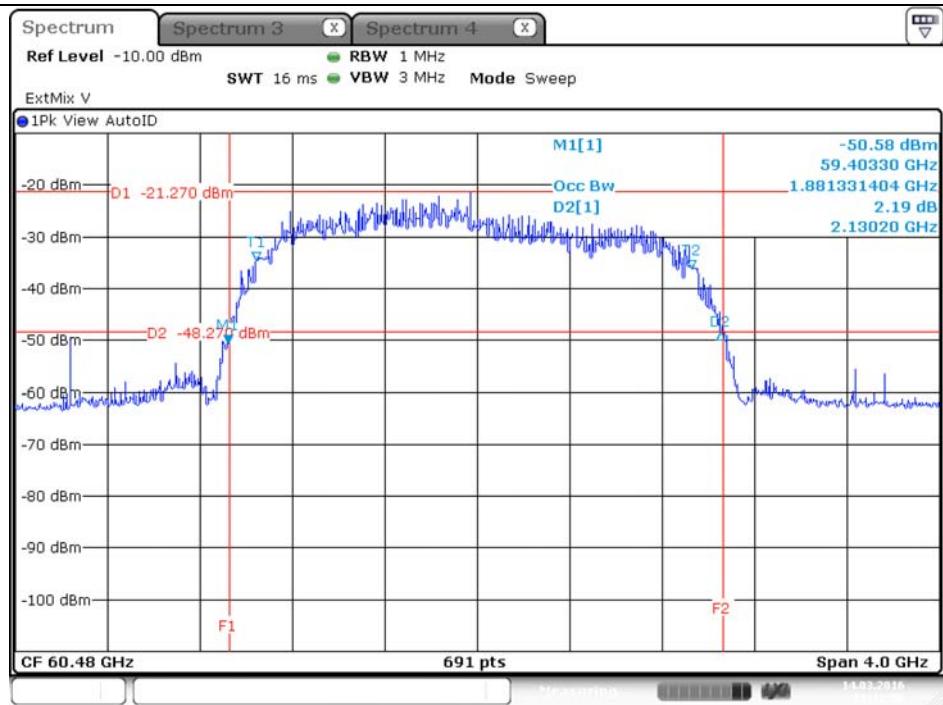

Date: 14.MAR.2016 11:12:06


Test Frequency: 62.64 GHz

6 dBc Bandwidth

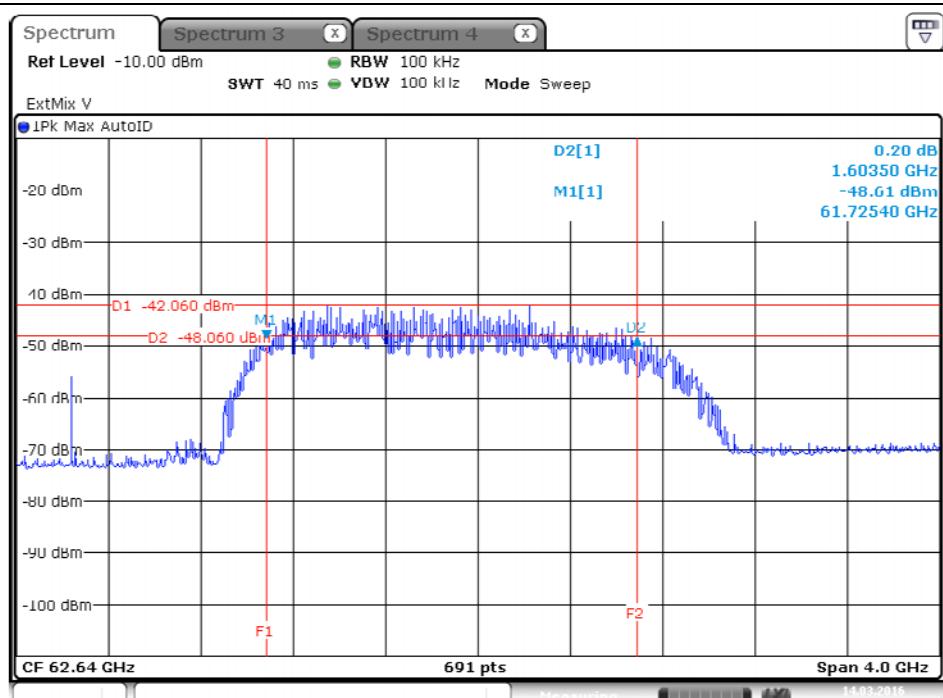

Date: 14.MAR.2016 11:28:13

Occupied Bandwidth&26 dBc Bandwidth

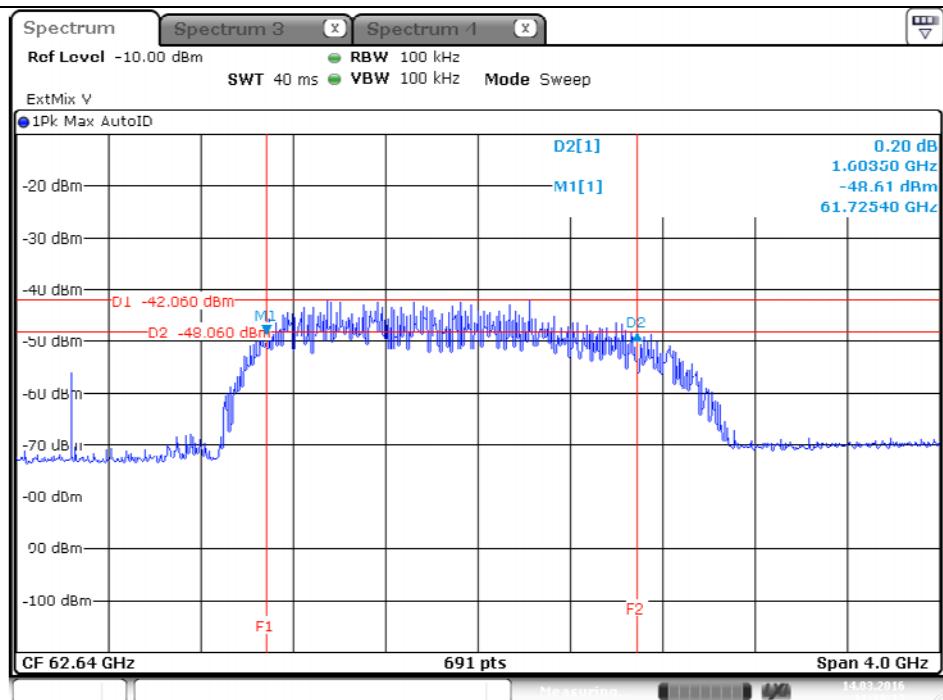

Date: 14.MAR.2016 11:28:13

3.3 EIRP Power

3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at 61-61.5GHz	10.08 dBm	13.09 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10.08 dBm
Except fixed field disturbance sensors(indoor)	40 dBm	43 dBm
Except fixed field disturbance sensors(outdoor)	82 dBm	85 dBm

NOTE: For the applicable limit, see FCC 15.255 (b)

Note: For outdoor device minus 2 dB for every dB that the antenna gain is less than 51 dBi.


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.3.4 Test Setup

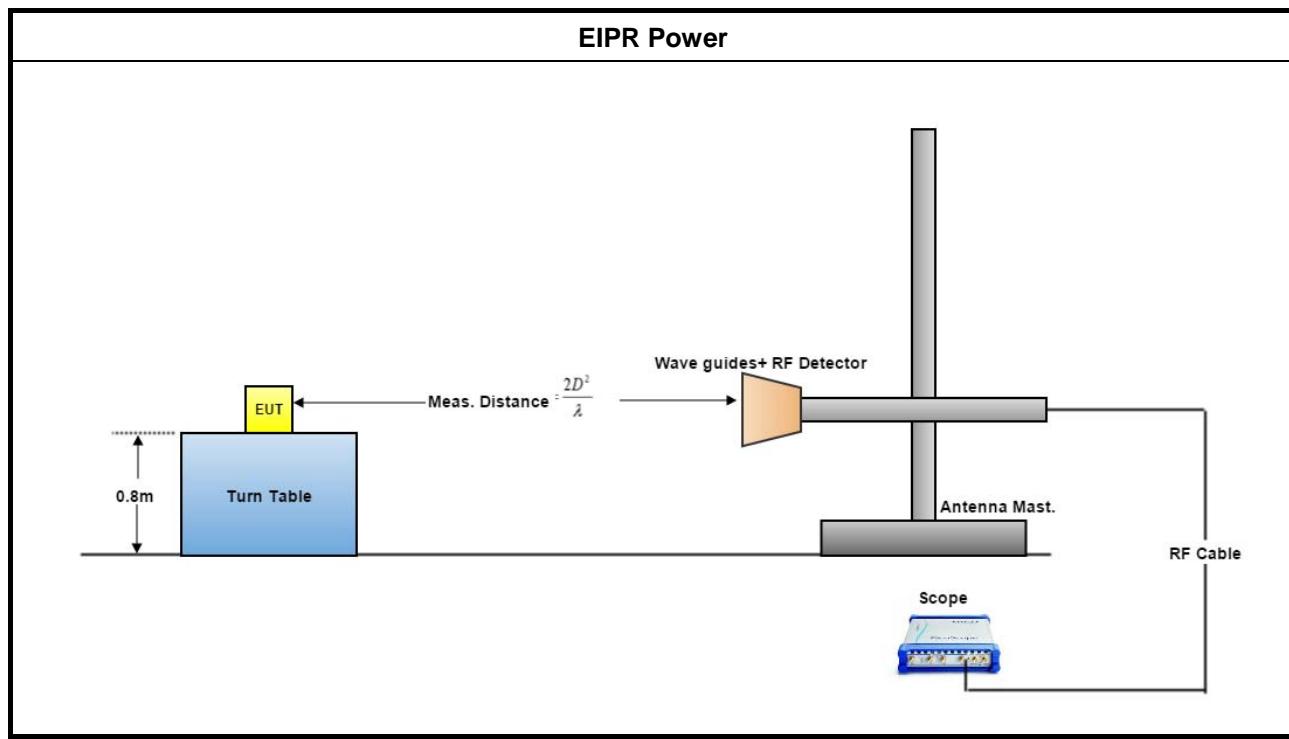



3.3.5 Test Result of EIRP Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	



3.3.5.1 Test Result of EIRP Power

Temp	23°C		Humidity		60%						
Test Engineer	Steven Liang		Test Distance	55 m							
Test Date	Mar. 14, 2016										
Test Results											
Test Freq. (GHz)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dB μ V/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)		
	Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV	
58.32	105	16	-25.51	-34.24	124.06	115.33	54.17	45.44	67	64	
60.48	118	17	-24.89	-34.19	125.00	115.70	55.11	45.81	67	64	
62.64	137	14	-24.52	-35.52	125.67	114.67	55.78	44.78	67	64	

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dB μ V/meter.

$$E = 126.8 - 20\log(\lambda) + P - G$$

where:

E : is the field strength of the emission at the measurement distance, in dB μ V/m

P : is the power measured at the output of the test antenna, in dBm

λ : is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

$$\text{EIRP} = E_{\text{meas}} + 20\log(d_{\text{meas}}) - 104.7$$

where:

EIRP : is the equivalent isotropically radiated power, in dBm

E_{meas} : is the field strength of the emission at the measurement distance, in dB μ V/m

d_{meas} : is the measurement distance, in m

NOTE 1: For the applicable limit, see FCC 15.255 (b)



3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit	
6dBc Bandwidth	Peak Conducted Power (note 1)
> 100MHz	500mW
≤ 100MHz	500mW x (BW/100) (see note 2)

NOTE 1: For the applicable limit, see FCC 15.255(e)

NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)

3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.4.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	



3.4.4.1 Peak Conducted Power

Temp	23°C		Humidity	60%							
Test Engineer	Steven Liang										
Test Date	Mar. 14, 2016										
Test Results											
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)					
58.32	54.17	42	12.17	16.486	1800.30	500					
60.48	55.11	42	13.11	20.451	1632.40	500					
62.64	55.78	42	13.78	23.888	1603.50	500					

NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain.

NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5.

NOTE 3: For the applicable limit, see FCC 15.255(e)

NOTE 4: For radiated emission measurements, calculate conducted transmitter output power $P(\text{cond})(\text{dBm})$

$$P(\text{cond}) = \text{EIRP} - G(\text{dBi})$$

where:

$G(\text{dBi})$ is gain of EUT antenna.

3.5 Transmitter Spurious Emissions

3.5.1 Limit of Transmitter Spurious Emissions

Frequency Range	Limit
Radiated emissions below 40 GHz	FCC 15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 µW, -9.91dBm)

NOTE 1: For the applicable limit, see FCC 15.255(c)


NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.


NOTE 3: publicly-accessible coordination channel, whose purpose is to coordinate operation between diverse transmitters with a view towards reducing the probability of interference throughout the 57-64 GHz band, are permitted in the 57-57.05 GHz band. The development of standards for this channel shall be performed pursuant to authorizations issued under part 5 of this chapter.


3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.5.3 Test Setup

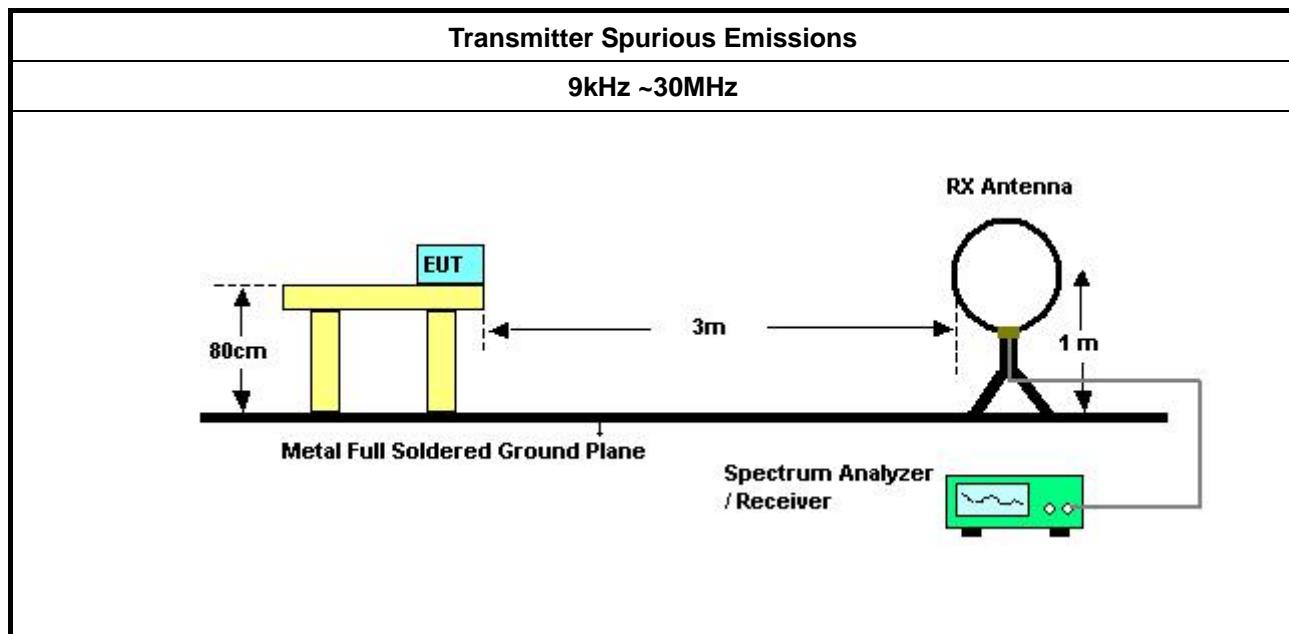

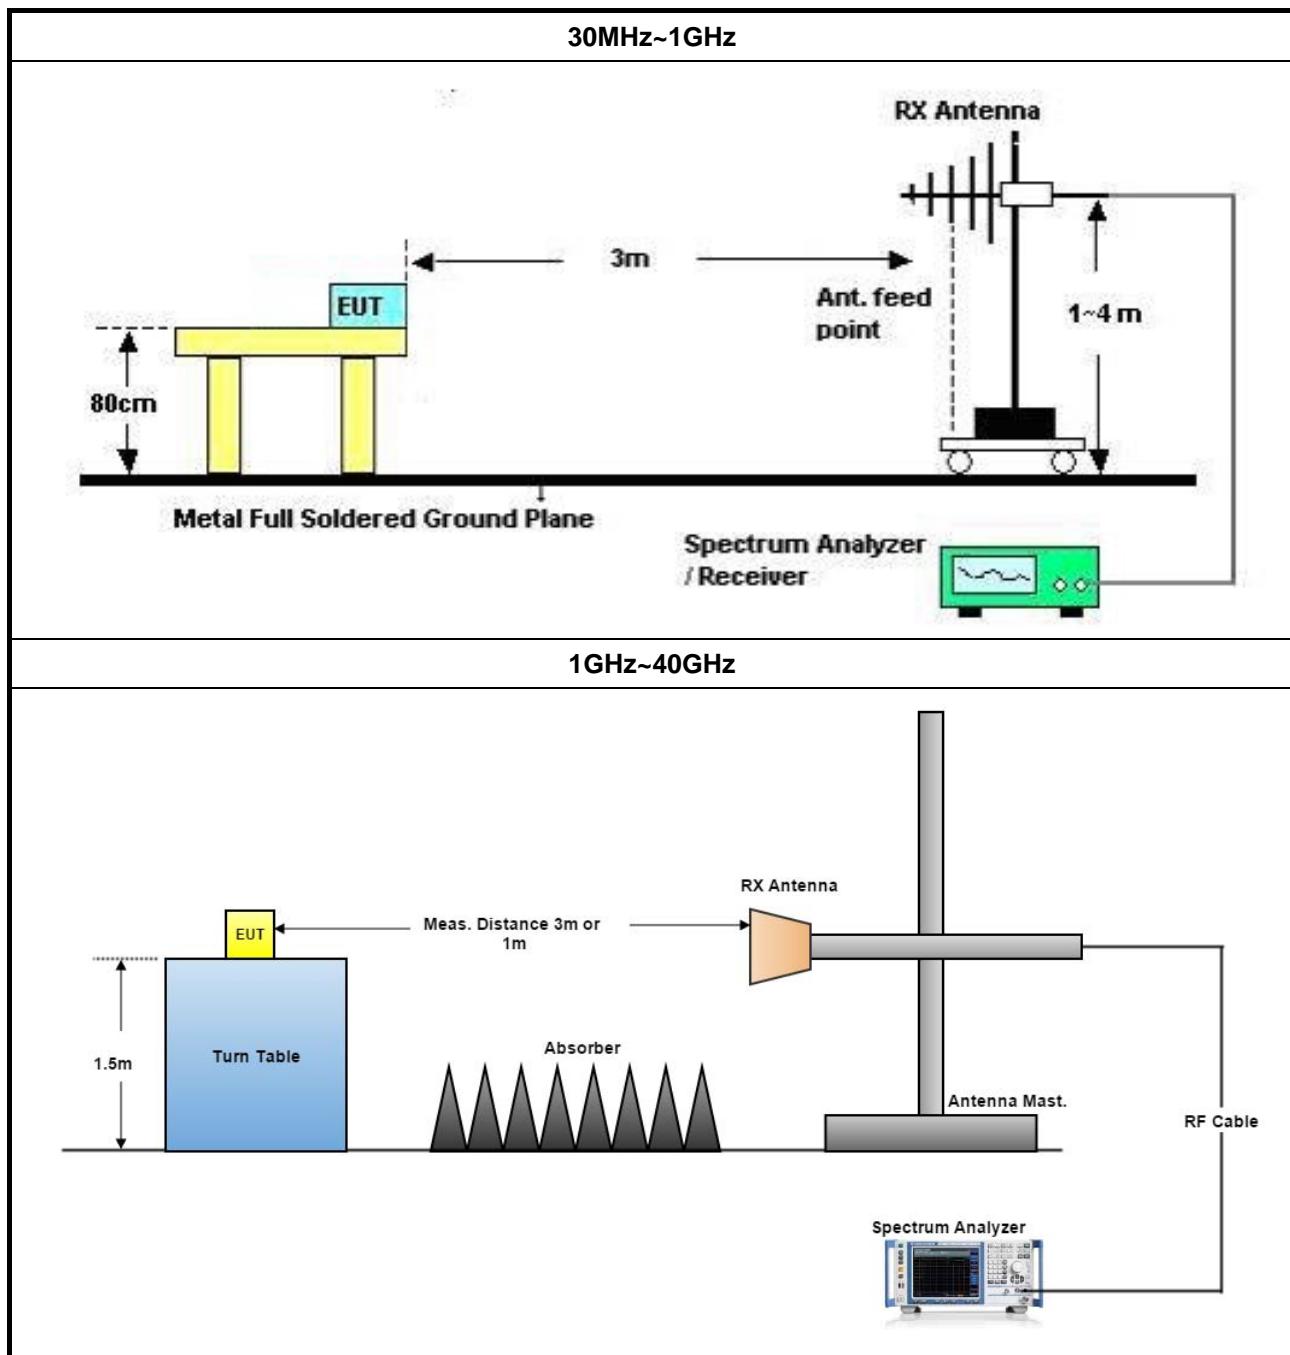

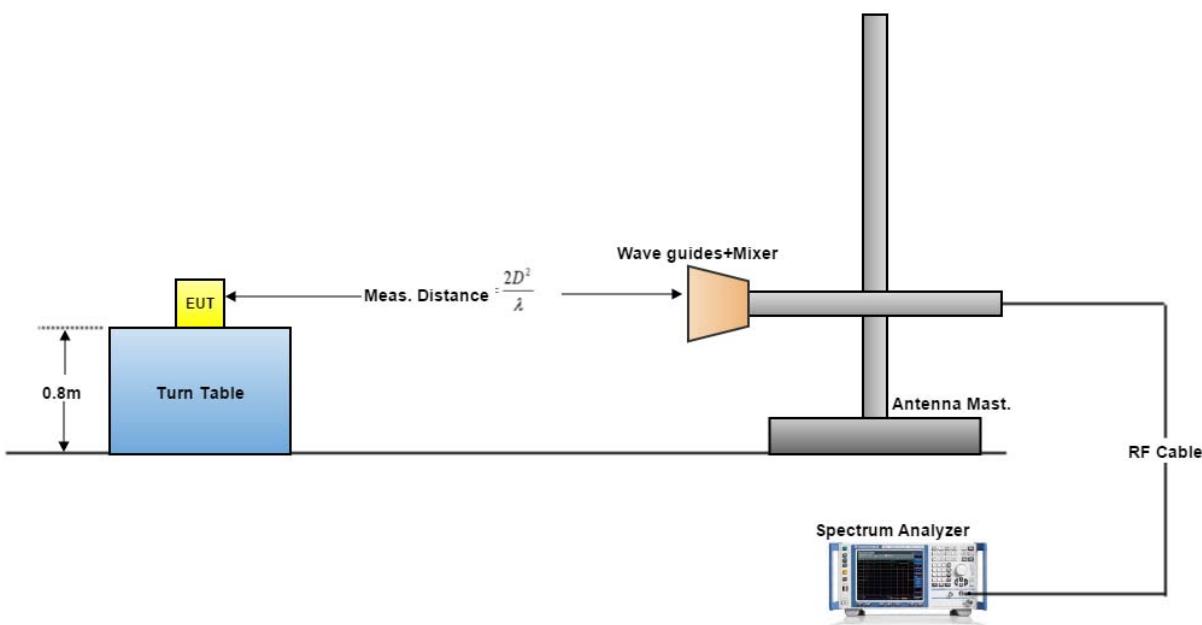Above 40GHz

A measuring distance of at 3 m shall be used for measurements at frequencies up to 15 GHz. For frequencies above 15 GHz, any suitable measuring distance may be used. The measurement distance is chosen up to far field distance, depending on the test system noise floor for detecting spurious emission signals. Then above 15 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from spec. distance (3 m) to measurement distance. Distance extrapolation factor = $20 \log (\text{spec. distance [3 m]} / \text{measurement distance [N m]})$ (dB). The measurements described in ANSI C63.10, clause 7.8.6. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.

3.5.4 Test Result of Transmitter Spurious Emissions

Test Conditions see ANSI C63.10, clause 5.11 & clause 9

Test Setup see ANSI C63.10, clause 9.12 & 9.13

NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.

3.5.4.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)


All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.5.4.2 Test Result of Transmitter Spurious Emissions

Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	3 m
Test Range	30 MHz – 1000 MHz	Test Configuration	Normal Link


Vertical

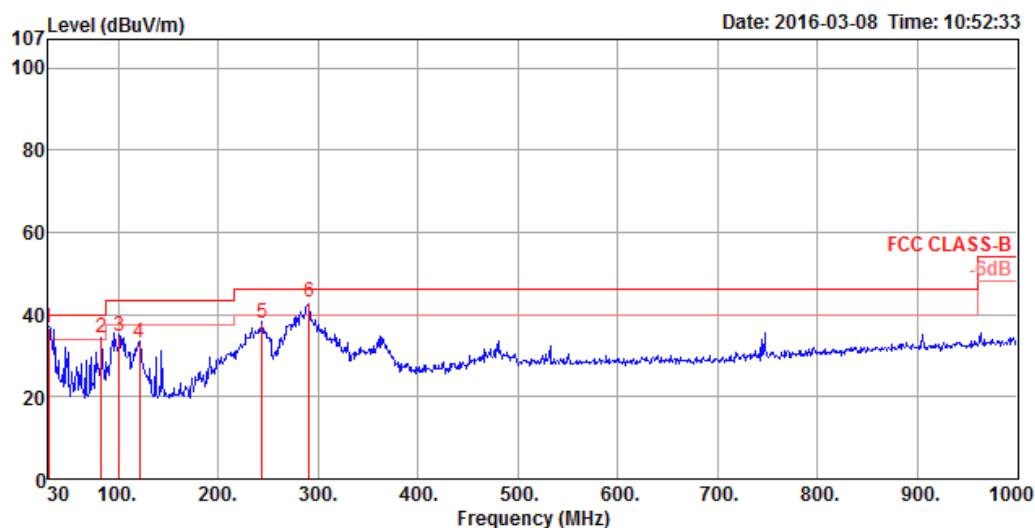

Freq	Level	Limit	Over	Read	Cable		Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit						
1	30.00	36.71	40.00	-3.29	35.75	0.53	25.30	24.87	100	256	QP	VERTICAL
2	83.35	34.20	40.00	-5.80	45.51	0.75	13.57	25.63	200	189	QP	VERTICAL
3	100.81	34.71	43.50	-8.79	43.13	0.87	16.83	26.12	150	349	QP	VERTICAL
4	121.18	33.21	43.50	-10.29	41.45	0.87	18.19	27.30	300	128	QP	VERTICAL
5	244.37	37.88	46.00	-8.12	48.59	1.24	18.08	30.03	100	236	QP	VERTICAL
6	290.93	42.89	46.00	-3.11	51.85	1.35	19.32	29.63	150	222	QP	VERTICAL



Horizontal

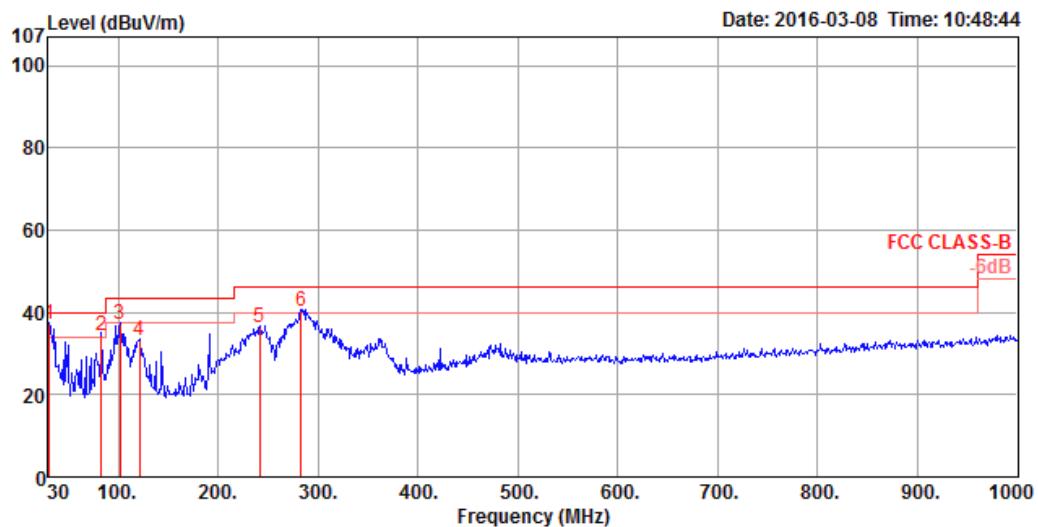

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	30.97	37.10	40.00	-2.90	36.72	0.53	24.69	24.84	200	236 QP	HORIZONTAL
2	83.35	34.38	40.00	-5.62	45.69	0.75	13.57	25.63	150	249 QP	HORIZONTAL
3	101.78	37.24	43.50	-6.26	45.65	0.87	16.91	26.19	175	136 QP	HORIZONTAL
4	121.18	33.15	43.50	-10.35	41.39	0.87	18.19	27.30	100	233 QP	HORIZONTAL
5	241.46	36.18	46.00	-9.82	47.16	1.23	17.85	30.06	125	334 QP	HORIZONTAL
6	283.17	40.35	46.00	-5.65	49.55	1.33	19.16	29.69	150	322 QP	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Configuration	Normal Link
Test Freq.	Channel 1: 58.32 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	1842.44	42.95	54.00	-11.05	46.36	4.41	26.83	34.65	102	333	Average	VERTICAL
2	1842.44	46.15	74.00	-27.85	49.56	4.41	26.83	34.65	102	333	Peak	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	1842.38	44.71	54.00	-9.29	48.12	4.41	26.83	34.65	104	13	Average	HORIZONTAL
2	1842.46	45.38	74.00	-28.62	48.79	4.41	26.83	34.65	104	13	Peak	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Configuration	Normal Link
Test Freq.	Channel 2: 60.48 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	1842.46	38.87	54.00	-15.13	42.28	4.41	26.83	34.65	101	214	Average	VERTICAL
2	1842.52	42.48	74.00	-31.52	45.89	4.41	26.83	34.65	101	214	Peak	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	1842.42	38.70	54.00	-15.30	42.11	4.41	26.83	34.65	100	358	Average	HORIZONTAL
2	1842.42	41.99	74.00	-32.01	45.40	4.41	26.83	34.65	100	358	Peak	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	3 m
Test Range	1 GHz – 18 GHz	Test Configuration	Normal Link
Test Freq.	Channel 3: 62.64 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1842.30	40.47	74.00	-33.53	43.88	4.41	26.83	34.65	143	33	Peak	VERTICAL
2	1842.40	37.46	54.00	-16.54	40.87	4.41	26.83	34.65	143	33	Average	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1842.42	43.72	54.00	-10.28	47.13	4.41	26.83	34.65	132	106	Average	HORIZONTAL
2	1842.46	41.64	74.00	-32.36	45.05	4.41	26.83	34.65	132	106	Peak	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Configuration	Normal Link
Test Freq.	Channel 1: 58.32 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	22115.02	46.89	83.54	-36.65	51.61	8.99	38.15	51.86	167	83	Peak	VERTICAL
2	22119.66	34.13	63.54	-29.41	38.85	8.99	38.15	51.86	167	83	Average	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	22119.60	32.93	63.54	-30.61	37.65	8.99	38.15	51.86	165	115	Average	HORIZONTAL
2	22119.78	46.16	83.54	-37.38	50.88	8.99	38.15	51.86	165	115	Peak	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Configuration	Normal Link
Test Freq.	Channel 2: 60.48 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18097.00	43.68	83.54	-39.86	50.03	8.48	37.36	52.19	158	154	Peak	VERTICAL
2	18101.90	29.33	63.54	-34.21	35.68	8.48	37.36	52.19	158	154	Average	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	dB	cm		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	18097.08	44.71	83.54	-38.83	51.06	8.48	37.36	52.19	156	201	Peak	HORIZONTAL
2	18101.38	30.50	63.54	-33.04	36.85	8.48	37.36	52.19	156	201	Average	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Distance	1 m
Test Range	18 GHz – 40 GHz	Test Configuration	Normal Link
Test Freq.	Channel 3: 62.64 GHz	Test Date	Mar. 04, 2016

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	37107.00	42.25	63.54	-21.29	41.87	11.78	42.14	53.54	156	201	Average	VERTICAL
2	37107.20	54.67	83.54	-28.87	54.29	11.78	42.14	53.54	156	201	Peak	VERTICAL

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
			Line	Limit	Level	Loss	Factor	Factor	cm	deg		
1	37090.40	42.09	63.54	-21.45	41.77	11.77	42.11	53.56	163	225	Average	HORIZONTAL
2	37097.40	54.52	83.54	-29.02	54.14	11.78	42.14	53.54	163	225	Peak	HORIZONTAL



Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Date	Mar. 14, 2016
Test Range	40GHz – 200GHz		

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23	3	40.07	-76.90
EIRP (dBm)	Specification Distance (m)	Power Density (pW/m^2)	Limit (pW/cm^2)	Test Result
-25.86	3	22.9429	90.00	Complied

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23	3	43.26	-76.43
EIRP (dBm)	Specification Distance (m)	Power Density (pW/m^2)	Limit (pW/cm^2)	Test Result
-24.72	3	29.7893	90.00	Complied

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23	3	41.75	-76.54
EIRP (dBm)	Specification Distance (m)	Power Density (pW/m^2)	Limit (pW/cm^2)	Test Result
-25.14	3	27.0583	90.00	Complied

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as FCC 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands

Note: These measurements shall also be performed at normal and extreme test conditions.


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.6.4 Test Setup

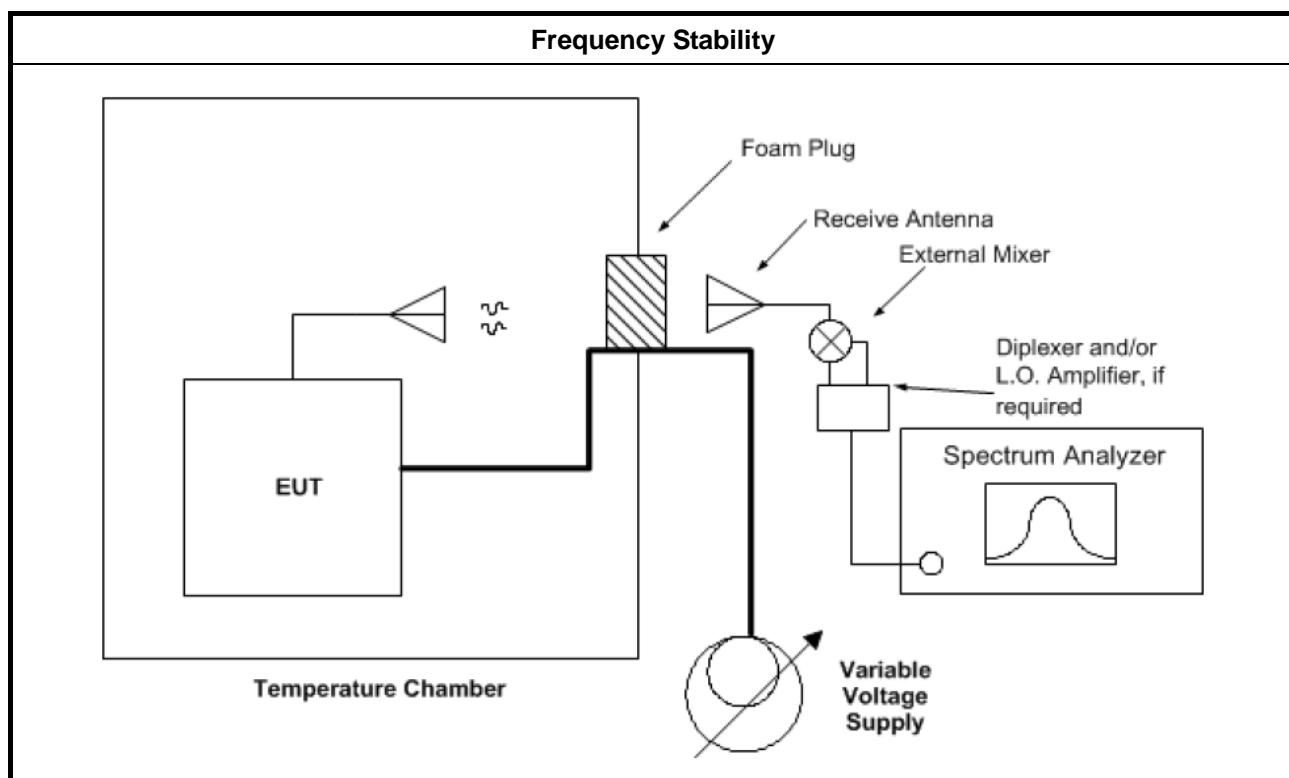



3.6.5 Test Result of Frequency Stability

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Date	Mar. 14, 2016
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-40	60491.6044	54.400	within band
-30	60491.5878	37.800	within band
-20	60491.5872	37.200	within band
-10	60491.5741	24.100	within band
0	60491.5841	34.100	within band
10	60491.5742	24.200	within band
20	60491.5500	Reference	within band
30	60491.4121	-137.900	within band
40	60491.4122	-137.800	within band
50	60491.4770	-73.000	within band
60	60491.4771	-72.900	within band
70	60491.4780	65.900	within band

NOTE:

1. For the applicable limit, see FCC 15.255(f).
2. The manufacturer's specified temperature range of -40 to 70°C.



3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Temp	23°C	Humidity	60%
Test Engineer	Steven Liang	Test Date	Mar. 14, 2016
Test Results			
Test Voltage: (Vdc)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
4.25	60491.5477	-2.300	within band
5	60491.5500	Reference	within band
5.75	60491.5778	27.800	within band

NOTE: For the applicable limit, see FCC 15.255(f).



3.7 Operation Restriction and Group Installation

3.7.1 Limit of Operation Restriction and Group Installation

Item	Limit
Operation Restriction	<p>Operation is not permitted for the following products:</p> <ul style="list-style-type: none">♦ Equipment used on aircraft or satellites. (Refer as FCC 15.255 (a))♦ Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. (Refer as FCC 15.255 (a))
Group Installation	<p>Operation is not permitted for the following products:</p> <ul style="list-style-type: none">♦ External phase-locking (Refer as FCC 15.255 (h))

3.7.2 Result of Operation Restriction

Manufacturer declares that EUT will not be used on aircraft or satellites. Then user manual will include a statement to caution EUT is not permitted for used on aircraft or satellites. EUT is a wireless video area network (WVAN) for the connection of consumer electronic (CE) audio and video devices.

3.7.3 Result of Group Installation

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10259	9kHz ~ 1.3GHz	Jan. 15, 2016	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 18, 2016	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 13, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 27, 2016	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-16	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-17	N/A	1 GHz ~ 18 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)

**FCC Radio Test Report****Report No. : FR5N2614-02**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Mixer	OML	M19HW/A	U91113-1	40 ~ 60 GHz	Sep. 09, 2015*	Radiation (03CH01-CB)
Mixer	OML	M15HW/A	V91113-1	50 ~ 75 GHz	Sep. 14, 2015*	Radiation (03CH01-CB)
Mixer	OML	M12HW/A	E91113-1	60 ~ 90 GHz	Sep. 17, 2015*	Radiation (03CH01-CB)
Mixer	OML	M08HW/A	F91113-1	90 ~ 140 GHz	Sep. 21, 2015*	Radiation (03CH01-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Sep. 24, 2015*	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	HO19R	U91113-A	40 ~ 60 GHz	Sep. 09, 2015*	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	HO15R	V91113-A	50 ~ 75 GHz	Sep. 14, 2015*	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	HO12R	E91113-A	60 ~ 90 GHz	Sep. 17, 2015*	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	HO08R	F91113-A	90 ~ 140 GHz	Sep. 21, 2015*	Radiation (03CH01-CB)
Standard Horn Antenna	Custom Microwave	HO05R	G91113-A	140 ~ 220 GHz	Sep. 24, 2015*	Radiation (03CH01-CB)
Pico Scope	Pico	Pico Scope 6402C	CX372/002	N/A	Jul. 06, 2015	Radiation (03CH01-CB)
RF Detector	millitech	DET-15-RPFW0	38	50 ~ 75 GHz	Oct. 31, 2015*	Radiation (03CH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 220GHz)	4.7 dB	Confidence levels of 95%
Temperature	0.7°C	Confidence levels of 95%