

FCC Test Report

Report No.: RF161013E06

FCC ID: HED-SSAC1900

Test Model: SS-AC1900

Received Date: Oct. 13, 2016

Test Date: Nov. 11 to 22, 2016

Issued Date: Dec. 05, 2016

Applicant: Accton Technology Corporation

Address: No.1, Creation Rd. III, Science-based Industrial Park, Hsinchu, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.

Test Location (1): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	14
3.4.1 Configuration of System under Test	15
3.5 General Description of Applied Standards	19
4 Test Types and Results	20
4.1 Radiated Emission and Bandedge Measurement.....	20
4.1.1 Limits of Radiated Emission and Bandedge Measurement	20
4.1.2 Test Instruments	21
4.1.3 Test Procedures.....	22
4.1.4 Deviation from Test Standard	22
4.1.5 Test Setup.....	23
4.1.6 EUT Operating Conditions.....	24
4.1.7 Test Results (Mode 3).....	25
4.2 Conducted Emission Measurement	38
4.2.1 Limits of Conducted Emission Measurement	38
4.2.2 Test Instruments	38
4.2.3 Test Procedures.....	39
4.2.4 Deviation from Test Standard	39
4.2.5 Test Setup.....	39
4.2.6 EUT Operating Conditions.....	39
4.2.7 Test Results (Mode 1).....	40
4.2.8 Test Results (Mode 2).....	42
4.2.9 Test Results (Mode 3).....	44
4.3 6dB Bandwidth Measurement	46
4.3.1 Limits of 6dB Bandwidth Measurement	46
4.3.2 Test Setup.....	46
4.3.3 Test Instruments	46
4.3.4 Test Procedure	46
4.3.5 Deviation from Test Standard	46
4.3.6 EUT Operating Conditions.....	46
4.3.7 Test Result.....	47
4.4 Conducted Output Power Measurement.....	49
4.4.1 Limits of Conducted Output Power Measurement	49
4.4.2 Test Setup.....	49
4.4.3 Test Instruments	49
4.4.4 Test Procedures.....	49
4.4.5 Deviation from Test Standard	49
4.4.6 EUT Operating Conditions.....	49
4.4.7 Test Results	50
4.5 Power Spectral Density Measurement.....	51
4.5.1 Limits of Power Spectral Density Measurement	51
4.5.2 Test Setup.....	51
4.5.3 Test Instruments	51
4.5.4 Test Procedure	51

4.5.5	Deviation from Test Standard	51
4.5.6	EUT Operating Condition	51
4.5.7	Test Results	52
4.6	Conducted Out of Band Emission Measurement	55
4.6.1	Limits of Conducted Out of Band Emission Measurement.....	55
4.6.2	Test Setup.....	55
4.6.3	Test Instruments	55
4.6.4	Test Procedure	55
4.6.5	Deviation from Test Standard	55
4.6.6	EUT Operating Condition	55
4.6.7	Test Results	55
5	Pictures of Test Arrangements.....	68
	Appendix – Information on the Testing Laboratories	69

Release Control Record

Issue No.	Description	Date Issued
RF161013E06	Original release.	Dec. 05, 2016

1 Certificate of Conformity

Product: SunSpot AC1900 Dual Band Enterprise AP

Brand: IgniteNet

Test Model: SS-AC1900

Sample Status: ENGINEERING SAMPLE

Applicant: Accton Technology Corporation

Test Date: Nov. 11 to 22, 2016

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Wendy Wu , **Date:** Dec. 05, 2016
Wendy Wu / Specialist

Approved by : May Chen , **Date:** Dec. 05, 2016
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -12.77dB at 0.15000MHz.
15.205 / 15.209 / 15.247(d)	Radiated Emissions and Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -0.1dB at 2483.50MHz.
15.247(d)	Antenna Port Emission	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pex not a standard connector.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	SunSpot AC1900 Dual Band Enterprise AP
Brand	IgniteNet
Test Model	SS-AC1900
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from adapter DC 48V or 24V from PoE
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode only
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps 802.11ac: up to 1300Mbps
Operating Frequency	2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz and 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: 990.783mW 5GHz: 5.18GHz ~ 5.24GHz: 560.003mW 5.745GHz ~ 5.825GHz: 637.218mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Adapter x 1
Data Cable Supplied	NA

Note:

1. Simultaneously transmission condition.

Condition	Technology	
1	WLAN (2.4GHz)	WLAN (5GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

2. The EUT power needs to be supplied from one power adapter or POE, the information is as below table:

Adapter			
Brand		Model No.	Spec.
MASS POWER		NBS30D120250HU	Input: 100-240V 50/60Hz, 0.8A Output: 12V 2.5A DC output cable (unshielded, 1.4m)
POE (test only not sale together)			
No	Brand	Model No.	Spec.
1	PowerDsine	PD-3501G/AC	Input: 100-240V 50/60Hz, 0.43A Output: 48V 0.35A
2	LEI	NU24-F240100-I2	Input: 100-240V 50/60Hz, 0.7A Output: 24V 1A

From above adapter and POE, the radiated emission worst case was found in **POE 2**. Therefore only the test data of the modes were recorded in this report individually.

3. The antennas provided to the EUT, please refer to the following table:

2.4GHz Band					
Ant. No.	Transmitter Circuit	Antenna Gain (dBi) <Including cable loss>	Frequency range (GHz)	Antenna Type	Connector Type
1	Chain (0)	4.71	2.4~2.4835	PIFA	i-pex
2	Chain (1)	4.67	2.4~2.4835	PIFA	i-pex
3	Chain (2)	3.68	2.4~2.4835	PIFA	i-pex
4	Chain (3)	5.53	2.4~2.4835	PIFA	i-pex
5GHz Band					
Ant. No.	Transmitter Circuit	Antenna Gain (dBi) <Including cable loss>	Frequency range (GHz)	Antenna Type	Connector Type
1	Chain (0)	6.89	5.15~5.85	PIFA	i-pex
2	Chain (1)	5.24	5.15~5.85	PIFA	i-pex
3	Chain (2)	5.44	5.15~5.85	PIFA	i-pex
4	Chain (3)	7.93	5.15~5.85	PIFA	i-pex

Note: For TX configuration mode will fix transmission on Chain (1), Chain (2) and Chain (3)

4. The EUT incorporates a MIMO function.

2.4GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11b	1 ~ 11Mbps	3TX	4RX
802.11g	6 ~ 54Mbps	3TX	4RX
802.11n (HT20)	MCS 0~7	3TX	4RX
	MCS 8~15	3TX	4RX
	MCS 16~23	3TX	4RX
802.11n (HT40)	MCS 0~7	3TX	4RX
	MCS 8~15	3TX	4RX
	MCS 16~23	3TX	4RX
5GHz Band			
MODULATION MODE	DATA RATE (MCS)	TX & RX CONFIGURATION	
802.11a	6 ~ 54Mbps	3TX	4RX
802.11n (HT20)	MCS 0~7	3TX	4RX
	MCS 8~15	3TX	4RX
	MCS 16~23	3TX	4RX
802.11n (HT40)	MCS 0~7	3TX	4RX
	MCS 8~15	3TX	4RX
	MCS 16~23	3TX	4RX
802.11ac (VHT20)	MCS 0~8, Nss=1	3TX	4RX
	MCS 0~8, Nss=2	3TX	4RX
	MCS 0~9, Nss=3	3TX	4RX
802.11ac (VHT40)	MCS 0~9, Nss=1	3TX	4RX
	MCS 0~9, Nss=2	3TX	4RX
	MCS 0~9, Nss=3	3TX	4RX
802.11ac (VHT80)	MCS 0~9, Nss=1	3TX	4RX
	MCS 0~9, Nss=2	3TX	4RX
	MCS 0~9, Nss=3	3TX	4RX

5. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

11 channels are provided for 802.11b, 802.11g and 802.11n (HT20):

Channel	Frequency	Channel	Frequency
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (HT40):

Channel	Frequency	Channel	Frequency
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
1	-	-	√	-	With adapter
2	-	-	√	-	With POE 1
3	√	√	√	√	With POE 2

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: 1. The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.
2. "-" means no effect.

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	11	OFDM	BPSK	1

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	11	OFDM	BPSK	1

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

Test Condition:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE $\geq$ 1G	26deg. C, 71%RH	120Vac, 60Hz	Weiwei Lo
RE<1G	26deg. C, 68%RH	120Vac, 60Hz	Weiwei Lo
PLC	23deg. C, 73%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Gary Cheng

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11b: Duty cycle = $8.188/8.248 = 0.993$

802.11g: Duty cycle = $1.36/1.413 = 0.962$, Duty factor = $10 * \log(1/0.962) = 0.17$

802.11n (HT20): Duty cycle = $1.271/1.326 = 0.959$, Duty factor = $10 * \log(1/0.959) = 0.18$

802.11n (HT40): Duty cycle = $0.631/0.69 = 0.914$, Duty factor = $10 * \log(1/0.914) = 0.39$

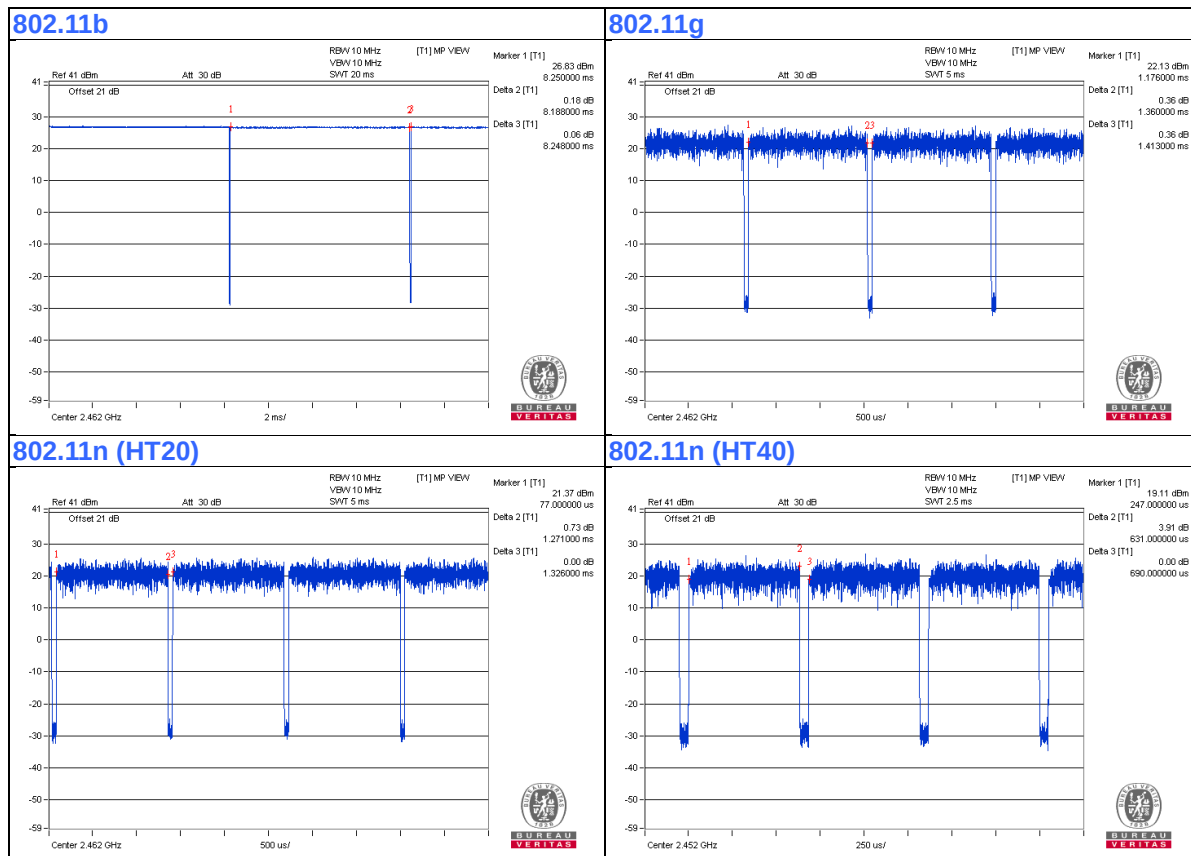

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E5430	4YV4VY1	FCC DoC	Provided by Lab
B.	Laptop	DELL	E5430	HYV4VY1	FCC DoC	Provided by Lab
C.	Laptop	DELL	E6440	F9LYQ32	FCC DoC	Provided by Lab
D.	USB 3.0 Disk	Transcend	B50527 9311	3D33193	NA	Provided by Lab
E.	SFP Tool	NA	NA	NA	NA	Supplied by client
F.	POE Adapter	LEI	NU24-F240100-I2	NA	NA	Supplied by client (For DC 24V)
G.	POE Adapter	Power Dsine	PD-3501G/AC	NA	NA	Supplied by client (For DC 48V)


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	DC Cable	1	1.4	No	0	Supplied by client
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	DC Wire Cable	1	0.06	No	0	Supplied by client
6.	RJ-45 Cable	1	3	No	0	Provided by Lab
7.	RJ-45 Cable	1	10	No	0	Provided by Lab
8.	RJ-45 Cable	1	3	No	0	Provided by Lab
9.	RJ-45 Cable	1	3	No	0	Provided by Lab
10.	RJ-45 Cable	1	10	No	0	Provided by Lab

3.4.1 Configuration of System under Test


Adapter Mode (for Conduction test mode 1)

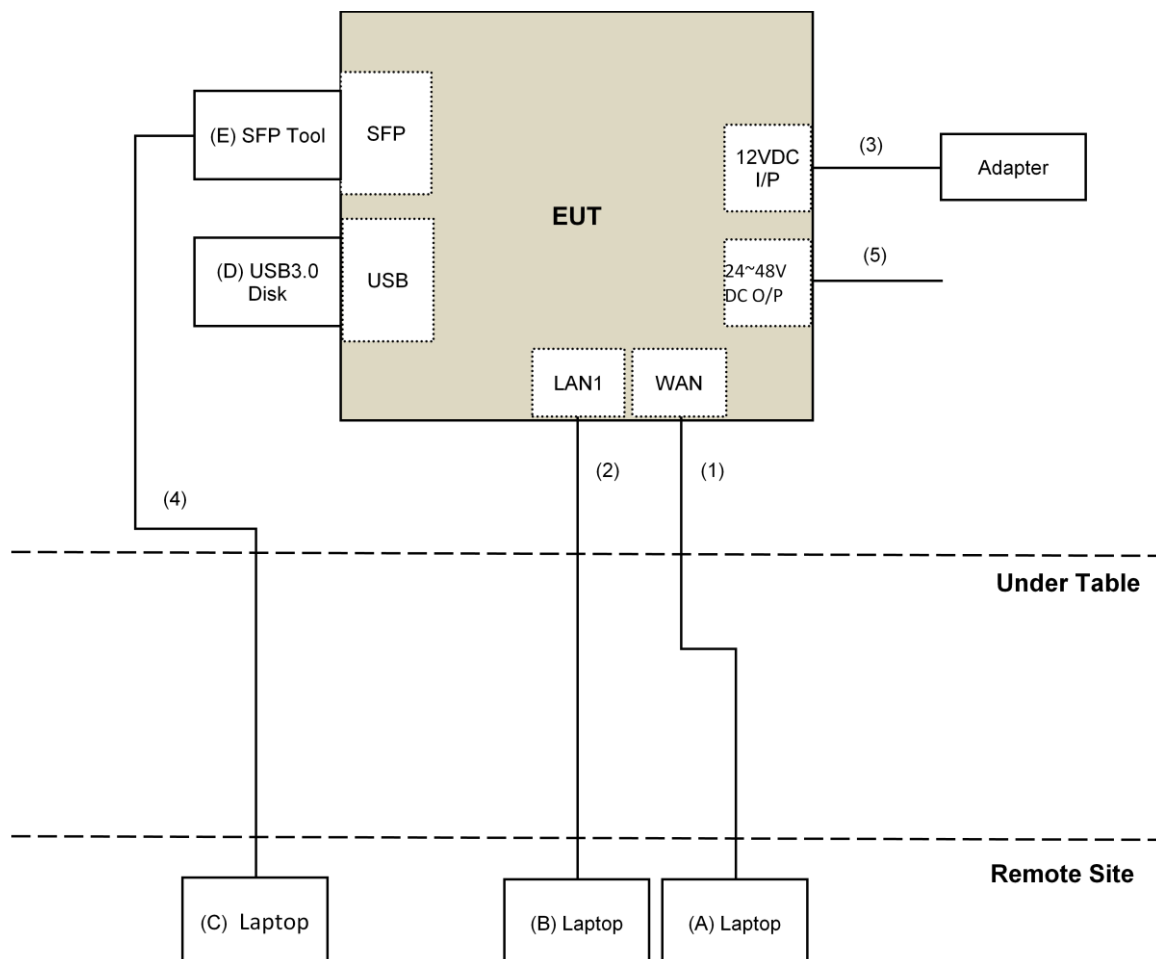


POE Mode (for Conduction test mode 2)

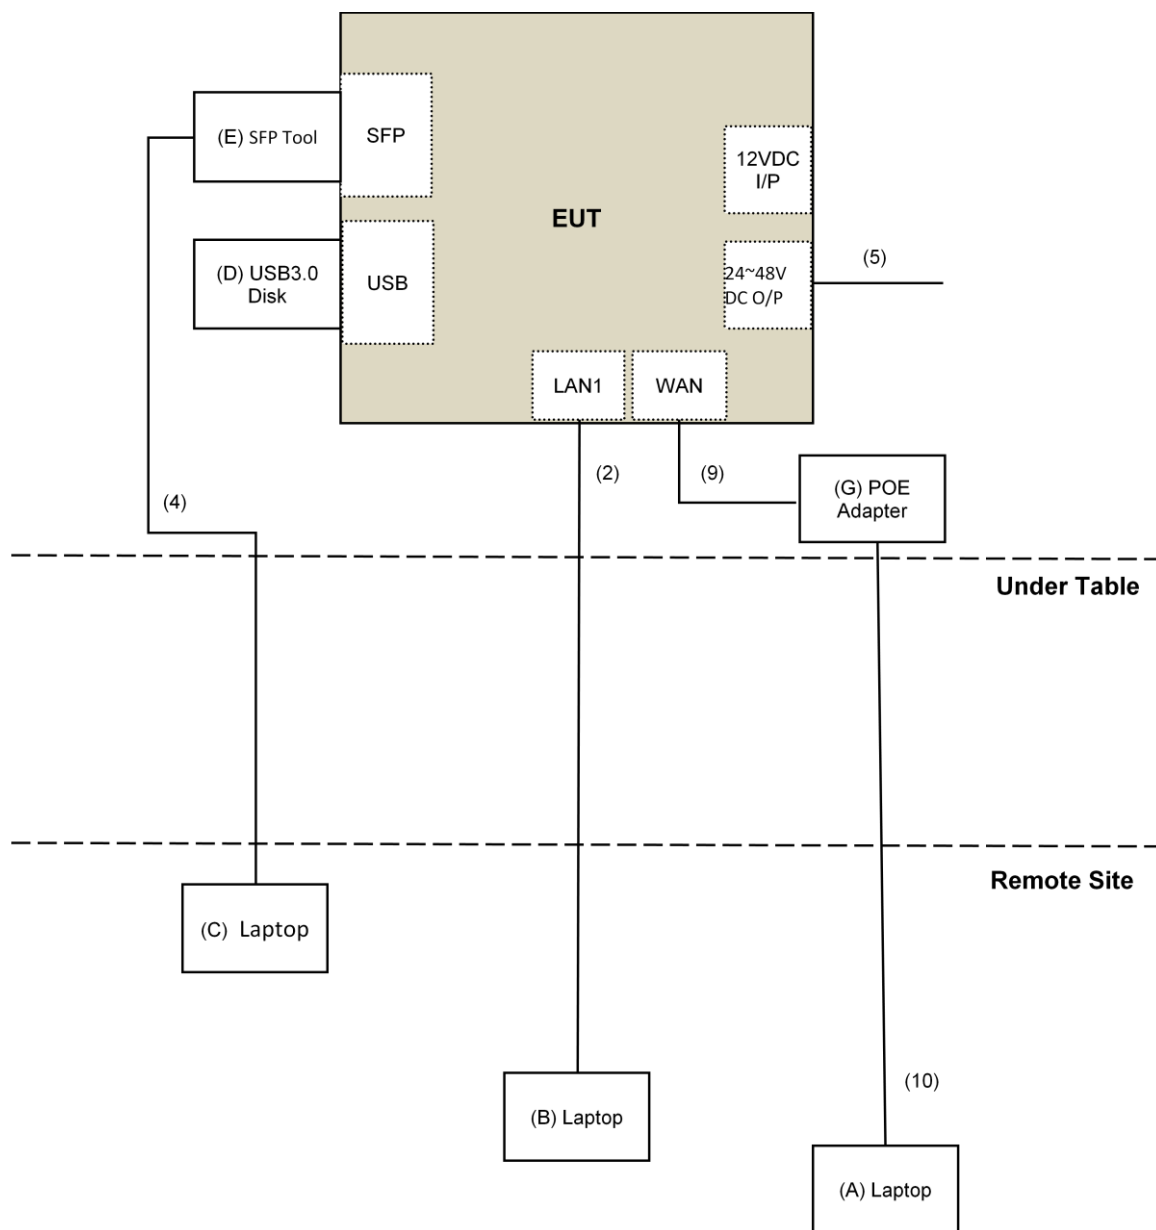

POE Mode (for Conduction test mode 3)

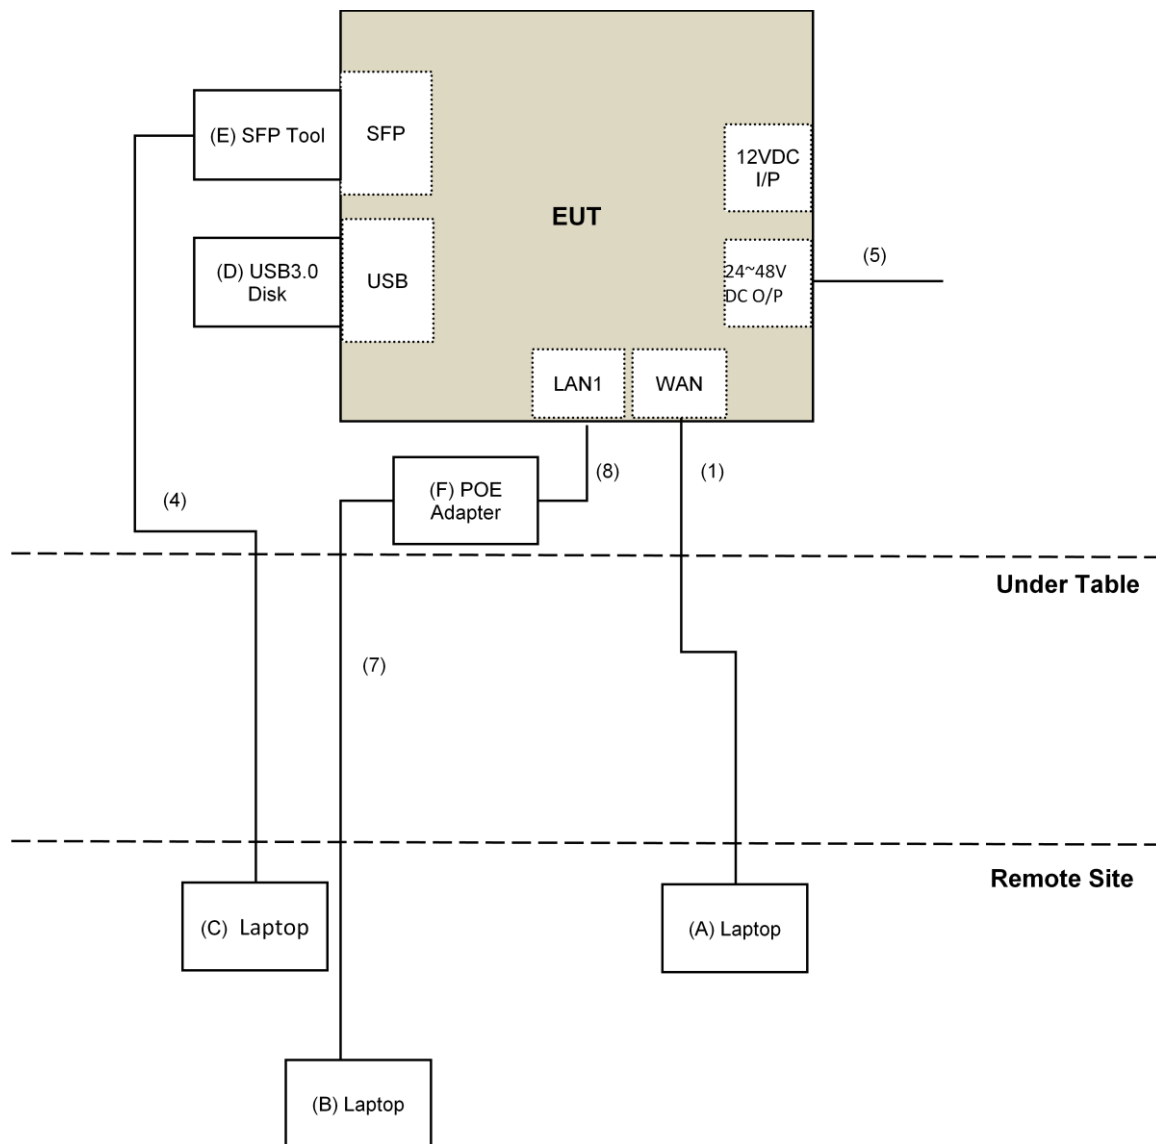

POE Mode (for other test)

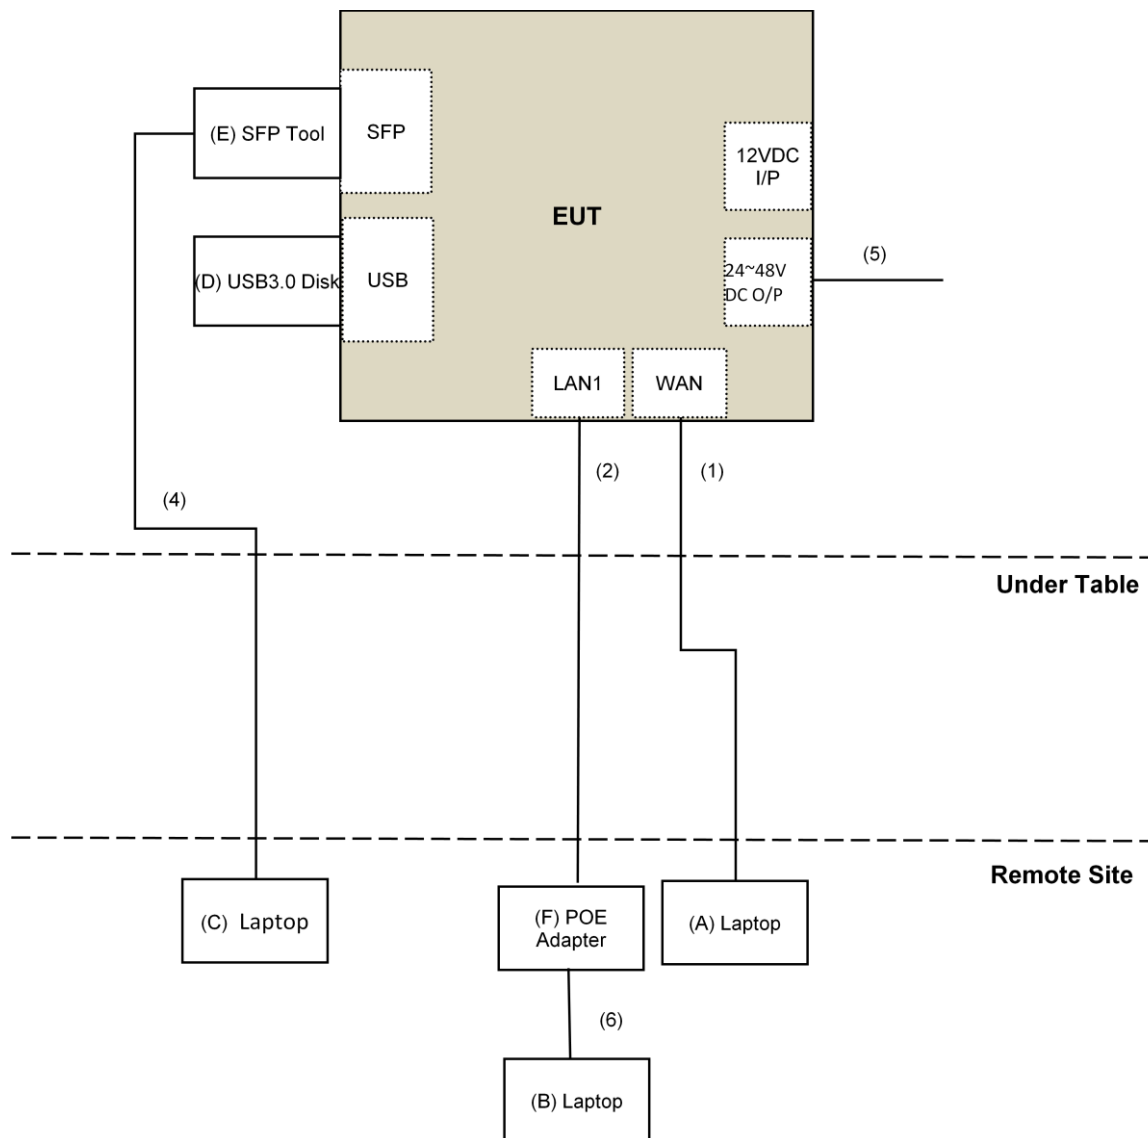

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

KDB 558074 D01 DTS Meas Guidance v03r05

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	Aug. 18, 2016	Aug. 17, 2017
Pre-Amplifier ^(*) EMCI	EMC001340	980142	Jan. 20, 2016	Jan. 19, 2018
Loop Antenna ^(*) Electro-Metrics	EM-6879	264	Dec. 16, 2014	Dec. 15, 2016
RF Cable	NA	LOOPCAB-001 LOOPCAB-002	Jan. 18, 2016	Jan. 17, 2017
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 07, 2016	May 06, 2017
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-156	Jan. 04, 2016	Jan. 03, 2017
RF Cable	8D	966-3-1 966-3-2 966-3-3	Apr. 02, 2016	Apr. 01, 2017
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Oct. 05, 2016	Oct. 04, 2017
Horn Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Jan. 20, 2016	Jan. 19, 2017
Pre-Amplifier Agilent	8449B	3008A02465	Apr. 05, 2016	Apr. 04, 2017
RF Cable	EMC104-SM-SM-2000 EMC104-SM-SM-5000 EMC104-SM-SM-5000	150317 150321 150322	Mar. 30, 2016	Mar. 29, 2017
Spectrum Analyzer Keysight	N9030A	MY54490520	July 29, 2016	July 28, 2017
Pre-Amplifier EMCI	EMC184045	980143	Jan. 15, 2016	Jan. 14, 2017
Horn Antenna SCHWARZBECK	BBHA 9170	BBHA9170608	Jan. 08, 2016	Jan. 07, 2017
RF Cable	SUCOFLEX 102	36432/2 36441/2	Jan. 16, 2016	Jan. 15, 2017
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 28, 2016	June 27, 2017
Power meter Anritsu	ML2495A	1014008	May 5, 2016	May 4, 2017
Power sensor Anritsu	MA2411B	0917122	May 5, 2016	May 4, 2017

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. *The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. The test was performed in 966 Chamber No. 3.
4. The FCC Site Registration No. is 147459
5. Loop antenna was used for all emissions below 30 MHz.
6. The CANADA Site Registration No. is 20331-1
8. Tested Date: Nov. 11 to 21, 2016

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

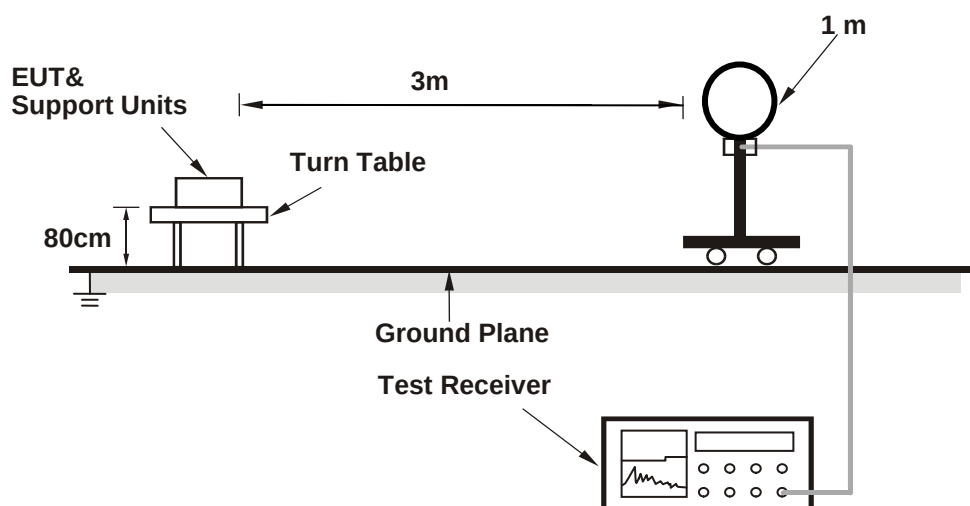

For Radiated emission 30MHz to 1GHz

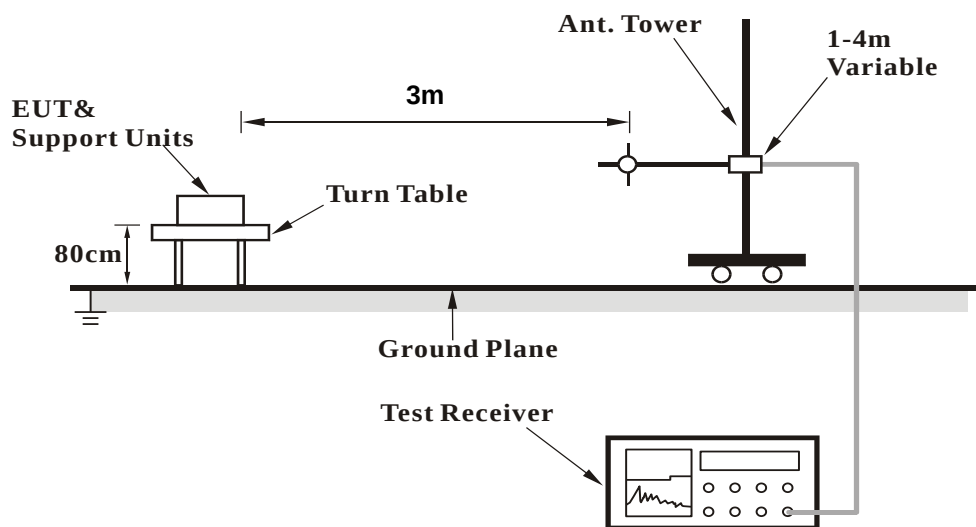

For Radiated emission above 1GHz

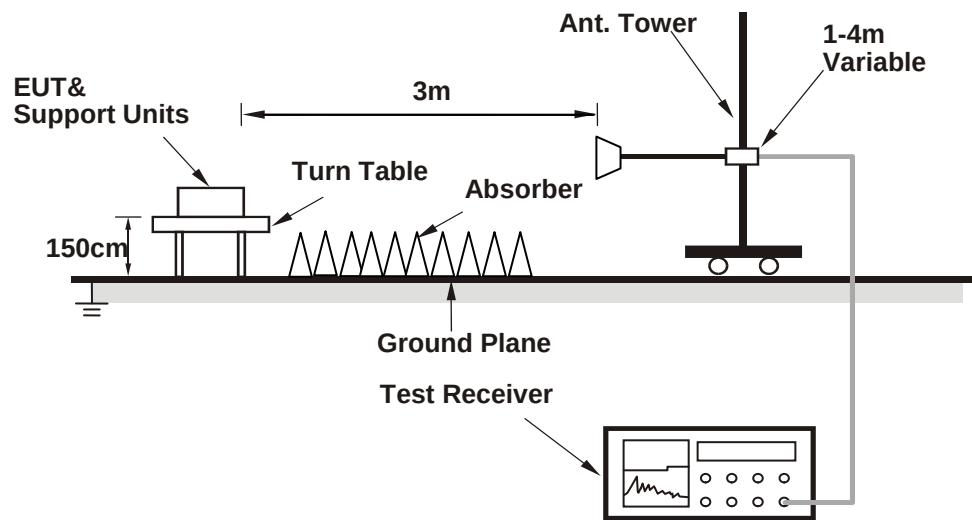

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

- Connected the EUT with the laptop which is placed on remote site.
- Contorlling software (RTL819 x3.3) has been activated to set the EUT on specific status.

4.1.7 Test Results (Mode 3)

Above 1GHz Data:

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.6 PK	74.0	-11.4	1.82 H	306	66.8	-4.2
2	2390.00	53.8 AV	54.0	-0.2	1.82 H	306	58.0	-4.2
3	*2412.00	114.5 PK			1.82 H	306	118.6	-4.1
4	*2412.00	110.6 AV			1.82 H	306	114.7	-4.1
5	4824.00	53.0 PK	74.0	-21.0	2.59 H	139	50.7	2.3
6	4824.00	50.5 AV	54.0	-3.5	2.59 H	139	48.2	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	2.10 V	120	60.0	-4.2
2	2390.00	37.5 AV	54.0	-16.5	2.10 V	120	41.7	-4.2
3	*2412.00	107.9 PK			2.10 V	120	112.0	-4.1
4	*2412.00	103.7 AV			2.10 V	120	107.8	-4.1
5	4824.00	52.1 PK	74.0	-21.9	1.51 V	360	49.8	2.3
6	4824.00	47.4 AV	54.0	-6.6	1.51 V	360	45.1	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.1 PK	74.0	-16.9	1.85 H	322	61.3	-4.2
2	2390.00	41.7 AV	54.0	-12.3	1.85 H	322	45.9	-4.2
3	*2437.00	111.7 PK			1.85 H	322	115.7	-4.0
4	*2437.00	108.4 AV			1.85 H	322	112.4	-4.0
5	2483.50	60.7 PK	74.0	-13.3	1.85 H	322	64.7	-4.0
6	2483.50	41.0 AV	54.0	-13.0	1.85 H	322	45.0	-4.0
7	4874.00	53.4 PK	74.0	-20.6	2.35 H	230	50.9	2.5
8	4874.00	51.2 AV	54.0	-2.8	2.35 H	230	48.7	2.5
9	7311.00	45.1 PK	74.0	-28.9	1.50 H	0	36.2	8.9
10	7311.00	33.1 AV	54.0	-20.9	1.50 H	0	24.2	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	2.22 V	100	60.0	-4.2
2	2390.00	37.7 AV	54.0	-16.3	2.22 V	100	41.9	-4.2
3	*2437.00	106.2 PK			2.22 V	100	110.2	-4.0
4	*2437.00	101.5 AV			2.22 V	100	105.5	-4.0
5	2483.50	55.9 PK	74.0	-18.1	2.22 V	100	59.9	-4.0
6	2483.50	37.2 AV	54.0	-16.8	2.22 V	100	41.2	-4.0
7	4874.00	53.7 PK	74.0	-20.3	1.49 V	360	51.2	2.5
8	4874.00	49.3 AV	54.0	-4.7	1.49 V	360	46.8	2.5
9	7311.00	42.6 PK	74.0	-31.4	1.55 V	30	33.7	8.9
10	7311.00	31.2 AV	54.0	-22.8	1.55 V	30	22.3	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	112.8 PK			1.95 H	337	116.9	-4.1
2	*2462.00	109.1 AV			1.95 H	337	113.2	-4.1
3	2483.50	70.2 PK	74.0	-3.8	1.95 H	337	74.2	-4.0
4	2483.50	52.0 AV	54.0	-2.0	1.95 H	337	56.0	-4.0
5	4924.00	54.6 PK	74.0	-19.4	2.25 H	232	52.1	2.5
6	4924.00	52.2 AV	54.0	-1.8	2.25 H	232	49.7	2.5
7	7386.00	46.6 PK	74.0	-27.4	1.54 H	2	37.3	9.3
8	7386.00	34.0 AV	54.0	-20.0	1.54 H	2	24.7	9.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.1 PK			2.30 V	109	110.2	-4.1
2	*2462.00	102.2 AV			2.30 V	109	106.3	-4.1
3	2483.50	56.5 PK	74.0	-17.5	2.30 V	109	60.5	-4.0
4	2483.50	37.6 AV	54.0	-16.4	2.30 V	109	41.6	-4.0
5	4924.00	53.2 PK	74.0	-20.8	1.53 V	360	50.7	2.5
6	4924.00	49.0 AV	54.0	-5.0	1.53 V	360	46.5	2.5
7	7386.00	42.9 PK	74.0	-31.1	1.52 V	42	33.6	9.3
8	7386.00	31.5 AV	54.0	-22.5	1.52 V	42	22.2	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.8 PK	74.0	-3.2	2.04 H	310	75.0	-4.2
2	2390.00	53.7 AV	54.0	-0.3	2.04 H	310	57.9	-4.2
3	*2412.00	115.3 PK			2.04 H	310	119.4	-4.1
4	*2412.00	105.9 AV			2.04 H	310	110.0	-4.1
5	4824.00	55.7 PK	74.0	-18.3	1.93 H	191	53.4	2.3
6	4824.00	40.9 AV	54.0	-13.1	1.93 H	191	38.6	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.2 PK	74.0	-5.8	2.00 V	100	72.4	-4.2
2	2390.00	49.4 AV	54.0	-4.6	2.00 V	100	53.6	-4.2
3	*2412.00	109.8 PK			2.00 V	100	113.9	-4.1
4	*2412.00	101.9 AV			2.00 V	100	106.0	-4.1
5	4824.00	56.9 PK	74.0	-17.1	1.45 V	172	54.6	2.3
6	4824.00	42.2 AV	54.0	-11.8	1.45 V	172	39.9	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.5 PK	74.0	-4.5	2.31 H	181	73.7	-4.2
2	2390.00	50.4 AV	54.0	-3.6	2.31 H	181	54.6	-4.2
3	*2437.00	119.6 PK			2.31 H	181	123.6	-4.0
4	*2437.00	109.6 AV			2.31 H	181	113.6	-4.0
5	2483.50	65.6 PK	74.0	-8.4	2.31 H	181	69.6	-4.0
6	2483.50	47.7 AV	54.0	-6.3	2.31 H	181	51.7	-4.0
7	4874.00	55.5 PK	74.0	-18.5	1.99 H	178	53.0	2.5
8	4874.00	40.5 AV	54.0	-13.5	1.99 H	178	38.0	2.5
9	7311.00	57.4 PK	74.0	-16.6	2.65 H	306	48.5	8.9
10	7311.00	38.9 AV	54.0	-15.1	2.65 H	306	30.0	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.8 PK	74.0	-31.2	2.10 V	123	47.0	-4.2
2	2390.00	31.5 AV	54.0	-22.5	2.10 V	123	35.7	-4.2
3	*2437.00	113.7 PK			2.10 V	123	117.7	-4.0
4	*2437.00	103.7 AV			2.10 V	123	107.7	-4.0
5	2483.50	56.5 PK	74.0	-17.5	2.10 V	123	60.5	-4.0
6	2483.50	37.8 AV	54.0	-16.2	2.10 V	123	41.8	-4.0
7	4874.00	56.4 PK	74.0	-17.6	1.50 V	187	53.9	2.5
8	4874.00	42.0 AV	54.0	-12.0	1.50 V	187	39.5	2.5
9	7311.00	60.4 PK	74.0	-13.6	3.74 V	29	51.5	8.9
10	7311.00	41.7 AV	54.0	-12.3	3.74 V	29	32.8	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.7 PK			2.00 H	188	119.8	-4.1
2	*2462.00	106.2 AV			2.00 H	188	110.3	-4.1
3	2483.50	73.2 PK	74.0	-0.8	2.00 H	188	77.2	-4.0
4	2483.50	53.9 AV	54.0	-0.1	2.00 H	188	57.9	-4.0
5	4924.00	55.0 PK	74.0	-19.0	1.94 H	187	52.5	2.5
6	4924.00	40.0 AV	54.0	-14.0	1.94 H	187	37.5	2.5
7	7386.00	57.9 PK	74.0	-16.1	2.70 H	306	48.6	9.3
8	7386.00	39.3 AV	54.0	-14.7	2.70 H	306	30.0	9.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	109.7 PK			2.11 V	111	113.8	-4.1
2	*2462.00	100.6 AV			2.11 V	111	104.7	-4.1
3	2483.50	69.3 PK	74.0	-4.7	2.11 V	111	73.3	-4.0
4	2483.50	49.6 AV	54.0	-4.4	2.11 V	111	53.6	-4.0
5	4924.00	56.7 PK	74.0	-17.3	1.51 V	202	54.2	2.5
6	4924.00	42.2 AV	54.0	-11.8	1.51 V	202	39.7	2.5
7	7386.00	60.4 PK	74.0	-13.6	3.68 V	13	51.1	9.3
8	7386.00	41.8 AV	54.0	-12.2	3.68 V	13	32.5	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.3 PK	74.0	-4.7	1.98 H	306	73.5	-4.2
2	2390.00	53.8 AV	54.0	-0.2	1.98 H	306	58.0	-4.2
3	*2412.00	111.8 PK			1.98 H	306	115.9	-4.1
4	*2412.00	102.3 AV			1.98 H	306	106.4	-4.1
5	4824.00	54.5 PK	74.0	-19.5	1.93 H	182	52.2	2.3
6	4824.00	39.6 AV	54.0	-14.4	1.93 H	182	37.3	2.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.7 PK	74.0	-5.3	1.94 V	115	72.9	-4.2
2	2390.00	49.6 AV	54.0	-4.4	1.94 V	115	53.8	-4.2
3	*2412.00	108.4 PK			1.94 V	115	112.5	-4.1
4	*2412.00	100.9 AV			1.94 V	115	105.0	-4.1
5	4824.00	55.7 PK	74.0	-18.3	1.52 V	178	53.4	2.3
6	4824.00	41.6 AV	54.0	-12.4	1.52 V	178	39.3	2.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	2.31 H	183	73.0	-4.2
2	2390.00	50.5 AV	54.0	-3.5	2.31 H	183	54.7	-4.2
3	*2437.00	117.1 PK			2.31 H	183	121.1	-4.0
4	*2437.00	107.4 AV			2.31 H	183	111.4	-4.0
5	2483.50	66.8 PK	74.0	-7.2	2.31 H	183	70.8	-4.0
6	2483.50	48.5 AV	54.0	-5.5	2.31 H	183	52.5	-4.0
7	4874.00	55.6 PK	74.0	-18.4	1.98 H	168	53.1	2.5
8	4874.00	40.5 AV	54.0	-13.5	1.98 H	168	38.0	2.5
9	7311.00	56.9 PK	74.0	-17.1	2.66 H	290	48.0	8.9
10	7311.00	38.6 AV	54.0	-15.4	2.66 H	290	29.7	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.4 PK	74.0	-31.6	2.09 V	129	46.6	-4.2
2	2390.00	31.4 AV	54.0	-22.6	2.09 V	129	35.6	-4.2
3	*2437.00	113.7 PK			2.09 V	129	117.7	-4.0
4	*2437.00	103.6 AV			2.09 V	129	107.6	-4.0
5	2483.50	56.6 PK	74.0	-17.4	2.09 V	129	60.6	-4.0
6	2483.50	37.9 AV	54.0	-16.1	2.09 V	129	41.9	-4.0
7	4874.00	56.1 PK	74.0	-17.9	1.52 V	180	53.6	2.5
8	4874.00	41.9 AV	54.0	-12.1	1.52 V	180	39.4	2.5
9	7311.00	60.4 PK	74.0	-13.6	3.77 V	27	51.5	8.9
10	7311.00	41.8 AV	54.0	-12.2	3.77 V	27	32.9	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.2 PK			2.25 H	184	117.3	-4.1
2	*2462.00	102.6 AV			2.25 H	184	106.7	-4.1
3	2483.50	69.5 PK	74.0	-4.5	2.25 H	184	73.5	-4.0
4	2483.50	53.8 AV	54.0	-0.2	2.25 H	184	57.8	-4.0
5	4924.00	56.1 PK	74.0	-17.9	1.96 H	175	53.6	2.5
6	4924.00	40.8 AV	54.0	-13.2	1.96 H	175	38.3	2.5
7	7386.00	57.0 PK	74.0	-17.0	2.61 H	291	47.7	9.3
8	7386.00	38.6 AV	54.0	-15.4	2.61 H	291	29.3	9.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.6 PK			1.99 V	100	111.7	-4.1
2	*2462.00	98.5 AV			1.99 V	100	102.6	-4.1
3	2483.50	66.7 PK	74.0	-7.3	1.99 V	100	70.7	-4.0
4	2483.50	47.5 AV	54.0	-6.5	1.99 V	100	51.5	-4.0
5	4924.00	55.8 PK	74.0	-18.2	1.58 V	190	53.3	2.5
6	4924.00	41.6 AV	54.0	-12.4	1.58 V	190	39.1	2.5
7	7386.00	59.9 PK	74.0	-14.1	3.78 V	36	50.6	9.3
8	7386.00	41.5 AV	54.0	-12.5	3.78 V	36	32.2	9.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

802.11n (HT40)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	2.31 H	182	74.3	-4.2
2	2390.00	53.6 AV	54.0	-0.4	2.31 H	182	57.8	-4.2
3	*2422.00	113.2 PK			2.31 H	182	117.3	-4.1
4	*2422.00	102.6 AV			2.31 H	182	106.7	-4.1
5	4844.00	55.0 PK	74.0	-19.0	1.98 H	175	52.7	2.3
6	4844.00	40.1 AV	54.0	-13.9	1.98 H	175	37.8	2.3
7	7266.00	57.2 PK	74.0	-16.8	2.66 H	291	48.4	8.8
8	7266.00	38.8 AV	54.0	-15.2	2.66 H	291	30.0	8.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	41.7 PK	74.0	-32.3	2.00 V	110	45.9	-4.2
2	2390.00	31.0 AV	54.0	-23.0	2.00 V	110	35.2	-4.2
3	*2422.00	108.5 PK			2.00 V	110	112.6	-4.1
4	*2422.00	97.8 AV			2.00 V	110	101.9	-4.1
5	4844.00	56.6 PK	74.0	-17.4	1.58 V	189	54.3	2.3
6	4844.00	42.3 AV	54.0	-11.7	1.58 V	189	40.0	2.3
7	7266.00	61.2 PK	74.0	-12.8	3.74 V	19	52.4	8.8
8	7266.00	42.3 AV	54.0	-11.7	3.74 V	19	33.5	8.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.8 PK	74.0	-2.2	2.31 H	180	76.0	-4.2
2	2390.00	53.5 AV	54.0	-0.5	2.31 H	180	57.7	-4.2
3	*2437.00	115.6 PK			2.31 H	180	119.6	-4.0
4	*2437.00	106.0 AV			2.31 H	180	110.0	-4.0
5	2483.50	65.5 PK	74.0	-8.5	2.31 H	180	69.5	-4.0
6	2483.50	50.8 AV	54.0	-3.2	2.31 H	180	54.8	-4.0
7	4874.00	54.9 PK	74.0	-19.1	1.95 H	194	52.4	2.5
8	4874.00	40.1 AV	54.0	-13.9	1.95 H	194	37.6	2.5
9	7311.00	57.3 PK	74.0	-16.7	2.68 H	292	48.4	8.9
10	7311.00	38.6 AV	54.0	-15.4	2.68 H	292	29.7	8.9

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	42.2 PK	74.0	-31.8	2.02 V	104	46.4	-4.2
2	2390.00	31.4 AV	54.0	-22.6	2.02 V	104	35.6	-4.2
3	*2437.00	111.1 PK			2.02 V	104	115.1	-4.0
4	*2437.00	101.3 AV			2.02 V	104	105.3	-4.0
5	2483.50	57.0 PK	74.0	-17.0	2.02 V	104	61.0	-4.0
6	2483.50	38.1 AV	54.0	-15.9	2.02 V	104	42.1	-4.0
7	4874.00	56.3 PK	74.0	-17.7	1.46 V	176	53.8	2.5
8	4874.00	42.3 AV	54.0	-11.7	1.46 V	176	39.8	2.5
9	7311.00	60.6 PK	74.0	-13.4	3.73 V	42	51.7	8.9
10	7311.00	42.2 AV	54.0	-11.8	3.73 V	42	33.3	8.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	114.5 PK			2.31 H	184	118.6	-4.1
2	*2452.00	105.1 AV			2.31 H	184	109.2	-4.1
3	2483.50	73.8 PK	74.0	-0.2	2.31 H	184	77.8	-4.0
4	2483.50	53.6 AV	54.0	-0.4	2.31 H	184	57.6	-4.0
5	4904.00	55.4 PK	74.0	-18.6	1.96 H	172	52.9	2.5
6	4904.00	40.4 AV	54.0	-13.6	1.96 H	172	37.9	2.5
7	7356.00	57.7 PK	74.0	-16.3	2.64 H	315	48.5	9.2
8	7356.00	38.9 AV	54.0	-15.1	2.64 H	315	29.7	9.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.4 PK			1.99 V	97	112.5	-4.1
2	*2452.00	98.0 AV			1.99 V	97	102.1	-4.1
3	2483.50	56.5 PK	74.0	-17.5	1.99 V	97	60.5	-4.0
4	2483.50	37.8 AV	54.0	-16.2	1.99 V	97	41.8	-4.0
5	4904.00	55.9 PK	74.0	-18.1	1.57 V	183	53.4	2.5
6	4904.00	41.6 AV	54.0	-12.4	1.57 V	183	39.1	2.5
7	7356.00	60.5 PK	74.0	-13.5	3.81 V	36	51.3	9.2
8	7356.00	41.7 AV	54.0	-12.3	3.81 V	36	32.5	9.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.

Below 1GHz Data:

802.11b

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	375.00	23.8 QP	46.0	-22.2	1.00 H	360	29.3	-5.5
2	499.96	23.1 QP	46.0	-22.9	1.50 H	19	25.4	-2.3
3	624.97	29.2 QP	46.0	-16.8	1.50 H	315	28.8	0.4
4	749.98	32.0 QP	46.0	-14.0	1.00 H	182	29.5	2.5
5	874.97	30.2 QP	46.0	-15.8	1.50 H	197	26.5	3.7
6	999.98	39.2 QP	54.0	-14.8	2.00 H	197	34.0	5.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.27	36.0 QP	43.5	-7.5	1.50 V	0	49.3	-13.3
2	374.98	38.3 QP	46.0	-7.7	1.50 V	253	43.8	-5.5
3	499.99	38.2 QP	46.0	-7.8	1.00 V	270	40.5	-2.3
4	625.00	36.4 QP	46.0	-9.6	1.00 V	228	36.0	0.4
5	750.01	36.4 QP	46.0	-9.6	1.50 V	117	33.9	2.5
6	999.98	37.8 QP	54.0	-16.2	1.00 V	115	32.6	5.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2016	Oct. 23, 2017
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 26, 2016	Oct. 25, 2017
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 13, 2016	June 12, 2017
RF Cable	5D-FB	COACAB-002	Mar. 04, 2016	Mar. 03, 2017
10 dB PAD Mini-Circuits	HAT-10+	CONATT-004	Jun. 20, 2016	Jun. 19, 2017
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. 1.
- 3 Tested Date: Nov. 22, 2016

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

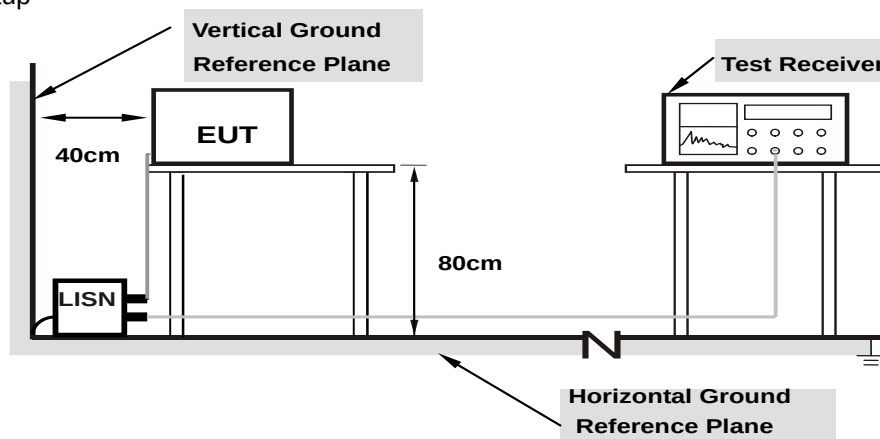

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.20	41.47	26.82	51.67	37.02	65.58	55.58	-13.91	-18.56
2	0.18125	10.20	37.94	23.86	48.14	34.06	64.43	54.43	-16.29	-20.37
3	0.25547	10.21	24.97	10.52	35.18	20.73	61.58	51.58	-26.40	-30.85
4	0.51719	10.25	27.72	17.41	37.97	27.66	56.00	46.00	-18.03	-18.34
5	4.39844	10.34	20.65	12.98	30.99	23.32	56.00	46.00	-25.01	-22.68
6	18.51953	11.58	21.33	13.51	32.91	25.09	60.00	50.00	-27.09	-24.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

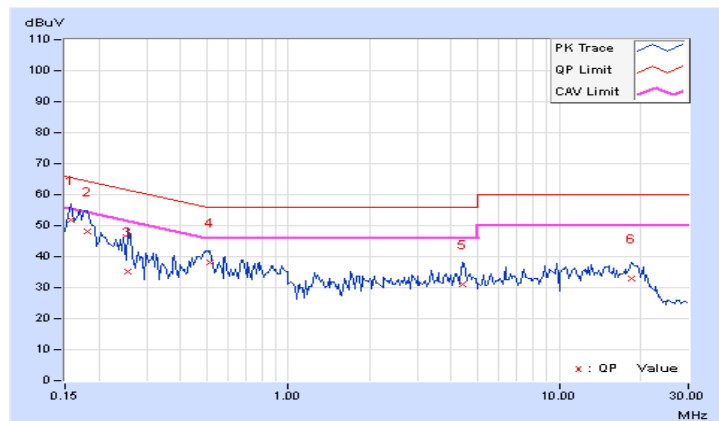


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.19	43.04	22.42	53.23	32.61	66.00	56.00	-12.77	-23.39
2	0.19297	10.17	36.28	22.35	46.45	32.52	63.91	53.91	-17.46	-21.39
3	0.49766	10.24	25.47	14.64	35.71	24.88	56.04	46.04	-20.33	-21.16
4	4.18750	10.23	20.98	11.13	31.21	21.36	56.00	46.00	-24.79	-24.64
5	11.04297	10.73	20.68	14.00	31.41	24.73	60.00	50.00	-28.59	-25.27
6	20.14063	11.38	24.76	18.71	36.14	30.09	60.00	50.00	-23.86	-19.91

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

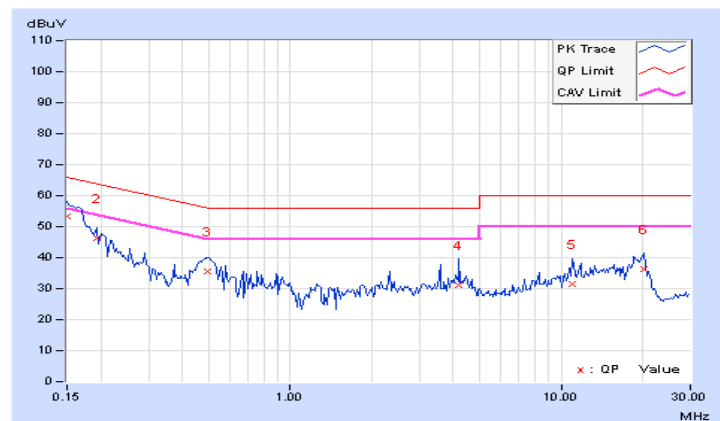


4.2.8 Test Results (Mode 2)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	10.19	40.71	30.32	50.90	40.51	65.79	55.79	-14.89	-15.28
2	0.18906	10.19	30.12	4.81	40.31	15.00	64.08	54.08	-23.77	-39.08
3	0.25156	10.20	20.21	5.72	30.41	15.92	61.71	51.71	-31.30	-35.79
4	0.48203	10.23	25.87	14.13	36.10	24.36	56.30	46.30	-20.20	-21.94
5	2.82422	10.24	19.70	9.84	29.94	20.08	56.00	46.00	-26.06	-25.92
6	25.20313	11.43	28.95	22.31	40.38	33.74	60.00	50.00	-19.62	-16.26

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

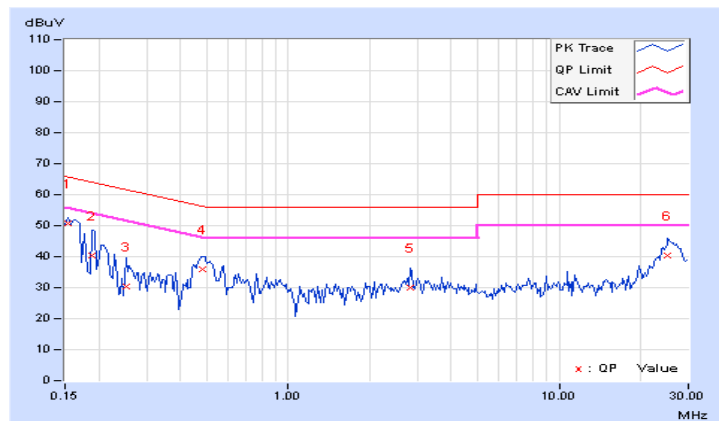


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.18	40.94	32.05	51.12	42.23	65.58	55.58	-14.46	-13.35
2	0.18516	10.17	25.74	3.61	35.91	13.78	64.25	54.25	-28.34	-40.47
3	0.20859	10.16	32.04	21.85	42.20	32.01	63.26	53.26	-21.06	-21.25
4	0.47422	10.21	26.88	20.02	37.09	30.23	56.44	46.44	-19.35	-16.21
5	0.57578	10.22	20.57	4.21	30.79	14.43	56.00	46.00	-25.21	-31.57
6	25.54688	11.07	29.76	23.37	40.83	34.44	60.00	50.00	-19.17	-15.56

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

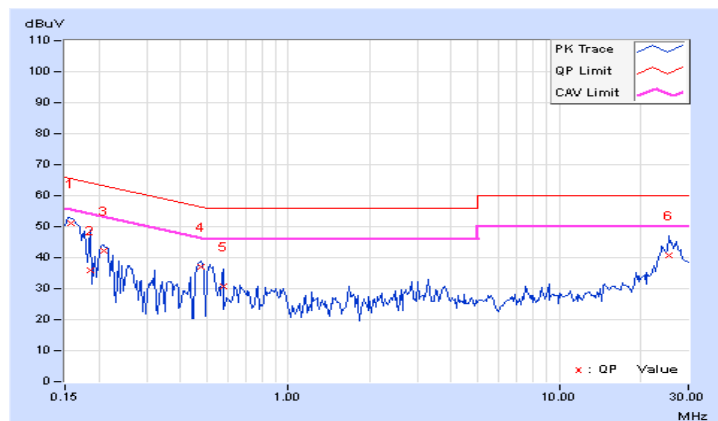


4.2.9 Test Results (Mode 3)

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	-----------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.19	39.87	27.44	50.06	37.63	65.58	55.58	-15.52	-17.95
2	0.20078	10.19	31.90	18.60	42.09	28.79	63.58	53.58	-21.49	-24.79
3	0.26328	10.20	24.22	8.41	34.42	18.61	61.33	51.33	-26.91	-32.72
4	0.94297	10.26	13.56	6.91	23.82	17.17	56.00	46.00	-32.18	-28.83
5	1.45313	10.25	11.18	6.27	21.43	16.52	56.00	46.00	-34.57	-29.48
6	23.51563	11.41	22.40	17.77	33.81	29.18	60.00	50.00	-26.19	-20.82

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

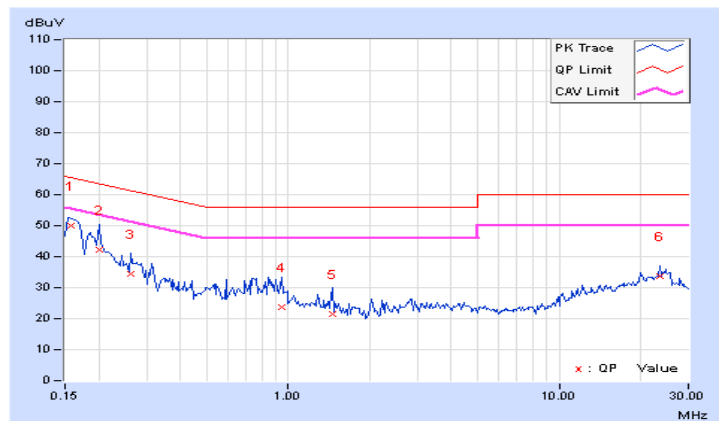


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq. [MHz]	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.18	37.61	22.50	47.79	32.68	66.00	56.00	-18.21	-23.32
2	0.20469	10.16	31.80	20.45	41.96	30.61	63.42	53.42	-21.46	-22.81
3	0.25547	10.17	25.91	13.10	36.08	23.27	61.58	51.58	-25.50	-28.31
4	1.64844	10.26	10.87	6.33	21.13	16.59	56.00	46.00	-34.87	-29.41
5	12.28125	10.67	15.86	9.35	26.53	20.02	60.00	50.00	-33.47	-29.98
6	23.75391	11.08	21.35	17.09	32.43	28.17	60.00	50.00	-27.57	-21.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

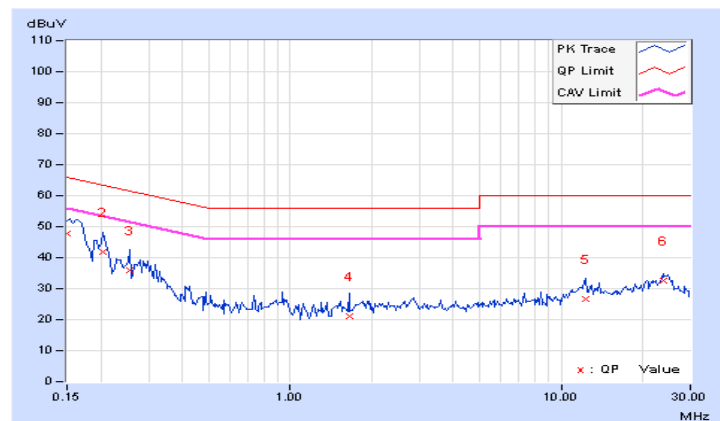


4.3 6dB Bandwidth Measurement

4.3.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Result

802.11b

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 1	Chain 2	Chain 3		
1	2412	10.13	10.15	10.17	0.5	PASS
6	2437	10.13	10.14	10.14	0.5	PASS
11	2462	10.13	10.14	10.13	0.5	PASS

802.11g

Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 1	Chain 2	Chain 3		
1	2412	16.42	16.43	16.43	0.5	PASS
6	2437	16.41	16.41	16.43	0.5	PASS
11	2462	16.41	16.40	16.42	0.5	PASS

802.11n (HT20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 1	Chain 2	Chain 3		
1	2412	17.60	17.56	17.59	0.5	Pass
6	2437	17.60	17.60	17.59	0.5	Pass
11	2462	17.60	17.62	17.39	0.5	Pass

802.11n (HT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)			Minimum Limit (MHz)	Pass / Fail
		Chain 1	Chain 2	Chain 3		
3	2422	36.10	35.65	36.11	0.5	Pass
6	2437	35.91	35.75	36.31	0.5	Pass
9	2452	36.00	35.74	36.21	0.5	Pass

Spectrum Plot of Worst Value


802.11b / Chain 1 : CH1

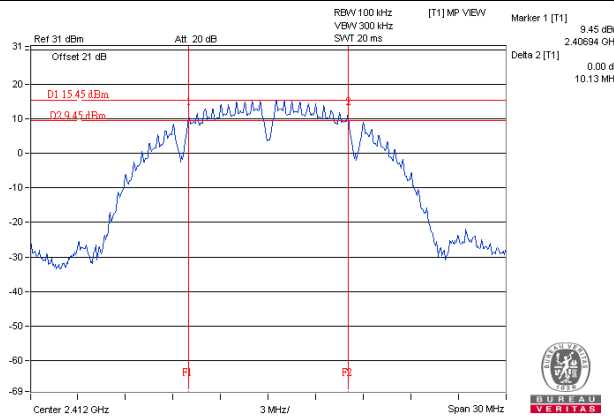


802.11g / Chain 2 : CH11

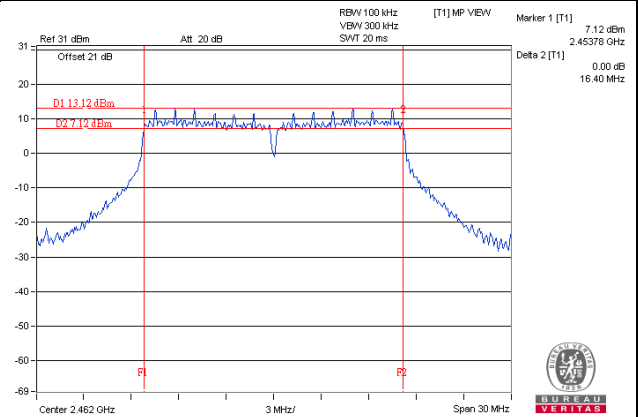

802.11n (HT20) / Chain 3 : CH11

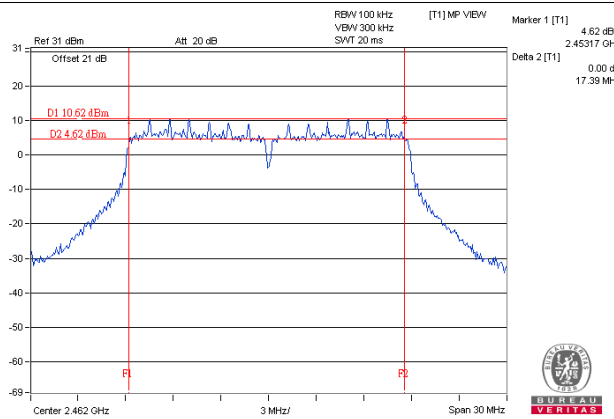

802.11n (HT40) / Chain 2 : CH3

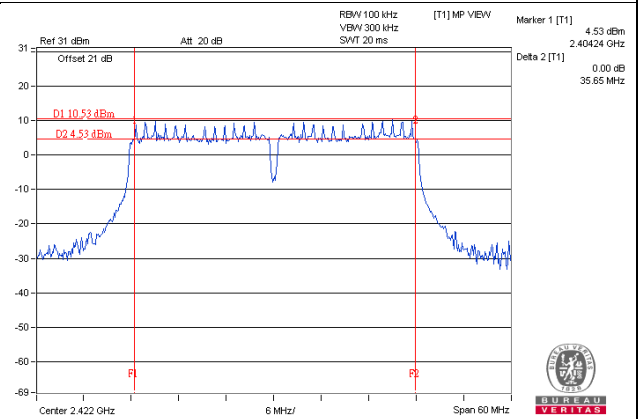

4.4 Conducted Output Power Measurement

4.4.1 Limits of Conducted Output Power Measurement

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30dBm)

Per KDB 662911 D01 Multiple Transmitter Output Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.4.2 Test Setup



4.4.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.4 Test Procedures

An average power sensor was used on the output port of the EUT. A power meter was used to read the response of the average power sensor. Record the power level.

4.4.5 Deviation from Test Standard

No deviation.

4.4.6 EUT Operating Conditions

Same as Item 4.3.6.

4.4.7 Test Results

802.11b

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 1	Chain 2	Chain 3				
1	2412	24.22	25.05	25.12	909.218	29.59	30	Pass
6	2437	24.48	25.01	25.42	945.837	29.76	30	Pass
11	2462	24.10	25.68	25.61	990.783	29.96	30	Pass

802.11g

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 1	Chain 2	Chain 3				
1	2412	20.25	19.57	19.89	293.997	24.68	30	Pass
6	2437	25.18	25.61	24.66	985.94	29.94	30	Pass
11	2462	22.55	22.64	21.91	518.78	27.15	30	Pass

802.11n (HT20)

Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 1	Chain 2	Chain 3				
1	2412	19.86	20.31	19.94	302.855	24.81	30	Pass
6	2437	25.14	25.26	25.08	984.433	29.93	30	Pass
11	2462	21.08	20.85	21.44	389.168	25.90	30	Pass

802.11n (HT40)


Chan.	Chan. Freq. (MHz)	Average Power (dBm)			Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 1	Chain 2	Chain 3				
3	2422	22.88	22.95	22.85	584.083	27.66	30	Pass
6	2437	24.68	24.93	24.47	884.835	29.47	30	Pass
9	2452	23.14	22.93	22.53	581.46	27.65	30	Pass

4.5 Power Spectral Density Measurement

4.5.1 Limits of Power Spectral Density Measurement

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For 802.11b

- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.

For 802.11g, 802.11n (HT20), 802.11n (HT40)

- Measure the duty cycle (x).
- Set instrument center frequency to DTS channel center frequency.
- Set span to at least 1.5 times the OBW.
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set VBW $\geq 3 \times \text{RBW}$.
- Detector = power averaging (RMS) or sample detector (when RMS not available).
- Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$.
- Sweep time = auto couple.
- Do not use sweep triggering. Allow sweep to "free run".
- Employ trace averaging (RMS) mode over a minimum of 100 traces.
- Use the peak marker function to determine the maximum amplitude level.
- Add $10 \log(1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6

4.5.7 Test Results

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3kHz)	10 log (N=3) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Pass /Fail
1	1	2412	-5.36	4.77	-0.59	4.57	Pass
	6	2437	-7.30	4.77	-2.53	4.57	Pass
	11	2462	-5.14	4.77	-0.37	4.57	Pass
2	1	2412	-6.13	4.77	-1.36	4.57	Pass
	6	2437	-5.32	4.77	-0.55	4.57	Pass
	11	2462	-4.77	4.77	0.00	4.57	Pass
3	1	2412	-5.12	4.77	-0.35	4.57	Pass
	6	2437	-5.45	4.77	-0.68	4.57	Pass
	11	2462	-5.12	4.77	-0.35	4.57	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 9.43\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(9.43-6) = 4.57\text{dBm}$.

802.11g

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
1	1	2412	-11.61	4.77	0.17	-6.67	4.57	Pass
	6	2437	-5.76	4.77	0.17	-0.82	4.57	Pass
	11	2462	-9.31	4.77	0.17	-4.37	4.57	Pass
2	1	2412	-10.28	4.77	0.17	-5.34	4.57	Pass
	6	2437	-3.63	4.77	0.17	1.31	4.57	Pass
	11	2462	-7.52	4.77	0.17	-2.58	4.57	Pass
3	1	2412	-9.92	4.77	0.17	-4.98	4.57	Pass
	6	2437	-5.56	4.77	0.17	-0.62	4.57	Pass
	11	2462	-9.66	4.77	0.17	-4.72	4.57	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 9.43\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(9.43-6) = 4.57\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT20)

TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
1	1	2412	-12.11	4.77	0.18	-7.16	4.57	Pass
	6	2437	-8.08	4.77	0.18	-3.13	4.57	Pass
	11	2462	-12.55	4.77	0.18	-7.60	4.57	Pass
2	1	2412	-11.79	4.77	0.18	-6.84	4.57	Pass
	6	2437	-6.27	4.77	0.18	-1.32	4.57	Pass
	11	2462	-9.21	4.77	0.18	-4.26	4.57	Pass
3	1	2412	-11.72	4.77	0.18	-6.77	4.57	Pass
	6	2437	-5.94	4.77	0.18	-0.99	4.57	Pass
	11	2462	-9.62	4.77	0.18	-4.67	4.57	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 9.43\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(9.43-6) = 4.57\text{dBm}$.

2. Refer to section 3.3 for duty cycle spectrum plot.

802.11n (HT40)


TX chain	Channel	Freq. (MHz)	PSD W/O Duty Factor (dBm/10kHz)	10 log (N=3) dB	Duty Factor (dB)	TOTAL PSD With Duty Factor (dBm/10kHz)	Limit (dBm/3kHz)	Pass /Fail
1	3	2422	-11.87	4.77	0.39	-6.71	4.57	Pass
	6	2437	-9.75	4.77	0.39	-4.59	4.57	Pass
	9	2452	-12.16	4.77	0.39	-7.00	4.57	Pass
2	3	2422	-10.74	4.77	0.39	-5.58	4.57	Pass
	6	2437	-10.07	4.77	0.39	-4.91	4.57	Pass
	9	2452	-10.24	4.77	0.39	-5.08	4.57	Pass
3	3	2422	-11.38	4.77	0.39	-6.22	4.57	Pass
	6	2437	-10.93	4.77	0.39	-5.77	4.57	Pass
	9	2452	-12.41	4.77	0.39	-7.25	4.57	Pass

Note: 1. Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + 10^{G3/20})^2 / 3] = 9.43\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $8-(9.43-6) = 4.57\text{dBm}$.


2. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11b / Chain 2 : CH11

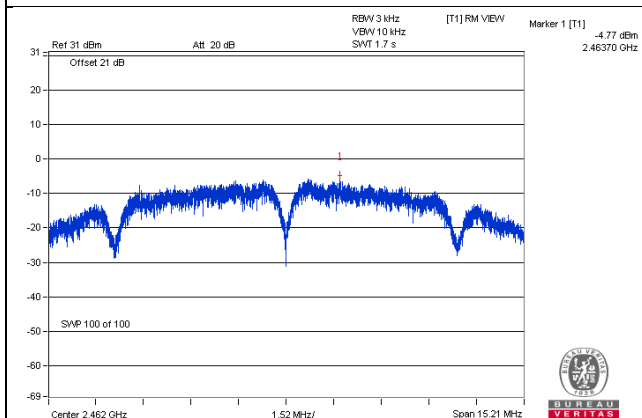


802.11g / Chain 2 : CH6

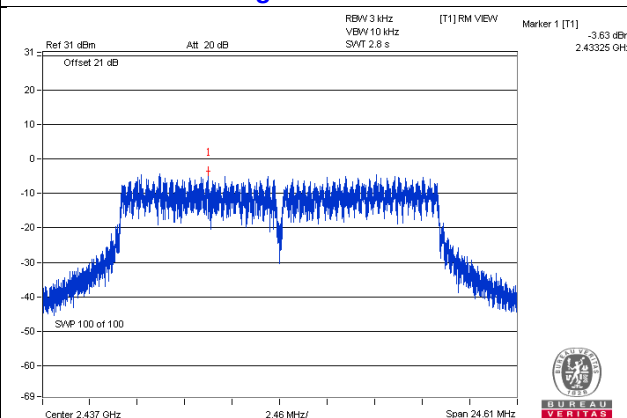

802.11n (HT20) / Chain 3 : CH6

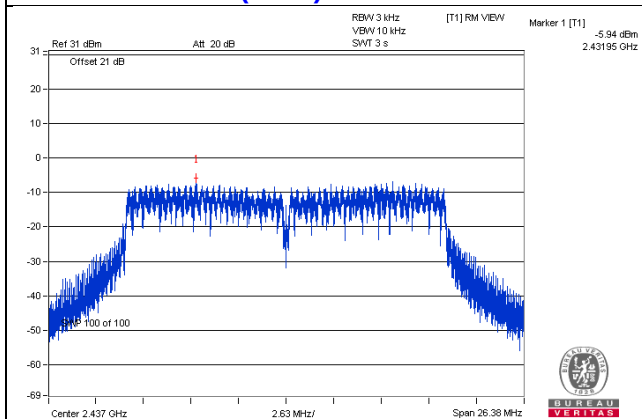

802.11n (HT40) / Chain 1 : CH6

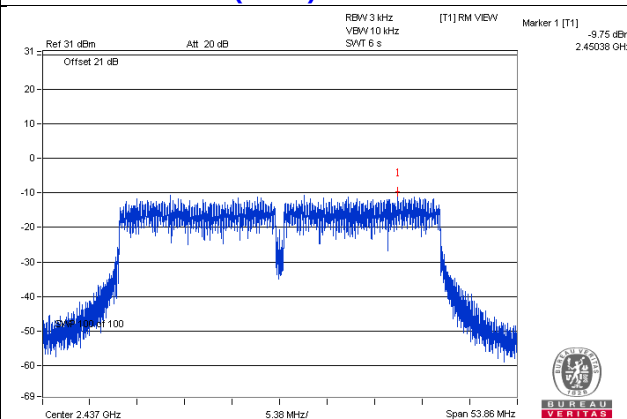


4.6 Conducted Out of Band Emission Measurement

4.6.1 Limits of Conducted Out of Band Emission Measurement

Below 30dBc of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 Test Setup



4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.6.5 Deviation from Test Standard

No deviation.


4.6.6 EUT Operating Condition

Same as Item 4.3.6


4.6.7 Test Results

The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.


802.11b

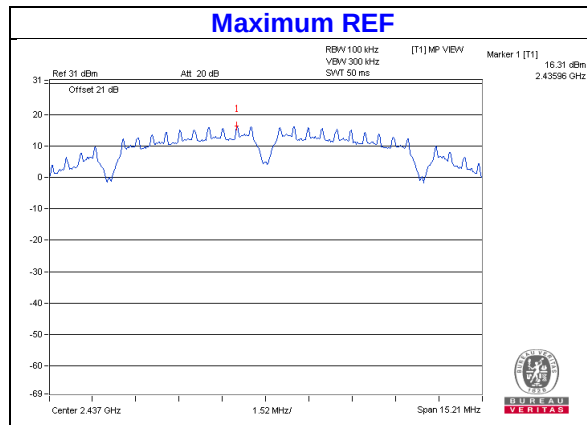


CHAIN 1

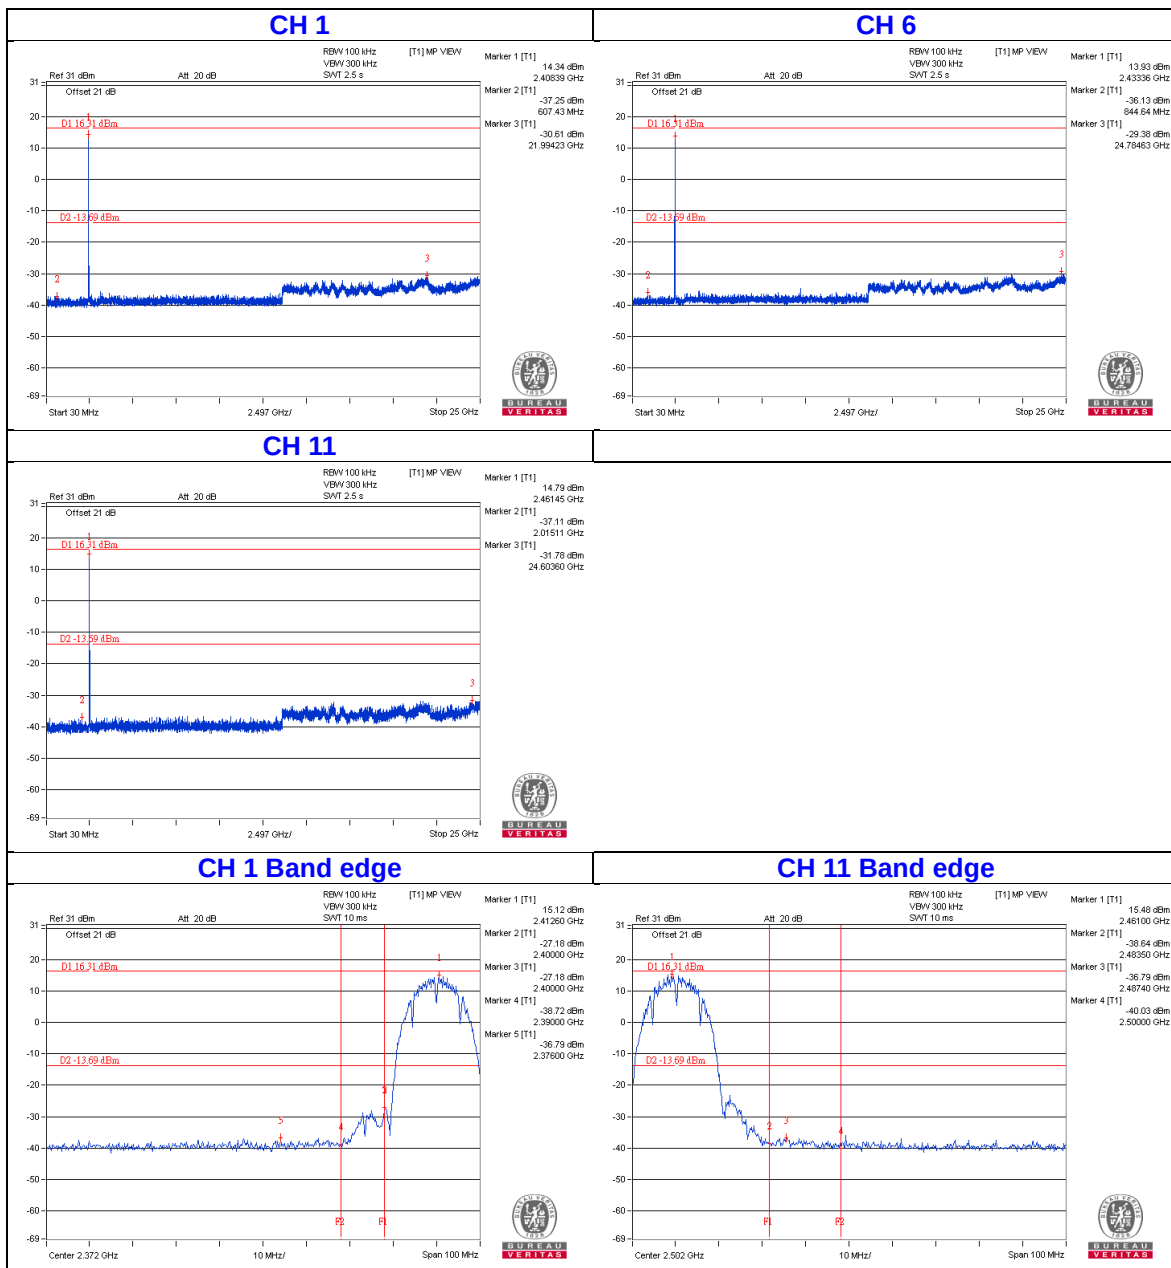


CHAIN 2

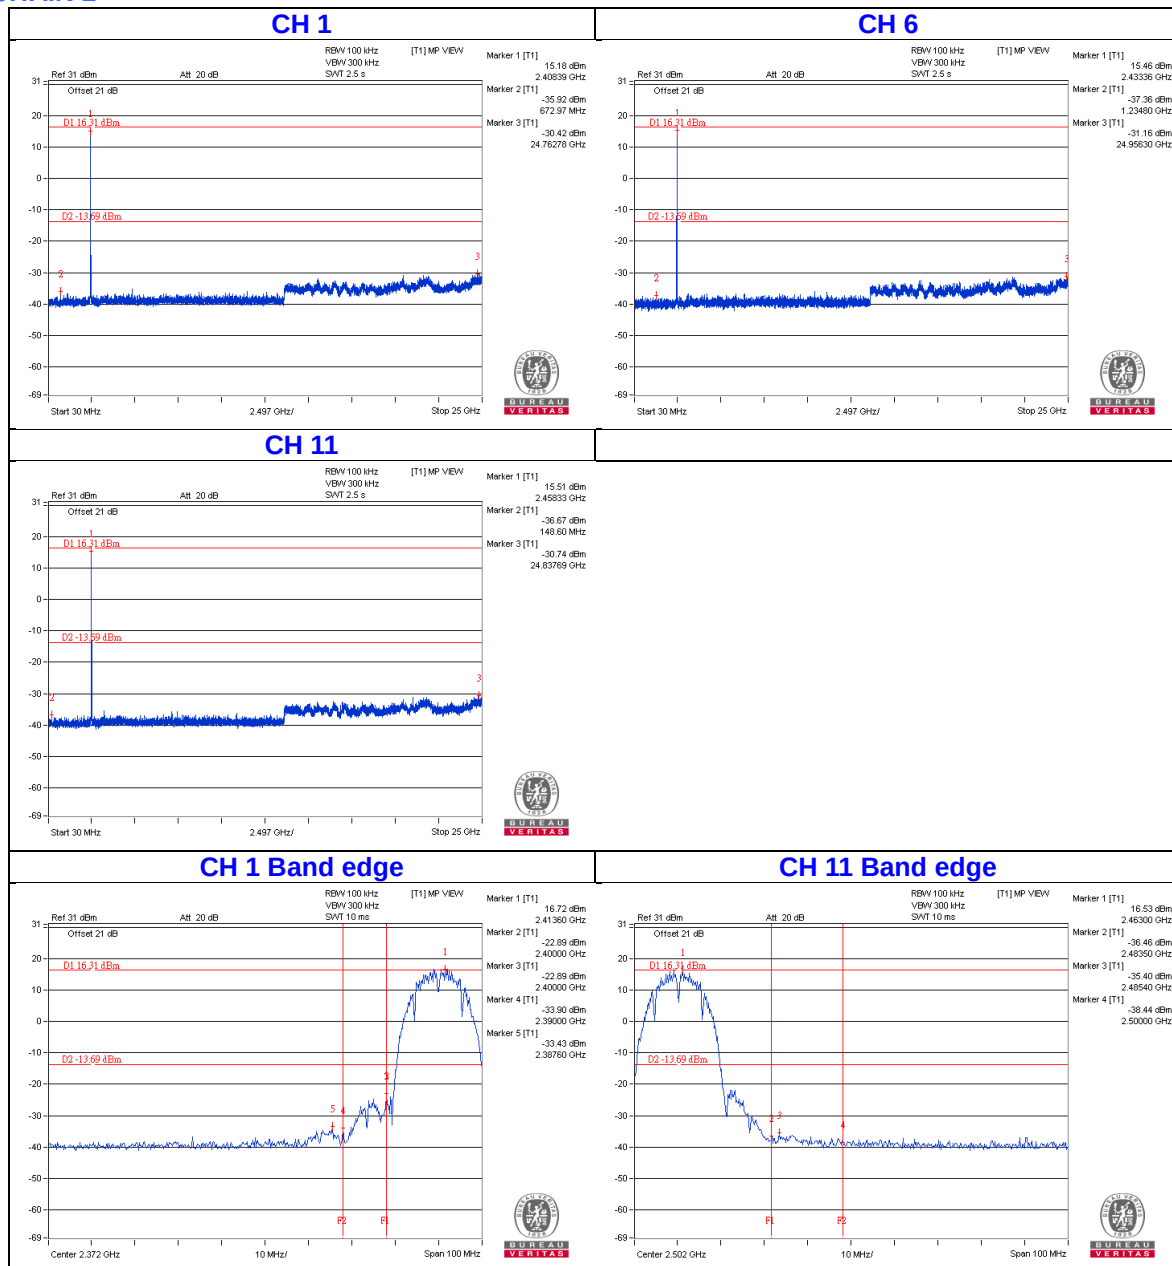


CHAIN 3

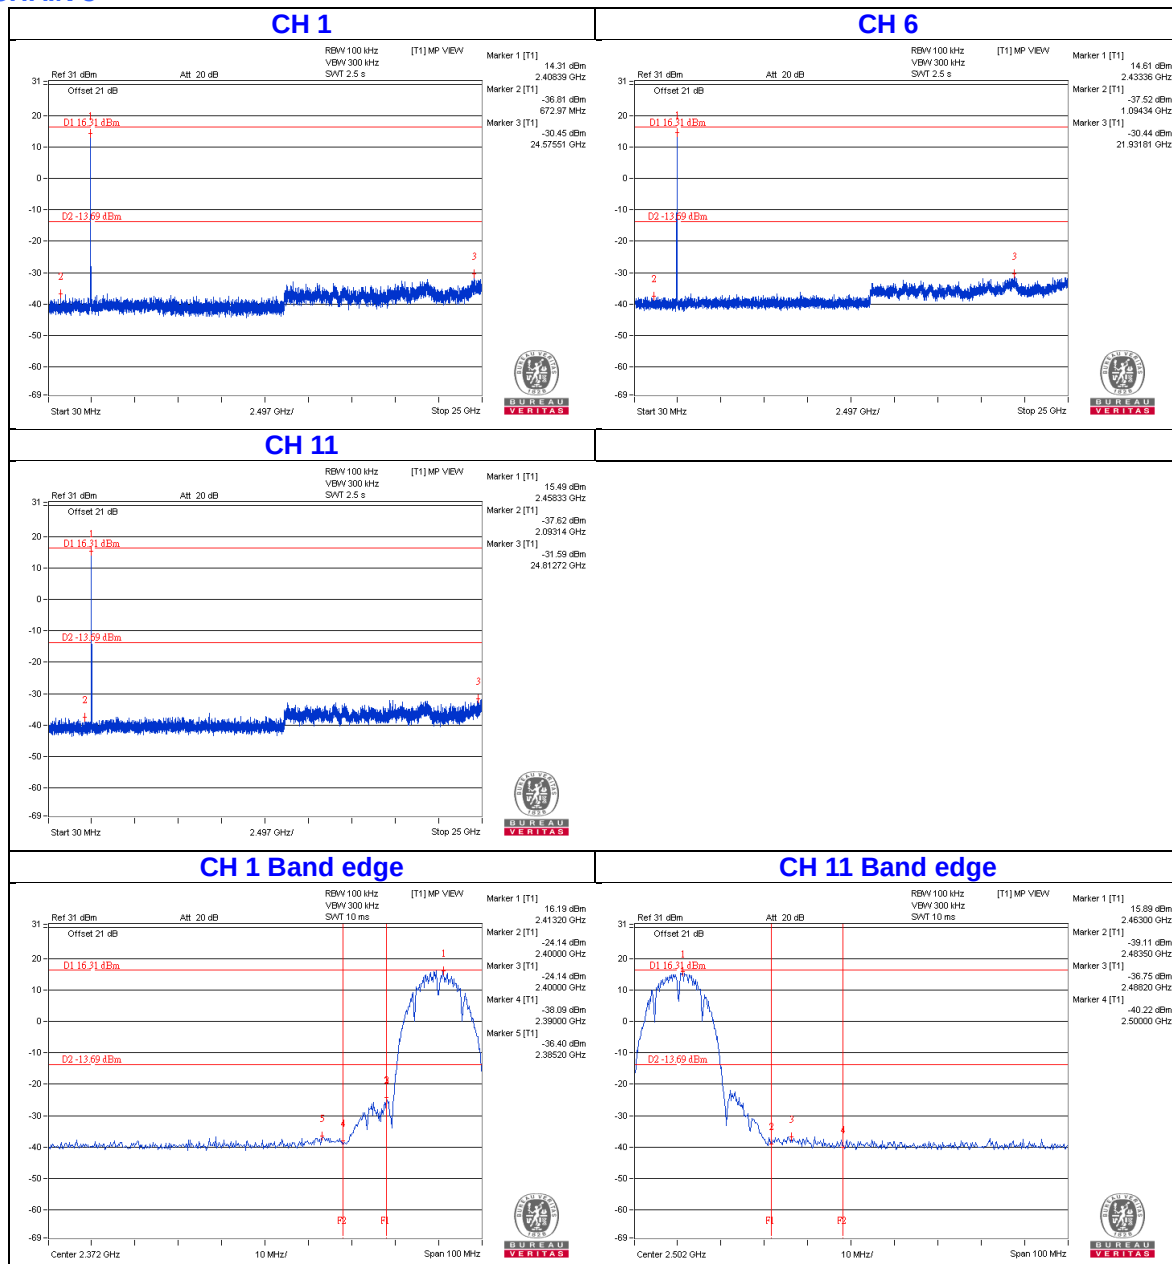


802.11g

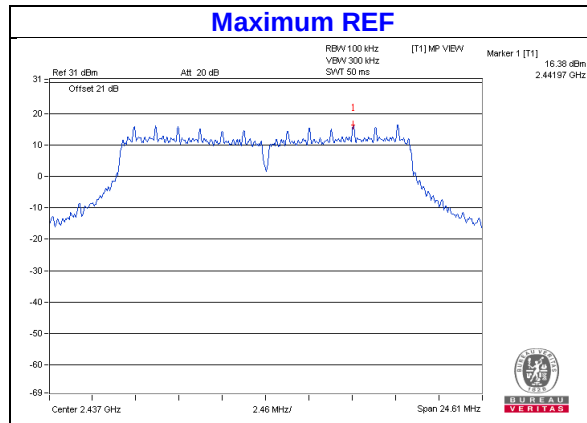


CHAIN 1

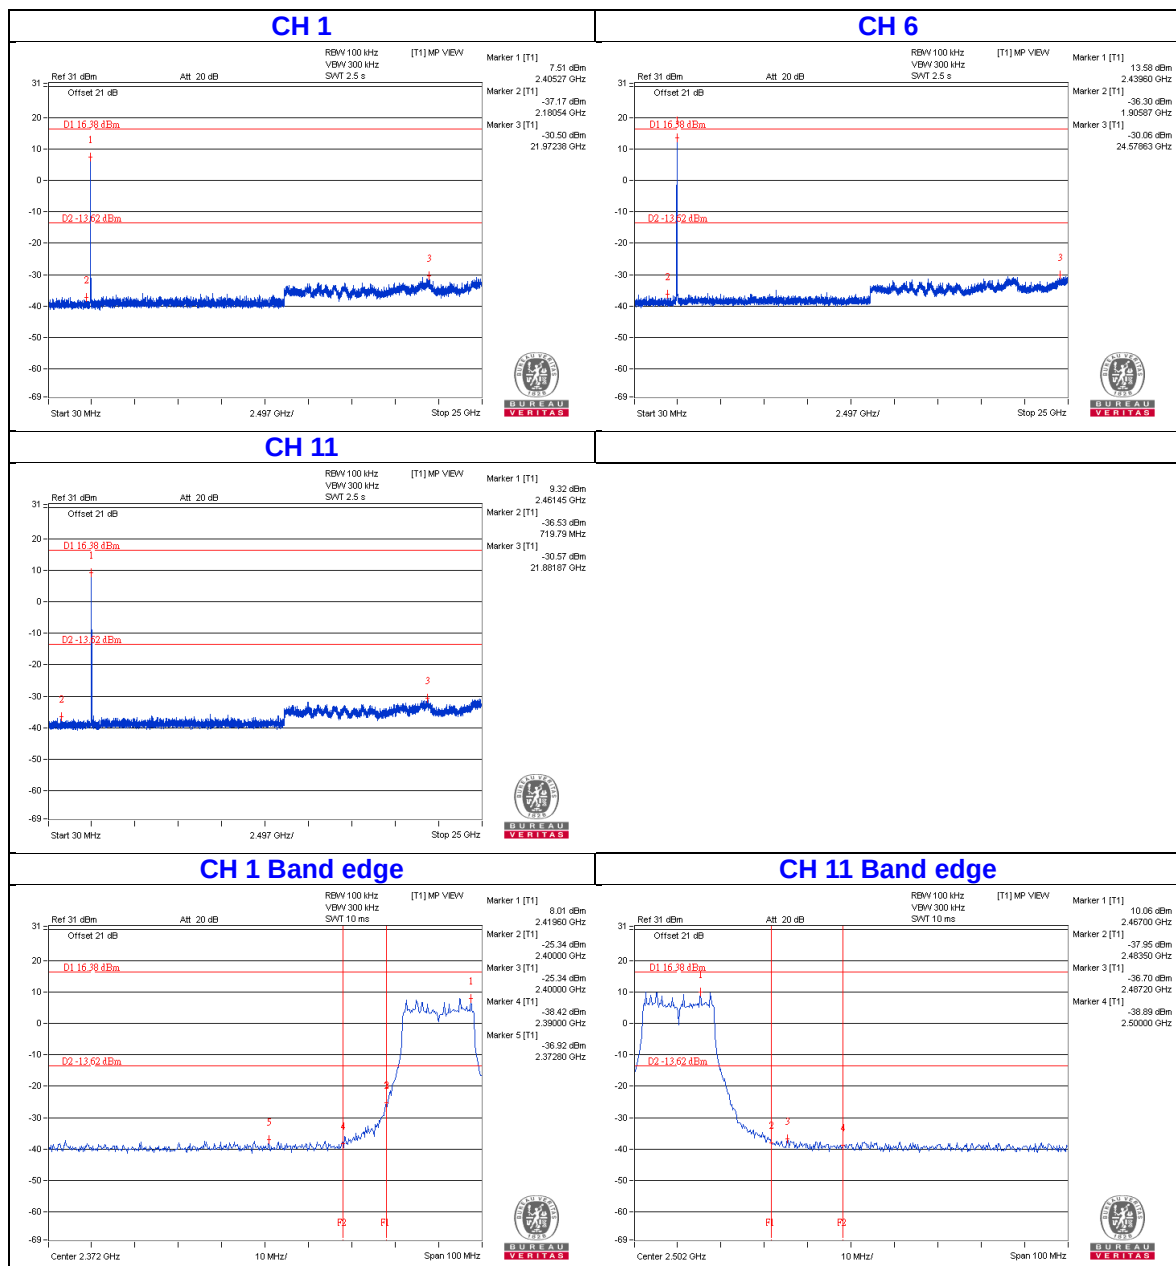


CHAIN 2

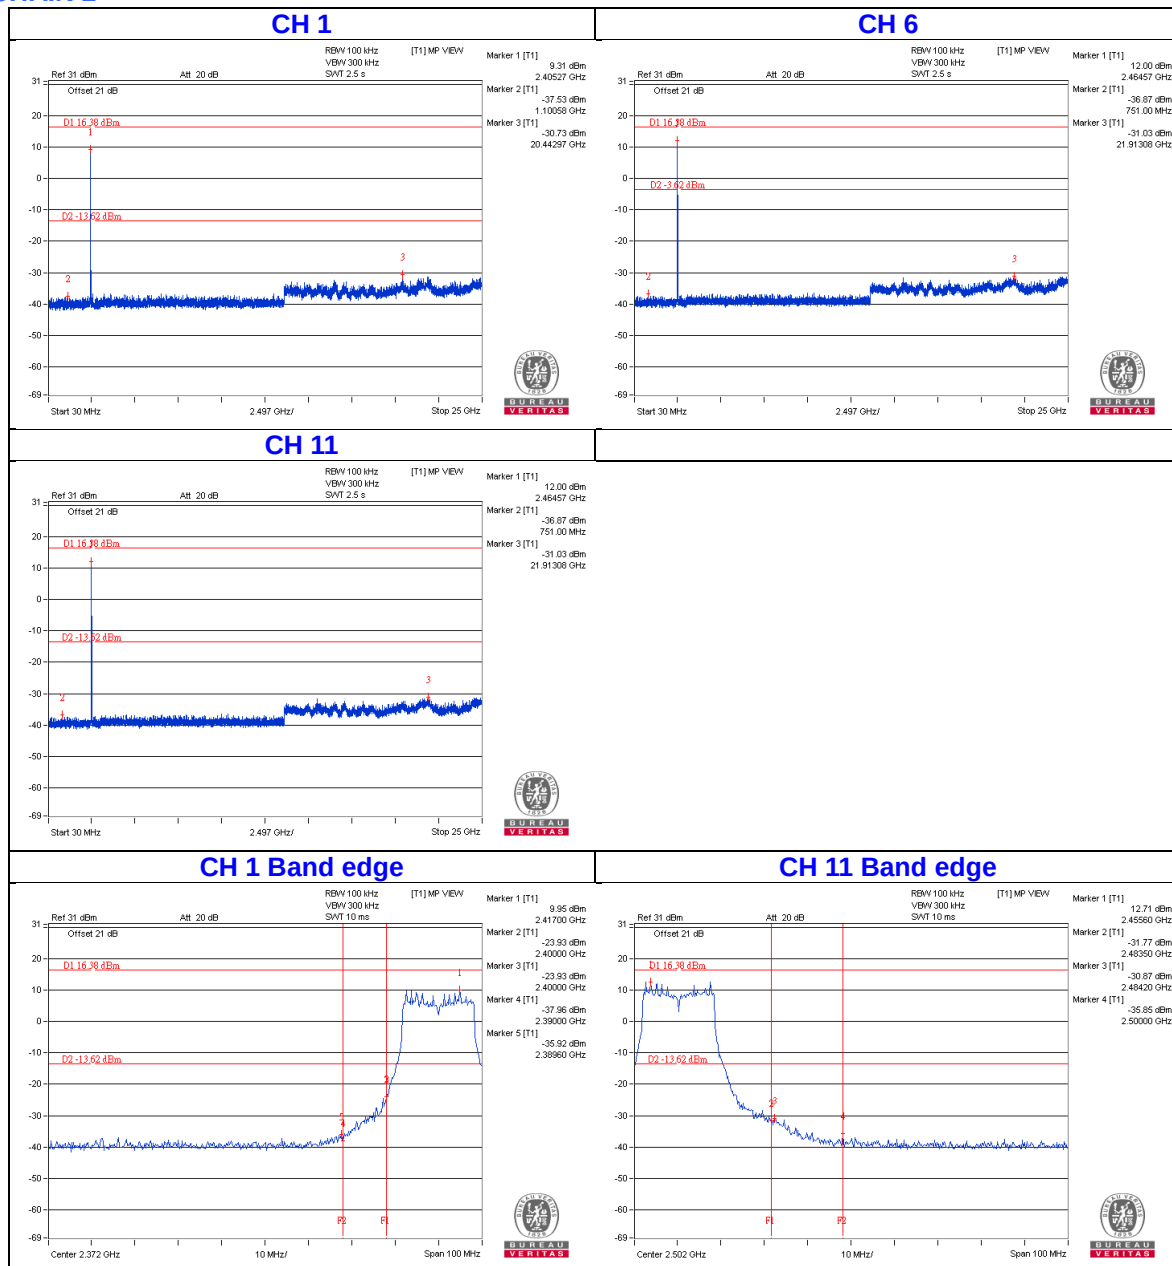


CHAIN 3

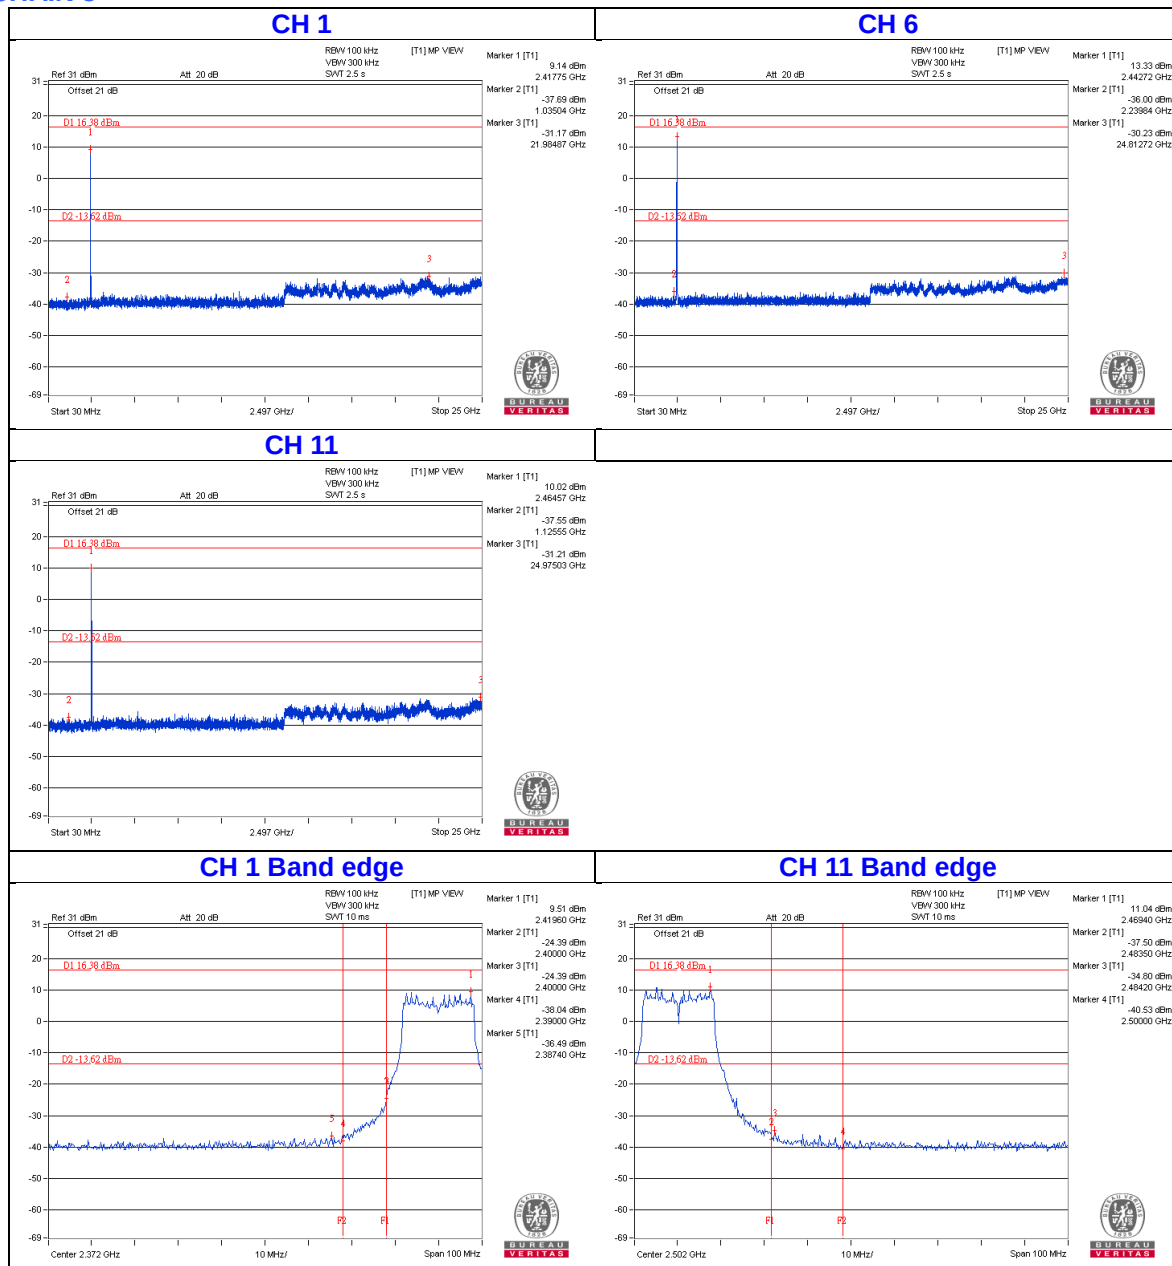


802.11n (HT20)

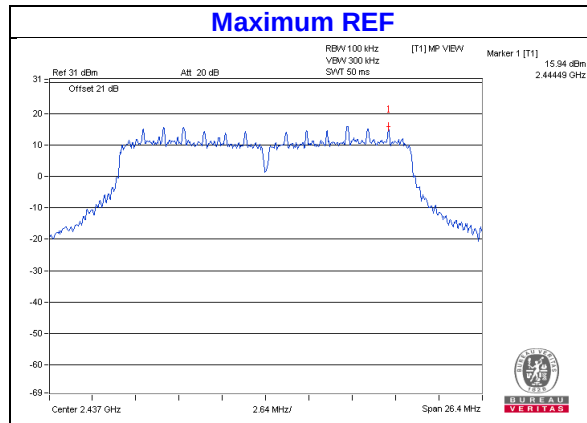


CHAIN 1

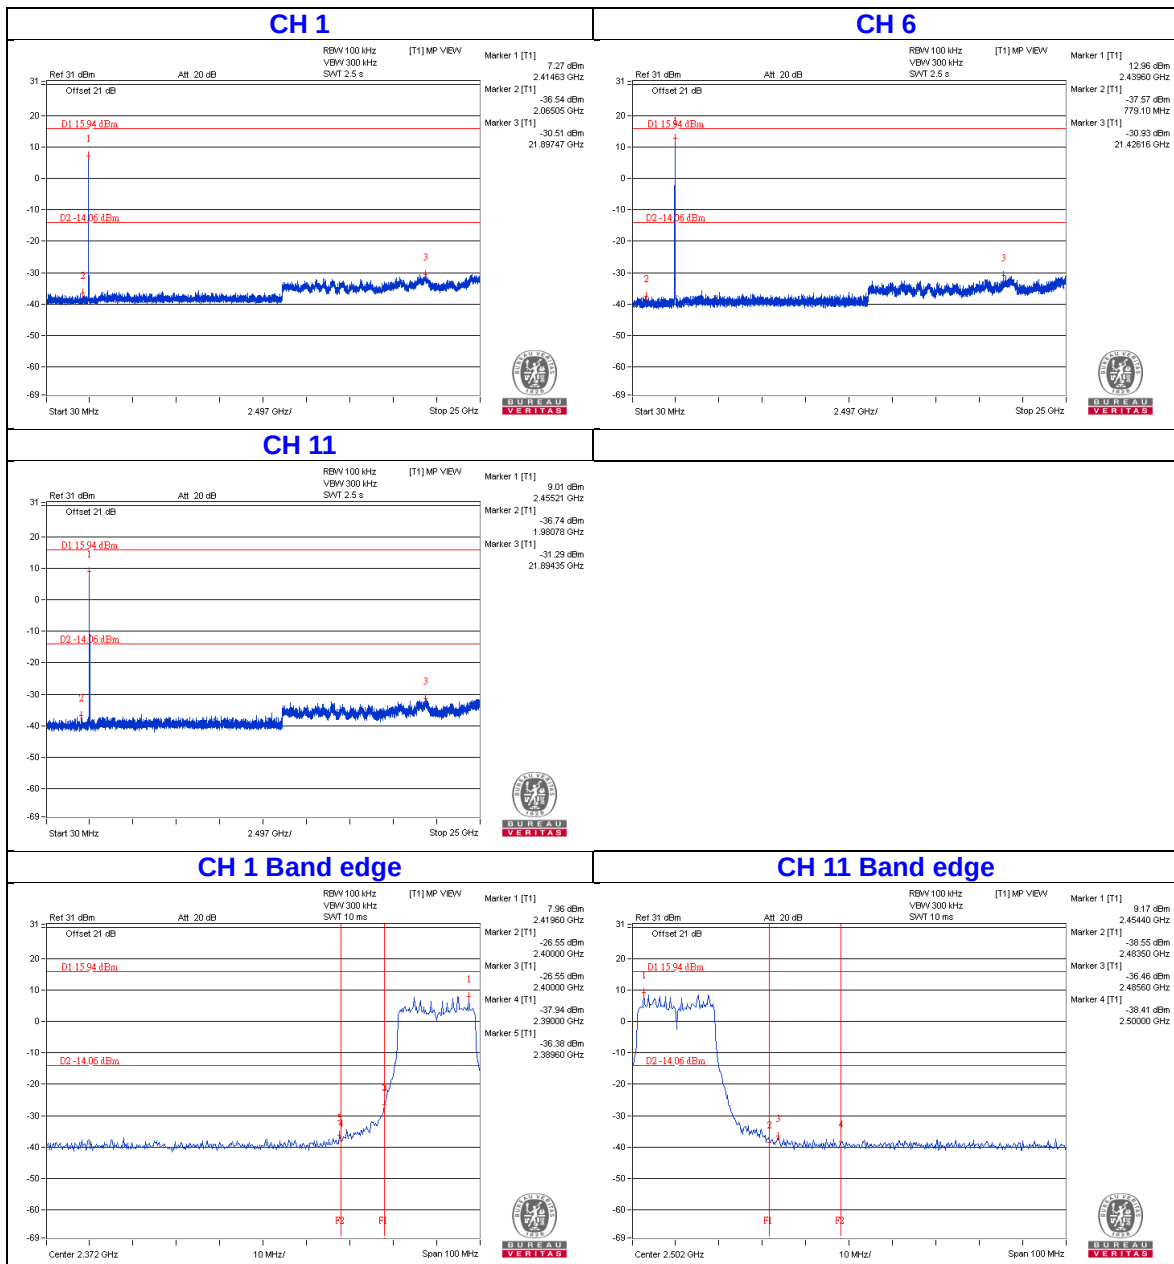


CHAIN 2

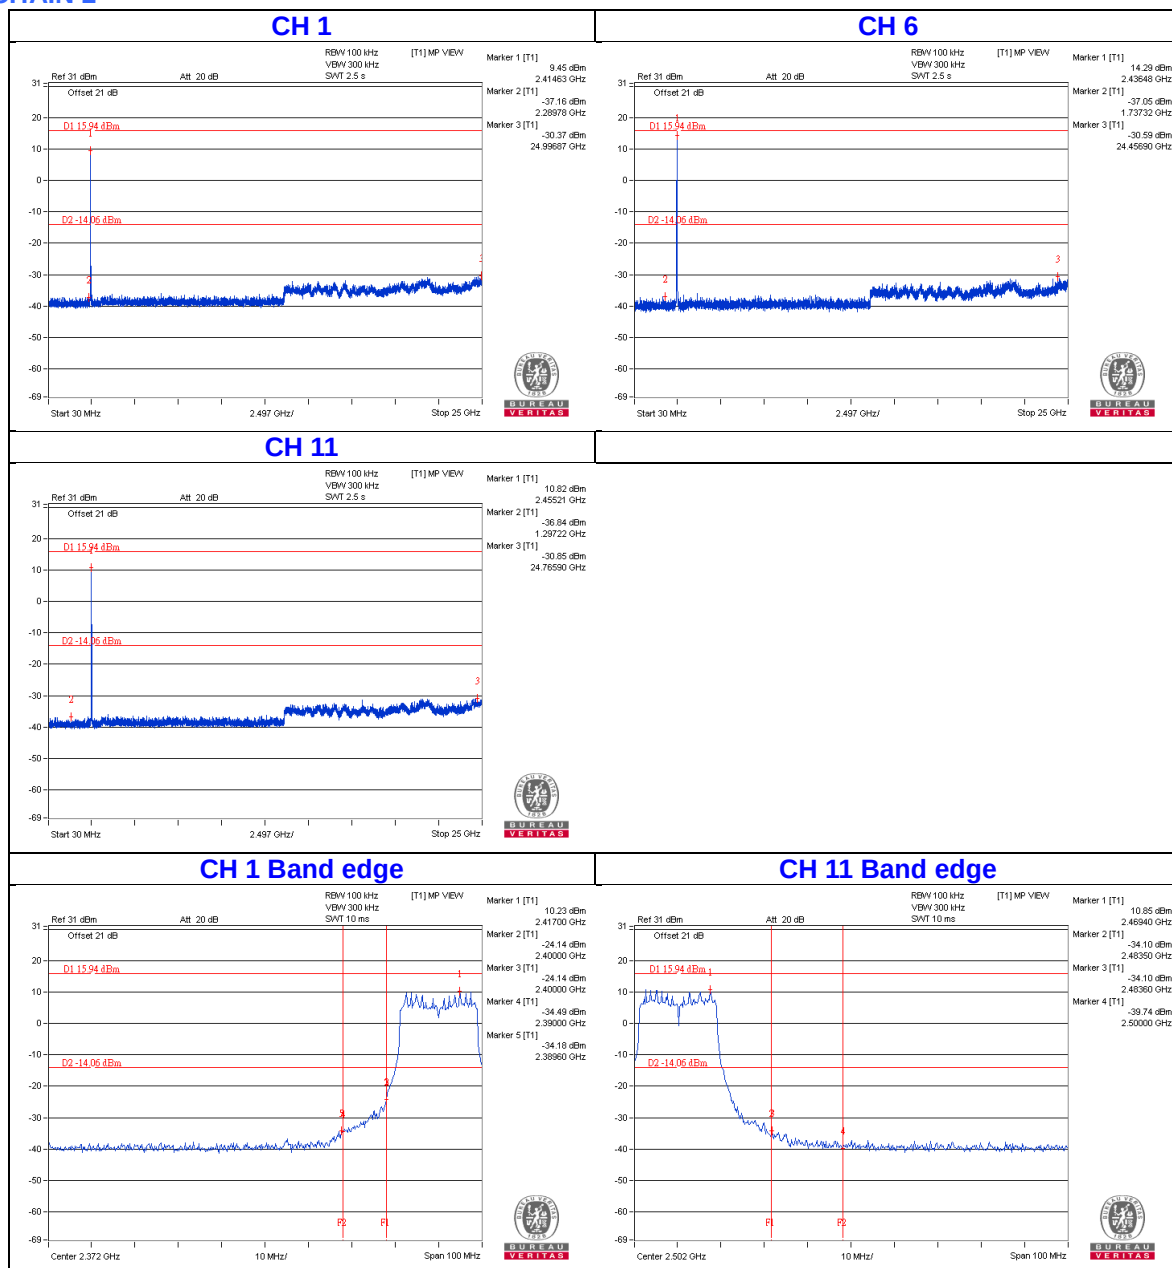


CHAIN 3

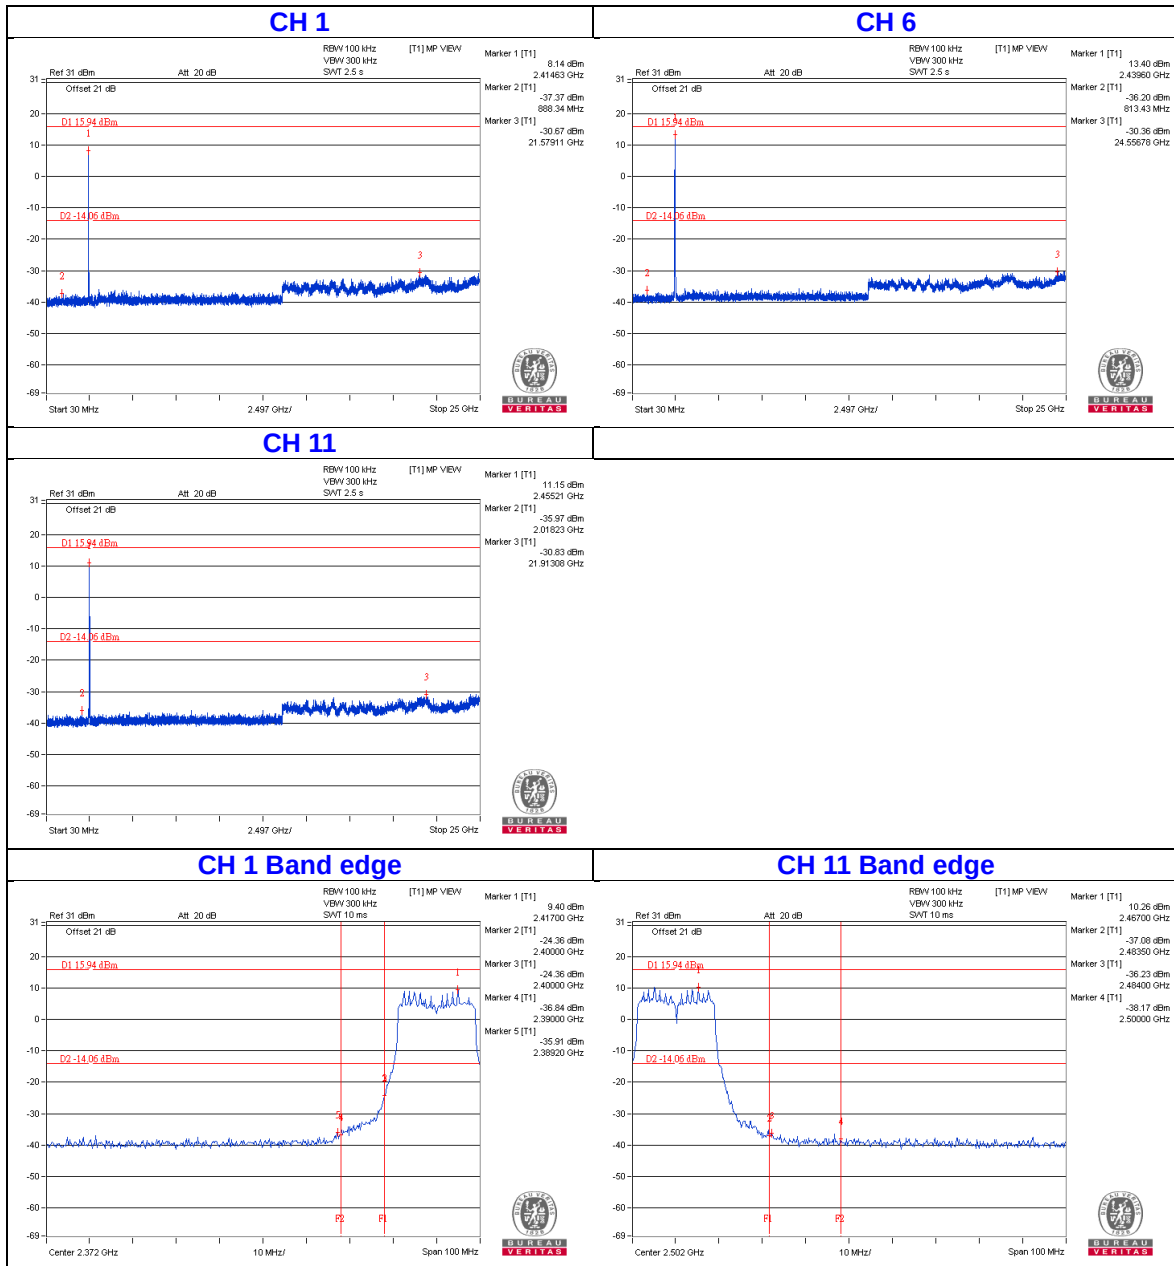


802.11n (HT40)

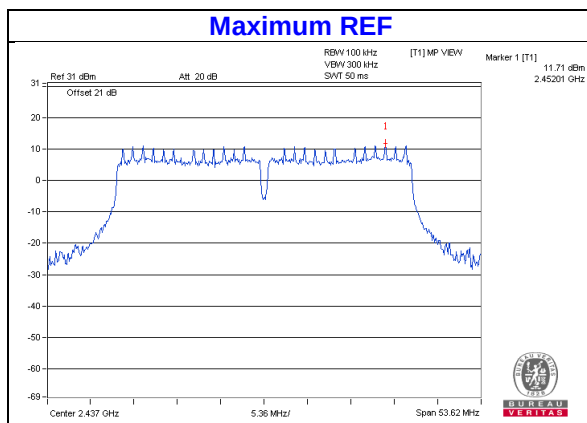


CHAIN 1

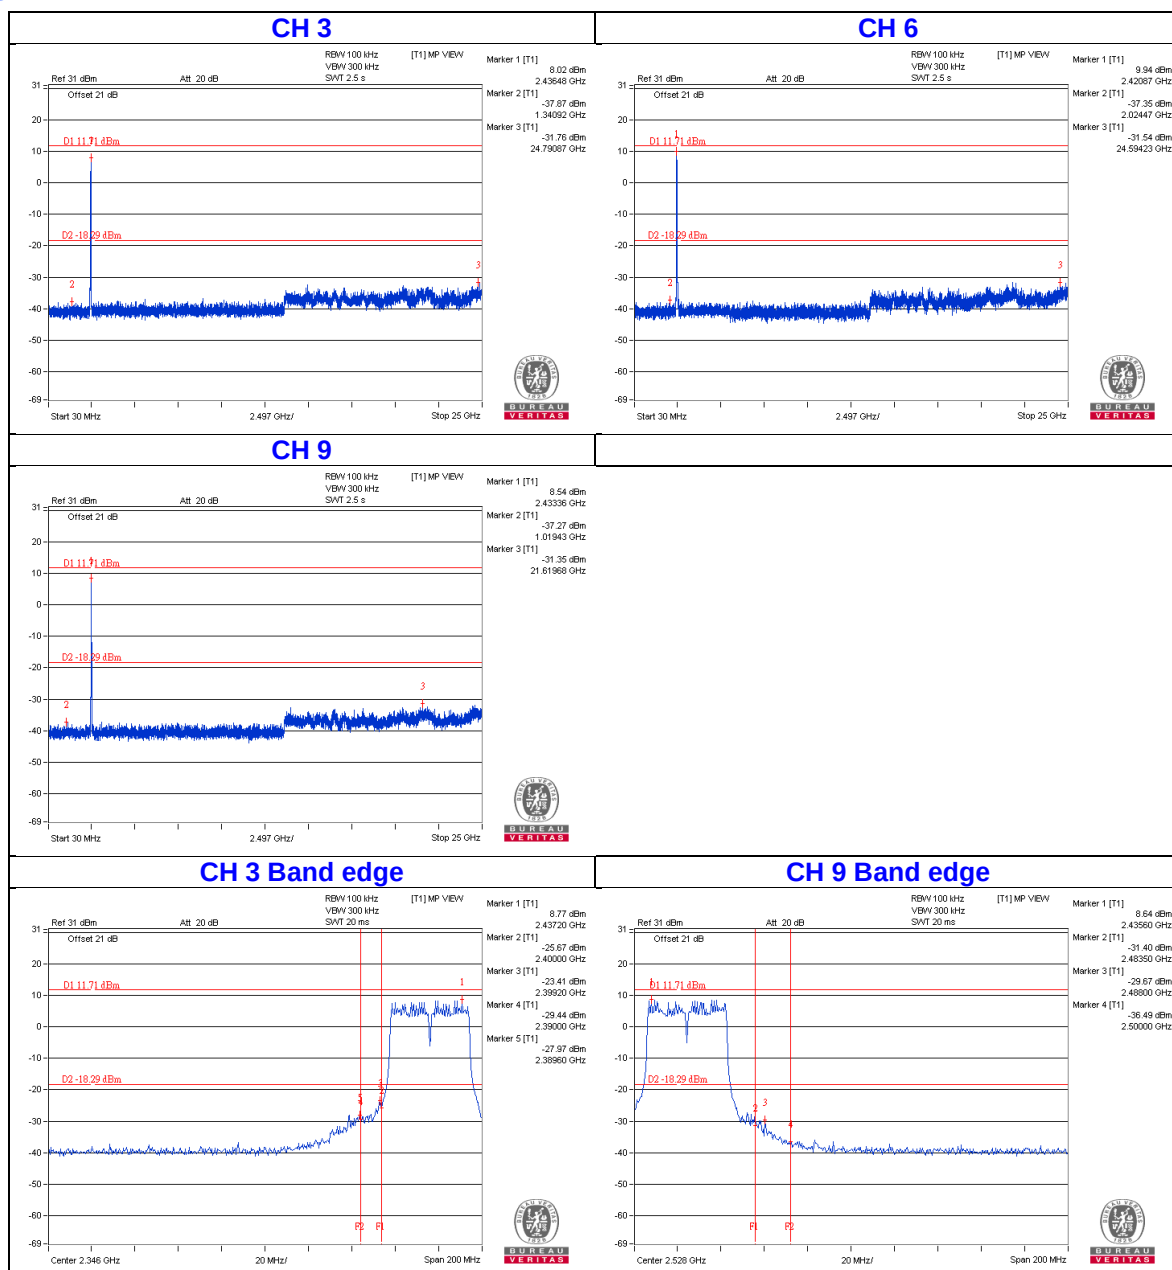

CHAIN 2

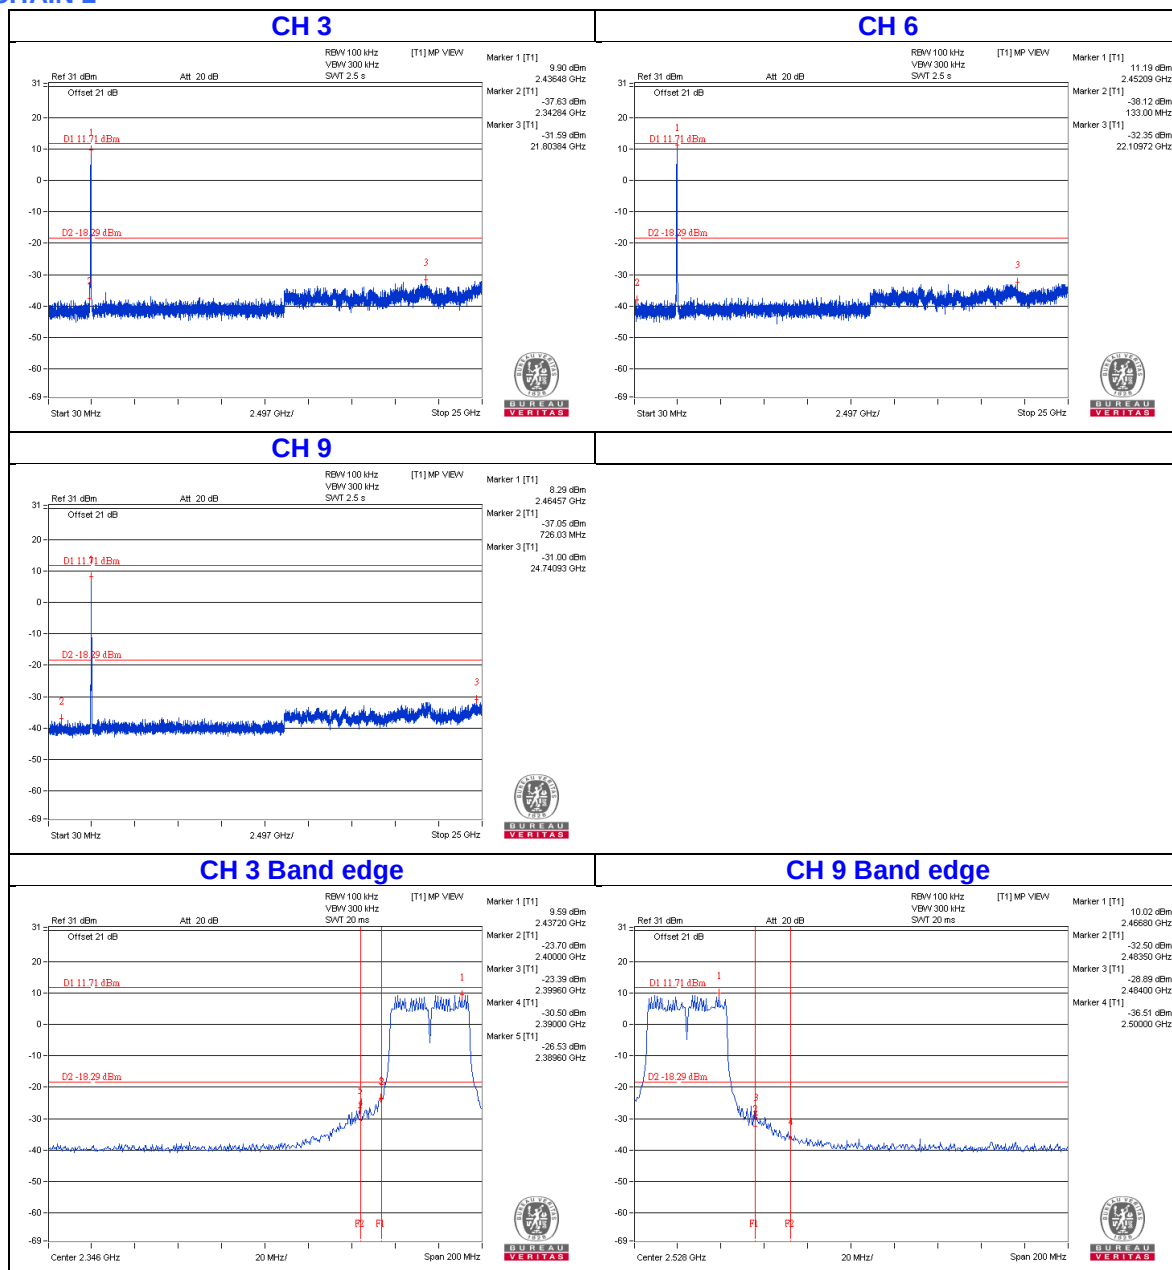

CHAIN 3

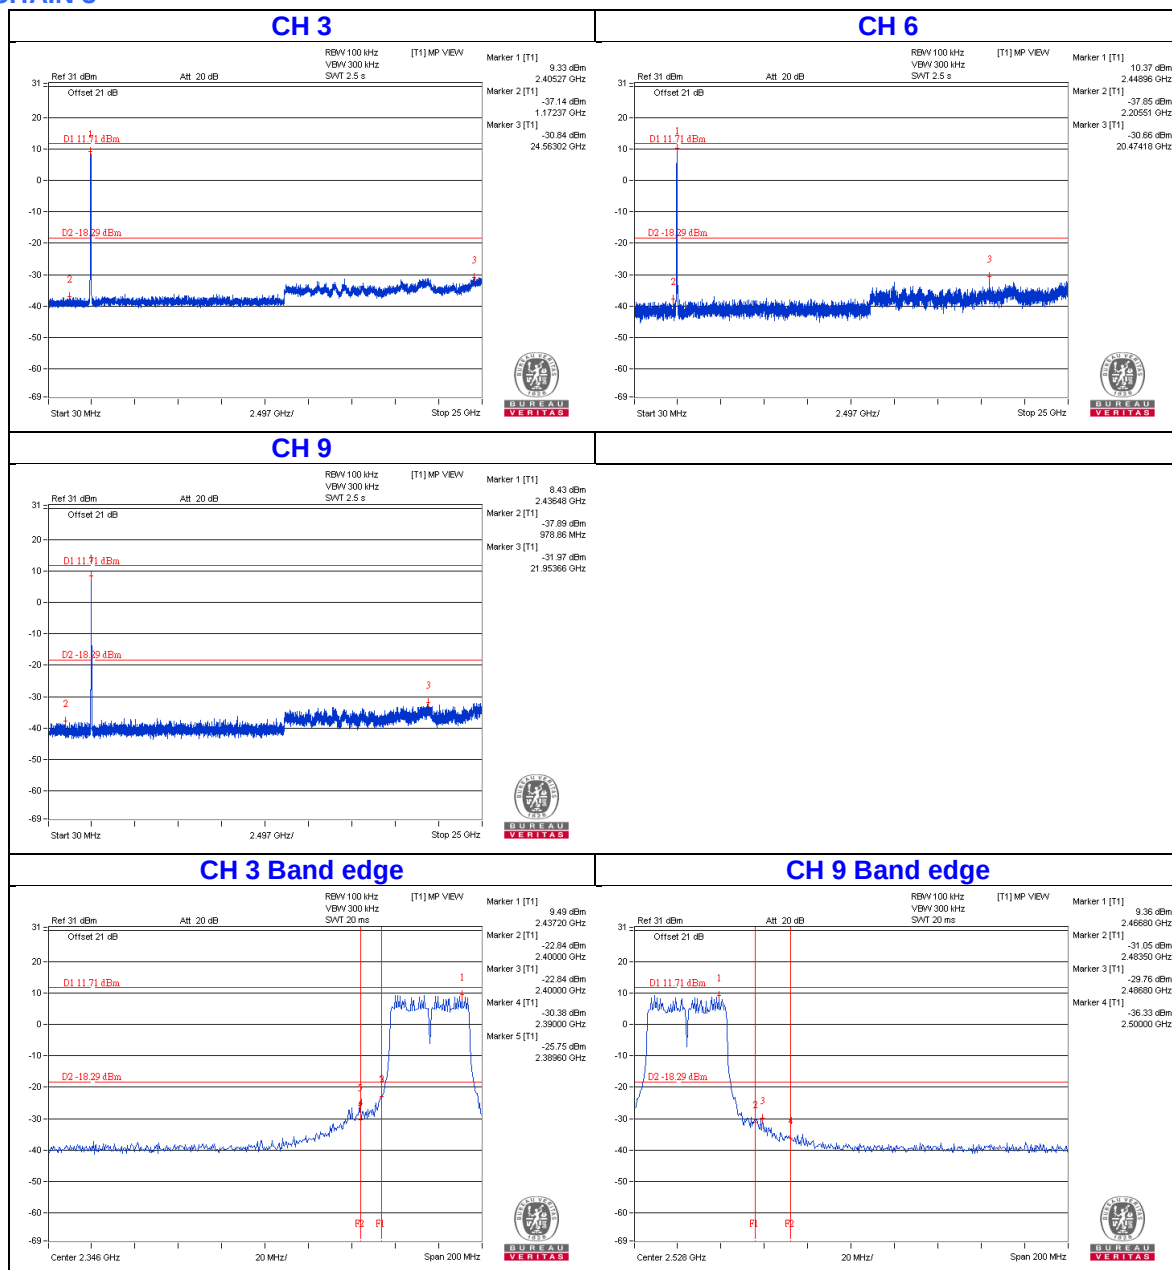

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---