



Vertical

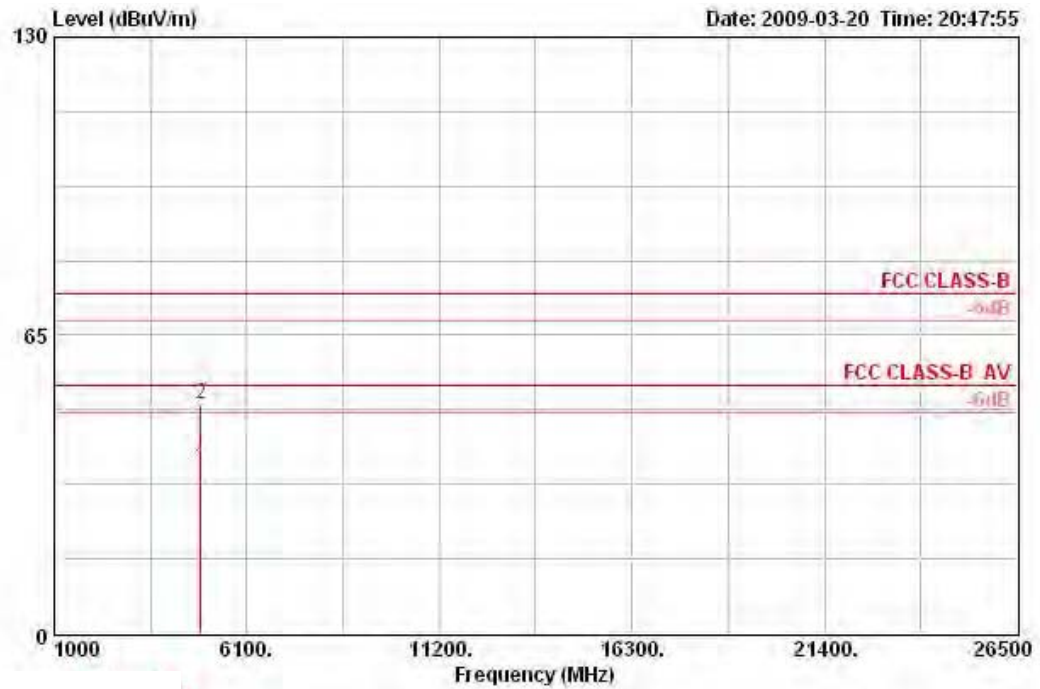

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable		Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	4874.040	36.48	-17.52	54.00	31.64	33.48	35.20	6.56	AVERAGE	0	100
2	4874.580	49.95	-24.05	74.00	45.11	33.48	35.20	6.56	PEAK	0	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 9 / Ant. A + Ant. B + Ant. C

Horizontal

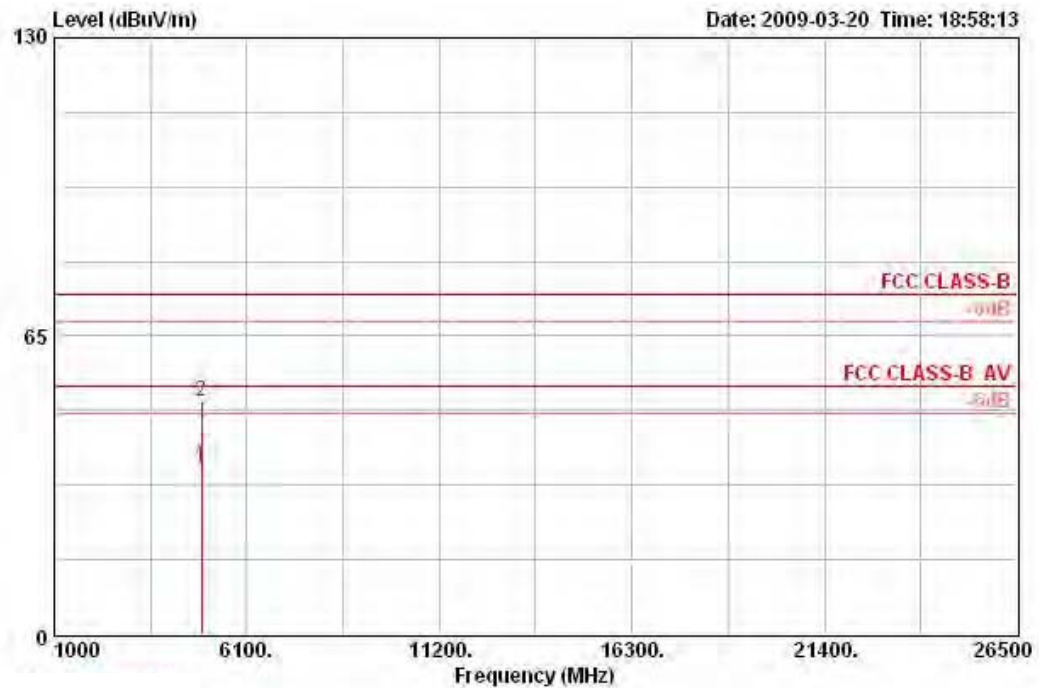

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss			Pos	Pos
			dB	dBuV/m	dBuV			dB			deg	cm
1	4902.040	36.13	-17.87	54.00	31.14	33.54	35.20	6.65	AVERAGE	HORIZONTAL	0	100
2	4905.880	50.65	-23.35	74.00	45.66	33.54	35.20	6.65	PEAK	HORIZONTAL	0	100


Vertical

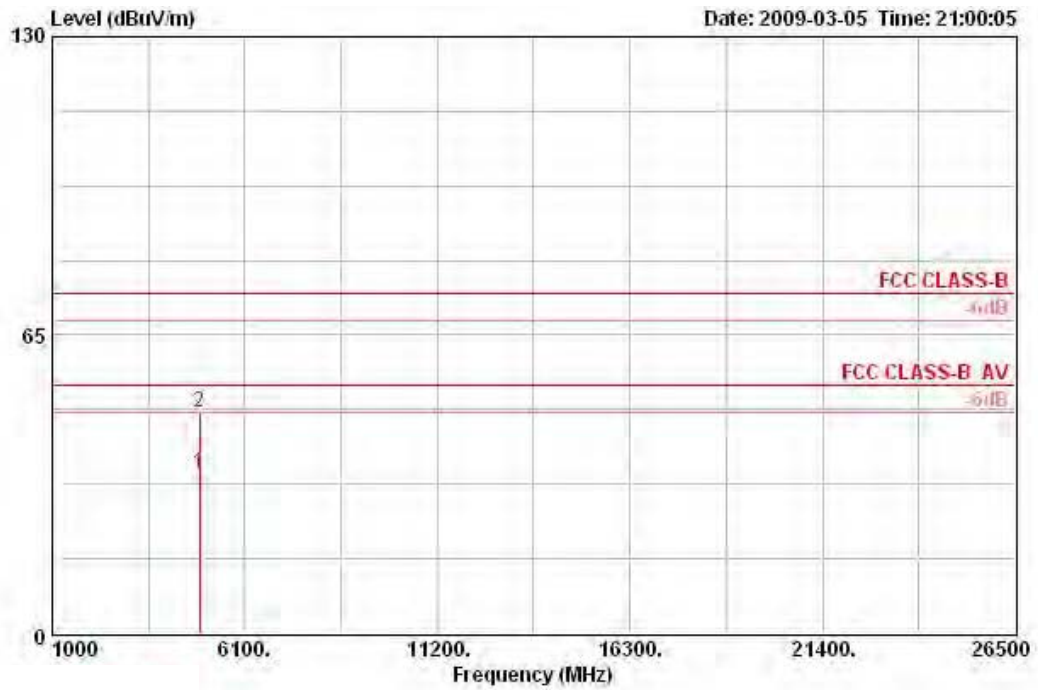

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss			Pos	Pos
			dB	dBuV/m	dBuV			dB			deg	cm
1	4901.840	34.89	-19.11	54.00	29.79	33.54	35.09	6.65	AVERAGE	VERTICAL	0	100
2	4906.360	48.32	-25.68	74.00	43.22	33.54	35.09	6.65	PEAK	VERTICAL	0	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 20MHz CH 149 / Ant. A + Ant. B + Ant. C

Horizontal

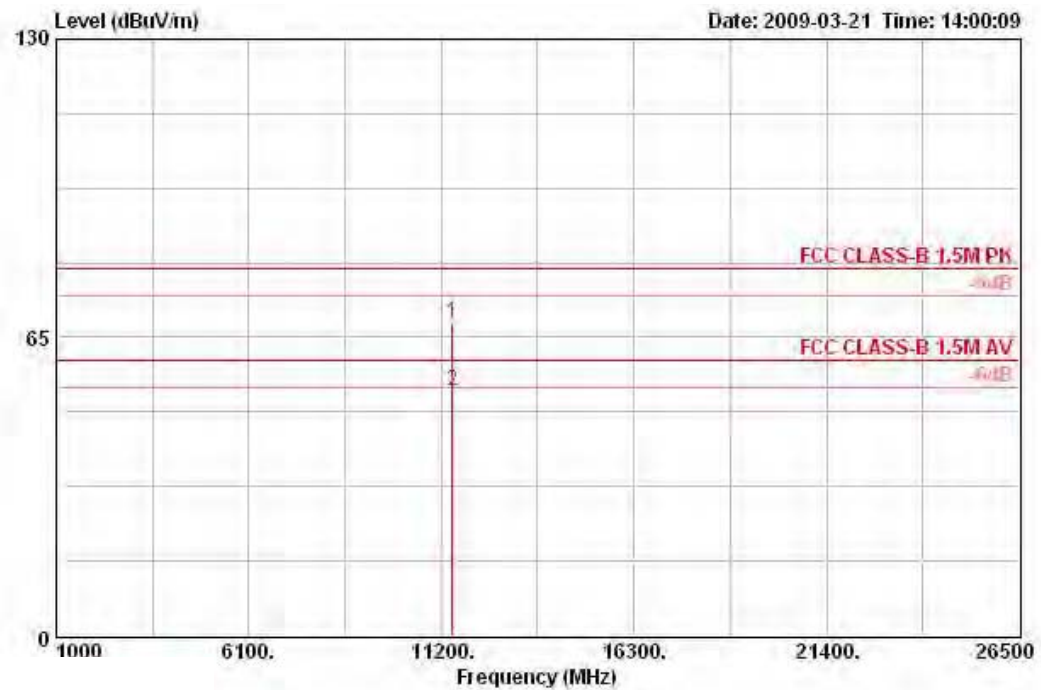

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11493.700	68.29	-11.71	80.00	52.95	39.50	35.09	10.93	PEAK	HORIZONTAL	204	119
2	11493.800	53.30	-6.70	60.00	37.96	39.50	35.09	10.93	AVERAGE	HORIZONTAL	339	119


Vertical

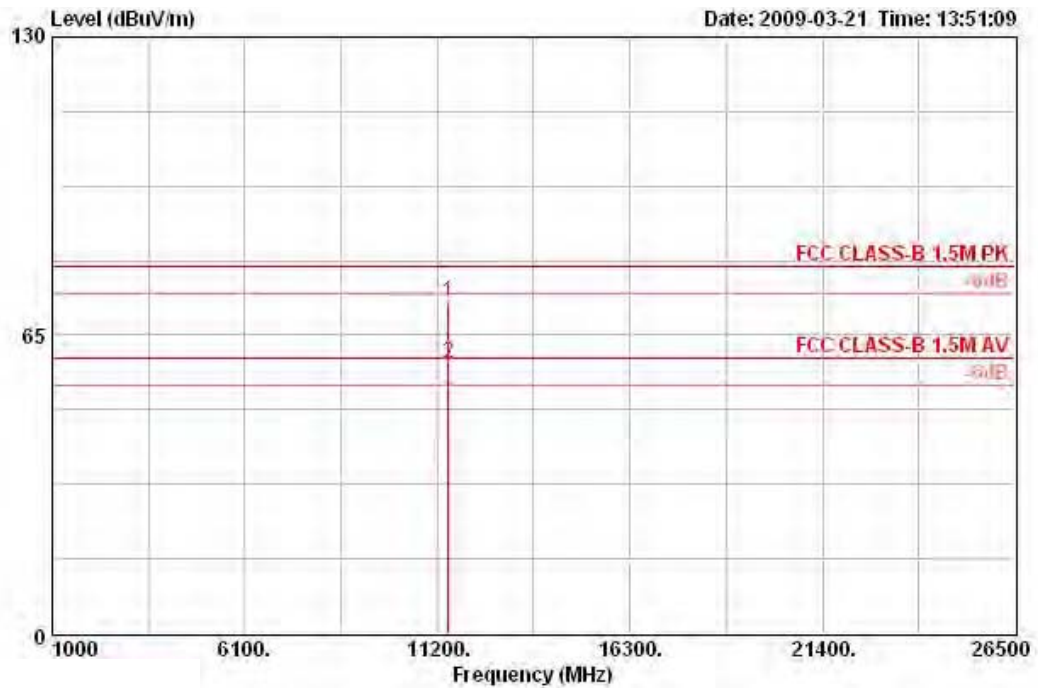

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	11491.100	72.21	-7.79	80.00	56.90	39.50	35.09	10.90 PEAK	VERTICAL	204	119
2	11491.500	58.87	-1.13	60.00	43.56	39.50	35.09	10.90 AVERAGE	VERTICAL	204	119


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 20MHz CH 157 / Ant. A + Ant. B + Ant. C

Horizontal

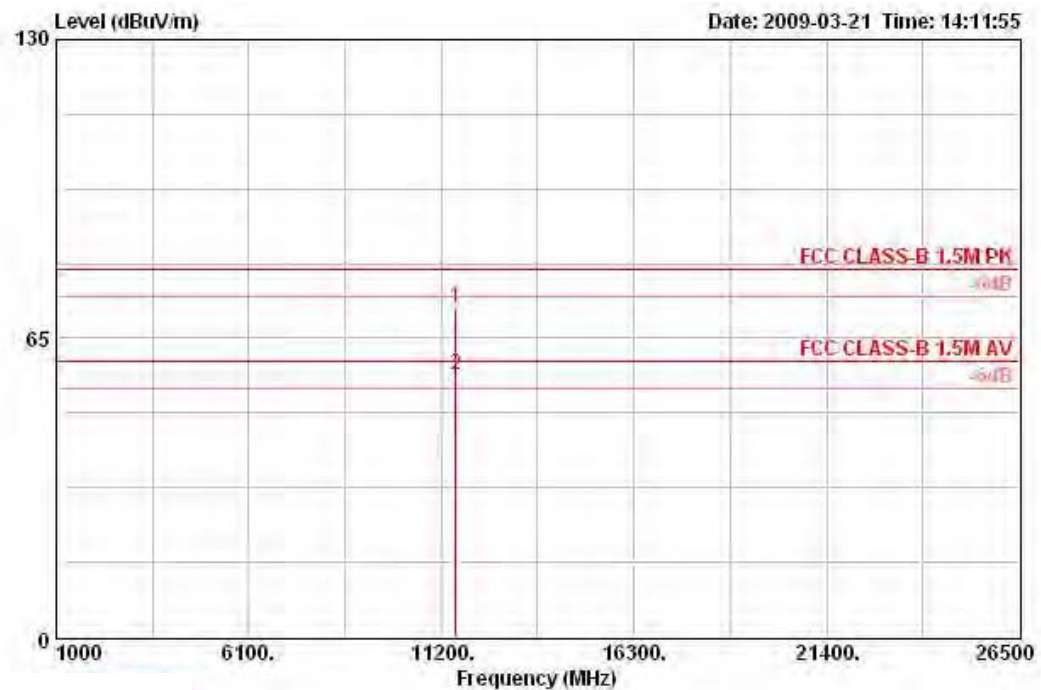

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11572.900	71.35	-8.65	80.00	56.13	39.47	35.09	10.83	PEAK	HORIZONTAL	206	118
2	11574.200	57.00	-3.00	60.00	41.79	39.47	35.09	10.83	AVERAGE	HORIZONTAL	206	118


Vertical

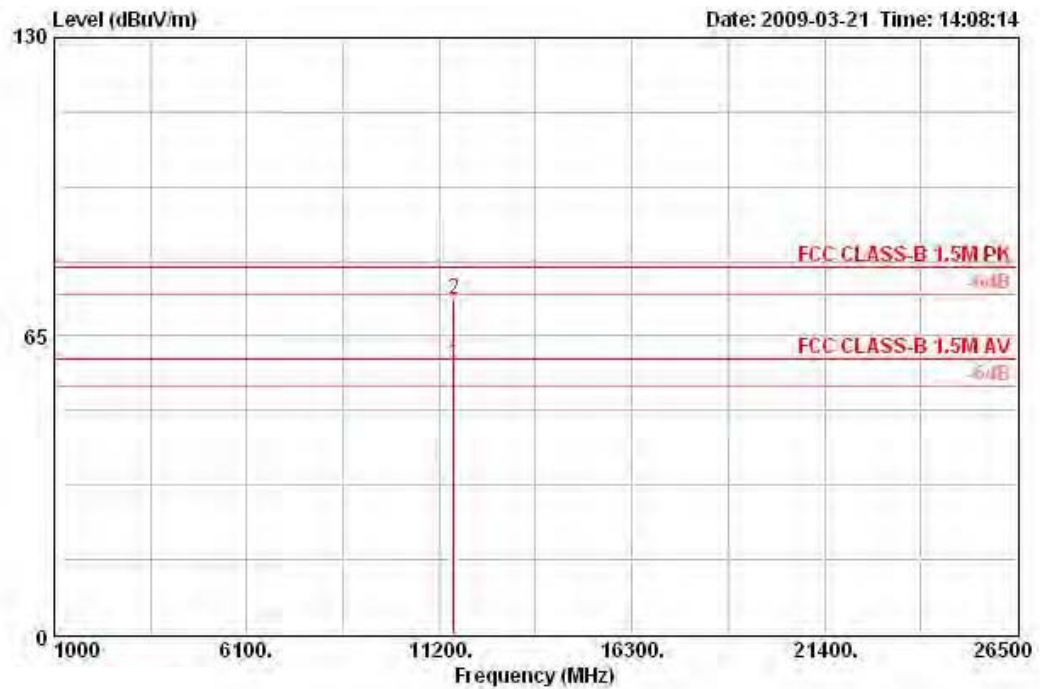

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable		Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	11574.100	59.06	-0.94	60.00	43.85	39.47	35.09	10.83	AVERAGE	342	111
2	11574.500	73.00	-7.00	80.00	57.79	39.47	35.09	10.83	PEAK	342	111


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 20MHz CH 165 / Ant. A + Ant. B + Ant. C

Horizontal

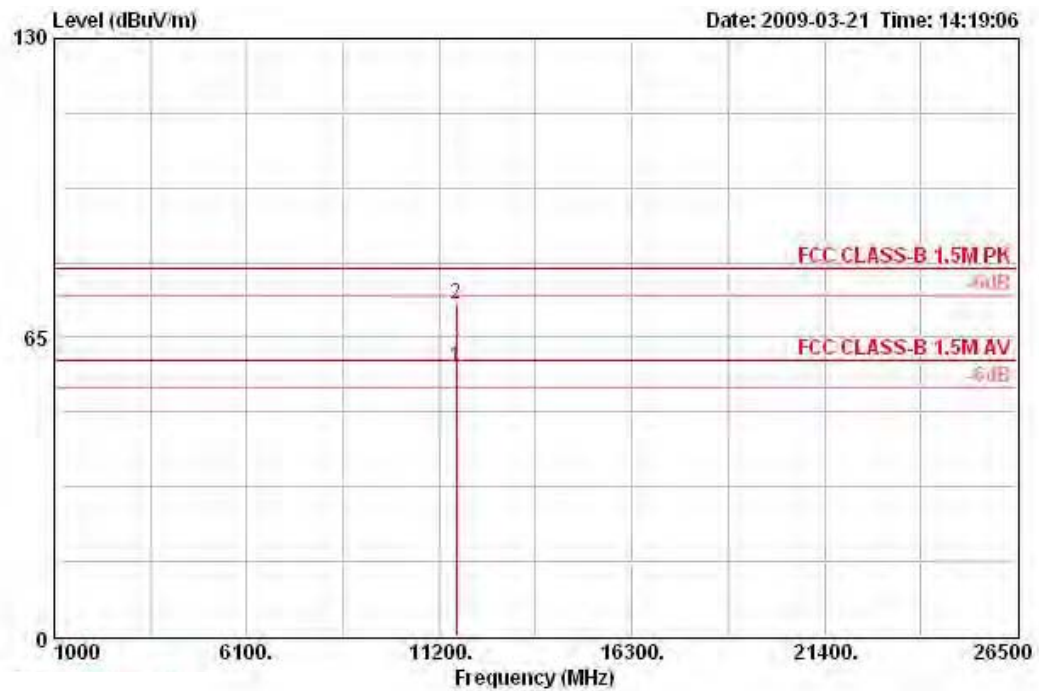

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11654.200	58.35	-1.65	60.00	43.25	39.44	35.07	10.72	AVERAGE	HORIZONTAL	204	119
2	11654.900	72.12	-7.88	80.00	57.03	39.44	35.07	10.72	PEAK	HORIZONTAL	204	119


Vertical

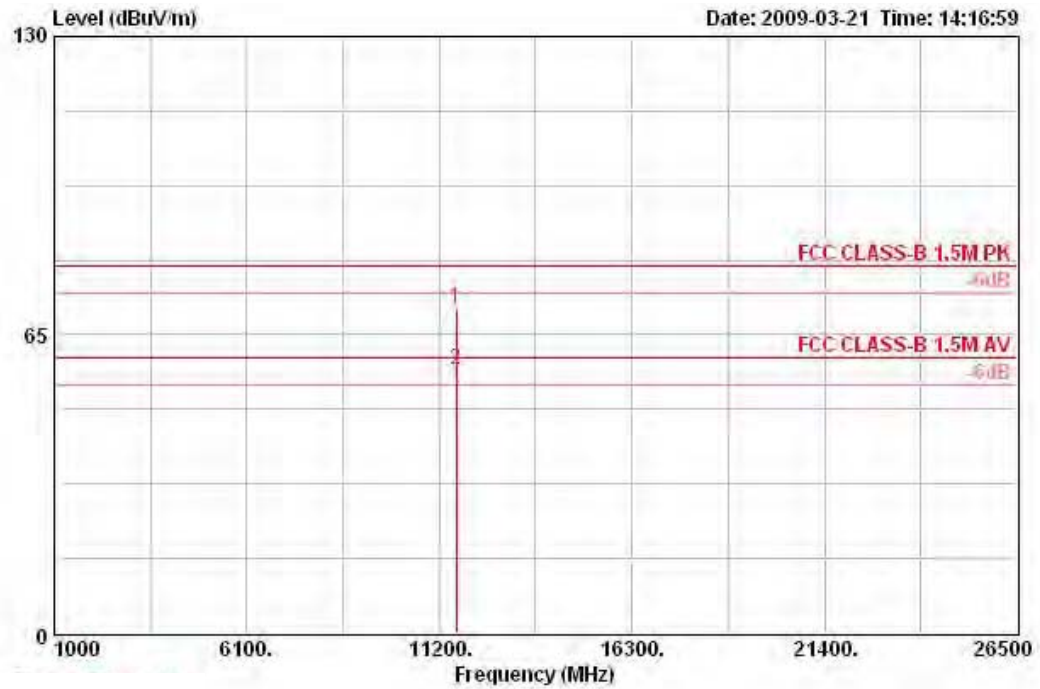

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	11652.600	70.92	-9.08	80.00	55.83	39.44	35.07	10.72 PEAK	VERTICAL	67	112
2	11652.900	57.46	-2.54	60.00	42.36	39.44	35.07	10.72 AVERAGE	VERTICAL	67	112


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 40MHz CH 151 / Ant. A + Ant. B + Ant. C

Horizontal

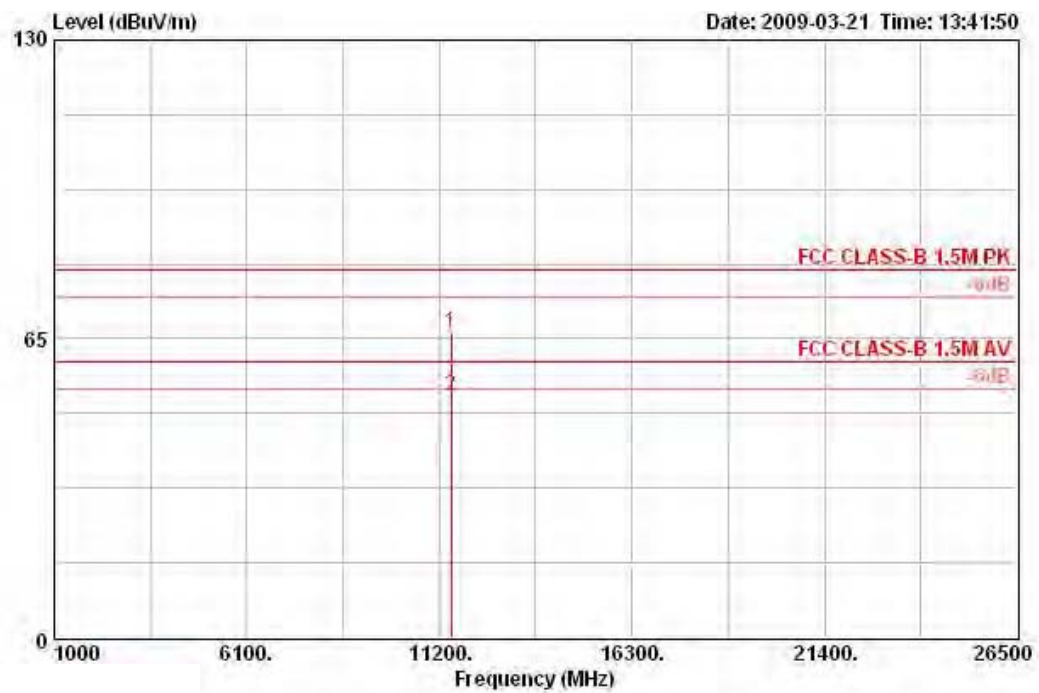

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11508.800	66.32	-13.68	80.00	50.99	39.50	35.10	10.93	PEAK	HORIZONTAL	154	114
2	11509.640	52.71	-7.29	60.00	37.38	39.50	35.10	10.93	AVERAGE	HORIZONTAL	154	114


Vertical

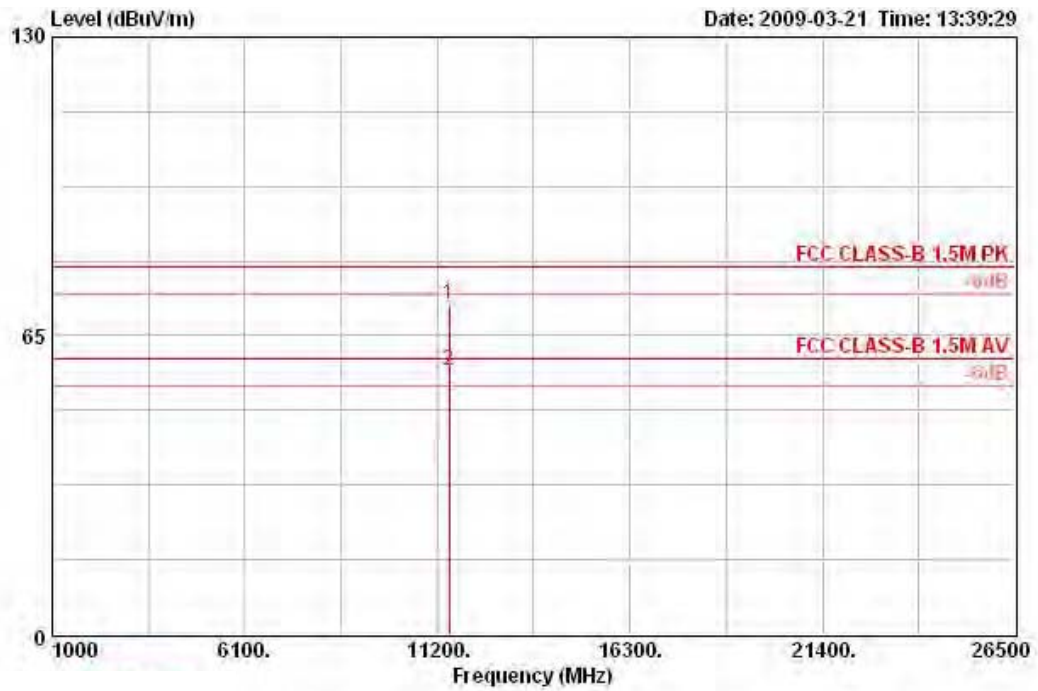

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	11510.120	71.94	-8.06	80.00	56.61	39.50	35.10	10.93	PEAK	VERTICAL	342 108
2	11510.240	57.31	-2.69	60.00	41.98	39.50	35.10	10.93	AVERAGE	VERTICAL	342 108


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 40MHz CH 159 / Ant. A + Ant. B + Ant. C

Horizontal

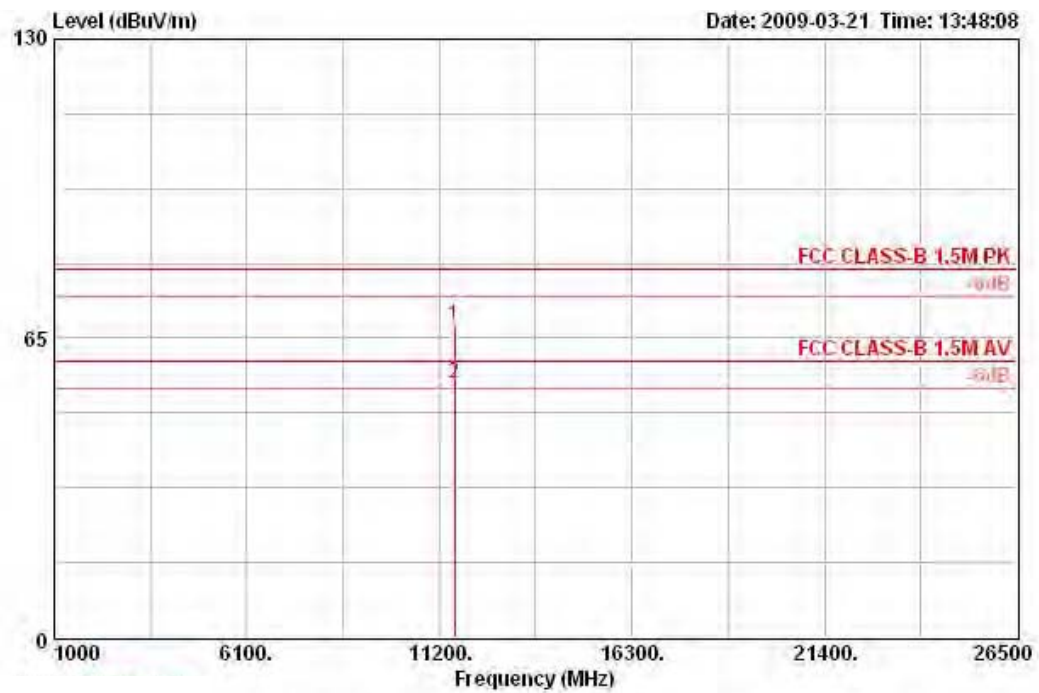

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	11597.500	67.72	-12.28	80.00	52.55	39.47	35.08	10.79	PEAK	HORIZONTAL	153	115
2 @	11597.700	55.05	-4.95	60.00	39.88	39.47	35.08	10.79	AVERAGE	HORIZONTAL	153	115


Vertical

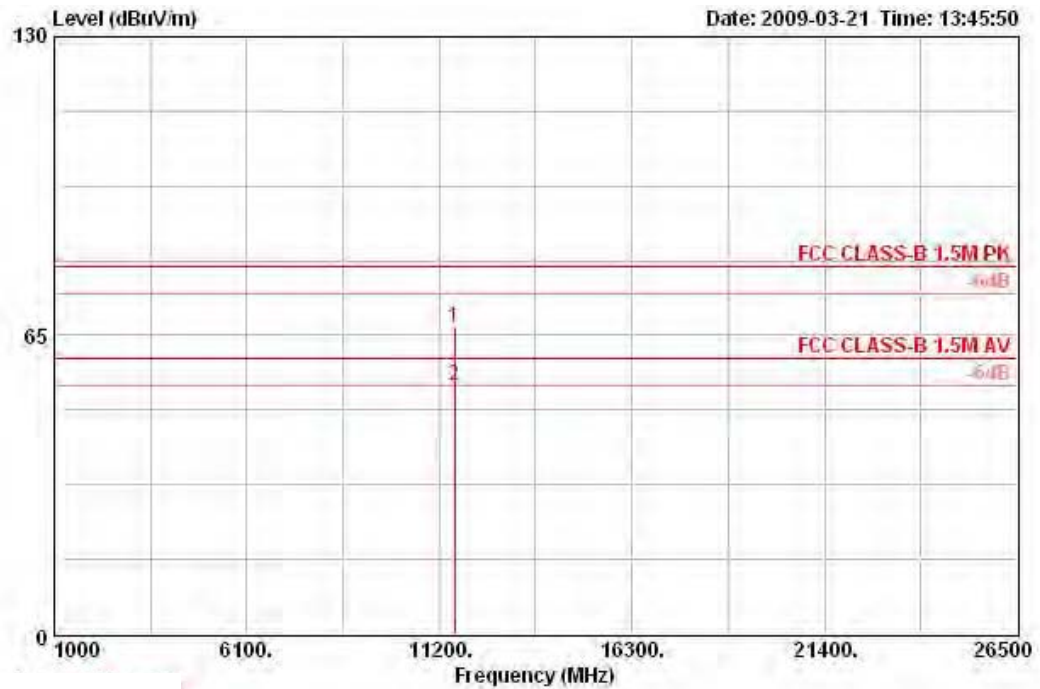

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11595.600	66.65	-13.35	80.00	51.47	39.47	35.08	10.79	PEAK	VERTICAL	78	120
2	11597.400	53.91	-6.09	60.00	38.73	39.47	35.08	10.79	AVERAGE	VERTICAL	78	120


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1 / Ant. A + Ant. B + Ant. C

Horizontal

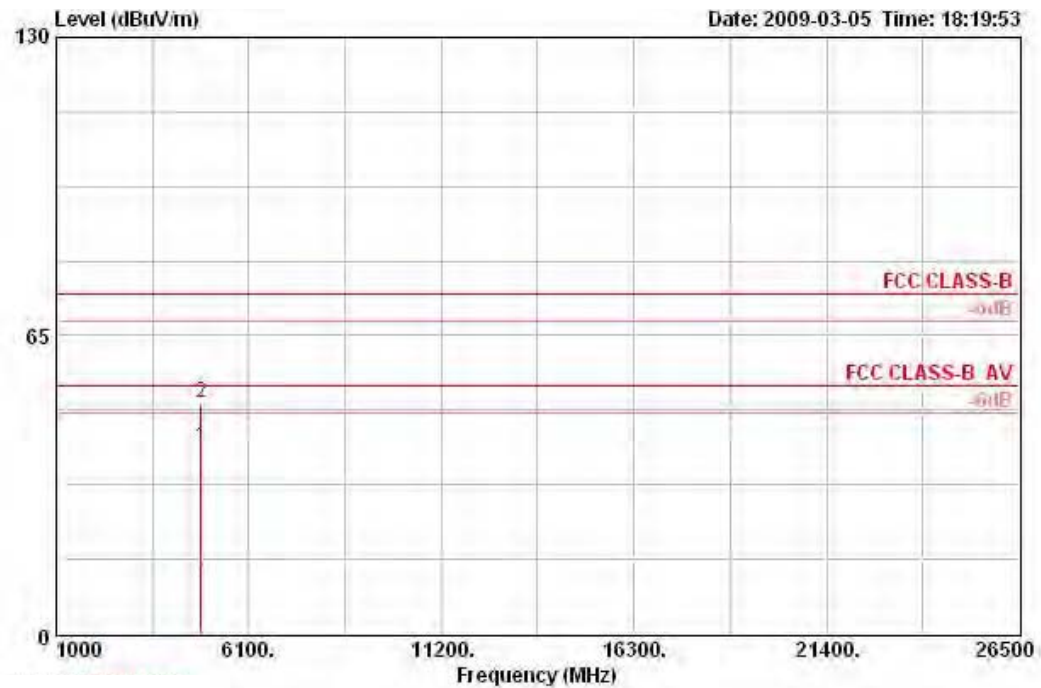

	Freq	Level	Over	Limit	ReadAntenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1 B	4823.990	40.87	-13.13	54.00	36.35	33.39	35.26	6.39	AVERAGE	HORIZONTAL	138
2	4824.000	50.31	-23.69	74.00	45.79	33.39	35.26	6.39	PEAK	HORIZONTAL	138


Vertical

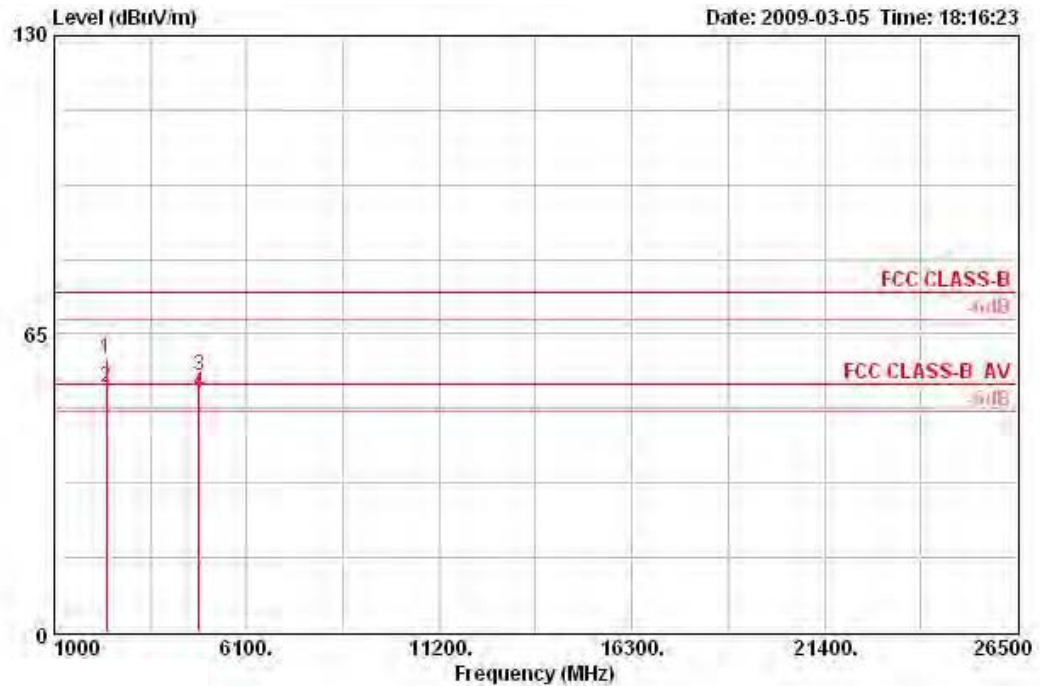

	Freq	Level	Over	Limit	ReadAntenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	2378.210	59.65	-14.35	74.00	62.74	28.01	35.01	3.90	PEAK	168	173
2	2378.780	53.18	-0.82	54.00	56.28	28.01	35.01	3.90	AVERAGE	168	173
3	4824.000	55.86	-18.14	74.00	51.34	33.39	35.26	6.39	PEAK	359	134
4	4824.010	52.20	-1.80	54.00	47.68	33.39	35.26	6.39	AVERAGE	359	134


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 6 / Ant. A + Ant. B + Ant. C

Horizontal

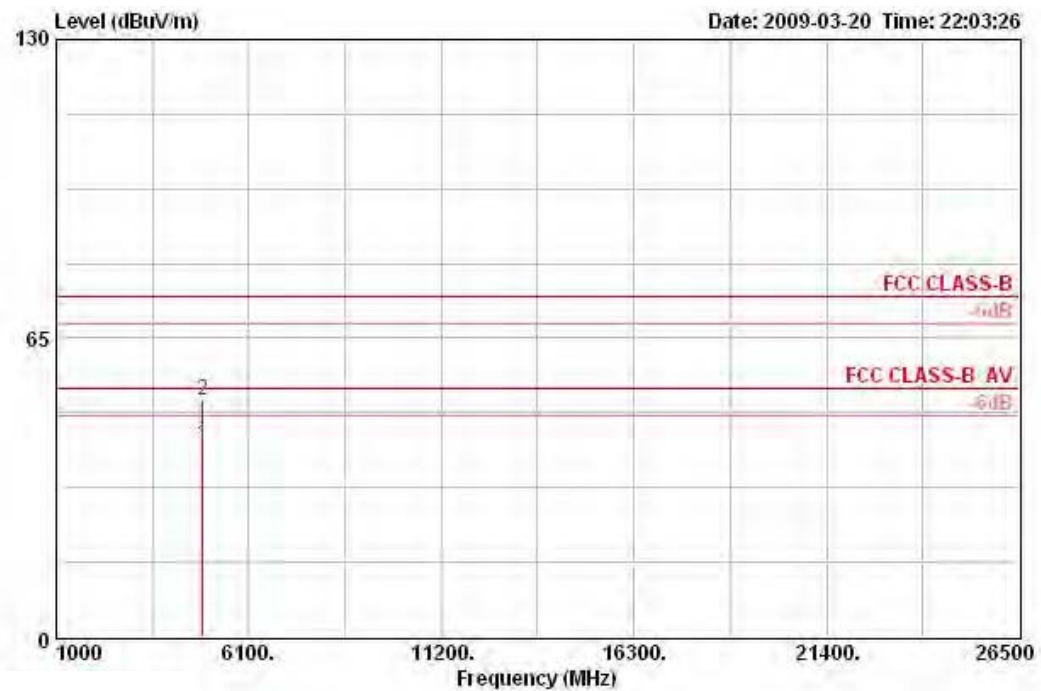

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	4874.010	41.72	-12.28	54.00	36.88	33.48	35.20	6.56 AVERAGE	HORIZONTAL	85	106
2	4874.120	51.52	-22.48	74.00	46.67	33.48	35.20	6.56 PEAK	HORIZONTAL	85	106


Vertical

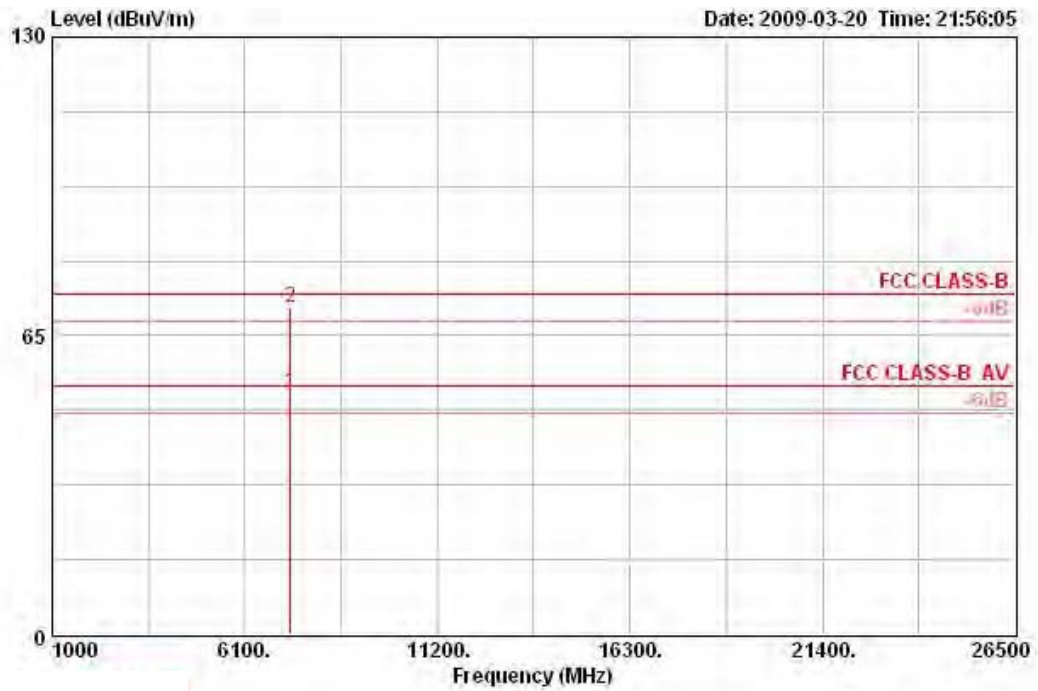

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	7311.730	52.67	-1.33	54.00	43.58	36.50	35.42	8.01 AVERAGE	VERTICAL	143	100
2	7312.340	71.11	-2.89	74.00	62.03	36.50	35.42	8.01 PEAK	VERTICAL	143	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 11 / Ant. A + Ant. B + Ant. C

Horizontal

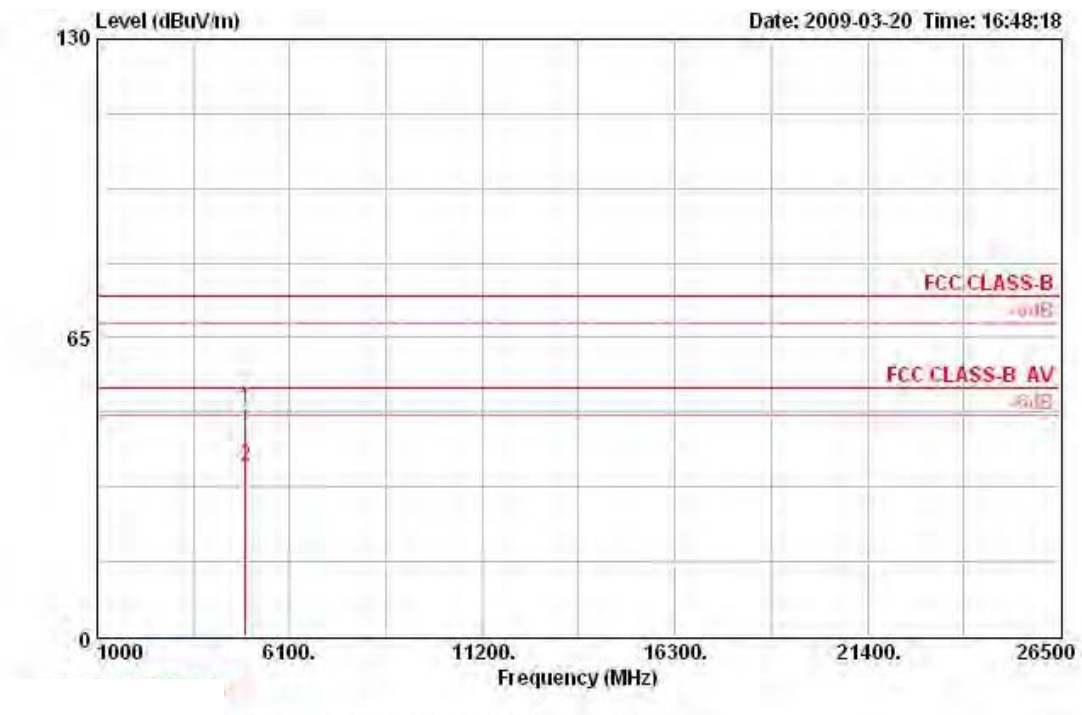

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4923.510	49.65	-24.35	74.00	44.54	33.58	35.20	6.73	PEAK	HORIZONTAL	86	100
2	4924.170	36.92	-17.08	54.00	31.81	33.58	35.20	6.73	AVERAGE	HORIZONTAL	86	100


Vertical

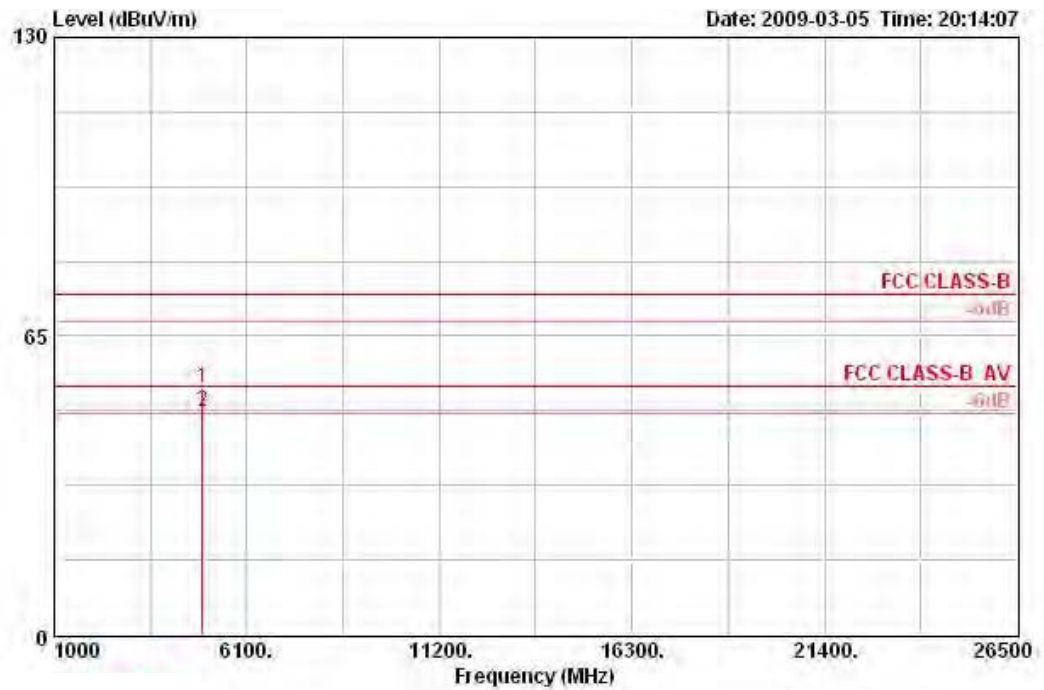

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	dB	dBuV/m	Level	Factor	Factor	Loss	Remark	Pos	Pos
					dBuV	dB/m	dB	dB		deg	cm
1	4923.900	53.82	-20.18	74.00	48.55	33.58	35.03	6.73	PEAK	288	118
2	4924.010	48.34	-5.66	54.00	43.07	33.58	35.03	6.73	AVERAGE	288	118


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1 / Ant. A + Ant. B + Ant. C

Horizontal

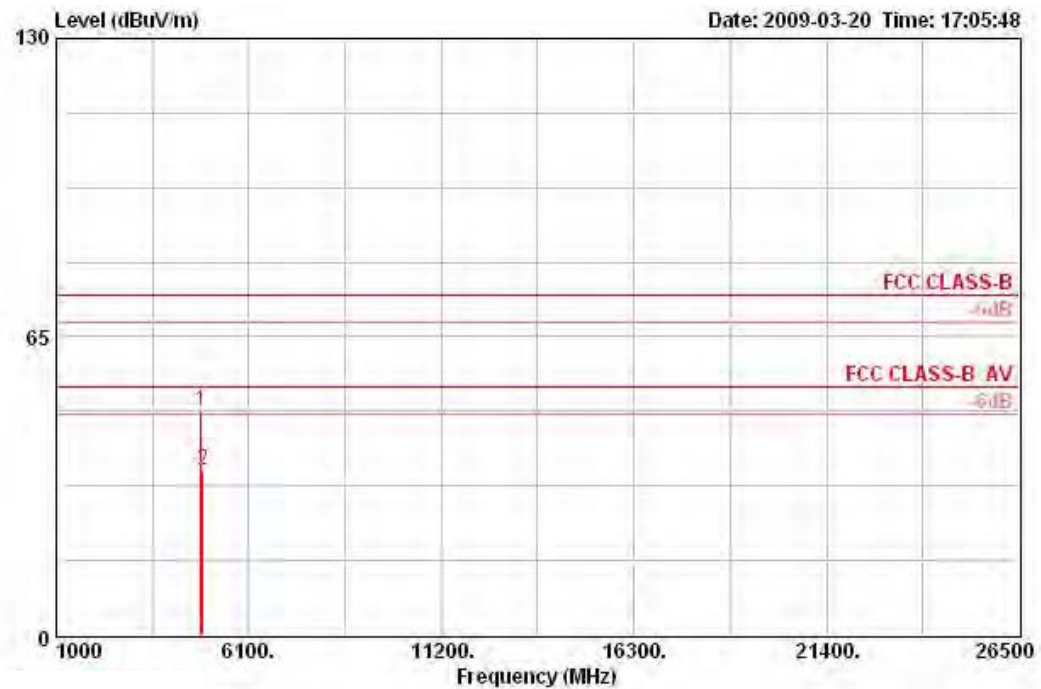

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4845.000	48.92	-25.08	74.00	44.23	33.42	35.20	6.47	PEAK	HORIZONTAL	0	100
2	4874.000	35.94	-18.06	54.00	31.10	33.48	35.20	6.56	AVERAGE	HORIZONTAL	0	100


Vertical

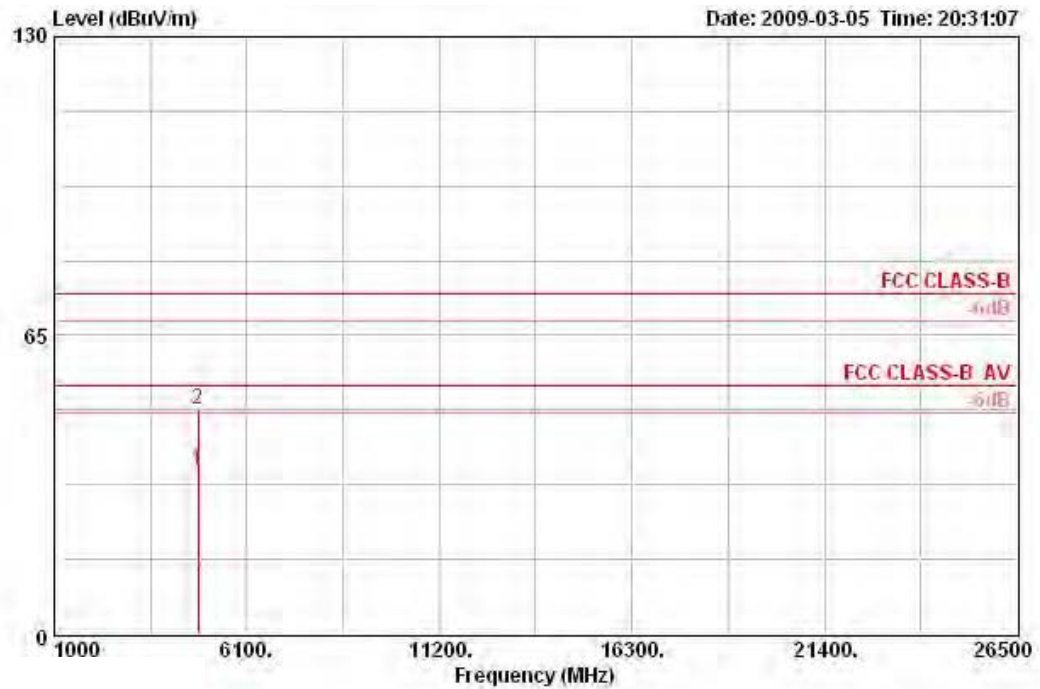

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4821.670	35.50	-18.50	54.00	30.98	33.39	35.26	6.39	AVERAGE	VERTICAL	336	100
2	4822.150	49.00	-25.00	74.00	44.48	33.39	35.26	6.39	PEAK	VERTICAL	336	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 6 / Ant. A + Ant. B + Ant. C

Horizontal

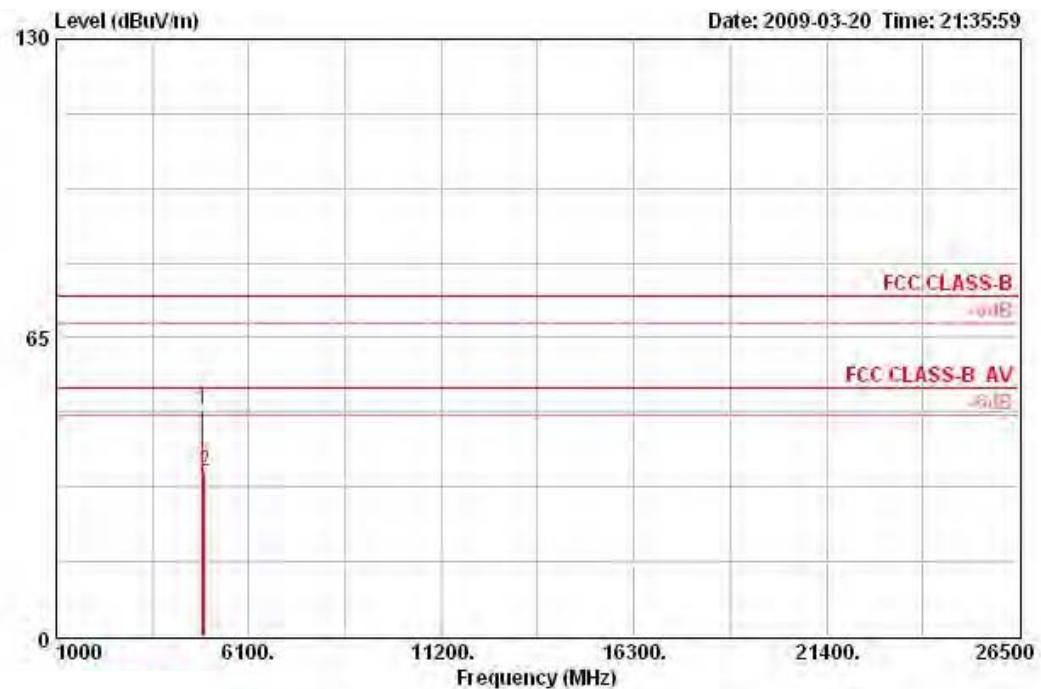

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4875.800	49.39	-24.61	74.00	44.55	33.48	35.20	6.56	PEAK	HORIZONTAL	360	100
2	4921.800	35.78	-18.22	54.00	30.67	33.58	35.20	6.73	AVERAGE	HORIZONTAL	360	100


Vertical

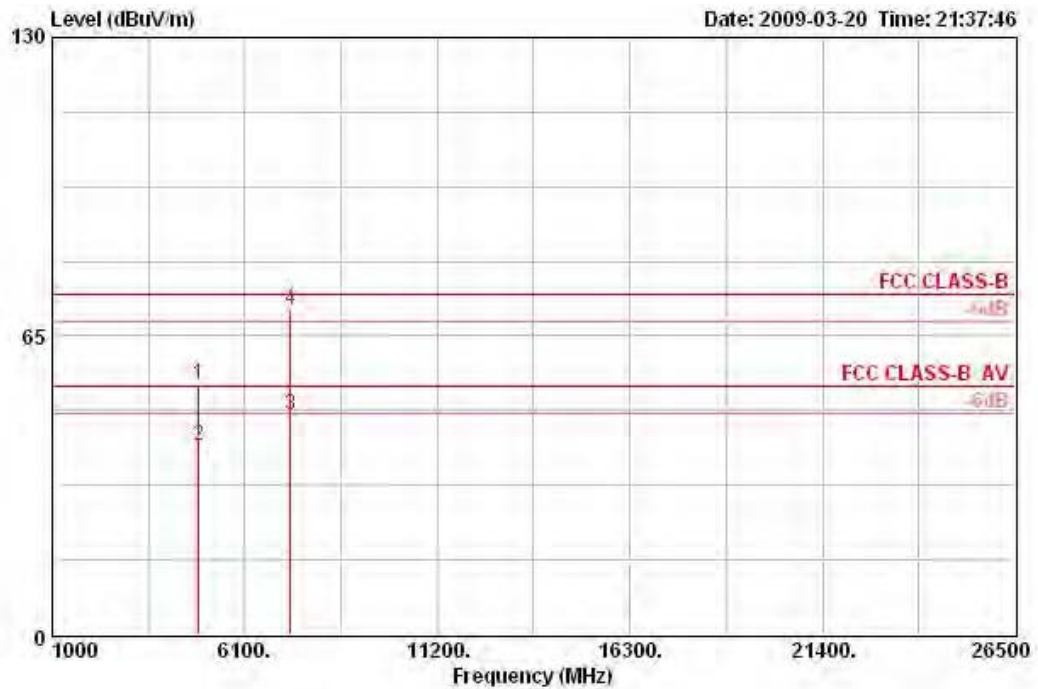

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB			deg	cm
1	4873.410	54.27	-19.73	74.00	49.42	33.48	35.20	6.56 Peak	VERTICAL	135	100
2	4873.490	40.93	-13.07	54.00	36.08	33.48	35.20	6.56 AVERAGE	VERTICAL	135	100
3	7312.200	47.79	-6.21	54.00	38.70	36.50	35.42	8.01 AVERAGE	VERTICAL	135	100
4	7313.590	70.70	-3.30	74.00	61.62	36.50	35.42	8.01 PEAK	VERTICAL	135	100


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 11 / Ant. A + Ant. B + Ant. C

Horizontal

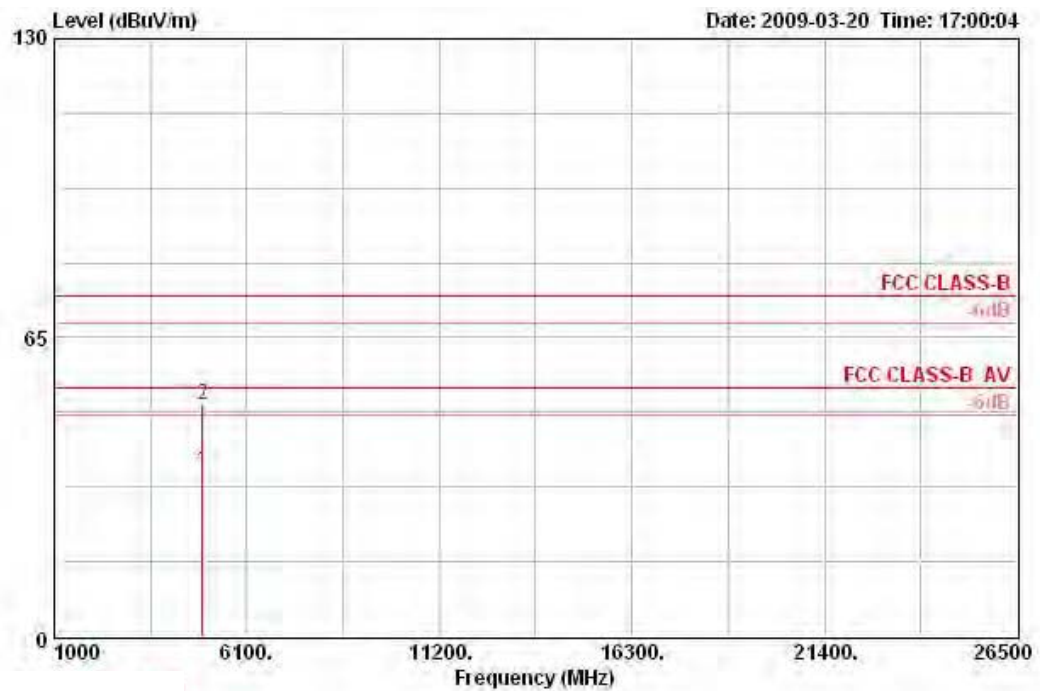

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable	Remark	Pol/Phase	Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss			Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4921.500	35.77	-18.23	54.00	30.66	33.58	35.20	6.73	AVERAGE	HORIZONTAL	360	100
2	4925.190	50.52	-23.48	74.00	45.41	33.58	35.20	6.73	PEAK	HORIZONTAL	360	100


Vertical

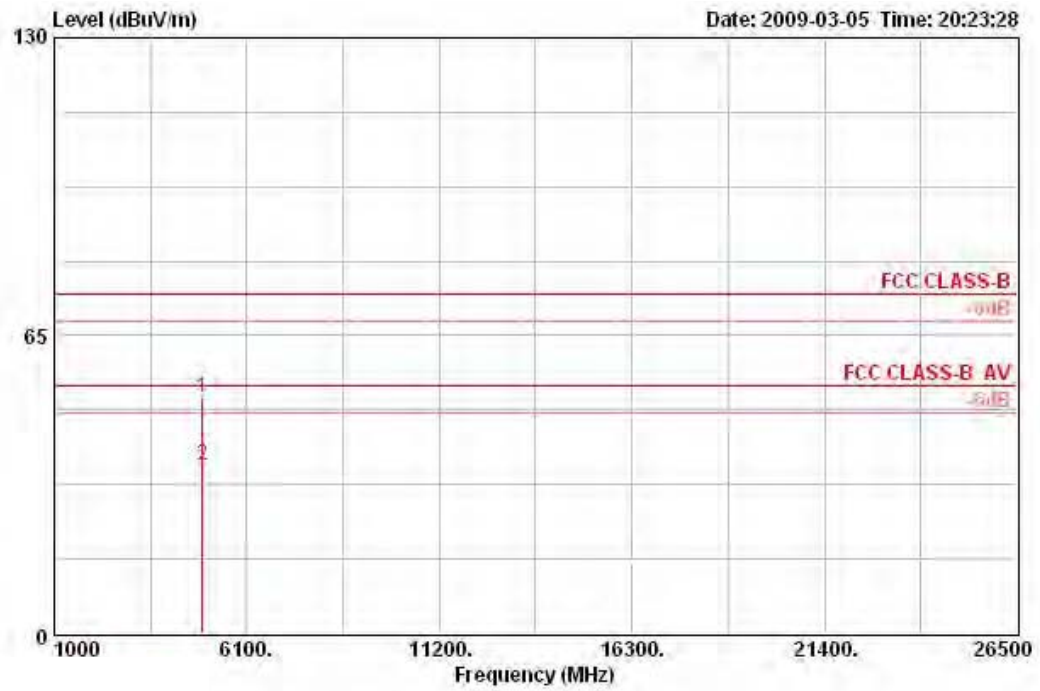

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	4924.350	51.39	-22.61	74.00	46.11	33.58	35.03	6.73	PEAK	VERTICAL	288	118
2	4924.910	36.81	-17.19	54.00	31.53	33.58	35.03	6.73	AVERAGE	VERTICAL	288	118


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 149 / Ant. A + Ant. B + Ant. C

Horizontal

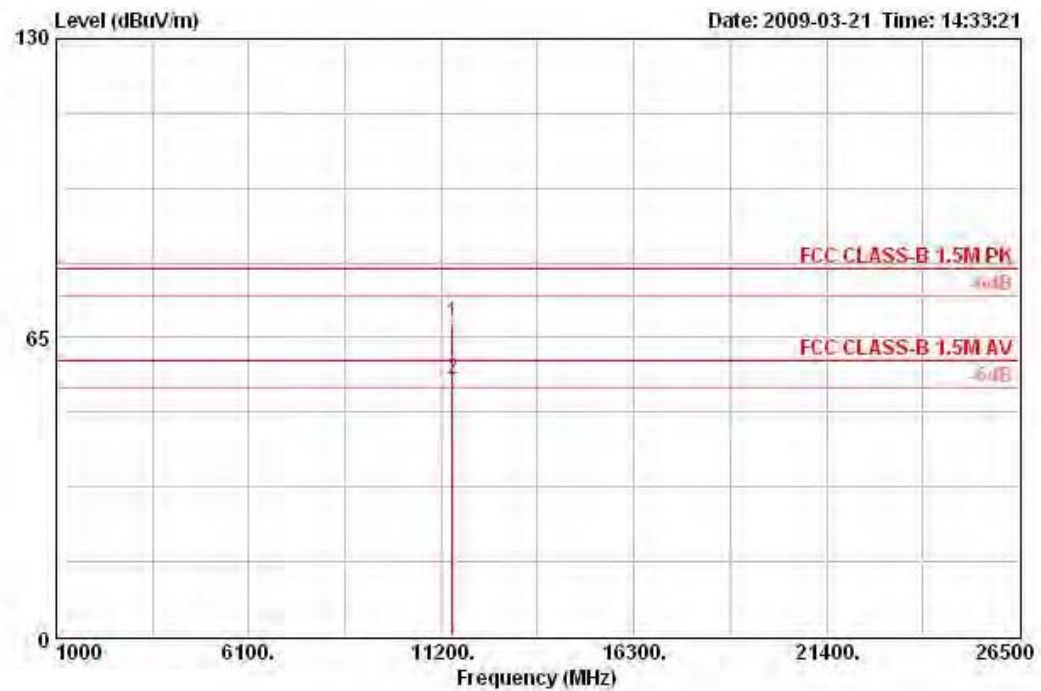

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11490.100	68.12	-11.88	80.00	52.81	39.50	35.09	10.90	PEAK	HORIZONTAL	205	120
2	11491.400	56.02	-3.98	60.00	40.71	39.50	35.09	10.90	AVERAGE	HORIZONTAL	205	120


Vertical

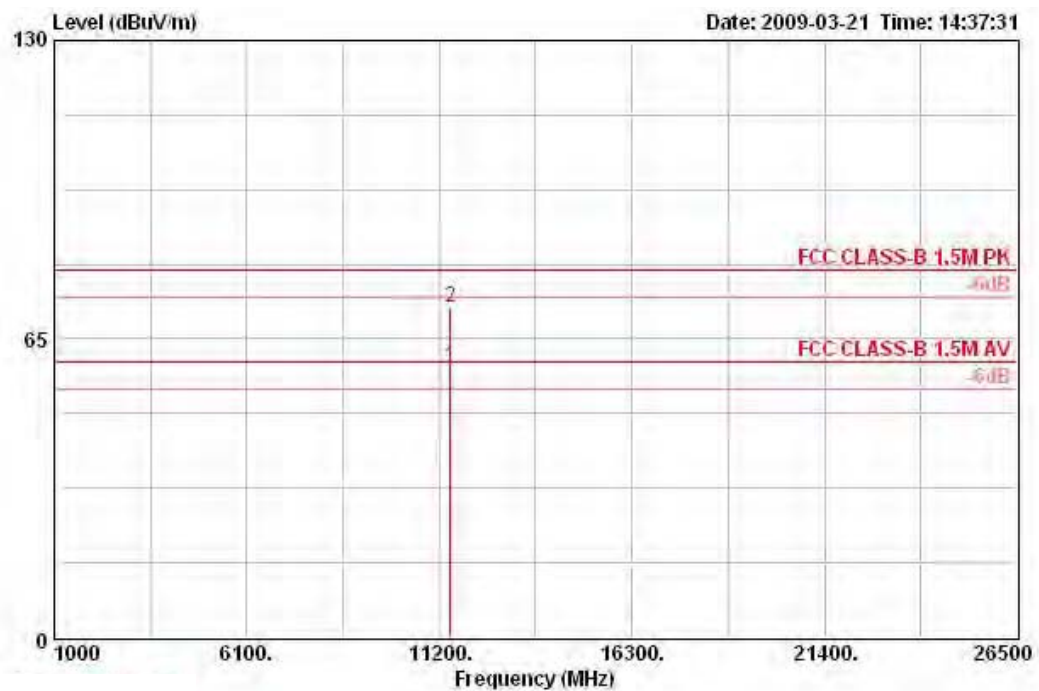

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11492.700	59.06	-0.94	60.00	43.75	39.50	35.09	10.90	AVERAGE	VERTICAL	342	108
2	11492.800	71.90	-8.10	80.00	56.59	39.50	35.09	10.90	PEAK	VERTICAL	342	108


Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 157 / Ant. A + Ant. B + Ant. C

Horizontal

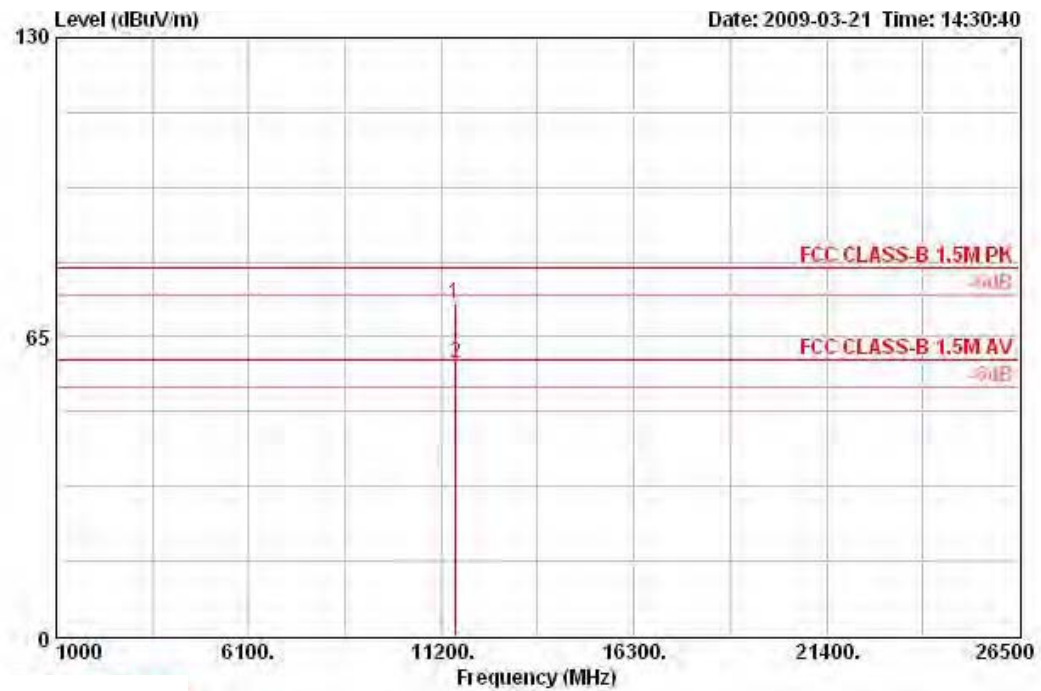

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11562.600	72.20	-7.80	80.00	56.95	39.48	35.09	10.86	PEAK	HORIZONTAL	153	107
2	11573.000	59.27	-0.73	60.00	44.06	39.47	35.09	10.83	AVERAGE	HORIZONTAL	153	107


Vertical

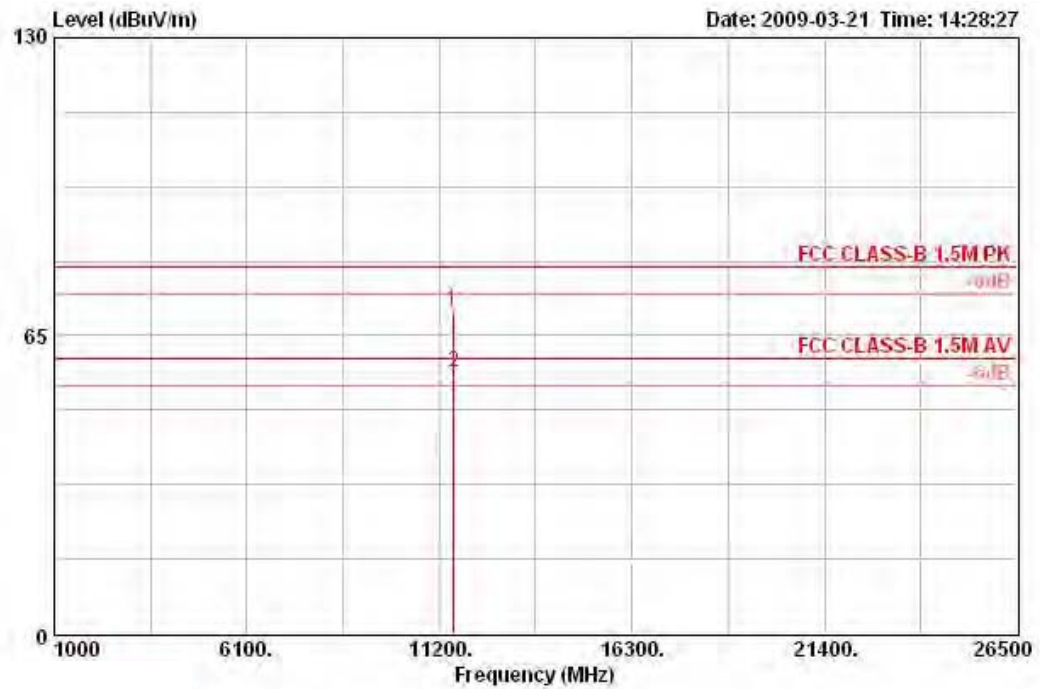

	Freq	Level	Over	Limit	Read	Antenna	Preamp	Cable			Table	Ant
	MHz	dBuV/m	Limit	Line	Level	Factor	Factor	Loss	Remark	Pol/Phase	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11564.900	70.20	-9.80	80.00	54.94	39.48	35.09	10.86	PEAK	VERTICAL	78	103
2	11572.900	57.11	-2.89	60.00	41.90	39.47	35.09	10.83	AVERAGE	VERTICAL	78	8960

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 165 / Ant. A + Ant. B + Ant. C

Horizontal

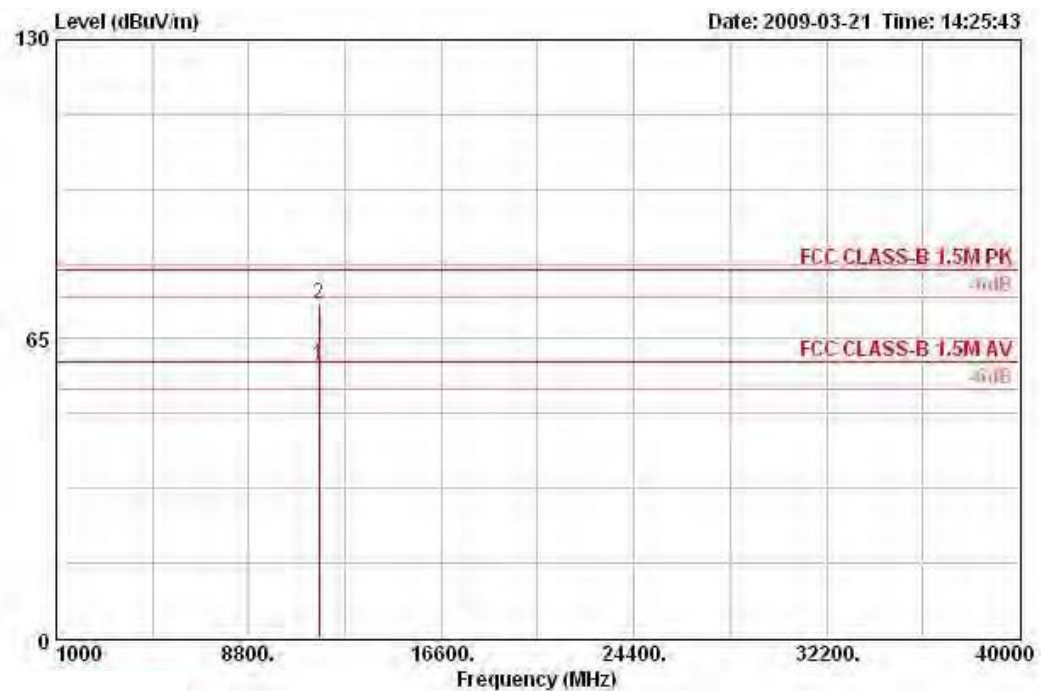

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	11653.000	59.42	-0.58	60.00	44.32	39.44	35.07	10.72	AVERAGE	HORIZONTAL	204	119
2	11653.300	72.44	-7.56	80.00	57.35	39.44	35.07	10.72	PEAK	HORIZONTAL	204	119