


Vertical

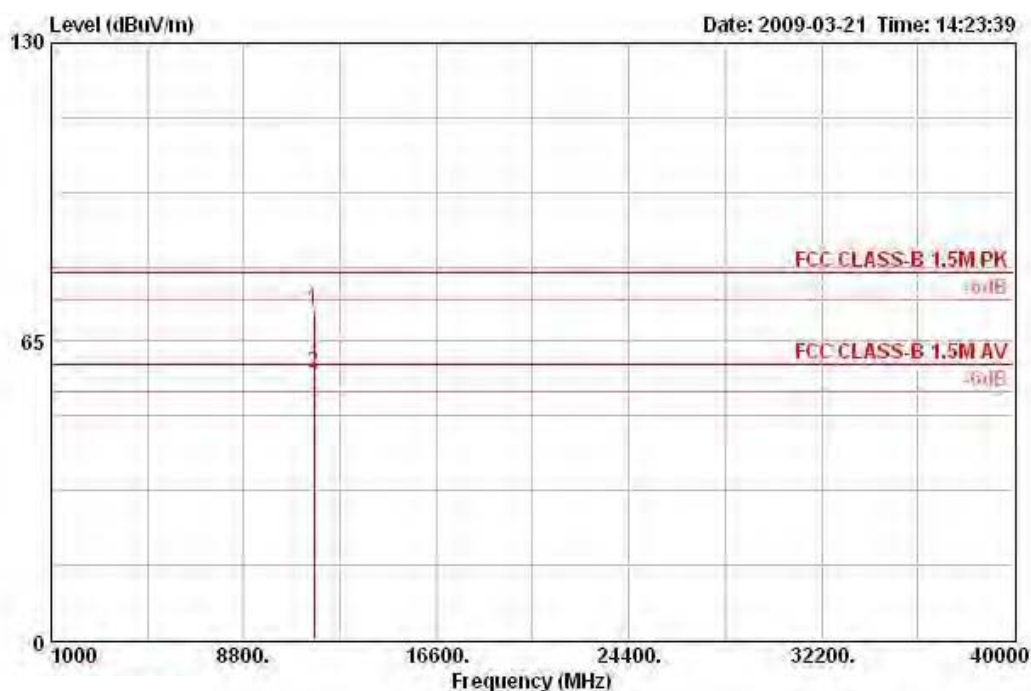

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1	11653.100	71.93	-8.07	80.00	56.83	39.44	35.07	10.72 PEAK	VERTICAL	83	106
2	11654.000	58.07	-1.93	60.00	42.98	39.44	35.07	10.72 AVERAGE	VERTICAL	83	106

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 20MHz Ch 1, 6, 11 / Ant. A + Ant. B + Ant. C
Test date	Apr. 01, 2009		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	2386.200	70.95	-3.05	74.00	39.60	27.87	3.49	0.00	PEAK	100	350	VERTICAL
2 !	2387.200	53.39	-0.61	54.00	22.04	27.87	3.49	0.00	AVERAGE	100	350	VERTICAL
3	2404.800	107.88			76.53	27.84	3.50	0.00	PEAK	100	350	VERTICAL
4 @	2405.800	97.87			66.53	27.84	3.50	0.00	AVERAGE	100	350	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	2388.600	62.14	-11.86	74.00	31.23	28.05	0.00	2.86	PEAK	VERTICAL	237	138
2 @	2390.000	47.01	-6.99	54.00	16.08	28.05	0.00	2.88	AVERAGE	VERTICAL	237	138
3 @	2438.200	103.94			72.87	28.18	0.00	2.90	AVERAGE	VERTICAL	237	138
4 @	2438.800	115.47			84.40	28.18	0.00	2.90	PEAK	VERTICAL	237	138
5 @	2483.500	53.45	-0.55	54.00	22.27	28.26	0.00	2.93	AVERAGE	VERTICAL	237	138
6 @	2484.500	72.47	-1.53	74.00	41.28	28.26	0.00	2.93	PEAK	VERTICAL	237	138

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamplifier	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2461.000	107.86			76.56	27.76	3.54	0.00	PEAK	100	325	VERTICAL
2 @	2463.200	97.23			65.93	27.76	3.54	0.00	AVERAGE	100	325	VERTICAL
3 !	2483.500	52.74	-1.26	54.00	21.45	27.73	3.56	0.00	AVERAGE	100	325	VERTICAL
4 !	2483.900	72.66	-1.34	74.00	41.37	27.73	3.56	0.00	PEAK	100	325	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	Draft n MCS0 40MHz Ch 3, 6, 9 / Ant. A + Ant. B + Ant. C
Test date	Apr. 01, 2009		

Channel 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	2384.400	73.83	-0.17	74.00	42.45	27.89	3.49	0.00	PEAK	100	80	VERTICAL
2 !	2387.200	51.57	-2.43	54.00	20.22	27.87	3.49	0.00	AVERAGE	100	80	VERTICAL
3 @	2436.400	92.73			61.40	27.81	3.52	0.00	AVERAGE	100	80	VERTICAL
4	2436.800	102.53			71.22	27.78	3.52	0.00	PEAK	100	80	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	2389.200	70.39	-3.61	74.00	39.47	28.05	0.00	2.86	PEAK	VERTICAL	121	138
2 @	2390.000	53.22	-0.78	54.00	22.28	28.05	0.00	2.88	AVERAGE	VERTICAL	121	138
3 @	2426.600	96.92			65.89	28.13	0.00	2.90	AVERAGE	VERTICAL	121	138
4 @	2444.600	109.09			78.00	28.18	0.00	2.91	PEAK	VERTICAL	121	138
5 @	2483.500	53.90	-0.10	54.00	22.72	28.26	0.00	2.93	AVERAGE	VERTICAL	121	138
6 @	2483.900	73.69	-0.31	74.00	42.50	28.26	0.00	2.93	PEAK	VERTICAL	121	138

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2436.400	102.19			70.86	27.81	3.52	0.00	PEAK	100	325	VERTICAL
2 @	2441.200	92.38			61.06	27.78	3.54	0.00	AVERAGE	100	325	VERTICAL
3 !	2483.500	49.35	-4.65	54.00	18.06	27.73	3.56	0.00	AVERAGE	100	325	VERTICAL
4 !	2485.900	73.50	-0.50	74.00	42.21	27.73	3.56	0.00	PEAK	100	325	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 20MHz CH 149, 157, 165 / Ant. A + Ant. B + Ant. C
Test date	Mar. 21, 2009		

Channel 149

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5743.400	118.49			79.19	34.89	0.00	4.41	PEAK	VERTICAL	206	100
2 ☒	5744.000	107.83			68.53	34.89	0.00	4.41	AVERAGE	VERTICAL	206	100

Item 1, 2 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5783.400	118.50			79.16	34.92	0.00	4.42	PEAK	VERTICAL	218	101
2 ☒	5786.200	106.91			67.55	34.93	0.00	4.42	AVERAGE	VERTICAL	218	101

Item 1, 2 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5823.200	121.29			81.91	34.96	0.00	4.42	PEAK	VERTICAL	206	101
2 ☒	5829.800	110.17			70.78	34.96	0.00	4.42	AVERAGE	VERTICAL	206	101

Item 1, 2 are the fundamental frequency at 5825 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	11a Draft n MCS0 40MHz CH 151, 159 / Ant. A + Ant. B + Ant. C
Test date	Mar. 21, 2009		

Channel 151

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5741.400	106.72			67.43	34.89	0.00	4.41	AVERAGE	VERTICAL	208	100
2 ☒	5750.200	118.40			79.10	34.89	0.00	4.41	PEAK	VERTICAL	208	100

Item 1, 2 are the fundamental frequency at 5755 MHz.

Channel 159

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5800.200	117.01			77.65	34.93	0.00	4.42	PEAK	VERTICAL	212	100
2 ☒	5801.400	105.95			66.59	34.93	0.00	4.42	AVERAGE	VERTICAL	212	100

Item 1, 2 are the fundamental frequency at 5795 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11b CH 1, 6, 11 / Ant. A + Ant. B + Ant. C
Test Date	Mar. 20, 2009		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1 ☒	2386.800	53.96	-0.04	54.00	23.05	28.05	0.00	2.86 AVERAGE	VERTICAL	27	100
2 ☒	2386.800	62.54	-11.46	74.00	31.62	28.05	0.00	2.86 PEAK	VERTICAL	27	100
3 ☒	2411.000	107.90			76.93	28.09	0.00	2.88 PEAK	VERTICAL	27	100
4 ☒	2411.200	103.66			72.69	28.09	0.00	2.88 AVERAGE	VERTICAL	27	100

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1 ☒	2388.200	57.10	-16.90	74.00	26.18	28.05	0.00	2.86 PEAK	VERTICAL	217	100
2 ☒	2390.000	45.36	-8.64	54.00	14.43	28.05	0.00	2.88 AVERAGE	VERTICAL	217	100
3 ☒	2436.000	111.24			80.21	28.13	0.00	2.90 PEAK	VERTICAL	217	100
4 ☒	2436.400	106.75			75.72	28.13	0.00	2.90 AVERAGE	VERTICAL	217	100
5 ☒	2484.700	57.59	-16.41	74.00	26.41	28.26	0.00	2.93 PEAK	VERTICAL	217	100
6 ☒	2484.700	45.04	-8.96	54.00	13.86	28.26	0.00	2.93 AVERAGE	VERTICAL	217	100

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna	Preamp	Cable	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		deg	cm
1 ☒	2461.200	105.09			73.96	28.22	0.00	2.91 AVERAGE	VERTICAL	324	100
2 ☒	2463.000	112.07			80.95	28.22	0.00	2.91 PEAK	VERTICAL	324	100
3 ☒	2487.900	64.09	-9.91	74.00	32.87	28.30	0.00	2.93 PEAK	VERTICAL	324	100
4 ☒	2488.000	53.45	-0.55	54.00	22.22	28.30	0.00	2.93 AVERAGE	VERTICAL	324	100

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11g CH 1, 6, 11 / Ant. A + Ant. B + Ant. C
Test Date	Apr. 01, 2009		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	2390.000	53.11	-0.89	54.00	21.74	27.87	3.50	0.00	AVERAGE	100	80	VERTICAL
2 !	2390.000	71.26	-2.74	74.00	39.89	27.87	3.50	0.00	PEAK	100	80	VERTICAL
3 @	2414.600	97.98			66.63	27.84	3.50	0.00	AVERAGE	100	80	VERTICAL
4	2415.200	108.74			77.39	27.84	3.50	0.00	PEAK	100	80	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 @	2389.200	64.10	-9.90	74.00	33.18	28.05	0.00	2.86	PEAK	VERTICAL	144	120
2 @	2390.000	47.96	-6.04	54.00	17.03	28.05	0.00	2.88	AVERAGE	VERTICAL	144	120
3 @	2435.200	103.06			72.03	28.13	0.00	2.90	AVERAGE	VERTICAL	144	120
4 @	2440.000	114.95			83.88	28.18	0.00	2.90	PEAK	VERTICAL	144	120
5 @	2483.500	53.94	-0.06	54.00	22.75	28.26	0.00	2.93	AVERAGE	VERTICAL	144	120
6 @	2483.500	70.05	-3.95	74.00	38.86	28.26	0.00	2.93	PEAK	VERTICAL	144	120

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2457.000	110.03			78.73	27.76	3.54	0.00	PEAK	100	34	VERTICAL
2 @	2467.000	99.34			68.02	27.76	3.56	0.00	AVERAGE	100	34	VERTICAL
3 !	2483.500	53.55	-0.45	54.00	22.26	27.73	3.56	0.00	AVERAGE	100	34	VERTICAL
4 !	2484.900	73.00	-1.00	74.00	41.71	27.73	3.56	0.00	PEAK	100	34	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.6°C	Humidity	56%
Test Engineer	Johnson Chang	Configurations	802.11a CH 149, 157, 165 / Ant. A + Ant. B + Ant. C
Test Date	Mar. 21, 2009		

Channel 149

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5743.000	120.89			81.59	34.89	0.00	4.41	PEAK	VERTICAL	172	100
2 ☒	5743.600	108.85			69.55	34.89	0.00	4.41	AVERAGE	VERTICAL	172	100

Item 1, 2 are the fundamental frequency at 5745 MHz.

Channel 157

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5782.000	110.95			71.61	34.92	0.00	4.42	AVERAGE	VERTICAL	212	100
2 ☒	5784.400	122.71			83.37	34.92	0.00	4.42	PEAK	VERTICAL	212	100

Item 1, 2 are the fundamental frequency at 5785 MHz.

Channel 165

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1 ☒	5822.000	121.47			82.09	34.96	0.00	4.42	PEAK	VERTICAL	201	100
2 ☒	5826.200	110.10			70.71	34.96	0.00	4.42	AVERAGE	VERTICAL	201	100

Item 1, 2 are the fundamental frequency at 5825 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. A + Ant. B + Ant. C / 2412 MHz

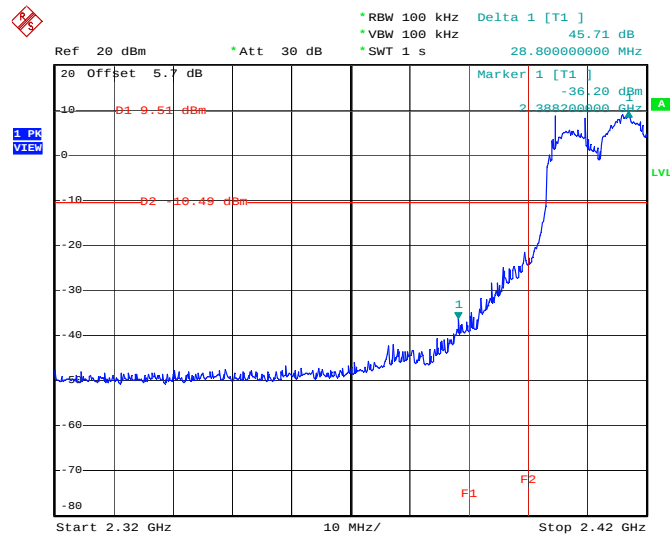


Date: 23.MAR.2009 14:14:05

High Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. A + Ant. B + Ant. C / 2462 MHz

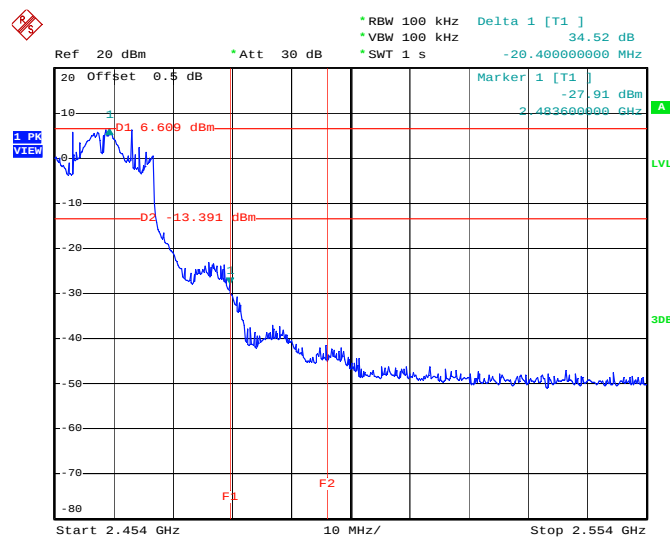


Date: 2.APR.2009 13:50:12

Low Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. A + Ant. B + Ant. C / 2422 MHz

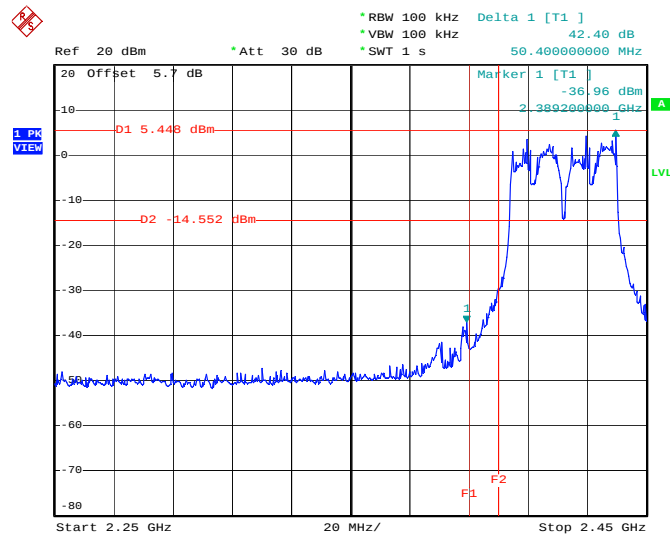


Date: 23.MAR.2009 14:29:20

High Band Edge Plot on Configuration Drafft n MCS0 40MHz Ant. A + Ant. B + Ant. C / 2452 MHz

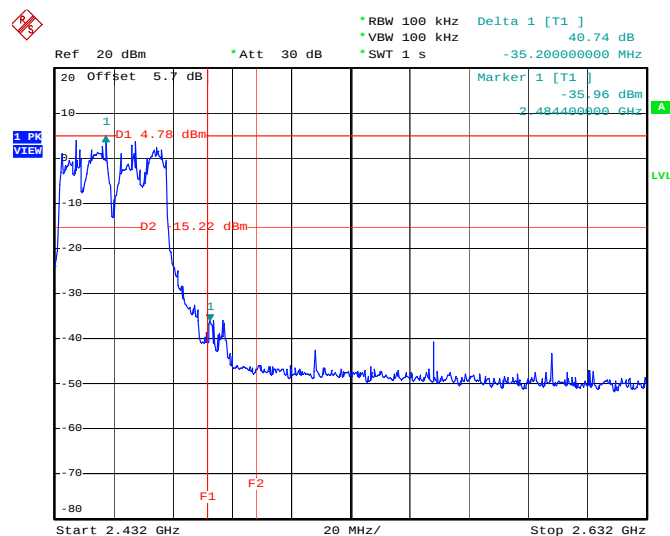

Date: 23.MAR.2009 14:33:56

Low Band Edge Plot on Configuration 11a Draft n MCS0 20MHz Ant. A + Ant. B + Ant. C / 5745 MHz

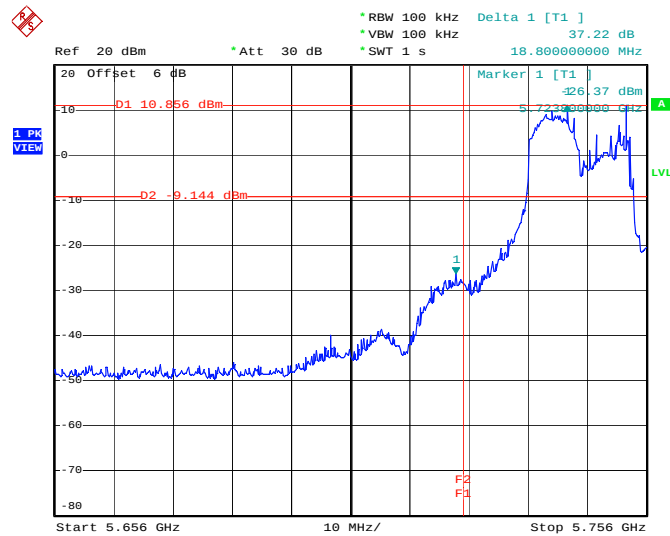


Date: 23.MAR.2009 16:06:06

High Band Edge Plot on Configuration 11a Draft n MCS0 20MHz Ant. A + Ant. B + Ant. C / 5825 MHz




Date: 23.MAR.2009 16:11:00

Low Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. A + Ant. B + Ant. C / 5755 MHz

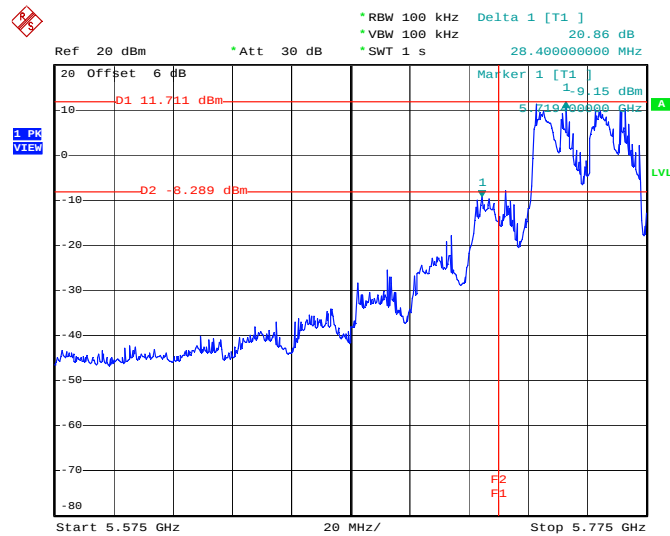

Date: 23.MAR.2009 15:43:41


High Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. A + Ant. B + Ant. C / 5795 MHz

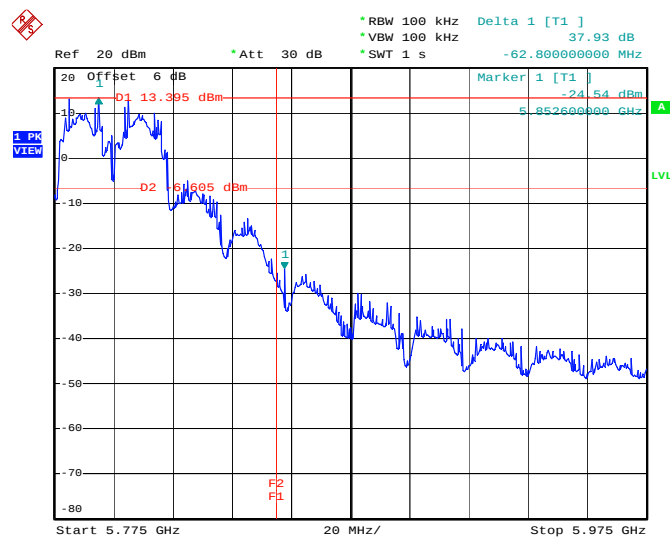

Date: 23.MAR.2009 15:46:46


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b Ant. A + Ant. B + Ant. C / 2412 MHz

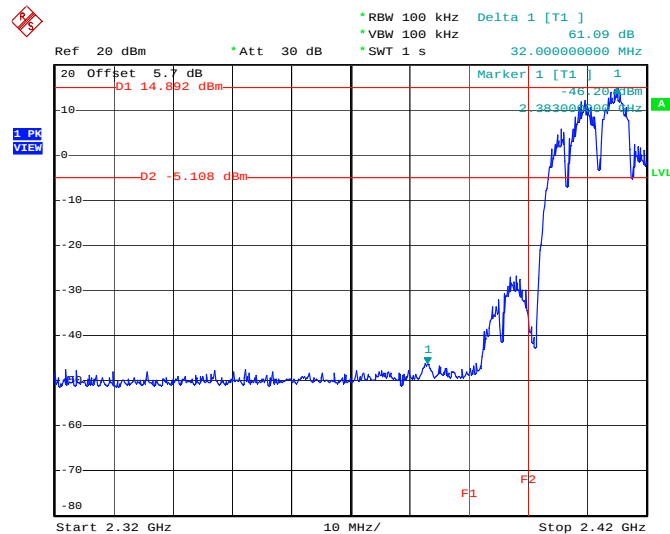


Date: 23.MAR.2009 13:55:47

High Band Edge Plot on Configuration IEEE 802.11b Ant. A + Ant. B + Ant. C / 2462 MHz

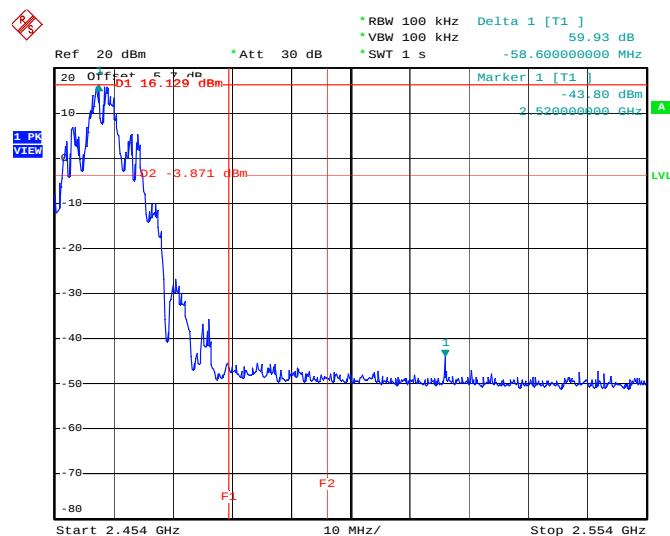


Date: 23.MAR.2009 14:01:49

Low Band Edge Plot on Configuration IEEE 802.11g Ant. A + Ant. B + Ant. C / 2412 MHz

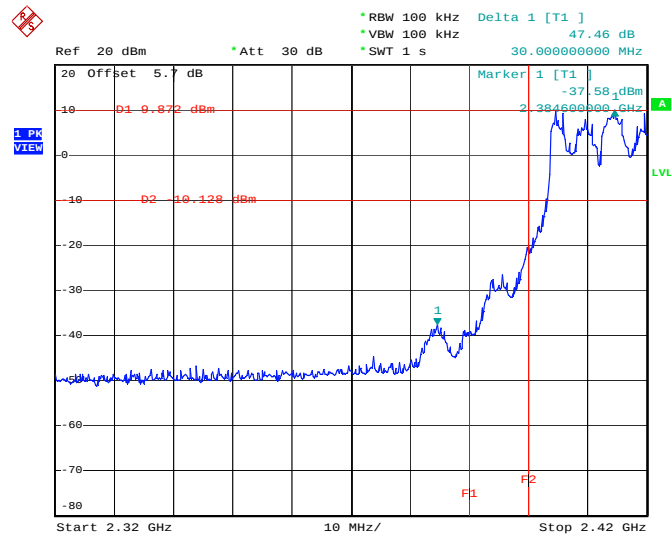


Date: 23.MAR.2009 14:11:11

High Band Edge Plot on Configuration IEEE 802.11g Ant. A + Ant. B + Ant. C / 2462 MHz

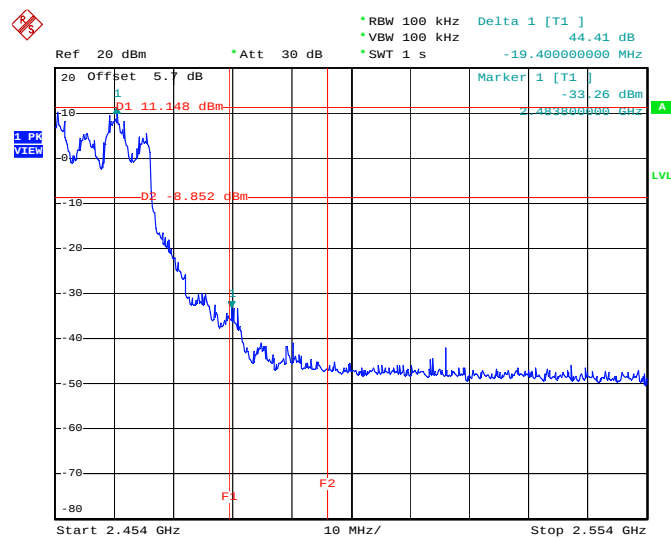

Date: 23.MAR.2009 14:05:42

Low Band Edge Plot on Configuration IEEE 802.11a Ant. A + Ant. B + Ant. C / 5745 MHz

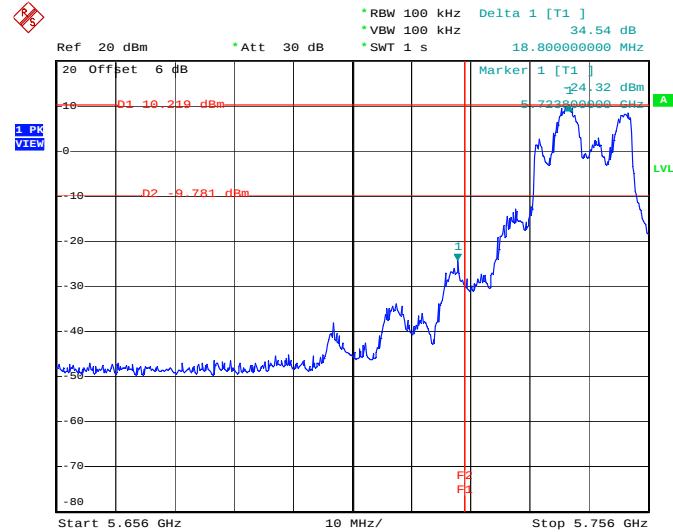

Date: 23.MAR.2009 16:19:50

High Band Edge Plot on Configuration IEEE 802.11a Ant. A + Ant. B + Ant. C / 5825 MHz



Date: 23.MAR.2009 16:14:51

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2008	Conduction (CO04-HY)
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Mar. 03, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2008	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Mar. 27, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Jan. 22, 2008*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9 kHz - 30 GHz	Oct. 06, 2008	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 04, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan. 16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Jan. 09, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2008	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Dec. 14, 2008	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2008	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 10, 2009	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/ 2GS/s	Jun. 27, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihsu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : LI190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.