



FCC TEST REPORT

REPORT NO.: RF941122H03D

MODEL NO.: HiveAP 20 ag

RECEIVED: April 07, 2008

TESTED: April 17 to May 09, 2008

ISSUED: June 05, 2008

APPLICANT: Accton Technology Corporation

ADDRESS: No.1, Creation Rd. III, Science-based
Industrial Park, Hsinchu, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

TEST LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 105 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced, except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.





Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY.....	8
3.	GENERAL INFORMATION	9
3.1	GENERAL DESCRIPTION OF EUT	9
3.2	DESCRIPTION OF TEST MODES	11
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:	12
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4	DESCRIPTION OF SUPPORT UNITS.....	15
3.5	CONFIGURATION OF SYSTEM UNDER TEST	16
4.	TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz BAND).....	20
4.1	CONDUCTED EMISSION MEASUREMENT	20
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	20
4.1.2	TEST INSTRUMENTS.....	20
4.1.3	TEST PROCEDURES	21
4.1.4	DEVIATION FROM TEST STANDARD	21
4.1.5	TEST SETUP	22
4.1.6	EUT OPERATING CONDITIONS	22
4.1.7	TEST RESULTS	23
4.2	RADIATED EMISSION MEASUREMENT	27
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	27
4.2.2	TEST INSTRUMENTS.....	28
4.2.3	TEST PROCEDURES	29
4.2.4	DEVIATION FROM TEST STANDARD	29
4.2.5	TEST SETUP	30
4.2.6	EUT OPERATING CONDITIONS	30
4.2.7	TEST RESULTS	31
4.3	6dB BANDWIDTH MEASUREMENT	39
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	39
4.3.2	TEST INSTRUMENTS.....	39
4.3.3	TEST PROCEDURE.....	40
4.3.4	DEVIATION FROM TEST STANDARD	40
4.3.5	TEST SETUP	40
4.3.6	EUT OPERATING CONDITIONS	40
4.3.7	TEST RESULTS	41
4.4	MAXIMUM PEAK OUTPUT POWER	47
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47
4.4.2	INSTRUMENTS.....	47



4.4.3	TEST PROCEDURES	48
4.4.4	DEVIATION FROM TEST STANDARD	48
4.4.5	TEST SETUP	48
4.4.6	EUT OPERATING CONDITIONS	48
4.4.7	TEST RESULTS	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.2	TEST INSTRUMENTS.....	51
4.5.3	TEST PROCEDURE.....	52
4.5.4	DEVIATION FROM TEST STANDARD	52
4.5.5	TEST SETUP	52
4.5.6	EUT OPERATING CONDITION	52
4.5.7	TEST RESULTS	53
4.6	BAND EDGES MEASUREMENT.....	59
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	59
4.6.2	TEST INSTRUMENTS.....	59
4.6.3	TEST PROCEDURE.....	59
4.6.4	EUT OPERATING CONDITION	59
4.6.5	TEST RESULTS – DSSS.....	60
4.6.6	TEST RESULTS – OFDM.....	64
4.7	ANTENNA REQUIREMENT	68
4.7.1	STANDARD APPLICABLE.....	68
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	68
5.	TEST TYPES AND RESULTS (802.11a, 5725~5850MHz BAND).....	69
5.1	CONDUCTED EMISSION MEASUREMENT	69
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	69
5.1.2	TEST INSTRUMENTS.....	69
5.1.3	TEST PROCEDURES	70
5.1.4	DEVIATION FROM TEST STANDARD	70
5.1.5	TEST SETUP	71
5.1.6	EUT OPERATING CONDITIONS	71
5.1.7	TEST RESULTS	72
5.2	RADIATED EMISSION MEASUREMENT	76
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	76
5.2.2	TEST INSTRUMENTS.....	77
5.2.3	TEST PROCEDURES	78
5.2.4	DEVIATION FROM TEST STANDARD	78
5.2.5	TEST SETUP	79
5.2.6	EUT OPERATING CONDITIONS	79
5.2.7	TEST RESULTS	80
5.3	6dB BANDWIDTH MEASUREMENT	85



5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	85
5.3.2	TEST INSTRUMENTS.....	85
5.3.3	TEST PROCEDURE.....	86
5.3.4	DEVIATION FROM TEST STANDARD	86
5.3.5	TEST SETUP	86
5.3.6	EUT OPERATING CONDITIONS	86
5.3.7	TEST RESULTS	87
5.4	MAXIMUM PEAK OUTPUT POWER.....	90
5.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	90
5.4.2	INSTRUMENTS.....	90
5.4.3	TEST PROCEDURES	91
5.4.4	DEVIATION FROM TEST STANDARD	91
5.4.5	TEST SETUP	91
5.4.6	EUT OPERATING CONDITIONS	91
5.4.7	TEST RESULTS	92
5.5	POWER SPECTRAL DENSITY MEASUREMENT	93
5.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	93
5.5.2	TEST INSTRUMENTS.....	93
5.5.3	TEST PROCEDURE.....	94
5.5.4	DEVIATION FROM TEST STANDARD	94
5.5.5	TEST SETUP	94
5.5.6	EUT OPERATING CONDITION	94
5.5.7	TEST RESULTS	95
5.6	BAND EDGES MEASUREMENT.....	98
5.6.1	LIMITS OF BAND EDGES MEASUREMENT	98
5.6.2	TEST INSTRUMENTS.....	98
5.6.3	TEST PROCEDURE.....	99
5.6.4	DEVIATION FROM TEST STANDARD	99
5.6.5	EUT OPERATING CONDITION	99
5.6.6	TEST RESULTS	100
5.7	ANTENNA REQUIREMENT	103
5.7.1	STANDARD APPLICABLE.....	103
5.7.2	ANTENNA CONNECTED CONSTRUCTION.....	103
6.	INFORMATION ON THE TESTING LABORATORIES	104
7.	APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	105



1. CERTIFICATION

PRODUCT: HiveAP 20 ag

BRAND NAME: AEROHIVE

MODEL NO.: HiveAP 20 ag

TEST SAMPLE: R&D SAMPLE

TESTED: April 17 to May 09, 2008

APPLICANT: Accton Technology Corporation

STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment (Model: HiveAP 20 ag) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Midoli Peng , **DATE:** June 05, 2008
(Midoli Peng, Specialist)

**TECHNICAL
ACCEPTANCE** : Hank Chung , **DATE:** June 05, 2008
Responsible for RF
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** June 05, 2008
(May Chen, Deputy Manager)



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 802.11b & g, 2412~2462MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.56dB at 0.478MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -5.8dB at 2483.5MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.



For 802.11a, 5725~5850MHz Band

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -1.88dB at 0.4780MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.80dB at 11570.0MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE:

1. The EUT was operating in 2.412 ~ 2.462GHz, 5.180 ~ 5.240GHz and 5.745 ~ 5.825GHz frequencies band. This report was recorded the RF parameters including 2.412 ~ 2.462GHz and 5.745 ~ 5.825GHz. For the 5.180 ~ 5.240GHz RF parameters was recorded in another test report.



2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions	2.44 dB
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.33 dB
Radiated emissions (18GHz -40GHz)	2.55 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	HiveAP 20 ag
MODEL NO.	HiveAP 20 ag
FCC ID	HEDHIVEAP20AG
POWER SUPPLY	DC 48V from power adapter or POE (Power over Ethernet)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b:11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps 802.11a: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	802.11b & 802.11g: 2412 ~ 2462MHz 802.11a: 5.18 ~ 5.24GHz , 5.745 ~ 5.825GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 802.11a: 9
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz
OUTPUT POWER	802.11b: 138.038mW 802.11g: 245.471mW 802.11a: 31.696mW (For 5.18 ~ 5.24GHz) 802.11a: 251.189mW (For 5.745 ~ 5.825GHz)
DATA CABLE	NA
ANTENNA TYPE	Please see note 3 (on next page)
I/O PORTS	RS232 Port x 1, POE port x 1, DC power Port x 1
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.



2. The EUT was operated with the following power adapter or POE(Power Over Ethernet):

ADAPTER	
BRAND:	PHIHONG
MODEL:	PSA 18U-480C
INPUT:	AC 100~240V, 0.5A, 50~60Hz
OUTPUT:	DC 48V, 0.38A , 1.5m/ nonshield/ with one core

POE (for test only)	
BRAND:	3Com
MODEL:	PW130
INPUT:	AC100-250V, 0.5A, 50/60Hz
OUTPUT:	DC 48V, 0.42A

3. There are four antennas provided to this EUT, please refer to the following table:

Model	Antenna Type	Gain (dBi)	Antenna Connector	Note
FDS_2FED01+I3G	Dual Band Antenna, Dipole	For 2.4GHz : 3 dBi	MMCX	Integral antenna
		For 5GHz : 5 dBi		
NA	Dipole	For 2.4GHz : 2 dBi	Reverse SMA	dedicated antenna
W1028	Dipole	For 5GHz : 2 dBi	Reverse SMA	

The model: FDS_2FED01+I3G, the worse case one was chosen for final test.

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

Operated in 5725 ~ 5850MHz band:

For 802.11a (5725 ~ 5850MHz band): Five channels are provided to this EUT.

Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	5825 MHz

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where PLC: Power Line Conducted Emission
 RE<1G: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz
 APCM: Antenna Port Conducted Measurement

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11a	1 to 5	5	OFDM	BPSK	6

- EUT was tested with the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11a	1 to 5	5	OFDM	BPSK	6

- EUT was tested with the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6

- EUT was pre-tested in chamber as the following test modes:

Test Mode	Power
Mode 1	With Adapter
Mode 2	With POE

Mode 1, the worst case one, was chosen for final test.

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 5	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a HiveAP 20 ag. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP01L	TW-09c748-12800 -165-3171	FCC DoC
2	Terminal Resistor	SUHNER	50 Ohm	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA


NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST


With ADAPTER: (2.4GHz Band)

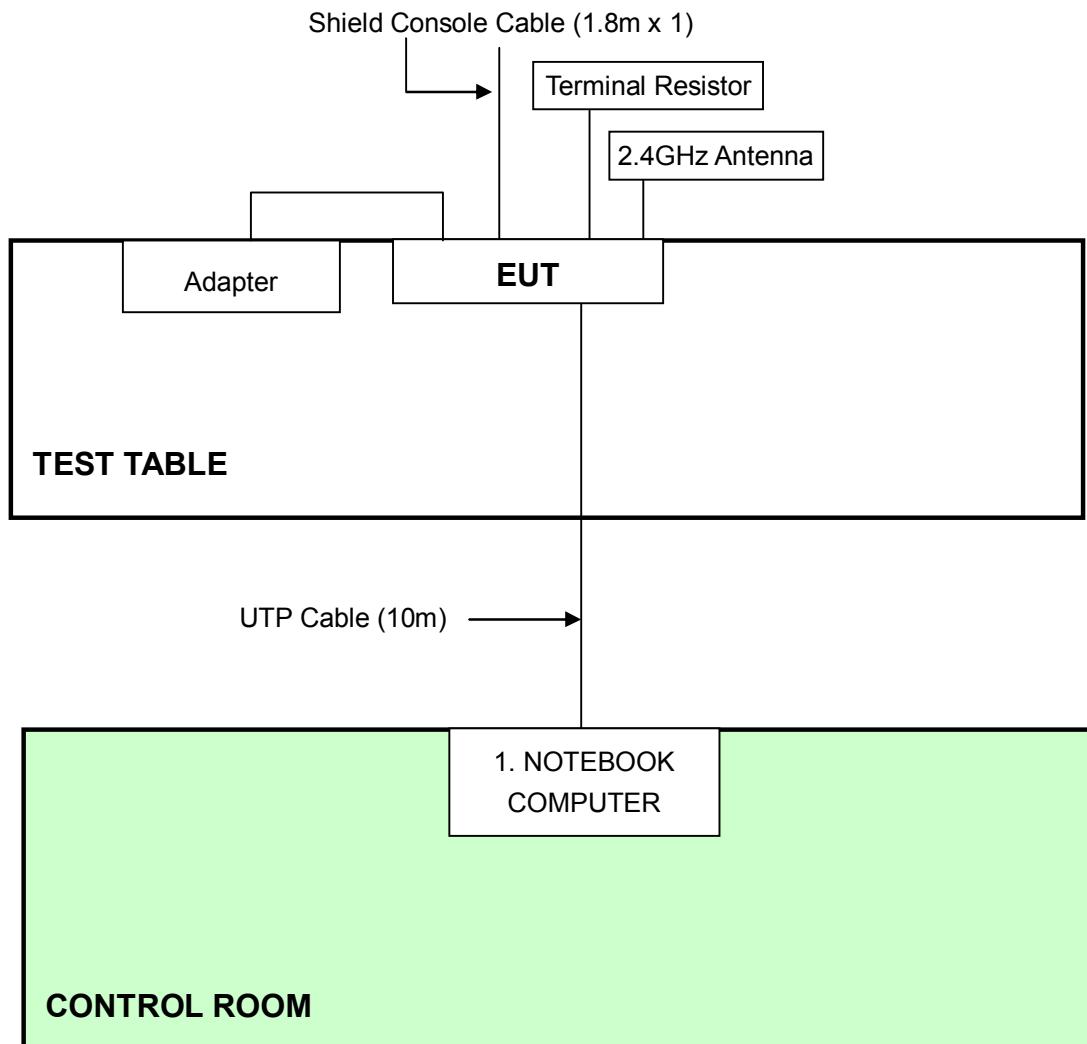


NOTE: 1. Support unit 1 was kept in the control room during the test.

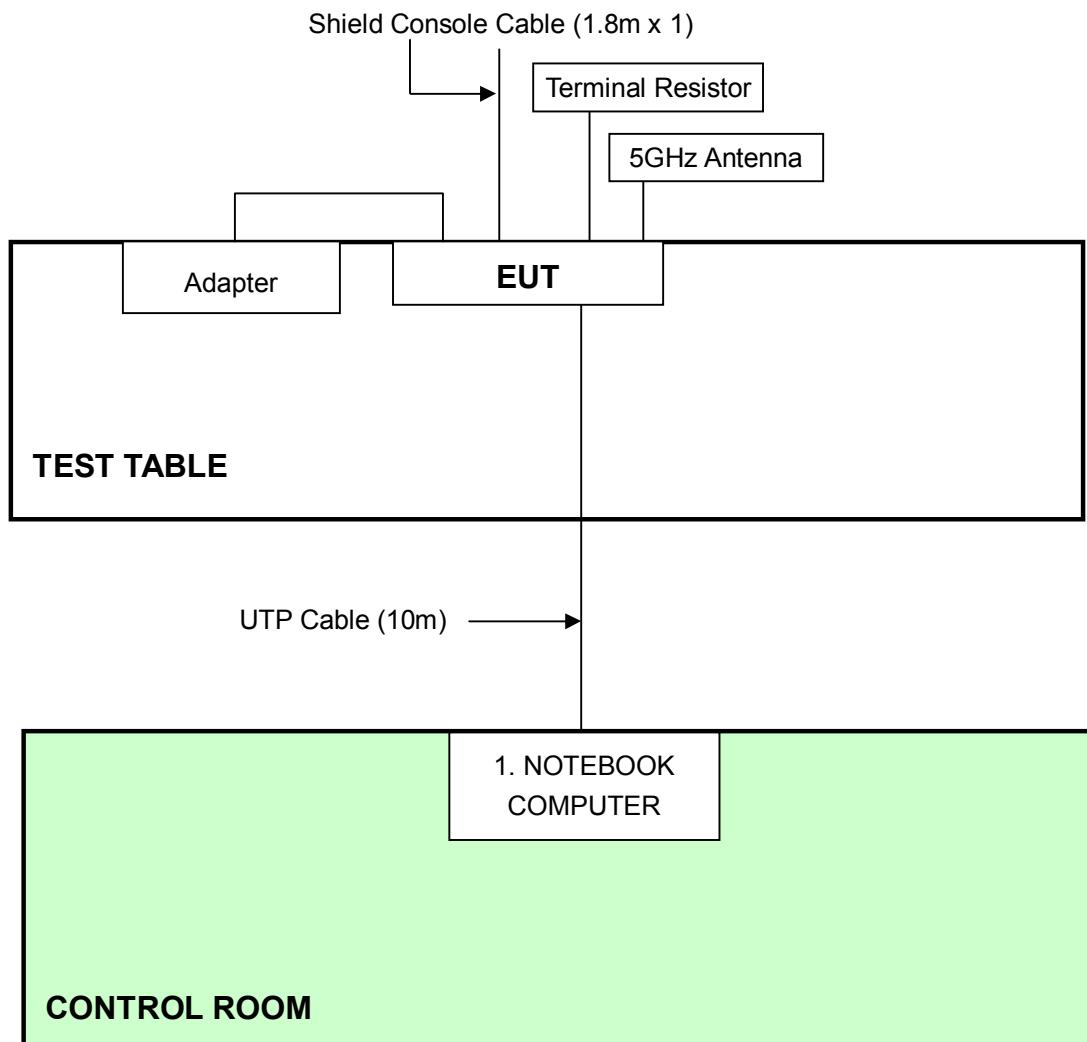With ADAPTER: (5GHz Band)

NOTE: 1. Support unit 1 was kept in the control room during the test.

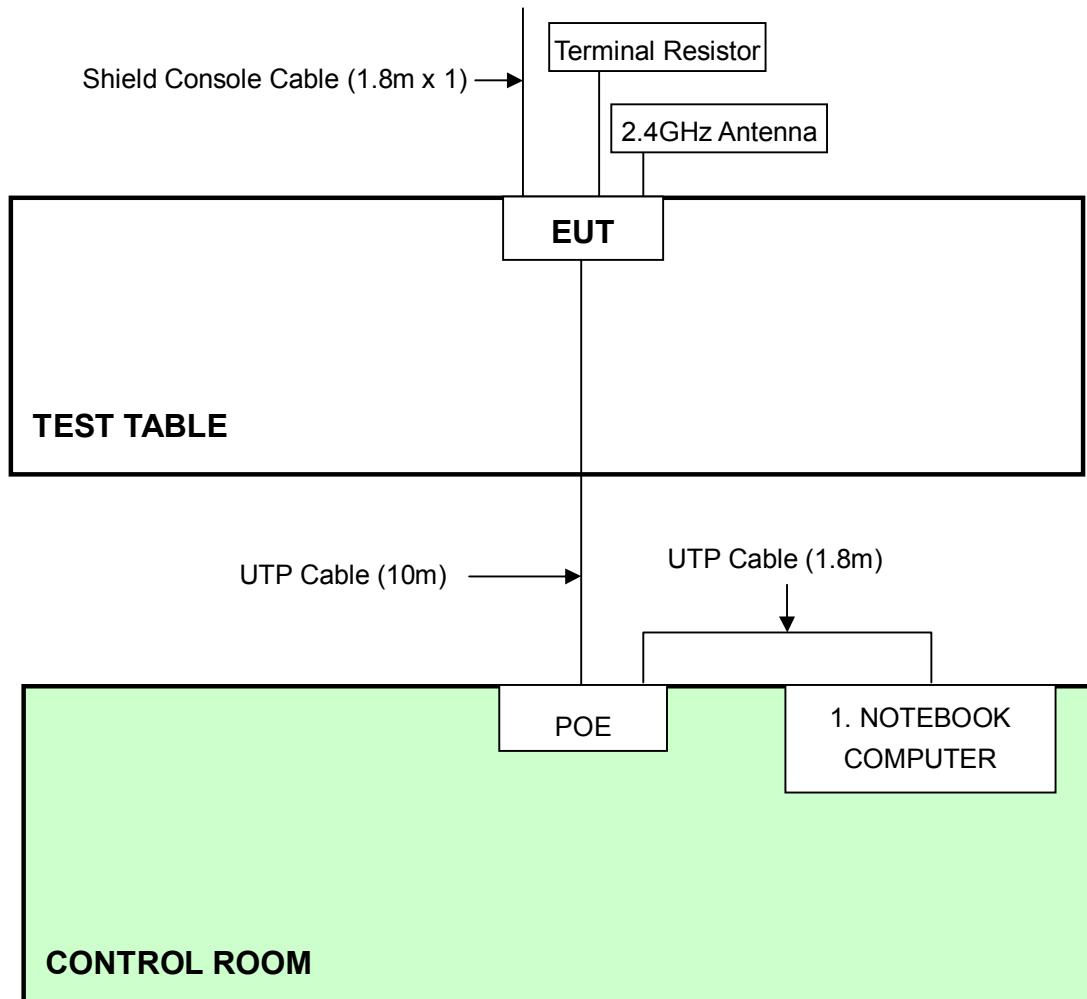With POE : (2.4GHz Band)

NOTE: 1. Support unit 1 was kept in the control room during the test.

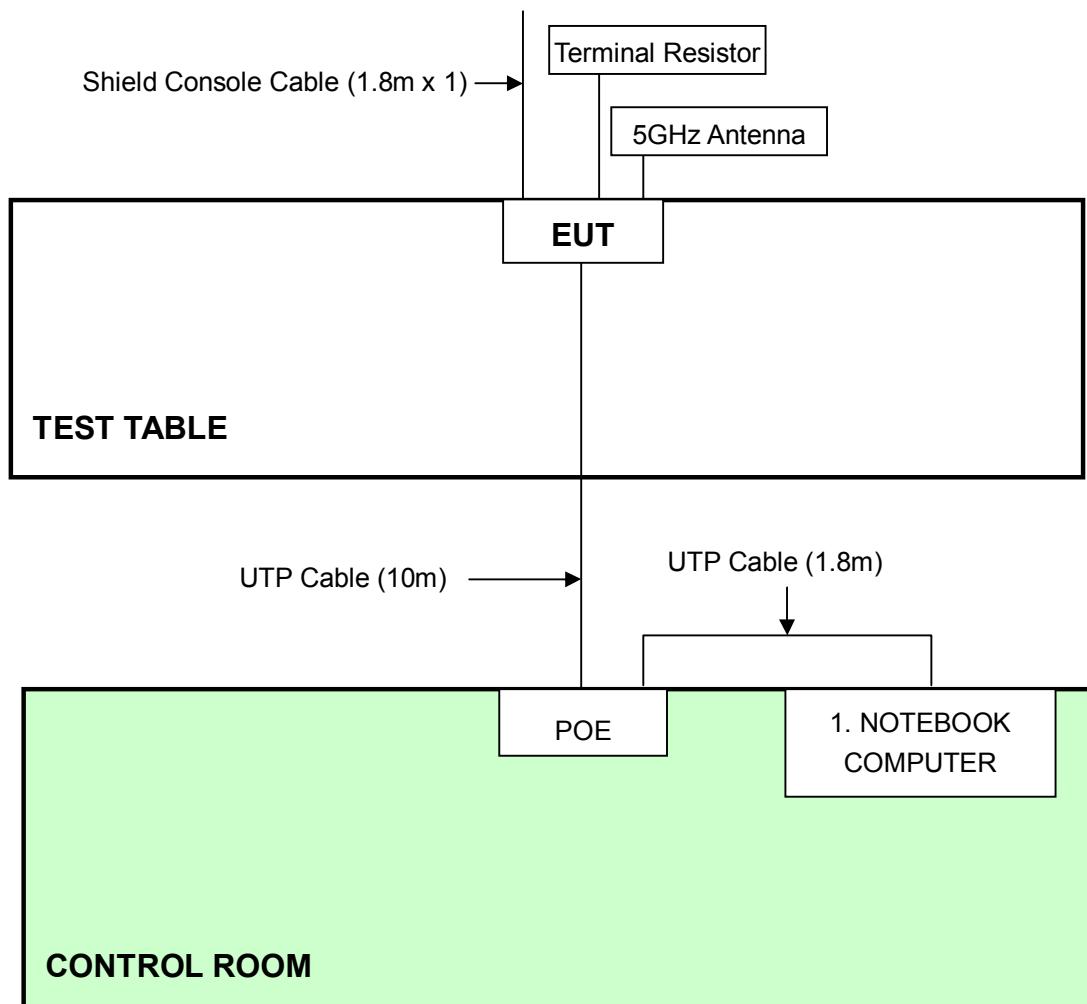With POE : (5GHz Band)

NOTE: 1. Support unit 1 was kept in the control room during the test.



4. TEST TYPES AND RESULTS (802.11b & g, 2400 ~ 2483.5MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 10, 2009
Line-Impedance Stabilization Network(for EUT)	KNW-407	8-1395-12	Aug. 19, 2008
Line-Impedance Stabilization Network(for Peripheral)	ENV-216	100072	Nov. 08, 2008
RF Cable (JETBAO)	RG5B/U-6m	COACAB-9KHz-3 0MHz	Aug. 15, 2008
50 ohms Terminator	50	3	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in ADT Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

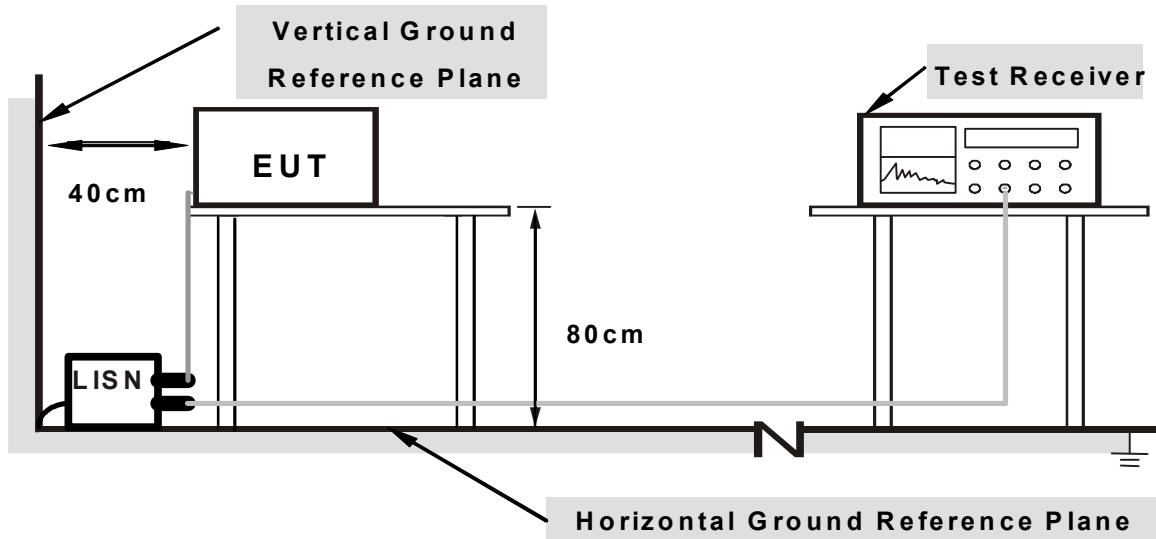

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared other computer systems to act as a communication partner and placed them outside of testing area.
- c. The communication partner run test program “ART48 Build 10” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable.


4.1.7 TEST RESULTS Conducted Worst-Case Data

TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]
					Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.267	0.60	48.41	-	49.01	-	61.20	51.20	-12.19	-
2	0.412	0.60	44.64	-	45.24	-	57.61	47.61	-12.37	-
3	0.529	0.62	44.52	-	45.14	-	56.00	46.00	-10.86	-
4	0.552	0.63	44.36	-	44.99	-	56.00	46.00	-11.01	-
5	1.248	0.70	41.97	-	42.67	-	56.00	46.00	-13.33	-
6	5.000	0.93	34.40	-	35.33	-	56.00	46.00	-20.67	-

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

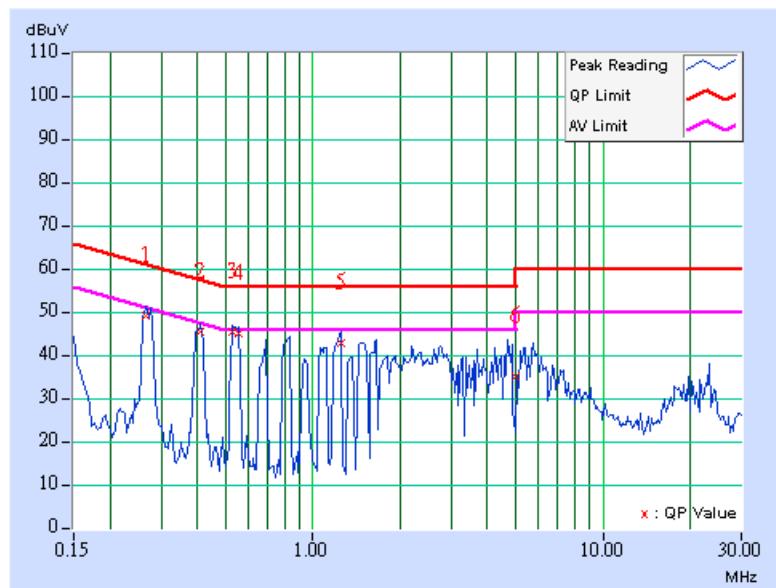


TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.275	0.40	47.45	-	47.85	-	60.97	50.97	-13.12	-
2	0.412	0.40	44.72	-	45.12	-	57.61	47.61	-12.49	-
3	0.541	0.45	44.12	-	44.57	-	56.00	46.00	-11.43	-
4	0.693	0.50	41.43	-	41.93	-	56.00	46.00	-14.07	-
5	1.248	0.60	41.69	-	42.29	-	56.00	46.00	-13.71	-
6	5.672	0.91	38.00	-	38.91	-	60.00	50.00	-21.09	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

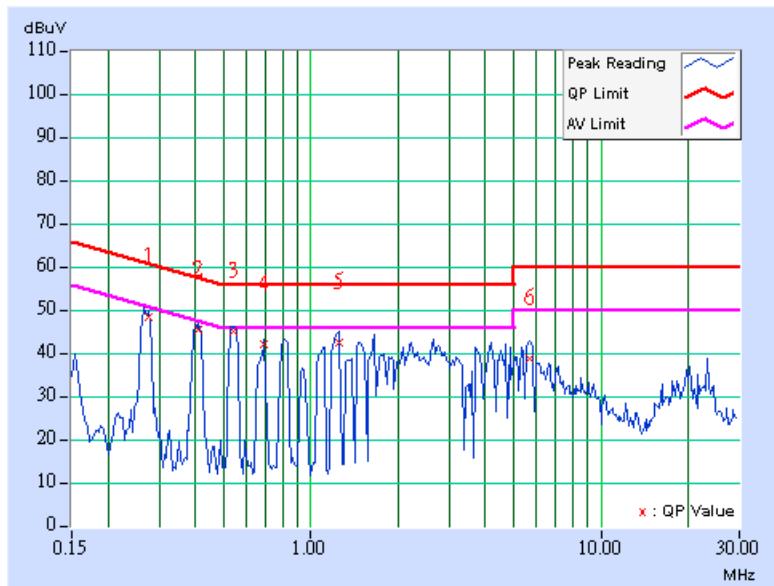


Conducted Worst-Case Data

TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	38.68	-	48.48	-	63.42	53.42	-14.94	-
2	0.500	9.82	3.46	-	13.28	-	56.00	46.00	-42.72	-
3	0.955	9.89	33.10	-	42.99	-	56.00	46.00	-13.01	-
4	1.709	9.90	31.13	-	41.03	-	56.00	46.00	-14.97	-
5	5.000	10.02	-0.56	-	9.46	-	56.00	46.00	-46.54	-
6	16.848	10.10	30.90	-	41.00	-	60.00	50.00	-19.00	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

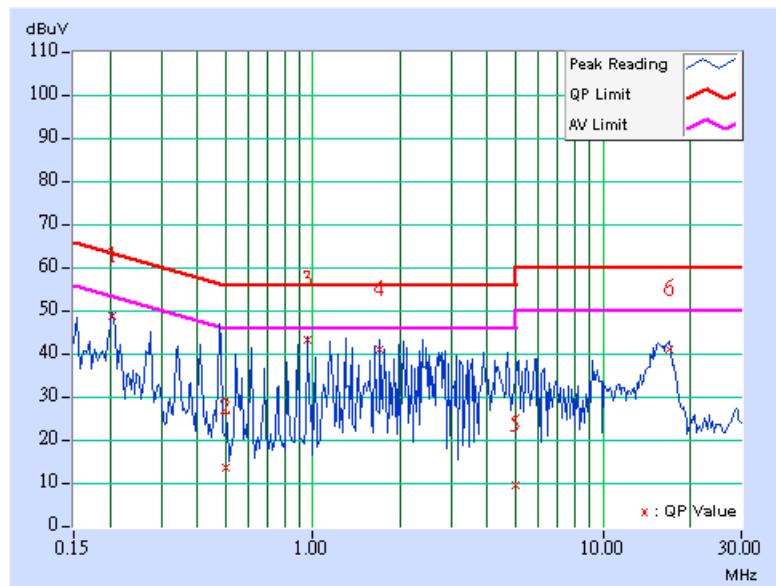


TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	38.54	-	48.34	-	63.42	53.42	-15.08	-
2	0.478	9.81	37.58	35.00	47.39	44.81	56.37	46.37	-8.98	-1.56
3	0.615	9.84	33.06	-	42.90	-	56.00	46.00	-13.10	-
4	0.955	9.89	34.82	-	44.71	-	56.00	46.00	-11.29	-
5	2.048	10.00	32.58	-	42.58	-	56.00	46.00	-13.42	-
6	16.660	10.27	31.76	-	42.03	-	60.00	50.00	-17.97	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

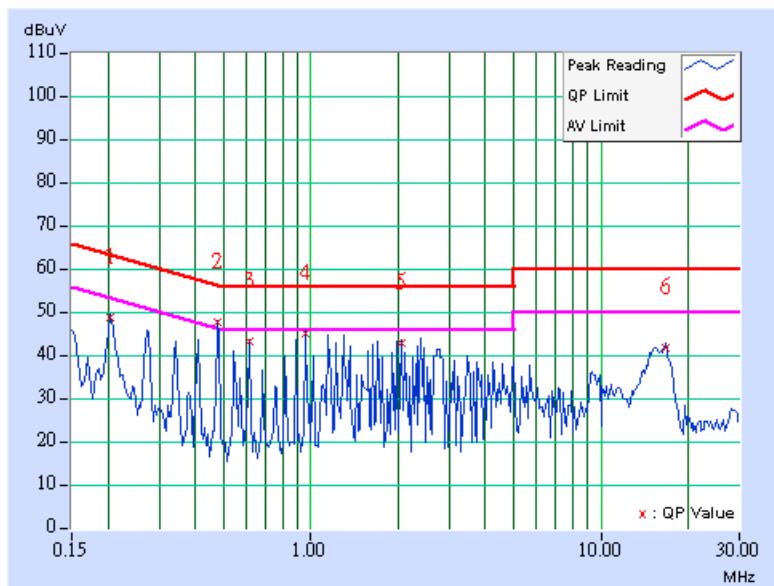



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 15, 2008
HP Pre_Amplifier	8449B	3008A01922	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	July 26, 2008
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 27, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008
RF CABLE (Chaintek)	SF102	22054-2	Dec. 06. 2008
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Aug. 13, 2008
Software	ADT_Radiated_V 7.6.15.8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 3789C-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

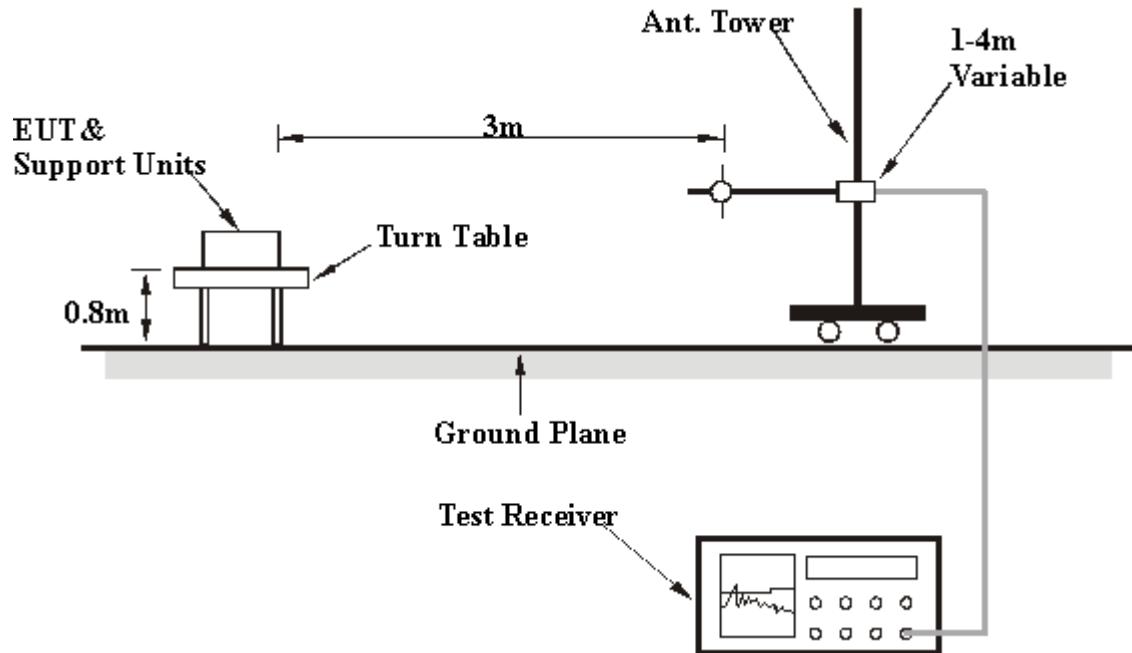

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

TEST MODE	With Adapter	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	22.10 QP	46.00	-23.90	1.41 H	355	8.80	13.30
2	300.00	22.50 QP	46.00	-23.50	1.00 H	2	6.20	16.30
3	375.00	22.00 QP	46.00	-24.00	2.16 H	3	4.40	17.60
4	500.00	24.70 QP	46.00	-21.30	2.10 H	204	3.80	20.90
5	792.00	36.60 QP	46.00	-9.40	2.14 H	306	10.00	26.60
6	890.99	39.90 QP	46.00	-6.10	1.08 H	275	12.10	27.80
7	924.00	34.80 QP	46.00	-11.20	1.00 H	276	6.50	28.40
8	989.99	31.70 QP	54.00	-22.30	2.10 H	51	2.80	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.90	31.00 QP	40.00	-9.00	1.01 V	226	16.80	14.20
2	500.00	32.80 QP	46.00	-13.20	1.01 V	226	11.90	20.90
3	792.00	34.00 QP	46.00	-12.00	1.33 V	1	7.40	26.60
4	858.00	35.00 QP	46.00	-11.00	1.32 V	128	7.50	27.50
5	891.00	39.90 QP	46.00	-6.10	1.19 V	108	12.10	27.80
6	924.00	38.60 QP	46.00	-7.40	1.13 V	355	10.20	28.40
7	958.00	34.20 QP	46.00	-11.80	1.70 V	276	5.30	28.90
8	990.00	34.90 QP	54.00	-19.10	1.84 V	94	6.00	28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Below 1GHz Worst-Case Data

TEST MODE	With POE	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	23.00 QP	46.00	-23.00	1.76 H	176	9.70	13.30
2	300.00	21.70 QP	46.00	-24.30	1.15 H	342	5.40	16.30
3	375.00	24.90 QP	46.00	-21.10	1.11 H	224	7.30	17.60
4	500.00	24.70 QP	46.00	-21.30	1.00 H	6	3.80	20.90
5	792.00	37.10 QP	46.00	-8.90	1.26 H	277	10.50	26.60
6	891.00	39.60 QP	46.00	-6.40	1.03 H	278	11.80	27.80
7	924.00	37.60 QP	46.00	-8.40	1.05 H	269	9.30	28.40
8	990.00	39.60 QP	54.00	-14.40	1.00 H	261	10.70	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.51	32.80 QP	40.00	-7.20	1.24 V	28	18.50	14.20
2	249.99	27.40 QP	46.00	-18.60	1.17 V	49	14.10	13.30
3	500.00	26.50 QP	46.00	-19.50	1.04 V	210	5.70	20.90
4	792.00	34.80 QP	46.00	-11.20	1.00 V	261	8.20	26.60
5	858.00	34.10 QP	46.00	-11.90	1.29 V	2	6.60	27.50
6	891.00	38.00 QP	46.00	-8.00	1.16 V	109	10.20	27.80
7	924.00	38.90 QP	46.00	-7.10	1.05 V	1	10.60	28.40
8	990.00	37.00 QP	54.00	-17.00	1.00 V	105	8.10	28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



802.11b DSSS modulation

CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	46.00 PK	74.00	-28.00	1.23 H	294	13.30	32.80
1	2387.00	33.80 AV	54.00	-20.20	1.23 H	294	1.00	32.80
2	2390.00	46.20 PK	74.00	-27.80	1.23 H	294	12.50	33.70
2	2390.00	34.40 AV	54.00	-19.60	1.23 H	294	0.70	33.70
3	*2412.00	103.30 PK			1.23 H	294	73.50	29.80
3	*2412.00	95.60 AV			1.23 H	294	65.80	29.80
4	4824.00	40.40 PK	74.00	-33.60	1.26 H	317	5.30	35.10
4	4824.00	30.60 AV	54.00	-23.40	1.26 H	317	-4.50	35.10
5	7236.00	46.30 PK	74.00	-27.70	1.18 H	218	5.80	40.50
5	7236.00	34.80 AV	54.00	-19.20	1.18 H	218	-5.70	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	56.90 PK	74.00	-17.10	1.07 V	68	24.20	32.80
1	2387.00	44.60 AV	54.00	-9.40	1.07 V	68	11.80	32.80
2	2390.00	57.10 PK	74.00	-16.90	1.07 V	68	23.40	33.70
2	2390.00	45.20 AV	54.00	-8.80	1.07 V	68	11.50	33.70
3	*2412.00	114.20 PK			1.07 V	68	84.40	29.80
3	*2412.00	106.40 AV			1.07 V	68	76.60	29.80
4	4824.00	44.20 PK	74.00	-29.80	1.38 V	207	9.10	35.10
4	4824.00	32.30 AV	54.00	-21.70	1.38 V	207	-2.80	35.10
5	7236.00	45.00 PK	74.00	-29.00	1.20 V	119	4.50	40.50
5	7236.00	35.00 AV	54.00	-19.00	1.20 V	119	-5.50	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.20 PK			1.62 H	34	74.30	29.90
1	*2437.00	96.70 AV			1.62 H	34	66.80	29.90
2	4874.00	40.90 PK	74.00	-33.10	1.14 H	17	5.60	35.30
2	4874.00	30.60 AV	54.00	-23.40	1.14 H	17	-4.70	35.30
3	7311.00	45.60 PK	74.00	-28.40	1.51 H	279	4.90	40.70
3	7311.00	34.40 AV	54.00	-19.60	1.51 H	279	-6.30	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	114.60 PK			1.37 V	344	84.70	29.90
1	*2437.00	107.30 AV			1.37 V	344	77.40	29.90
2	4874.00	44.50 PK	74.00	-29.50	1.32 V	278	9.20	35.30
2	4874.00	32.20 AV	54.00	-21.80	1.32 V	278	-3.10	35.30
3	7311.00	45.30 PK	74.00	-28.70	1.32 V	278	4.60	40.70
3	7311.00	35.00 AV	54.00	-19.00	1.32 V	278	-5.70	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.80 PK			1.61 H	41	69.80	30.00
1	*2462.00	92.70 AV			1.61 H	41	62.70	30.00
2	2483.50	44.30 PK	74.00	-29.70	1.61 H	41	14.20	30.10
2	2483.50	37.00 AV	54.00	-17.00	1.61 H	41	6.90	30.10
3	4924.00	40.70 PK	74.00	-33.30	1.23 H	182	5.20	35.50
3	4924.00	30.70 AV	54.00	-23.30	1.23 H	182	-4.80	35.50
4	7386.00	46.50 PK	74.00	-27.50	1.46 H	323	5.70	40.80
4	7386.00	34.30 AV	54.00	-19.70	1.46 H	323	-6.50	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.00 PK			1.34 V	343	81.00	30.00
1	*2462.00	103.90 AV			1.34 V	343	73.90	30.00
2	2483.50	55.50 PK	74.00	-18.50	1.34 V	343	25.40	30.10
2	2483.50	48.20 AV	54.00	-5.80	1.34 V	343	18.10	30.10
3	4924.00	43.80 PK	74.00	-30.20	1.29 V	257	8.30	35.50
3	4924.00	32.10 AV	54.00	-21.90	1.29 V	257	-3.40	35.50
4	7386.00	47.00 PK	74.00	-27.00	1.39 V	325	6.20	40.80
4	7386.00	35.20 AV	54.00	-18.80	1.39 V	325	-5.60	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



802.11g OFDM modulation

CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	47.70 PK	74.00	-26.30	1.27 H	311	14.00	33.70
1	2390.00	33.40 AV	54.00	-20.60	1.27 H	311	-0.30	33.70
2	*2412.00	95.60 PK			1.27 H	311	65.80	29.80
2	*2412.00	86.10 AV			1.27 H	311	56.30	29.80
3	4824.00	40.40 PK	74.00	-33.60	1.27 H	311	5.30	35.10
3	4824.00	30.30 AV	54.00	-23.70	1.27 H	311	-4.80	35.10
4	7236.00	45.50 PK	74.00	-28.50	1.17 H	225	5.00	40.50
4	7236.00	34.50 AV	54.00	-19.50	1.17 H	225	-6.00	40.50

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	60.00 PK	74.00	-14.00	1.08 V	68	26.30	33.70
1	2390.00	45.90 AV	54.00	-8.10	1.08 V	68	12.20	33.70
2	*2412.00	107.90 PK			1.08 V	68	78.10	29.80
2	*2412.00	98.60 AV			1.08 V	68	68.80	29.80
3	4824.00	43.20 PK	74.00	-30.80	1.33 V	200	8.10	35.10
3	4824.00	31.60 AV	54.00	-22.40	1.33 V	200	-3.50	35.10
4	7236.00	45.40 PK	74.00	-28.60	1.21 V	116	4.90	40.50
4	7236.00	34.80 AV	54.00	-19.20	1.21 V	116	-5.70	40.50

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.10 PK			1.24 H	33	72.20	29.90
1	*2437.00	93.70 AV			1.24 H	33	63.80	29.90
2	4874.00	40.50 PK	74.00	-33.50	1.18 H	345	5.20	35.30
2	4874.00	30.40 AV	54.00	-23.60	1.18 H	345	-4.90	35.30
3	7311.00	45.40 PK	74.00	-28.60	1.43 H	321	4.70	40.70
3	7311.00	34.50 AV	54.00	-19.50	1.43 H	321	-6.20	40.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.50 PK			1.37 V	347	82.60	29.90
1	*2437.00	104.20 AV			1.37 V	347	74.30	29.90
2	4874.00	43.10 PK	74.00	-30.90	1.35 V	229	7.80	35.30
2	4874.00	31.50 AV	54.00	-22.50	1.35 V	229	-3.80	35.30
3	7311.00	44.90 PK	74.00	-29.10	1.49 V	314	4.20	40.70
3	7311.00	34.80 AV	54.00	-19.20	1.49 V	314	-5.90	40.70

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Tony Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	94.80 PK			1.26 H	298	64.80	30.00
1	*2462.00	84.80 AV			1.26 H	298	54.80	30.00
2	2483.50	47.80 PK	74.00	-26.20	1.26 H	298	17.70	30.10
2	2483.50	35.90 AV	54.00	-18.10	1.26 H	298	5.70	30.10
3	4924.00	40.60 PK	74.00	-33.40	1.25 H	320	5.10	35.50
3	4924.00	30.80 AV	54.00	-23.20	1.25 H	320	-4.70	35.50
4	7386.00	45.90 PK	74.00	-28.10	1.19 H	218	5.10	40.80
4	7386.00	34.70 AV	54.00	-19.30	1.19 H	218	-6.10	40.80

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.20 PK			1.07 V	57	76.20	30.00
1	*2462.00	96.90 AV			1.07 V	57	66.90	30.00
2	2483.50	59.20 PK	74.00	-14.80	1.07 V	57	29.10	30.10
2	2483.50	47.70 AV	54.00	-6.30	1.07 V	57	17.50	30.10
3	4924.00	43.40 PK	74.00	-30.60	1.36 V	196	7.90	35.50
3	4924.00	31.90 AV	54.00	-22.10	1.36 V	196	-3.60	35.50
4	7386.00	45.60 PK	74.00	-28.40	1.22 V	115	4.80	40.80
4	7386.00	34.90 AV	54.00	-19.10	1.22 V	115	-5.90	40.80

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “*”: Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.3.7 TEST RESULTS

802.11b DSSS modulation


MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.97	0.5	PASS
6	2437	12.42	0.5	PASS
11	2462	11.43	0.5	PASS


CH1

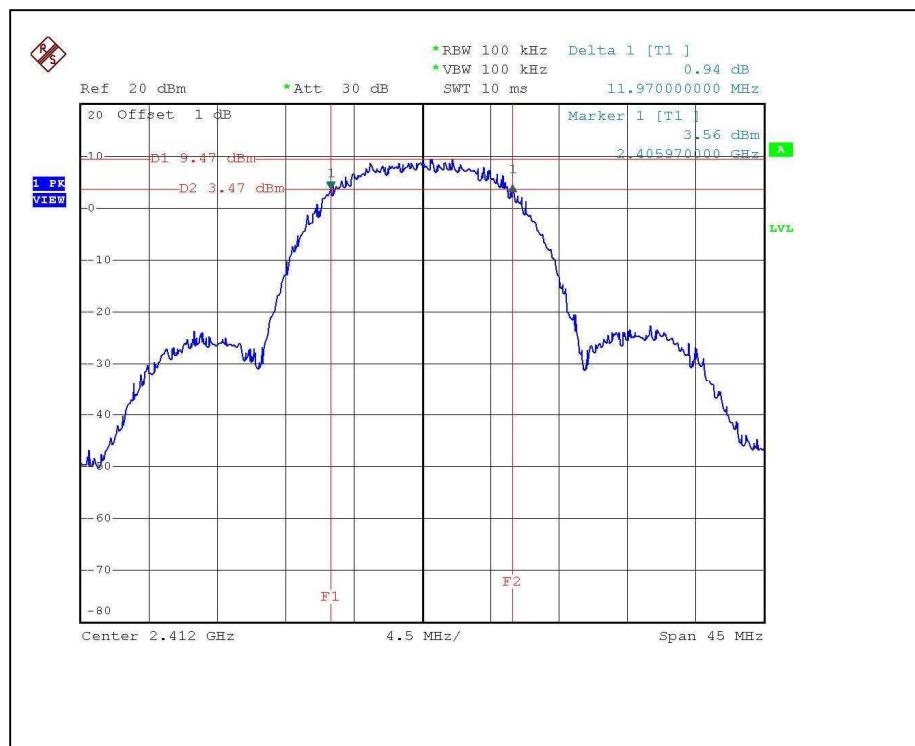

CH6

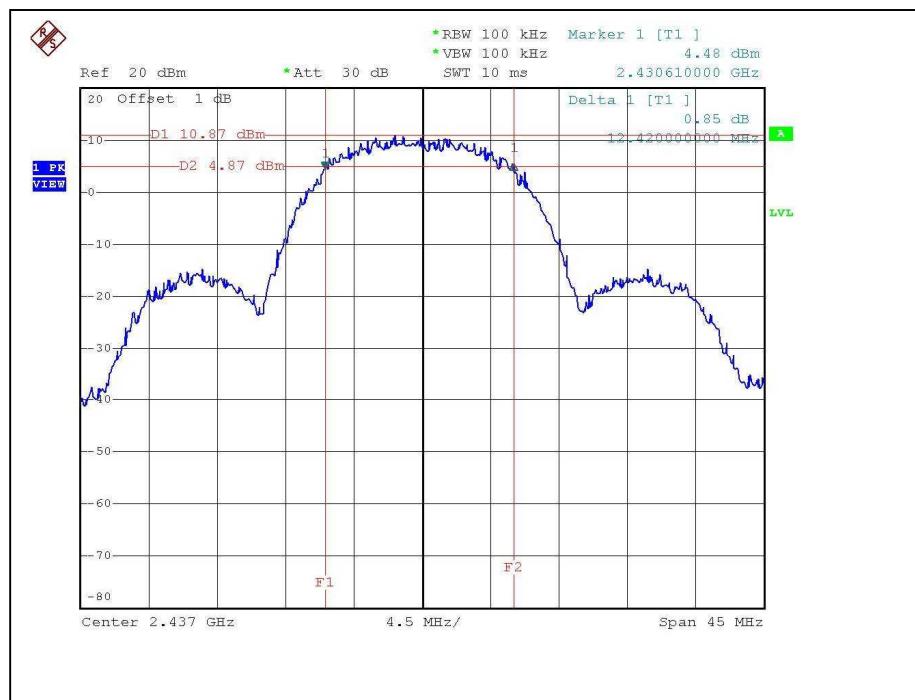

CH11

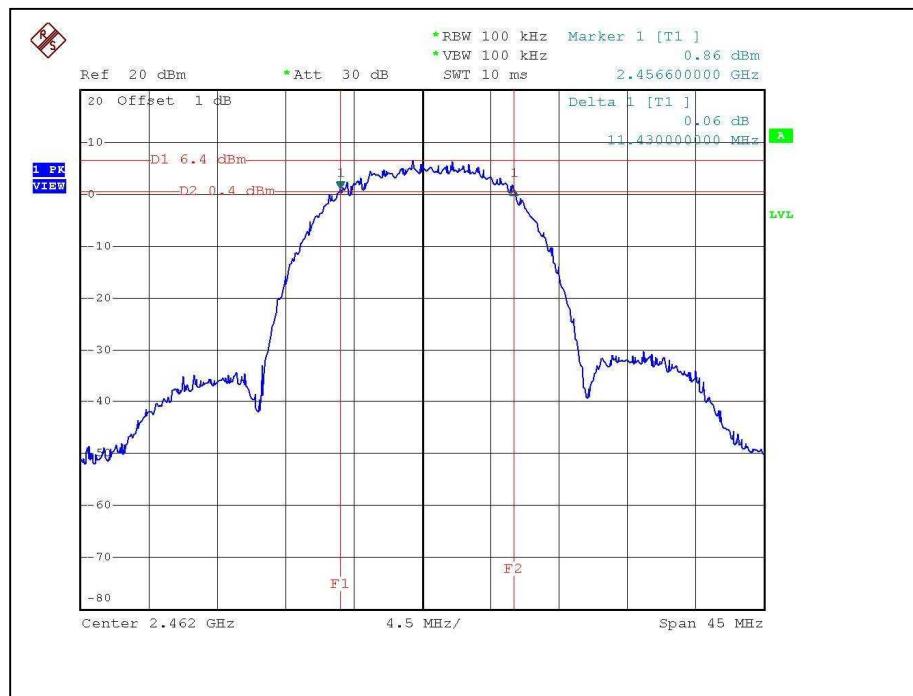




802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.38	0.5	PASS
6	2437	16.38	0.5	PASS
11	2462	16.29	0.5	PASS


CH1

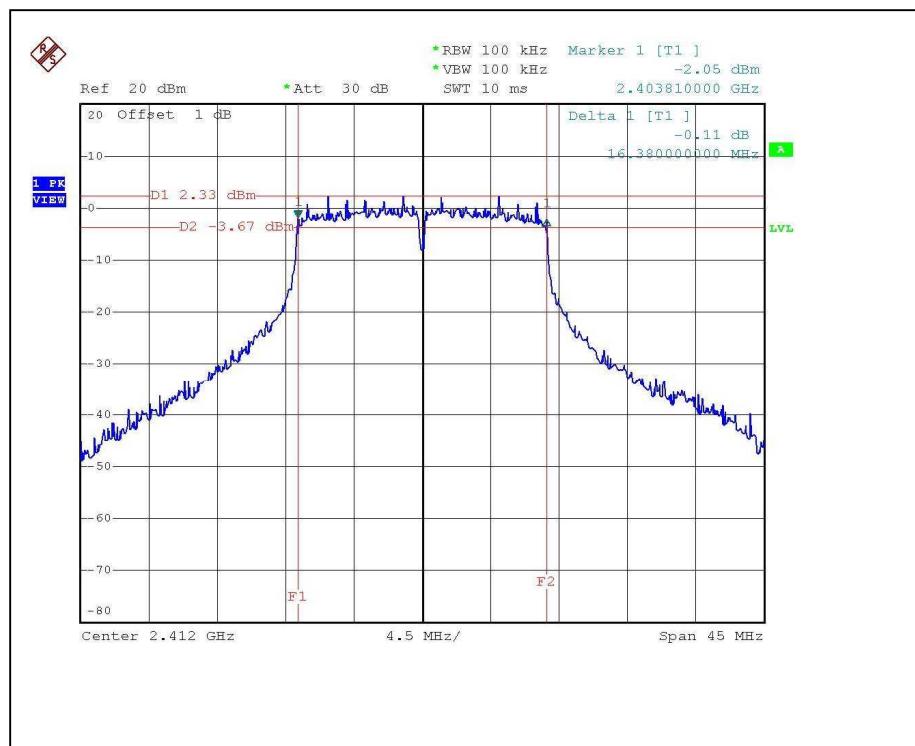

CH6

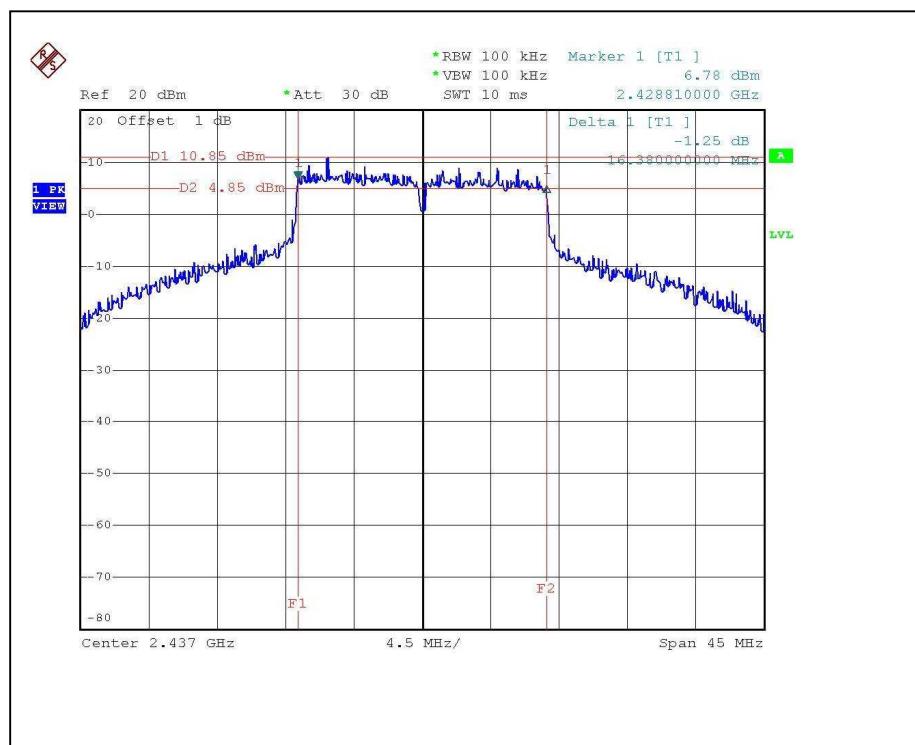

CH11

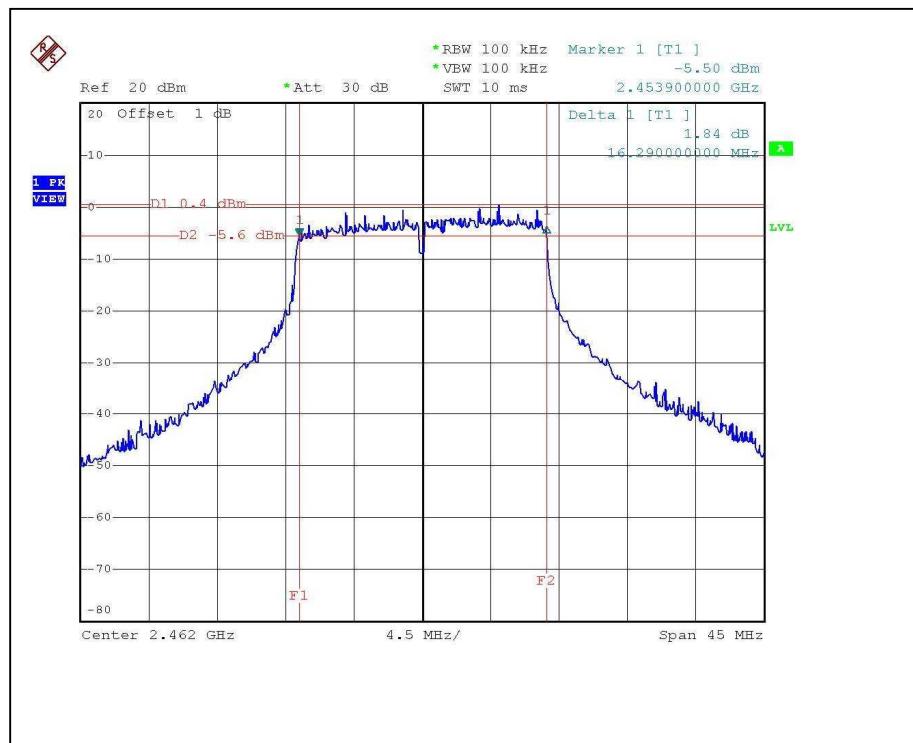



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Nov. 17, 2008
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 25, 2008
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	Aug. 15, 2008
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.7 TEST RESULTS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	123.027	20.90	30	PASS
6	2437	138.038	21.40	30	PASS
11	2462	56.234	17.50	30	PASS



802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	70.795	18.50	30	PASS
6	2437	245.471	23.90	30	PASS
11	2462	36.308	15.60	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

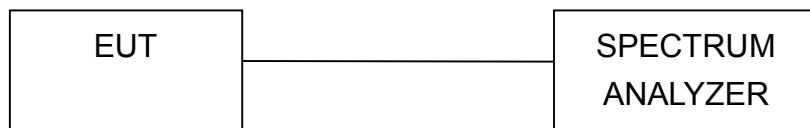

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6





4.5.7 TEST RESULTS


802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg.C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-1.21	8	PASS
6	2437	2.35	8	PASS
11	2462	-4.66	8	PASS

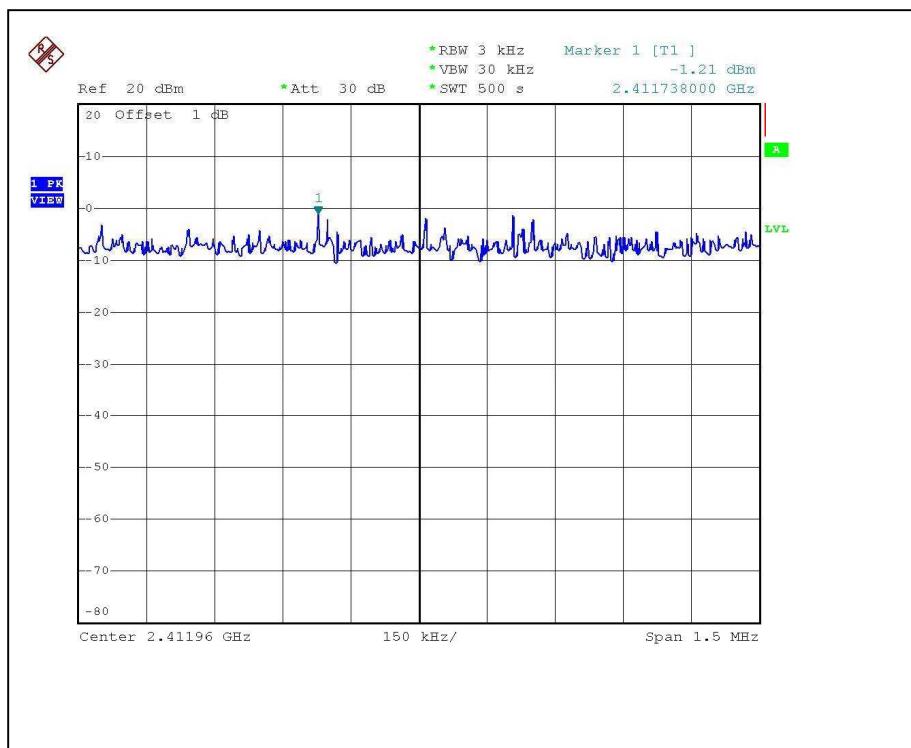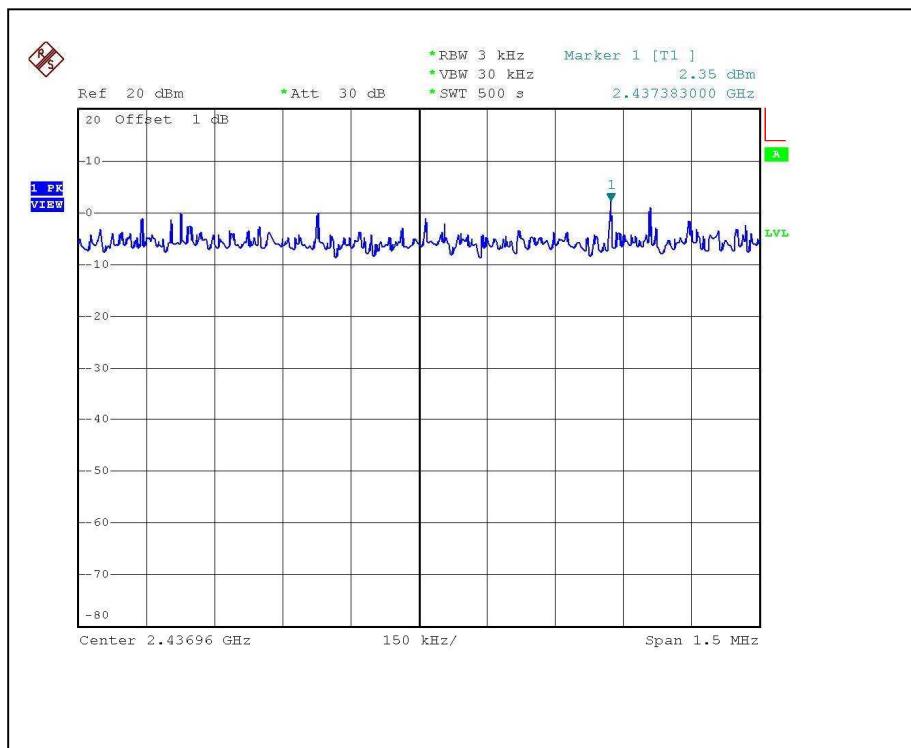CH1

CH6

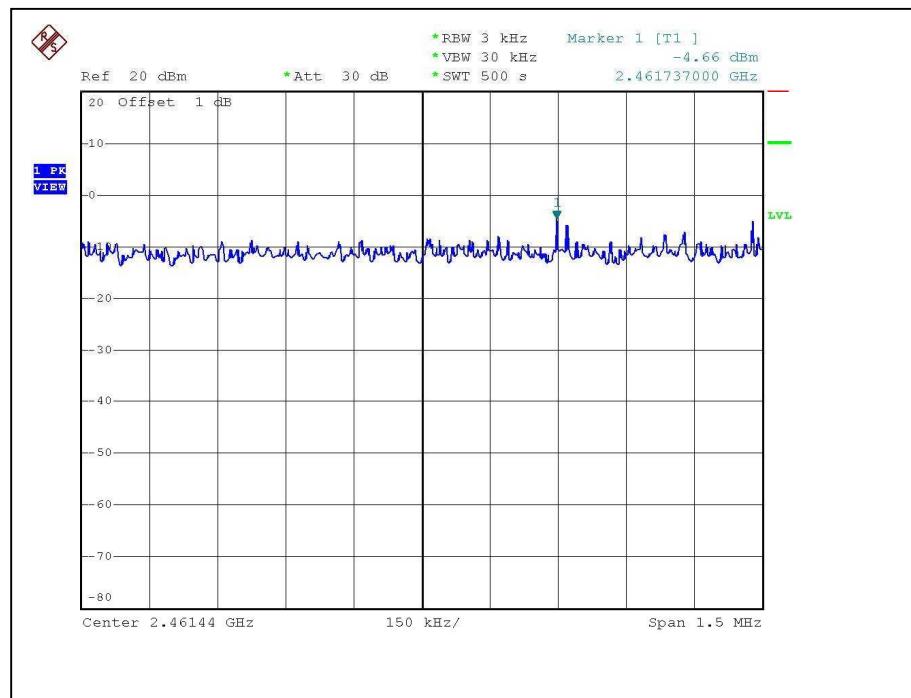
CH11






802.11g OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg.C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-9.68	8	PASS
6	2437	-3.74	8	PASS
11	2462	-12.35	8	PASS


CH1

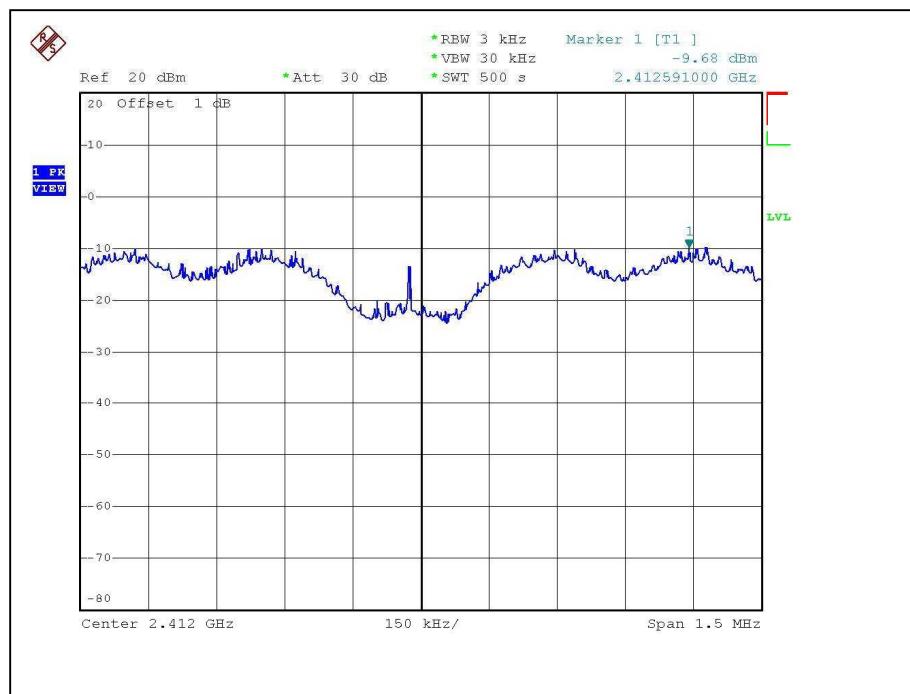

CH6

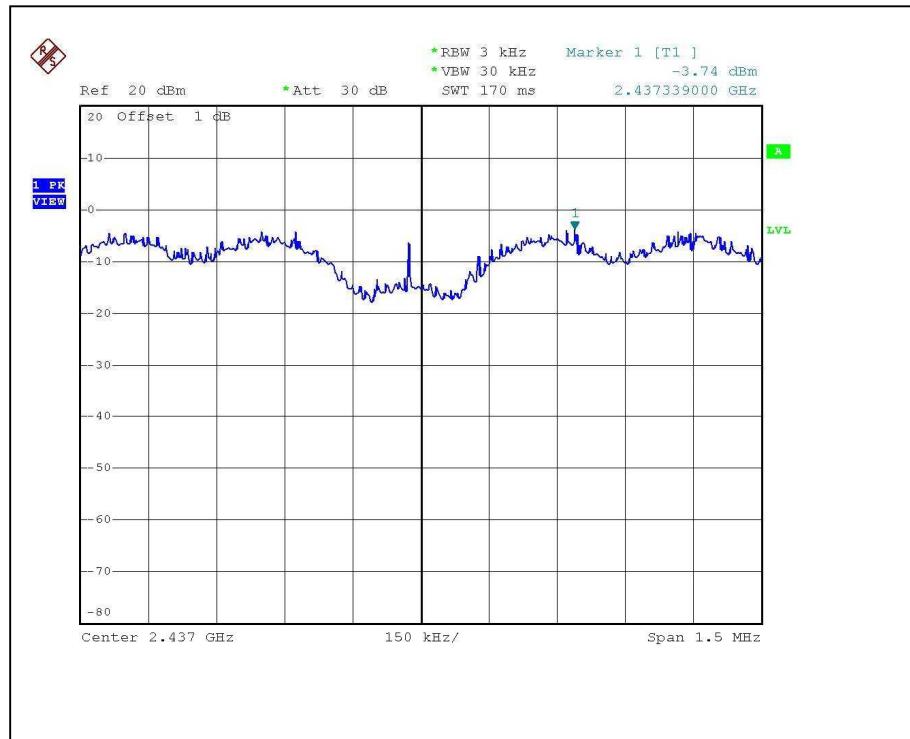

CH11

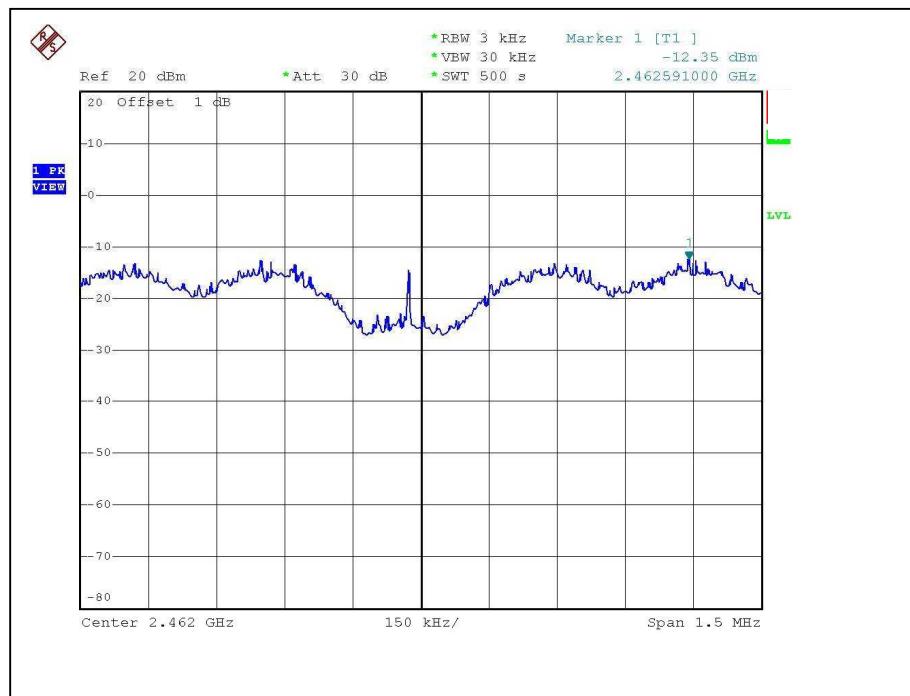



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 1MHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set RBW spectrum analyzer to 1 MHz and set VBW spectrum analyzer to 10 Hz with suitable frequency span including 1 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 EUT OPERATING CONDITION

Same as Item 4.1.6



4.6.5 TEST RESULTS – DSSS

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of DSSS technique on the following first page show 57.12dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 114.2dB_{UV}/m, so the maximum field strength in restrict band is $114.2 - 57.12 = 57.08$ dB_{UV}/m which is under 74 dB_{UV}/m limit.



The band edge emission plot of DSSS technique on the following first page shows 55.52dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 111.0dB_{UV}/m, so the maximum field strength in restrict band is $111.0 - 55.52 = 55.48$ dB_{UV}/m which is under 74 dB_{UV}/m limit.

NOTE (Average):


The band edge emission plot of DSSS technique on the following second page shows 61.22dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 106.4dB_{UV}/m, so the maximum field strength in restrict band is $106.4 - 61.22 = 45.18$ dB_{UV}/m which is under 54 dB_{UV}/m limit.

The band edge emission plot of DSSS technique on the following second page shows 57.5dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 103.9dB_{UV}/m, so the maximum field strength in restrict band is $103.9 - 57.5 = 46.4$ dB_{UV}/m which is under 54 dB_{UV}/m limit.

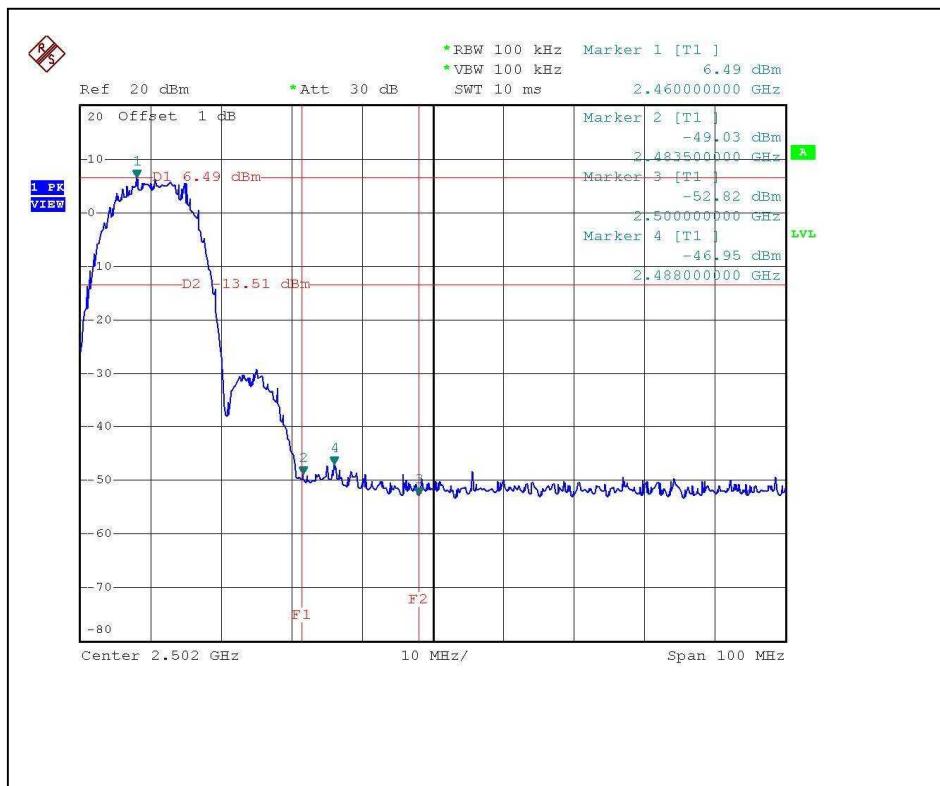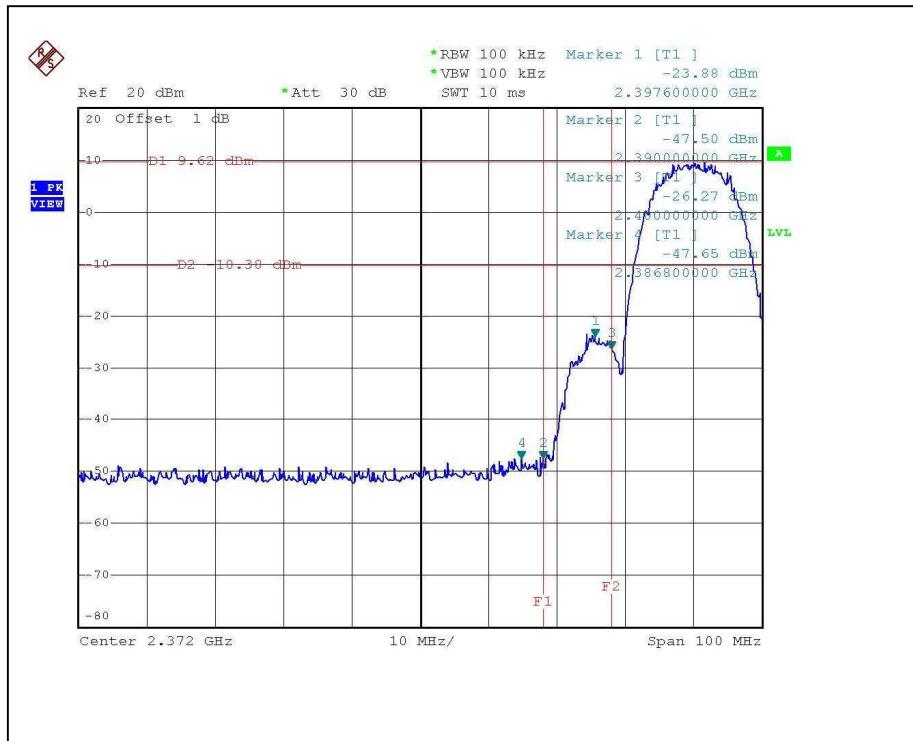


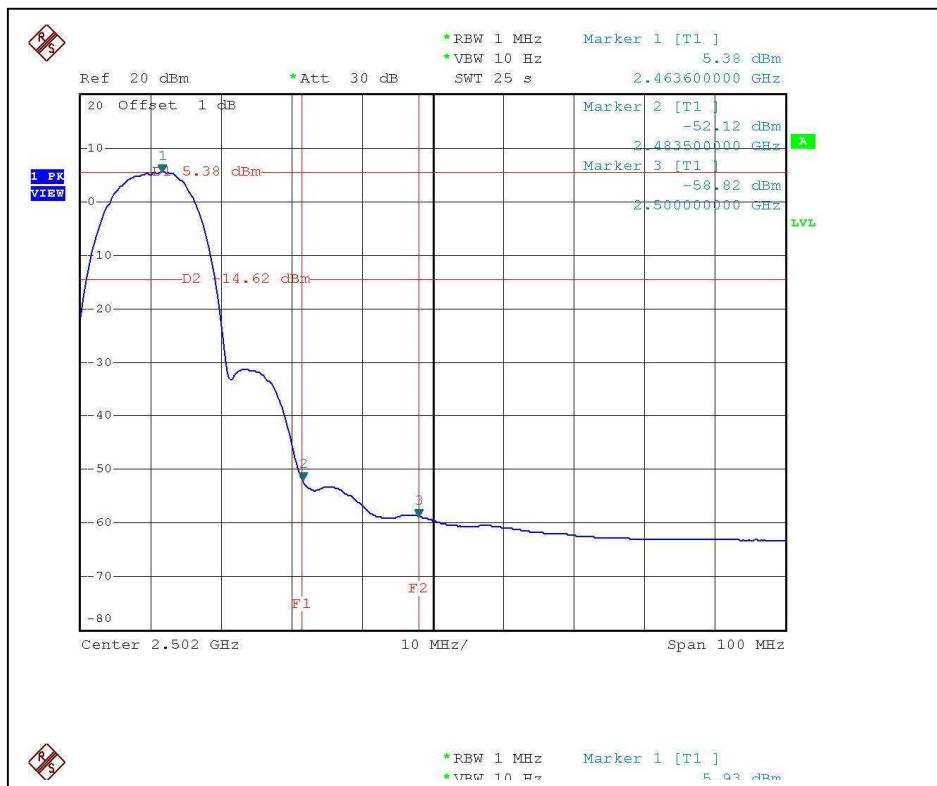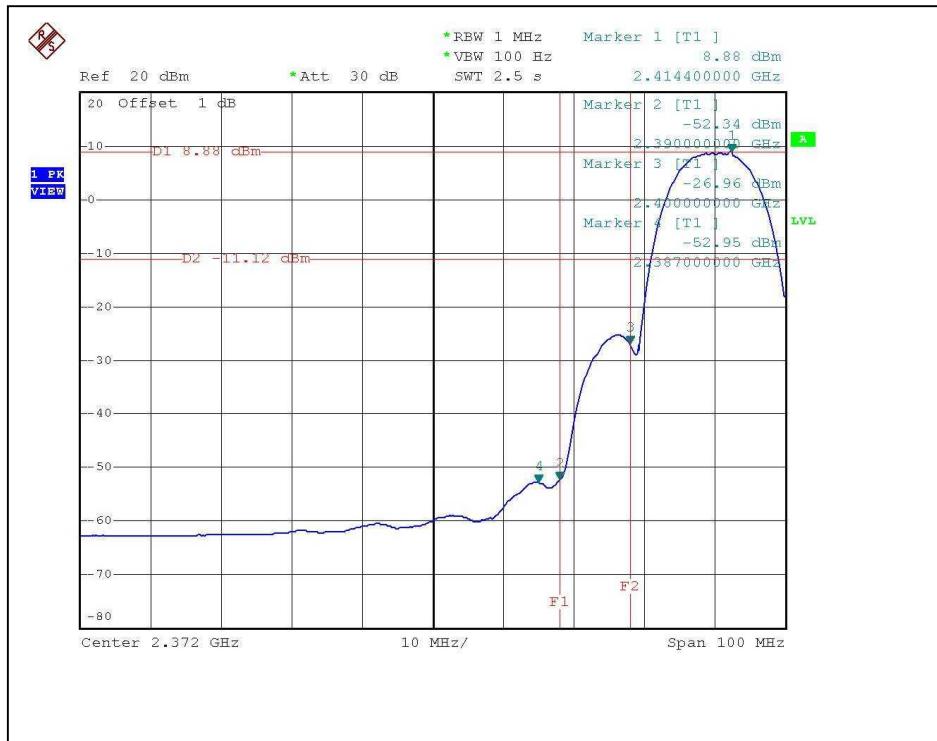

CH 1

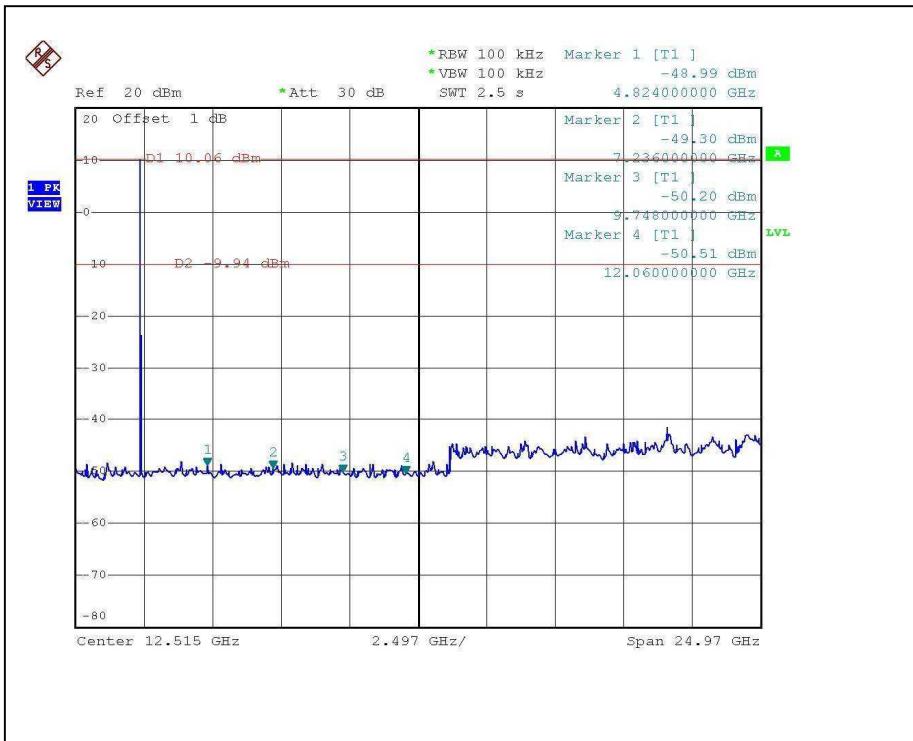

CH 11

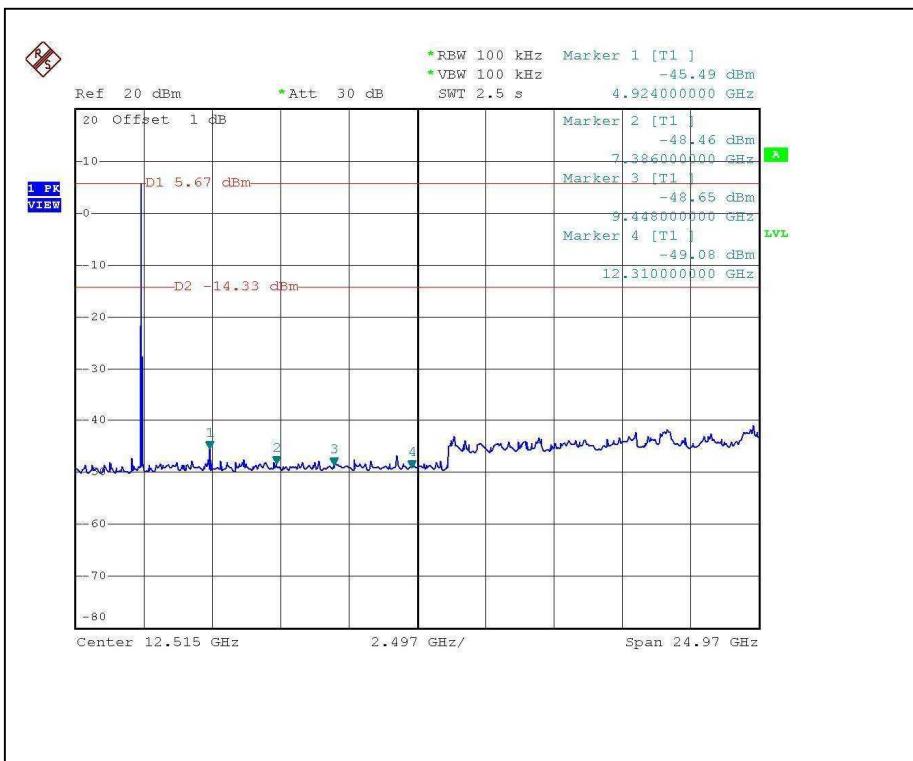

4.6.6 TEST RESULTS – OFDM

The spectrum plots are attached on the following page. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(C).

Note - The delta method is only used up to 2 MHz away from the restricted bandage, The radiated emissions which located in other restricted frequency band, the result, please refer to 4.2.

NOTE (Peak):



The band edge emission plot of OFDM technique on the following first page show 47.92dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 107.9dBuV/m, so the maximum field strength in restrict band is $107.9 - 47.92 = 59.98$ dBuV/m which is under 74 dBuV/m limit.



The band edge emission plot of OFDM technique on the following first page shows 46.96dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 106.2dBuV/m, so the maximum field strength in restrict band is $106.2 - 46.96 = 59.24$ dBuV/m which is under 74 dBuV/m limit.

NOTE (Average):


The band edge emission plot of OFDM technique on the following second page shows 52.69dB delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2 is 98.6dBuV/m, so the maximum field strength in restrict band is $98.6 - 52.69 = 45.91$ dBuV/m which is under 54 dBuV/m limit.

The band edge emission plot of OFDM technique on the following second page shows 48.94dB delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2 is 96.9dBuV/m, so the maximum field strength in restrict band is $96.9 - 48.94 = 47.96$ dBuV/m which is under 54 dBuV/m limit.

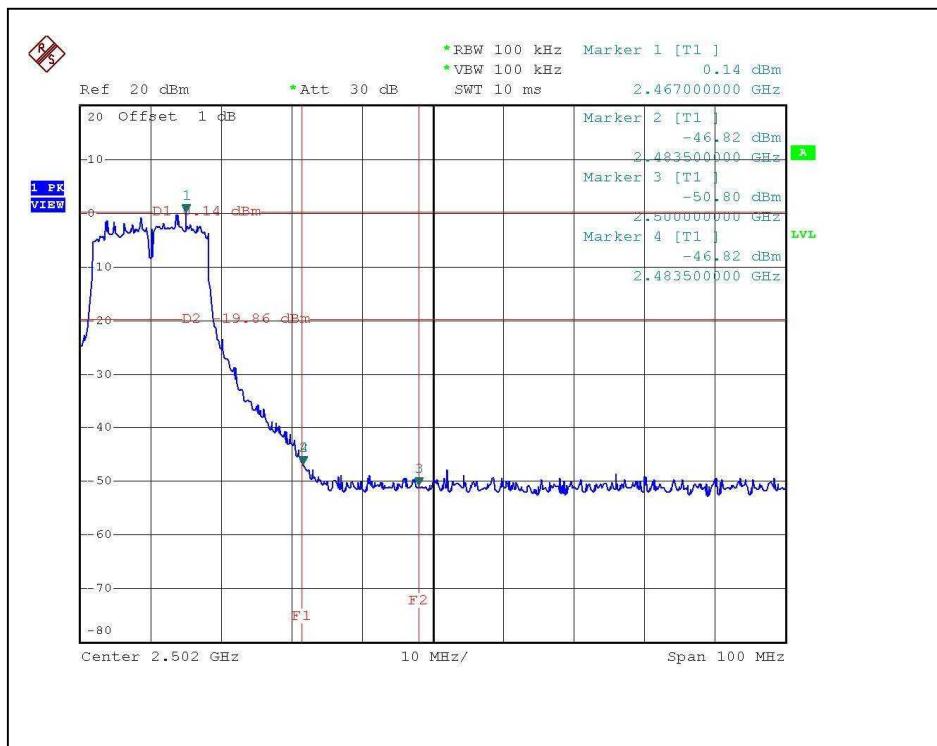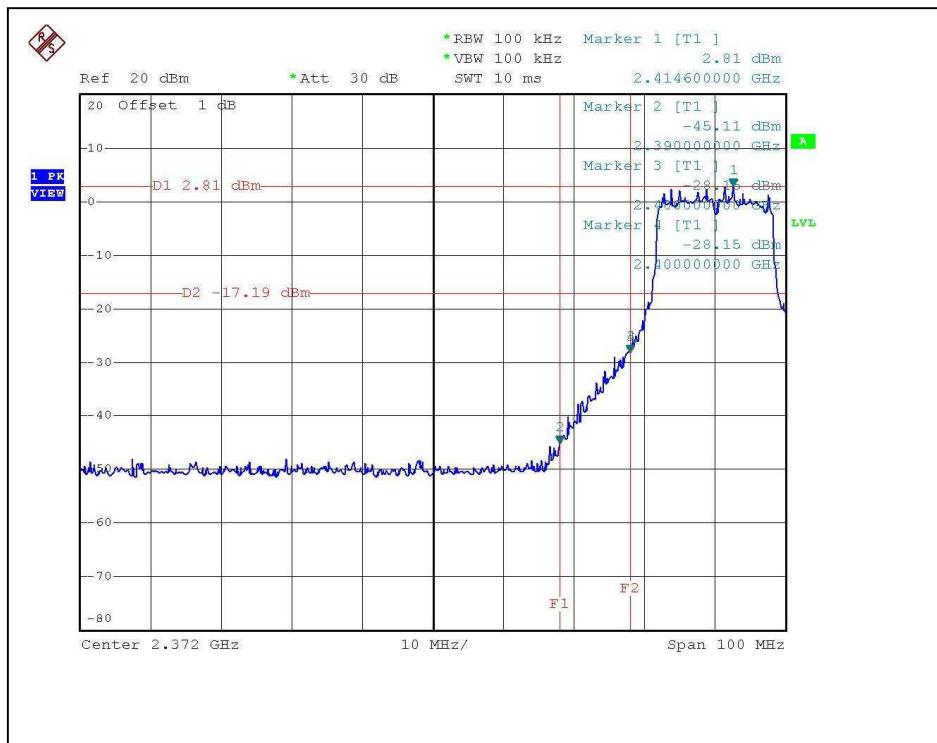


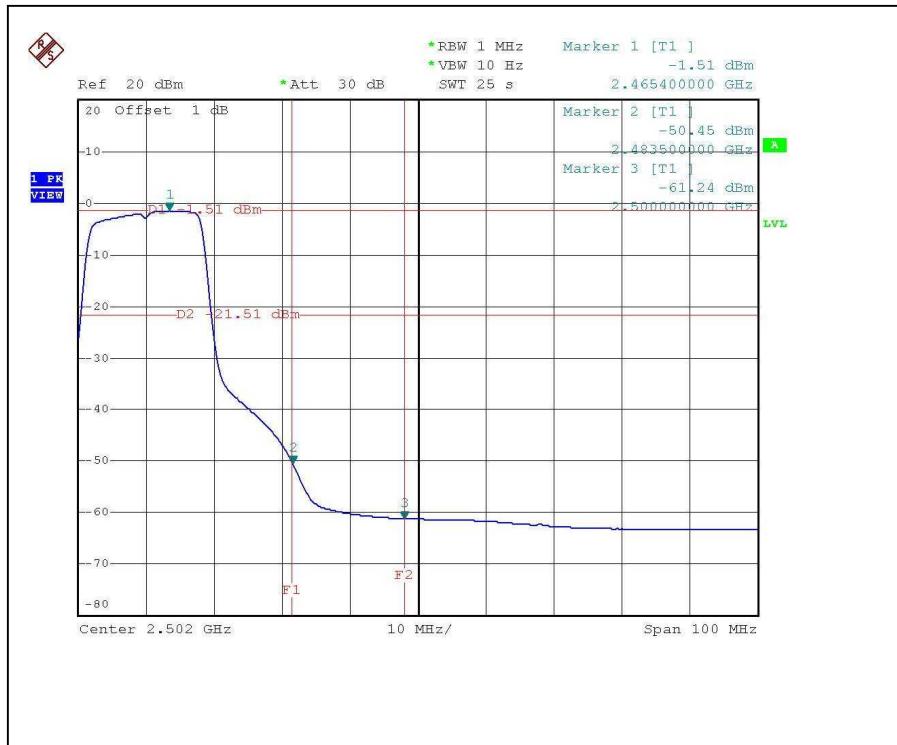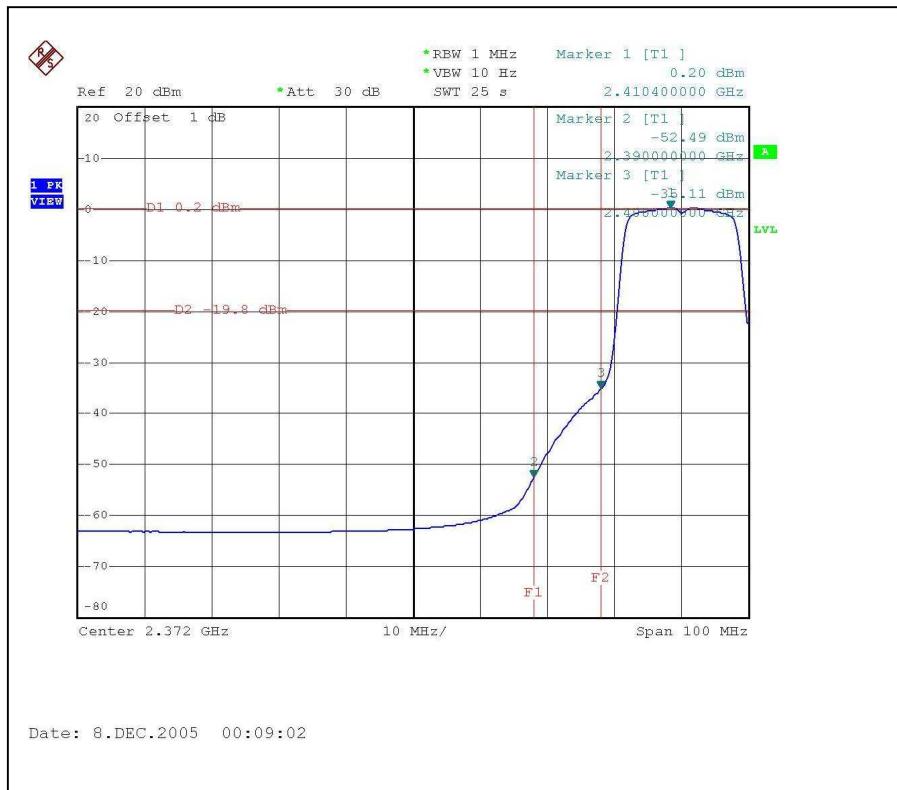

CH 1

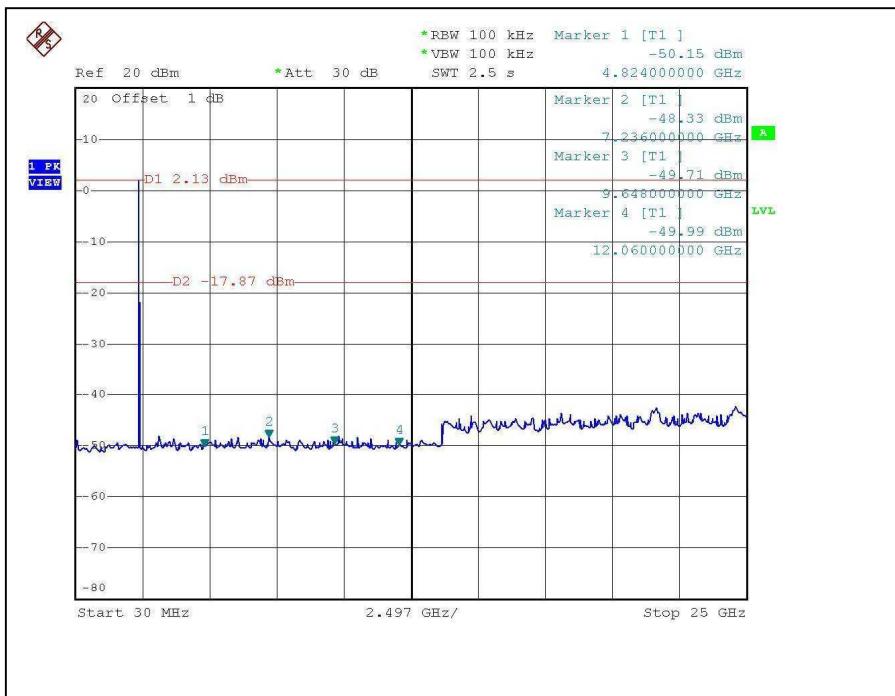

CH 11

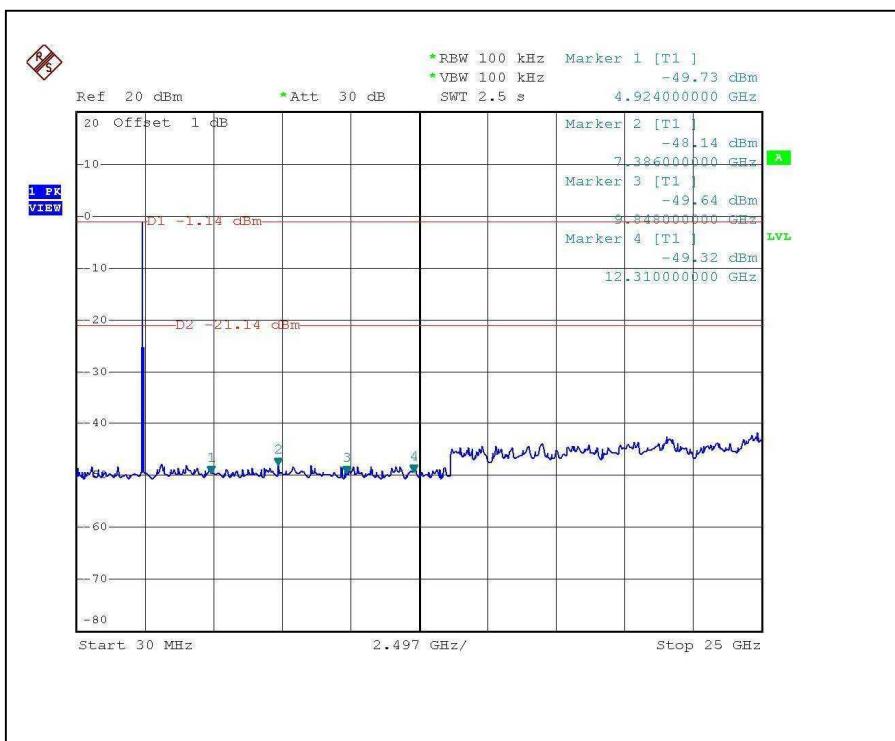



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

There are four antennas provided to this EUT, please refer to the following table:

Model	Antenna Type	Gain (dBi)	Antenna Connector	Note
FDS_2FED01+I3G	Dual Band Antenna, Dipole	For 2.4GHz : 3 dBi	MMCX	Integral antenna
		For 5GHz : 5 dBi		
NA	Dipole	For 2.4GHz : 2 dBi	Reverse SMA	dedicated antenna
W1028	Dipole	For 5GHz : 2 dBi	Reverse SMA	

The model: FDS_2FED01+I3G, the worse case one was chosen for final test.



5. TEST TYPES AND RESULTS (802.11a, 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 10, 2009
Line-Impedance Stabilization Network(for EUT)	KNW-407	8-1395-12	Aug. 19, 2008
Line-Impedance Stabilization Network(for Peripheral)	ENV-216	100072	Nov. 08, 2008
RF Cable (JETBAO)	RG5B/U-6m	COACAB-9KHz-30MHz	Aug. 15, 2008
50 ohms Terminator	50	3	Nov. 15, 2008
Software	ADT_Cond_V7.3.2	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
4. The test was performed in ADT Shielded Room No. A.
5. The VCCI Con A Registration No. is C-817.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs
- b. provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

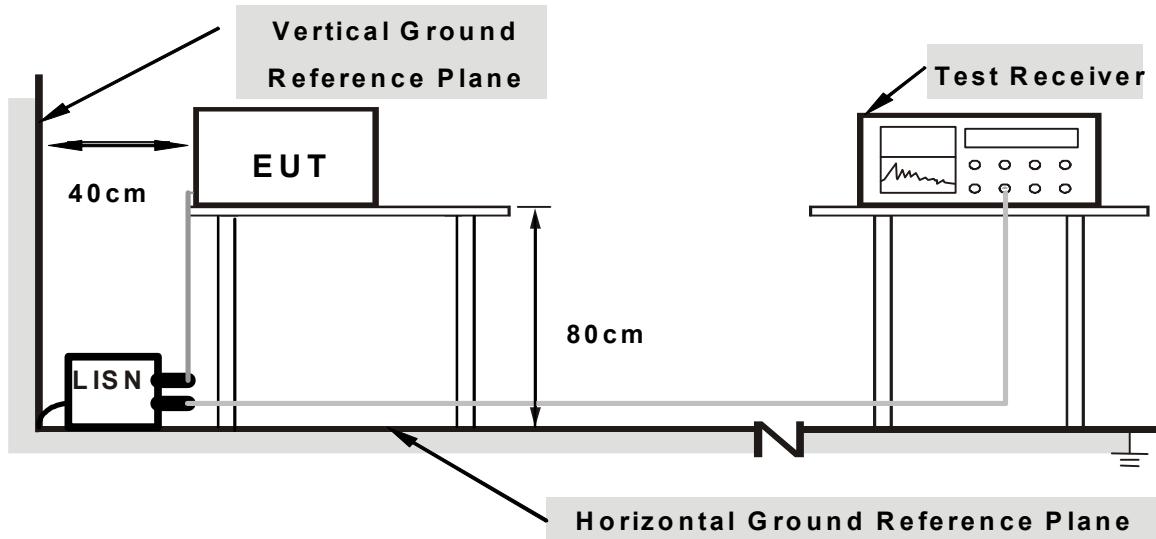

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared other computer systems to act as a communication partner and placed them outside of testing area.
- c. The communication partner run test program “ART48 Build 10” to enable EUT under transmission/receiving condition continuously at specific channel frequency via UTP cable.

5.1.7 TEST RESULTS


Conducted Worst-Case Data

TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]
	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.271	0.60	47.17	-	47.77	-	61.08	51.08	-13.31	-
2	0.420	0.60	44.63	-	45.23	-	57.46	47.46	-12.22	-
3	0.560	0.63	43.18	-	43.81	-	56.00	46.00	-12.19	-
4	1.236	0.70	41.45	-	42.15	-	56.00	46.00	-13.85	-
5	1.677	0.70	39.75	-	40.45	-	56.00	46.00	-15.55	-
6	5.316	0.94	39.54	-	40.48	-	60.00	50.00	-19.52	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

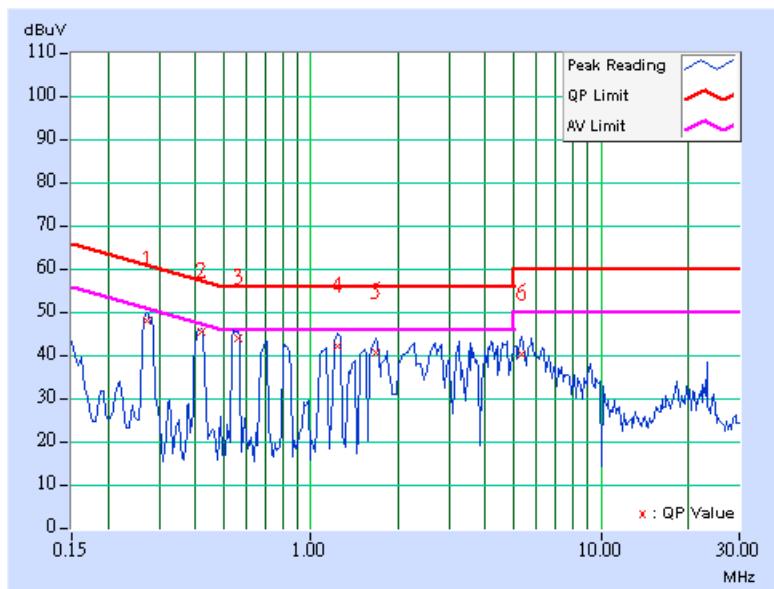


TEST MODE	With Adapter	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.271	0.40	46.89	-	47.29	-	61.08	51.08	-13.79	-
2	0.416	0.41	44.43	-	44.84	-	57.54	47.54	-12.70	-
3	0.564	0.45	42.60	-	43.05	-	56.00	46.00	-12.95	-
4	0.681	0.49	41.05	-	41.54	-	56.00	46.00	-14.46	-
5	1.228	0.60	40.69	-	41.29	-	56.00	46.00	-14.71	-
6	5.000	0.87	34.46	-	35.33	-	56.00	46.00	-20.67	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

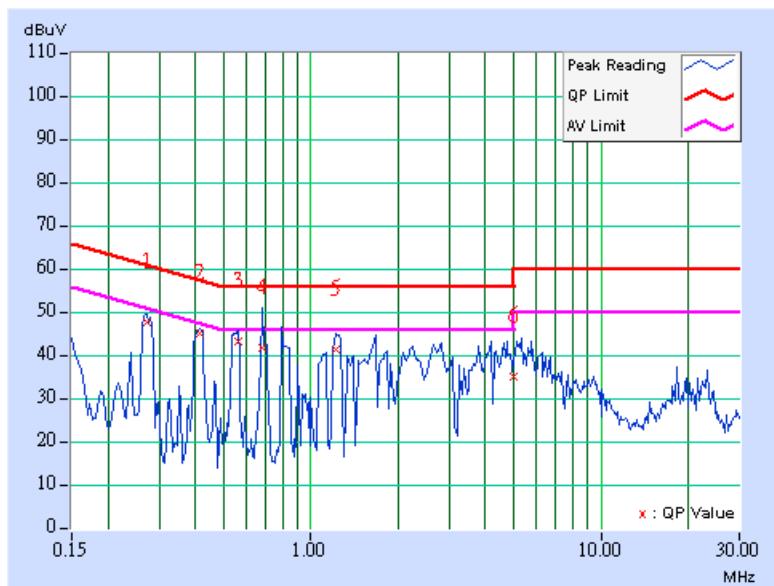


TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	39.08	-	48.88	-	63.42	53.42	-14.54	-
2	0.271	9.80	34.87	-	44.67	-	61.08	51.08	-16.41	-
3	0.500	9.82	3.84	-	13.66	-	56.00	46.00	-42.34	-
4	0.955	9.89	33.08	-	42.97	-	56.00	46.00	-13.03	-
5	2.045	9.90	32.13	-	42.03	-	56.00	46.00	-13.97	-
6	15.141	10.10	30.73	-	40.83	-	60.00	50.00	-19.17	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

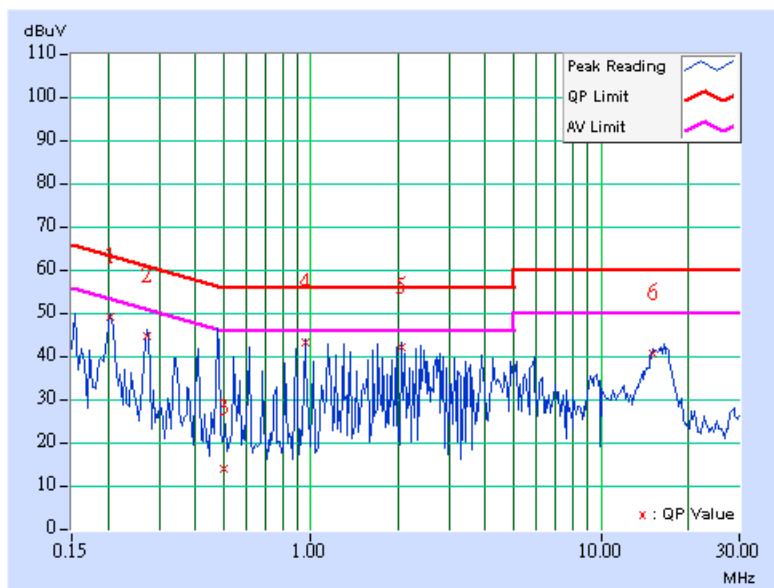


TEST MODE	With POE	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 980hPa	TESTED BY	Eric Lee

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.205	9.80	38.91	-	48.71	-	63.42	53.42	-14.71	-
2	0.478	9.81	37.75	34.68	47.56	44.49	56.37	46.37	-8.81	-1.88
3	0.615	9.84	32.53	-	42.37	-	56.00	46.00	-13.63	-
4	0.955	9.89	34.41	-	44.30	-	56.00	46.00	-11.70	-
5	1.978	10.00	32.91	-	42.91	-	56.00	46.00	-13.09	-
6	16.383	10.26	30.34	-	40.60	-	60.00	50.00	-19.40	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

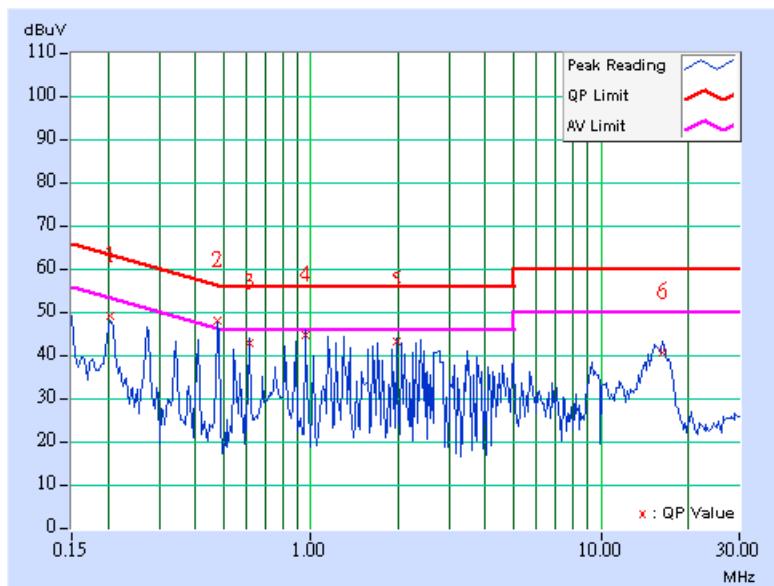

5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 15, 2008
HP Pre_Amplifier	8449B	3008A01922	Oct. 04, 2008
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Mar. 31, 2009
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	July 26, 2008
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 16, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 27, 2009
RF Switches (ARNITSU)	CS-201	1565157	Aug. 13, 2008
RF CABLE (Chaintek)	SF102	22054-2	Dec. 06. 2008
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	Aug. 13, 2008
Software	ADT_Radiated_V 7.6.15.8	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 3789C-3.

5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10-meter open field site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

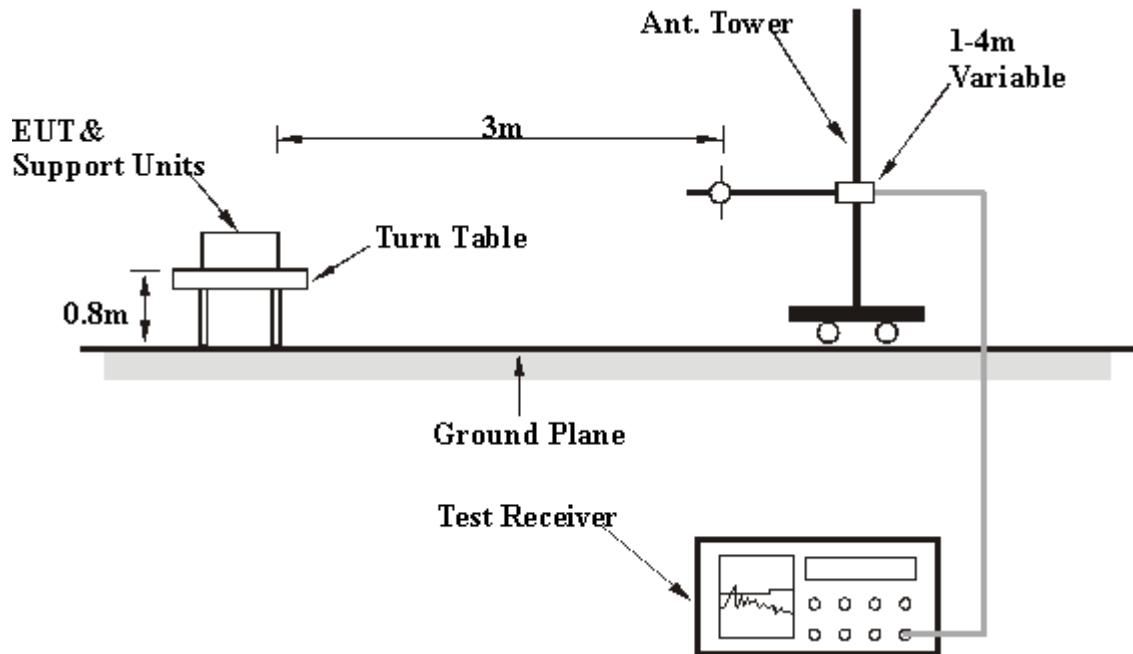

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

TEST MODE	With Adapter	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	23.80 QP	46.00	-22.20	1.82 H	287	10.50	13.30
2	300.00	23.70 QP	46.00	-22.30	1.28 H	322	7.40	16.30
3	375.00	26.20 QP	46.00	-19.80	1.05 H	307	8.60	17.60
4	500.00	26.00 QP	46.00	-20.00	1.12 H	216	5.10	20.90
5	792.00	37.10 QP	46.00	-8.90	1.06 H	187	10.50	26.60
6	891.00	38.90 QP	46.00	-7.10	1.03 H	274	11.10	27.80
7	924.00	38.50 QP	46.00	-7.50	1.54 H	321	10.10	28.40
8	990.00	40.10 QP	54.00	-13.90	1.72 H	243	11.20	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.10	25.50 QP	40.00	-14.50	1.13 V	275	11.30	14.20
2	250.00	28.50 QP	46.00	-17.50	1.07 V	238	15.20	13.30
3	500.00	26.30 QP	46.00	-19.70	1.31 V	143	5.40	20.90
4	792.00	33.70 QP	46.00	-12.30	1.15 V	246	7.10	26.60
5	858.00	33.60 QP	46.00	-12.40	1.22 V	48	6.10	27.50
6	891.00	38.50 QP	46.00	-7.50	1.25 V	210	10.70	27.80
7	924.00	37.20 QP	46.00	-8.80	1.00 V	54	8.80	28.40
8	990.00	38.10 QP	54.00	-15.90	1.09 V	219	9.20	28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



Below 1GHz Worst-Case Data

TEST MODE	With POE	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	21deg. C, 63%RH, 980hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	250.00	23.40 QP	46.00	-22.60	1.84 H	203	10.10	13.30
2	300.00	21.90 QP	46.00	-24.10	1.19 H	324	5.60	16.30
3	375.00	24.70 QP	46.00	-21.30	1.21 H	176	7.10	17.60
4	500.00	25.20 QP	46.00	-20.80	1.01 H	84	4.30	20.90
5	792.00	36.80 QP	46.00	-9.20	1.31 H	305	10.20	26.60
6	891.00	39.90 QP	46.00	-6.10	1.13 H	249	12.10	27.80
7	924.00	37.50 QP	46.00	-8.50	1.06 H	278	9.10	28.40
8	990.00	39.30 QP	54.00	-14.70	1.00 H	302	10.40	28.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	42.10	32.10 QP	40.00	-7.90	1.00 V	342	17.90	14.20
2	250.00	26.50 QP	46.00	-19.50	1.01 V	296	13.20	13.30
3	500.00	26.10 QP	46.00	-19.90	1.31 V	58	5.20	20.90
4	792.00	35.50 QP	46.00	-10.50	1.25 V	264	8.90	26.60
5	858.00	33.50 QP	46.00	-12.50	1.28 V	172	6.00	27.50
6	891.00	37.20 QP	46.00	-8.80	1.21 V	273	9.40	27.80
7	924.00	38.30 QP	46.00	-7.70	1.14 V	84	9.90	28.40
8	990.00	37.00 QP	54.00	-17.00	1.03 V	209	8.10	28.90

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value



802.11a OFDM modulation

CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Moris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	103.50 PK			1.28 H	246	67.10	36.40
1	*5745.00	95.00 AV			1.28 H	246	58.60	36.40
2	#11490.00	62.50 PK	74.00	-11.50	1.54 H	142	11.40	51.10
2	#11490.00	51.20 AV	54.00	-2.80	1.54 H	142	0.10	51.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5745.00	113.90 PK			1.25 V	278	77.50	36.40
1	*5745.00	105.70 AV			1.25 V	278	69.30	36.40
2	#11490.00	62.90 PK	74.00	-11.10	1.38 V	314	11.80	51.10
2	#11490.00	51.80 AV	54.00	-2.20	1.38 V	314	0.70	51.10

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247



CHANNEL	Channel 3	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Moris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	103.60 PK			1.21 H	287	67.10	36.50
1	*5785.00	94.90 AV			1.21 H	287	58.40	36.50
2	#11570.00	62.50 PK	74.00	-11.50	1.51 H	3	11.60	50.90
2	#11570.00	51.50 AV	54.00	-2.50	1.51 H	3	0.60	50.90

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5785.00	114.30 PK			1.17 V	265	77.80	36.50
1	*5785.00	105.50 AV			1.17 V	265	69.00	36.50
2	#11570.00	63.10 PK	74.00	-10.90	1.42 V	343	12.20	50.90
2	#11570.00	52.20 AV	54.00	-1.80	1.42 V	343	1.30	50.90

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247



CHANNEL	Channel 5	FREQUENCY RANGE	1 ~ 40 GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	14deg. C, 57%RH, 980hPa	TESTED BY	Moris Lin

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	103.30 PK			1.26 H	274	66.70	36.60
1	*5825.00	95.00 AV			1.26 H	274	58.40	36.60
2	#11650.00	62.20 PK	74.00	-11.80	1.47 H	335	11.60	50.60
2	#11650.00	51.40 AV	54.00	-2.60	1.47 H	335	0.80	50.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5825.00	114.70 PK			1.17 V	270	78.10	36.60
1	*5825.00	106.10 AV			1.17 V	270	69.50	36.60
2	#11650.00	62.30 PK	74.00	-11.70	1.39 V	26	11.70	50.60
2	#11650.00	51.20 AV	54.00	-2.80	1.39 V	26	0.60	50.60

NOTE:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value
5. “*” : Fundamental frequency
6. “#”The radiated frequency falling in the restricted band.
7. The limit value is defined as per 15.247



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP



5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




5.3.7 TEST RESULTS

802.11a OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.38	0.5	PASS
3	5785	16.29	0.5	PASS
5	5825	16.47	0.5	PASS

CH1

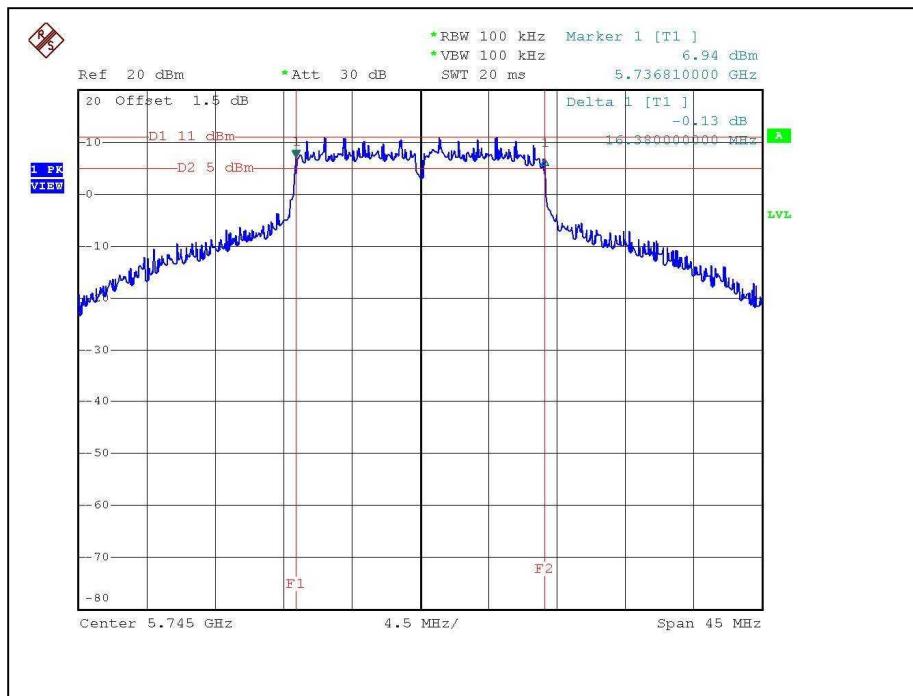


CH3

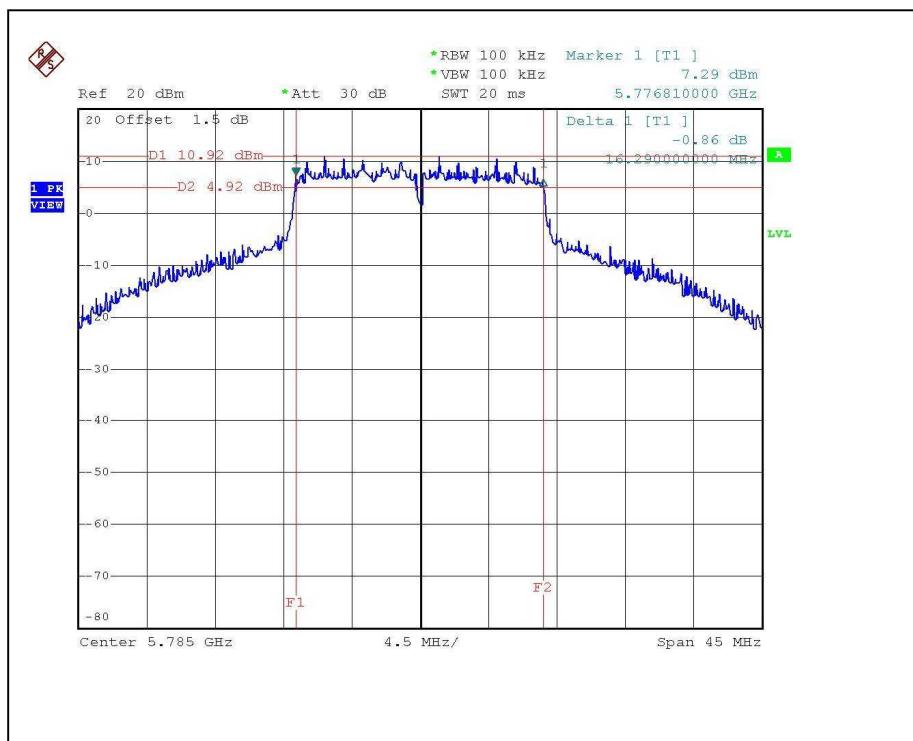



CH5

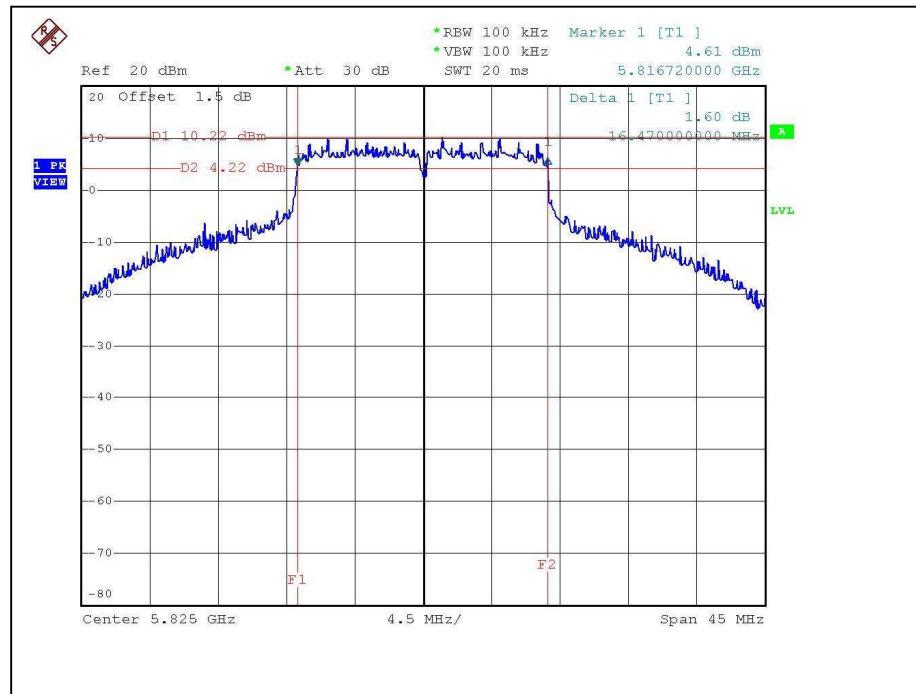



5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008
Agilent SIGNAL GENERATOR	E8257C	MY43320668	Dec. 28, 2008
TEKTRONIX OSCILLOSCOPE	TDS380	B016335	July. 16, 2008
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6



5.4.7 TEST RESULTS

802.11a OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	251.189	24	30	PASS
3	5785	218.776	23.4	30	PASS
5	5825	213.796	23.3	30	PASS



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP

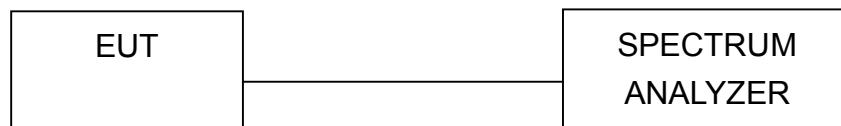

5.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




5.5.7 TEST RESULTS

802.11a OFDM modulation


MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	20deg. C, 50%RH, 980hPa
TESTED BY	Moris Lin		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-3.08	8	PASS
3	5785	-2.37	8	PASS
5	5825	-3.08	8	PASS


CH1

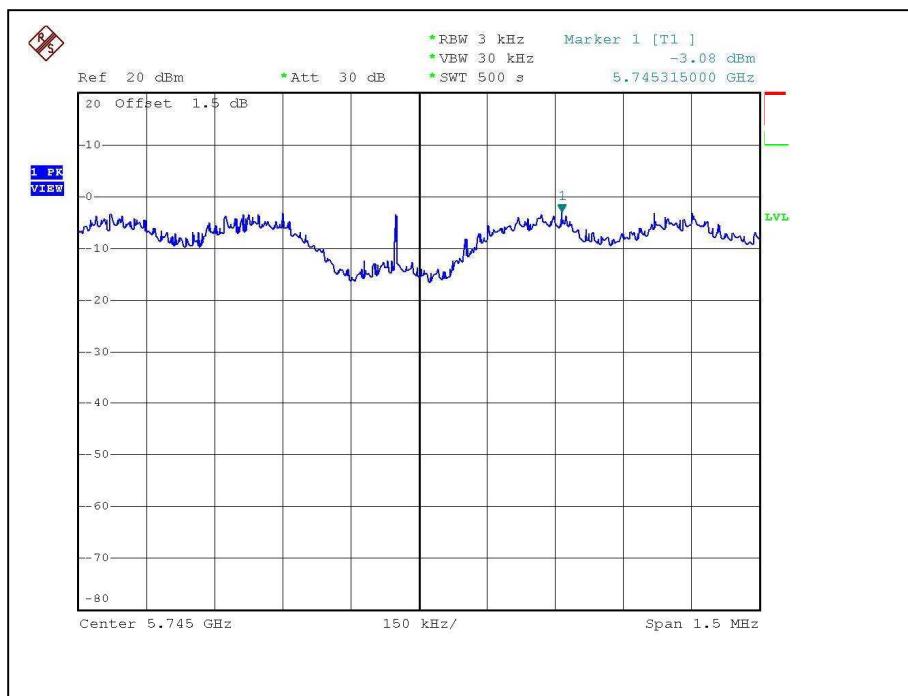

CH3

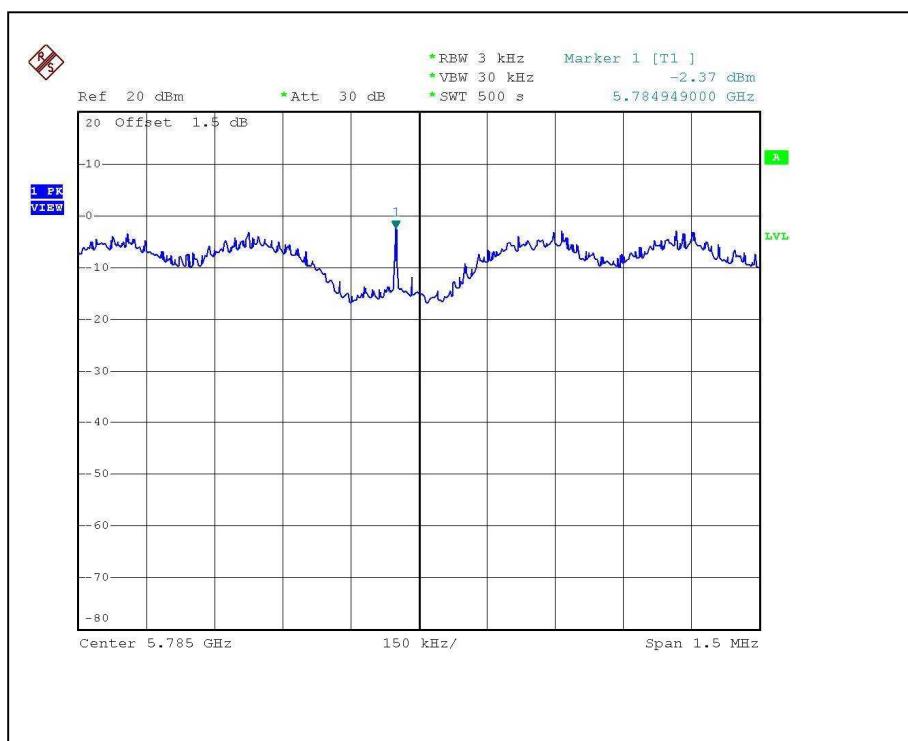

CH5

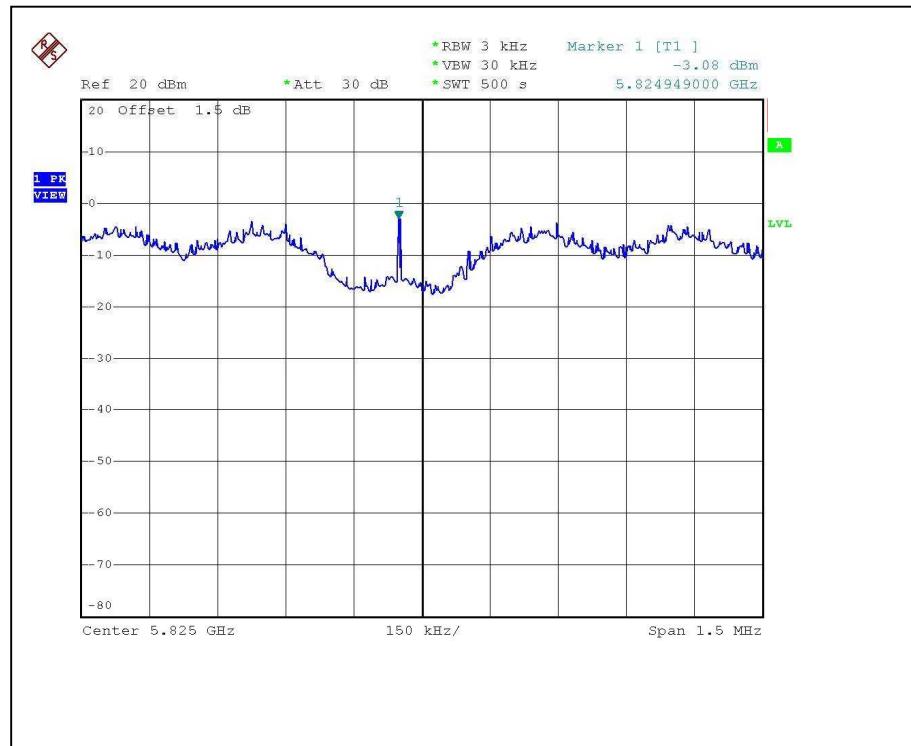



5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 17, 2008

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.



5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation

5.6.5 EUT OPERATING CONDITION



Same as Item 4.3.6




5.6.6 TEST RESULTS

The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).


802.11a OFDM modulation

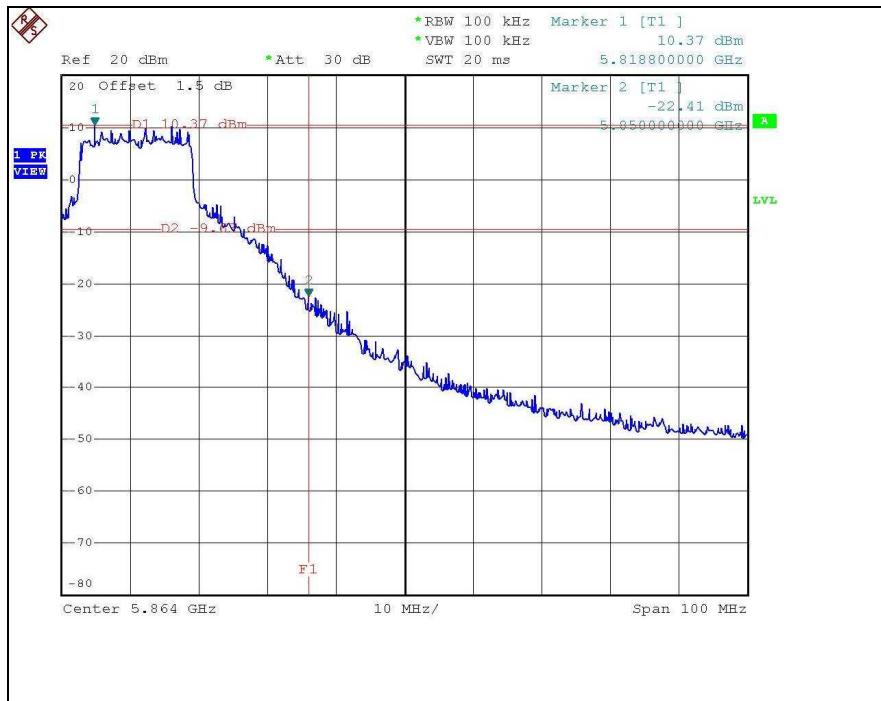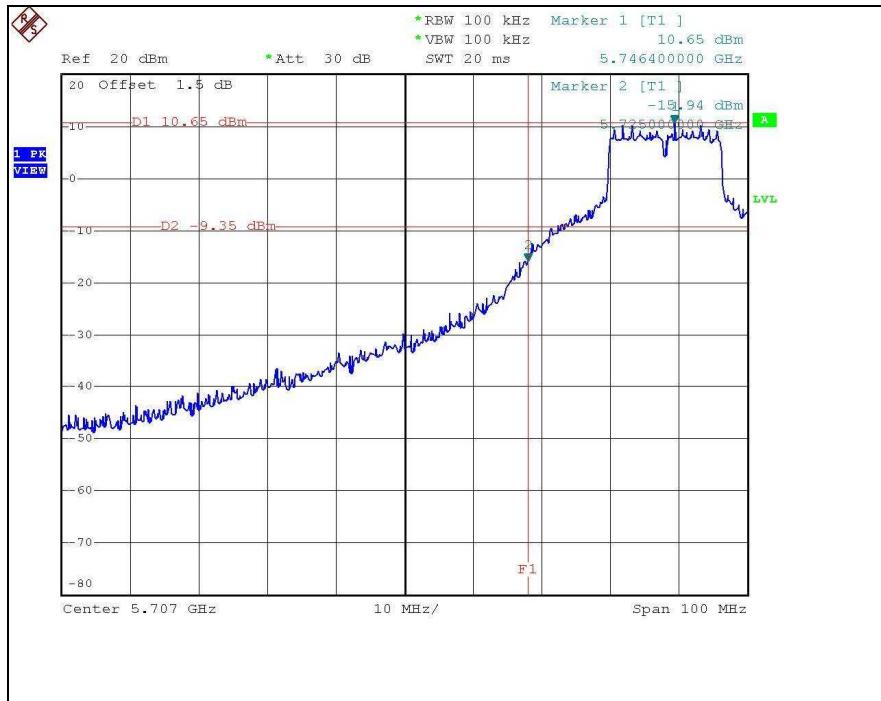

CH 1

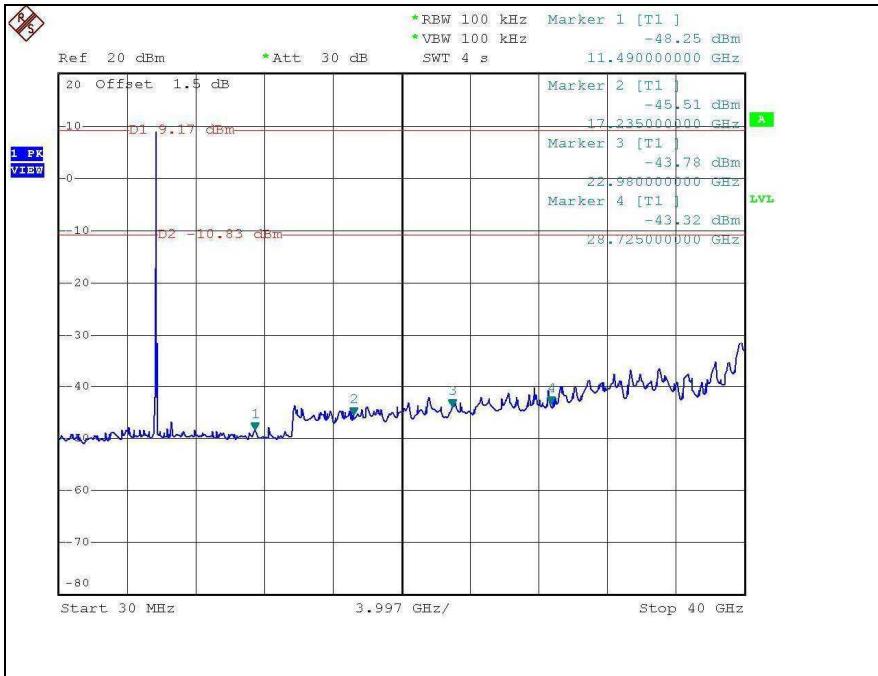

CH 5

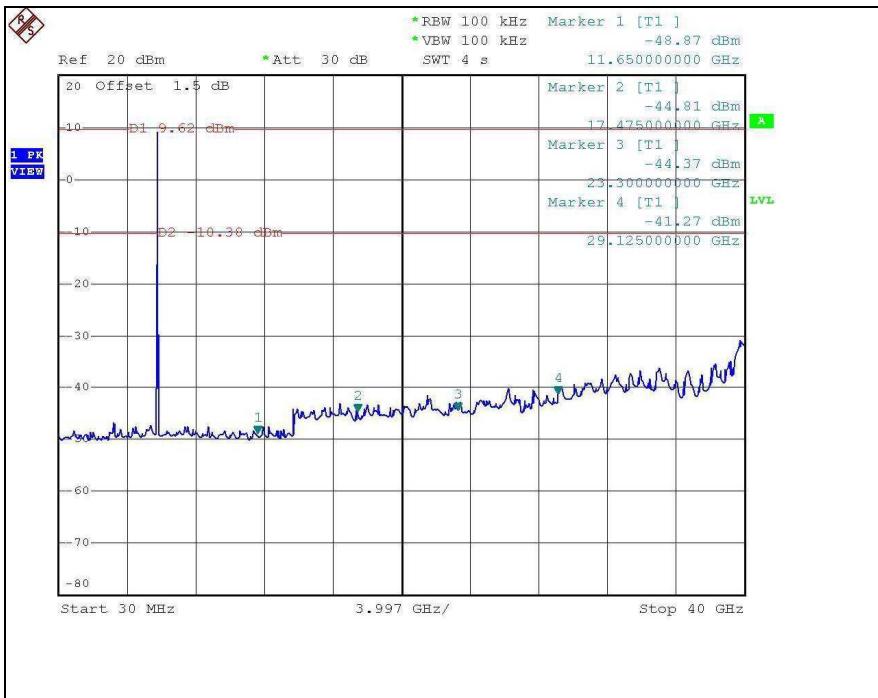



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.7.2 ANTENNA CONNECTED CONSTRUCTION

There are four antennas provided to this EUT, please refer to the following table:

Model	Antenna Type	Gain (dBi)	Antenna Connector	Note
FDS_2FED01+I3G	Dual Band Antenna, Dipole	For 2.4GHz : 3 dBi	MMCX	Integral antenna
		For 5GHz : 5 dBi		
NA	Dipole	For 2.4GHz : 2 dBi	Reverse SMA	dedicated antenna
W1028	Dipole	For 5GHz : 2 dBi	Reverse SMA	

The model: FDS_2FED01+I3G, the worse case one was chosen for final test.



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



7. APPENDIX-A- MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.