



FCC RADIO EXPOSURE TEST REPORT

FCC ID : HEDML60PRS4601

Equipment : Metrolinq 60GHz Module

Brand Name : IgniteNet

Model Name : RDO-60-FB-USBB-18BF

Applicant : Accton Technology Corporation
No. 1, Creation Rd. III, Science-based Industrial
Park Hsin Chu 30077, Taiwan R.O.C.

Manufacturer (1) : Joy Technology (Shen Zhen) Co. Ltd
HengKeng Ind., Shangpai, Shangwu, Aiqun Rd.,
Shiyan Town, Shenzhen 518108 China


Manufacturer (2) : Accton Technology Corporation
No. 1, Creation Rd. III, Science-based Industrial
Park Hsin Chu 30077, Taiwan R.O.C.

Standard : 47 CFR Part 2.1091

The product was received on Aug. 15, 2019, and testing was started from Sep. 27, 2019 and completed on Oct. 08, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR Part 2.1091 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

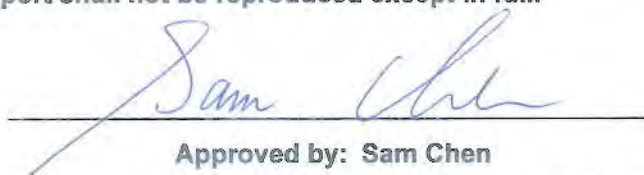

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 EUT General Information	5
1.2 Table for Class II Change.....	5
1.3 Test Mode.....	5
1.4 Testing Location	5
2 Maximum Permissible Exposure	6
2.1 Limit of Maximum Permissible Exposure	6
2.2 MPE Calculation Method.....	7
2.3 Calculated Result and Limit.....	8

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: CB Ver1.0



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
2	-	Exposure evaluation	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Viola Huang

1 General Description

1.1 EUT General Information

The Channel Plan(s)			
Evaluation Mode	Frequency Range	Operating Frequency (GHz)	Modulation Type
60 GHz	57-71 GHz	Channel 1: 58.32GHz Channel 1.5: 59.40GHz Channel 2: 60.48GHz Channel 2.5: 61.56GHz Channel 3: 62.64GHz Channel 3.5: 63.72GHz Channel 4: 64.80GHz Channel 4.5: 65.88GHz	$\pi/2$ -BPSK, $\pi/2$ -QPSK, $\pi/2$ -16QAM

1.2 Table for Class II Change

This product is an extension of original one reported under Sporton project number: FA791405

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Adding bandwidth 1.08GHz channel 1, 1.5, 2, 2.5, 3, 3.5, 4, 4.5 and bandwidth 2.16GHz channel 1.5, 2.5, 3.5, 4.5. (Please refer to section 1.1 for detail information.)	Maximum Permissible Exposure

1.3 Test Mode

Mode	Description
1	EUT in Y axis / Bandwidth 1.08GHz
2	EUT in Y axis / Bandwidth 2.16GHz

1.4 Testing Location

Testing Location		
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL : 886-3-327-3456 FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

2 Maximum Permissible Exposure

2.1 Limit of Maximum Permissible Exposure

15.255(g) Regardless of the power density levels permitted under this section, devices operating under the provisions of this section are subject to the radio frequency radiation exposure requirements specified in §§1.1307(b), 2.1091 and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density



2.2 MPE Calculation Method

The MPE was calculated at 20 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \qquad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3 Calculated Result and Limit

For mode 1: 1.08 GHz

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~200GHz Total Integrated Band Power (mW)
58.32	3.089	30.11	1025.65	1028.741
62.64		30.15	1035.14	1038.231
65.88		30.66	1164.13	1167.215

Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)	20						
Maximum EIPR Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
65.88	17.2	30.66	0.50	31.16	1306.17	0.260	1.00



Maximum Permissible Exposure of Fundamental + Unwanted Emissions						
Separation Distance (cm)	20					
Maximum EIRP Power of Test Frequency (GHz)	Antenna Gain (dBi)	Average EIRP Power (mW)	Tolerance (dB)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
65.88	17.2	1167.21	0.50	1309.64	0.261	1.00

For mode 2: 2.16 GHz

Worst-case Integrated Band Power of Unwanted Emission (30MHz ~ 40GHz)						
Start (MHz)	Stop (MHz)	Limit (dBuV/m at 3m)	Limit (mW EIRP)	RBW (MHz)	Num Intervals	Integrated Band Power (mW)
30	88	40	3.01995E-06	0.1	580	0.002
88	216	43.5	6.76083E-06	0.1	1280	0.009
216	960	46	1.20226E-05	0.1	7440	0.089
960	1000	54	7.58578E-05	0.1	400	0.030
1000	40000	54	7.58578E-05	1	39000	2.958
Total						3.089

Total Integrated Band Power of All Emission (30MHz ~ 200GHz)				
Test Frequency (GHz)	30MHz ~ 40GHz Integrated Band Power (mW)	40 ~ 200GHz EIRP (dBm)	40 ~ 200GHz EIRP (mW)	30MHz ~200GHz Total Integrated Band Power (mW)
59.40	3.089	30.28	1066.60	1069.685
61.56		30.23	1054.39	1057.476
63.72		30.36	1086.43	1089.514
65.88		30.36	1086.43	1089.514



Maximum Permissible Exposure of Fundamental Emissions							
Separation Distance (cm)	20						
Maximum EIRP Power of Test Frequency (GHz)	Ant. Gain (dBi)	Average EIRP Power (dBm)	Tolerance (dB)	Tune-up Average EIRP Power (dBm)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
65.88	17.2	30.36	0.50	30.86	1218.99	0.243	1.00

Maximum Permissible Exposure of Fundamental + Unwanted Emissions						
Separation Distance (cm)	20					
Maximum EIRP Power of Test Frequency (GHz)	Antenna Gain (dBi)	Average EIRP Power (mW)	Tolerance (dB)	Tune-up Average EIRP Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
65.88	17.2	1089.51	0.50	1222.46	0.243	1.00

————THE END————