



**FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4:2003
TEST REPORT**

For

300 Mbps N Wireless USB Adapter

Model : WUS622C-A

Issued for

Accton Technology Corporation

**No. 1, Creation Rd. III, Science-based Industrial Park,
Hsin Chu 30077, Taiwan**

Issued by

**Compliance Certification Services Inc.
Hsinchu Lab.**

**NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C**

TEL: +886-3-5921698

FAX: +886-3-5921108

<http://www.ccsrf.com>

E-Mail : service@ccsrf.com

Issued Date: November 09, 2011



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF or any government agencies. The test results of this report relate only to the tested sample identified in this report.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	08/31/2011	Initial Issue	All Page 122	Cindy Pon
01	09/28/2011	Revised Conducted Spurious Emission	Page 01, 03, 59-62, All Page 126	Cindy Pon
02	10/31/2011	Revised IEEE 802.11b/g Mode	Page 01, 03-06, 09, 11-20, 29-30, 32-39, 48-49, 51-52, 54-61, 70-74, 79-90, 105, 109-114, 121-128 All Page 148	Cindy Pon
03	11/09/2011	Revised EUT DESCRIPTION	Page 01, 05	Cindy Pon

**TABLE OF CONTENTS**

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. DESCRIPTION OF TEST MODES	6
4. TEST METHODOLOGY	7
5. FACILITIES AND ACCREDITATION	7
5.1 FACILITIES	7
5.2 ACCREDITATIONS.....	7
5.3 MEASUREMENT UNCERTAINTY	8
6. SETUP OF EQUIPMENT UNDER TEST.....	9-10
7. FCC PART 15.247 REQUIREMENTS	11
7.1 6dB BANDWIDTH	11-28
7.2 MAXIMUM PEAK OUTPUT POWER	29-47
7.3 AVERAGE POWER	48-50
7.4 POWER SPECTRAL DENSITY	51-69
7.5 CONDUCTED SPURIOUS EMISSION	70-102
7.6 RADIATED EMISSION.....	103-136
7.7 CONDUCTED EMISSION.....	137-141
APPENDIX SETUP PHOTOS	142-148



1. TEST REPORT CERTIFICATION

Applicant : Accton Technology Corporation
Address : No. 1, Creation Rd. III, Science-based Industrial Park,
Hsin Chu 30077, Taiwan
Equipment Under Test : 300 Mbps N Wireless USB Adapter
Model : WUS622C-A
Tested Date : August 22 ~ 31 ; October 21 ~ 31, 2011

APPLICABLE STANDARD	
Standard	Test Result
FCC Part 15 Subpart C AND ANSI C63.4:2003	PASS

WE HEREBY CERTIFY THAT: The above equipment has been tested by Compliance Certification Services Inc., and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved by:

Sb. Lu
Sr. Engineer

Reviewed by:

Gundam Lin
Sr. Engineer



2. EUT DESCRIPTION

Product Name	300 Mbps N Wireless USB Adapter
Model Number	WUS622C-A
Identify Number	T110822302
Received Date	August 22, 2011
Frequency Range	IEEE 802.11b/g, 802.11n HT20 : 2412MHz~2462MHz IEEE 802.11n HT40 : 2422MHz~2452MHz
Transmit Power	IEEE 802.11b : 19.99dBm (0.0998 W) IEEE 802.11g : 19.60 dBm (0.0912 W) IEEE 802.11n HT20 : 20.17 dBm (0.1039 W) IEEE 802.11n HT40 : 20.05 dBm (0.1011 W)
Channel Spacing	IEEE 802.11b/g, 802.11n HT20/HT40 : 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20 : 11 Channels IEEE 802.11n HT40 : 7 Channels
Transmit Data Rate	IEEE 802.11b : 11, 5.5, 2, 1 Mbps IEEE 802.11g : 54, 48, 36, 24, 18, 12, 9, 6 Mbps IEEE 802.11n HT20 : 144.4, 130, 117, 115.6, 104, 86.7, 78, 72.2, 65.0, 58.5, 57.8, 52, 43.3, 39, 28.9, 26, 21.7, 19.5, 14.4, 13, 7.2, 6.5 Mbps IEEE 802.11n HT40 : 300, 270, 243, 240, 216, 180, 162, 150, 135, 121.5, 120, 108, 90, 81, 60, 54, 45, 40.5, 30, 27, 15, 13.5 Mbps
Type of Modulation	IEEE 802.11b : DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g : OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20/40 : OFDM (64QAM, 16QAM, QPSK, BPSK)
Cyclic-Delay Diversity (CDD)	IEEE 802.11b/g/n HT20/HT40
Antenna Type	PCB Antenna x 2, Antenna Gain 0.67 dBi (Chain0 : BOT antenna ; Chain1 : TOP antenna) Directional Gain : 3.68 dBi (CDD mode)
Power Rating	5Vdc
I/O Port	USB port x 1

Remark :

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. For more details, please refer to the User's manual of the EUT.
3. This submittal(s) (test report) is intended for FCC ID: HEDWUS622CA filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. DESCRIPTION OF TEST MODES

The EUT is an 802.11n MIMO transceiver in 300 Mbps N Wireless USB Adapter form factor. It has two transmitter chains and two receive chains (2x2 configurations).

Conducted Emission / Radiated Emission Test (Below 1 GHz)

1. The following test modes were scanned during the preliminary test:

No.	Pre-Test Mode
1	Normal Operating

2. After the preliminary scan, the following test mode was found to produce the highest emission level.

Final Test Mode			
Emission	Radiated Emission	Normal Operating	
	Conducted Emission	Normal Operating	

Remark : Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

Conducted / Radiated Emission Test (Above 1 GHz)

IEEE 802.11b, 802.11g, 802.11n HT20 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode : 1Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11g mode : 6Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT20 mode : 6.5Mbps data rate (worst case) were chosen for full testing.

IEEE 802.11n HT40 mode

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n HT40 mode : 13.5Mbps data rate (worst case) were chosen for full testing.



4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2003 and FCC CFR 47, 15.207, 15.209 and 15.247.

5. FACILITIES AND ACCREDITATION

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

NO. 989-1 Wen Shan Rd., Shang Shan Village,
Qionglin Shiang Hsinchu County 30741, Taiwan, R.O.C

The sites are constructed in conformance with the requirements of ANSI C63.4:2003 and CISPR 22. All receiving equipment conforms to CISPR 16-1-1, CISPR 16-1-2, CISPR 16-1-3, CISPR 16-1-4, CISPR 16-1-5.

5.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

Taiwan TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

Canada	INDUSTRY CANADA
Japan	VCCI
Taiwan	BSMI
USA	FCC MRA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>



5.3 MEASUREMENT UNCERTAINTY

The following table is for the measurement uncertainty, which is calculated as per the document CISPR 16-4-2.

PARAMETER	UNCERTAINTY
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 30 to 1000 MHz	+/- 3.0371
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 1 to 18GHz	+/- 2.5258
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 18 to 26 GHz	+/- 2.5012
Semi Anechoic Chamber (966 Chamber_A) / Radiated Emission, 26 to 40 GHz	+/- 2.7846
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 30 to 1000 MHz	+/- 3.5189
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 1 to 18GHz	+/- 2.5164
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 18 to 26 GHz	+/- 2.4967
Semi Anechoic Chamber (966 Chamber_B) / Radiated Emission, 26 to 40 GHz	+/- 2.7655
Conducted Emission (Mains Terminals), 9kHz to 30MHz	+/- 1.5923

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Consistent with industry standard (e.g. CISPR 22: 2006, clause 11, Measurement Uncertainty) determining compliance with the limits shall be base on the results of the compliance measurement. Consequently the measure emissions being less than the maximum allowed emission result in this be a compliant test or passing test.

The acceptable measurement uncertainty value without requiring revision of the compliance statement is base on conducted and radiated emissions being less than U_{CISPR} which is 3.6dB and 5.2dB respectively. CCS values (called U_{Lab} in CISPR 16-4-2) is less than U_{CISPR} as shown in the table above. Therefore, MU need not be considered for compliance.



6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	HP	ProBook 4421s	CNF03242PJ	DoC
2	Notebook PC	Lenovo	S10e_4068-RZ1	L3CEV2X	DoC
3	Wireless Gigabit Router	D-Link	DI-724GU	-----	-----

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

RF Mode

1. Set up all computers like the setup diagram.
2. Start ART

E (Load Set) → H (Select TX Chain) → ESC →
C (Start TX)

TX Mode:

⇒ **Tx Data Rate:** 1Mbps Bandwidth 20 (IEEE 802.11b mode)
6Mbps Bandwidth 20 (IEEE 802.11g mode)
6.5Mbps Bandwidth 20 (IEEE 802.11n HT20 mode)
13.5Mbps Bandwidth 40 (IEEE 802.11n HT40 mode)



⇒ **Power control**

IEEE 802.11b Channel Low (2412MHz) TX Power 12.5
IEEE 802.11b Channel Mid (2437MHz) TX Power 13
IEEE 802.11b Channel High (2462MHz) TX Power 13
IEEE 802.11g Channel Low (2412MHz) TX Power 7
IEEE 802.11g Channel Mid (2437MHz) TX Power 11
IEEE 802.11g Channel High (2462MHz) TX Power 6
IEEE 802.11n HT20 Channel Low (2412MHz) TX Power 7.5
IEEE 802.11n HT20 Channel Mid (2437MHz) TX Power 10.5
IEEE 802.11n HT20 Channel High (2462MHz) TX Power 6.5
IEEE 802.11n HT40 Channel Low (2422MHz) TX Power 6.5
IEEE 802.11n HT40 Channel Mid (2437MHz) TX Power 10
IEEE 802.11n HT40 Channel High (2452MHz) TX Power 5

3. All of the functions are under run.

4. Start test.

Normal Mode

1. Setup whole system for test as shown on diagram.
2. Power on all equipments.
3. Notebook PC (1) use wireless Ink Router from EUT
4. Notebook PC (2) ping to Notebook PC (1)
5. Notebook PC (1) ping to Notebook PC (2)
6. Start test.



7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMITS

§ 15.247(a) (2) For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output was connected to a spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

**TEST RESULTS****IEEE 802.11b Mode (Two TX)**

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	9.58	8.33	500	PASS
Middle	2437	9.92	9.92	500	PASS
High	2462	9.50	9.33	500	PASS

IEEE 802.11g Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	16.50	16.42	500	PASS
Middle	2437	16.67	16.50	500	PASS
High	2462	16.50	16.50	500	PASS


IEEE 802.11n HT20 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2412	17.84	17.50	500	PASS
Middle	2437	17.66	17.84	500	PASS
High	2462	17.84	17.66	500	PASS


IEEE 802.11n HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)		Minimum Limit (kHz)	Pass / Fail
		Chain 0	Chain 1		
Low	2422	36.42	36.25	500	PASS
Middle	2437	36.34	36.50	500	PASS
High	2452	36.16	35.91	500	PASS

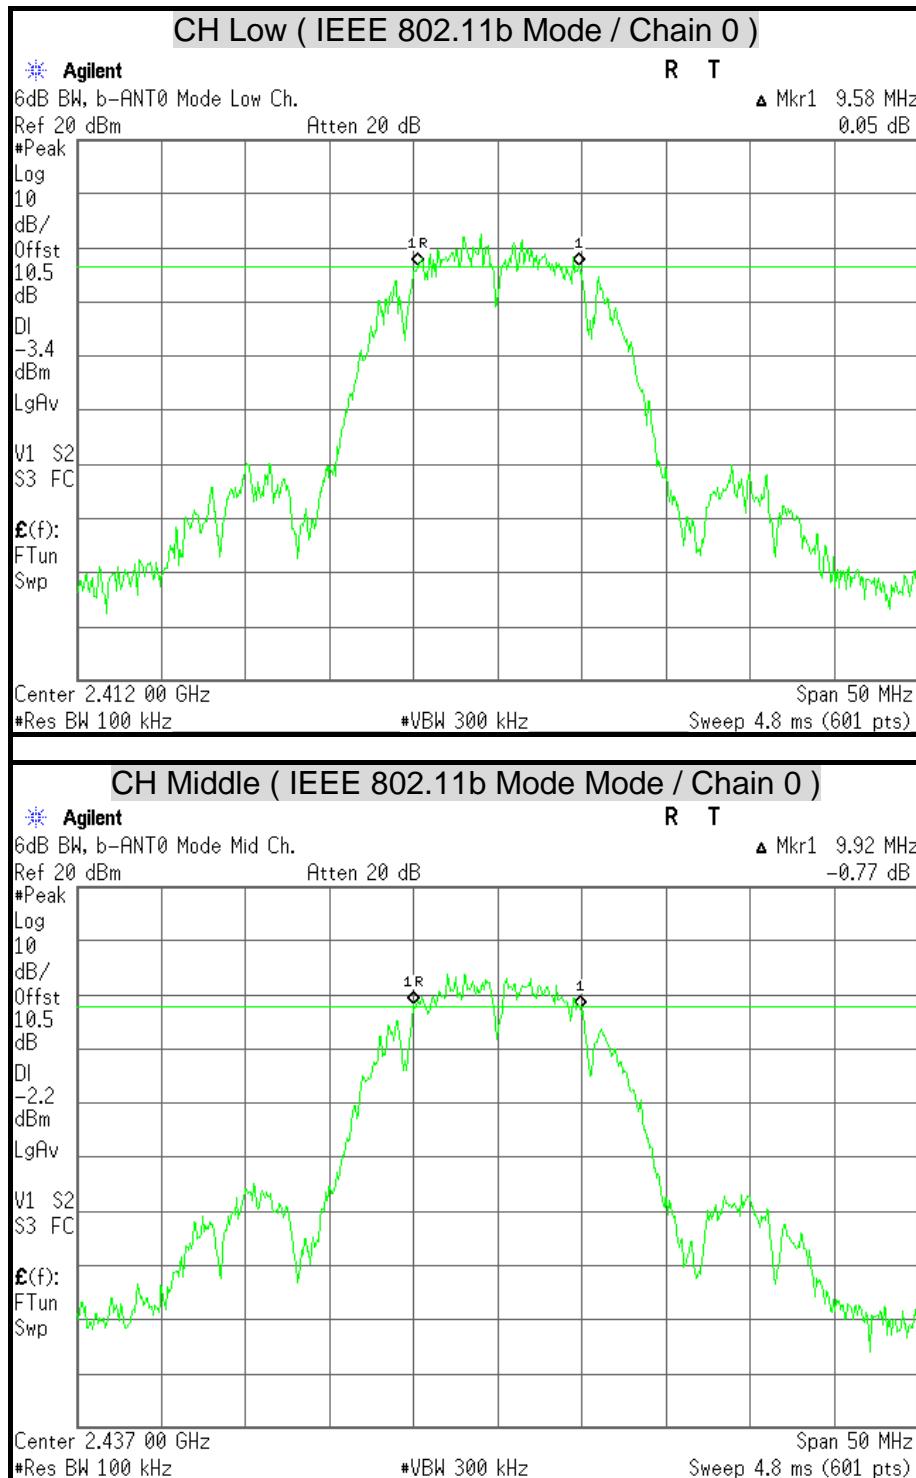
6dB BANDWIDTH

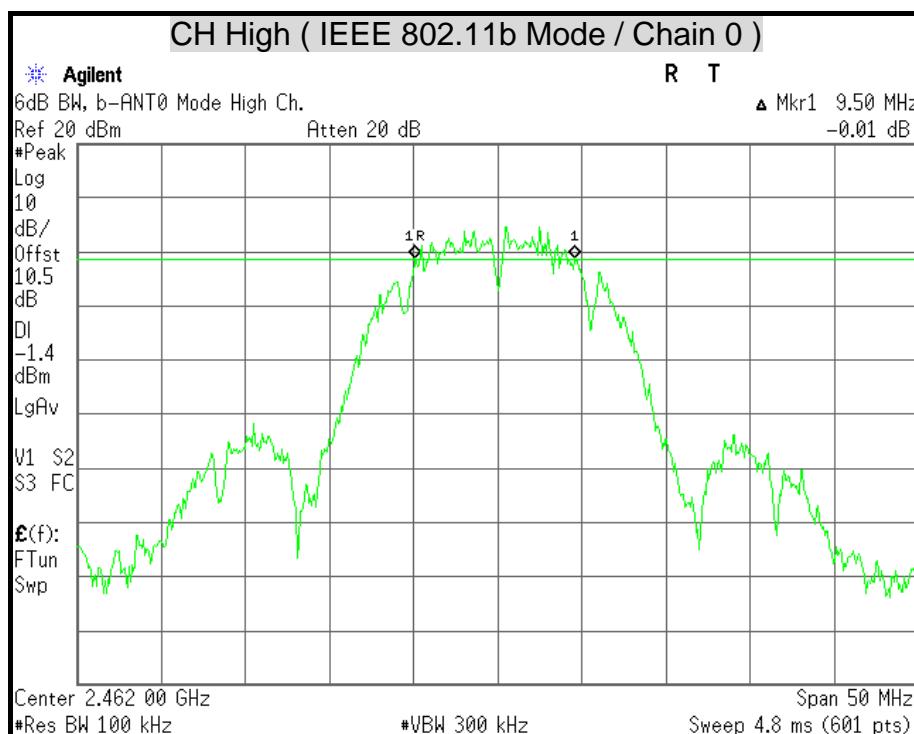


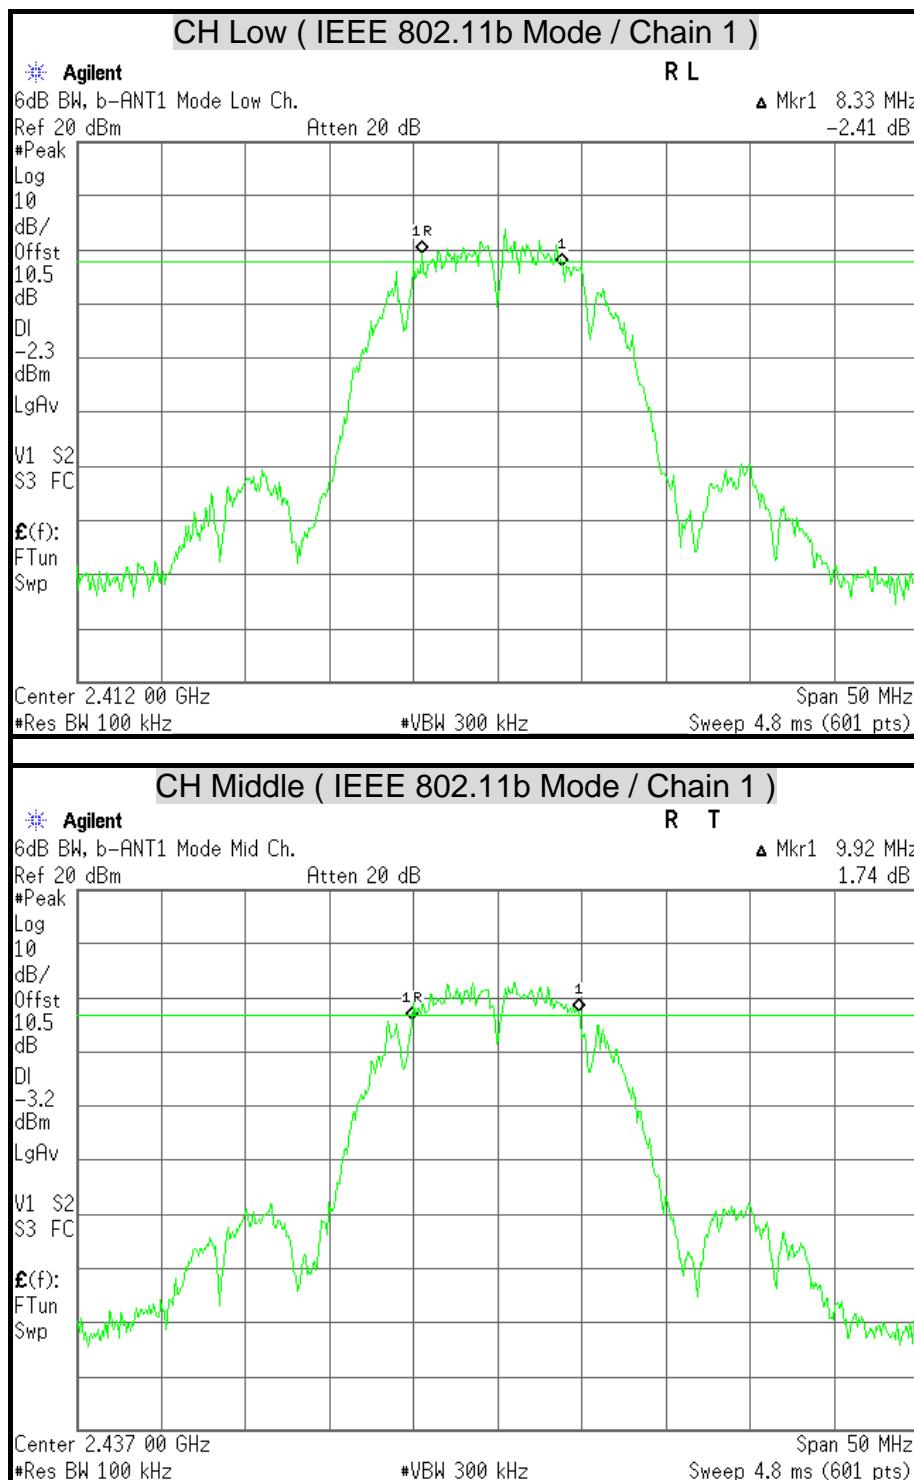


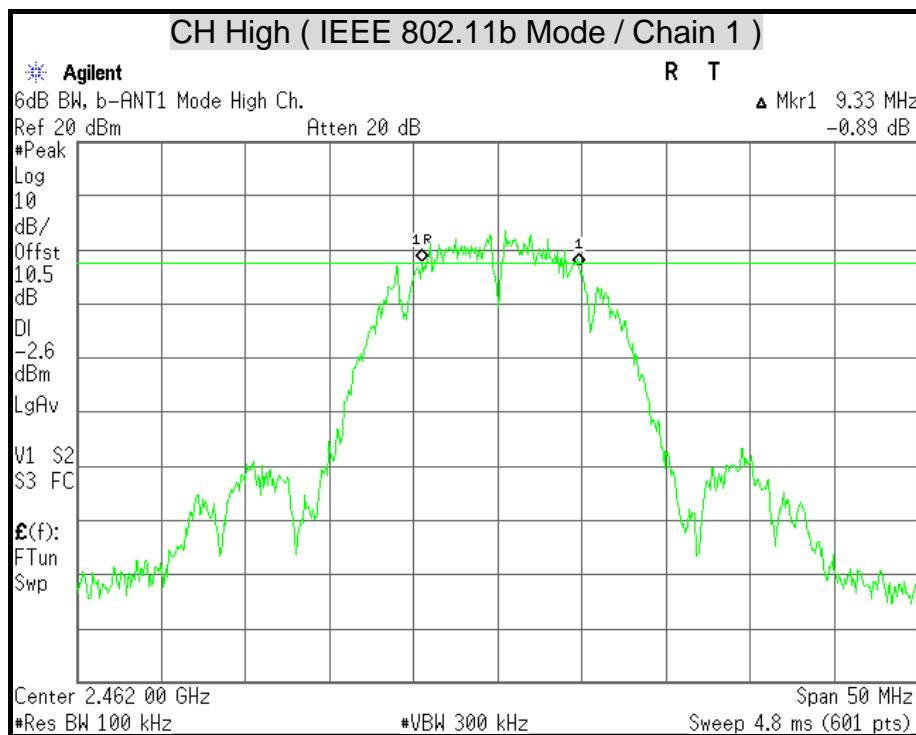


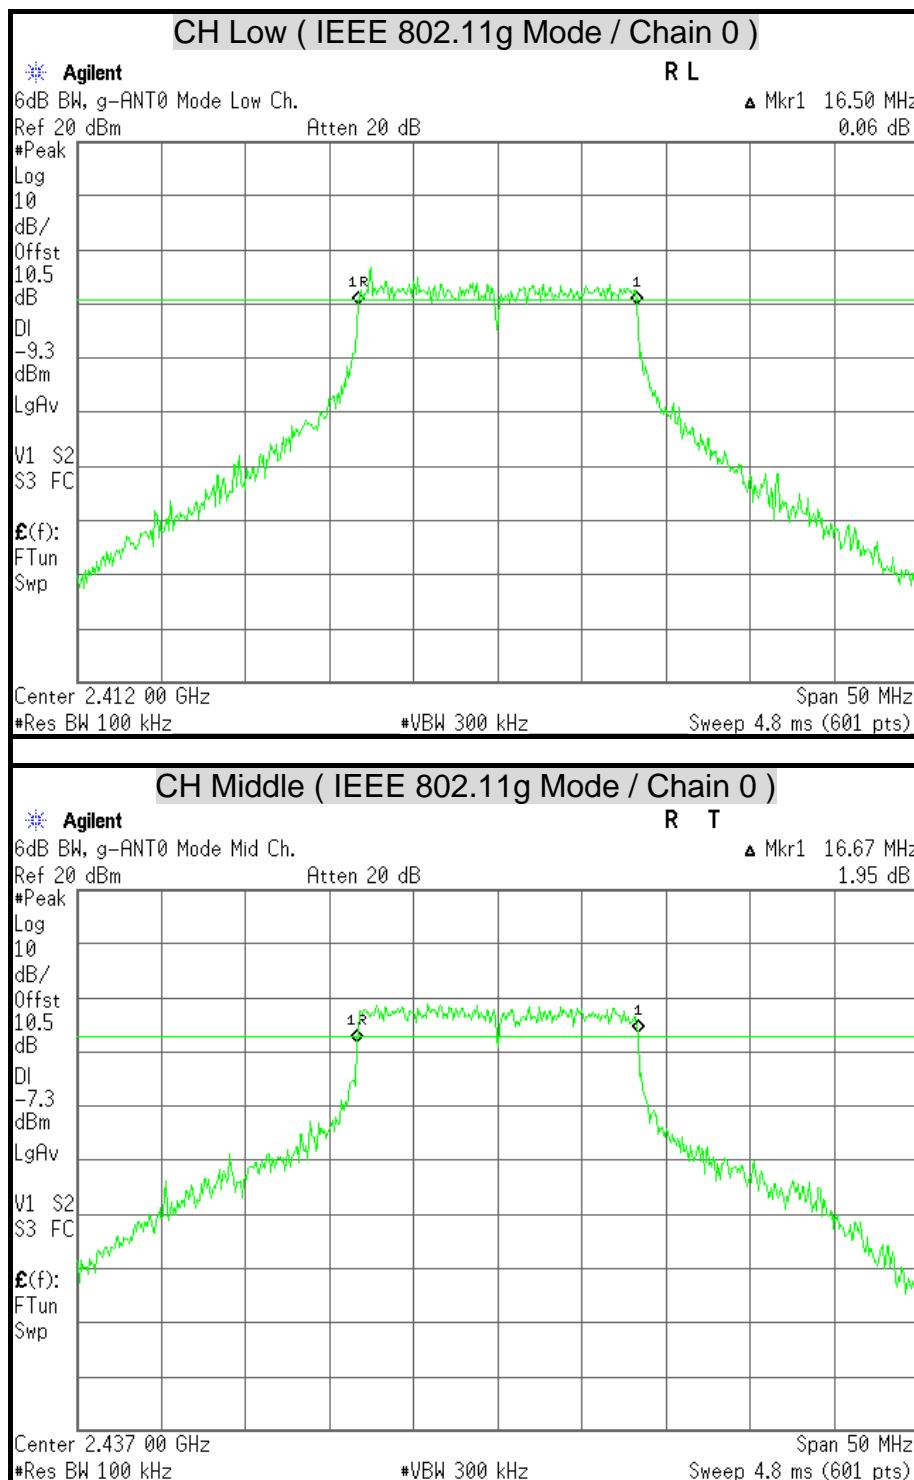


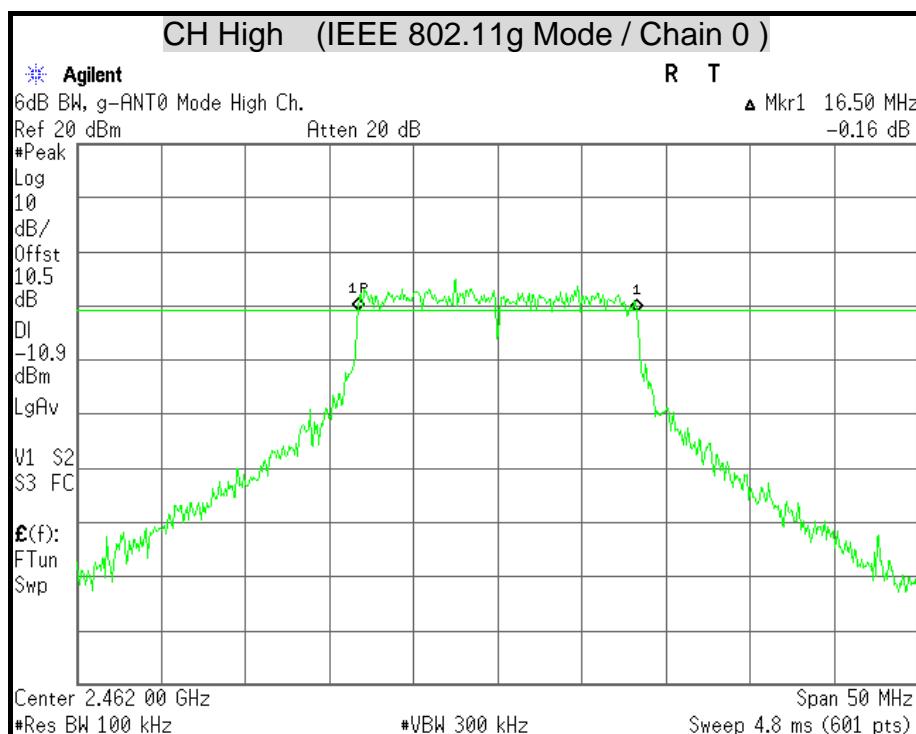


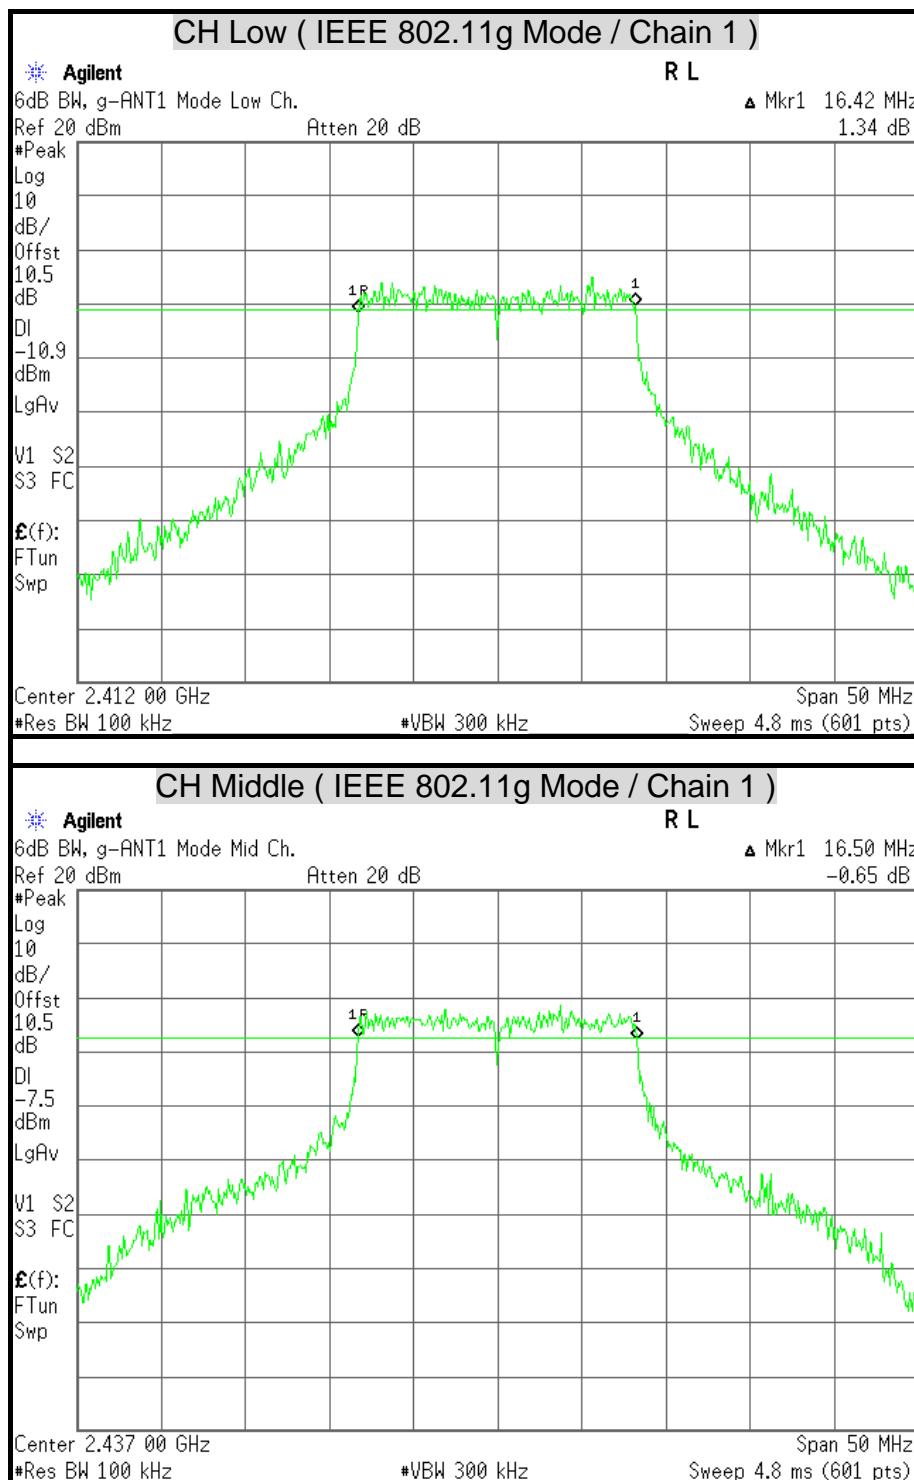


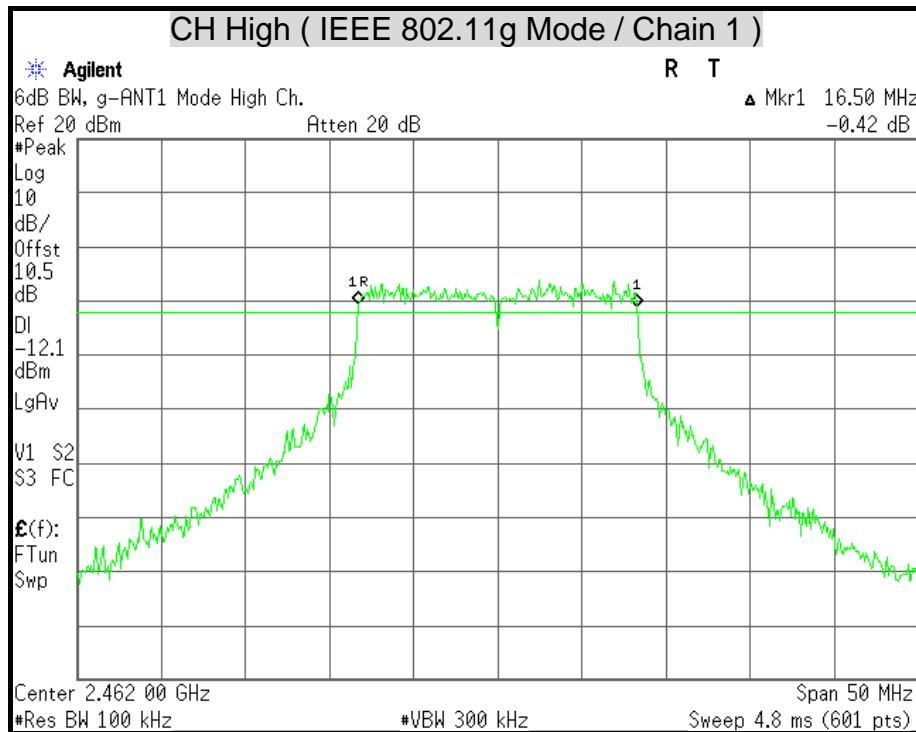


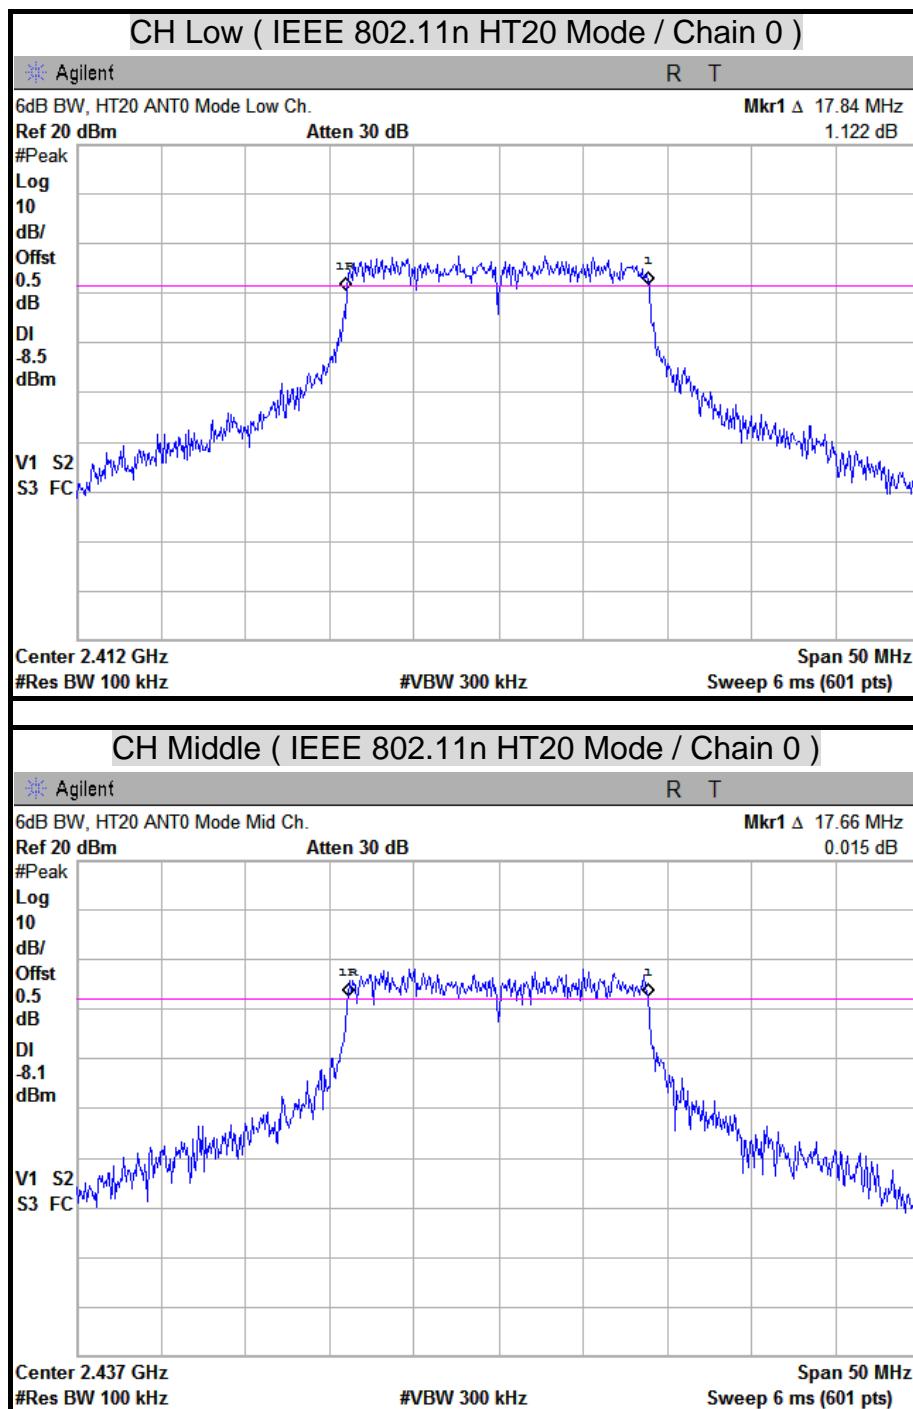


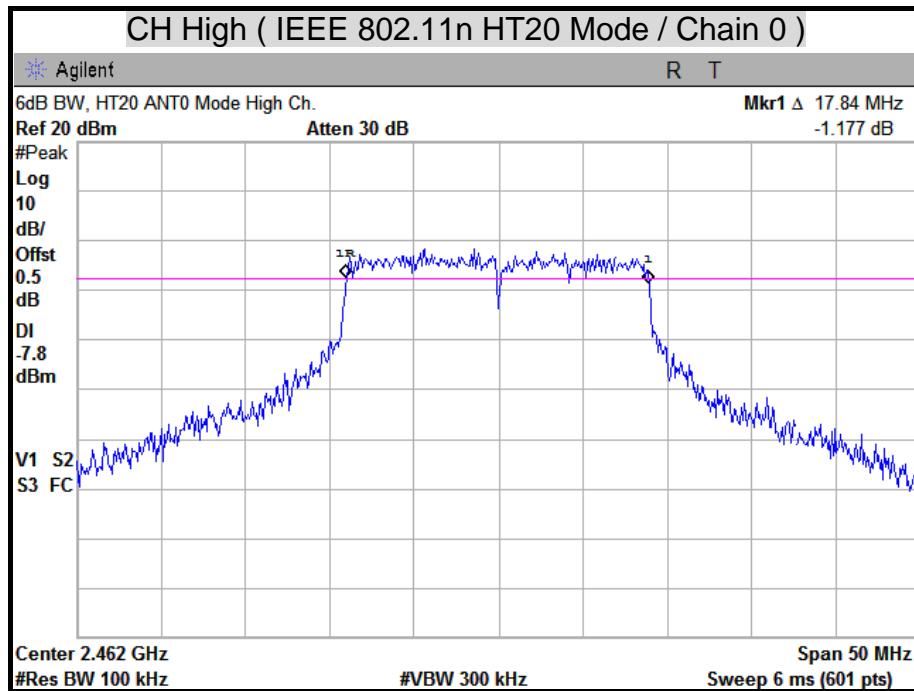


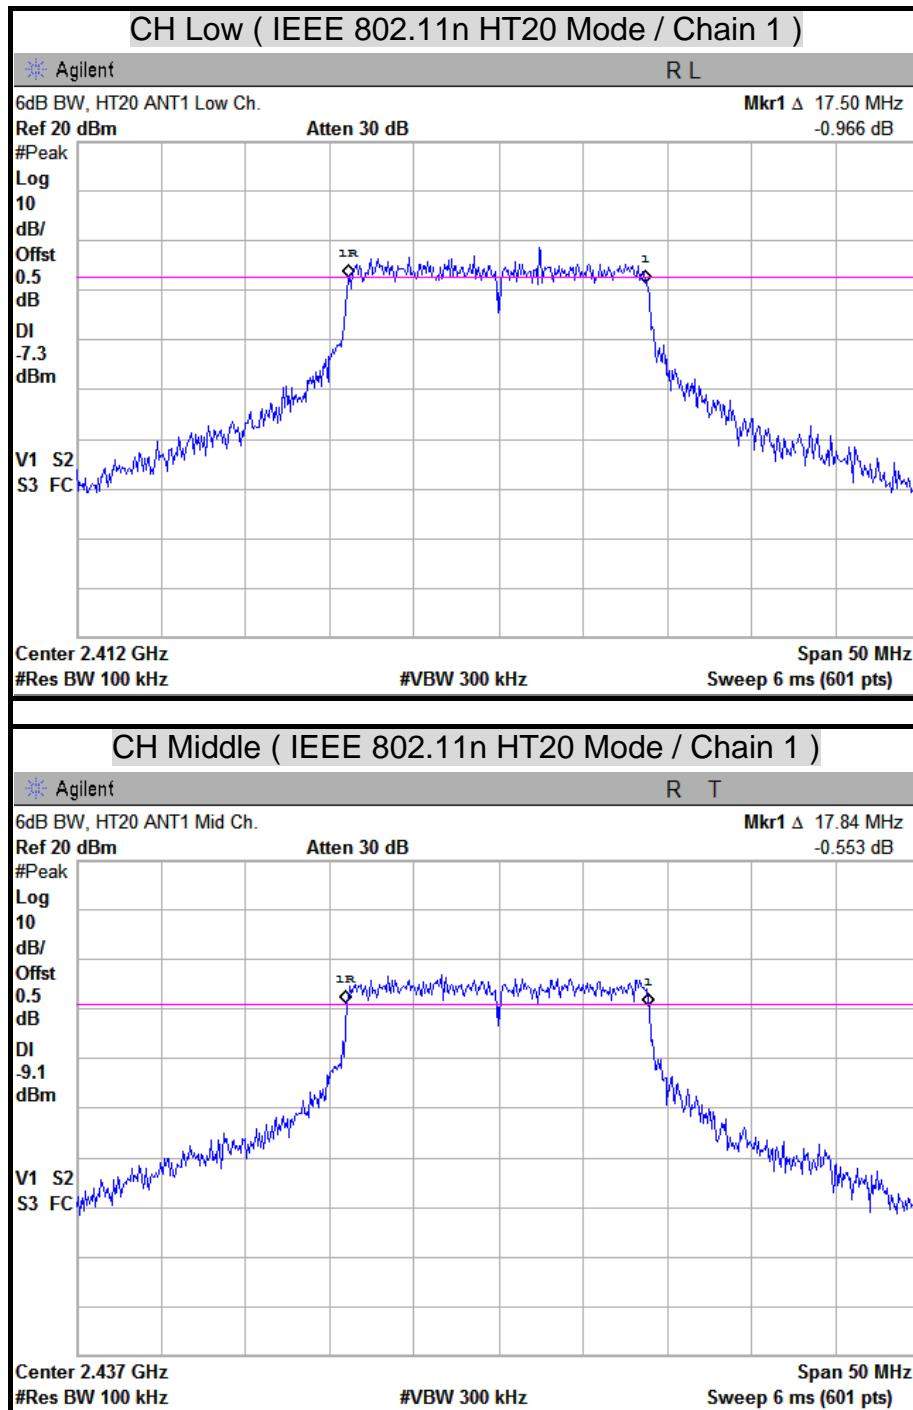


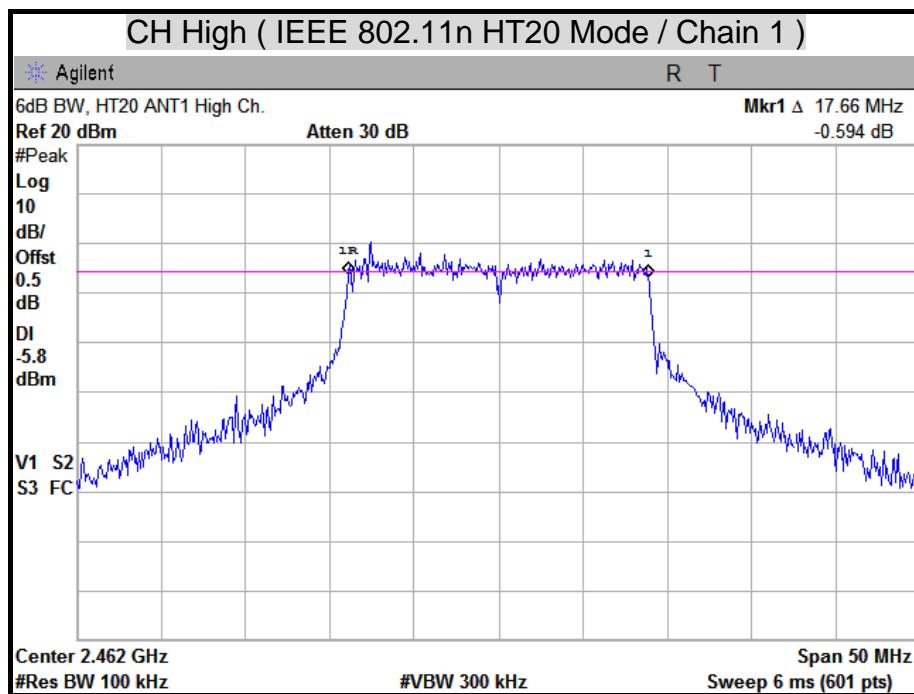

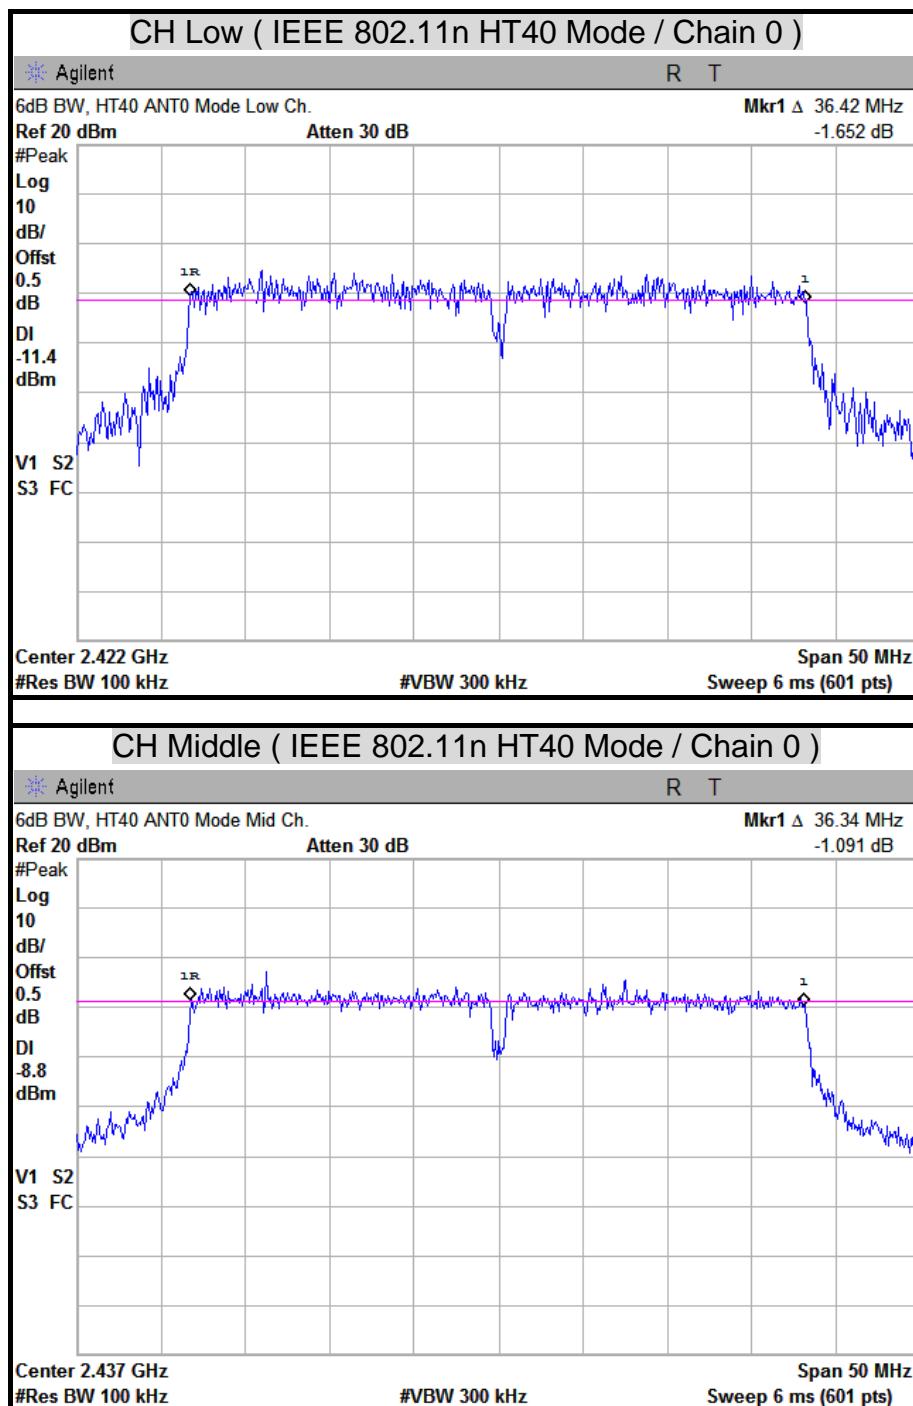

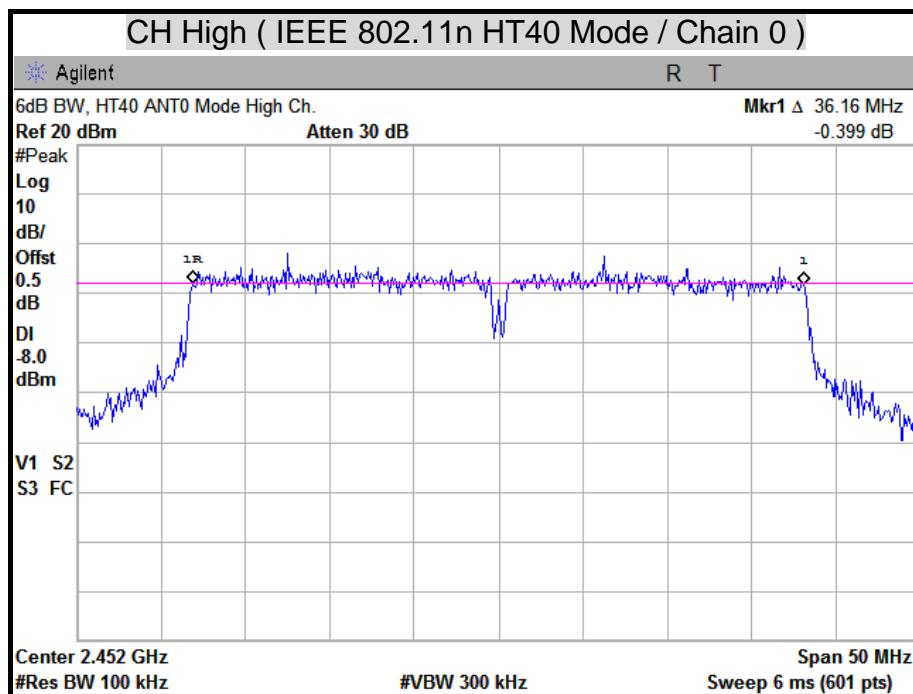

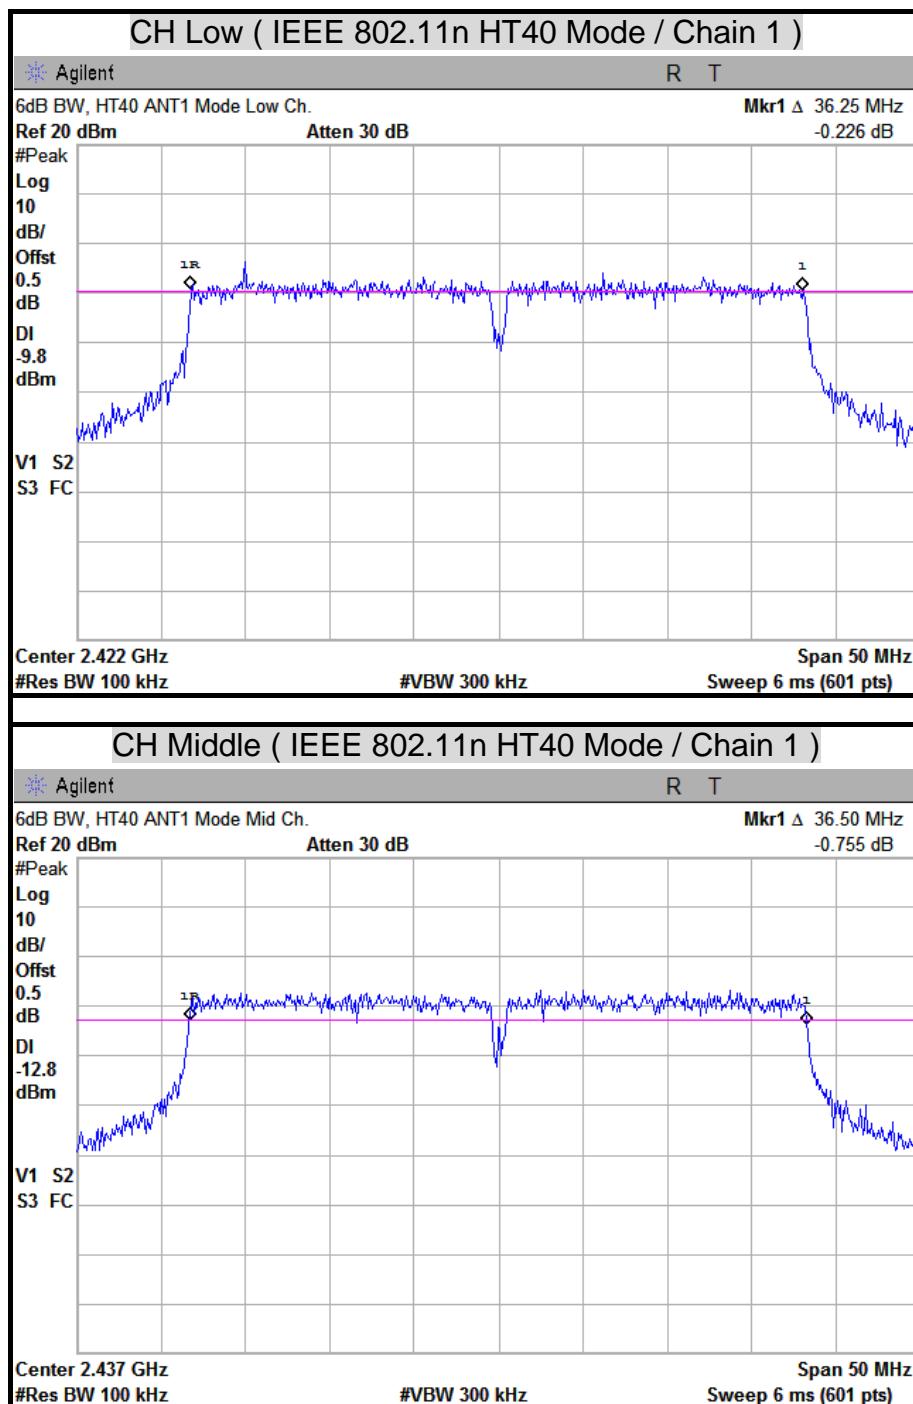

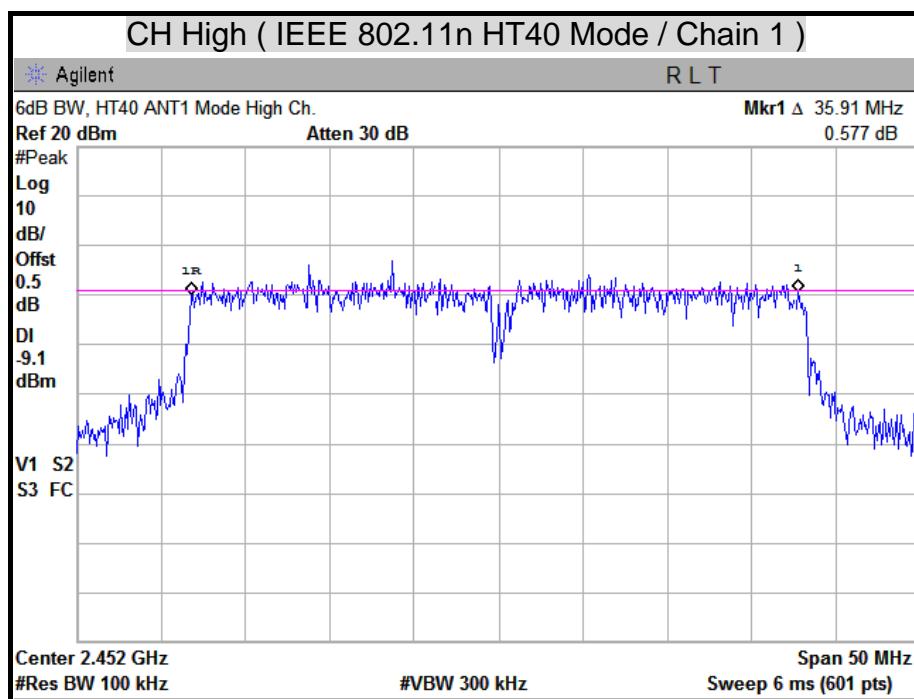



7.2 MAXIMUM PEAK OUTPUT POWER

LIMITS

§ 15.247(b) The maximum peak output power of the intentional radiator shall not exceed the following :

§ 15.247(b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands : 1 watt.

§ 15.247(b) (4) Except as shown in paragraphs (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

1. The spectrum shall be set as follows :

Span : 1.5 times channel integration bandwidth.

RBW : 1MHz

VBW : 3MHz

Detector : Peak

Sweep : Single trace

2. Compute the combined power of all signal responses contained in the trace by covering all the data points.

3. The peak output power is the channel power integrated over 26dB bandwidth.

**TEST RESULTS**

Total peak power calculation formula:

$10 \log (10^{\text{Chain 0 Power / 10}} + 10^{\text{Chain 1 Power / 10}})$.

IEEE 802.11b Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	16.83	15.60	19.27	0.0845	30	1	PASS
Middle	2437	17.22	16.28	19.79	0.0952	30	1	PASS
High	2462	17.35	16.58	19.99	0.0998	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	12.44	11.93	15.20	0.0331	30	1	PASS
Middle	2437	17.00	16.14	19.60	0.0912	30	1	PASS
High	2462	11.81	11.23	14.54	0.0284	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



IEEE 802.11n HT20 Mode (Two TX)

Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2412	14.26	13.45	16.88	0.0488	30	1	PASS
Middle	2437	17.94	16.20	20.17	0.1039	30	1	PASS
High	2462	12.86	12.57	15.73	0.0374	30	1	PASS

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	Peak Power (dBm)		Peak Power Total		Peak Power Limit		Pass / Fail
		Chain 0	Chain 1	(dBm)	(W)	(dBm)	(W)	
Low	2422	13.71	12.44	16.13	0.0410	30	1	PASS
Middle	2437	17.77	16.16	20.05	0.1011	30	1	PASS
High	2452	12.15	11.40	14.80	0.0302	30	1	PASS


Remark:


1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.





MAXIMUM PEAK OUTPUT POWER

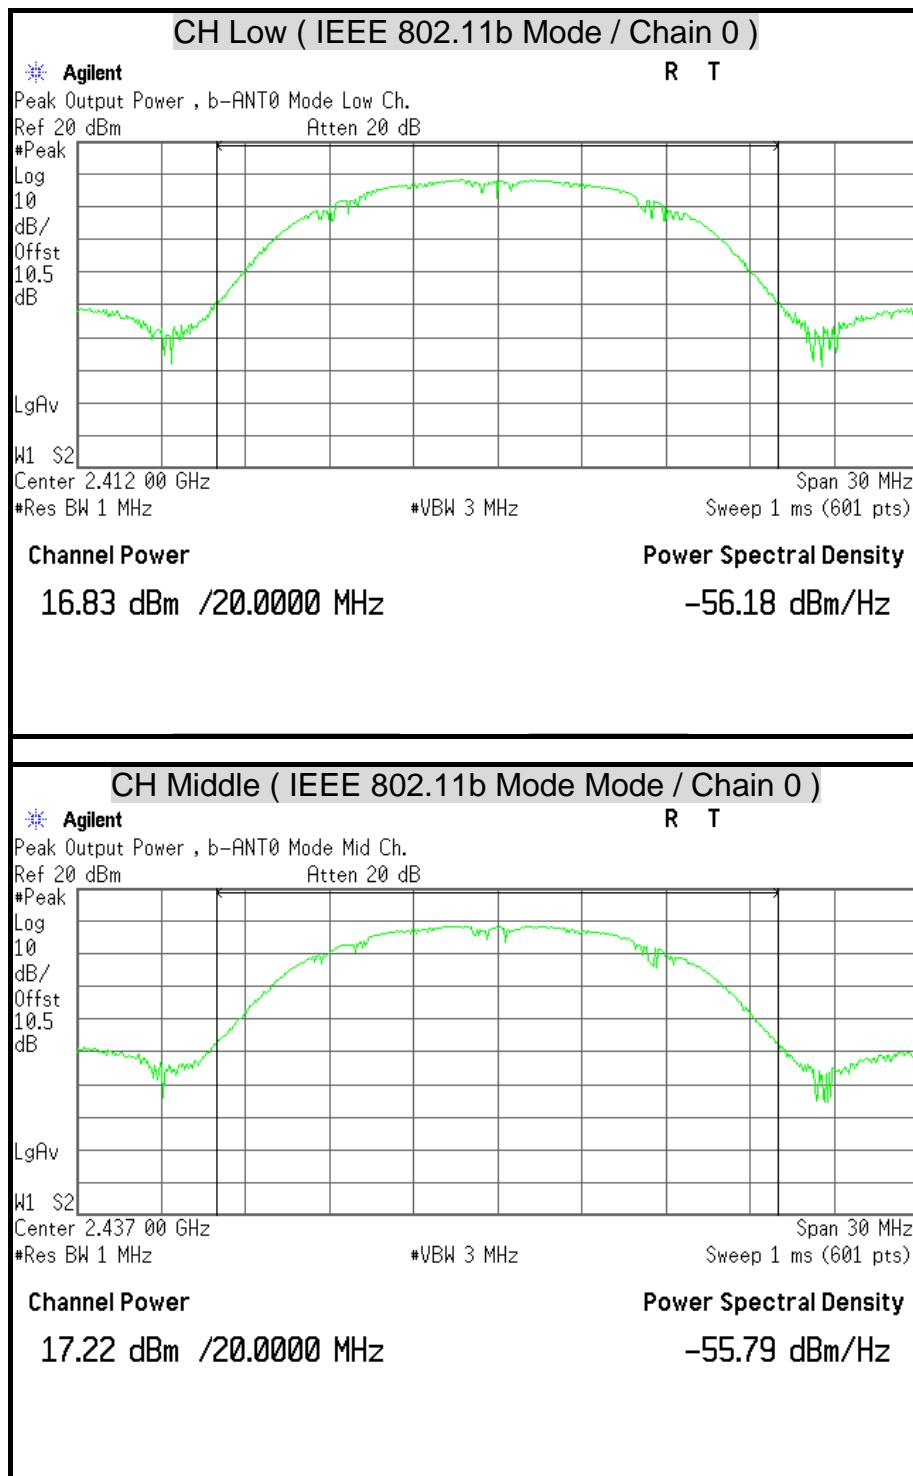


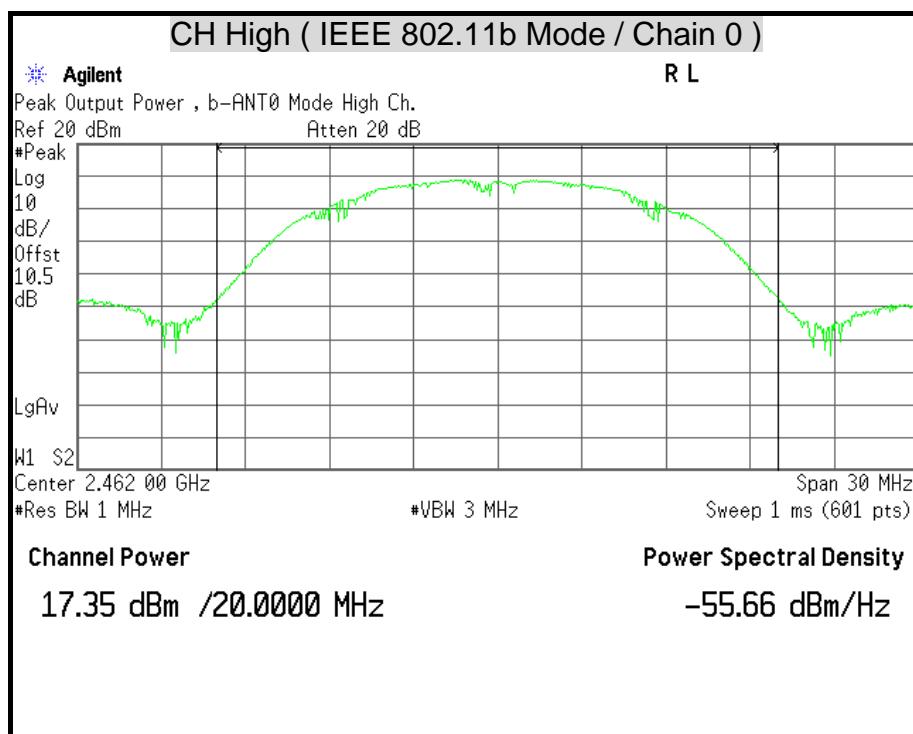


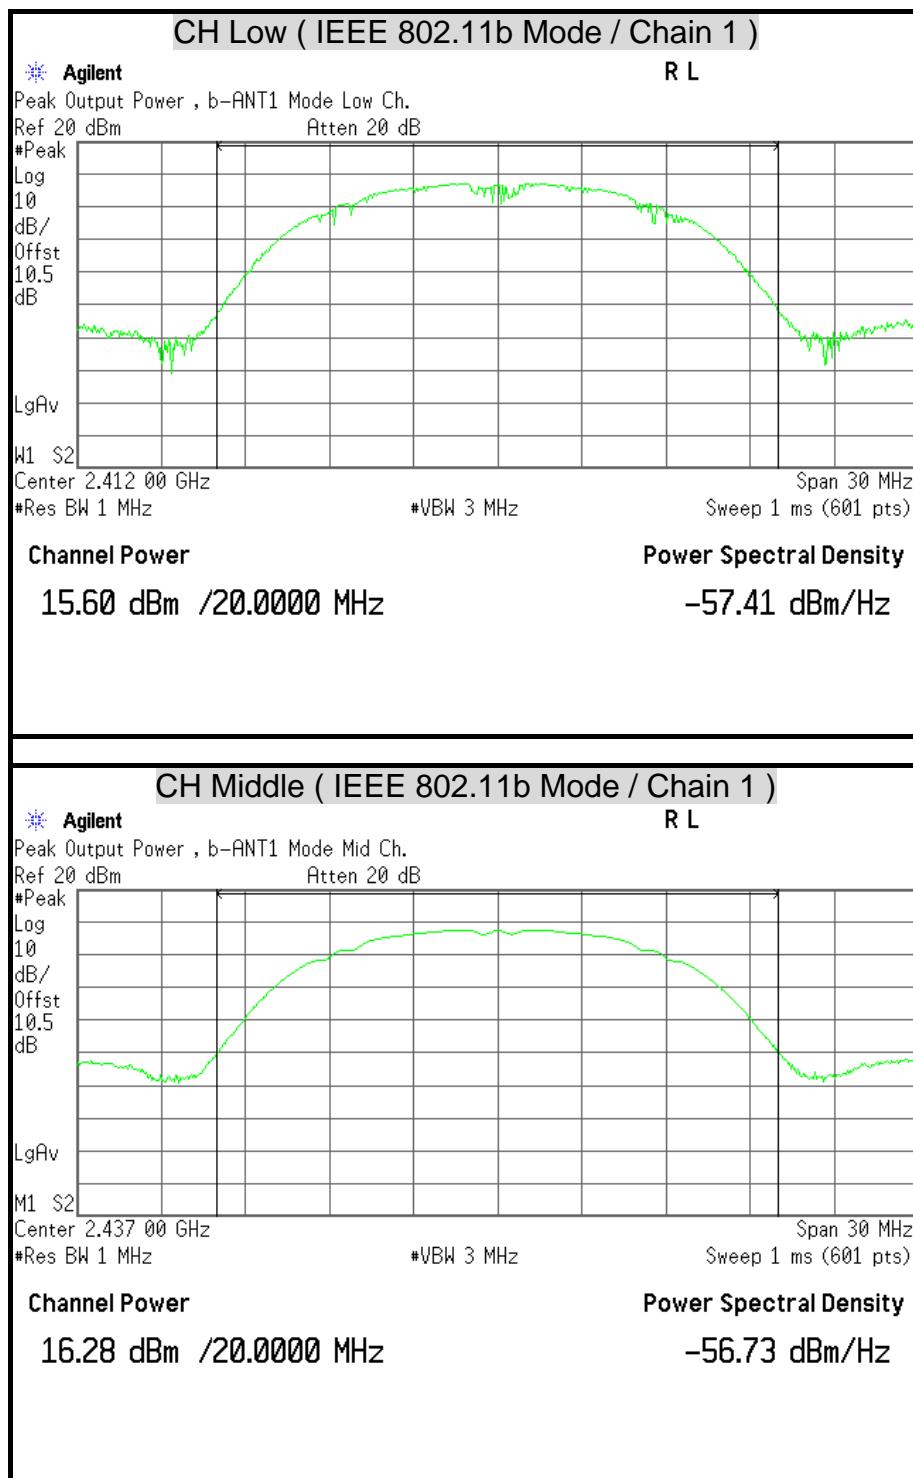


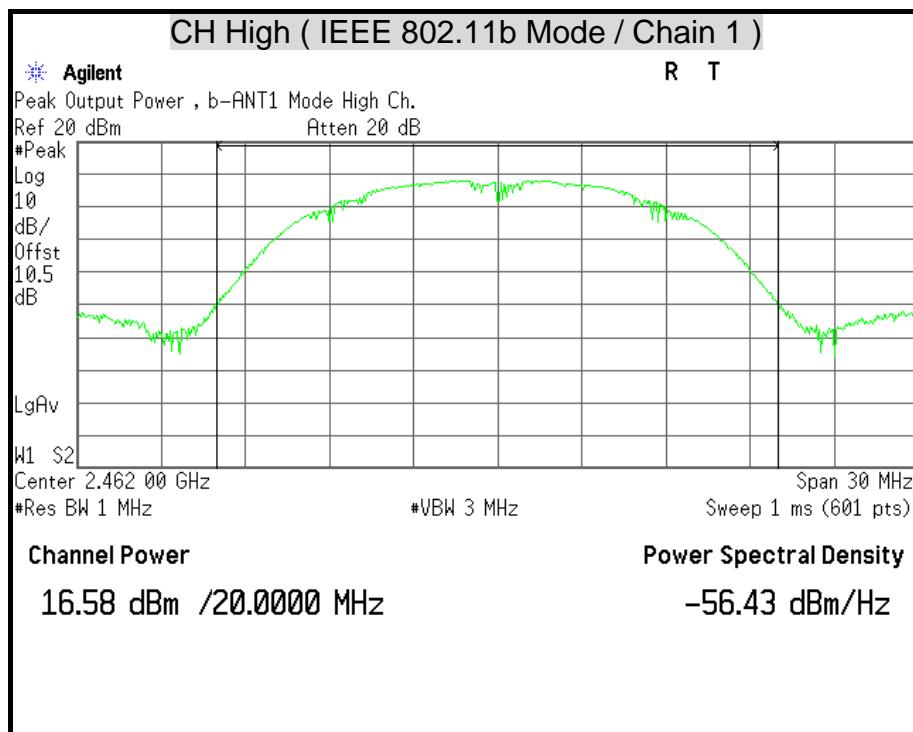


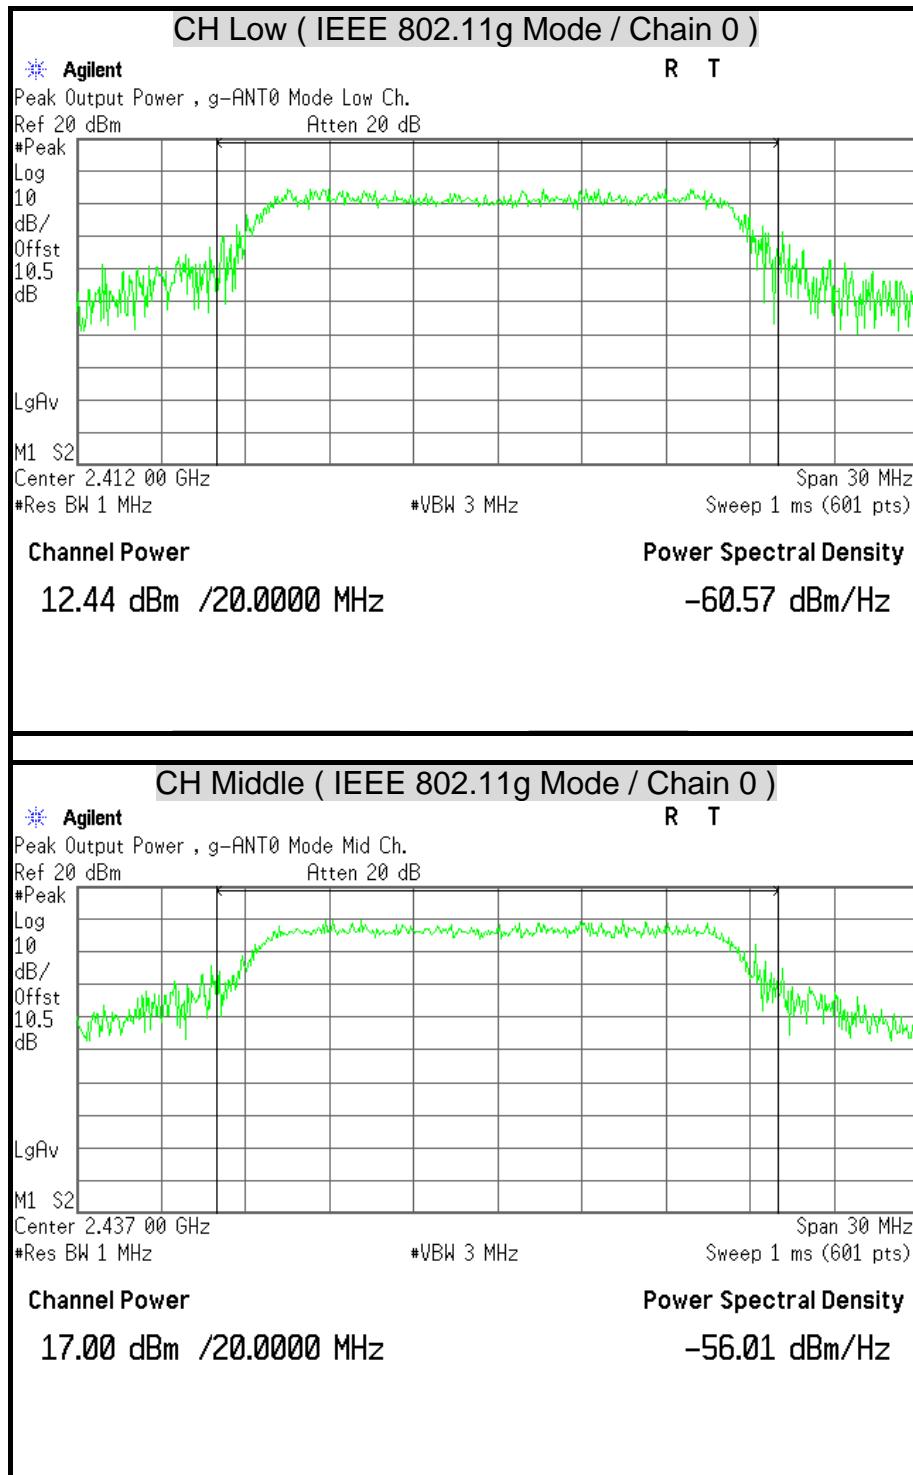


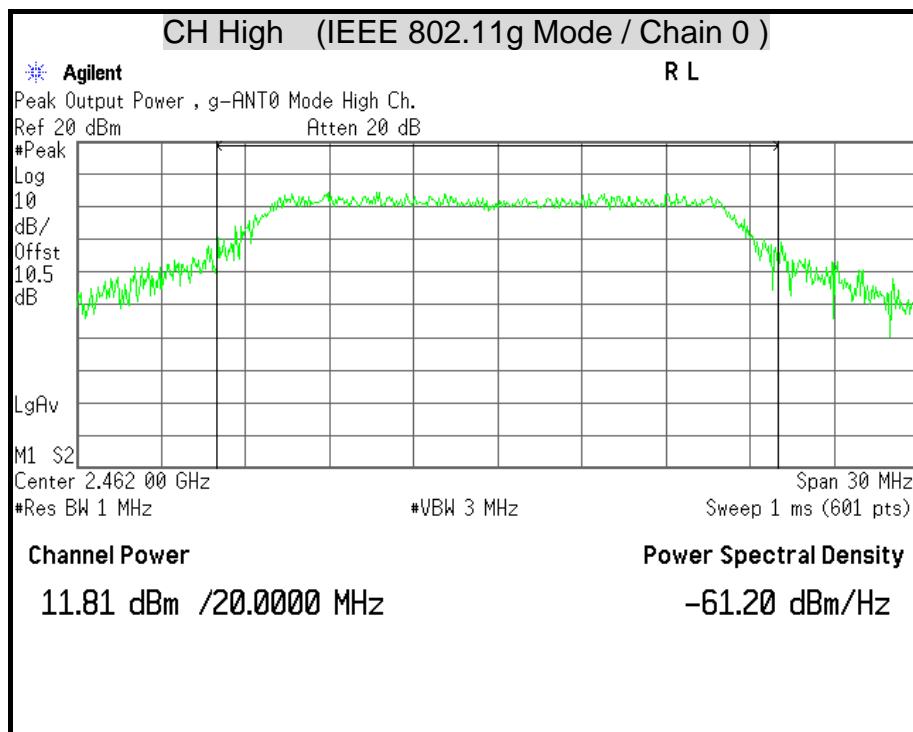


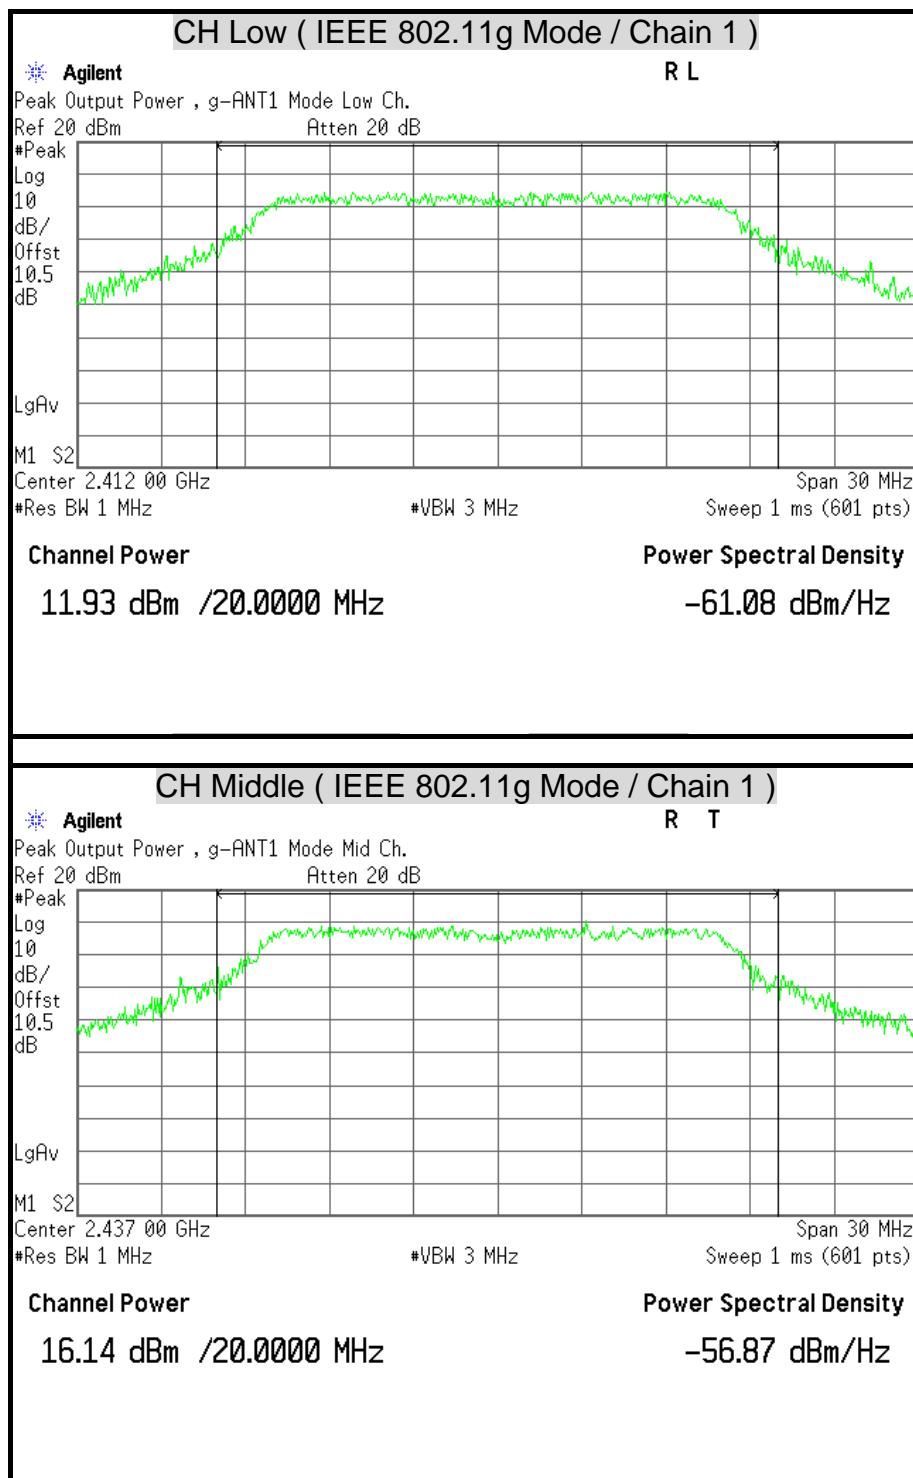


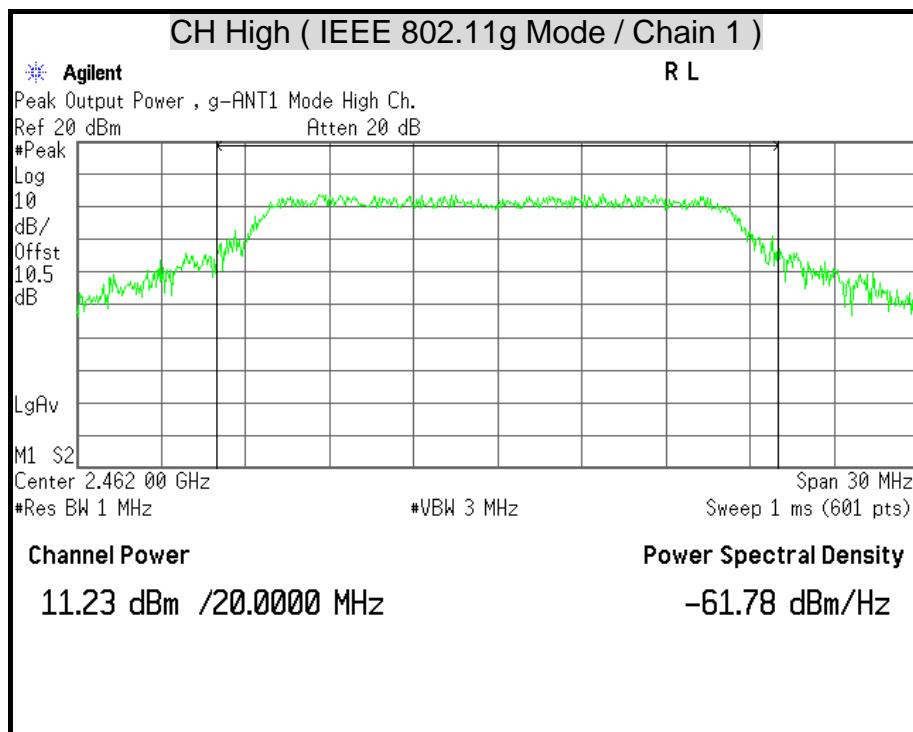


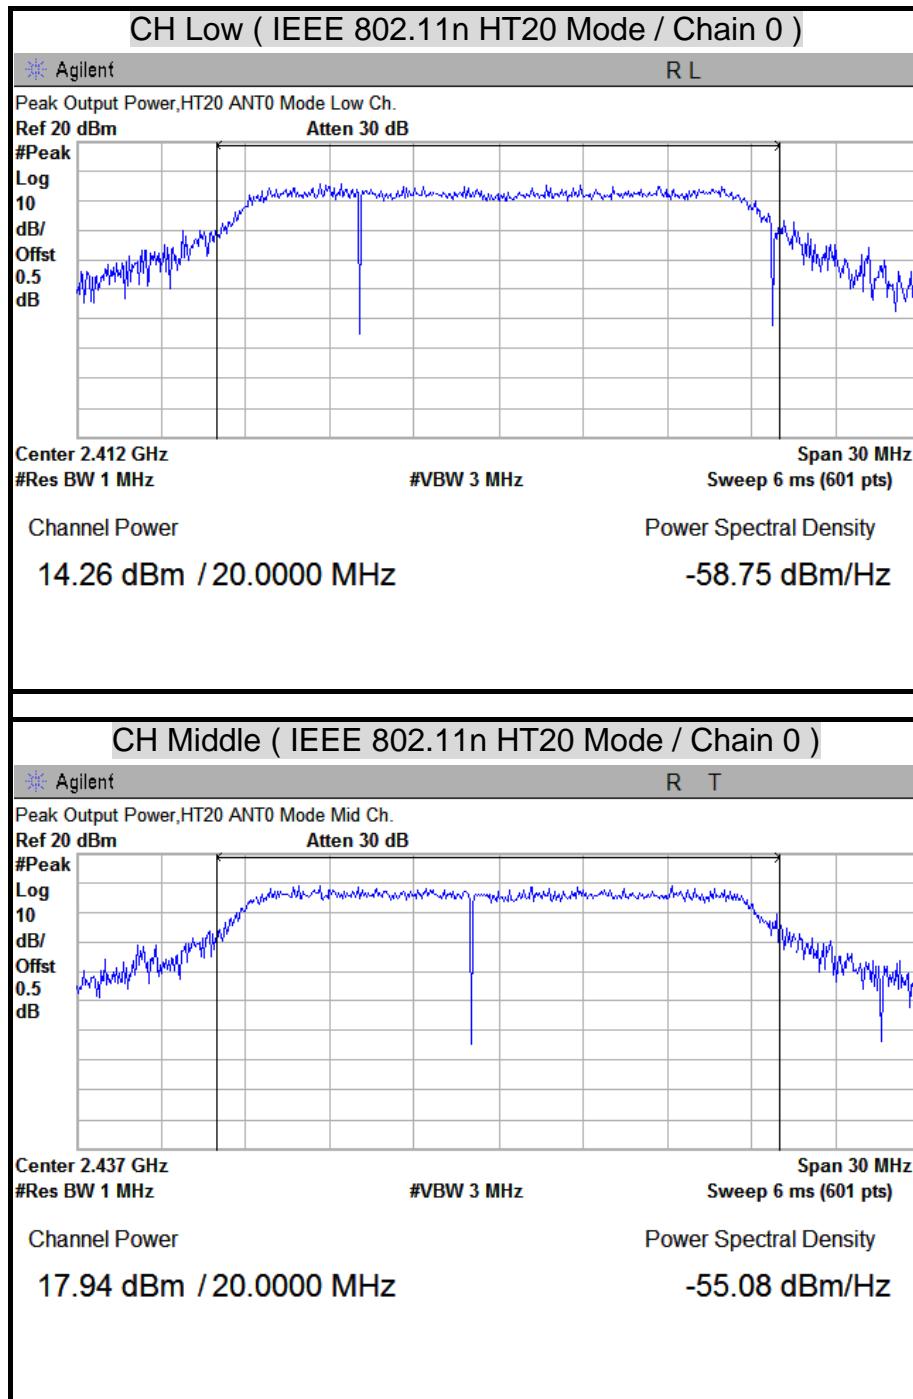


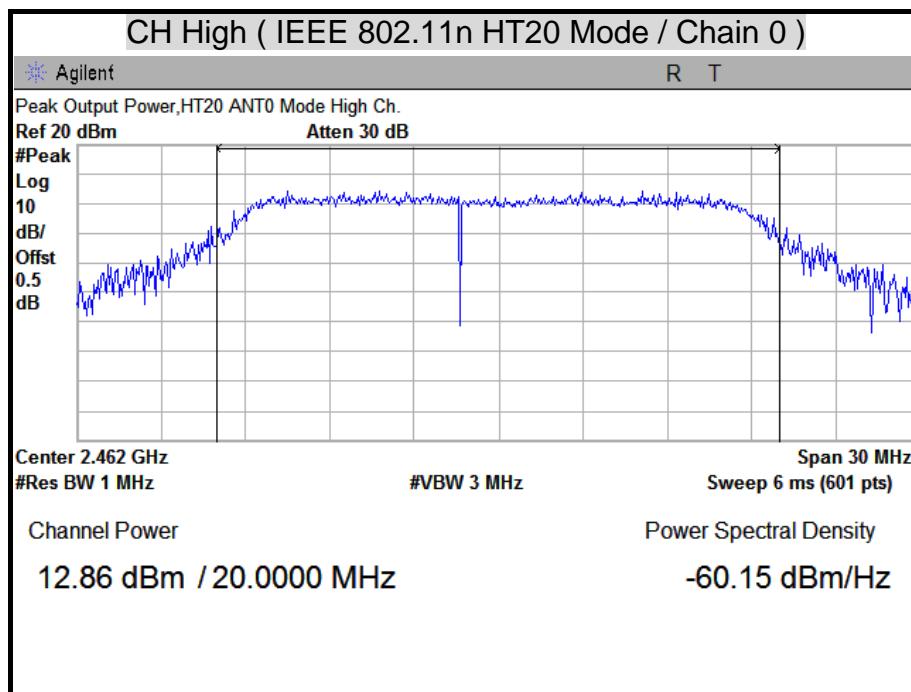


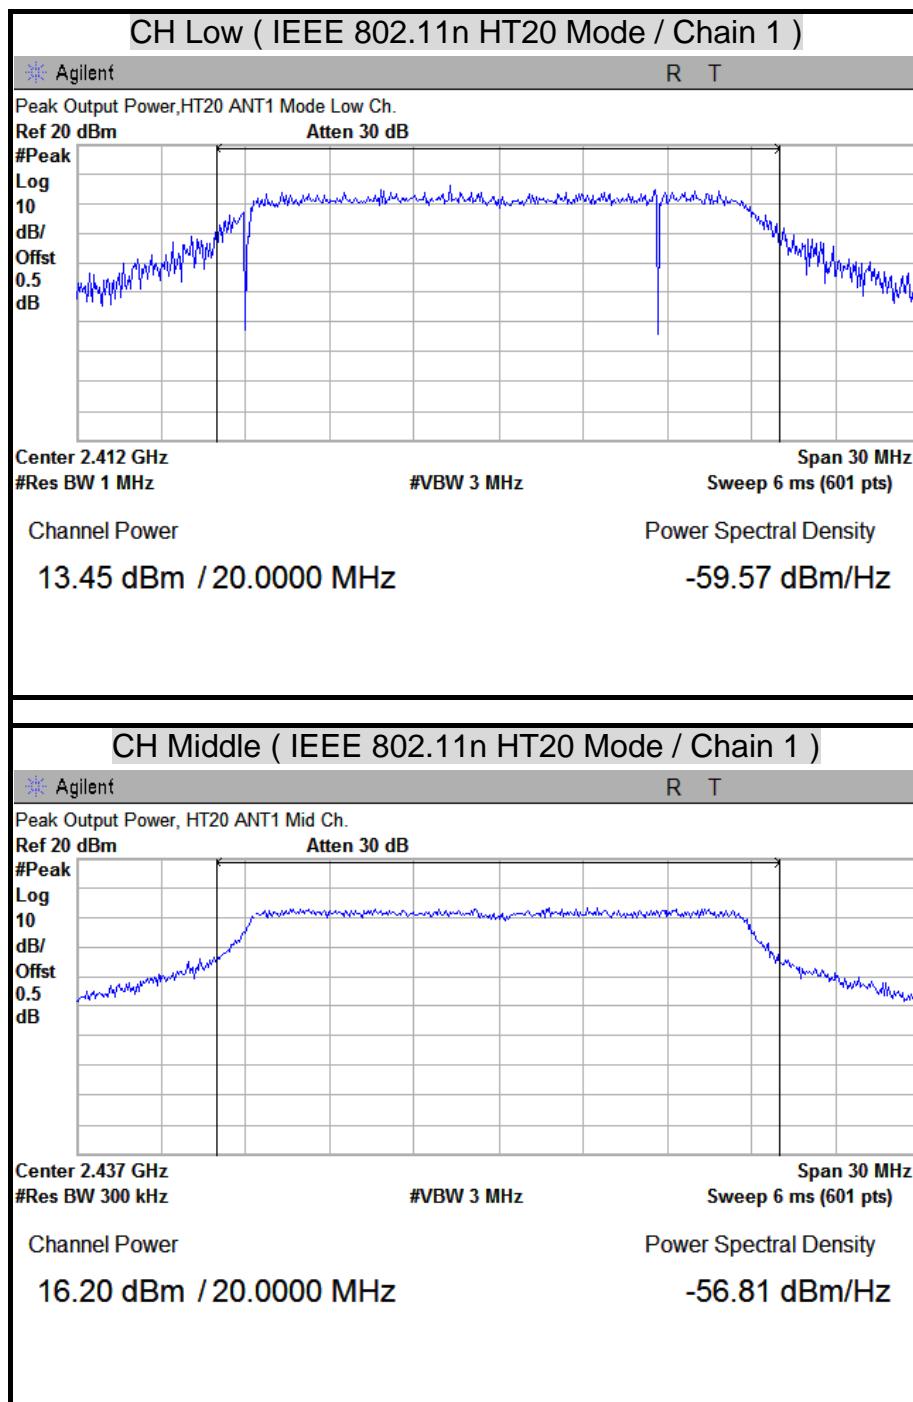


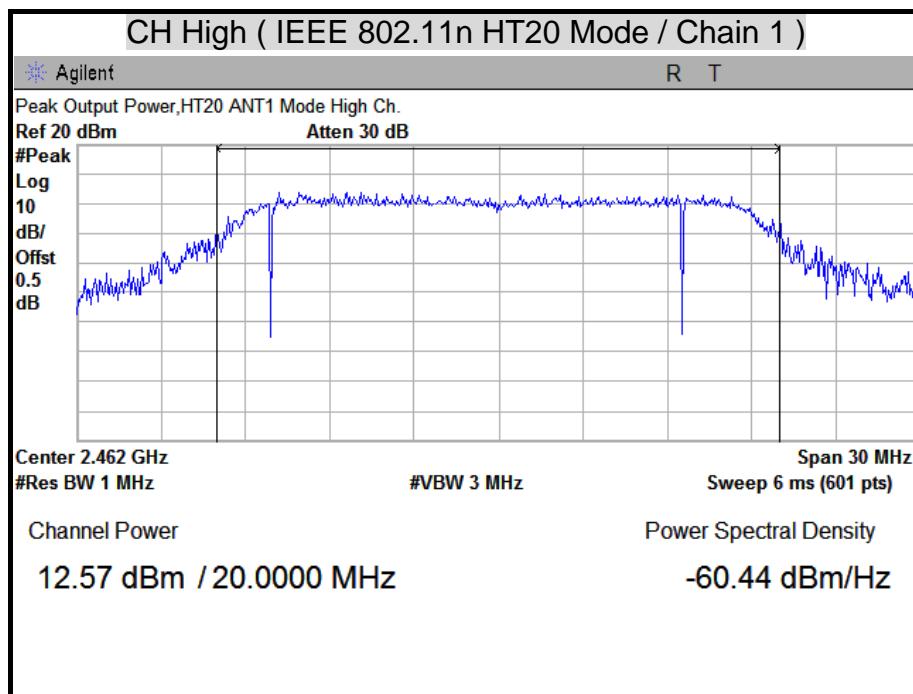

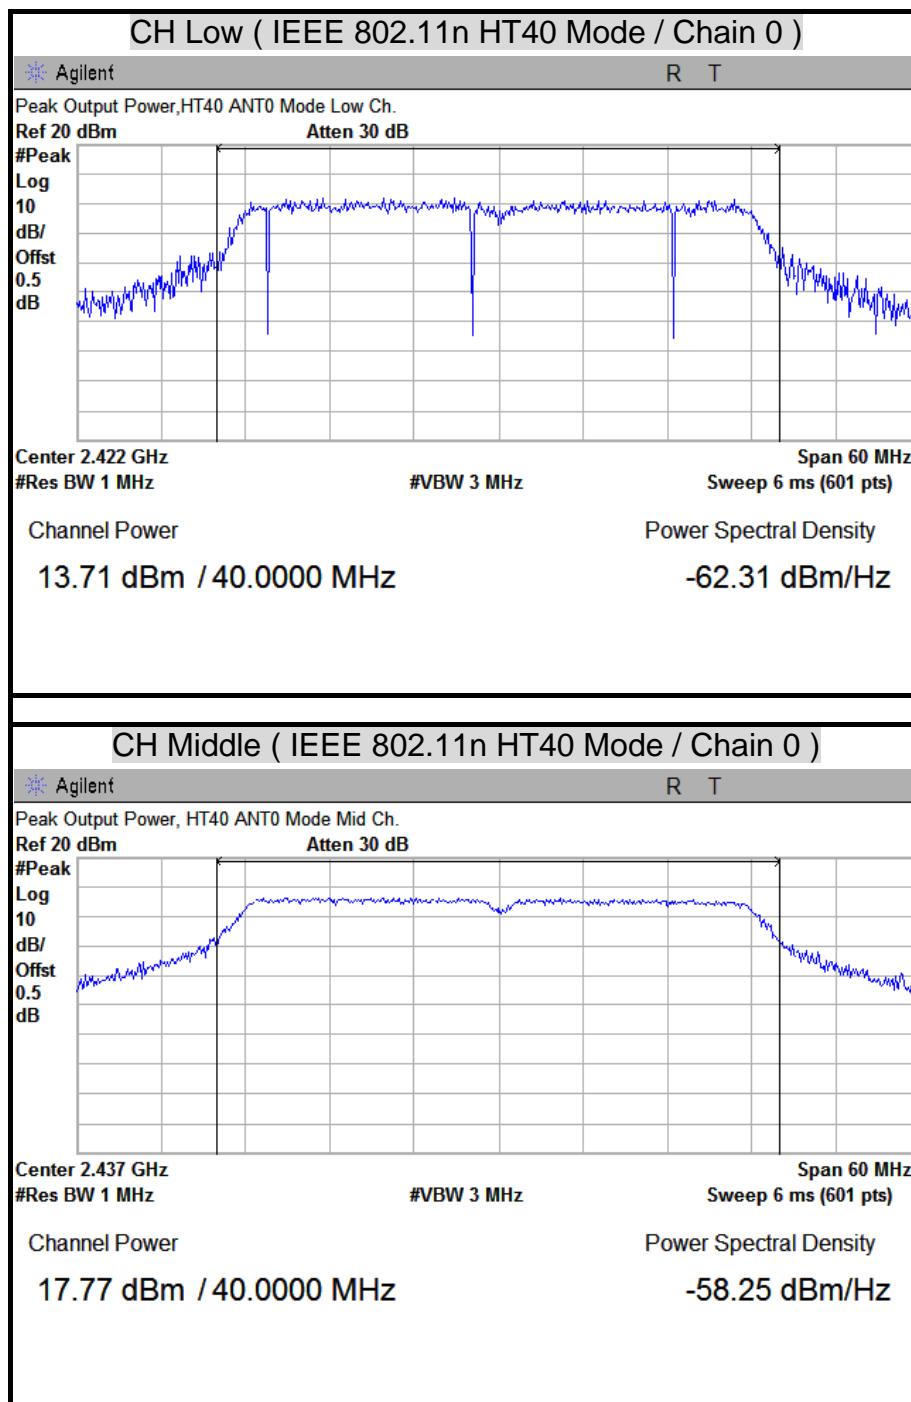

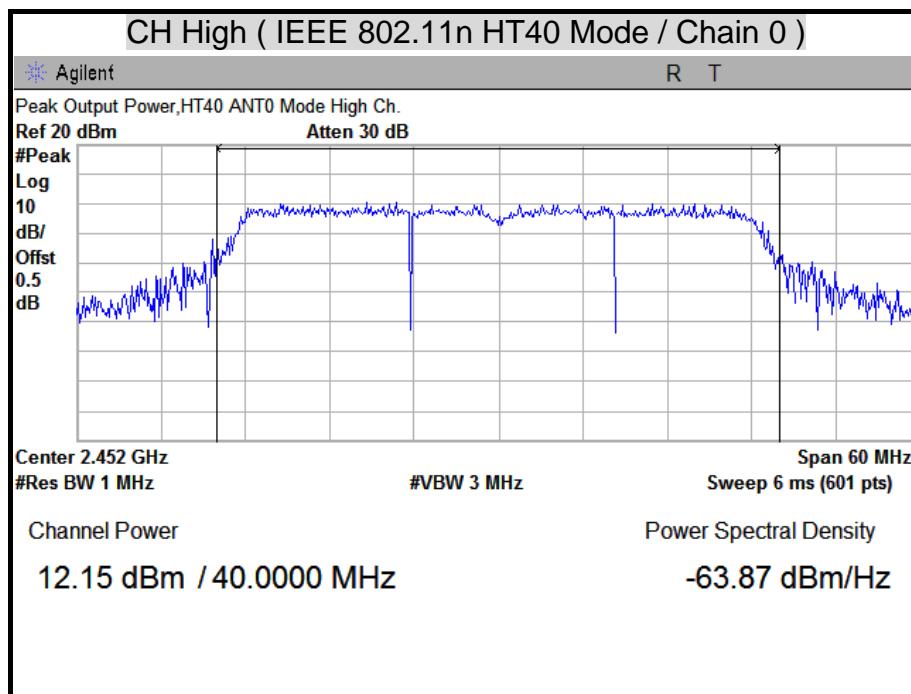

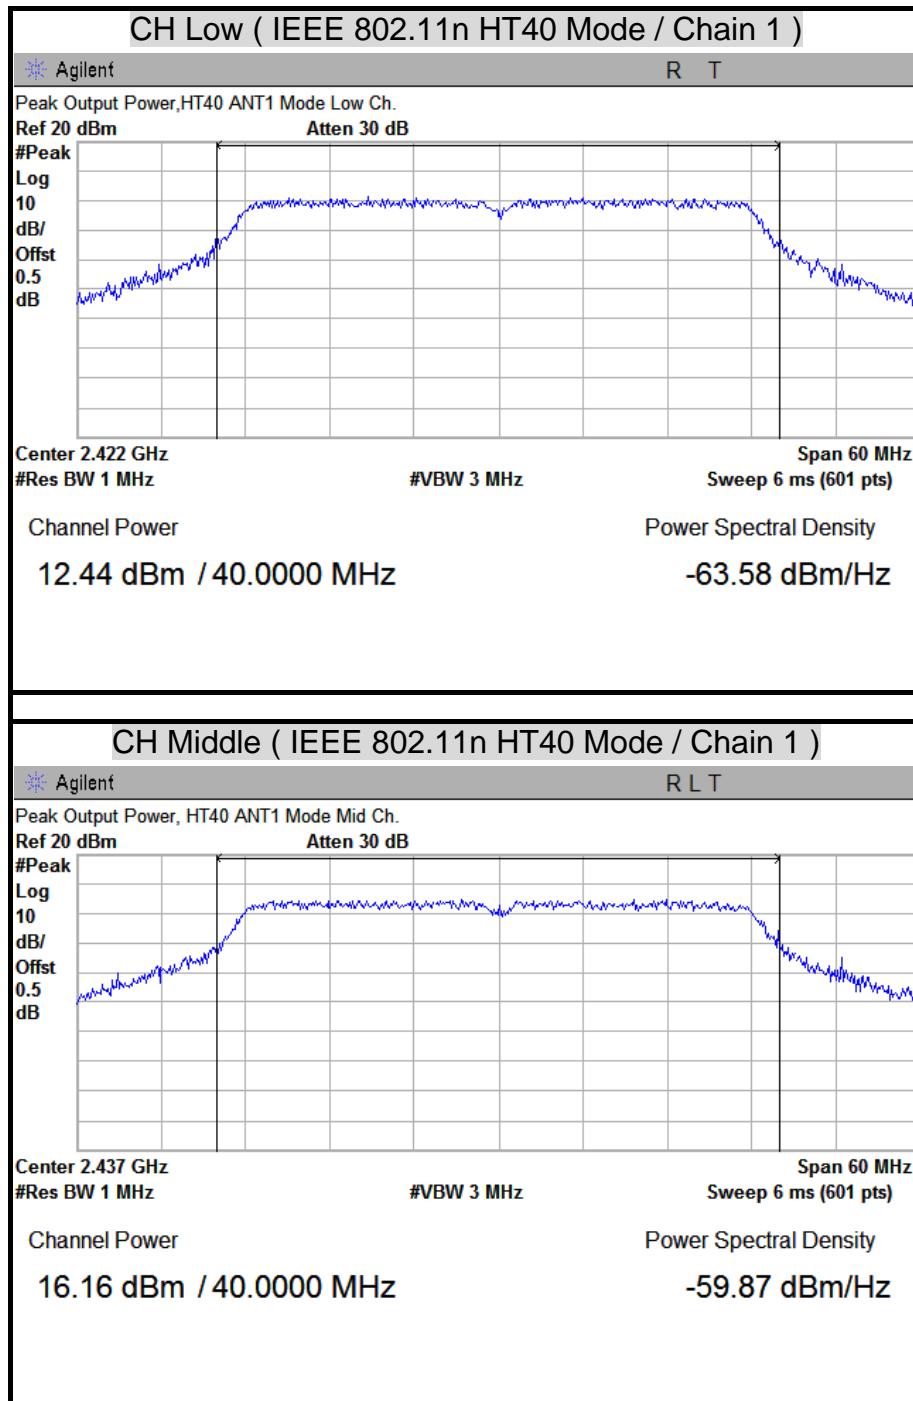

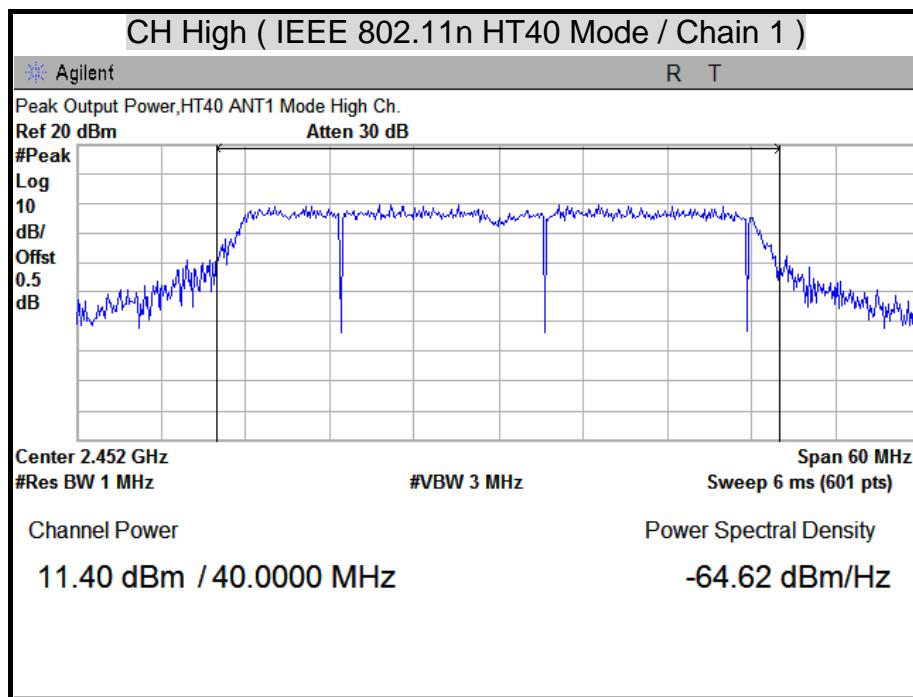



7.3 AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The Spectrum analyzer is set to the average power detection.

**TEST RESULTS**

Total avg power calculation formula:

$10 \log (10^{\text{Chain 0 Power}} / 10) + 10^{\text{Chain 1 Power}} / 10$).

IEEE 802.11b Mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power Output (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2412	14.17	13.09	16.67
Middle	2437	14.61	13.61	17.15
High	2462	14.55	13.68	17.15

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power Output (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2412	9.00	8.24	11.65
Middle	2437	13.67	12.38	16.08
High	2462	8.15	7.61	10.90

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Average Power Output (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2412	8.11	7.78	10.96
Middle	2437	11.55	10.50	14.07
High	2462	7.17	6.52	9.87

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11n HT40 Mode (Two TX)

Channel	Channel Frequency (MHz)	Average Power Output (dBm)		Average Power Total (dBm)
		Chain 0	Chain 1	
Low	2422	7.49	6.70	10.12
Middle	2437	11.47	10.45	14.00
High	2452	6.10	5.25	8.71

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.



7.4 POWER SPECTRAL DENSITY

LIMITS


§ 15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

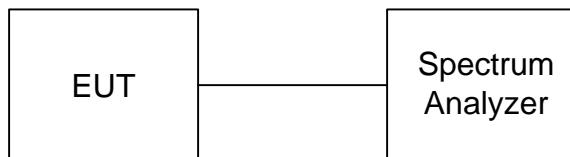

TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 3KHz and VBW RBW, set sweep time = span / 3Khz.

The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span / 3Khz for a full response of the mixer in the spectrum analyzer.



TEST RESULTS

Total power spectral density calculation formula:
10 log (10⁸ (Chain 0 PSD / 10) + 10⁸ (Chain 1 PSD / 10)).

IEEE 802.11b Mode (Two TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PPSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-8.99	-9.89	-6.41	8	PASS
Middle	2437	-7.94	-8.74	-5.31	8	PASS
High	2462	-8.22	-8.74	-5.46	8	PASS

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

IEEE 802.11g Mode (Two TX)

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PPSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-15.98	-15.85	-12.90	8	PASS
Middle	2437	-10.61	-12.62	-8.49	8	PASS
High	2462	-16.65	-17.96	-14.25	8	PASS

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

**IEEE 802.11n HT20 Mode (Two TX)**

Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2412	-12.49	-13.39	-9.91	8	PASS
Middle	2437	-12.67	-12.78	-9.71	8	PASS
High	2462	-11.55	-11.31	-8.42	8	PASS

Remark:


1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.


IEEE 802.11n HT40 Mode (Two TX)


Channel	Channel Frequency (MHz)	Final RF Power Level in 3KHz BW (dBm)		PSD Total (dBm)	Minimum Limit (dBm)	Pass / Fail
		Chain 0	Chain 1			
Low	2422	-12.72	-16.66	-11.25	8	PASS
Middle	2437	-14.89	-15.52	-12.18	8	PASS
High	2452	-13.32	-13.67	-10.48	8	PASS


Remark:


1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.

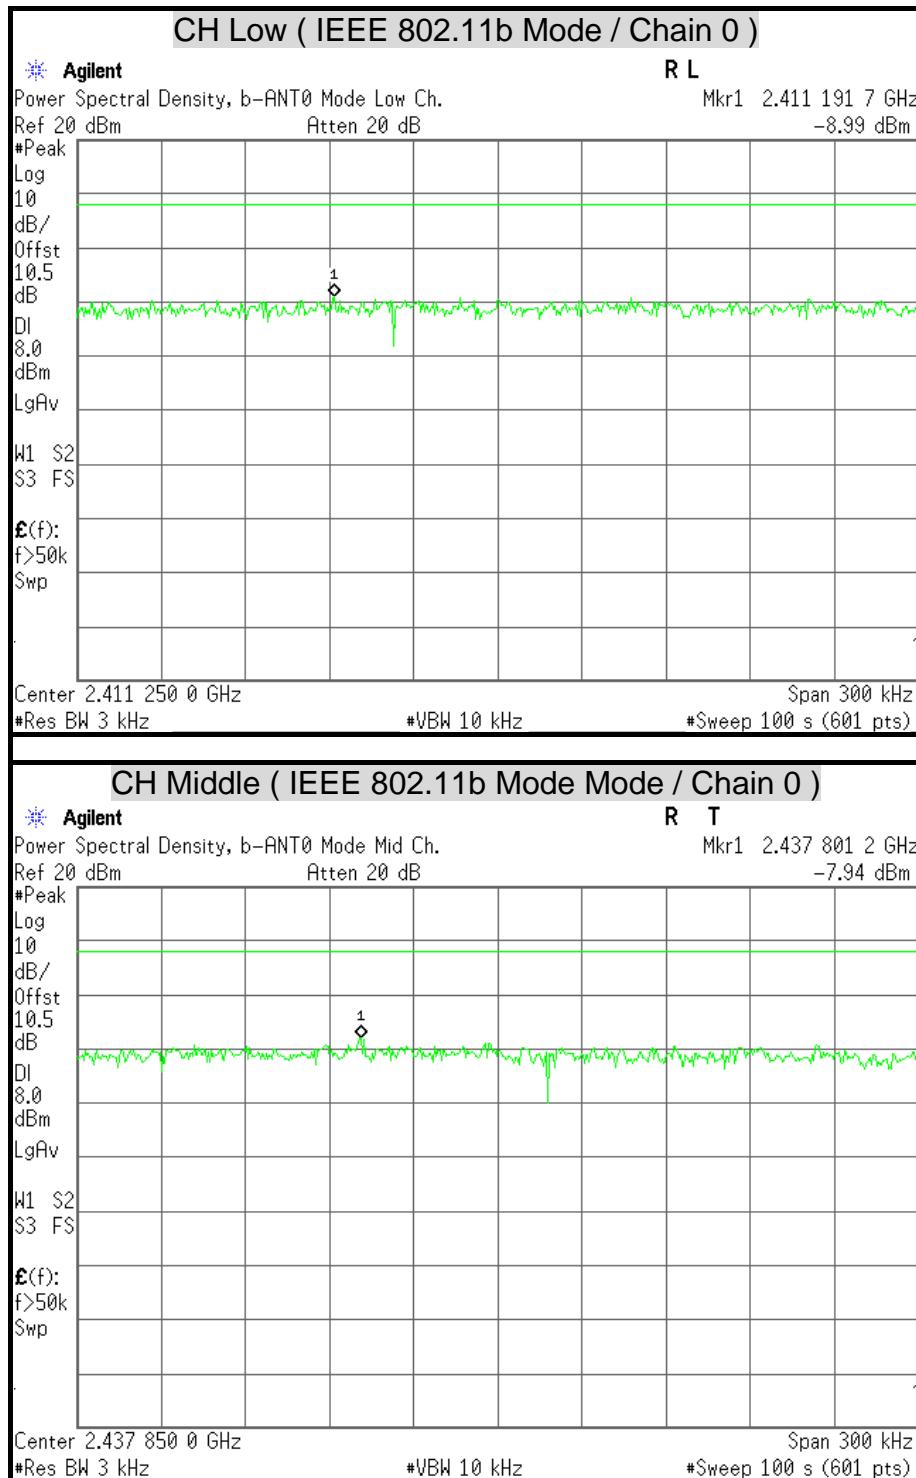
POWER SPECTRAL DENSITY

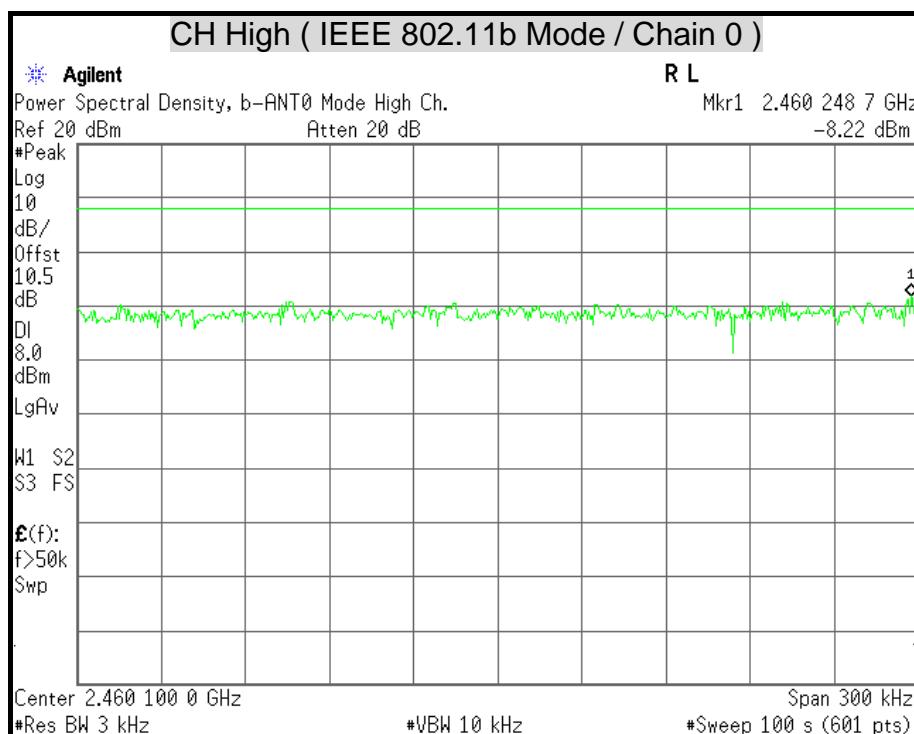


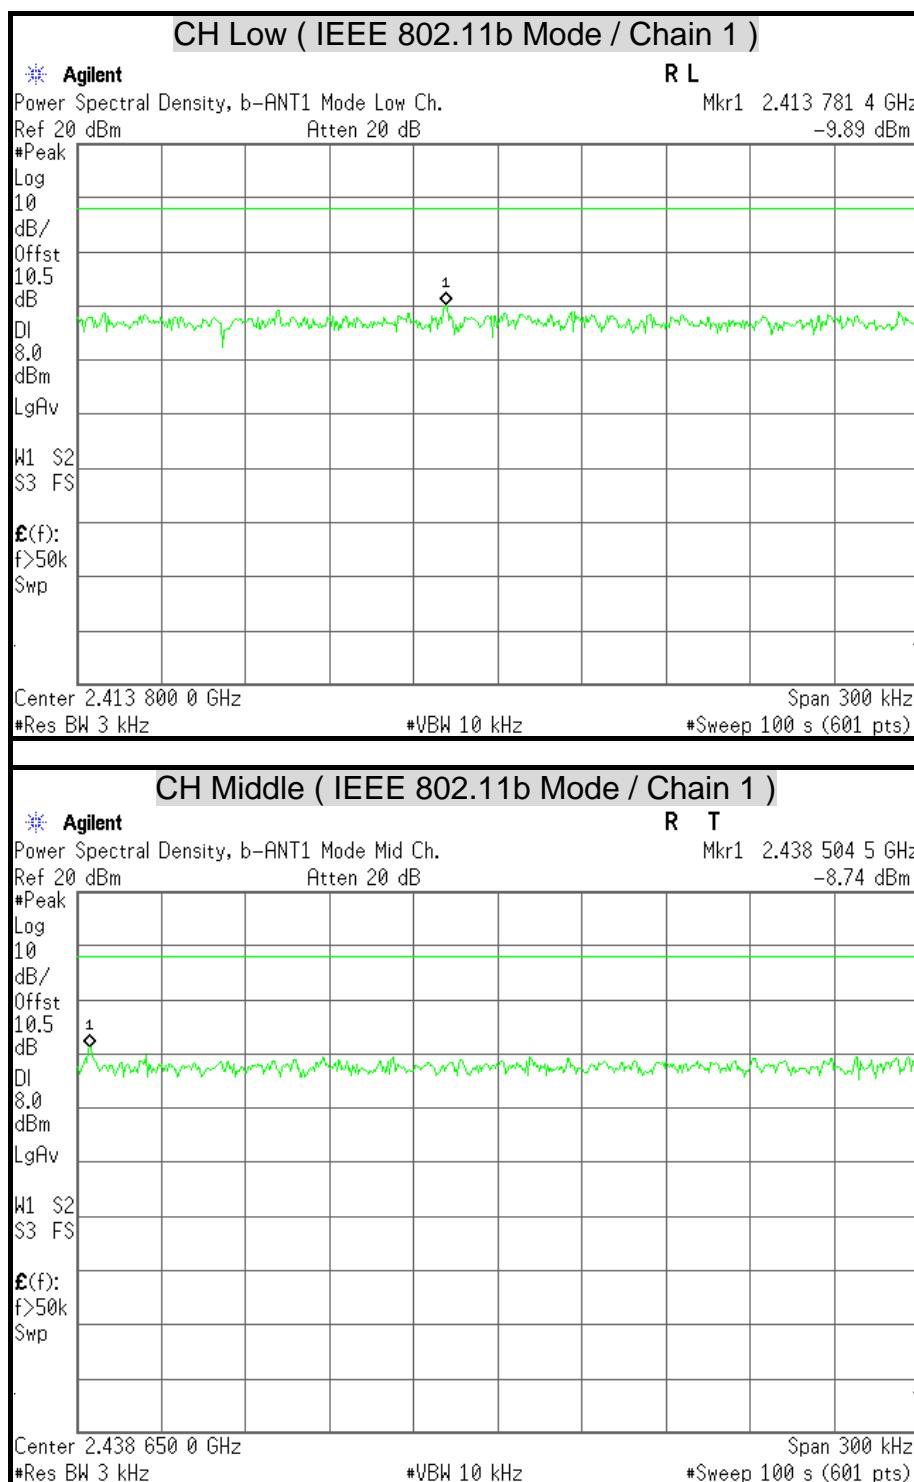


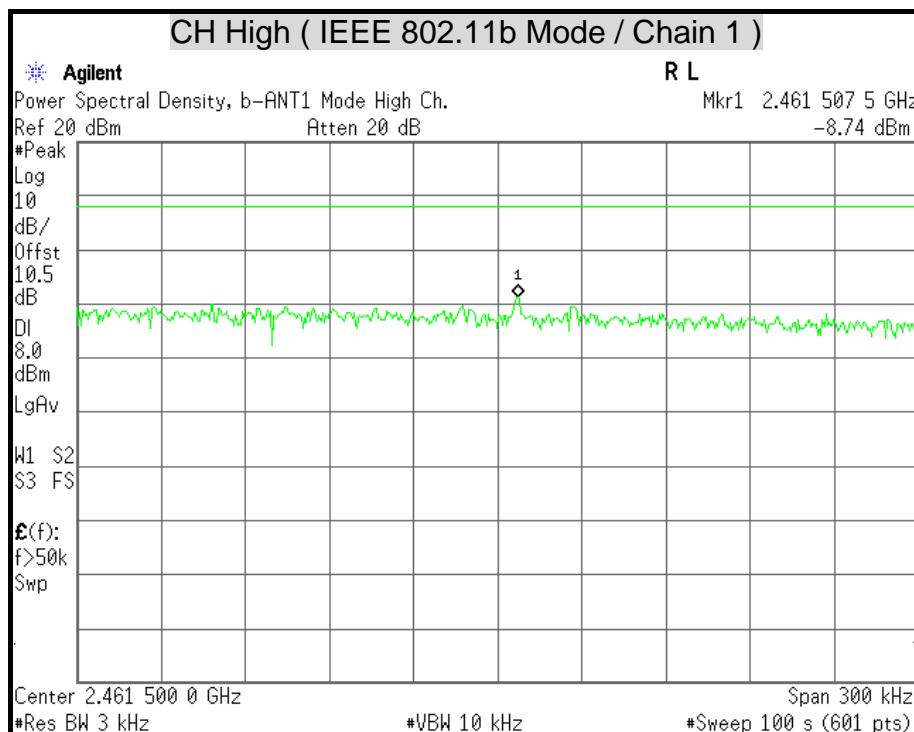


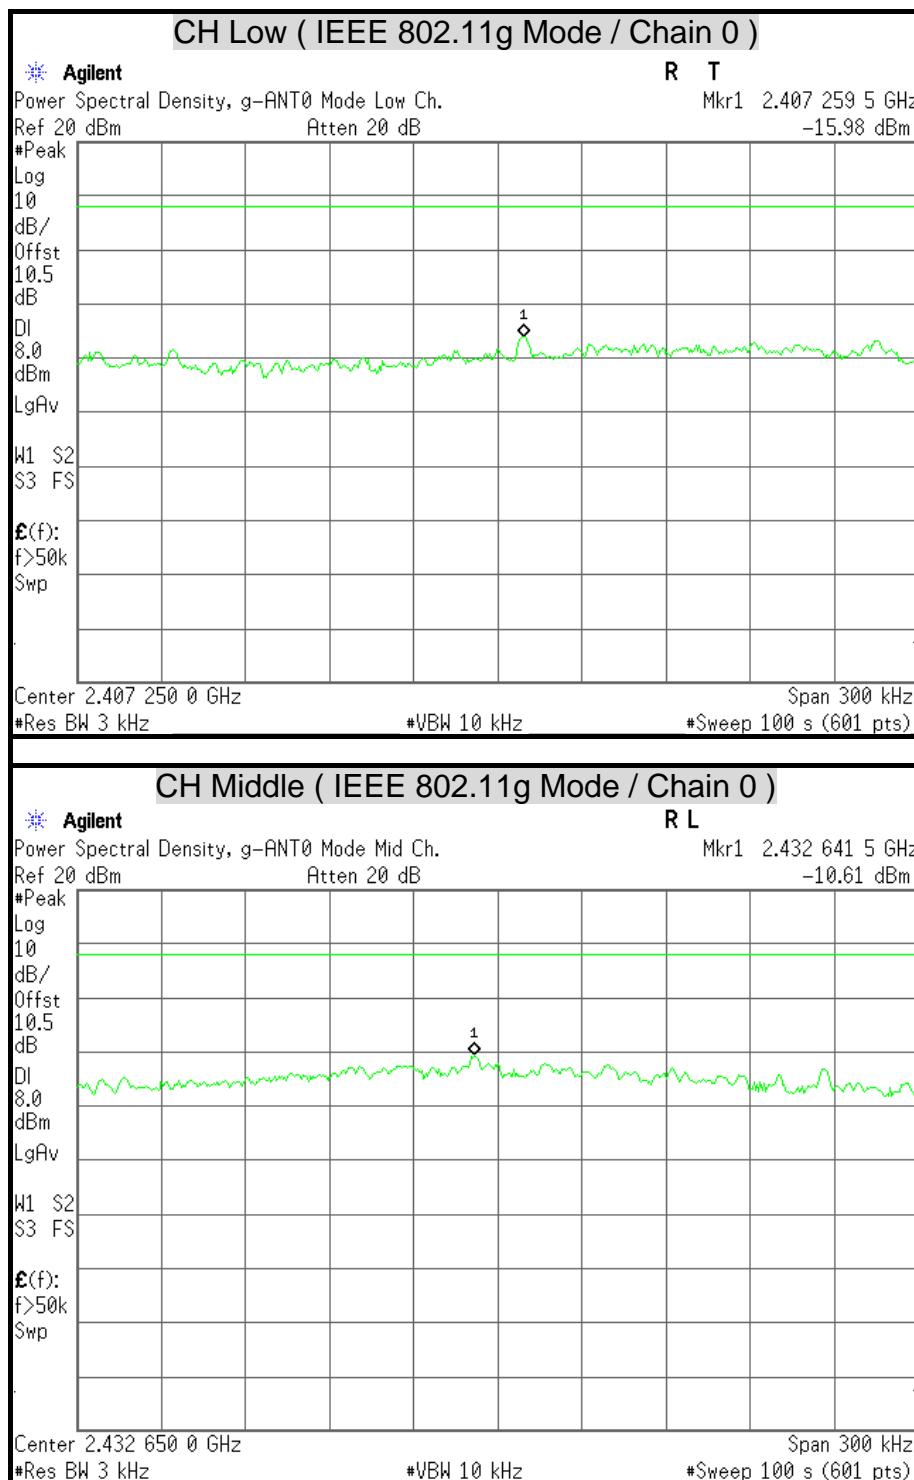


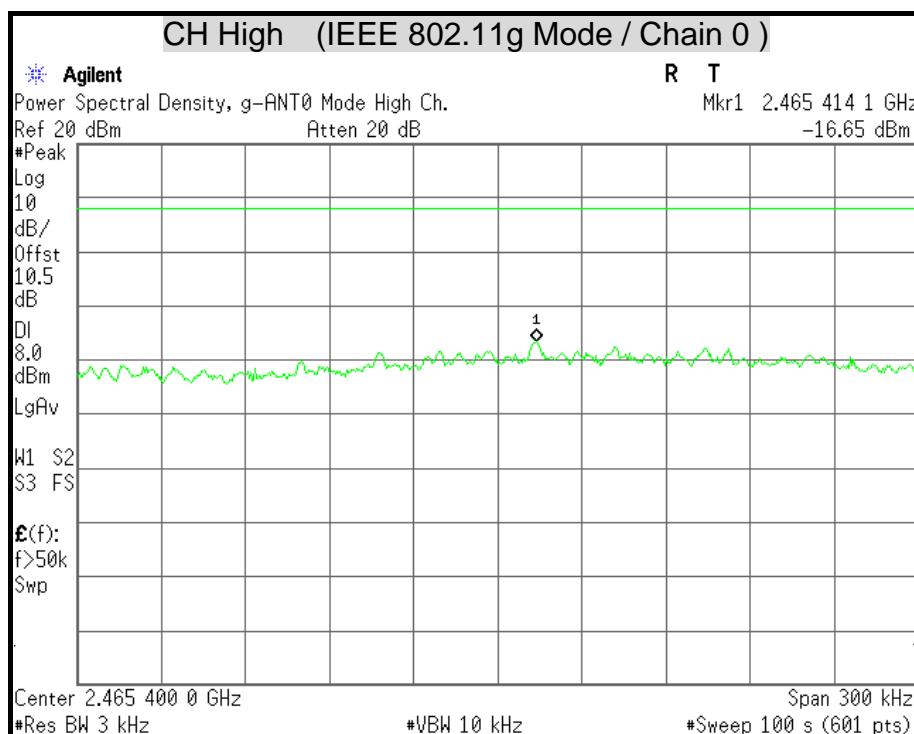


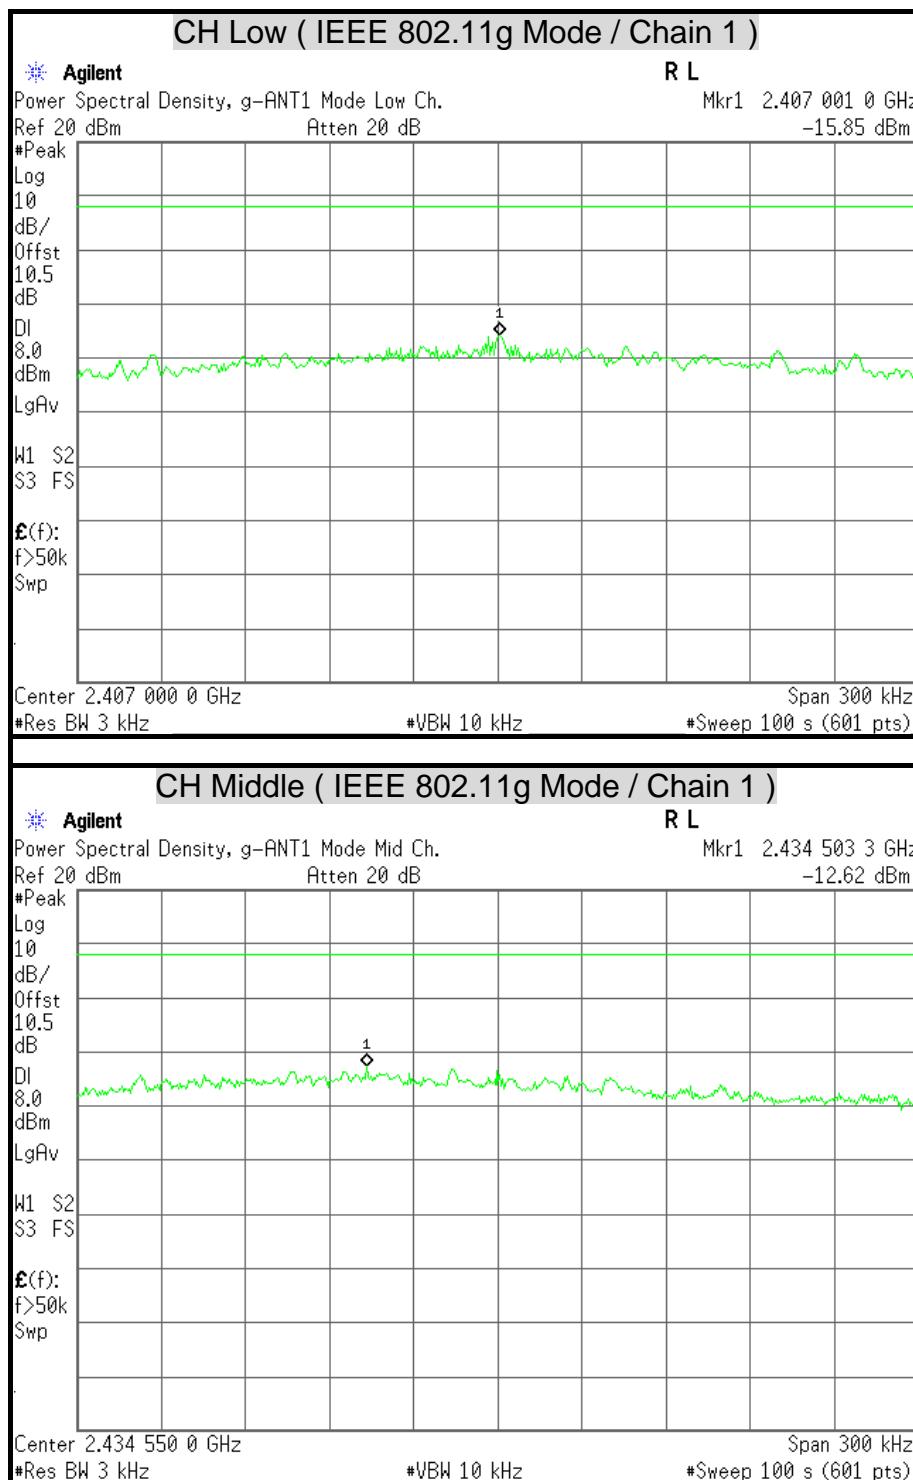


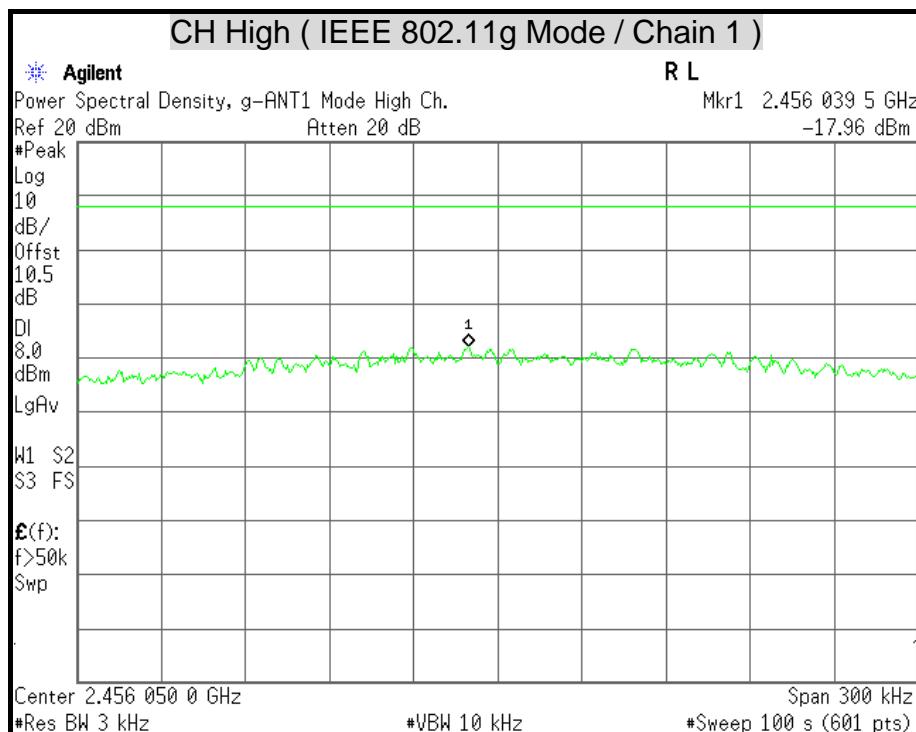


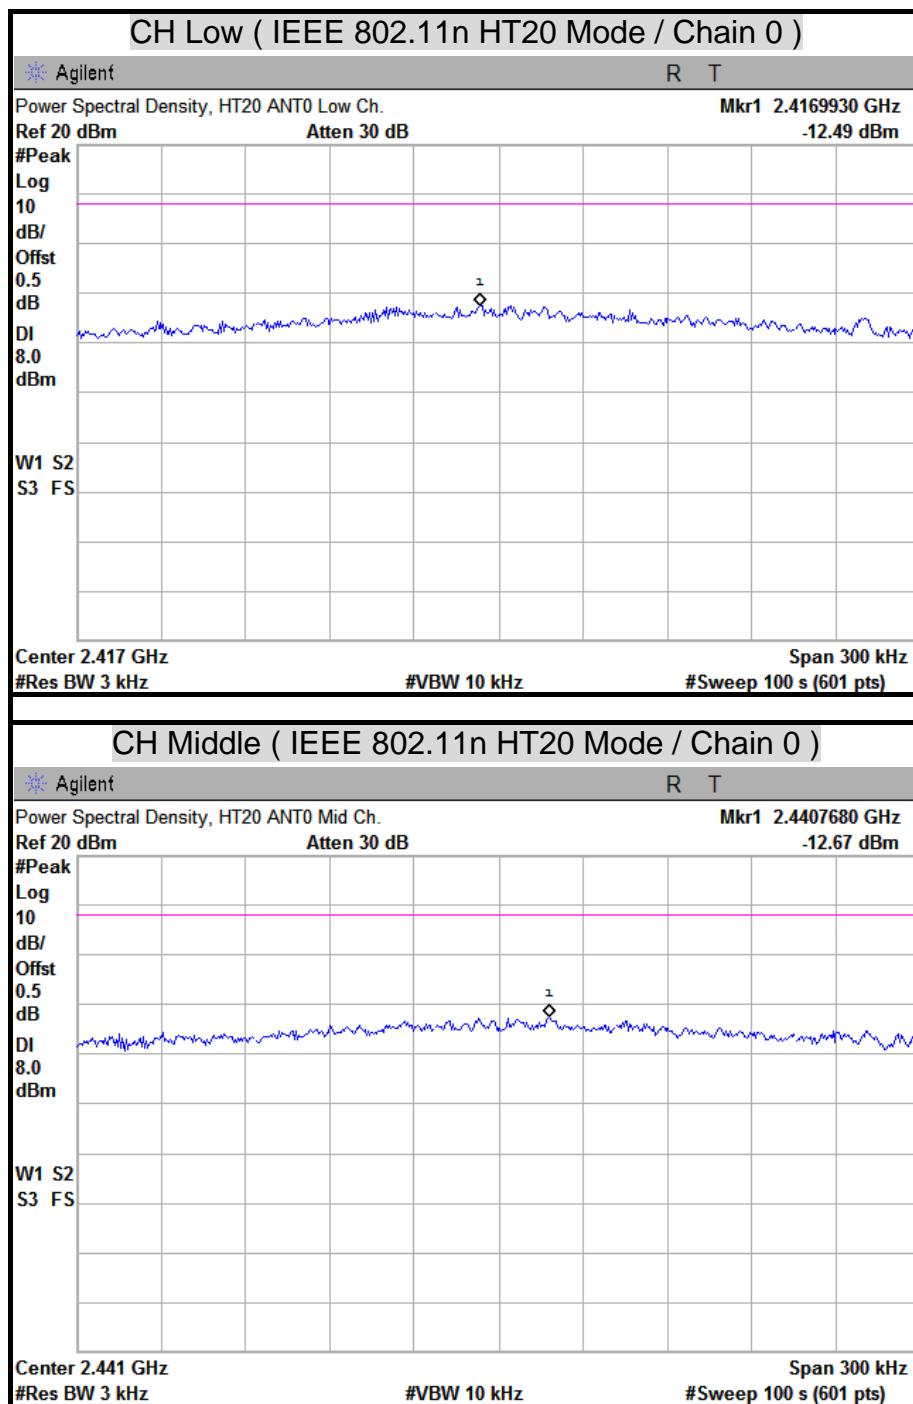


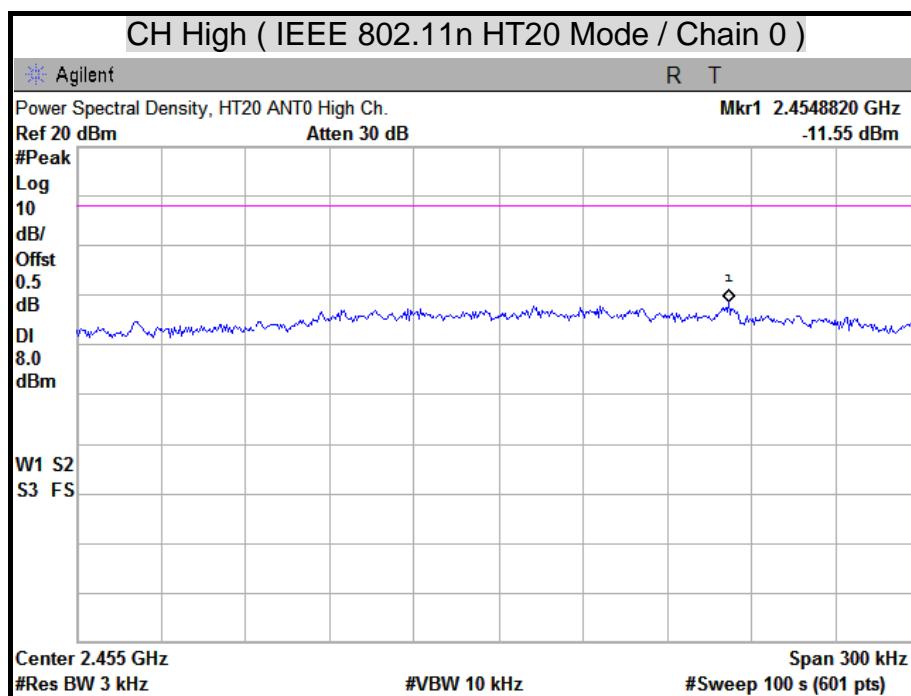


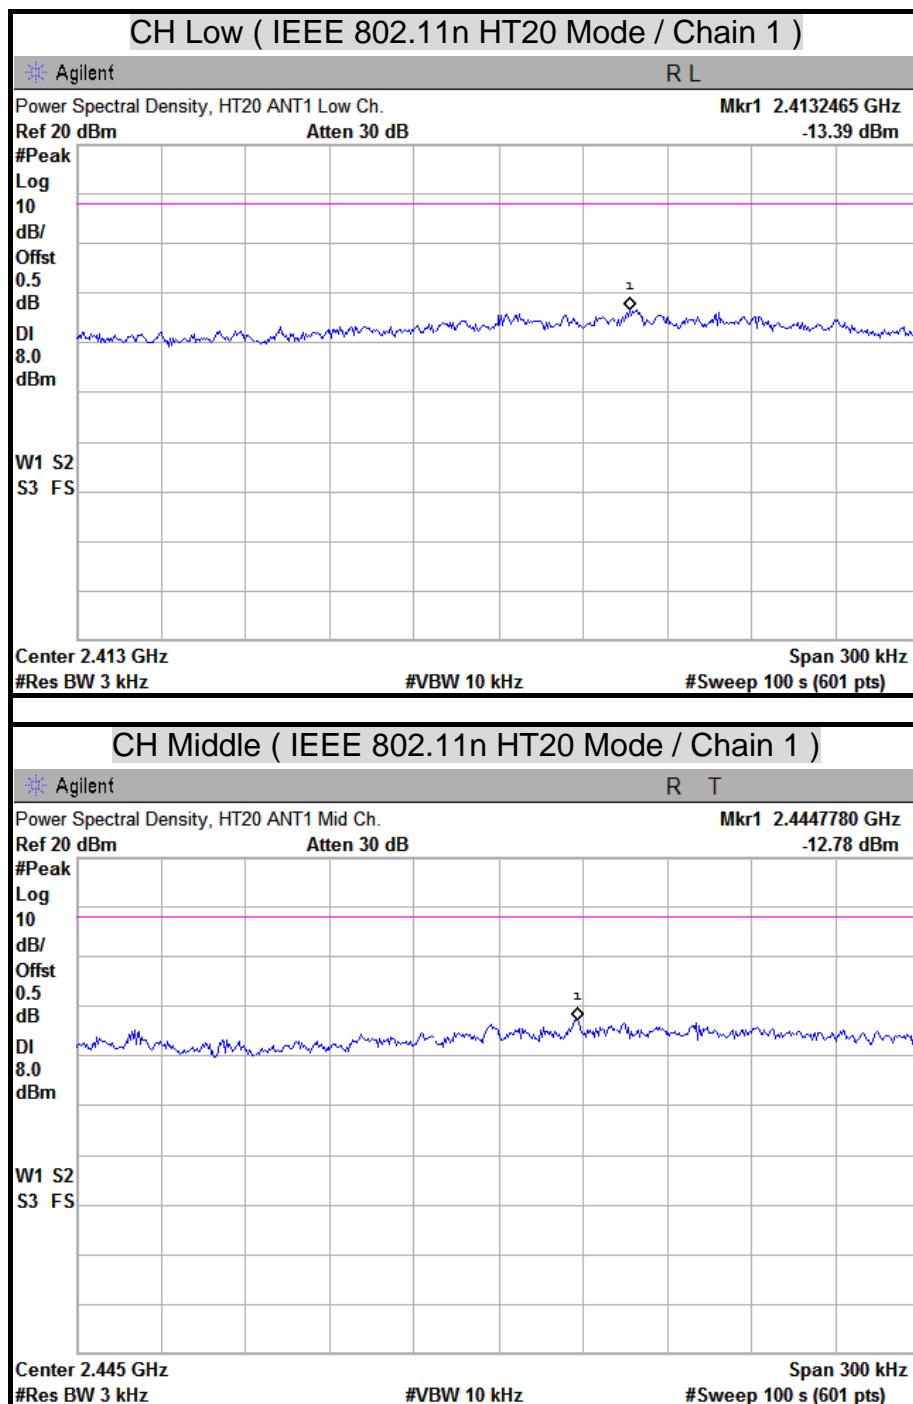


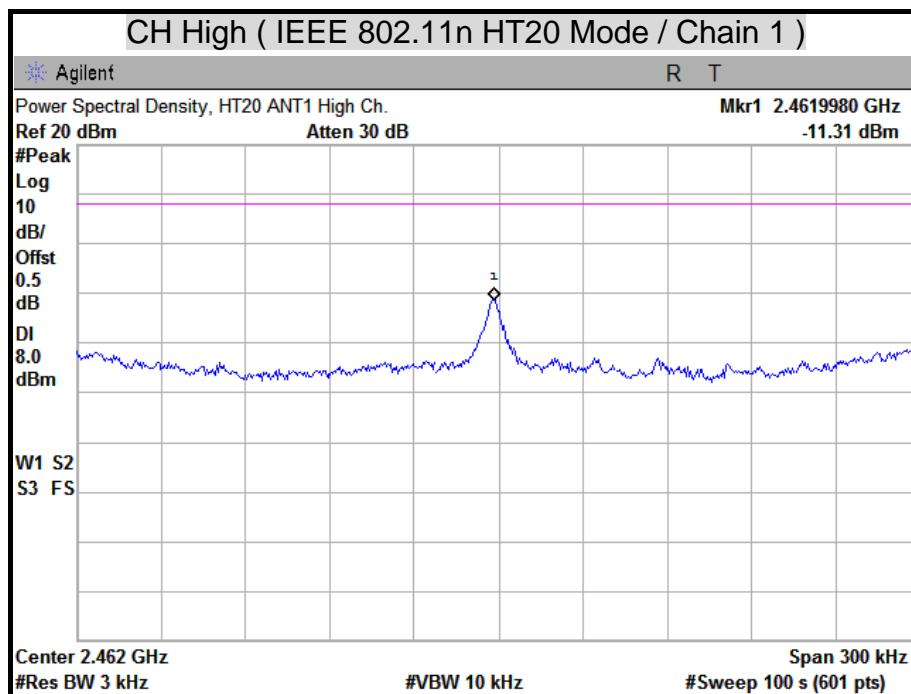

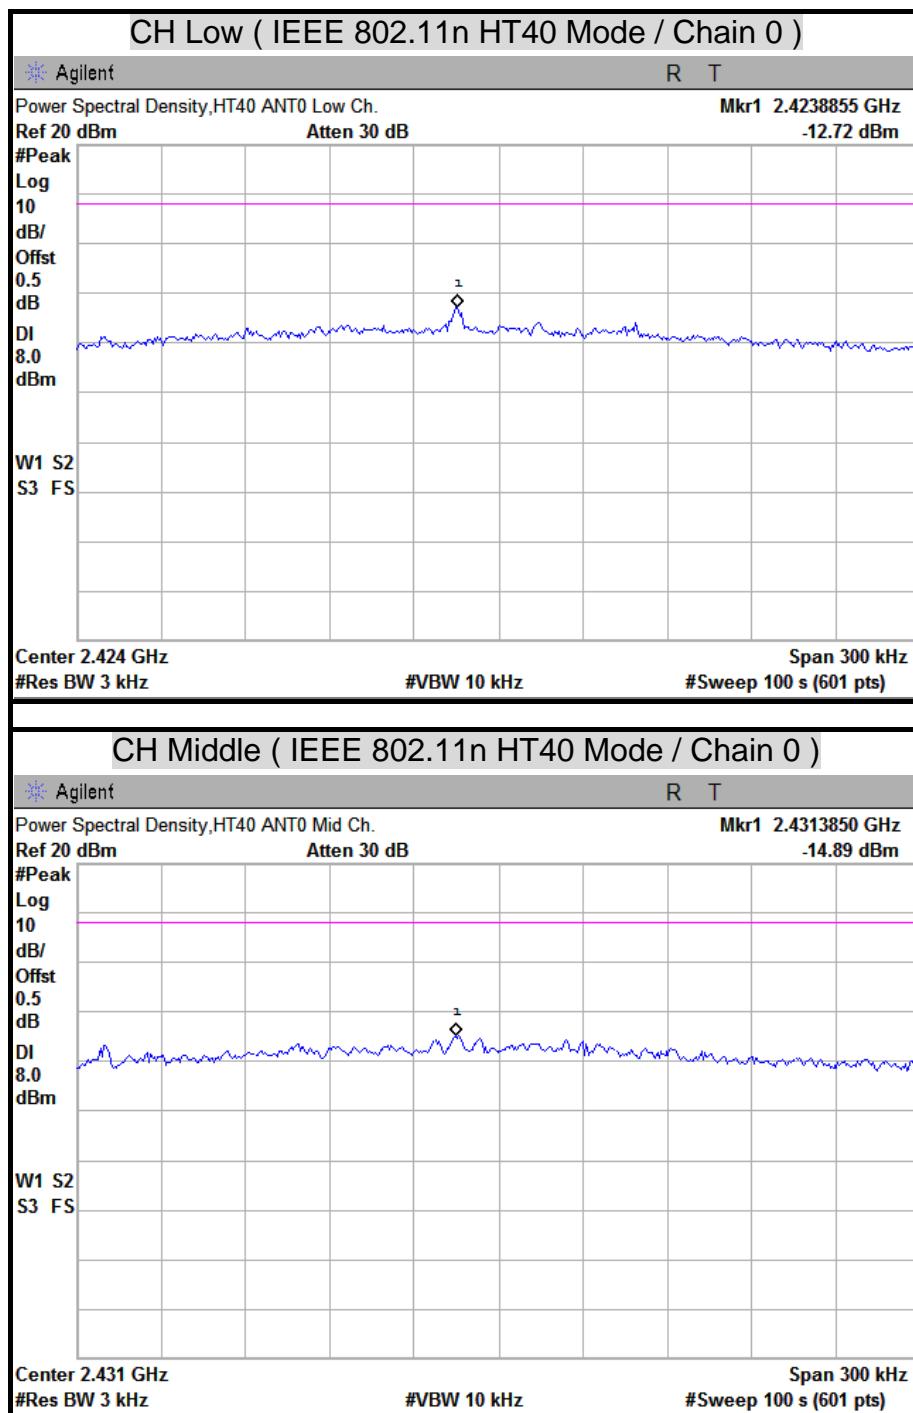

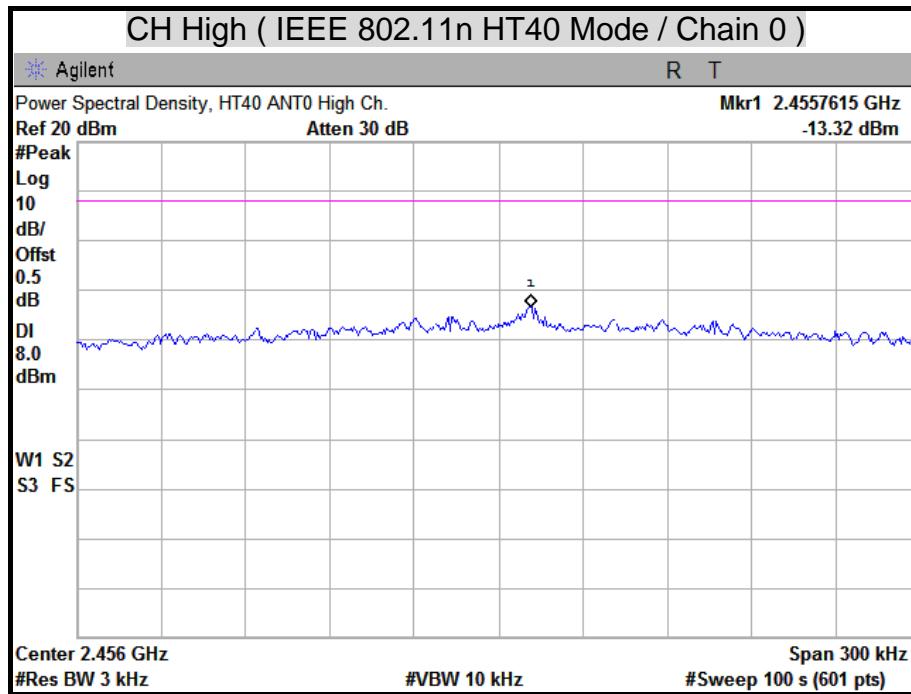

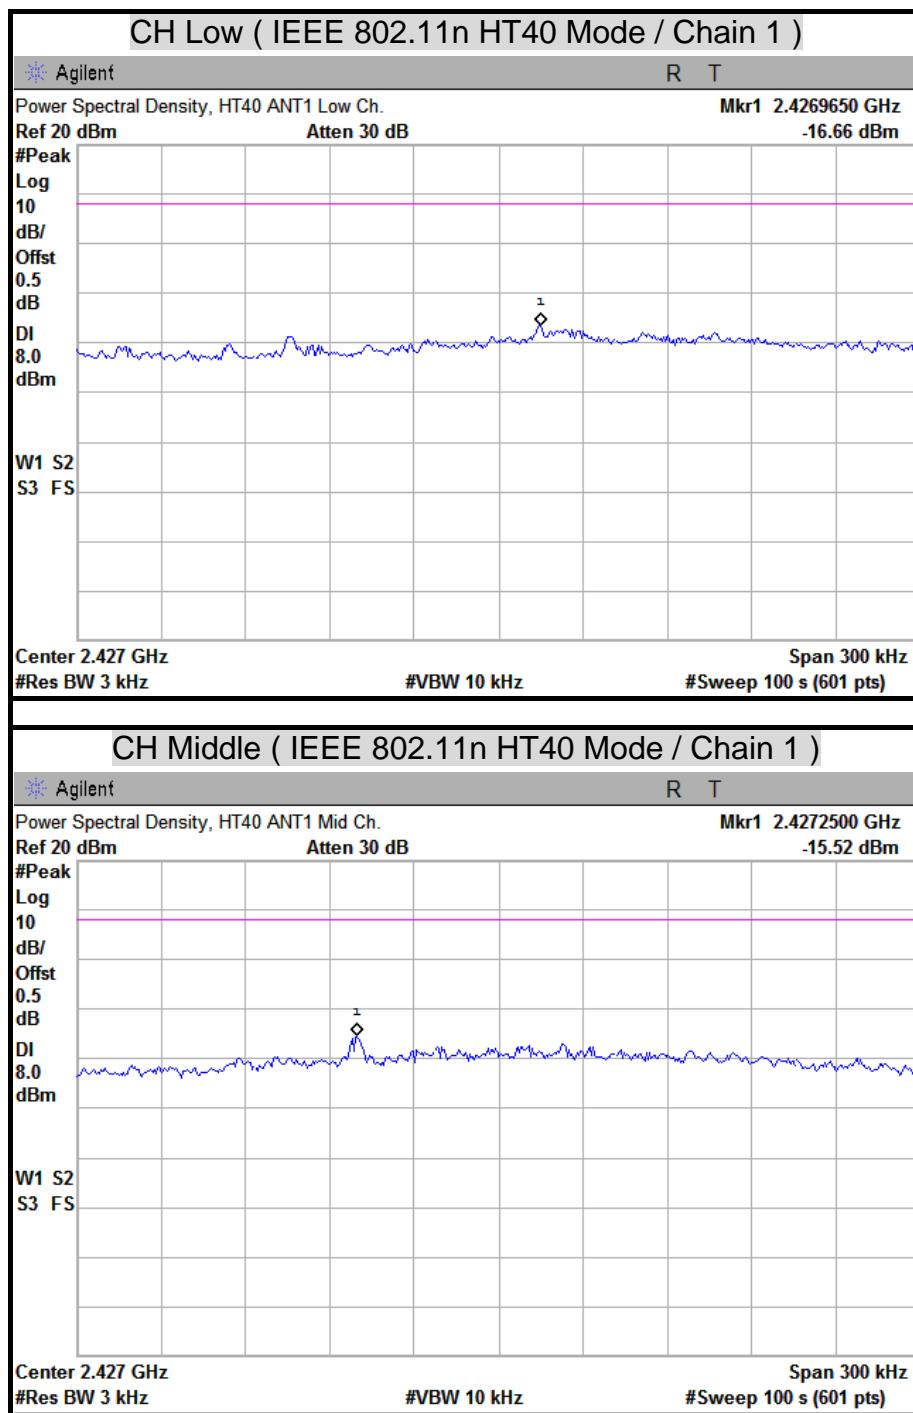

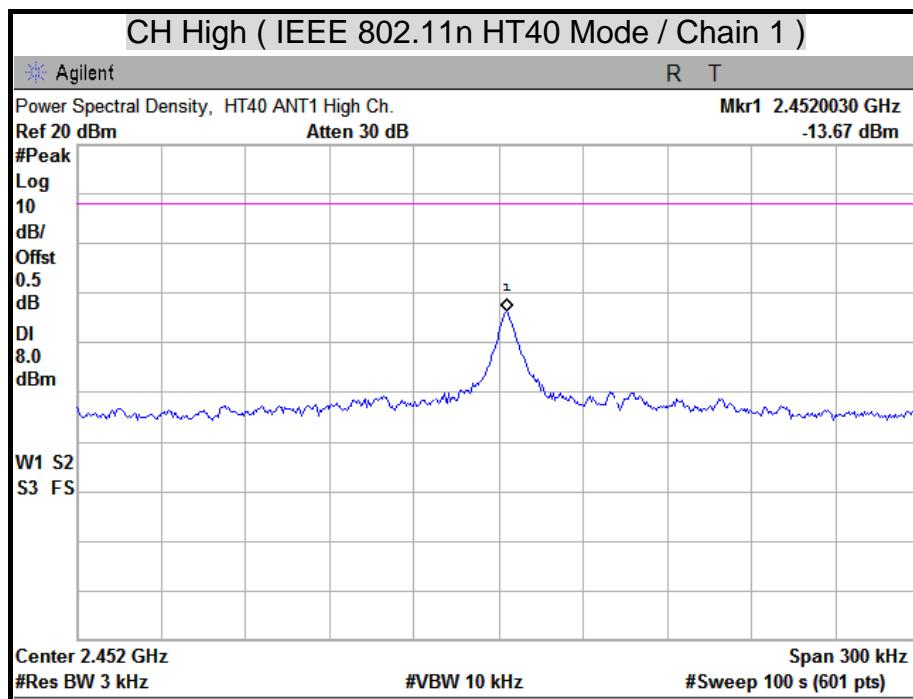



7.5 CONDUCTED SPURIOUS EMISSION

LIMITS


§ 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the and that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4407B	US41443108	08/09/2012
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012

Remark: Each piece of equipment is scheduled for calibration once a year.

TEST SETUP

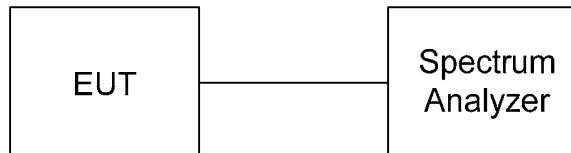

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

**TEST RESULTS****CH Low (30MHz ~ 26GHz / IEEE 802.11b Mode) / Two TX**

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	0.45000	-59.87	3.01	-56.86	-15.0
	2.39750	-33.57		-30.56	
	2.40000	-47.45		-44.44	
	3.22000	-52.90		-49.89	
	6.99000	-56.05		-53.04	
	13.61000	-52.79		-49.78	
Chan 1	1.17000	-60.96	3.01	-57.95	-16.3
	1.61000	-60.63		-57.62	
	2.39700	-38.47		-35.46	
	2.40000	-51.45		-48.44	
	3.22000	-56.85		-53.84	
	14.08000	-53.38		-50.37	

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2) = 3.01$.
4. Limit : Fundamental - 20dB.



CH Middle (30MHz ~ 26GHz / IEEE 802.11b Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.61000	-59.27	3.01	-56.26	-14.5
	3.25000	-54.66		-51.65	
	13.40000	-52.90		-49.89	
	21.33000	-51.44		-48.43	
Chan 1	1.61000	-60.05	3.01	-57.04	-15.7
	3.12000	-58.49		-55.48	
	8.68000	-55.42		-52.41	
	14.08000	-52.79		-49.78	

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.

CH High (30MHz ~ 26GHz / IEEE 802.11b Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	0.50000	-59.97	3.01	-56.96	-14.7
	0.91000	-57.47		-54.46	
	2.48350	-53.46		-50.45	
	2.48800	-53.26		-50.25	
	3.28000	-54.51		-51.50	
	13.90000	-51.64		-48.63	
Chan 1	1.64000	-60.60	3.01	-57.59	-15.5
	2.48350	-55.65		-52.64	
	2.49810	-55.41		-52.40	
	7.63000	-56.45		-53.44	
	15.51000	-53.15		-50.14	
	20.73000	-52.15		-49.14	

Remark:

1. At final test to get the worst-case emission at 1Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.



CH Low (30MHz ~ 26GHz / IEEE 802.11g Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.69000	-60.21	3.01	-57.20	-21.9
	2.40000	-30.18		-27.17	
	3.22000	-51.89		-48.88	
	10.18000	-55.03		-52.02	
	24.10000	-49.92		-46.91	
Chan 1	1.33000	-61.29	3.01	-58.28	-23.2
	2.40000	-32.74		-29.73	
	3.22000	-56.68		-53.67	
	6.81000	-55.70		-52.69	
	13.92000	-52.21		-49.20	

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.

CH Middle (30MHz ~ 26GHz / IEEE 802.11g Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	0.65000	-61.43	3.01	-58.42	-17.1
	3.25000	-52.24		-49.23	
	7.67000	-55.82		-52.81	
	13.90000	-52.81		-49.80	
Chan 1	0.50000	-60.88	3.01	-57.87	-19.0
	3.25000	-55.15		-52.14	
	4.60000	-58.10		-55.09	
	6.91000	-56.11		-53.10	

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10 dB pad and 0.5 dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.



CH High (30MHz ~ 26GHz / IEEE 802.11g Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.64000	-62.52	3.01	-59.51	-23.0
	2.48350	-52.33		-49.32	
	2.48390	-50.88		-47.87	
	3.28000	-54.06		-51.05	
	8.44000	-55.79		-52.78	
	13.64000	-52.49		-49.48	
Chan 1	1.46000	-61.24	3.01	-58.23	-23.7
	2.48350	-51.28		-48.27	
	3.21000	-58.94		-55.93	
	4.68000	-59.01		-56.00	
	13.92000	-52.42		-49.41	

Remark:

1. At final test to get the worst-case emission at 6Mbps.
2. The cable assembly insertion loss of 10.5dB (including 10dB pad and 0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2) = 3.01$.
4. Limit : Fundamental - 20dB.



CH Low (30MHz ~ 26GHz / IEEE 802.11n HT20 Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.71696	-44.89	3.01	-41.88	-20.2
	2.26641	-44.03		-41.02	
	2.39999	-25.35		-22.34	
	15.42000	-44.68		-41.67	
Chan 1	1.50609	-45.03	3.01	-42.02	-22.1
	1.85358	-44.93		-41.92	
	2.39999	-27.10		-24.09	
	14.59200	-45.97		-42.96	

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.

CH Middle (30MHz ~ 26GHz / IEEE 802.11n HT20 Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.09623	-46.38	3.01	-43.37	-18.8
	1.97238	-44.72		-41.71	
	14.84500	-45.44		-42.43	
Chan 1	1.86843	-44.89	3.01	-41.88	-19.7
	2.16543	-43.94		-40.93	
	15.46600	-45.57		-42.56	

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.



CH High (30MHz ~ 26GHz / IEEE 802.11n HT20 Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.67835	-44.88	3.01	-41.87	-19.6
	2.07633	-44.82		-41.81	
	15.14400	-45.71		-42.70	
Chan 1	1.56252	-45.17	3.01	-42.16	-19.2
	2.13870	-43.95		-40.94	
	21.99800	-45.69		-42.68	

Remark:

1. At final test to get the worst-case emission at 6.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2) = 3.01$.
4. Limit : Fundamental - 20dB.



CH Low (30MHz ~ 26GHz / IEEE 802.11n HT40 Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	0.87051	-46.00	3.01	-42.99	-21.4
	1.62489	-45.27		-42.26	
	2.39999	-27.09		-24.08	
	13.92500	-45.22		-42.21	
Chan 1	1.55955	-45.25	3.01	-42.24	-23.7
	1.86843	-44.91		-41.90	
	2.39999	-28.69		-25.68	
	15.55800	-45.88		-42.87	

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.

CH Middle (30MHz ~ 26GHz / IEEE 802.11n HT40 Mode) / Two TX

Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.79715	-45.15	3.01	-42.14	-21.5
	2.14464	-44.14		-41.13	
	14.63800	-45.46		-42.45	
Chan 1	1.98723	-44.57	3.01	-41.56	-23.8
	2.04960	-44.42		-41.41	
	16.89200	-45.75		-42.74	

Remark:

1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2)=3.01$.
4. Limit : Fundamental - 20dB.



CH High (30MHz ~ 26GHz / IEEE 802.11n HT40 Mode) / Two TX


Chain	Frequency (GHz)	Reading (dBm)	10 × log (n) (dB)	Result (dBm)	Limit (dBm)
Chan 0	1.29225	-45.73	3.01	-42.72	-21.3
	2.26344	-44.40		-41.39	
	15.74200	-45.68		-42.67	
Chan 1	1.51203	-45.28	3.01	-42.27	-24.3
	1.91298	-44.98		-41.97	
	19.12300	-44.92		-41.91	


Remark:


1. At final test to get the worst-case emission at 13.5Mbps.
2. The cable assembly insertion loss of 0.5dB (0.5dB cable) was Entered as an offset in the spectrum analyzer to allow for direct reading of power.
3. It has two transmitter chains : $10 \times \log (2) = 3.01$.
4. Limit : Fundamental - 20dB.





OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT

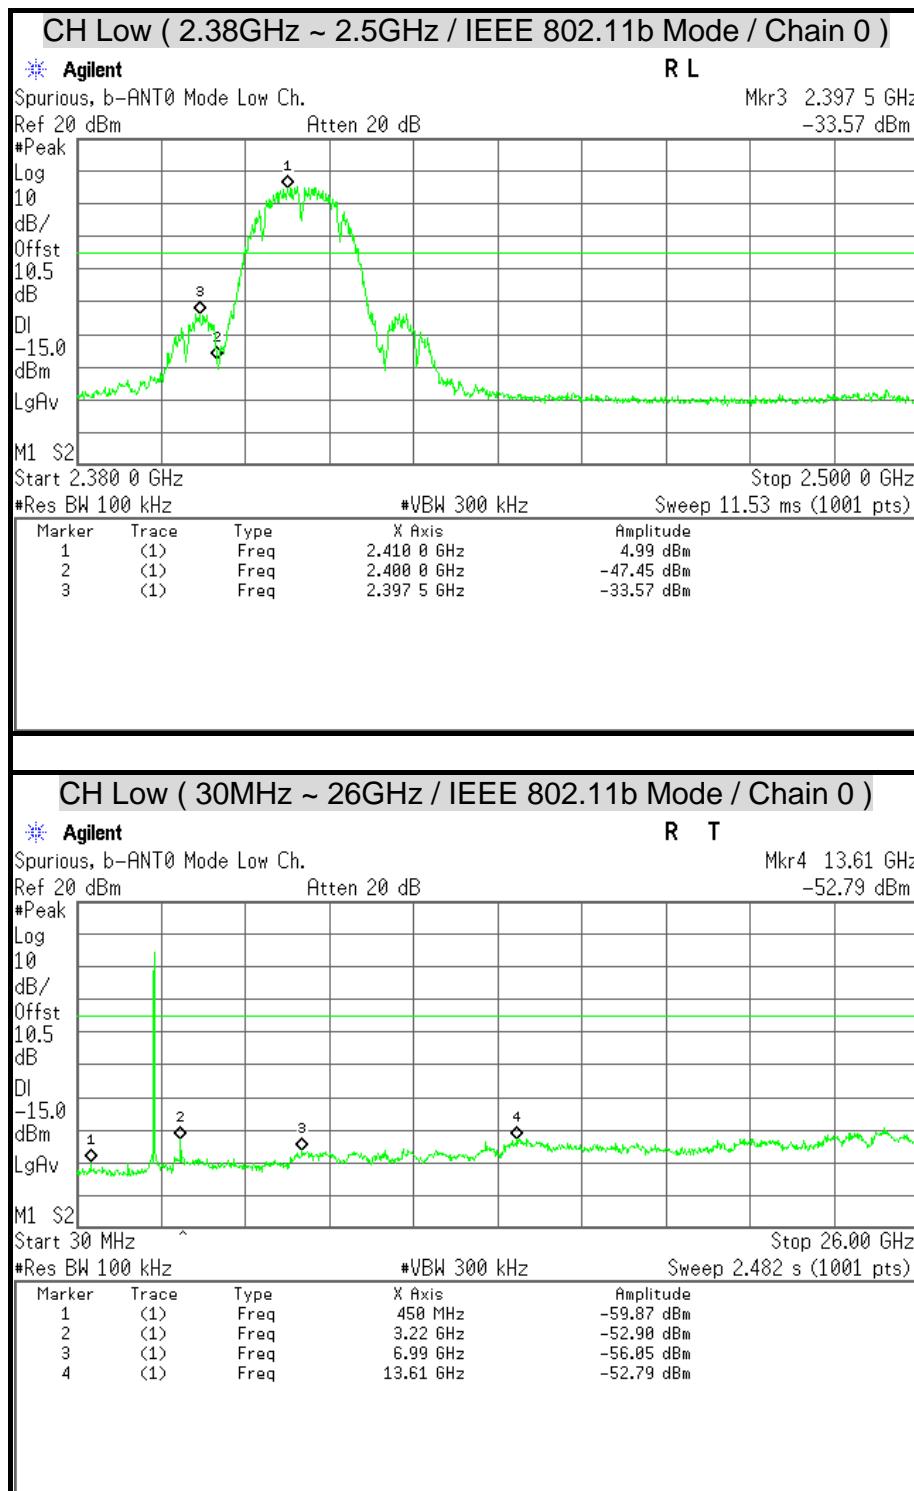


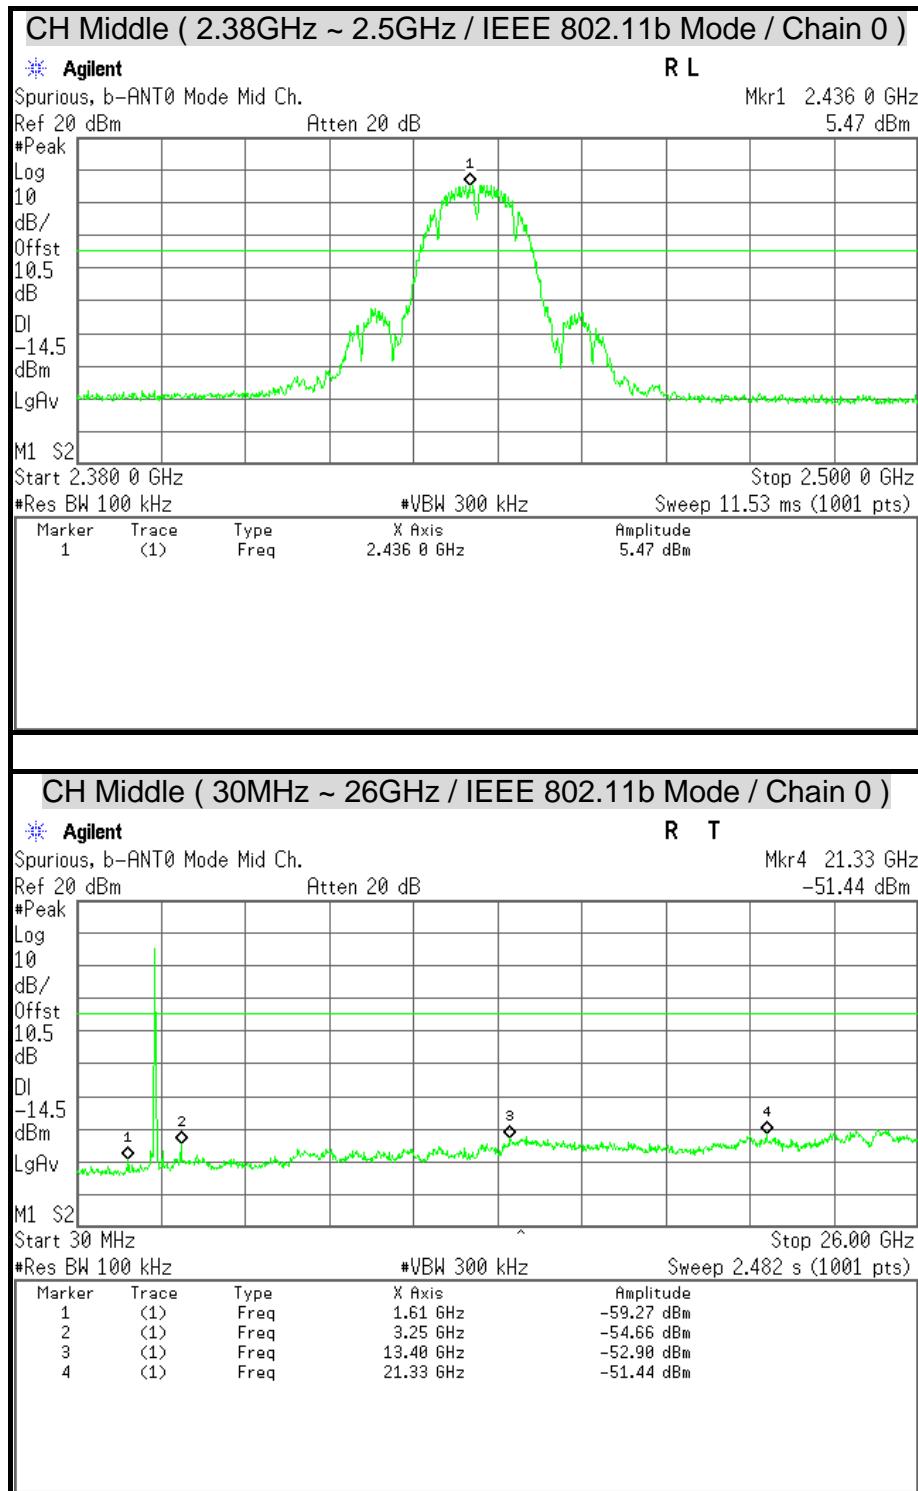


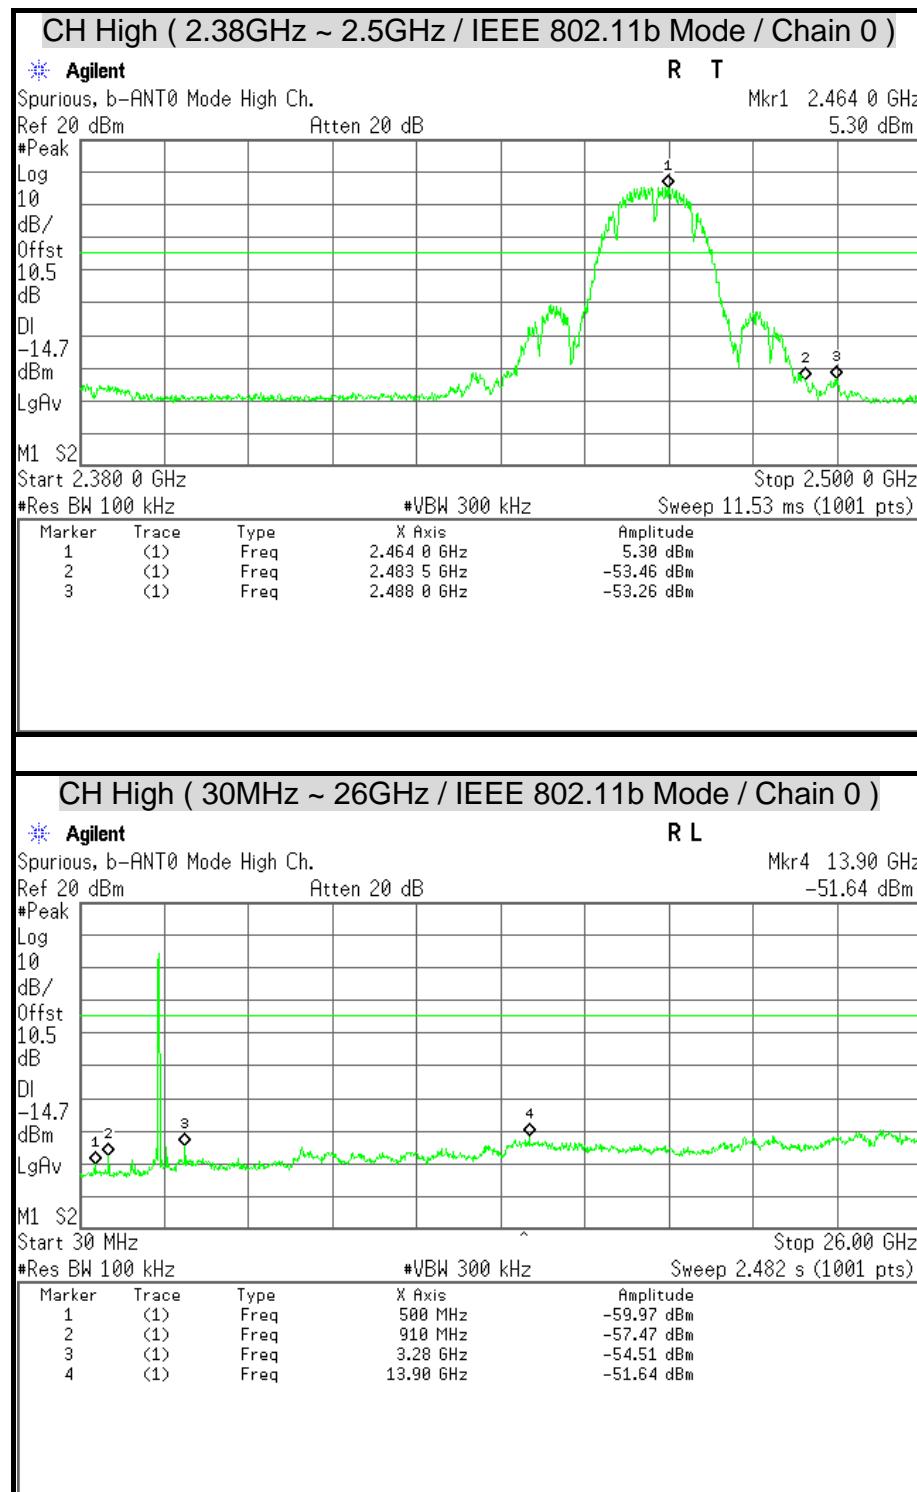


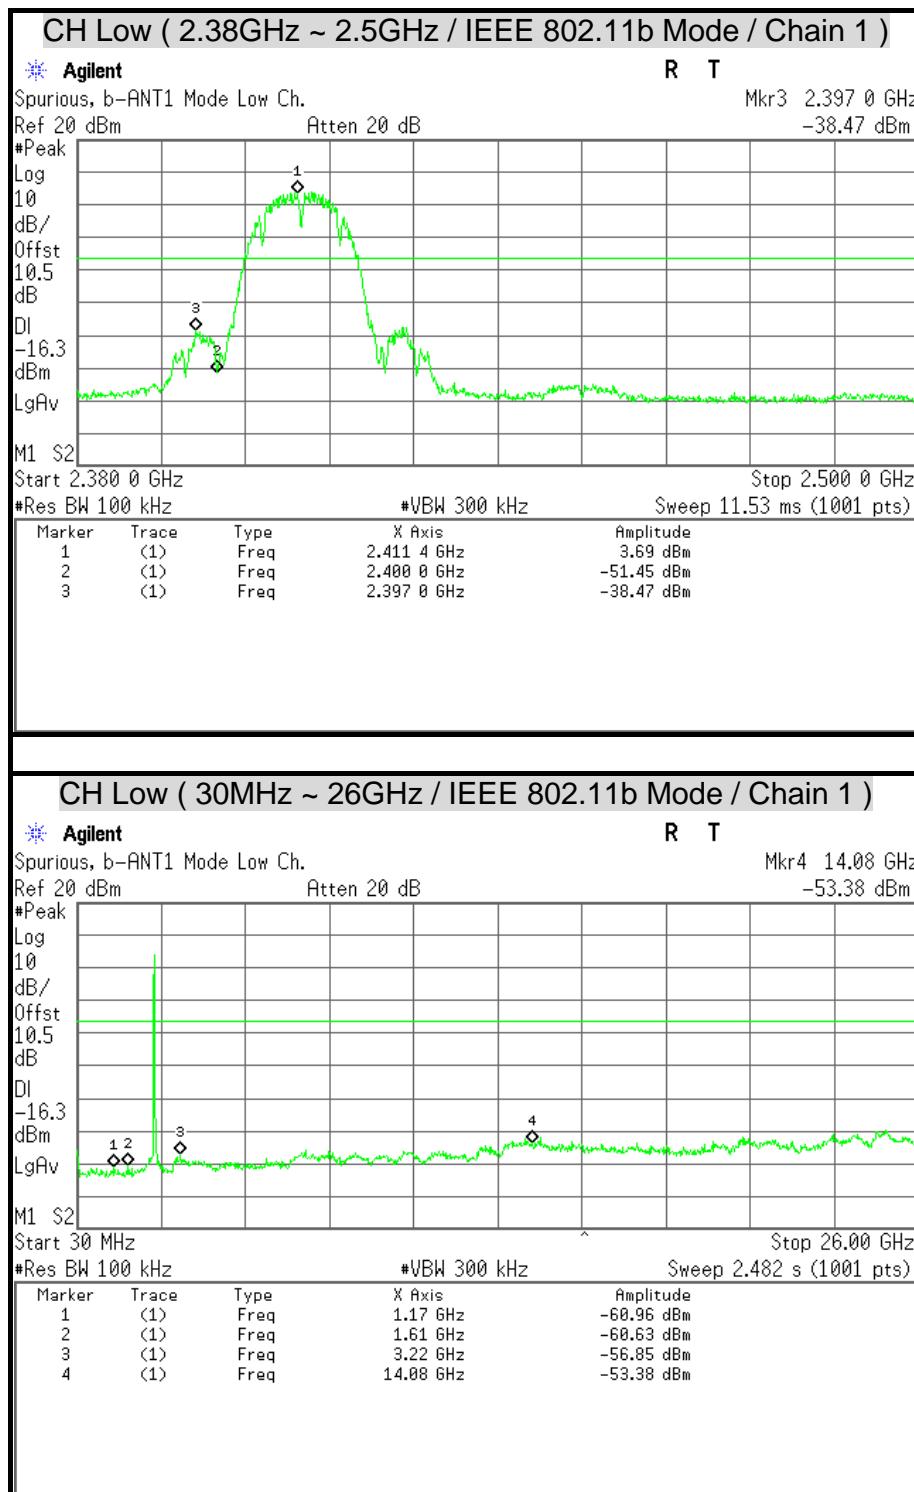


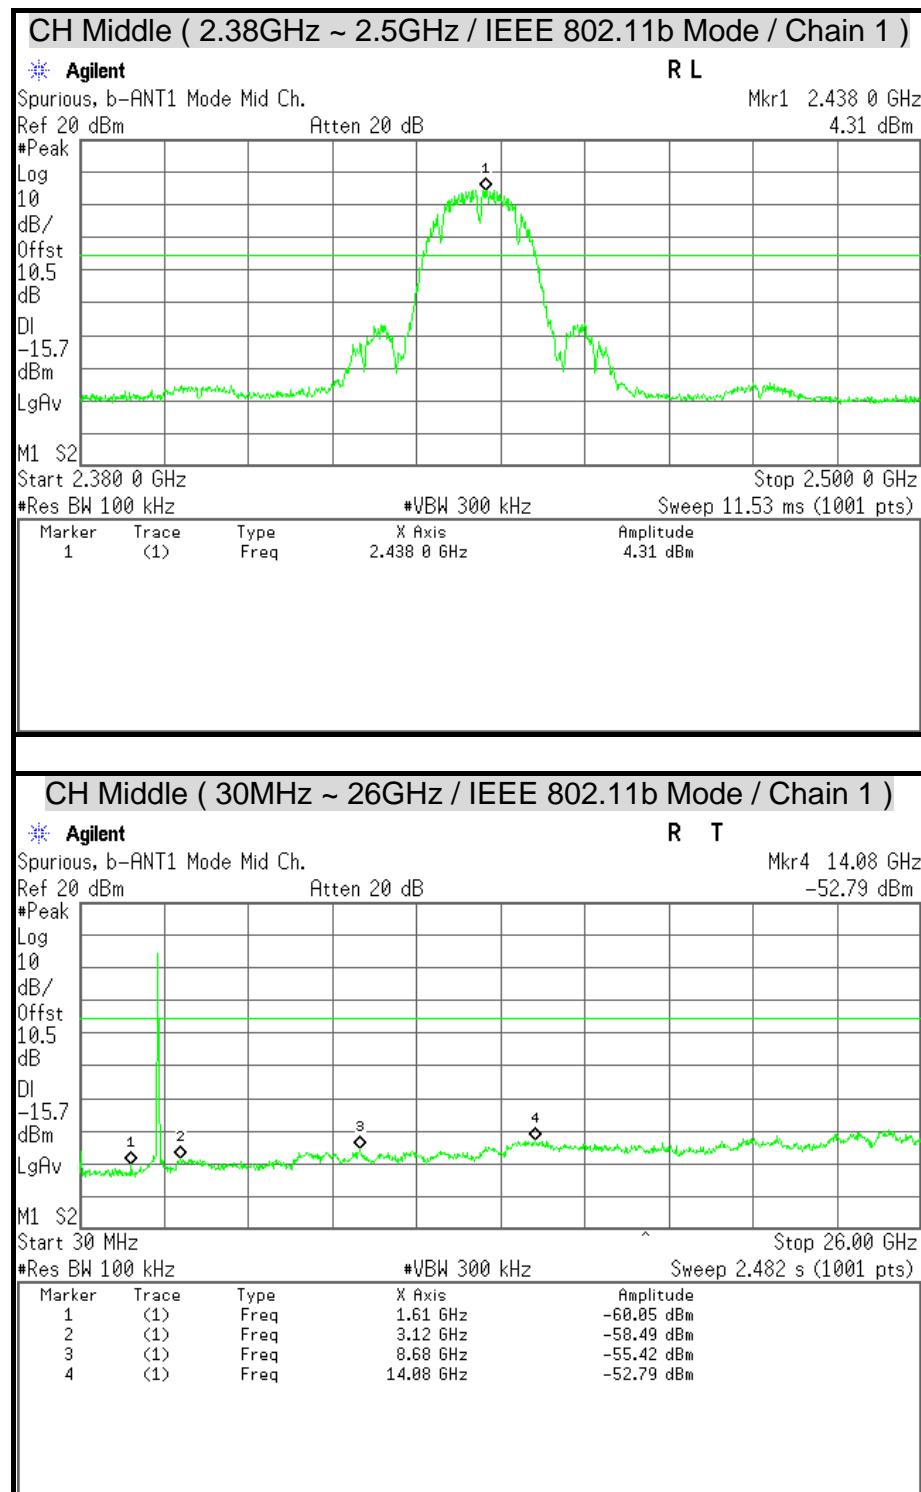


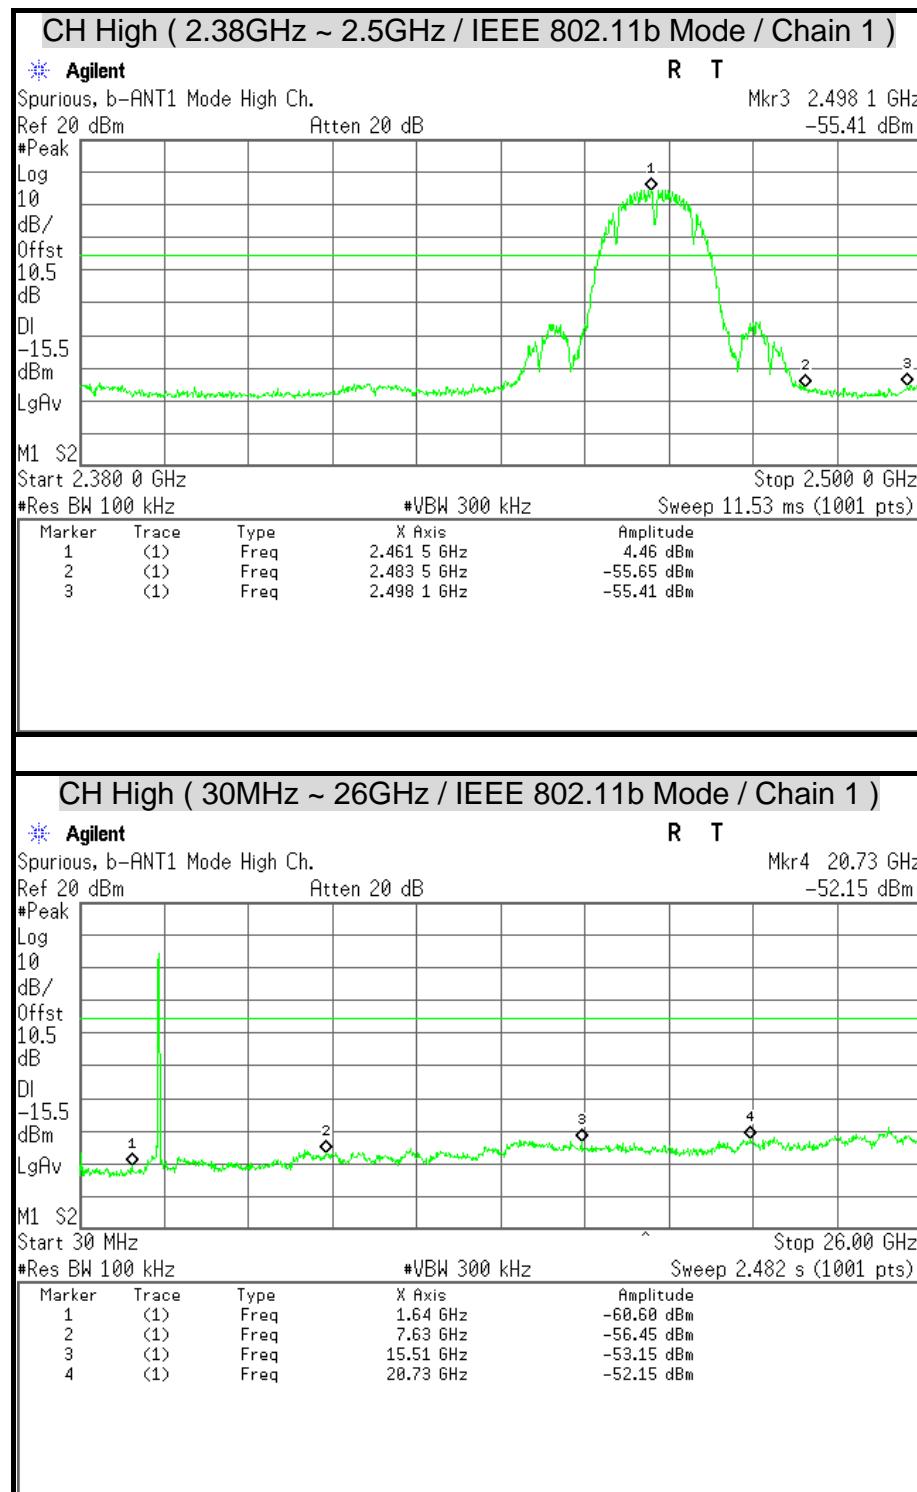


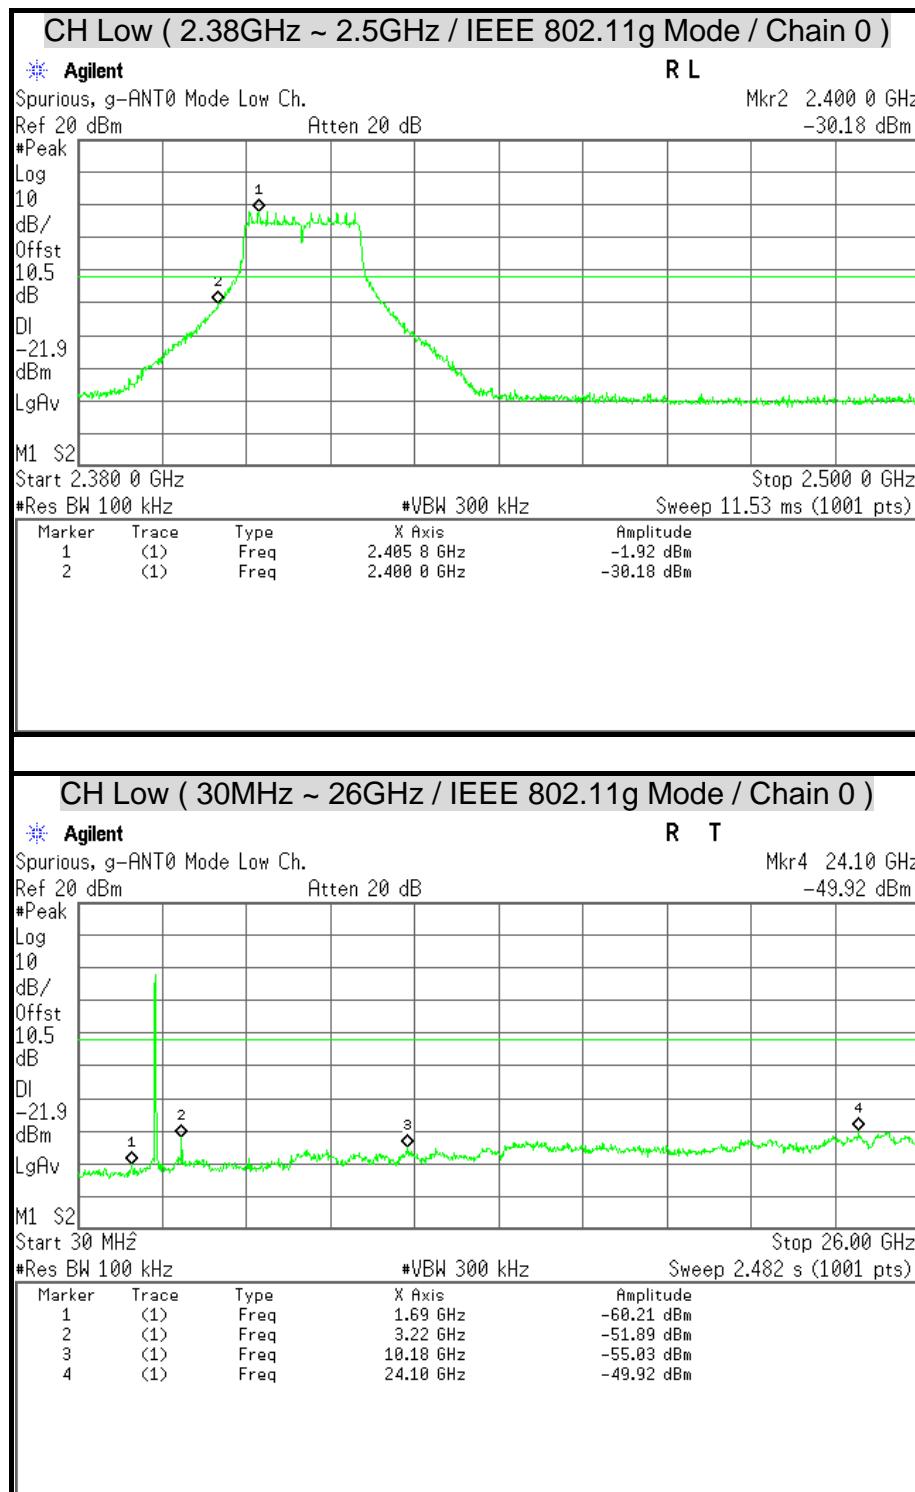


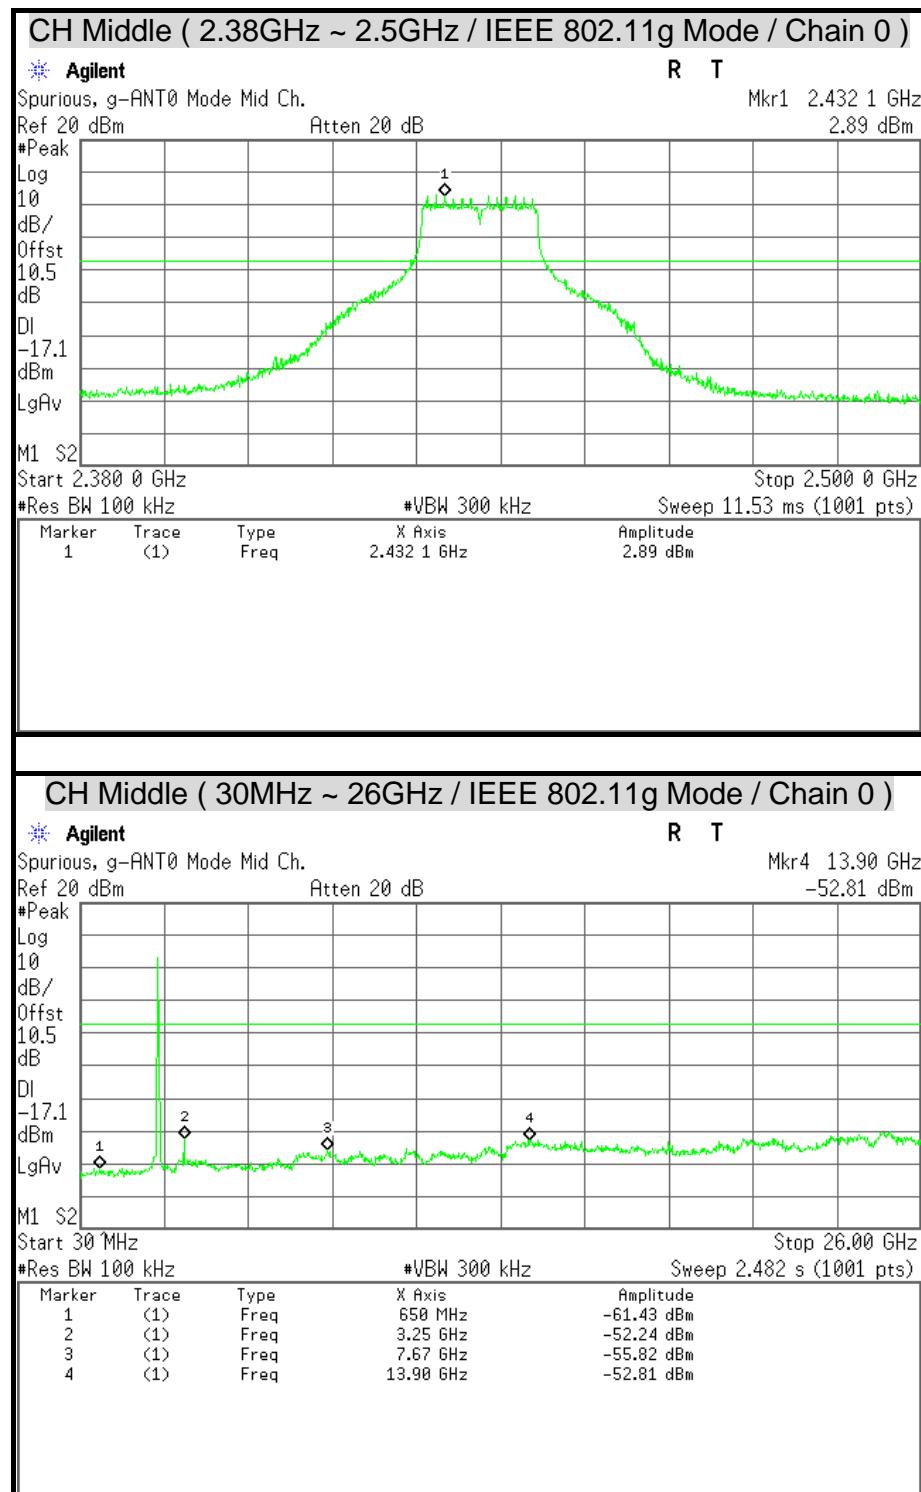


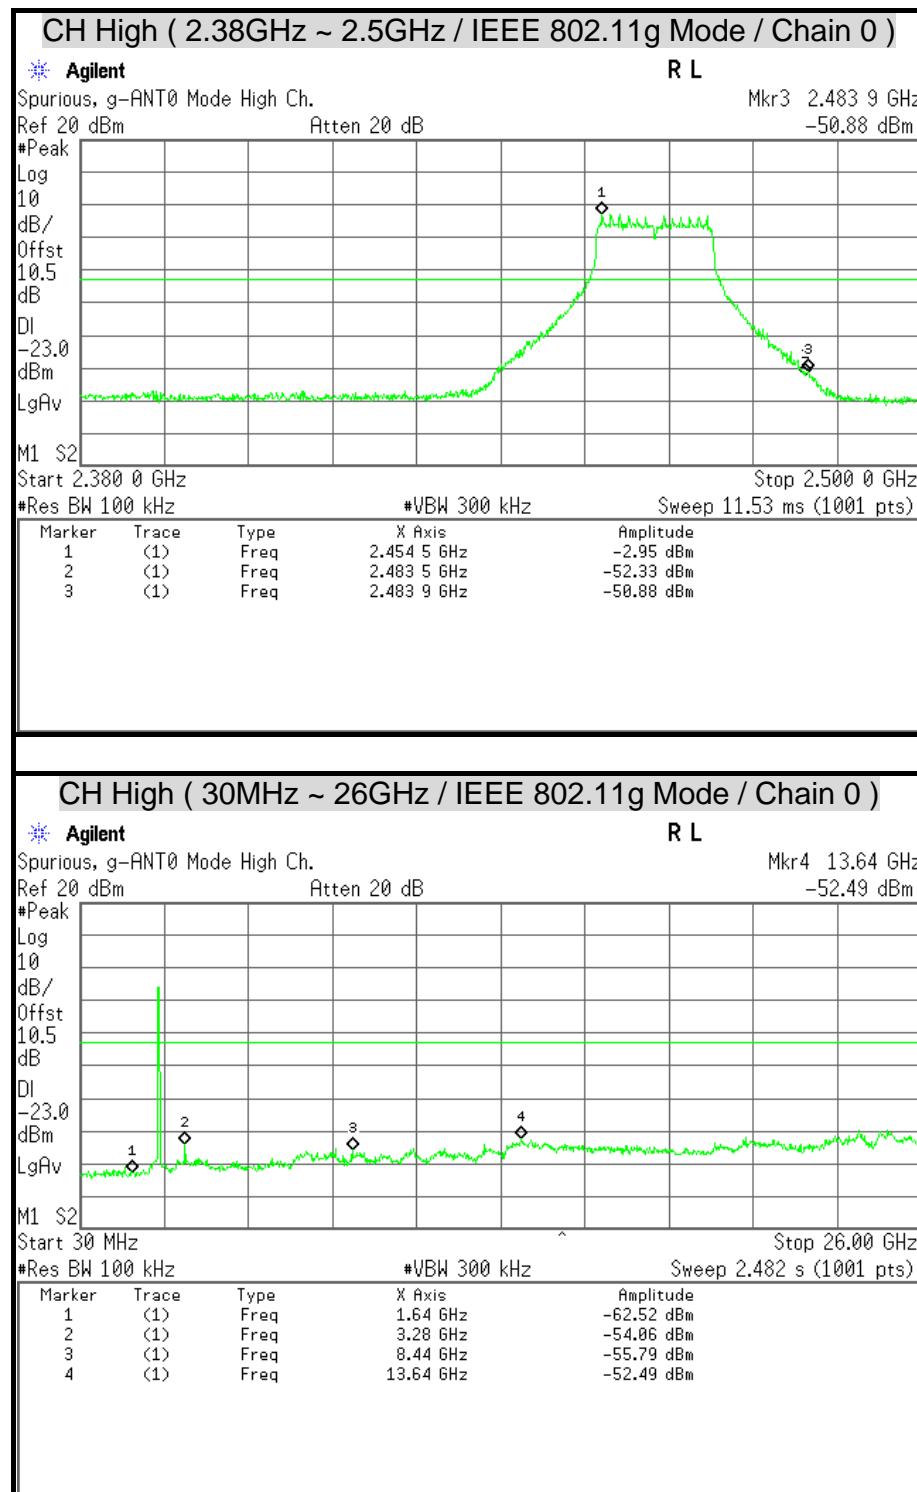


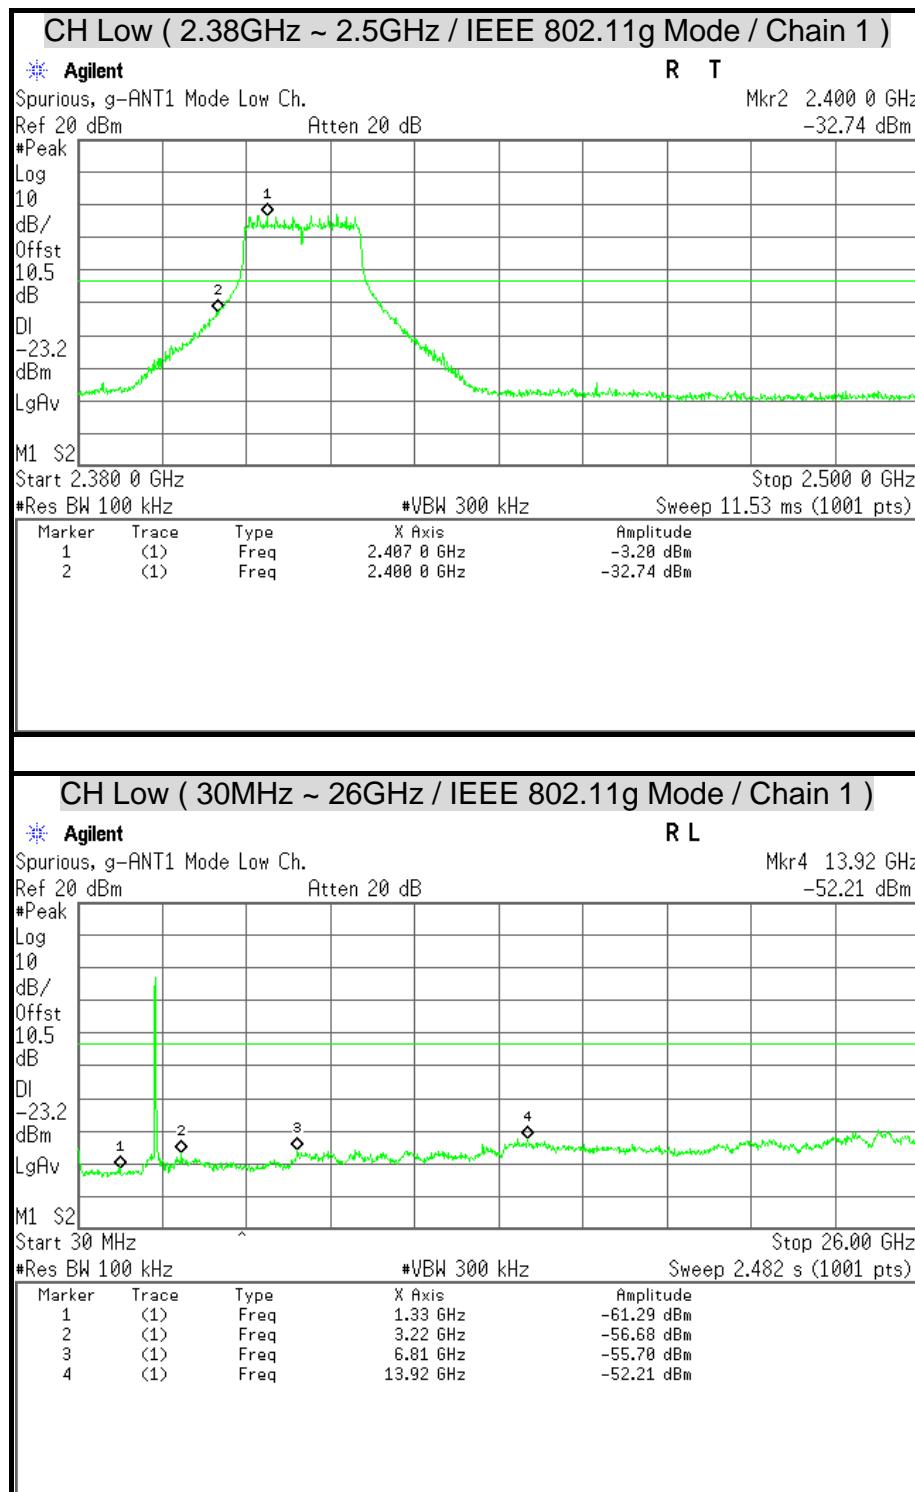

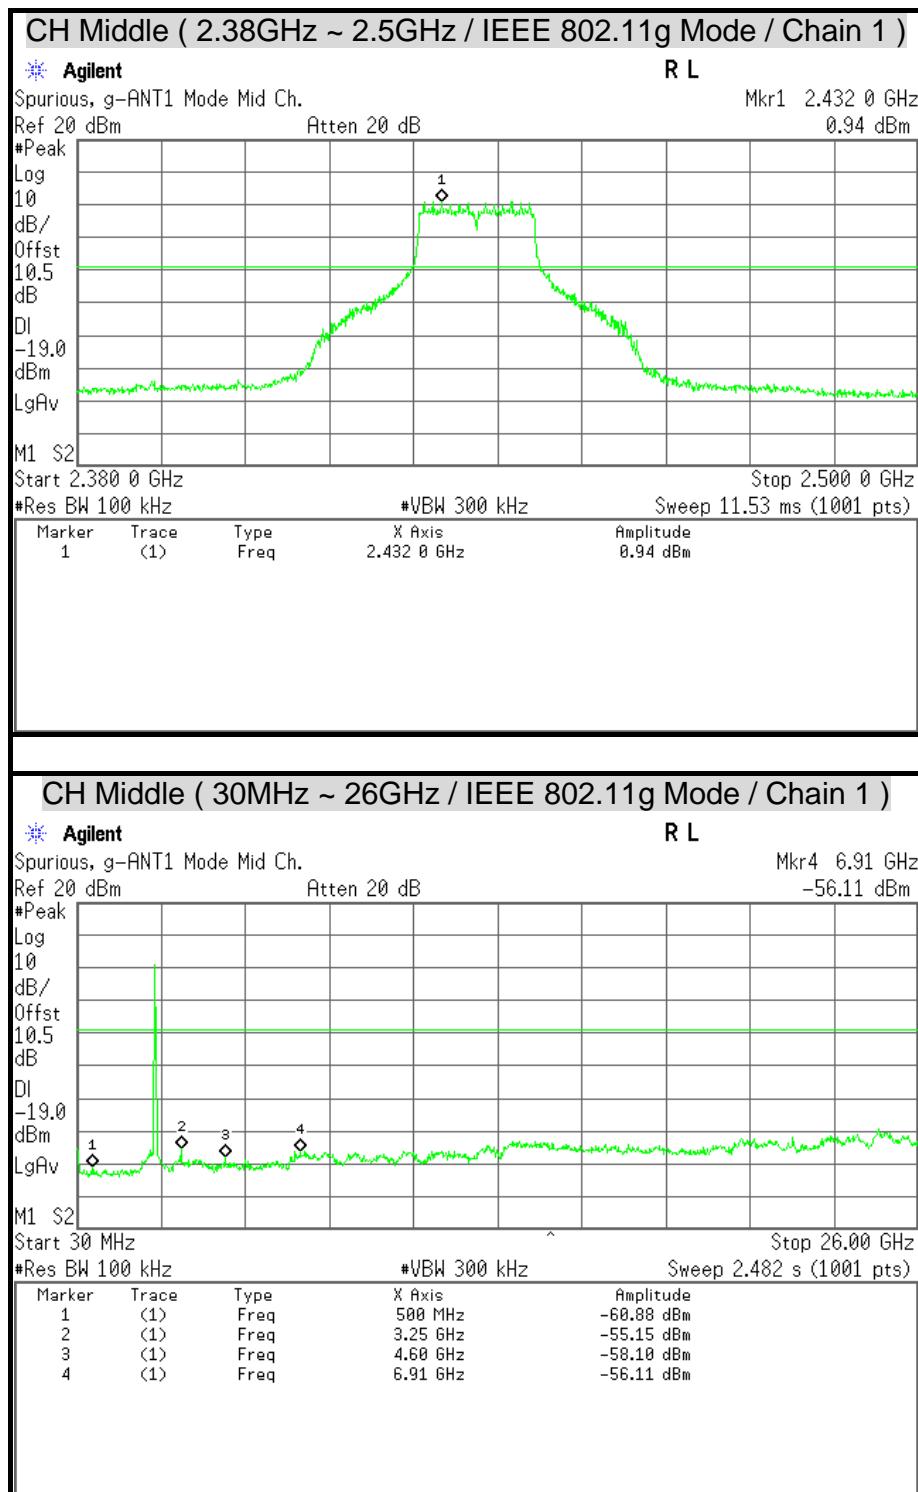

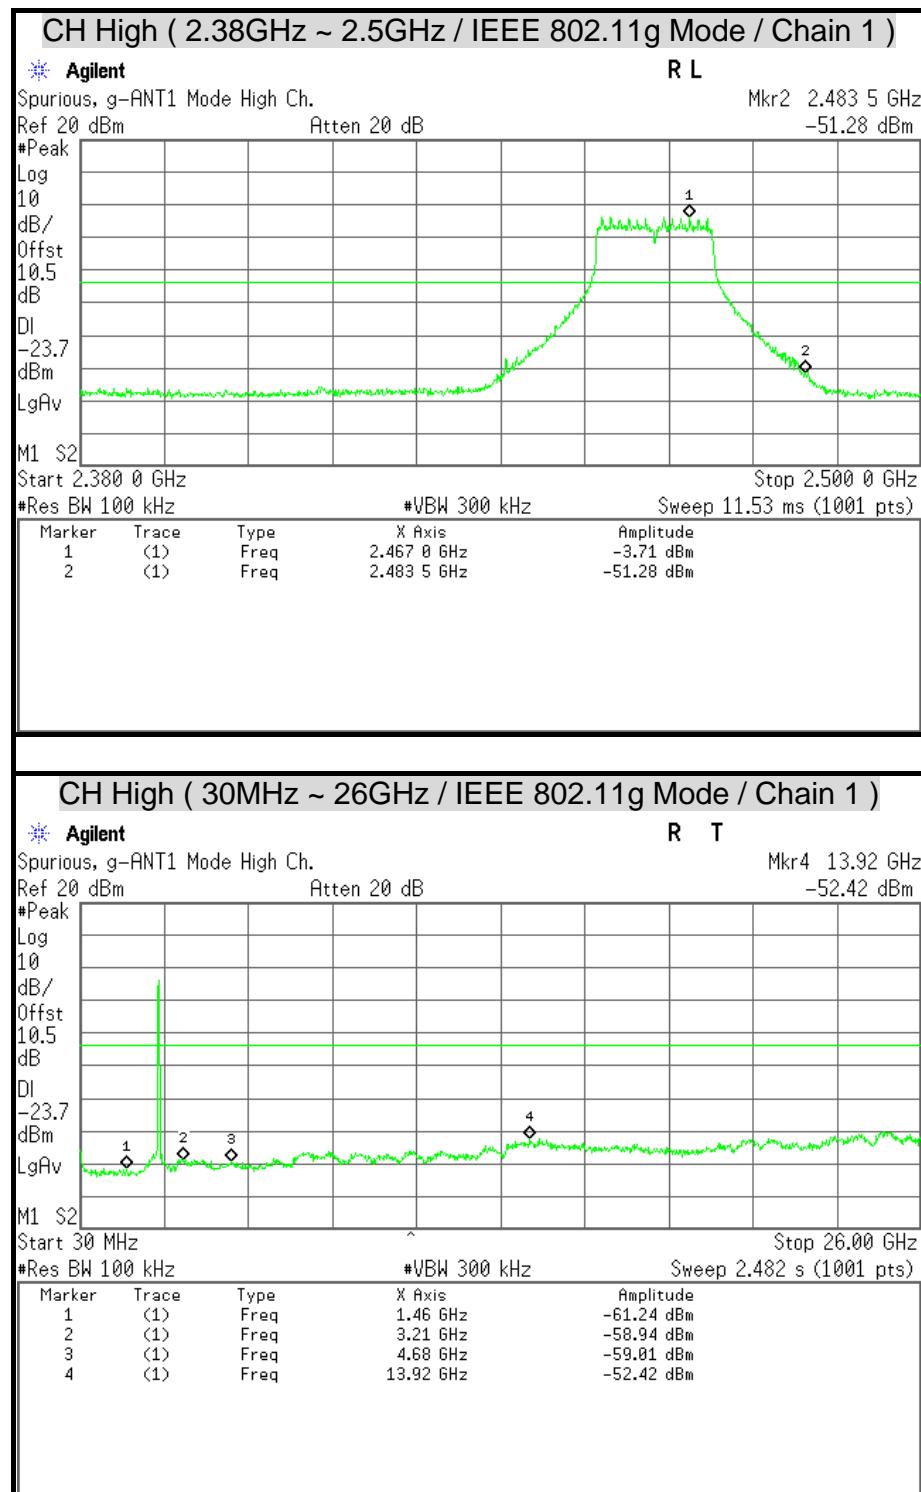

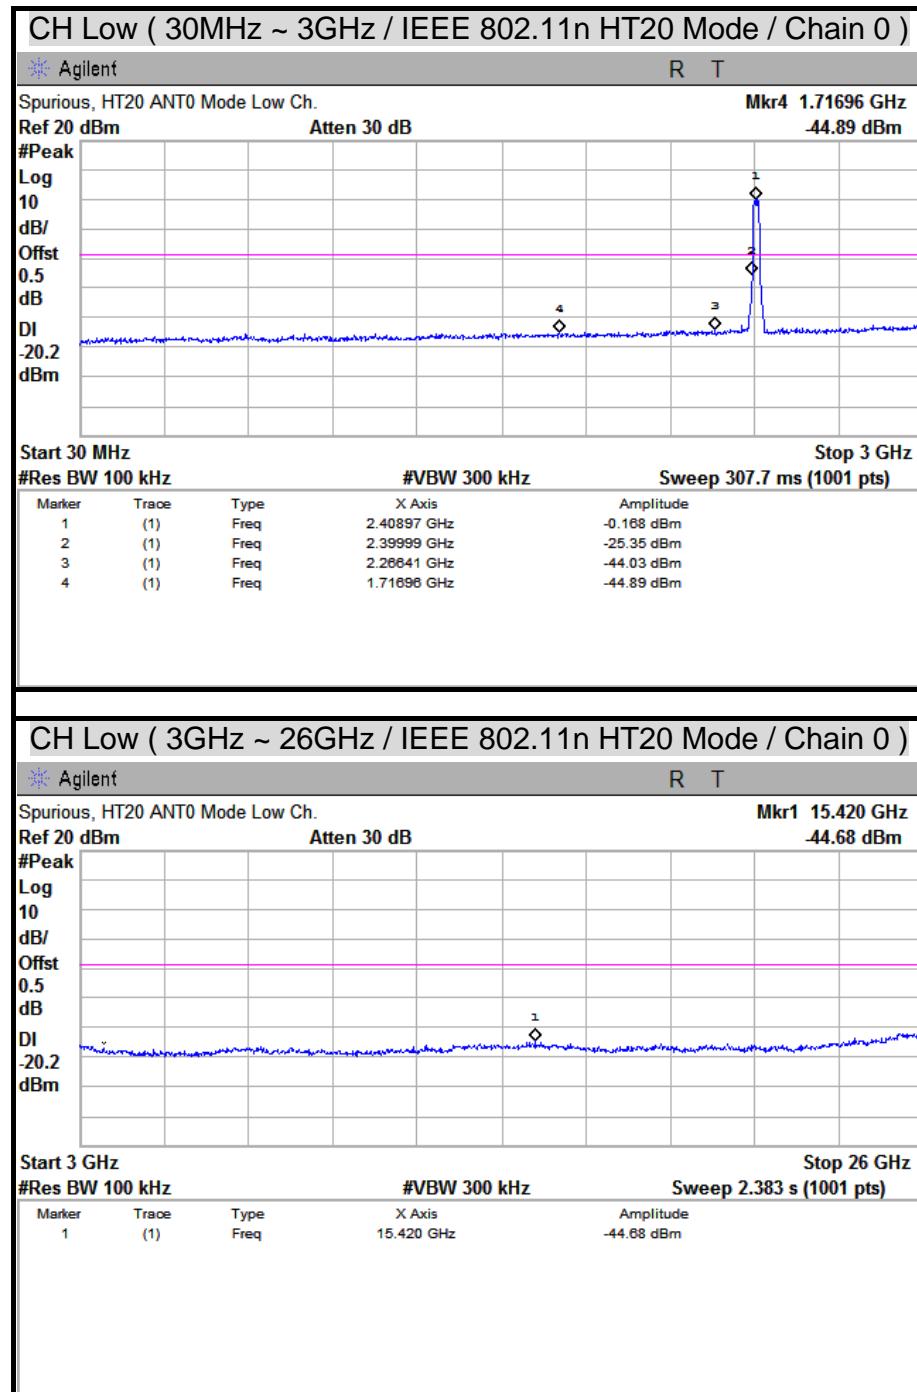

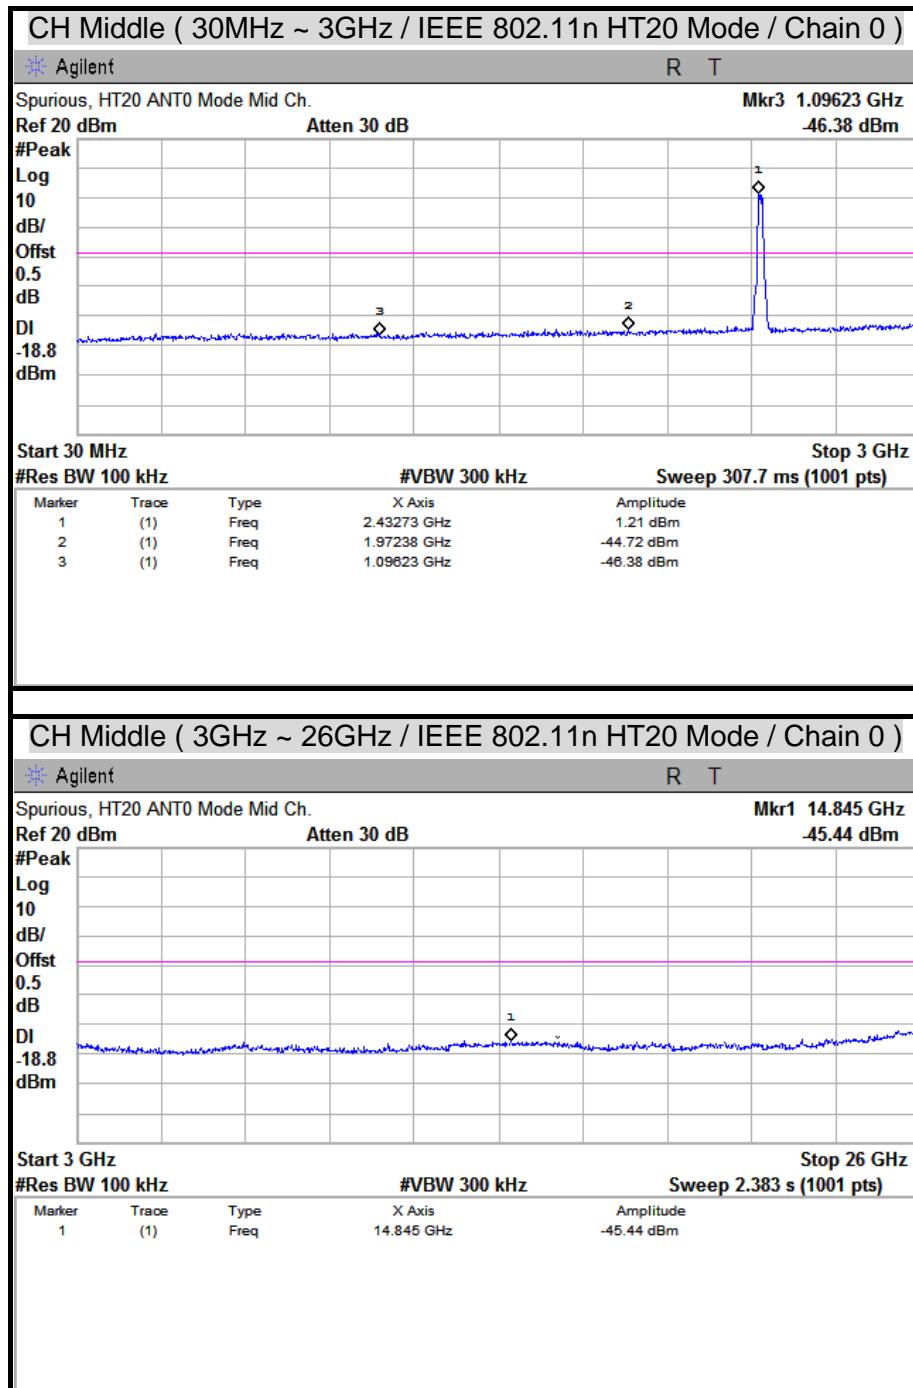




CH High (30MHz ~ 3GHz / IEEE 802.11n HT20 Mode / Chain 0)

Agilent

R T

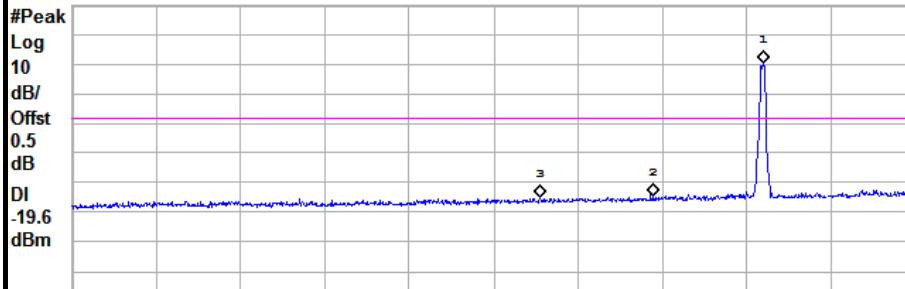
Spurious, HT20 ANT0 Mode High Ch.
Ref 20 dBm Atten 30 dBMkr3 1.67835 GHz
-44.88 dBmStart 30 MHz Stop 3 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 307.7 ms (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.46540 GHz	0.377 dBm
2	(1)	Freq	2.07633 GHz	-44.82 dBm
3	(1)	Freq	1.67835 GHz	-44.88 dBm


CH High (3GHz ~ 26GHz / IEEE 802.11n HT20 Mode / Chain 0)


Agilent

R T

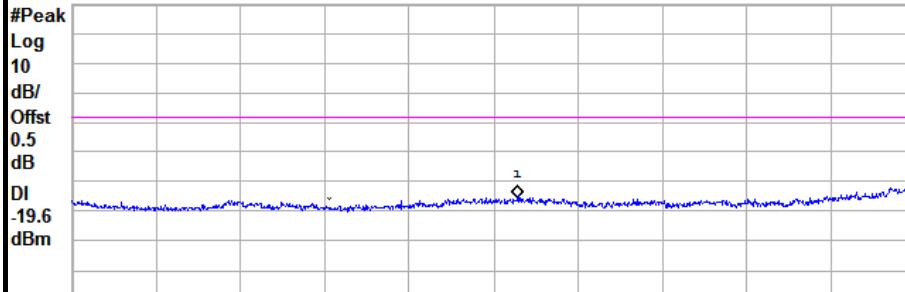Spurious, HT20 ANT0 Mode High Ch.
Ref 20 dBm Atten 30 dBMkr1 15.144 GHz
-45.71 dBmStart 3 GHz Stop 26 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.383 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	15.144 GHz	-45.71 dBm

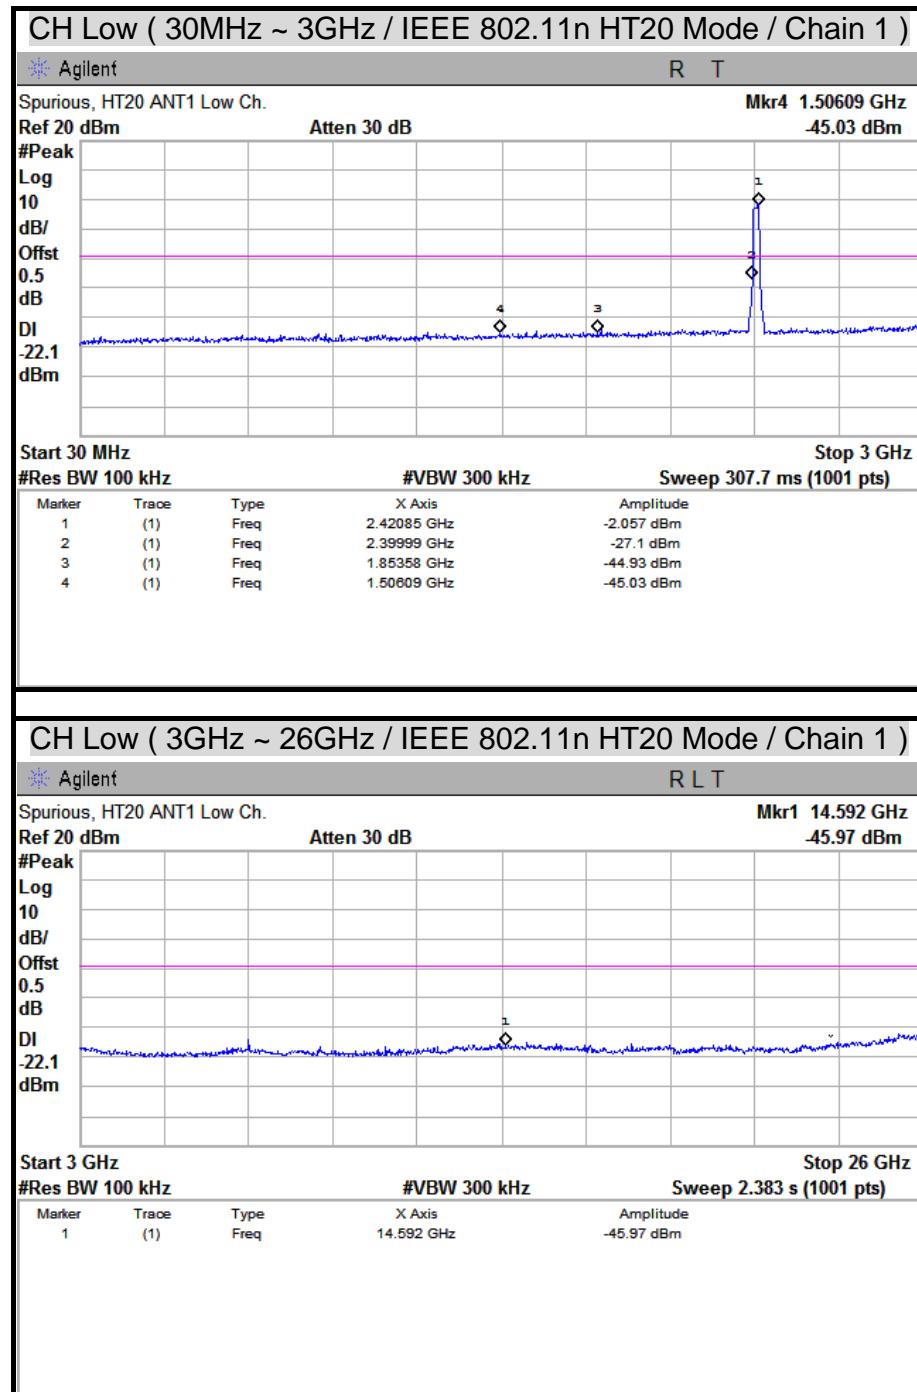

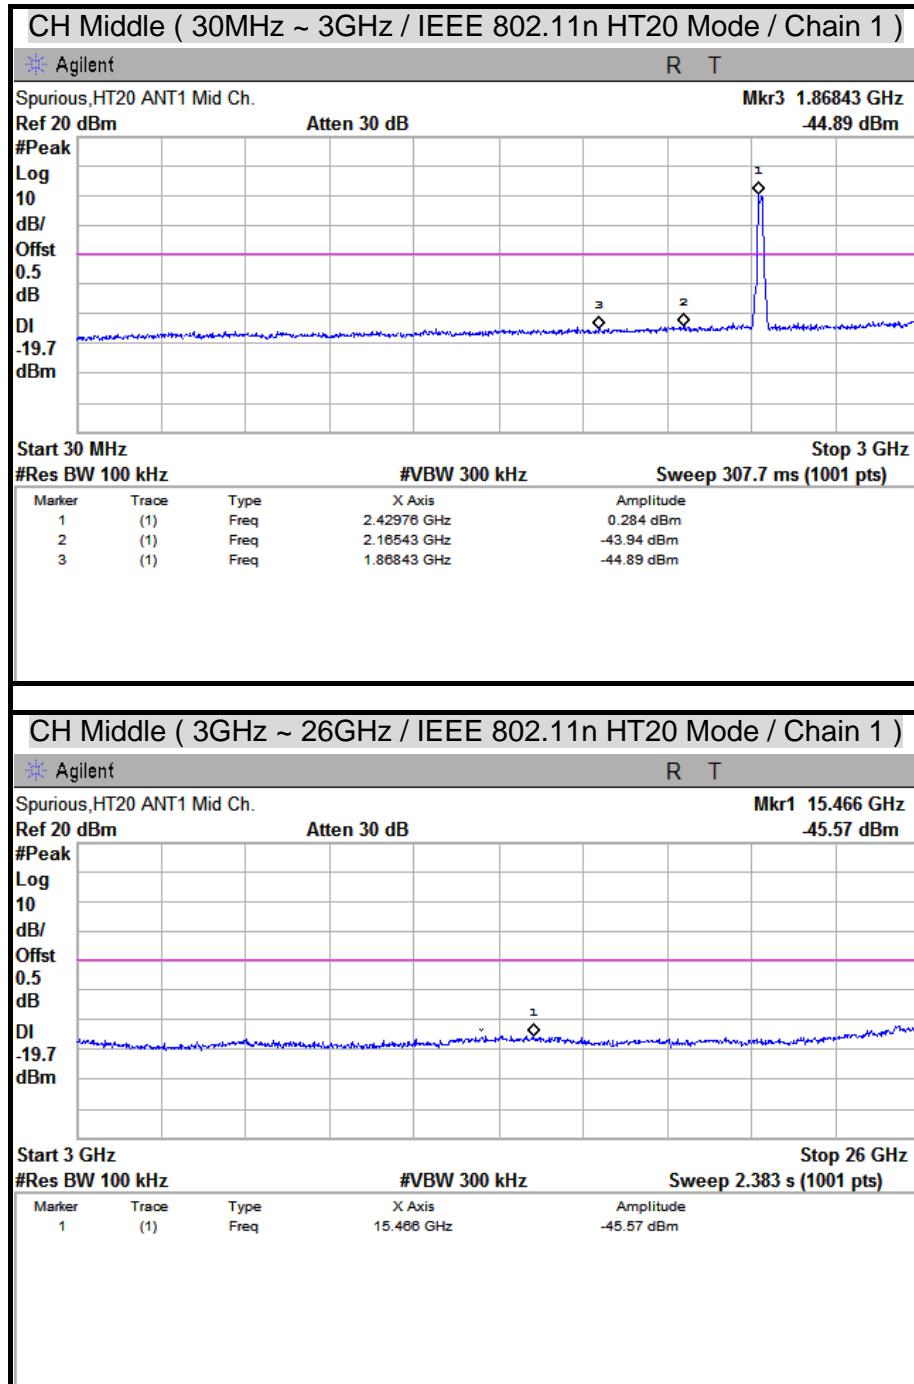




CH High (30MHz ~ 3GHz / IEEE 802.11n HT20 Mode / Chain 1)

Agilent

R T

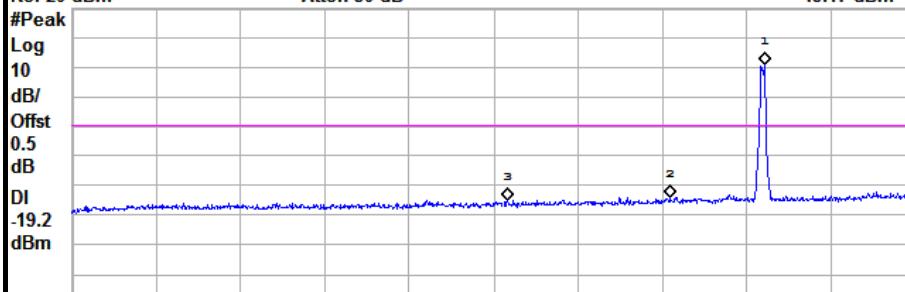
Spurious, HT20 ANT1 High Ch. Mkr3 1.56252 GHz
Ref 20 dBm Atten 30 dB -45.17 dBmStart 30 MHz Stop 3 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 307.7 ms (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.47134 GHz	0.757 dBm
2	(1)	Freq	2.13870 GHz	-43.95 dBm
3	(1)	Freq	1.56252 GHz	-45.17 dBm


CH High (3GHz ~ 26GHz / IEEE 802.11n HT20 Mode / Chain 1)


Agilent

R T

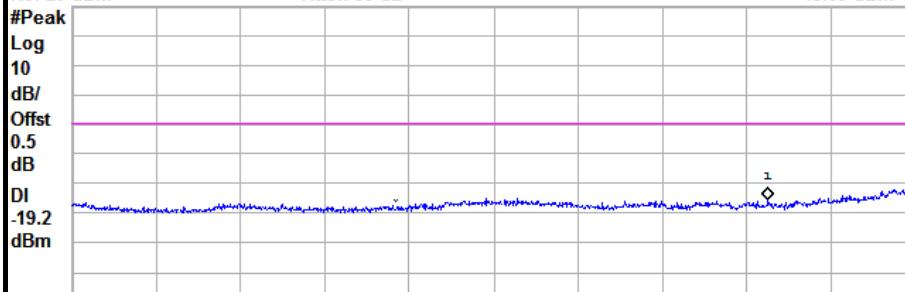Spurious, HT20 ANT1 High Ch. Mkr1 21.998 GHz
Ref 20 dBm Atten 30 dB -45.69 dBmStart 3 GHz Stop 26 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.383 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	21.998 GHz	-45.69 dBm

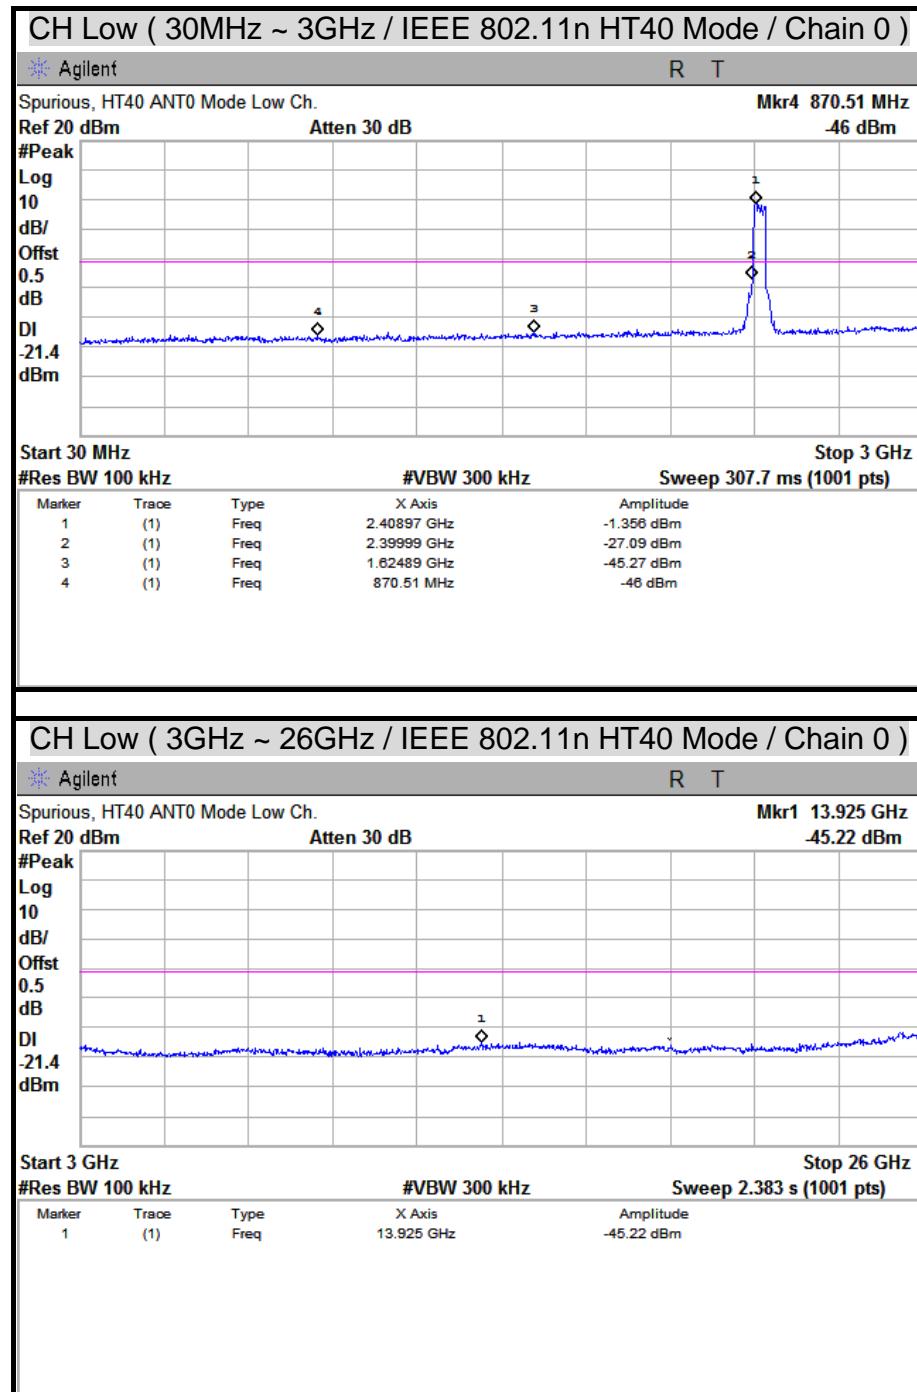

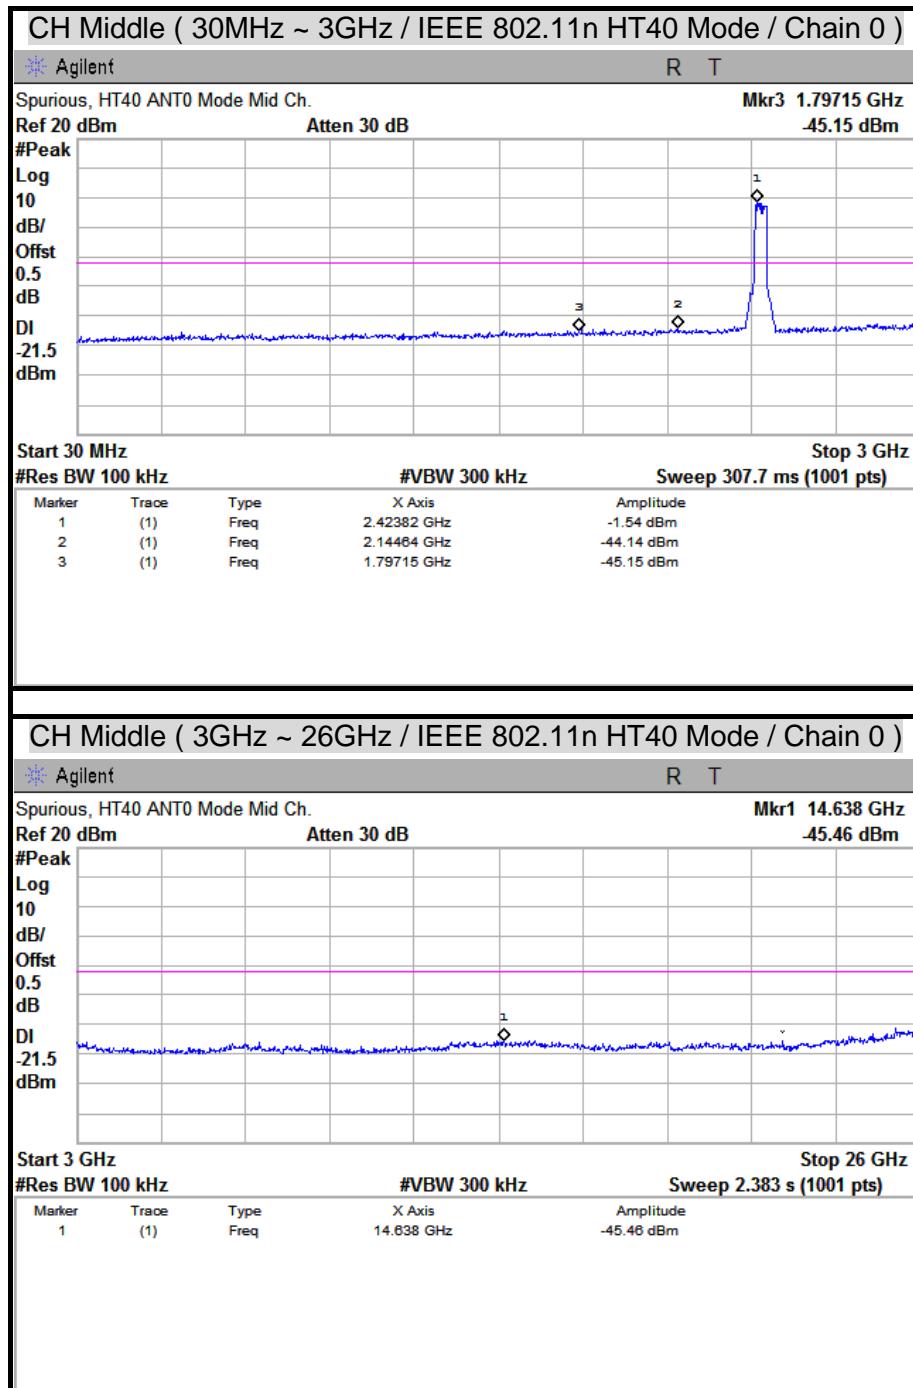




CH High (30MHz ~ 3GHz / IEEE 802.11n HT40 Mode / Chain 0)

Agilent

R T

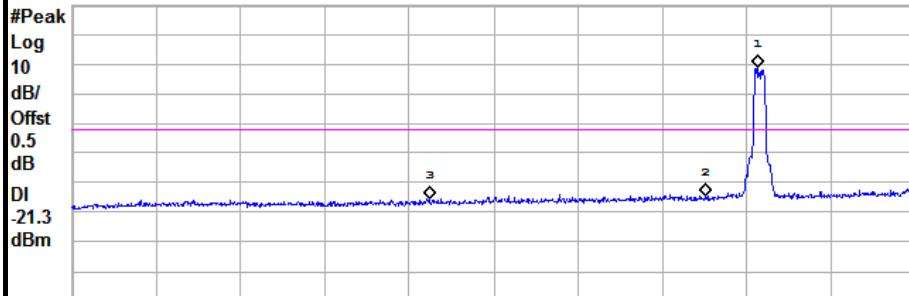
Spurious, HT40 ANT0 Mode High Ch. Mkr3 1.29225 GHz
Ref 20 dBm Atten 30 dB -45.73 dBmStart 30 MHz Stop 3 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 307.7 ms (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.44758 GHz	-1.277 dBm
2	(1)	Freq	2.26344 GHz	-44.4 dBm
3	(1)	Freq	1.29225 GHz	-45.73 dBm


CH High (3GHz ~ 26GHz / IEEE 802.11n HT40 Mode / Chain 0)


Agilent

R T

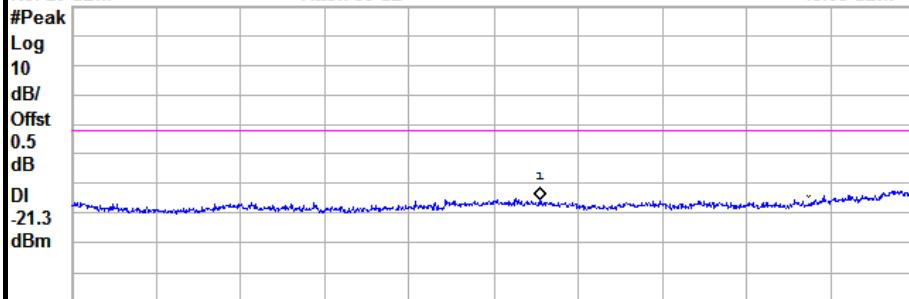Spurious, HT40 ANT0 Mode High Ch. Mkr1 15.742 GHz
Ref 20 dBm Atten 30 dB -45.68 dBmStart 3 GHz Stop 26 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.383 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	15.742 GHz	-45.68 dBm

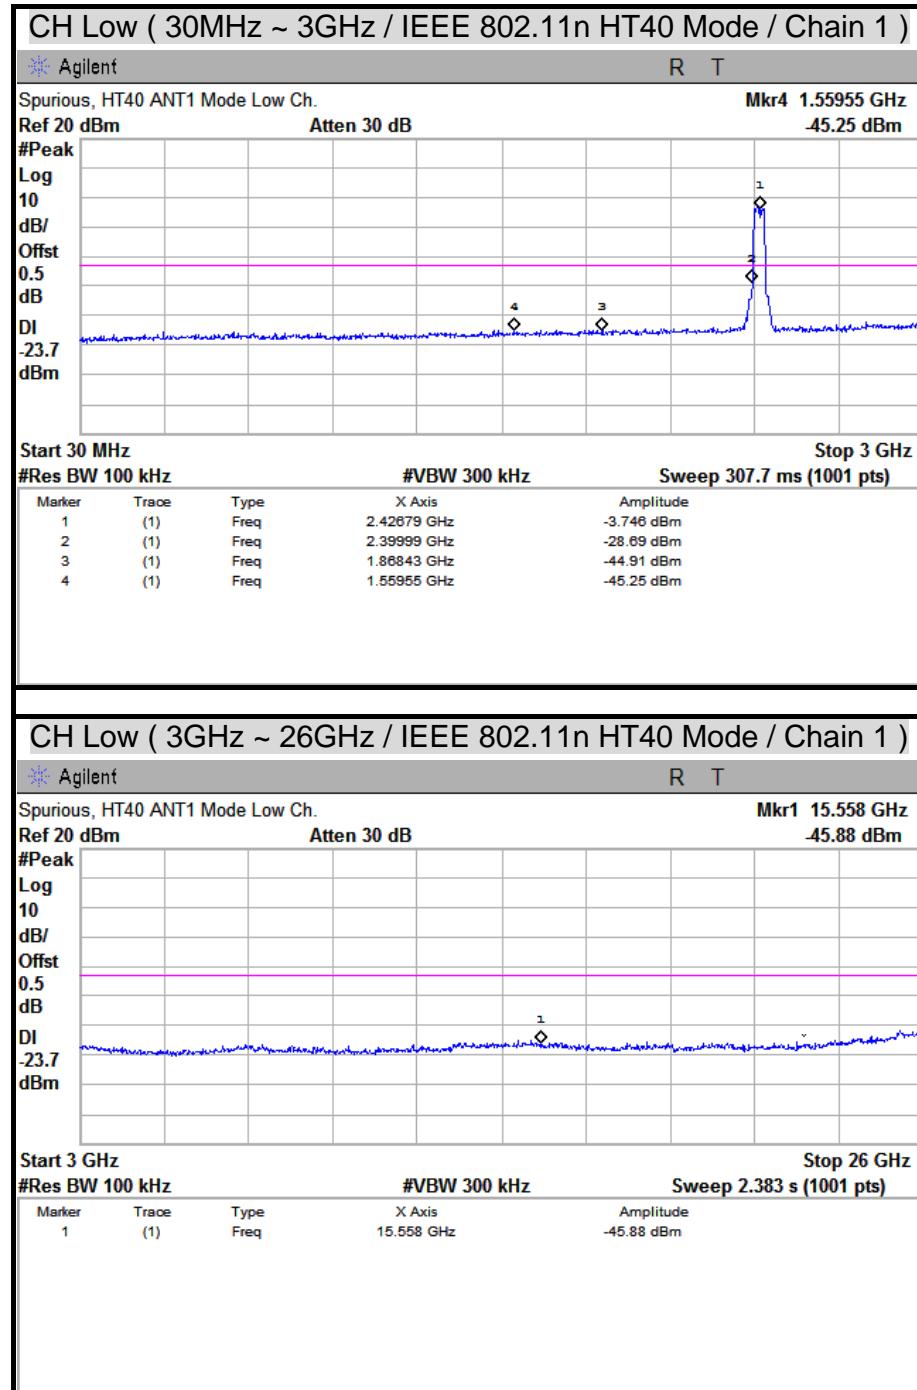

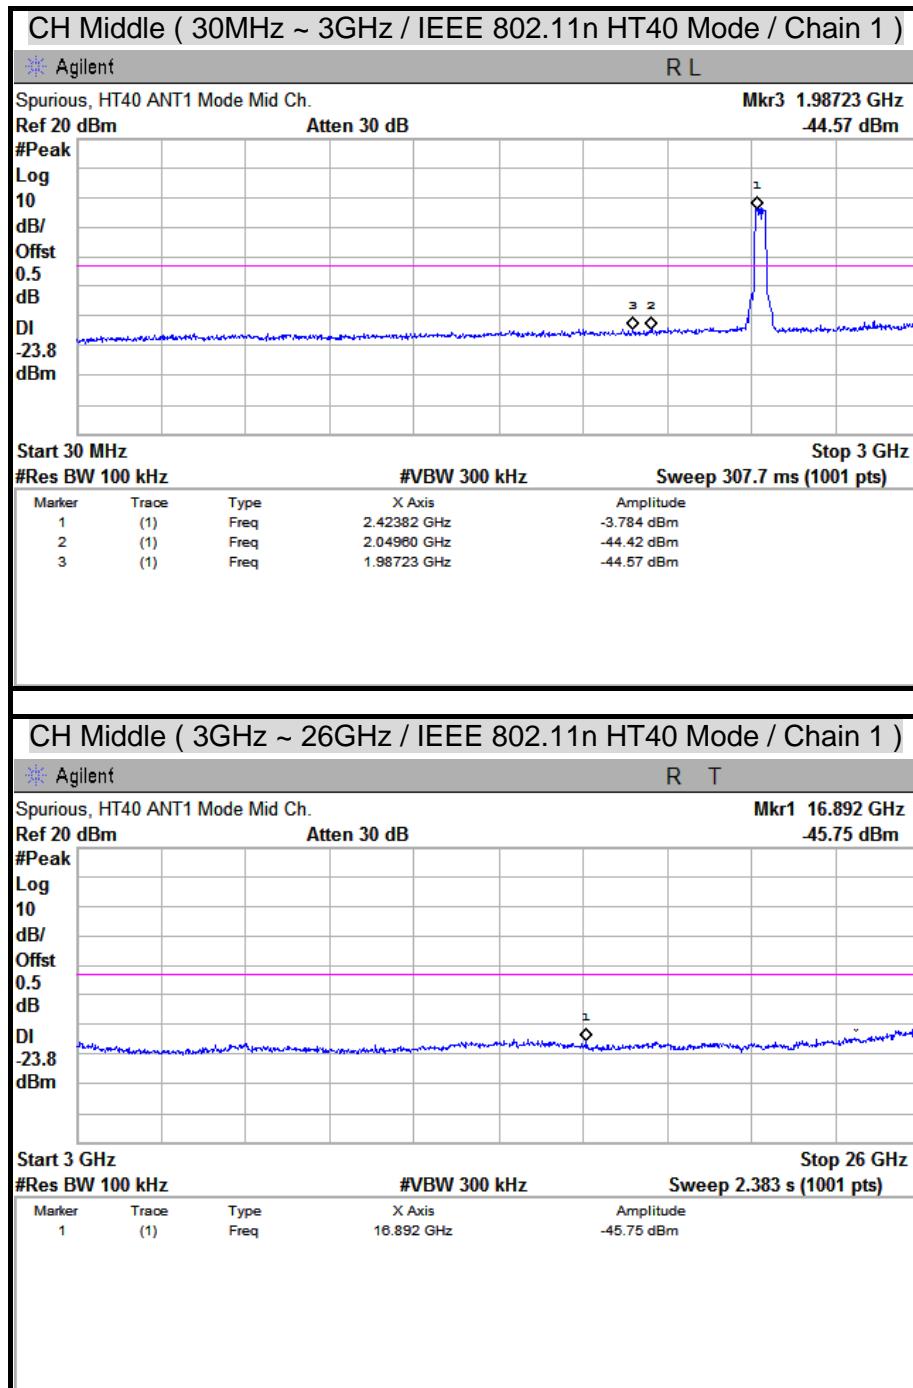




CH High (30MHz ~ 3GHz / IEEE 802.11n HT40 Mode / Chain 1)

Agilent

R T

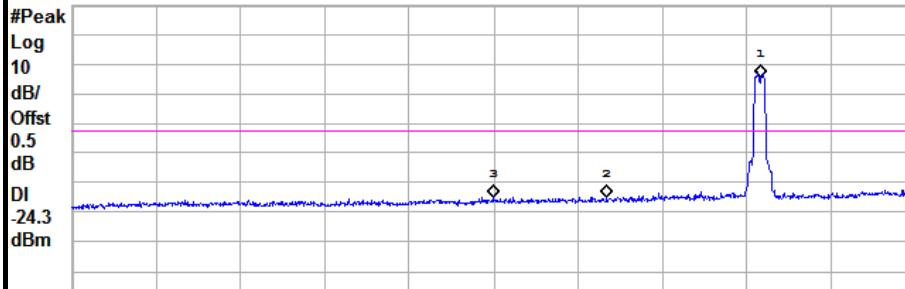
Spurious, HT40 ANT1 Mode High Ch.
Ref 20 dBm Atten 30 dB Mkr3 1.51203 GHz
-45.28 dBmStart 30 MHz Stop 3 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 307.7 ms (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.45649 GHz	-4.332 dBm
2	(1)	Freq	1.91298 GHz	-44.98 dBm
3	(1)	Freq	1.51203 GHz	-45.28 dBm

CH High (3GHz ~ 26GHz / IEEE 802.11n HT40 Mode / Chain 1)

Agilent

R T

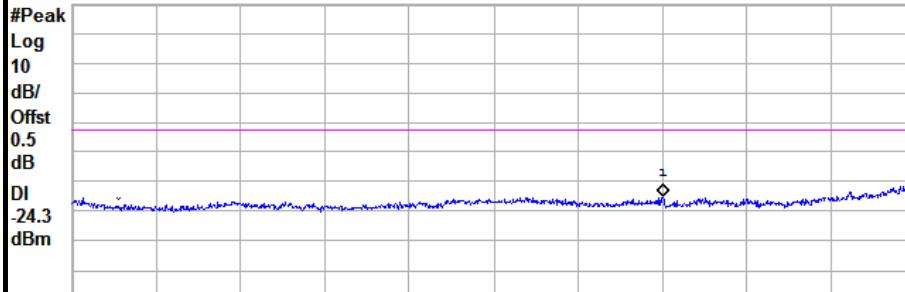Spurious, HT40 ANT1 Mode High Ch.
Ref 20 dBm Atten 30 dB Mkr1 19.123 GHz
-44.92 dBmStart 3 GHz Stop 26 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.383 s (1001 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	19.123 GHz	-44.92 dBm



7.6 RADIATED EMISSION

LIMITS

(1) According to § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

Remark:

1. ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.
2. ² Above 38.6

(2) According to § 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



(3) According to § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(KHz)	300
0.490 – 1.705	24000/F(KHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

Remark: **Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

(4) According to § 15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST EQUIPMENT

Radiated Emission below 1GHz / 966Chamber_A

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY46180323	04/24/2012
EMI Receiver	ROHDE & SCHWARZ	ESCI	100221	04/24/2012
Bi-log Antenna	SCHWARZBECK	VULB 9168	9168-249	10/04/2011
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-778	09/06/2011
Pre-Amplifier	Agilent	8449B	3008A01471	07/24/2012
Pre-Amplifier	HP	8447F	2944A03748	09/23/2011
LOOP Antenna	EMCO	6502	8905-2356	06/10/2012
Band Reject Notch Filter	Micro-Tronics	BRM05702-01	009	N.C.R

Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.


**Radiated Emission above 1GHz / 966Chamber_B**

Name of Equipment	Manufacture	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360132	06/19/2012
EMI Test Receiver	ROHDE & SCHWARZ	ESCI	101131	01/13/2012
Broadband Hybrid Bi-Log Antenna	Sunol Sciences	JB1	A100209-4	10/05/2012
Double-Ridged Waveguide Horn	ETS-LINDGREN	3117	00078732	07/03/2012
Horn Antenna	COM-POWER	AH-840	03077	12/12/2011
Pre-Amplifier	Agilent	8447D	2944A10052	07/19/2012
Pre-Amplifier	Agilent	8449B	3008A01916	09/18/2012
Notch Filters Band Reject	Micro-Tronics	BRM05702-01	026	N.C.R

Remark: 1. Each piece of equipment is scheduled for calibration once a year.
2. N.C.R = No Calibration Request.


TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from below 1GHz.

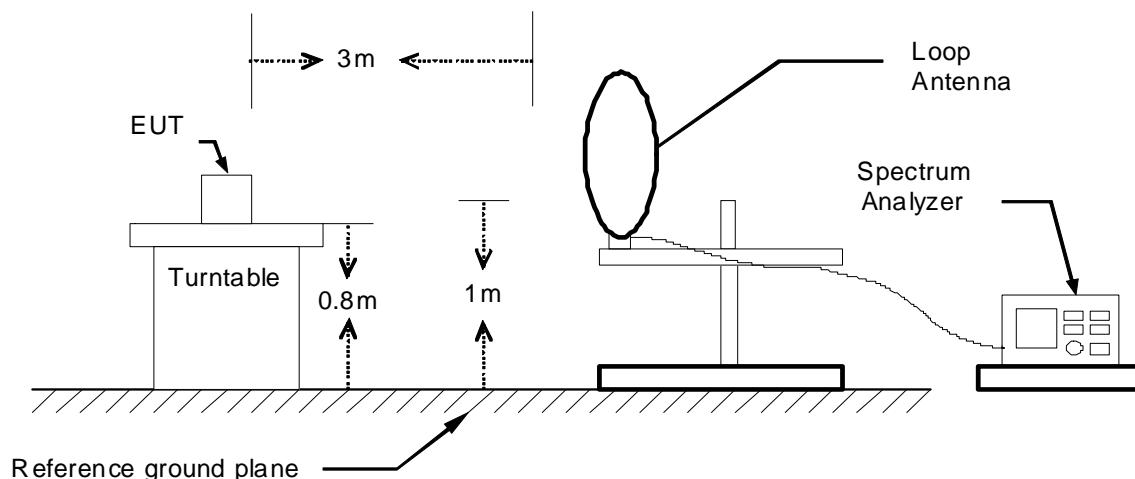
9kHz ~ 30MHz



30MHz ~ 1GHz

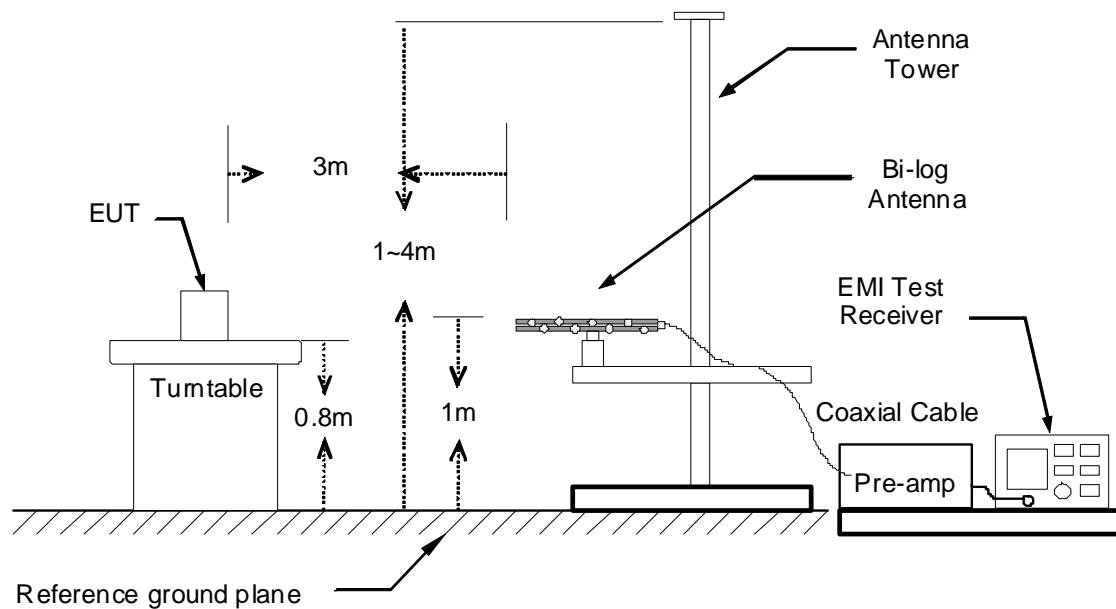

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

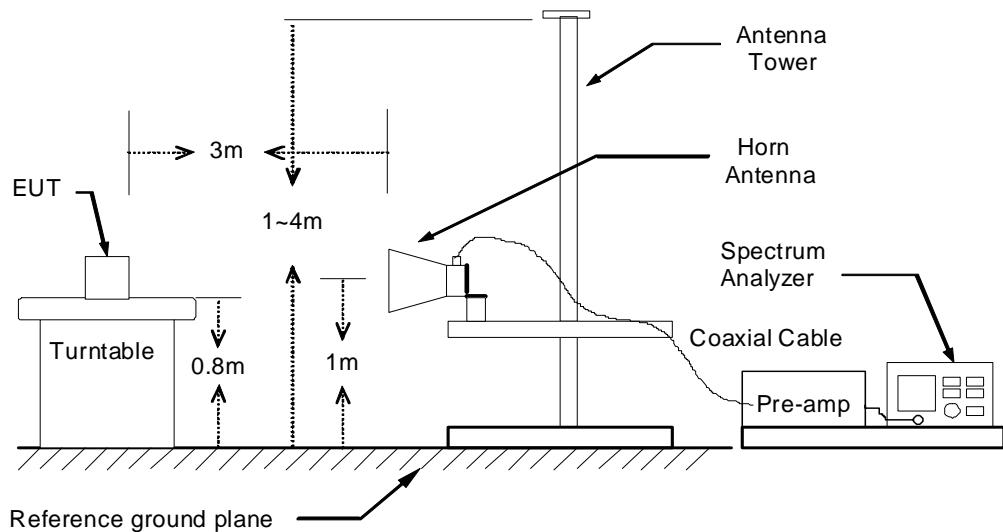



TEST PROCEDURE

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
2. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 3 meters away from the interference-receiving antenna.
3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Remark :

1. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.*
2. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.*
3. *The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.*

**TEST RESULTS****Below 1 GHz (9kHz ~ 30MHz)**

No emission found between lowest internal used/generated frequency to 30MHz.

Below 1 GHz (30MHz ~ 1GHz)

Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/30
Test Mode	Normal Operating	Temp. & Humidity	26°C, 57%

966 Chamber_A at 3Meter / Horizontal						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
40.67	34.33	-9.99	24.34	40.00	-15.66	Peak
166.77	33.42	-10.32	23.09	43.50	-20.41	Peak
200.72	39.96	-12.52	27.44	43.50	-16.06	Peak
232.73	39.60	-11.45	28.15	46.00	-17.85	Peak
400.54	38.13	-6.23	31.90	46.00	-14.10	Peak
500.45	43.80	-3.87	39.93	46.00	-6.07	QP
527.61	35.12	-3.36	31.77	46.00	-14.23	Peak
911.73	31.75	3.60	35.35	46.00	-10.65	Peak

966 Chamber_A at 3Meter / Vertical						
Frequency (MHz)	Reading (dB μ V)	Correction Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Remark
40.67	42.20	-9.99	32.22	40.00	-7.78	Peak
60.07	39.52	-10.32	29.20	40.00	-10.80	Peak
166.77	38.93	-10.32	28.60	43.50	-14.90	Peak
200.72	41.62	-12.52	29.11	43.50	-14.39	Peak
233.70	42.72	-11.40	31.32	46.00	-14.68	Peak
300.63	38.58	-8.78	29.80	46.00	-16.20	Peak
500.45	37.48	-3.87	33.61	46.00	-12.39	Peak
911.73	32.82	3.60	36.42	46.00	-9.58	Peak

Remark:

1. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.
2. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
3. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - PreAmp.Gain (dB)
4. Result (dB μ V/m) = Reading (dB μ V) + Correction Factor (dB/m)
5. Margin (dB) = Remark result (dB μ V/m) - Quasi-peak limit (dB μ V/m).



Above 1 GHz

Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11b TX / CH Low	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1470.00	45.15	---	-2.55	42.60	---	74.00	54.00	-11.40	Peak
1596.00	46.55	---	-1.55	45.00	---	74.00	54.00	-9.00	Peak
2636.00	43.54	---	4.11	47.65	---	74.00	54.00	-6.35	Peak
3195.00	41.88	---	5.52	47.40	---	74.00	54.00	-6.60	Peak
4485.00	40.43	---	9.12	49.55	---	74.00	54.00	-4.45	Peak
4785.00	39.22	---	9.38	48.59	---	74.00	54.00	-5.41	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	49.38	---	-3.33	46.05	---	74.00	54.00	-7.95	Peak
1330.00	46.00	---	-2.95	43.05	---	74.00	54.00	-10.95	Peak
1596.00	49.77	---	-1.55	48.22	---	74.00	54.00	-5.78	Peak
3255.00	42.07	---	5.59	47.66	---	74.00	54.00	-6.34	Peak
4500.00	39.44	---	9.19	48.63	---	74.00	54.00	-5.37	Peak
4920.00	39.83	---	9.47	49.30	---	74.00	54.00	-4.70	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11b TX / CH Middle	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1462.00	46.52	---	-2.58	43.94	---	74.00	54.00	-10.06	Peak
1524.00	46.09	---	-2.24	43.85	---	74.00	54.00	-10.15	Peak
1596.00	48.24	---	-1.55	46.69	---	74.00	54.00	-7.31	Peak
3585.00	41.35	---	6.05	47.39	---	74.00	54.00	-6.61	Peak
4470.00	40.12	---	9.06	49.18	---	74.00	54.00	-4.82	Peak
4935.00	39.36	---	9.48	48.84	---	74.00	54.00	-5.16	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	49.92	---	-3.32	46.60	---	74.00	54.00	-7.40	Peak
1602.00	47.23	---	-1.49	45.74	---	74.00	54.00	-8.26	Peak
1880.00	43.81	---	1.17	44.98	---	74.00	54.00	-9.02	Peak
3195.00	41.53	---	5.52	47.05	---	74.00	54.00	-6.95	Peak
4410.00	39.81	---	8.80	48.60	---	74.00	54.00	-5.40	Peak
4875.00	39.15	---	9.44	48.59	---	74.00	54.00	-5.41	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11b TX / CH High	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1464.00	45.78	---	-2.57	43.21	---	74.00	54.00	-10.79	Peak
1552.00	46.07	---	-1.97	44.10	---	74.00	54.00	-9.90	Peak
1598.00	46.53	---	-1.53	45.00	---	74.00	54.00	-9.00	Peak
3405.00	41.54	---	5.75	47.29	---	74.00	54.00	-6.71	Peak
4530.00	39.86	---	9.21	49.07	---	74.00	54.00	-4.93	Peak
4950.00	39.84	---	9.49	49.33	---	74.00	54.00	-4.67	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	48.61	---	-3.33	45.29	---	74.00	54.00	-8.71	Peak
1334.00	46.64	---	-2.94	43.70	---	74.00	54.00	-10.30	Peak
1598.00	49.79	---	-1.53	48.26	---	74.00	54.00	-5.74	Peak
3180.00	42.39	---	5.50	47.90	---	74.00	54.00	-6.10	Peak
3750.00	41.60	---	6.43	48.02	---	74.00	54.00	-5.98	Peak
4920.00	39.51	---	9.47	48.97	---	74.00	54.00	-5.03	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11g TX / CH Low	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	46.67	---	-3.32	43.34	---	74.00	54.00	-10.66	Peak
1598.00	46.41	---	-1.53	44.88	---	74.00	54.00	-9.12	Peak
1868.00	44.00	---	1.06	45.06	---	74.00	54.00	-8.94	Peak
3885.00	41.17	---	6.74	47.91	---	74.00	54.00	-6.09	Peak
4245.00	40.44	---	8.07	48.51	---	74.00	54.00	-5.49	Peak
4965.00	40.28	---	9.50	49.78	---	74.00	54.00	-4.22	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	48.70	---	-3.32	45.38	---	74.00	54.00	-8.62	Peak
1336.00	46.30	---	-2.93	43.37	---	74.00	54.00	-10.63	Peak
1604.00	46.61	---	-1.47	45.13	---	74.00	54.00	-8.87	Peak
3195.00	41.56	---	5.52	47.08	---	74.00	54.00	-6.92	Peak
4485.00	39.67	---	9.12	48.79	---	74.00	54.00	-5.21	Peak
4905.00	39.93	---	9.46	49.39	---	74.00	54.00	-4.61	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11g TX / CH Middle	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	46.83	---	-3.33	43.50	---	74.00	54.00	-10.50	Peak
1464.00	45.20	---	-2.57	42.63	---	74.00	54.00	-11.37	Peak
1602.00	45.71	---	-1.49	44.21	---	74.00	54.00	-9.79	Peak
3225.00	42.41	---	5.55	47.97	---	74.00	54.00	-6.03	Peak
4545.00	39.21	---	9.22	48.43	---	74.00	54.00	-5.57	Peak
4920.00	39.53	---	9.47	49.00	---	74.00	54.00	-5.00	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	49.75	---	-3.32	46.43	---	74.00	54.00	-7.57	Peak
1596.00	50.88	---	-1.55	49.33	---	74.00	54.00	-4.67	Peak
1636.00	47.58	---	-1.17	46.42	---	74.00	54.00	-7.58	Peak
3495.00	41.53	---	5.84	47.38	---	74.00	54.00	-6.62	Peak
4590.00	40.21	---	9.25	49.46	---	74.00	54.00	-4.54	Peak
4965.00	39.04	---	9.50	48.54	---	74.00	54.00	-5.46	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/10/25
Test Mode	IEEE 802.11g TX / CH High	TEMP & Humidity	25°C, 62%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1464.00	45.18	---	-2.57	42.61	---	74.00	54.00	-11.39	Peak
1596.00	45.76	---	-1.55	44.21	---	74.00	54.00	-9.79	Peak
2076.00	44.42	---	2.52	46.95	---	74.00	54.00	-7.05	Peak
3870.00	41.11	---	6.70	47.81	---	74.00	54.00	-6.19	Peak
4635.00	39.62	---	9.28	48.90	---	74.00	54.00	-5.10	Peak
4920.00	39.90	---	9.47	49.36	---	74.00	54.00	-4.64	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	50.78	---	-3.32	47.46	---	74.00	54.00	-6.54	Peak
1598.00	48.03	---	-1.53	46.50	---	74.00	54.00	-7.50	Peak
2820.00	42.46	---	4.72	47.17	---	74.00	54.00	-6.83	Peak
3165.00	41.59	---	5.49	47.07	---	74.00	54.00	-6.93	Peak
4305.00	39.89	---	8.34	48.23	---	74.00	54.00	-5.77	Peak
4980.00	40.41	---	9.51	49.91	---	74.00	54.00	-4.09	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT20 TX / CH Low	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1048.00	48.38	---	-4.88	43.50	---	74.00	54.00	-10.50	Peak
1600.00	50.50	---	-2.35	48.15	---	74.00	54.00	-5.85	Peak
2286.00	46.01	---	2.26	48.27	---	74.00	54.00	-5.73	Peak
2412.00	98.70	---	2.58	101.28	---	---	---	---	Carrier
3180.00	41.58	---	4.96	46.54	---	74.00	54.00	-7.46	Peak
4560.00	40.25	---	7.92	48.17	---	74.00	54.00	-5.83	Peak
5070.00	39.94	---	8.37	48.31	---	74.00	54.00	-5.69	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	52.99	---	-4.37	48.62	---	74.00	54.00	-5.38	Peak
1604.00	51.45	---	-2.31	49.14	---	74.00	54.00	-4.86	Peak
2412.00	98.54	---	2.58	101.13	---	---	---	---	Carrier
2668.00	44.91	---	3.58	48.49	---	74.00	54.00	-5.51	Peak
3225.00	41.93	---	4.92	46.85	---	74.00	54.00	-7.15	Peak
4500.00	40.19	---	7.88	48.07	---	74.00	54.00	-5.93	Peak
5565.00	38.87	---	9.59	48.46	---	74.00	54.00	-5.54	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT20 TX / CH Middle	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1048.00	49.18	---	-4.88	44.30	---	74.00	54.00	-9.70	Peak
1548.00	48.78	---	-2.85	45.93	---	74.00	54.00	-8.07	Peak
1596.00	49.50	---	-2.39	47.11	---	74.00	54.00	-6.89	Peak
2437.00	100.06	---	2.65	102.71	---	---	---	---	Carrier
3165.00	41.91	---	4.97	46.89	---	74.00	54.00	-7.11	Peak
4485.00	40.06	---	7.82	47.88	---	74.00	54.00	-6.12	Peak
4905.00	39.63	---	8.14	47.77	---	74.00	54.00	-6.23	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	53.03	---	-4.37	48.66	---	74.00	54.00	-5.34	Peak
1600.00	51.39	---	-2.35	49.04	---	74.00	54.00	-4.96	Peak
2437.00	101.24	---	2.62	103.86	---	---	---	---	Carrier
2668.00	44.66	---	3.58	48.24	---	74.00	54.00	-5.76	Peak
3150.00	41.42	---	4.98	46.40	---	74.00	54.00	-7.60	Peak
4380.00	39.53	---	7.41	46.94	---	74.00	54.00	-7.06	Peak
4860.00	39.11	---	8.11	47.22	---	74.00	54.00	-6.78	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT20 TX / CH High	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1498.00	47.04	---	-3.33	43.71	---	74.00	54.00	-10.29	Peak
1598.00	49.56	---	-2.37	47.19	---	74.00	54.00	-6.81	Peak
2258.00	44.41	---	2.19	46.60	---	74.00	54.00	-7.40	Peak
2462.00	97.23	---	2.72	99.95	---	---	---	---	Carrier
3195.00	41.74	---	4.95	46.68	---	74.00	54.00	-7.32	Peak
4260.00	40.16	---	6.93	47.10	---	74.00	54.00	-6.90	Peak
4995.00	39.51	---	8.20	47.70	---	74.00	54.00	-6.30	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1046.00	51.07	---	-4.89	46.17	---	74.00	54.00	-7.83	Peak
1198.00	50.68	---	-4.36	46.31	---	74.00	54.00	-7.69	Peak
1602.00	48.39	---	-2.33	46.06	---	74.00	54.00	-7.94	Peak
2462.00	98.51	---	2.70	101.21	---	---	---	---	Carrier
3180.00	42.03	---	4.96	46.99	---	74.00	54.00	-7.01	Peak
4335.00	40.01	---	7.23	47.24	---	74.00	54.00	-6.76	Peak
4950.00	39.97	---	8.17	48.14	---	74.00	54.00	-5.86	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT40 TX / CH Low	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	48.11	---	-4.36	43.74	---	74.00	54.00	-10.26	Peak
1600.00	49.95	---	-2.35	47.60	---	74.00	54.00	-6.40	Peak
1948.00	44.52	---	1.03	45.55	---	74.00	54.00	-8.45	Peak
2422.00	94.35	---	2.59	96.95	---	---	---	---	Carrier
3270.00	41.98	---	4.88	46.86	---	74.00	54.00	-7.14	Peak
4365.00	41.16	---	7.35	48.51	---	74.00	54.00	-5.49	Peak
4950.00	39.83	---	8.17	48.00	---	74.00	54.00	-6.00	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1046.00	49.26	---	-4.89	44.37	---	74.00	54.00	-9.63	Peak
1198.00	52.22	---	-4.36	47.86	---	74.00	54.00	-6.14	Peak
1598.00	50.27	---	-2.37	47.90	---	74.00	54.00	-6.10	Peak
2422.00	95.97	---	2.63	98.60	---	---	---	---	Carrier
3165.00	41.61	---	4.97	46.58	---	74.00	54.00	-7.42	Peak
4410.00	39.85	---	7.52	47.37	---	74.00	54.00	-6.63	Peak
4890.00	38.92	---	8.13	47.05	---	74.00	54.00	-6.95	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT40 TX / CH Middle	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1046.00	49.33	---	-4.89	44.44	---	74.00	54.00	-9.56	Peak
1414.00	46.15	---	-3.62	42.53	---	74.00	54.00	-11.47	Peak
1596.00	50.02	---	-2.39	47.63	---	74.00	54.00	-6.37	Peak
2437.00	97.54	---	2.65	100.19	---	---	---	---	Carrier
3165.00	42.01	---	4.97	46.98	---	74.00	54.00	-7.02	Peak
3900.00	41.17	---	5.66	46.83	---	74.00	54.00	-7.17	Peak
4935.00	39.97	---	8.16	48.13	---	74.00	54.00	-5.87	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1046.00	50.47	---	-4.89	45.58	---	74.00	54.00	-8.42	Peak
1198.00	53.19	---	-4.36	48.82	---	74.00	54.00	-5.18	Peak
1602.00	49.18	---	-2.33	46.85	---	74.00	54.00	-7.15	Peak
2437.00	98.89	---	2.65	101.54	---	---	---	---	Carrier
3150.00	41.77	---	4.98	46.75	---	74.00	54.00	-7.25	Peak
4230.00	40.66	---	6.81	47.47	---	74.00	54.00	-6.53	Peak
4920.00	40.01	---	8.15	48.15	---	74.00	54.00	-5.85	Peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/29
Test Mode	IEEE 802.11n HT40 TX / CH High	TEMP & Humidity	25°C, 57%

966 Chamber_B at 3Meter / Horizontal									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1196.00	48.38	---	-4.37	44.01	---	74.00	54.00	-9.99	Peak
1604.00	50.39	---	-2.31	48.08	---	74.00	54.00	-5.92	Peak
1944.00	44.53	---	0.99	45.51	---	74.00	54.00	-8.49	Peak
2452.00	92.95	---	2.66	95.61	---	---	---	---	Carrier
3105.00	42.05	---	5.02	47.07	---	74.00	54.00	-6.93	Peak
4245.00	40.34	---	6.87	47.21	---	74.00	54.00	-6.79	Peak
4965.00	40.23	---	8.18	48.41	---	74.00	54.00	-5.59	Peak

966 Chamber_B at 3Meter / Vertical									
Frequency (MHz)	Reading-PK (dBuV)	Reading-AV (dBuV)	Correction Factor (dB/m)	Result-PK (dBuV/m)	Result-AV (dBuV/m)	Limit-PK (dBuV/m)	Limit-AV (dBuV/m)	Margin (dB)	Remark
1198.00	51.60	---	-4.36	47.23	---	74.00	54.00	-6.77	Peak
1604.00	50.89	---	-2.31	48.58	---	74.00	54.00	-5.42	Peak
1628.00	49.29	---	-2.08	47.21	---	74.00	54.00	-6.79	Peak
2452.00	96.01	---	2.69	98.69	---	---	---	---	Carrier
3210.00	41.62	---	4.93	46.55	---	74.00	54.00	-7.45	Peak
3915.00	41.47	---	5.70	47.17	---	74.00	54.00	-6.83	Peak
4965.00	39.98	---	8.18	48.16	---	74.00	54.00	-5.84	Peak

Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Average test would be performed if the peak result were greater than the average limit.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
6. Result = Reading + Correction Factor
Margin = Result - Limit
Remark Peak = Result(PK) - Limit(AV)
Remark AVG = Result(AV) - Limit(AV)



Restricted Band Edges


Detector Mode : Peak

Polarity : Horizontal

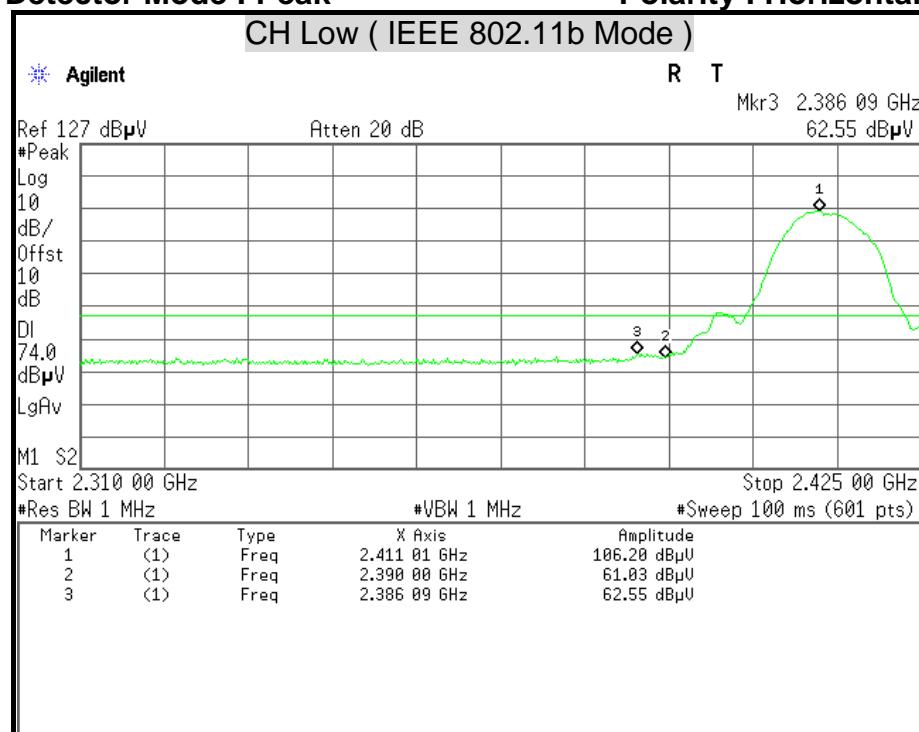

Detector Mode : Average


Polarity : Horizontal

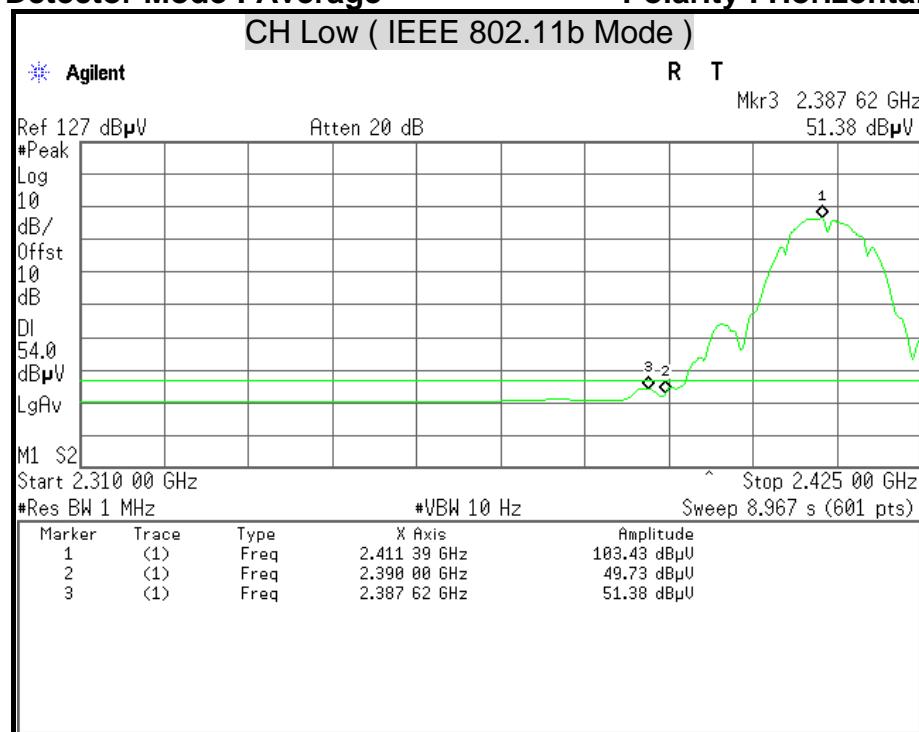




Detector Mode : Peak



Polarity : Vertical

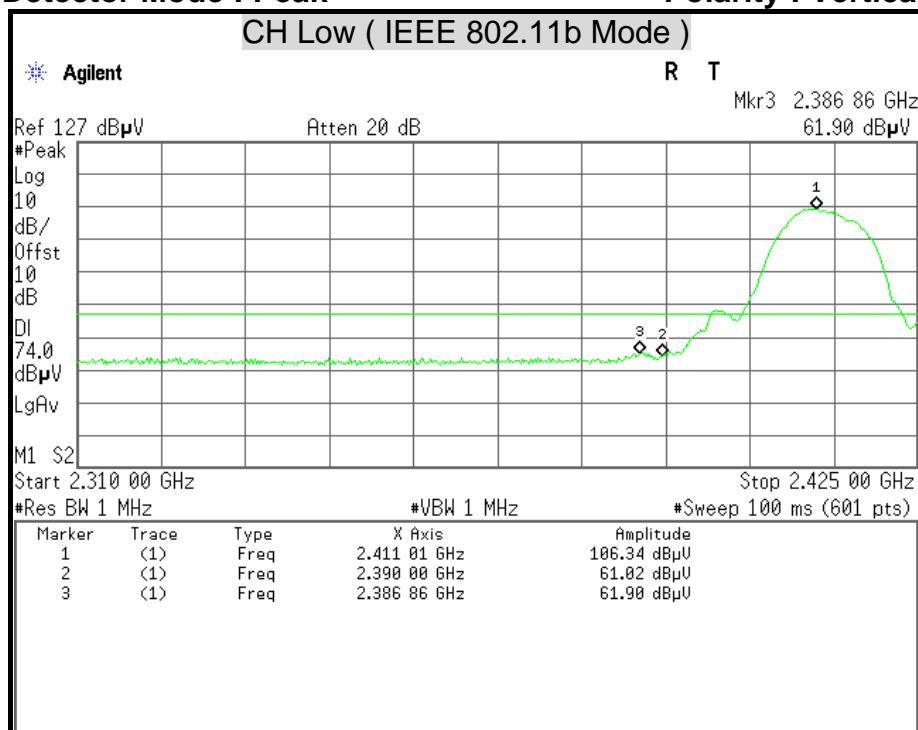

Detector Mode : Average

Polarity : Vertical

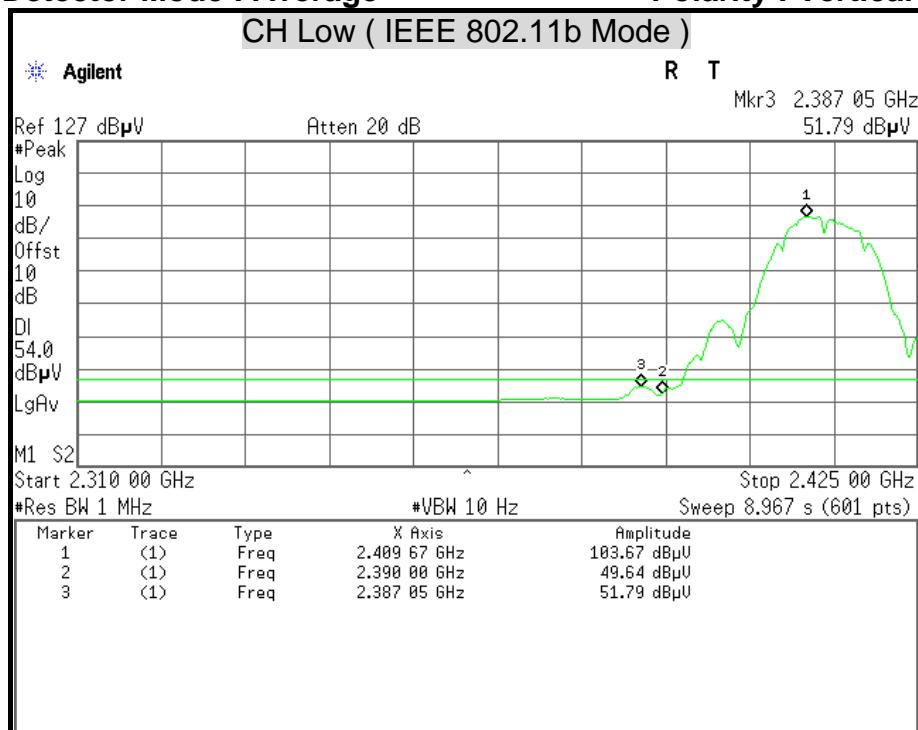


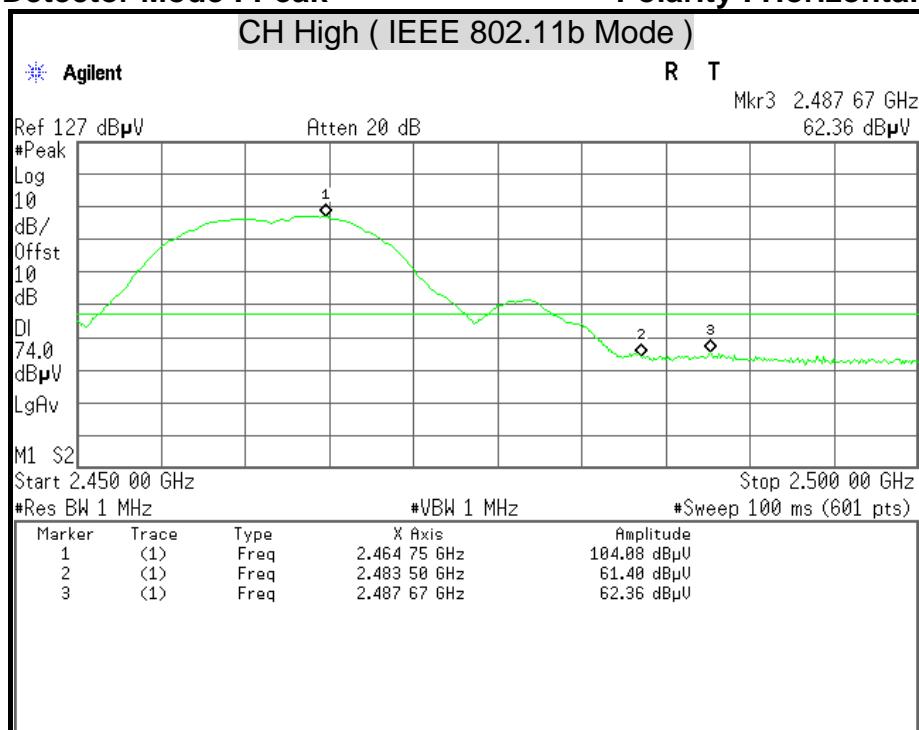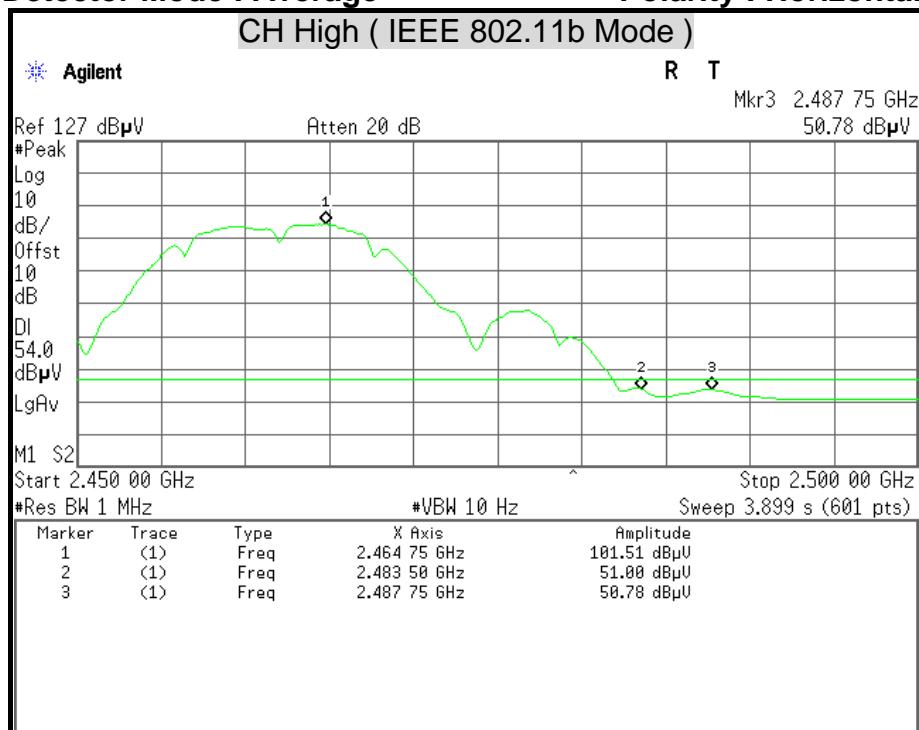**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**




Detector Mode : Peak



Polarity : Vertical

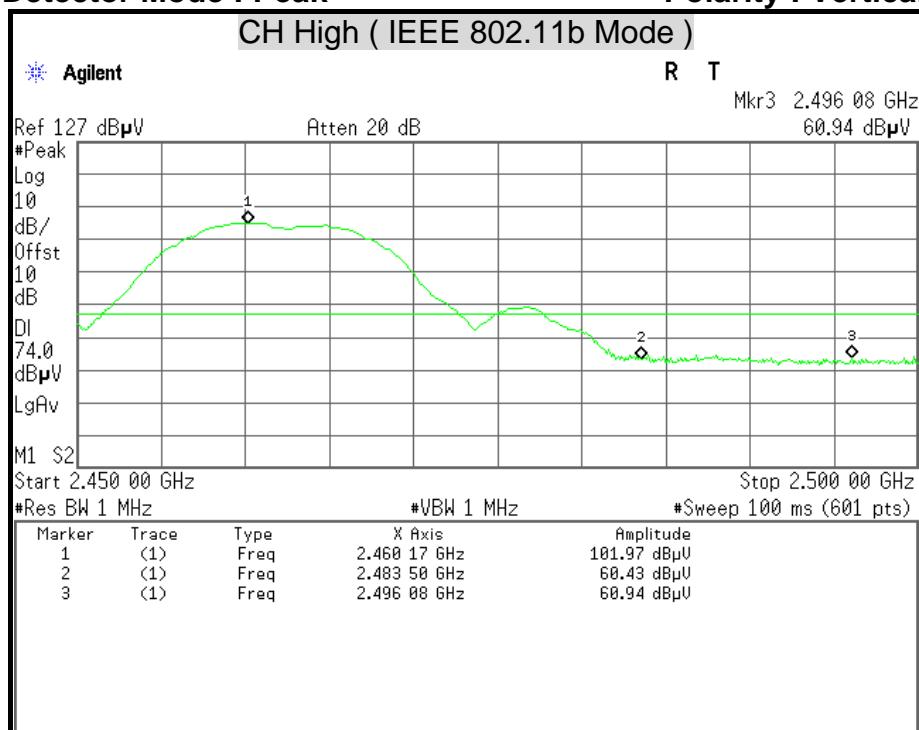

Detector Mode : Average

Polarity : Vertical

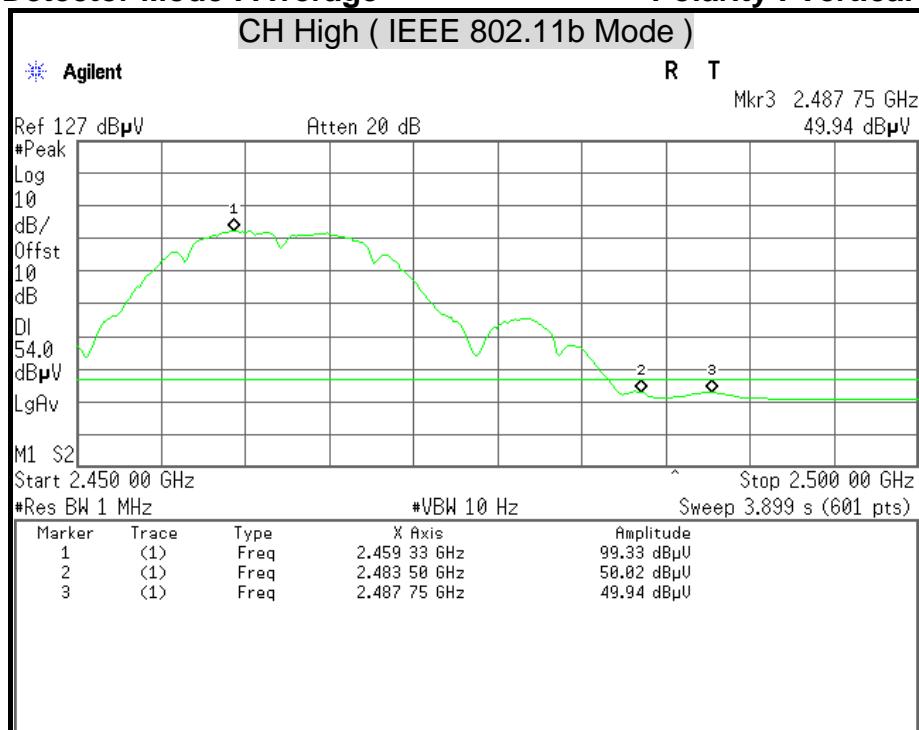


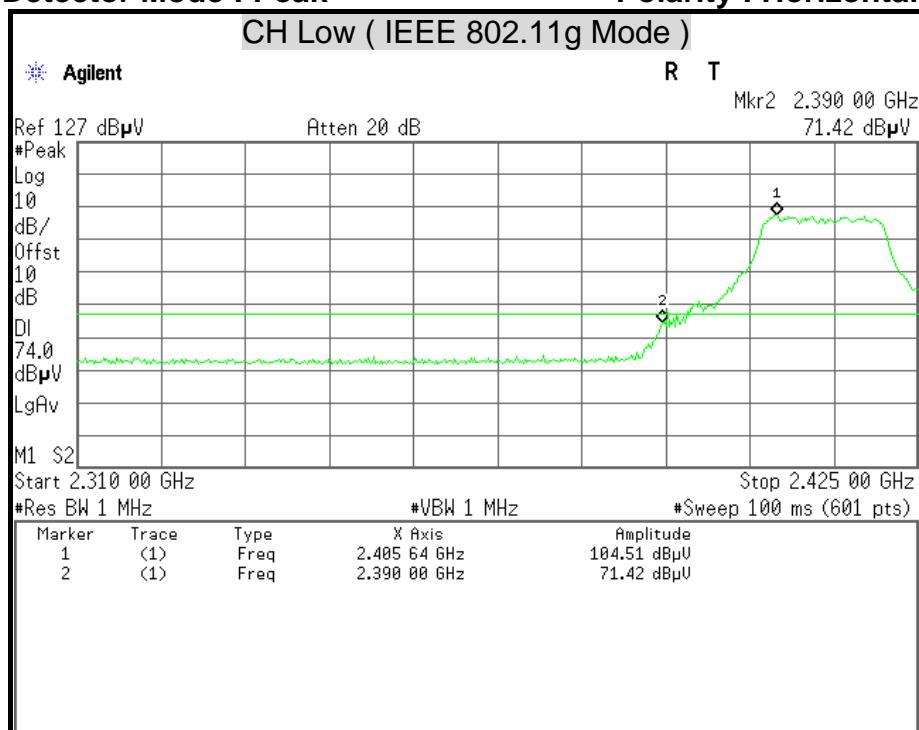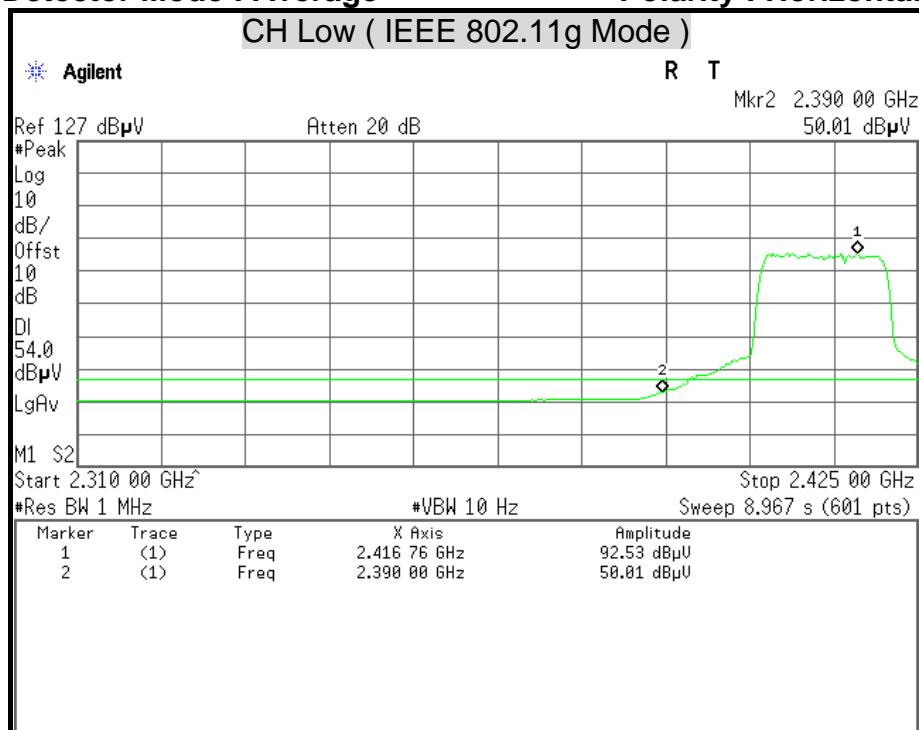**Detector Mode : Peak****Polarity : Horizontal****Detector Mode : Average****Polarity : Horizontal**




Detector Mode : Peak

Polarity : Vertical

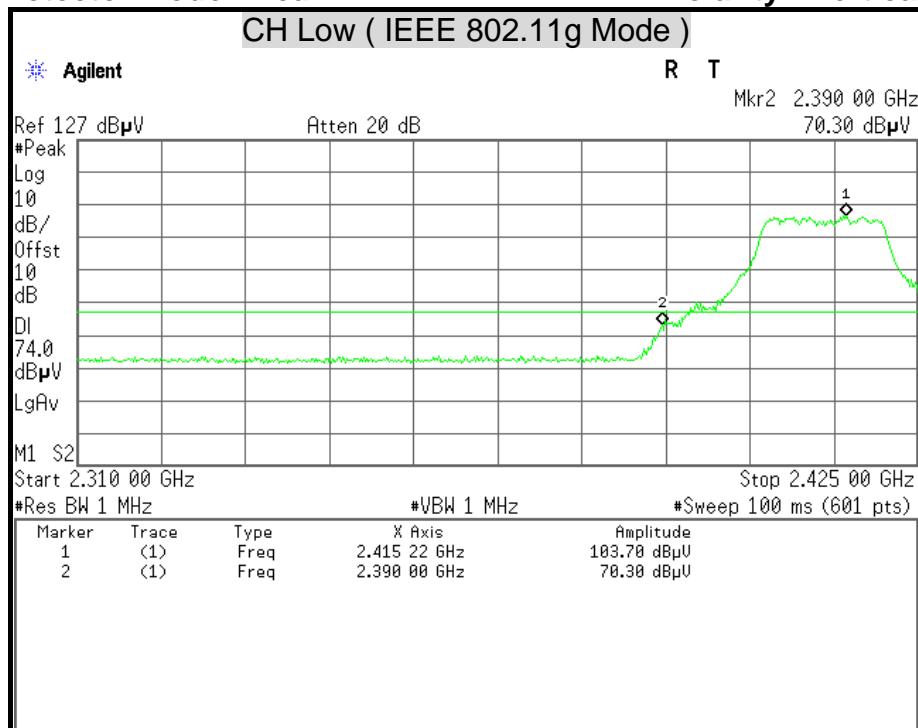

Detector Mode : Average


Polarity : Vertical

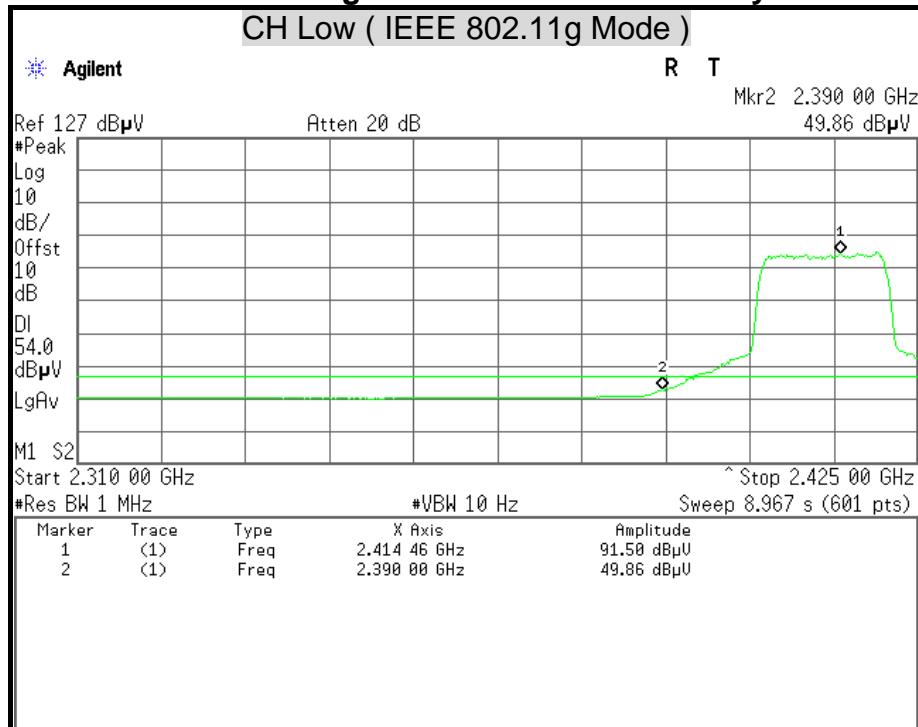




Detector Mode : Peak



Polarity : Horizontal

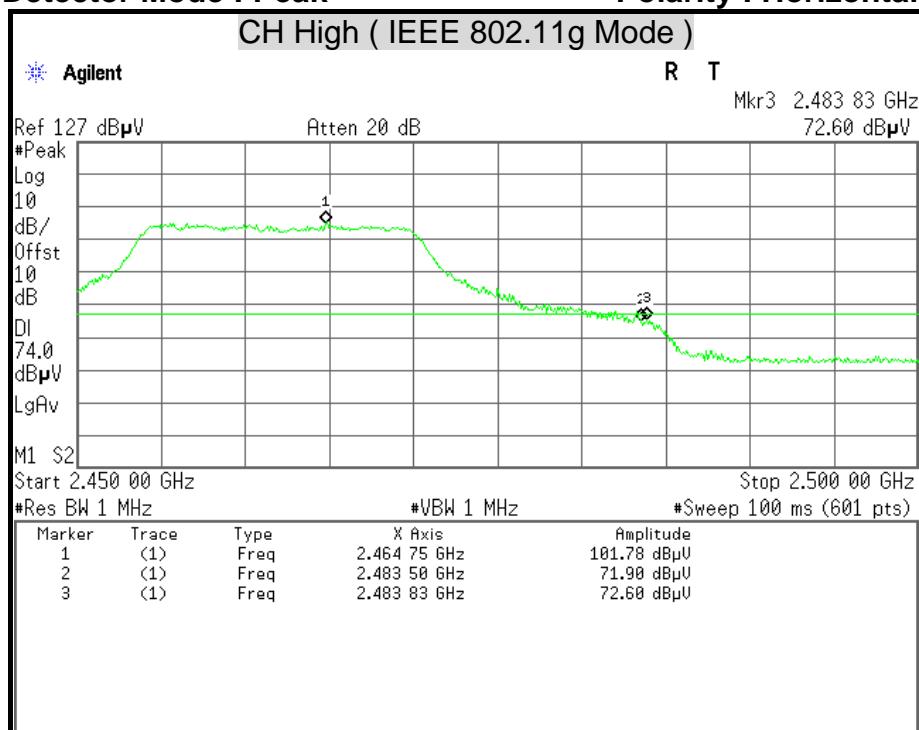

Detector Mode : Average

Polarity : Horizontal

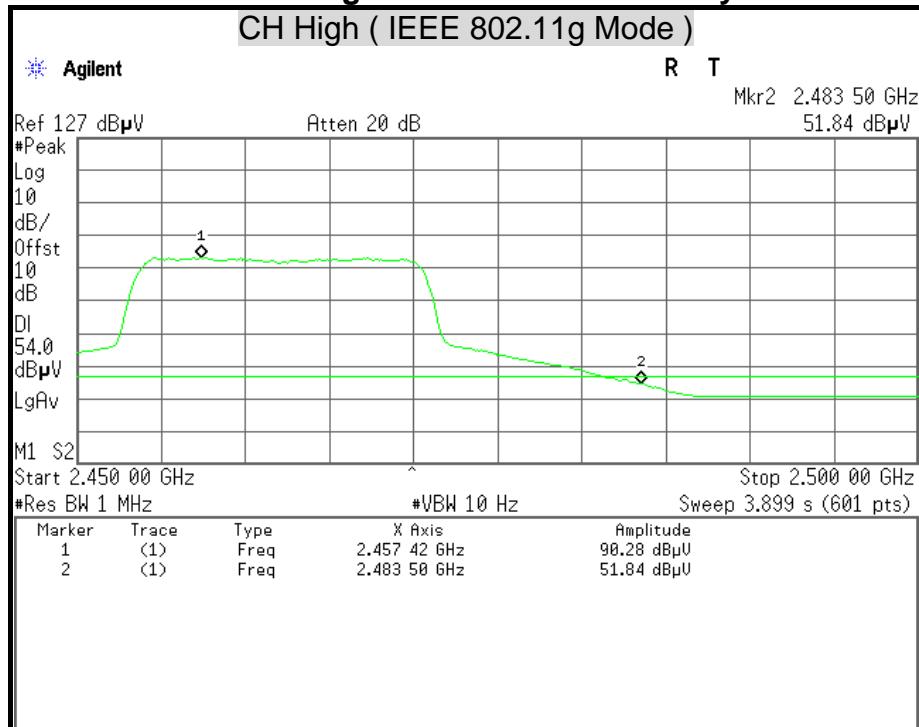


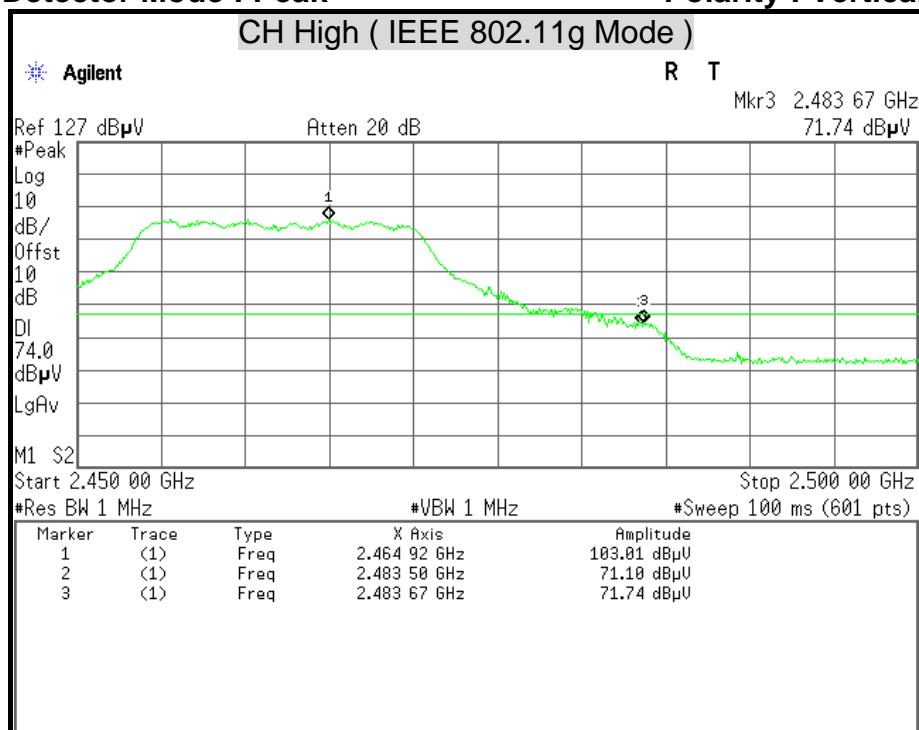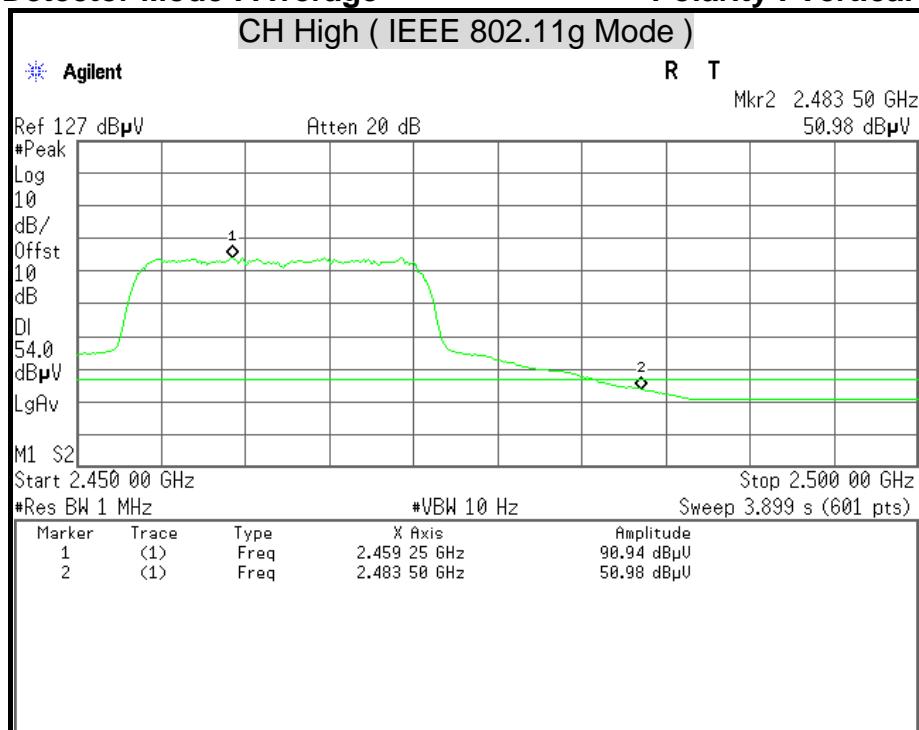**Detector Mode : Peak****Polarity : Vertical****Detector Mode : Average****Polarity : Vertical**




Detector Mode : Peak

Polarity : Horizontal

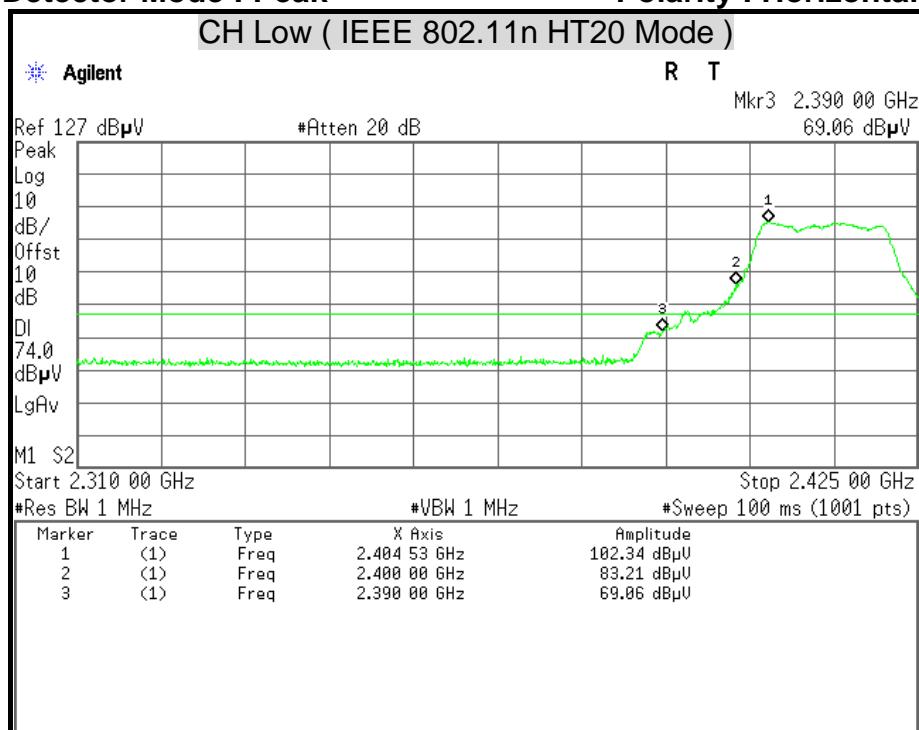

Detector Mode : Average


Polarity : Horizontal

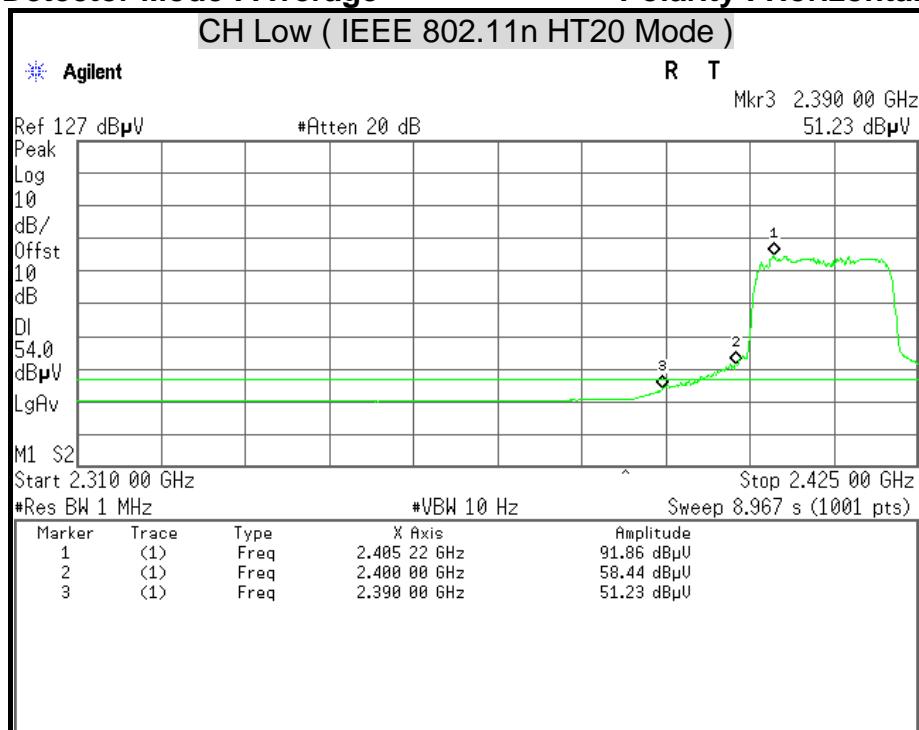




Detector Mode : Peak

Polarity : Vertical

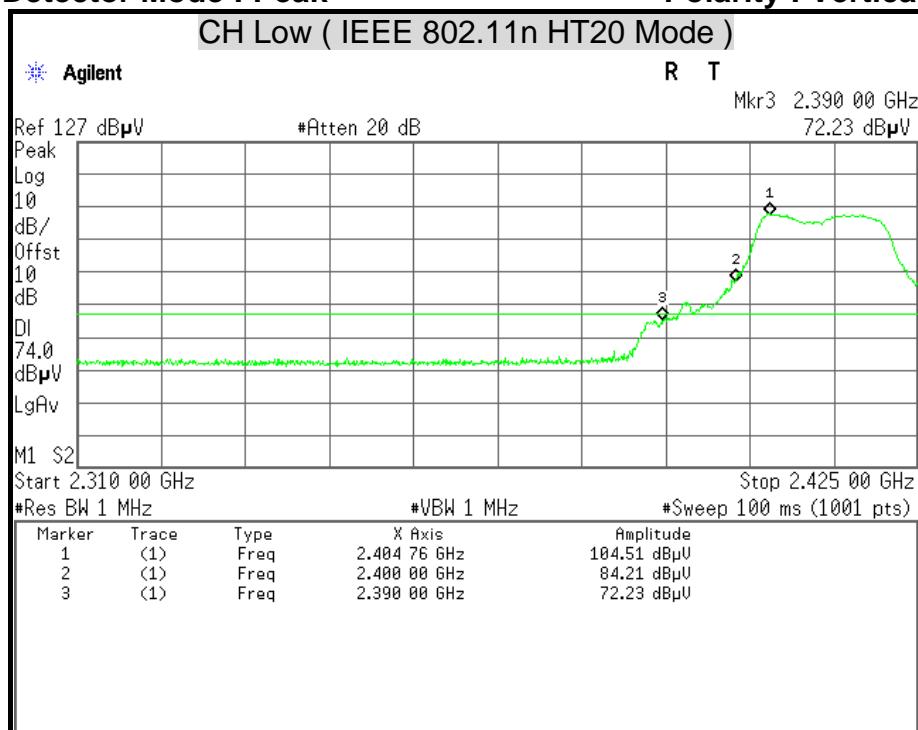

Detector Mode : Average


Polarity : Vertical

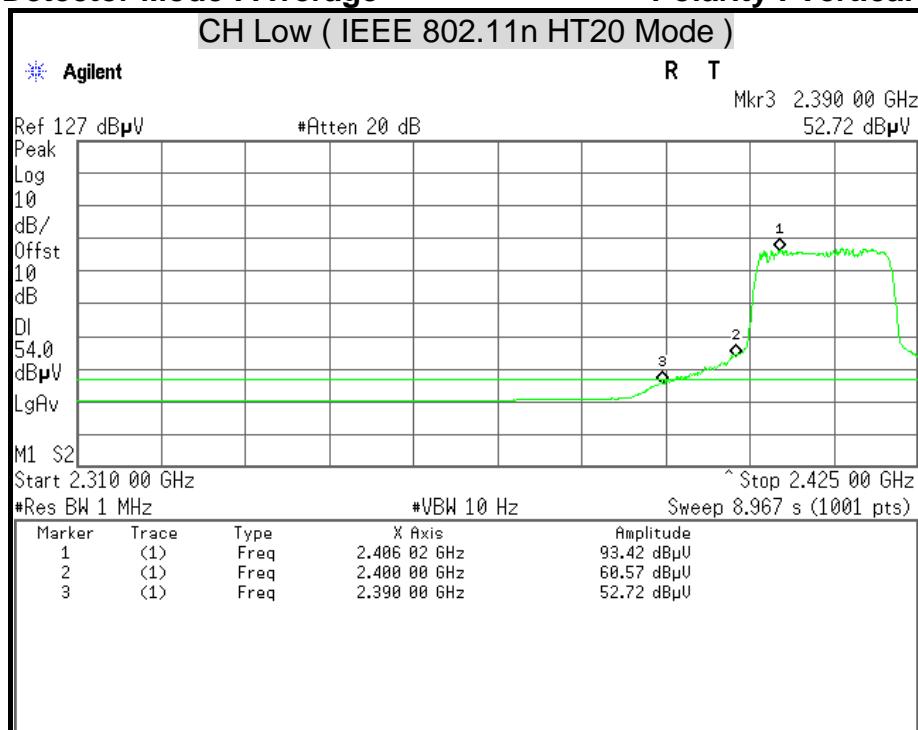




Detector Mode : Peak

Polarity : Horizontal

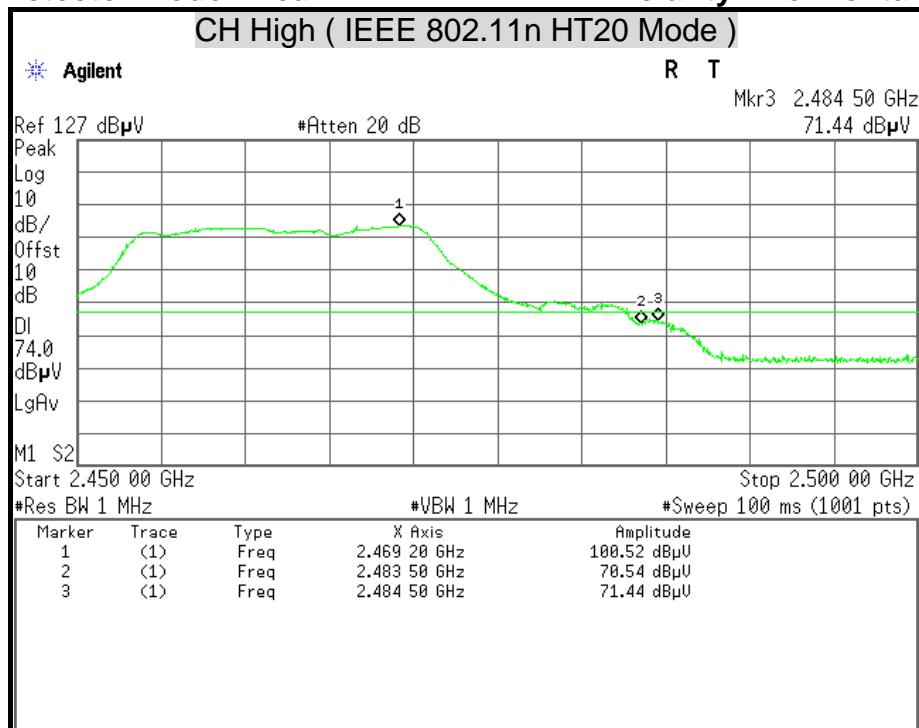

Detector Mode : Average


Polarity : Horizontal

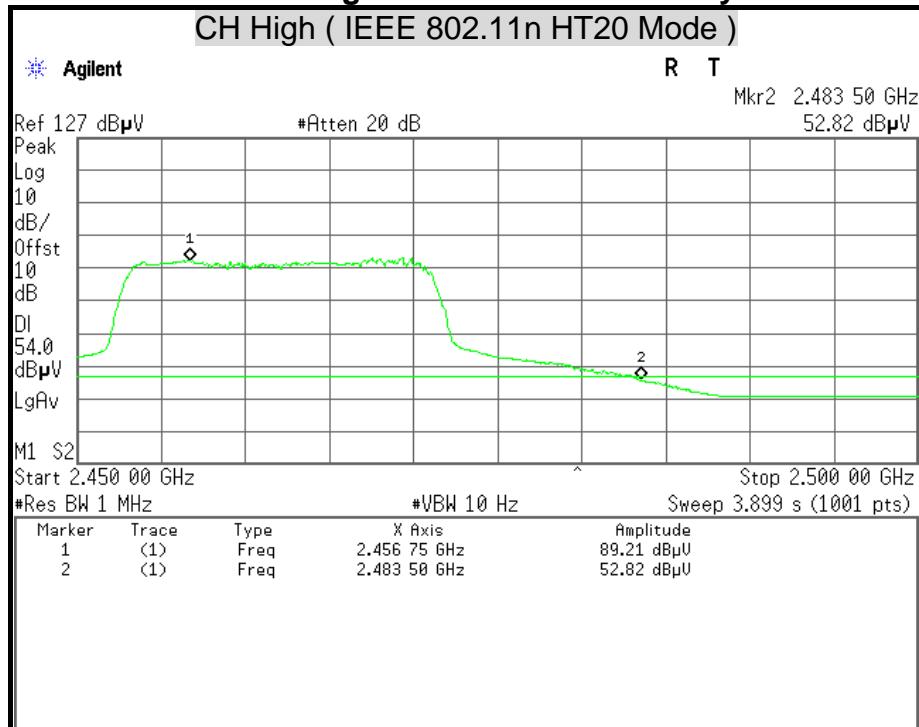




Detector Mode : Peak

Polarity : Vertical

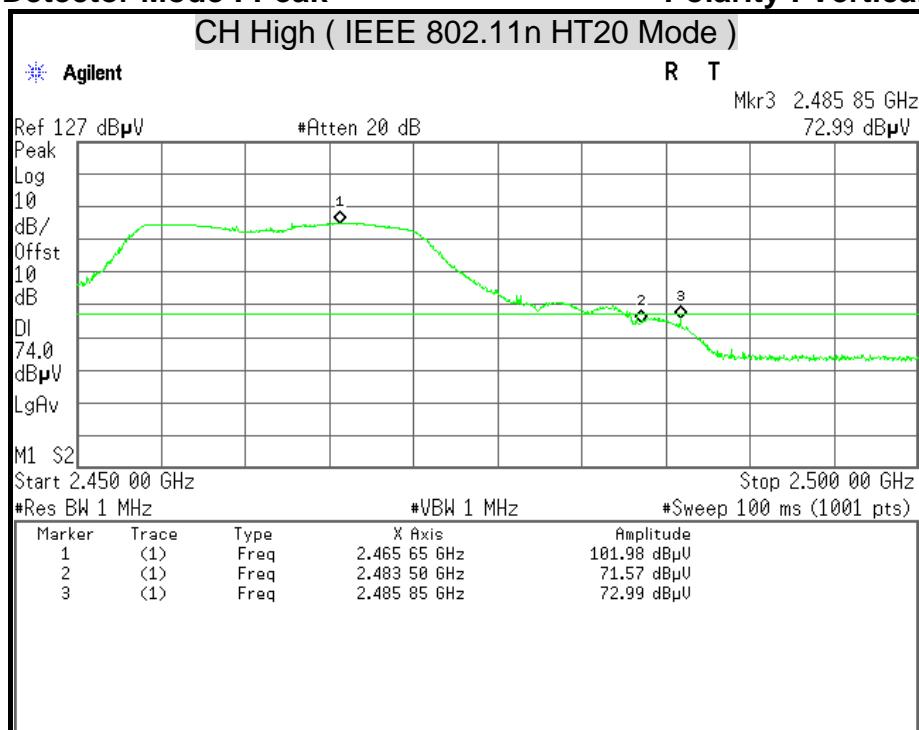

Detector Mode : Average


Polarity : Vertical

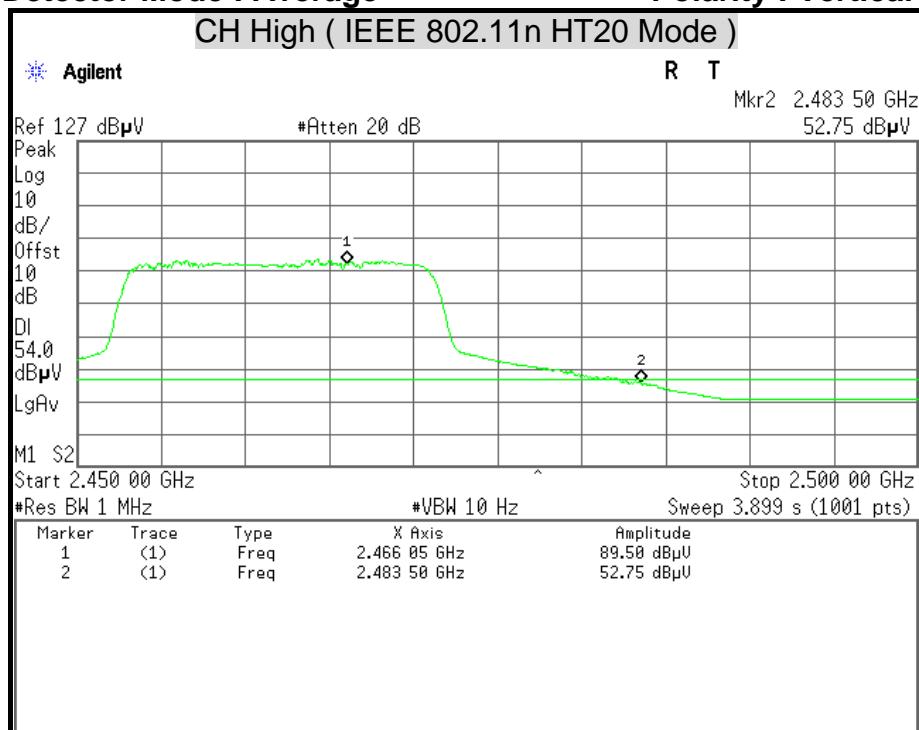




Detector Mode : Peak

Polarity : Horizontal

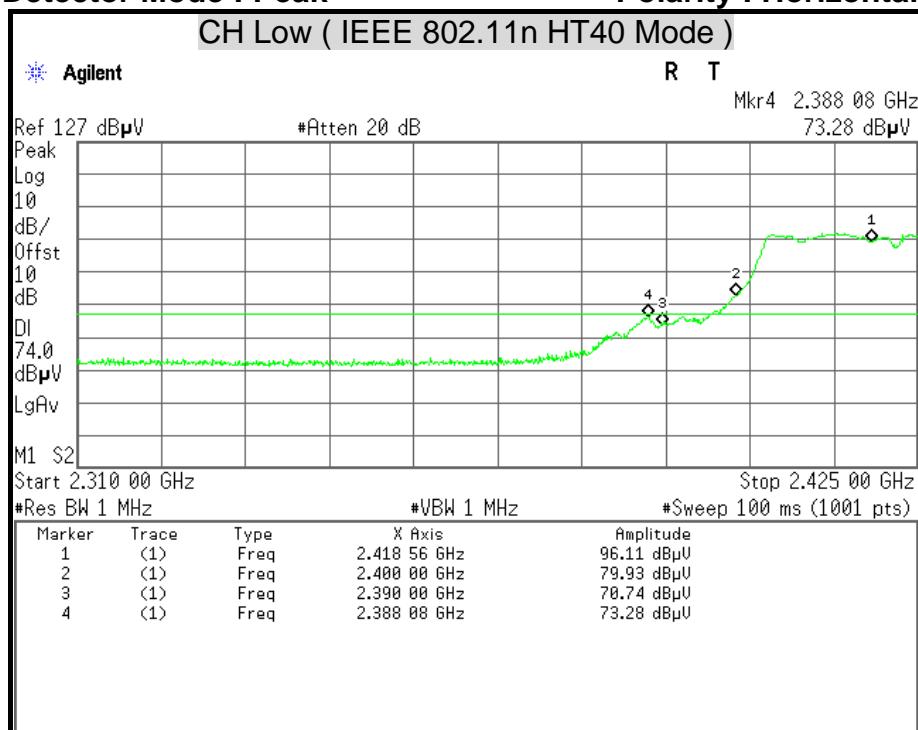

Detector Mode : Average


Polarity : Horizontal

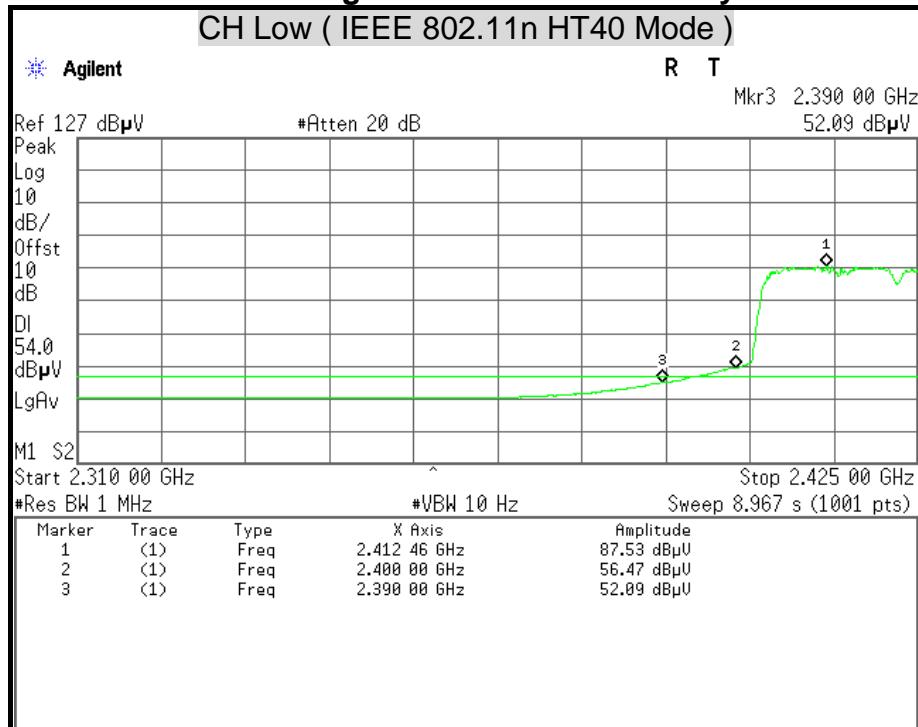




Detector Mode : Peak

Polarity : Vertical

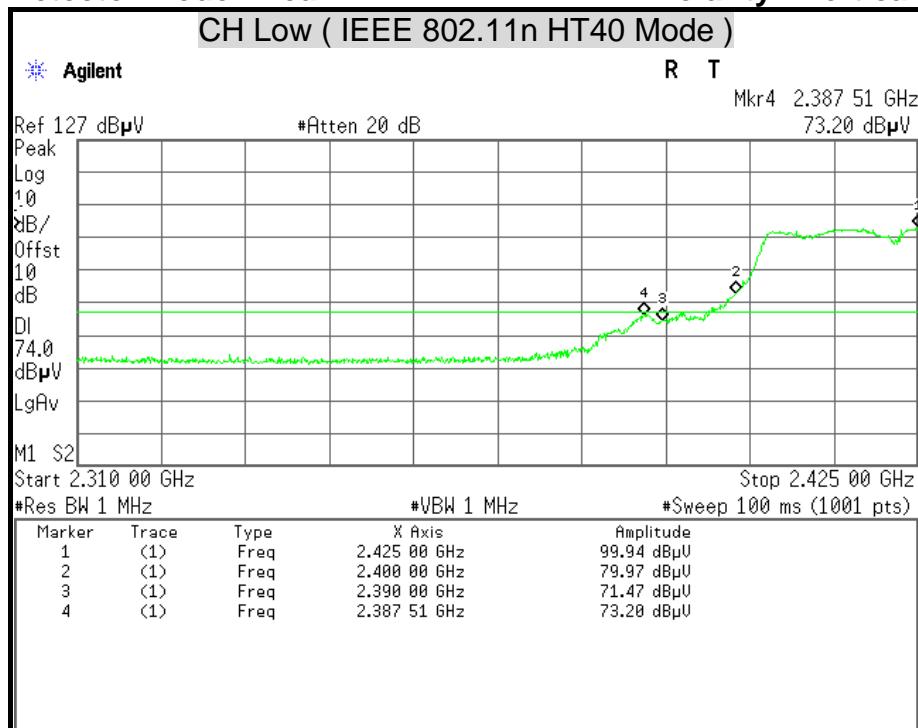

Detector Mode : Average


Polarity : Vertical

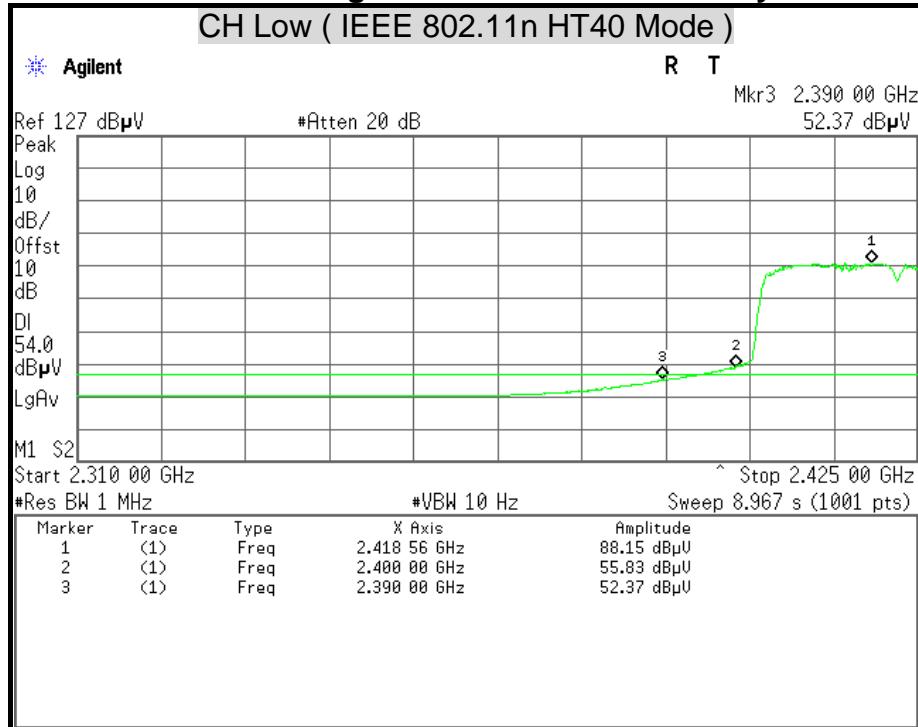




Detector Mode : Peak

Polarity : Horizontal

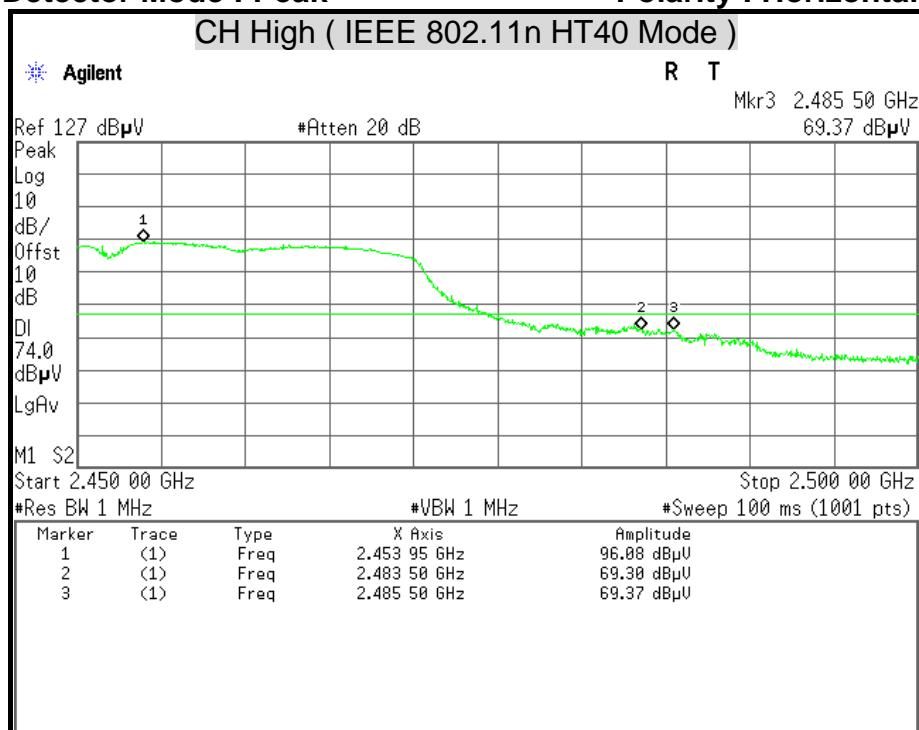

Detector Mode : Average


Polarity : Horizontal

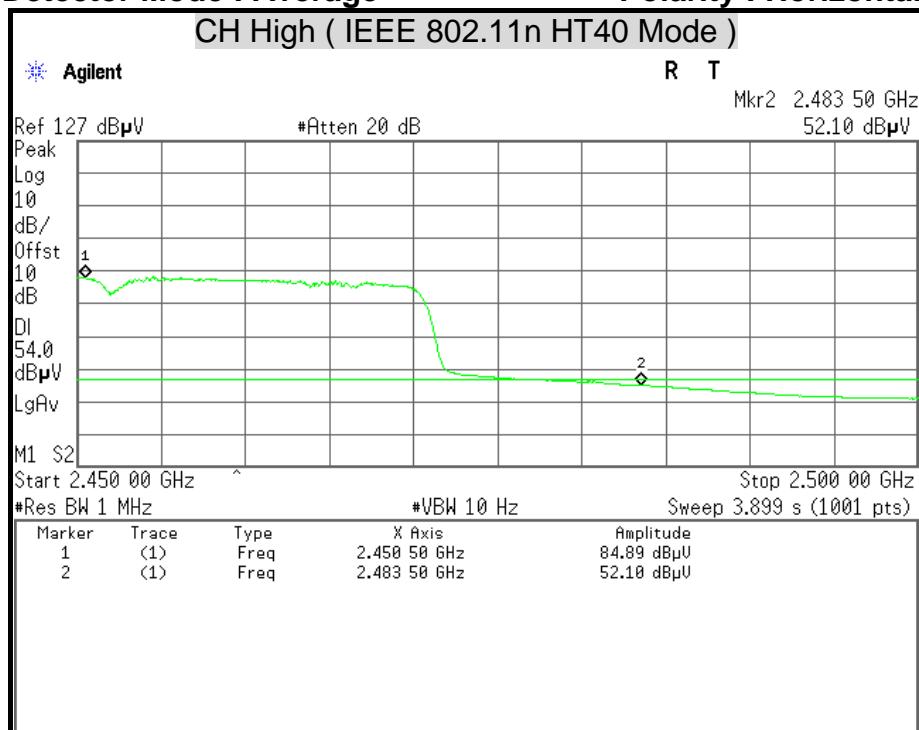




Detector Mode : Peak

Polarity : Vertical

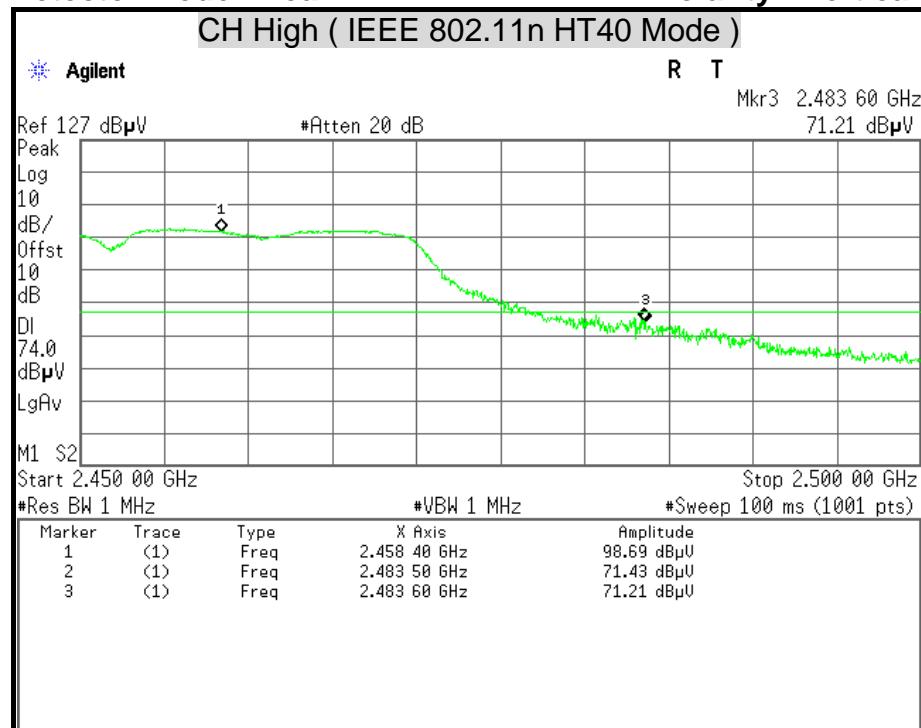

Detector Mode : Average

Polarity : Vertical

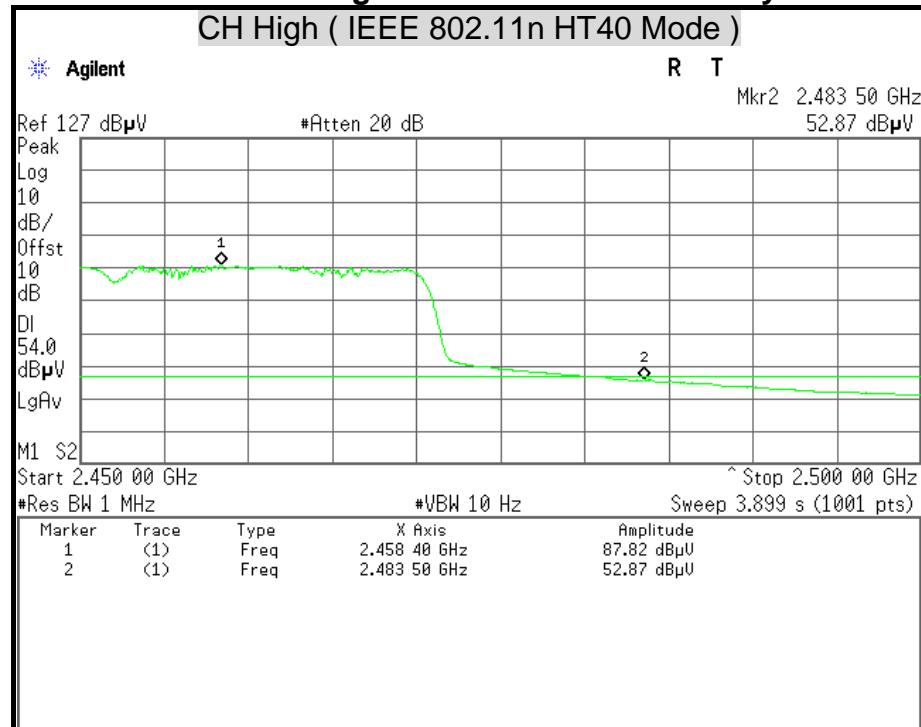



7.7 CONDUCTED EMISSION

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5.00	56	46
5.00 - 30.0	60	50



TEST EQUIPMENT

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-465	08/09/2012
L.I.S.N	SCHWARZBECK	NSLK 8127	8127-473	03/14/2012
EMI Receiver	ROHDE & SCHWARZ	ESCS 30	835418/008	10/24/2011
Pulse Limit	ROHDE & SCHWARZ	ESH3-Z2	100117	09/17/2011

Remark: Each piece of equipment is scheduled for calibration once a year.



TEST SETUP

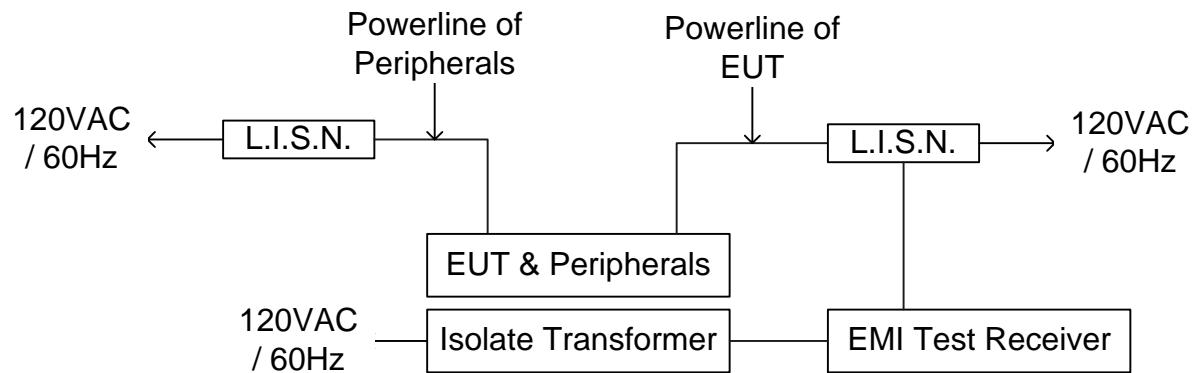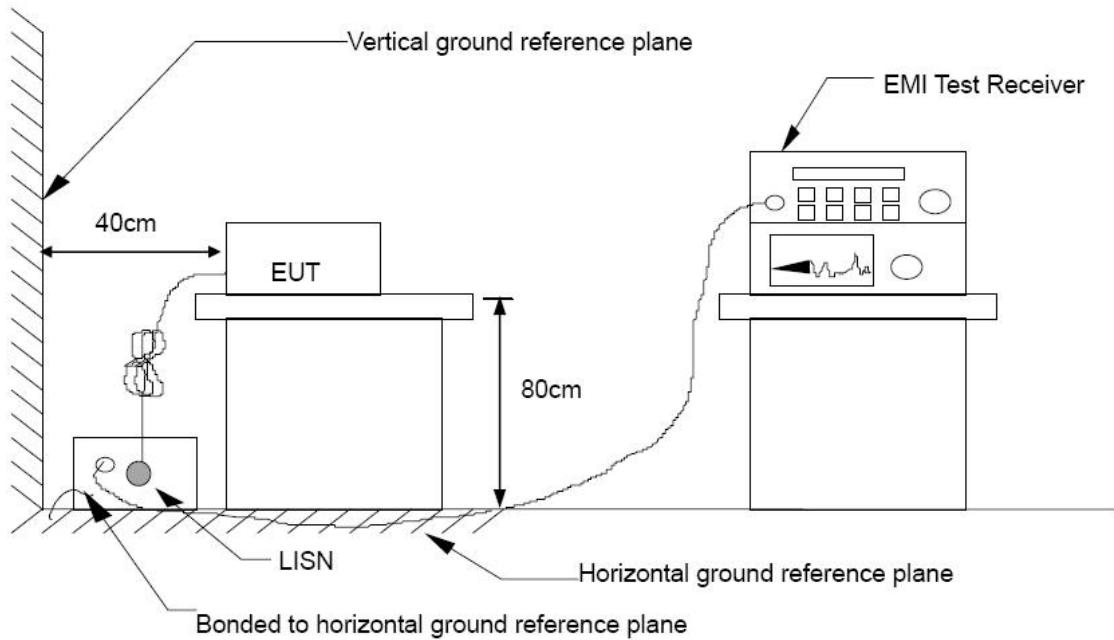



TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2003.

The test procedure is performed in a 4m x 3m x 2.4m (LxWxH) shielded room.

The EUT along with its peripherals were placed on a 1.0m (W) x 1.5m (L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.


The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.

The EUT was located so that the distance between the boundary of the EUT and the closest surface of the LISN is 0.8 m. Where a mains flexible cord was provided by the manufacturer shall be 1 m long, or if in excess of 1 m, the excess cable was folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

TEST RESULTS

Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/24
Test Mode	Normal Operating	Temp. & Humidity	23°C, 60%

LINE

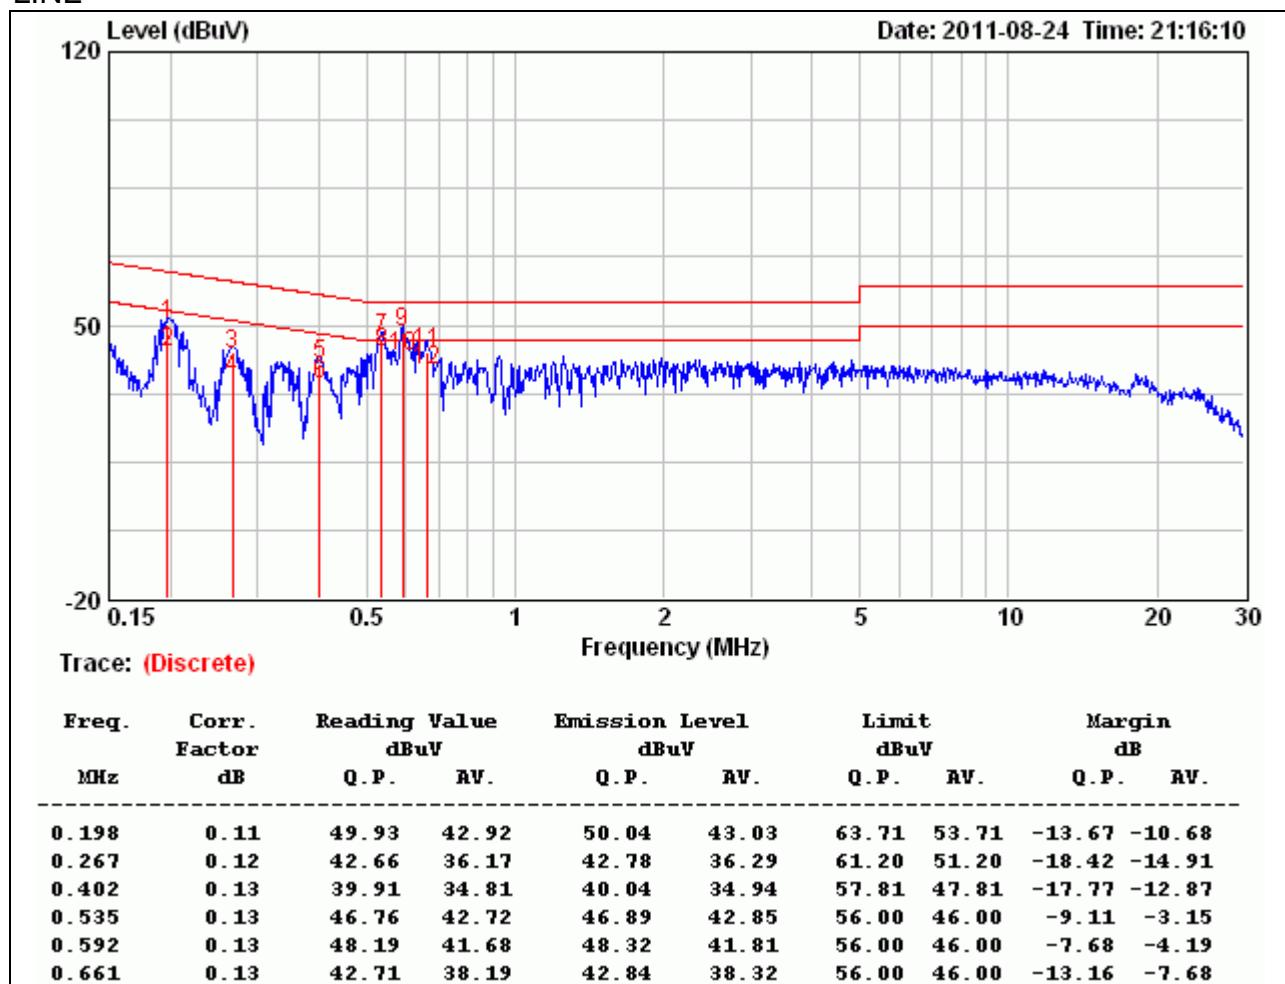


Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value



Product Name	300 Mbps N Wireless USB Adapter	Test By	Waternal Guan
Model	WUS622C-A	Test Date	2011/08/24
Test Mode	Normal Operating	Temp. & Humidity	23°C, 60%

NEUTRAL

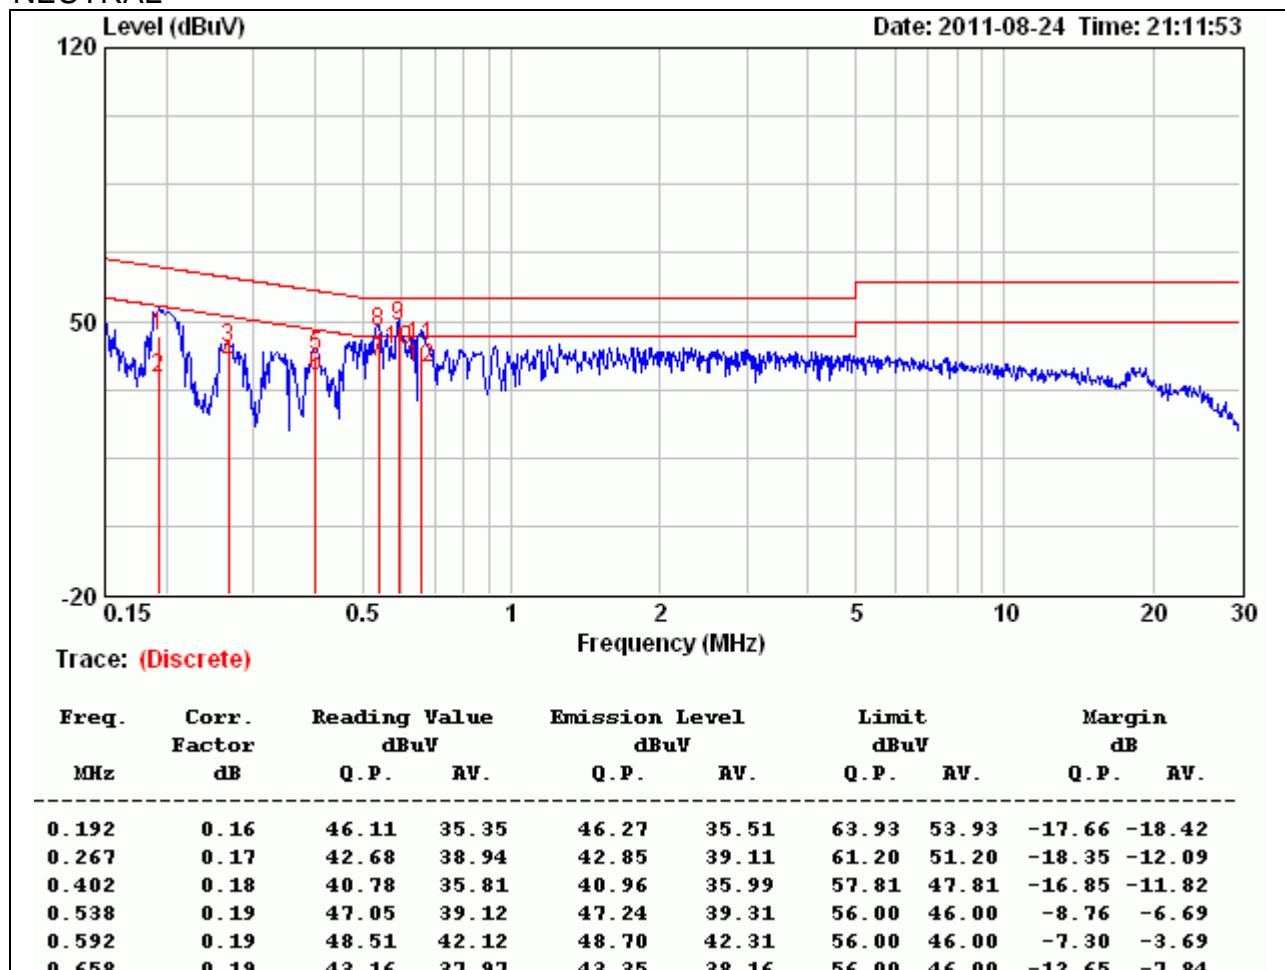

Remark:

1. Correction Factor = Insertion loss + Cable loss
2. Emission level = Reading Value + Correction factor
3. Margin value = Emission level - Limit value