




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	5/19/2008 10:32:51 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	24.2°C	Liquid Simulant:	850
Device Under Test:	ECG Recorder	Relative Permittivity:	54.47
Relative Humidity:	47.5%	Conductivity:	0.98
Phantom S/No:	Head04_37.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	20.00 mm
DUT Position:	Belt Clip 0mm	Max SAR Y-axis Location:	2.00 mm
Antenna Configuration:	Integral	Max E Field:	21.48 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.541 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.486 / .486 / .486	SAR Start:	0.137 W/kg
Type of Modulation:		SAR End:	0.134 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.99 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/19/08
Input Power Level:	2 Uplink Timeslots	Extrapolation:	poly4

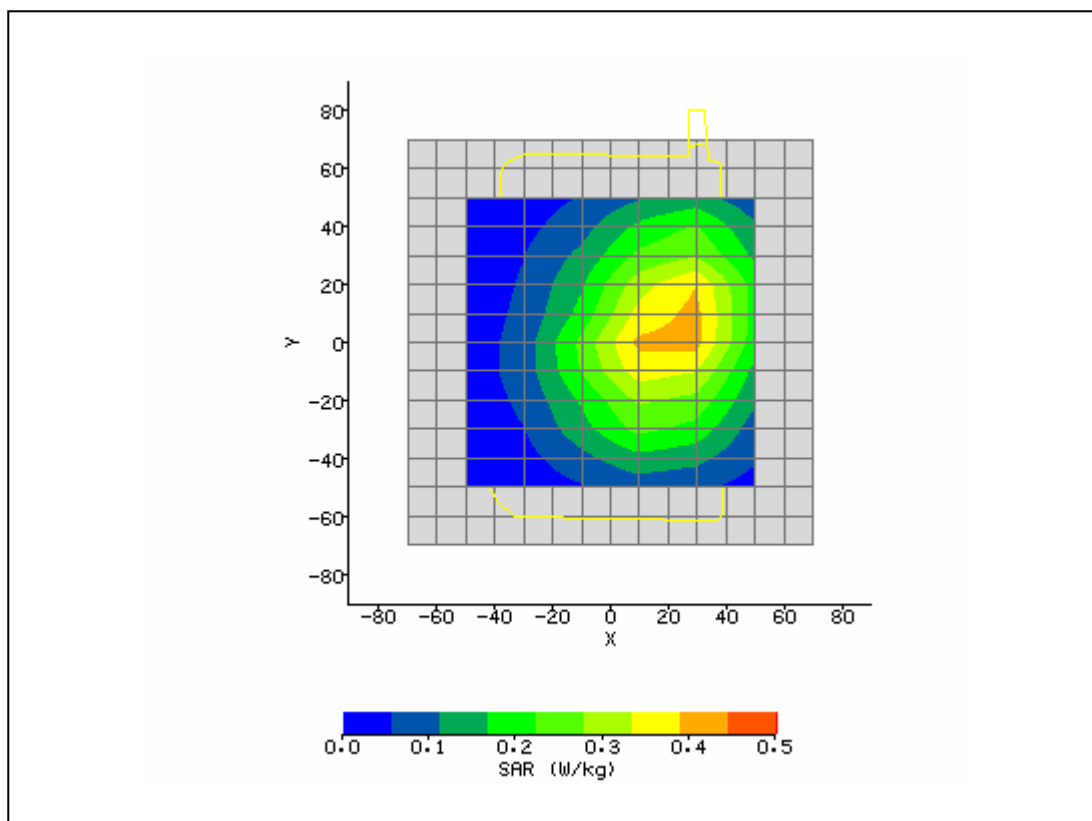

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	5/19/2008 10:58:19 AM	DUT Battery Model/No:	
Filename:	850_M_3d.txt	Probe Serial Number:	L0116
Ambient Temperature:	24.2°C	Liquid Simulant:	1900
Device Under Test:	ECG Recorder	Relative Permittivity:	52.91
Relative Humidity:	47.5%	Conductivity:	1.501
Phantom S/No:	Head04_37.csv	Liquid Temperature:	24.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	2.00 mm
DUT Position:	Belt Clip 0mm	Max SAR Y-axis Location:	10.00 mm
Antenna Configuration:	Integral	Max E Field:	13.10 V/m
Test Frequency:	1880MHz	SAR 1g:	0.301 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.610 / .610 / .610	SAR Start:	0.066 W/kg
Type of Modulation:		SAR End:	0.064 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.76 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/19/08
Input Power Level:	2 Uplink Timeslots	Extrapolation:	poly4

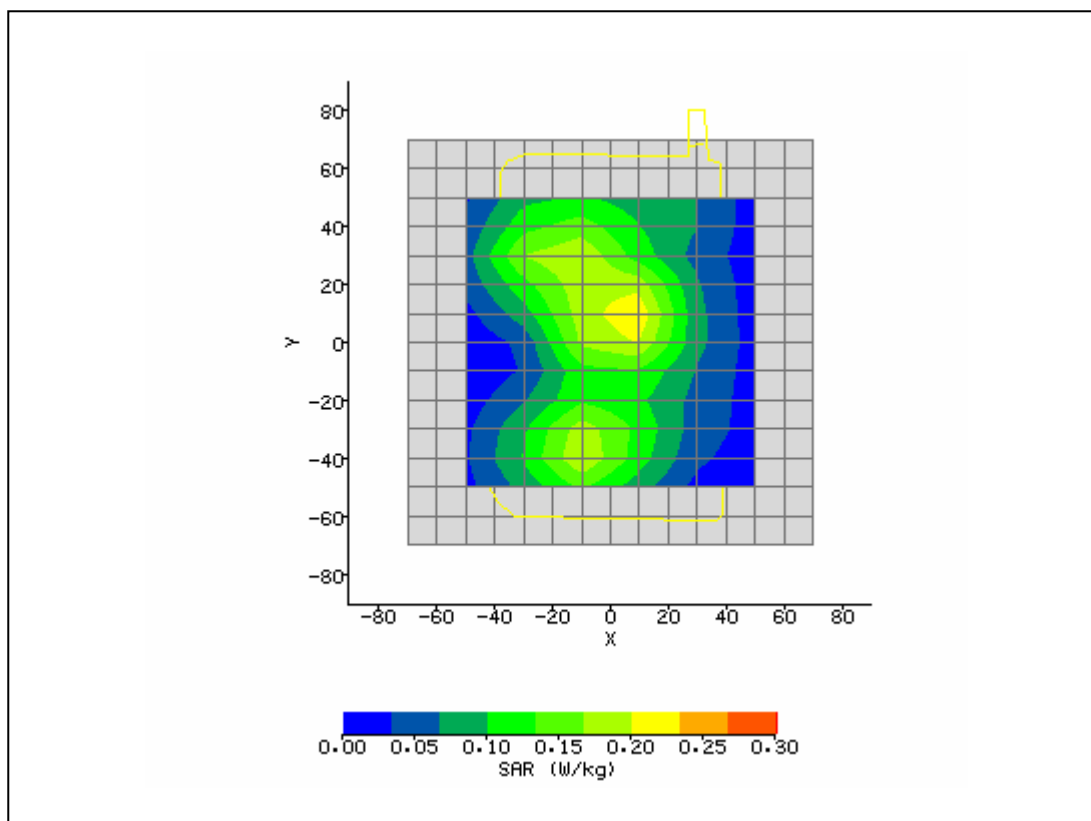

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	5/19/2008 8:27:28 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	40.85
Relative Humidity:	35.9%	Conductivity:	0.902
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	7.00 mm
Antenna Configuration:	Dipole	Max E Field:	88.33 V/m
Test Frequency:	835MHz	SAR 1g:	8.792 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	5.778 W/kg
Conversion Factors:	.457 / .457 / .457	SAR Start:	2.070 W/kg
Type of Modulation:		SAR End:	2.043 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.30 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/19/08
Input Power Level:	1W	Extrapolation:	poly4

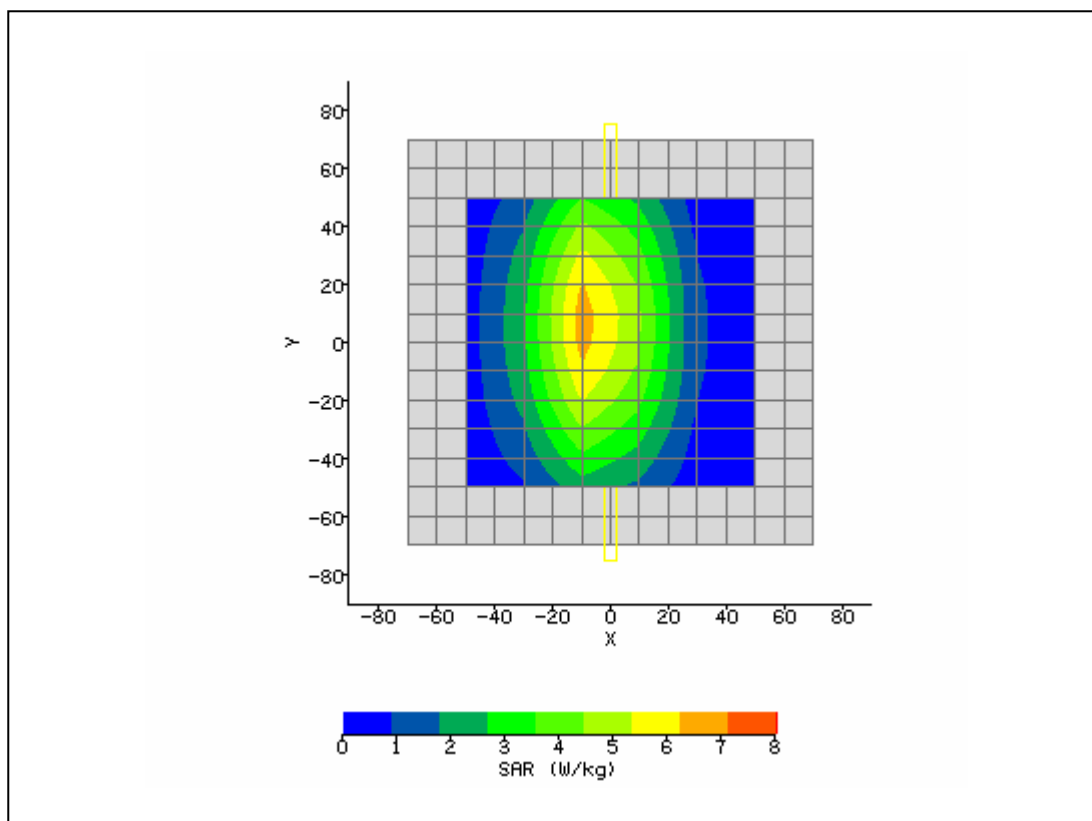

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	5/19/2008 9:02:40 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	23.3°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	39.78
Relative Humidity:	35.9%	Conductivity:	1.416
Phantom S/No:	Head04_37.csv	Liquid Temperature:	23.2°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	8mm	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Dipole	Max E Field:	144.87 V/m
Test Frequency:	1900MHz	SAR 1g:	40.322 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	21.324 W/kg
Conversion Factors:	.550 / .550 / .550	SAR Start:	5.123 W/kg
Type of Modulation:		SAR End:	5.141 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.34 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	5/19/08
Input Power Level:	1W	Extrapolation:	poly4

