




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/18/2009 4:35:19 PM	DUT Battery Model/No:	
Filename:	back_with case_850.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.2°C	Liquid Simulant:	850
Device Under Test:	Braemar	Relative Permittivity:	54.42
Relative Humidity:	47%	Conductivity:	0.981
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	22.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	-14.67 mm
Antenna Configuration:	Integral	Max E Field:	21.74 V/m
Test Frequency:	836.6MHz	SAR 1g:	0.522 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.395 / .395 / .395	SAR Start:	0.171 W/kg
Type of Modulation:		SAR End:	0.168 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.70 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

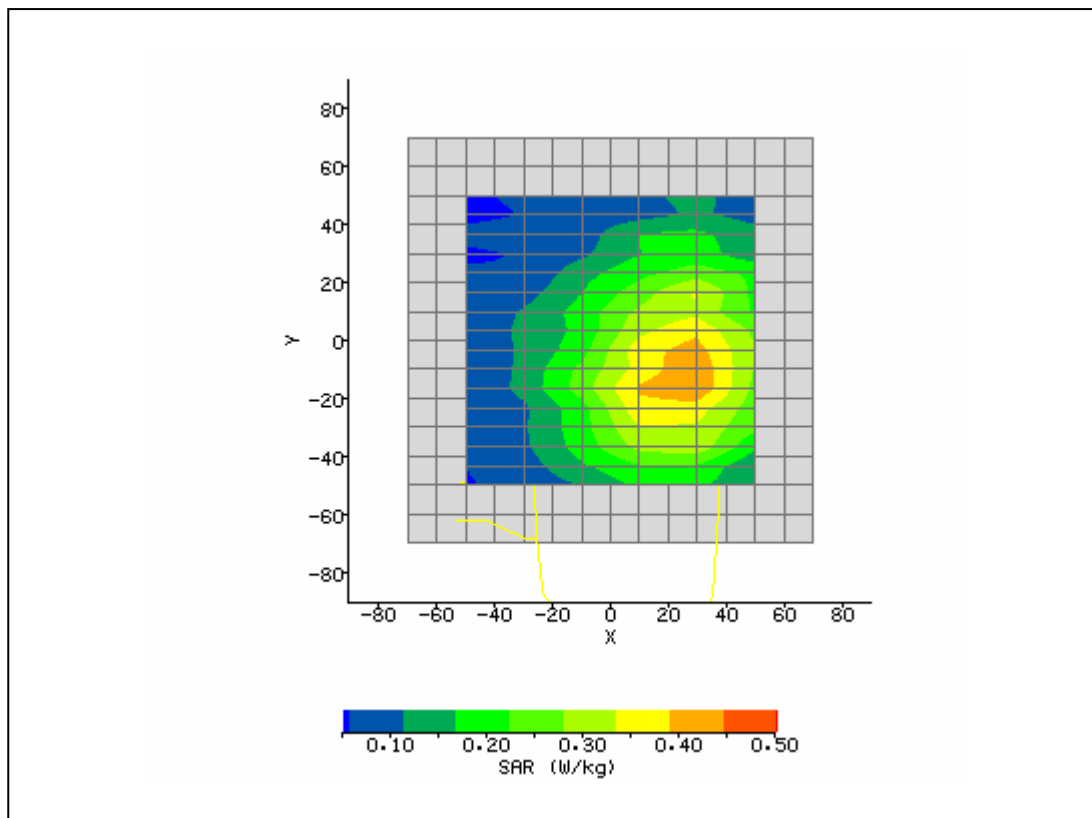


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/19/2009 9:41:28 AM	DUT Battery Model/No:	
Filename:	back_with case_1900.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.2°C	Liquid Simulant:	1900
Device Under Test:	Braemar	Relative Permittivity:	52.65
Relative Humidity:	47%	Conductivity:	1.518
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Integral	Max E Field:	13.81 V/m
Test Frequency:	1880MHz	SAR 1g:	0.328 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.476 / .476 / .476	SAR Start:	0.092 W/kg
Type of Modulation:		SAR End:	0.094 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.17 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	Two uplink timeslots	Extrapolation:	poly4

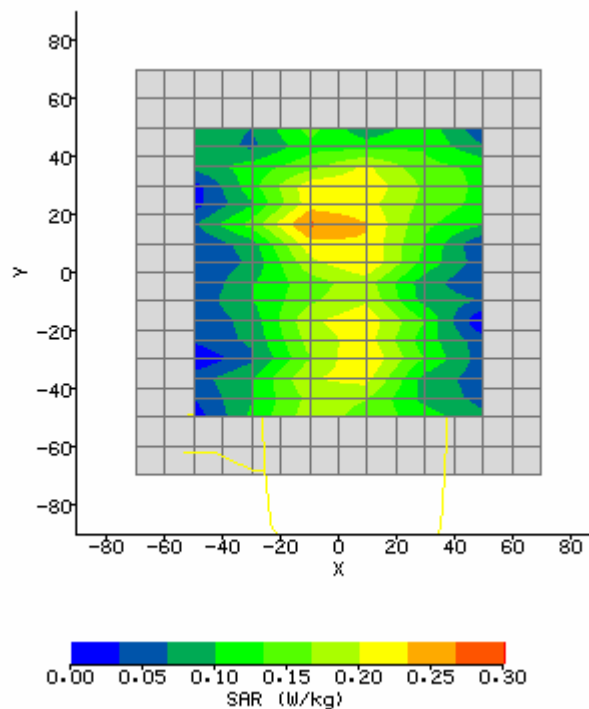


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/19/2009 11:17:37 AM	DUT Battery Model/No:	
Filename:	back_with case_bt.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.2°C	Liquid Simulant:	2450
Device Under Test:	Braemar	Relative Permittivity:	49.33
Relative Humidity:	47%	Conductivity:	1.958
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Back	Max SAR Y-axis Location:	-50.00 mm
Antenna Configuration:	Integral	Max E Field:	0.00 V/m
Test Frequency:	2441MHz	SAR 1g:	0.000 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.487 / .487 / .487	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	Set by software	Extrapolation:	poly4

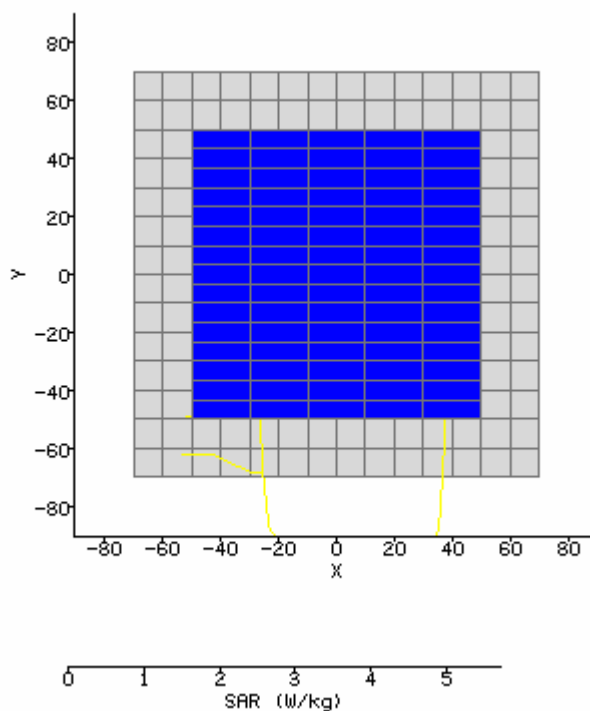

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/18/2009 2:55:15 PM	DUT Battery Model/No:	
Filename:	back_with case_1900.txt	Probe Serial Number:	L0116
Ambient Temperature:	22.2°C	Liquid Simulant:	850
Device Under Test:	System	Relative Permittivity:	54.42
Relative Humidity:	47%	Conductivity:	0.981
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	2.40 mm
DUT Position:	15mm	Max SAR Y-axis Location:	0.40 mm
Antenna Configuration:	Dipole	Max E Field:	90.93 V/m
Test Frequency:	835MHz	SAR 1g:	9.921 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.395 / .395 / .395	SAR Start:	2.419 W/kg
Type of Modulation:		SAR End:	2.428 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.39 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	1W	Extrapolation:	poly4

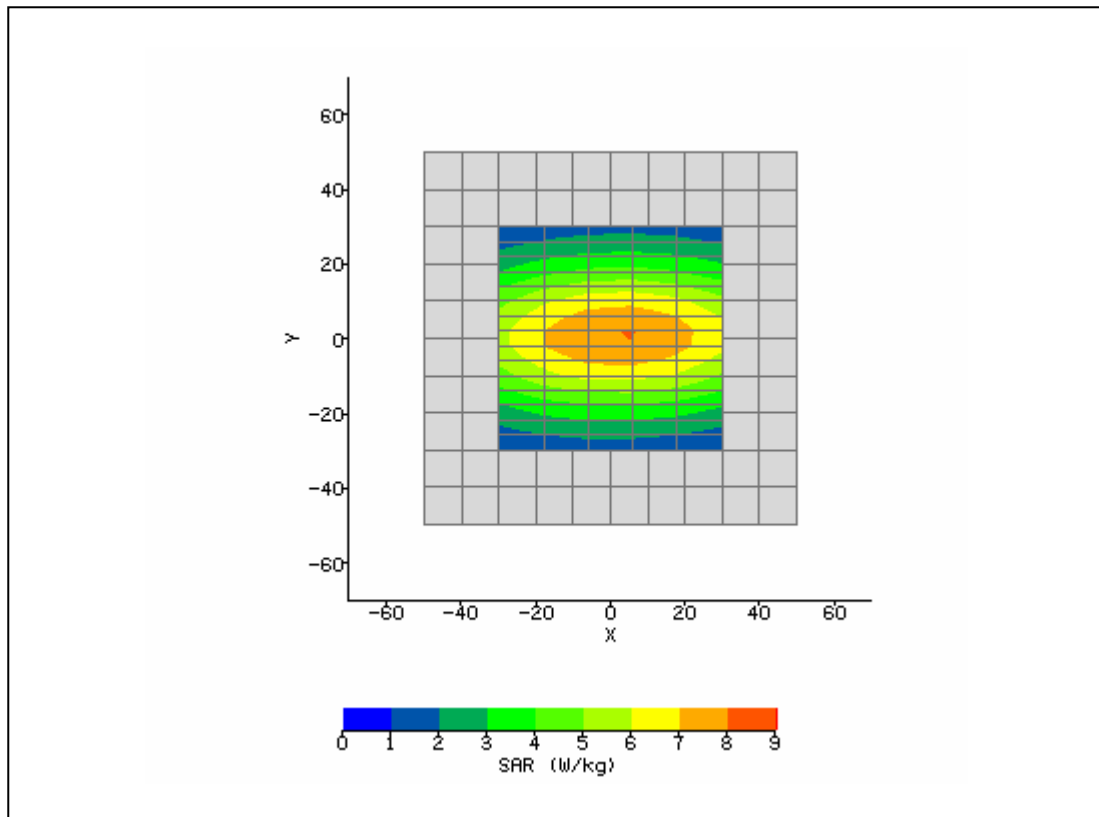

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/19/2009 8:31:35 AM	DUT Battery Model/No:	
Filename:	back_with case_850.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.2°C	Liquid Simulant:	1900
Device Under Test:	System	Relative Permittivity:	52.65
Relative Humidity:	47%	Conductivity:	1.518
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	0.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	1.20 mm
Antenna Configuration:	Dipole	Max E Field:	151.44 V/m
Test Frequency:	1900MHz	SAR 1g:	43.303 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.476 / .476 / .476	SAR Start:	6.213 W/kg
Type of Modulation:		SAR End:	6.217 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.06 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	1W	Extrapolation:	poly4

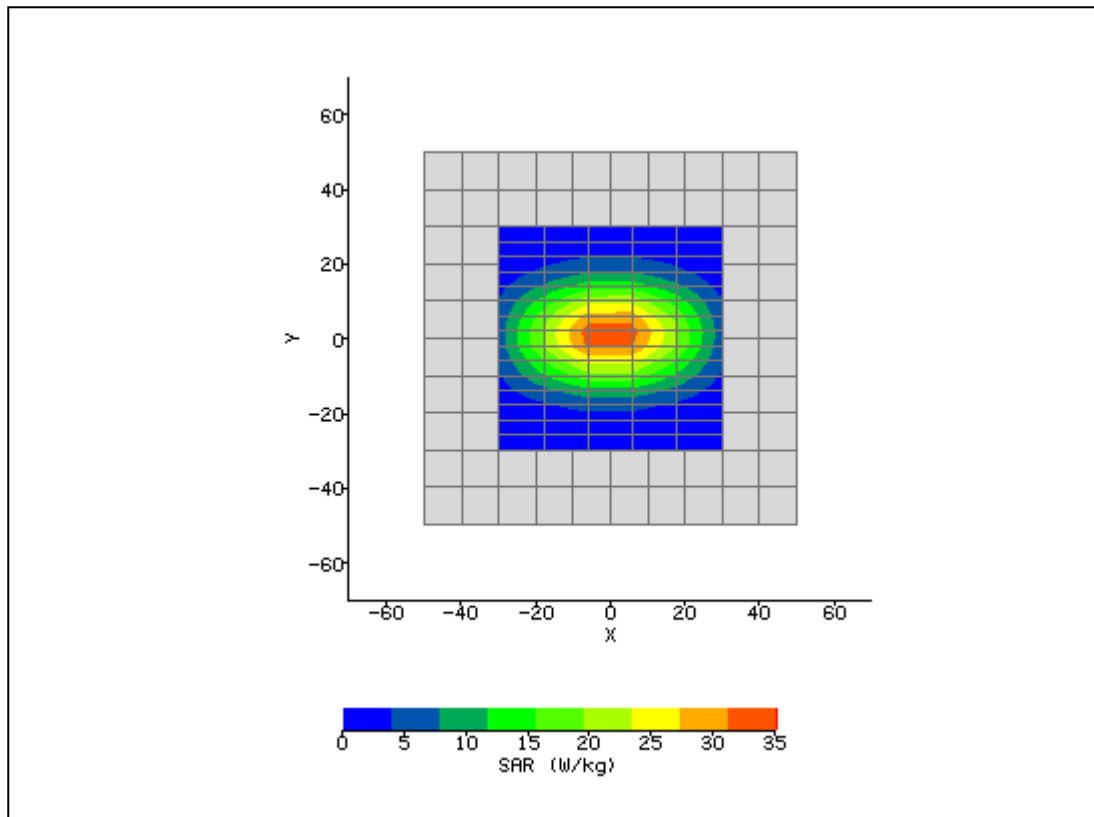

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	3/19/2009 9:41:28 AM	DUT Battery Model/No:	
Filename:	back_with case_1900.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.2°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	49.25
Relative Humidity:	47%	Conductivity:	1.984
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	180°	Max SAR X-axis Location:	2.40 mm
DUT Position:	10mm	Max SAR Y-axis Location:	3.20 mm
Antenna Configuration:	Dipole	Max E Field:	139.26 V/m
Test Frequency:	2450MHz	SAR 1g:	49.605 W/kg
Air Factors:	2573 / 2262 / 2365	SAR 10g:	
Conversion Factors:	.487 / .487 / .487	SAR Start:	4.407 W/kg
Type of Modulation:		SAR End:	4.437 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.68 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	03/06/09
Input Power Level:	1W	Extrapolation:	poly4

