

RF Test Report

Applicant : unitech electronics co., ltd.
Product Type : Rugged Handheld Computer
Trade Name : unitech
Model Number : EA630
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : May 11, 2020
Test Period : May 19 ~ May 26, 2020
Issued Date : Jun. 16, 2020

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Revisions	Revised By
00	Jun. 16, 2020	Initial Issue	Nina Lin

Verification of Compliance

Issued Date: Jun. 16, 2020

Applicant : unitech electronics co., ltd.
Product Type : Rugged Handheld Computer
Trade Name : unitech
Model Number : EA630
FCC ID : HLEEA630BTNFL
EUT Rated Voltage : DC 5 V, 2.5 A / DC 9 V, 2 A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu
(Manager) (Fly Lu)

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	6
2	EUT Description.....	7
3	Test Methodology	8
3.1.	Mode of Operation.....	8
3.2.	EUT Test Step.....	8
3.3.	Configuration of Test System Details	9
3.4.	Test Instruments	10
3.5.	Test Site Environment.....	11
4	Measurement Procedure	12
4.1.	Maximum Conducted Output Power Measurement	12
4.2.	AC Power Line Conducted Emission Measurement	13
4.3.	Radiated Emission Measurement.....	15
4.4.	20 dB RF Bandwidth Measurement	18
4.5.	Carrier Frequency Separation Measurement.....	19
4.6.	Number of Hopping Measurement.....	20
4.7.	Time of Occupancy (Dwell Time) Measurement	21
4.8.	Out of Band Conducted Emissions Measurement	22
4.9.	Antenna Measurement	22
5	Test Results	23
	Annex A. Conducted Emission.....	23
	Annex B. Conducted Test Results.....	25
	Annex C. Radiated Emission Measurement	45

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	-----
15.203	Antenna Requirement	PASS	-----
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20 dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
DA 00-705	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.68
Radiated Emission	9 kHz ~ 30 MHz	2.14
	30 MHz ~ 1000 MHz	4.99
	1000 MHz ~ 18000 MHz	4.99
	18000 MHz ~ 26500 MHz	4.23
	26500 MHz ~ 40000 MHz	4.39
Conducted Output Power		0.92 dB
RF Bandwidth		4.79 %
Power Spectral Density		0.92 dB

Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

2 EUT Description

Applicant	unitech electronics co., ltd. 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist, New Taipei City, Taiwan	
Manufacturer	unitech electronics co., ltd. 5F., No.136, Lane 235, Pao-Chiao Rd., Hsin-Tien Dist, New Taipei City, Taiwan	
Product	Rugged Handheld Computer	
Trade Name	unitech	
Model Number	EA630	
IMEI No.	IMEI1: 355239110051120, IMEI2: 355239115204005	
FCC ID	HLEEA630BTNFL	
Frequency Range	2402 ~ 2480 MHz	
Modulation Type	GFSK for 1 Mbps	
	$\pi/4$ -DQPSK for 2 Mbps	
	8DPSK for 3 Mbps	
Operate Temp. Range	-10 ~ +50 °C	
Antenna information	Type	Max. Gain (dBi)
	PIFA Antenna	0.6
Max. RF Output Power	GFSK for 1 Mbps	0.01435 W
	$\pi/4$ -DQPSK for 2 Mbps	0.01297 W
	8DPSK for 3 Mbps	0.01303 W

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Pre-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 3: $\pi/4$ -DQPSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Final-Test Mode
Mode 1: Transmit mode
Mode 2: GFSK Continuous TX mode
Mode 4: 8DPSK Continuous TX mode

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 4.5. Investigation has been done on all the possible configurations for searching the worst cases.


3.2. EUT Test Step

1	Setup the EUT shown on "Configuration of Test System Details."
2	Turn on the power of all equipment.
3	Turn on TX function
4	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details

Conducted Emission

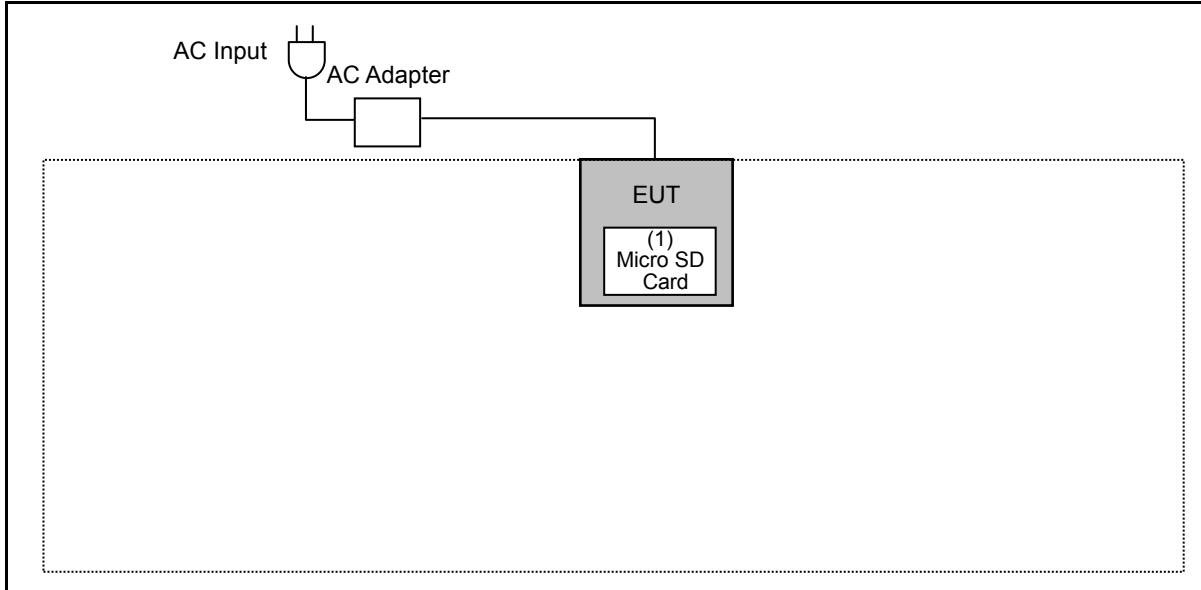

Radiated Emissions

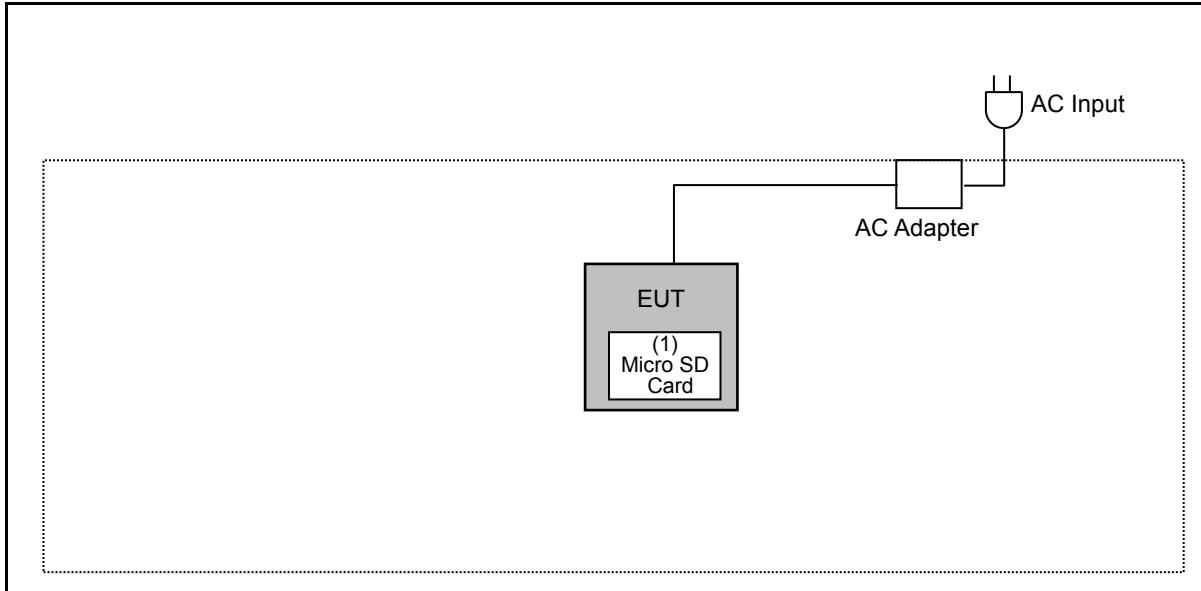

Devices Description					
Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Micro SD Card	Transcend	9153BA 8G 07DS1	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: May 26, 2020

Testing Engineer: Louis Shen

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/22/2020	1 year
LISN	R&S	ENV216	101040	03/23/2020	1 year
LISN	R&S	ENV216	101041	04/06/2020	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/22/2020	1 year

For Radiated Emissions

Test Period: May 19, 2020

Testing Engineer: Marc Yeh

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/13/2020	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/18/2019	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/15/2020	1 year
Pre Amplifier (1~26.5 GHz)	EMCI	EMC012645SE	980289	01/15/2020	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/23/2019	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/22/2019	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/27/2020	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2020	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/29/2019	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2020	1 year
Bluetooth Tester	R&S	CBT	100350	03/27/2019	2 years

Note: N.C.R. = No Calibration Request.

For Conducted

Test Period: May 19 ~ May 20, 2020

Testing Engineer: Peter Shui

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Power Sensor	Agilent	N1921A	MY45241957	12/11/2019	1 year
Power Meter	Agilent	N1911A	MY45101619	12/11/2019	1 year
Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	09/18/2019	1 year
Bluetooth Tester	R&S	CBT	100350	03/27/2019	2 years

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75
Barometric pressure (mbar)	860-1060	990-1005


4 Measurement Procedure

4.1. Maximum Conducted Output Power Measurement

■ Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 0.125 watt.

■ Test Setup

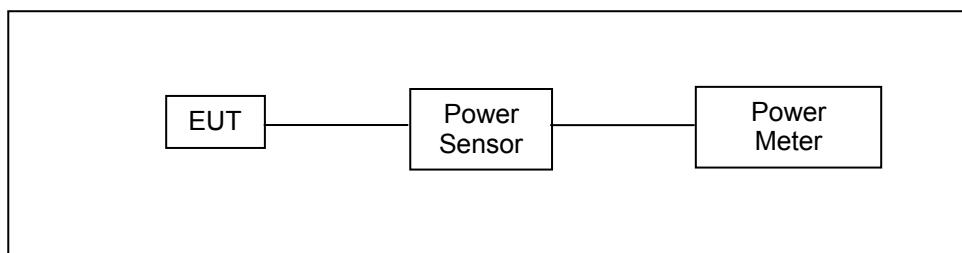

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode.


For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to $(GAIN - 6)/3$ dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.2. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

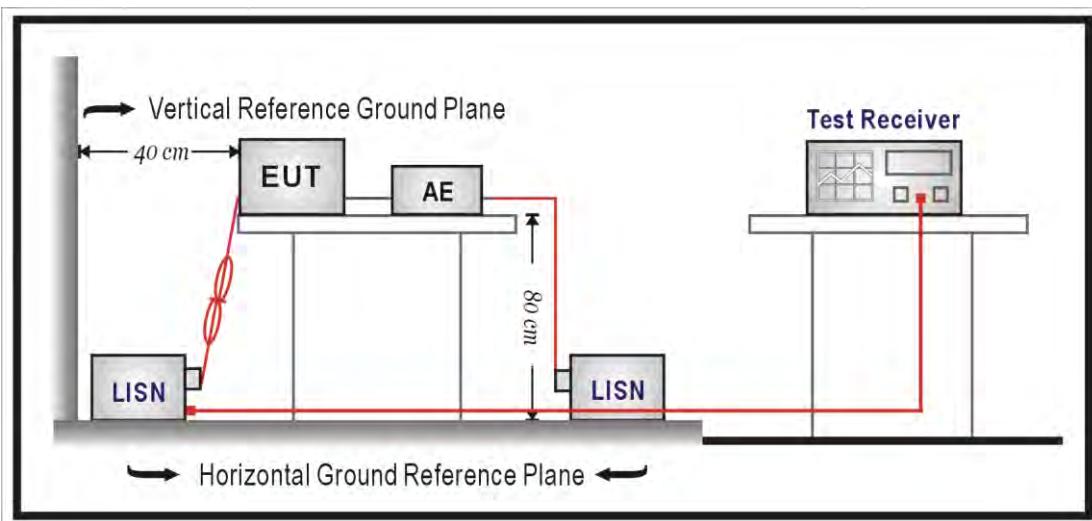

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50Ω // $50 \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50Ω // $50 \mu\text{H}$ coupling impedance with 50Ω termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50Ω ports of the LISN shall be resistively terminated into 50Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.3. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

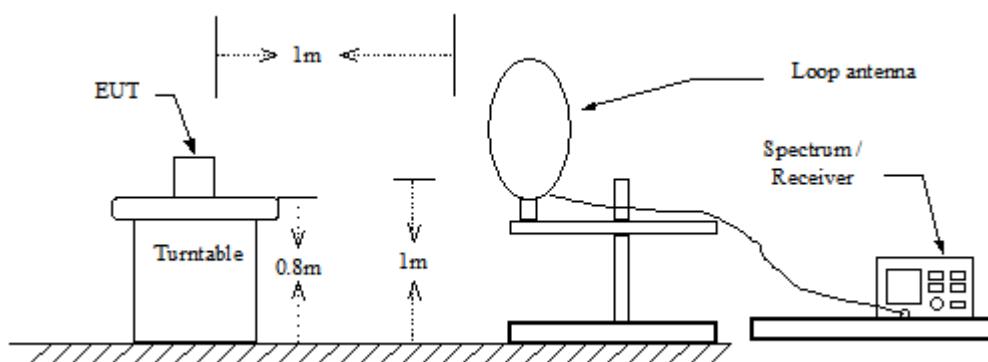

Below 1 GHz

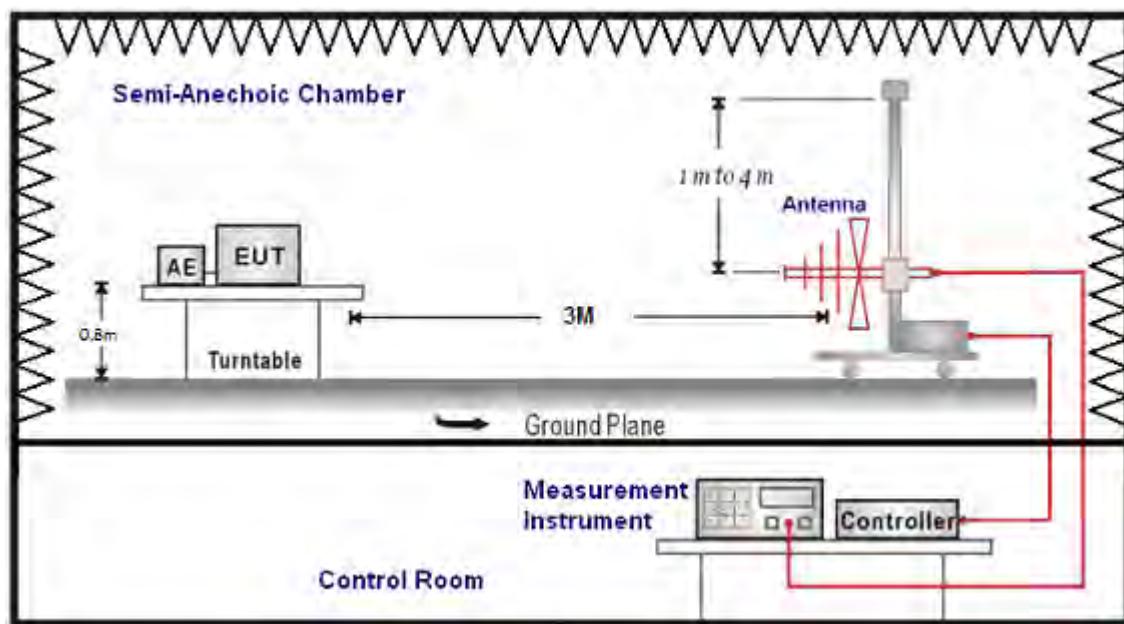

Above 1 GHz

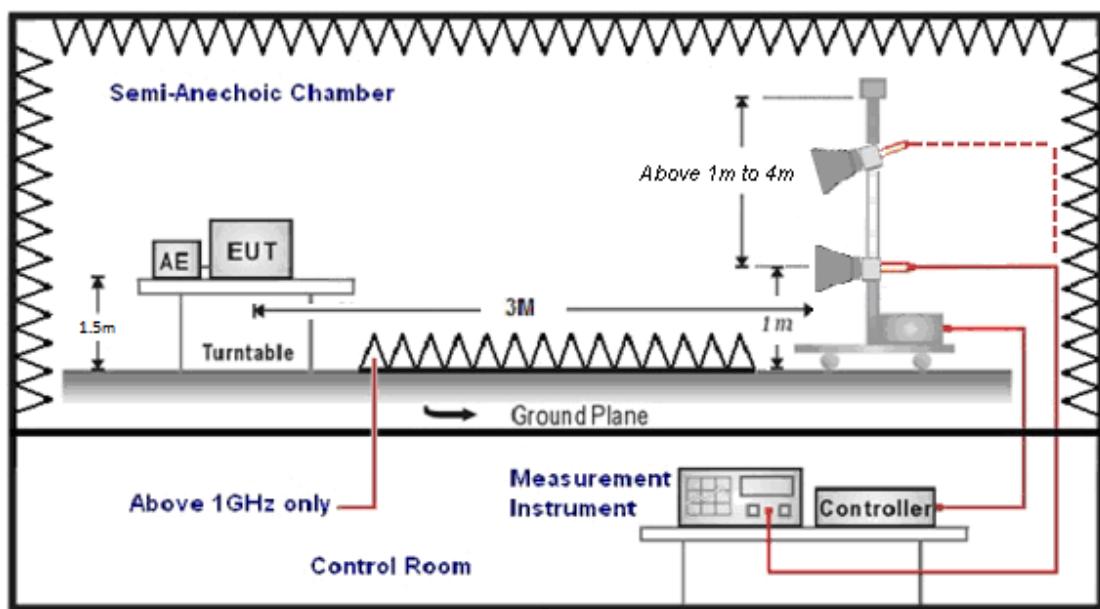

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >98 % / 1/T for average measurements when Duty cycle <98 %. A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m)} = \text{FI (dBuV)} + \text{AF (dBuV)} + \text{CL (dBuV)} - \text{Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m)} = \text{Amplitude (dBuV)} - \text{Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10


Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

4.4. 20 dB RF Bandwidth Measurement

- **Limit**

N/A

- **Test Setup**

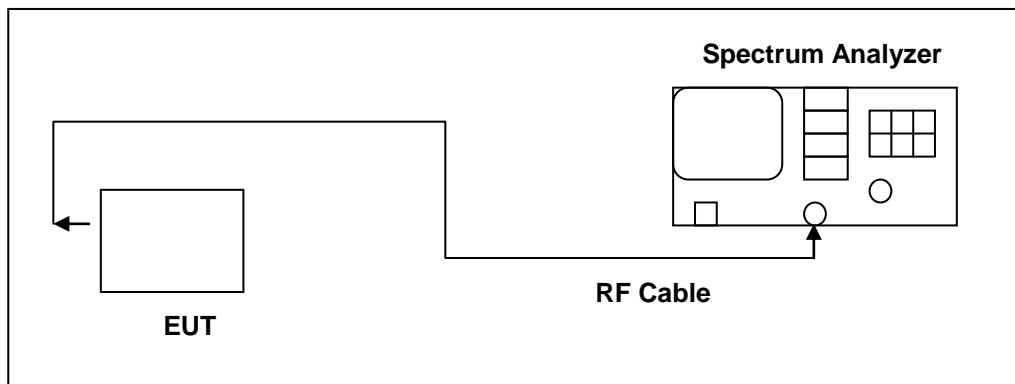

- **Test Procedure**

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20 dB bandwidth, centered on a hopping frequency
2. RBW \geq 1 % of the 20 dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20 dB bandwidth of the emission.

4.5. Carrier Frequency Separation Measurement

■ Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.

■ Test Setup

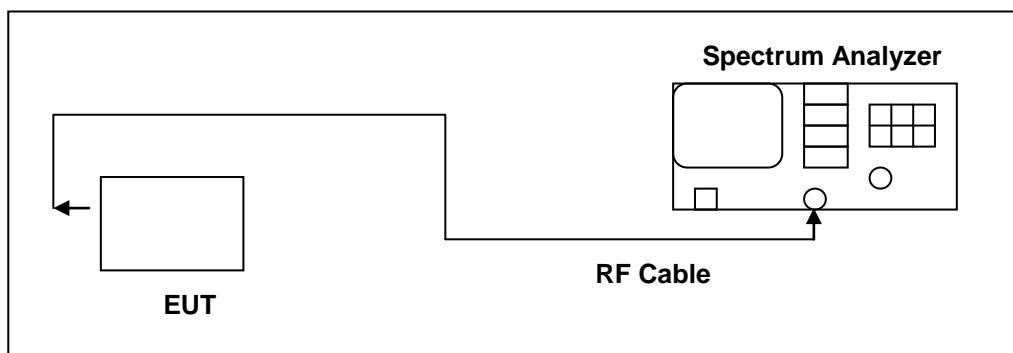

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

4.6. Number of Hopping Measurement

■ Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

■ Test Setup

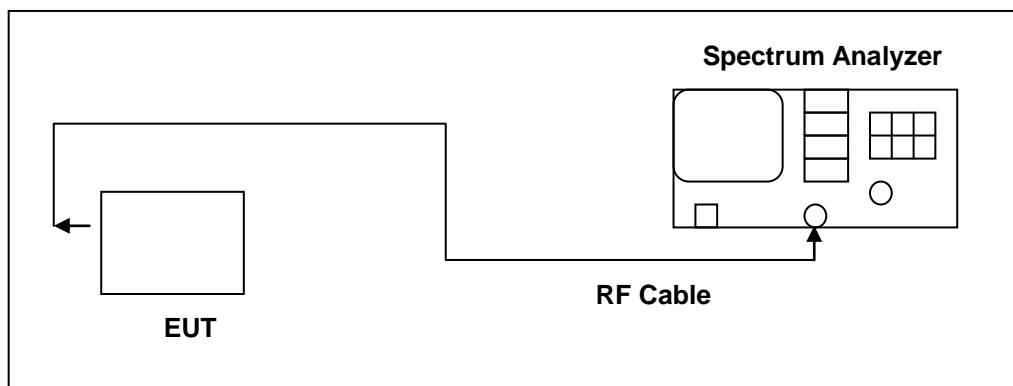

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW \geq 1 % of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

4.7. Time of Occupancy (Dwell Time) Measurement

■ Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

■ Test Setup

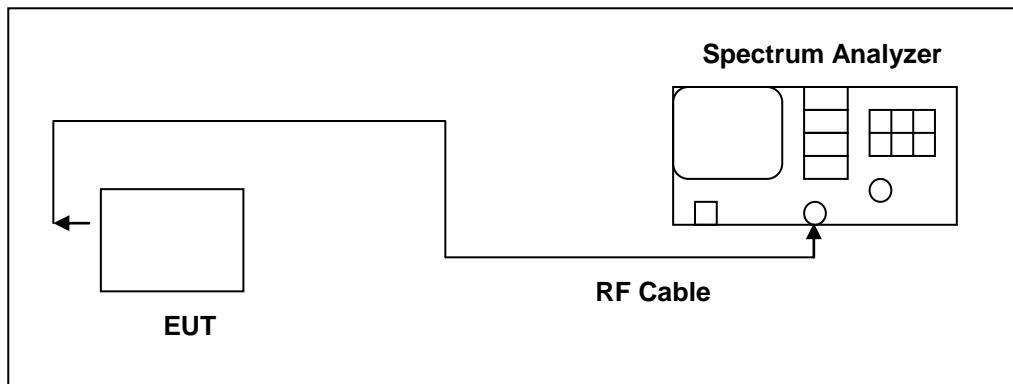

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the spectrum through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold


The marker-delta function was used to determine the dwell time.

4.8. Out of Band Conducted Emissions Measurement

■ Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

■ Test Setup

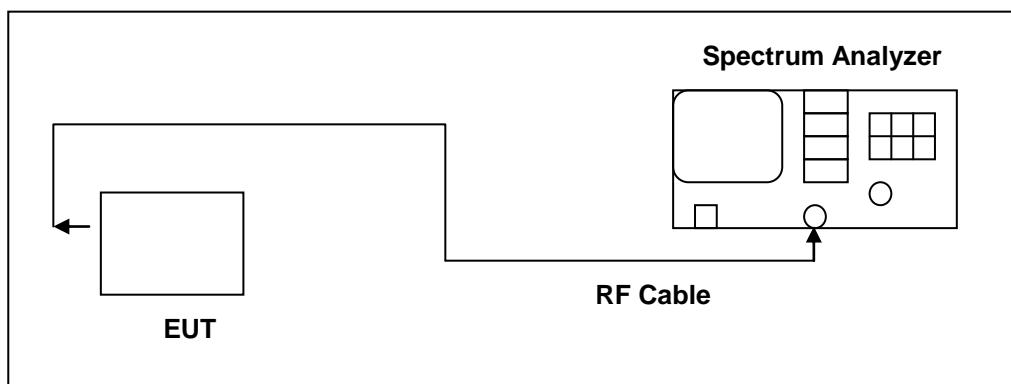

■ Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

4.9. Antenna Measurement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


■ Antenna Connector Construction

See section 2 – antenna information.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

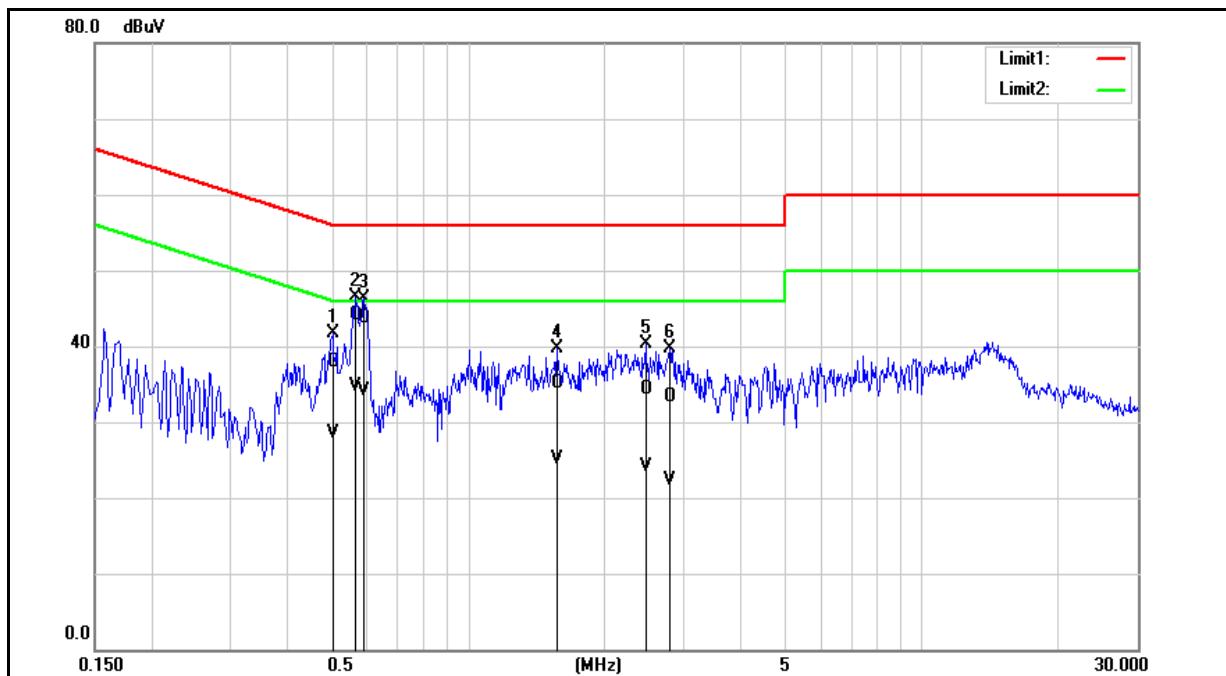


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.5020	28.18	18.87	9.71	37.89	28.58	56.00	46.00	-18.11	-17.42	Pass
2	0.5660	34.36	25.08	9.71	44.07	34.79	56.00	46.00	-11.93	-11.21	Pass
3	0.5900	34.03	24.31	9.71	43.74	34.02	56.00	46.00	-12.26	-11.98	Pass
4	1.5740	25.30	15.46	9.74	35.04	25.20	56.00	46.00	-20.96	-20.80	Pass
5	2.4660	24.46	14.24	9.77	34.23	24.01	56.00	46.00	-21.77	-21.99	Pass
6	2.7940	23.45	12.59	9.77	33.22	22.36	56.00	46.00	-22.78	-23.64	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:			

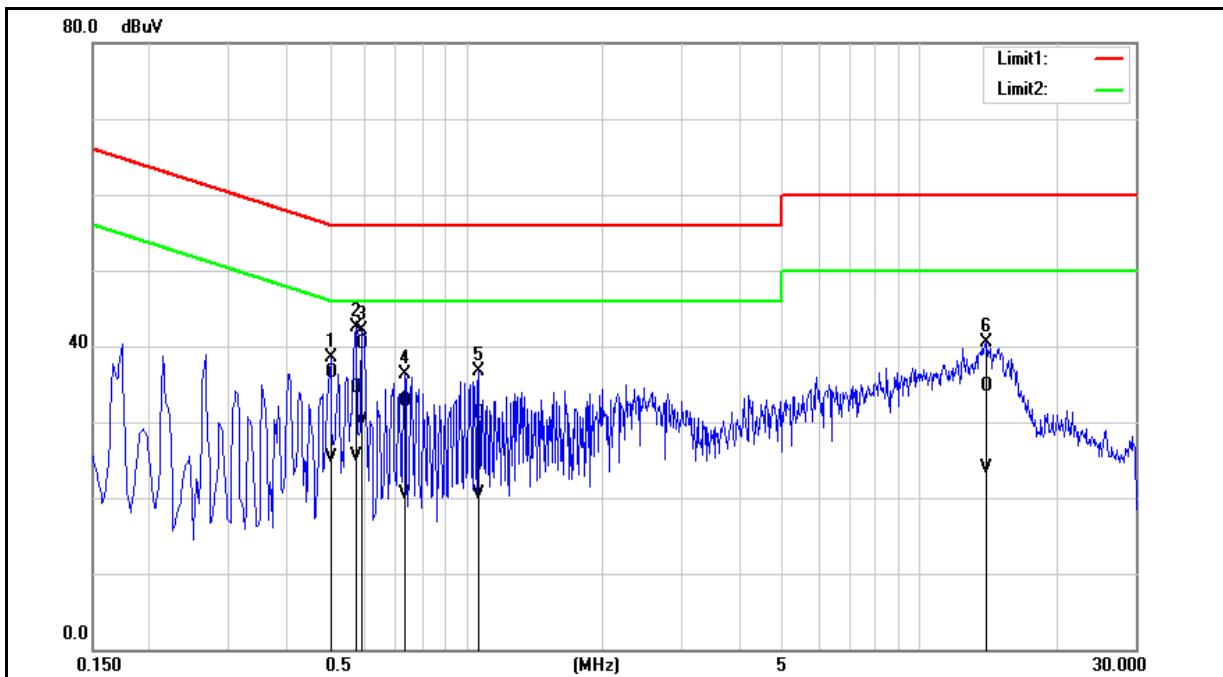

No.	Frequency (MHz)	QP reading (dBuV)	Avg reading (dBuV)	Correction factor (dB)	QP result (dBuV)	Avg result (dBuV)	QP limit (dBuV)	Avg limit (dBuV)	QP margin (dB)	Avg margin (dB)	Remark
1	0.5020	26.88	15.64	9.70	36.58	25.34	56.00	46.00	-19.42	-20.66	Pass
2	0.5740	24.86	15.79	9.70	34.56	25.49	56.00	46.00	-21.44	-20.51	Pass
3	0.5900	30.63	20.37	9.70	40.33	30.07	56.00	46.00	-15.67	-15.93	Pass
4	0.7340	22.96	10.85	9.69	32.65	20.54	56.00	46.00	-23.35	-25.46	Pass
5	1.0660	21.33	10.74	9.70	31.03	20.44	56.00	46.00	-24.97	-25.56	Pass
6	14.0660	24.77	13.85	9.97	34.74	23.82	60.00	50.00	-25.26	-26.18	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Conducted Test Results

Maximum Conducted Output Power Measurement

Test Mode	Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
			(dBm)	(W)	(dBm)	(W)	
Mode 2	2402	DH1	11.33	0.01358	11.47	0.01403	≤ 0.125
		DH3	11.36	0.01368	11.50	0.01413	≤ 0.125
		DH5	11.41	0.01384	11.57	0.01435	≤ 0.125
	2441	DH1	10.76	0.01191	10.94	0.01242	≤ 0.125
		DH3	10.78	0.01197	10.97	0.01250	≤ 0.125
		DH5	10.82	0.01208	11.01	0.01262	≤ 0.125
	2480	DH1	11.01	0.01262	11.17	0.01309	≤ 0.125
		DH3	11.05	0.01274	11.20	0.01318	≤ 0.125
		DH5	11.10	0.01288	11.24	0.01330	≤ 0.125
Mode 3	2402	2DH1	9.28	0.00847	10.93	0.01239	≤ 0.125
		2DH3	9.32	0.00855	10.97	0.01250	≤ 0.125
		2DH5	9.64	0.00920	11.13	0.01297	≤ 0.125
	2441	2DH1	8.34	0.00682	10.67	0.01167	≤ 0.125
		2DH3	8.37	0.00687	10.73	0.01183	≤ 0.125
		2DH5	8.68	0.00738	10.77	0.01194	≤ 0.125
	2480	2DH1	8.99	0.00793	10.91	0.01233	≤ 0.125
		2DH3	9.04	0.00802	10.95	0.01245	≤ 0.125
		2DH5	9.35	0.00861	11.01	0.01262	≤ 0.125
Mode 4	2402	3DH1	9.30	0.00851	10.96	0.01247	≤ 0.125
		3DH3	9.34	0.00859	10.99	0.01256	≤ 0.125
		3DH5	9.65	0.00923	11.15	0.01303	≤ 0.125
	2441	3DH1	8.37	0.00687	10.68	0.01169	≤ 0.125
		3DH3	8.39	0.00690	10.75	0.01189	≤ 0.125
		3DH5	8.69	0.00740	10.79	0.01199	≤ 0.125
	2480	3DH1	9.02	0.00798	10.94	0.01242	≤ 0.125
		3DH3	9.06	0.00805	10.97	0.01250	≤ 0.125
		3DH5	9.37	0.00865	11.04	0.01271	≤ 0.125


Note: The relevant measured result has the offset with cable loss already.

20 dB RF Bandwidth Measurement



Test Mode	Frequency (MHz)	Measurement Results (MHz)
Mode 2	2402	0.929
	2441	0.949
	2480	0.952
Mode 4	2402	1.289
	2441	1.315
	2480	1.308

■ Test Graphs

Mode 2: BR, GFSK Continuous TX Mode

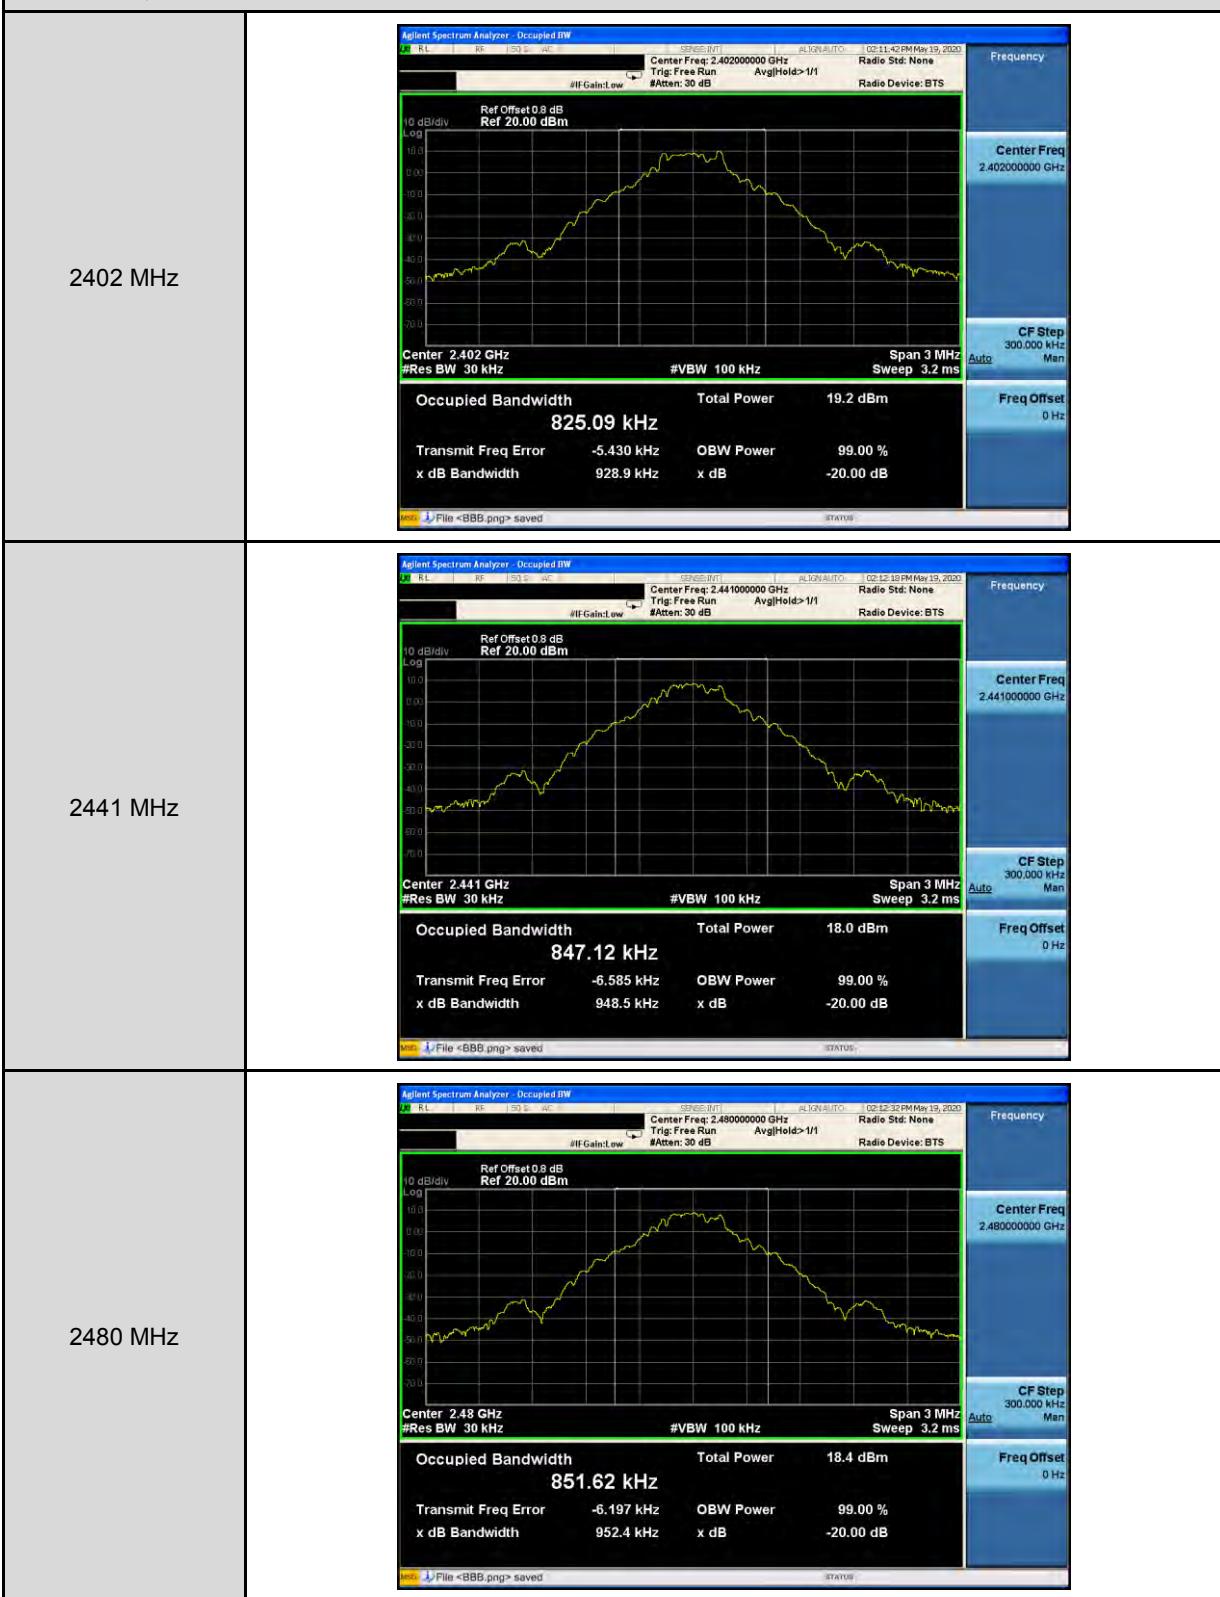

Mode 4: EDR,8DPSK Continuous TX Mode

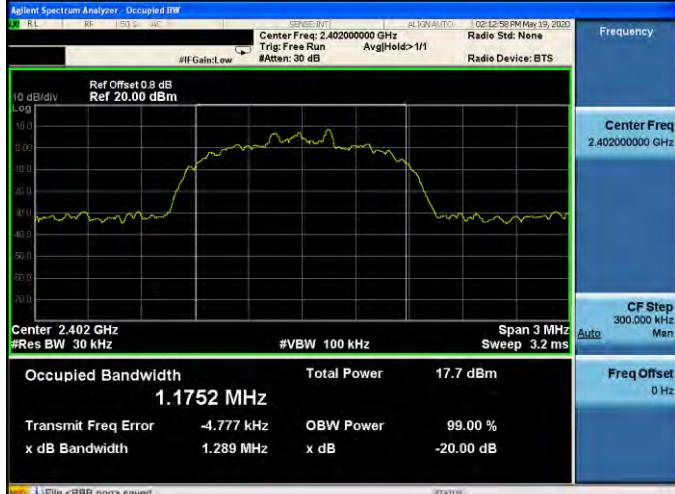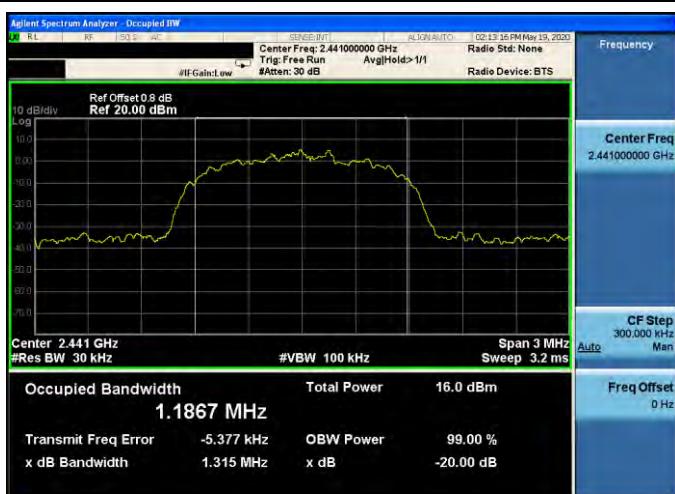
2402 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Center Freq: 2.402000000 GHz Trig: Free Run Avg/Hold>1/1 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.402000000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.1752 MHz</p> <p>Total Power 17.7 dBm</p> <p>Transmit Freq Error -4.777 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.289 MHz</p> <p>x dB -20.00 dB</p> <p>File <BBB.png> saved</p>
2441 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Center Freq: 2.441000000 GHz Trig: Free Run Avg/Hold>1/1 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.441000000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.1867 MHz</p> <p>Total Power 16.0 dBm</p> <p>Transmit Freq Error -5.377 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.315 MHz</p> <p>x dB -20.00 dB</p> <p>File <BBB.png> saved</p>
2480 MHz	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>Center Freq: 2.480000000 GHz Trig: Free Run Avg/Hold>1/1 Radio Std: None Radio Device: BTS</p> <p>Frequency</p> <p>Center Freq 2.480000000 GHz</p> <p>CF Step 300.000 kHz Man</p> <p>Freq Offset 0 Hz</p> <p>Occupied Bandwidth 1.1916 MHz</p> <p>Total Power 16.8 dBm</p> <p>Transmit Freq Error -7.869 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.308 MHz</p> <p>x dB -20.00 dB</p> <p>File <BBB.png> saved</p>

Carrier Frequency Separation Measurement


Test Mode	Frequency (MHz)	Measurement Results (MHz)	Limit (MHz)
Mode 2	2402	1.000	≥ 0.619
	2441	1.000	≥ 0.632
	2480	1.000	≥ 0.635
Mode 4	2402	1.000	≥ 0.859
	2441	1.000	≥ 0.877
	2480	1.000	≥ 0.872

■ Test Graphs

Mode 2: BR, GFSK Continuous TX Mode

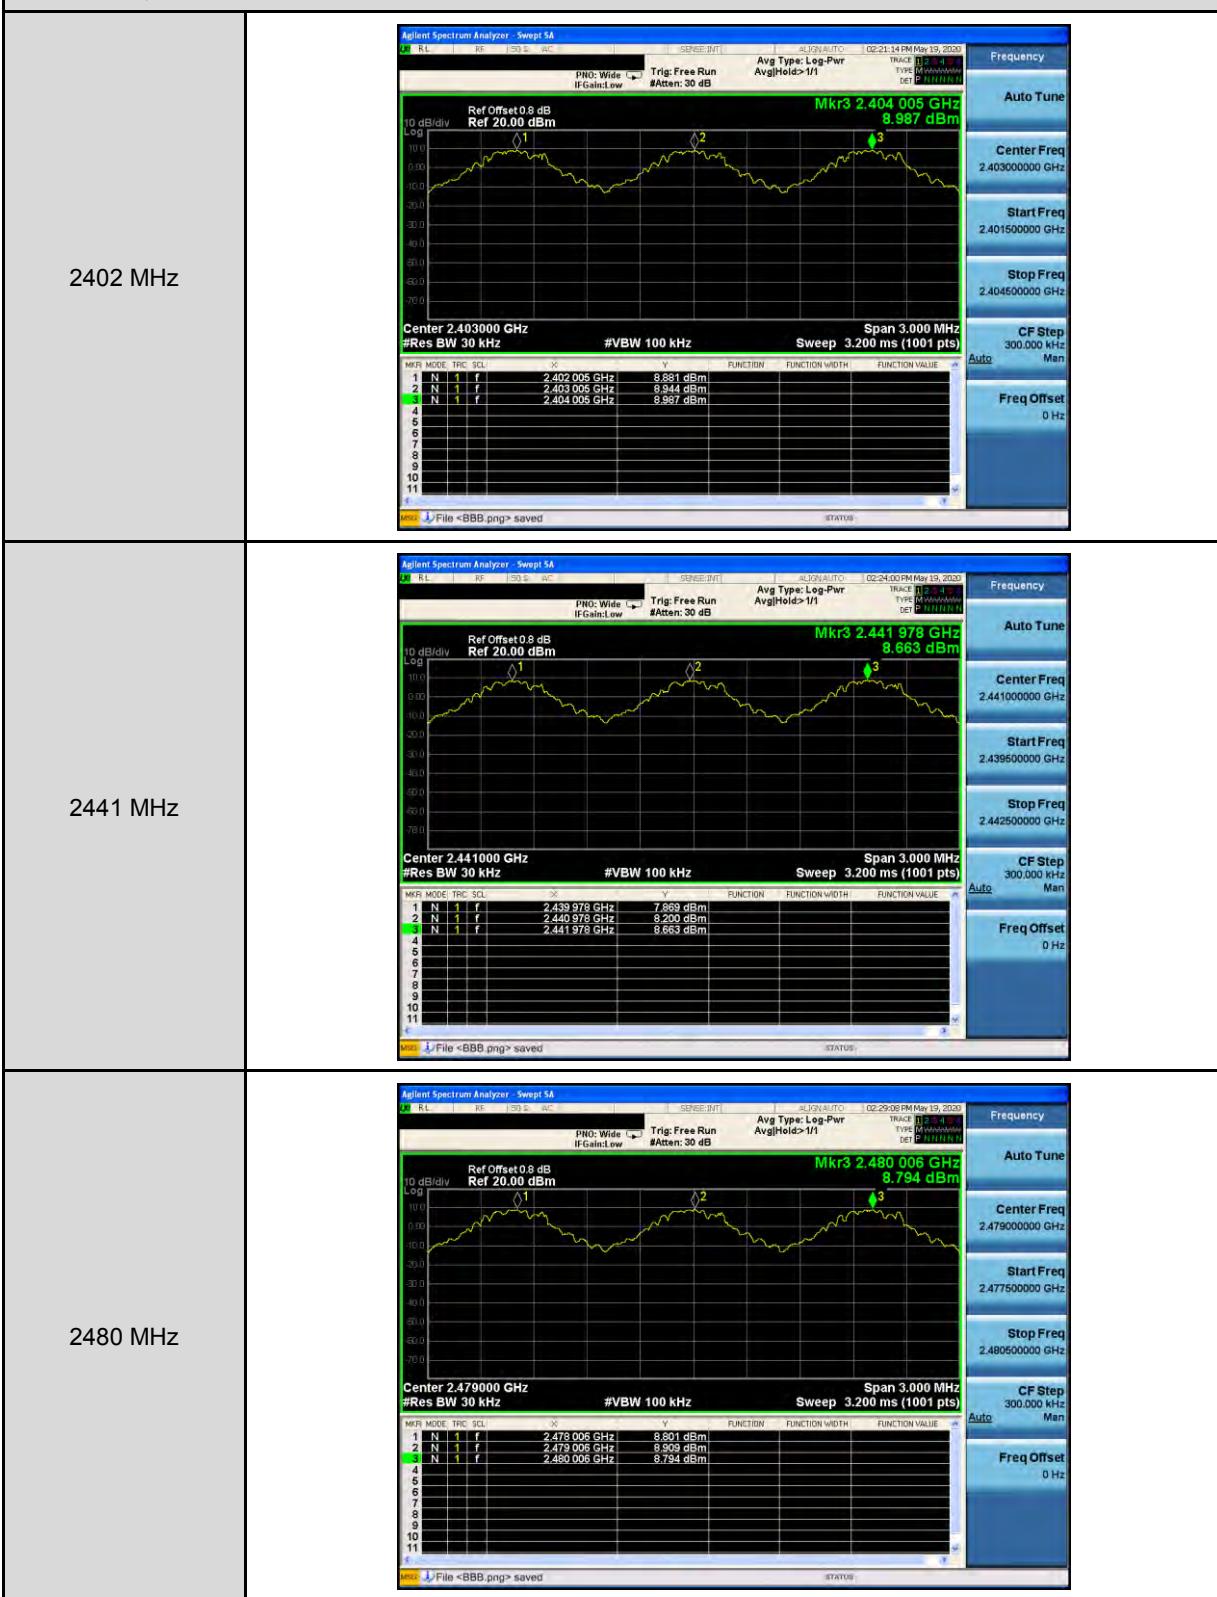

Mode 4: EDR, 8DPSK Continuous TX Mode

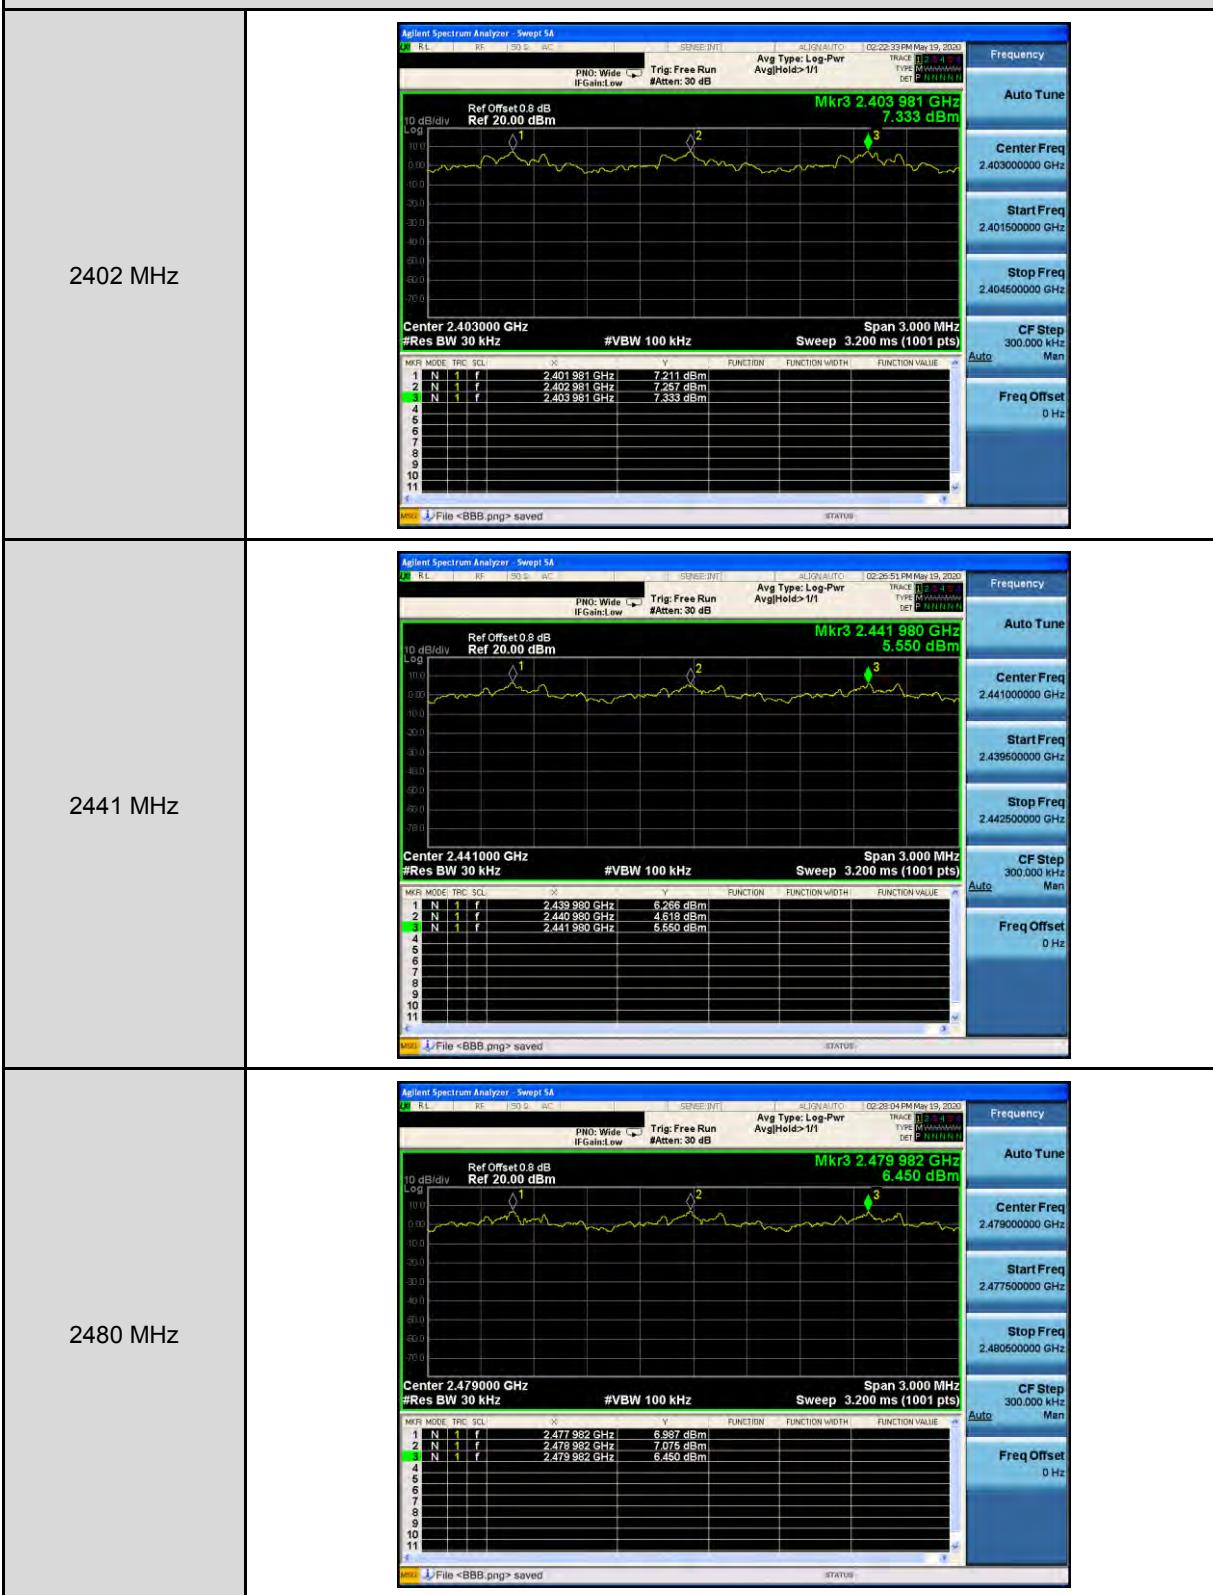


Number of Hopping Measurement

Test Mode	Frequency Range (MHz)	Measurement Results (Ch)	Limit (ch)
Mode 2	2402 - 2480	79	≥ 15
Mode 4	2402 - 2480	79	≥ 15


■ Test Graphs

Mode 2: BR, GFSK Continuous TX Mode

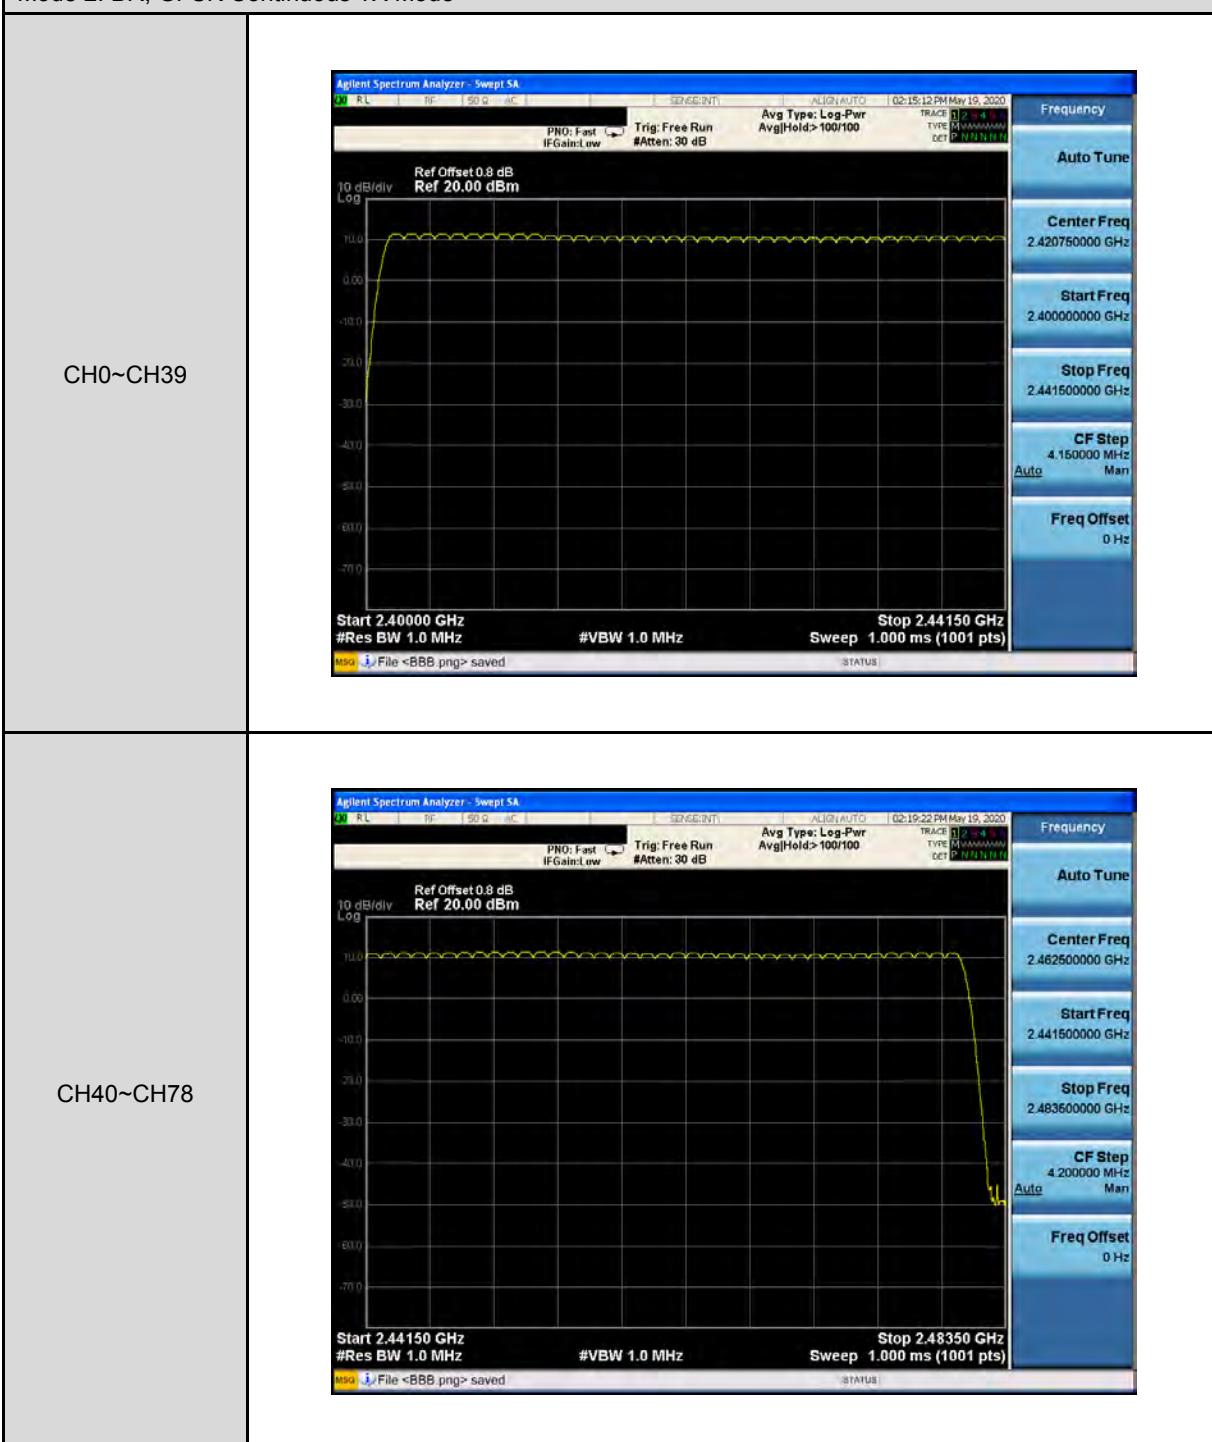

Mode 4: EDR, 8DPSK Continuous TX Mode

CH0~CH39

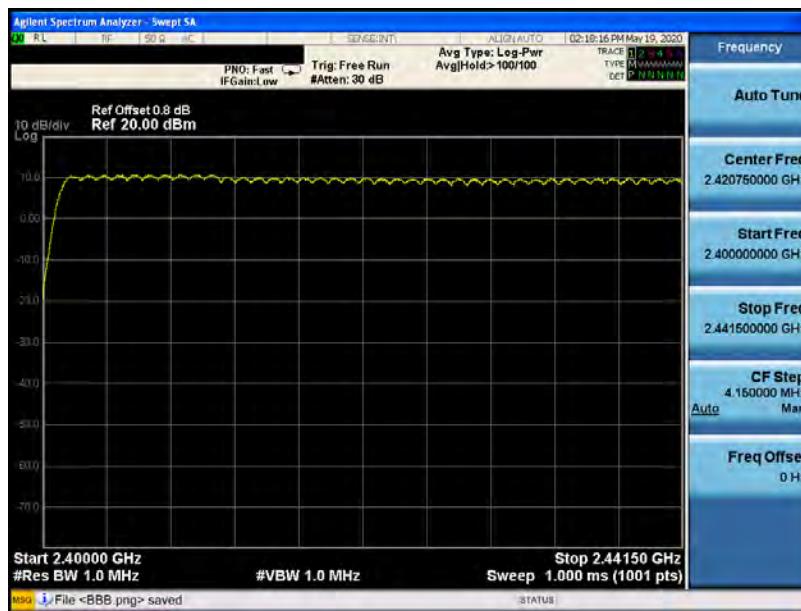

CH40~CH78




Time of Occupancy (Dwell Time) Measurement

Mode 2: GFSK Continuous TX mode	
DH1	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108$ (times)
Each Channel Dwell Times (2)	0.420 ms (sec)
Dwell Times on Cycle (1) * (2)	134.445 ms (sec)
LIMIT(msec)	< = 400
DH3	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16$ (times)
Each Channel Dwell Times (2)	1.680 ms (sec)
Dwell Times on Cycle (1) * (2)	268.625 ms (sec)
LIMIT(msec)	< = 400
DH5	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492$ (times)
Each Channel Dwell Times (2)	2.930 ms (sec)
Dwell Times on Cycle (1) * (2)	312.947 ms (sec)
LIMIT(msec)	< = 400




Mode 4: 8DPSK Continuous TX mode	
3DH1	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$800/79CH = 10.13$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 10.13 = 320.108$ (times)
Each Channel Dwell Times (2)	0.430 ms (sec)
Dwell Times on Cycle (1) * (2)	137.646 ms (sec)
LIMIT(msec)	< = 400
3DH3	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$400/79CH = 5.1$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 5.1 = 161.16$ (times)
Each Channel Dwell Times (2)	1.680 ms (sec)
Dwell Times on Cycle (1) * (2)	269.625 ms (sec)
LIMIT(msec)	< = 400
3DH5	
Cycle Calculate	$79CH * 0.4 = 31.6$ (sec)
The EUT Hopping Number per Sec	1600 times/sec
Each Channel Dwell Times per Sec	$266.7/79CH = 3.37$ (times/sec)
Each Channel Dwell Times on Cycle(1)	$31.6 * 3.37 = 106.492$ (times)
Each Channel Dwell Times (2)	2.940 ms (sec)
Dwell Times on Cycle (1) * (2)	314.016 ms (sec)
LIMIT(msec)	< = 400

■ Test Graphs

Mode 2: BR, GFSK Continuous TX Mode

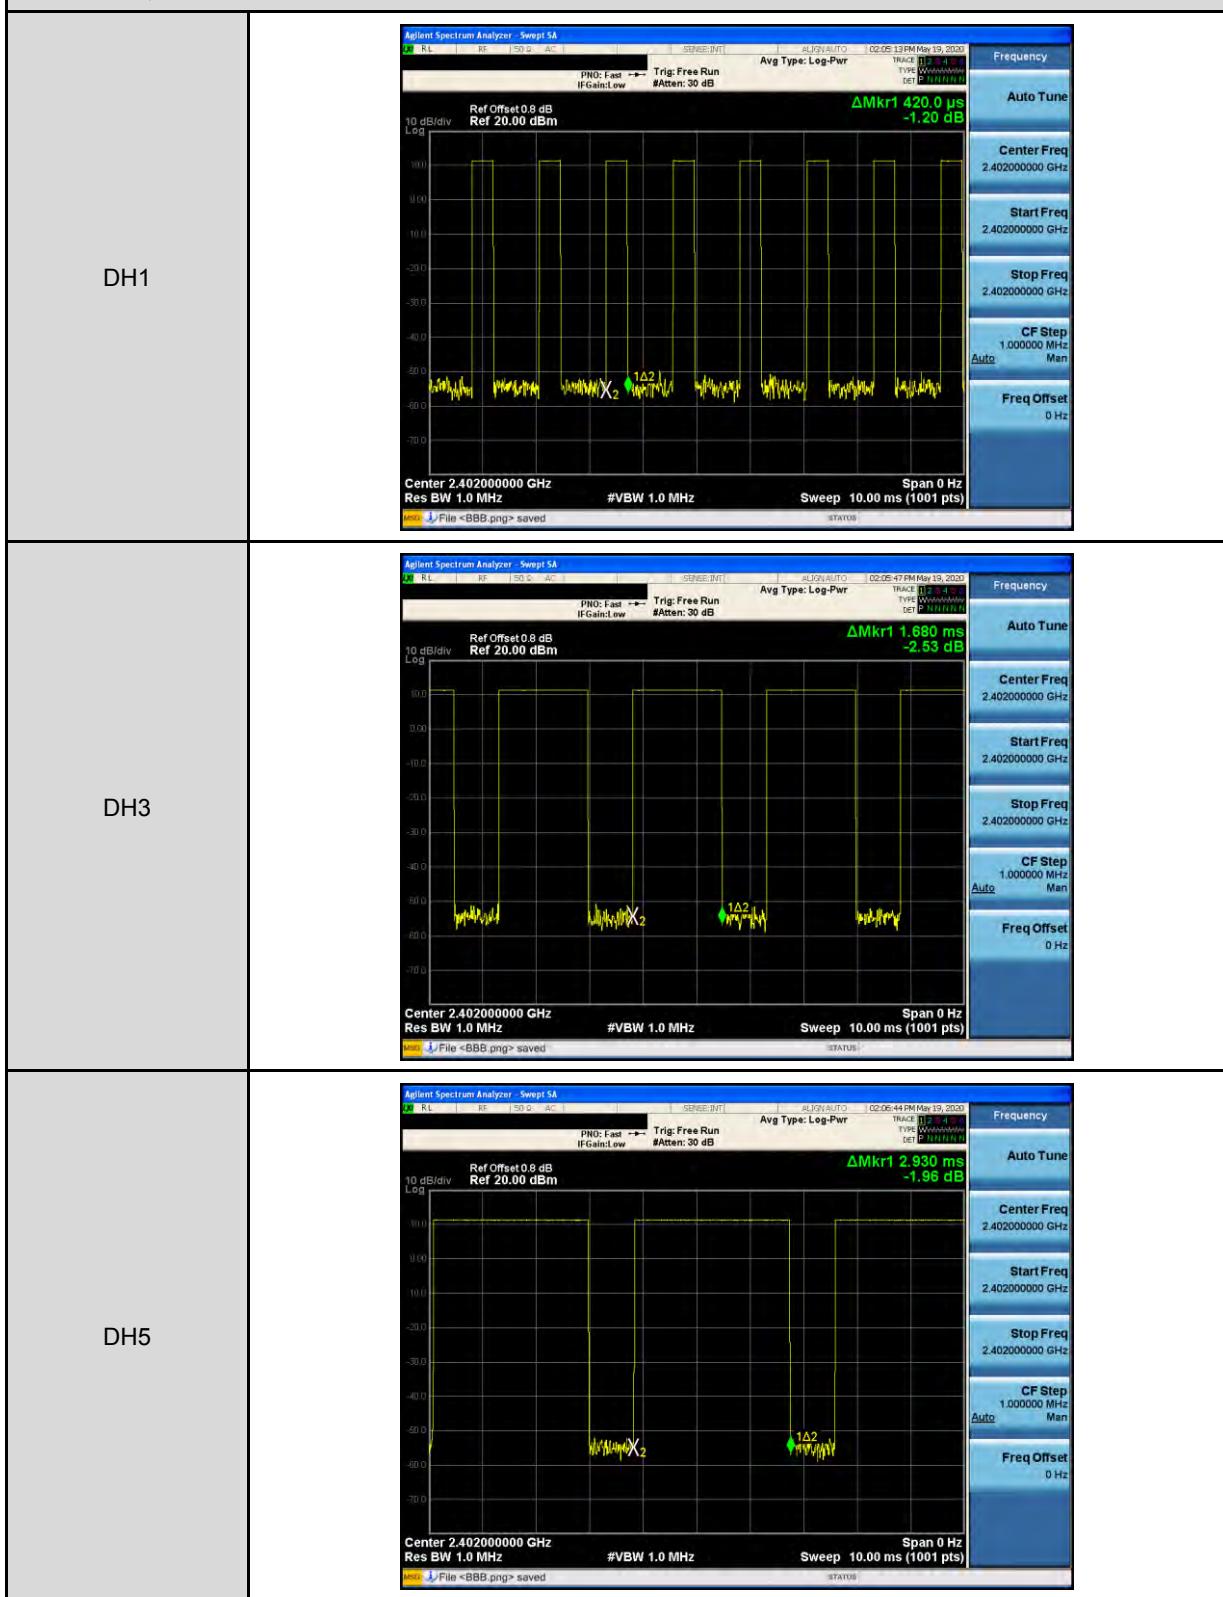

Mode 4: EDR, 8DPSK Continuous TX Mode

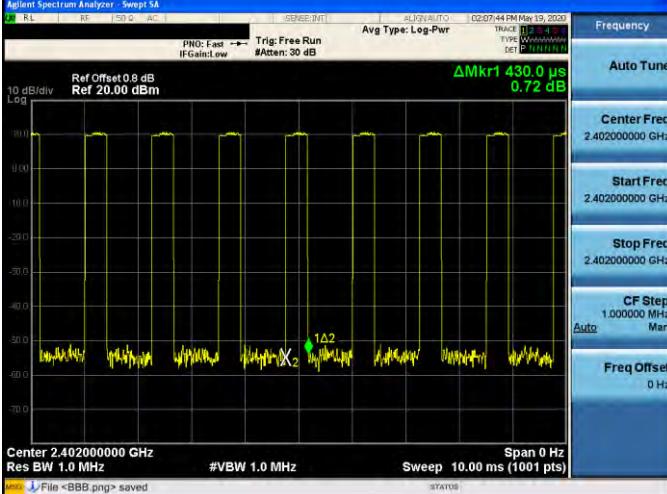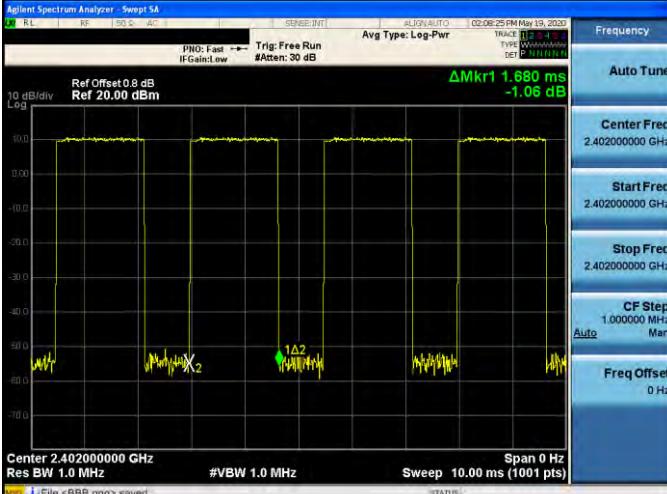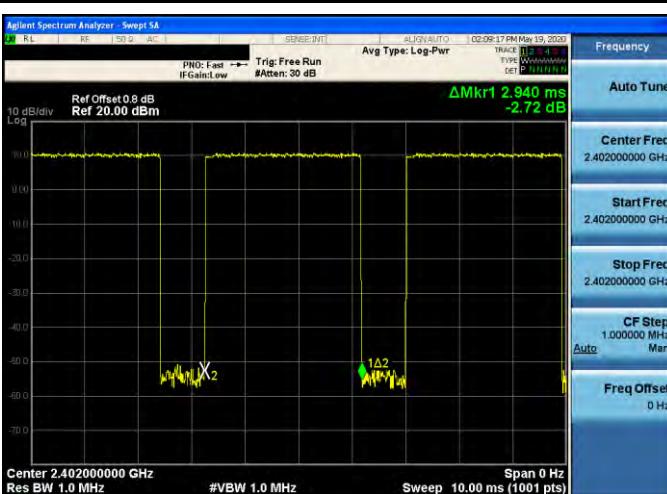DH1	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Auto Tune Center Freq 2.40200000 GHz Start Freq 2.40200000 GHz Stop Freq 2.40200000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz</p>
DH3	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Auto Tune Center Freq 2.40200000 GHz Start Freq 2.40200000 GHz Stop Freq 2.40200000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz</p>
DH5	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Ref Offset 0.8 dB Ref 20.00 dBm</p> <p>10 dB/div Log</p> <p>Center 2.40200000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (1001 pts)</p> <p>Auto Tune Center Freq 2.40200000 GHz Start Freq 2.40200000 GHz Stop Freq 2.40200000 GHz CF Step 1.000000 MHz Auto Freq Offset 0 Hz</p>


Out of Band Conducted Emissions Measurement

■ Test Graphs


Mode 2: BR, GFSK Continuous TX Mode




Mode 4: EDR, 8DPSK Continuous TX Mode

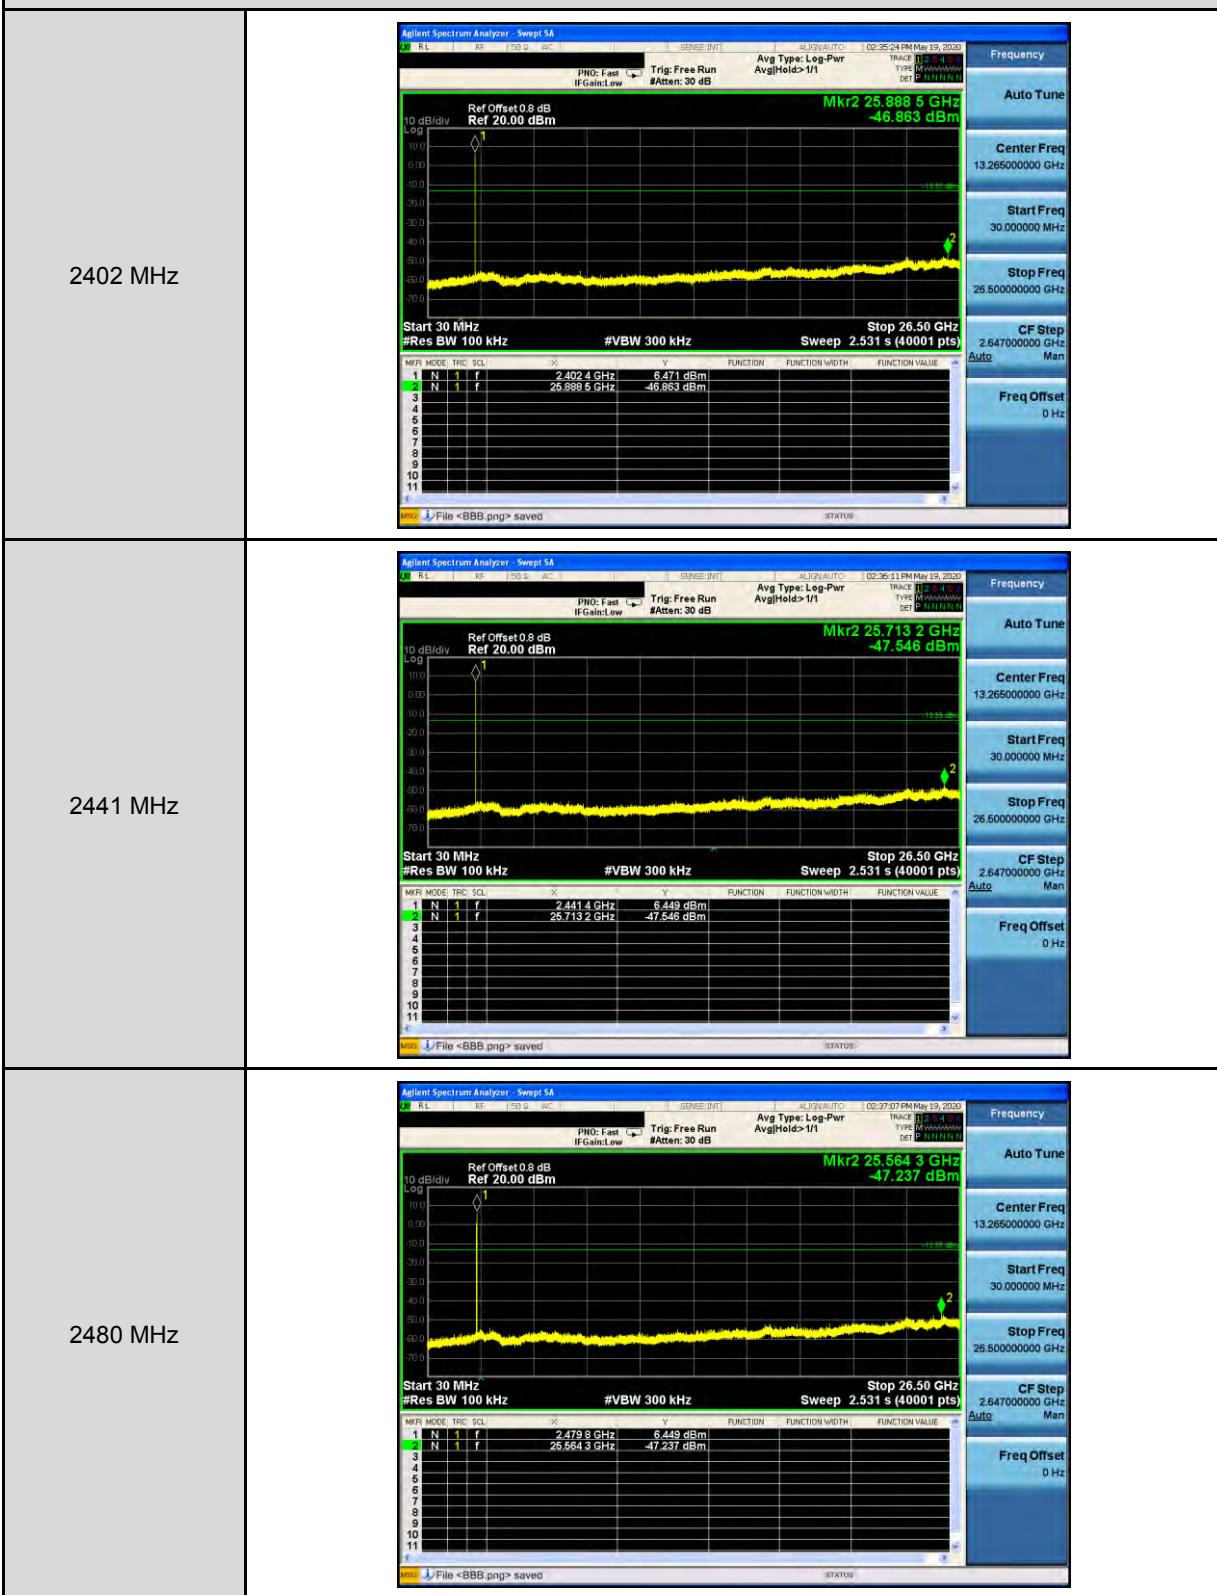


Mode 2: BR, GFSK Continuous TX Mode_Un-hopping

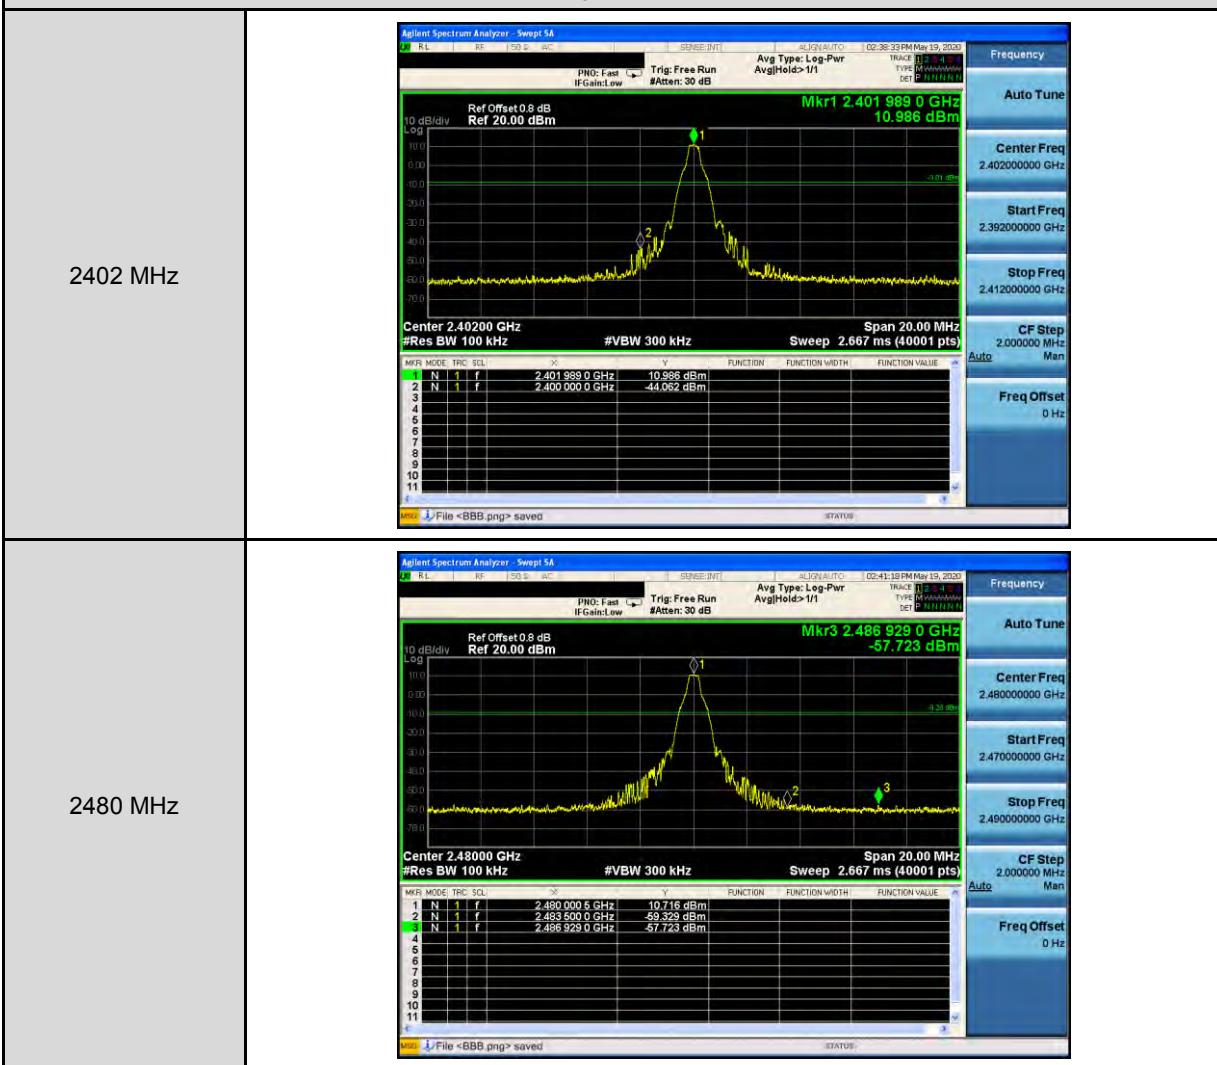

Mode 2: BR, GFSK Continuous TX Mode_Hopping

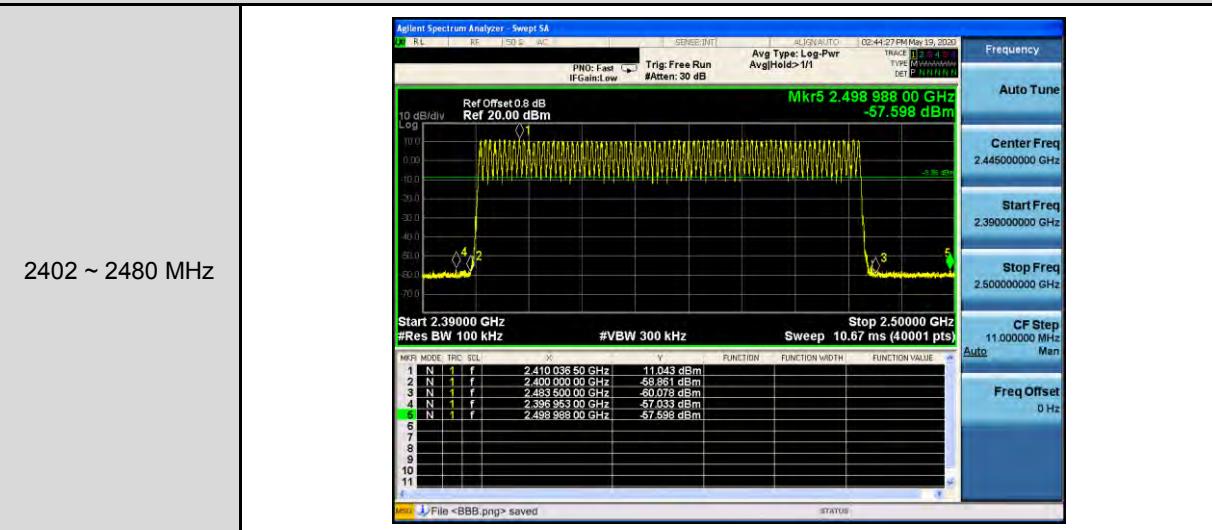


Mode 4: EDR, 8DPSK Continuous TX Mode_Un-hopping

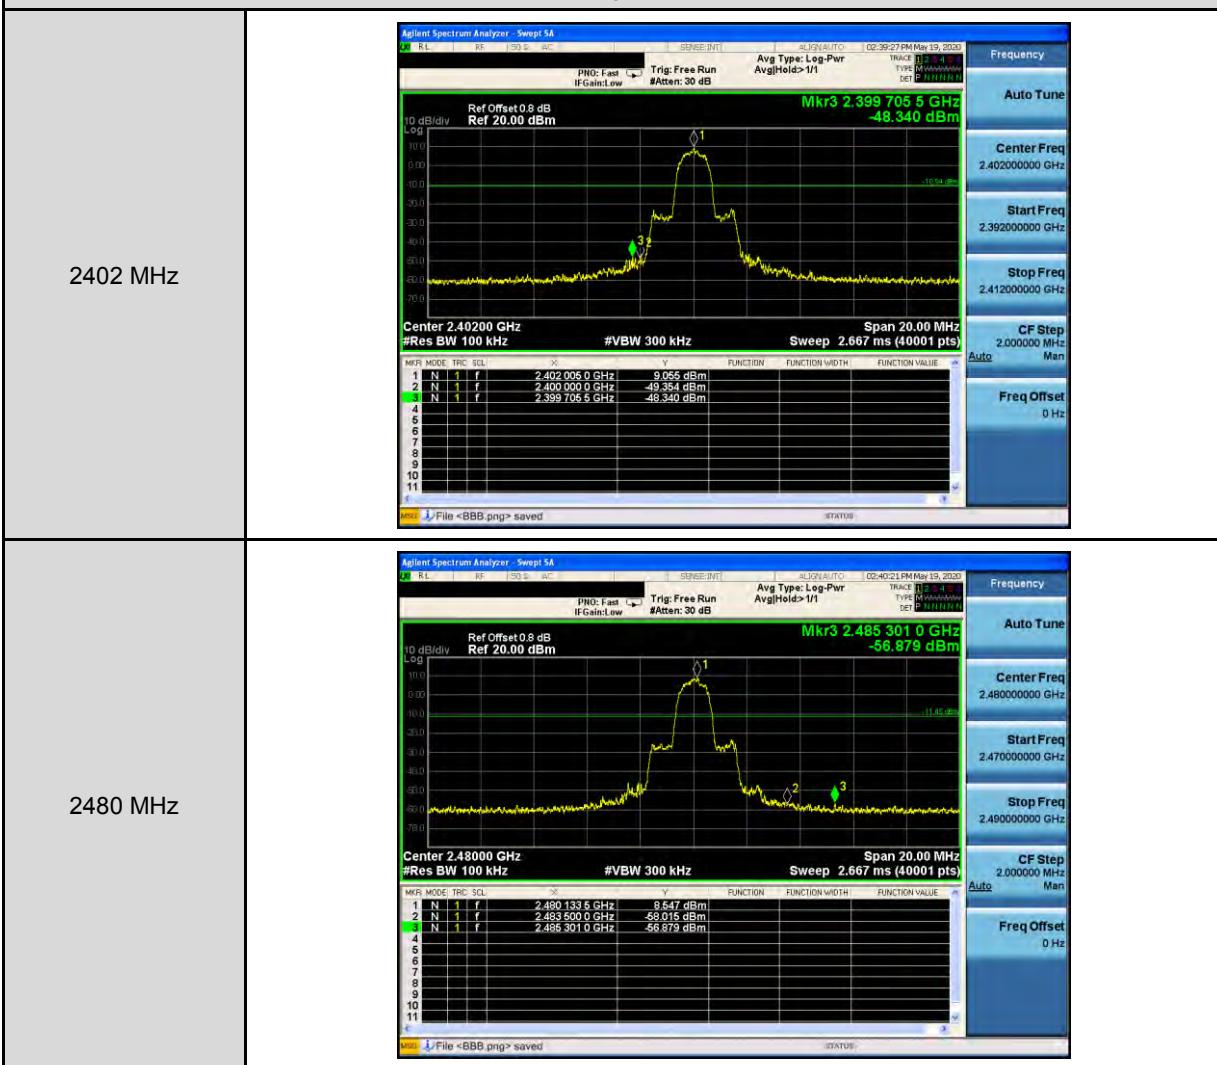

Mode 4: EDR, 8DPSK Continuous TX Mode_Hopping

2402 ~ 2480 MHz

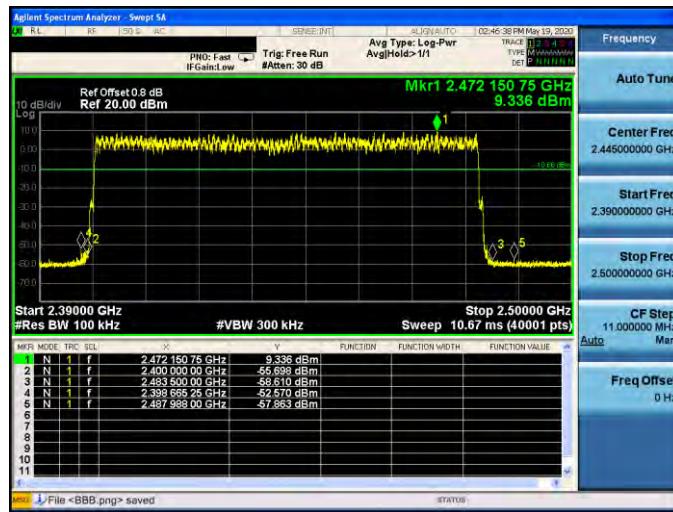

Annex C. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247		Test Distance:	3 m			
Test item:	Radiated Emission		Power:	AC 120 V/60 Hz			
Frequency:	2402 MHz		Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH			
Mode:	Mode 2						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
191.9900	34.40	-7.42	26.98	43.50	-16.52	QP	H
220.1200	34.66	-7.13	27.53	46.00	-18.47	QP	H
281.2300	37.51	-4.66	32.85	46.00	-13.15	QP	H
515.9700	30.13	0.24	30.37	46.00	-15.63	QP	H
656.6200	29.14	3.04	32.18	46.00	-13.82	QP	H
760.4100	29.38	5.33	34.71	46.00	-11.29	QP	H
179.3800	39.22	-6.57	32.65	43.50	-10.85	QP	V
227.8800	39.87	-7.02	32.85	46.00	-13.15	QP	V
555.7400	30.79	1.21	32.00	46.00	-14.00	QP	V
643.0400	30.17	2.85	33.02	46.00	-12.98	QP	V
822.4900	28.87	6.19	35.06	46.00	-10.94	QP	V
942.7700	29.32	8.84	38.16	46.00	-7.84	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 26.98 = (-7.42) + 34.40.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Harmonic

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

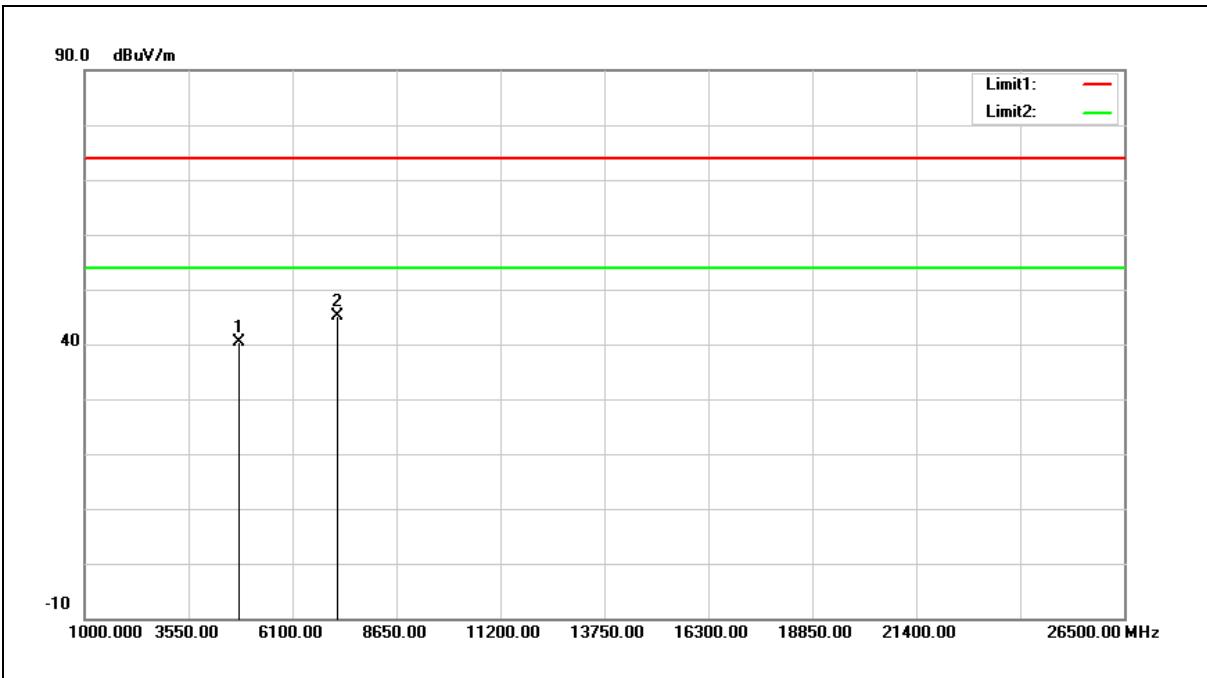

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	34.59	5.91	40.50	74.00	-33.50	peak
2	7206.000	32.70	12.38	45.08	74.00	-28.92	peak


Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $40.50 = 5.91 + 34.59$.

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

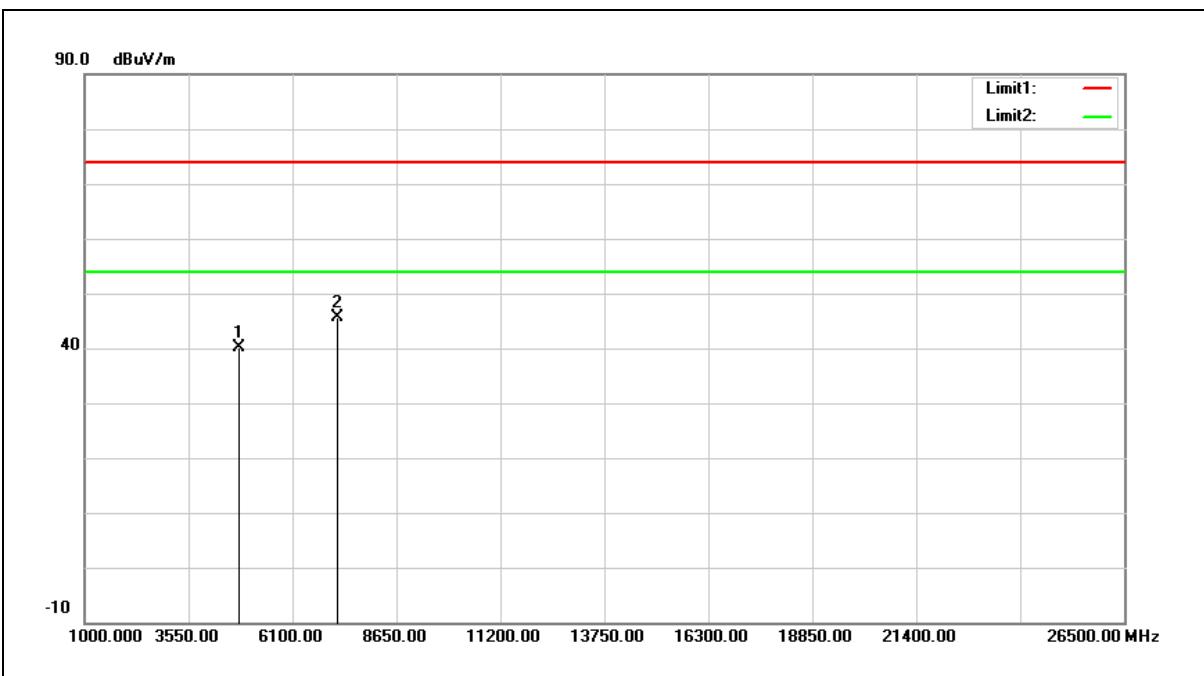

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	34.13	5.91	40.04	74.00	-33.96	peak
2	7206.000	33.30	12.38	45.68	74.00	-28.32	peak


Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $40.04 = 5.91 + 34.13$.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

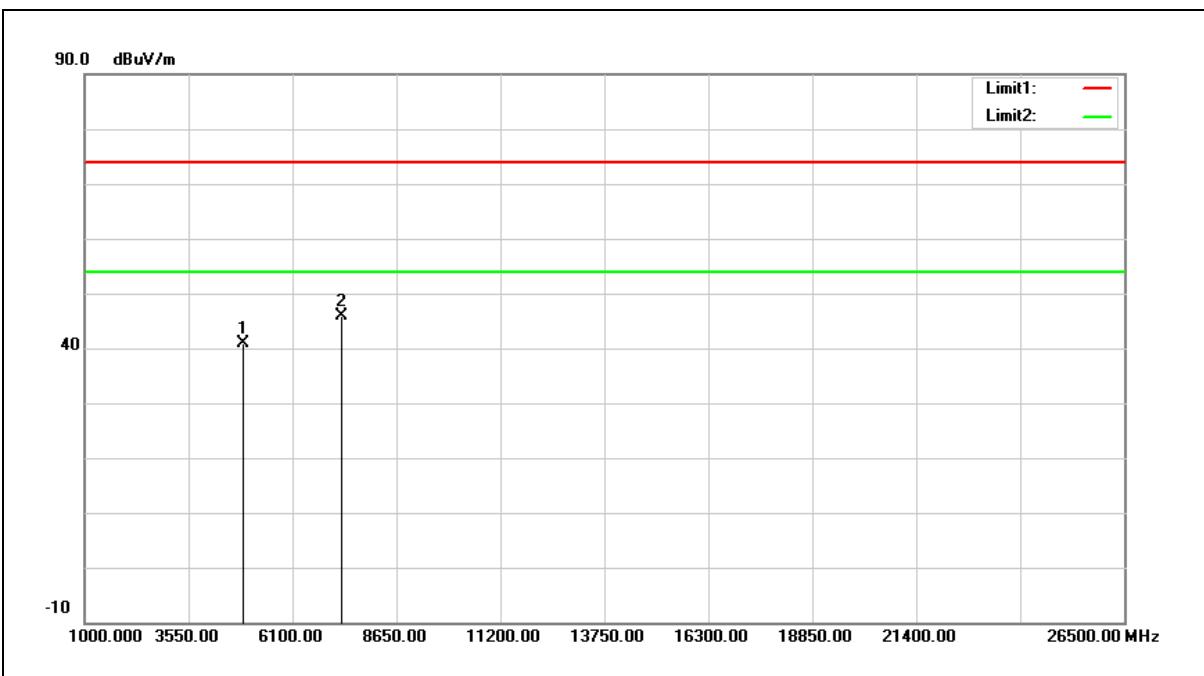


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.76	6.15	40.91	74.00	-33.09	peak
2	7323.000	33.09	12.78	45.87	74.00	-28.13	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

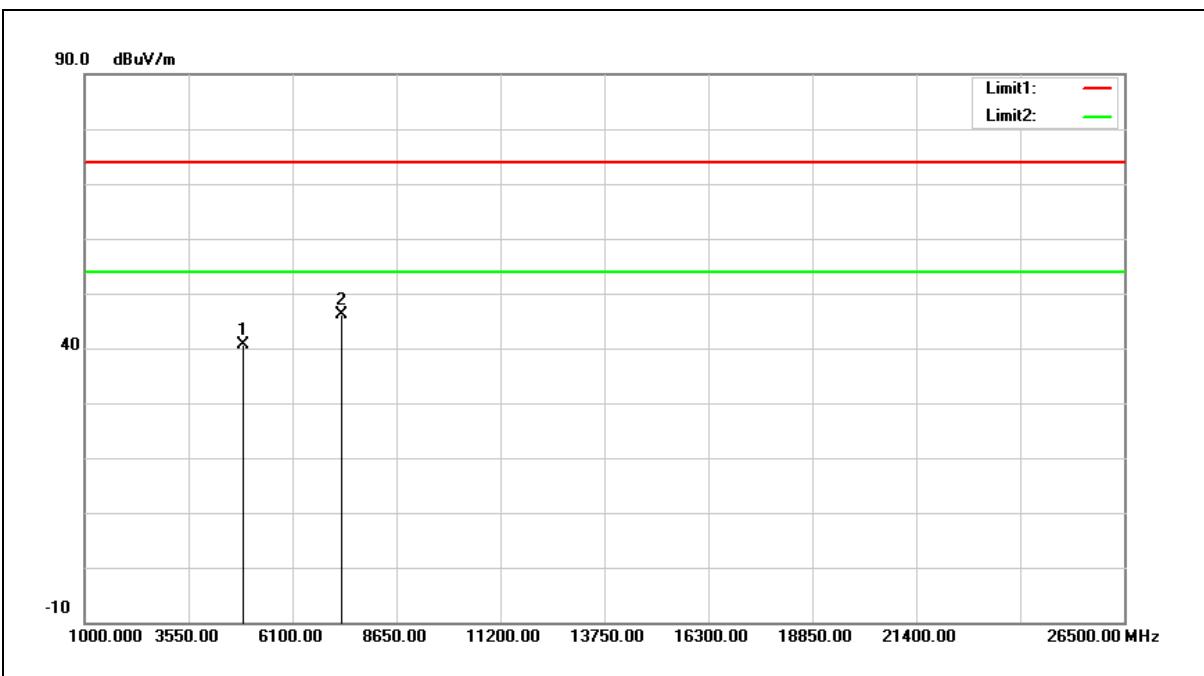


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.55	6.15	40.70	74.00	-33.30	peak
2	7323.000	33.46	12.78	46.24	74.00	-27.76	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

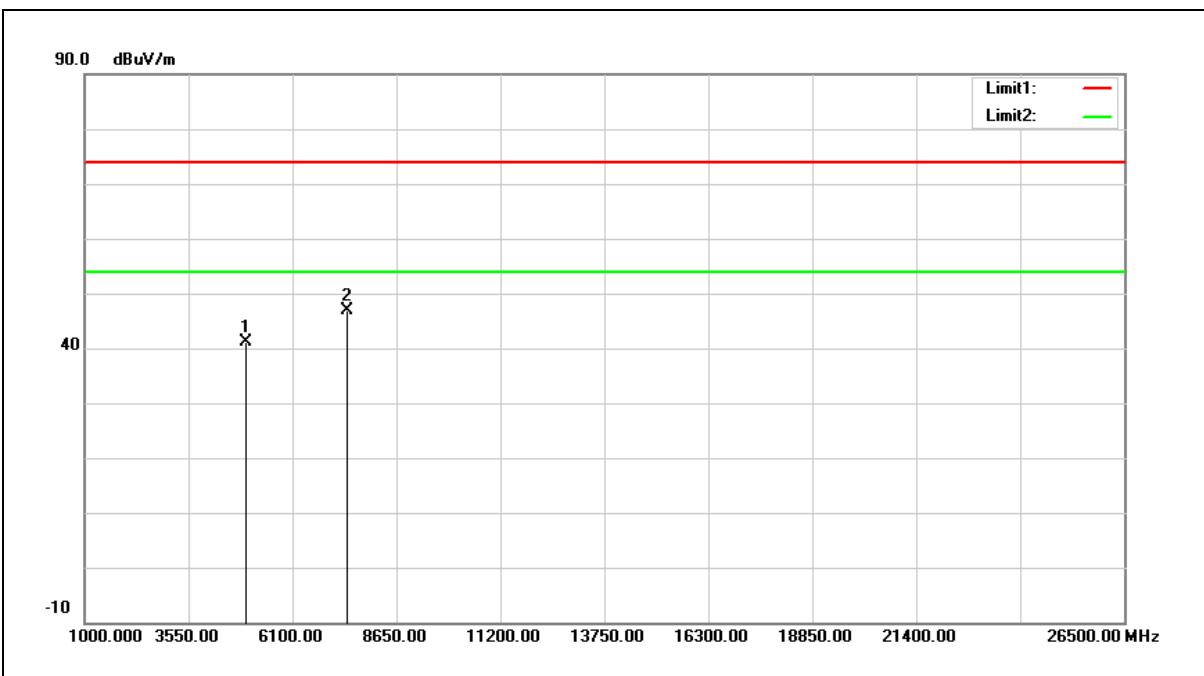


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	34.77	6.38	41.15	74.00	-32.85	peak
2	7440.000	33.78	13.18	46.96	74.00	-27.04	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

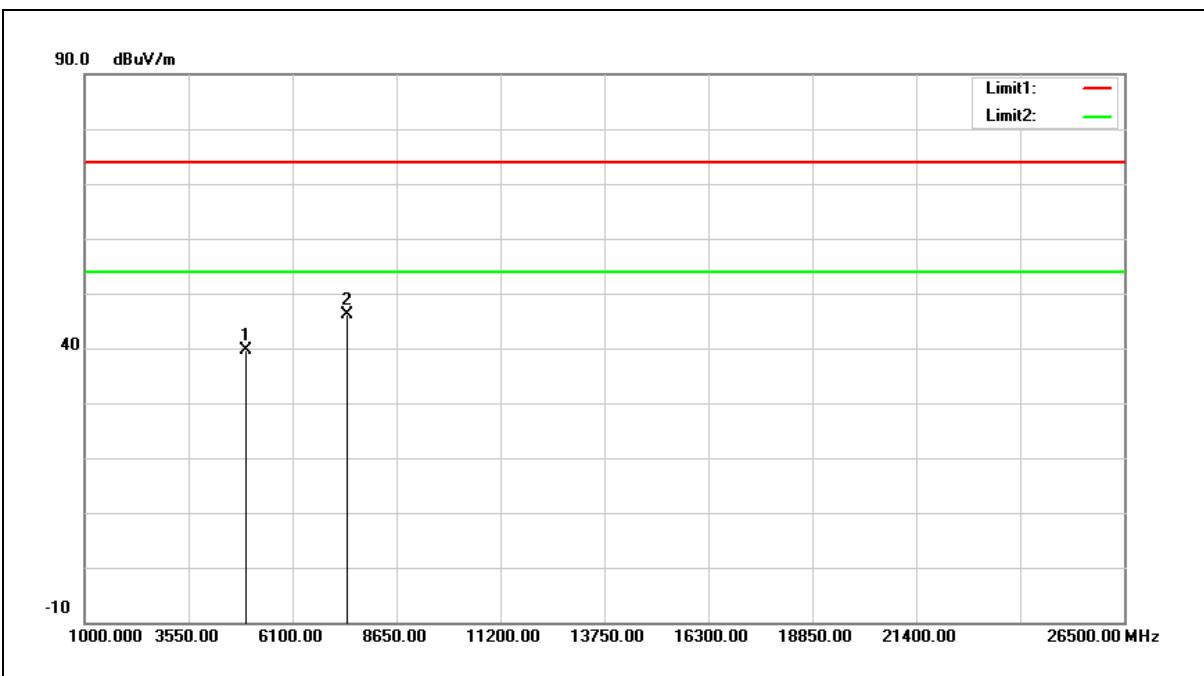


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.15	6.38	39.53	74.00	-34.47	peak
2	7440.000	33.06	13.18	46.24	74.00	-27.76	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

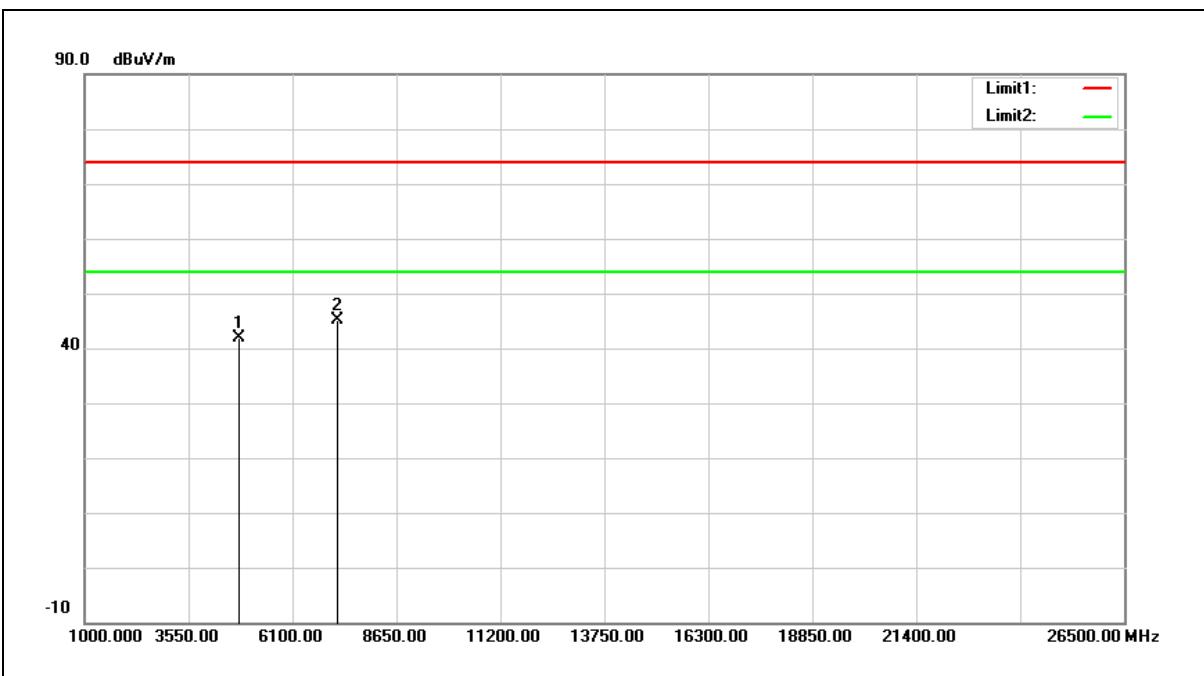


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	36.07	5.91	41.98	74.00	-32.02	peak
2	7206.000	32.76	12.38	45.14	74.00	-28.86	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

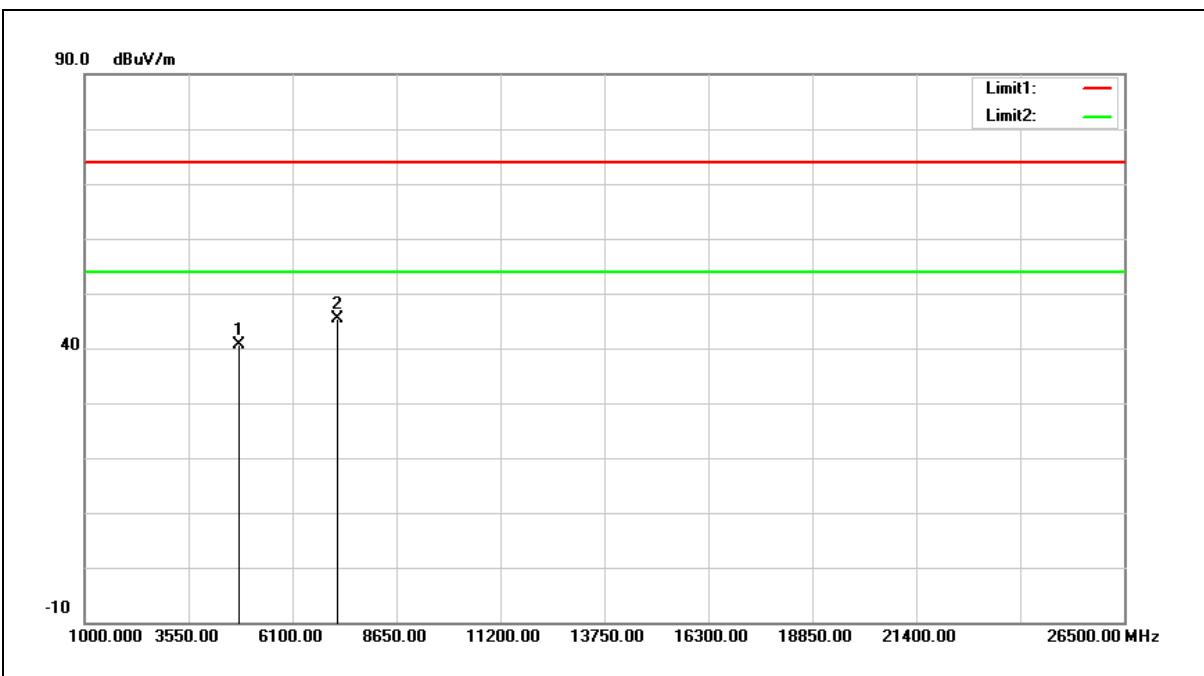


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	34.81	5.91	40.72	74.00	-33.28	peak
2	7206.000	33.04	12.38	45.42	74.00	-28.58	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

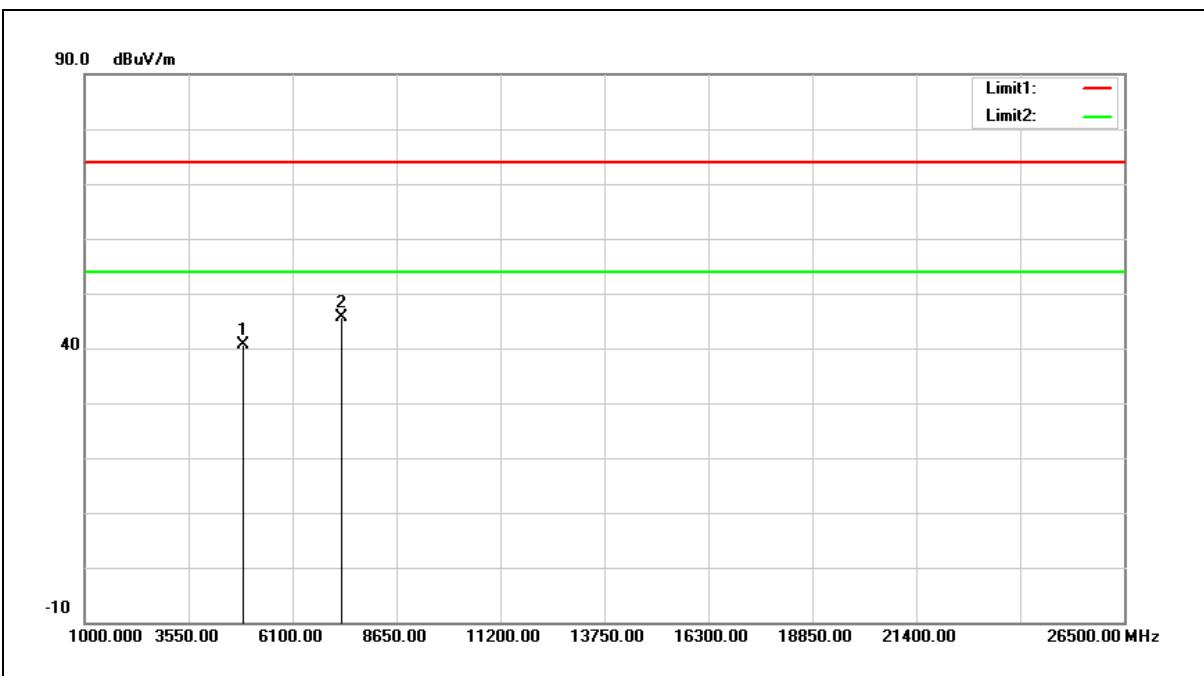


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	34.36	6.15	40.51	74.00	-33.49	peak
2	7323.000	32.86	12.78	45.64	74.00	-28.36	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2441 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

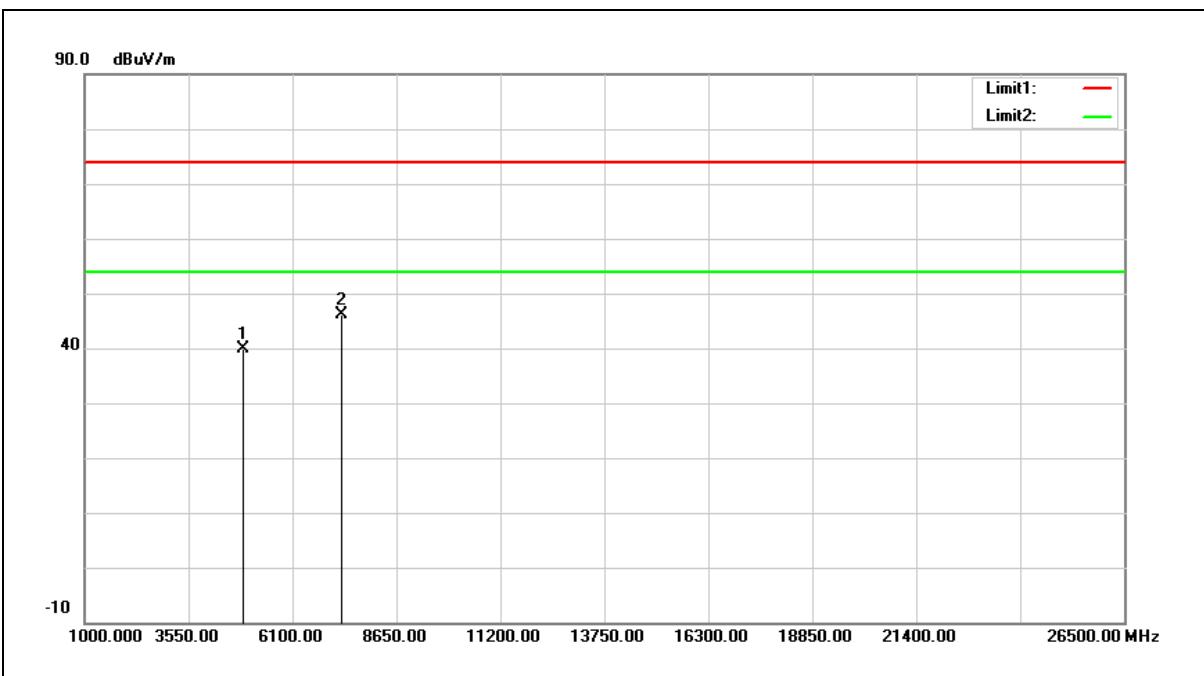


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	33.78	6.15	39.93	74.00	-34.07	peak
2	7323.000	33.27	12.78	46.05	74.00	-27.95	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

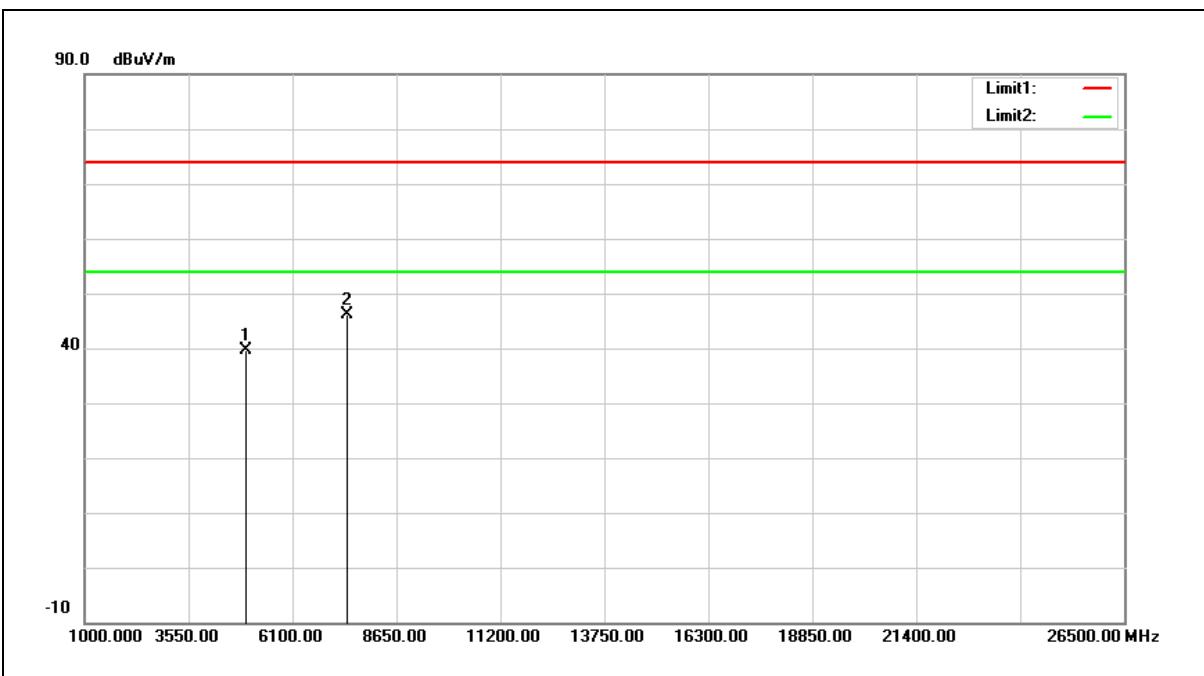


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	33.14	6.38	39.52	74.00	-34.48	peak
2	7440.000	33.02	13.18	46.20	74.00	-27.80	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

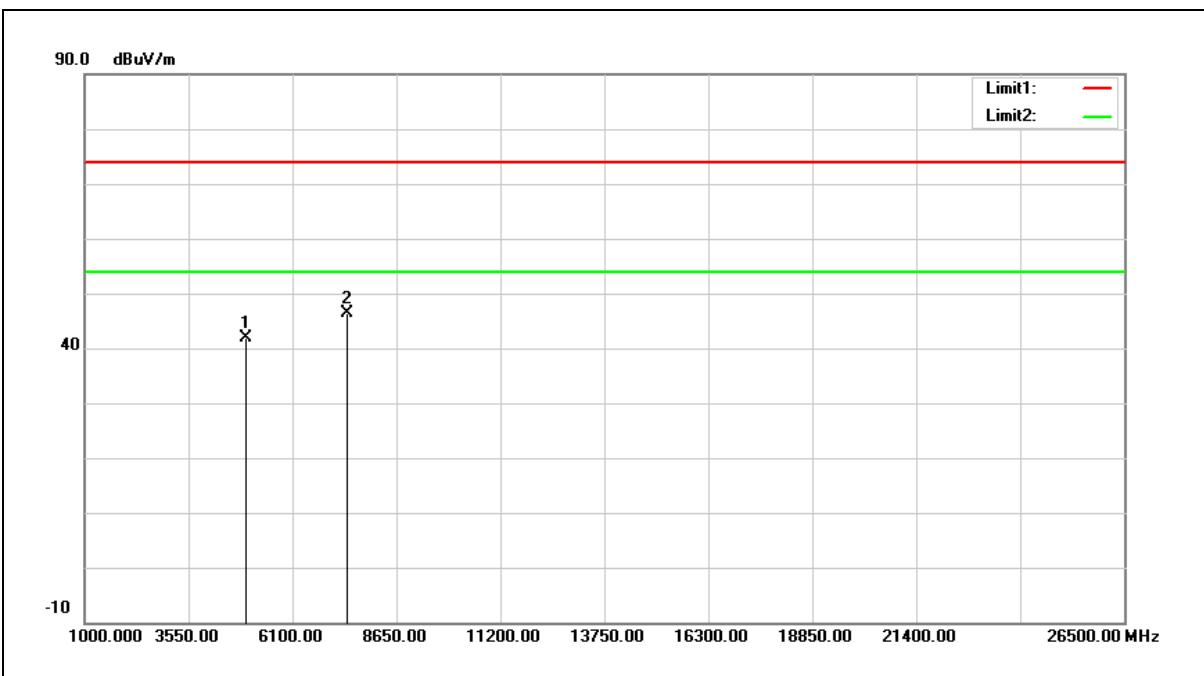


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	35.38	6.38	41.76	74.00	-32.24	peak
2	7440.000	33.11	13.18	46.29	74.00	-27.71	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Mode:	Simultaneous Transmitting (2.4 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

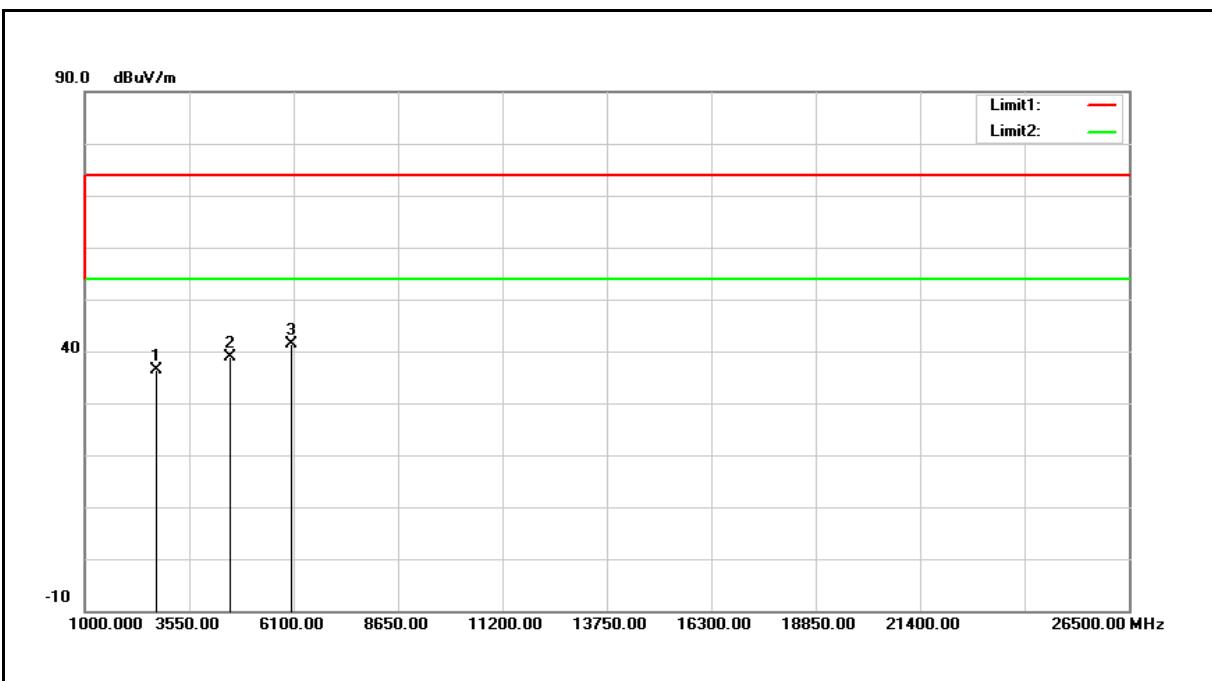


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	36.01	0.42	36.43	74.00	-37.57	peak
2	4553.000	33.80	5.15	38.95	74.00	-35.05	peak
3	6049.000	32.23	9.09	41.32	74.00	-32.68	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Mode:	Simultaneous Transmitting (2.4 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

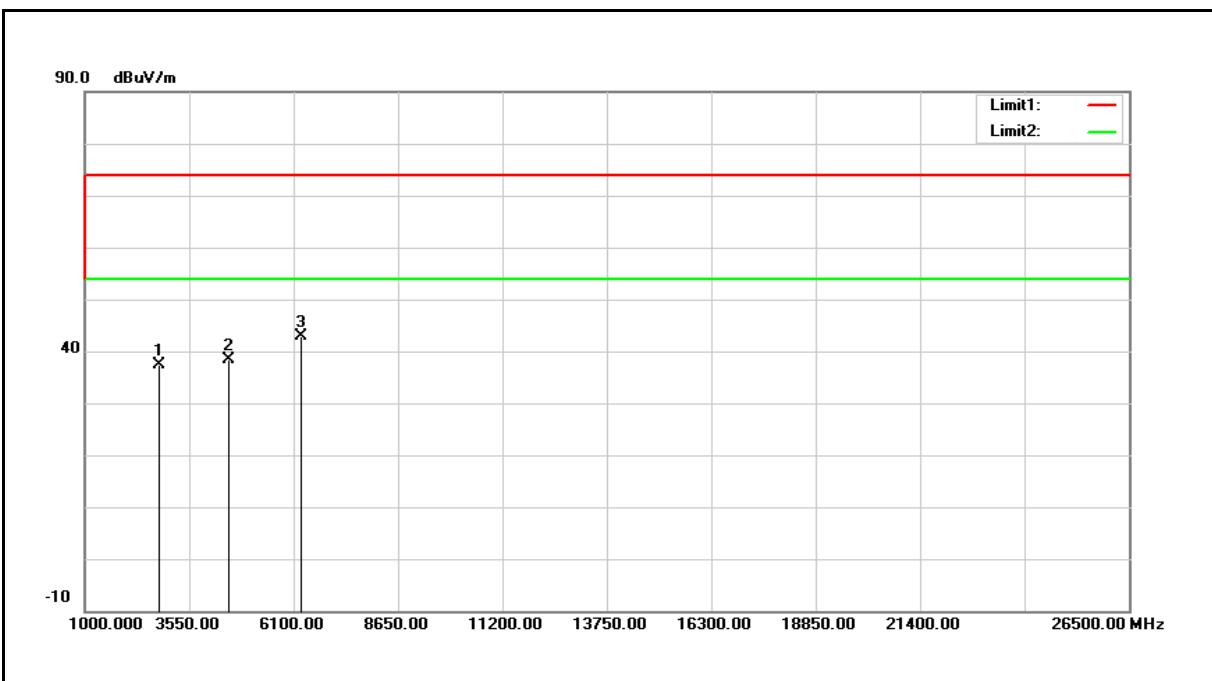


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	36.88	0.56	37.44	74.00	-36.56	peak
2	4519.000	33.43	5.03	38.46	74.00	-35.54	peak
3	6270.000	33.25	9.74	42.99	74.00	-31.01	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Mode:	Simultaneous Transmitting (5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Horizontal		

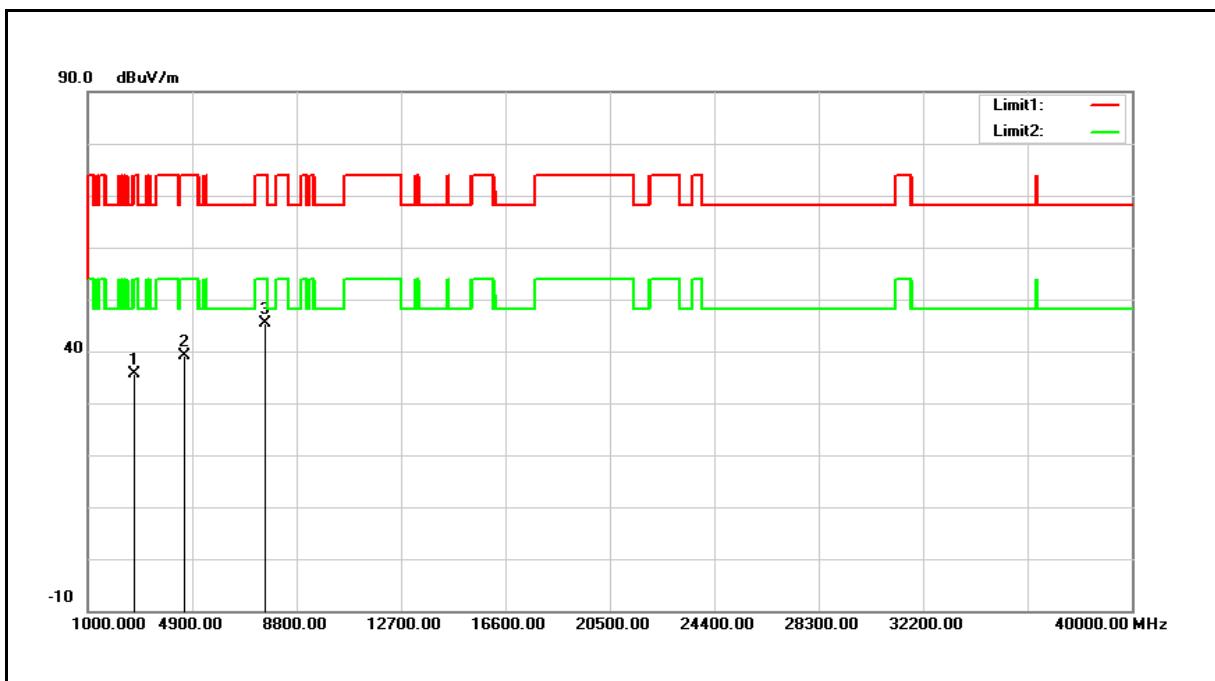


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2734.000	35.19	0.37	35.56	74.00	-38.44	peak
2	4570.000	34.01	5.19	39.20	74.00	-34.80	peak
3	7613.000	31.73	13.62	45.35	74.00	-28.65	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic	Power:	AC 120 V/60 Hz
Mode:	Simultaneous Transmitting (5 GHz WLAN+BT)	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Ant.Polar.:	Vertical		

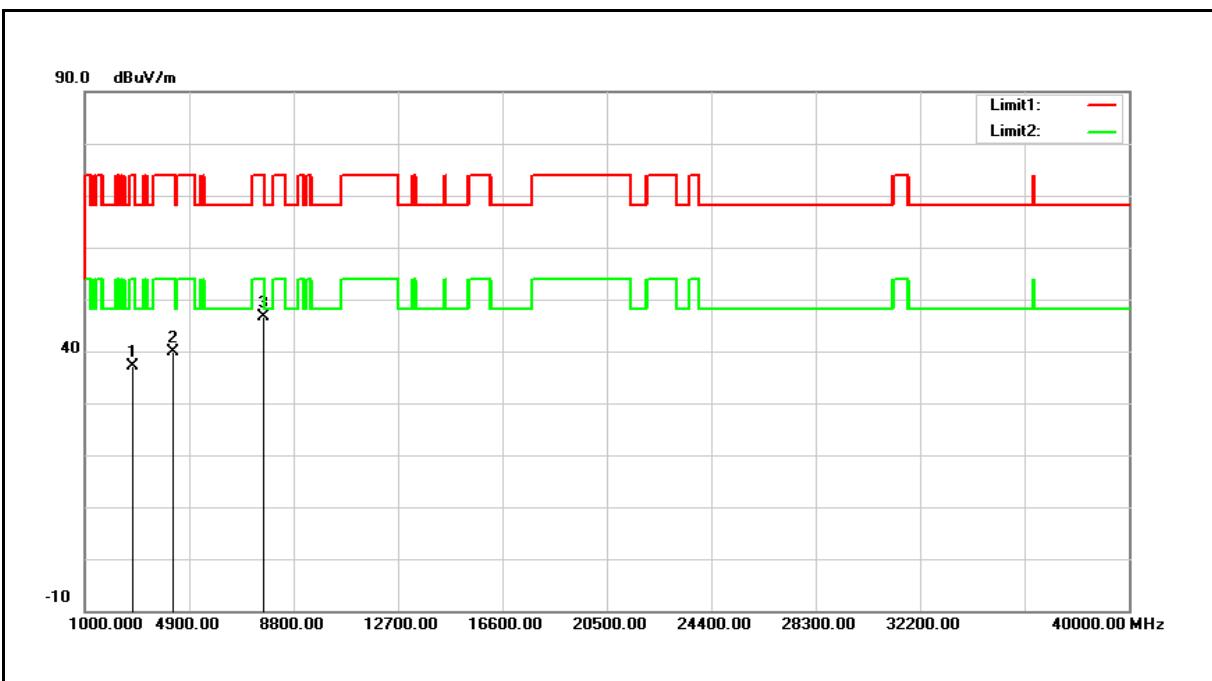

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	36.65	0.56	37.21	74.00	-36.79	peak
2	4315.000	35.27	4.62	39.89	74.00	-34.11	peak
3	7647.000	33.06	13.69	46.75	74.00	-27.25	peak


Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

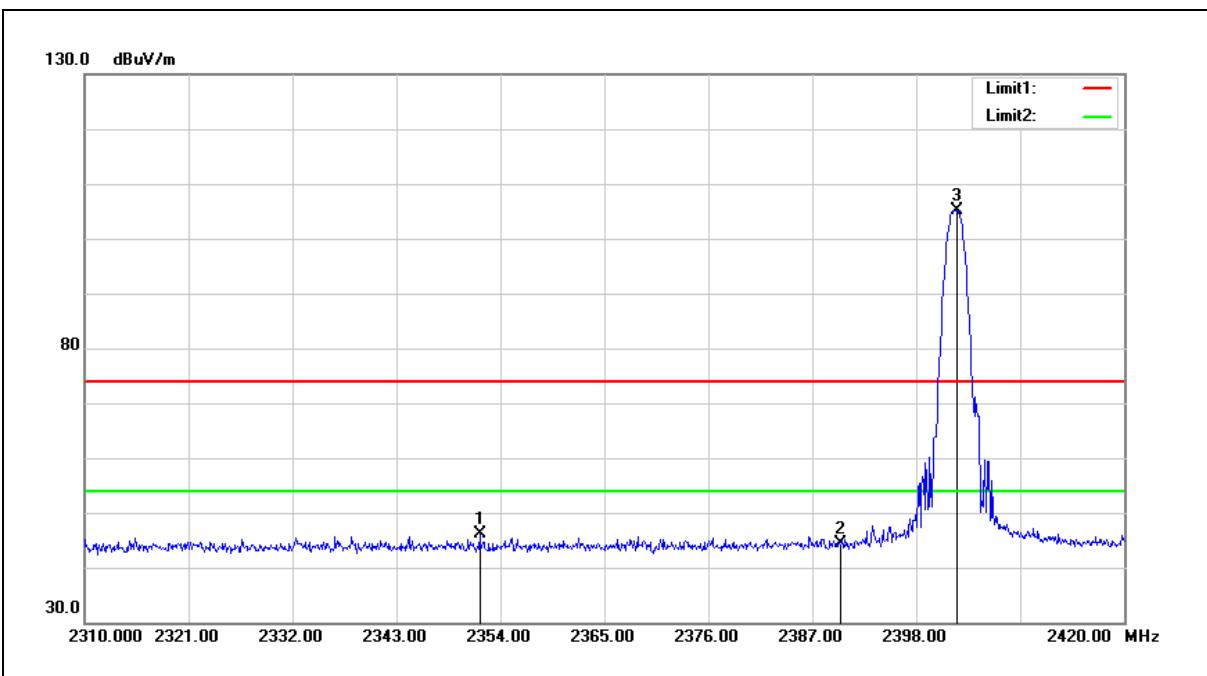


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2351.800	47.09	-1.05	46.04	74.00	-27.96	peak
2	2390.000	45.32	-0.87	44.45	74.00	-29.55	peak
3	2402.290	105.97	-0.81	105.16	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

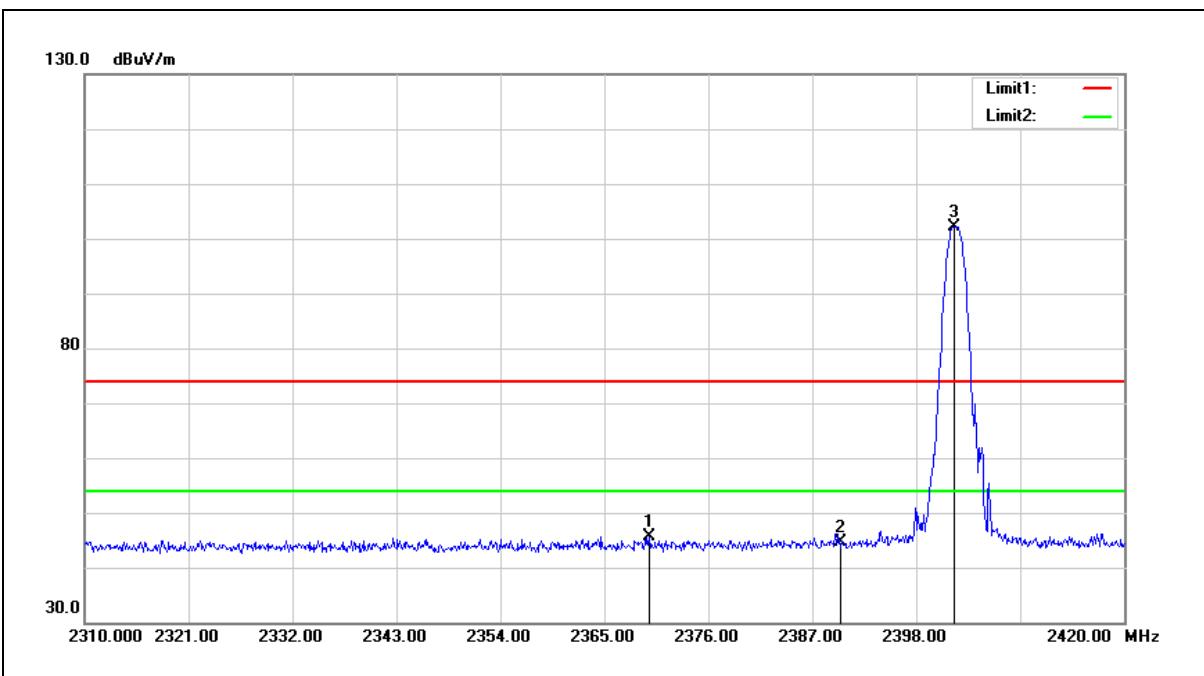


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2369.730	46.58	-0.97	45.61	74.00	-28.39	peak
2	2390.000	45.60	-0.87	44.73	74.00	-29.27	peak
3	2402.070	102.97	-0.81	102.16	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

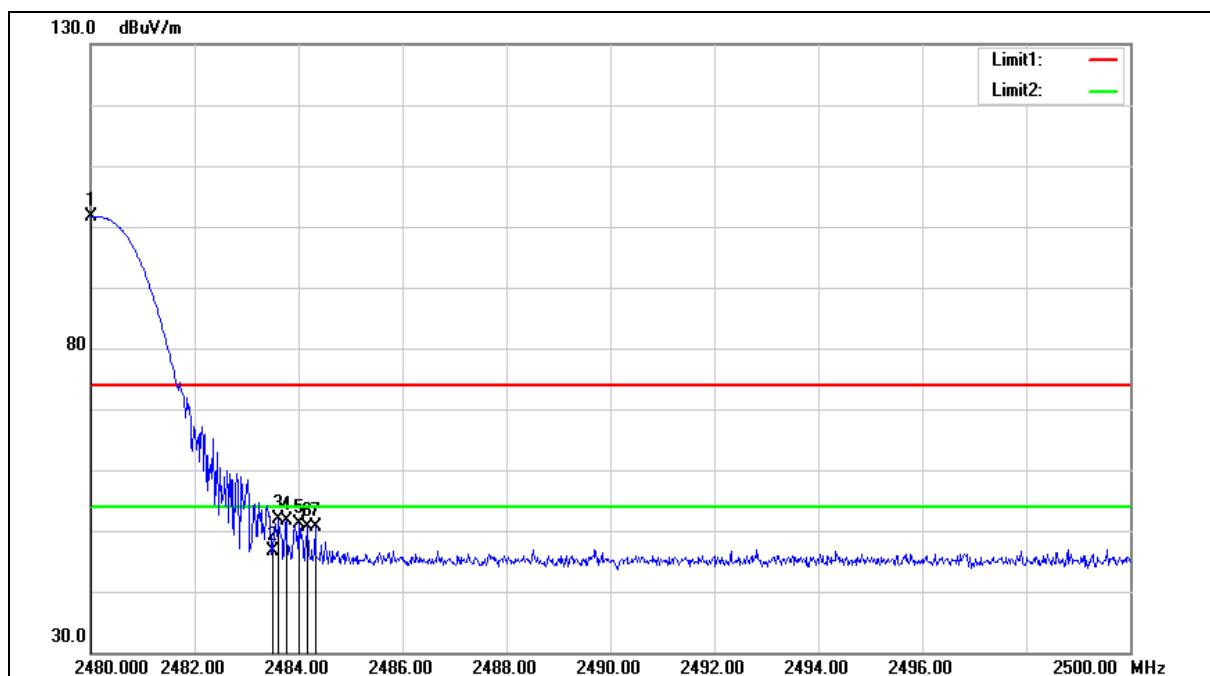

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.95	-0.41	101.54	--	--	peak
2	2483.500	46.95	-0.40	46.55	74.00	-27.45	peak
3	2483.620	52.31	-0.40	51.91	74.00	-22.09	peak
4	2483.760	52.08	-0.40	51.68	74.00	-22.32	peak
5	2484.000	51.41	-0.39	51.02	74.00	-22.98	peak
6	2484.180	51.13	-0.39	50.74	74.00	-23.26	peak
7	2484.320	51.10	-0.39	50.71	74.00	-23.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

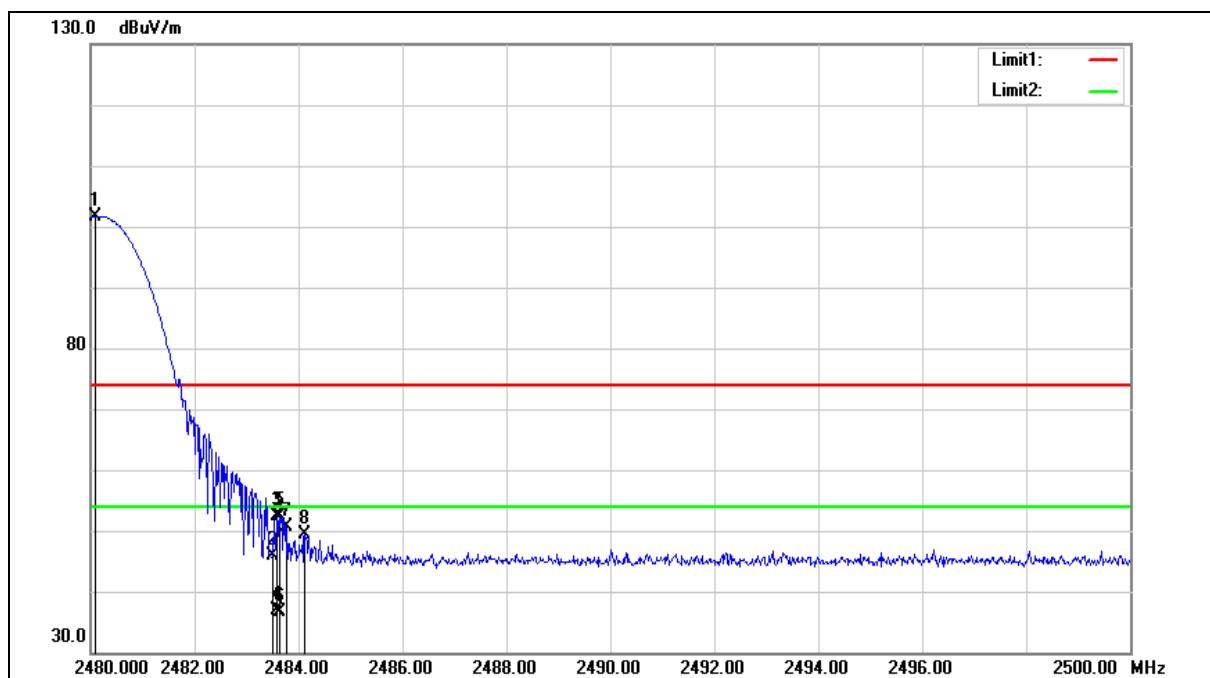

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.080	102.15	-0.41	101.74	--	--	peak
2	2483.500	46.21	-0.40	45.81	74.00	-28.19	peak
3	2483.580	52.80	-0.40	52.40	74.00	-21.60	peak
4	2483.580	37.21	-0.40	36.81	54.00	-17.19	AVG
5	2483.640	52.77	-0.40	52.37	74.00	-21.63	peak
6	2483.640	37.09	-0.40	36.69	54.00	-17.31	AVG
7	2483.780	51.11	-0.40	50.71	74.00	-23.29	peak
8	2484.120	49.80	-0.39	49.41	74.00	-24.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

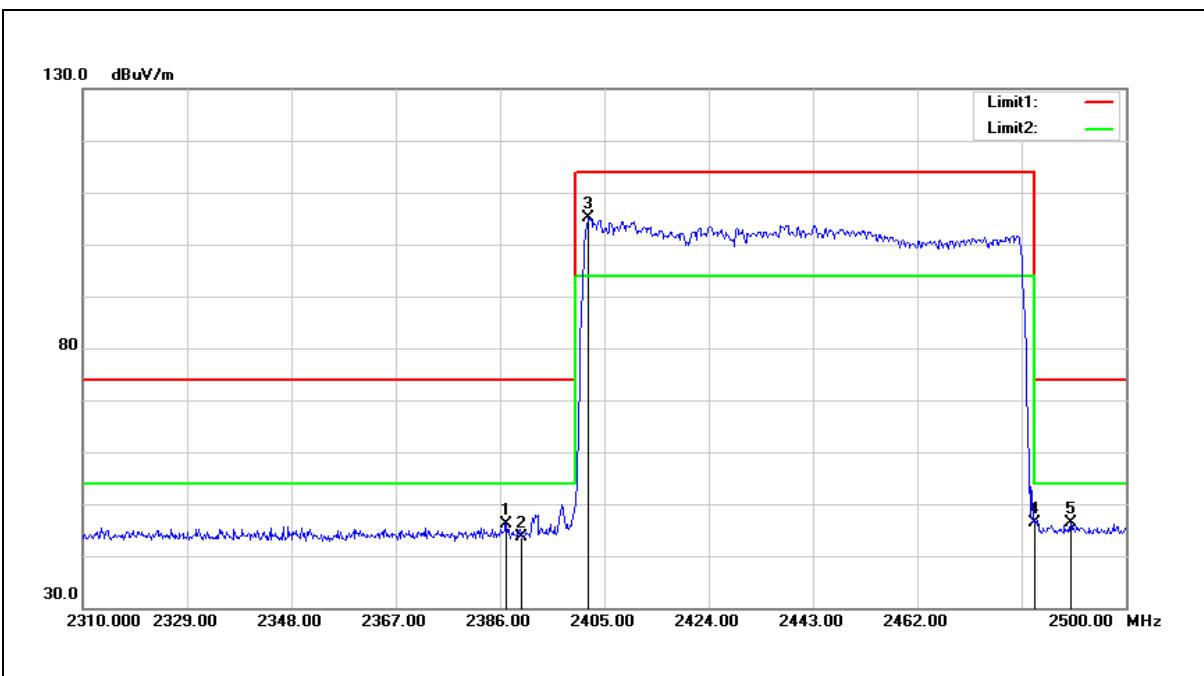


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.140	47.11	-0.88	46.23	74.00	-27.77	peak
2	2390.000	44.51	-0.87	43.64	74.00	-30.36	peak
3	2402.150	106.01	-0.81	105.20	--	--	peak
4	2483.500	46.67	-0.40	46.27	74.00	-27.73	peak
5	2489.930	46.62	-0.36	46.26	74.00	-27.74	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 2		
Ant.Polar.:	Vertical		

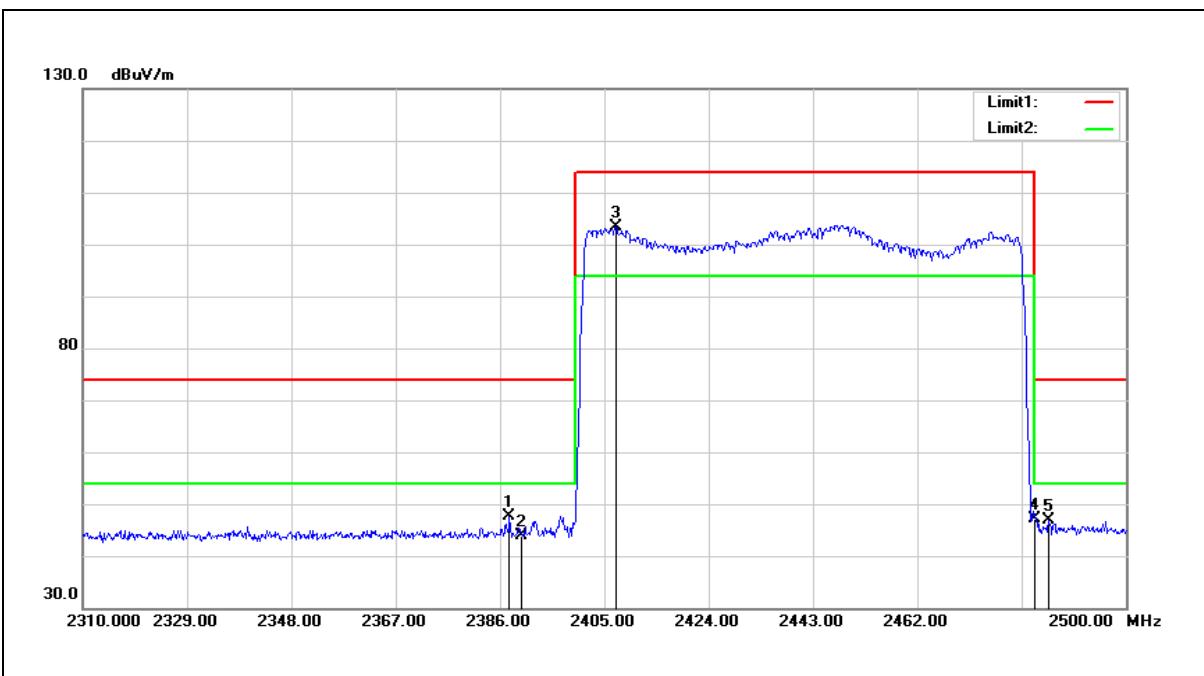


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.710	48.40	-0.88	47.52	74.00	-26.48	peak
2	2390.000	44.80	-0.87	43.93	74.00	-30.07	peak
3	2407.090	104.18	-0.79	103.39	--	--	peak
4	2483.500	47.53	-0.40	47.13	74.00	-26.87	peak
5	2485.940	47.31	-0.38	46.93	74.00	-27.07	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

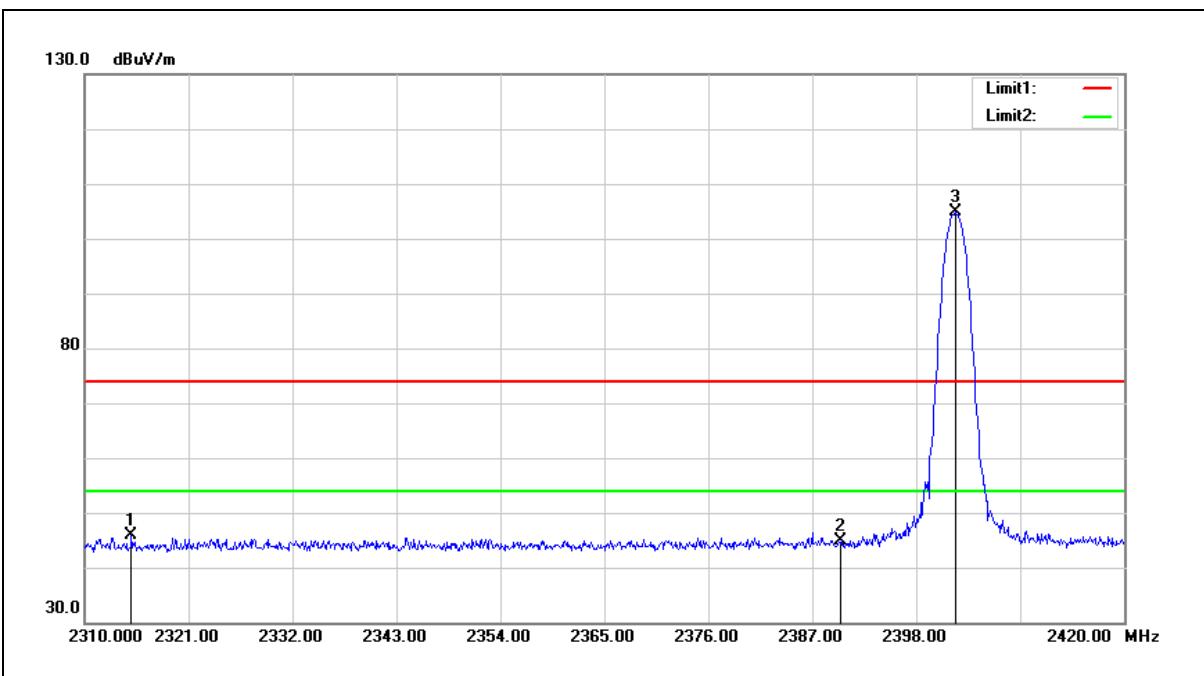


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2314.950	47.06	-1.25	45.81	74.00	-28.19	peak
2	2390.000	45.66	-0.87	44.79	74.00	-29.21	peak
3	2402.180	105.72	-0.81	104.91	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2402 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

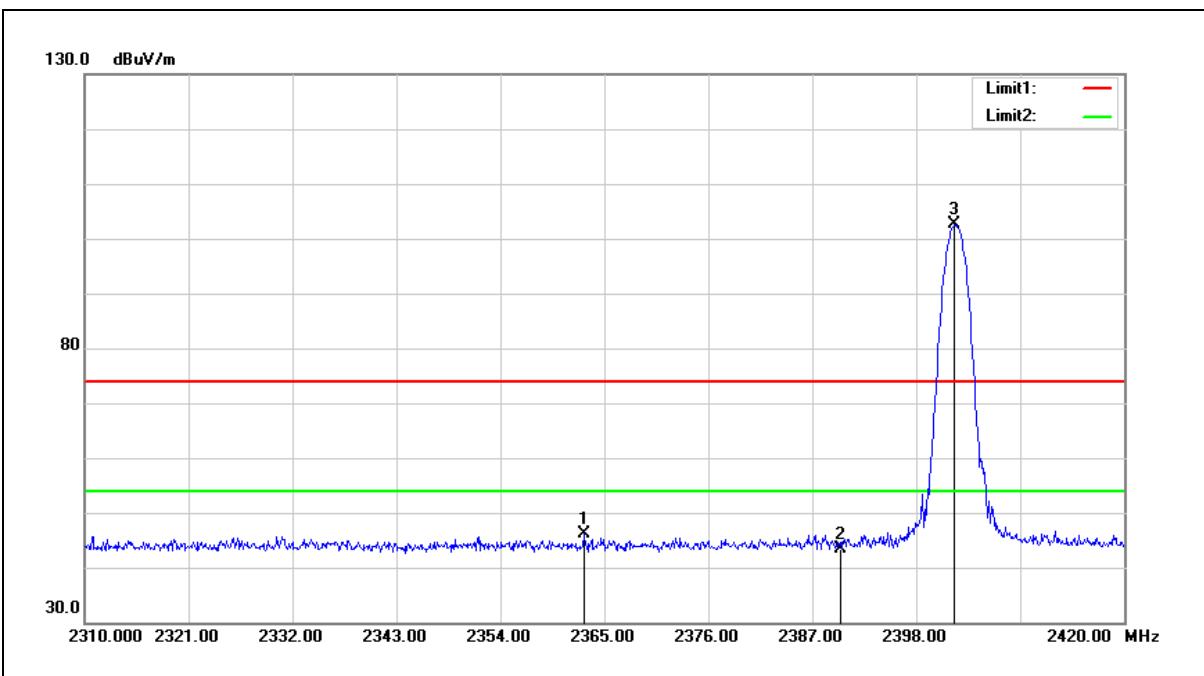


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.800	47.25	-1.02	46.23	74.00	-27.77	peak
2	2390.000	44.33	-0.87	43.46	74.00	-30.54	peak
3	2402.070	103.40	-0.81	102.59	--	--	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correct factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

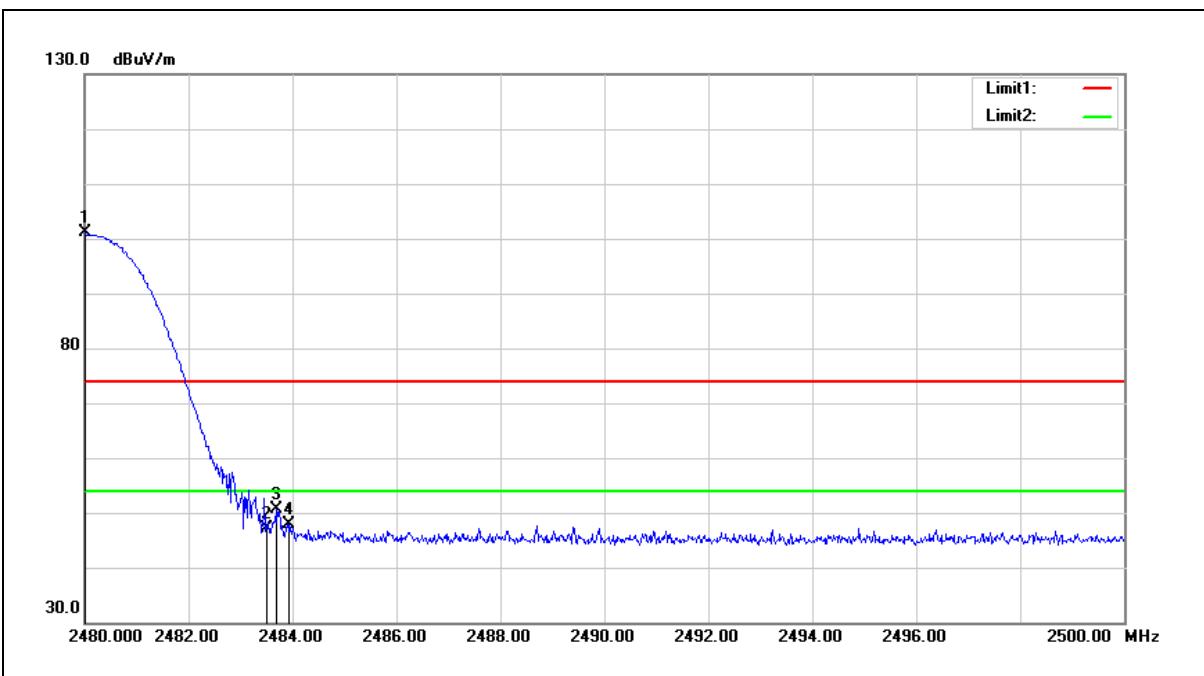


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.000	101.53	-0.41	101.12	--	--	peak
2	2483.500	47.64	-0.40	47.24	74.00	-26.76	peak
3	2483.680	50.94	-0.40	50.54	74.00	-23.46	peak
4	2483.940	48.33	-0.39	47.94	74.00	-26.06	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	2480 MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

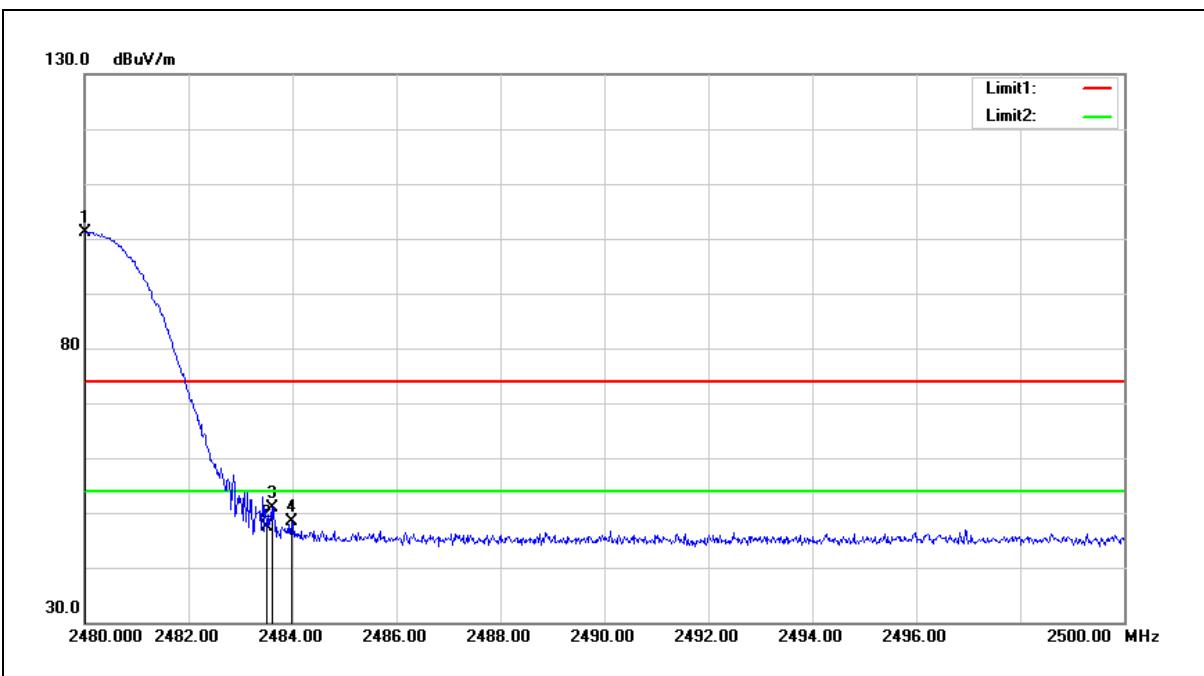


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.020	101.58	-0.41	101.17	--	--	peak
2	2483.500	47.83	-0.40	47.43	74.00	-26.57	peak
3	2483.620	51.39	-0.40	50.99	74.00	-23.01	peak
4	2483.980	48.74	-0.39	48.35	74.00	-25.65	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

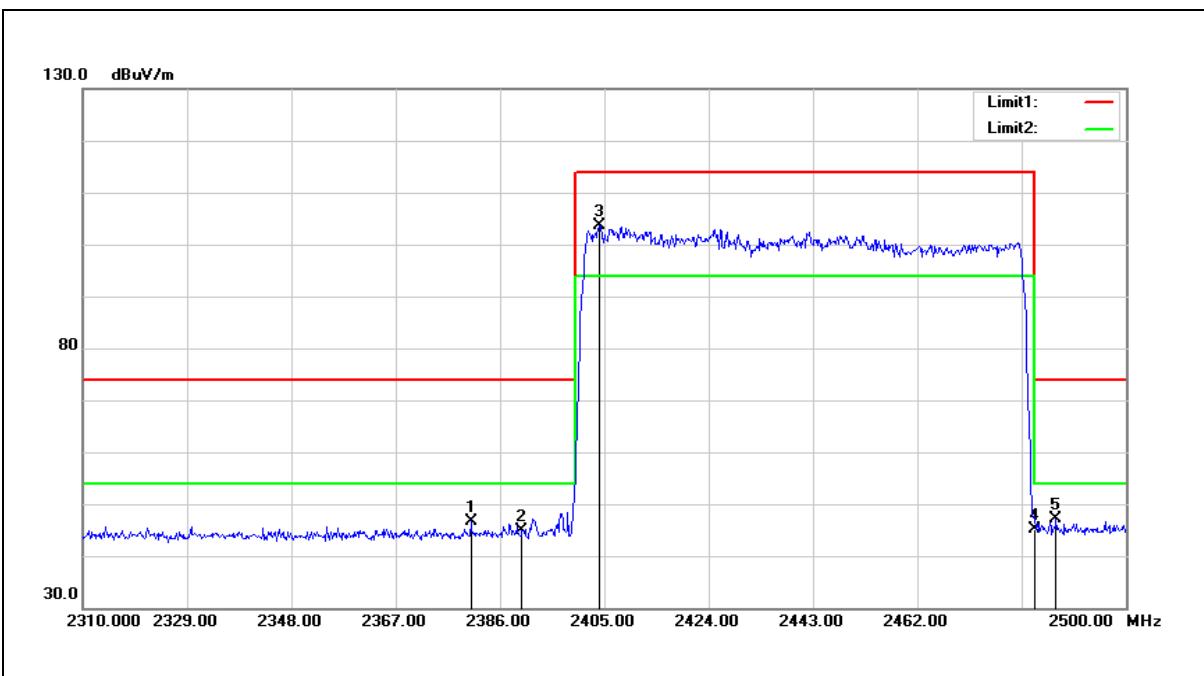


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.680	47.53	-0.93	46.60	74.00	-27.40	peak
2	2390.000	45.85	-0.87	44.98	74.00	-29.02	peak
3	2404.050	104.38	-0.81	103.57	--	--	peak
4	2483.500	45.45	-0.40	45.05	74.00	-28.95	peak
5	2487.270	47.46	-0.37	47.09	74.00	-26.91	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge	Power:	AC 120 V/60 Hz
Frequency:	hopping	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Mode:	Mode 4		
Ant.Polar.:	Vertical		

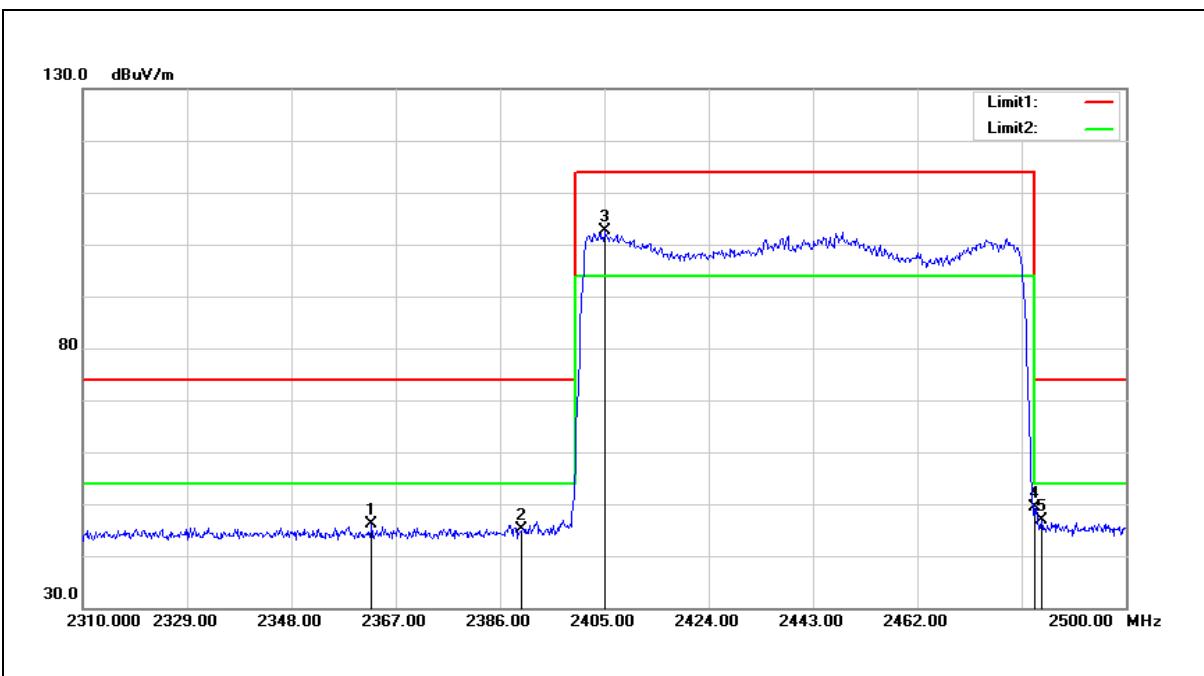

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2362.630	47.16	-1.02	46.14	74.00	-27.86	peak
2	2390.000	46.03	-0.87	45.16	74.00	-28.84	peak
3	2405.190	103.36	-0.79	102.57	--	--	peak
4	2483.500	49.89	-0.40	49.49	74.00	-24.51	peak
5	2484.610	47.28	-0.39	46.89	74.00	-27.11	peak

Note: 1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

--- END---